



## FCC PART 15B, CLASS B

### TEST REPORT

For

### Yeastar Technology Co., Ltd.

202, No.23 Wanghai Road, 2nd Software Park, Xiamen, Fujian, China

**FCC ID: Z7C-STD**

<b>Report Type:</b> Original Report	<b>Product Name:</b> IP PBX
<b>Test Engineer:</b> <u>Lebron Wang</u> <i>Lebron Wang</i>	
<b>Report Number:</b> <u>R1XM120806056-00</u>	
<b>Report Date:</b> <u>2012-10-29</u> <u>Sula Huang</u> <i>Sula Huang</i>	
<b>Reviewed By:</b> <u>RF Engineer</u>	
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
EQUIPMENT MODIFICATIONS .....	5
REMOTE AND SUPPORT EQUIPMENT LIST AND DETAILS .....	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....</b>	<b>8</b>
EUT SETUP .....	8
EMI TEST RECEIVER SETUP.....	8
TEST PROCEDURE .....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
CORRECTED FACTOR & MARGIN CALCULATION .....	9
TEST RESULTS SUMMARY .....	9
TEST DATA .....	9
<b>FCC§15.109 - RADIATED EMISSIONS .....</b>	<b>12</b>
MEASUREMENT UNCERTAINTY .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE .....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
TEST RESULTS SUMMARY .....	14
TEST DATA .....	14

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Yeastar Technology Co., Ltd.*'s product, model number *MyPBX (FCC ID: Z7C-STD)* or the "EUT" in this report was an *IP PBX*, which was measured approximately: 29.7 cm (L) x 18.0 cm (W) x 3.5 cm (H), rated input: DC 12.0V from adapter, the highest operating frequency of EUT is 600 MHz.

Adapter information:

Manufacturer: Gospell Digital Technology Co., Ltd.

Model: GP306A-120-500

Input: 100-240V~1.5A MAX, 50/60 Hz

Output: DC 12.0 V, 5A

*\*All measurement and test data in this report was gathered from production sample serial number: MA16V4I12150414 (Assigned by Applicant). The EUT supplied by the applicant was received on 2012-08-06.*

### Objective

The following test report is prepared on behalf of *Yeastar Technology Co., Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC Part 15B, Class B.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

### Equipment Modifications


No modification was made to the EUT tested.

### Remote and Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	VOSTRO 220S	127BP2X
DELL	Keyboard	L100	CNORH656658907BL 05DC
DELL	Mouse	MOC5UO	G1900NKD
DELL	LCD Monitor	E178WFPC	CN-OWY564-64180-7 C4-2SQH
SAST	Modem	AEM-2100	0293
TIANNIAO	PHONE	TL2201	N/A
SPIKER	PHONE	HP100	N/A
SAGEMCOM	Modem/Router	F@st 3804	LK11153DP530005

### External I/O Cable

Cable Description	Length (m)	From/Port	To
Shielded Detachable USB Cable	1.5	Host PC	Mouse
Shielded Detachable Serial Cable	1.2	Host PC	Modem
Shielded Detachable K/B Cable	1.5	Host PC	Keyboard
Shielded Detachable VGA Cable	1.5	Host PC	LCD Monitor
Unshielded Detachable RJ45 Cable	1.5	EUT	Host PC
Unshielded Detachable RJ11Cable	1.5	PHONE	EUT
Unshielded Detachable RJ45 Cable	6.0	EUT	Router
Unshielded Detachable DC Cable	1.5	Adapter	EUT

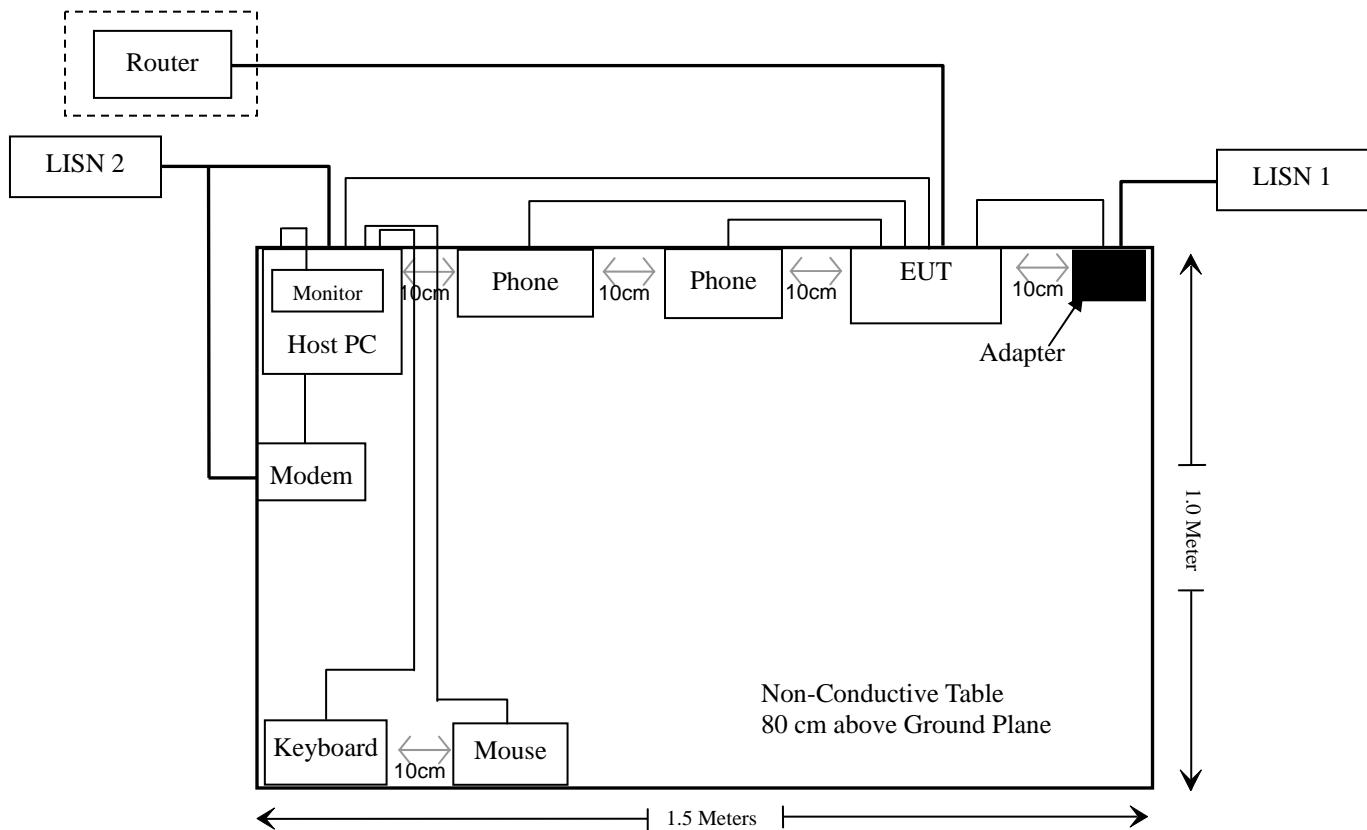**Block Diagram of Test Setup**


**SUMMARY OF TEST RESULTS**

---

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

## FCC §15.107 – AC LINE CONDUCTED EMISSIONS

### EUT Setup

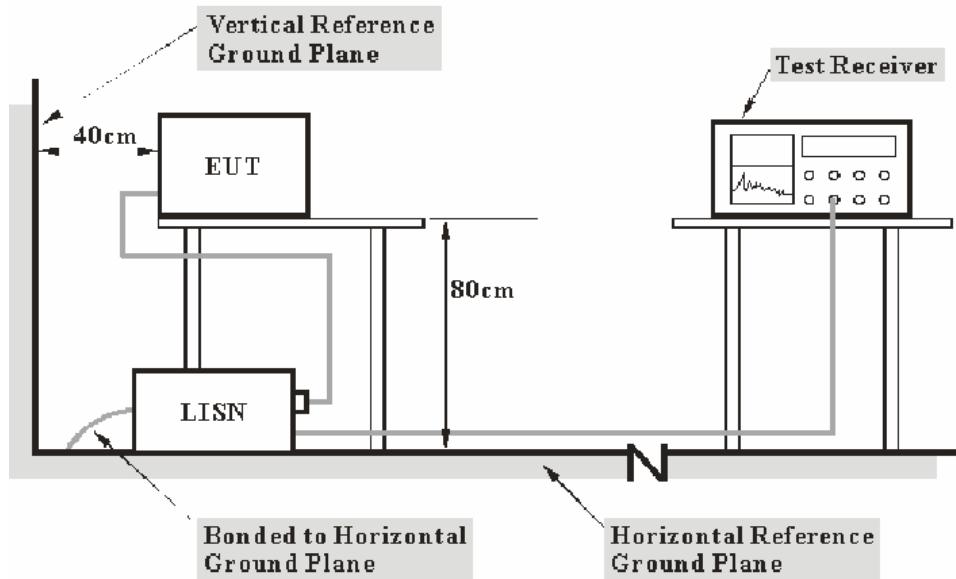

**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source for AC adapter power supply.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2011-11-24	2012-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2012-08-22	2013-08-21
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2012-07-08	2013-07-07
BACL	CE Test software	BACL-CE	V1.0	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Pulse Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Pulse Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the worst margin reading of:

**8.36 dB at 0.495 MHz in the Line conducted mode**

## Test Data


### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

*The testing was performed by Lebron Wang on 2012-10-24.*


*Test Mode: Running*

**AC 120V/60 Hz, Line:**

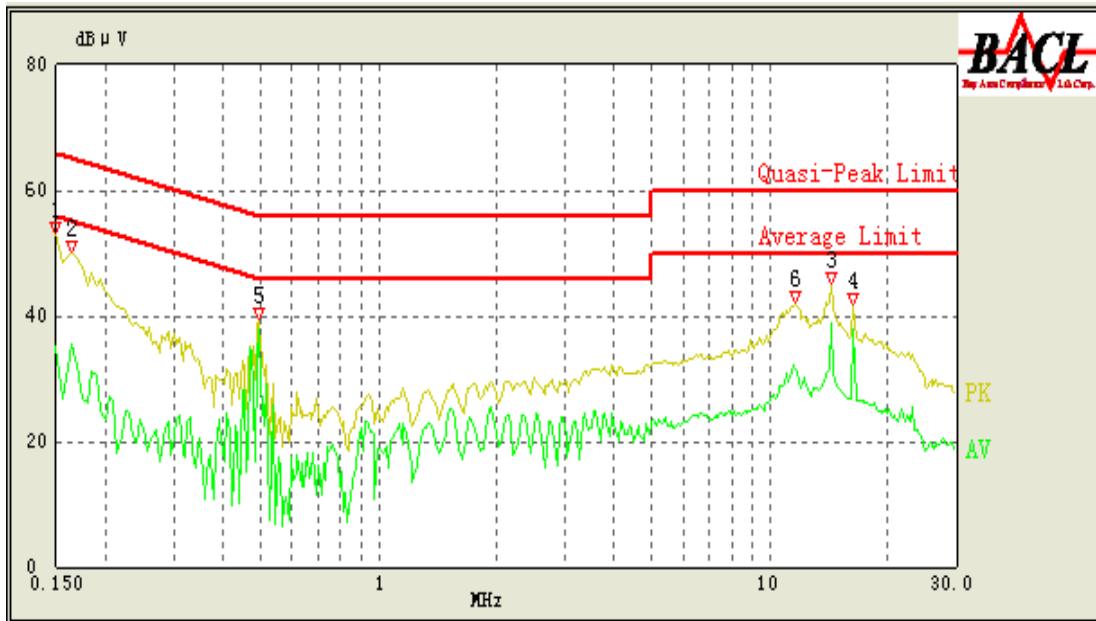

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Detector (QP/ Ave.)
0.495	37.78	10.25	46.14	8.36	Ave.
14.345	38.85	11.21	50.00	11.15	Ave.
16.375	37.86	11.73	50.00	12.14	Ave.
0.150	50.35	10.27	66.00	15.65	QP
0.160	48.38	10.27	65.57	17.19	QP
14.345	42.14	11.21	60.00	17.86	QP
0.495	38.03	10.25	56.14	18.11	QP
11.795	30.66	11.12	50.00	19.34	Ave.
11.795	40.12	11.12	60.00	19.88	QP
0.160	35.49	10.27	55.57	20.08	Ave.
16.375	39.58	11.73	60.00	20.42	QP
0.150	35.16	10.27	56.00	20.84	Ave.

## AC 120V/60 Hz, Neutral

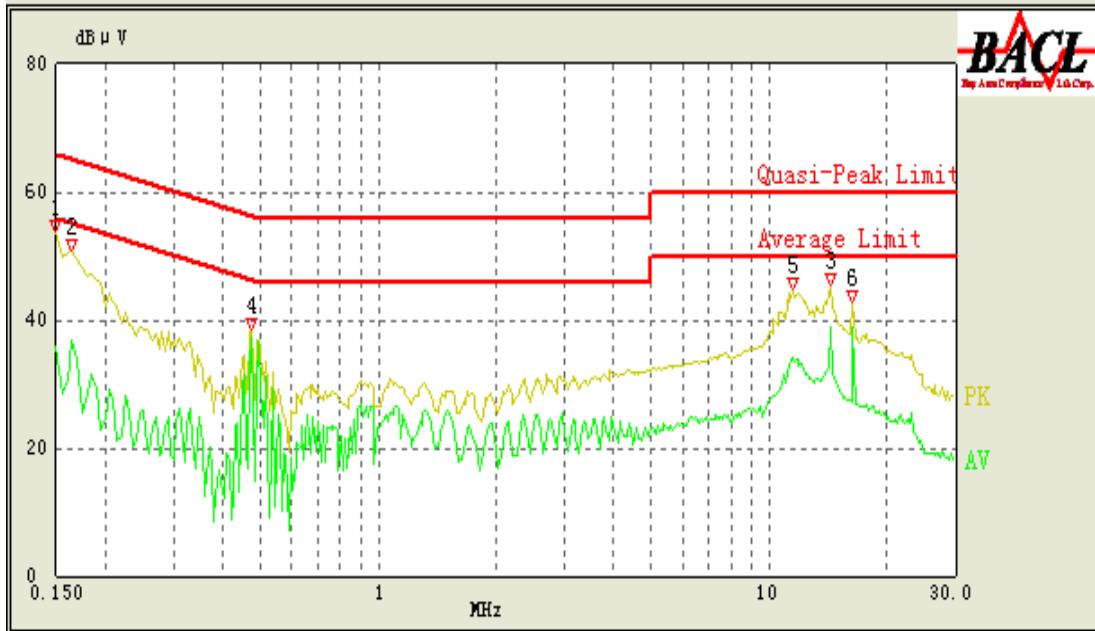


Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Detector (PK/ QP/Ave.)
0.475	37.03	10.25	46.71	9.68	Ave.
14.335	38.78	11.14	50.00	11.22	Ave.
16.385	38.62	11.61	50.00	11.38	Ave.
0.150	50.73	10.24	66.00	15.27	QP
11.895	34.44	11.12	50.00	15.56	Ave.
0.165	49.05	10.24	65.57	16.52	QP
14.335	42.84	11.14	60.00	17.16	QP
11.895	41.65	11.12	60.00	18.35	QP
0.165	36.93	10.24	55.57	18.64	Ave.
0.475	37.84	10.25	56.71	18.87	QP
16.385	40.28	11.61	60.00	19.72	QP
0.150	36.05	10.24	56.00	19.95	Ave.

## FCC§15.109 - RADIATED EMISSIONS

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

### EUT Setup

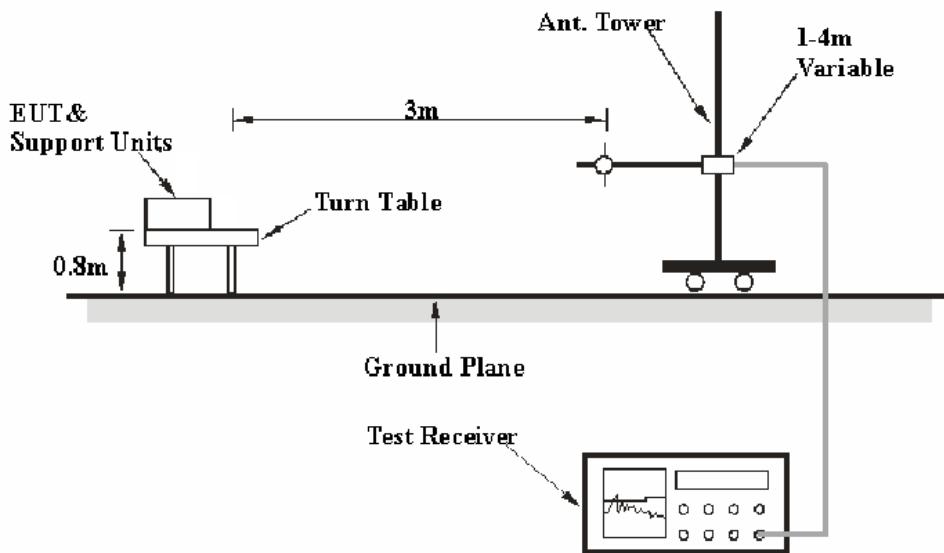

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

## EMI Test Receiver Setup

According to FCC 15.33 requirements, the EUT system was measured from 30 MHz to 5 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
1000 MHz – 5 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2011-11-24	2012-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2011-11-17	2012-11-16
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2011-11-24	2012-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
R&S	Auto test Software	EMC32	V6.30	-	-

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Institute of Metrology (NIM).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the worst margin reading is below:

**3.4 dB at 56.838500 MHz in the Vertical polarization**

## Test Data


### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Lebron Wang on 2012-10-24.

Test Mode: Running

### 1): 30-1000 MHz

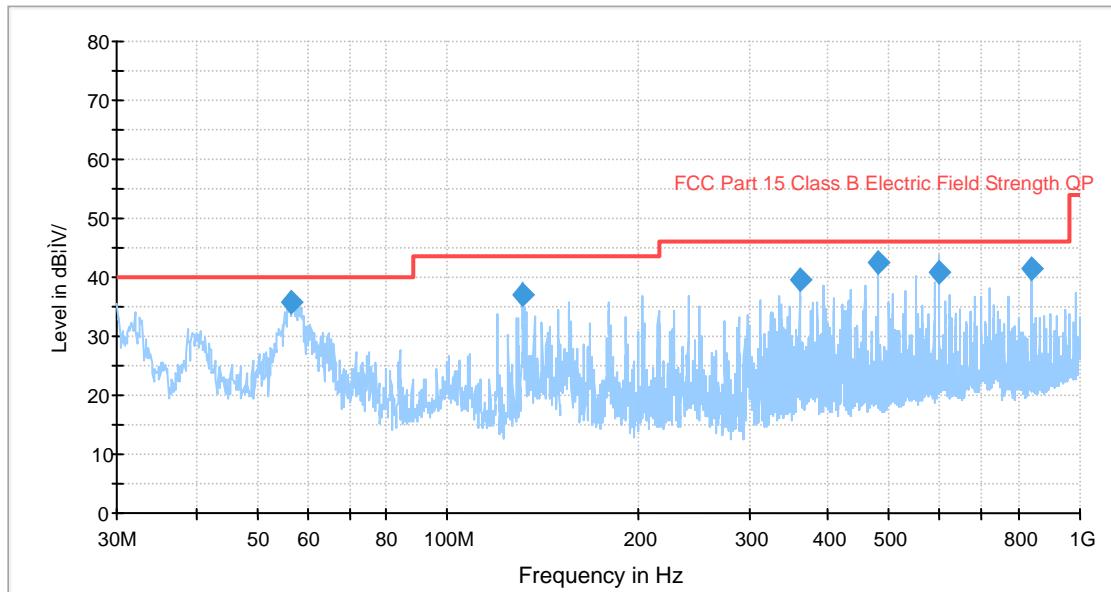

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
56.838500	36.6	137.0	V	331.0	-18.4	40.0	3.4
480.080000	42.5	120.0	H	56.0	-8.9	46.0	3.5
840.107975	41.8	109.0	V	318.0	-1.6	46.0	4.2
600.066650	41.2	108.0	V	91.0	-6.9	46.0	4.8
131.893525	37.2	331.0	H	316.0	-12.8	43.5	6.3
372.867525	39.4	107.0	V	227.0	-11.2	46.0	6.6

## 2) 1 – 5 GHz

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC Part 15.109	
	Reading (dB $\mu$ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB $\mu$ V/m)	Margin (dB)
1040.5	38.96	Ave.	78	1.10	H	-0.66	38.30	54.00	15.70
2494.2	36.56	Ave.	27	1.20	V	7.21	43.77	54.00	10.23
1201.4	32.86	Ave.	83	1.30	V	0.13	32.99	54.00	21.01
1040.5	52.05	PK	78	1.10	H	-0.66	51.39	74.00	22.61
2493.1	30.52	Ave.	116	1.20	H	7.21	37.73	54.00	16.27
1201.4	45.74	PK	83	1.30	V	0.13	45.87	74.00	28.13
2494.2	43.06	PK	27	1.20	V	7.21	50.27	74.00	23.73
2493.1	37.48	PK	116	1.20	H	7.21	44.69	74.00	29.31

\*\*\*\*\*END OF REPORT \*\*\*\*\*