


Panozzo 22023128

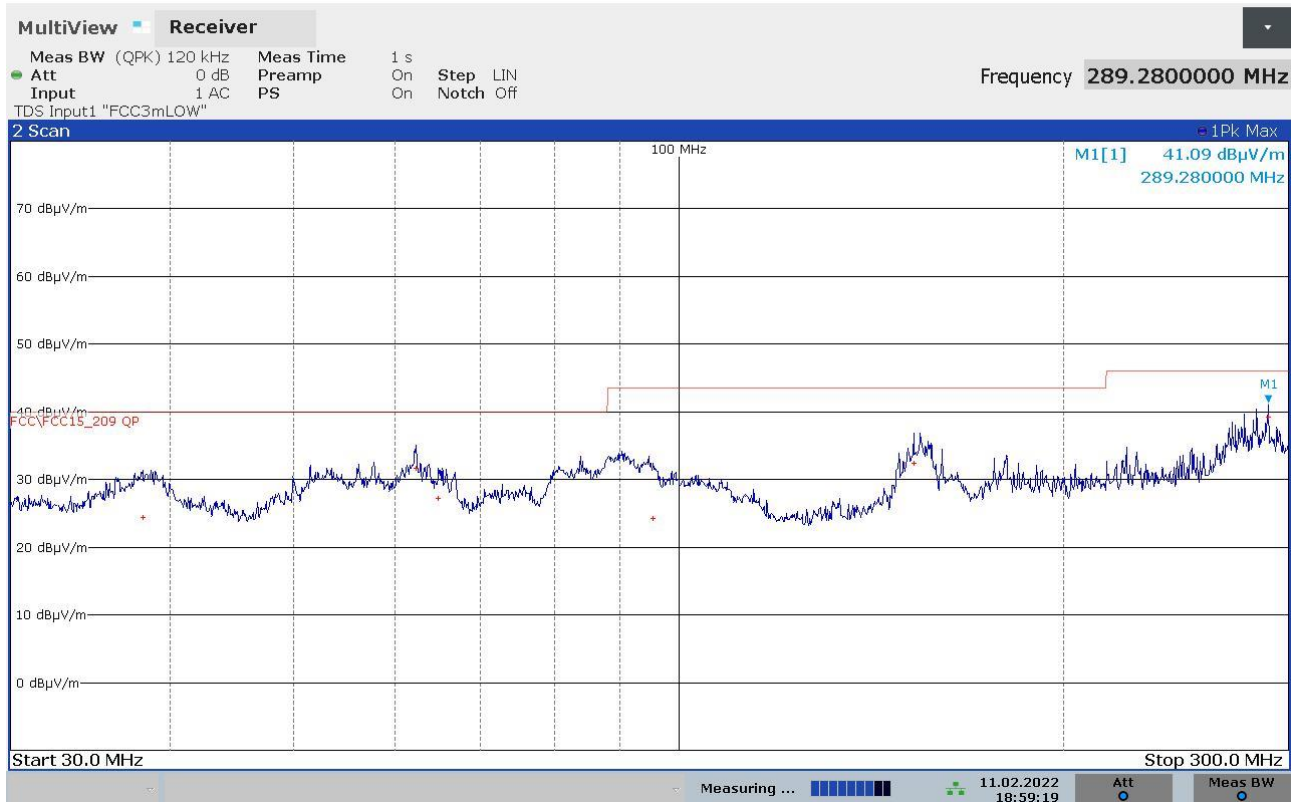

FINAL RESULT TABLE

QUASI PEAK


Freq Hz	Lev dBuV/m	Margin dB
38080000	+24,40	-15,60
62320000	+31,73	-8,27
64840000	+27,16	-12,84
95480000	+24,22	-19,30
152800000	+32,39	-11,13
289280000	+39,28	-6,74

22023128_2

9.4 20 dB bandwidth

Tested by	C. Panozzo
Test date	14.02.2022
Test location (stand)	Laboratory
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.215 (c) ANSI C63.10 cl. 7.8.7
Supplementary test set-up description	--
Supplementary information.....	--

Test setup

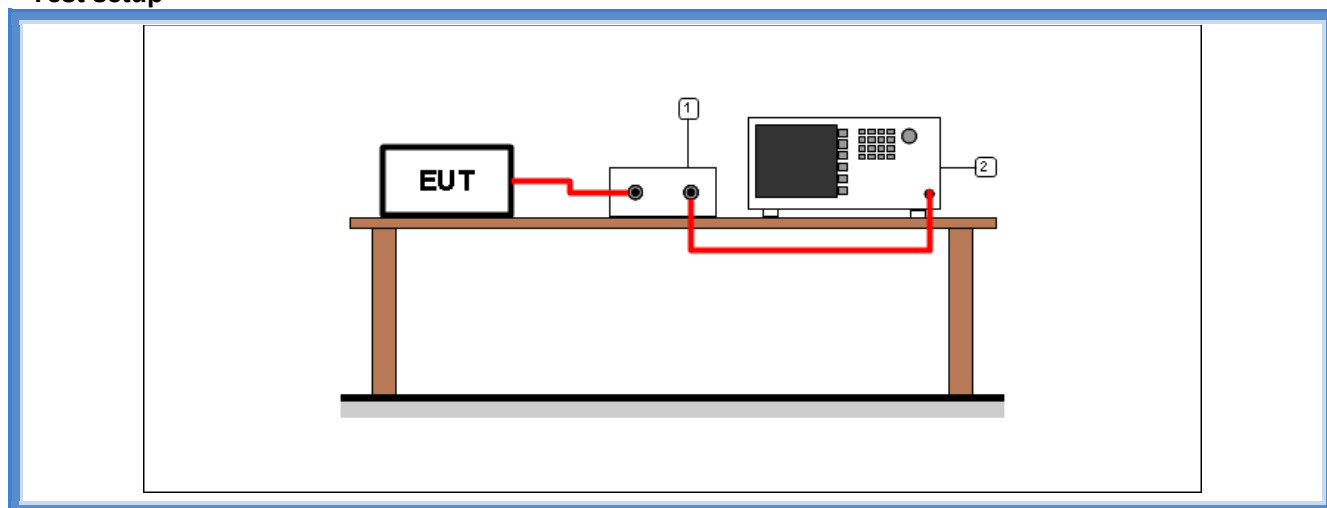

Test setup PR002_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz
1	--	--	--	Cable + attenuator (calibrated before the test)

Result – spread factor 10


Frequency (MHz)	Graphs	20 dB bandwidth (kHz)
902,30	G22023142	130,68
908,30	G22023143	132,44
914,90	G22023144	132,94

Result – spread factor 7


<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>20 dB bandwidth (kHz)</i>
902,30	G22023136	136,18
908,30	G22023137	135,68
914,90	G22023138	134,18

Graphs


Panozzo 22023136

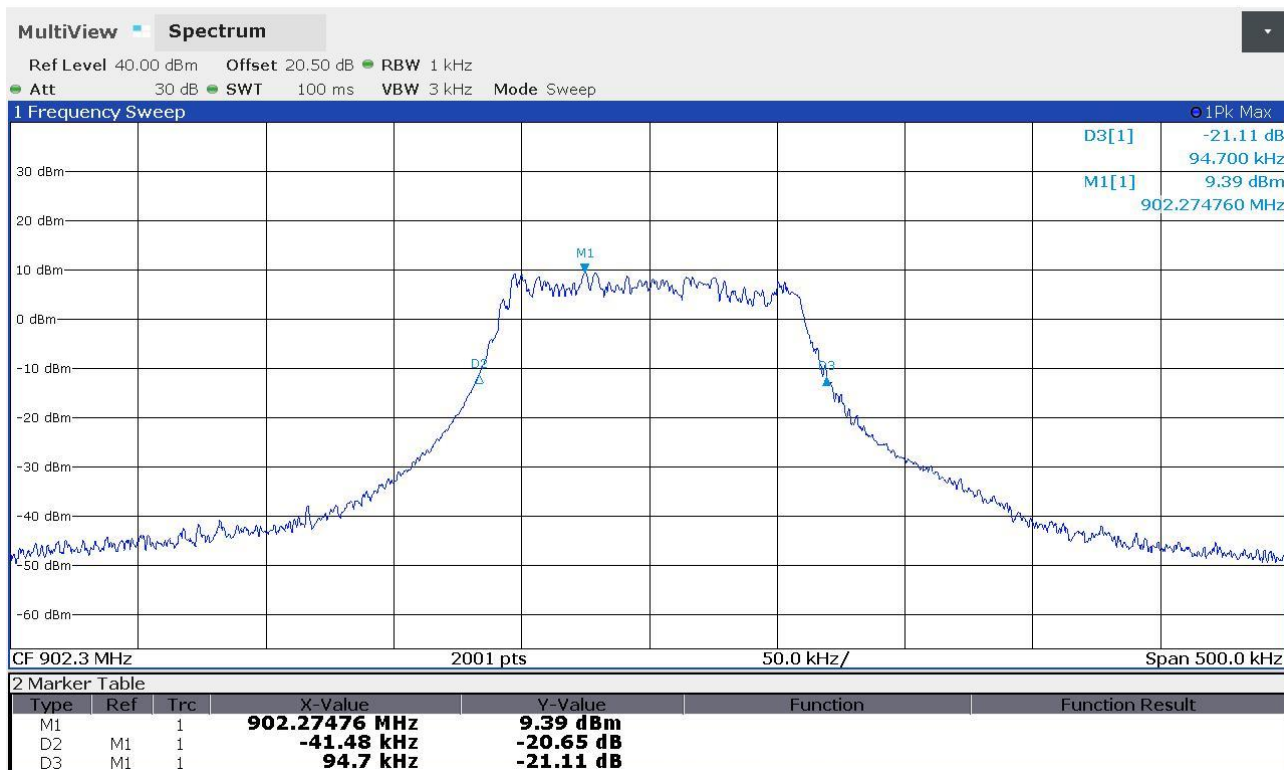


Panozzo 22023137

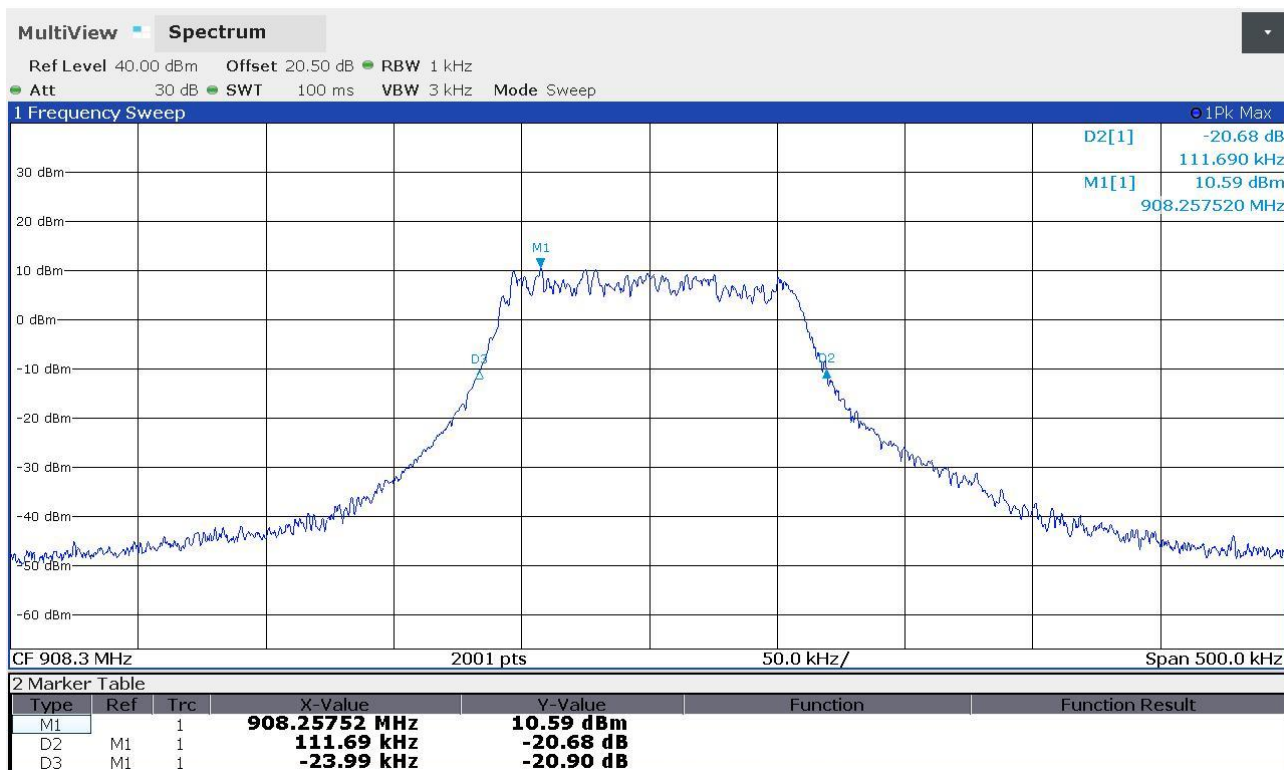


Panozzo 22023138

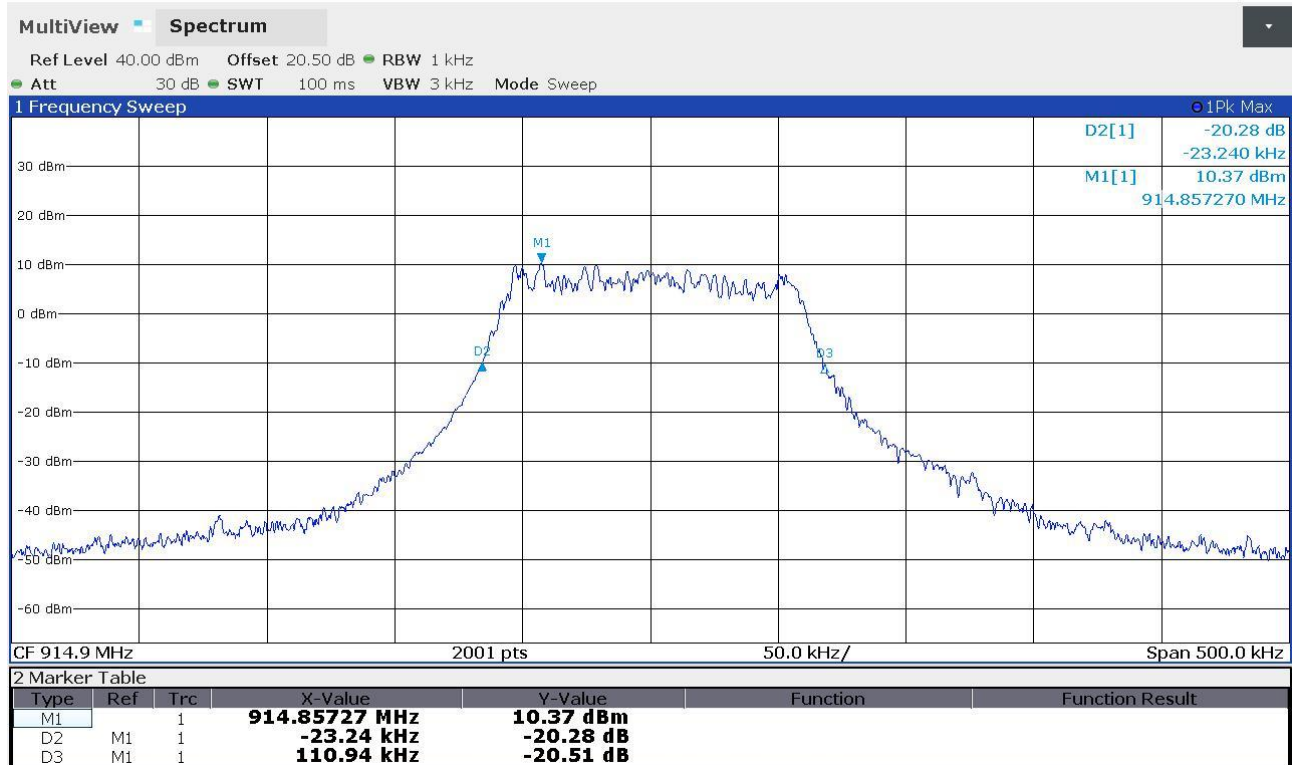


Panozzo 22023142

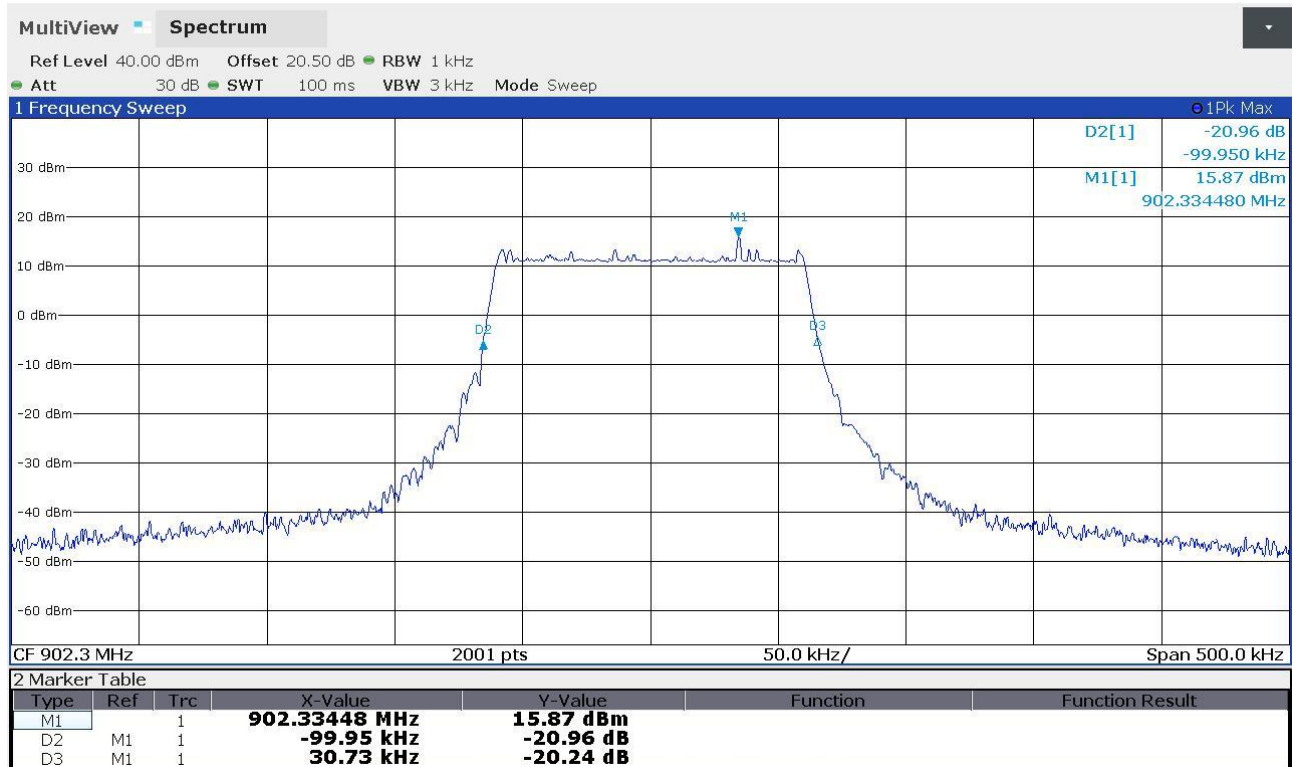

Panozzo 22023143

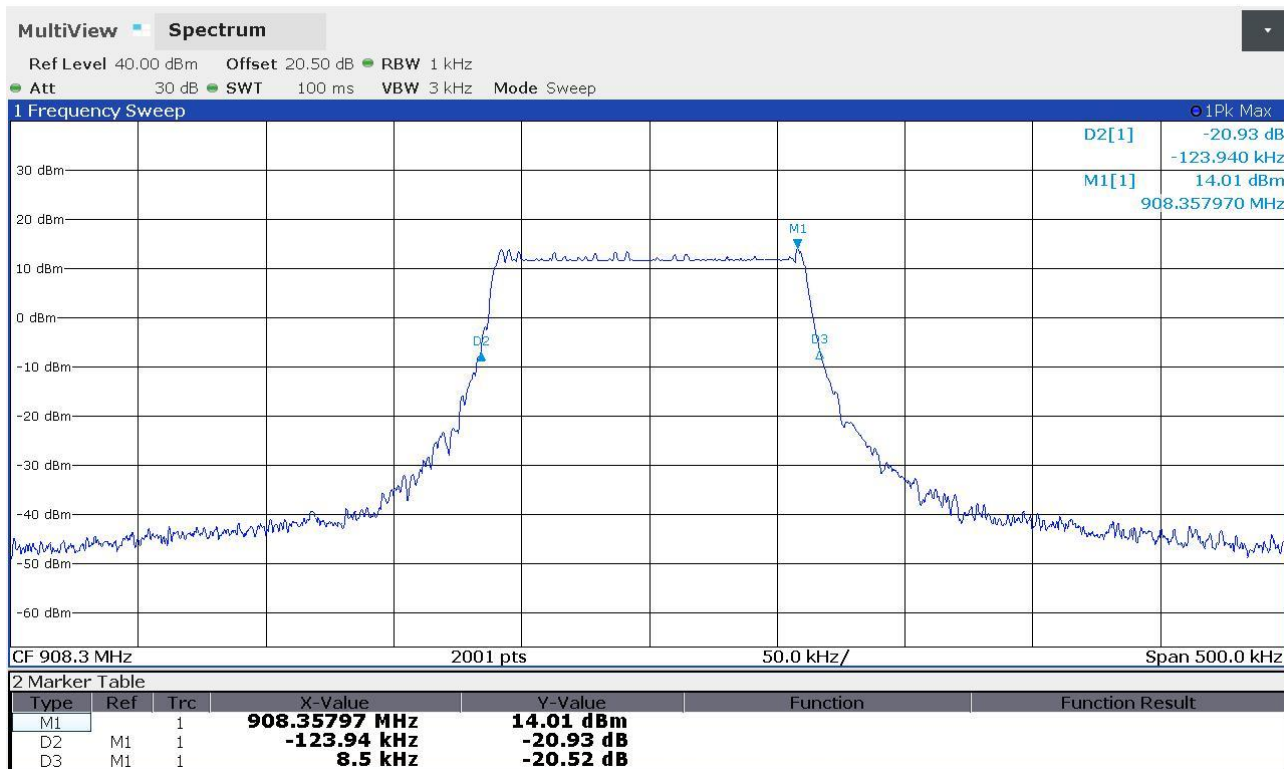

Panozzo 22023144

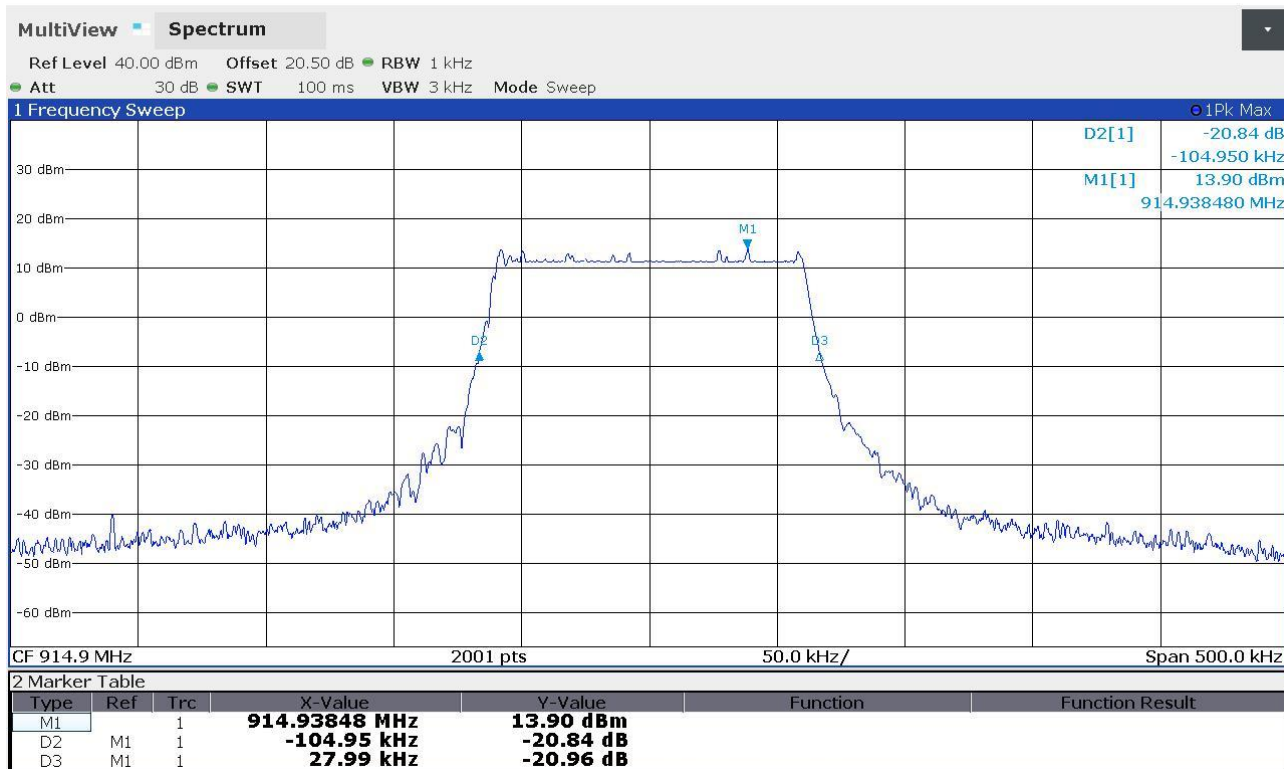


9.5 Channel separation

Tested by	C. Panozzo
Test date	14.02.2022
Test location (stand)	Laboratory
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 9 b) ANSI C63.10 cl. 7.8.2
Supplementary test set-up description	--
Supplementary information.....	--

Acceptance limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test setup

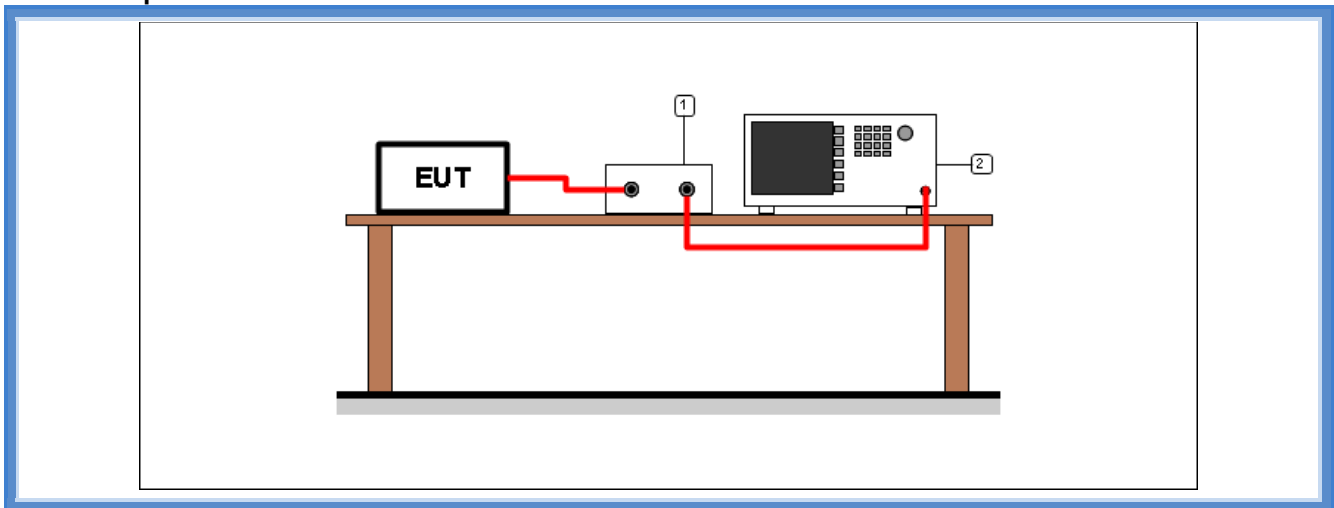

Test setup PR002_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz
1	--	--	--	Cable + attenuator (calibrated before the test)

Result – spread factor 10


<i>Frequency band (MHz)</i>	<i>Graphs</i>	<i>Channel separation (kHz)</i>	<i>Minimum channel separation required (kHz)</i>	<i>Results</i>
902 – 928	G22023157	200,9	25	Complies

Result – spread factor 7


<i>Frequency band (MHz)</i>	<i>Graphs</i>	<i>Channel separation (kHz)</i>	<i>Minimum channel separation required (kHz)</i>	<i>Results</i>
902 – 928	G22023156	200,6	25	Complies

Graphs

Panozzo 22023156

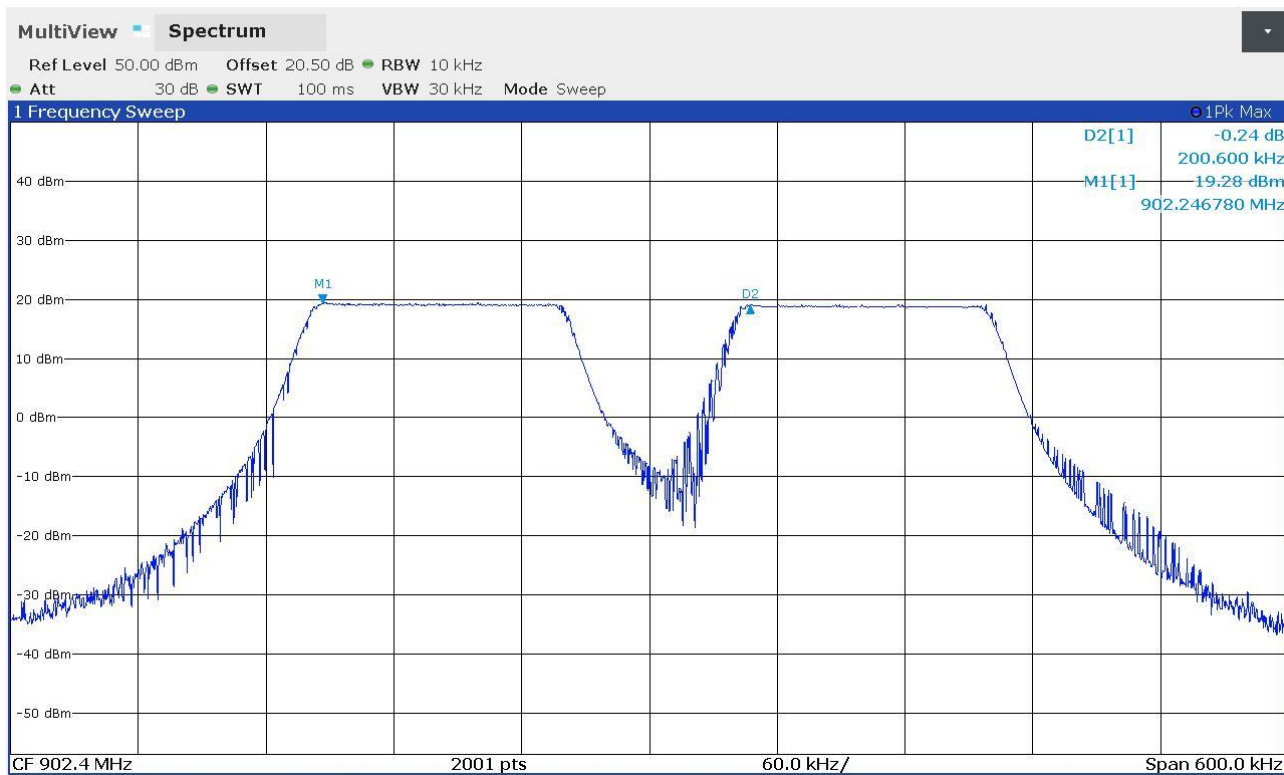

Panozzo 22023157

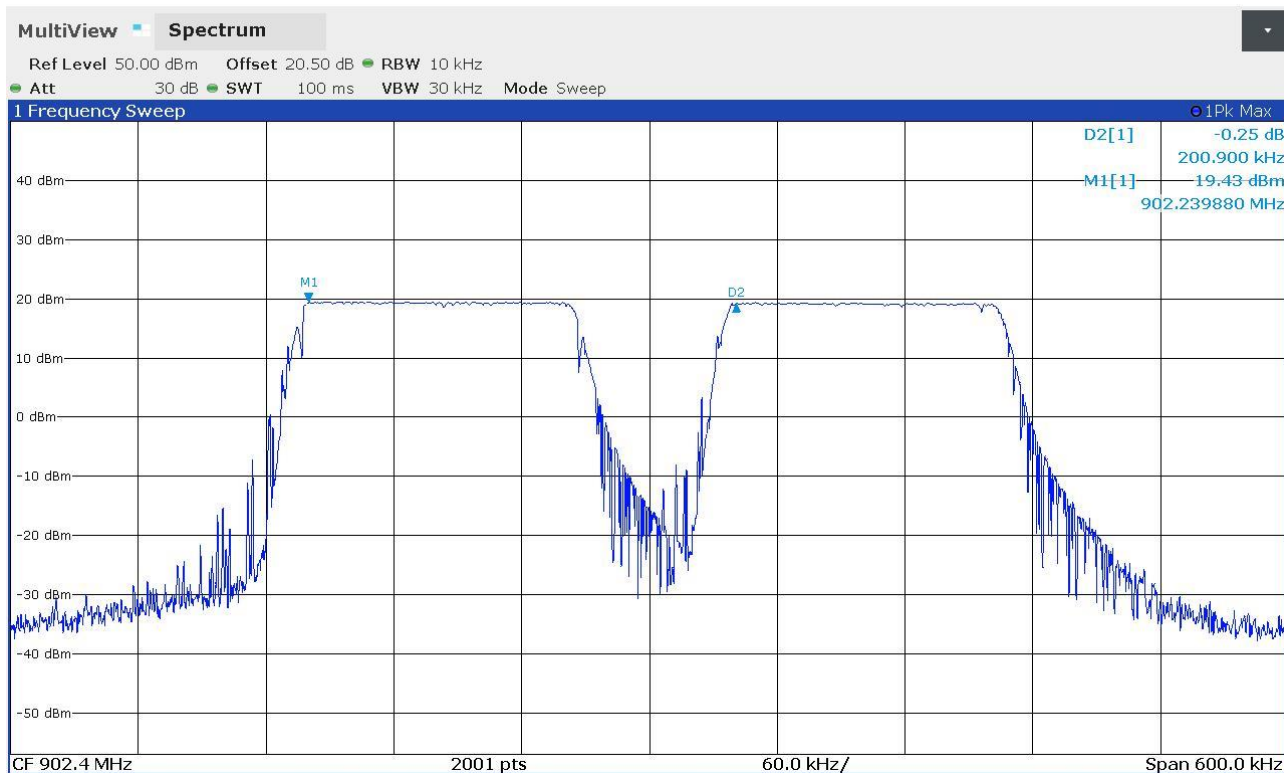


9.6 Number of hopping channels

Tested by	C. Panozzo
Test date	14.02.2022
Test location (stand)	Laboratory
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 10 b) 4) ANSI C63.10 cl. 7.8.3
Supplementary test set-up description	--
Supplementary information.....	--

Acceptance limits

There is no minimum number of hopping channels associated with this type of hybrid system. While there is not a specific minimum limit, the hop sequence is required to appear as pseudorandom per Section 15.247(a)(1) (see Section 3 of KDB 558074 D01).

Test setup

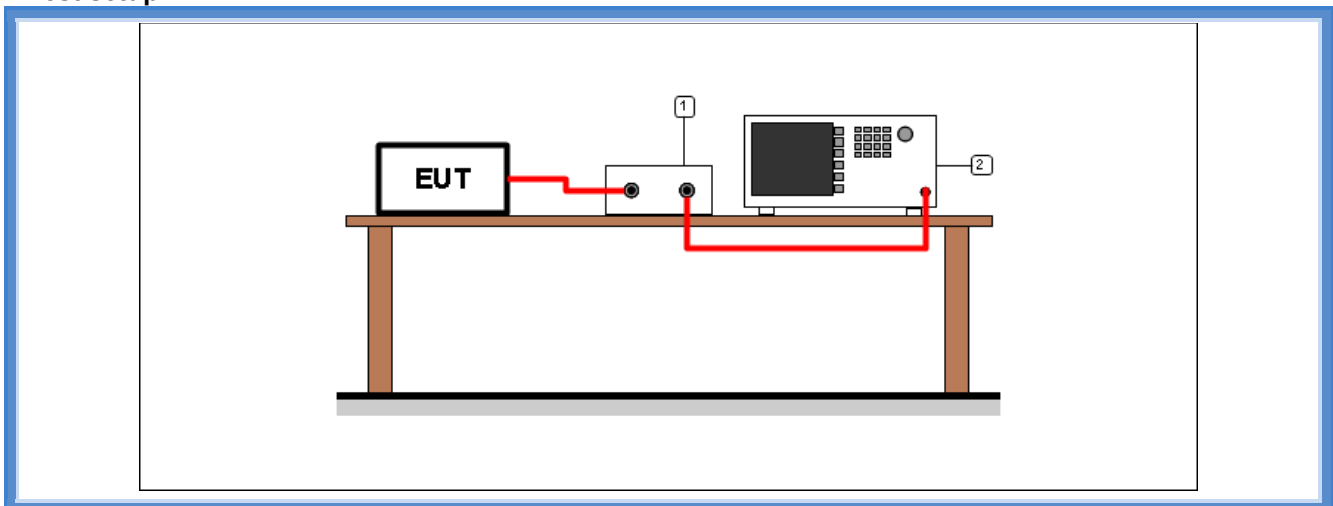

Test setup PR002_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz
1	--	--	--	Cable + attenuator (calibrated before the test)

Result – spread factor 10


Frequency band (MHz)	Graphs	Number of hopping channels
902 – 928	G22023158	8

Result – spread factor 7


Frequency band (MHz)	Graphs	Number of hopping channels
902 – 928	G22023159	8

Graphs

Panozzo 22023158

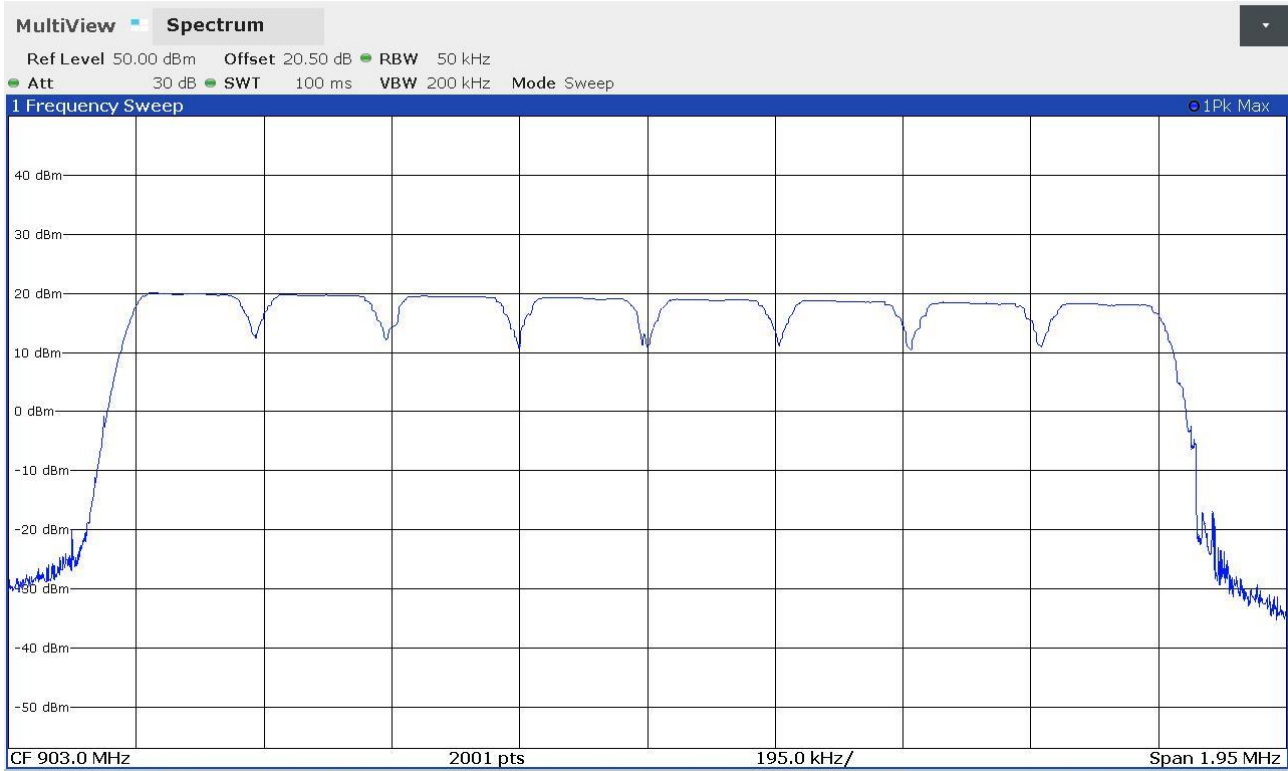

Panozzo 22023159

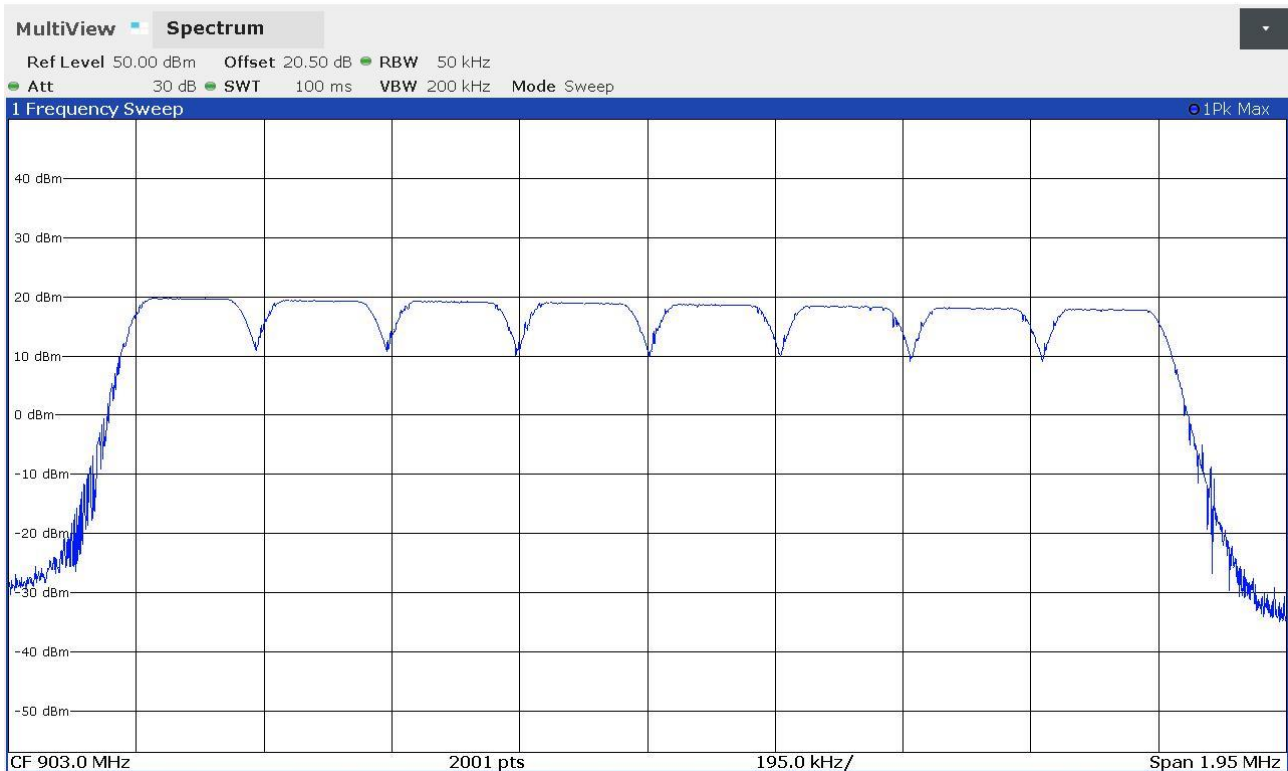


9.7 Time of occupancy

Tested by	C. Panozzo
Test date	14.02.2022
Test location (stand)	Laboratory
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 10 b) 2) ANSI C63.10 cl. 7.8.4
Supplementary test set-up description	--
Supplementary information.....	--

Acceptance limits

The transmission must comply with a 0,4 second/channel maximum dwell time when the hopping function is turned on.

Test setup

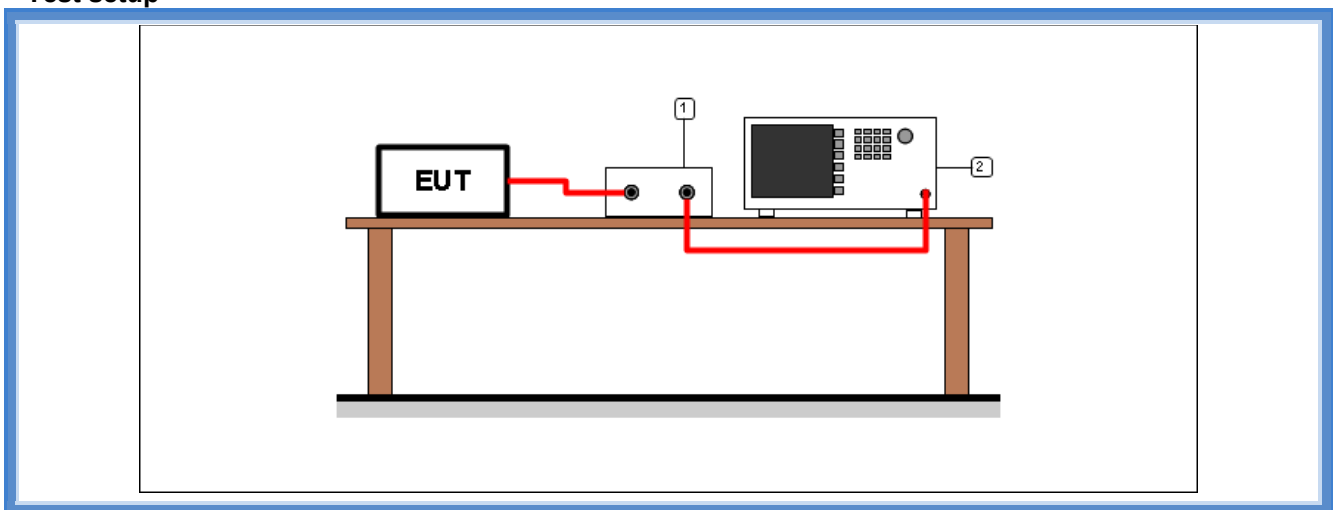

Test setup PR002_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz
1	--	--	--	Cable + attenuator (calibrated before the test)

Result – spread factor 10

<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>Dwell time (ms)</i>
902,30	G22023169	207,00

<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>Number of transmissions</i>	<i>Period</i>
902,30	G22023168	1	3,20 s

<i>Time of occupancy (Dwell time x Nr. transmissions)</i>	<i>Maximum allowed time of occupancy</i>	<i>Results</i>
0,207 s/channel	0,4 s/channel	Complies

Result – spread factor 7


<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>Dwell time (ms)</i>
902,30	G22023166	31,20

<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>Number of transmissions</i>	<i>Period</i>
902,30	G22023167	1	3,20 s


<i>Time of occupancy (Dwell time x Nr. transmissions)</i>	<i>Maximum allowed time of occupancy</i>	<i>Results</i>
0,0312 s/channel	0,4 s/channel	Complies

Graphs


Panozzo 22023166

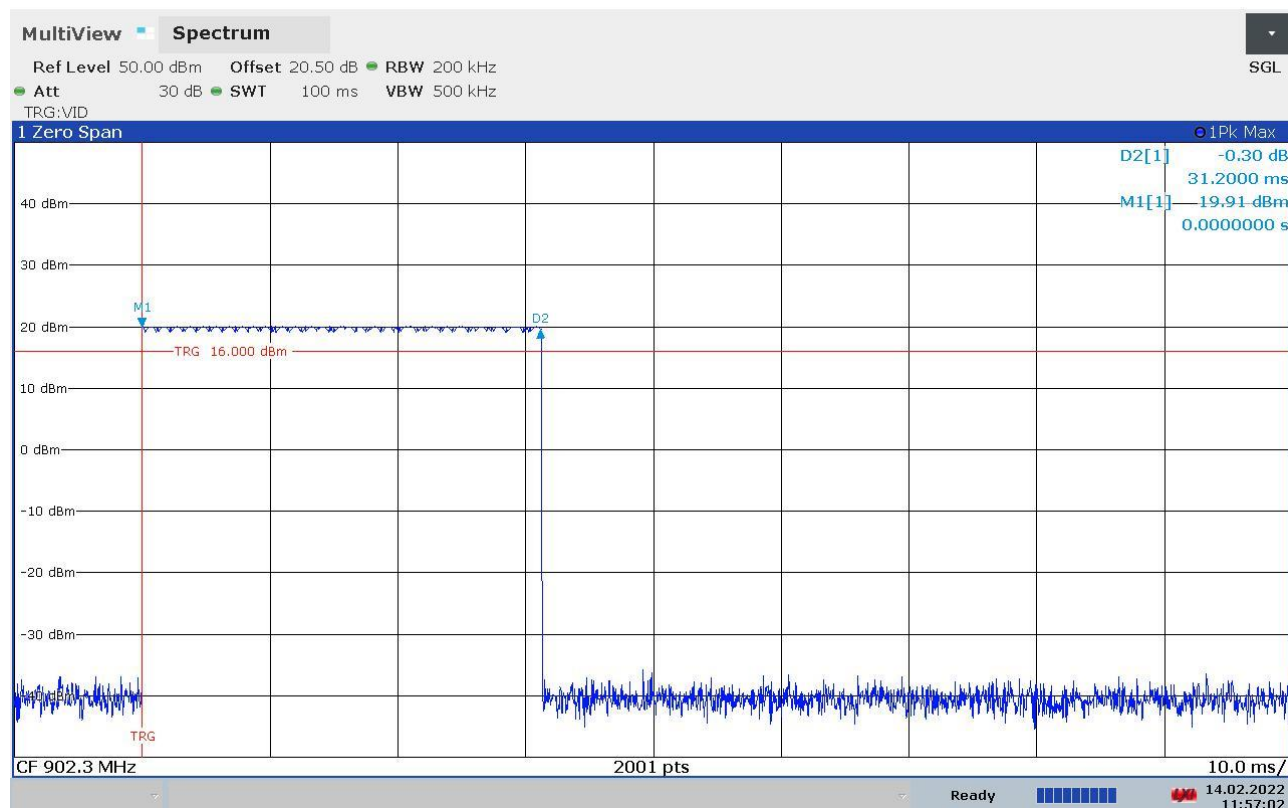


Panozzo 22023167

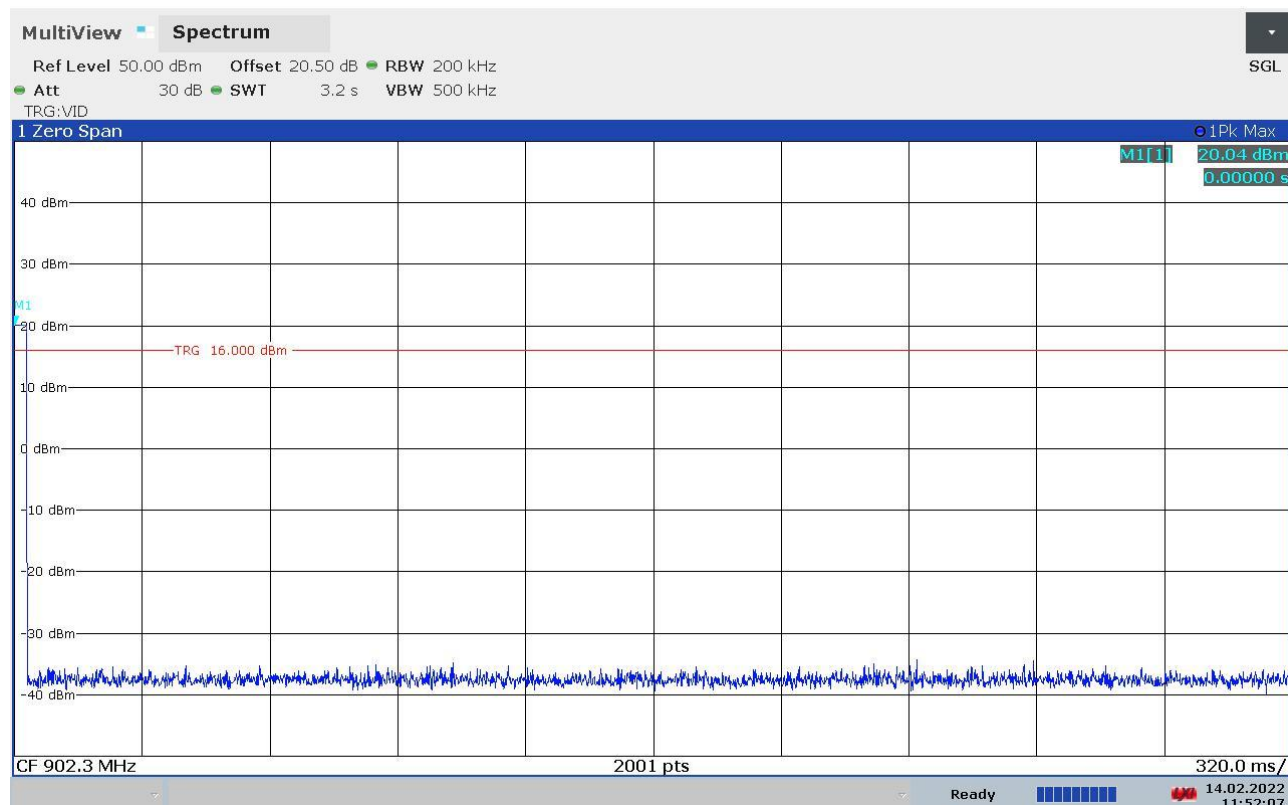

Panozzo 22023168

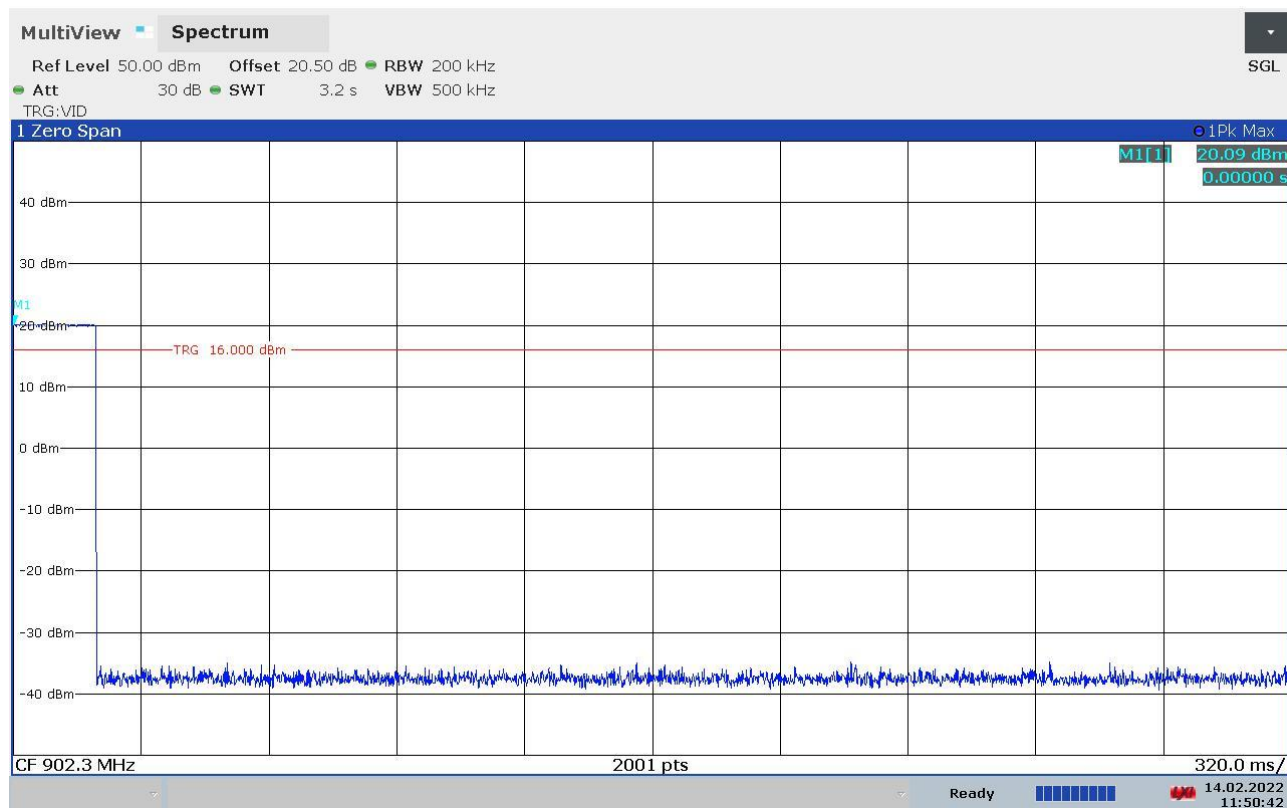

Panozzo 22023169

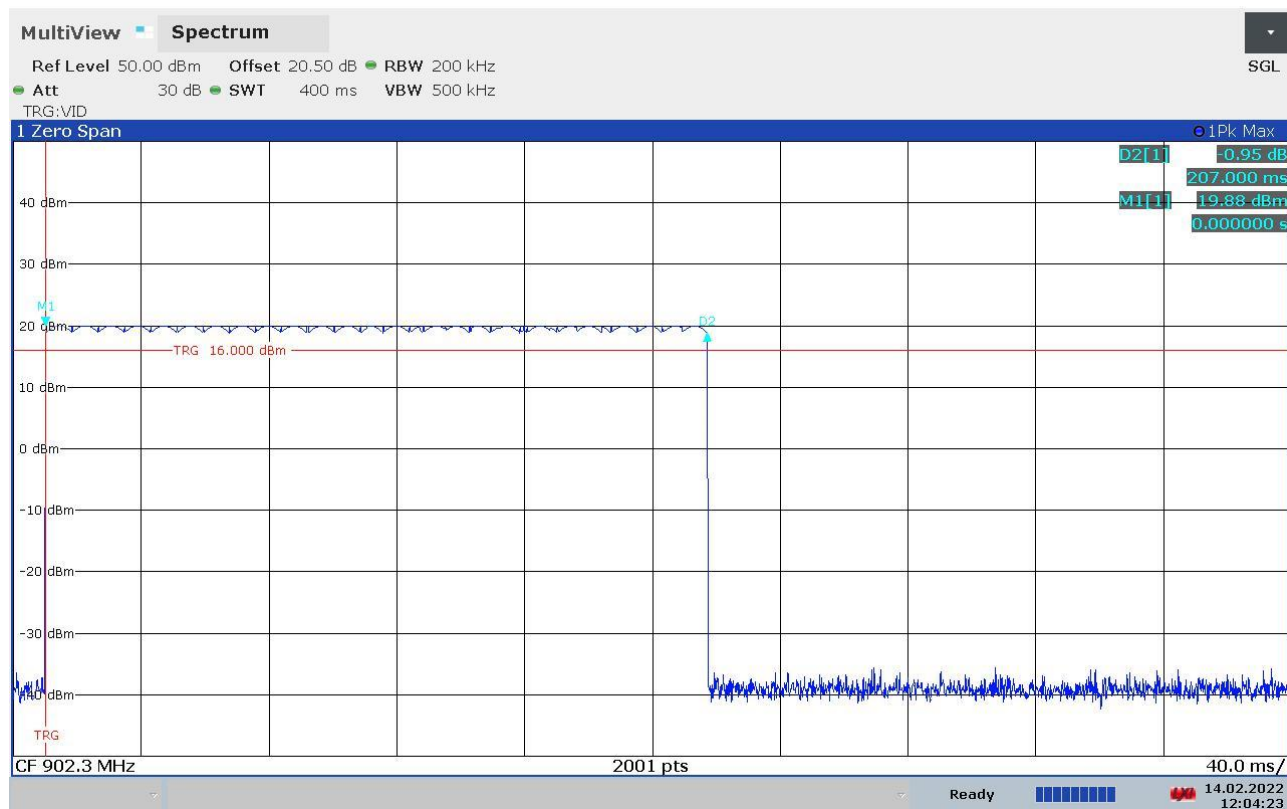

9.8 Band edge


Tested by	C. Panozzo
Test date	14.02.2022
Test location (stand)	Laboratory
Reference standards	FCC Rules and Regulation; Titles 47 Part 15.205, 15.209, 15.247 (d) ANSI C63.10 cl. 7.8.6, 11.11.1 and 11.12.1 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 8.7
Supplementary test set-up description	--
Supplementary information.....	--

Acceptance limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Operation within the band 902 – 928 MHz

Test setup

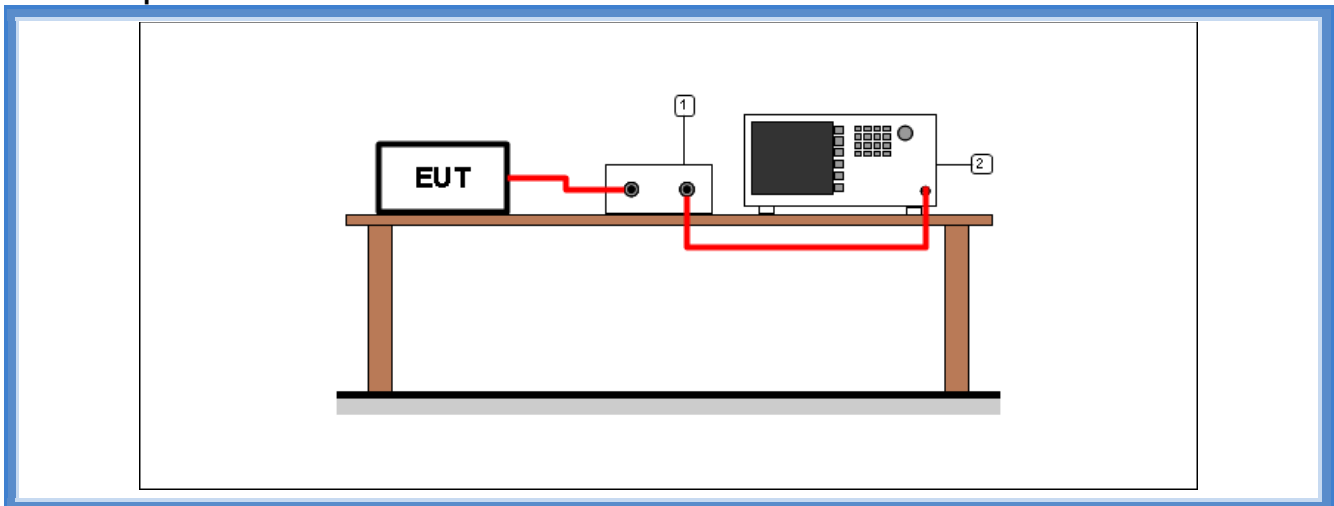

Test setup PR002_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz
1	--	--	--	Cable + attenuator (calibrated before the test)

Result – spread factor 10

Frequency (MHz)	Bandwidth	Graph(s) – Hopping	Results	
902,30	100 kHz	G22023150	F _L : 902,1100 MHz	Complies
914,90	100 kHz	G22023153	F _H : 915,0910 MHz	Complies

Frequency (MHz)	Bandwidth	Graph(s) – No hopping	Results	
902,30	100 kHz	G22023151	F _L : 902,1075 MHz	Complies
914,90	100 kHz	G22023152	F _H : 915,1070 MHz	Complies


Result – spread factor 7

Frequency (MHz)	Bandwidth	Graph(s) – Hopping	Results	
902,30	100 kHz	G22023149	F _L : 902,1125 MHz	Complies
914,90	100 kHz	G22023154	F _H : 915,1060 MHz	Complies


Frequency (MHz)	Bandwidth	Graph(s) – No hopping	Results	
902,30	100 kHz	G22023148	F _L : 902,1075 MHz	Complies
914,90	100 kHz	G22023155	F _H : 915,1070 MHz	Complies

Graphs


Panozzo 22023148

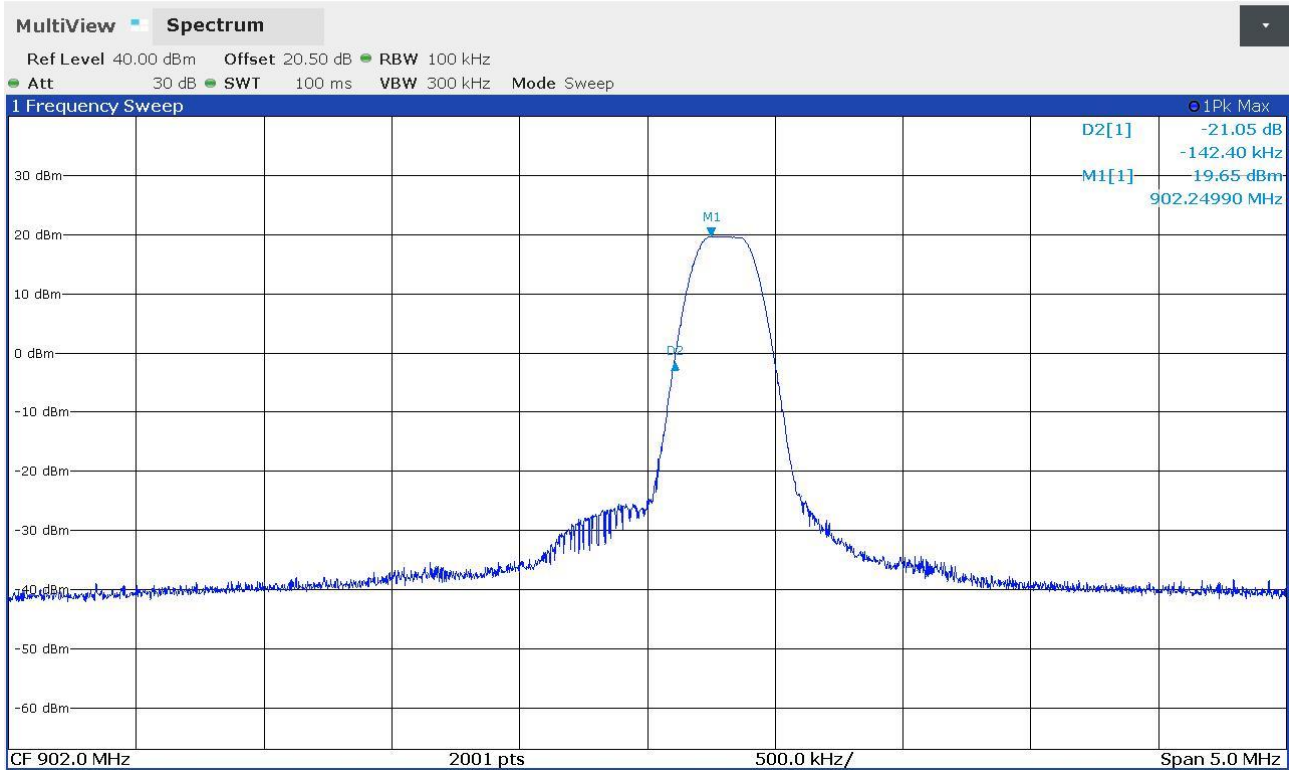


Panozzo 22023149

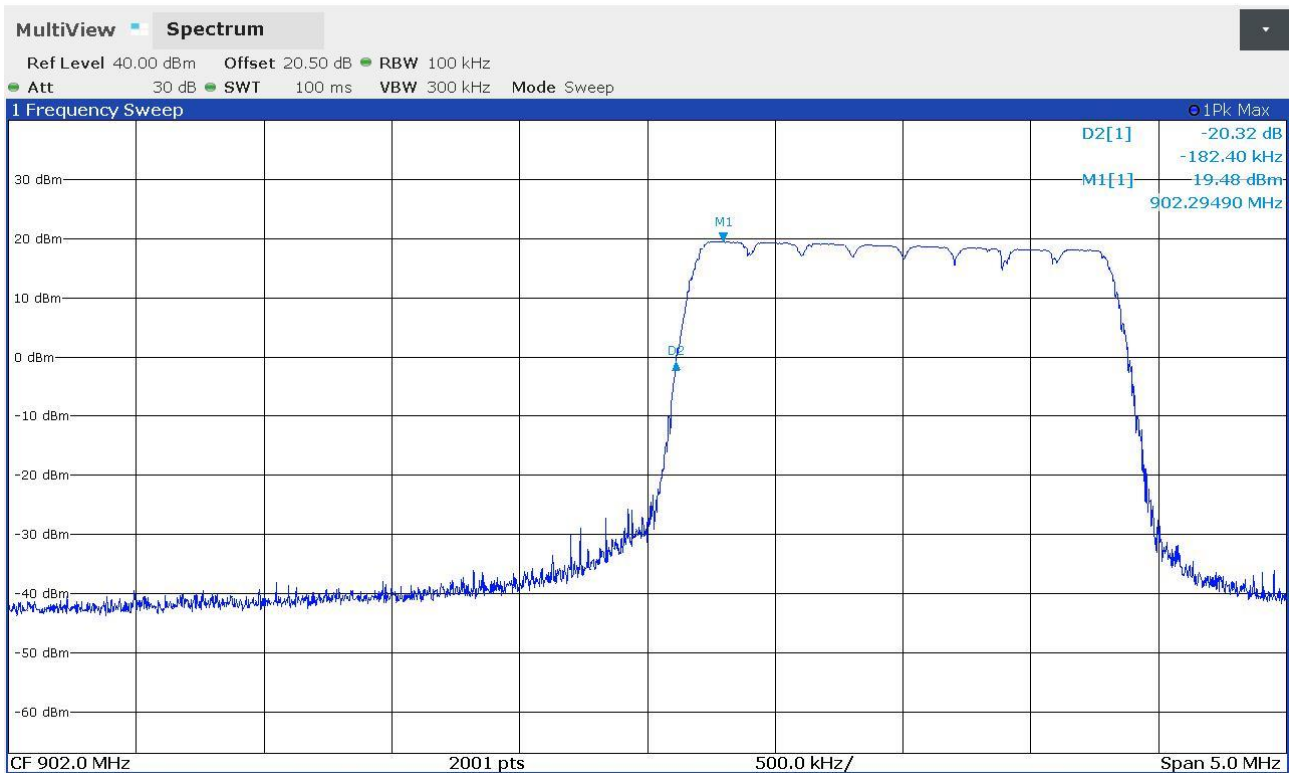


Panozzo 22023150

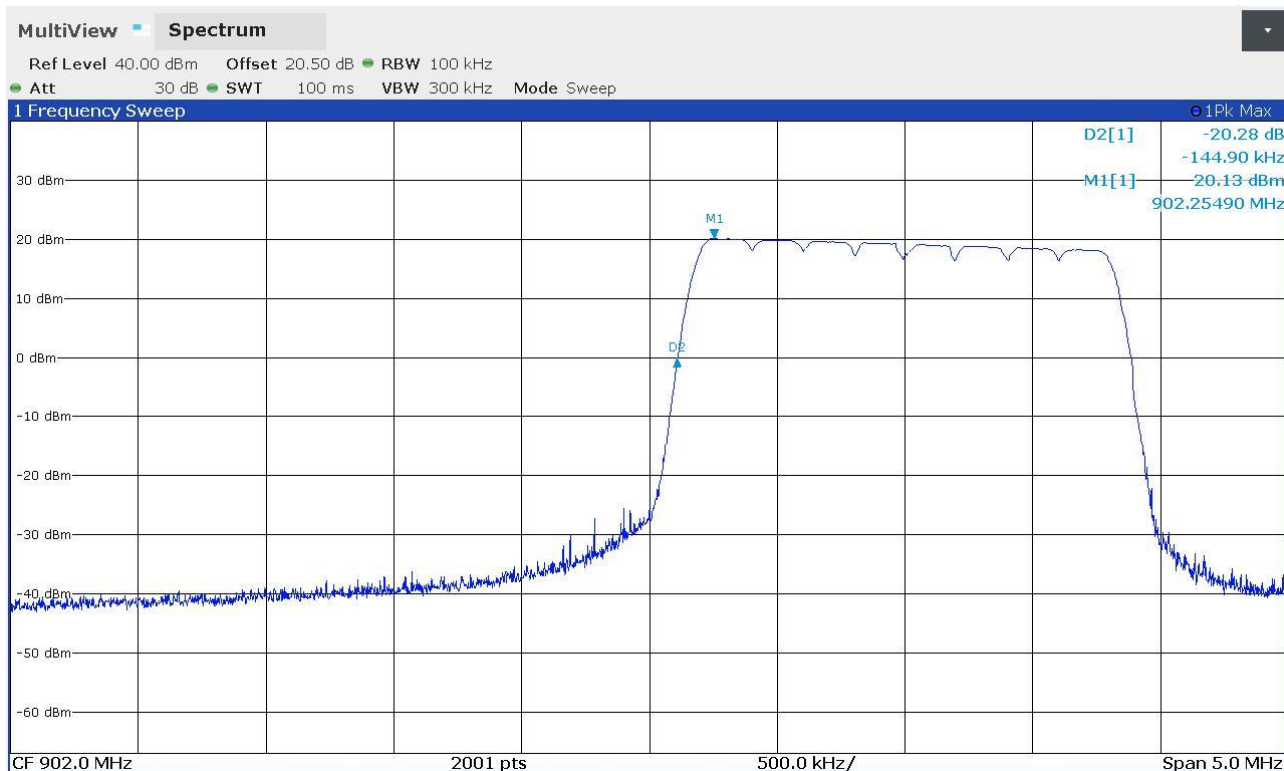


Panozzo 22023151

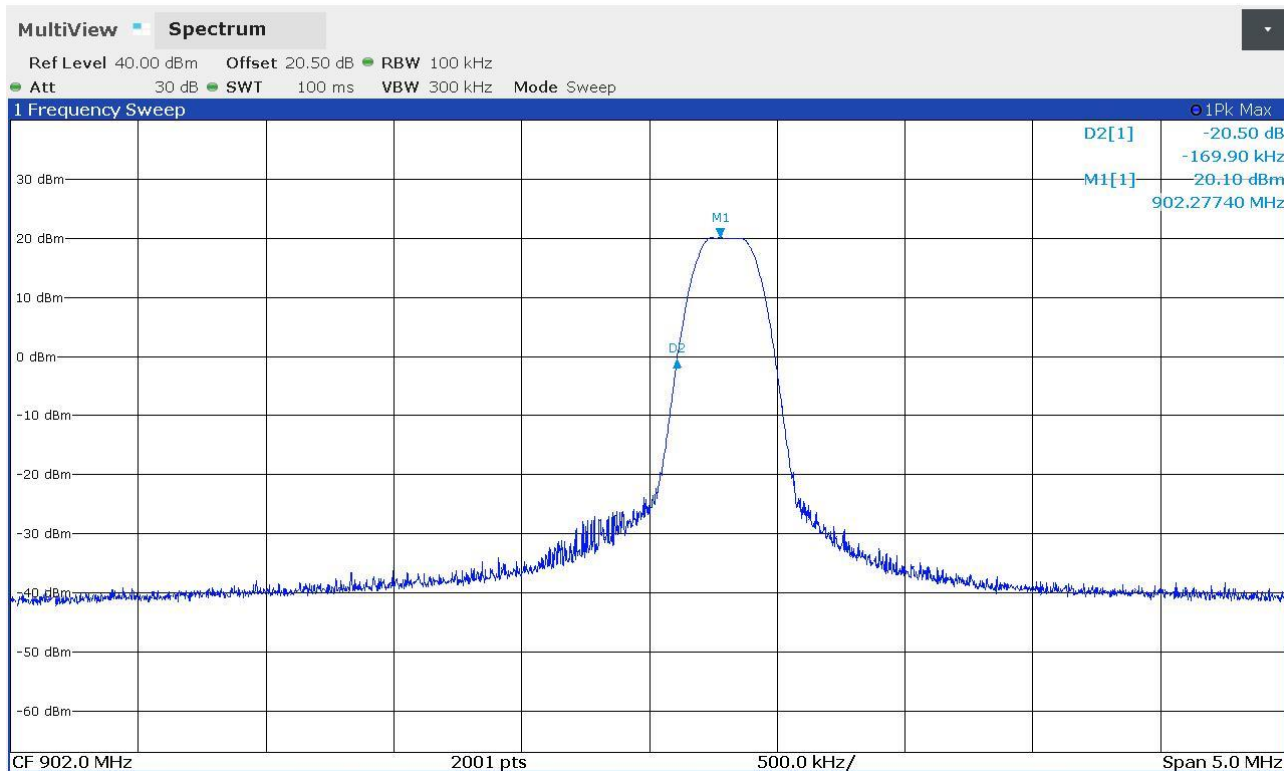


Panozzo 22023152

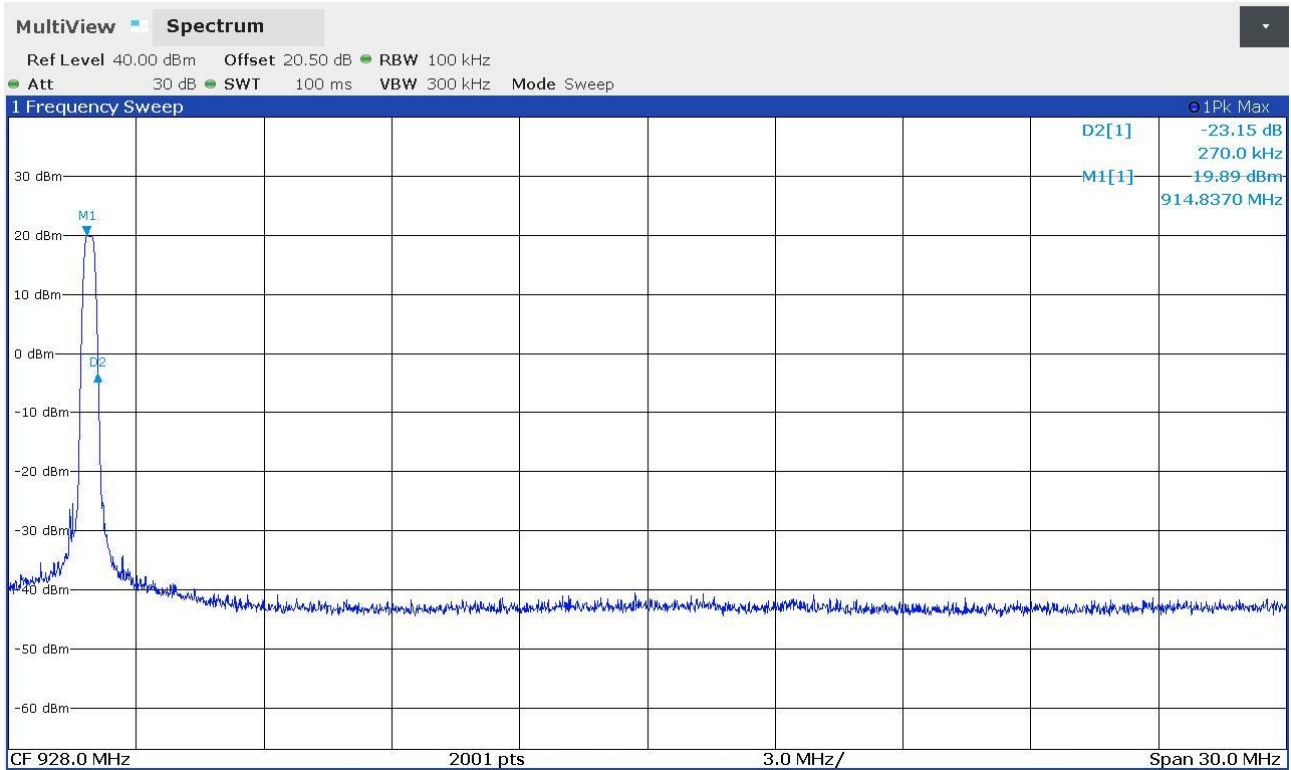


Panozzo 22023153

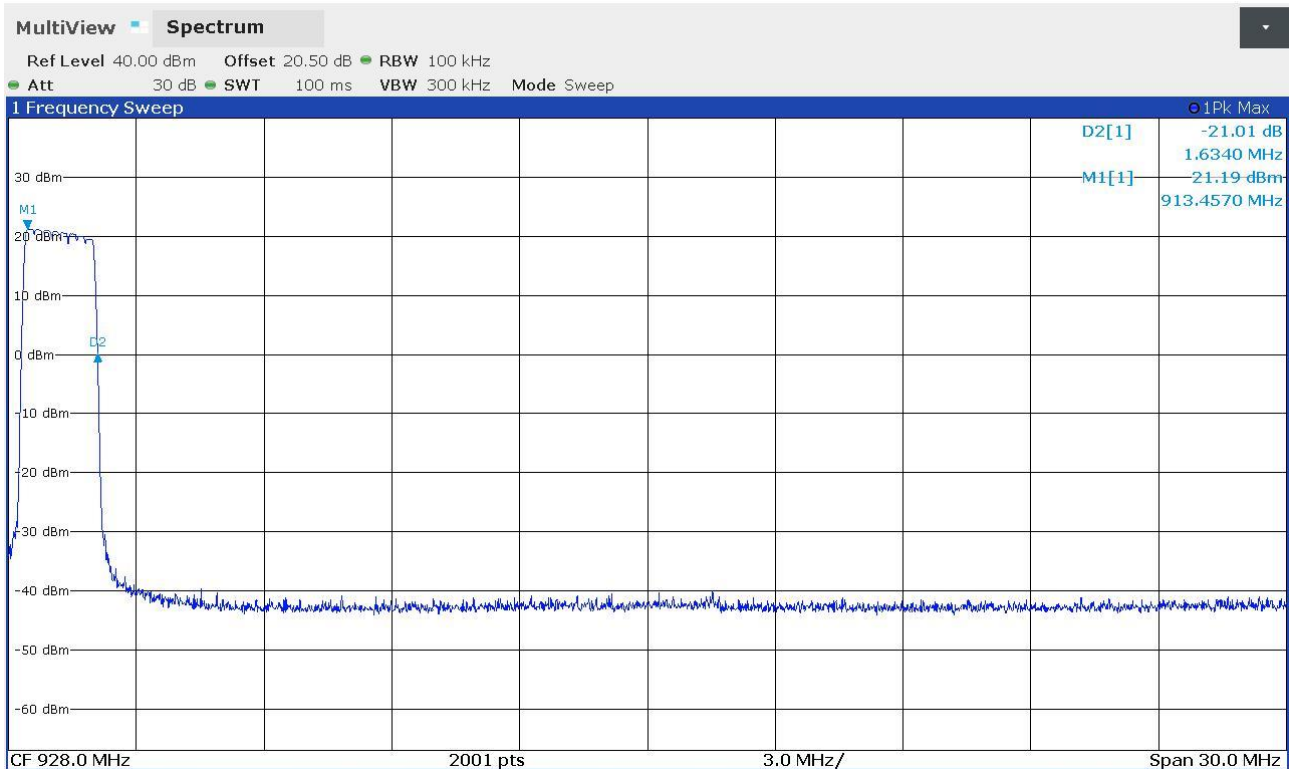

Panozzo 22023154

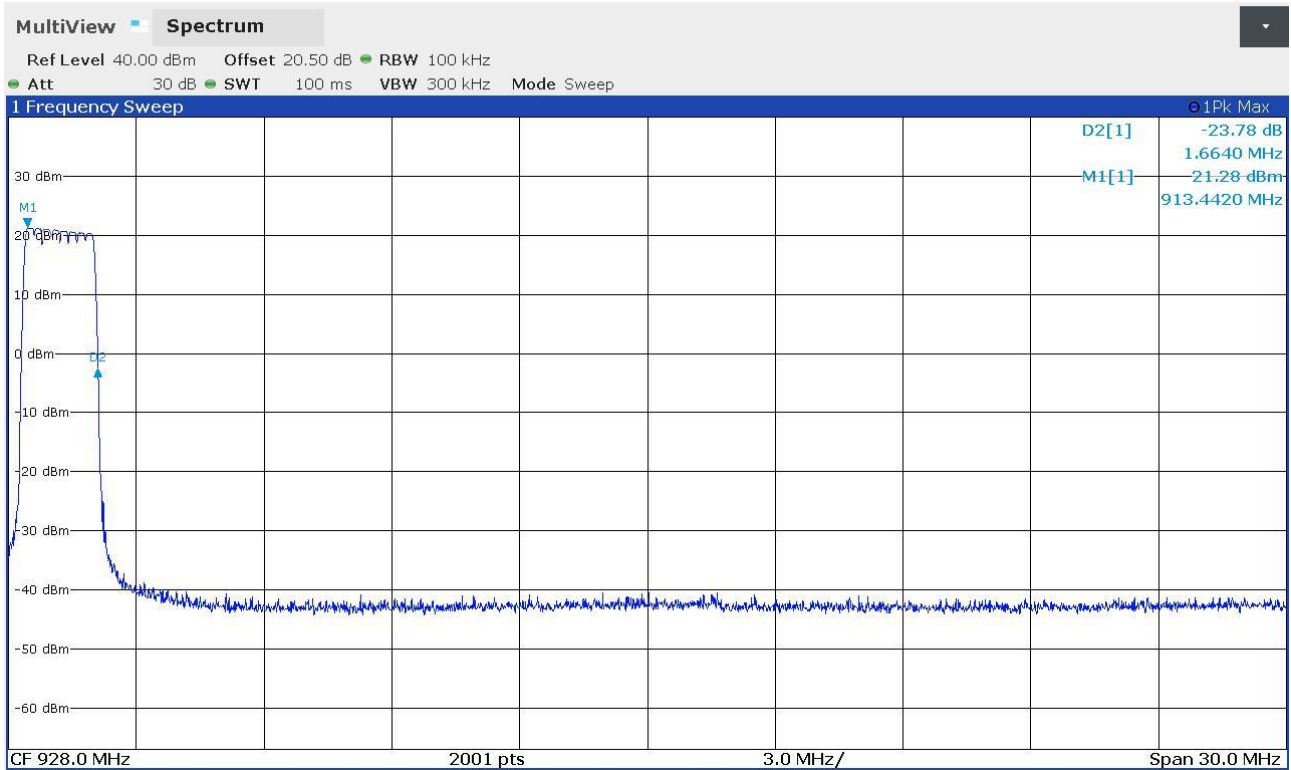

Panozzo 22023155

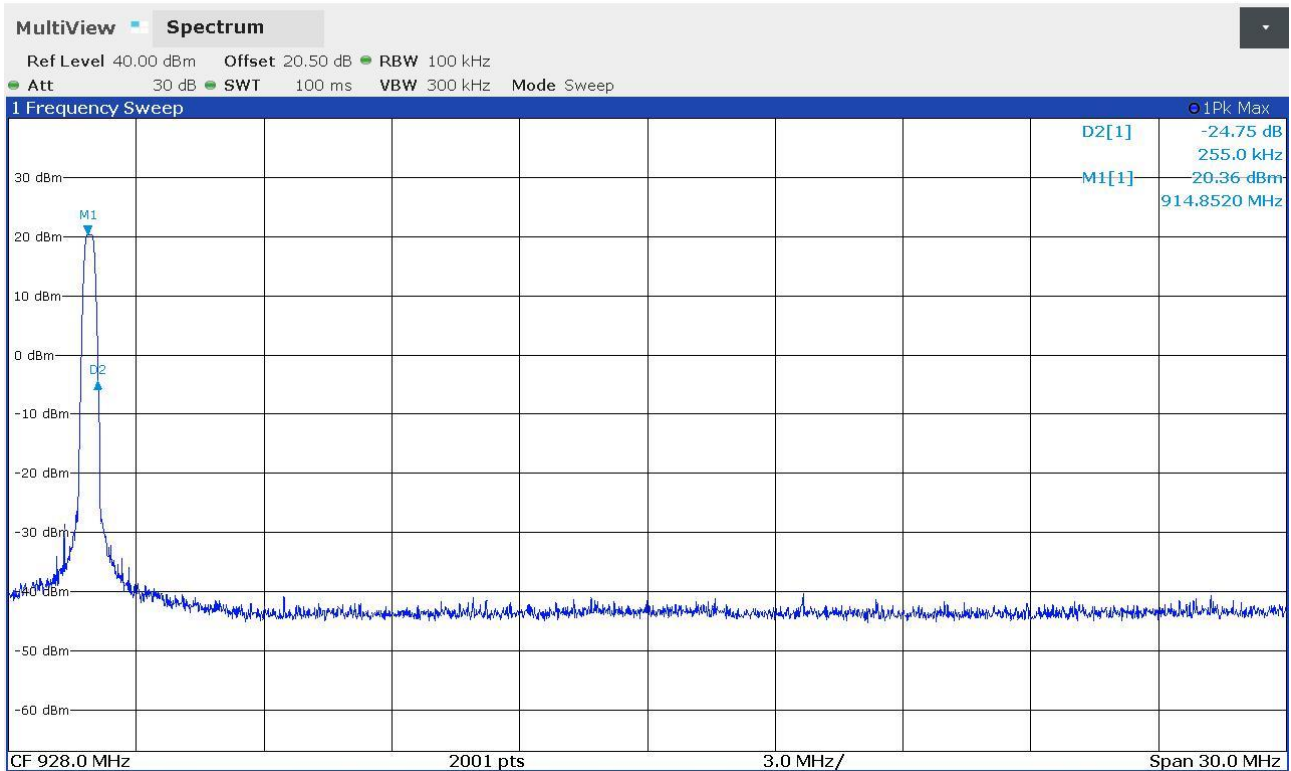

9.9 Fundamental emission output power


Tested by	C. Panozzo
Test date	14.02.2022
Test location (stand)	Laboratory
Reference standards	FCC Rules and Regulation; Titles 47 Part 15.247 (b) (3) ANSI C63.10 cl. 7.8.5 and 11.9.1.1 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 10 b) 6) i)
Supplementary test set-up description	--
Supplementary information.....	--

Acceptance limits

For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0,25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 watt.

Test setup

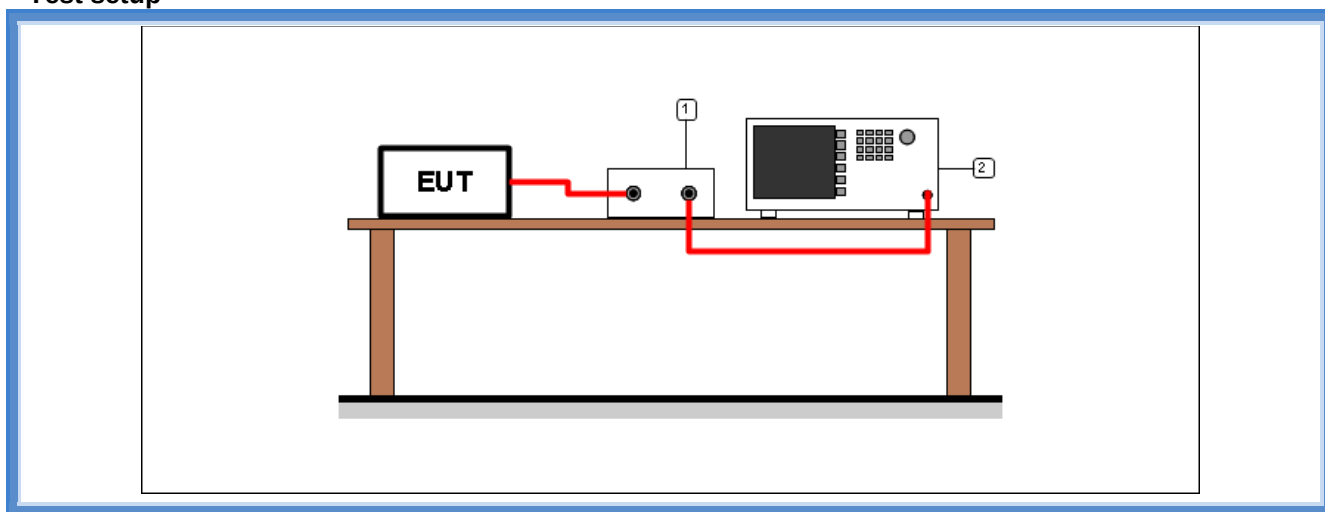

Test setup PR002_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz
1	--	--	--	Cable + attenuator (calibrated before the test)

Result – spread factor 10


<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>Peak Output Power (dBm)</i>	<i>Peak Output Power (mW)</i>	<i>Limit (mW)</i>
902,30	G22023135	20,61	115,08	1000
908,30	G22023134	20,21	104,95	1000
914,90	G22023133	20,02	100,46	1000

Result – spread factor 7


<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>Peak Output Power (dBm)</i>	<i>Peak Output Power (mW)</i>	<i>Limit (mW)</i>
902,30	G22023130	20,18	104,23	1000
908,30	G22023131	20,26	106,17	1000
914,90	G22023133	20,07	101,62	1000

Graphs


Panozzo 22023130

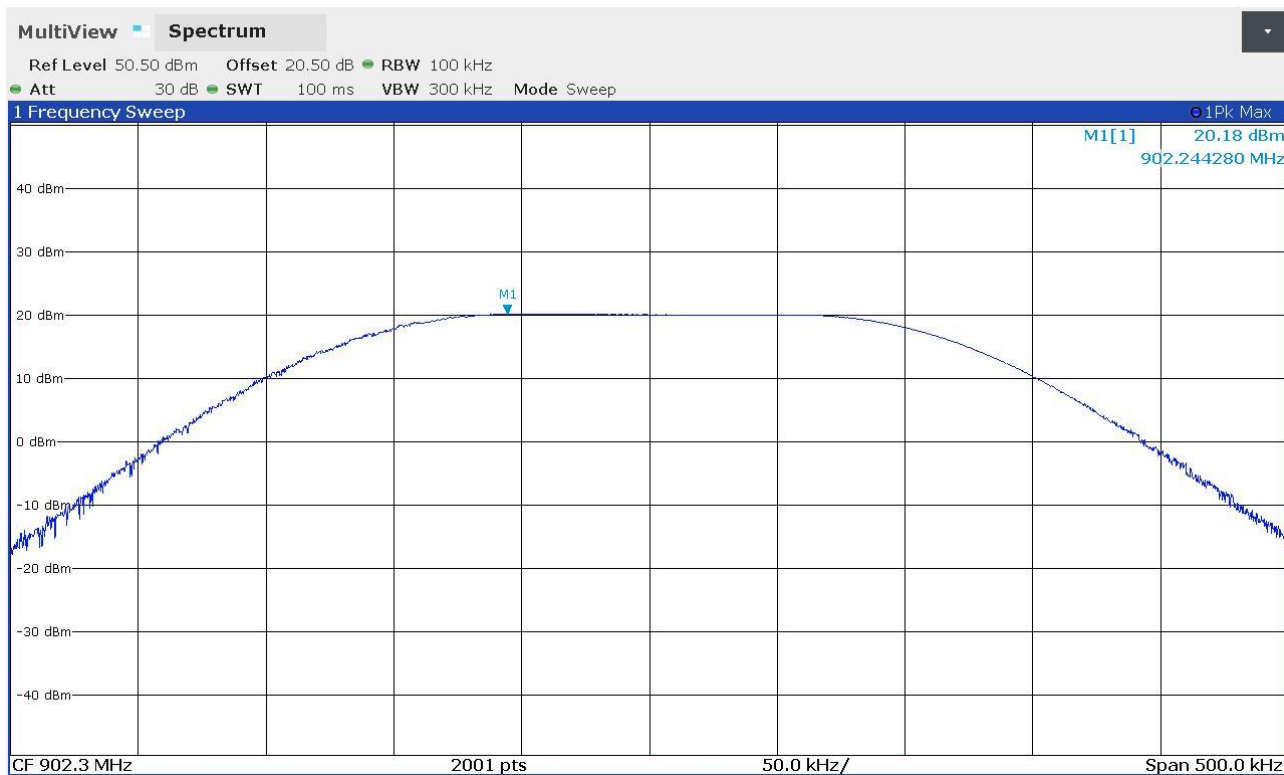


Panozzo 22023131

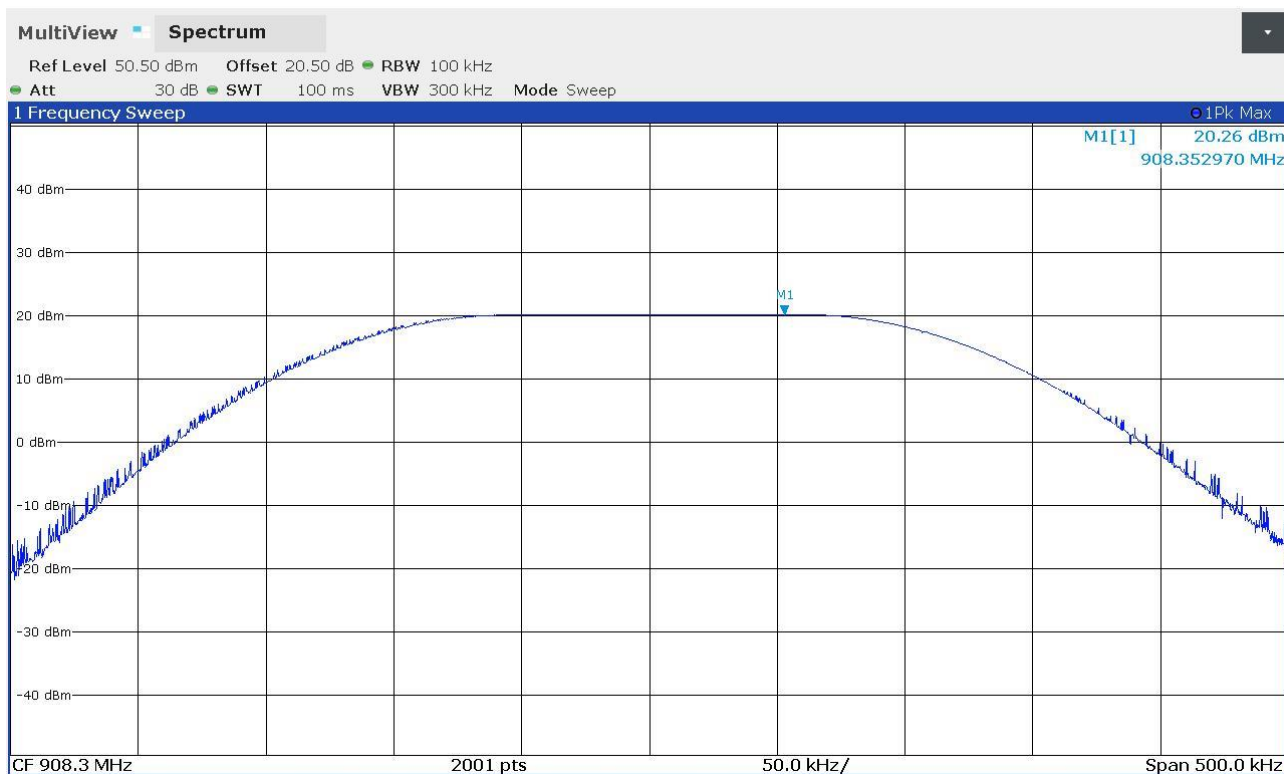


Panozzo 22023132

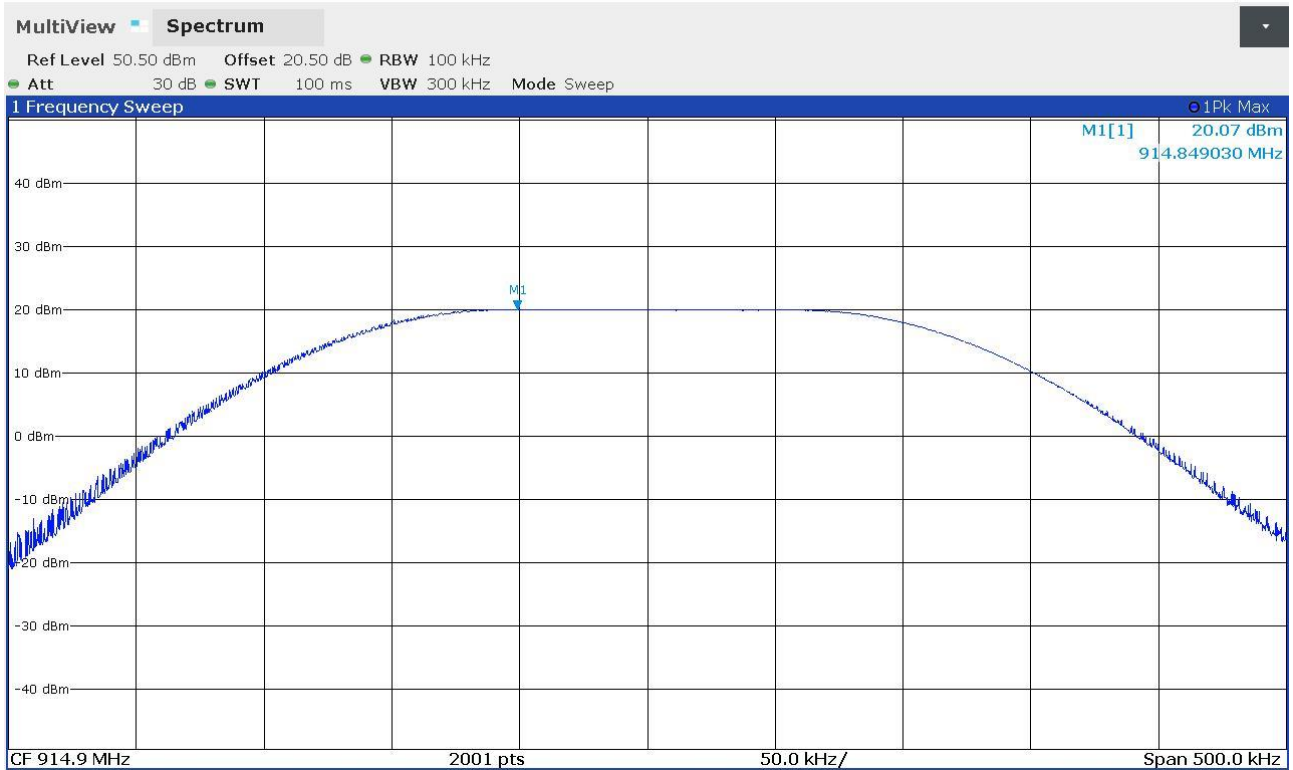


Panozzo 22023133

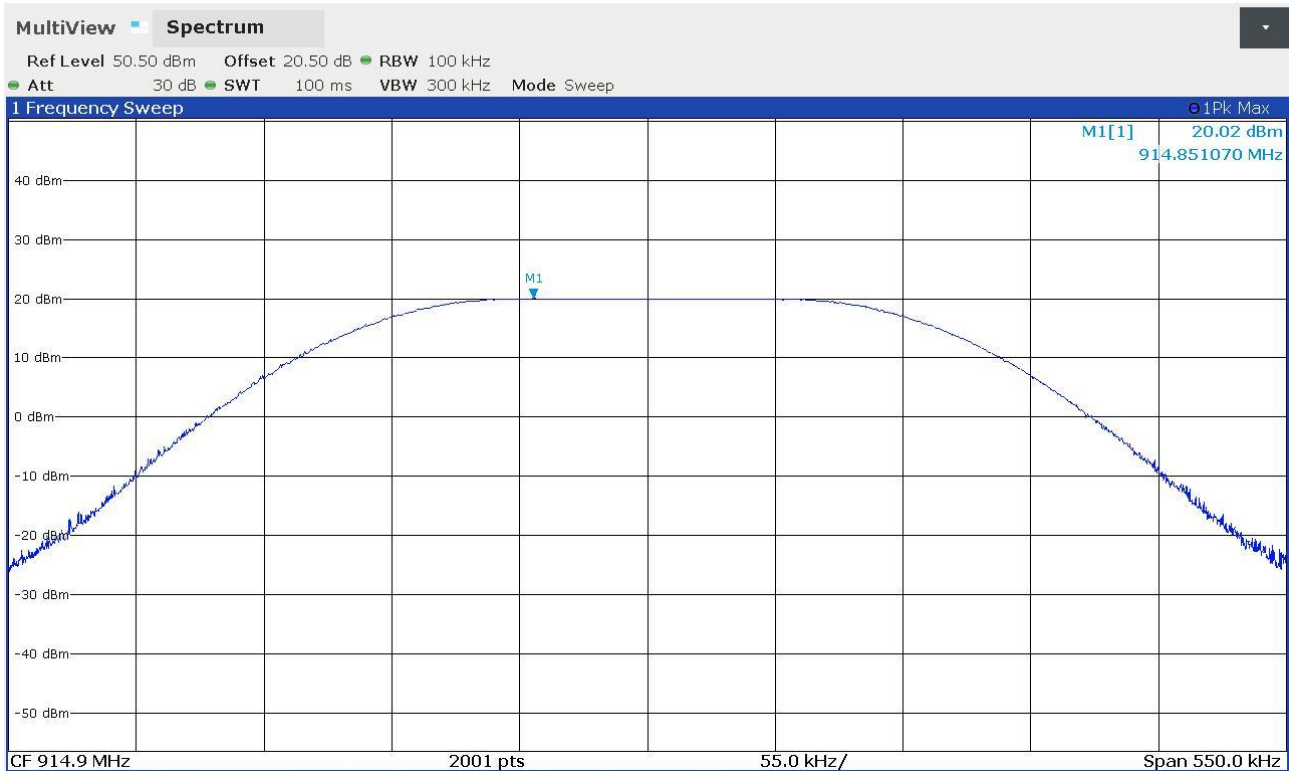

Panozzo 22023134

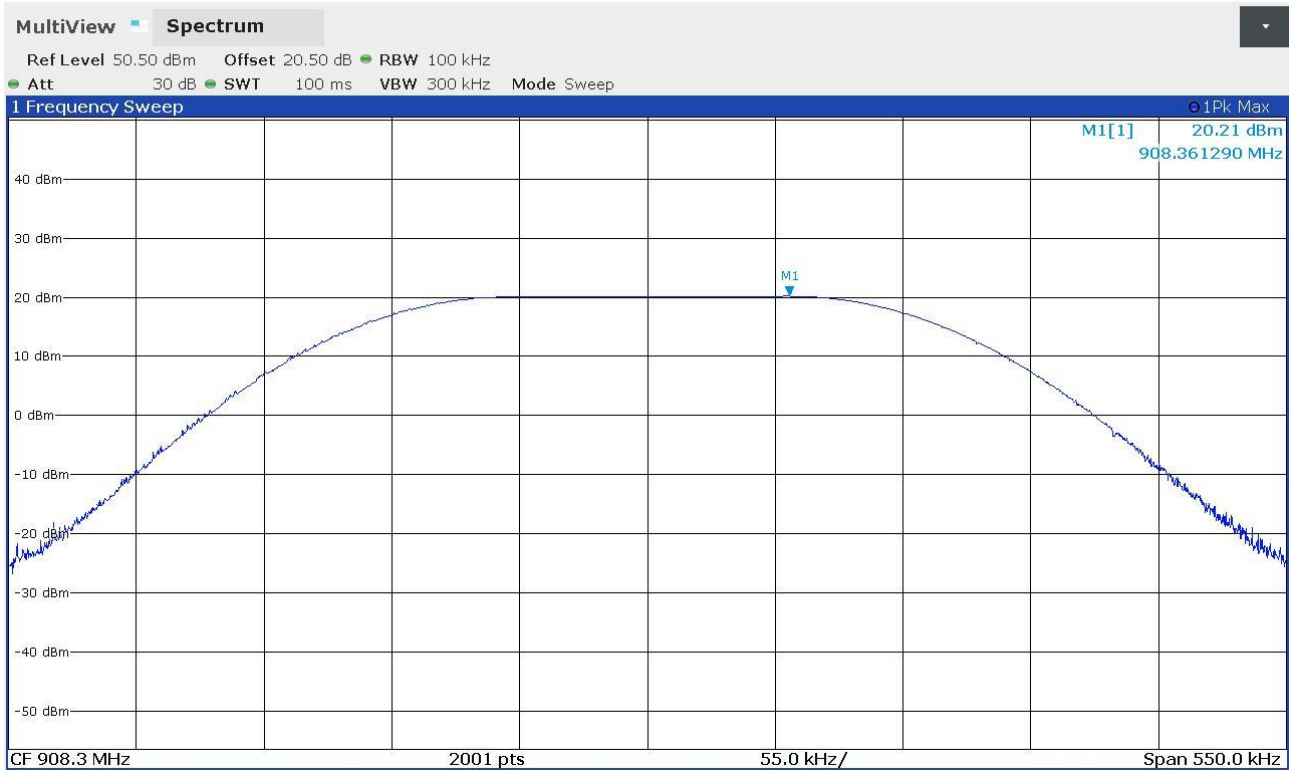

Panozzo 22023135

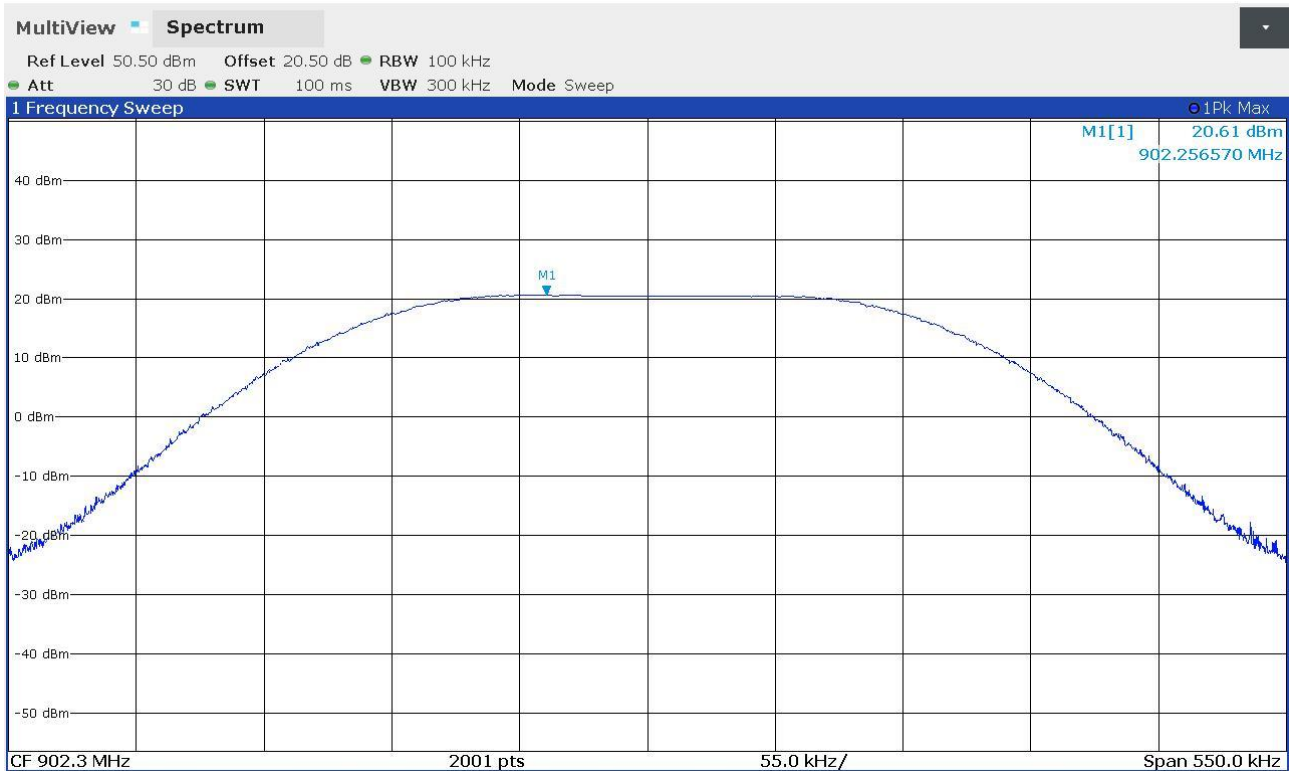


9.10 Maximum power spectral density level in the fundamental emission

Tested by	C. Panozzo
Test date	14.02.2022
Test location (stand)	Laboratory
Reference standards	FCC Rules and Regulation; Titles 47 Part 15.247 (e) ANSI C63.10 cl. 11.10.2 KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 10 b) 1)
Supplementary test set-up description	--
Supplementary information	--

Acceptance limits

As specified in Section 15.247(f), a hybrid system must comply with the power density standard of 8 dBm in any 3 kHz band when the frequency hopping function is turned off

Test setup

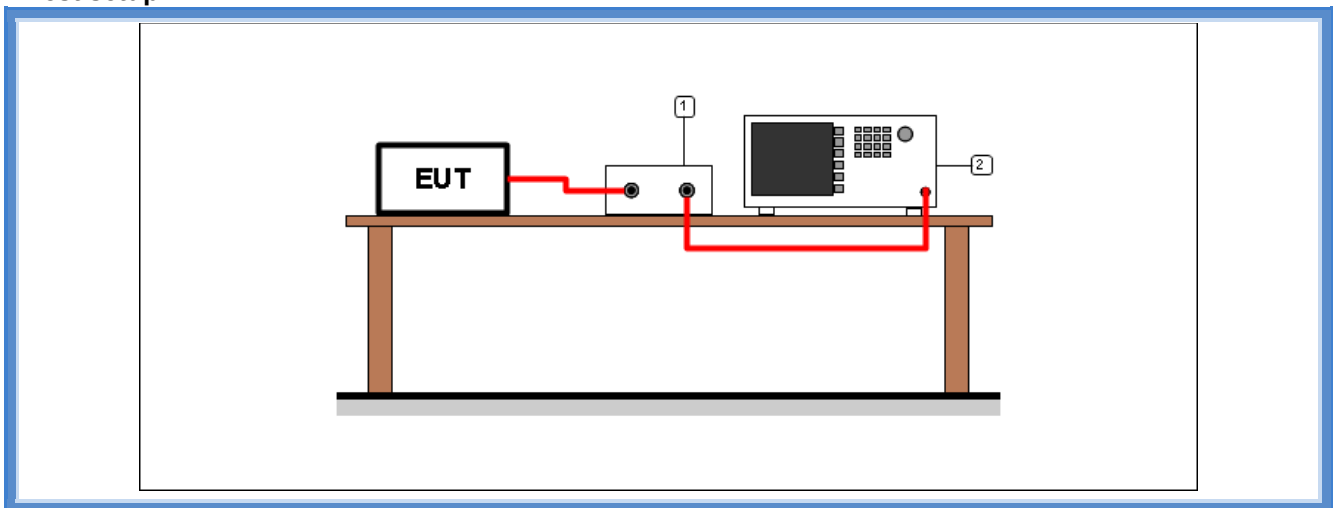

Test setup PR002_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz
1	--	--	--	Cable + attenuator (calibrated before the test)

Result – spread factor 10


Frequency (MHz)	Graphs	Bandwidth (kHz)	Measured level (dBm/3 kHz)	Limits (dBm/3 kHz)
902,30	G22023165	3	4,19	8,00
908,30	G22023164	3	4,89	8,00
914,90	G22023163	3	3,89	8,00

Result – spread factor 7


Frequency (MHz)	Graphs	Bandwidth (kHz)	Measured level (dBm/3 kHz)	Limits (dBm/3 kHz)
902,30	G22023160	3	4,93	8,00
908,30	G22023161	3	4,33	8,00
914,90	G22023162	3	4,59	8,00

Graphs


Panozzo 22023160

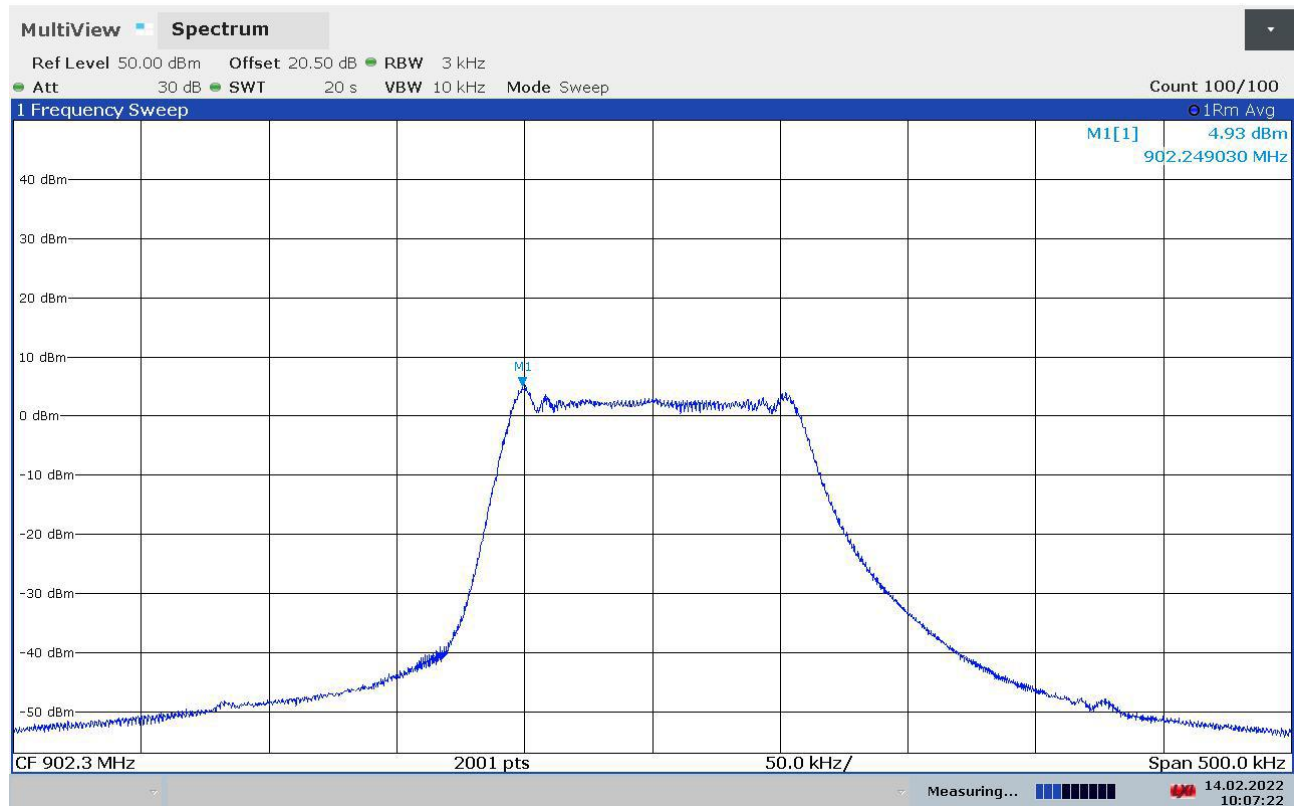


Panozzo 22023161

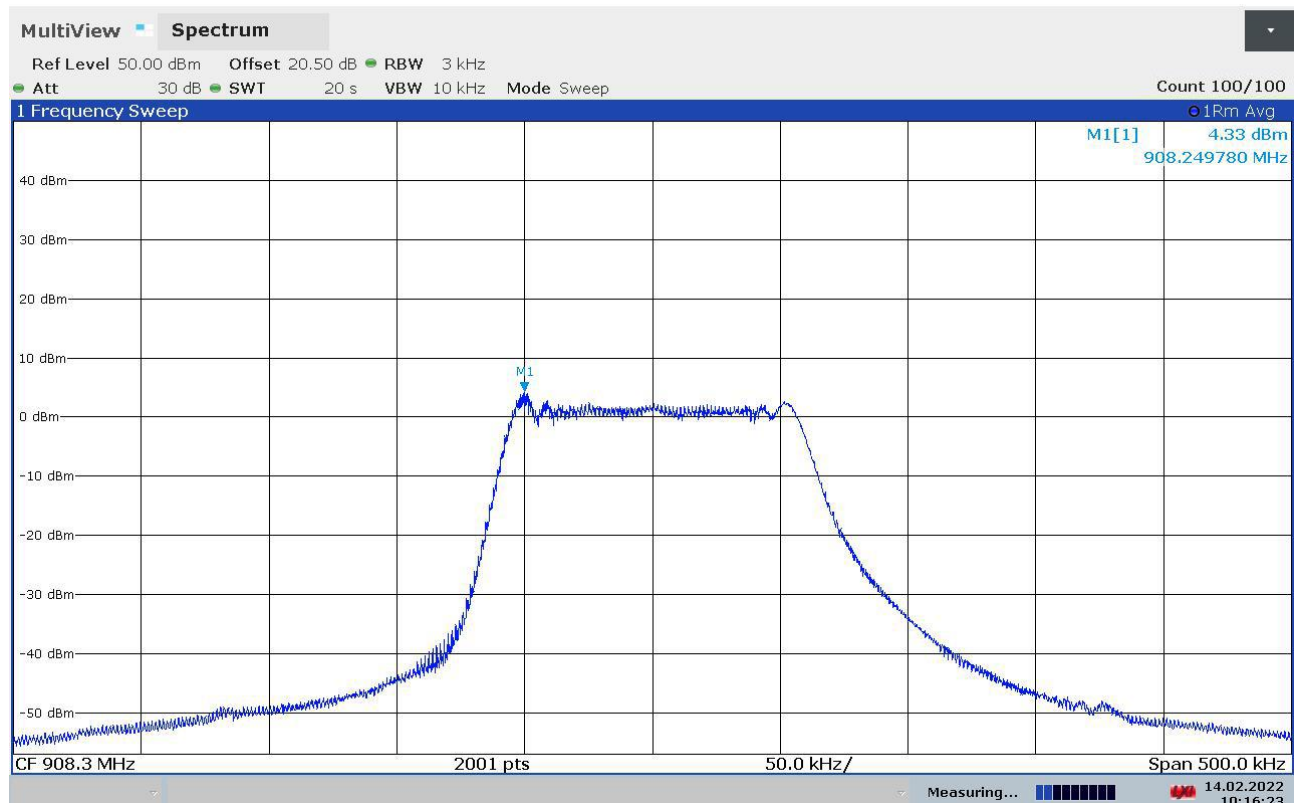


Panozzo 22023162

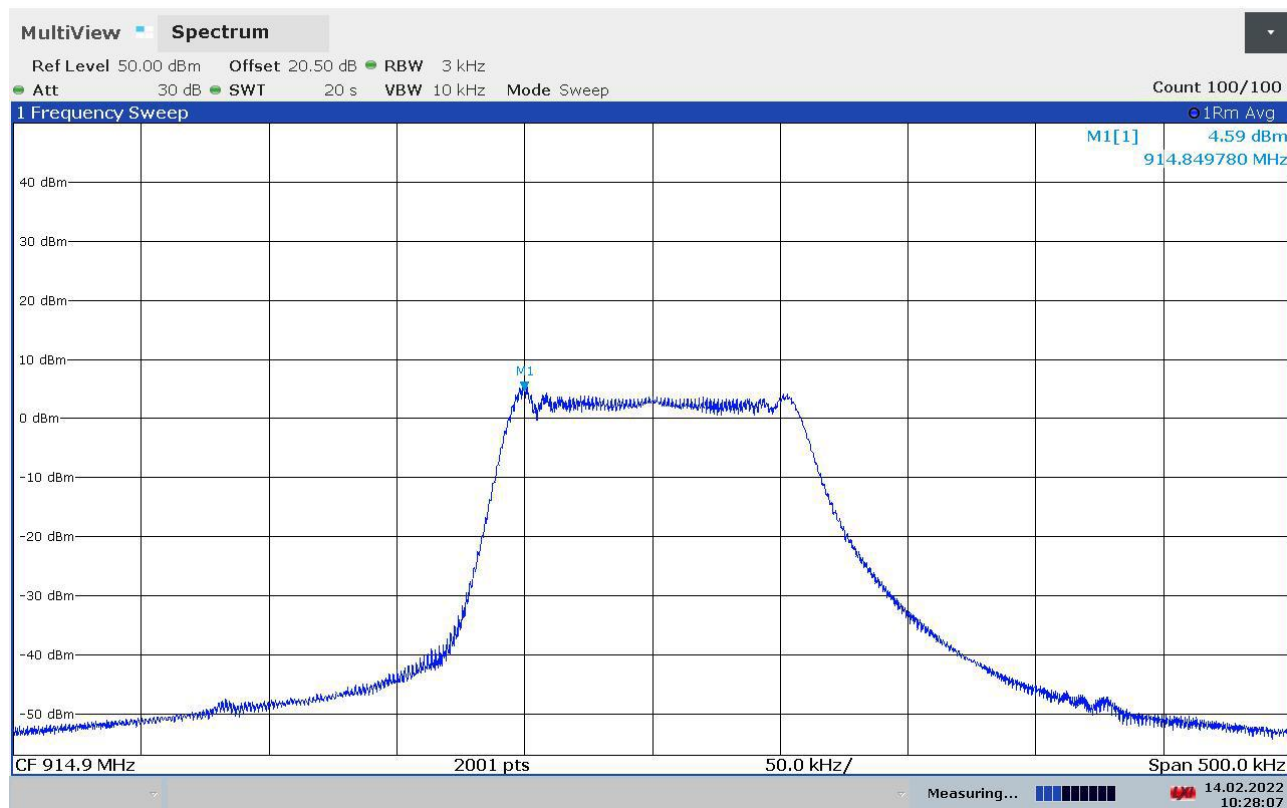


Panozzo 22023163

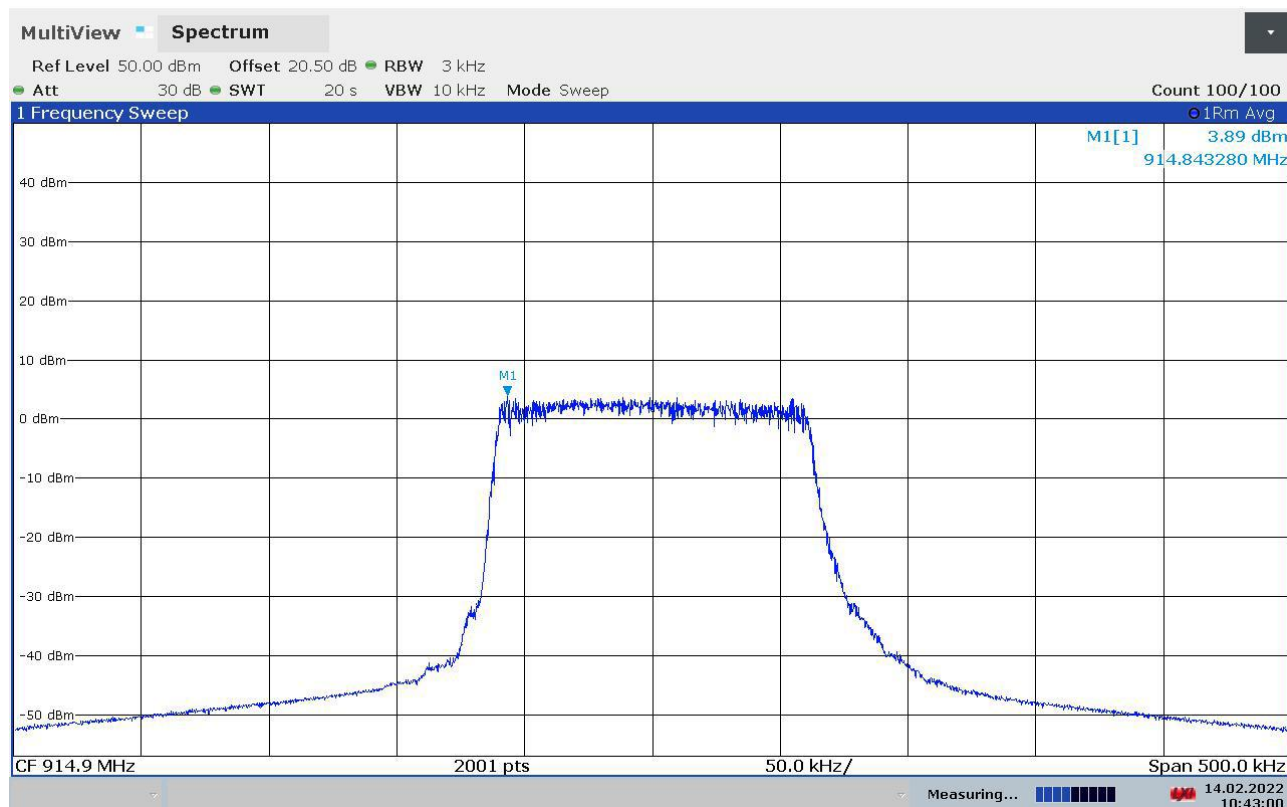

Panozzo 22023164

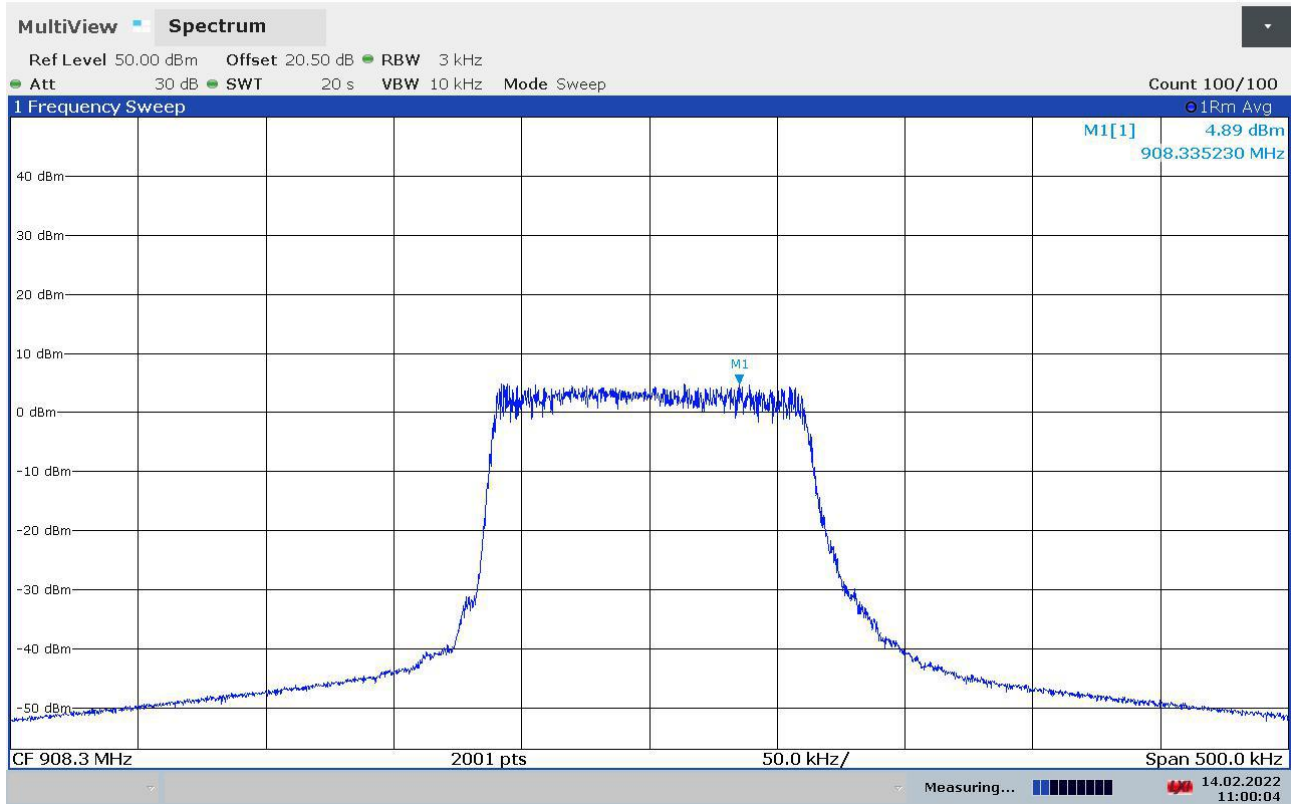

Panozzo 22023165

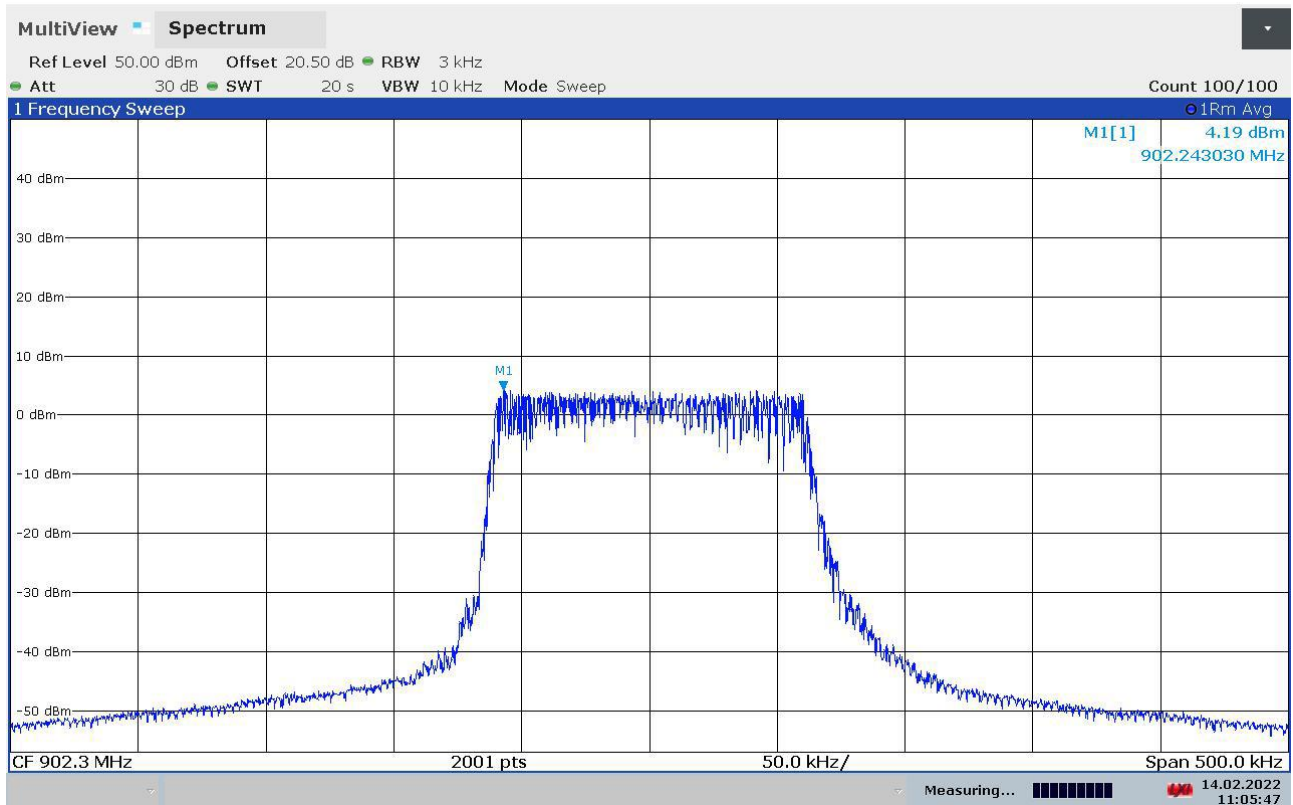

Attachment 1

Instruments list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	- - -	January '22	January '23
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '19	June '22
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	November '18	November '23
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '22	January '23
CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz	100781	January '22	January '23
CMC S260	CMC	Wfr_N	Shielded Cable	Wfr_ant10-1	November '21	November '22
CMC S261	CMC	Wfr_N	Shielded Cable	Wfr_ant20-1	November '21	November '22
CMC S262	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix32-1	November '21	November '22
CMC S263	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix31-1	November '21	November '22
CMC S264	CMC	Wfr_N	Shielded Cable	Wfr_ext03-1	November '21	November '22
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '19	June '22
CMC S287	Schwarzbeck	VUSLP 9111B	Log-periodic Antenna (200 MHz-3GHz)	9111B-203	June '19	June '22
CMC S288	CMC	W_sma_white	Joint Shielded Cable	W_001	November '21	November '22
CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz	104059	November '19	November '22
CMC S353	Rohde & Schwarz	ESW26	Emi Test Receiver 1 Hz - 26.5 GHz	101492	September '20	September '22

Attachment 1

Measurement uncertainty

Test	Test Setup	Expanded uncertainty		Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150 MHz	PE001_01	3,4 dB		1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_01	3,0 dB		1
Conducted emission CISPR 16 Voltage Probe 0,15-30 MHz	PE001_02	2,3 dB		1
Conducted emission CISPR 16 Current Probe 0,15-30 MHz	PE001_03	2,6 dB		1
Conducted emission CISPR 16 ISN 0,15-30 MHz	PE001_04	4,7 dB		1
Clic CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_05	2,9 dB		1
Radiated Emission CDNE 30-300 MHz	PE001_06	3,3 dB		1
Disturbance Power 30-300 MHz	PE002_01	3,8 dB		1
Radiated Emission LAS 0,15-30 MHz	PE003_01	2,0 dB		1
Radiated Emission CISPR 16 Loop Ant. 0,15-30 MHz	PE004_01	4,1 dB		1
Radiated Emission CISPR 16 Bicon. Ant. 30-300 MHz	PE004_02	4,7 dB		1
Radiated Emission CISPR 16 LogP. Ant. 300-1000 MHz	PE004_03	4,6 dB		1
Radiated Emission CISPR 16 Horn Ant. 1-18 GHz	PE004_04	4,7 dB		1
Human Exposure to electromagnetic fields	PE005_01	16,7 %		1
Harmonics	PE006_01	10 mA +	2,9 %	1
Flicker	PE007_01	4,15 %		1
Radiated Immunity 80 MHz - 6 GHz	PE102_XX	2,20 dB	0,86 V/m a 3V/m	1
Conducted Immunity 0,15 - 230 MHz	PE105_XX	1,20 dB	0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 %	0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,23 %	18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,23 %	1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,16 %	0,22 V a 10V	1

Attachment 1

Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	4,1 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04+05	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_06	5,4 dB	1
Frequency error	PR002_01+02	$< 1 \times 10^{-7}$	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	$< 1 \times 10^{-7}$	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillatory immunity test	PE113_01		2
Rev. 22_01 date 31/01/2022			

Note 1:





The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of $p = 95\%$

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor $k=2$

Attachment 1

Judgement of compliance

Case 1	Case 2	Case 3	Case 4
 The sample complies with the requirements. The measurement results is within the specification limit when the measurement uncertainty is taken into account.	 The sample complies with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	 The sample does not comply with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	 The sample does not comply with the requirements. The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8:09/2019 cl.4.2.1 Guidelines on Decision Rules and Statements of Conformity

Quality manual references – Internal procedure

Internal Procedure PM001 rev. 3.1 (Quality Manual)	Measure procedure
Internal Procedure INC_M rev. 9.7 (Quality Manual)	Measurement uncertainty calculation