


ID Label/Location

Label Location



Note that the lettering on the photo is not the final letters used. The drawing on page 2 of this document shows the final wording. This is the final location.

Drawing of label

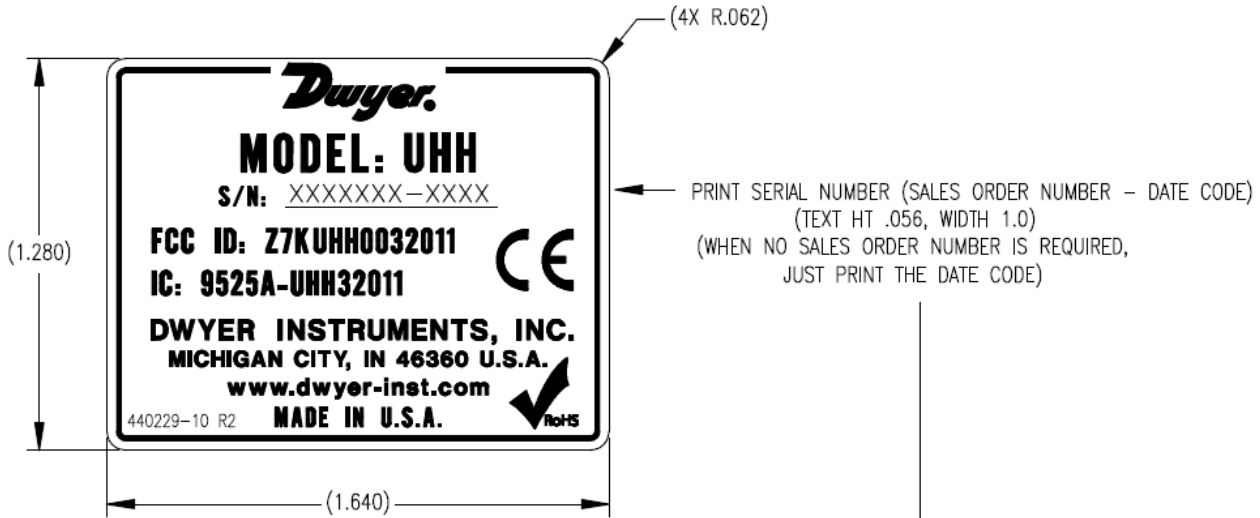

Ⓢ = CRITICAL DIMENSION
 STANDARD TOLERANCES UNLESS NOTED:
 ALL DECIMAL DIMENSIONS ± .015
 ALL ANGLES ± 1°

NOTES

- MATERIAL SPECIFICATIONS:
 IDENTCO TT730 THERMAL TRANSFER GLOSSY SILVER POLYESTER FILM, 0.2 mils THICK, COATED WITH 0.8-0.9 mils PERMANENT ACRYLIC ADHESIVE AND BACKED WITH 50# KRAFT RELEASE LINER.
 USE IDENTCO TTRR-D THERMAL TRANSFER RESIN RIBBON.
 SERVICE TEMP.: -40°F to 302°F (-40°C to 150°C).
 MIN. APPLICATION TEMP.: 50°F (10°C).
 STORAGE CONDITIONS: 70°F (21°C) AND 40-50% RELATIVE HUMIDITY.
- LABEL TO BE KISS CUT TO LINER AND PUT UP IN A 8" MAX. DIA. WITH 3" DIA. CORE PRINTER ROLL FORM AS SHOWN. APPLY UL AND CSA REQUIRED DATA ON EACH ROLL CORE.
- CUTTING TOL.: WITHIN ±0.01.

