


ID Label/Location

Label Drawings

Module Label

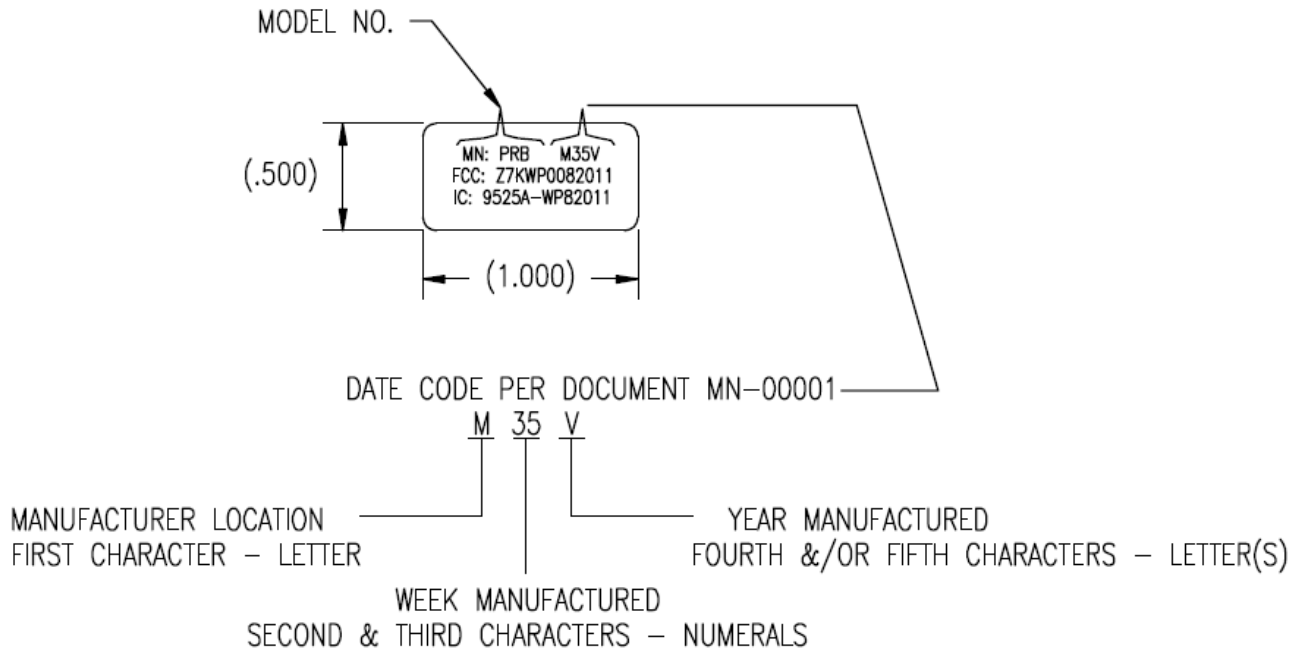

NOTES

1. MATERIAL SPECIFICATIONS:
IDENTCO TT730 THERMAL TRANSFER GLOSSY SILVER POLYESTER FILM, 0.2 mils THICK, COATED WITH 0.8-0.9 mils PERMANENT ACRYLIC ADHESIVE AND BACKED WITH 50# KRAFT RELEASE LINER.


USE IDENTCO TTRR-D THERMAL TRANSFER RESIN RIBBON.

SERVICE TEMP.: -40°F to 302°F (-40°C to 150°C).

MIN. APPLICATION TEMP.: 50°F (10°C).

STORAGE CONDITIONS: 70°F (21°C) AND 40-50% RELATIVE HUMIDITY.
2. LABEL TO BE KISS CUT TO LINER AND PUT UP IN A 8" MAX. DIA. WITH 3" DIA. CORE PRINTER ROLL FORM AS SHOWN. APPLY UL AND CSA REQUIRED DATA ON EACH ROLL CORE.
3. CUTTING TOL.: WITHIN ± 0.01 .

External Label

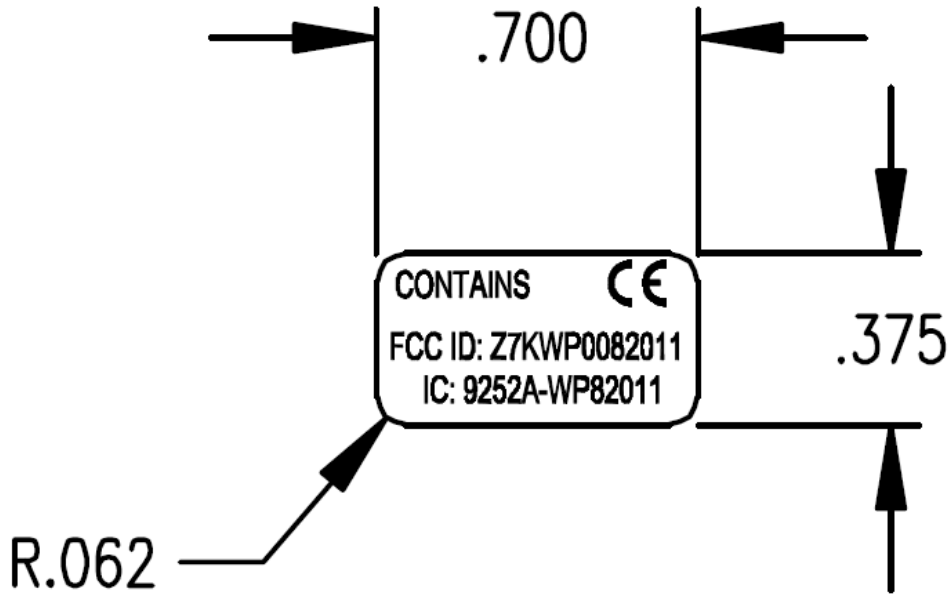

Location of Label

Location of Label on Module



Note that the lettering on the photo is not the final letters used. The drawing on page 1 of this document shows the final wording. This is the final location.

External Label Location



Outer case

Note that the lettering on the photo is not the final letters used. The drawing on page 2 of this document shows the final wording. This is the final location.