

FCC CERTIFICATION TEST REPORT

FOR

Applicant	: Jiangmen Dascom Computer Peripherals Co.,Ltd.
Address	: No.399, Jin Xing Road, Jiang Hai District, Jiangmen City, Guang Dong Province, P.R.China
Equipment under Test	: Dot Matrix Printer
Model No	: DM-210, DM-220
Trade Mark	: Tally/DASCOM
FCC ID	: Z7ODM2100
Manufacturer	: Jiangmen Dascom Computer Peripherals Co.,Ltd.
Address	: No.399, Jin Xing Road, Jiang Hai District, Jiangmen City, Guang Dong Province, P.R.China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City,
Guangdong Province, China, 523808

Tel: +86-0769-22891499 [Http://www.dgddt.com](http://www.dgddt.com)

REPORT

TABLE OF CONTENTS

	Test report declare	3
1.	Summary of test results	4
2.	General test information	5
2.1.	Description of EUT	5
2.2.	Model Description.....	5
2.3.	Assistant equipment used for test.....	5
2.4.	Accessories of EUT.....	5
2.5.	Block diagram EUT configuration for test.....	5
2.6.	Test environment conditions	6
2.7.	Test laboratory.....	6
2.8.	Measurement uncertainty	6
3.	Power Line Conducted Emission Test	7
3.1.	Test equipment	7
3.2.	Block diagram of test setup	7
3.3.	Power Line Conducted Emission Limits(Class B).....	7
3.4.	Test Procedure.....	7
3.5.	Test Result.....	8
4.	Radiated emission test.....	15
4.1.	Test equipment	15
4.2.	Block diagram of test setup	15
4.3.	Radiated emission limit(Class B)	15
4.4.	Test Procedure.....	16
4.5.	Test result	16

TEST REPORT DECLARE

Applicant	:	Jiangmen Dascom Computer Peripherals Co.,Ltd.
Address	:	No.399, Jin Xing Road, Jiang Hai District, Jiangmen City, Guang Dong Province, P.R.China
Equipment under Test	:	Dot Matrix Printer
Model No	:	DM-210, DM-220
Trade mark	:	Tally/DASCOM
FCC ID	:	Z7ODM2100
Manufacturer	:	Jiangmen Dascom Computer Peripherals Co.,Ltd.
Address	:	No.399, Jin Xing Road, Jiang Hai District, Jiangmen City, Guang Dong Province, P.R.China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart B Class B 2012; ANSI C63.4:2009.

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above (class B). The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	DDT-RE130089		
Date of Test:	2013/04/17	Date of Report:	2013/04/24

Prepared By:



Leo Liu/Engineer



Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

1. Summary of test results

Description of Test Item	Standard	Limits	Results
Power Line Conducted Emission Test	FCC Part 15: 2012 ANSI C63.4: 2009	Class B	PASS
Radiated Emission Test	FCC Part 15: 2012 ANSI C63.4: 2009	Class B	PASS

2. General test information

2.1. Description of EUT

EUT* Name	: Dot Matrix Printer
Model Number	: DM-210, DM-220
EUT function description	: Please reference user manual of this device
Power supply	: DC 24V From adapter input AC 120V/60Hz
Trade mark	: Tally/DASCOM
EUT Class	: Class B, intended primarily for use in the domestic environment
Maximum work frequency	: 25MHz
Date of Receipt	: 2013/04/17
Sample Type	: Series production

Note: EUT is the ab. of equipment under test.

2.2. Model Description

Model: DM-210 and DM-220 are the same electrical principle, performance parameter and PCB design, Their difference lies in the DM-220 with paper cutting knife , DM-210 without paper cutting knife, so DM-220 was selected to test and recorded in this report.

2.3. Assistant equipment used for test


Description of Assistant equipment	Manufacturer	Model number or Type	Other
HP Pro 3330 Small Form Factor (PC)	HP	A6T13PA#AB2	1.5m long, unshielded
LCD COLOR DISPLAY	HP	GV537A	VGA line: 1.5m long, unshielded
Keyboard	HP	KB-0316	Signal line: 1.5m long, unshielded
Mouse	HP	M-SBF96	Signal line: 1.5m long, unshielded

2.4. Accessories of EUT

equipment	Manufacturer	Model number or Type	Other
AC ADAPTER	Asian Power Devices Inc.	DA-50C24	DC Line: 1.5m long, unshielded

2.5. Block diagram EUT configuration for test

For Printing mode:

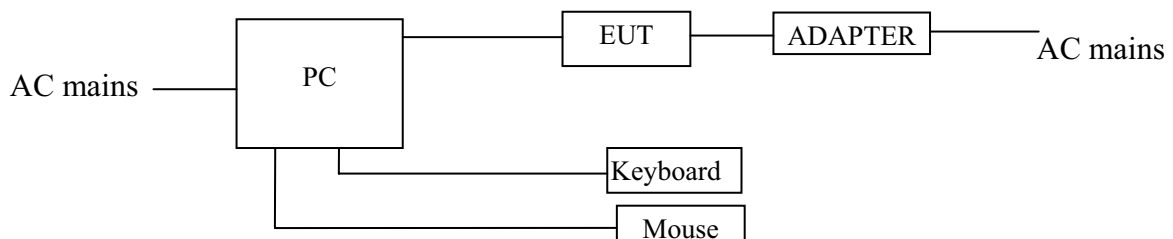

EUT print “H” character during test. The EUT have Parallel interface, USB 2.0, Ethernet and Serial Interface connect to the computer receiving data printing.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808 Tel: +86-0769-22891499 <http://www.dgddt.com>

FCC Registration Number: 270092

2.8. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.44dB
Uncertainty for Radiation Emission test	3.14 dB (Polarize: V)
	3.16 dB (Polarize: H)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. Power Line Conducted Emission Test

3.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R&S	ESU8	100316	2012/11/26	1 Year
2	LISN 1	R&S	ENV216	101109	2012/11/26	1 Year
3	LISN 2	R&S	ESH2-Z5	100309	2012/11/26	1 Year
4	Pulse Limiter	R&S	ESH3-Z2	101242	2012/11/26	1 Year
5	RF Cable	R&S	R01	10403	2012/11/26	1 Year

3.2. Block diagram of test setup

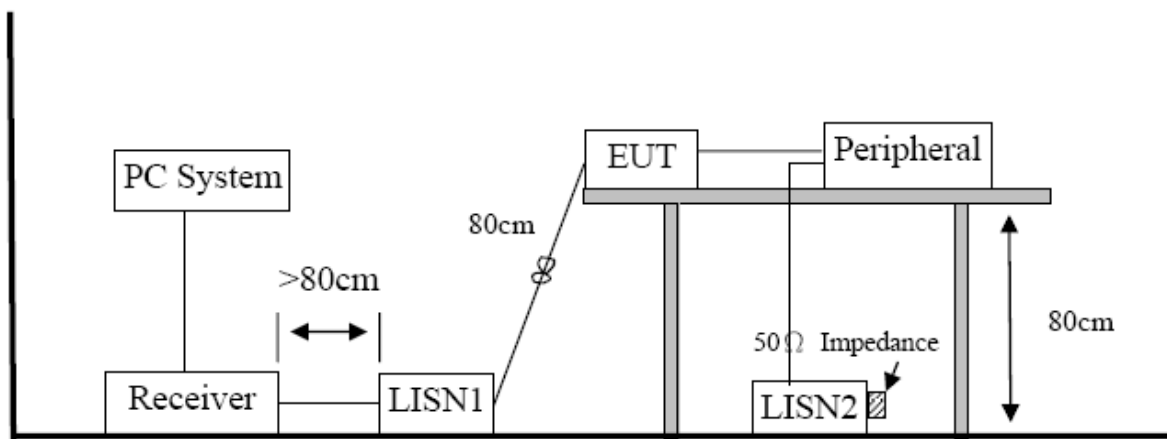

3.3. Power Line Conducted Emission Limits(Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

3.4. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.5 and test equipment as described in clause 3.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.5 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

3.5. Test Result

PASS. (See below detailed test result)


Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” mans Average detection

Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	E:\2013 report data\13QS0001\13QS0001CE.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(Parallel interface)
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	LISN : 2012 ENV216/LINE
Memo	:	

Data : 10

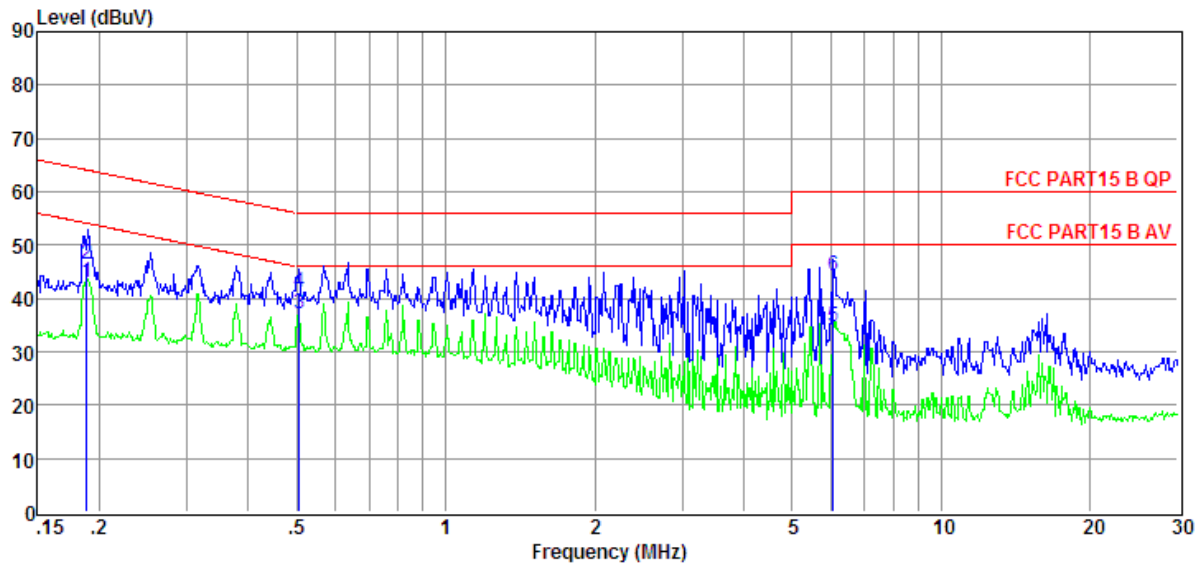


Item	Freq	Read Level	LISN Factor	Cable Loss	Pluse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.19	23.40	9.63	0.04	9.90	42.97	54.11	-11.14	Average	LINE
2	0.19	26.83	9.63	0.04	9.90	46.40	64.11	-17.71	QP	LINE
3	0.51	17.66	9.65	0.04	9.89	37.24	46.00	-8.76	Average	LINE
4	0.51	21.55	9.65	0.04	9.89	41.13	56.00	-14.87	QP	LINE
5	6.06	14.90	9.77	0.12	9.92	34.71	50.00	-15.29	Average	LINE
6	6.06	24.55	9.77	0.12	9.92	44.36	60.00	-15.64	QP	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pluse Limiter Factor + Cable loss
 2. If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	E:\2013 report data\13QS0001\13QS0001CE.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(Parallel interface)
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	LISN : 2012 ENV216/NEUTRAL
Memo	:	

Data : 12

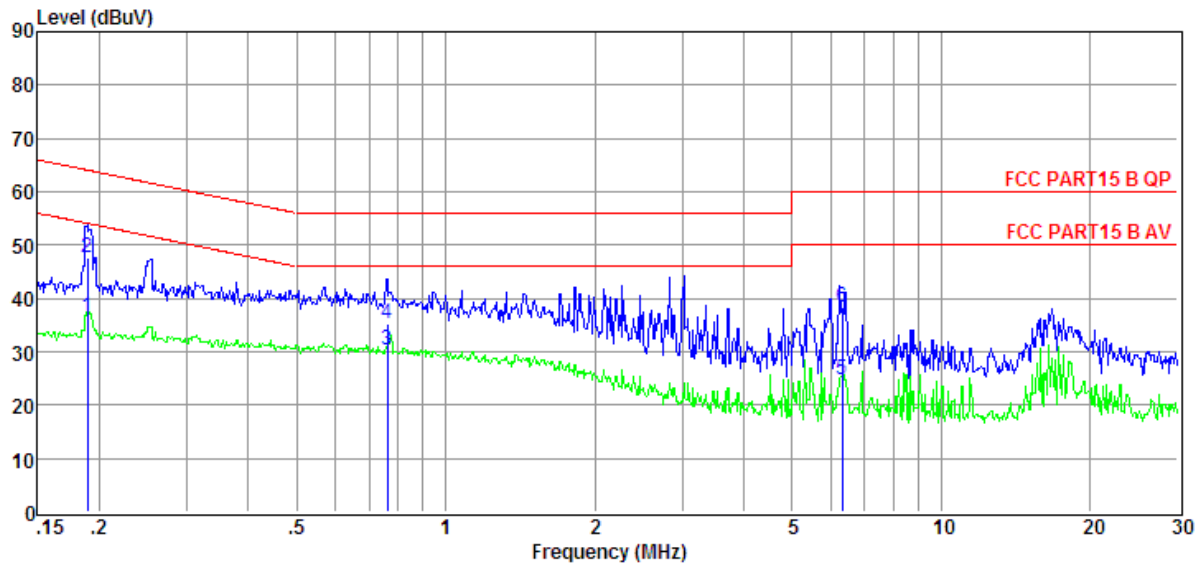


Item	Freq	Read Level	LISN Factor	Cable Loss	Pluse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.19	16.91	9.63	0.04	9.90	36.48	54.06	-17.58	Average	NEUTRAL
2	0.19	27.92	9.63	0.04	9.90	47.49	64.06	-16.57	QP	NEUTRAL
3	0.76	10.60	9.65	0.05	9.88	30.18	46.00	-15.82	Average	NEUTRAL
4	0.76	15.69	9.65	0.05	9.88	35.27	56.00	-20.73	QP	NEUTRAL
5	6.32	5.11	9.72	0.12	9.92	24.87	50.00	-25.13	Average	NEUTRAL
6	6.32	18.54	9.72	0.12	9.92	38.30	60.00	-21.70	QP	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pluse Limiter Factor + Cable loss
 2. If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	E:\2013 report data\13QS0001\13QS0001CE.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(USB Connect)
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	LISN : 2012 ENV216/NEUTRAL
Memo	:	

Data : 14

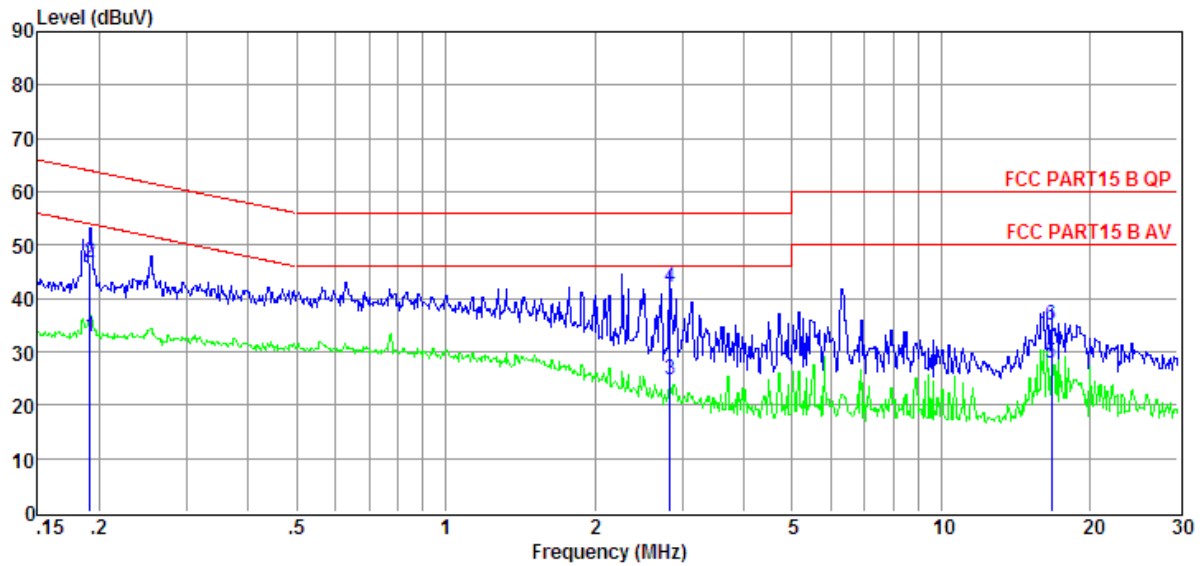


Item	Freq	Read Level	LISN Factor	Cable Loss	Pluse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.19	13.22	9.63	0.04	9.90	32.79	53.98	-21.19	Average	NEUTRAL
2	0.19	27.19	9.63	0.04	9.90	46.76	63.98	-17.22	QP	NEUTRAL
3	2.84	5.12	9.68	0.08	9.90	24.78	46.00	-21.22	Average	NEUTRAL
4	2.84	22.51	9.68	0.08	9.90	42.17	56.00	-13.83	QP	NEUTRAL
5	16.66	7.99	9.81	0.21	9.93	27.94	50.00	-22.06	Average	NEUTRAL
6	16.66	14.87	9.81	0.21	9.93	34.82	60.00	-25.18	QP	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pluse Limiter Factor + Cable loss
 2. If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	E:\2013 report data\13QS0001\13QS0001CE.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(USB Connect)
Condition	: Temp:24.5°C,Humi:55%, Press:100.1kPa	LISN : 2012 ENV216/LINE
Memo	:	

Data : 16

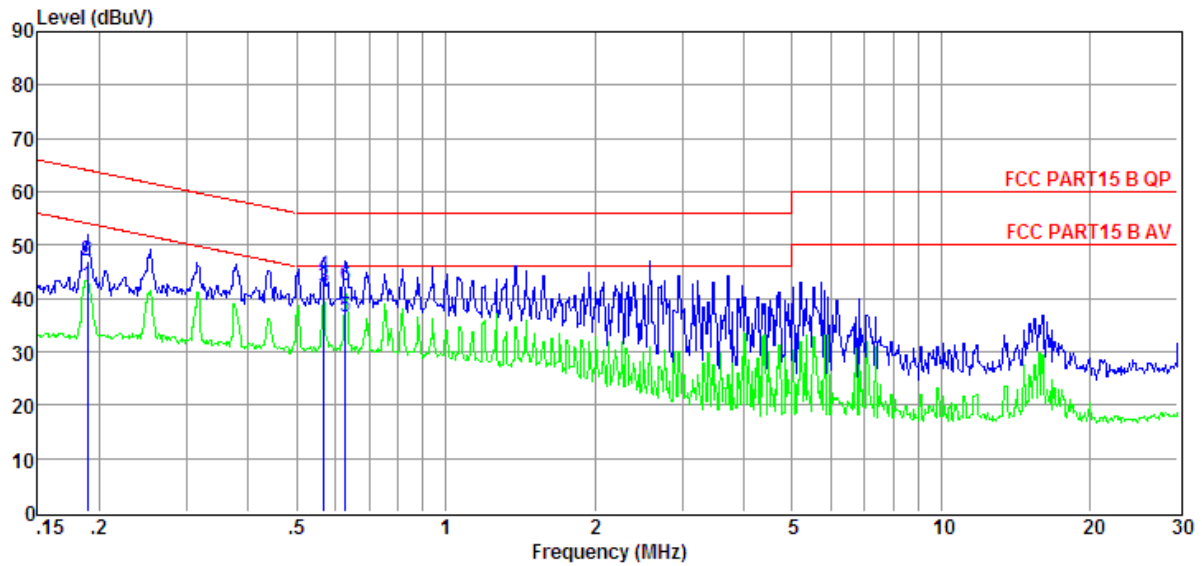


Item	Freq	Read Level	LISN Factor	Cable Loss	Pluse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.19	22.85	9.63	0.04	9.90	42.42	54.06	-11.64	Average	LINE
2	0.19	27.38	9.63	0.04	9.90	46.95	64.06	-17.11	QP	LINE
3	0.57	22.33	9.66	0.05	9.89	41.93	46.00	-4.07	Average	LINE
4	0.57	24.59	9.66	0.05	9.89	44.19	56.00	-11.81	QP	LINE
5	0.63	16.90	9.67	0.05	9.88	36.50	46.00	-9.50	Average	LINE
6	0.63	22.92	9.67	0.05	9.88	42.52	56.00	-13.48	QP	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pluse Limiter Factor + Cable loss
 2. If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	E:\2013 report data\13QS0001\13QS0001CE.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(Serial Interface)
Condition	: Temp:24.5°C,Humi:55%,Press:100 .1kPa	LISN : 2012 ENV216/LINE
Memo	:	

Data : 26

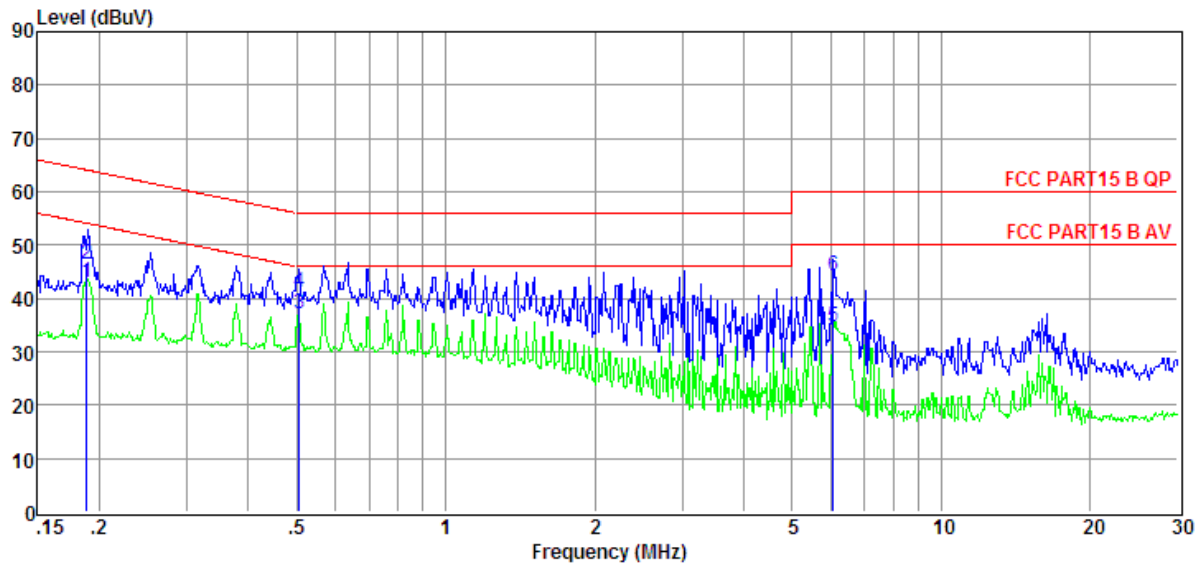


Item	Freq	Read Level	LISN Factor	Cable Loss	Pluse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.19	23.40	9.63	0.04	9.90	42.97	54.11	-11.14	Average	LINE
2	0.19	26.83	9.63	0.04	9.90	46.40	64.11	-17.71	QP	LINE
3	0.51	17.66	9.65	0.04	9.89	37.24	46.00	-8.76	Average	LINE
4	0.51	21.55	9.65	0.04	9.89	41.13	56.00	-14.87	QP	LINE
5	6.06	14.90	9.77	0.12	9.92	34.71	50.00	-15.29	Average	LINE
6	6.06	24.55	9.77	0.12	9.92	44.36	60.00	-15.64	QP	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pluse Limiter Factor + Cable loss
 2. If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

Conducted Emission Test Result

Test Site	: DDT 1# Shield Room	E:\2013 report data\13QS0001\13QS0001CE.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(Serial Interface)
Condition	: Temp:24.5°C,Humi:55%,Press:100 .1kPa	LISN : 2012 ENV216/NEUTRAL
Memo	:	

Data : 28

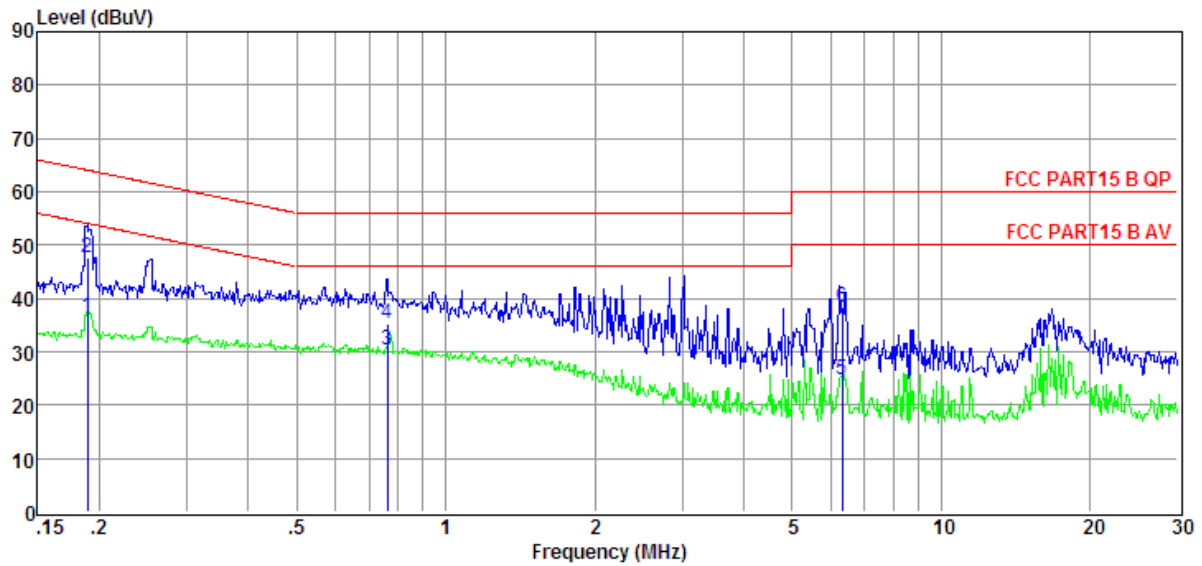

Item	Freq	Read Level	LISN Factor	Cable Loss	Pluse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.19	16.91	9.63	0.04	9.90	36.48	54.06	-17.58	Average	NEUTRAL
2	0.19	27.92	9.63	0.04	9.90	47.49	64.06	-16.57	QP	NEUTRAL
3	0.76	10.60	9.65	0.05	9.88	30.18	46.00	-15.82	Average	NEUTRAL
4	0.76	15.69	9.65	0.05	9.88	35.27	56.00	-20.73	QP	NEUTRAL
5	6.32	5.11	9.72	0.12	9.92	24.87	50.00	-25.13	Average	NEUTRAL
6	6.32	18.54	9.72	0.12	9.92	38.30	60.00	-21.70	QP	NEUTRAL


Note: 1. Result Level = Read Level + LISN Factor + Pluse Limiter Factor + Cable loss
 2. If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

4. Radiated emission test

4.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	EMI Test Receiver	R&S	ESU8	100316	2012/11/26	1 Year
2	Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	2012/11/26	1 Year
3	Pre-Amplifier	R&S	SCU-01	10049	2012/11/26	1 Year
4	RF Cable	R&S	R01	10403	2012/11/26	1 Year

4.2. Block diagram of test setup

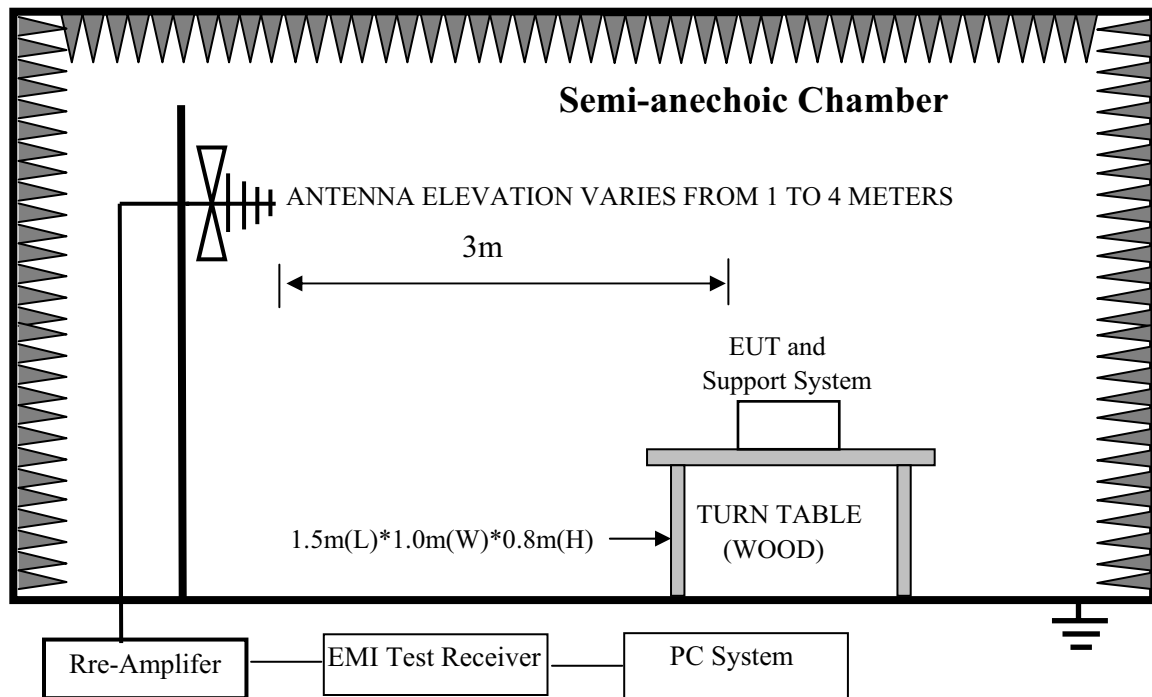

4.3. Radiated emission limit(Class B)

Frequency (MHz)	Distance (Meters)	Field Strengths Limits dB(μ V)/m
30--88	3	40.0
88--216	3	43.5
216--960	3	46.0
960--1000	3	54.0

Note: (1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.4. Test Procedure

Procedure of Preliminary Test

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.5 and test equipment as described in clause 4.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The test mode(s) described in clause 2.5 were scanned during the preliminary test:

After the preliminary scan, we found the test mode producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.

The bandwidth setting of the test receiver is 120 kHz.

4.5. Test result


PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Radiated Emission Test Result

Test Site	: DDT 3m Chamber	E:\2013 Report data\13QS0001\RE2.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(USB Connect)
Condition	: Temp:24.5°C,Humi:55%,Press:100 .3kPa	Antenna/Distance : 2013 VULB9163/3m/VERTICAL
Memo	:	

Data : 5

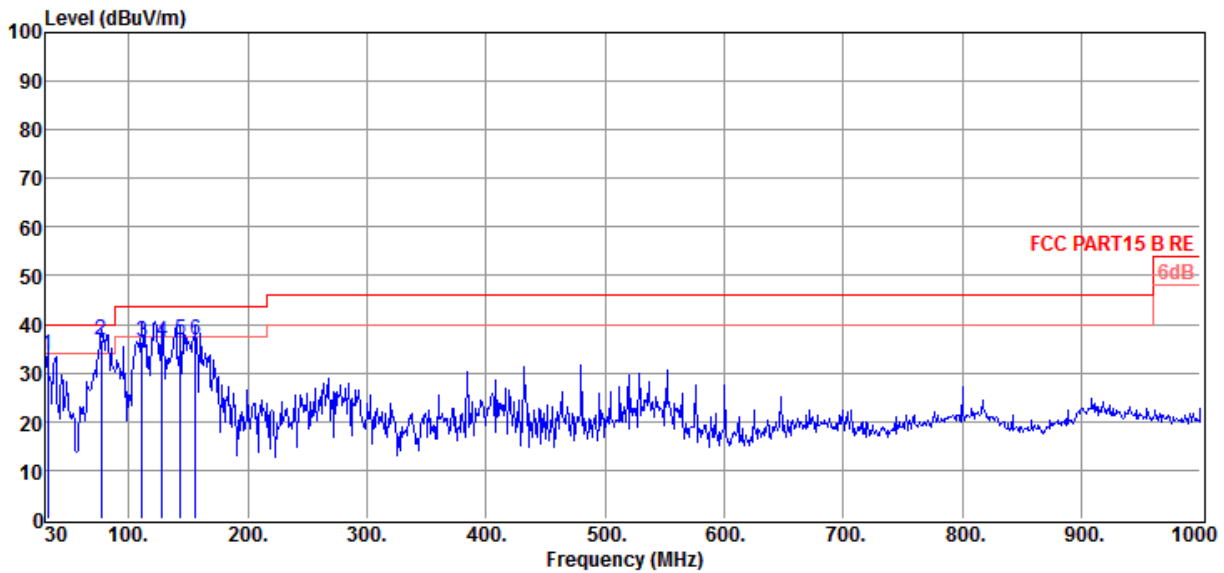


Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	31.94	57.32	13.15	37.45	0.81	33.83	40.00	-6.17	QP	VERTICAL
2	76.56	67.15	8.20	39.80	1.24	36.79	40.00	-3.21	QP	VERTICAL
3	111.48	66.00	10.10	41.17	1.53	36.46	43.50	-7.04	QP	VERTICAL
4	127.97	67.50	8.78	41.43	1.66	36.51	43.50	-6.99	QP	VERTICAL
5	143.49	69.00	7.85	41.70	1.78	36.93	43.50	-6.57	QP	VERTICAL
6	156.10	69.67	7.37	41.97	1.86	36.93	43.50	-6.57	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor
 2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit

Radiated Emission Test Result

Test Site	: DDT 3m Chamber	E:\2013 Report data\13QS0001\RE2.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(USB Connect)
Condition	: Temp:24.5°C,Humi:55%,Press:100 .3kPa	Antenna/Distance : 2013 VULB9163/3m/HORIZONTAL
Memo	:	

Data : 6

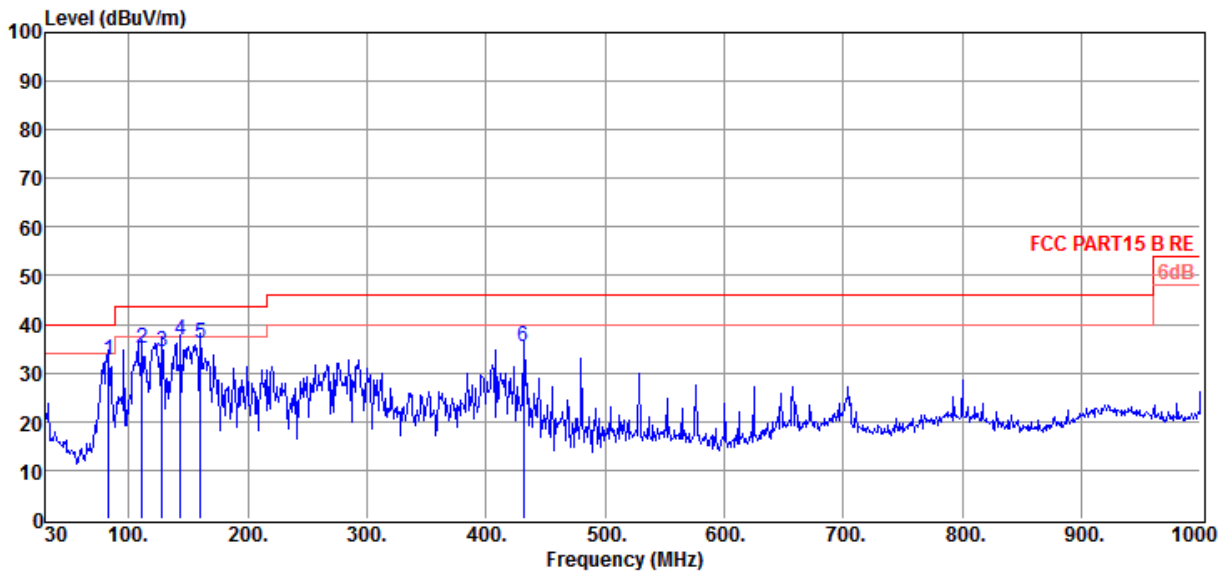


Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	83.35	63.81	8.40	40.90	1.29	32.60	40.00	-7.40	QP	HORIZONTAL
2	111.48	64.48	10.10	41.17	1.53	34.94	43.50	-8.56	QP	HORIZONTAL
3	127.97	65.34	8.78	41.43	1.66	34.35	43.50	-9.15	QP	HORIZONTAL
4	143.49	69.00	7.85	41.70	1.78	36.93	43.50	-6.57	QP	HORIZONTAL
5	159.98	69.00	7.33	41.97	1.88	36.24	43.50	-7.26	QP	HORIZONTAL
6	431.58	60.63	14.60	43.19	3.24	35.28	46.00	-10.72	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor
 2. If Peak Result comply with QP limit,QP Result is deemed to comply with QP limit

Radiated Emission Test Result

Test Site	: DDT 3m Chamber	E:\2013 Report data\13QS0001\RE2.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(Parallel interface)
Condition	: Temp:24.5°C,Humi:55%,Press:100 .3kPa	Antenna/Distance : 2013 VULB9163/3m/HORIZONTAL
Memo	:	

Data : 7

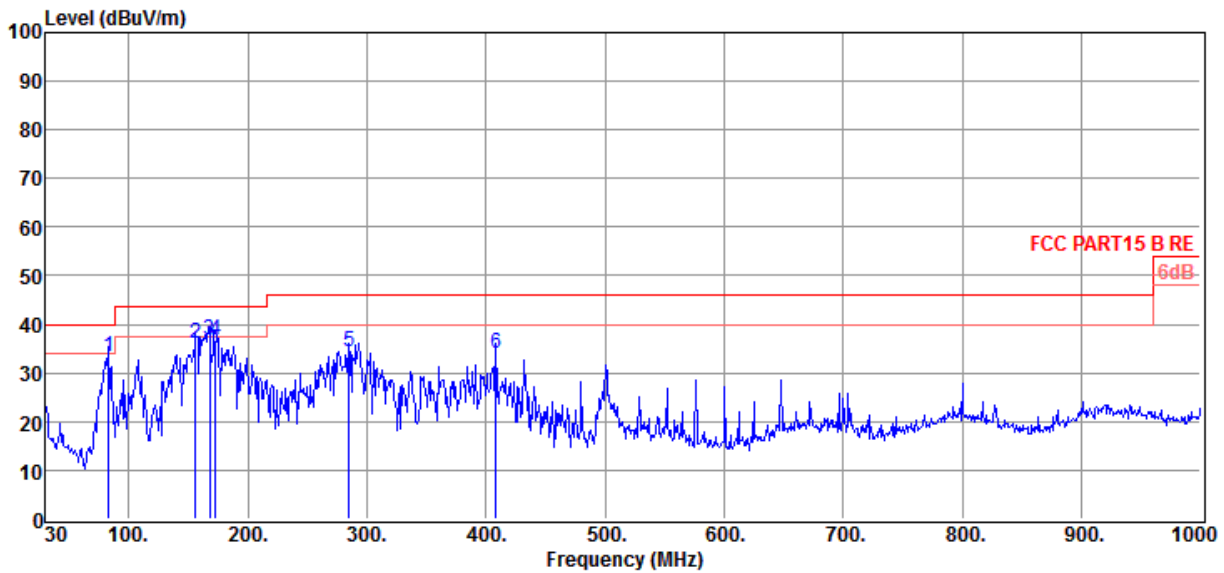


Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	83.35	64.58	8.40	40.90	1.29	33.37	40.00	-6.63	QP	HORIZONTAL
2	156.10	68.94	7.37	41.97	1.86	36.20	43.50	-7.30	QP	HORIZONTAL
3	167.74	69.93	6.80	41.97	1.92	36.68	43.50	-6.82	QP	HORIZONTAL
4	172.59	70.11	6.75	41.97	1.96	36.85	43.50	-6.65	QP	HORIZONTAL
5	285.11	61.26	13.18	42.76	2.57	34.25	46.00	-11.75	QP	HORIZONTAL
6	408.30	58.78	15.37	43.14	3.14	34.15	46.00	-11.85	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor
 2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit

Radiated Emission Test Result

Test Site	: DDT 3m Chamber	E:\2013 Report data\13QS0001\RE2.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(Parallel interface)
Condition	: Temp:24.5°C,Humi:55%,Press:100 .3kPa	Antenna/Distance : 2013 VULB9163/3m/VERTICAL
Memo	:	

Data : 8

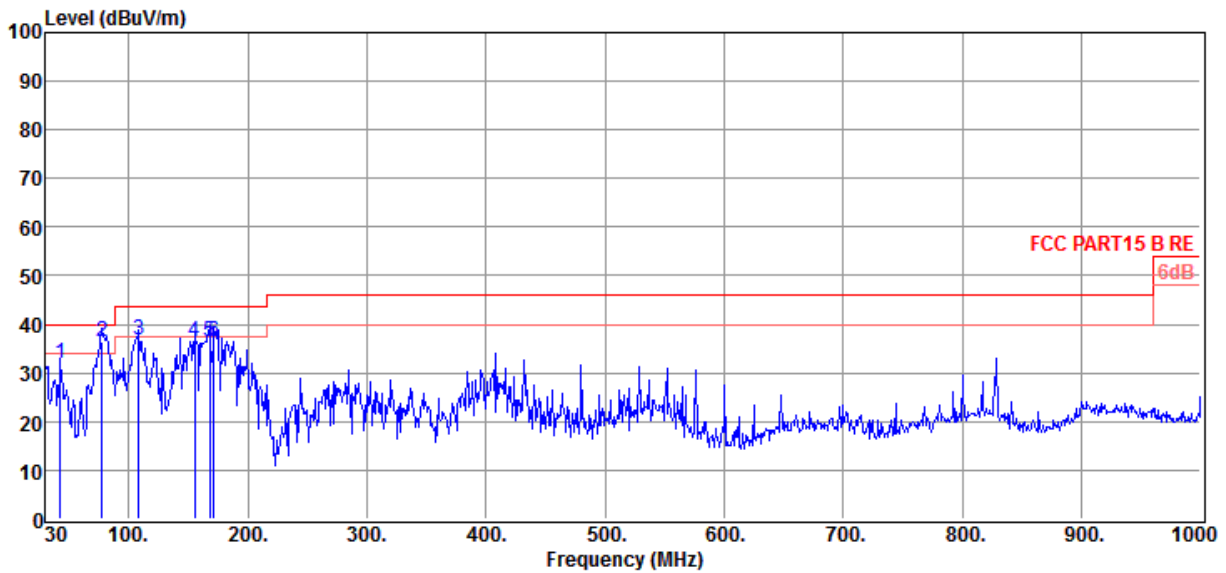


Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	42.61	55.02	13.40	37.45	0.95	31.92	40.00	-8.08	QP	VERTICAL
2	77.53	66.65	8.20	39.80	1.25	36.30	40.00	-3.70	QP	VERTICAL
3	108.57	66.47	10.10	41.17	1.51	36.91	43.50	-6.59	QP	VERTICAL
4	155.13	69.15	7.40	41.97	1.86	36.44	43.50	-7.06	QP	VERTICAL
5	167.74	69.80	6.80	41.97	1.92	36.55	43.50	-6.95	QP	VERTICAL
6	171.62	69.59	6.75	41.97	1.94	36.31	43.50	-7.19	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor
 2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit

Radiated Emission Test Result

Test Site	: DDT 3m Chamber	E:\2013 Report data\13QS0001\RE2.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(Serial Interface)
Condition	: Temp:24.5°C,Humi:55%,Press:100 .1kPa	Antenna/Distance : 2013 VULB9163/3m/VERTICAL
Memo	:	

Data : 11

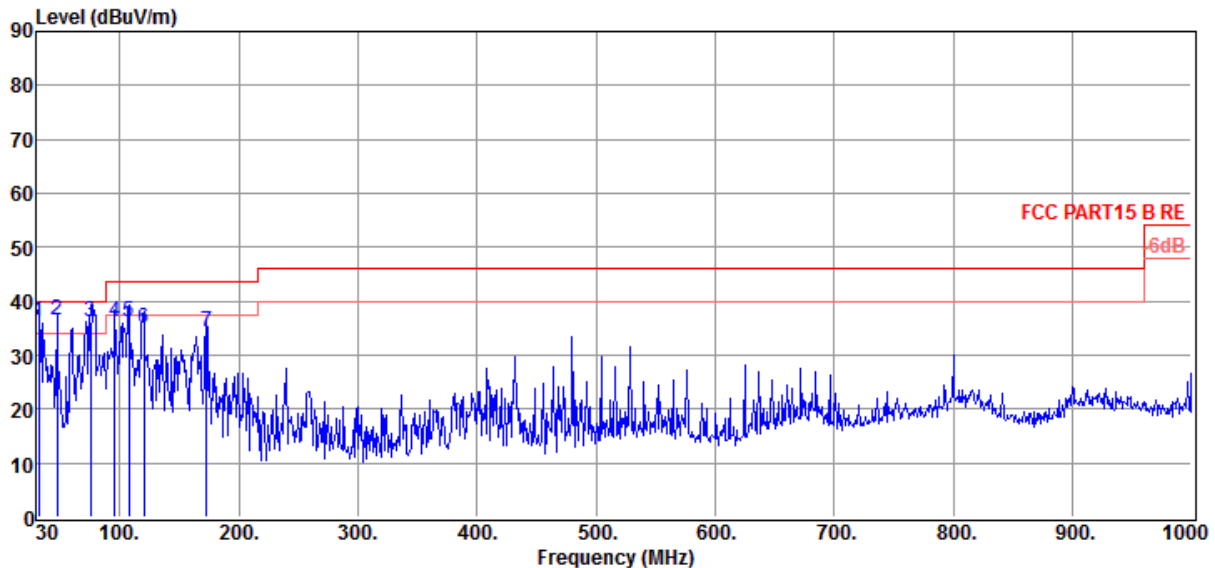


Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	31.94	59.80	13.15	37.45	0.81	36.31	40.00	-3.69	QP	VERTICAL
2	47.46	61.00	13.30	38.70	0.98	36.58	40.00	-3.42	QP	VERTICAL
3	75.59	66.57	8.20	39.80	1.24	36.21	40.00	-3.79	QP	VERTICAL
4	95.96	66.00	9.80	40.90	1.39	36.29	43.50	-7.21	QP	VERTICAL
5	107.60	65.81	10.10	41.17	1.50	36.24	43.50	-7.26	QP	VERTICAL
6	120.21	65.59	9.15	41.43	1.61	34.92	43.50	-8.58	QP	VERTICAL
7	172.59	67.69	6.75	41.97	1.96	34.43	43.50	-9.07	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor
 2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit

Radiated Emission Test Result

Test Site	: DDT 3m Chamber	E:\2013 Report data\13QS0001\RE2.EM6
Test Date	: 2013-04-17	Tested By : Leo
EUT	: Dot Matrix Printer	Model Number : DM-220
Power Supply	: DC 24V From Adapter input AC 120V/60Hz	Test Mode : Printing(Serial Interface)
Condition	: Temp:24.5°C,Humi:55%,Press:100 .1kPa	Antenna/Distance : 2013 VULB9163/3m/HORIZONTAL
Memo	:	

Data : 12

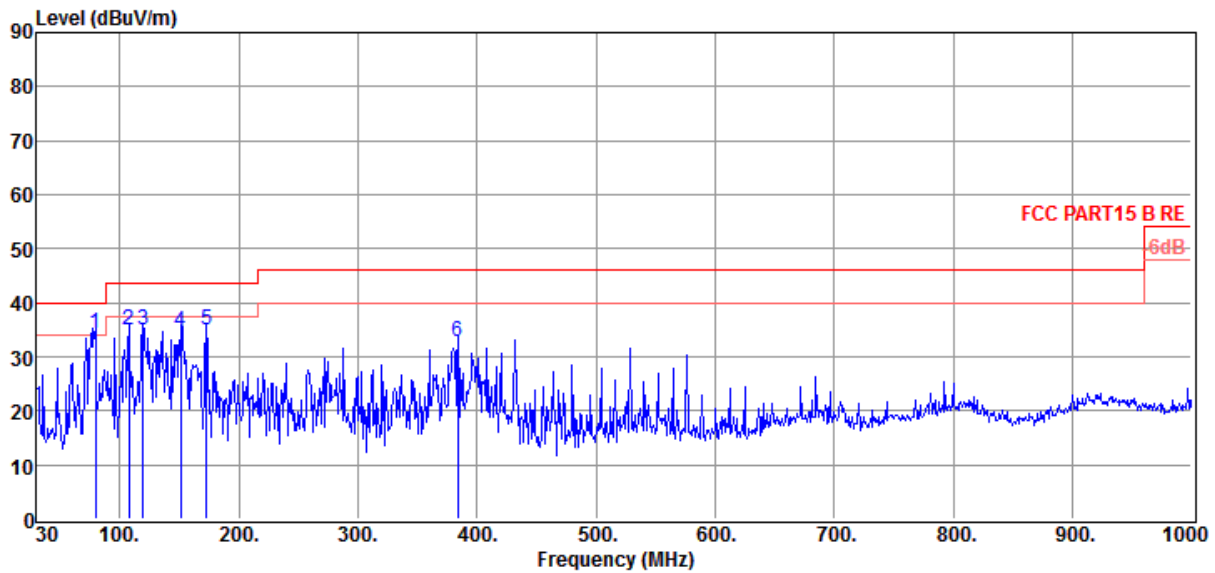

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	79.47	64.62	8.20	39.80	1.26	34.28	40.00	-5.72	QP	HORIZONTAL
2	107.60	64.49	10.10	41.17	1.50	34.92	43.50	-8.58	QP	HORIZONTAL
3	119.24	65.17	9.47	41.43	1.60	34.81	43.50	-8.69	QP	HORIZONTAL
4	151.25	67.21	7.45	41.70	1.82	34.78	43.50	-8.72	QP	HORIZONTAL
5	172.59	68.31	6.75	41.97	1.96	35.05	43.50	-8.45	QP	HORIZONTAL
6	384.05	58.34	14.55	43.03	3.04	32.90	46.00	-13.10	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor
 2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit

END OF REPORT