

FCC PART 15C REPORT FOR CERTIFICATION  
On Behalf of

Jiangmen Dascom Computer Peripherals Co.,Ltd.

Portable receipt and label printer

Model Number: FP641

Additional Model: DP-641

FCC ID: Z7OFP641

Applicant :	Jiangmen Dascom Computer Peripherals Co.,Ltd.
Address:	No.399,Jin Xing Road,Jiang Hai District,Jiangmen City,
	Guang Dong Province ,P.R. China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2308299
Date of Test:	Jul. 25, ~Aug. 23, 2023
Date of Report:	Aug. 25, 2023

## TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. Antenna Information.....	5
1.3. Information of RF Cable.....	5
2. SUMMARY OF TEST.....	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty.....	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram.....	8
2.6. Test Mode.....	9
2.7. Power Setting of Test Software.....	10
2.8. Duty Cycle.....	10
2.9. Channel List.....	11
2.10. Test Equipment List.....	12
3. 6DB BANDWIDTH.....	14
3.1. Limit.....	14
3.2. Test Setup.....	14
3.3. Spectrum Analyzer Setting.....	14
3.4. Test Procedure.....	14
3.5. Test Result.....	14
4. MAXIMUM PEAK OUTPUT POWER.....	15
4.1. Limit.....	15
4.2. Test Setup.....	15
4.3. Spectrum Analyzer Setting.....	15
4.4. Test Procedure.....	15
4.5. Test Result.....	15
5. POWER SPECTRAL DENSITY.....	16
5.1. Limit.....	16
5.2. Test Setup.....	16
5.3. Spectrum Analyzer Setting.....	16
5.4. Test Procedure.....	16
5.5. Test Result.....	16
6. CONDUCTED BAND EDGE.....	17
6.1. Limit.....	17
6.2. Test Setup.....	17
6.3. Spectrum Analyzer Setting.....	17
6.4. Test Procedure.....	17
6.5. Test Result.....	17
7. CONDUCTED SPURIOUS EMISSIONS.....	18
7.1. Limit.....	18
7.2. Test Setup.....	18
7.3. Spectrum Analyzer Setting.....	18

7.4. Test Procedure ..... 18

7.5. Test Result..... 18

8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE ..... 19

8.1. Limit ..... 19

8.2. Test Setup ..... 20

8.3. Spectrum Analyzer Setting ..... 21

8.4. Test Procedure ..... 22

8.5. Test Result..... 23

9. AC POWER LINE CONDUCTED EMISSIONS ..... 39

9.1. Limit ..... 39

9.2. Test Setup ..... 39

9.3. Spectrum Analyzer Setting ..... 39

9.4. Test Procedure ..... 39

9.5. Test Result..... 40

10. ANTENNA REQUIREMENTS ..... 46

10.1. Limit ..... 46

10.2. Test Result..... 46

11. APPENDIX ..... 47

12. TEST SETUP PHOTO ..... 79

13. EUT PHOTO..... 81

## EST Technology Co., Ltd.

<b>Applicant:</b>	Jiangmen Dascom Computer Peripherals Co., Ltd.		
<b>Address:</b>	No.399, Jin Xing Road, Jiang Hai District, Jiangmen City, Guang Dong Province, P.R. China		
<b>Manufacturer:</b>	Jiangmen Dascom Computer Peripherals Co., Ltd.		
<b>Address:</b>	No.399, Jin Xing Road, Jiang Hai District, Jiangmen City, Guang Dong Province, P.R. China		
<b>Factory:</b>	Jiangmen Dascom Computer Peripherals Co., Ltd.		
<b>Address:</b>	No.399, Jin Xing Road, Jiang Hai District, Jiangmen City, Guang Dong Province, P.R. China		
<b>E.U.T:</b>	Portable receipt and label printer		
<b>Model Number:</b>	FP641		
<b>Additional Model:</b>	DP-641 Note: They are identical except model name.		
<b>Power Supply:</b>	DC 24V From Adapter Input AC 100-240V, 50/60Hz DC 20V From Adapter Input AC 100-240V, 50/60Hz DC 10.8V From Battery		
<b>Trade Name:</b>	TALLY/DASCOM,DASCOM, PRINTEK	Serial No.:	-----
<b>Date of Receipt:</b>	Jul. 25, 2023	<b>Date of Test:</b>	Jul. 25, ~Aug. 23, 2023
<b>Test Specification:</b>	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02		
<b>Test Result:</b>	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p style="text-align: center;">This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
<b>Prepared by:</b>	<i>Emily Cai</i>	<b>Reviewed by:</b>	<i>Seven Wang</i>
	Emily Cai / Assistant		Seven Wang / Engineer
		<b>Date:</b>	Aug 29, 2023
		<b>Approved by:</b>	<i>Iceman Hu</i>
			Iceman Hu / Manager
<b>Other Aspects:</b>	None.		
<i>Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Product Name	:	Portable receipt and label printer
Model Number	:	FP641
Software Version	:	00.00.00.PF
Hardware Version	:	34331208
Operation frequency	:	2412MHz~2462MHz 2422MHz~2452MHz
Number of channel	:	IEEE 802.11b/g/n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Max Output Power (PEAK)	:	IEEE 802.11b:21.24dBm IEEE 802.11g: 23.02dBm IEEE 802.11n HT20: 22.62dBm IEEE 802.11n HT40: 22.56dBm
Modulation Type	:	DSSS/OFDM
Sample Type	:	Prototype production

Note: For a more detailed features description, please refer to the manufacturer’s specifications or the user’s manual.

## 1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	Internal	-	1.0

Note: This information is provided by the applicant

## 1.3. Information of RF Cable

Cable Loss(dB)	Provided by
1.0	Jiangmen Dascom Computer Peripherals Co.,Ltd.

Note: 1.The customer declared the loss value of the RF Cable, and the test results of this report only apply to the sample as received.  
2. This information is provided by the applicant.

## 2. SUMMARY OF TEST

### 2.1. Summary of test result

No.	Description of Test Item	FCC Standard Section	Results
1	6dB Bandwidth	15.247(a)(2)	PASS
2	Maximum Peak Output Power	15.247(b)(3)	PASS
3	Power Spectral Density	15.247(e)	PASS
4	Conducted Band Edge	15.247(d)	PASS
5	Conducted Spurious Emissions	15.247(d)	PASS
6	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
7	AC Power Line Conducted Emissions	15.207	PASS
8	Antenna Requirement	15.203	PASS

Note: "N/A" denotes test is not applicable in this test report.

## 2.2. Test Facilities

EMC Lab : Certificated by CNAS, CHINA  
Registration No.: L5288  
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA  
Designation Number: CN1215  
This Certificate is valid until: January 31, 2024

Certificated by A2LA, USA  
Registration No.: 4366.01  
This Certificate is valid until: January 31, 2024

Certificated by Industry Canada  
CAB identifier No.: CN0035  
This Certificate is valid until: January 31, 2024

Certificated by VCCI, Japan  
Registration No.:C-14103; T-20073; R-13663;  
R-20103; G-20097  
Date of registration: Apr. 20, 2020  
This Certificate is valid until: Apr. 19, 2026

Certificated by TUV Rheinland, Germany  
Registration No.: UA 50413872 0001  
Date of registration: July 31, 2018

Certificated by Intertek  
Registration No.: 2011-RTL-L2-64  
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,  
Guangdong, China

### 2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	±3.48dB
Uncertainty for spurious emissions test (Below 30MHz)	±1.62 dB
Uncertainty for spurious emissions test (30MHz-1GHz)	±4.60 dB(Polarize: H)
	±4.68 dB(Polarize: V)
Uncertainty for spurious emissions test (1GHz to 25GHz)	±4.96dB
Uncertainty for radio frequency	$7 \times 10^{-8}$
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


### 2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Adapter	-	①HKC10020050-0A2 ②SAWA-55-25024B ③A879-200500C-US1	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	DC Cable

### 2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into 2.4G WIFI test mode by software before test.

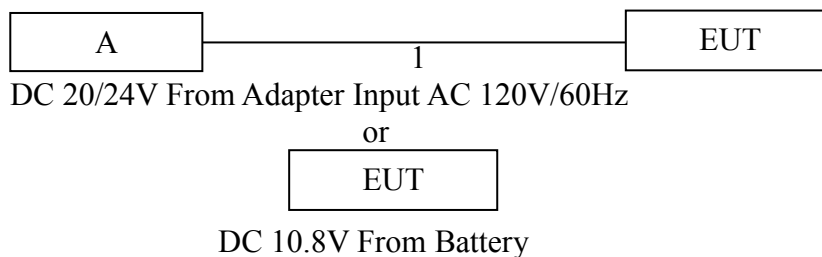

(EUT: Portable receipt and label printer)



## 2.6. Test Mode

The test mode was selected for the final test as listed below.

Test Item	Mode	Date Rate	Test Channel
6dB Bandwidth	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Maximum Peak Output Power	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Power Spectral Density	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Conducted Band Edge	IEEE 802.11b	1Mbps	Low/ High
	IEEE 802.11g	6Mbps	Low/ High
	IEEE 802.11n HT20	MCS0	Low/ High
	IEEE 802.11n HT40	MCS0	Low/ High
Conducted Spurious Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Below 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Band Edge	IEEE 802.11b	1Mbps	Low/ High
	IEEE 802.11g	6Mbps	Low/ High
	IEEE 802.11n HT20	MCS0	Low/ High
	IEEE 802.11n HT40	MCS0	Low/ High
AC Power Line Conducted Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High

Note: In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

## 2.7. Power Setting of Test Software

Software Name	PUTTY		
Frequency(MHz)	2412	2437	2462
IEEE 802.11b Setting	15	15	15
IEEE 802.11g Setting	14	14	14
IEEE 802.11n HT20 Setting	15	15	15
Frequency(MHz)	2422	2437	2452
IEEE 802.11n HT40 Setting	14	14	14

Note: This information is provided by the applicant.

## 2.8. Duty Cycle

Refer to section 11: Appendix A

Note:

1. If duty cycle  $< 98\%$ , the conducted average output power and average power spectral density should be add duty factor.
2. If duty cycle  $\geq 98\%$ , the EUT is consider to be transmitting continuously, the conducted average output power and average power spectral density no need to add duty factor (consider to be zero).
3. The conducted peak output power and peak power spectral density no need to consider duty factor.
4. The on-time time is transmission duration(T).

## 2.9. Channel List

IEEE 802.11b/802.11g/802.11n HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		
IEEE 802.11n HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

## 2.10. Test Equipment List

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 12,23	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 12,23	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 12,23	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 12,23	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 12,23	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 12,23	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 12,23	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	EST-E144	LISAI	June 12,23	1 Year
Horn Antenna	Com-Power	AHA-840	EST-E133	LISAI	June 12,23	1 Year
Low Noise Amplifier	RF	TRLA-01018 0G45N	EST-E142	LISAI	June 12,23	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 12,23	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A


For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
TS 1120	Tonscend	/	/	/	/	/
Test Software	Tonscend	TS1120-3	3.2.22.0	/	/	/
RF Control Unit	Tonscend	JS0806-2	EST-E134	LISAI	June 12,23	1 Year
Signal and Spectrum Analyzer	Keysight	N9010B	EST-E141	LISAI	June 12,23	1 Year

### 3. 6dB BANDWIDTH

#### 3.1. Limit

Systems using digital modulation techniques operate in the 2400-2483.5 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### 3.2. Test Setup

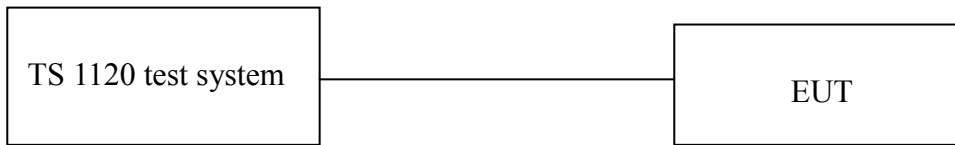

#### 3.3. Spectrum Analyzer Setting

6dB Bandwidth

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth

Spectrum Parameters	Setting
RBW	300KHz(20MHz Bandwidth mode)/1MHz(40MHz Bandwidth mode)
VBW	1MHz(20MHz Bandwidth mode)/3MHz(40MHz Bandwidth mode)
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

#### 3.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 3.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

#### 3.5. Test Result


Refer to section 11: Appendix B

## 4. MAXIMUM PEAK OUTPUT POWER

### 4.1. Limit

For systems using digital modulation in 2400-2483.5MHz, the maximum peak output power is 1 Watt(30dBm).

### 4.2. Test Setup

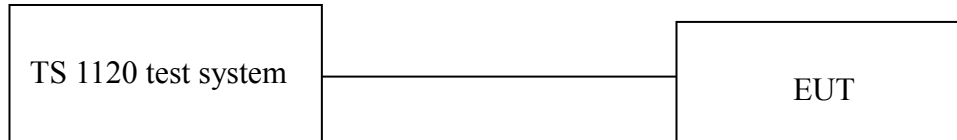

### 4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz
VBW	3MHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

### 4.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 4.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Use the channel power function to measure maximum peak output power, allow trace to stabilize, save test pictures.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

### 4.5. Test Result


Refer to section 11: Appendix C

## 5. POWER SPECTRAL DENSITY

### 5.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2. Test Setup

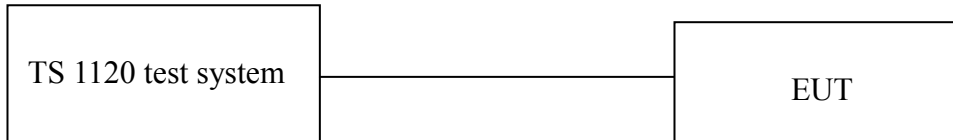

### 5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	3KHz
VBW	10KHz
Span	30MHz(20MHz Bandwidth mode)/60MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

### 5.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 5.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

### 5.5. Test Result

Refer to section 11: Appendix D



## 6. CONDUCTED BAND EDGE

### 6.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.2. Test Setup



### 6.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz(20MHz Bandwidth mode)/200MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

### 6.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 6.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report

### 6.5. Test Result

Refer to section 11: Appendix E & F

## 7. CONDUCTED SPURIOUS EMISSIONS

### 7.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.2. Test Setup



### 7.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	26.5GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

### 7.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 7.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

### 7.5. Test Result

Refer to section 11: Appendix E & G

## 8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

### 8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### 15.209 Limit


Frequency (MHz)	Field Strength( $\mu$ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


- (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$ .
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 8.2. Test Setup


9kHz~30MHz

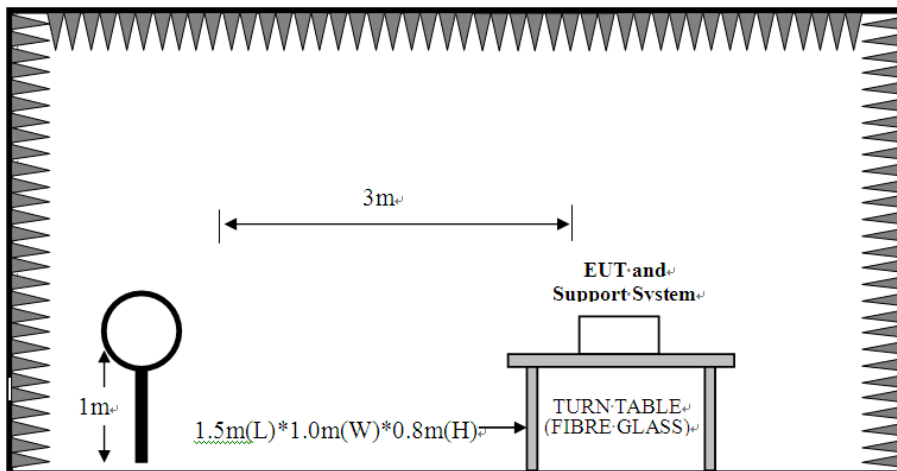

30~1000MHz

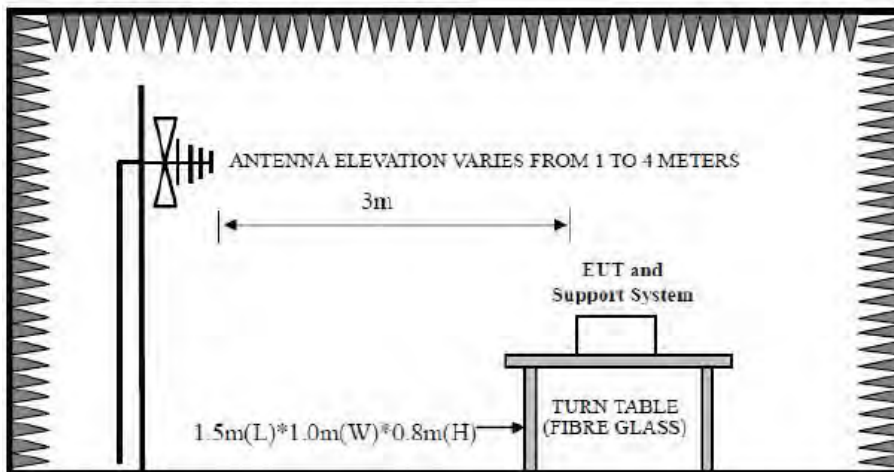

Above 1GHz

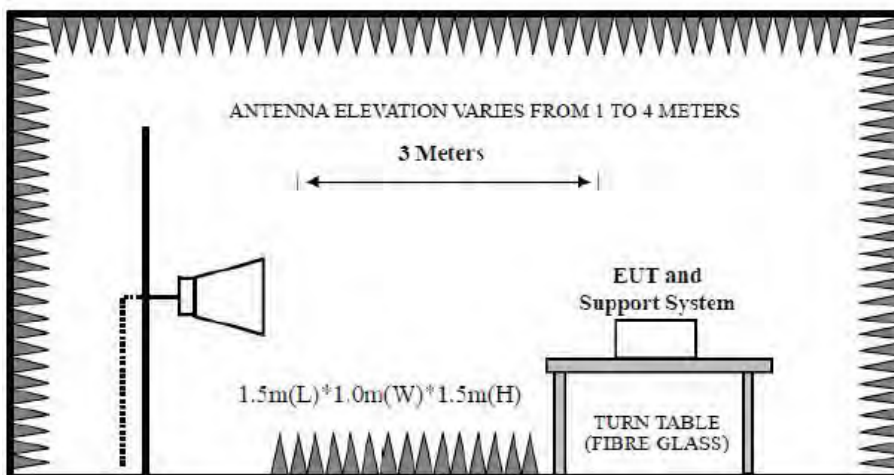

### 8.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	
	3MHz	AVG Measurement
		Duty cycle $\geq 98\%$ , VBW=10Hz
	Duty cycle $< 98\%$ , VBW $\geq 1/T$	
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

Note :T is the on-time time of the duty cycle,when EUT transmit continuously with maximum output power,unit is seconds. reference section 2.8 for the on-time time.

## 8.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 8.3.
- g. Repeat above procedures until all channels were measured.
- h. Record the results in the test report.

### Note:

1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2412MHz/2422MHz/2437MHz/2452MHz/2462MHz are fundamental frequency, which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.
3. IEEE 802.11b, IEEE 802.11g, IEEE 802.11n TH20, IEEE 802.11n TH40 all have been tested, only worst case IEEE 802.11b is recorded.


### 8.5. Test Result

## Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 22 File: \\EMC-966-1\test data\2023\RFID\IDE SH\FP641(30-1000).EM6 (24) Date: 2023-08-22

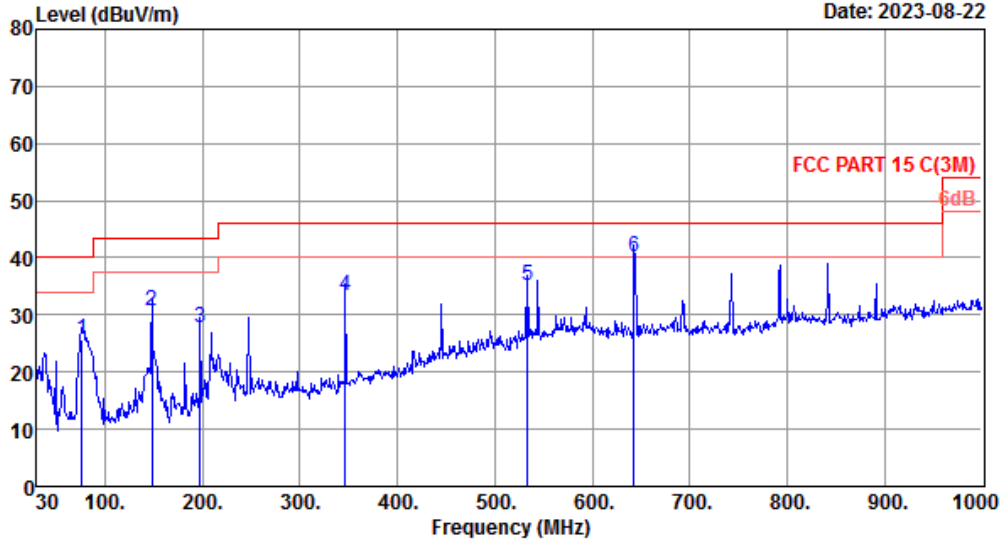


Site no. : 1# 966 Chamber Data no. : 22  
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C(3M)  
 Env. / Ins. : Temp:23.4°C,Humi:54%;Press:101.82KPa  
 Engineer : ZQL  
 EUT : Portable receipt and label printer  
 Power : DC 20V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 A879-200500C-US1

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	76.56	8.20	1.20	16.33	25.73	40.00	14.27	QP
2	148.34	10.70	1.75	18.28	30.73	43.50	12.77	QP
3	197.81	9.00	2.04	16.58	27.62	43.50	15.88	QP
4	346.22	15.08	2.82	15.59	33.49	46.00	12.51	QP
5	533.43	19.33	3.56	12.16	35.05	46.00	10.95	QP
6	643.04	21.46	3.99	14.77	40.22	46.00	5.78	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 21 File: \\EMC-966-1\test data\2023\RFID\IDE SHIFP641(30-1000).EM6 (24) Date: 2023-08-22

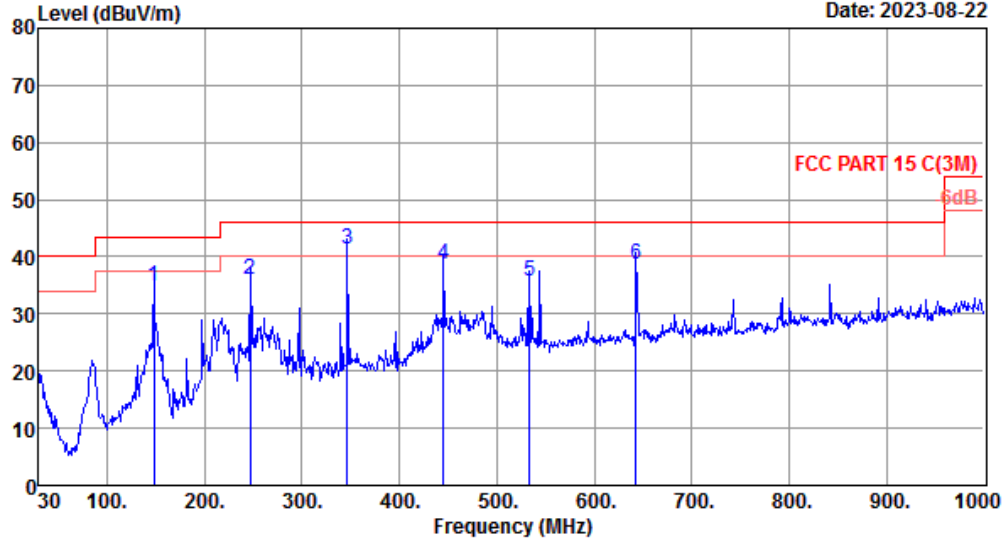


Site no. : 1# 966 Chamber Data no. : 21  
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C(3M)  
 Env. / Ins. : Temp:23.4°C,Humi:54%;Press:101.82KPa  
 Engineer : ZQL  
 EUT : Portable receipt and label printer  
 Power : DC 20V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 A879-200500C-US1

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	148.34	10.70	1.75	22.34	34.79	43.50	8.71	QP
2	247.28	12.18	2.30	21.54	36.02	46.00	9.98	QP
3	346.22	15.08	2.82	23.28	41.18	46.00	4.82	QP
4	445.16	17.90	3.22	17.45	38.57	46.00	7.43	QP
5	533.43	19.33	3.56	12.71	35.60	46.00	10.40	QP
6	643.04	21.46	3.99	13.26	38.71	46.00	7.29	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.



Data: 14 File: \\EMC-966-1\test data\2023\RFID\IDE SHIFP641(30-1000).EM6 (24) Date: 2023-08-22

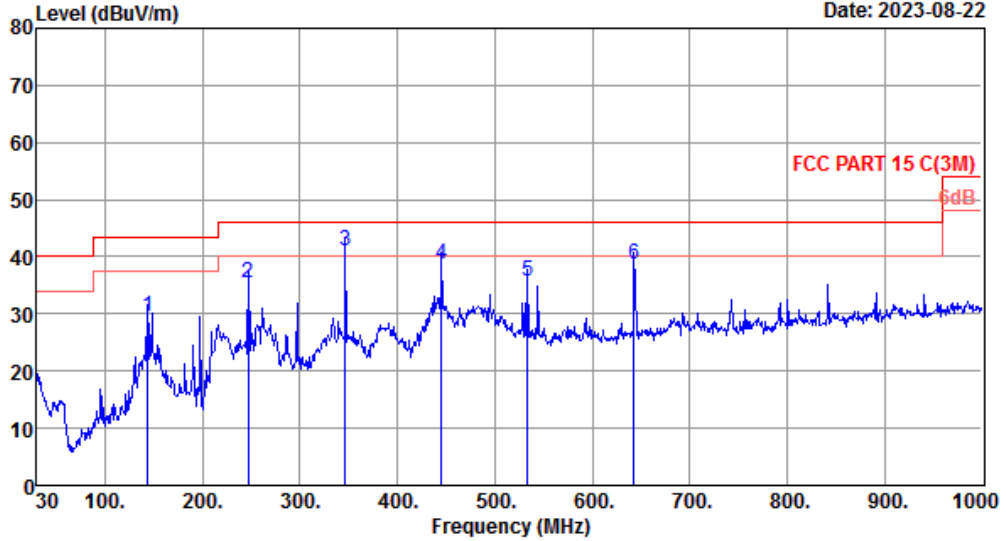


Site no. : 1# 966 Chamber Data no. : 14  
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C(3M)  
 Env. / Ins. : Temp:23.4°C,Humi:54%;Press:101.82KPa  
 Engineer : ZQL  
 EUT : Portable receipt and label printer  
 Power : DC 20V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 HKC10020050-0A2

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	143.49	11.85	1.71	15.92	29.48	43.50	14.02	QP
2	247.28	12.18	2.30	20.98	35.46	46.00	10.54	QP
3	346.22	15.08	2.82	23.14	41.04	46.00	4.96	QP
4	445.16	17.90	3.22	17.70	38.82	46.00	7.18	QP
5	533.43	19.33	3.56	12.88	35.77	46.00	10.23	QP
6	643.04	21.46	3.99	13.27	38.72	46.00	7.28	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 13 File: \\EMC-966-1\test data\2023\RFID\IDE SHIFP641(30-1000).EM6 (24) Date: 2023-08-22

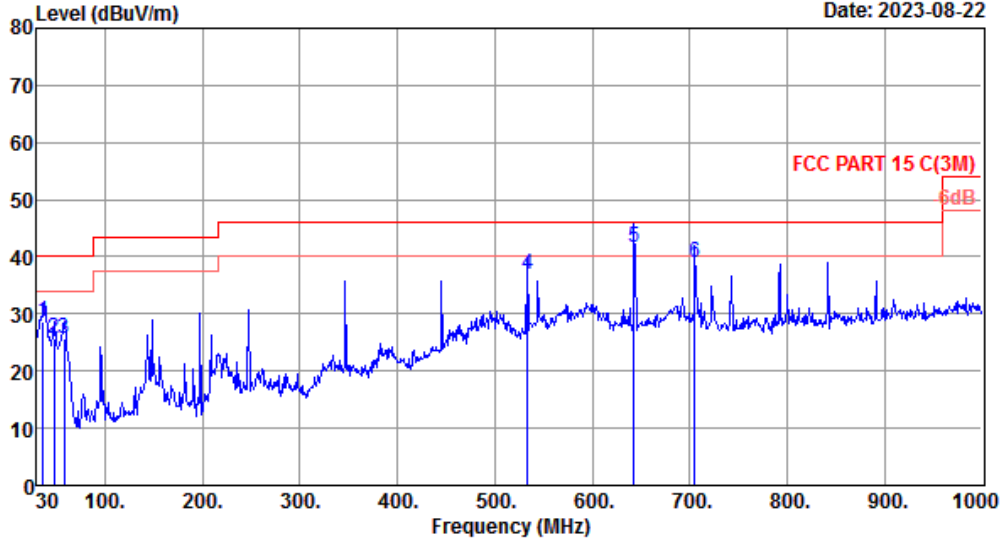


Site no. : 1# 966 Chamber Data no. : 13  
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C(3M)  
 Env. / Ins. : Temp:23.4°C,Humi:54%;Press:101.82KPa  
 Engineer : ZQL  
 EUT : Portable receipt and label printer  
 Power : DC 20V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 HKC10020050-0A2

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	36.79	14.60	0.79	13.36	28.75	40.00	11.25	QP
2	47.46	10.60	0.92	14.24	25.76	40.00	14.24	QP
3	58.13	6.00	1.09	18.46	25.55	40.00	14.45	QP
4	533.43	19.33	3.56	13.99	36.88	46.00	9.12	QP
5	643.04	21.46	3.99	16.18	41.63	46.00	4.37	QP
6	705.12	21.60	4.22	13.01	38.83	46.00	7.17	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 6 File: \\EMC-966-1\test data\2023\RFID\IDE SH\FP641(30-1000).EM6 (24) Date: 2023-08-22

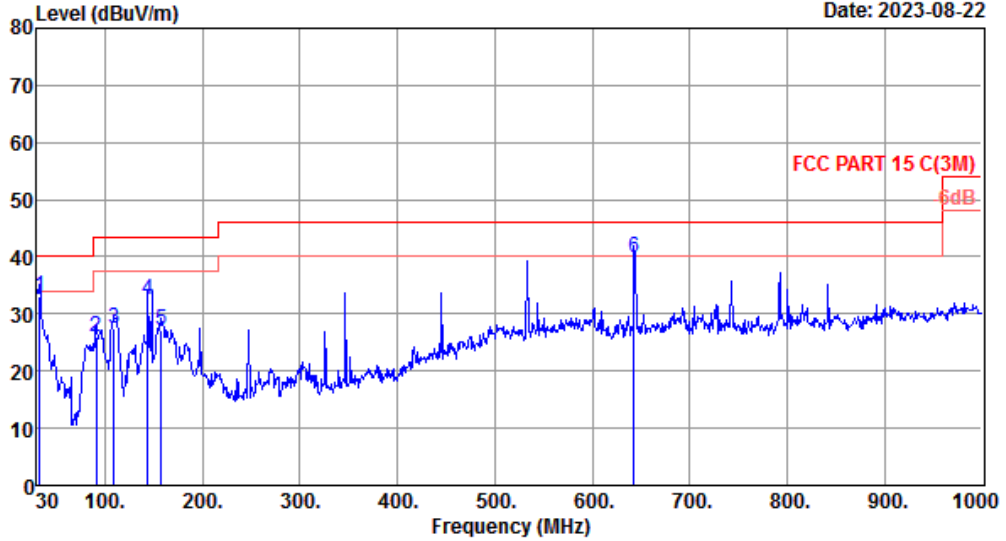


Site no. : 1# 966 Chamber Data no. : 6  
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C(3M)  
 Env. / Ins. : Temp:23.4°C,Humi:54%;Press:101.82KPa  
 Engineer : ZQL  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 SAWA-55-25024B

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.91	16.80	0.74	15.65	33.19	40.00	6.81	QP
2	91.11	10.10	1.34	14.62	26.06	43.50	17.44	QP
3	109.54	11.00	1.48	15.09	27.57	43.50	15.93	QP
4	143.49	11.85	1.71	18.80	32.36	43.50	11.14	QP
5	158.04	11.50	1.81	13.89	27.20	43.50	16.30	QP
6	643.04	21.46	3.99	14.36	39.81	46.00	6.19	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

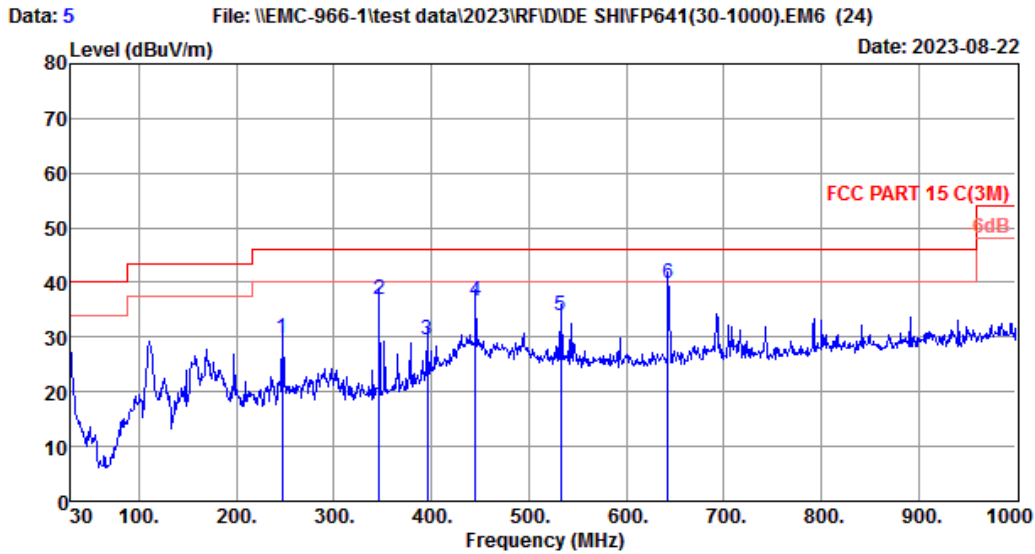

Site no. : 1# 966 Chamber Data no. : 5  
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C(3M)  
 Env. / Ins. : Temp:23.4°C,Humi:54%;Press:101.82KPa  
 Engineer : ZQL  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 SAWA-55-25024B

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	247.28	12.18	2.30	15.26	29.74	46.00	16.26	QP
2	346.22	15.08	2.82	19.11	37.01	46.00	8.99	QP
3	395.69	15.64	3.04	10.93	29.61	46.00	16.39	QP
4	445.16	17.90	3.22	15.62	36.74	46.00	9.26	QP
5	532.46	19.30	3.55	11.08	33.93	46.00	12.07	QP
6	643.04	21.46	3.99	14.43	39.88	46.00	6.12	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All channels had been pre-test, only the worst case was reported.




### Radiated Emissions Above 1G

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 165 File: \\EMC-966-1\test data\2023\RFID\DE SH\FP641.EM6 (174) Date: 2023-08-18

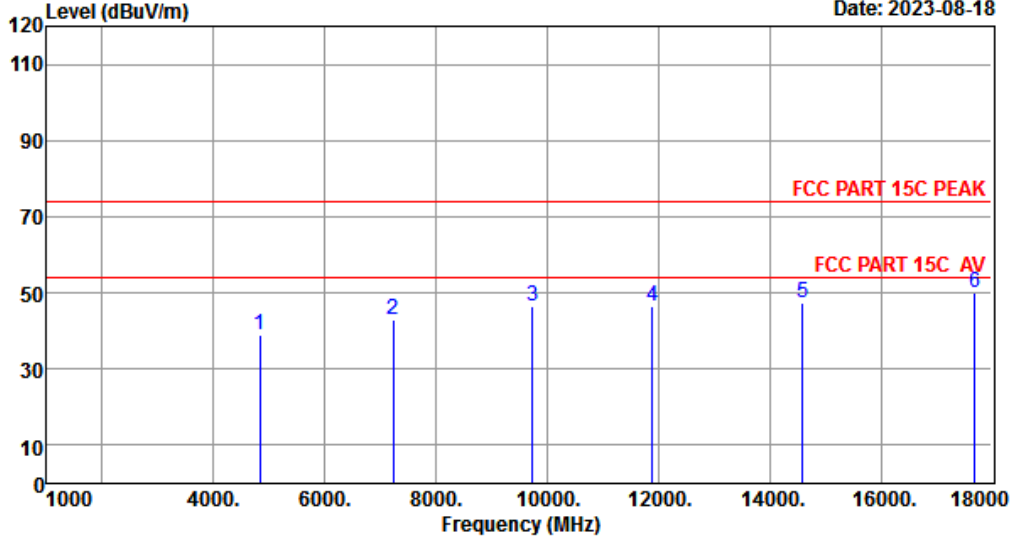


Site no. : 1# 966 Chamber Data no. : 165  
 Dis. / Ant. : 3m BBHA9120D-2667 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:20.1°C;Humi:64%;Press:101.52kPa  
 Engineer : QZ  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : IEEE 802.11b TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.43	5.22	44.47	46.01	39.19	74.00	34.81	Peak
2	7236.00	36.19	6.68	44.08	44.34	43.13	74.00	30.87	Peak
3	9738.00	38.15	7.77	43.70	44.12	46.34	74.00	27.66	Peak
4	11897.00	38.81	8.77	42.28	41.11	46.41	74.00	27.59	Peak
5	14600.00	39.70	10.05	42.28	39.97	47.44	74.00	26.56	Peak
6	17694.00	40.59	12.18	43.16	40.55	50.16	74.00	23.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.



Data: 166 File: \\EMC-966-1\test data\2023\RFID\IDE SHNFP641.EM6 (174) Date: 2023-08-18

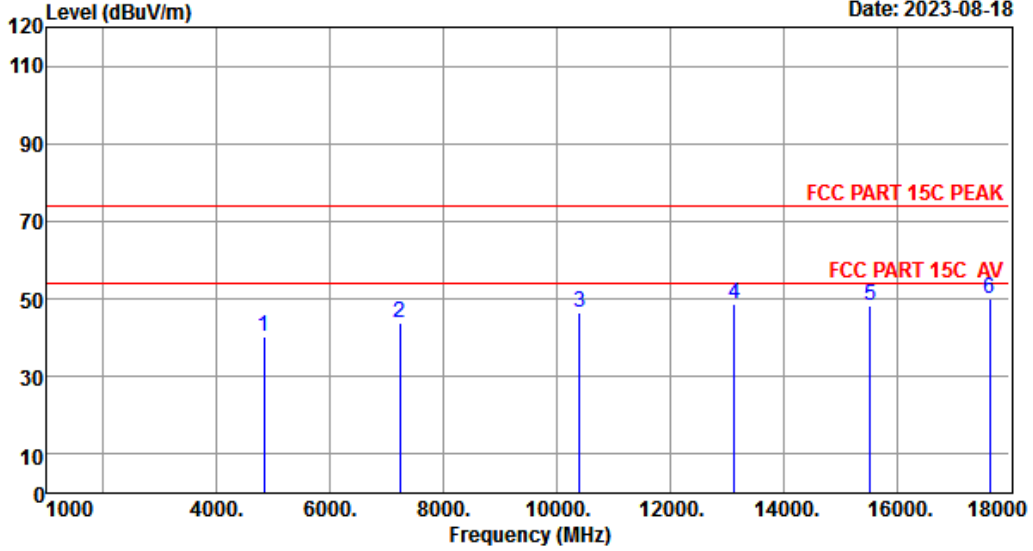


Site no. : 1# 966 Chamber Data no. : 166  
 Dis. / Ant. : 3m BBHA9120D-2667 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:20.1°C;Humi:64%;Press:101.52kPa  
 Engineer : QQZ  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : IEEE 802.11b TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.43	5.22	44.47	47.17	40.35	74.00	33.65	Peak
2	7236.00	36.19	6.68	44.08	45.10	43.89	74.00	30.11	Peak
3	10401.00	38.48	7.97	43.47	43.55	46.53	74.00	27.47	Peak
4	13138.00	39.74	9.33	40.80	40.45	48.72	74.00	25.28	Peak
5	15535.00	38.59	10.46	43.73	43.09	48.41	74.00	25.59	Peak
6	17643.00	40.42	12.14	43.23	40.65	49.98	74.00	24.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology


Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

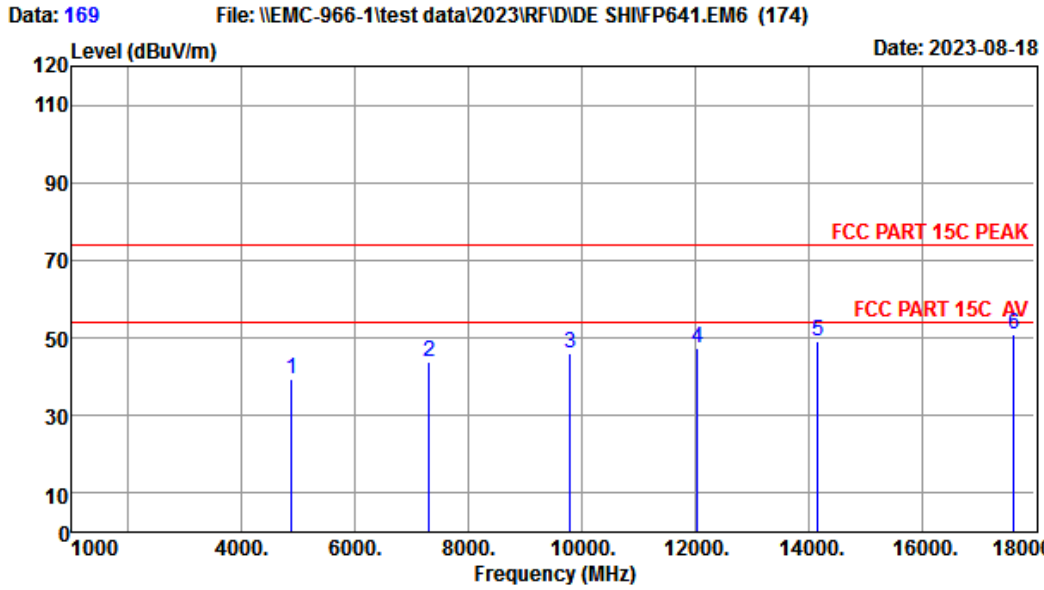

Site no. : 1# 966 Chamber Data no. : 169  
 Dis. / Ant. : 3m BBHA9120D-2667 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:20.1°C;Humi:64%;Press:101.52kPa  
 Engineer : QQZ  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : IEEE 802.11b TX 2437MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.54	5.28	44.42	46.13	39.53	74.00	34.47	Peak
2	7311.00	36.25	6.70	44.07	44.93	43.81	74.00	30.19	Peak
3	9789.00	38.16	7.77	43.72	43.97	46.18	74.00	27.82	Peak
4	12050.00	38.85	8.85	42.13	41.92	47.49	74.00	26.51	Peak
5	14175.00	39.91	9.85	41.22	40.48	49.02	74.00	24.98	Peak
6	17626.00	40.37	12.12	43.26	41.67	50.90	74.00	23.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

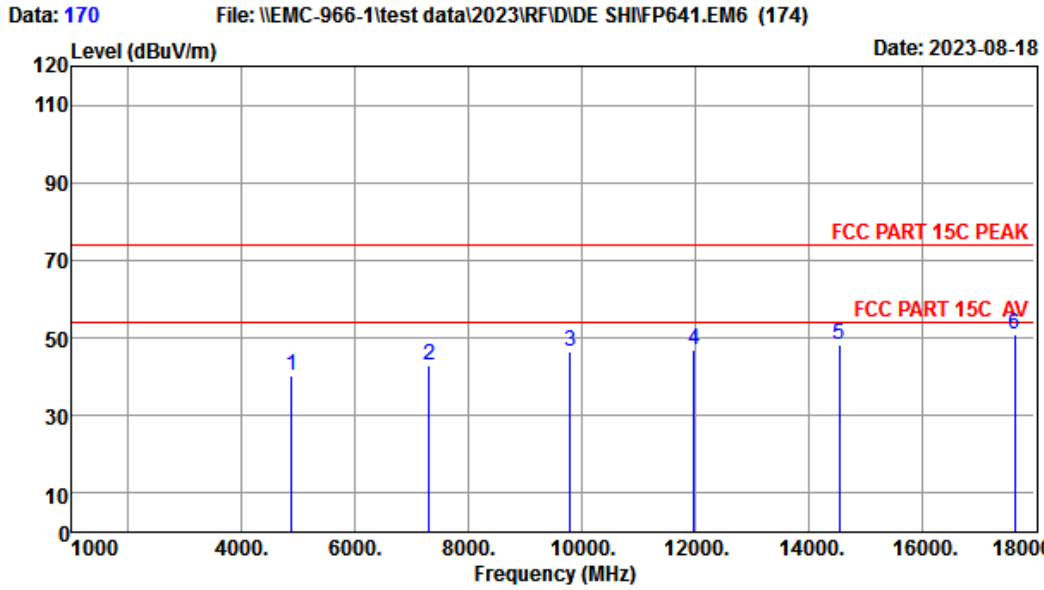

Site no. : 1# 966 Chamber Data no. : 170  
 Dis. / Ant. : 3m BBHA9120D-2667 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:20.1°C;Humi:64%;Press:101.52kPa  
 Engineer : QQZ  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : IEEE 802.11b TX 2437MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.54	5.28	44.42	46.72	40.12	74.00	33.88	Peak
2	7311.00	36.25	6.70	44.07	43.92	42.80	74.00	31.20	Peak
3	9789.00	38.16	7.77	43.72	44.11	46.32	74.00	27.68	Peak
4	11982.00	38.80	8.82	42.21	41.63	47.04	74.00	26.96	Peak
5	14549.00	39.73	10.03	42.16	40.79	48.39	74.00	25.61	Peak
6	17643.00	40.42	12.14	43.23	41.38	50.71	74.00	23.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.



EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

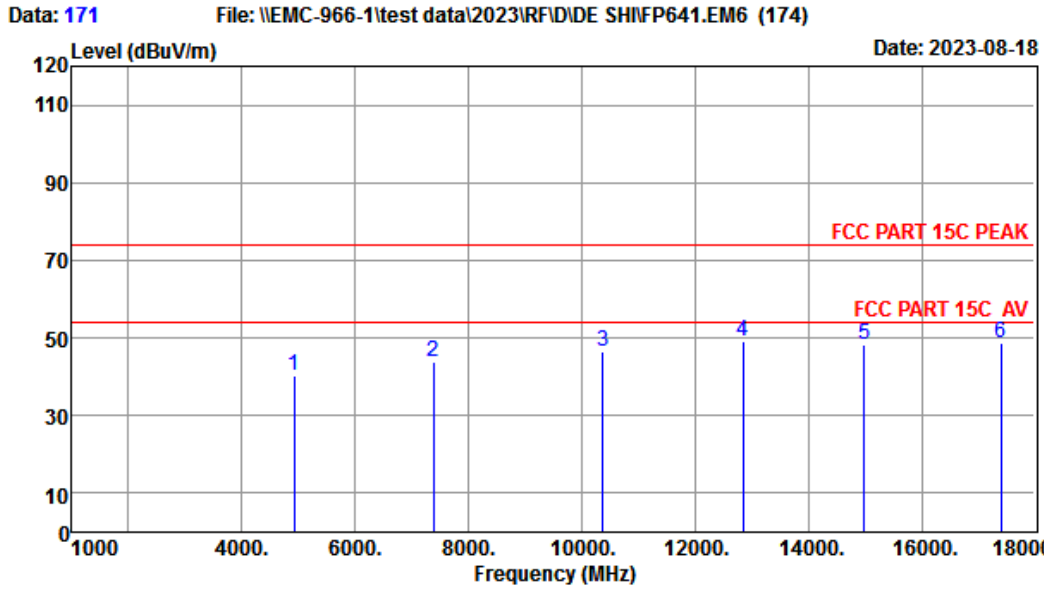

Site no. : 1# 966 Chamber Data no. : 171  
 Dis. / Ant. : 3m BBHA9120D-2667 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:20.1°C;Humi:64%;Press:101.52kPa  
 Engineer : QQZ  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : IEEE 802.11b TX 2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.64	5.33	44.37	46.54	40.14	74.00	33.86	Peak
2	7386.00	36.31	6.72	44.06	45.06	44.03	74.00	29.97	Peak
3	10367.00	38.46	7.95	43.50	43.60	46.51	74.00	27.49	Peak
4	12849.00	39.56	9.19	41.01	41.55	49.29	74.00	24.71	Peak
5	14991.00	39.50	10.24	43.26	41.63	48.11	74.00	25.89	Peak
6	17405.00	39.64	11.93	43.59	40.62	48.60	74.00	25.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 172 File: \\EMC-966-1\test data\2023\RFID\DE SHIFP641.EM6 (174)

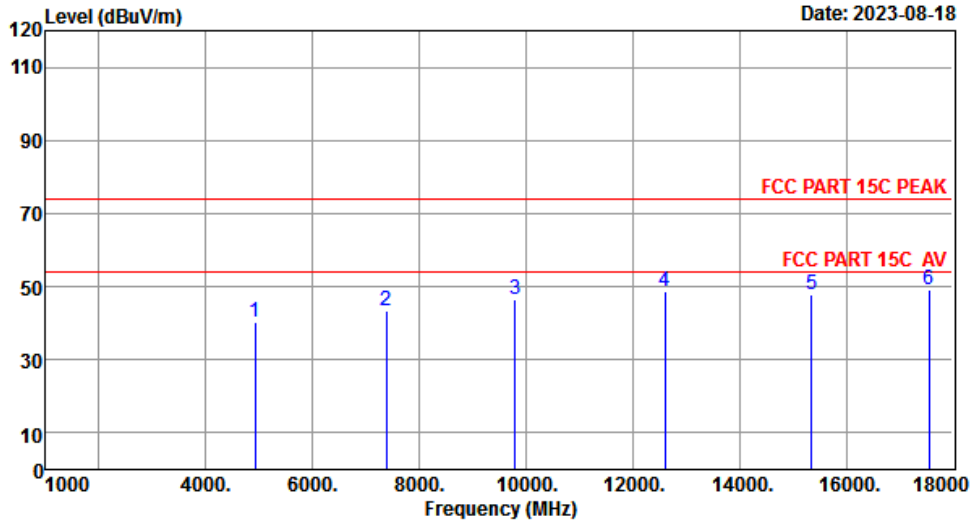

Site no. : 1# 966 Chamber Data no. : 172  
 Dis. / Ant. : 3m BBHA9120D-2667 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:20.1℃;Humi:64%;Press:101.52kPa  
 Engineer : QQZ  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : IEEE 802.11b TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.64	5.33	44.37	46.61	40.21	74.00	33.79	Peak
2	7386.00	36.31	6.72	44.06	44.44	43.41	74.00	30.59	Peak
3	9789.00	38.16	7.77	43.72	44.15	46.36	74.00	27.64	Peak
4	12611.00	39.35	9.09	41.35	41.43	48.52	74.00	25.48	Peak
5	15348.00	38.91	10.38	43.58	42.32	48.03	74.00	25.97	Peak
6	17558.00	40.14	12.06	43.36	40.13	48.97	74.00	25.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.




### Radiated Band Edge

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878


Data: 167 File: \\EMC-966-1\test data\2023\RFID\DE SH\FP641.EM6 (174) Date: 2023-08-18

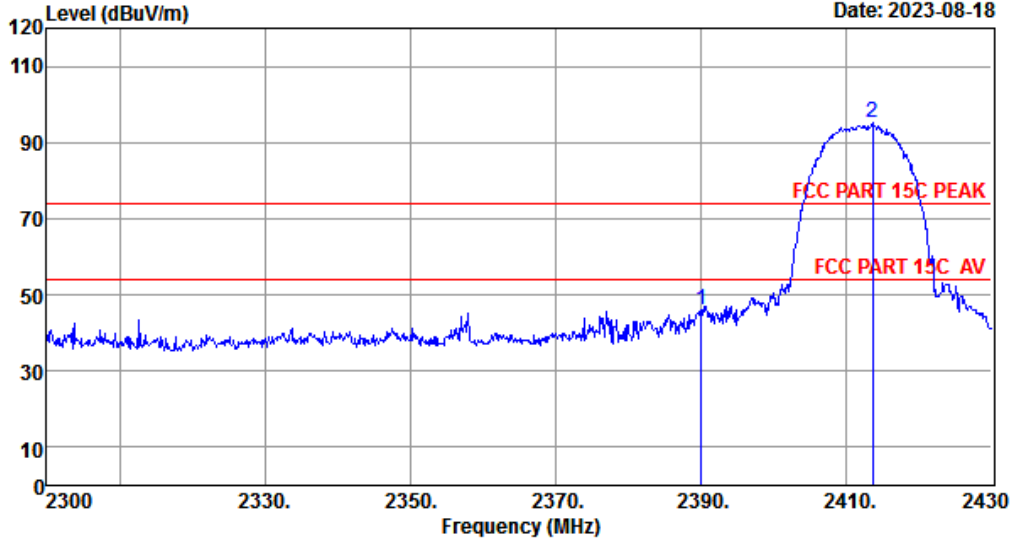

Site no. : 1# 966 Chamber Data no. : 167  
 Dis. / Ant. : 3m BBHA9120D-2667 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:20.1°C;Humi:64%;Press:101.52kPa  
 Engineer : QZ  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : IEEE 802.11b TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.43	3.55	45.01	60.12	46.09	74.00	27.91	Peak
2	2413.62	27.50	3.57	44.99	108.94	95.02	74.00	-21.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

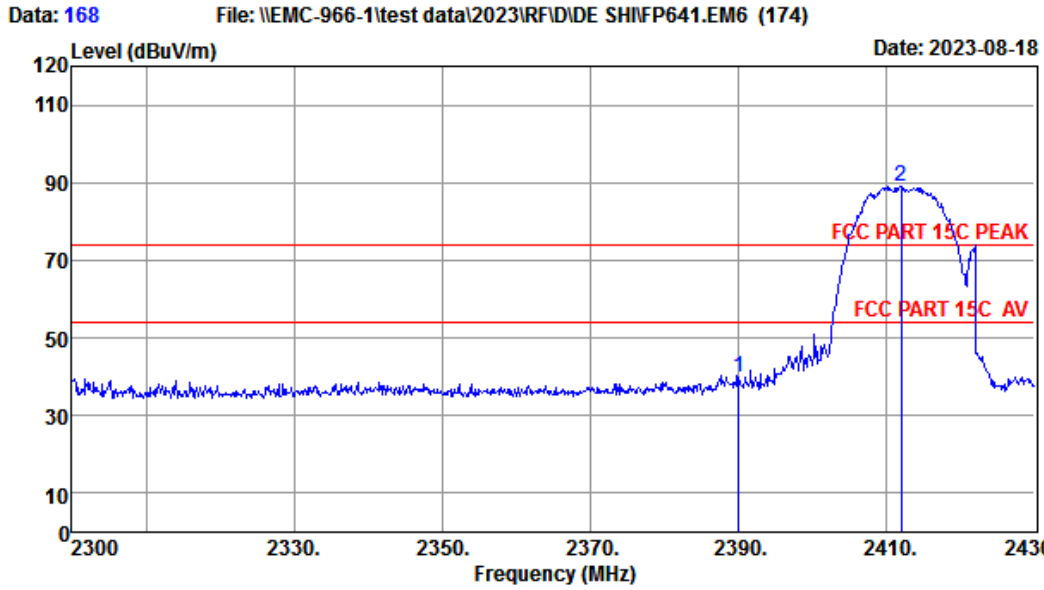

Site no. : 1# 966 Chamber Data no. : 168  
 Dis. / Ant. : 3m BBHA9120D-2667 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:20.1°C;Humi:64%;Press:101.52kPa  
 Engineer : QQZ  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : IEEE 802.11b TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.43	3.55	45.01	53.95	39.92	74.00	34.08	Peak
2	2411.93	27.49	3.57	44.99	103.12	89.19	74.00	-15.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

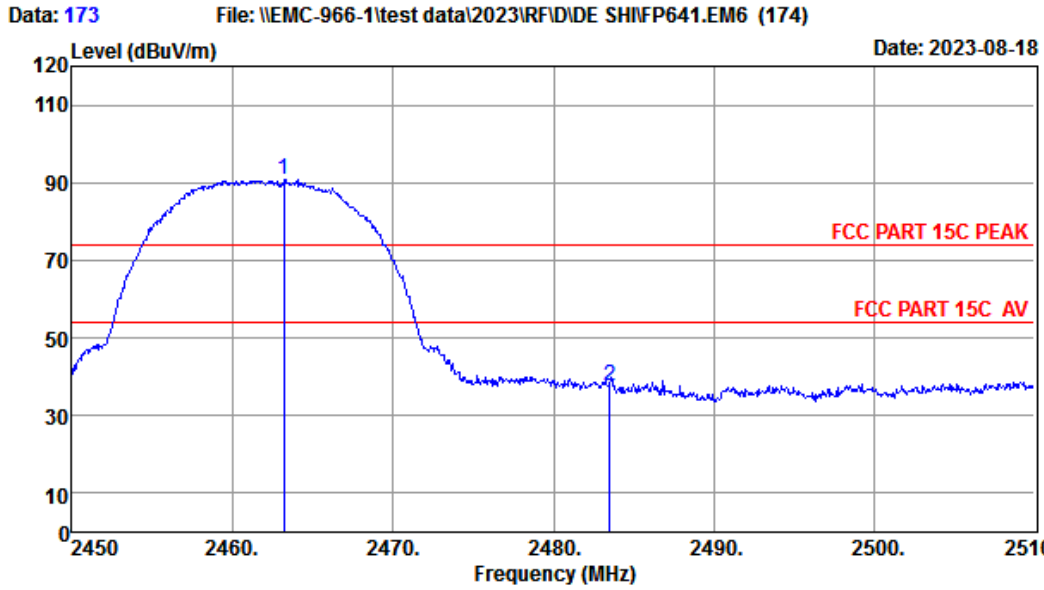

Site no. : 1# 966 Chamber Data no. : 173  
 Dis. / Ant. : 3m BBHA9120D-2667 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:20.1°C;Humi:64%;Press:101.52kPa  
 Engineer : QQZ  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : IEEE 802.11b TX 2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.20	27.64	3.60	44.94	104.53	90.83	74.00	-16.83	Peak
2	2483.50	27.70	3.62	44.93	51.46	37.85	74.00	36.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 174 File: \\EMC-966-1\test data\2023\RFID\IDE SHINFP641.EM6 (174) Date: 2023-08-18

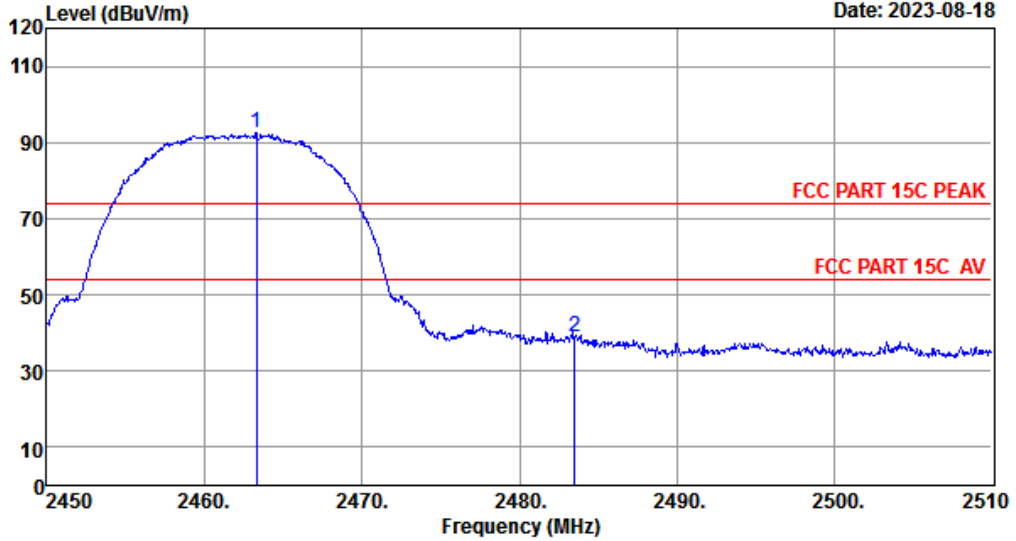

Site no. : 1# 966 Chamber Data no. : 174  
 Dis. / Ant. : 3m BBHA9120D-2667 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:20.1°C;Humi:64%;Press:101.52kPa  
 Engineer : QQZ  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : IEEE 802.11b TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.32	27.64	3.60	44.94	106.19	92.49	74.00	-18.49	Peak
2	2483.50	27.70	3.62	44.93	52.46	38.85	74.00	35.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. All channels had been pre-test, only of the worst case channels were reported.



## 9. AC POWER LINE CONDUCTED EMISSIONS


### 9.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note:

1. \* Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

### 9.2. Test Setup

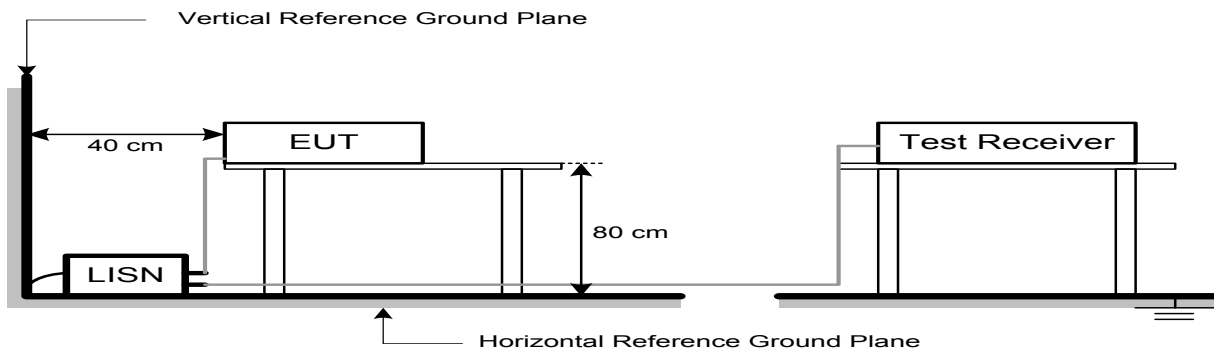

### 9.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold


### 9.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 9.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

### 9.5. Test Result

**EST Technology**

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

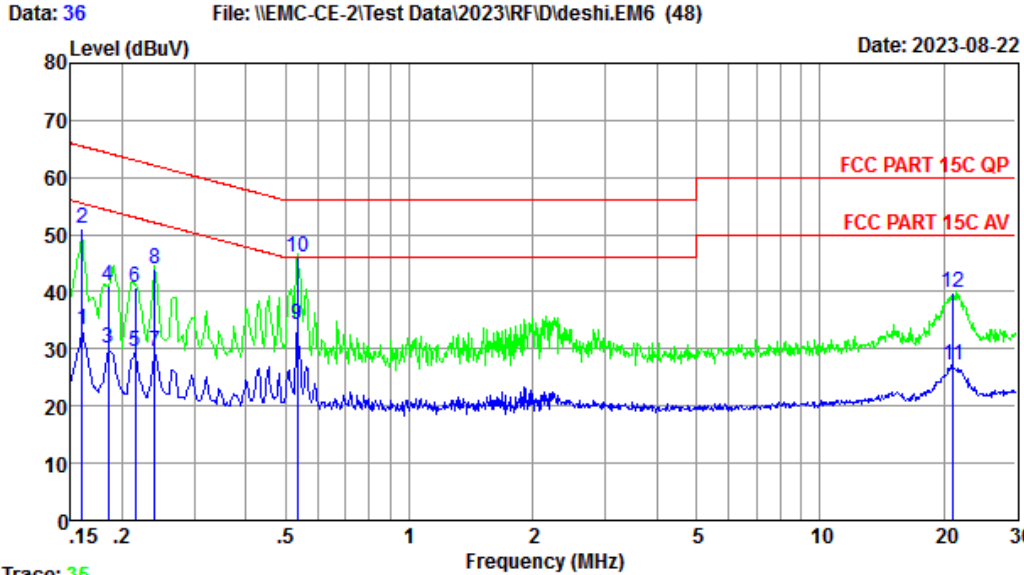


Trace: 35  
 Site no : 2#CE Shield Room Data no. : 36  
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15C QP  
 Engineer : MRS  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 SAWA-55-25024B

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	10.22	9.89	13.14	33.25	55.47	22.22	Average
2	0.16	10.22	9.89	30.85	50.96	65.47	14.51	QP
3	0.19	10.14	9.93	9.96	30.03	54.24	24.21	Average
4	0.19	10.14	9.93	20.97	41.04	64.24	23.20	QP
5	0.22	10.15	9.94	9.42	29.51	53.01	23.50	Average
6	0.22	10.15	9.94	20.74	40.83	63.01	22.18	QP
7	0.24	10.16	9.95	9.41	29.52	52.08	22.56	Average
8	0.24	10.16	9.95	23.96	44.07	62.08	18.01	QP
9	0.53	9.99	9.95	14.44	34.38	46.00	11.62	Average
10	0.53	9.99	9.95	25.97	45.91	56.00	10.09	QP
11	21.15	10.57	10.31	6.16	27.04	50.00	22.96	Average
12	21.15	10.57	10.31	18.97	39.85	60.00	20.15	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.



Data: 34 File: \\EMC-CE-2\Test Data\2023\RFID\deshi.EM6 (48) Date: 2023-08-22

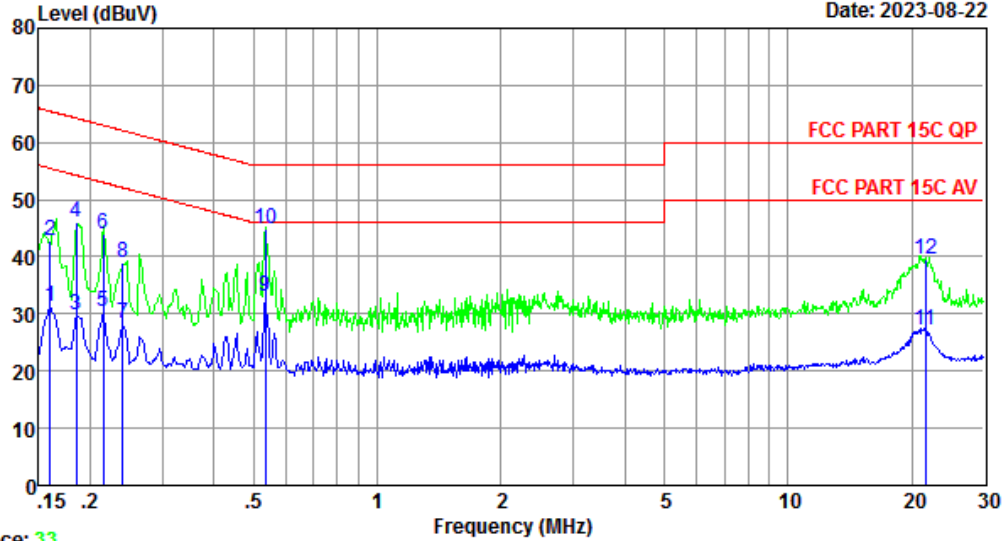


Trace: 33  
 Site no : 2#CE Shield Room Data no. : 34  
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE  
 Limit : FCC PART 15C QP  
 Engineer : MRS  
 EUT : Portable receipt and label printer  
 Power : DC 24V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 SAWA-55-25024B

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	10.12	9.89	11.42	31.43	55.47	24.04	Average
2	0.16	10.12	9.89	22.74	42.75	65.47	22.72	QP
3	0.19	10.16	9.93	9.59	29.68	54.24	24.56	Average
4	0.19	10.16	9.93	25.97	46.06	64.24	18.18	QP
5	0.22	10.16	9.94	10.36	30.46	53.01	22.55	Average
6	0.22	10.16	9.94	23.95	44.05	63.01	18.96	QP
7	0.24	10.15	9.95	8.35	28.45	52.08	23.63	Average
8	0.24	10.15	9.95	18.97	39.07	62.08	23.01	QP
9	0.53	10.06	9.95	13.08	33.09	46.00	12.91	Average
10	0.53	10.06	9.95	24.86	44.87	56.00	11.13	QP
11	21.60	10.76	10.32	6.11	27.19	50.00	22.81	Average
12	21.60	10.76	10.32	18.36	39.44	60.00	20.56	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

Data: 24 File: \\EMC-CE-2\Test Data\2023\RFID\deshi.EM6 (48) Date: 2023-08-22

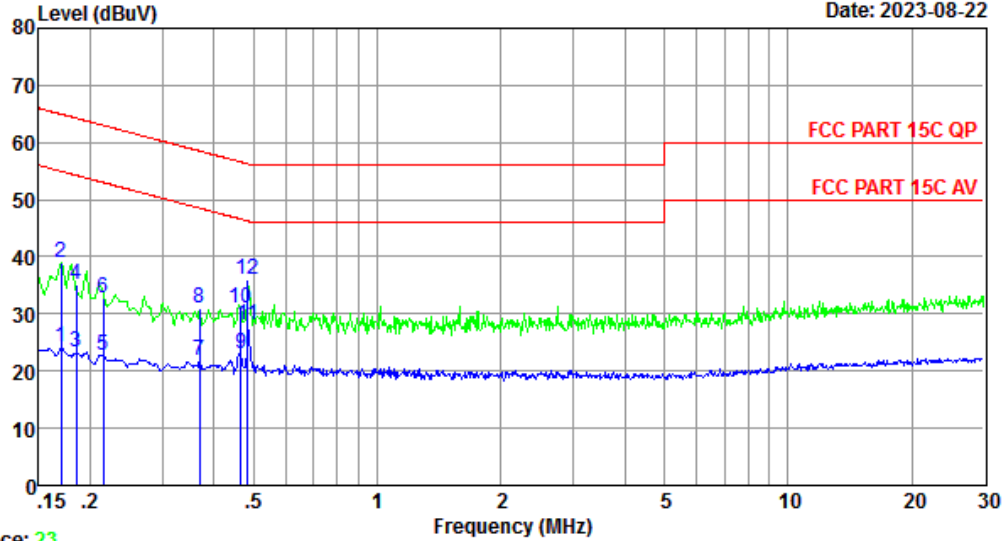


Trace: 23  
 Site no : 2#CE Shield Room Data no. : 24  
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE  
 Limit : FCC PART 15C QP  
 Engineer : MRS  
 EUT : Portable receipt and label printer  
 Power : DC 20V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 A879-200500C-US1

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	10.12	9.89	4.08	24.09	54.94	30.85	Average
2	0.17	10.12	9.89	18.96	38.97	64.94	25.97	QP
3	0.19	10.16	9.93	3.19	23.28	54.24	30.96	Average
4	0.19	10.16	9.93	14.96	35.05	64.24	29.19	QP
5	0.22	10.16	9.94	2.74	22.84	53.01	30.17	Average
6	0.22	10.16	9.94	12.70	32.80	63.01	30.21	QP
7	0.37	10.12	9.89	1.72	21.73	48.52	26.79	Average
8	0.37	10.12	9.89	10.96	30.97	58.52	27.55	QP
9	0.47	10.09	9.93	2.91	22.93	46.58	23.65	Average
10	0.47	10.09	9.93	10.96	30.98	56.58	25.60	QP
11	0.48	10.08	9.94	8.06	28.08	46.27	18.19	Average
12	0.48	10.08	9.94	15.96	35.98	56.27	20.29	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 22 File: \\EMC-CE-2\Test Data\2023\RFID\deshi.EM6 (48) Date: 2023-08-22

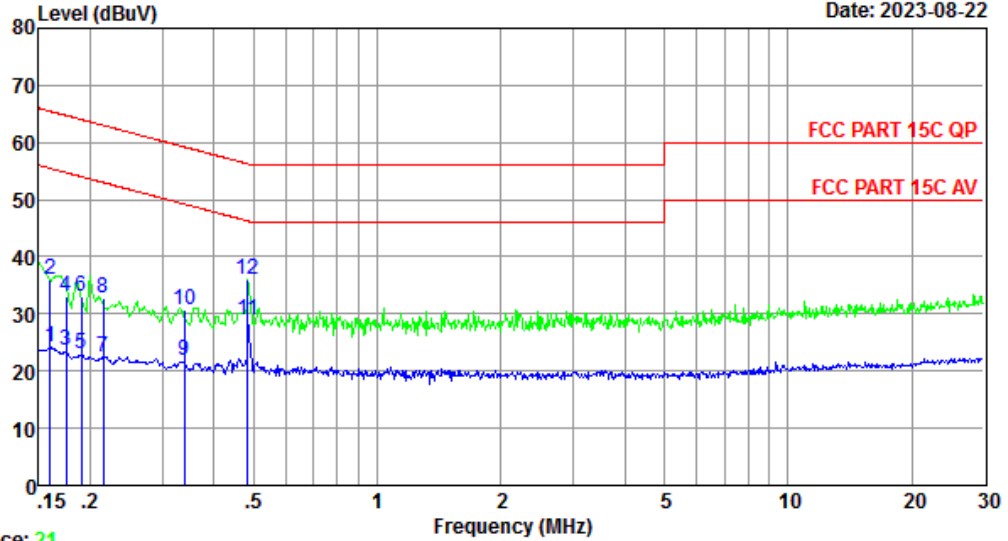


Trace: 21  
 Site no : 2#CE Shield Room Data no. : 22  
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15C QP  
 Engineer : MRS  
 EUT : Portable receipt and label printer  
 Power : DC 20V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 A879-200500C-US1

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	10.22	9.89	4.06	24.17	55.47	31.30	Average
2	0.16	10.22	9.89	15.96	36.07	65.47	29.40	QP
3	0.17	10.14	9.93	3.43	23.50	54.72	31.22	Average
4	0.17	10.14	9.93	13.08	33.15	64.72	31.57	QP
5	0.19	10.14	9.93	2.84	22.91	54.02	31.11	Average
6	0.19	10.14	9.93	12.96	33.03	64.02	30.99	QP
7	0.22	10.15	9.94	2.41	22.50	53.01	30.51	Average
8	0.22	10.15	9.94	12.62	32.71	63.01	30.30	QP
9	0.34	10.13	9.88	1.71	21.72	49.22	27.50	Average
10	0.34	10.13	9.88	10.74	30.75	59.22	28.47	QP
11	0.48	9.98	9.94	8.95	28.87	46.27	17.40	Average
12	0.48	9.98	9.94	15.96	35.88	56.27	20.39	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

Data: 12 File: \\EMC-CE-2\Test Data\2023\RFID\deshi.EM6 (48) Date: 2023-08-22

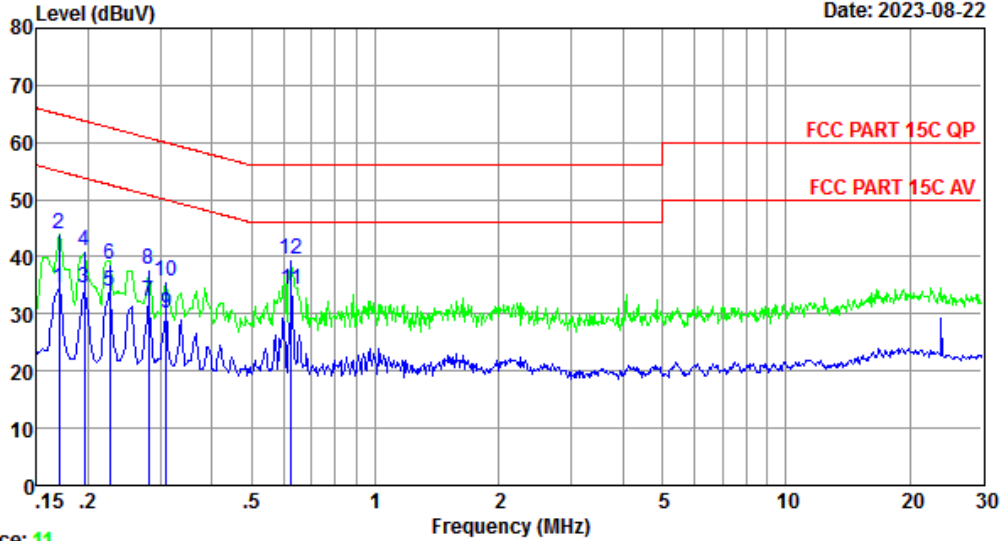


Trace: 11  
 Site no : 2#CE Shield Room Data no. : 12  
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15C QP  
 Engineer : MRS  
 EUT : Portable receipt and label printer  
 Power : DC 20V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 HKC10020050-0A2

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	10.22	9.89	14.54	34.65	54.94	20.29	Average
2	0.17	10.22	9.89	23.99	44.10	64.94	20.84	QP
3	0.20	10.14	9.93	14.52	34.59	53.80	19.21	Average
4	0.20	10.14	9.93	20.95	41.02	63.80	22.78	QP
5	0.23	10.15	9.94	13.95	34.04	52.61	18.57	Average
6	0.23	10.15	9.94	18.65	38.74	62.61	23.87	QP
7	0.28	10.16	9.91	12.22	32.29	50.81	18.52	Average
8	0.28	10.16	9.91	17.63	37.70	60.81	23.11	QP
9	0.31	10.17	9.87	10.19	30.23	49.97	19.74	Average
10	0.31	10.17	9.87	15.74	35.78	59.97	24.19	QP
11	0.62	10.01	9.98	14.34	34.33	46.00	11.67	Average
12	0.62	10.01	9.98	19.63	39.62	56.00	16.38	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 10 File: \\EMC-CE-2\Test Data\2023\RFID\deshi.EM6 (48) Date: 2023-08-22

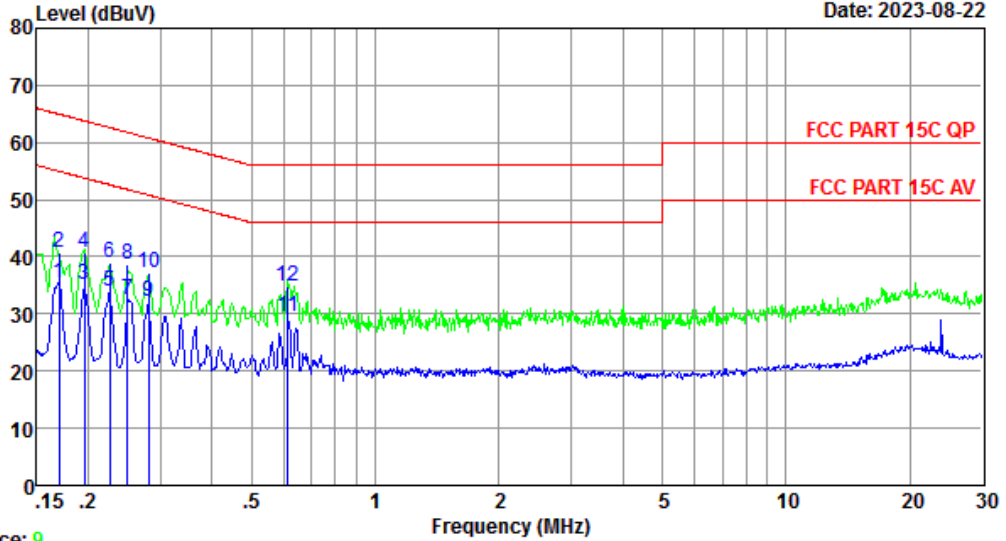

Trace: 9  
 Site no : 2#CE Shield Room Data no. : 10  
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE  
 Limit : FCC PART 15C QP  
 Engineer : MRS  
 EUT : Portable receipt and label printer  
 Power : DC 20V From Adapter Input AC 120V/60Hz  
 M/N : FP641  
 Test Mode : TX Mode  
 HKC10020050-0A2

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	10.12	9.89	15.56	35.57	54.94	19.37	Average
2	0.17	10.12	9.89	20.65	40.66	64.94	24.28	QP
3	0.20	10.16	9.93	14.90	34.99	53.80	18.81	Average
4	0.20	10.16	9.93	20.65	40.74	63.80	23.06	QP
5	0.23	10.16	9.94	13.97	34.07	52.61	18.54	Average
6	0.23	10.16	9.94	18.96	39.06	62.61	23.55	QP
7	0.25	10.15	9.95	12.44	32.54	51.78	19.24	Average
8	0.25	10.15	9.95	18.66	38.76	61.78	23.02	QP
9	0.28	10.15	9.91	12.13	32.19	50.81	18.62	Average
10	0.28	10.15	9.91	17.10	37.16	60.81	23.65	QP
11	0.61	10.05	9.97	9.53	29.55	46.00	16.45	Average
12	0.61	10.05	9.97	14.96	34.98	56.00	21.02	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## 10. ANTENNA REQUIREMENTS

### 10.1. Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 10.2. Test Result


The antennas used for this product is integral antenna ,so compliance with antenna requirements. ( Please refer to the EUT photo for details)

## 11. APPENDIX


### Appendix A: Duty Cycle Test Result

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2437	0.37	0.40	92.50
11G	Ant1	2437	0.06	0.08	75.00
11N20SISO	Ant1	2437	0.36	0.38	94.74
11N40SISO	Ant1	2437	0.05	0.07	71.43

Test Graphs

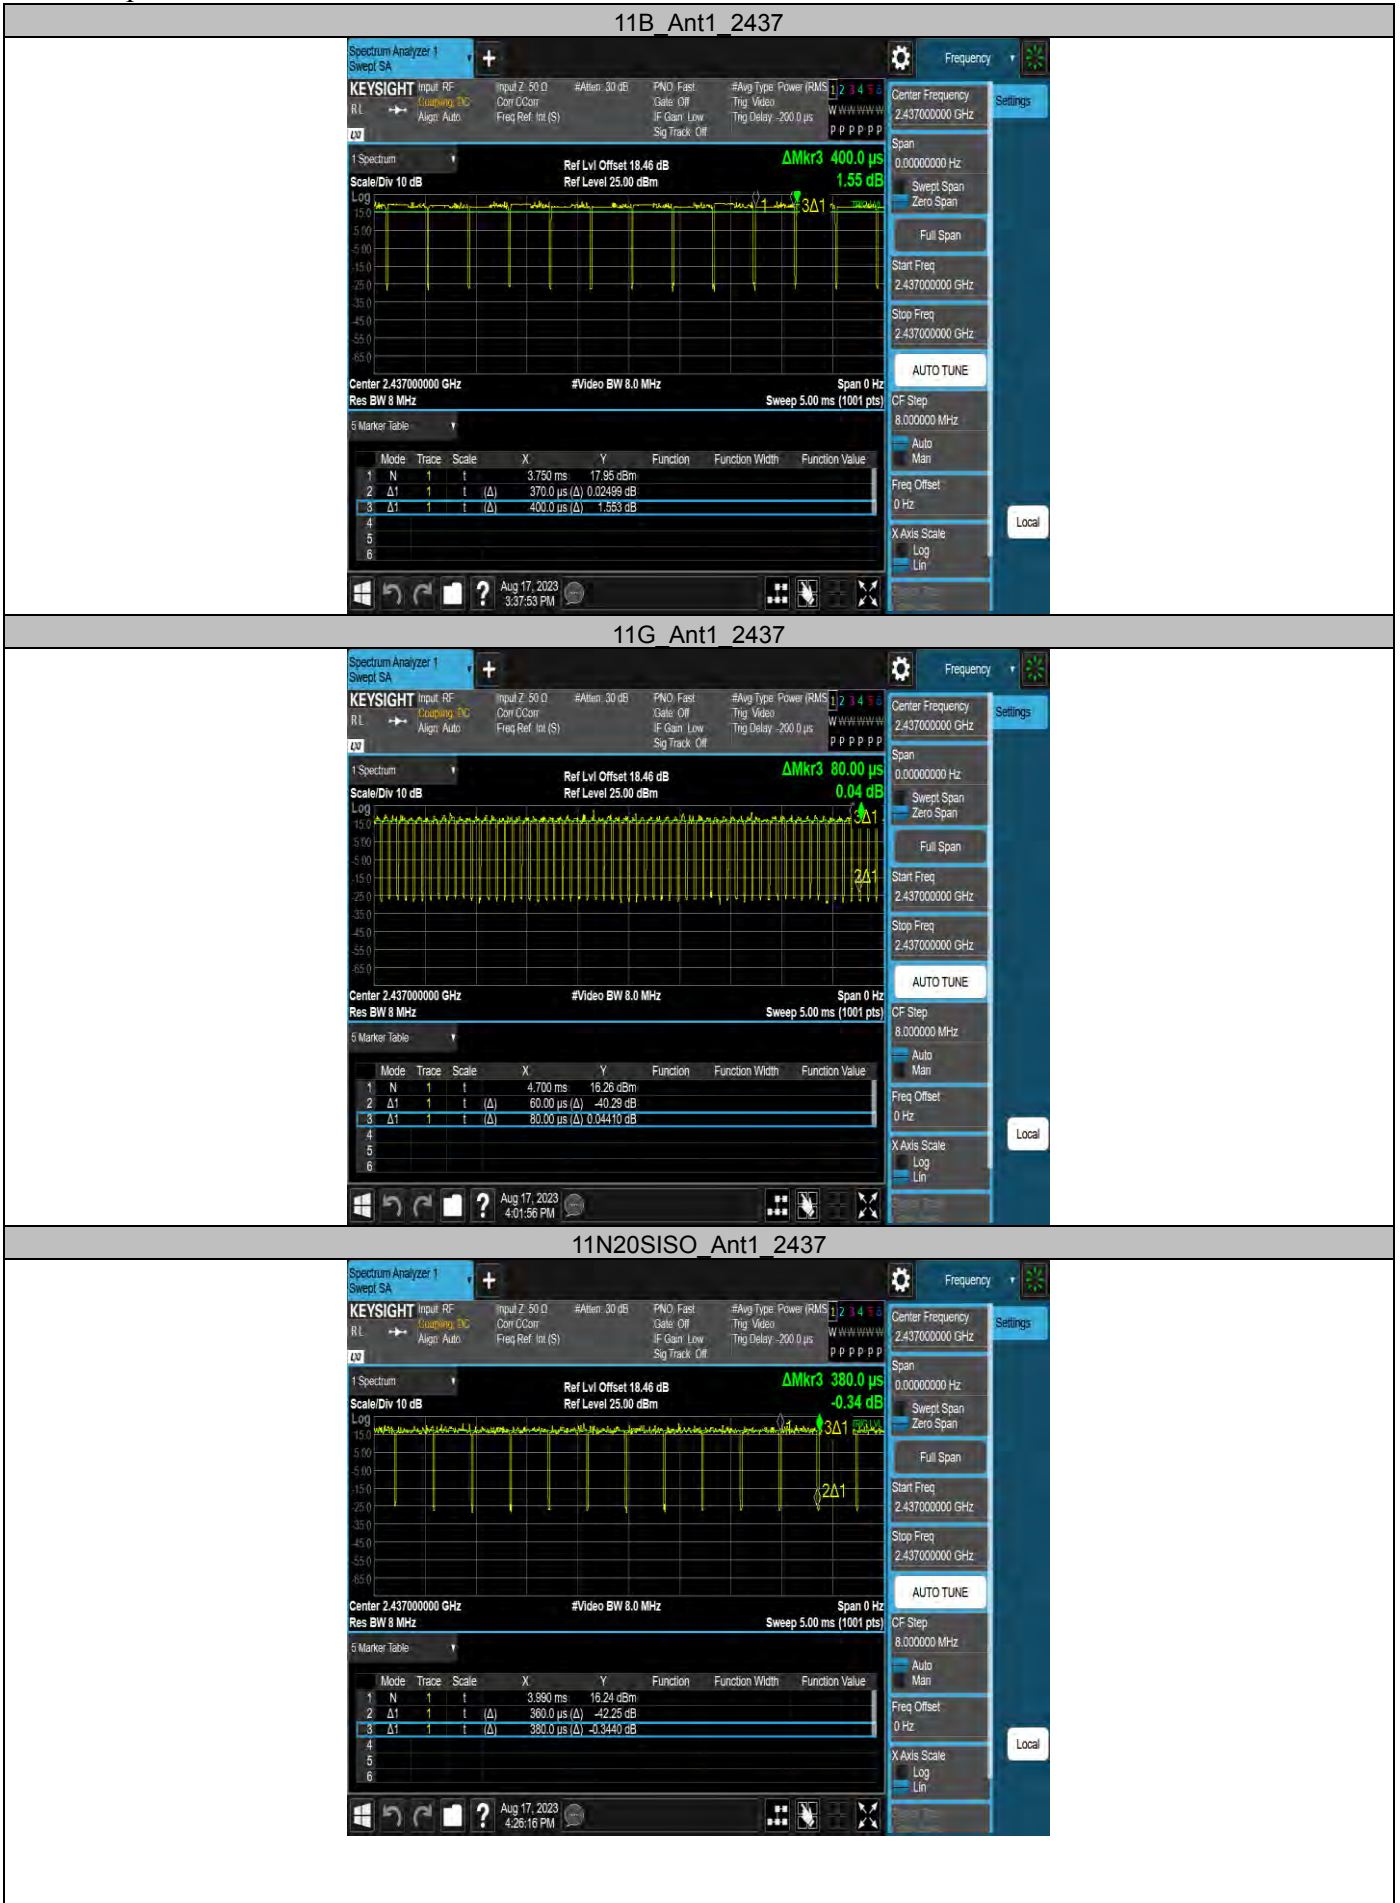



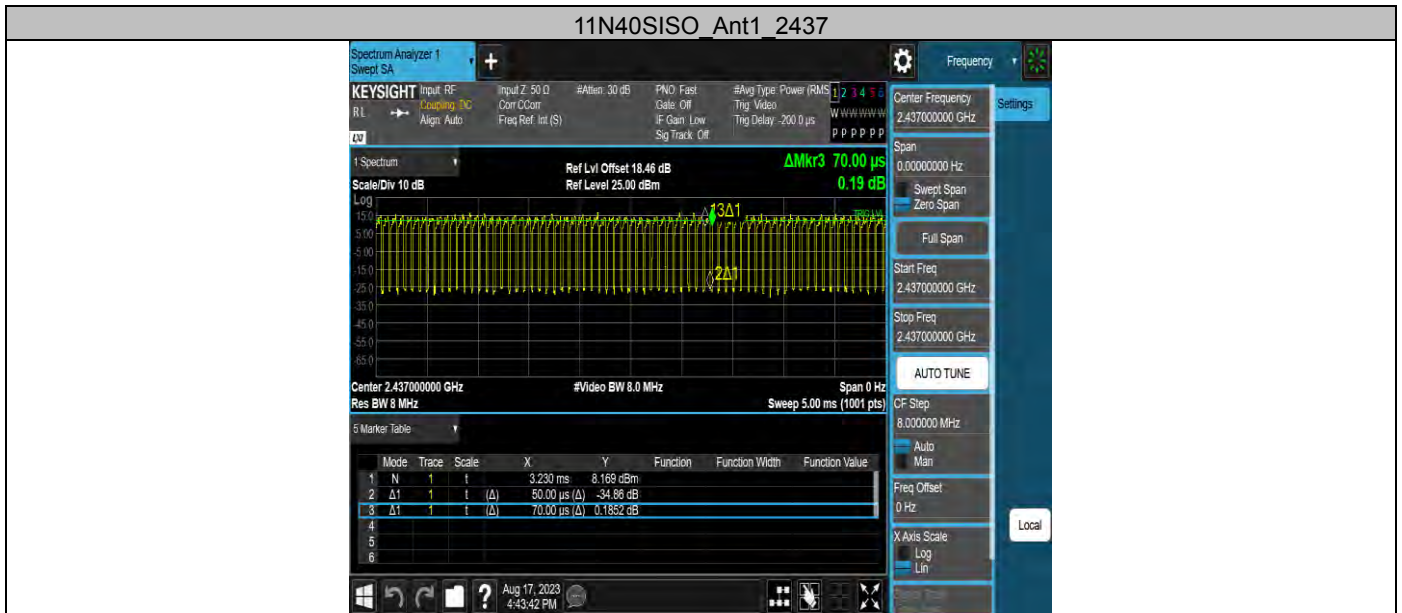

## Appendix B: DTS Bandwidth Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.120	2407.440	2416.560	0.5	PASS
		2437	9.120	2432.440	2441.560	0.5	PASS
		2462	9.240	2457.440	2466.680	0.5	PASS
11G	Ant1	2412	16.480	2403.760	2420.240	0.5	PASS
		2437	16.440	2428.760	2445.200	0.5	PASS
		2462	16.480	2453.760	2470.240	0.5	PASS
11N20SISO	Ant1	2412	17.560	2403.200	2420.760	0.5	PASS
		2437	17.560	2428.200	2445.760	0.5	PASS
		2462	17.560	2453.200	2470.760	0.5	PASS
11N40SISO	Ant1	2422	36.000	2403.840	2439.840	0.5	PASS
		2437	36.320	2418.840	2455.160	0.5	PASS
		2452	36.400	2433.760	2470.160	0.5	PASS

Test Graphs



11G\_Ant1\_2412



11G\_Ant1\_2437



11G\_Ant1\_2462



11N20SISO Ant1 2412



11N20SISO Ant1 2437



11N20SISO Ant1 2462



11N40SISO Ant1 2422



11N40SISO Ant1 2437




11N40SISO Ant1 2452



Appendix C: Maximum conducted output power  
Test Result Peak


Test Mode	Antenna	Frequency [MHz]	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	21.24	≤30.00	PASS
		2437	20.74	≤30.00	PASS
		2462	20.51	≤30.00	PASS
11G	Ant1	2412	23.02	≤30.00	PASS
		2437	22.51	≤30.00	PASS
		2462	22.21	≤30.00	PASS
11N20SISO	Ant1	2412	22.62	≤30.00	PASS
		2437	22.19	≤30.00	PASS
		2462	21.87	≤30.00	PASS
11N40SISO	Ant1	2422	22.56	≤30.00	PASS
		2437	22.38	≤30.00	PASS
		2452	22.13	≤30.00	PASS

### Test Graphs Peak

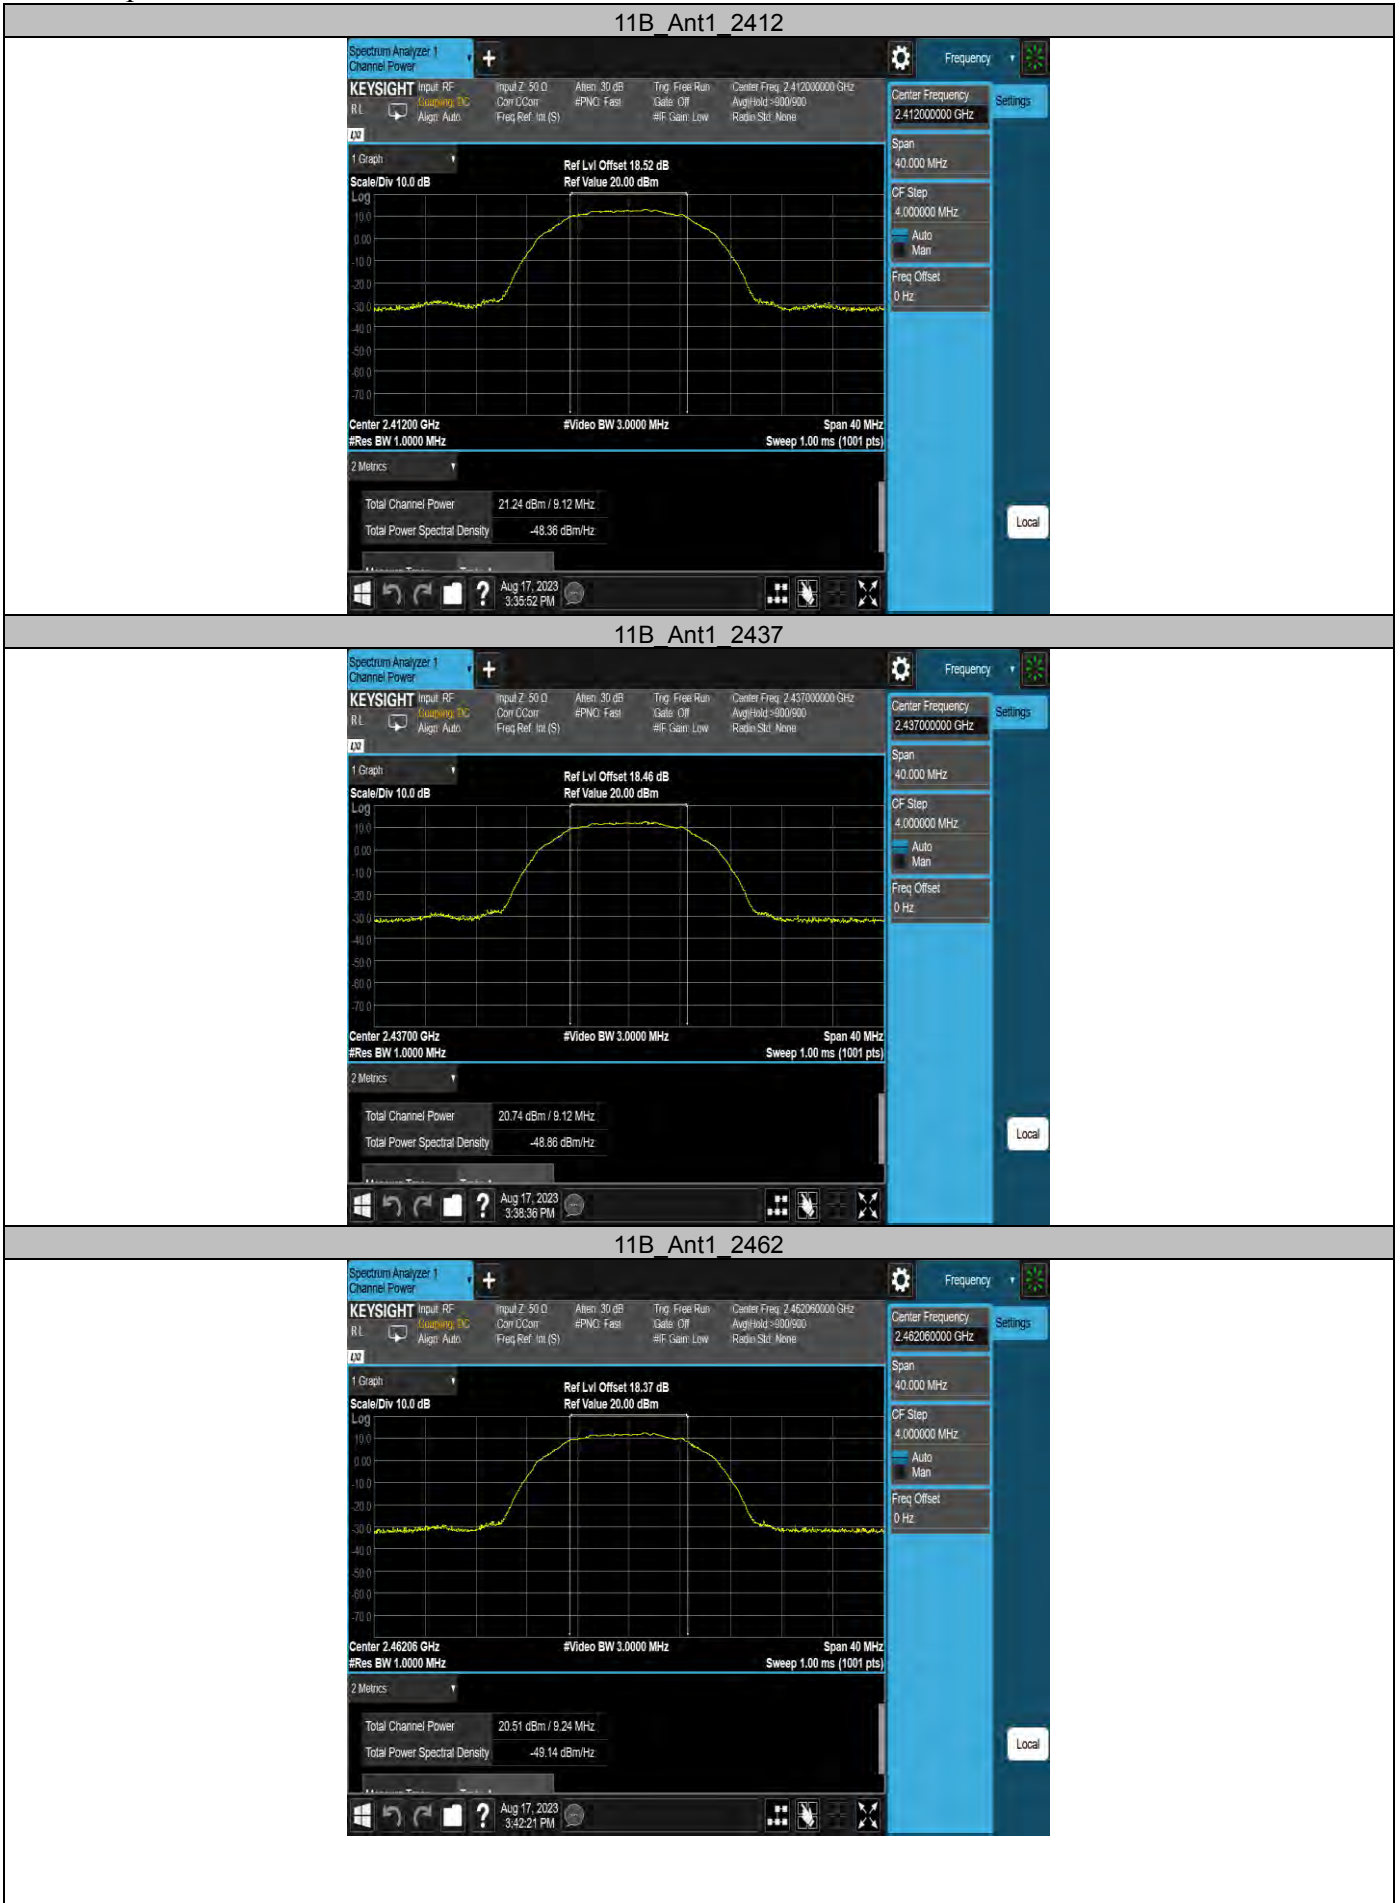





11G\_Ant1\_2412

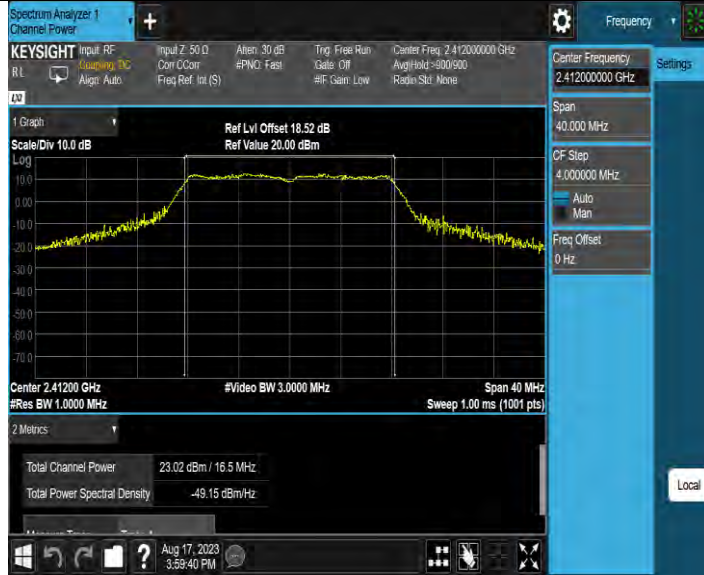


11G\_Ant1\_2437

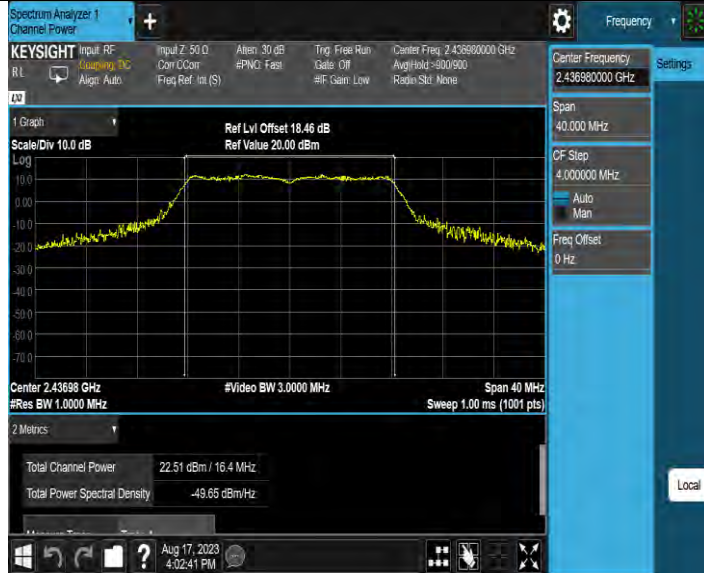


11G\_Ant1\_2462

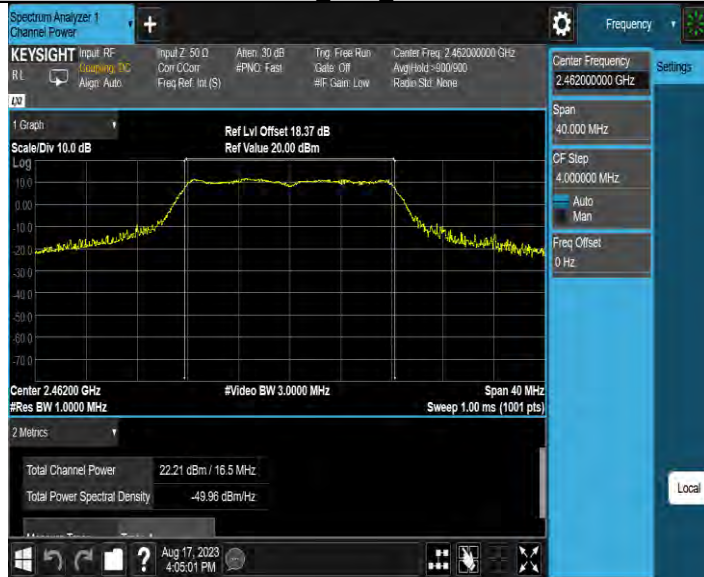


11N20SISO Ant1 2412

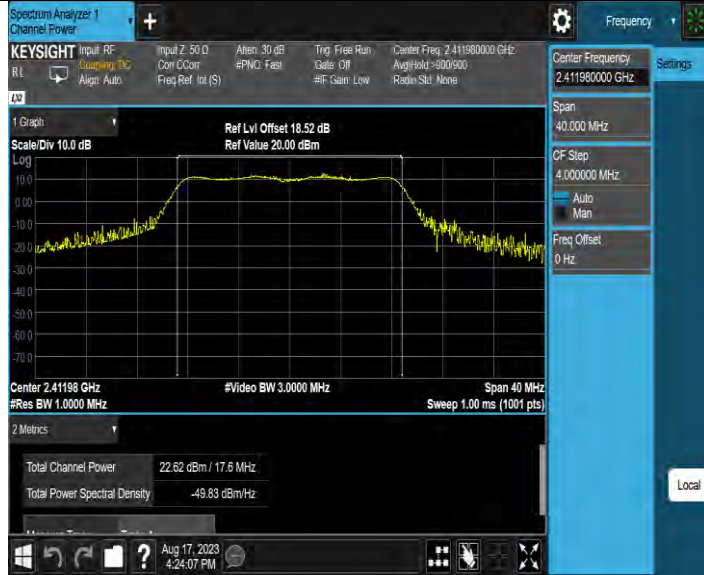


11N20SISO Ant1 2437

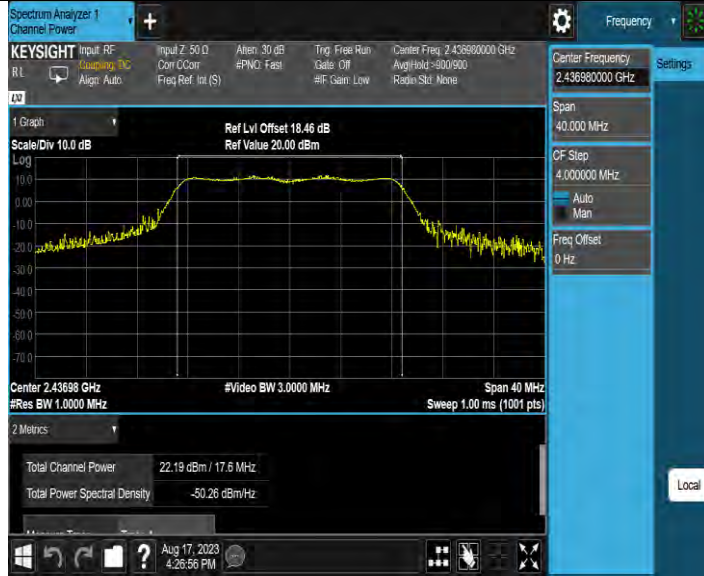

11N20SISO Ant1 2462

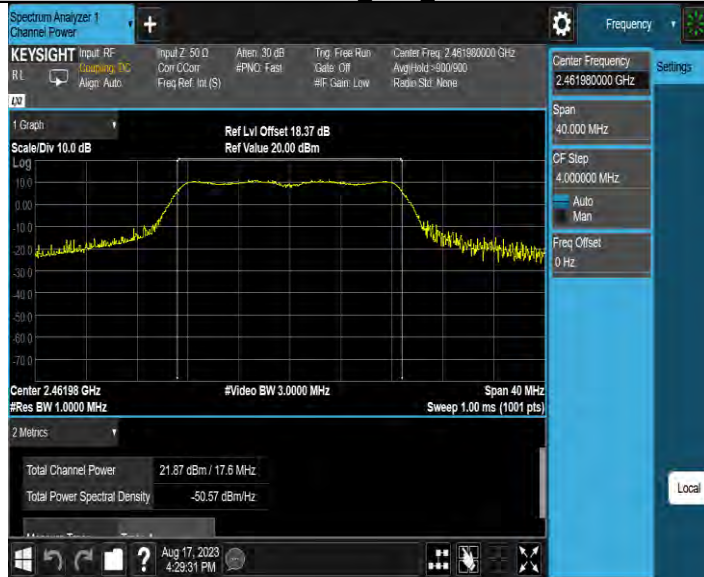


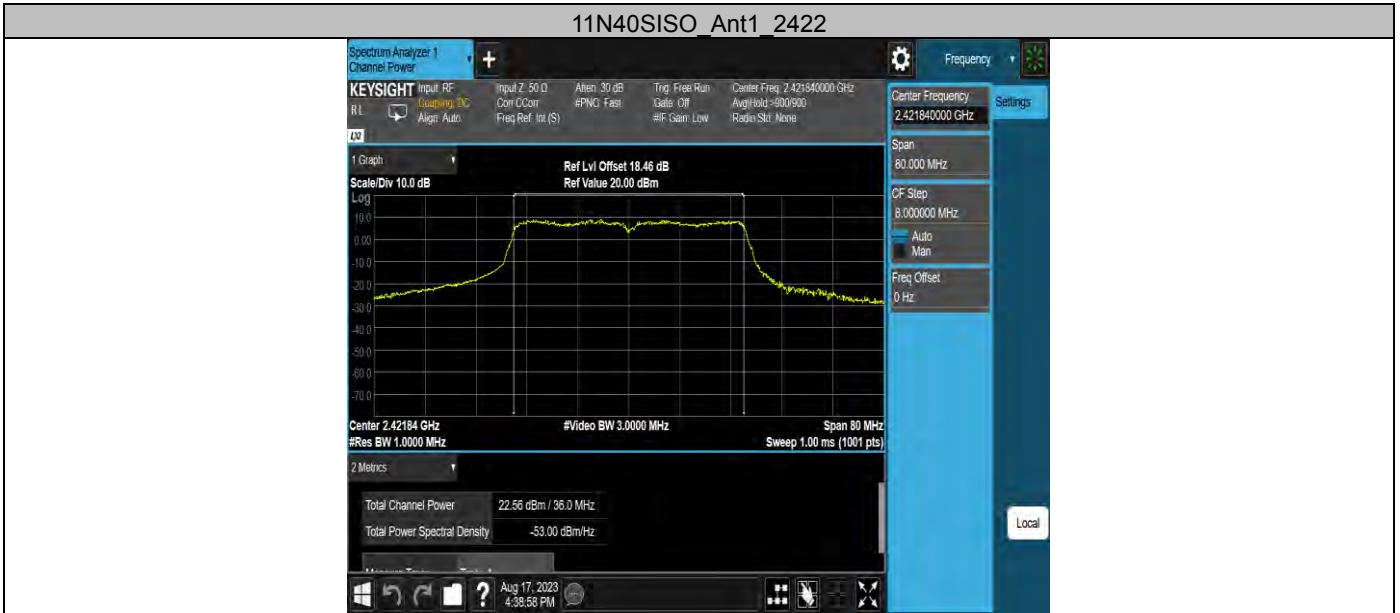


### Appendix D: Maximum power spectral density Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-3.03	≤8.00	PASS
		2437	-0.82	≤8.00	PASS
		2462	-4.05	≤8.00	PASS
11G	Ant1	2412	-9.26	≤8.00	PASS
		2437	-10.2	≤8.00	PASS
		2462	-9.98	≤8.00	PASS
11N20SISO	Ant1	2412	-10.17	≤8.00	PASS
		2437	-10.99	≤8.00	PASS
		2462	-10.26	≤8.00	PASS
11N40SISO	Ant1	2422	-11.63	≤8.00	PASS
		2437	-11.49	≤8.00	PASS
		2452	-11.9	≤8.00	PASS


### Test Graphs

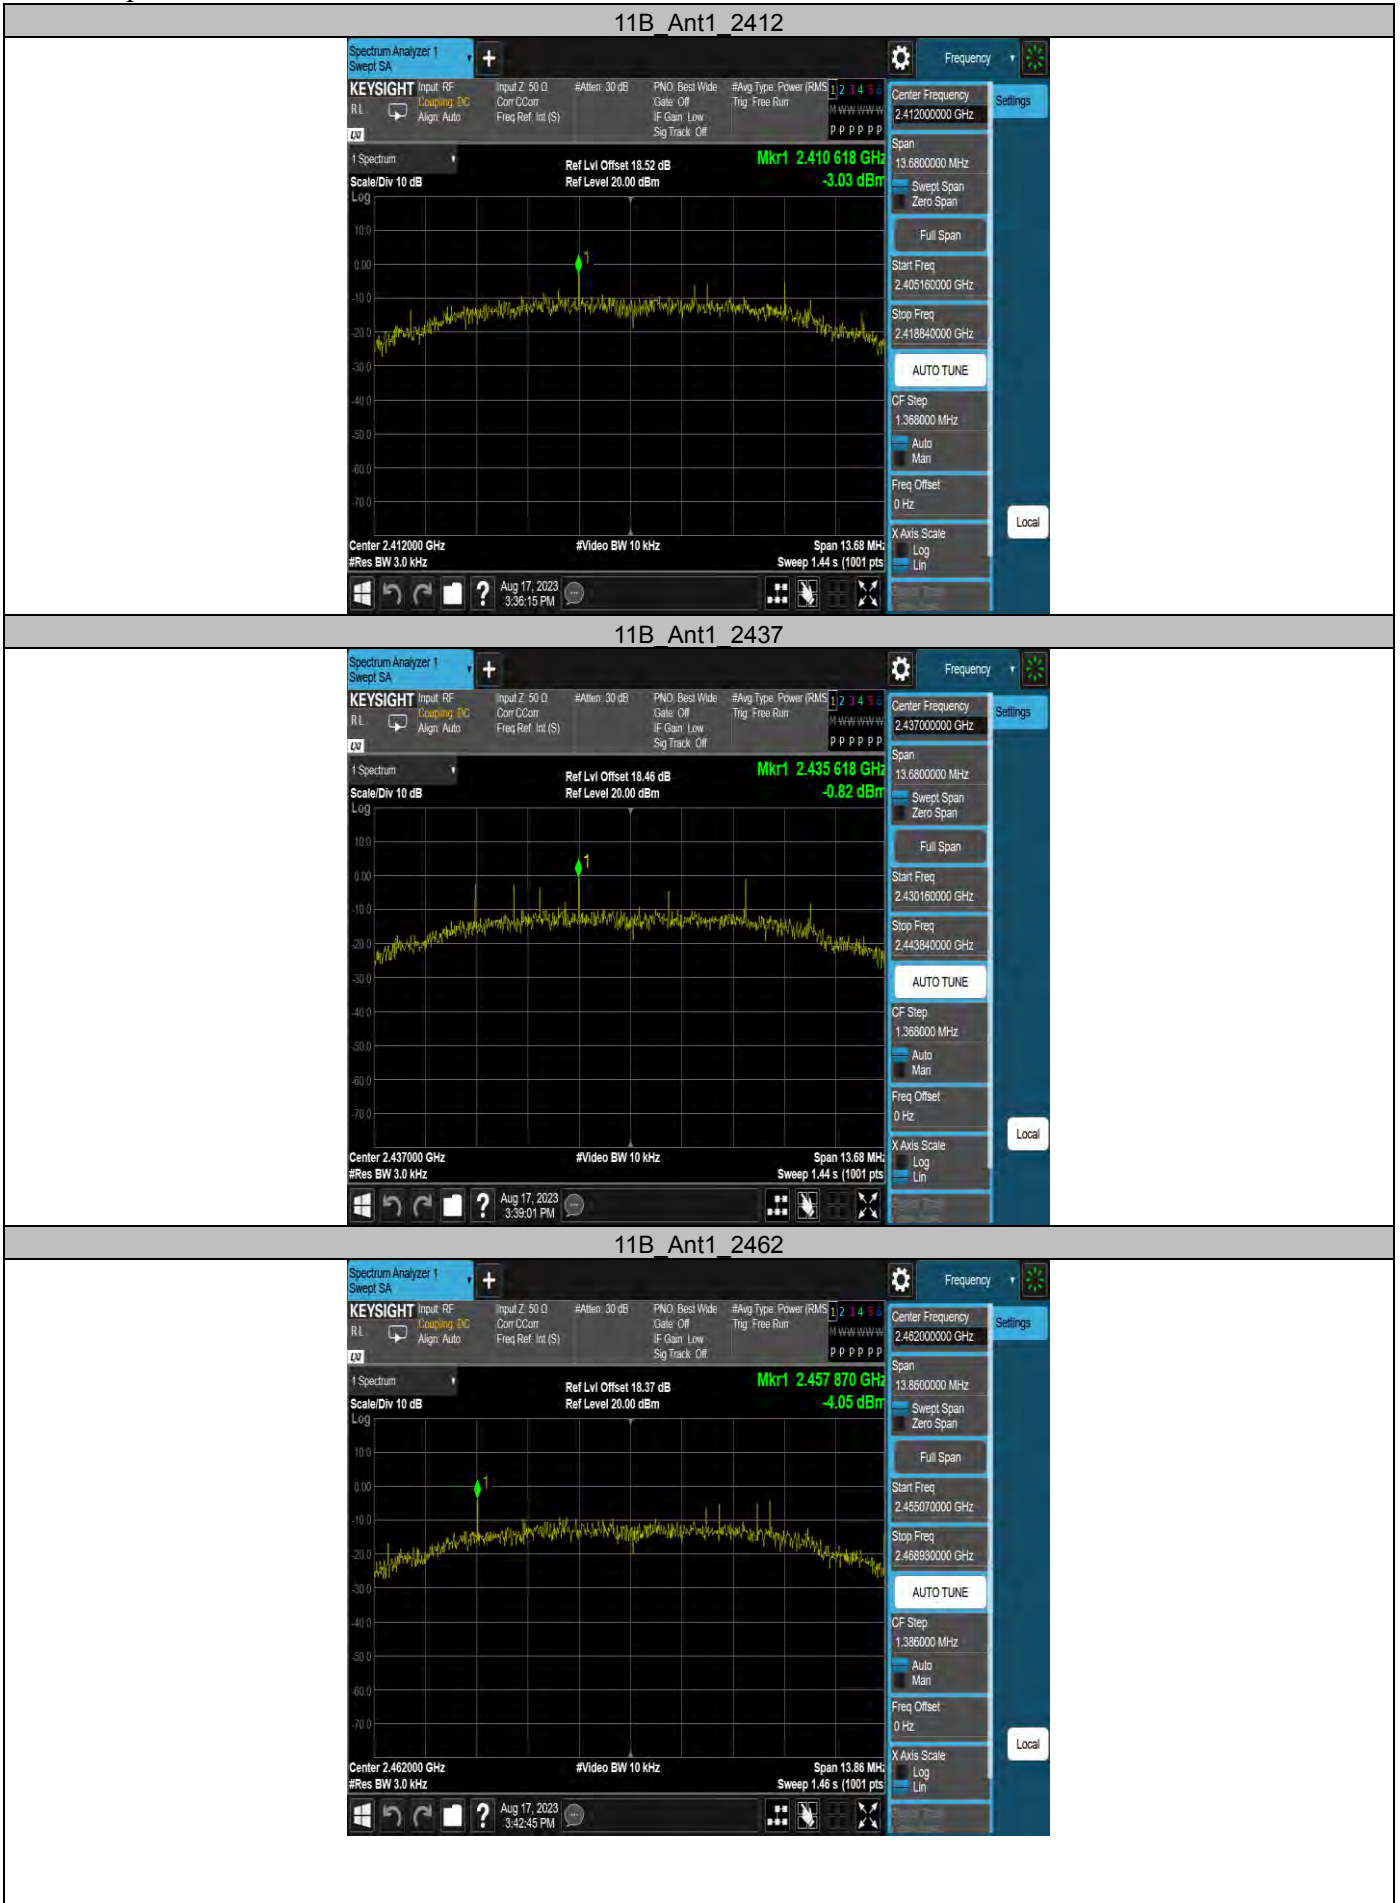


11G\_Ant1\_2412

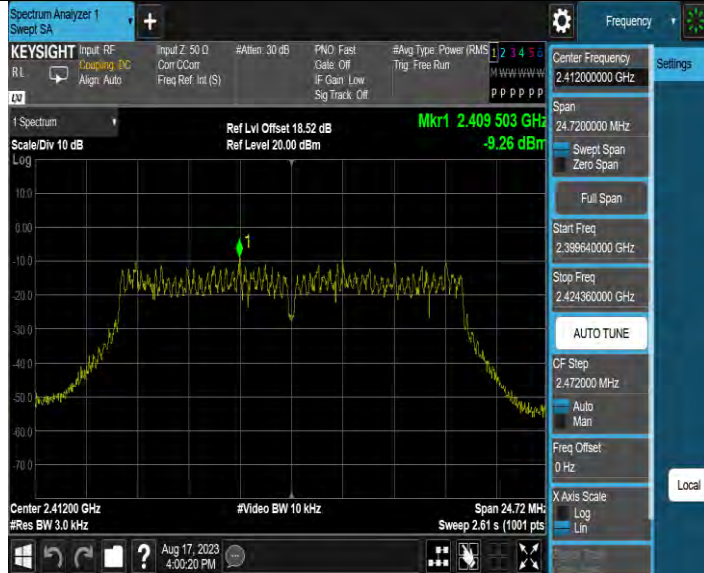


11G\_Ant1\_2437

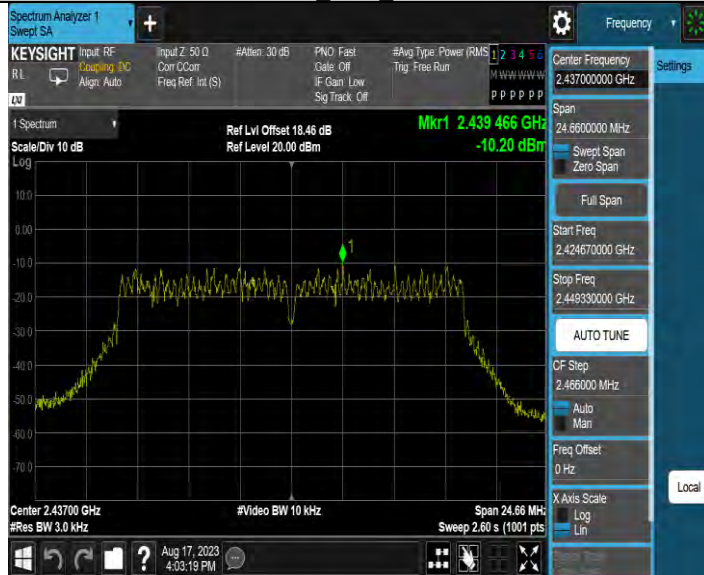


11G\_Ant1\_2462

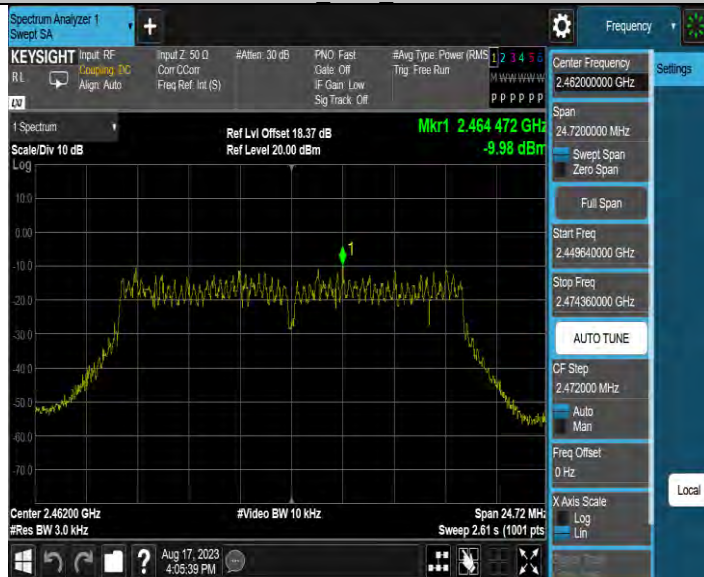


11N20SISO Ant1 2412

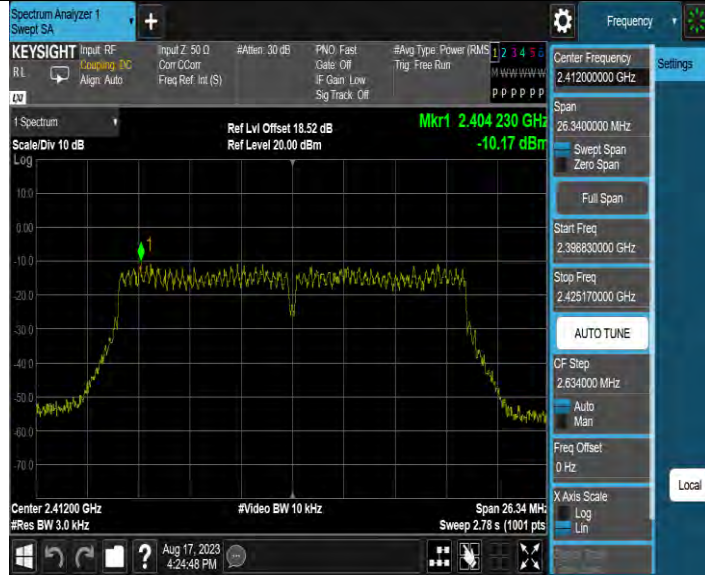


11N20SISO Ant1 2437

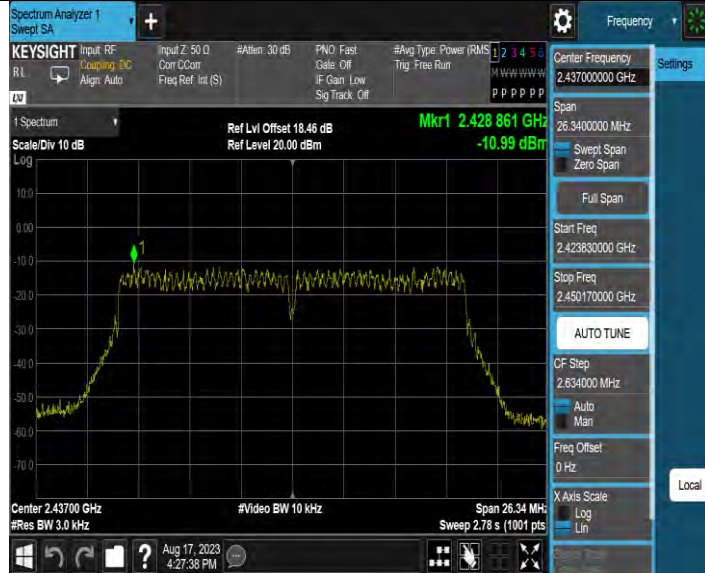


11N20SISO Ant1 2462

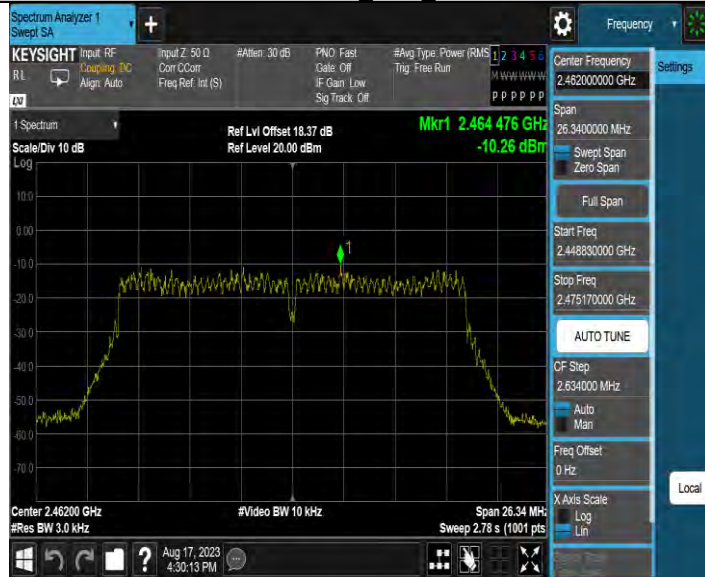


11N40SISO Ant1 2422

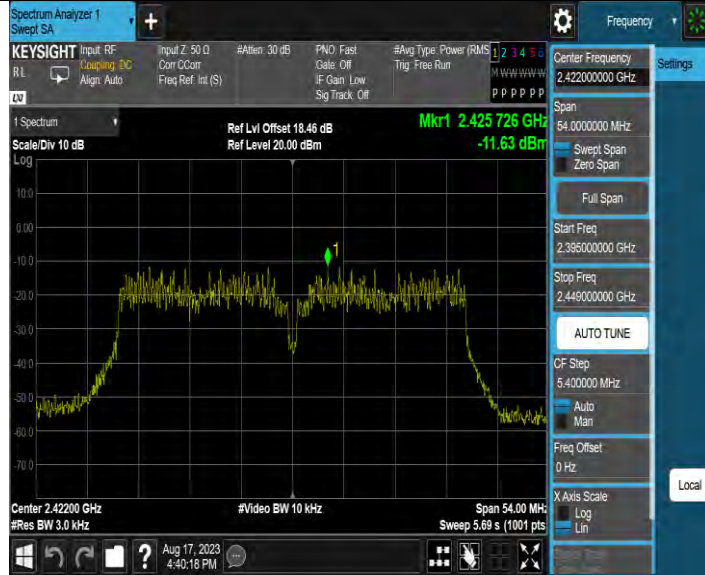

11N40SISO Ant1 2437

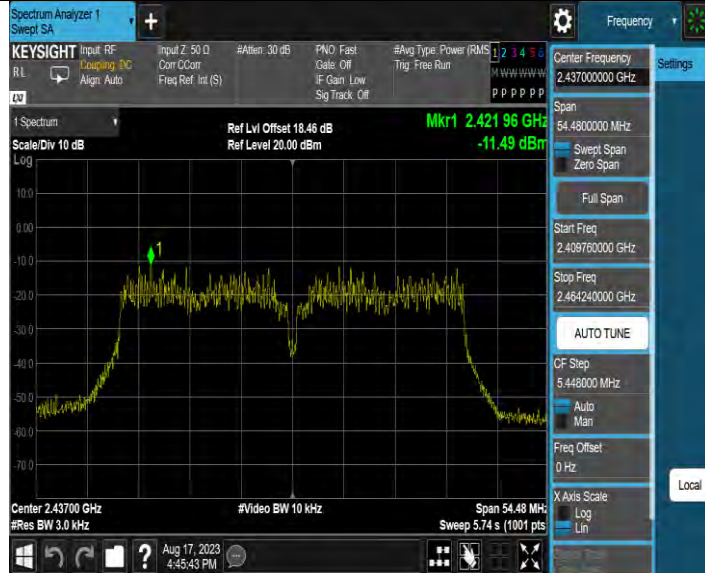

11N40SISO Ant1 2452

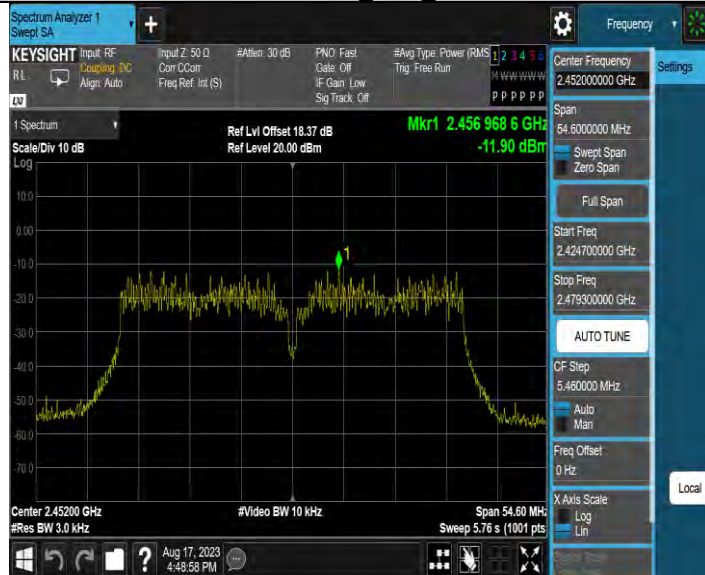





Appendix E: Reference level measurement  
Test Result

Test Mode	Antenna	Freq (MHz)	Max.Point [MHz]	Result [dBm]
11B	Ant1	2412	2412.34	7.10
		2437	2437.34	6.60
		2462	2462.33	6.34
11G	Ant1	2412	2404.51	3.77
		2437	2429.50	3.31
		2462	2454.51	2.96
11N20SISO	Ant1	2412	2404.52	3.73
		2437	2429.52	3.37
		2462	2464.50	2.95
11N40SISO	Ant1	2422	2405.75	0.90
		2437	2420.71	0.71
		2452	2435.73	0.43


Test Graphs

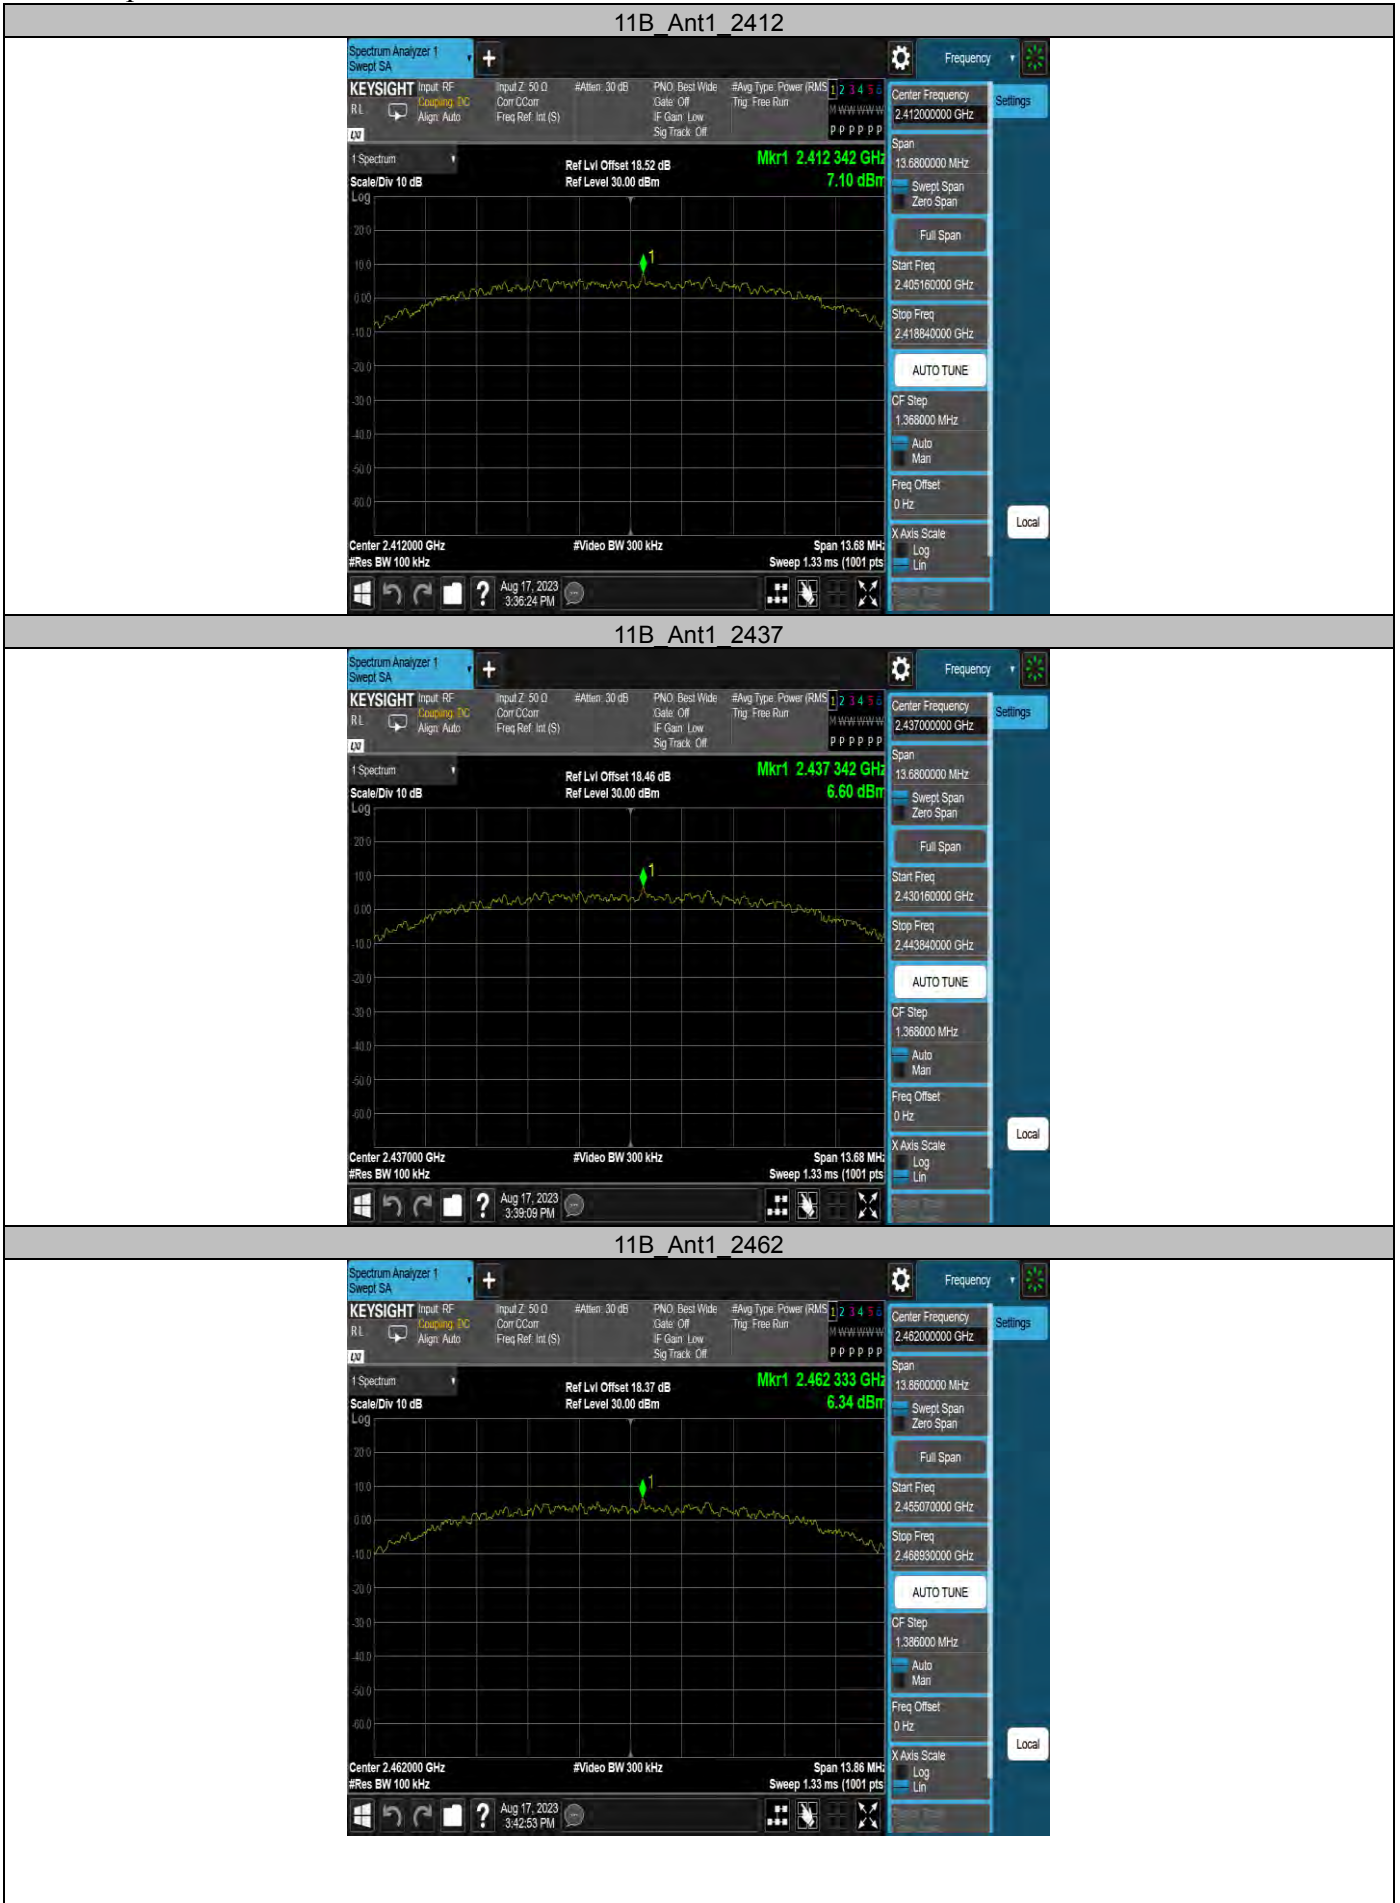


11G\_Ant1\_2412

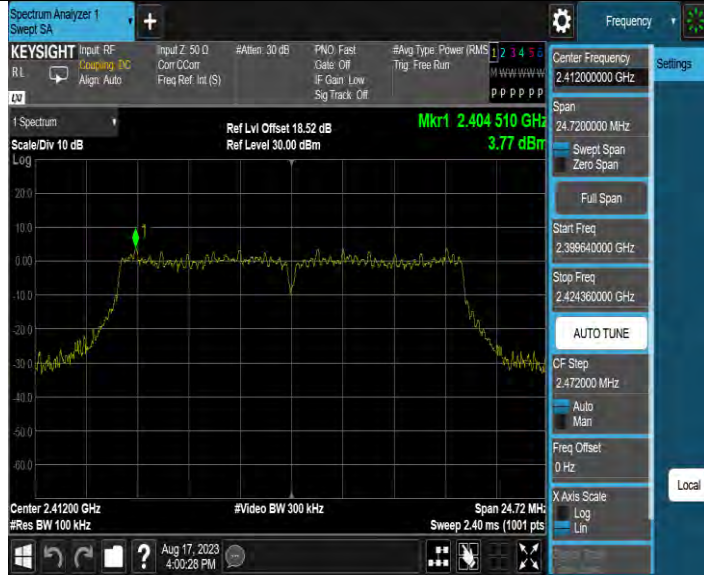

11G\_Ant1\_2437

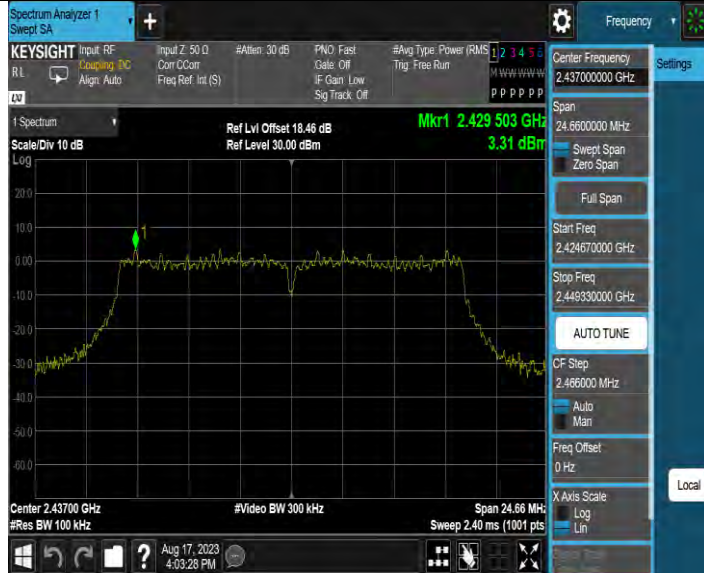

11G\_Ant1\_2462

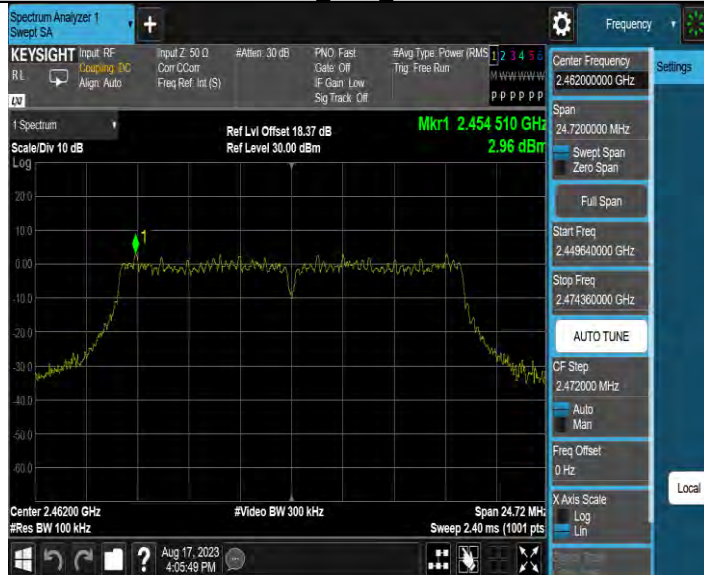

11N20SISO Ant1 2412




11N20SISO Ant1 2437




11N20SISO Ant1 2462



11N40SISO Ant1 2422

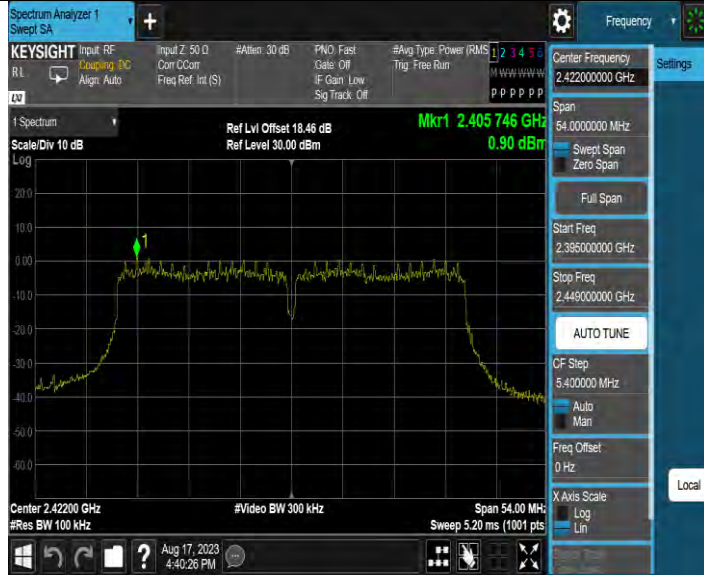

11N40SISO Ant1 2437

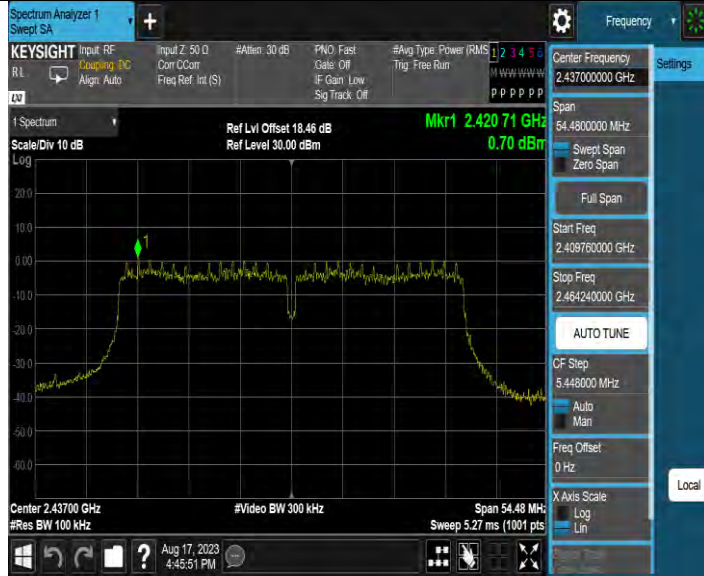

11N40SISO Ant1 2452

