



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

**Industry Canada Spectrum Management and Telecommunications
Radio Standards Specification
RSS-210 Issue 8 December 2010**

THE FOLLOWING **MEETS** THE ABOVE TEST SPECIFICATION
(DFS not tested by DLS Electronic Systems Inc.)

Formal Name: Avenger AP 5.2GHz (or 5.4GHz or 5.7GHz) Radio
Kind of Equipment: Point-to-Multipoint Digital Transmission Transceiver
Frequency Range: **5270 to 5330 MHz (5.2 GHz xcvr in this report)**
or 5495 to 5705 MHz (5.4 GHz xcvr reported to Industry Canada in RSS-210 Issue 8 report # 19221)
or 5740 to 5835 MHz (5.7 GHz xcvr reported to Industry Canada in RSS-210 Issue 8 report # 19130)
Test Configuration: Stand-alone
Model Number(s): C058900P112A
Model(s) Tested: C058900P112A
Serial Number(s): 000456C005DE & 000456C005E4
Date of Tests: June, July, August & September 2013
Test Conducted For: Cambium Networks
3800 Golf Road, Suite 360
Rolling Meadows, IL 60008, USA

NOTICE: “This test report relates only to the items tested and must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government”. Please see the "Description of Test Sample" page listed inside of this report.

© Copyright 1983 – 2013, D.L.S. Electronic Systems, Inc.

COPYRIGHT NOTICE

This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems, Inc.



166 South Carter, Genoa City, WI 53128

Company:
Model Tested:
Report Number:
DLS Project:

Cambium Networks
C058900P112A
19275
5949

SIGNATURE PAGE

Tested By:

A handwritten signature in black ink that reads "Craig Brandt". The signature is written in a cursive style with a long horizontal stroke extending to the right.

Craig Brandt
Senior Test Engineer

Reviewed By:

A handwritten signature in black ink that reads "William Stumpf". The signature is written in a cursive style with a long horizontal stroke extending to the right.

William Stumpf
OATS Manager

Approved By:

A handwritten signature in black ink that reads "Brian J. Mattson". The signature is written in a cursive style with a long horizontal stroke extending to the right.

Brian Mattson
General Manager



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Table of Contents

i. Cover Page 1
ii. Signature Page 2
iii. Table of Contents 3
iv. NVLAP Certificate of Accreditation 5
1.0 Summary of Test Report 6
2.0 Introduction 7
3.0 Test Facilities 7
4.0 Description of Test Sample 7
5.0 Test Equipment 9
6.0 Test Arrangements 10
7.0 Test Conditions 10
8.0 Modifications Made To EUT For Compliance 11
9.0 Additional Descriptions 11
10.0 Results 11
11.0 Conclusion 11
Appendix A – Test Photos 12
Appendix B – Measurement Data 19
B1.0 Duty Cycle of Test Unit 19
B2.0 Emission Bandwidth – 26 dB bandwidth – conducted 21
B2.0a - 20MHz Bandwidth 22
B2.0b - 40MHz Bandwidth 28
B3.0 99 Percent Occupied Bandwidth 34
B3.0a - 20MHz Bandwidth 35
B3.0b - 40MHz Bandwidth 41
B4.0 Maximum Conducted Output Power 47
B4.0a - 20MHz Bandwidth 48
B4.0b - 40MHz Bandwidth 54
B5.0 Peak Power Spectral Density – Conducted 60
B5.0a - 20MHz Bandwidth 61
B5.0b - 40MHz Bandwidth 67



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

B6.0	Peak Excursion – Conducted	73
B6.0a	- 20MHz Bandwidth	74
B6.0b	- 40MHz Bandwidth	80
B7.0	Unwanted Emission Levels – Radiated Band-Edge - with antenna connected	86
B7.0a	- 20MHz Bandwidth	87
B7.0b	- 40MHz Bandwidth	95
B7.0c	- Mid Channel Band-Edge data	103
B8.0	Unwanted Emission Levels – RF Conducted	111
B8.0a	- 20MHz Bandwidth	112
B8.0b	- 40MHz Bandwidth	172
B9.0	Unwanted Emission Levels – Radiated from cabinet.....	232
B9.0a	- 30 to 1000MHz.....	233
B9.0b	- above 1GHz.....	239
B10.0	AC Line Conducted Emissions.....	240




166 South Carter, Genoa City, WI 53128

Company:
Model Tested:
Report Number:
DLS Project:

Cambium Networks
C058900P112A
19275
5949

United States Department of Commerce
National Institute of Standards and Technology

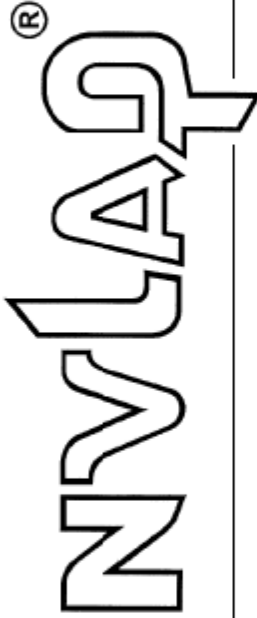

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.
Wheeling, IL

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-IAC-IAF Communiqué dated January 2009).*

2012-10-01 through 2013-09-30

Effective dates



For the National Institute of Standards and Technology

NVLAP-01C (REV. 2009-01-28)



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
 Model Tested: C058900P112A
 Report Number: 19275
 DLS Project: 5949

1.0 Summary of Test Report

It was determined that the Cambium Networks Avenger AP 5.2GHz Radio, Model: C058900P112A, complies with the requirements of Industry Canada RSS-210 Issue 8, Annex 9. FCC limits & procedures were used to show compliance with Industry Canada regulations. The data demonstrating IC compliance of the 5.4GHz and 5.7GHz radios is found in D.L.S. Electronics, Inc. Reports #19221 and #19130.

Applicable Technical Requirements Tested:

Section	Description	Procedure	Note	Compliant?
Informative	Duty Cycle	FCC KDB 789033 D01 General UNII Test Procedures v01r03 Section B(2)(b)	1	NA
Informative	Emission Bandwidth – 26 dB bandwidth	FCC KDB 789033 D01 General UNII Test Procedures v01r03 Section C	1	NA
Informative	99 Percent Occupied Bandwidth	FCC KDB 789033 D01 General UNII Test Procedures v01r03 Section D	1	NA
15.407(a)(2) RSS-210, A9.2(2)	Maximum Conducted Output Power	FCC KDB 789033 D01 General UNII Test Procedures v01r03 Section E(3)(a)	1	Yes
15.407(a)(2) RSS-210, A9.2(2)	Peak Power Spectral Density - Conducted	FCC KDB 789033 D01 General UNII Test Procedures v01r03 Sections F & E(2)(b)	1	Yes
15.407(a)(6) RSS-210, A9.4(2)	Peak Excursion - Conducted	FCC KDB 789033 D01 General UNII Test Procedures v01r03 Section G	1	Yes
15.407(b)(3) RSS-210, A9.2(2)	Unwanted Emission Levels – Radiated Band-Edge	FCC KDB 789033 D01 General UNII Test Procedures v01r03 Sections H(1), H(2), H(3), H(5), & H(6)	2	Yes
15.407(b)(3) & 15.407(b)(6) RSS-210, A9.2(2)	Unwanted Emission Levels – RF Conducted	FCC KDB 789033 D01 General UNII Test Procedures v01r03 Sections H(1), H(2), H(3), H(4), H(5), & H(6)	1	Yes
15.407(b)(3) & 15.407(b)(6) RSS-210, A9.2(2)	Unwanted Emission Levels – Radiated from cabinet	FCC KDB 789033 D01 General UNII Test Procedures v01r03 Sections H(1), H(2), H(3), H(4), H(5), & H(6)	2	Yes



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
 Model Tested: C058900P112A
 Report Number: 19275
 DLS Project: 5949

Subpart E Section 15.407 Applicable Technical Requirements: continued

15.407(b)6) & 15.207(a) RSS-Gen 7.2.4	AC Line Conducted Emissions	ANSI C63.4-2009		Yes
15.407(h)(2) RSS-210 A9.3	Dynamic Frequency Selection (DFS)	Not tested by DLS		NA

Note 1: RF Conducted emission measurement.
 Note 2: Radiated emission measurement.

2.0 Introduction

In June, July, August & September 2013 the Avenger AP 5.2GHz Radio, Model: C058900P112A, as provided from Cambium Networks, was tested to the requirements of Industry Canada RSS-210 Issue 8, Annex 9. To meet these requirements, the procedures contained within this report were performed by personnel of D.L.S Electronic Systems, Inc.

3.0 Test Facilities

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI.

Wisconsin Test Facility:
 D.L.S. Electronic Systems, Inc.
 166 S. Carter Street
 Genoa City, Wisconsin 53128

Wheeling Test Facility:
 D.L.S. Electronic Systems, Inc.
 1250 Peterson Drive
 Wheeling, IL 60090

4.0 Description of Test Sample

Description:

Point-to-Multipoint 5.2 GHz (or 5.4GHz or 5.7GHz) 802.11 fixed outdoor transceiver with either 20 MHz or 40 MHz channel bandwidth. 16dBi antenna assembly. OFDM modulation. This is a software defined radio.



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Type of Equipment / Frequency Range:

Stand-Alone / **5270 to 5330 MHz (20 MHz bandwidth) (in this report)**
5280 to 5315 MHz (40 MHz bandwidth) (in this report)

5495 to 5705 MHz (5.4 GHz xcvr) reported to IC in report # 19221
5740 to 5835 MHz (5.7 GHz xcvr) reported to IC in report # 19130

Physical Dimensions of Equipment Under Test:

Length: 8.5 in. Width: 3 in. Height: 1 in.

Power Source:

30 VDC (Power Over Ethernet to Radio)
120 Vac, 60 Hz using Phihong power supply model: PSA15M-300(SM) (for AC Line Conducted)

Internal Frequencies:

292 kHz, 940 - 1000 kHz, 4 MHz (Switching Power Supply Frequency)
25 MHz, 40 MHz

Transmit / Receive Frequencies Used For Test Purpose:

20 MHz Channel Bandwidth: Low channel: 5270 MHz, Middle channel: 5300 MHz,
High channel: 5330 MHz

40 MHz Channel Bandwidth: Low channel: 5280 MHz, Middle channel: 5300 MHz,
High channel: 5315 MHz

Type of Modulation(s):

OFDM: 802.11n: MCS15

Description of Circuit Board(s) / Part Number:

AP PCB	84009654001
external 17dBi antenna w/1dB cables	85009324001 Rev AA
antenna assembly	P005135



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
 Model Tested: C058900P112A
 Report Number: 19275
 DLS Project: 5949

5.0 Test Equipment

A list of the equipment used can be found in the table below. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.

D.L.S. Wisconsin

Description	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Dates	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	7-23-13	7-23-14
LISN	Solar	9252-50-R-24-BNC	961019	9 kHz – 30 MHz	5-24-13	5-24-14
Filter- High-Pass	SOLAR	7930-120	090702	120 kHz – 30 MHz	1-7-13	1-7-14
Limiter	Electro-Metrics	EM-7600	706	9 kHz – 30 MHz	1-7-13	1-7-14
Preamp	Miteq	AMF-7D-01001800-22-10P	1809602	1GHz-18GHz	5-29-13	5-29-14
Horn Antenna	EMCO	3115	9502-4451	1-18GHz	3-18-13	3-18-15
High Pass Filter	Planar	HP8G-7G8-CD-SFF	PF1226/0728	7.5-18 GHz	8-14-13	8-14-14
Preamp	Miteq	AMF-8B-180265-40-10P-H/S	438727	18GHz-26GHz	8-12-13	8-12-14
Horn Antenna	ETS Lindgren	3116	00062917	18 – 40GHz	10-4-11	9-23-13
High Pass Filter	Planar	CL22500-9000-CD-SS	PF1229/0728	15-40 GHz	8-14-13	8-14-14
20 dB attenuator	Aeroflex/weinschel	75A-20-12	1071	DC – 40 GHz	8-14-13	8-14-14
10 dB attenuator	narda	4768-10	0702	DC – 40 GHz	8-13-13	8-13-14
Receiver	Rohde & Schwarz	ESI 26	837491/010	20 Hz – 26 GHz	1-3-13	1-3-14
Preamplifier	Rohde & Schwarz	TS-PR10	032001/005	9 kHz – 1 GHz	1-10-13	1-10-14
Antenna	EMCO	3104C	97014785	20 MHz – 200 MHz	8-22-12	8-22-14
Antenna	EMCO	3146	97024895	200 MHz – 1 GHz	9-6-12	9-6-14
Power Meter	Anritsu	ML2487A	6K00002069	N/A	3-8-13	3-8-14
Thermal Power Sensor	Anritsu	MA24002A	1204359	10MHz-18GHz	3-3-13	3-3-14



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

6.0 Test Arrangements

RF Conducted Emissions Measurement Arrangement:

All RF conducted emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to FCC Publication KDB 789033 D01 General UNII test Procedures v01r03, unless otherwise noted. Description of procedures and measurements can be found in Appendix B – Measurement Data. See Appendix A for photos of the test set up.

Radiated Emissions Measurement Arrangement:

All radiated emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to ANSI C63.4-2009, unless otherwise noted. Description of procedures and measurements can be found in Appendix B – Measurement Data. See Appendix A for photos of the test set up.

Unless otherwise noted, the bandwidth of the measuring receiver / analyzer used during testing is shown below.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

7.0 Test Conditions

Normal Test Conditions:

Temperature and Humidity:

73°F at 51% RH

Supply Voltage:

30 VDC (Power Over Ethernet to Radio)

120 Vac, 60 Hz using Phihong power supply model: PSA15M-300(SM) (for AC Line Conducted)



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

8.0 Modifications Made To EUT For Compliance

No modifications were made to the EUT at the time of test.

9.0 Additional Descriptions

Testing was performed at low, mid, and high channels over 2 modulation bandwidths (20MHz & 40MHz). The antenna ports were tested (Channel 0 & 1). Worst case emissions were recorded. AC line conducted tested in transmit mode.

Radiated band-edge emissions were tested with a Cambium Networks 16dBi panel antenna assembly, Model: SCC-90-1.

Emission Designators: 20M0x1D, 40M0x1D

Power Settings noted on the test data.

Please note that Cambium Networks requested a new model number for the Avenger AP 5.2GHz (or 5.4GHz or 5.7GHz) Radio on August 22, 2013. The model number for the 5.7GHz radio was reported as C050900P12A in DLS Report # 19130. This number has been updated to C058900P112A. The same physical units were used to test the radio at all frequencies reported to Industry Canada.

10.0 Results

Measurements were performed in accordance with FCC Publication KDB 789033 D01 General UNII test Procedures v01r03 and ANSI C63.4-2009. Graphical and tabular data can be found in Appendix B at the end of this report.

11.0 Conclusion

Dynamic Frequency Selection (DFS) testing was not performed by DLS Electronic Systems, Inc. Otherwise, the Avenger AP 5.2GHz Radio, Model C058900P112A, as provided from Cambium Networks tested in June, July, August & September 2013 **meets** the requirements of Industry Canada RSS-210 Issue 8.

Note: FCC limits & procedures were used to show compliance with Industry Canada regulations.

Appendix A – Test Photos

Photo Information and Test Setup:

- Item0: Avenger AP 5.2GHz (or 5.4GHz or 5.7GHz) Radio, Model C058900P112A
- Item1: Cambium Networks Antenna, Model: SCC-90-1, SN: 1668492
- Item2: Unshielded Ethernet Cable - 20 meters long

Radiated Band-Edge, front



Appendix A – Test Photos

Radiated Band-Edge, back





166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix A – Test Photos

Photo Information and Test Setup:

- Item0: Avenger AP 5.4GHz (or 5.7GHz) Radio, Model C058900P112A
- Item1: Laird 5.4-6.0 GHz 17 dBi Panel Antenna with cable, Model: 85009324001 Rev AA
- Item2: Unshielded Ethernet Cable - 20 meters long

Radiated Spurious below 1 GHz, side 1



Appendix A – Test Photos

Radiated Spurious below 1 GHz, side 2




Appendix A – Test Photos

Radiated Spurious - above 1 GHz



Appendix A – Test Photos

RF Conducted / Output Power

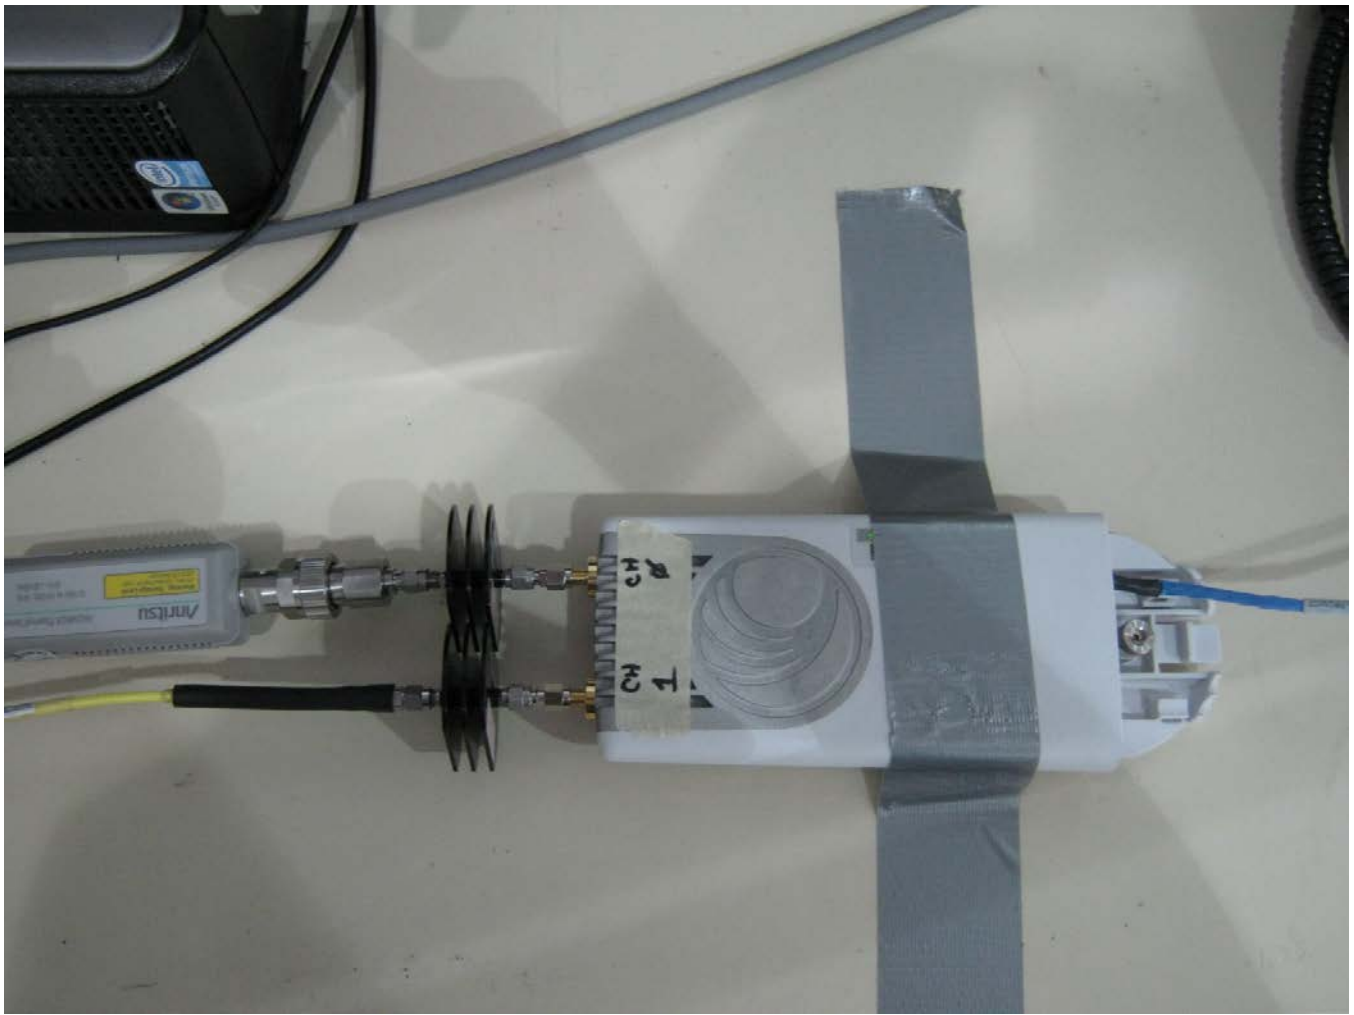



166 South Carter, Genoa City, WI 53128

Company:
Model Tested:
Report Number:
DLS Project:

Cambium Networks
C058900P112A
19275
5949

Appendix A – Test Photos

AC Line Conducted





166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix B – Measurement Data

B1.0 Duty Cycle of Test Unit

Rule Part: FCC Section 15.35(c) (Informative)
RSS-Gen Section 4.5

Test Procedure: FCC KDB 789033 D01 General UNII Test Procedures v01r03
Section B(2)(b)

Limits: Informative


Results: EUT is continuously transmitting (duty cycle = 100%).

Sample Equations: None

Notes: No Duty cycle correction factor was applied to measurements for this device.

Test Date: 9-3-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM
 Test: Duty Cycle during testing
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 B)2)b) Duty Cycle measurement: zero-span method - Page 3
 RBW = 10 MHz VBW = 10 MHz
 Span = 0 Hz SWT = 5 ms
 Mid Channel: Transmit = 5.300GHz 20MHz BW
 Total on Time = Duration of one pulse = 5.000000 ms

Duty cycle factor $x = 5.0 / 5.0 = 1.00$

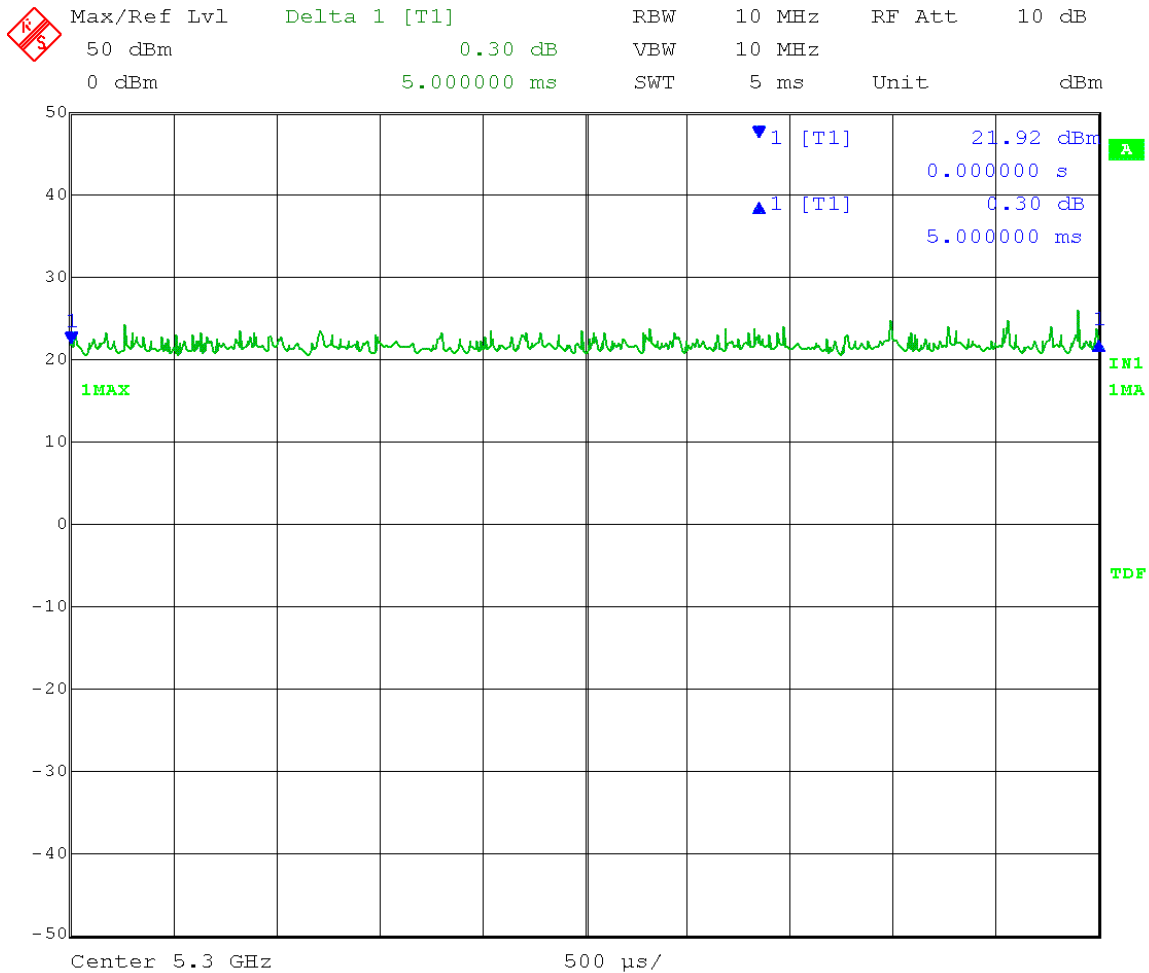

Date: 3.SEP.2013 09:41:15



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix B – Measurement Data

B2.0 Emission Bandwidth – 26 dB bandwidth – conducted

Rule Section: Informative

Test Procedure: FCC KDB 789033 D01 General UNII Test Procedures v01r03 – *Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E*

Section C – Emission bandwidth

Description: RBW = approximately 1% of EBW
VBW > RBW
Detector = Peak
Trace mode = max hold

Measure the maximum width of the emission between the lower and upper frequencies that measure 26 dB below the maximum level of the in-band emission.


Limit: Informative

Notes: Measurements were taken for MCS15 OFDM modulation at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously with 100% duty cycle.

Channel 1:

26 dB Emission Bandwidth = 21.16MHz

	Max/Ref Lvl	Delta 1 [T1]	RBW	200 kHz	RF Att	20 dB
	15 dBm	0.09 dB	VBW	500 kHz		
	-10 dBm	21.16232465 MHz	SWT	5 ms	Unit	dBm

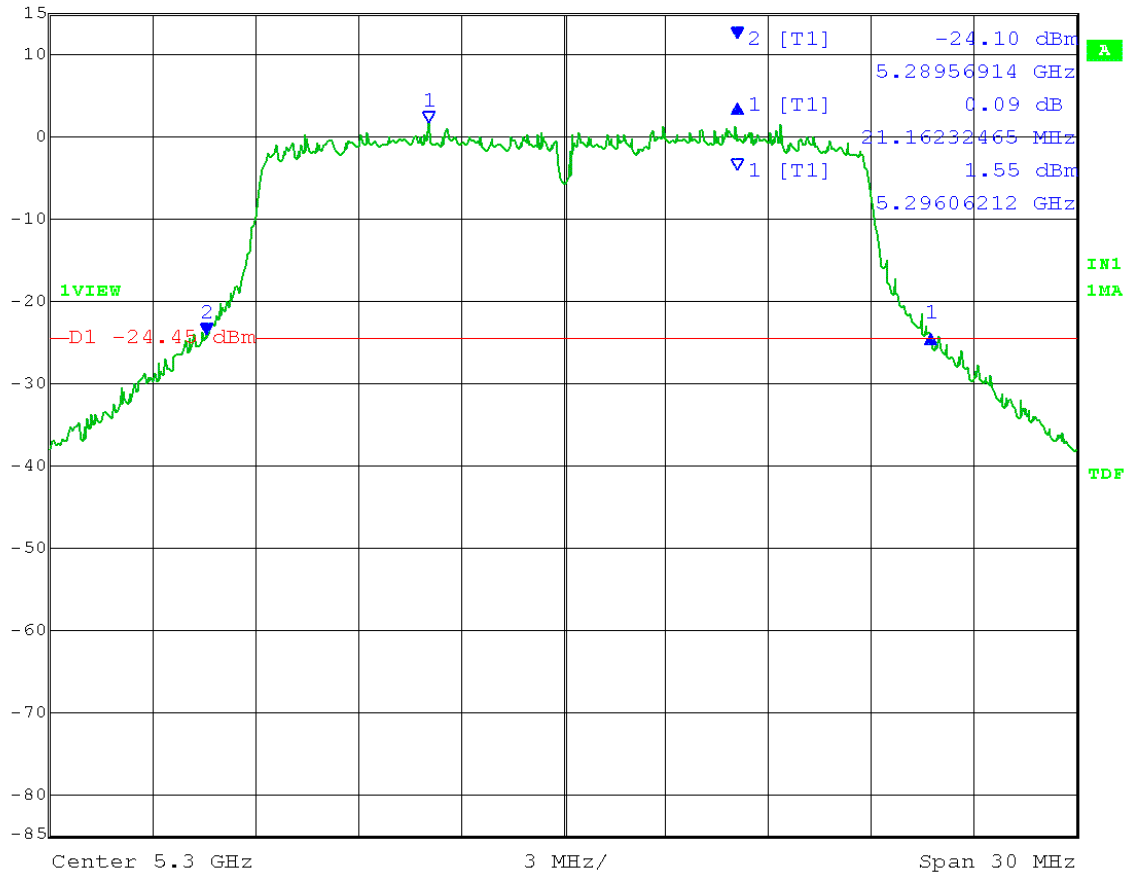


Date: 6.SEP.2013 10:42:30

Test Date: 09-6-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.4GHz OFDM - ESN# 000456C005DE
 Test: Emission Bandwidth (26 dB) - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 C) Emission bandwidth: Page 3
 RBW = 500 kHz VBW = 1 MHz
 Mid Channel: Transmit = 5.300 GHz 40MHz BW
 Output power setting: 10

Channel 0:


26 dB Emission Bandwidth = 44.37MHz

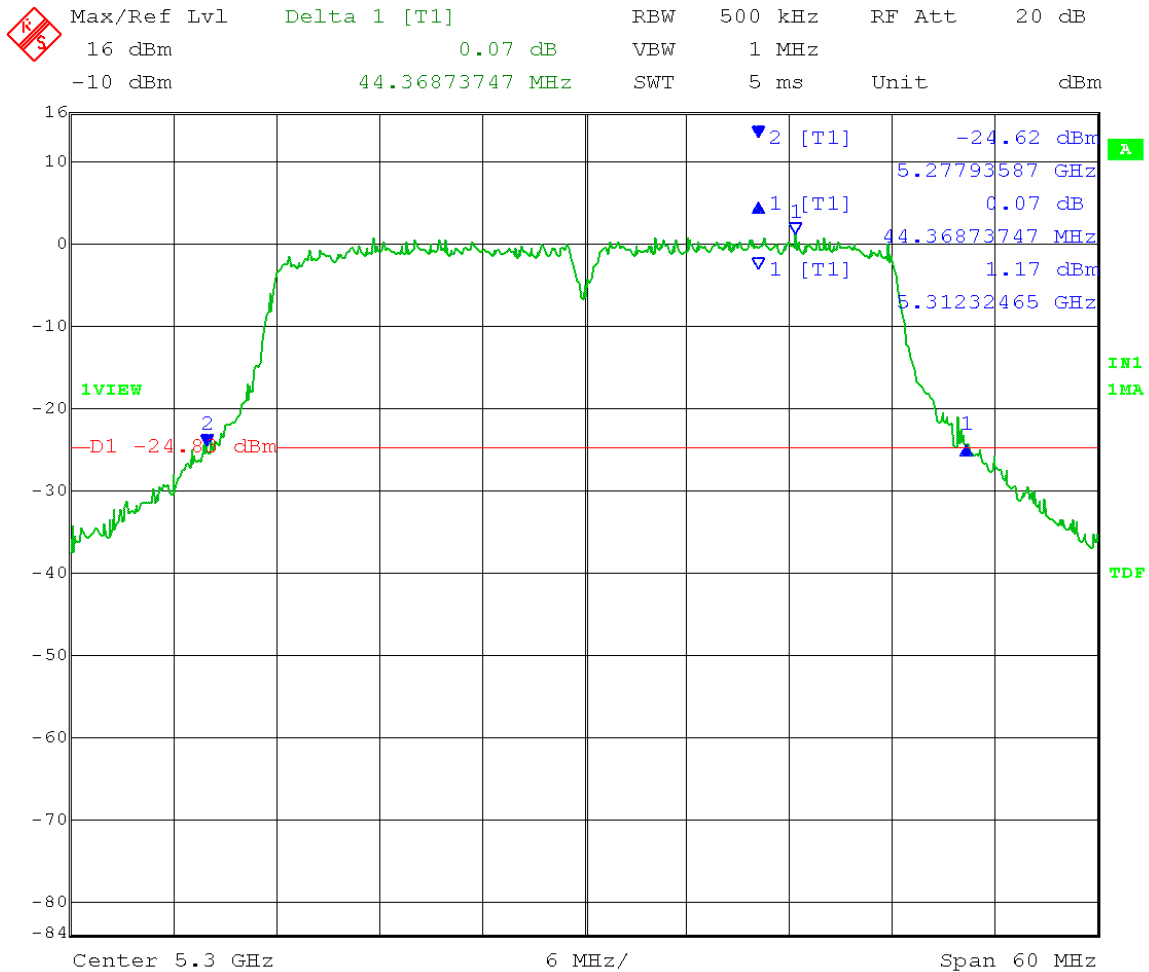

Date: 6.SEP.2013 09:11:17

Channel 1:

26 dB Emission Bandwidth = 43.77MHz

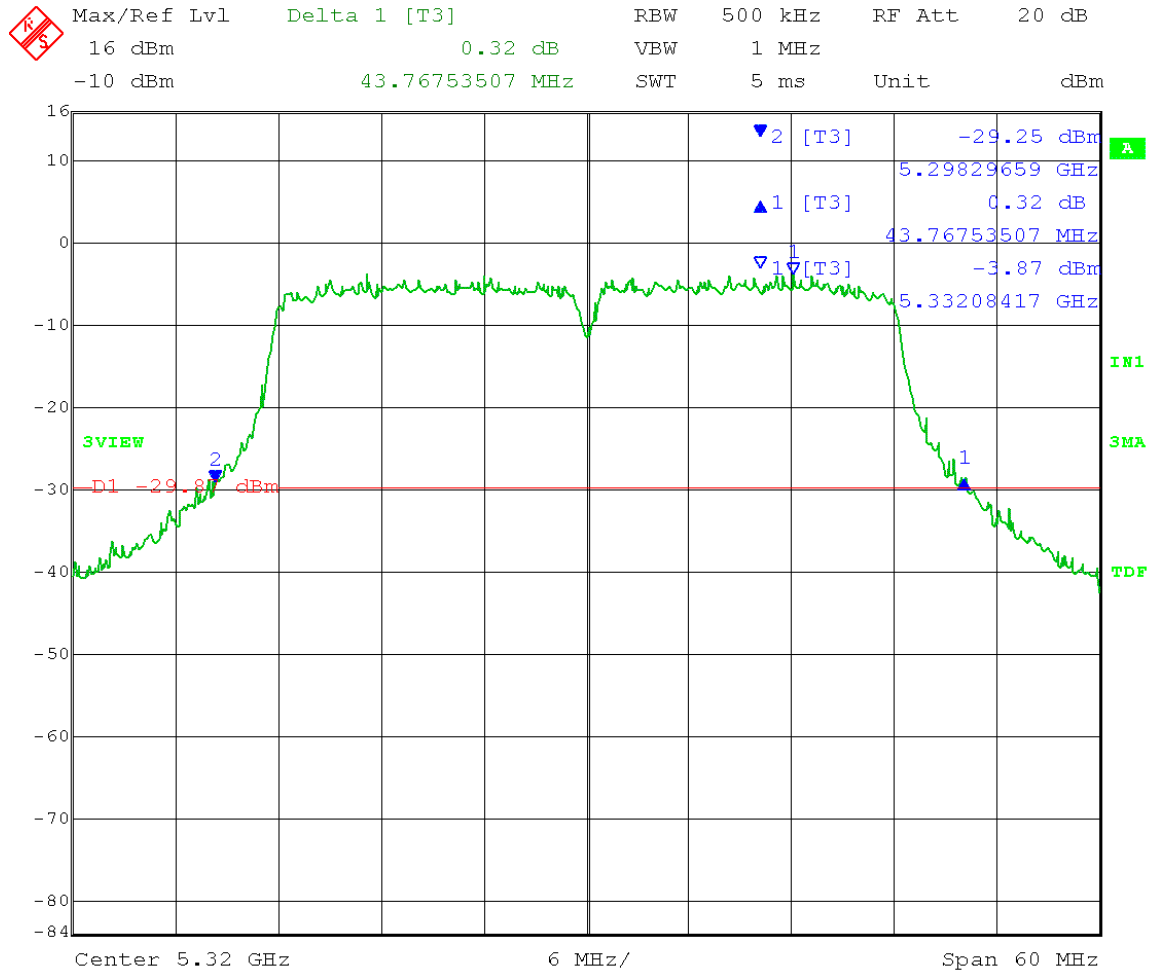

Date: 7.AUG.2013 14:56:58



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix B – Measurement Data

B3.0 99 Percent Occupied Bandwidth

Rule Section: Informative

Test Procedure: FCC KDB 789033 D01 General UNII Test Procedures v01r03 – *Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E*

Section D – 99 Percent Occupied Bandwidth

Description: SPAN = 1.5 to 5 times the OBW
RBW = 1% to 5% of OBW
VBW \geq RBW
Detector = Peak
Trace mode = max hold

Measure the width of the emission using the 99% power bandwidth function of the spectrum analyzer

Limit: Informative

Notes: Measurements were taken for MCS15 OFDM modulation at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously with 100% duty cycle.

Test Date: 08-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM - ESN# 000456C005DE
 Test: 99% Occupied Bandwidth - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013

D) 99% Occupied Bandwidth - Page 4

RBW = 300 kHz

VBW = 1 MHz

Detector = Peak

Trace = Max Hold


Low Channel: Transmit = 5.270 GHz

20MHz BW

Output power setting: 5

Channel 0


99% OBW = 17.86MHz

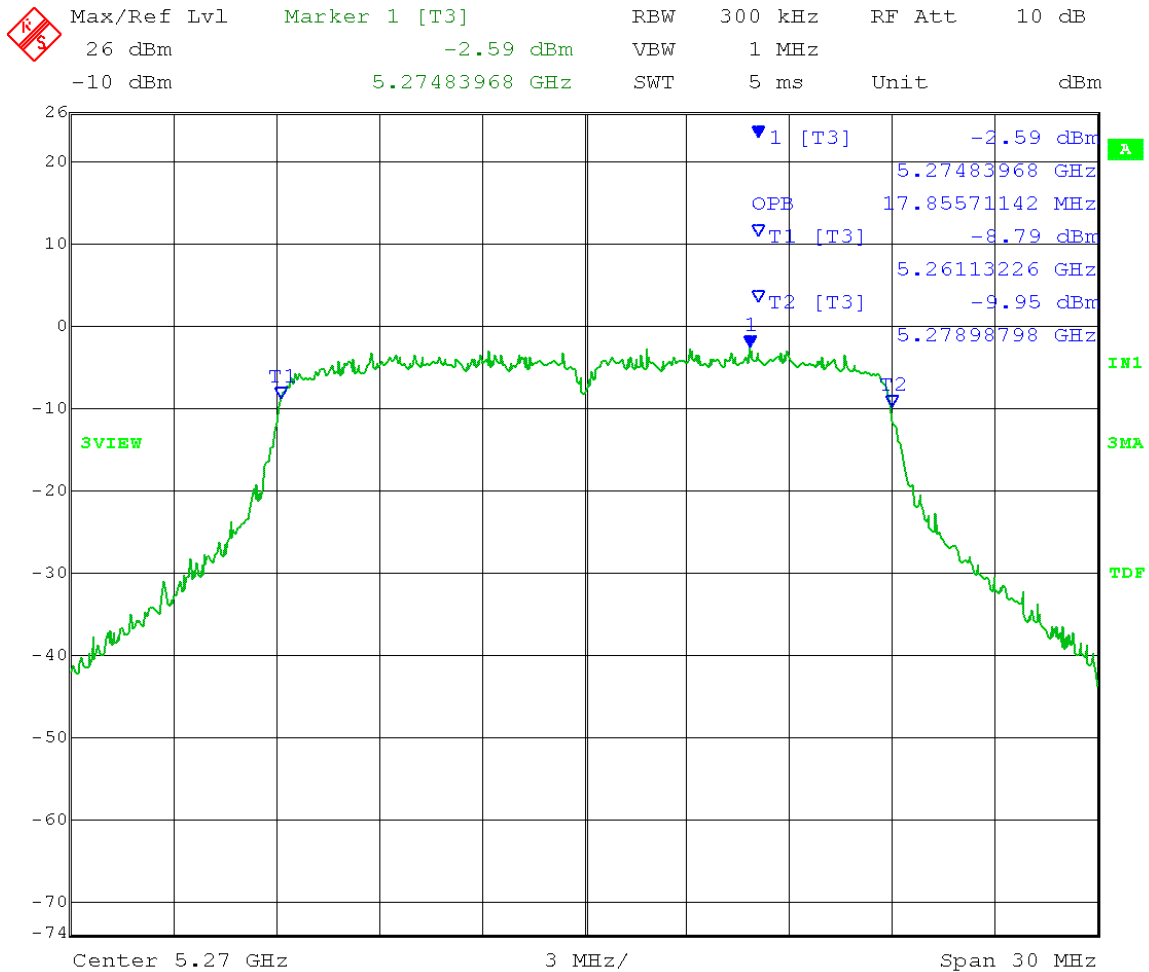

Date: 8.AUG.2013 08:54:06

Test Date: 08-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM - ESN# 000456C005DE
 Test: 99% Occupied Bandwidth - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 D) 99% Occupied Bandwidth - Page 4
 RBW = 300 kHz
 Detector = Peak
 Low Channel: Transmit = 5.270 GHz
 Output power setting: 5
 VBW = 1 MHz
 Trace = Max Hold
 20MHz BW
 Channel 1

99% OBW = 17.86MHz

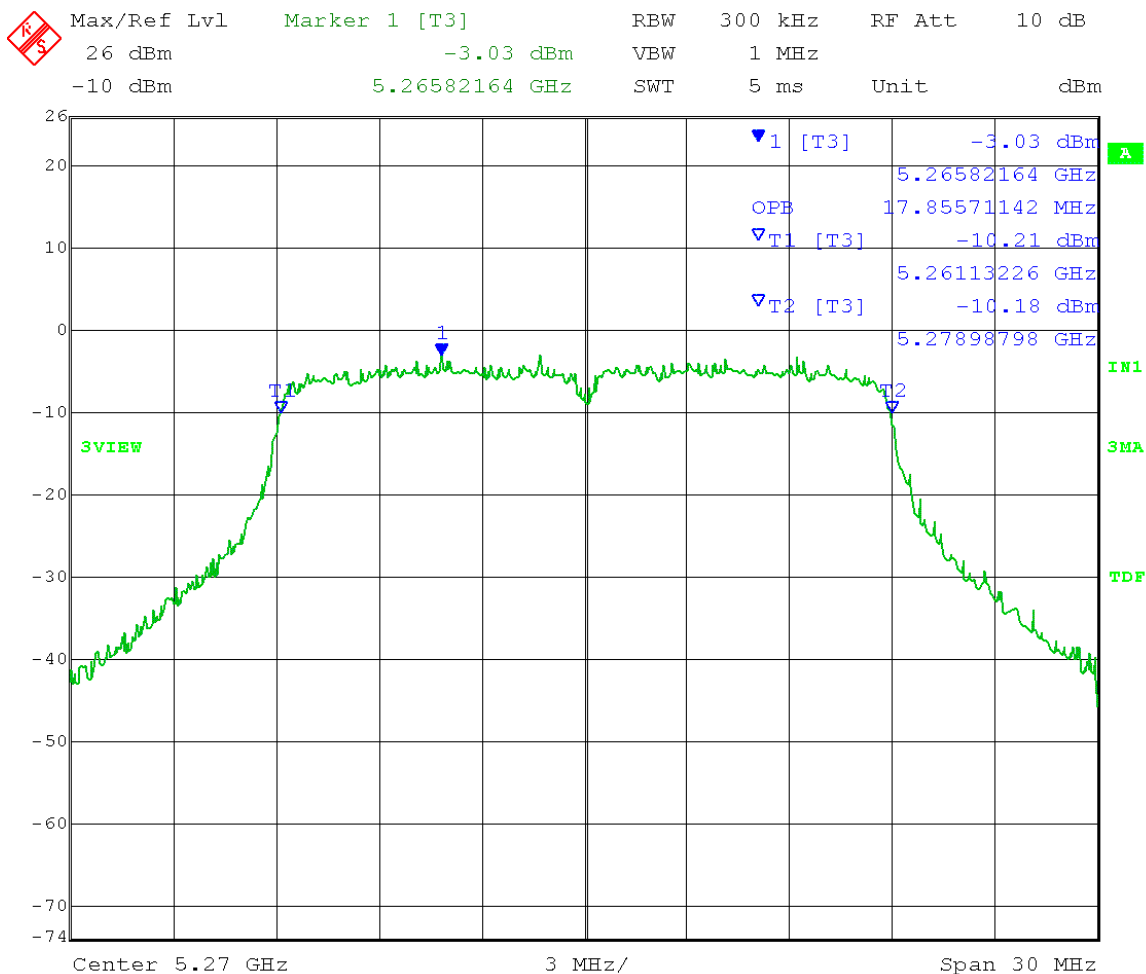


Date: 8.AUG.2013 09:32:02

Test Date: 09-6-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM - ESN# 000456C005DE
 Test: 99% Occupied Bandwidth - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 D) 99% Occupied Bandwidth - Page 4
 RBW = 300 kHz
 Detector = Peak
 Mid Channel: Transmit = 5.300 GHz
 Output power setting: 10
 VBW = 1 MHz
 Trace = Max Hold
 20MHz BW

Channel 0:

99% OBW = 17.92MHz

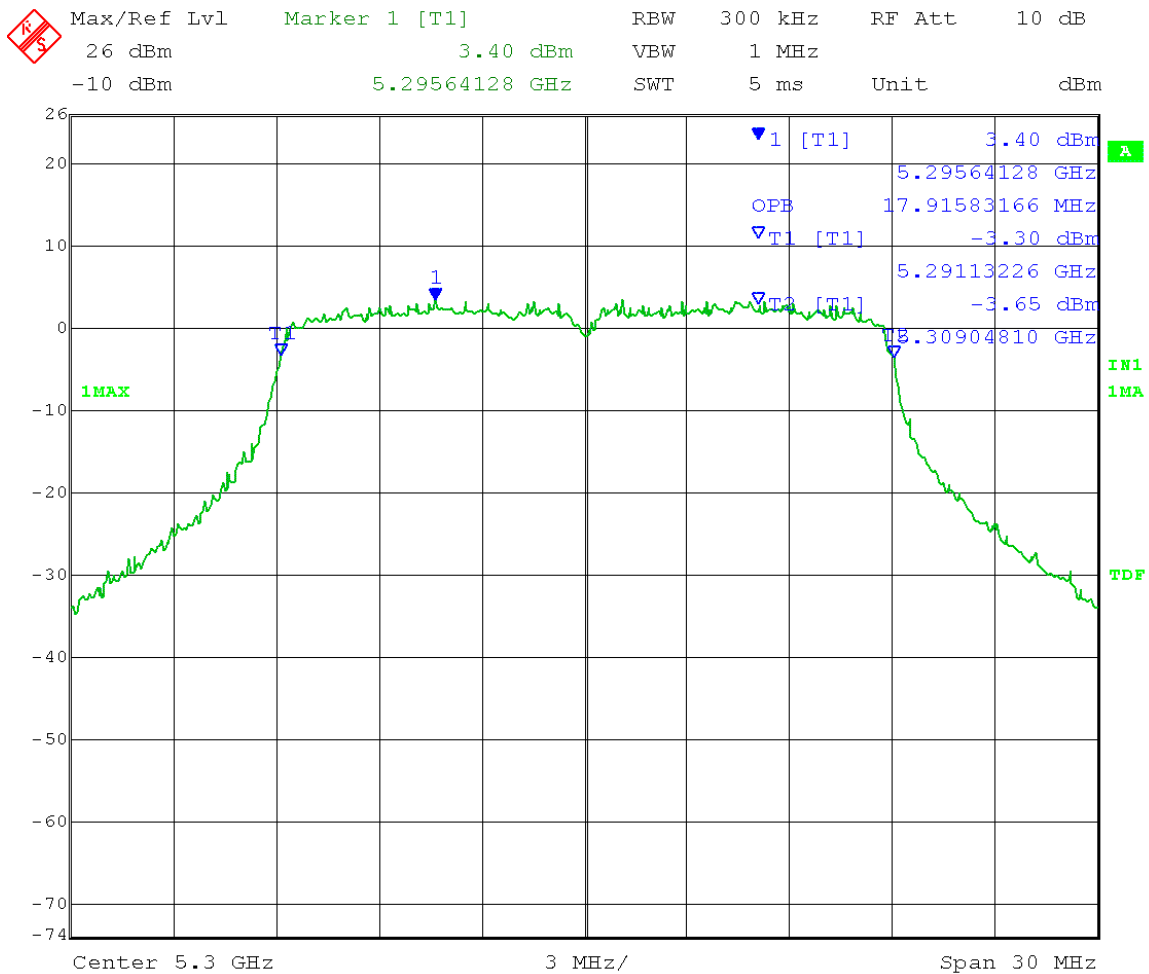


Date: 6.SEP.2013 13:24:05

Channel 1:

99% OBW = 17.92MHz

	Max/Ref Lvl	Marker 1 [T1]	RBW	300 kHz	RF Att	10 dB
	26 dBm	2.98 dBm	VBW	1 MHz		
	-10 dBm	5.29624248 GHz	SWT	5 ms	Unit	dBm

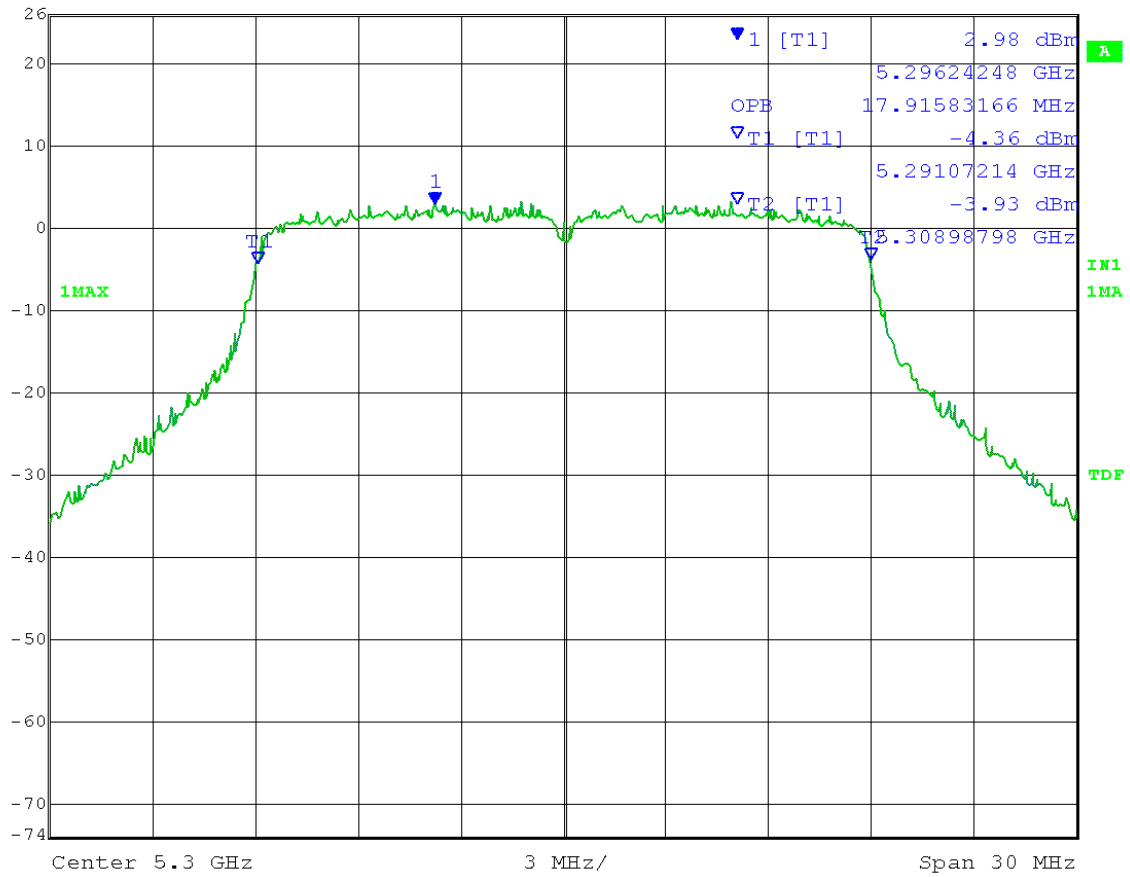

Date: 6.SEP.2013 13:29:14

Test Date: 08-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM - ESN# 000456C005DE
 Test: 99% Occupied Bandwidth - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013

D) 99% Occupied Bandwidth - Page 4

RBW = 300 kHz

Detector = Peak

High Channel: Transmit = 5.330 GHz

Output power setting: 5


VBW = 1 MHz

Trace = Max Hold

20MHz BW

Channel 0


99% OBW = 17.92MHz

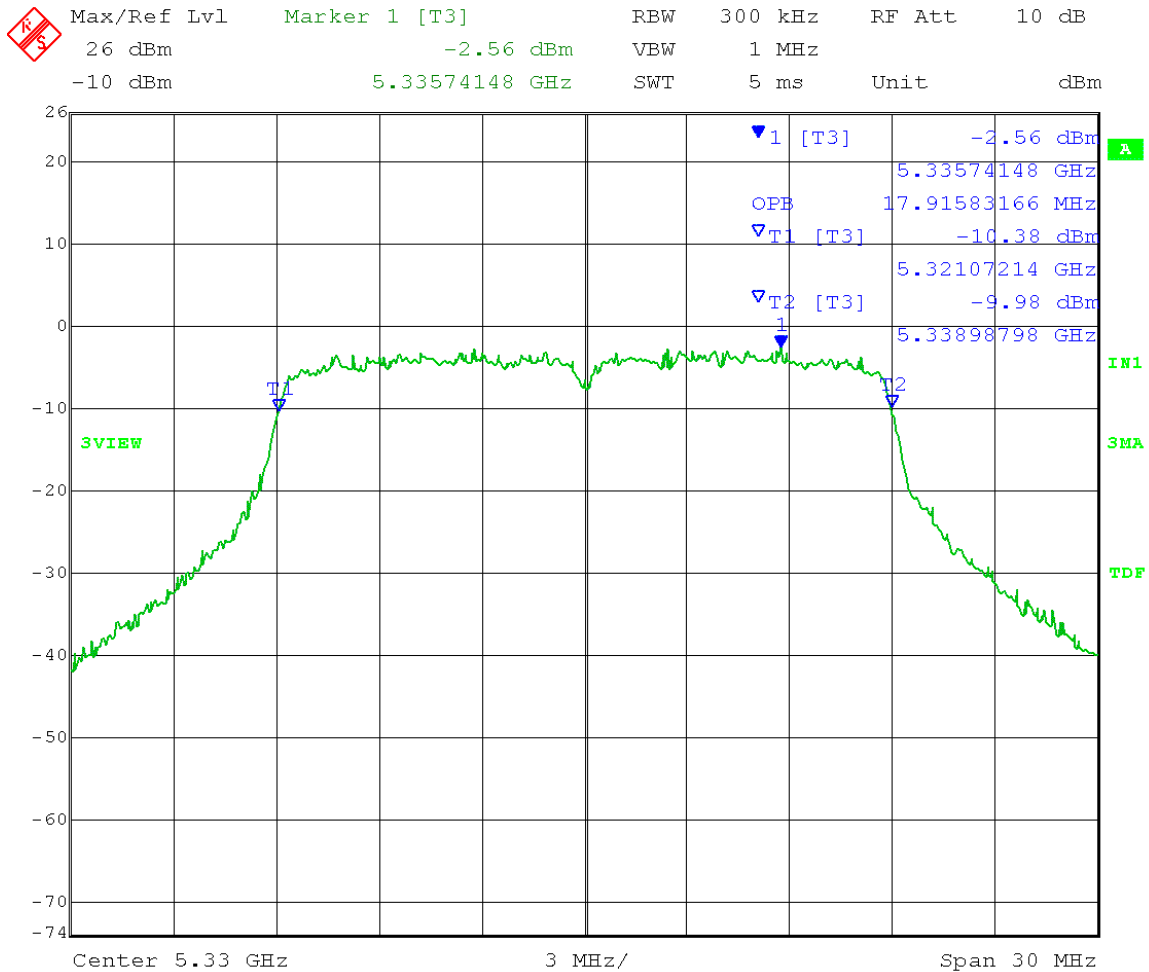

Date: 8.AUG.2013 09:03:11

Test Date: 08-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM - ESN# 000456C005DE
 Test: 99% Occupied Bandwidth - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 D) 99% Occupied Bandwidth - Page 4
 RBW = 300 kHz
 Detector = Peak
 High Channel: Transmit = 5.330 GHz
 Output power setting: 5
 VBW = 1 MHz
 Trace = Max Hold
 20MHz BW
 Channel 1

99% OBW = 17.92MHz

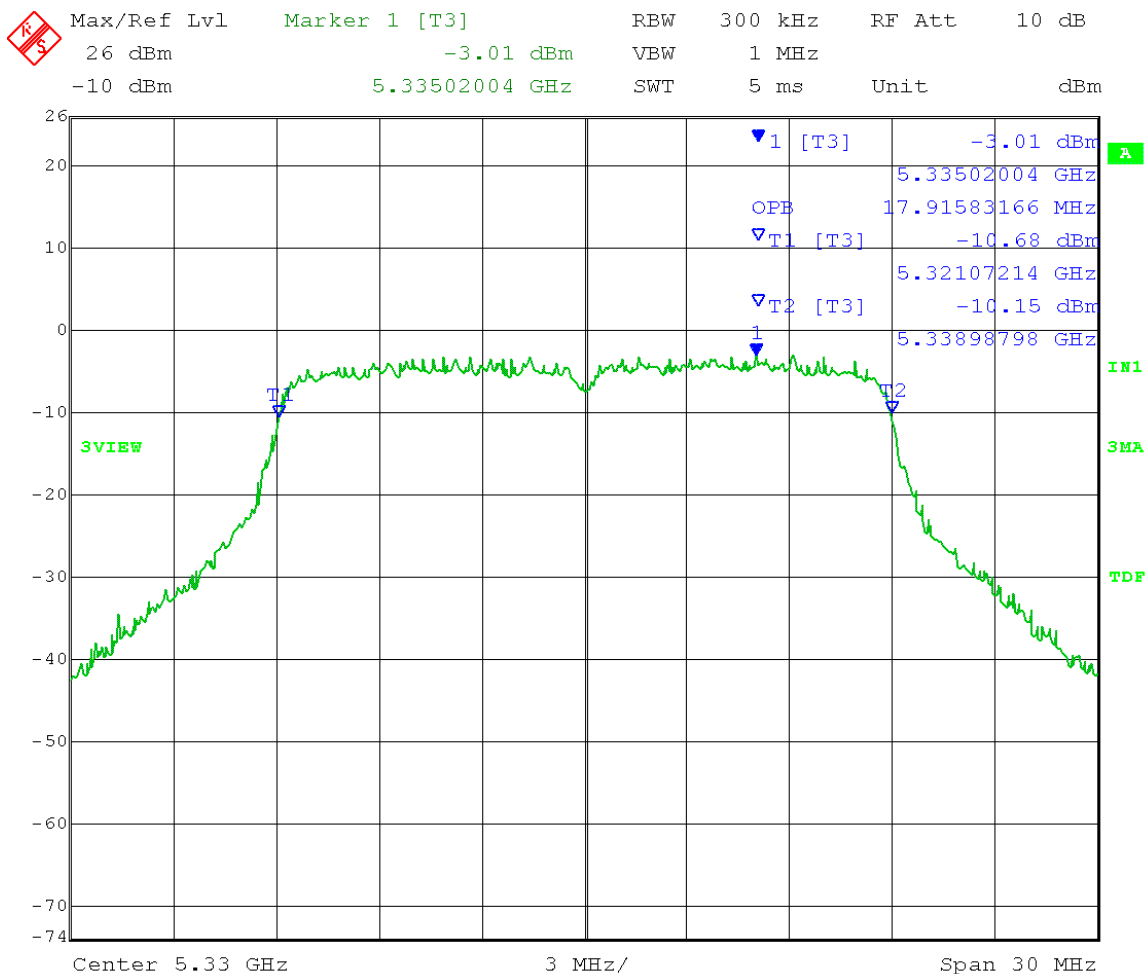

Date: 8.AUG.2013 09:27:30

Test Date: 08-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM - ESN# 000456C005DE
 Test: 99% Occupied Bandwidth - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013

D) 99% Occupied Bandwidth - Page 4

RBW = 1 MHz

Detector = Peak

Low Channel: Transmit = 5.280 GHz

Output power setting: 3.5


VBW = 3 MHz

Trace = Max Hold

40MHz BW

Channel 0

99% OBW = 37.15MHz

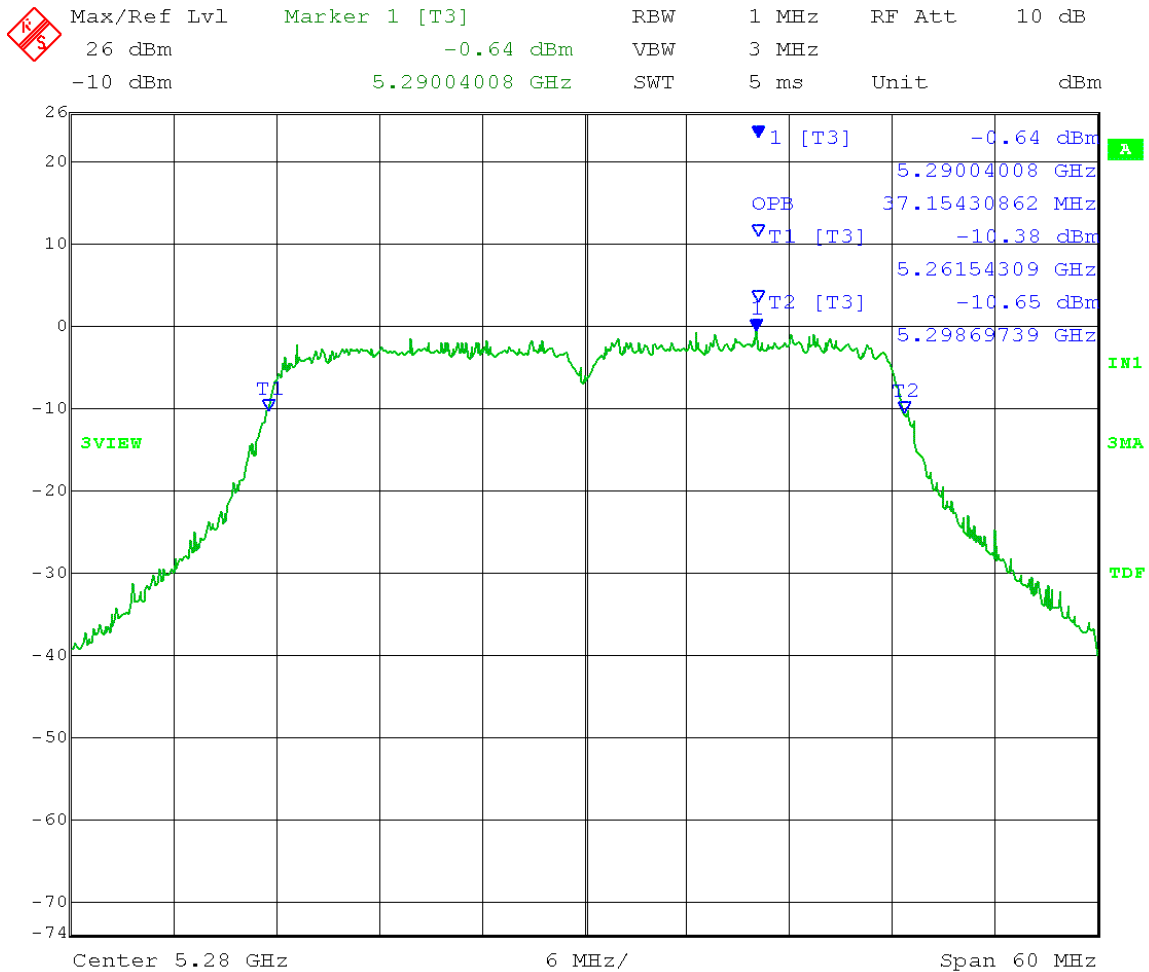

Date: 8.AUG.2013 09:14:12


Test Date: 08-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM - ESN# 000456C005DE
 Test: 99% Occupied Bandwidth - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013

D) 99% Occupied Bandwidth - Page 4

RBW = 1 MHz
 Detector = Peak
 Low Channel: Transmit = 5.280 GHz
 Output power setting: 3.5

VBW = 3 MHz
 Trace = Max Hold
 40MHz BW
 Channel 1

99% OBW = 37.39MHz

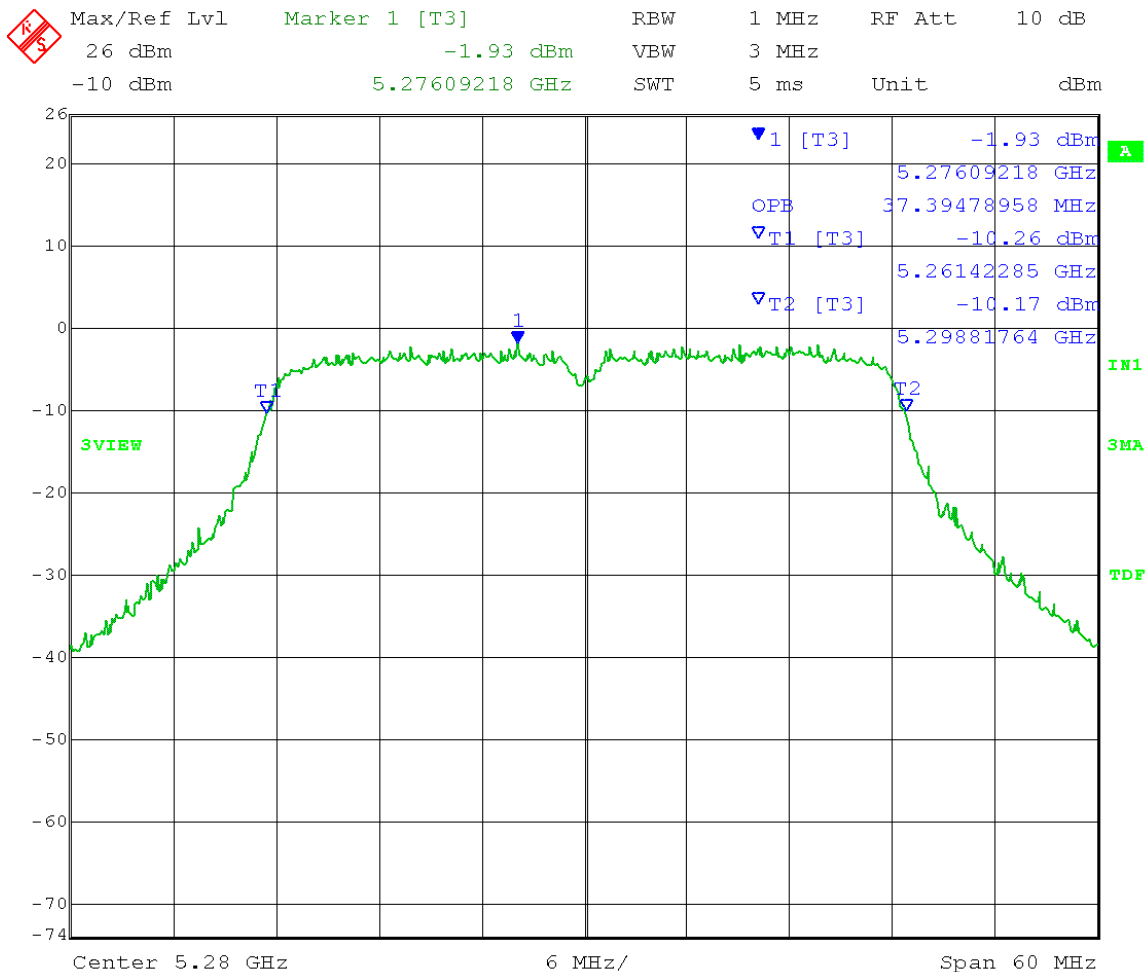

Date: 8.AUG.2013 09:19:38

Test Date: 09-6-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM - ESN# 000456C005DE
 Test: 99% Occupied Bandwidth - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013

D) 99% Occupied Bandwidth - Page 4

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Trace = Max Hold


Mid Channel: Transmit = 5.300 GHz

40MHz BW

Output power setting: 10.0

Channel 0


99% OBW = 37.27MHz

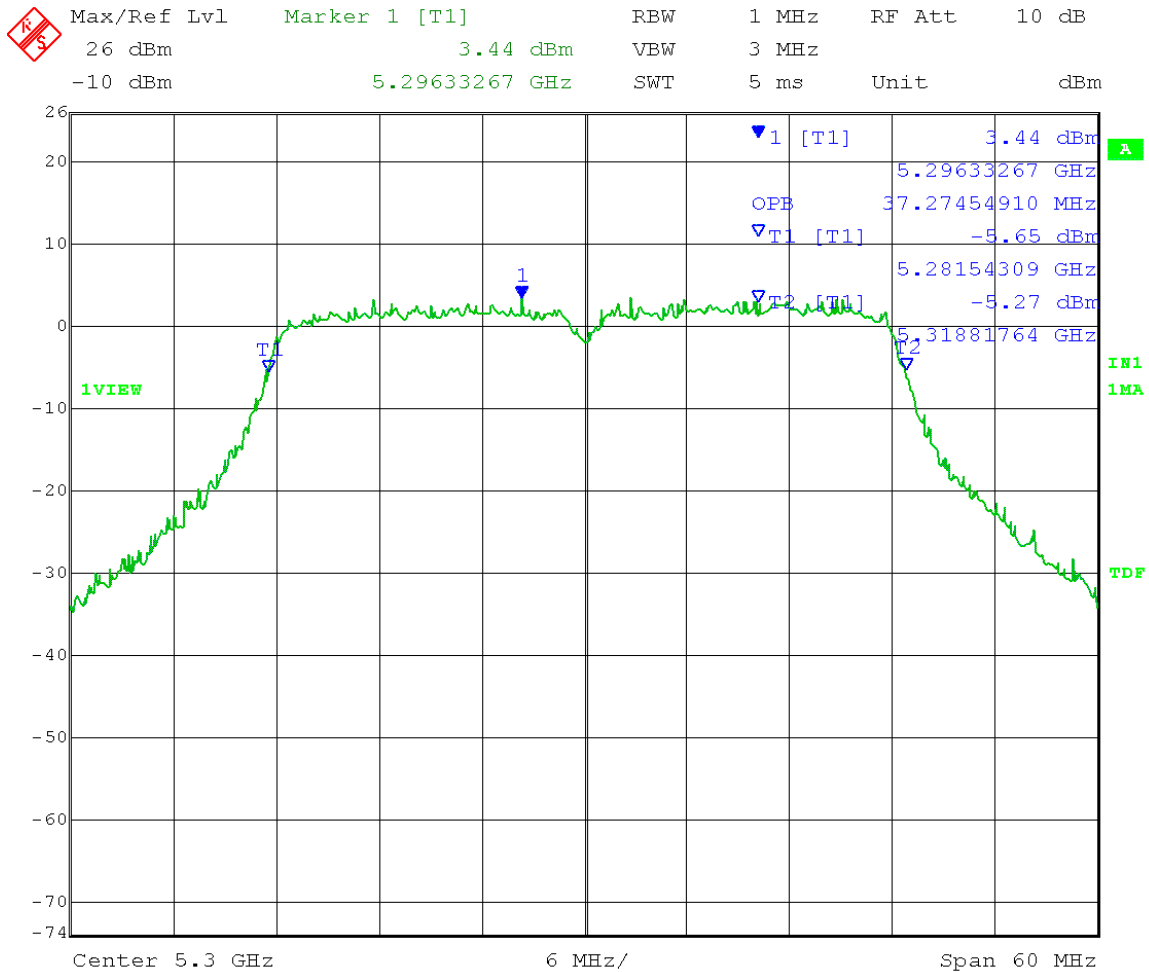


Date: 6.SEP.2013 13:20:01

Channel 1:

99% OBW = 37.39MHz

	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
	26 dBm	6.06 dBm	VBW	3 MHz		
	-10 dBm	5.30691383 GHz	SWT	5 ms	Unit	dBm

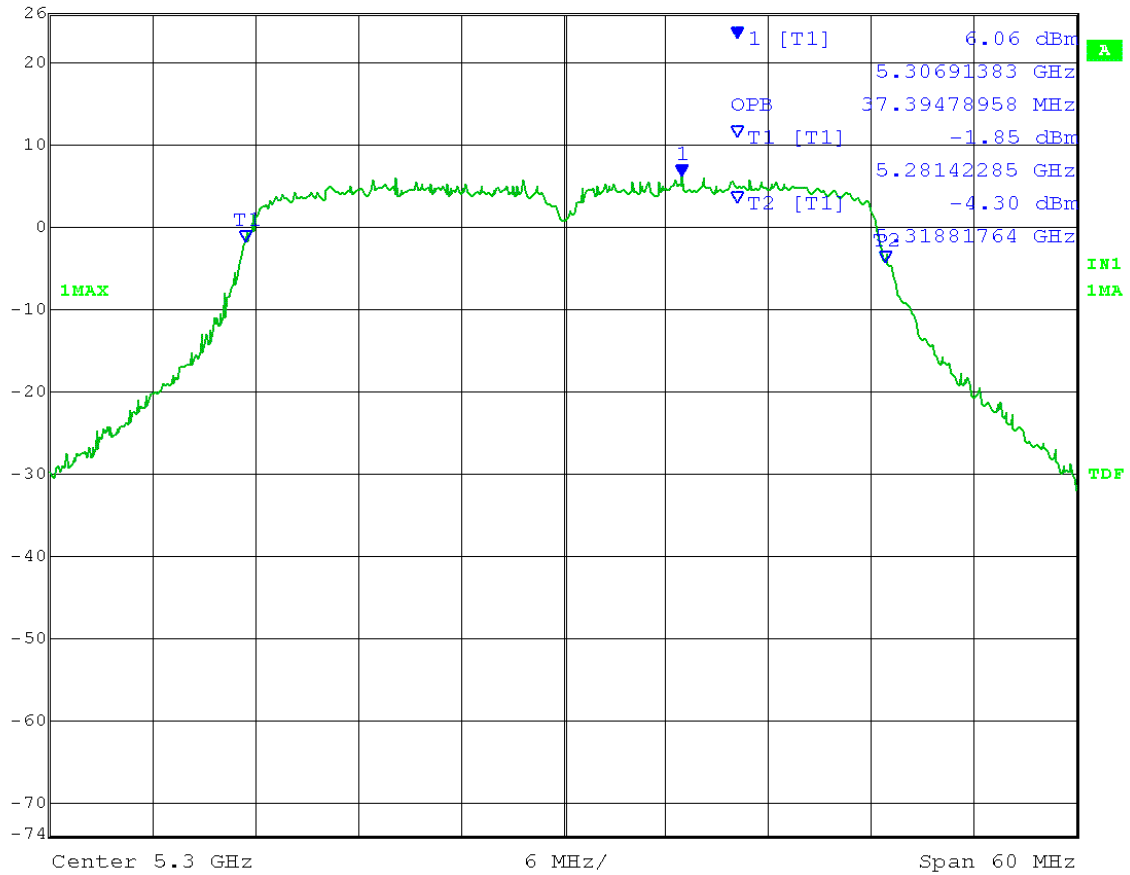

Date: 6.SEP.2013 13:32:19

Test Date: 08-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM - ESN# 000456C005DE
 Test: 99% Occupied Bandwidth - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013

D) 99% Occupied Bandwidth - Page 4

RBW = 1 MHz

VBW = 3 MHz

Detector = Peak

Trace = Max Hold


High Channel: Transmit = 5.320 GHz

40MHz BW

Output power setting: 4.5

Channel 0


99% OBW = 37.15MHz

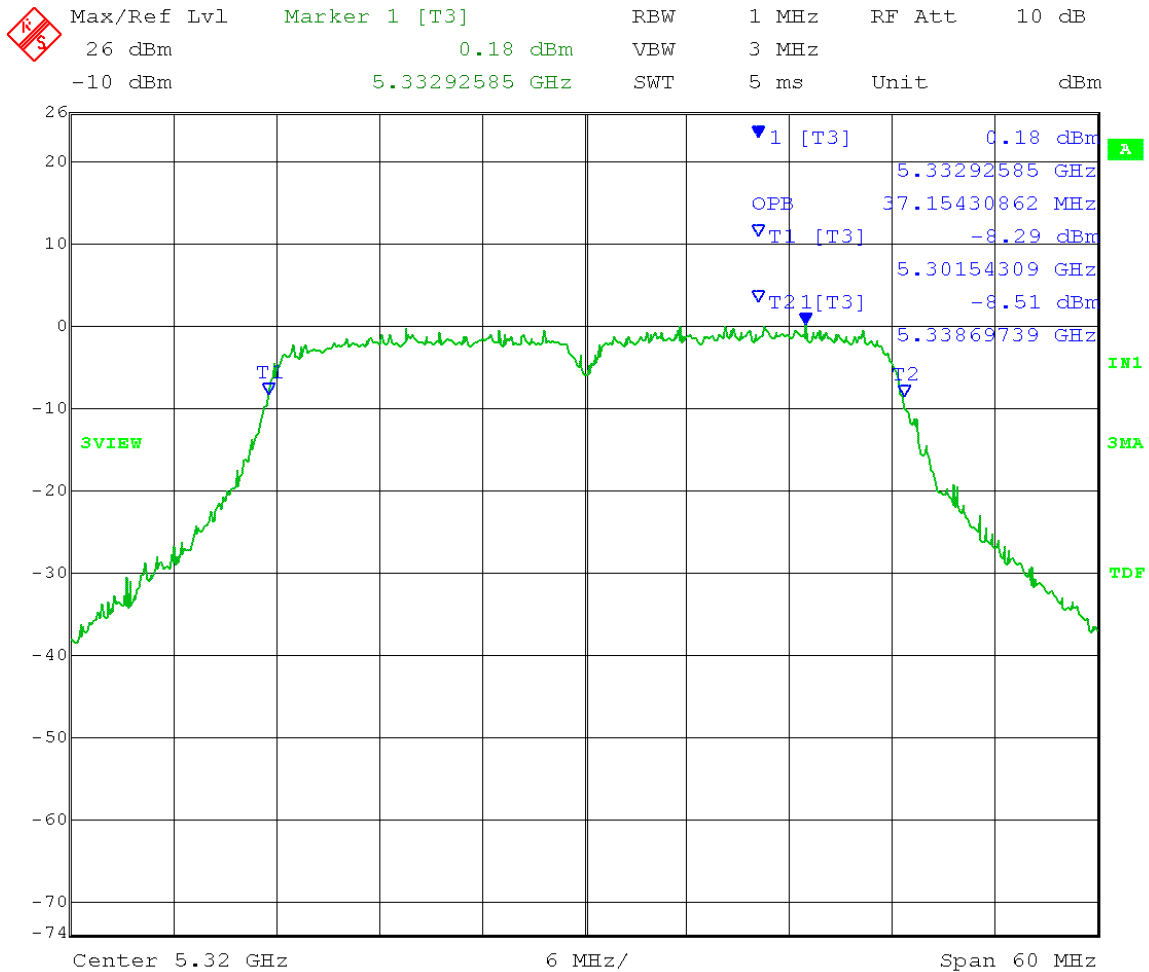

Date: 8.AUG.2013 09:08:45

Test Date: 08-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz OFDM - ESN# 000456C005DE
 Test: 99% Occupied Bandwidth - Conducted
 Operator: Lillian Li
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 D) 99% Occupied Bandwidth - Page 4
 RBW = 1 MHz
 Detector = Peak
 High Channel: Transmit = 5.320 GHz
 Output power setting: 4.5
 VBW = 3 MHz
 Trace = Max Hold
 40MHz BW
 Channel 1

99% OBW = 37.15MHz

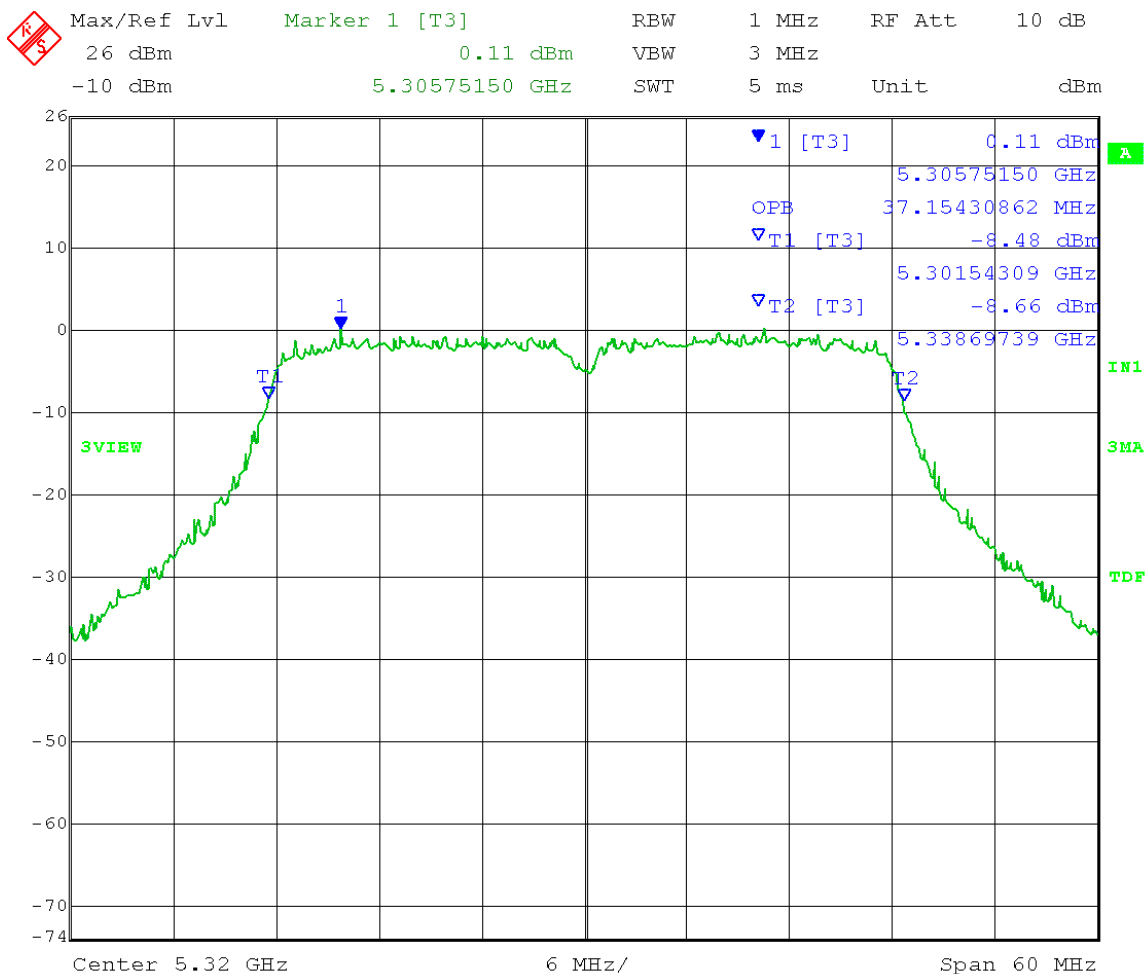

Date: 8.AUG.2013 09:24:48



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix B – Measurement Data

B4.0 Maximum Conducted Output Power

Rule Section: Section 15.407(a)(2)
RSS-210 A9.2(2)

Test Procedure: FCC KDB 789033 D01 General UNII Test Procedures v01r03 – *Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E*

Section E(3)(a) Method PM (Measurement using an RF average power meter):
Measurements performed using a wideband RF power meter with a thermocouple detector

Description: Measure the average power of the transmitter
Add $10 \log(1/x)$, where x is the duty cycle, to the measured power
Add $10 \log(N)$, where N is the number of outputs, for MIMO operation
(according to FCC KDB 662911)

Limit: RF conducted: Lesser of: 250 mW (24 dBm) or $11 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth in MHz.
e.i.r.p.: Lesser of: 1 W (30 dBm) or $17 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth in MHz.

Results: Passed


Notes: Measurements were taken for MCS15 OFDM modulation at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously with 100% duty cycle.

Test Date: 8-8-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm, whichever power is less (e.i.r.p limit: $17 + 10 \log_{10} B$, dBm)
Conducted limit: $11 + 10 \log_{10} (17.86 \text{ MHz}) = 23.51 \text{ dBm}$
e.i.r.p. limit: $17 + 10 \log_{10} (17.86 \text{ MHz}) = 29.51 \text{ dBm}$

Low Channel: Transmit = 5.270 GHz 20MHz BW
Output power setting: 5; Ch 0:

Maximum conducted output power = $4.15 \text{ dBm} + 3 \text{ dB (MIMO)}$
= $7.15 \text{ dBm} < 23.51 \text{ dBm} = \text{Pass}$
Maximum e.i.r.p. = $4.15 \text{ dBm} + 3 \text{ dB (MIMO)} + 16 \text{ dBi antenna gain}$
= $23.15 \text{ dBm} < 29.51 \text{ dBm} = \text{Pass}$

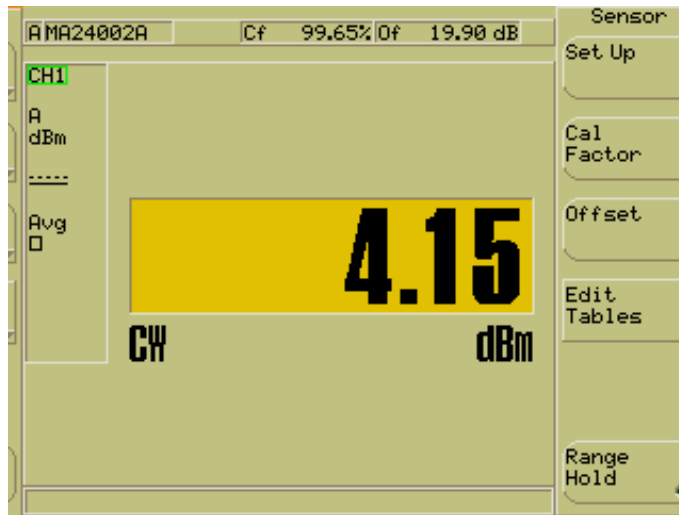


Test Date: 8-8-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm, whichever power is less (e.i.r.p limit: $17 + 10 \log_{10} B$, dBm)
Conducted limit: $11 + 10 \log_{10} (17.86 \text{ MHz}) = 23.51 \text{ dBm}$
e.i.r.p. limit: $17 + 10 \log_{10} (17.86 \text{ MHz}) = 29.51 \text{ dBm}$

Low Channel: Transmit = 5.270 GHz 20MHz BW
Output power setting: 5; Ch 1:

Maximum conducted output power = $3.96 \text{ dBm} + 3 \text{ dB (MIMO)}$
 $= 6.96 \text{ dBm} < 23.51 \text{ dBm} = \text{Pass}$
Maximum e.i.r.p. = $3.96 \text{ dBm} + 3 \text{ dB (MIMO)} + 16 \text{ dBi antenna gain}$
 $= 22.96 \text{ dBm} < 29.51 \text{ dBm} = \text{Pass}$

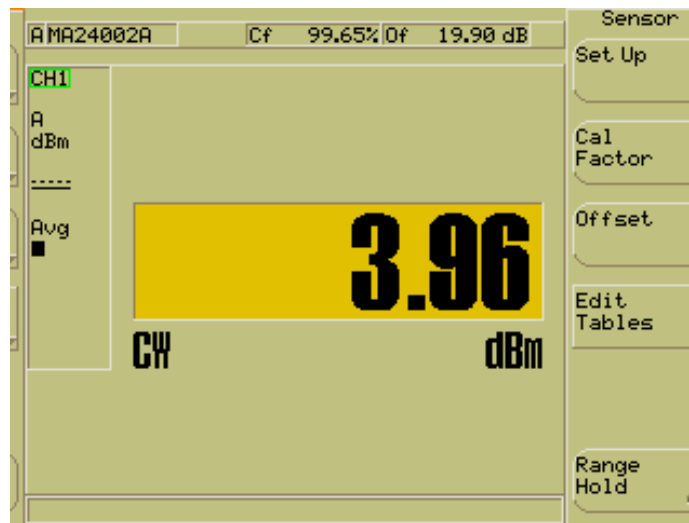


Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm, whichever power is less (e.i.r.p limit: $17 + 10 \log_{10} B$, dBm)
Conducted limit: $11 + 10 \log_{10} (17.92 \text{ MHz}) = 23.53 \text{ dBm}$
e.i.r.p. limit: $17 + 10 \log_{10} (17.92 \text{ MHz}) = 29.53 \text{ dBm}$

Mid Channel: Transmit = 5.300 GHz 20MHz BW
Output power setting: 10; Ch 0:

Maximum conducted output power = $9.31 \text{ dBm} + 3 \text{ dB (MIMO)}$
= $12.31 \text{ dBm} < 23.53 \text{ dBm} = \text{Pass}$
Maximum e.i.r.p. = $9.31 \text{ dBm} + 3 \text{ dB (MIMO)} + 16 \text{ dBi antenna gain}$
= $28.31 \text{ dBm} < 29.53 \text{ dBm} = \text{Pass}$

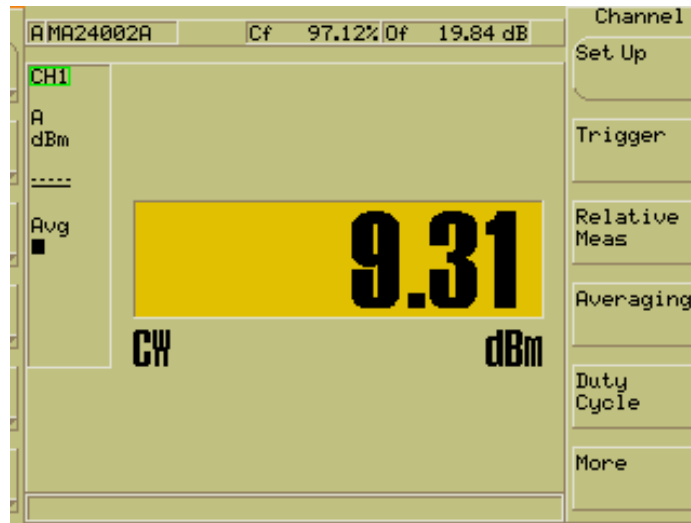


Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm, whichever power is less (e.i.r.p limit: $17 + 10 \log_{10} B$, dBm)
Conducted limit: $11 + 10 \log_{10} (17.92 \text{ MHz}) = 23.53 \text{ dBm}$
e.i.r.p. limit: $17 + 10 \log_{10} (17.92 \text{ MHz}) = 29.53 \text{ dBm}$

Mid Channel: Transmit = 5.300 GHz 20MHz BW
Output power setting: 10; Ch 1:

Maximum conducted output power = $9.32 \text{ dBm} + 3 \text{ dB (MIMO)}$
= $12.32 \text{ dBm} < 23.53 \text{ dBm} = \text{Pass}$
Maximum e.i.r.p. = $9.32 \text{ dBm} + 3 \text{ dB (MIMO)} + 16 \text{ dBi antenna gain}$
= $28.32 \text{ dBm} < 29.53 \text{ dBm} = \text{Pass}$

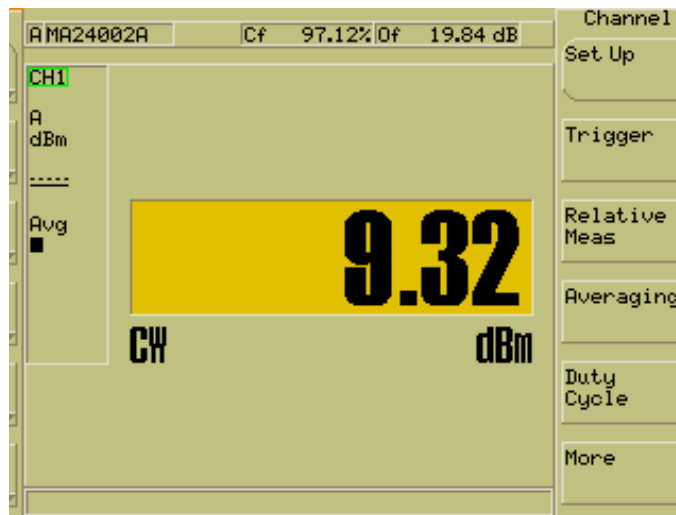


Test Date: 8-8-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm, whichever power is less (e.i.r.p limit: $17 + 10 \log_{10} B$, dBm)
Conducted limit: $11 + 10 \log_{10} (17.92 \text{ MHz}) = 23.53 \text{ dBm}$
e.i.r.p. limit: $17 + 10 \log_{10} (17.92 \text{ MHz}) = 29.53 \text{ dBm}$

High Channel: Transmit = 5.330 GHz 20MHz BW
Output power setting: 5; Ch 0:

Maximum conducted output power = $4.08 \text{ dBm} + 3 \text{ dB (MIMO)}$
= $7.08 \text{ dBm} < 23.53 \text{ dBm} = \text{Pass}$
Maximum e.i.r.p. = $4.08 \text{ dBm} + 3 \text{ dB (MIMO)} + 16 \text{ dBi antenna gain}$
= $23.08 \text{ dBm} < 29.53 \text{ dBm} = \text{Pass}$

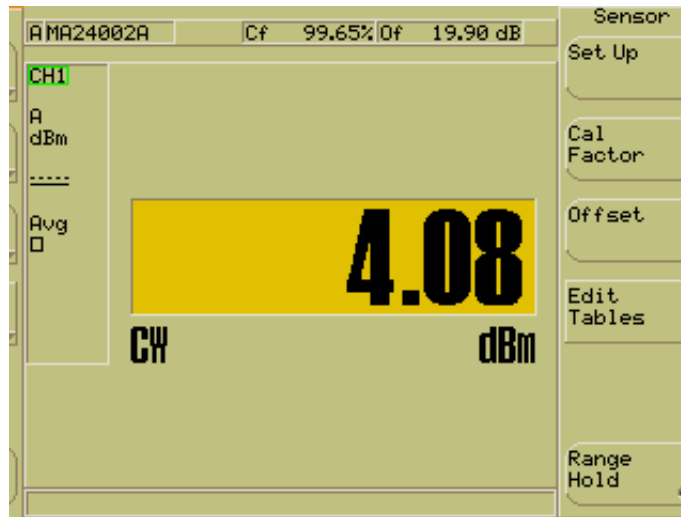


Test Date: 8-8-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm, whichever power is less (e.i.r.p limit: $17 + 10 \log_{10} B$, dBm)
Conducted limit: $11 + 10 \log_{10} (17.92 \text{ MHz}) = 23.53 \text{ dBm}$
e.i.r.p. limit: $17 + 10 \log_{10} (17.92 \text{ MHz}) = 29.53 \text{ dBm}$

High Channel: Transmit = 5.330 GHz 20MHz BW
Output power setting: 5; Ch 1:

Maximum conducted output power = $4.25 \text{ dBm} + 3 \text{ dB (MIMO)}$
 $= 7.25 \text{ dBm} < 23.53 \text{ dBm} = \text{Pass}$
Maximum e.i.r.p. = $4.25 \text{ dBm} + 3 \text{ dB (MIMO)} + 16 \text{ dBi antenna gain}$
 $= 23.25 \text{ dBm} < 29.53 \text{ dBm} = \text{Pass}$

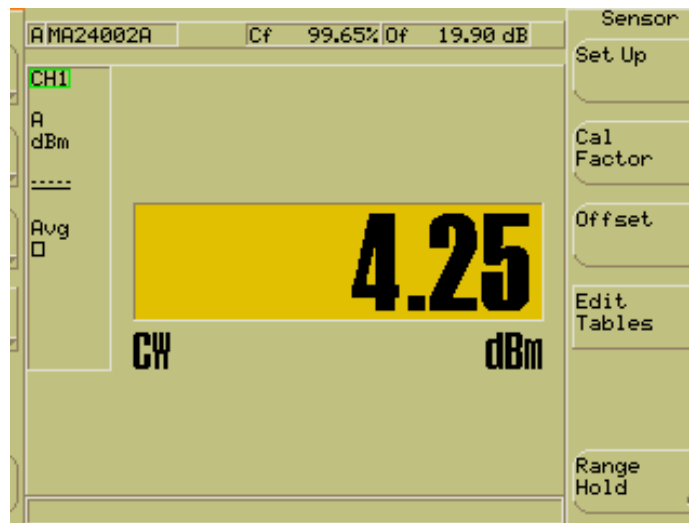


Test Date: 8-8-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm,
(e.i.r.p limit: 1 W (30 dBm) or $17 + 10 \log_{10} B$, dBm) whichever power is less
Conducted limit: **24 dBm**
e.i.r.p. limit: **30 dBm**

Low Channel: Transmit = 5.280 GHz 40MHz BW
Output power setting: 3.5; Ch 0:

Maximum conducted output power = 2.91 dBm + 3 dB (MIMO)
= 5.91 dBm < 24 dBm = Pass
Maximum e.i.r.p. = 2.91 dBm + 3 dB (MIMO) + 16 dBi antenna gain
= 21.91 dBm < 30 dBm = Pass

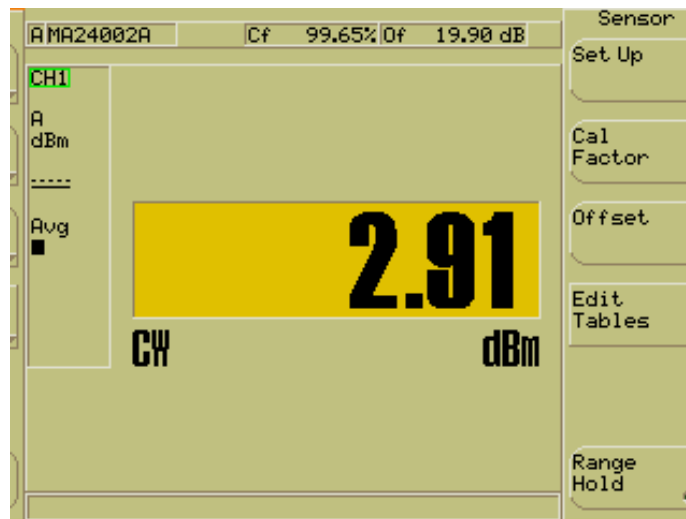


Test Date: 8-8-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm,
(e.i.r.p limit: 1 W (30 dBm) or $17 + 10 \log_{10} B$, dBm) whichever power is less
Conducted limit: **24 dBm**
e.i.r.p. limit: **30 dBm**

Low Channel: Transmit = 5.280 GHz 40MHz BW
Output power setting: 3.5; Ch 1:

Maximum conducted output power = 2.09 dBm + 3 dB (MIMO)
= 5.09 dBm < 24 dBm = Pass
Maximum e.i.r.p. = 2.09 dBm + 3 dB (MIMO) + 16 dBi antenna gain
= 21.09 dBm < 30 dBm = Pass

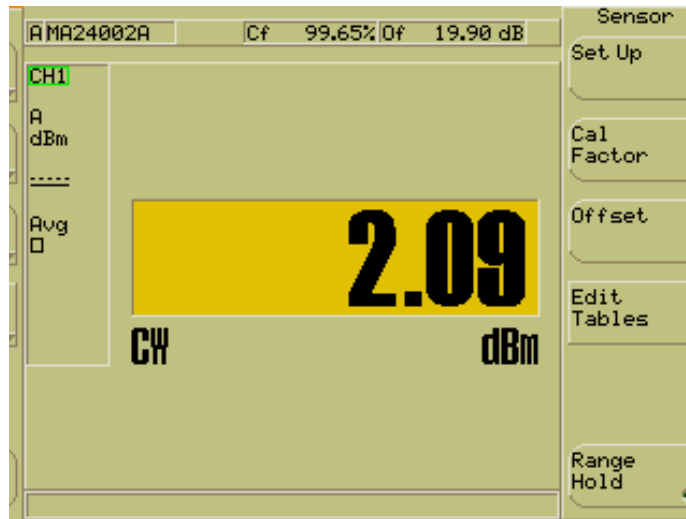


Test Date: 9-6-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm,
(e.i.r.p limit: 1 W (30 dBm) or $17 + 10 \log_{10} B$, dBm) whichever power is less
Conducted limit: **24 dBm**
e.i.r.p. limit: **30 dBm**

Mid Channel: Transmit = 5.300 GHz 40MHz BW
Output power setting: 10; Ch 0:

Maximum conducted output power = $9.94 \text{ dBm} + 3 \text{ dB (MIMO)}$
= $12.94 \text{ dBm} < 24 \text{ dBm} = \text{Pass}$
Maximum e.i.r.p. = $9.94 \text{ dBm} + 3 \text{ dB (MIMO)} + 16 \text{ dBi antenna gain}$
= $28.94 \text{ dBm} < 30 \text{ dBm} = \text{Pass}$

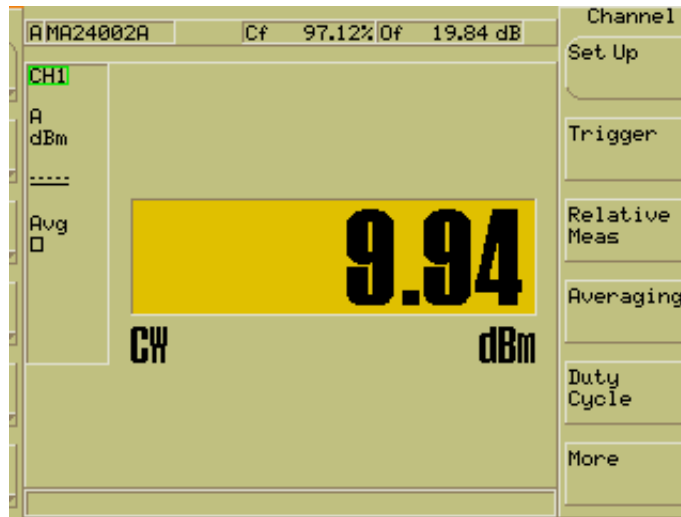


Test Date: 9-6-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm,
(e.i.r.p limit: 1 W (30 dBm) or $17 + 10 \log_{10} B$, dBm) whichever power is less
Conducted limit: **24 dBm**
e.i.r.p. limit: **30 dBm**

Mid Channel: Transmit = 5.300 GHz 40MHz BW
Output power setting: 10; Ch 1:

Maximum conducted output power = $9.29 \text{ dBm} + 3 \text{ dB (MIMO)}$
= $12.29 \text{ dBm} < 24 \text{ dBm} = \text{Pass}$
Maximum e.i.r.p. = $9.29 \text{ dBm} + 3 \text{ dB (MIMO)} + 16 \text{ dBi antenna gain}$
= $28.29 \text{ dBm} < 30 \text{ dBm} = \text{Pass}$

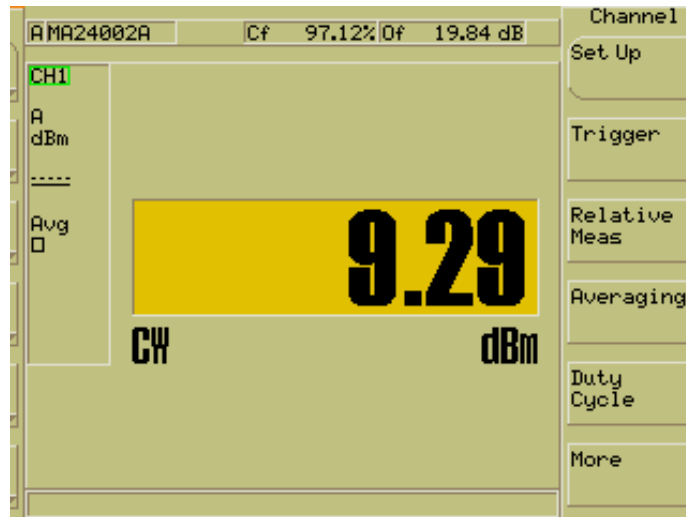


Test Date: 8-8-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm,
(e.i.r.p limit: 1 W (30 dBm) or $17 + 10 \log_{10} B$, dBm) whichever power is less
Conducted limit: **24 dBm**
e.i.r.p. limit: **30 dBm**

High Channel: Transmit = 5.320 GHz 40MHz BW
Output power setting: 4.5; Ch 0:

Maximum conducted output power = 3.82 dBm + 3 dB (MIMO)
= 6.82 dBm < 24 dBm = Pass
Maximum e.i.r.p. = 3.82 dBm + 3 dB (MIMO) + 16 dBi antenna gain
= 22.82 dBm < 30 dBm = Pass

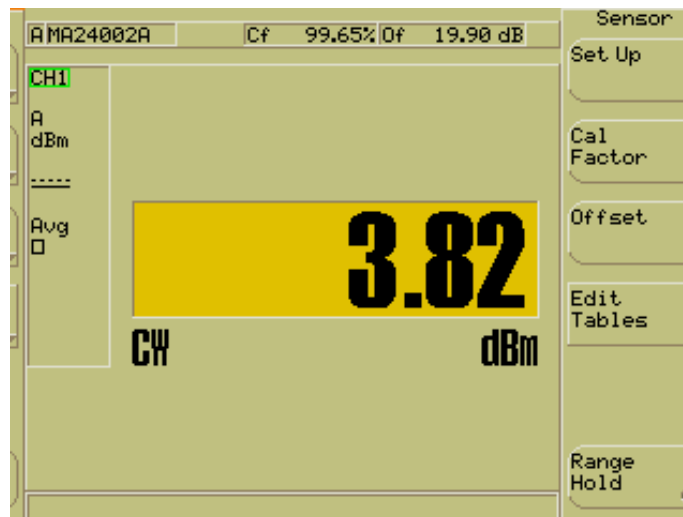


Test Date: 8-8-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz OFDM - ESN# 000456C005DE
Test: Maximum conducted output power – Conducted
Operator: Lillian L
Comment: FCC UNII operating under 15.407 – OET 4/8/2013
E)3) Measurement using a power meter(PM) - Page 8
Operating Mode: Point-to-Multipoint; Antenna Gain = 16 dBi

Limit: [RSS-210,A9.2(2)]: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm,
(e.i.r.p limit: 1 W (30 dBm) or $17 + 10 \log_{10} B$, dBm) whichever power is less
Conducted limit: **24 dBm**
e.i.r.p. limit: **30 dBm**

High Channel: Transmit = 5.320 GHz 40MHz BW
Output power setting: 4.5; Ch 1:

Maximum conducted output power = 3.28 dBm + 3 dB (MIMO)
= 6.28 dBm < 24 dBm = Pass
Maximum e.i.r.p. = 3.28 dBm + 3 dB (MIMO) + 16 dBi antenna gain
= 22.28 dBm < 30 dBm = Pass

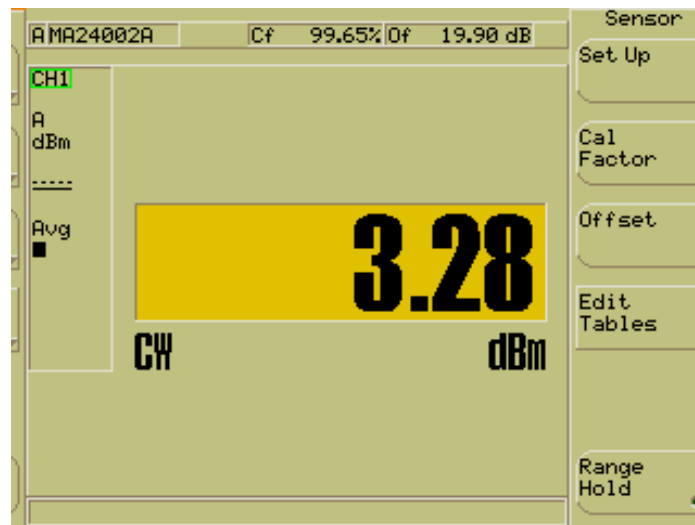



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix B – Measurement Data

B5.0 Peak Power Spectral Density – Conducted

Rule Section: Section 15.407(a)(2)
RSS-210 A9.2(2)

Test Procedure: FCC KDB 789033 D01 General UNII Test Procedures v01r03 – *Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E*

Section F – Peak power spectral density (PPSD)
Using method E(2)(b) SA-1 for power spectrum


Description: SPAN: set to encompass entire emission bandwidth
RBW = 1 MHz
VBW \geq 3 MHz
Number of points \geq 2 x Span/RBW
Sweep time: auto
Detector = RMS
Sweep: trace average 200 sweeps in RMS mode
Use peak search to find the peak of the spectrum

Limit: 11 dBm in any 1 MHz band
Limit shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

Results: Passed


Notes: Measurements were taken for MCS15 OFDM modulation at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously with 100% duty cycle.

Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak Power Spectral Density - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 F) PPSD – Page 9
 Limit:[15.407(a)(2)]: $11 - [16(\text{antenna gain})+3(\text{MIMO})-6] = -2\text{dBm}/1\text{MHz}$
 RBW = 1 MHz VBW = 3 MHz
 Detector = RMS Trace = AVG
 Sweep Time = Auto Sweep counts = 200
 Low Channel: Transmit = 5.270GHz 20MHz BW
 Output power setting: 5 Channel 0
 26 dB Emission Bandwidth = 21.76MHz
 PPSD = -7.51dBm < -2 dBm = Pass

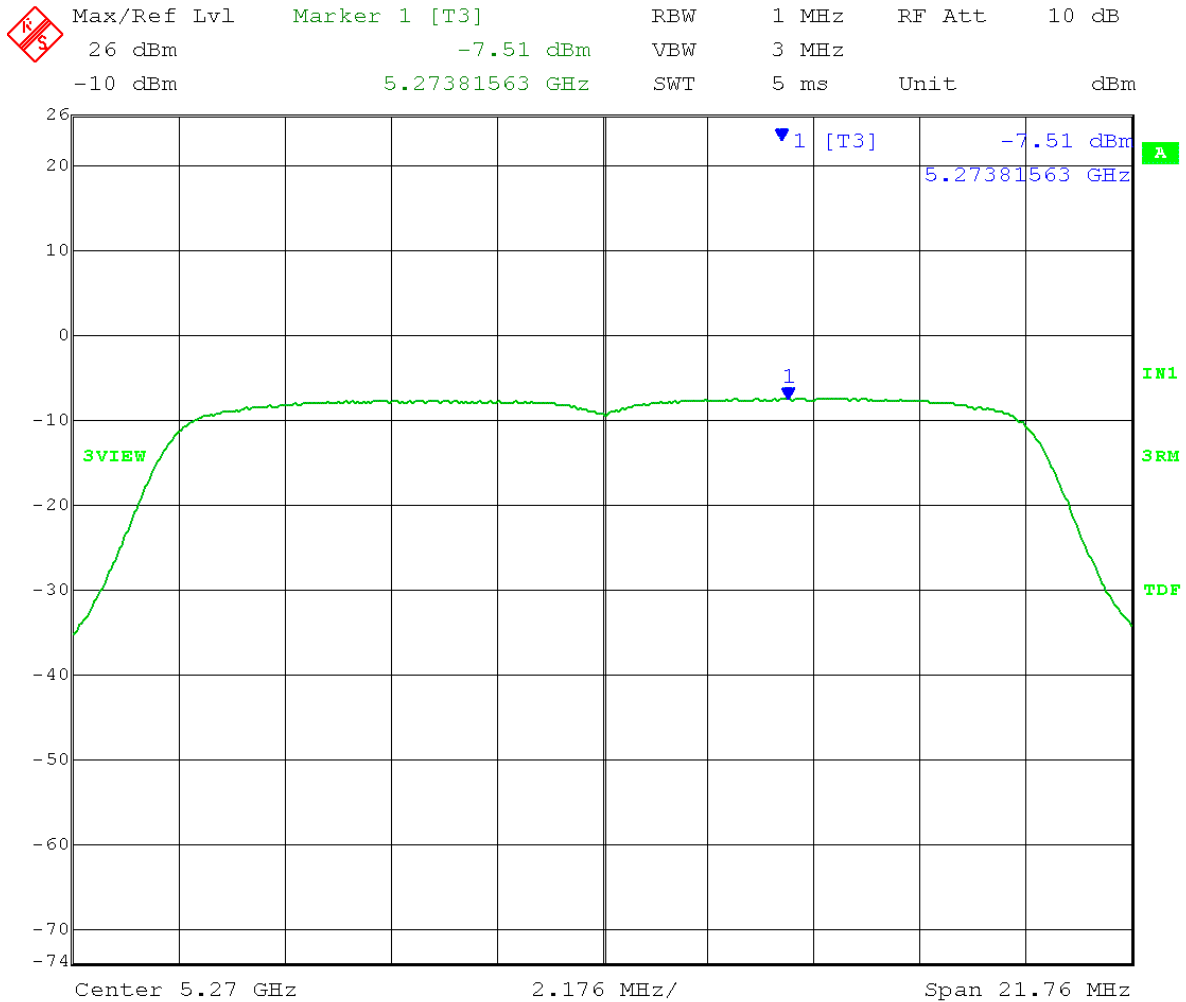

Date: 8.AUG.2013 10:39:15


Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak Power Spectral Density - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 F) PPSD – Page 9
 Limit:[15.407(a)(2)]: $11 - [16(\text{antenna gain})+3(\text{MIMO})-6] = -2\text{dBm}/1\text{MHz}$
 RBW = 1 MHz VBW = 3 MHz
 Detector = RMS Trace = AVG
 Sweep Time = Auto Sweep counts = 200
 Low Channel: Transmit = 5.270GHz 20MHz BW
 Output power setting: 5 Channel 1
 26 dB Emission Bandwidth = 20.62MHz
 PPSD = -9.05 dBm < -2 dBm = Pass

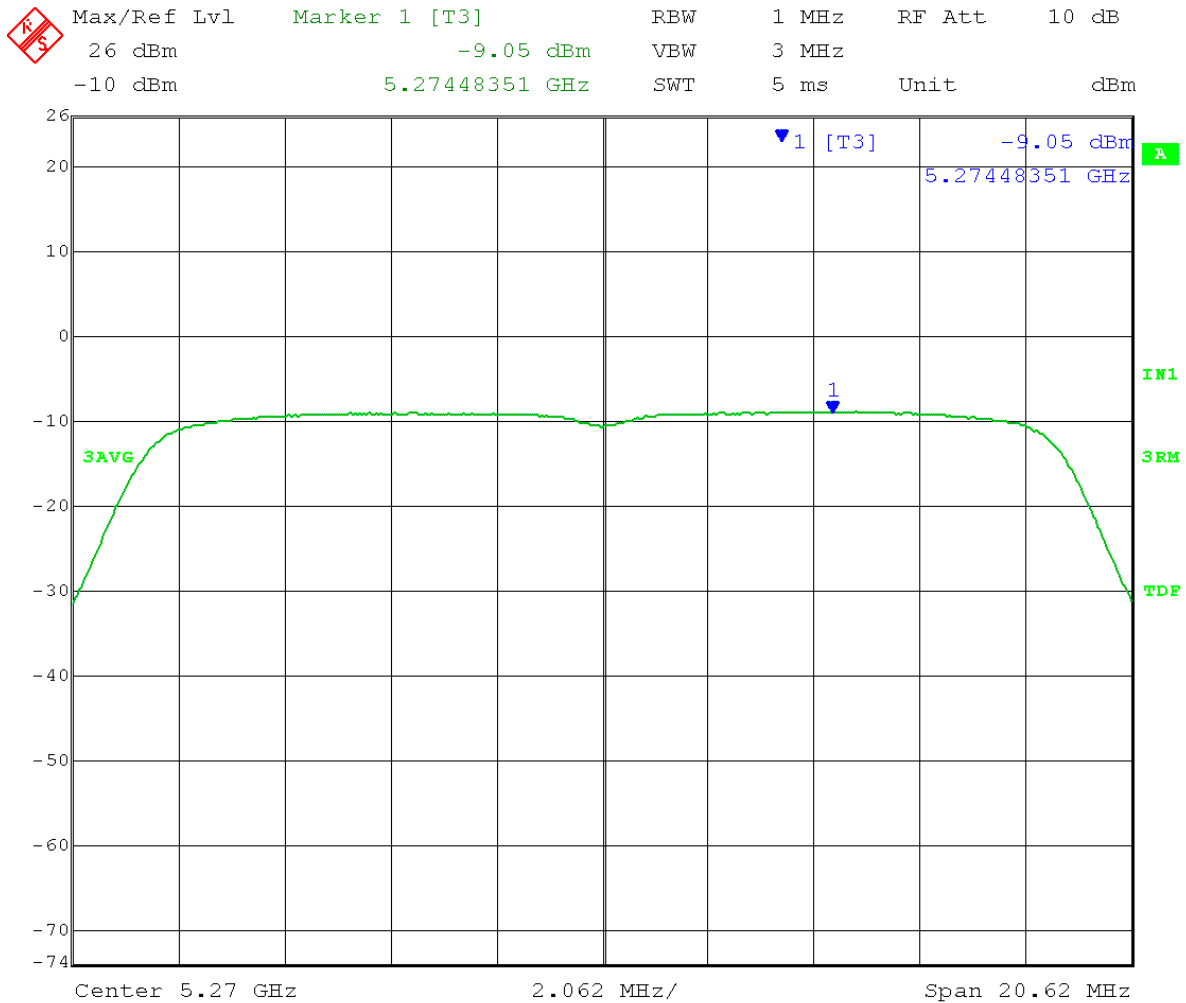

Date: 8.AUG.2013 09:47:12

Test Date: 9-6-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak Power Spectral Density - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 F) PPSD – Page 9
 Limit:[15.407(a)(2)]: $11 - [16(\text{antenna gain}) + 3(\text{MIMO}) - 6] = -2\text{dBm}/1\text{MHz}$
 RBW = 1 MHz VBW = 3 MHz
 Detector = RMS Trace = AVG
 Sweep Time = Auto Sweep counts = 200
 Mid Channel: Transmit = 5.300GHz 20MHz BW
 Output power setting: 10.0


Channel 0:
 26 dB Emission Bandwidth = 21.70MHz
 PPSD = -2.58dBm < -2 dBm = Pass

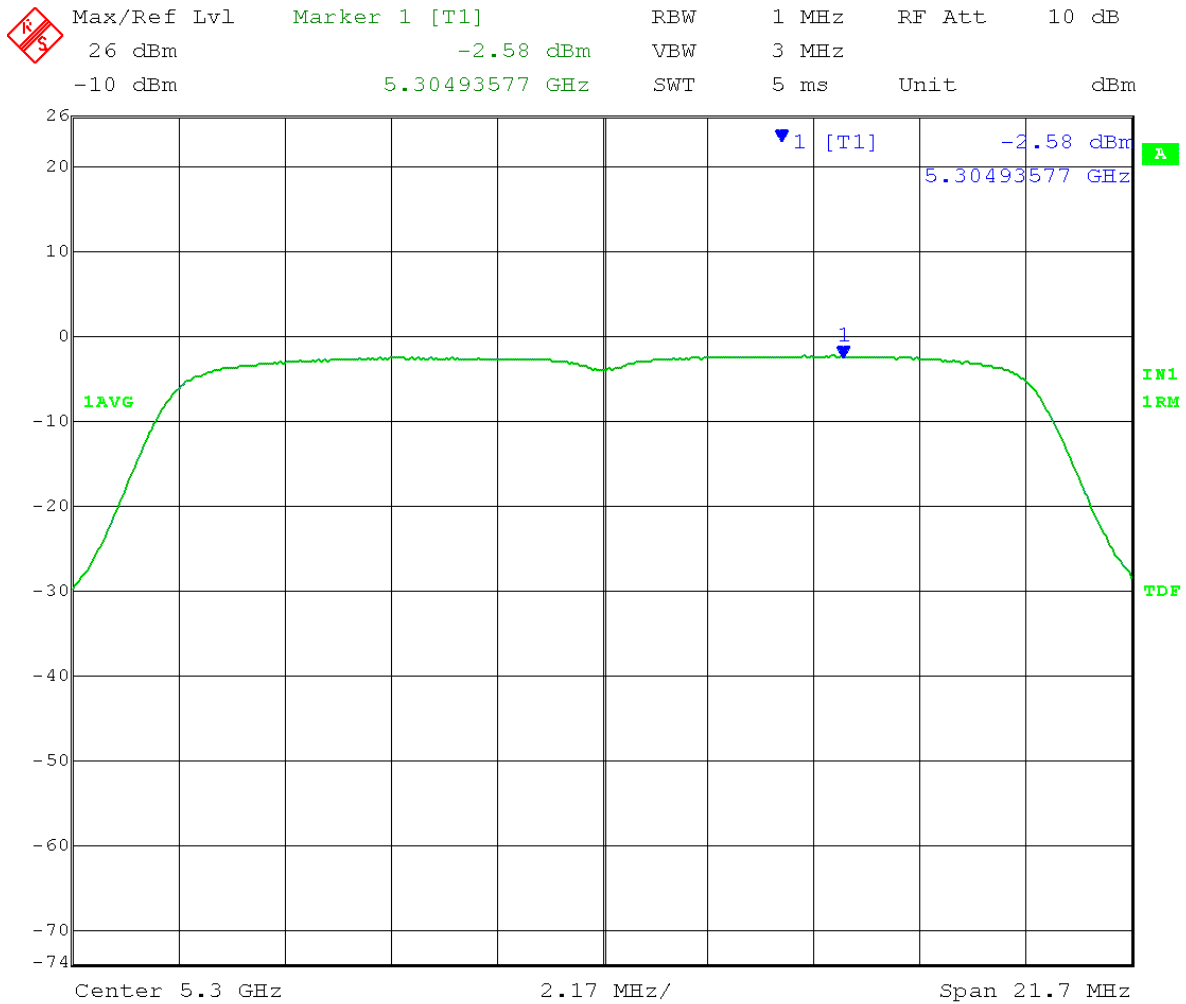

Date: 6.SEP.2013 10:16:33


Channel 1:

26 dB Emission Bandwidth = 21.16MHz
PPSD = -2.12 dBm < -2 dBm = Pass

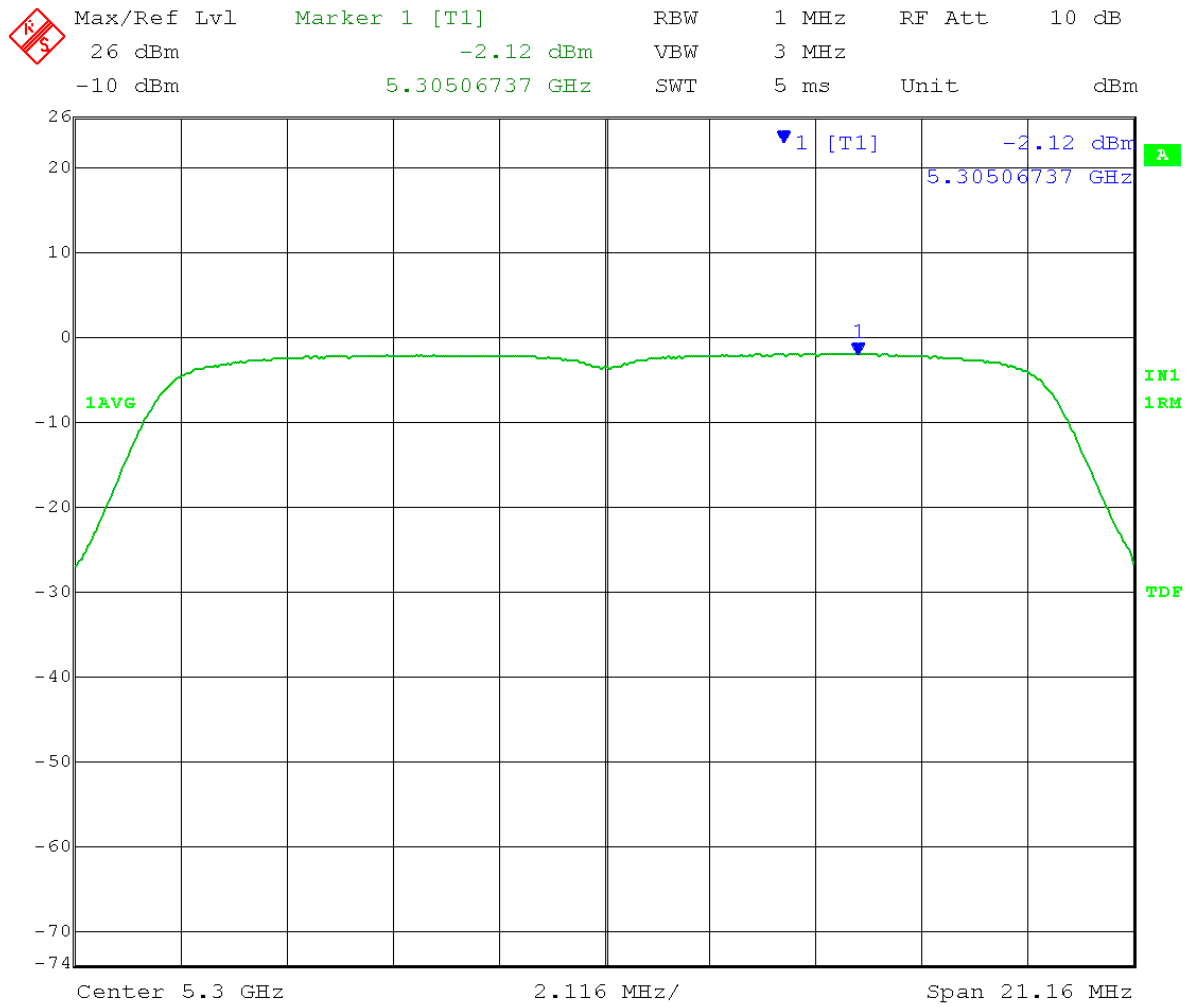


Date: 6.SEP.2013 10:45:40

Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak Power Spectral Density - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 F) PPSD – Page 9
 Limit:[15.407(a)(2)]: $11 - [16(\text{antenna gain})+3(\text{MIMO})-6] = -2\text{dBm}/1\text{MHz}$
 RBW = 1 MHz VBW = 3 MHz
 Detector = RMS Trace = AVG
 Sweep Time = Auto Sweep counts = 200
 High Channel: Transmit = 5.330GHz 20MHz BW
 Output power setting: 5 Channel 0
 26 dB Emission Bandwidth = 21.70MHz
 PPSD = -8.23dBm < -2 dBm = Pass

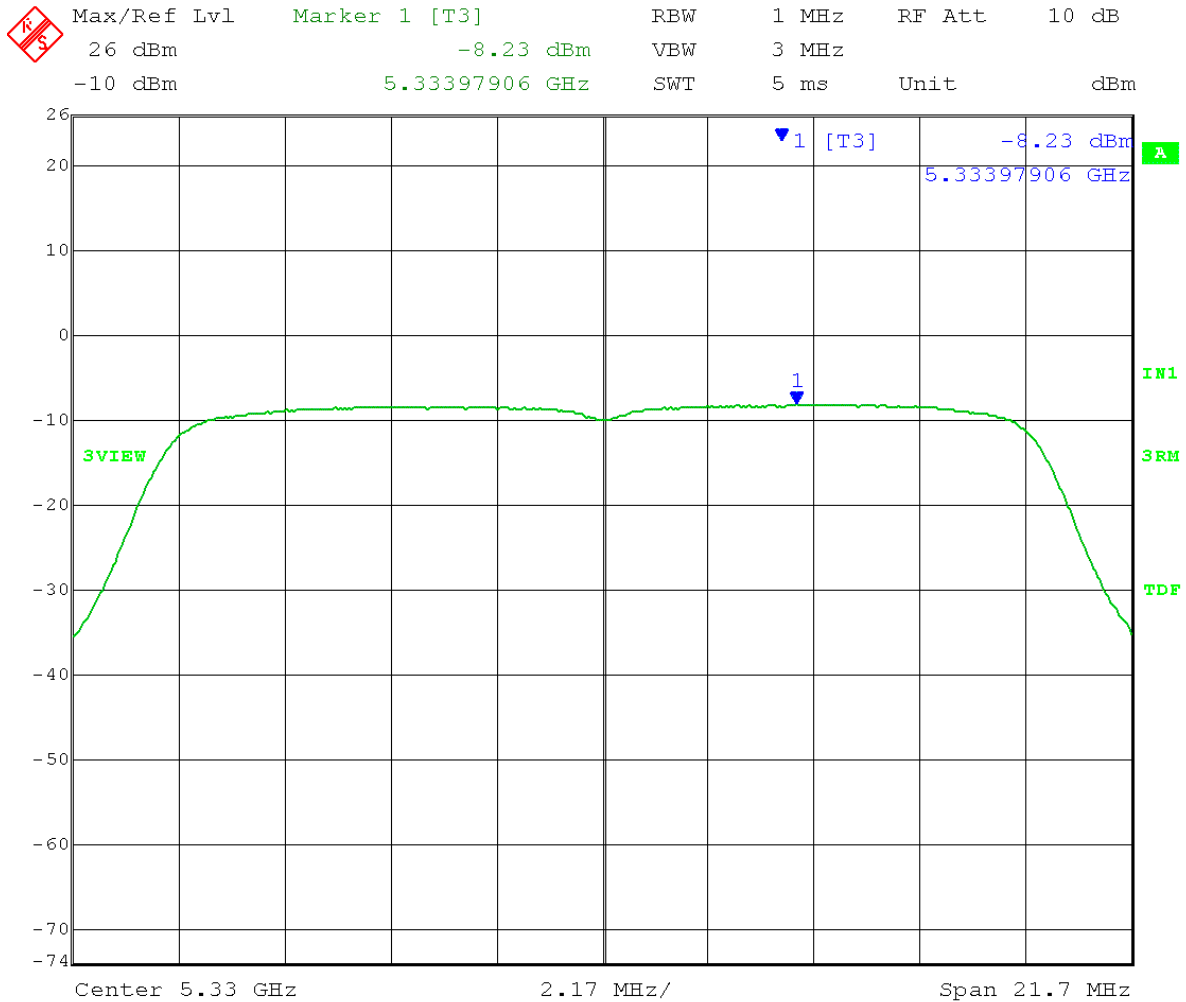


Date: 8.AUG.2013 10:34:29

Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak Power Spectral Density - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 F) PPSD – Page 9
 Limit:[15.407(a)(2)]: $11 - [16(\text{antenna gain})+3(\text{MIMO})-6] = -2\text{dBm}/1\text{MHz}$
 RBW = 1 MHz VBW = 3 MHz
 Detector = RMS Trace = AVG
 Sweep Time = Auto Sweep counts = 200
 High Channel: Transmit = 5.330GHz 20MHz BW
 Output power setting: 5 Channel 1
 26 dB Emission Bandwidth = 21.28MHz
 PPSD = -7.59 dBm < -2 dBm = Pass

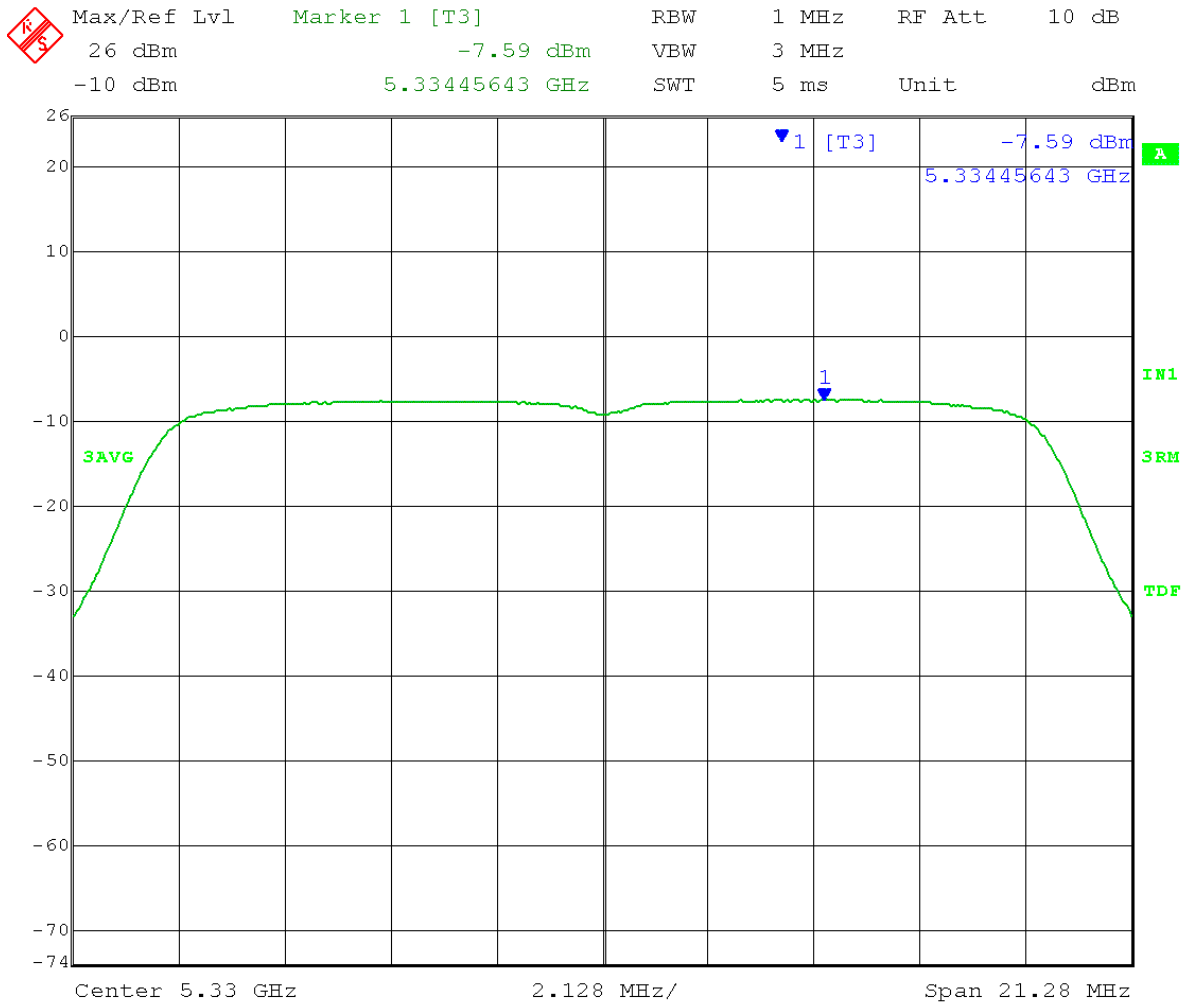


Date: 8.AUG.2013 09:57:15

Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak Power Spectral Density - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 F) PPSD – Page 9
 Limit:[15.407(a)(2)]: $11 - [16(\text{antenna gain})+3(\text{MIMO})-6] = -2\text{dBm}/1\text{MHz}$
 RBW = 1 MHz VBW = 3 MHz
 Detector = RMS Trace = AVG
 Sweep Time = Auto Sweep counts = 200
 Low Channel: Transmit = 5.280GHz 40MHz BW
 Output power setting: 3.5 Channel 0
 26 dB Emission Bandwidth = 44.73MHz
 PPSD = $-11.32\text{dBm} < -2\text{ dBm} = \text{Pass}$

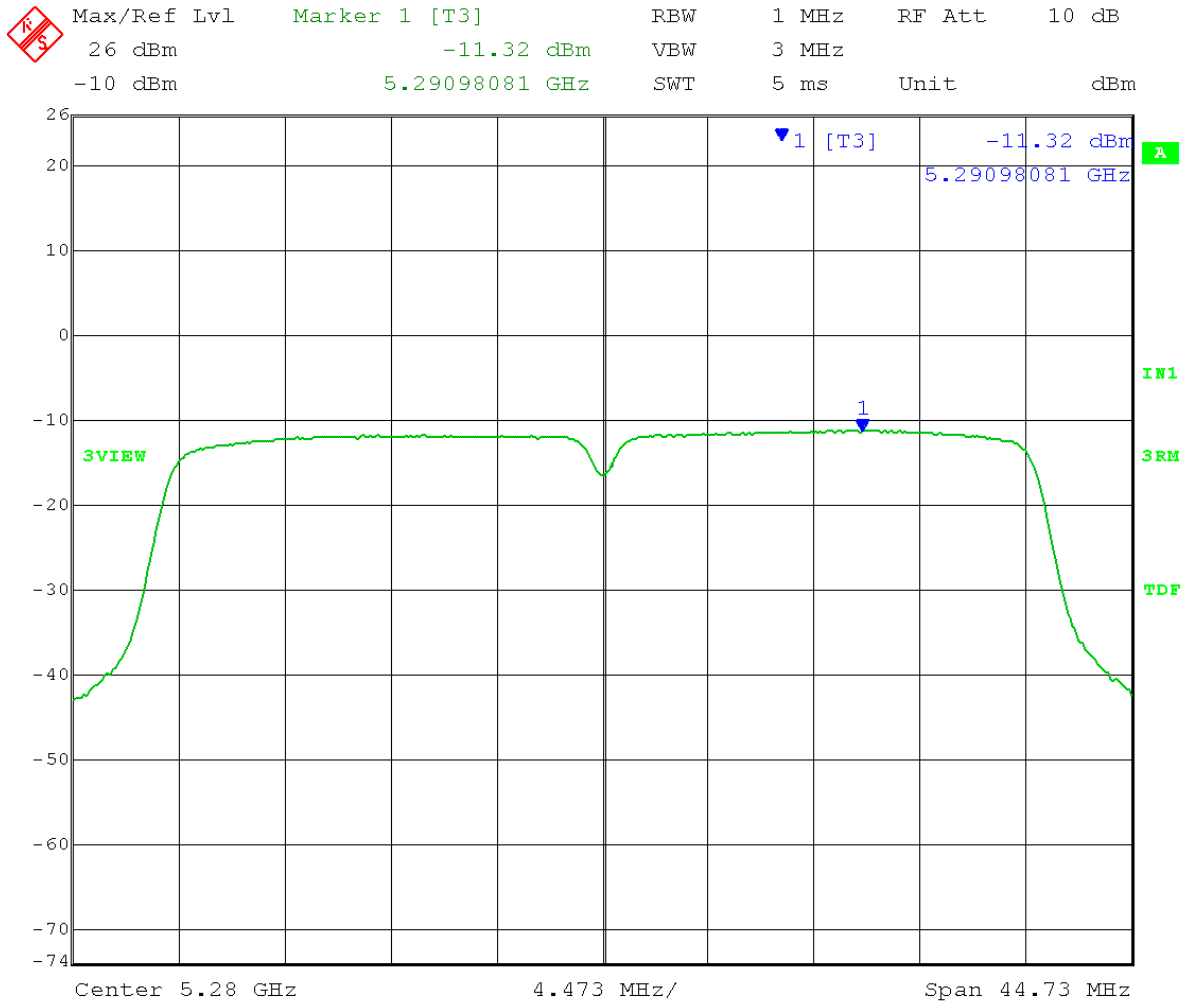


Date: 8.AUG.2013 10:26:47

Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak Power Spectral Density - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 F) PPSD – Page 9
 Limit:[15.407(a)(2)]: $11 - [16(\text{antenna gain})+3(\text{MIMO})-6] = -2\text{dBm}/1\text{MHz}$
 RBW = 1 MHz VBW = 3 MHz
 Detector = RMS Trace = AVG
 Sweep Time = Auto Sweep counts = 200
 Low Channel: Transmit = 5.280GHz 40MHz BW
 Output power setting: 3.5 Channel 1
 26 dB Emission Bandwidth = 44.37MHz
 PPSD = -12.80 dBm < -2 dBm = Pass

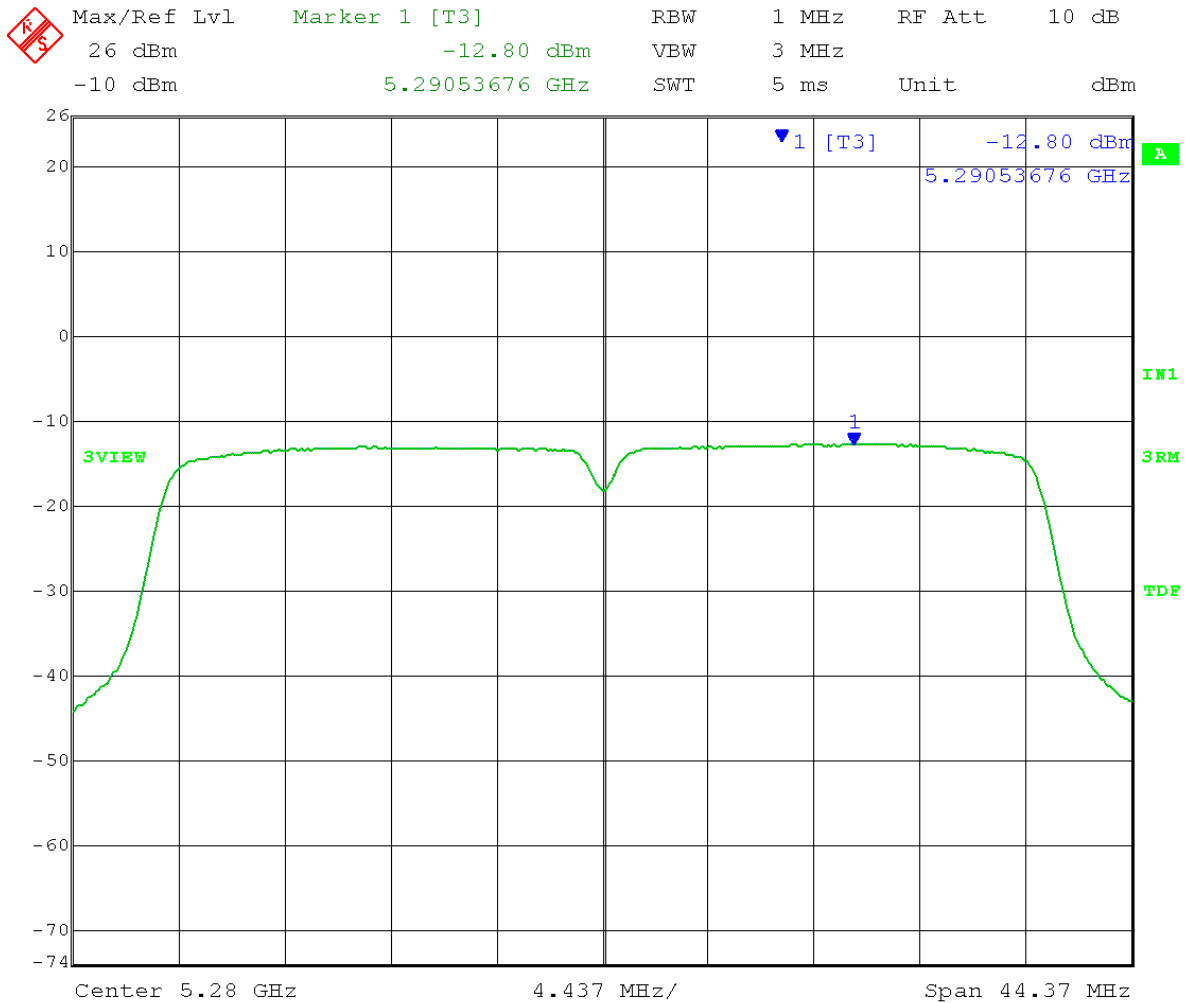

Date: 8.AUG.2013 10:17:04

Test Date: 9-6-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak Power Spectral Density - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 F) PPSD – Page 9
 Limit:[15.407(a)(2)]: $11 - [16(\text{antenna gain})+3(\text{MIMO})-6] = -2\text{dBm}/1\text{MHz}$
 RBW = 1 MHz VBW = 3 MHz
 Detector = RMS Trace = AVG
 Sweep Time = Auto Sweep counts = 200
 Mid Channel: Transmit = 5.300GHz 40MHz BW
 Output power setting: 10.0 Channel 0
 26 dB Emission Bandwidth = 44.37MHz
 PPSD = $-6.11\text{dBm} < -2\text{ dBm} = \text{Pass}$

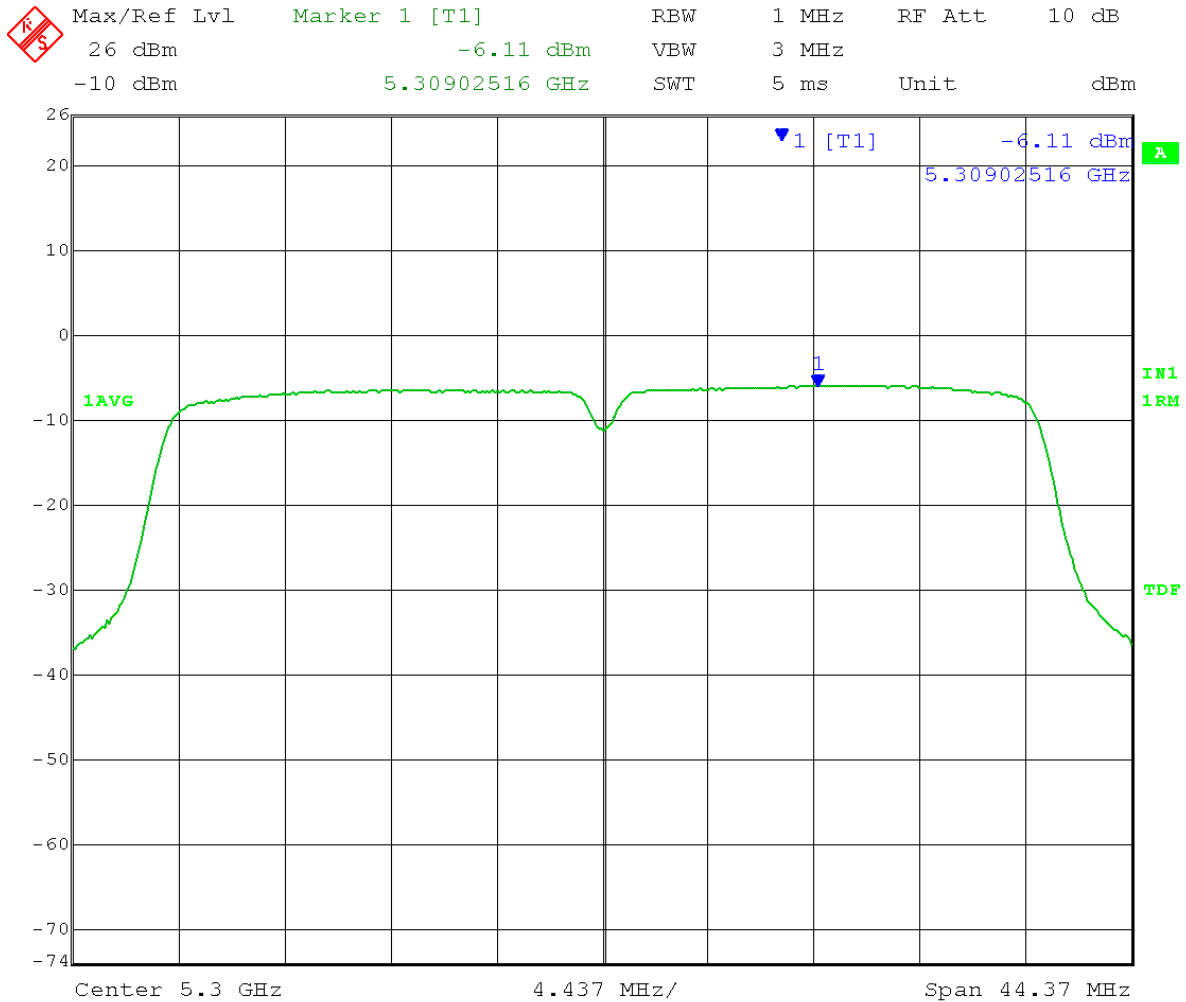


Date: 6.SEP.2013 09:14:26

Channel 1:


26 dB Emission Bandwidth = 44.97MHz

PPSD = -5.34 dBm < -2 dBm = Pass

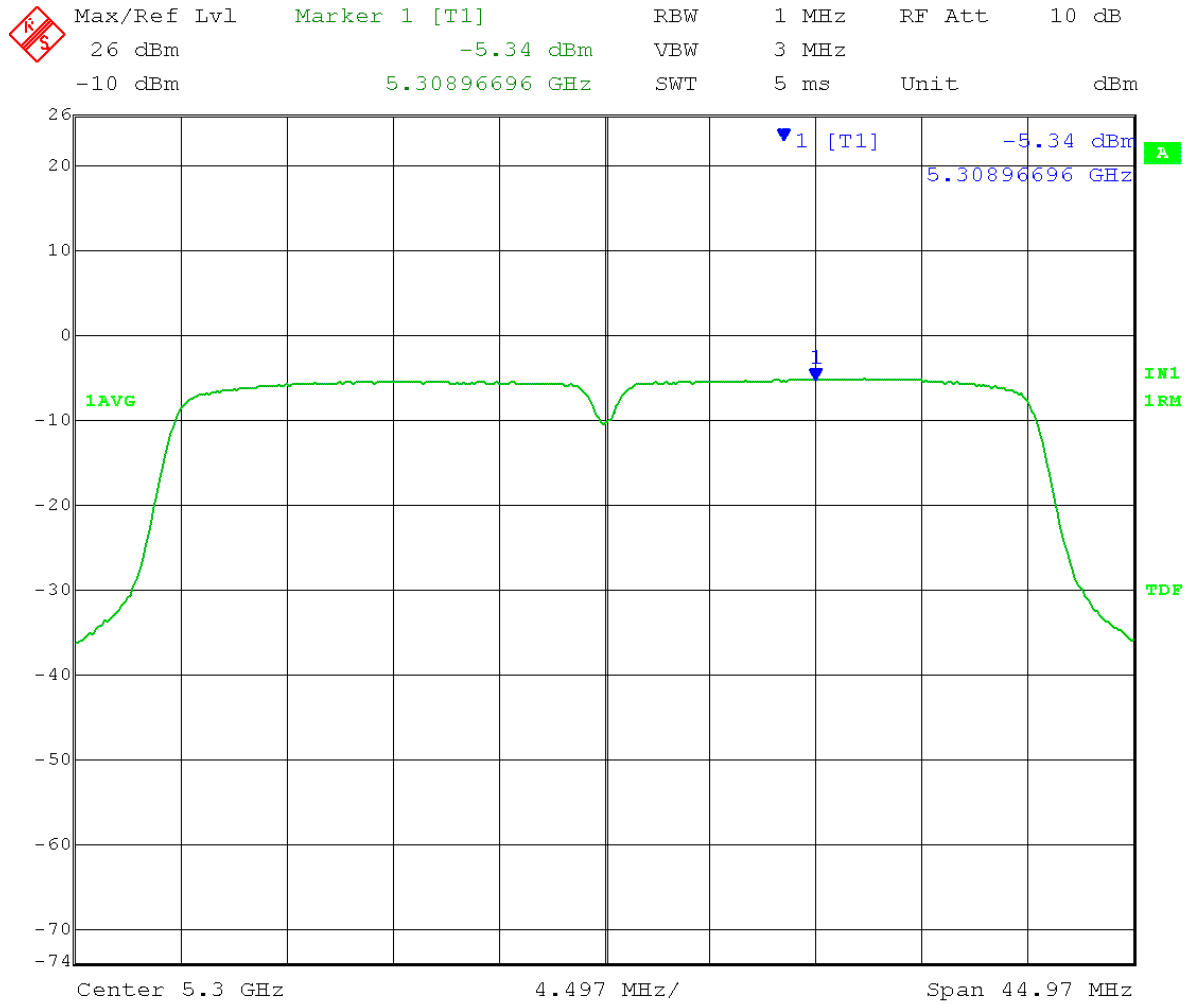


Date: 6.SEP.2013 11:09:26

Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak Power Spectral Density - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 F) PPSD – Page 9
 Limit:[15.407(a)(2)]: $11 - [16(\text{antenna gain})+3(\text{MIMO})-6] = -2\text{dBm}/1\text{MHz}$
 RBW = 1 MHz VBW = 3 MHz
 Detector = RMS Trace = AVG
 Sweep Time = Auto Sweep counts = 200
 High Channel: Transmit = 5.320GHz 40MHz BW
 Output power setting: 4.5 Channel 0
 26 dB Emission Bandwidth = 44.61MHz
 PPSD = -11.36dBm < -2 dBm = Pass

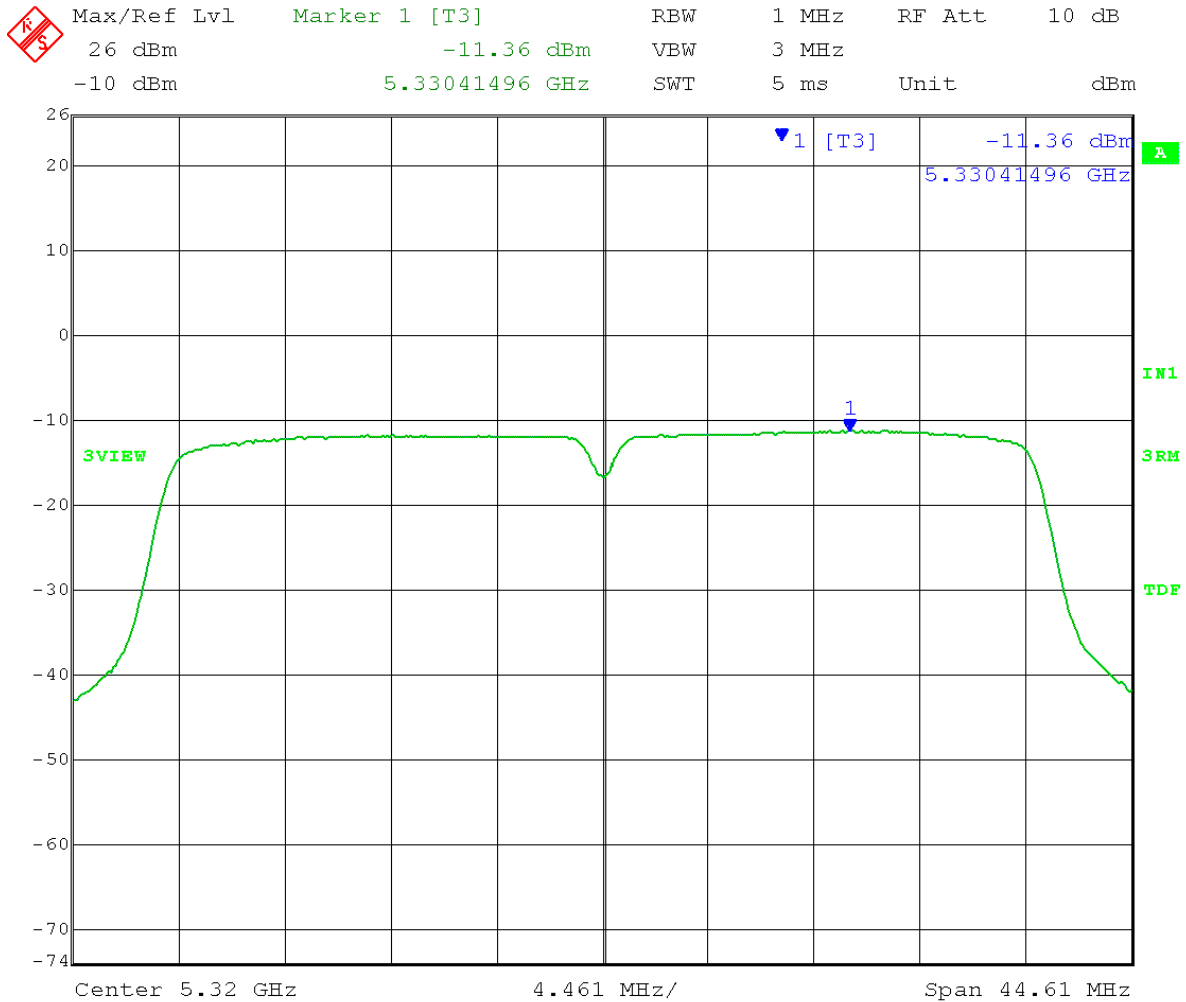

Date: 8.AUG.2013 10:32:09

Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak Power Spectral Density - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 F) PPSD – Page 9
 Limit:[15.407(a)(2)]: $11 - [16(\text{antenna gain}) + 3(\text{MIMO}) - 6] = -2\text{dBm}/1\text{MHz}$
 RBW = 1 MHz VBW = 3 MHz
 Detector = RMS Trace = AVG
 Sweep Time = Auto Sweep counts = 200
 High Channel: Transmit = 5.320GHz 40MHz BW
 Output power setting: 4.5 Channel 1
 26 dB Emission Bandwidth = 43.77MHz
 PPSD = -11.15 dBm < -2 dBm = Pass

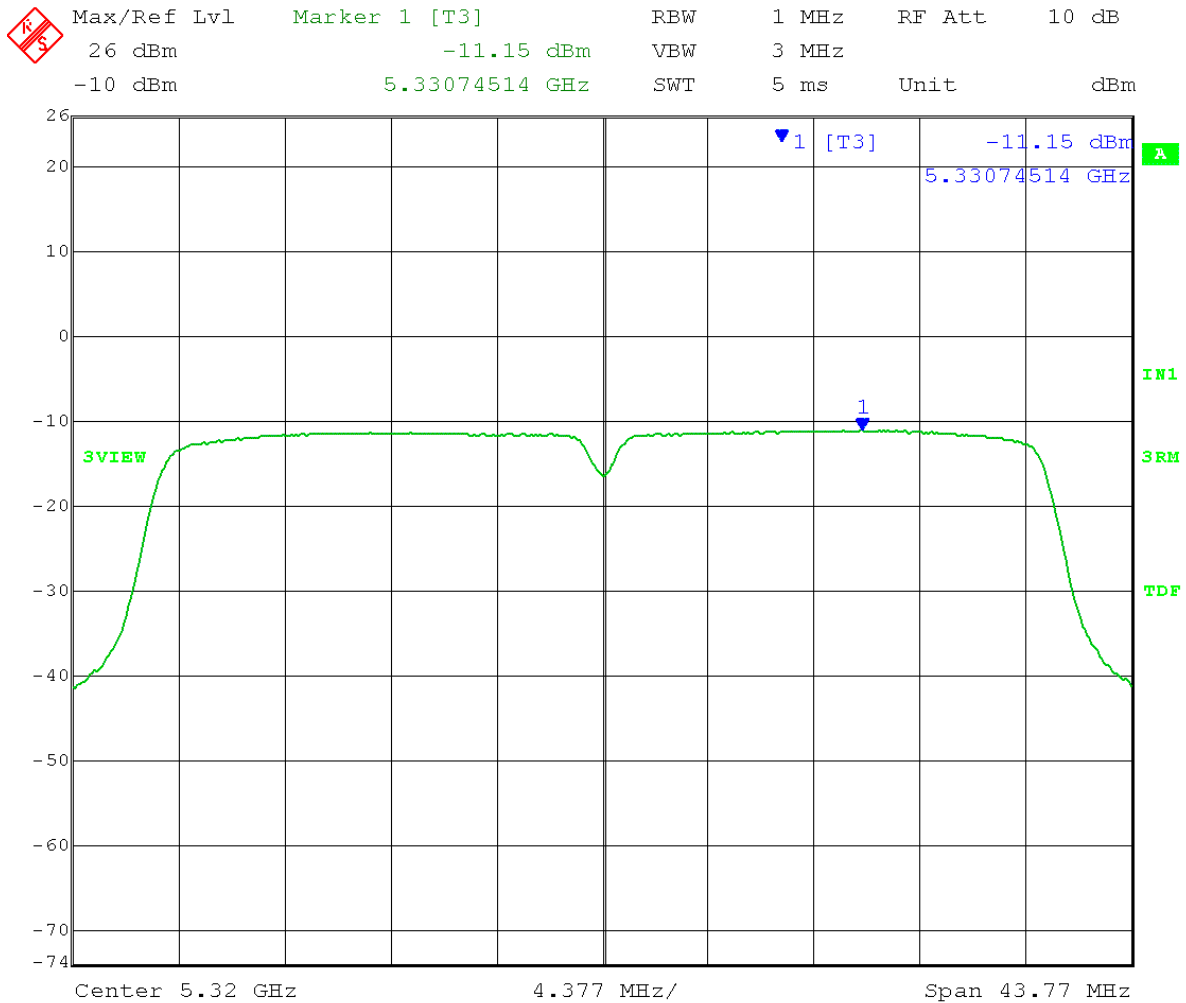

Date: 8.AUG.2013 10:02:07



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix B – Measurement Data

B6.0 Peak Excursion – Conducted

Rule Section: Section 15.407(a)(6)
RSS-210 A9.4(2)

Test Procedure: FCC KDB 789033 D01 General UNII Test Procedures v01r03 – *Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E*

Section G – Peak excursion measurement


Description: SPAN: set to encompass entire emission bandwidth
RBW = 1 MHz
VBW \geq 3 MHz
Detector = Peak
Trace mod = max hold
Use peak search to find the peak of the spectrum
Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD

Limit: 13 dB peak-to-average ratio across any 1 MHz bandwidth

Results: Passed

Notes: Measurements were taken for MCS15 OFDM modulation at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously with 100% duty cycle.


Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak excursion measurement - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 G) PK excursion measurement – Page 9
 Limit:[15.407(a)(6)]: 13dBm/1MHz
 RBW = 1 MHz
 Detector = peak
 Sweep Time = Auto
 Low Channel: Transmit = 5.270GHz
 26 dB Emission Bandwidth = 21.76MHz
 Peak excursion = 3.24 - (-7.51) = 10.75 dBm <13 dBm = Pass

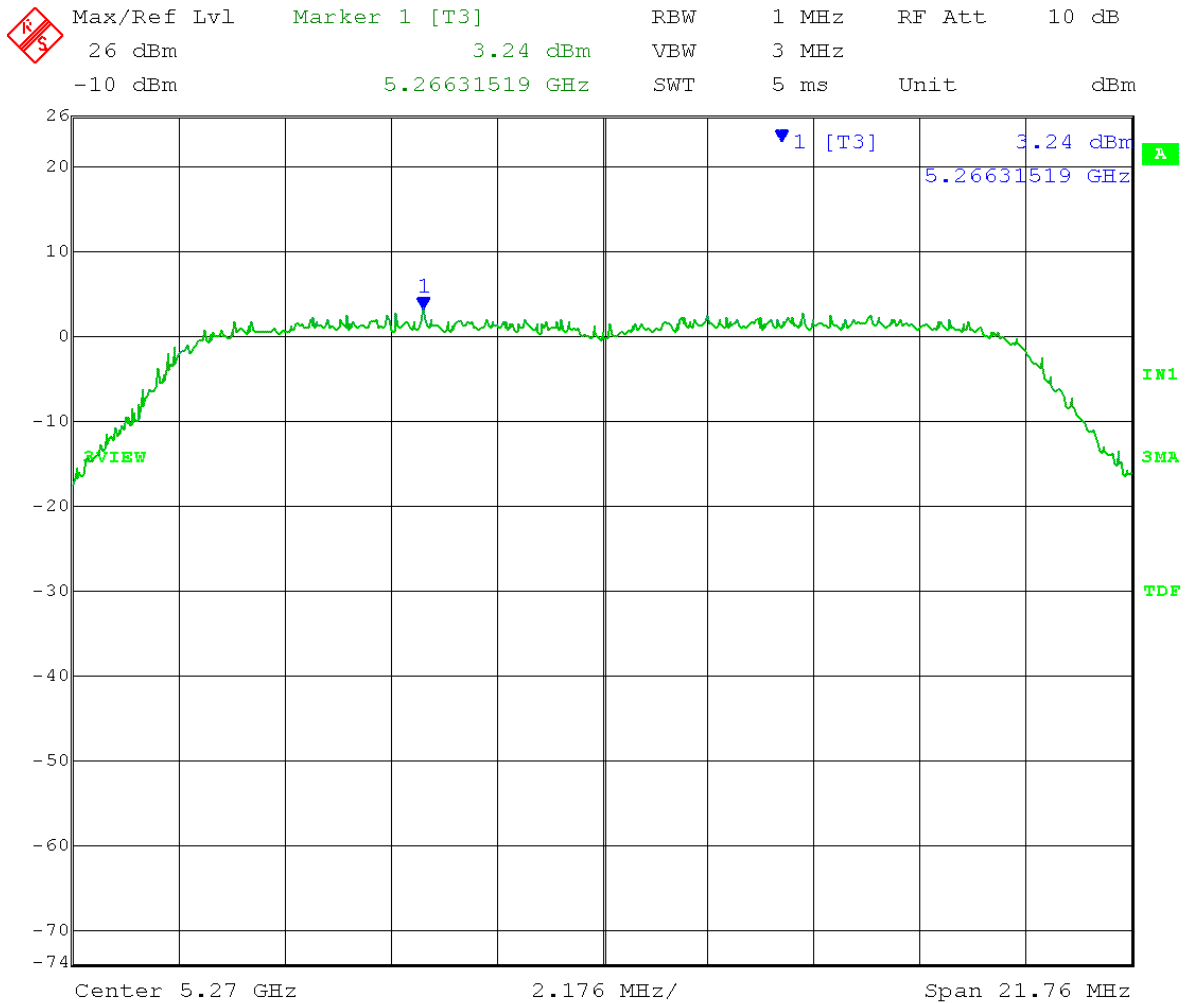

Date: 8.AUG.2013 10:47:43




Max/Ref Lvl Marker 1 [T3] RBW 1 MHz RF Att 10 dB
26 dBm -7.51 dBm VBW 3 MHz
-10 dBm 5.27381563 GHz SWT 5 ms Unit dBm

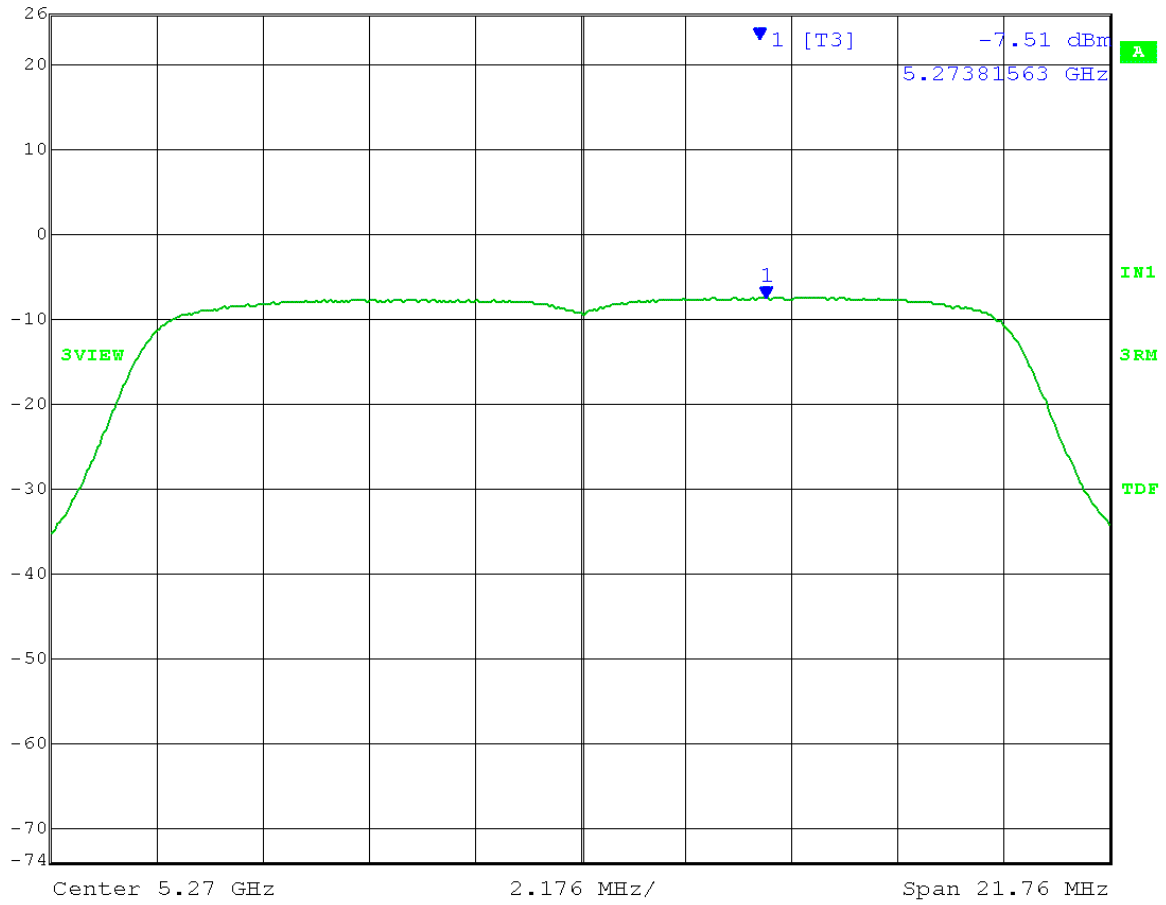

Date: 8.AUG.2013 10:39:15


Test Date: 9-6-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak excursion measurement - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 G) PK excursion measurement – Page 9
 Limit:[15.407(a)(6)]: 13dBm/1MHz
 RBW = 1 MHz
 Detector = peak
 Sweep Time = Auto
 Mid Channel: Transmit = 5.300GHz
 26 dB Emission Bandwidth = 21.70MHz
 Peak excursion = 8.03 - (-2.58) = 10.61 dBm <13 dBm = Pass
 VBW = 3 MHz
 Trace = max-hold
 Output power setting: 10.0
 20MHz BW
 PSD = -2.58dBm

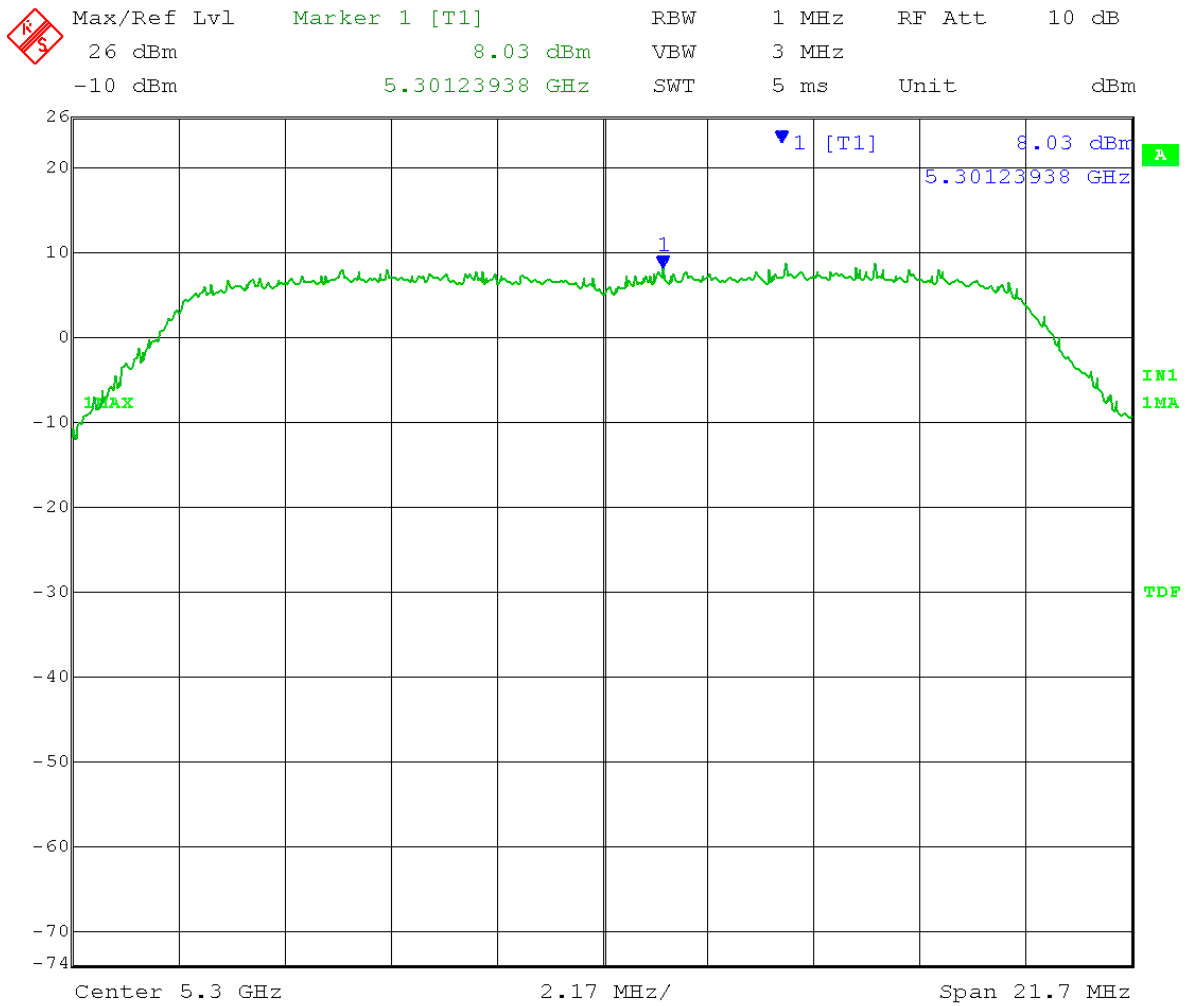

Date: 6.SEP.2013 10:22:20




Max/Ref Lvl Marker 1 [T1] RBW 1 MHz RF Att 10 dB
26 dBm -2.58 dBm VBW 3 MHz
-10 dBm 5.30493577 GHz SWT 5 ms Unit dBm

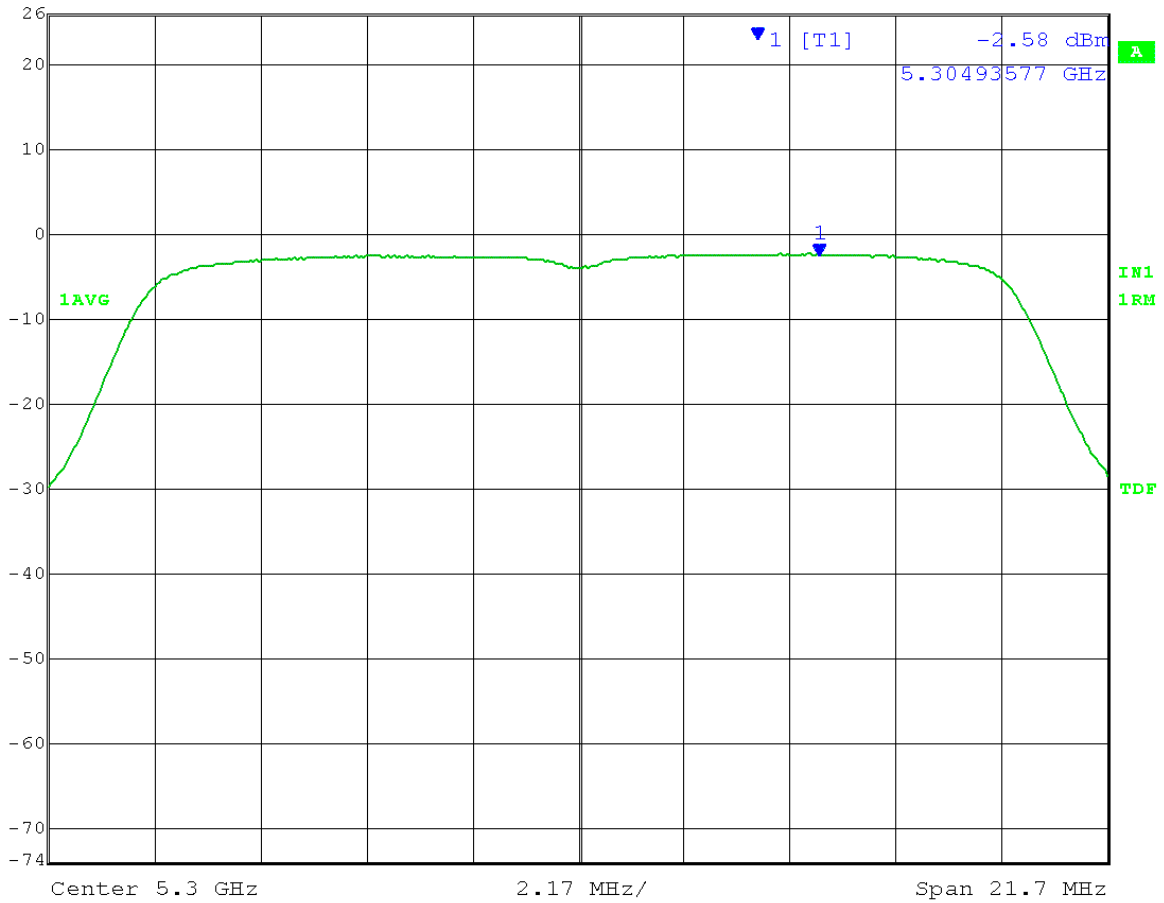

Date: 6.SEP.2013 10:16:33


Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak excursion measurement - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 G) PK excursion measurement – Page 9
 Limit:[15.407(a)(6)]: 13dBm/1MHz
 RBW = 1 MHz
 Detector = peak
 Sweep Time = Auto
 High Channel: Transmit = 5.330GHz
 26 dB Emission Bandwidth = 21.70MHz
 Peak excursion = 2.96 - (-8.23) = 11.19 dBm <13 dBm = Pass

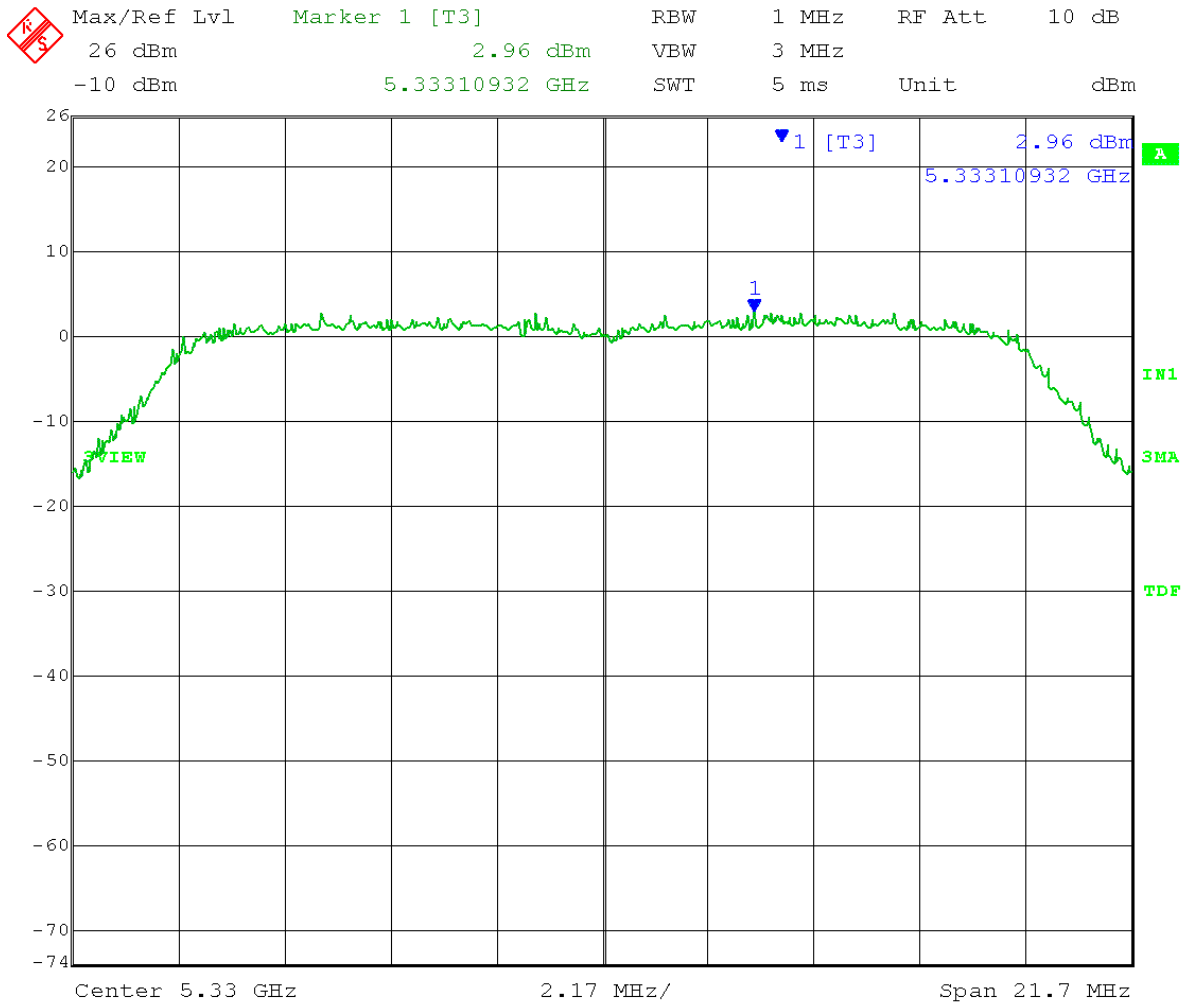

Date: 8.AUG.2013 11:02:17




Max/Ref Lvl Marker 1 [T3] RBW 1 MHz RF Att 10 dB
26 dBm -8.23 dBm VBW 3 MHz
-10 dBm 5.33397906 GHz SWT 5 ms Unit dBm

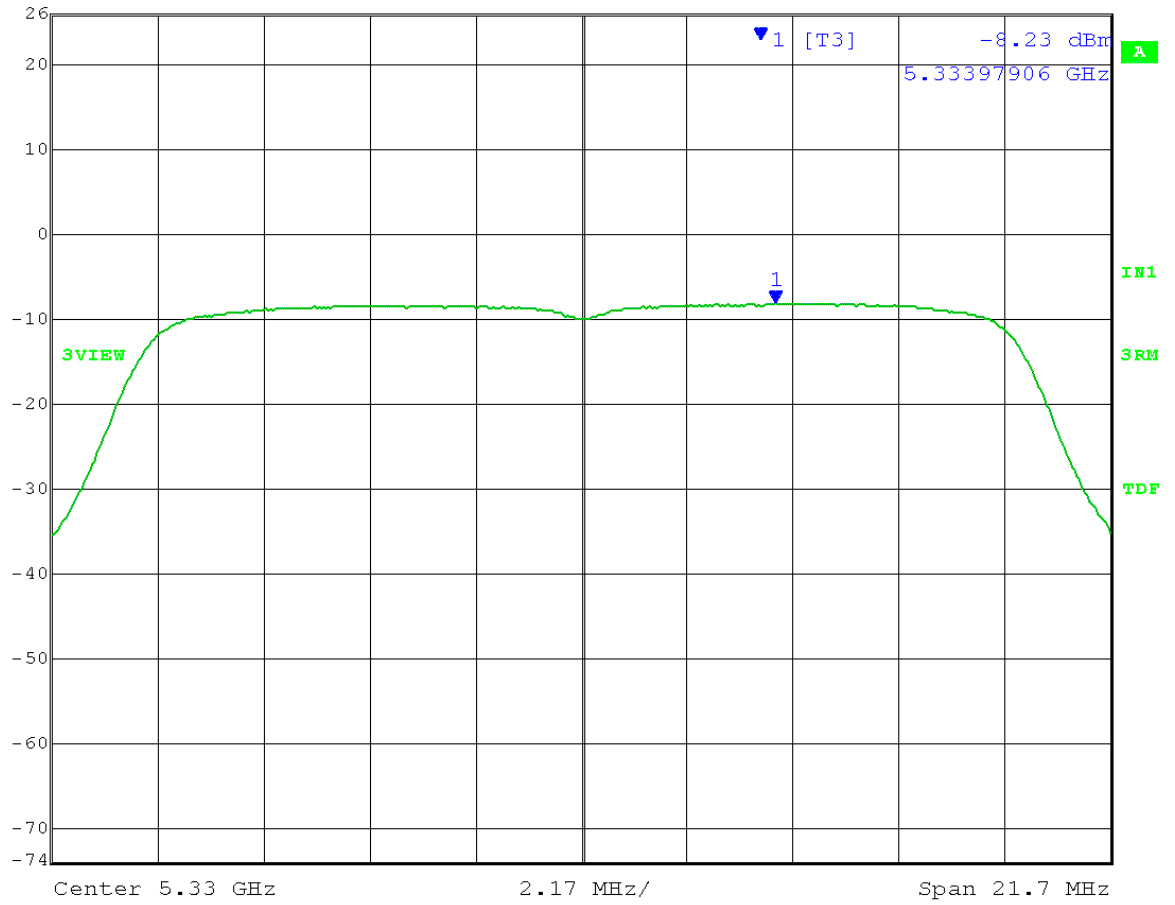

Date: 8.AUG.2013 10:34:29

Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak excursion measurement - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 G) PK excursion measurement – Page 9
 Limit:[15.407(a)(6)]: 13dBm/1MHz
 RBW = 1 MHz
 Detector = peak
 Sweep Time = Auto
 Low Channel: Transmit = 5.280GHz
 26 dB Emission Bandwidth = 44.73MHz
 Peak excursion = -0.60 - (-11.32) = 10.72 dBm < 13 dBm = Pass


VBW = 3 MHz
 Trace = max-hold
 Output power setting: 3.5
 40MHz BW
 PSD = -11.32dBm

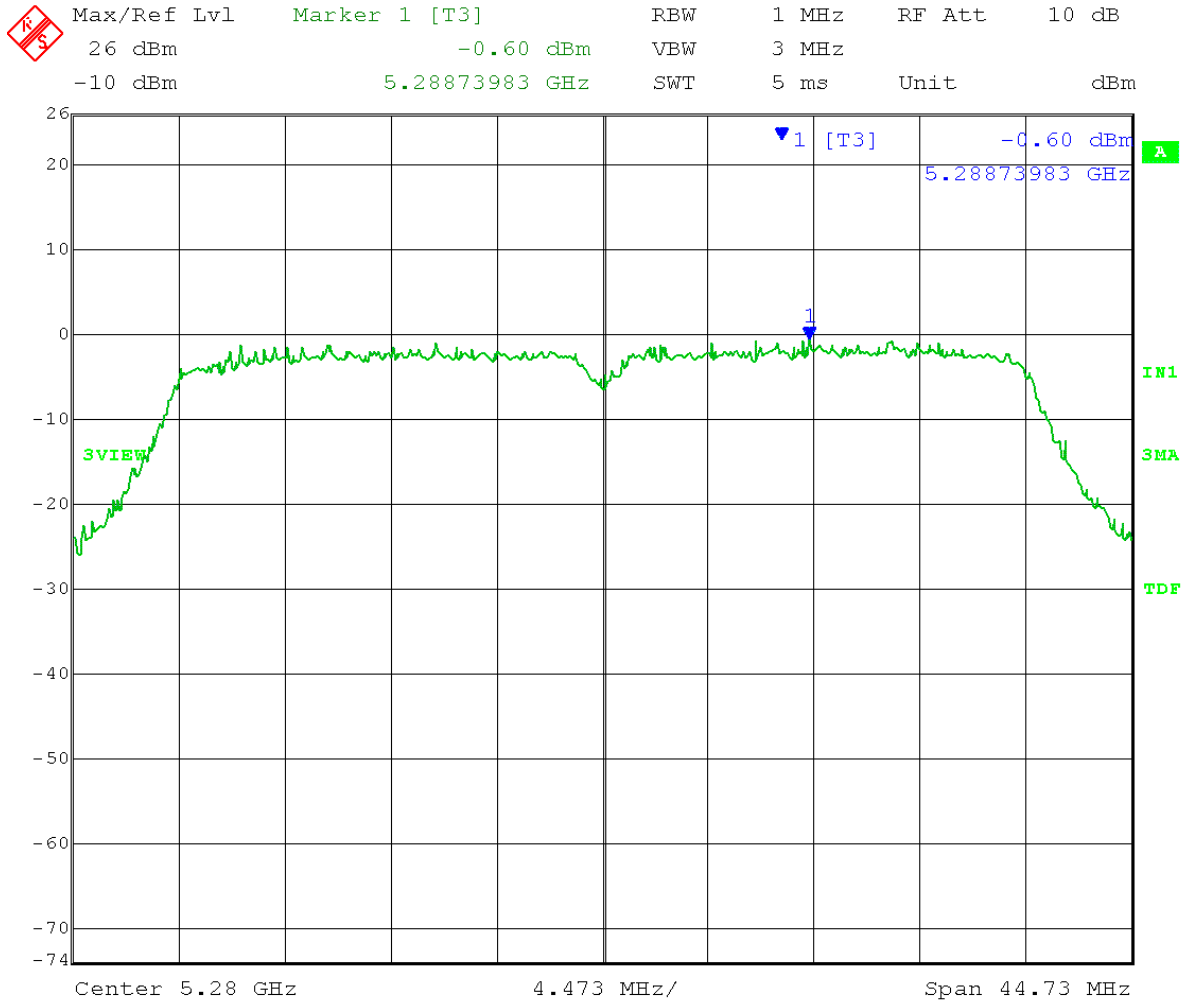

Date: 8.AUG.2013 11:19:33




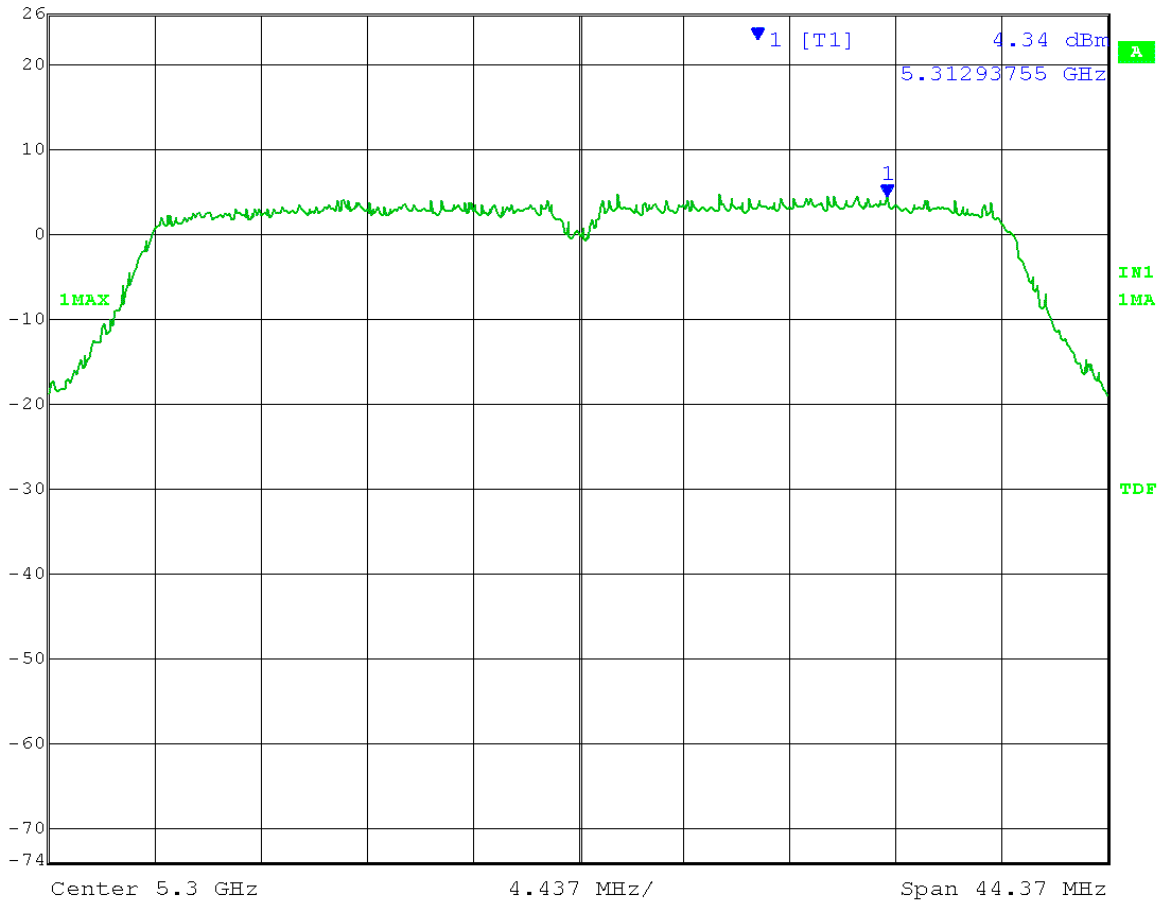
Max/Ref Lvl Marker 1 [T3] RBW 1 MHz RF Att 10 dB
26 dBm -11.32 dBm VBW 3 MHz
-10 dBm 5.29098081 GHz SWT 5 ms Unit dBm

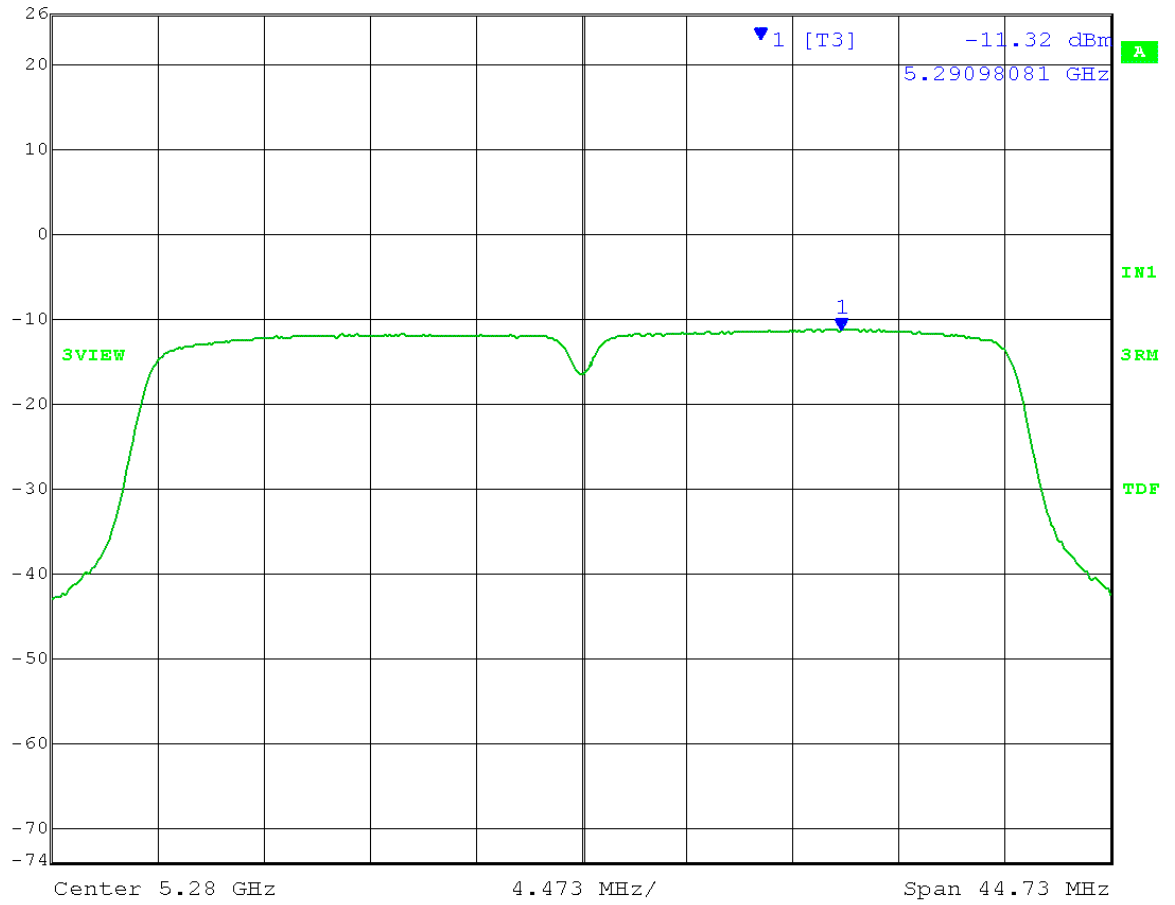

Date: 8.AUG.2013 10:26:47

Test Date: 9-6-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak excursion measurement - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 G) PK excursion measurement – Page 9
 Limit:[15.407(a)(6)]: 13dBm/1MHz
 RBW = 1 MHz
 Detector = peak
 Sweep Time = Auto
 Mid Channel: Transmit = 5.300GHz
 26 dB Emission Bandwidth = 44.37MHz
 Peak excursion = 4.34 - (-6.11) = 10.45 dBm < 13 dBm = Pass


	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
	26 dBm	4.34 dBm	VBW	3 MHz		
	-10 dBm	5.31293755 GHz	SWT	5 ms	Unit	dBm



Date: 6.SEP.2013 09:19:51



Max/Ref Lvl Marker 1 [T1] RBW 1 MHz RF Att 10 dB
26 dBm -6.11 dBm VBW 3 MHz
-10 dBm 5.30902516 GHz SWT 5 ms Unit dBm

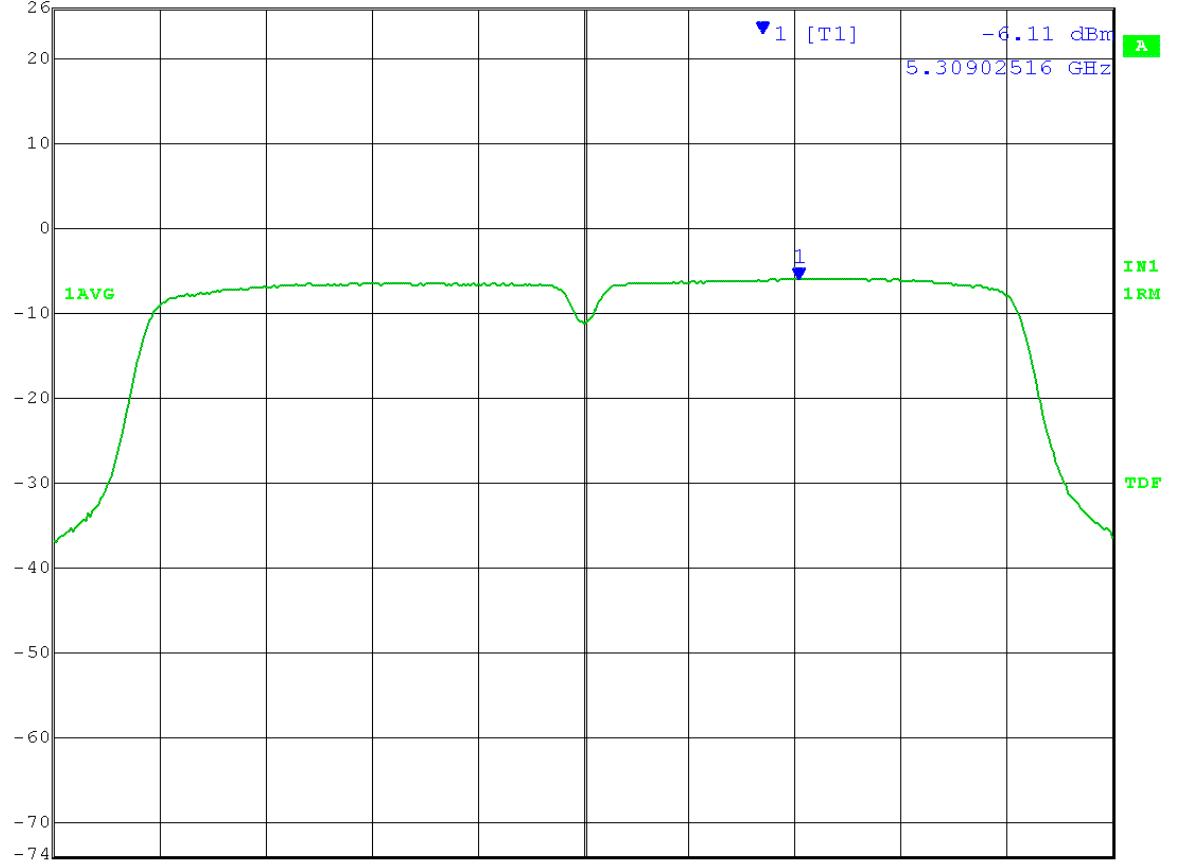


Center 5.3 GHz 4.437 MHz/ Span 44.37 MHz

Date: 6.SEP.2013 09:14:26

Test Date: 8-8-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2GHz: OFDM - ESN# 000456C005DE
 Test: Peak excursion measurement - Conducted
 Operator: Lillian L
 Comment: FCC UNII operating under 15.407 – OET 4/8/2013
 G) PK excursion measurement – Page 9
 Limit:[15.407(a)(6)]: 13dBm/1MHz
 RBW = 1 MHz
 Detector = peak
 Sweep Time = Auto
 High Channel: Transmit = 5.320GHz
 26 dB Emission Bandwidth = 44.61MHz
 Peak excursion = 0.01 - (-11.36) = 11.37 dBm <13 dBm = Pass


VBW = 3 MHz
 Trace = max-hold
 Output power setting: 4.5
 40MHz BW
 PSD = -11.36dBm

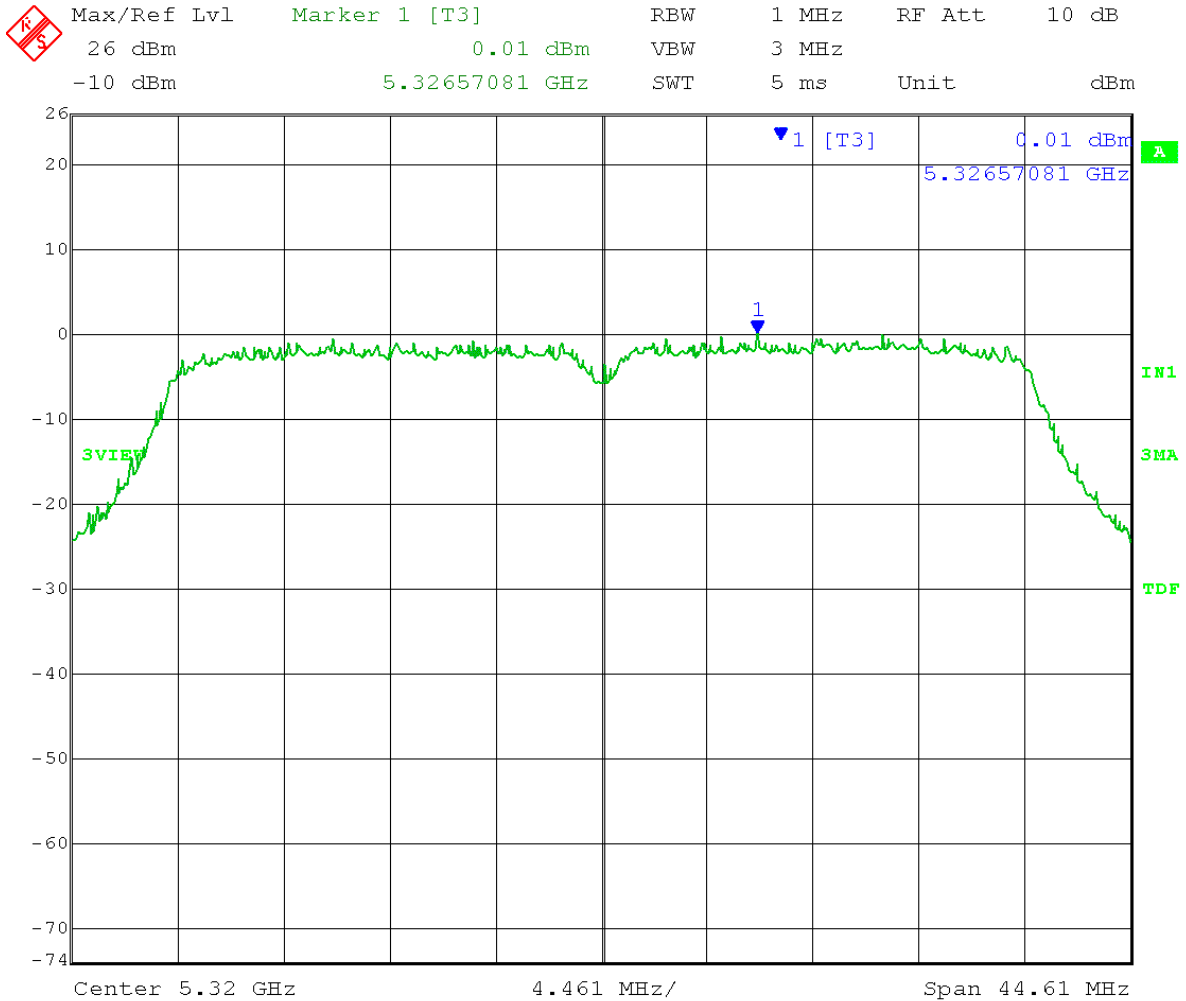

Date: 8.AUG.2013 11:08:45



Max/Ref Lvl Marker 1 [T3] RBW 1 MHz RF Att 10 dB
26 dBm -11.36 dBm VBW 3 MHz
-10 dBm 5.33041496 GHz SWT 5 ms Unit dBm

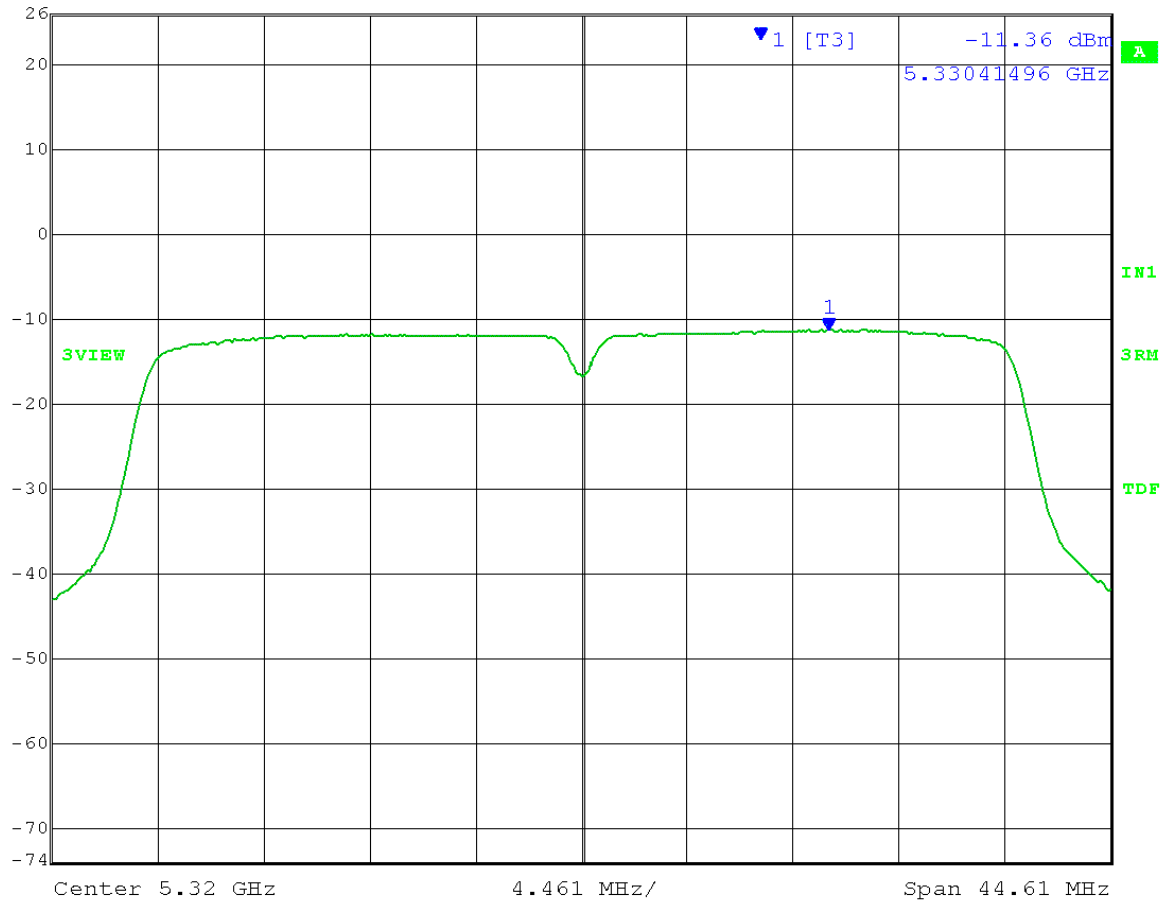

Date: 8.AUG.2013 10:32:09



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix B – Measurement Data

B7.0 Unwanted Emission Levels – Radiated Band-Edge - with antenna connected

Rule Section: Sections 15.407(b)(3) and 15.407(b)(5) / **RSS-210 A9.2(2)**

Test Procedure: FCC KDB 789033 D01 General UNII Test Procedures v01r03 – *Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E*

Section H – Unwanted emission levels
Section H(1) – Unwanted emissions in the restricted bands
Section H(2) – Unwanted emissions that fall outside of the restricted bands
Section H(3) – General Requirements for Unwanted Emissions Measurements
Section H(5) – Procedure for Peak Unwanted Emissions Measurements Above 1 GHz
Section H(6) – Procedure for Average Unwanted Emissions Measurements Above 1 GHz
Section H(6)(c) – Average Detection method

Description: Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

Measure the band-edge emission level using the following settings

PEAK measurements:

RBW = 1 MHz
VBW \geq 3 MHz
Detector = peak
Sweep time = auto
Trace mode = max hold

AVERAGE measurements:

RBW = 1 MHz
VBW \geq 3 MHz
Detector = RMS
Sweep time = auto
Trace mode = trace average 200 traces

Limit: Peak and Average limits of 15.209/**RSS-Gen 7.2.5** were used instead of the -27 dBm/MHz limit of FCC Part 15.407(b)(3)/ **RSS-210 A9.2(2)**.

Results: Passed


Notes: Measurements were taken for MCS15 OFDM modulation at the lowest and highest channels of operation. EUT was set to transmit continuously with 100% duty cycle.

Tested with Cambium Networks 16 dBi Antenna Assembly (Model SCC-90-1) connected

Test Date: 09-5-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower Band-Edge Compliance - Radiated
 (FCC 15.407(b)(3)) - With Antenna (Model#: SCC-90-1) connected
 Operator: Craig B/Lillian L
 Comment: Low Channel: Frequency – 5270 MHz
 Output power setting: 6.0 on both chains
 Channel bandwidth: 20 MHz
 Modulation: OFDM; MCS15
 Polarization: Horizontal
 Band-Edge Frequency: 5.250 GHz


Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”


15.209 Average Limit: 54 dBμV/m AVERAGE at a test distance of 3 meter. Result = Pass

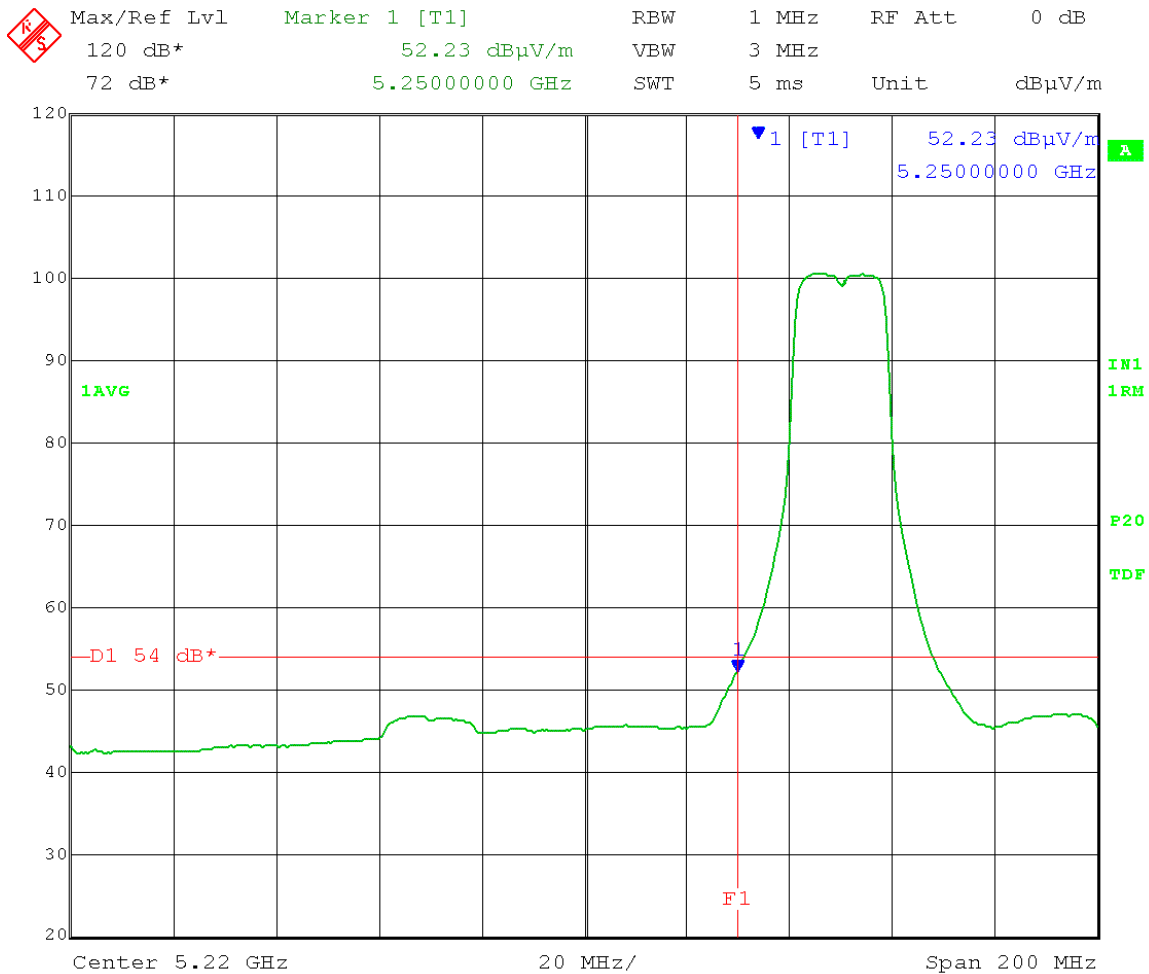

Date: 5.SEP.2013 15:07:22

Band-Edge Peak Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
	120 dB*	68.38 dB μ V/m	VBW	3 MHz		
	72 dB*	5.25000000 GHz	SWT	5 ms	Unit	dB μ V/m

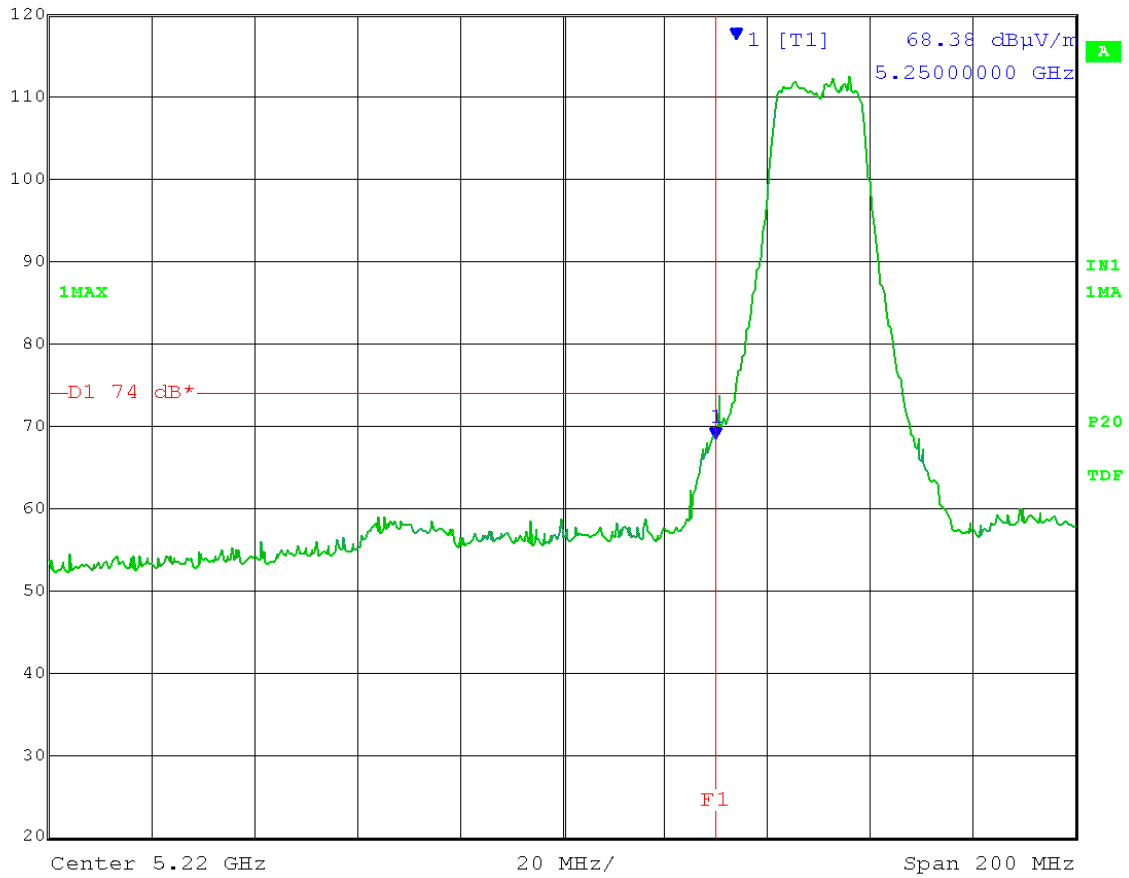


Date: 5.SEP.2013 15:09:34

Test Date: 09-5-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower Band-Edge Compliance
 (FCC 15.407(b)(3)) - With Antenna (Model#: SCC-90-1) connected
 Operator: Craig B/Lillian L
 Comment: Low Channel: Frequency – 5270 MHz
 Output power setting: 7.0 on both chains
 Channel bandwidth: 20 MHz
 Modulation: OFDM; MCS15
 Polarization: Vertical
 Band-Edge Frequency: 5.250 GHz


Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Average Limit: 54 dBμV/m AVERAGE at a test distance of 3 meter. Result = Pass

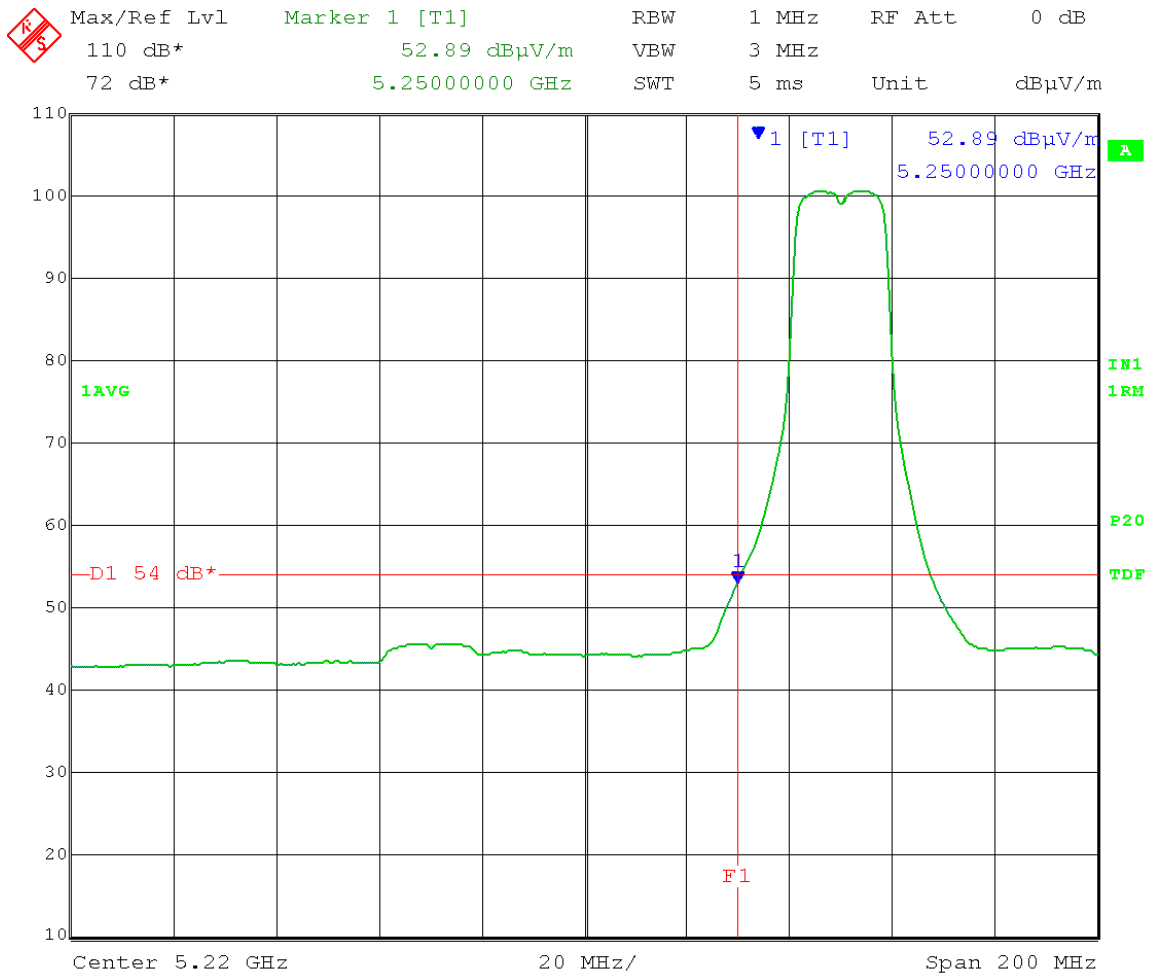

Date: 5.SEP.2013 14:27:09

Band-Edge Peak Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

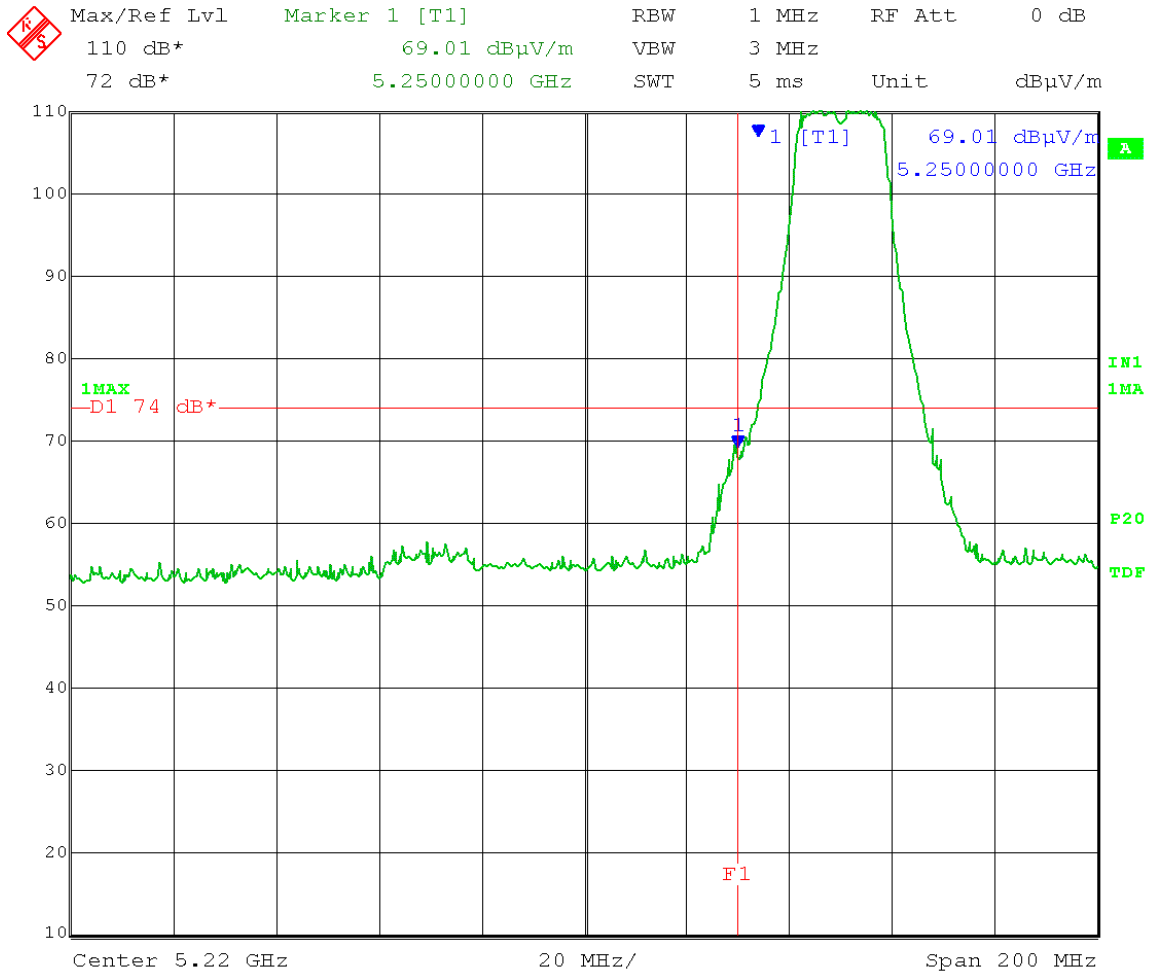


Date: 5.SEP.2013 14:30:11

Test Date: 09-5-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Upper Band-Edge Compliance - Radiated - AVG
 (FCC 15.407(b)(3)) - With Antenna (Model#: SCC-90-1) connected
 Operator: Craig B/Lillian L
 Comment: High Channel: Frequency - 5330 MHz
 Output power setting: 4.5 on both chains
 Channel bandwidth: 20 MHz
 Modulation: OFDM; MCS15
 Polarization: Horizontal
 Band-Edge Frequency: 5.350 GHz
 Restricted Bandedge Frequency: 5.350 GHz


Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): "an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit."


15.209 Average Limit: 54 dB μ V/m AVERAGE at a test distance of 3 meter. Result = Pass

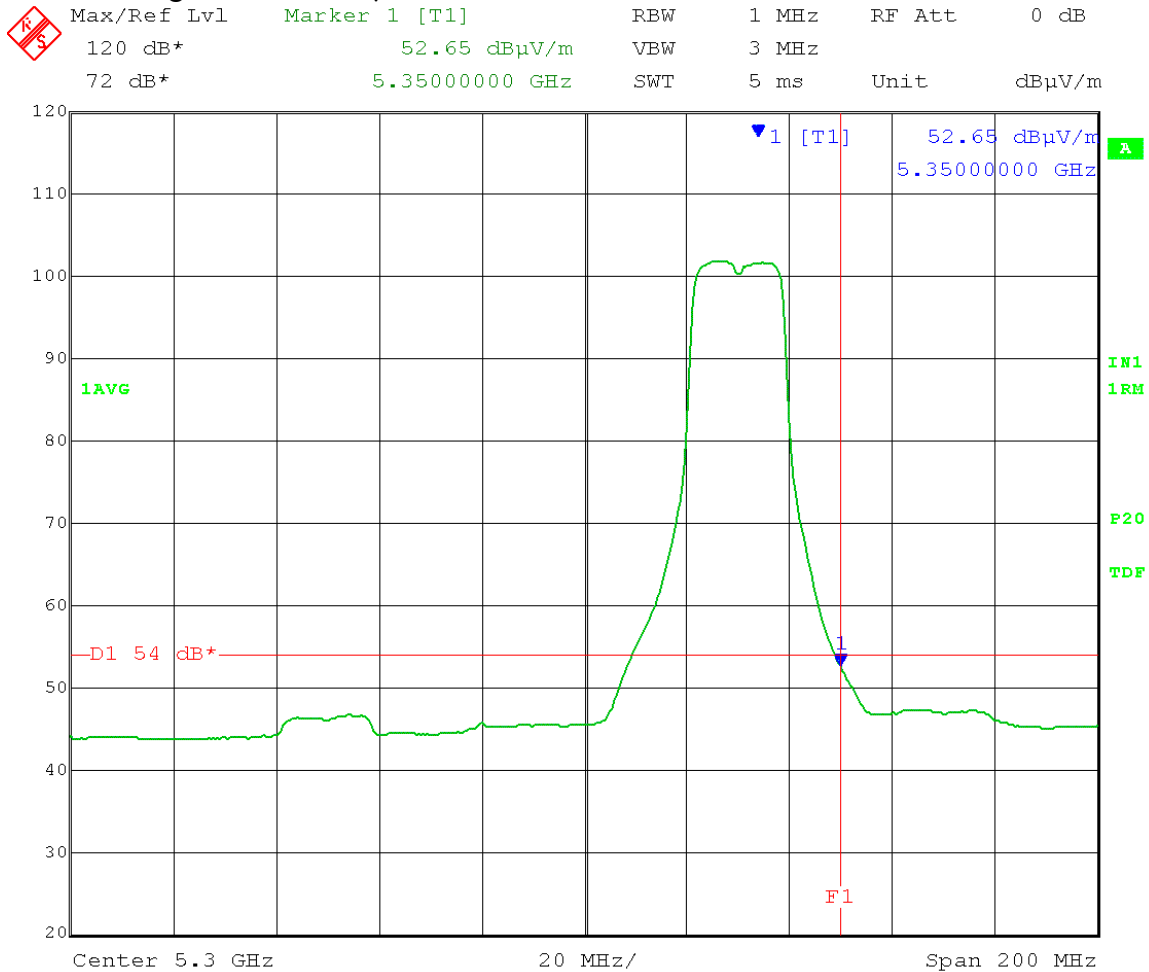

Date: 5.SEP.2013 15:29:25

Band-Edge Peak Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
	120 dB*	66.26 dB μ V/m	VBW	3 MHz		
	72 dB*	5.35000000 GHz	SWT	5 ms	Unit	dB μ V/m

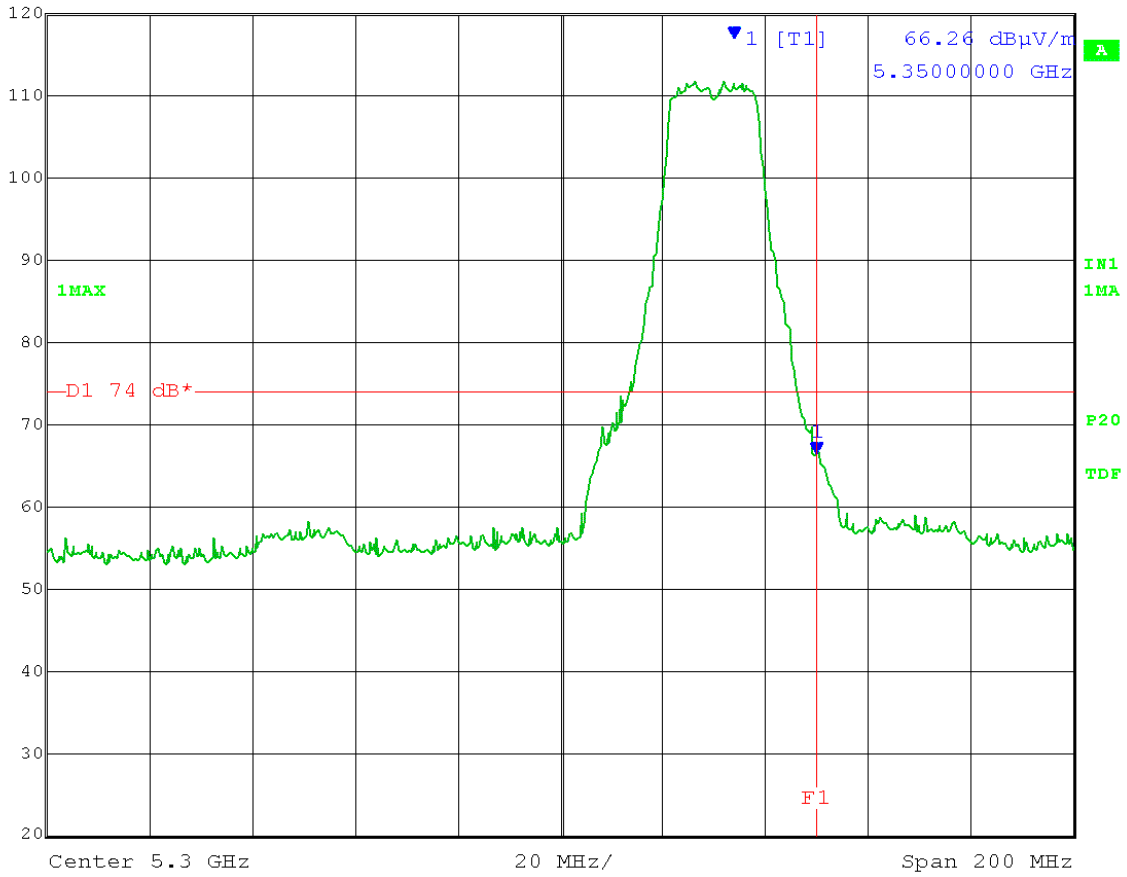


Date: 5.SEP.2013 15:31:22

Test Date: 09-5-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Upper Band-Edge Compliance - Radiated
 (FCC 15.407(b)(3)) - With Antenna (Model#: SCC-90-1) connected
 Operator: Craig B/Lillian L
 Comment: High Channel: Frequency – 5330 MHz
 Output power setting: 7.5 on both chains
 Channel bandwidth: 20 MHz
 Modulation: OFDM; MCS15
 Polarization: Vertical
 Band-Edge Frequency: 5.350 GHz
 Restricted Bandedge Frequency: 5.350 GHz


Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Limit: 54 dB μ V/m AVERAGE at a test distance of 3 meter. Result = Pass

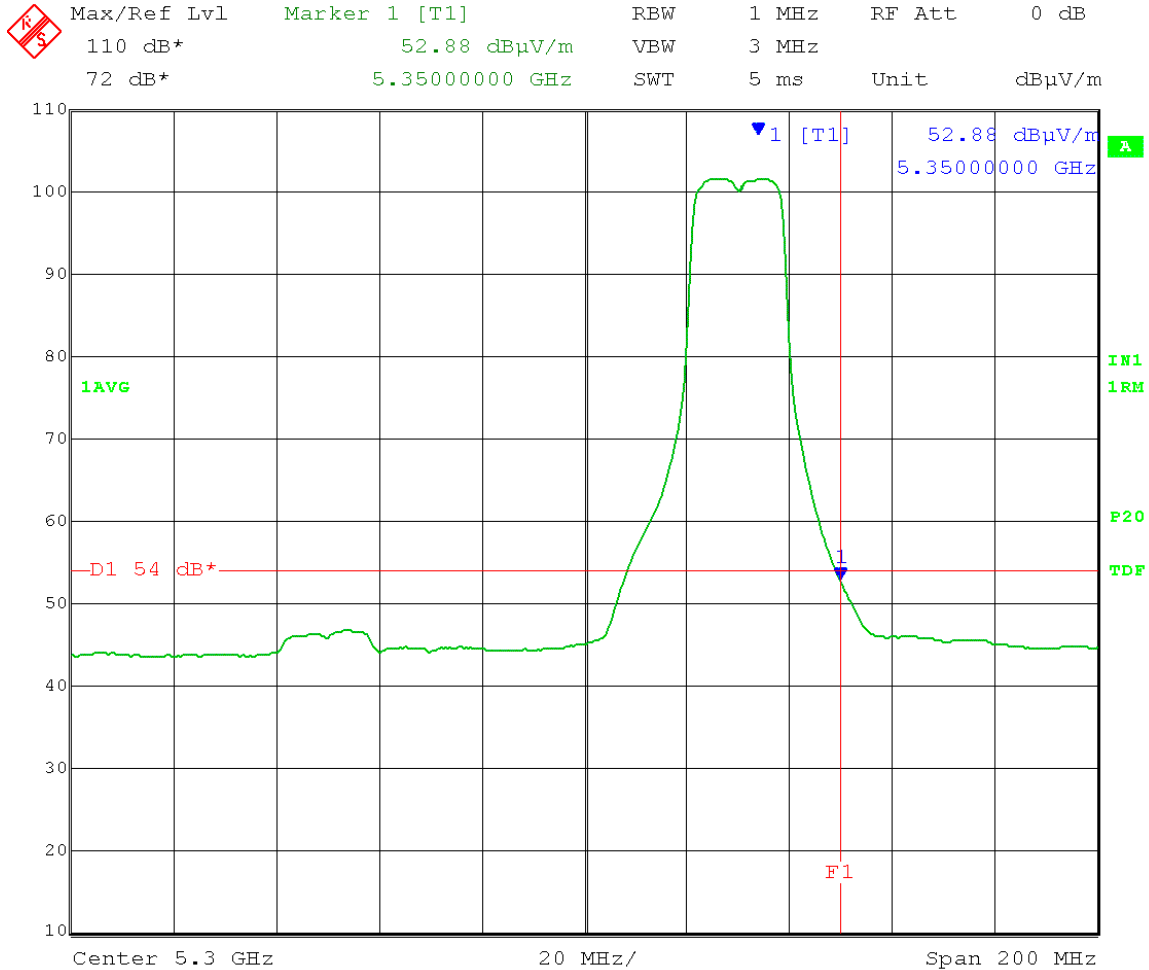

Date: 5.SEP.2013 14:44:19

Band-Edge Peak Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

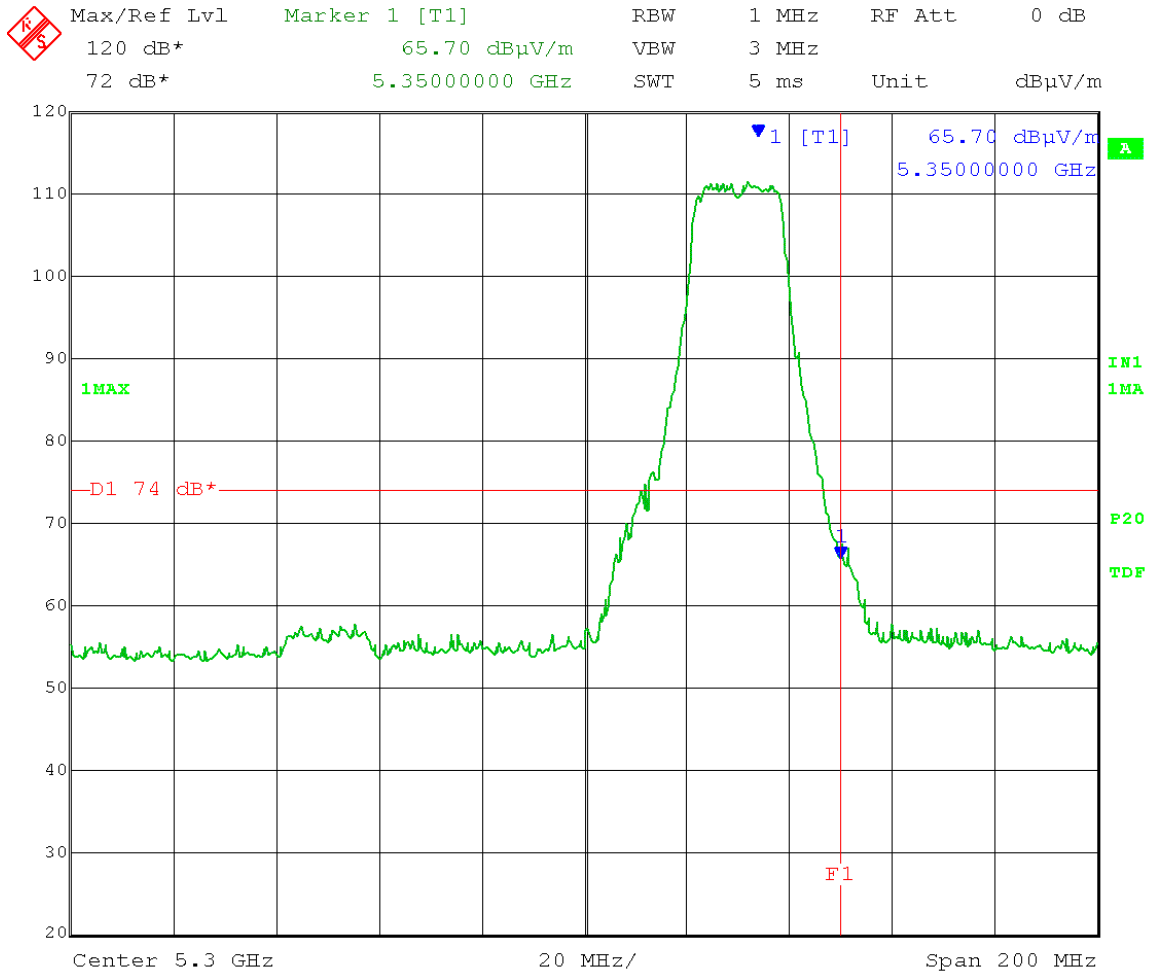


Date: 5.SEP.2013 14:45:14

Test Date: 09-5-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower Band-Edge Compliance - Radiated
 (FCC 15.407(b)(3)) - With Antenna (Model#: SCC-90-1) connected
 Operator: Craig B/Lillian L
 Comment: Low Channel: Frequency – 5280 MHz
 Output power setting: 3.0 on both chains
 Channel bandwidth: 40 MHz
 Modulation: OFDM; MCS15
 Polarization: Horizontal
 Band-Edge Frequency: 5.250 GHz

Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”


15.209 Average Limit: 54 dB μ V/m AVERAGE at a test distance of 3 meter. Result = Pass

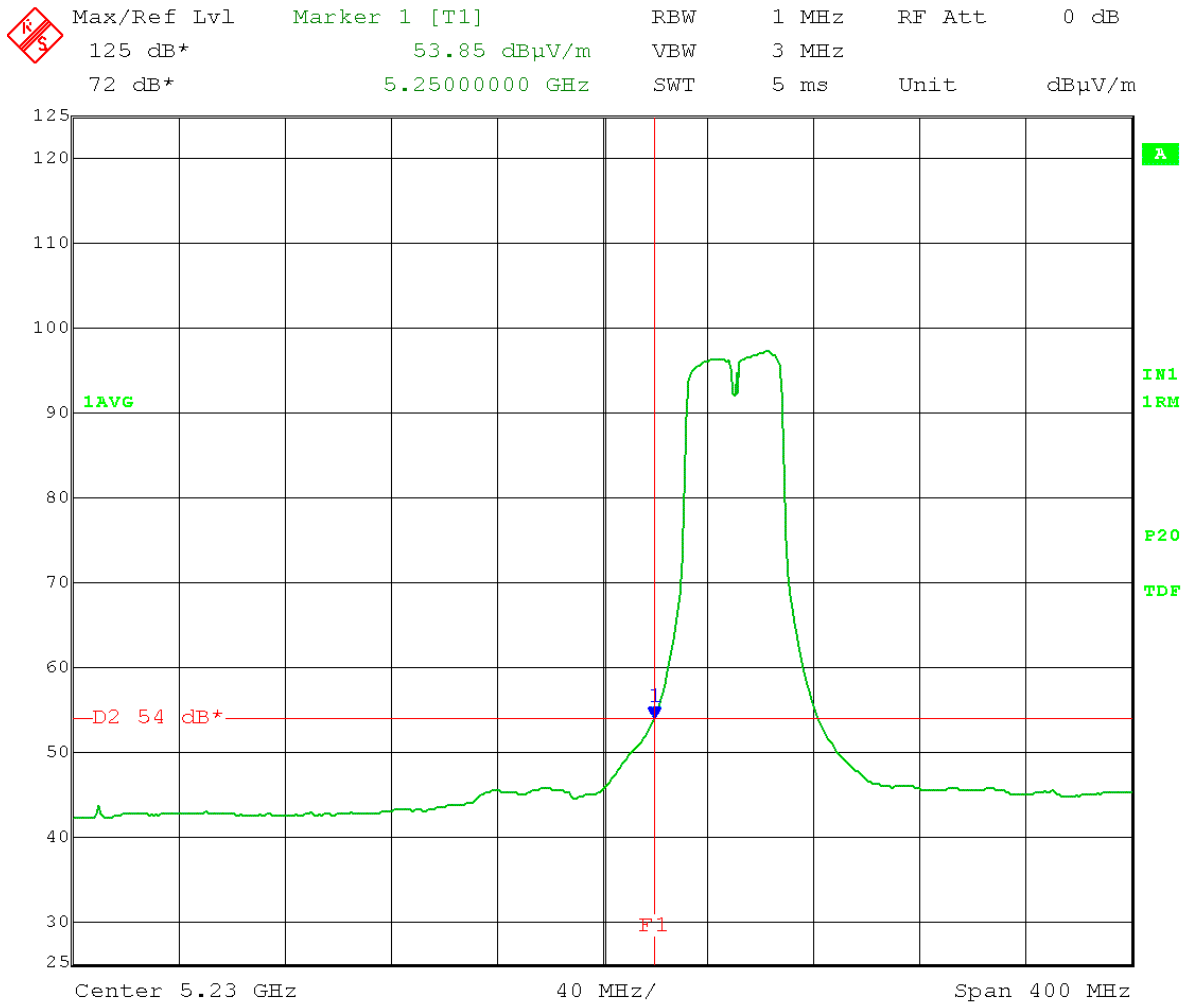

Date: 5.SEP.2013 11:33:07

Band-Edge Peak Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
	125 dB*	69.12 dB μ V/m	VBW	3 MHz		
	72 dB*	5.25000000 GHz	SWT	5 ms	Unit	dB μ V/m

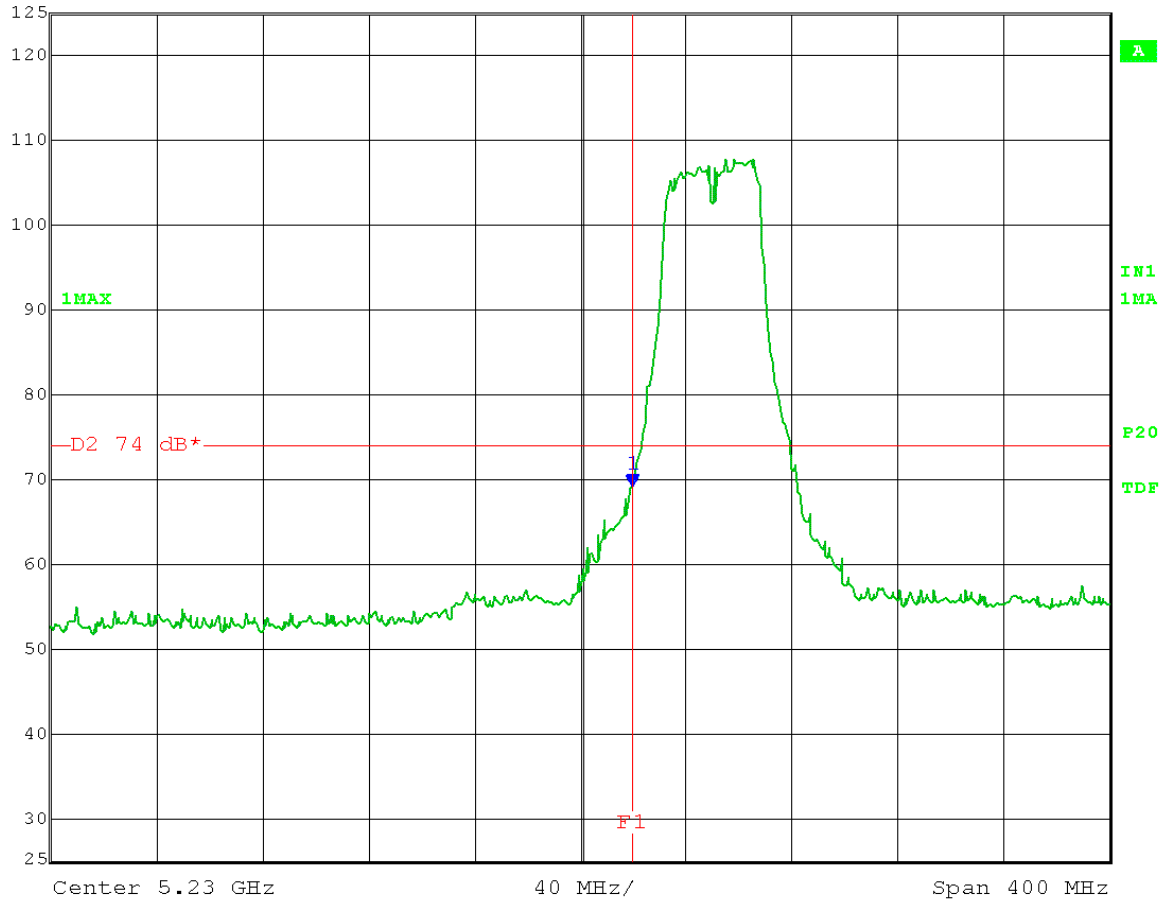


Date: 5.SEP.2013 10:45:56

Test Date: 09-5-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower Band-Edge Compliance - Radiated
 (FCC 15.407(b)(3)) - With Antenna (Model#: SCC-90-1) connected
 Operator: Craig B/Lillian L
 Comment: Low Channel: Frequency – 5280 MHz
 Output power setting: 3.5 on both chains
 Channel bandwidth: 40 MHz
 Modulation: OFDM; MCS15
 Polarization: Vertical
 Band-Edge Frequency: 5.250 GHz


Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Limit: 54 dB μ V/m AVERAGE at a test distance of 3 meter. Result = Pass

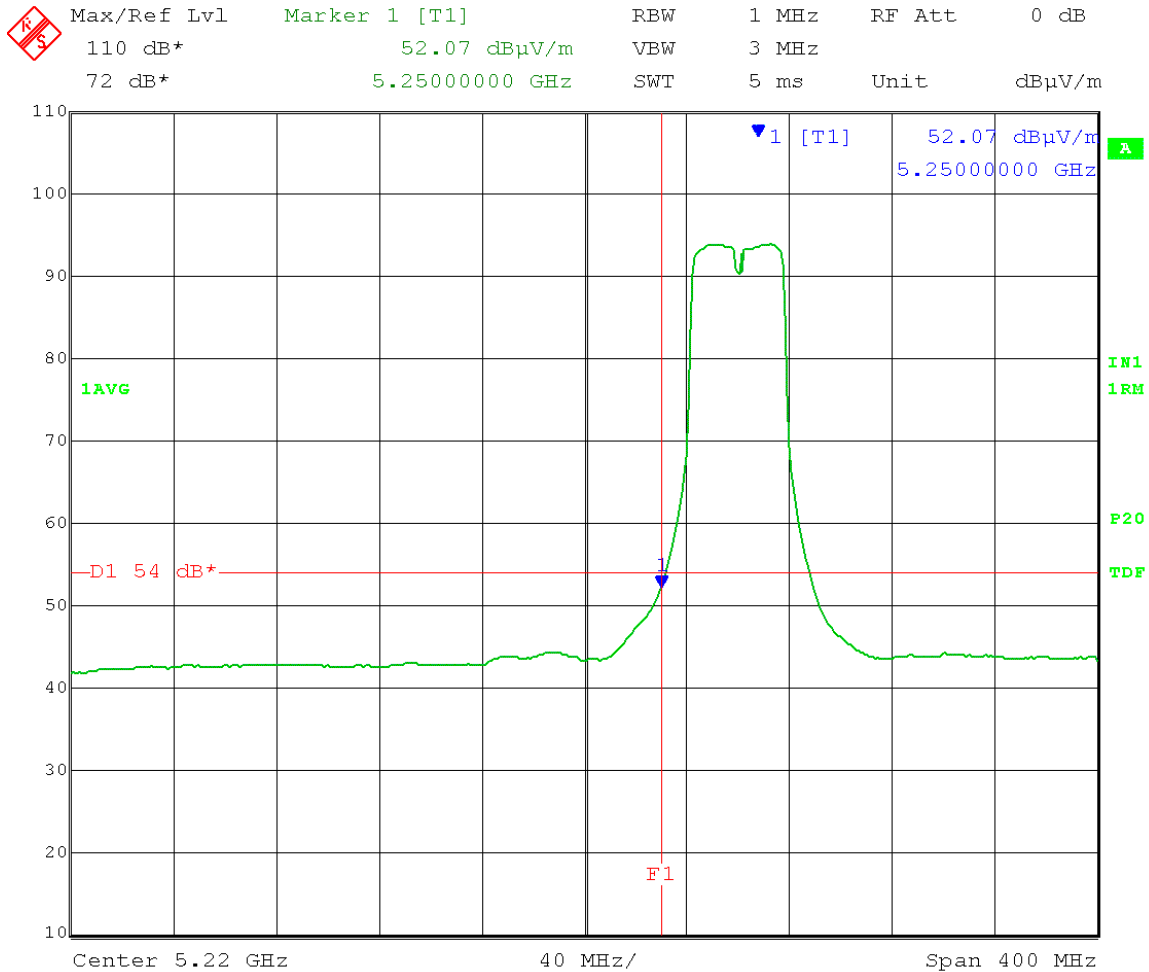

Date: 5.SEP.2013 14:36:18

Band-Edge Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

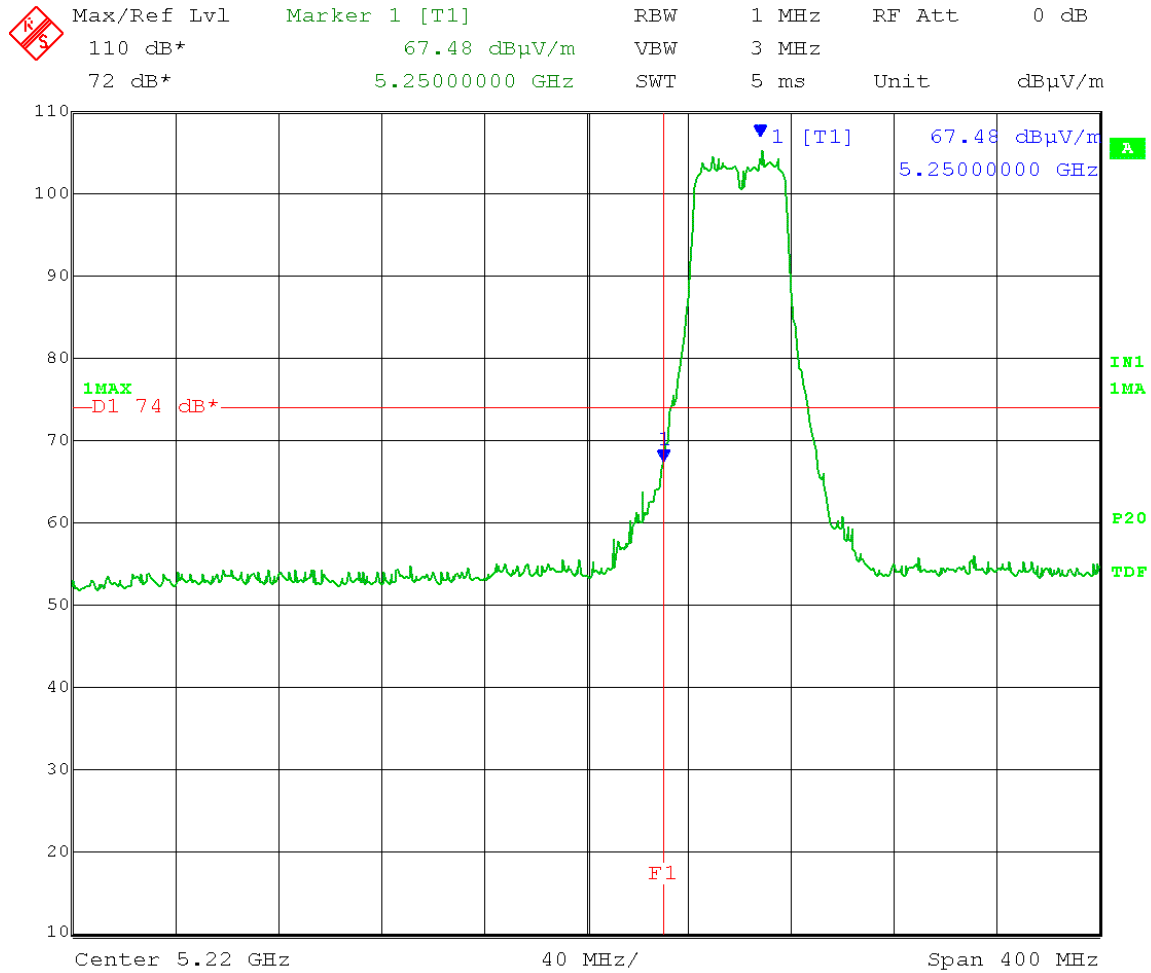


Date: 5.SEP.2013 14:36:58

Test Date: 09-4-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Upper Band-Edge Compliance - Radiated
 (FCC 15.407(b)(3)) - With Antenna (Model#: SCC-90-1) connected
 Operator: Craig B/Lillian L
 Comment: High Channel: Frequency – 5315 MHz
 Output power setting: 4.5 on both chains
 Channel bandwidth: 40 MHz
 Modulation: OFDM; MCS15
 Polarization: Horizontal
 Band-Edge Frequency: 5.350 GHz
 Restricted Bandedge Frequency: 5.350 GHz


Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Limit: 54 dBμV/m AVERAGE at a test distance of 3 meter. Result = Pass

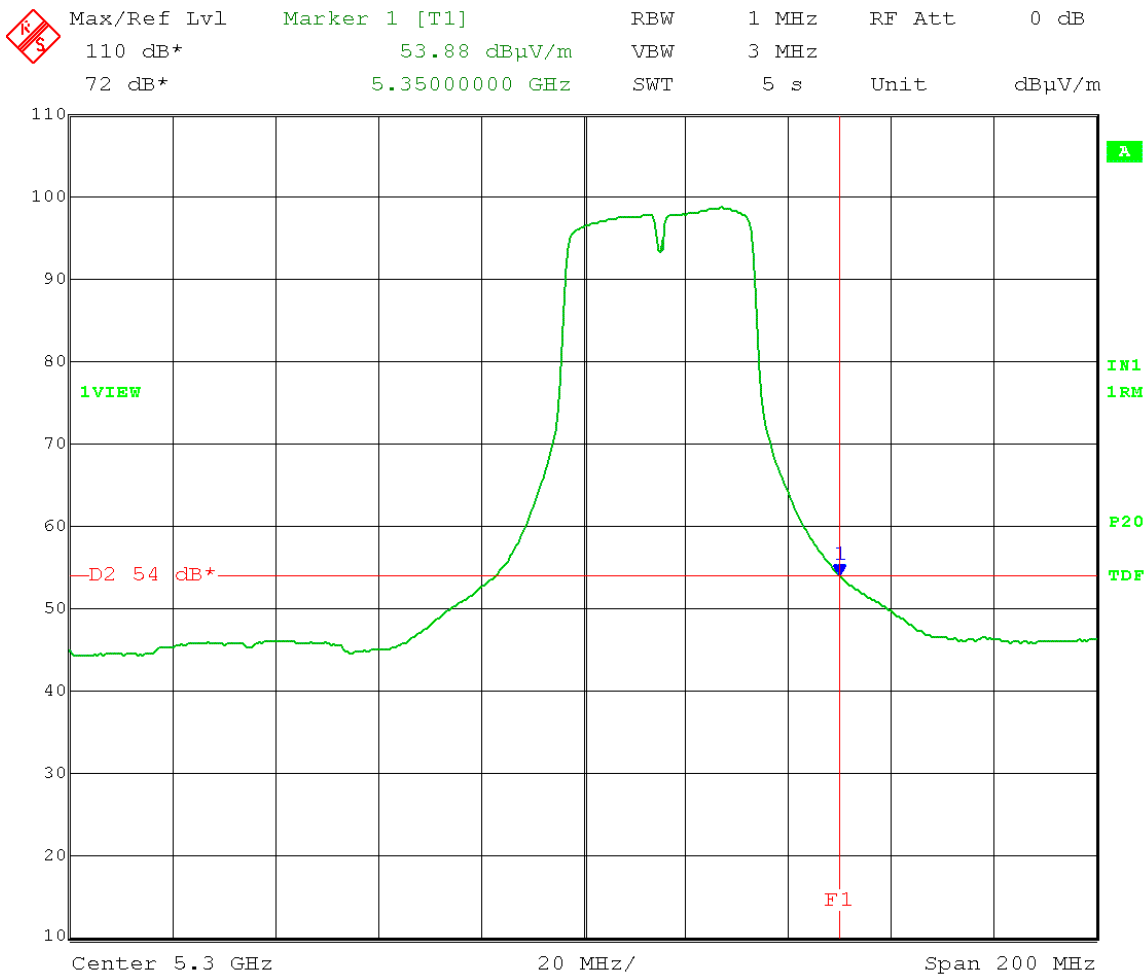

Date: 5.SEP.2013 09:30:47

Band-Edge Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

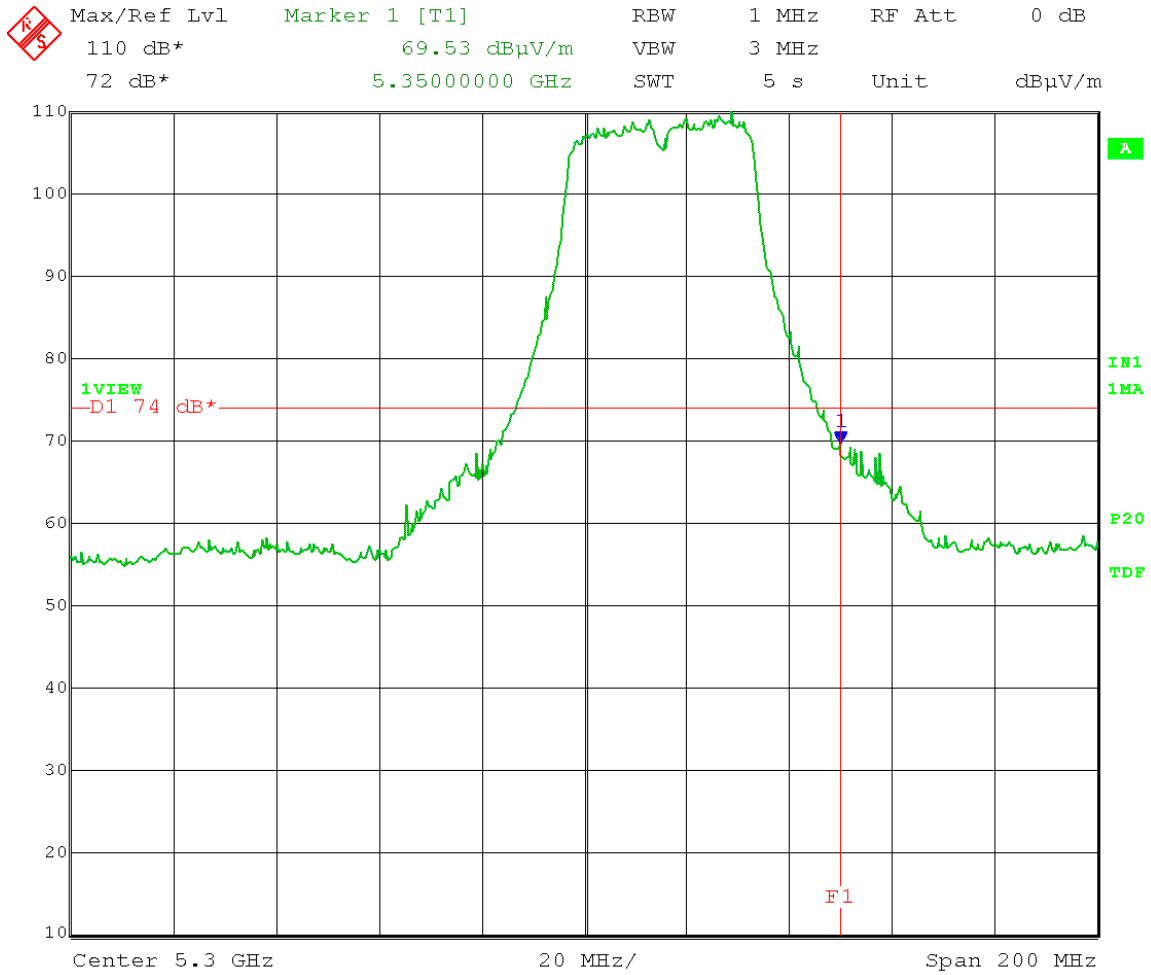


Date: 5.SEP.2013 09:32:49

Test Date: 09-5-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Upper Band-Edge Compliance - Radiated
 (FCC 15.407(b)(3)) - With Antenna (Model#: SCC-90-1) connected
 Operator: Craig B/Lillian L
 Comment: High Channel: Frequency – 5315 MHz
 Output power setting: 7.5 on both chains
 Channel bandwidth: 40 MHz
 Modulation: OFDM; MCS15
 Polarization: Vertical
 Band-Edge Frequency: 5.350 GHz
 Restricted Bandedge Frequency: 5.350 GHz


Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Limit: 54 dBμV/m AVERAGE at a test distance of 3 meter. Result = Pass

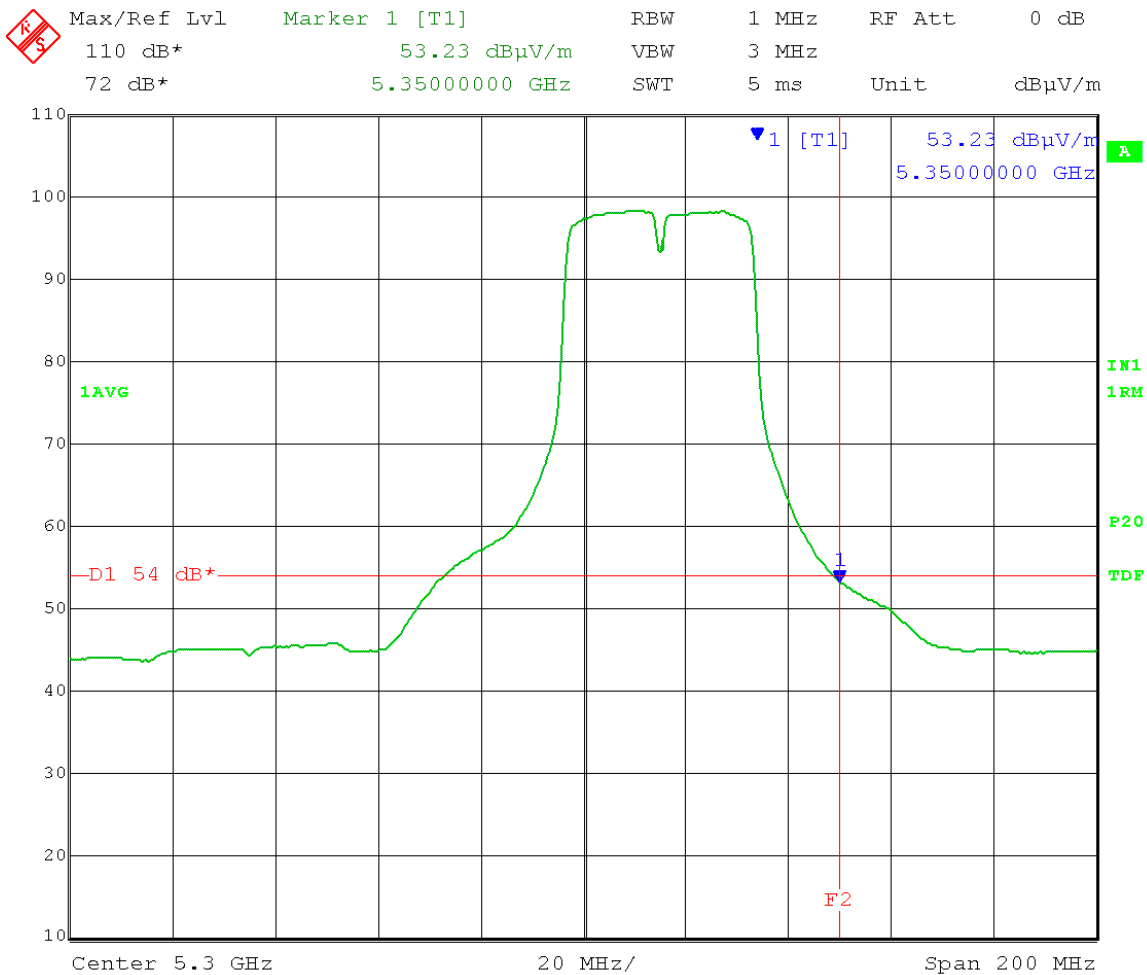

Date: 5.SEP.2013 14:06:27

Band-Edge Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

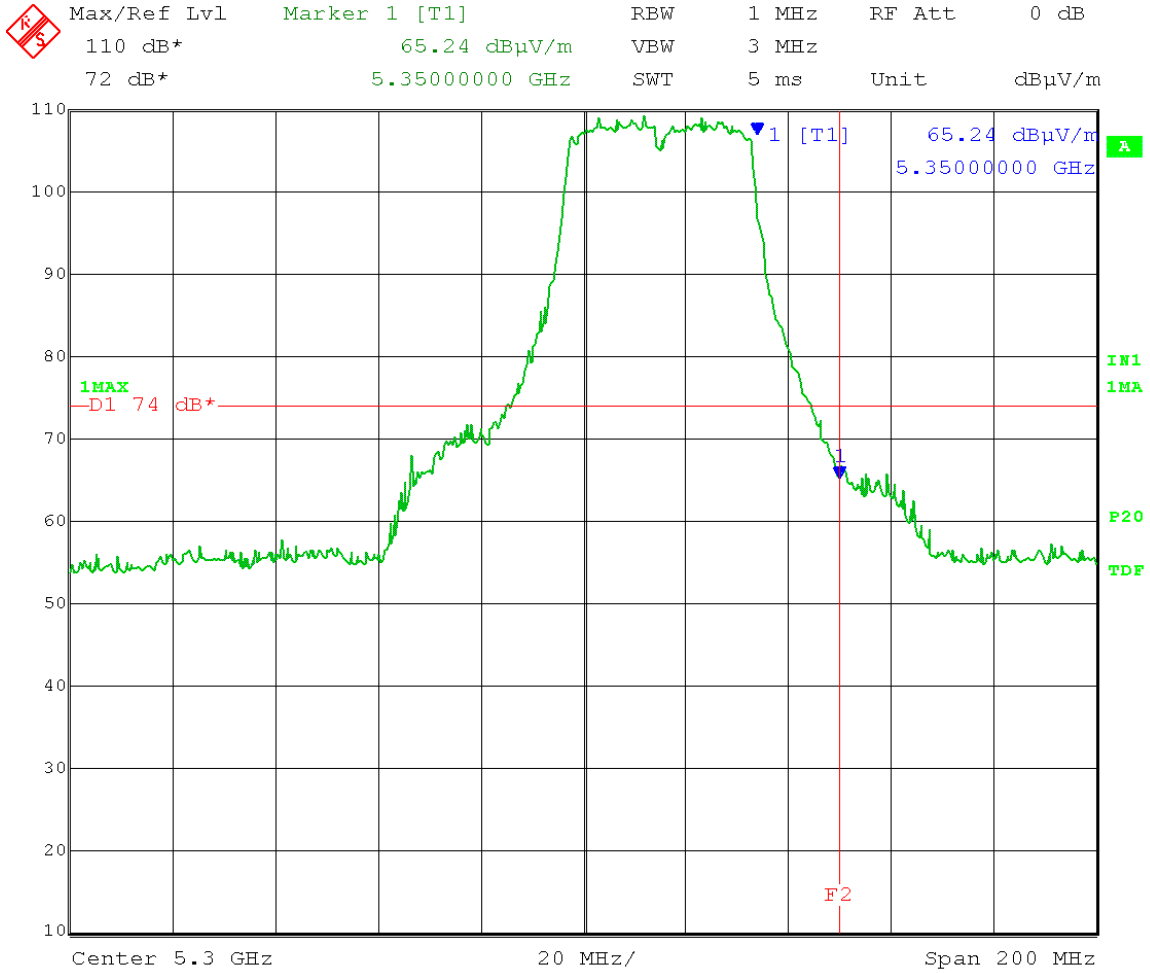


Date: 5.SEP.2013 14:07:07

Test Date: 09-05-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower & Upper Band-Edge Compliance
 (FCC 15.407(b)(3)) - With Antenna (Model#:SCC-90-1) connected
 Operator: Lillian L
 Comment: Middle Channel: Frequency – 5300 MHz
 Output power setting: 11.0 on both chains
 Channel bandwidth: 20 MHz
 Modulation: OFDM; MCS15
 Polarization: Vertical
 Lower Band-Edge Frequency: 5.250 GHz
 Upper Band-Edge Frequency: 5.350 GHz

Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Average Limit: 54 dB μ V/m AVERAGE at a test distance of 3 meter. Result = Pass

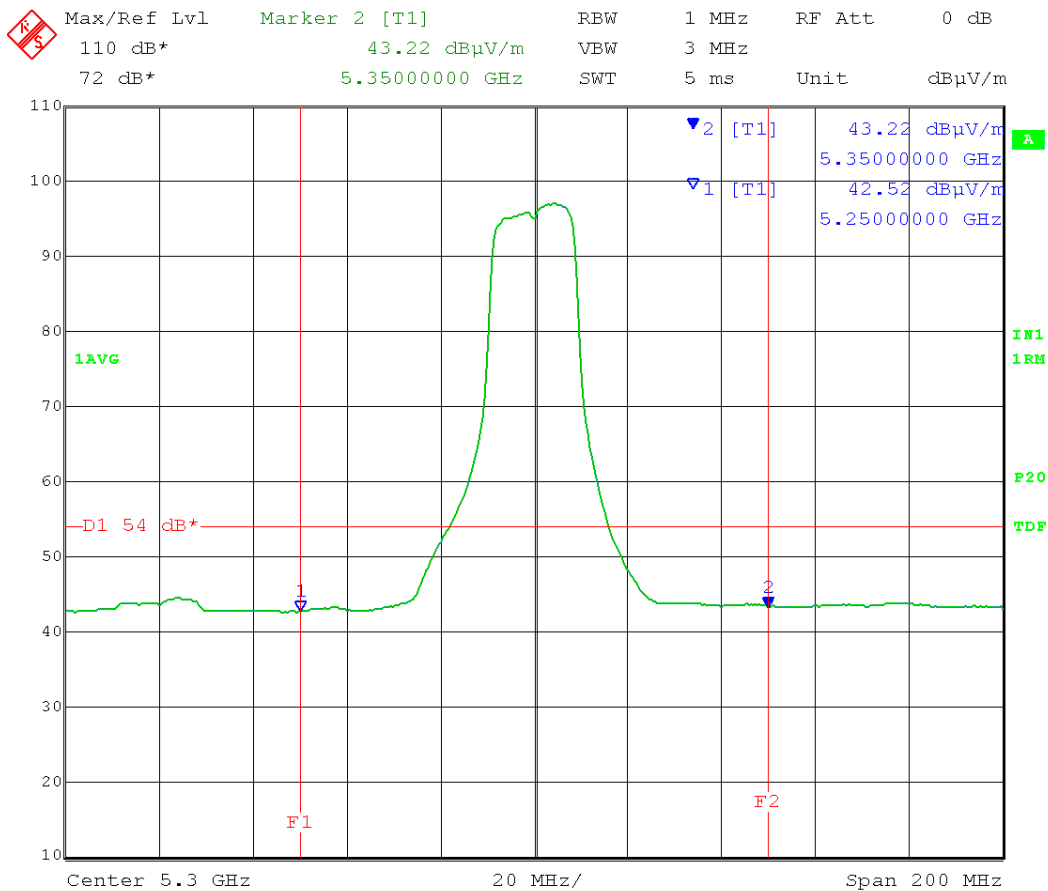


Date: 5.SEP.2013 13:44:05

Test Date: 09-05-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower & Upper Band-Edge Compliance
 (FCC 15.407(b)(3)) - With Antenna (Model#:SCC-90-1) connected
 Operator: Lillian L
 Comment: Middle Channel: Frequency – 5300 MHz
 Output power setting: 11.0 on both chains
 Channel bandwidth: 20 MHz
 Modulation: OFDM; MCS15
 Polarization: Vertical
 Lower Band-Edge Frequency: 5.250 GHz
 Upper Band-Edge Frequency: 5.350 GHz

Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Peak Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

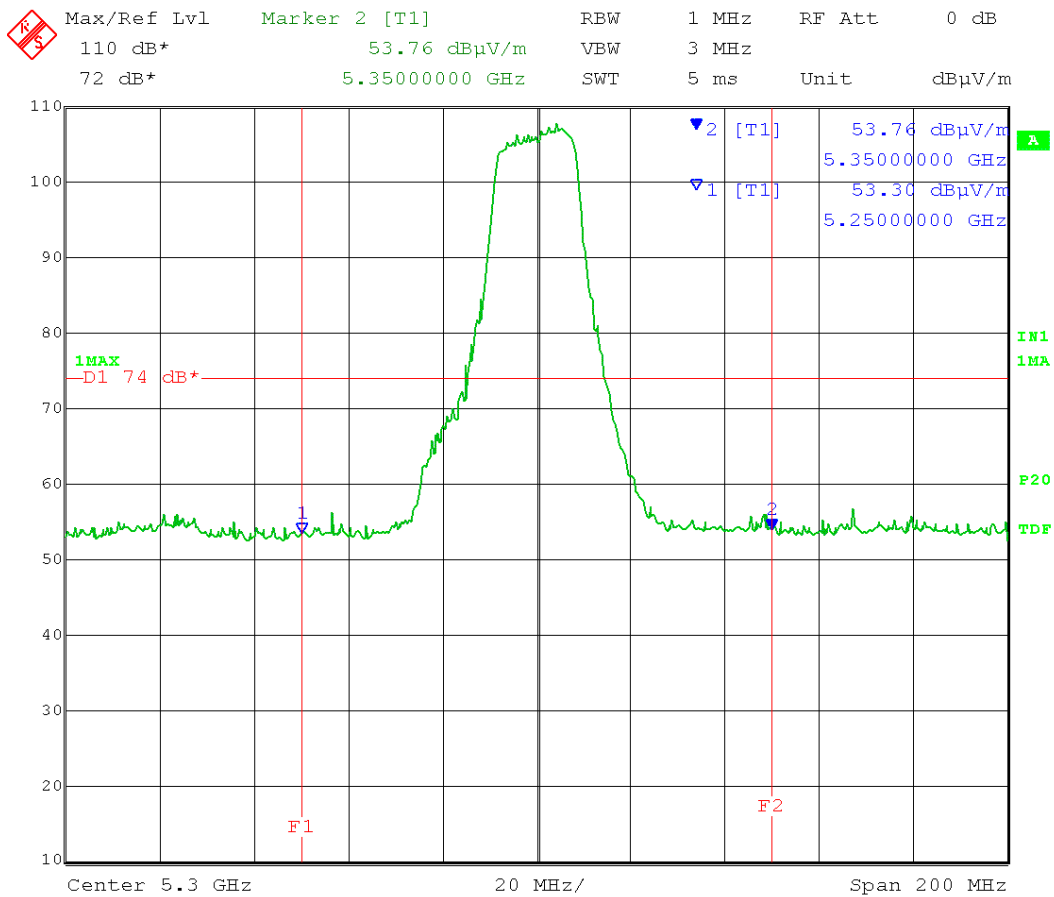


Date: 5.SEP.2013 13:42:40

Test Date: 09-05-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower & Upper Band-Edge Compliance
 (FCC 15.407(b)(3)) - With Antenna (Model#:SCC-90-1) connected
 Operator: Lillian L
 Comment: Middle Channel: Frequency – 5300 MHz
 Output power setting: 11.0 on both chains
 Channel bandwidth: 20 MHz
 Modulation: OFDM; MCS15
 Polarization: Horizontal
 Lower Band-Edge Frequency: 5.250 GHz
 Upper Band-Edge Frequency: 5.350 GHz

Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Average Limit: 54 dB μ V/m AVERAGE at a test distance of 3 meter. Result = Pass

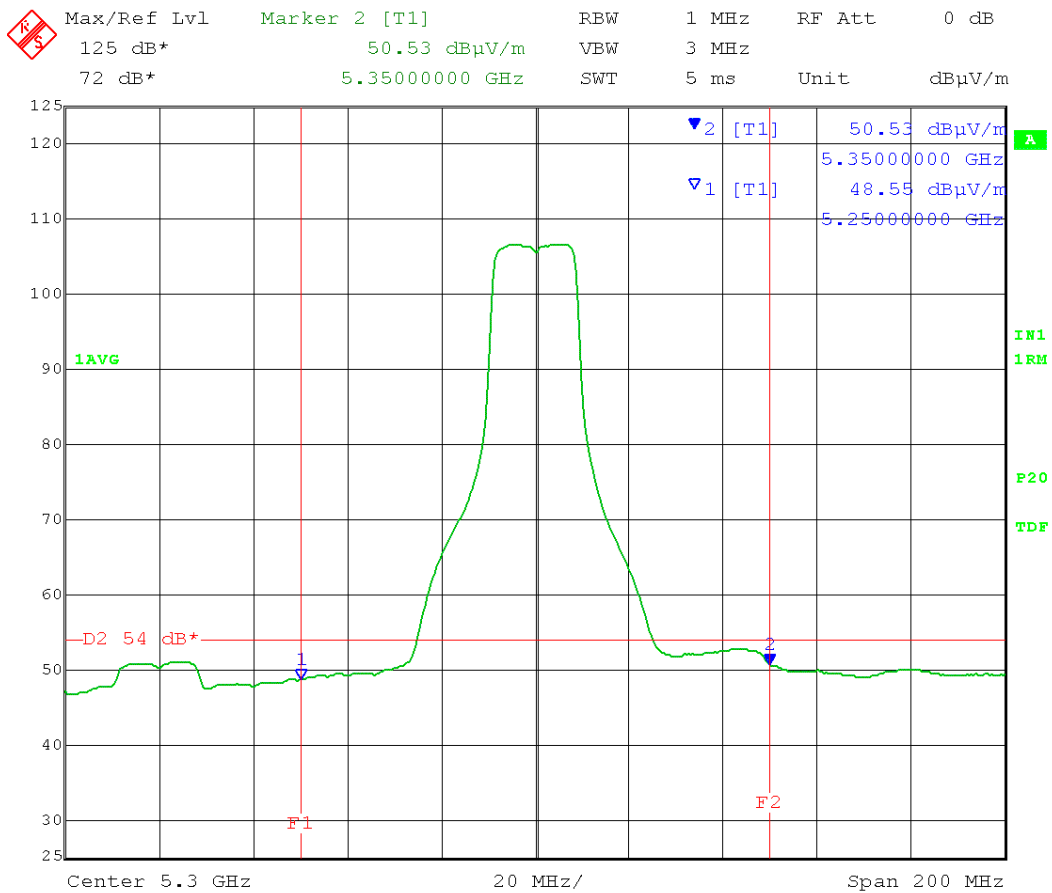


Date: 5.SEP.2013 12:55:03

Test Date: 09-05-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower & Upper Band-Edge Compliance
 (FCC 15.407(b)(3)) - With Antenna (Model#:SCC-90-1) connected
 Operator: Lillian L
 Comment: Middle Channel: Frequency – 5300 MHz
 Output power setting: 11.0 on both chains
 Channel bandwidth: 20 MHz
 Modulation: OFDM; MCS15
 Polarization: Horizontal
 Lower Band-Edge Frequency: 5.250 GHz
 Upper Band-Edge Frequency: 5.350 GHz

Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Peak Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

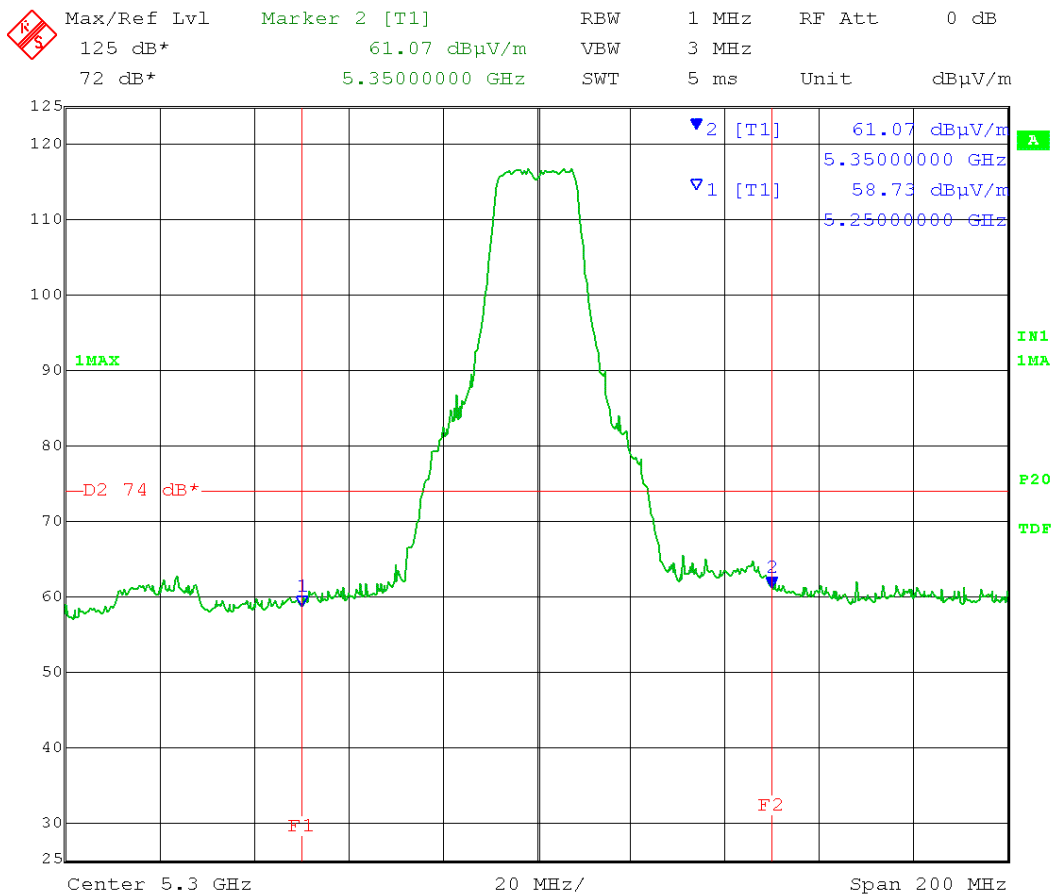


Date: 5.SEP.2013 12:57:31

Test Date: 09-05-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower & Upper Band-Edge Compliance
 (FCC 15.407(b)(3)) - With Antenna (Model Model#:SCC-90-1) connected
 Operator: Lillian L
 Comment: Middle Channel: Frequency – 5300 MHz
 Output power setting: 10.0 on both chains
 Channel bandwidth: 40 MHz
 Modulation: OFDM; MCS15
 Polarization: Vertical
 Lower Band-Edge Frequency: 5.250 GHz
 Upper Band-Edge Frequency: 5.350 GHz

Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Average Limit: 54 dBμV/m AVERAGE at a test distance of 3 meter. Result = Pass

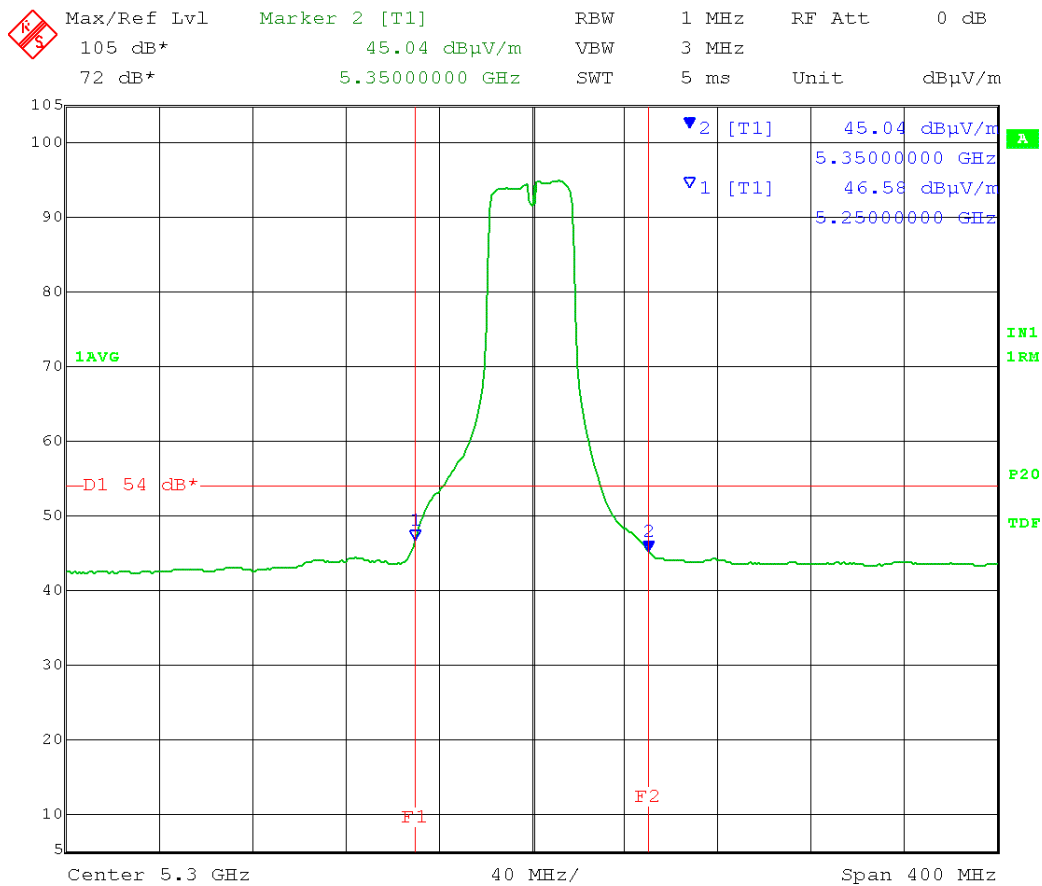


Date: 5.SEP.2013 15:54:02

Test Date: 09-05-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower & Upper Band-Edge Compliance
 (FCC 15.407(b)(3)) - With Antenna (Model#:SCC-90-1) connected
 Operator: Lillian L
 Comment: Middle Channel: Frequency – 5300 MHz
 Output power setting: 10.0 on both chains
 Channel bandwidth: 40 MHz
 Modulation: OFDM; MCS15
 Polarization: Vertical
 Lower Band-Edge Frequency: 5.250 GHz
 Upper Band-Edge Frequency: 5.350 GHz

Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Peak Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

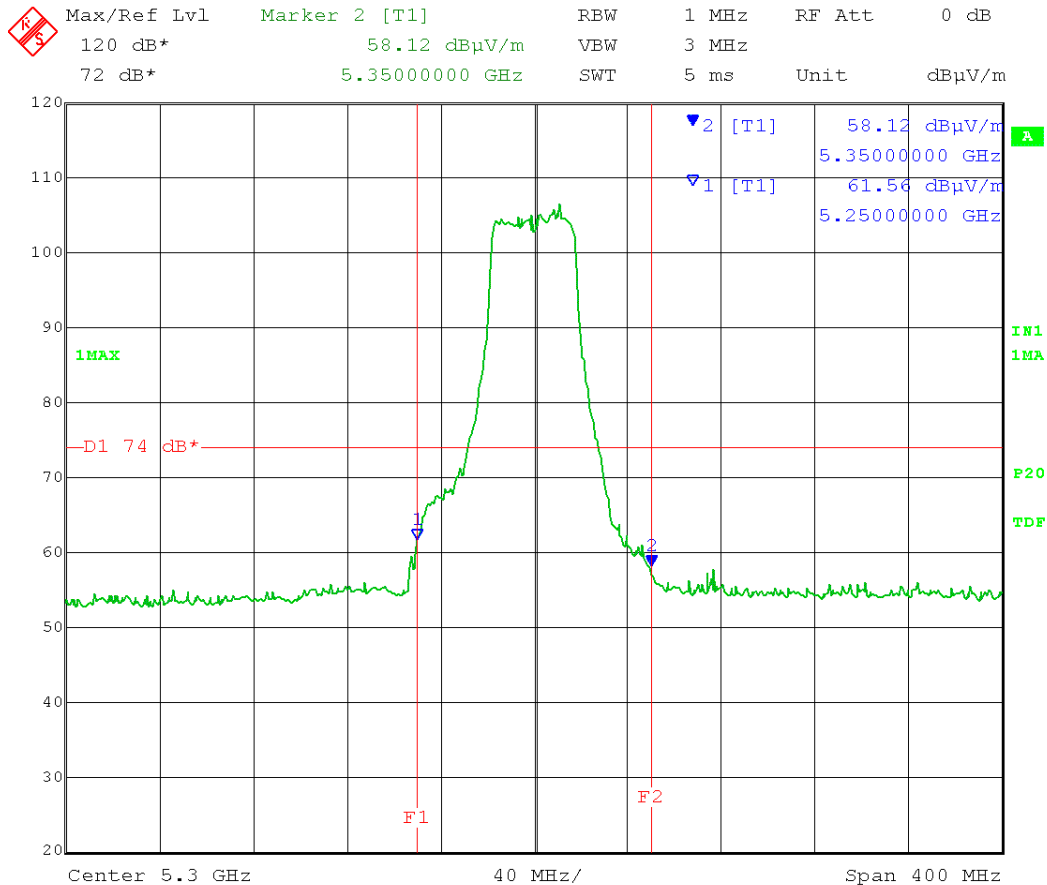


Date: 5.SEP.2013 15:56:53

Test Date: 09-05-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower & Upper Band-Edge Compliance
 (FCC 15.407(b)(3)) - With Antenna (Model#:SCC-90-1) connected
 Operator: Lillian L
 Comment: Middle Channel: Frequency – 5300 MHz
 Output power setting: 10.0 on both chains
 Channel bandwidth: 40 MHz
 Modulation: OFDM; MCS15
 Polarization: Horizontal
 Lower Band-Edge Frequency: 5.250 GHz
 Upper Band-Edge Frequency: 5.350 GHz

Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”


15.209 Average Limit: 54 dB μ V/m AVERAGE at a test distance of 3 meter. Result = Pass

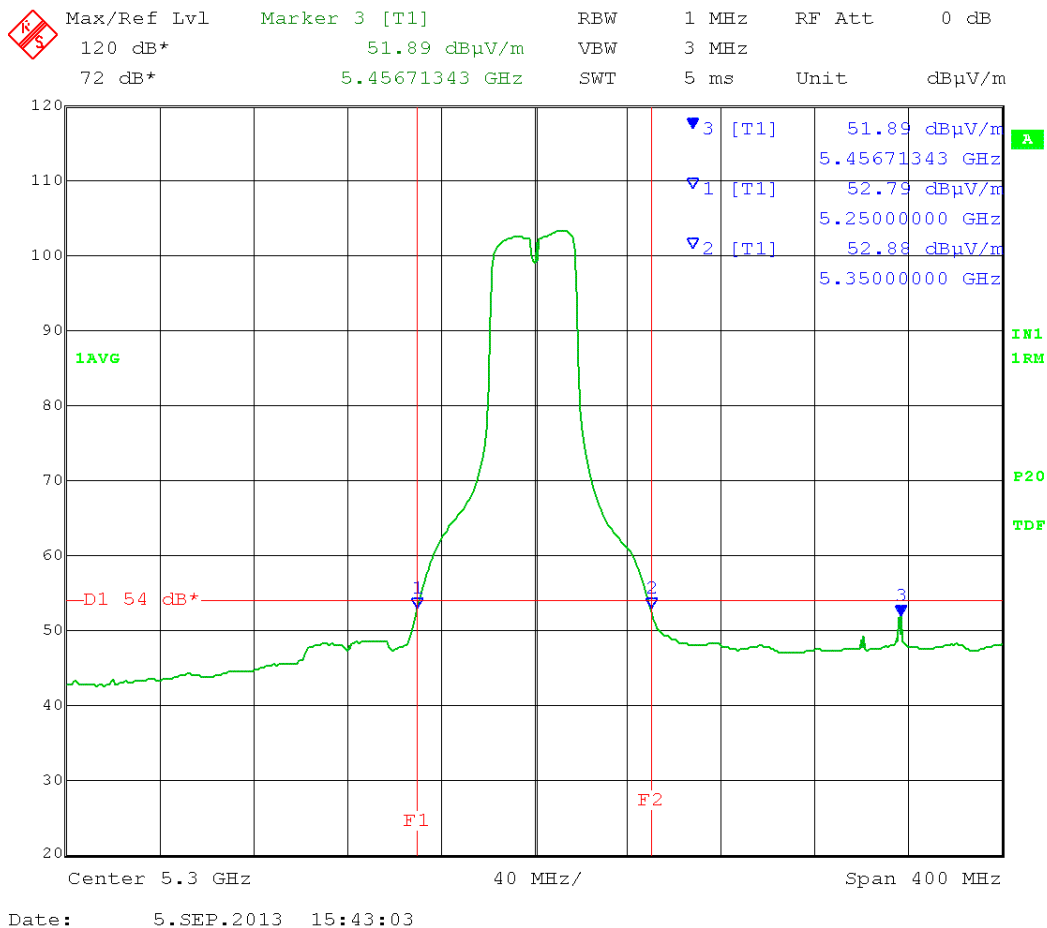

Test Date: 09-05-2013
 Company: Cambium Networks
 EUT: 5.2 GHz Avenger AP
 Test: Lower & Upper Band-Edge Compliance
 (FCC 15.407(b)(3)) - With Antenna (Model#:SCC-90-1) connected
 Operator: Lillian L
 Comment: Middle Channel: Frequency – 5300 MHz
 Output power setting: 10.0 on both chains
 Channel bandwidth: 40 MHz
 Modulation: OFDM; MCS15
 Polarization: Horizontal
 Lower Band-Edge Frequency: 5.250 GHz
 Upper Band-Edge Frequency: 5.350 GHz

Per 789033 D01 General UNII Test Procedures v01r03, section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

15.209 Peak Limit: 74 dB μ V/m PEAK at a test distance of 3 meter. Result = Pass

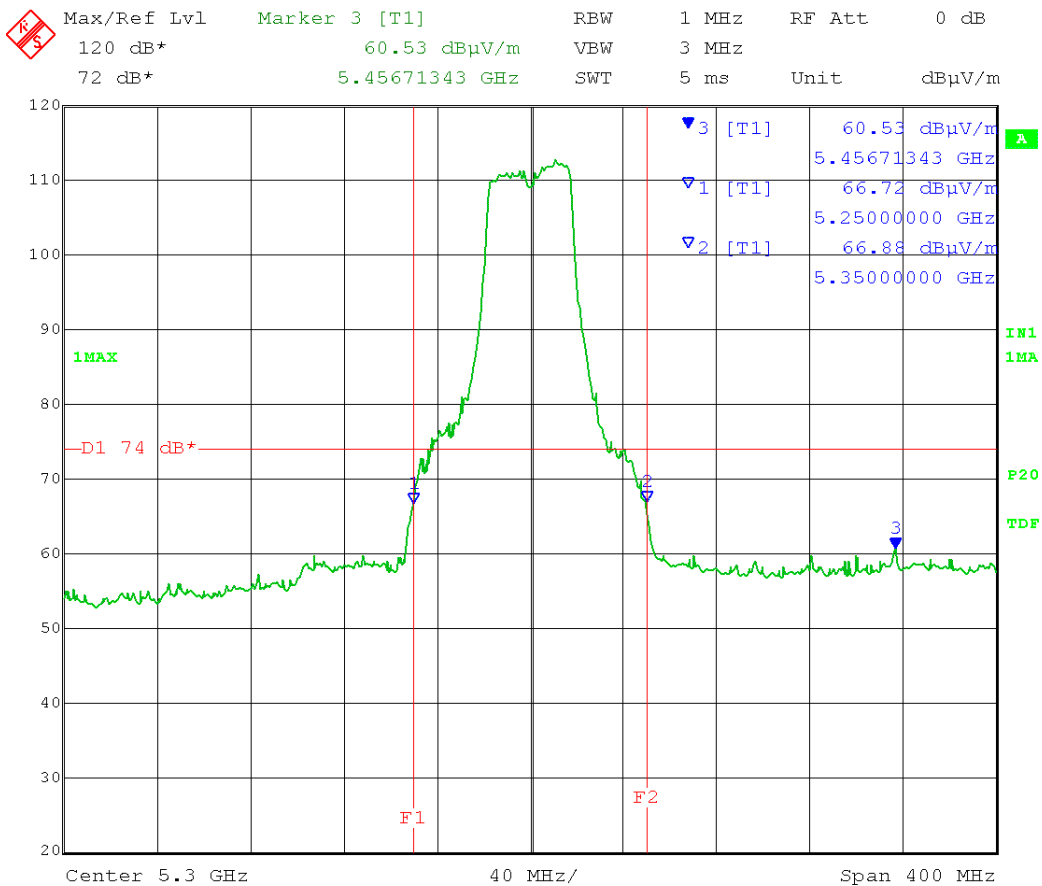

Date: 5.SEP.2013 15:03:01



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix B – Measurement Data

B8.0 Unwanted Emission Levels – RF Conducted

Rule Section: Sections 15.407(b)(3) and 15.407(b)(6) / **RSS-210 A9.2(2)**

Test Procedure: FCC KDB 789033 D01 General UNII Test Procedures v01r03 – *Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E*
Section H(1) – Unwanted emissions in the restricted bands
Section H(2) – Unwanted emissions that fall outside of the restricted bands
Section H(3) – General Requirements for Unwanted Emissions Measurements
Section H(4) – Procedure for Unwanted Emissions Measurements Below 1 GHz
Section H(5) – Procedure for Peak Unwanted Emissions Measurements Above 1 GHz
Section H(6) – Procedure for Average Unwanted Emissions Measurements Above 1 GHz
Section H(6)(c) – Average Detection method

Below 1000 MHz

Detector = quasi-peak

Alternately, peak detector is permitted

Peak measurements above 1000 MHz

RBW = 1 MHz

VBW \geq 3 MHz

Detector = peak

Sweep time = auto

Trace mode = max hold

Average measurements above 1000 MHz (required for peak emissions that are above the average limits) –

Method AD (Average Detection)

RBW = 1 MHz

VBW \geq 3 MHz

Detector = RMS (span/(# of points in sweep) \leq RBW/2)

Averaging type = power

Sweep time = auto

Trace mode = trace average 100 sweeps; increased by a

factor of (1 / duty cycle)

For a duty cycle less than 98%, add 10 log (1/duty cycle)

EIRP calculation:

Add upper bound on out-of-band antenna gain to measured antenna port conducted emission power. (This is the maximum in-band gain or 2 dBi, whichever is greater)

Add 10 log(N), where N is the number of output, for MIMO operation

Add an additional 10 log(N), if the signals are correlated according to FCC KDB 662911, or if the unwanted emission is narrowband

Field strength calculation:

Above 1 GHz: $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log (d\{\text{meters}\}) + 104.77$

Below 1 GHz: $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log (d\{\text{meters}\}) + 104.77 + 4.7 \text{ dB}$


Limits: Outside restricted bands: Peak EIRP shall not exceed -27 dBm/MHz
Inside restricted bands: Peak and Average limits of FCC Part 15.209/**RSS-Gen 7.2.5**

Notes: Measurements were taken for MCS15 OFDM modulation at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously with 100% duty cycle.

Test Date: 9-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 0 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30MHz to 1 GHz

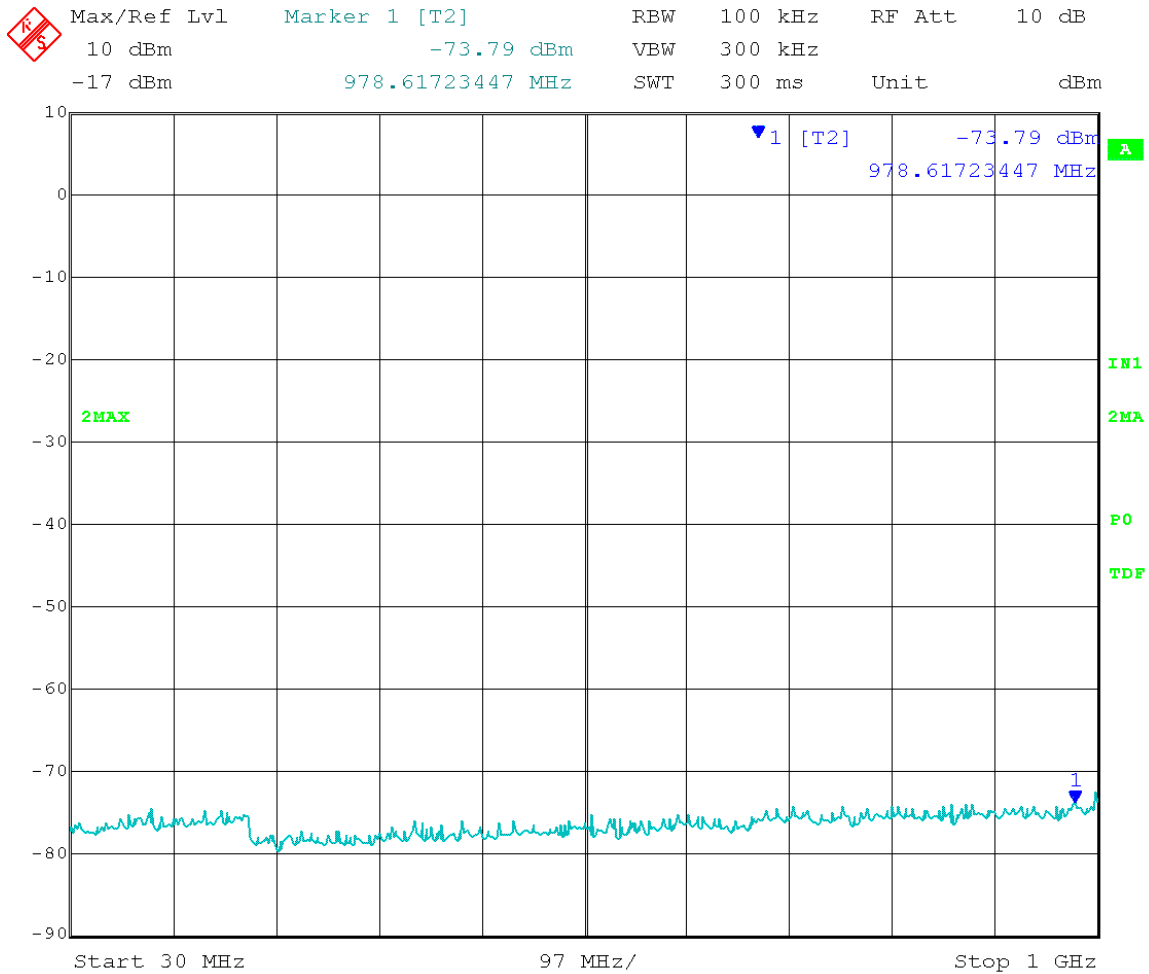


Date: 12.AUG.2013 11:32:58

Marker 1: Non-Restricted Band

Test Date: 9-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 0 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30MHz to 1 GHz

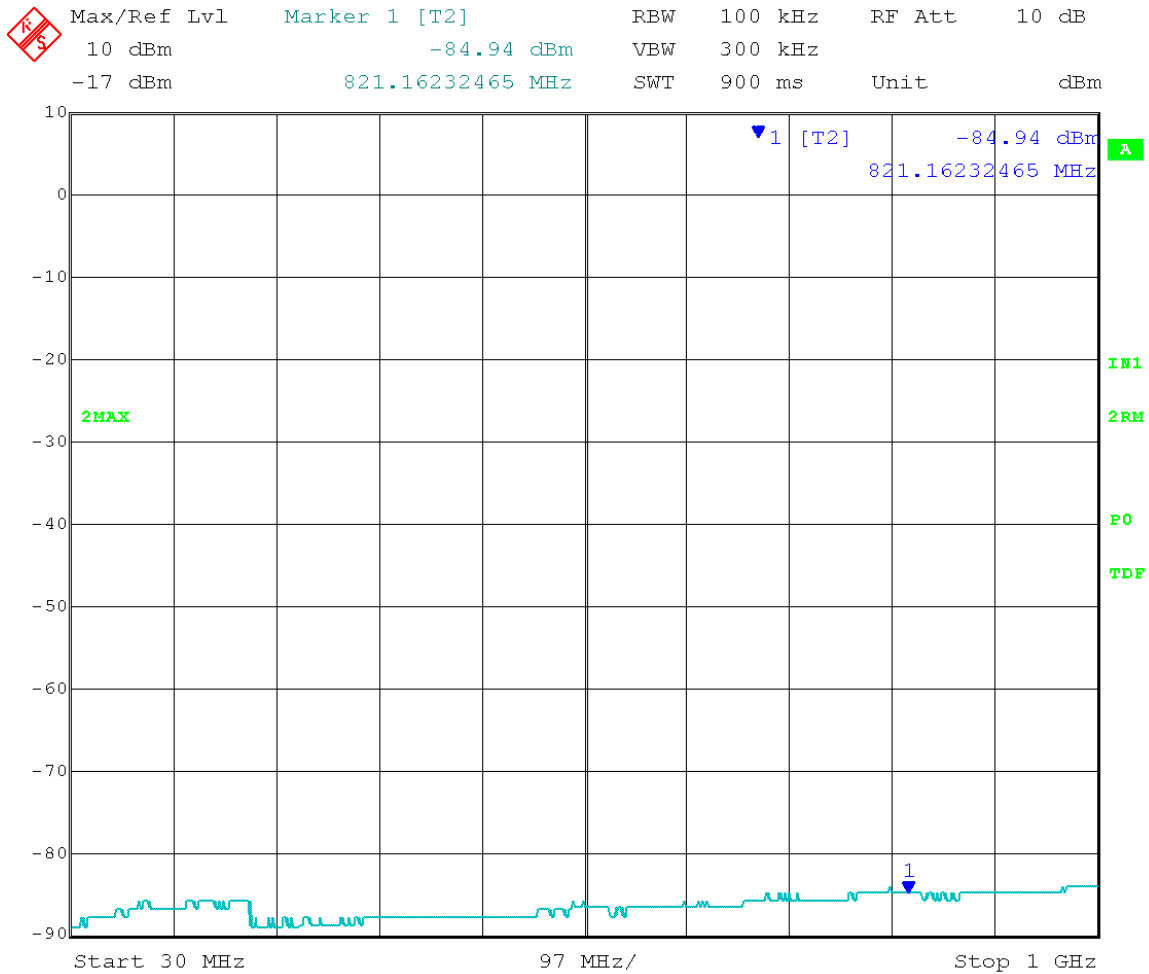


Date: 12.AUG.2013 11:31:59

Marker 1: Non-Restricted Band

Test Date: 9-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 1 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30MHz to 1 GHz

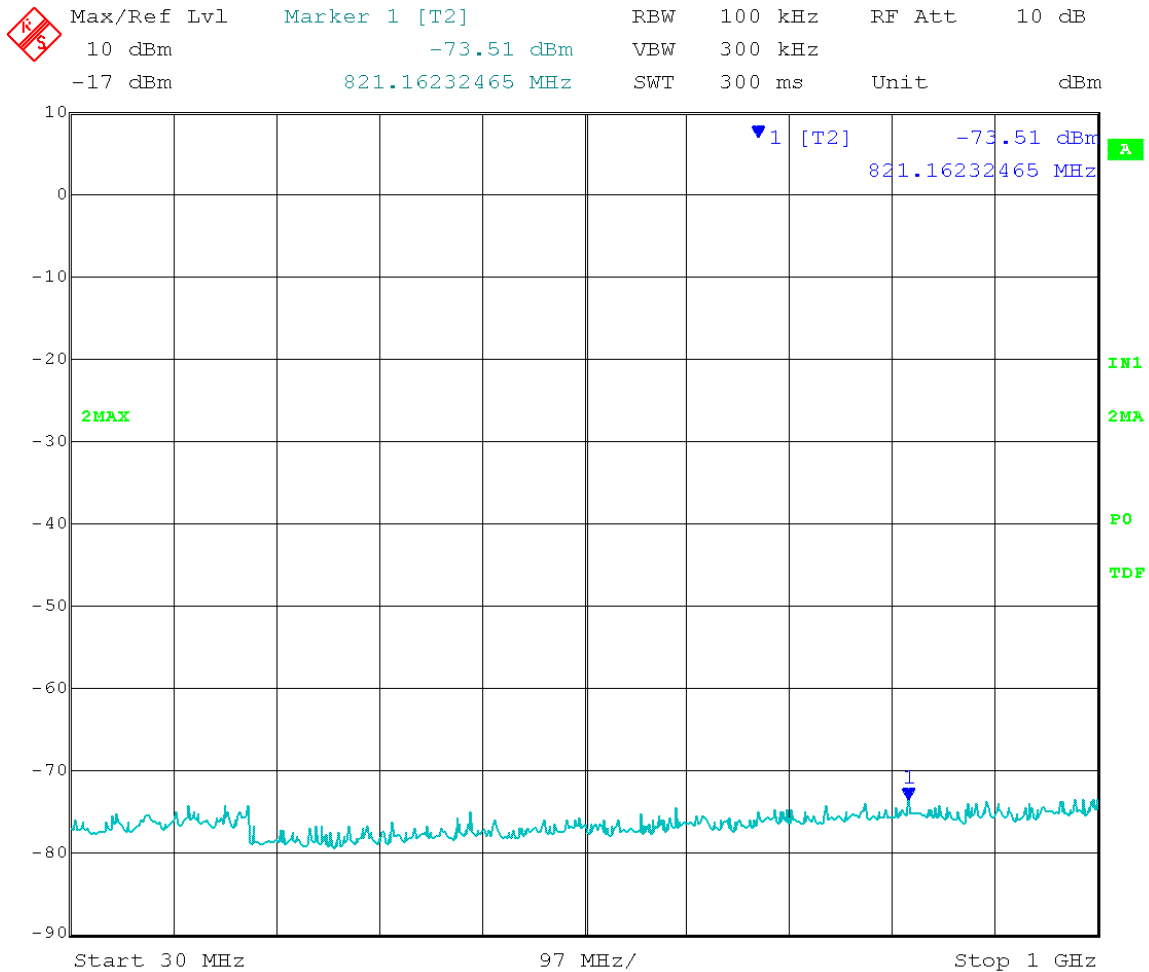


Date: 12.AUG.2013 11:27:51

Marker 1: Non-Restricted Band

Test Date: 9-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
Output Port: Channel 1 Low Channel Frequency: 5.270 GHz
Output Power Setting: 7 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30MHz to 1 GHz

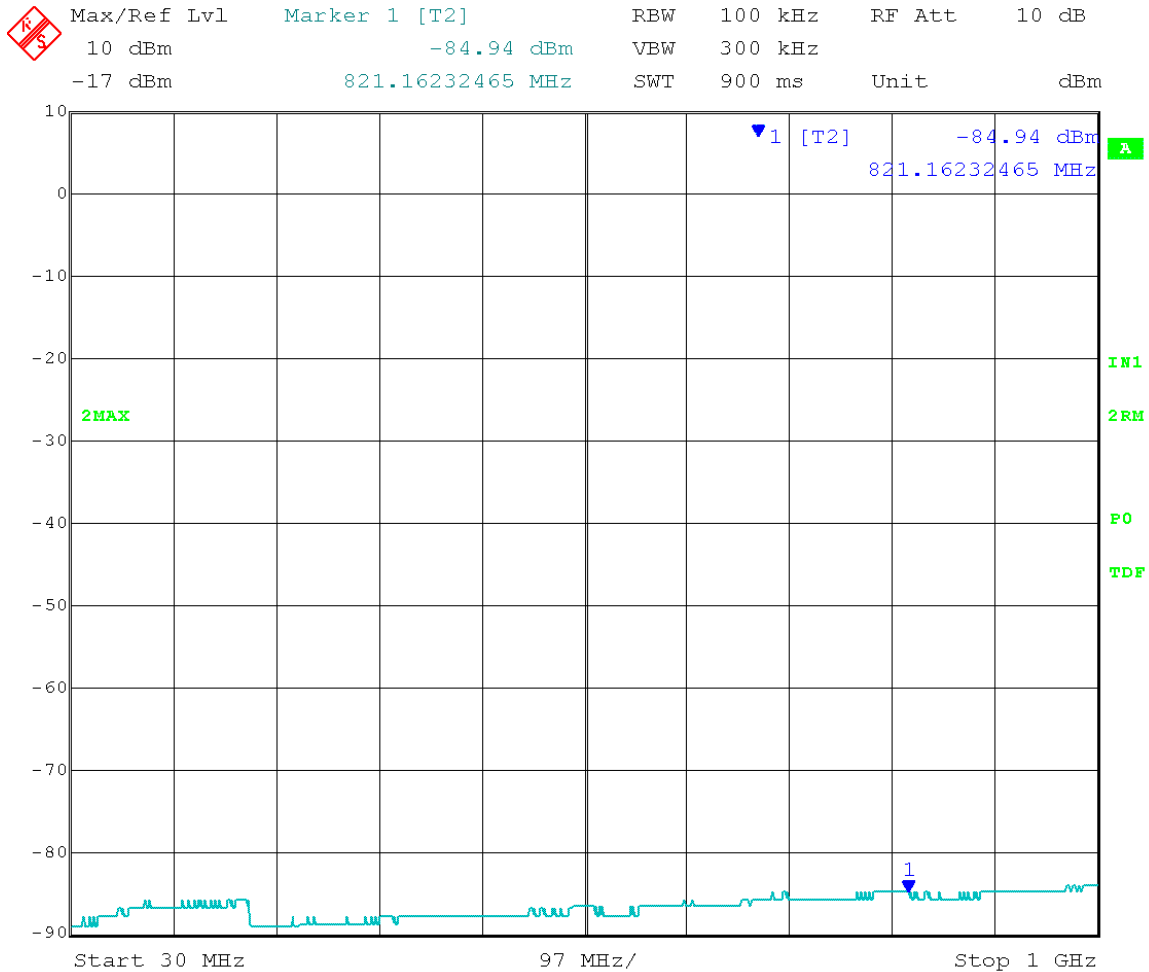


Date: 12.AUG.2013 11:28:38

Marker 1: Non-Restricted Band

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 0 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

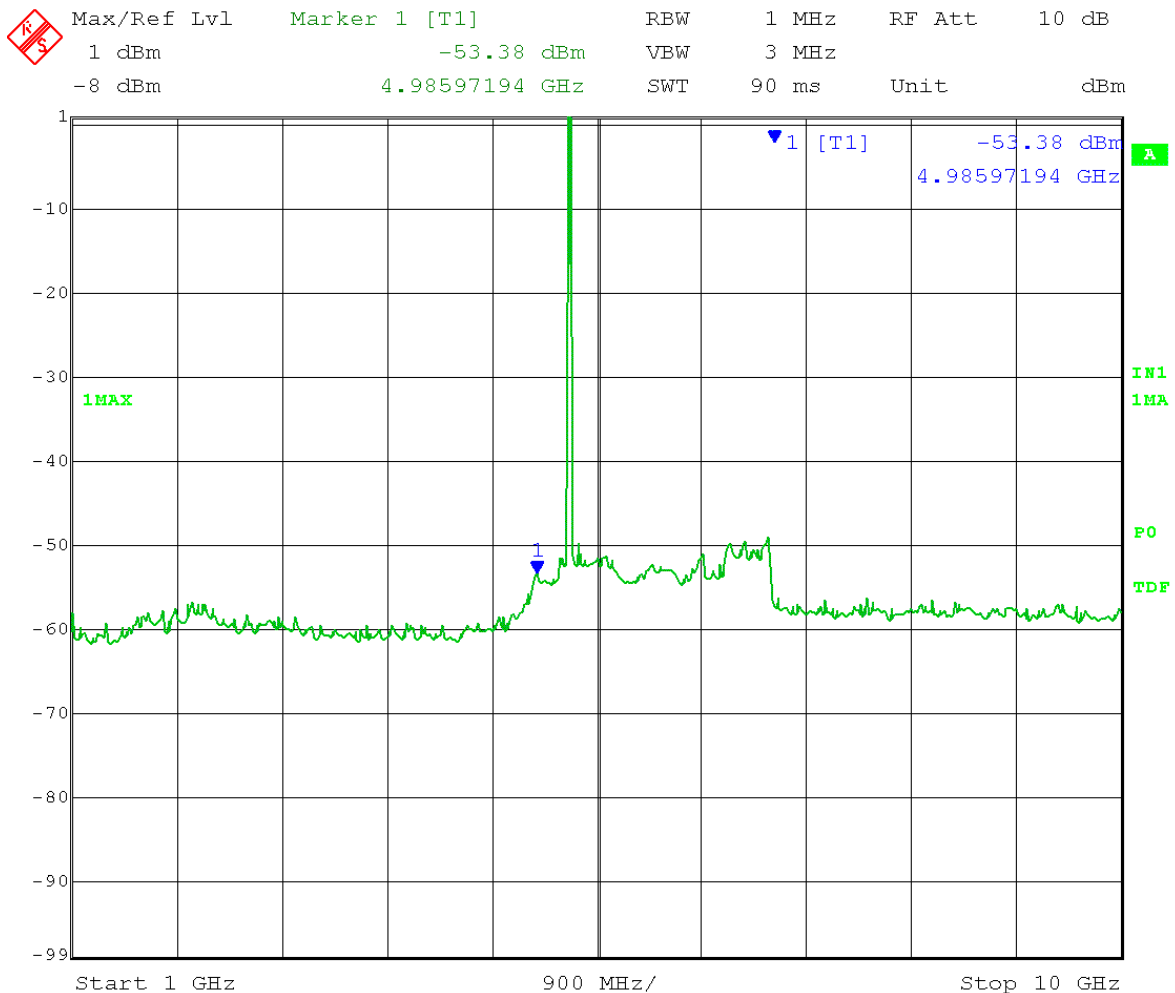


Date: 6.SEP.2013 11:48:37

Marker 1: Calculated Field Strength (Restricted Band) = -53.38 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 61.45dBμV/m Peak

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 0 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

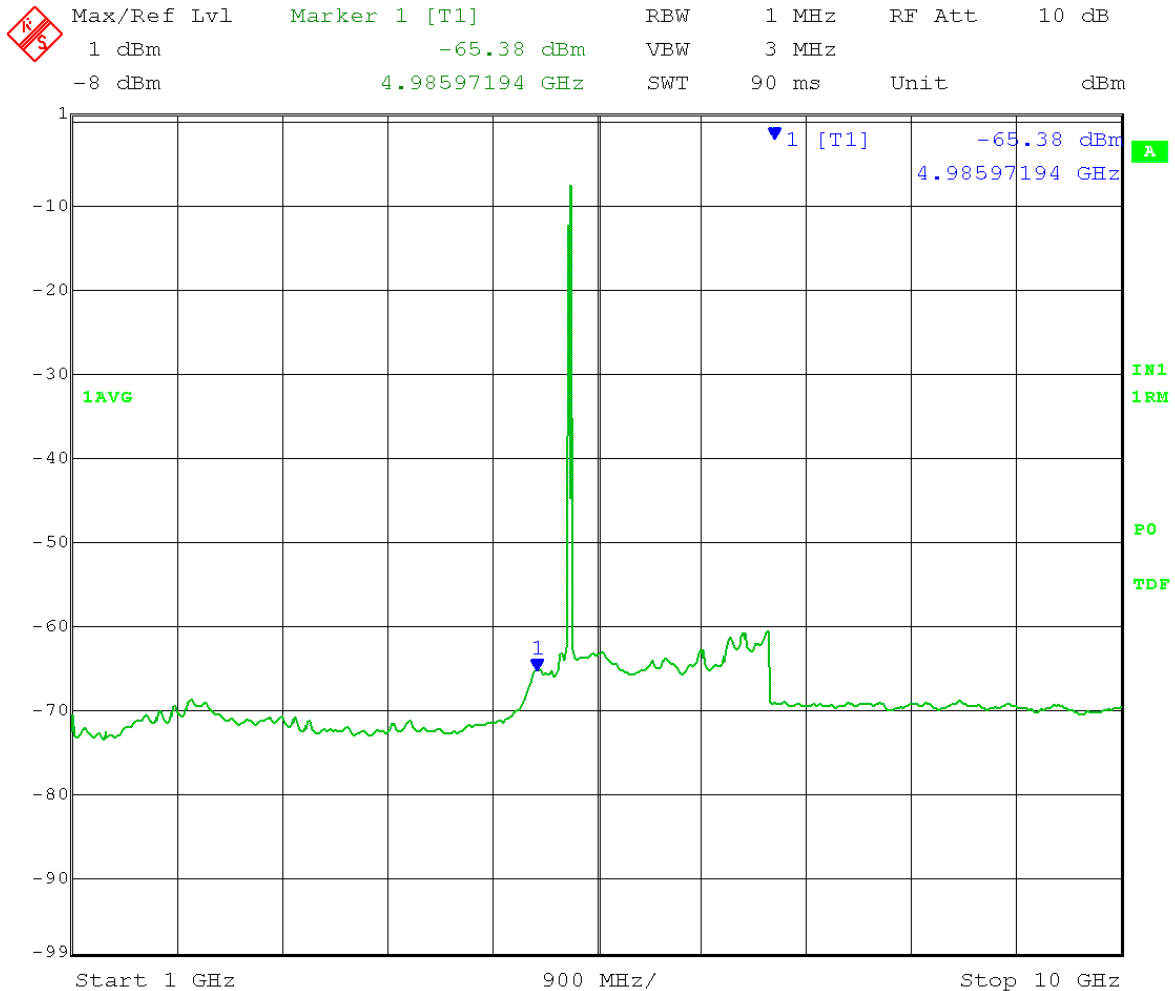


Date: 6.SEP.2013 11:50:18

Marker 1: Calculated Field Strength (Restricted Band) = $-65.38 + 16\text{dBi antenna gain} + 3\text{ dB (MIMO)} - 20\log(3\text{ meters}) + 104.77 = 48.85\text{dB}\mu\text{V/m Average}$

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 1 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

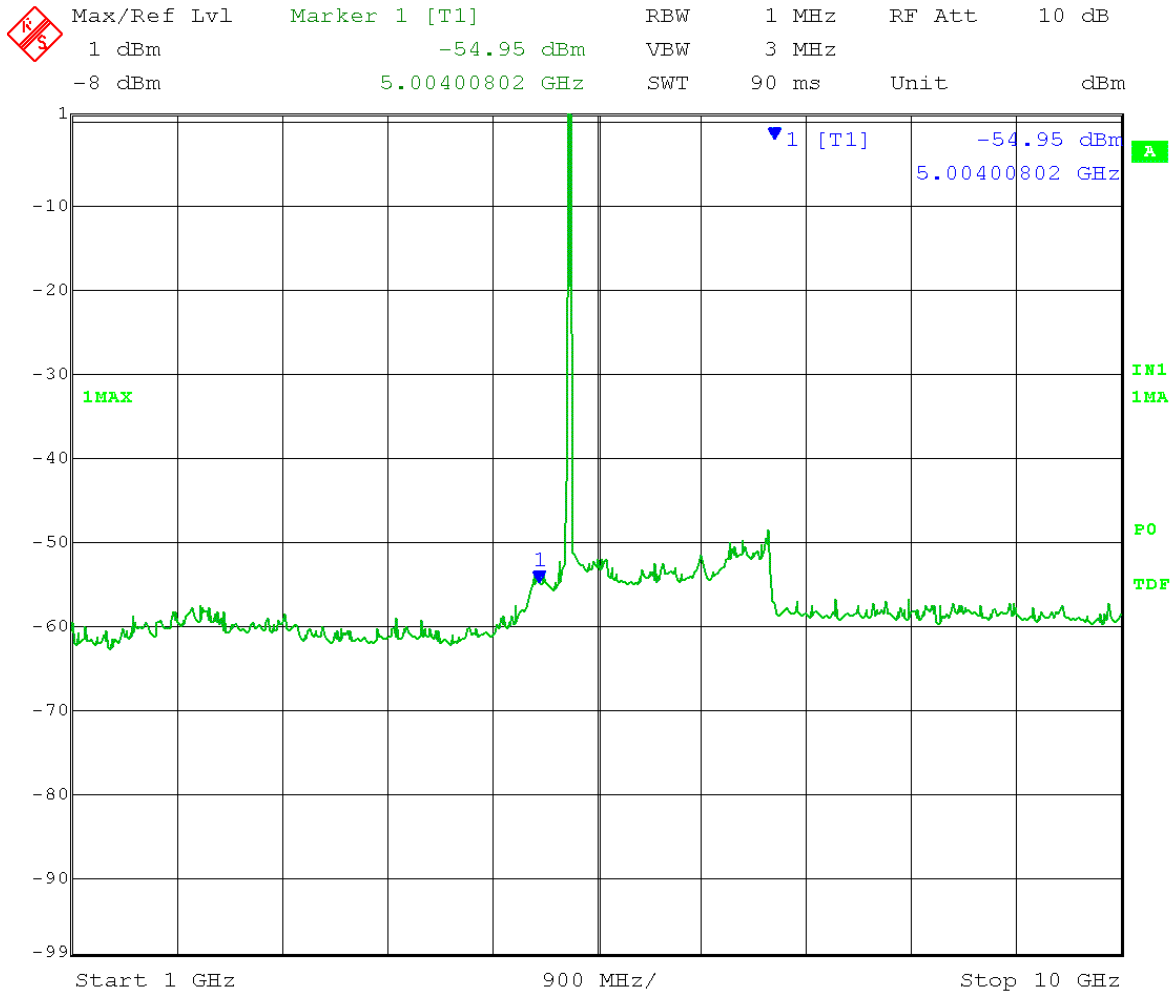


Date: 6.SEP.2013 11:53:28

Marker 1: Calculated Field Strength (Restricted Band) = -54.95 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 59.28dBμV/m Peak

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 1 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

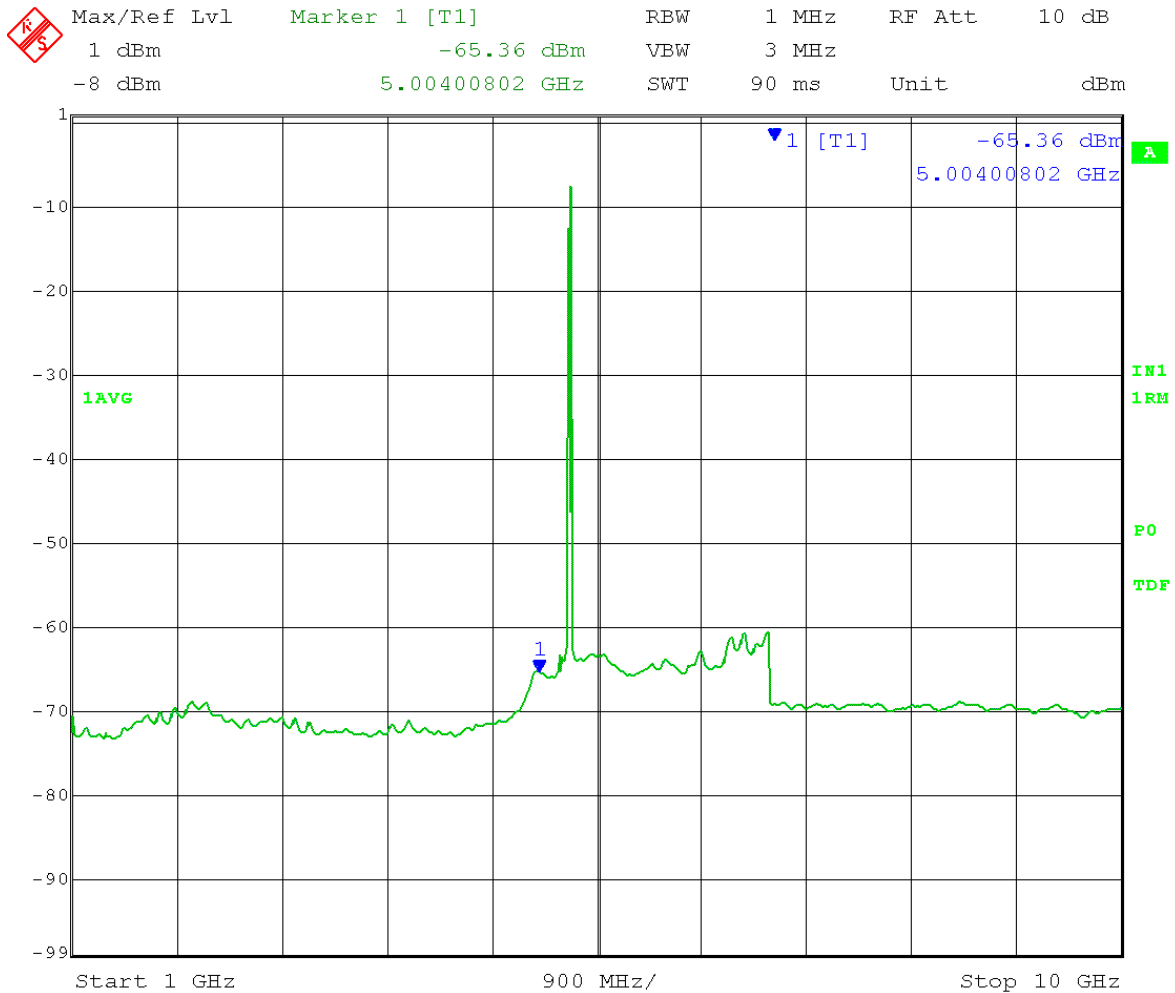


Date: 6.SEP.2013 11:51:49

Marker 1: Calculated Field Strength (Restricted Band) = $-65.36 + 16\text{dBi antenna gain} + 3\text{ dB (MIMO)} - 20\log(3\text{ meters}) + 104.77 = 48.87\text{dB}\mu\text{V/m Average}$

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 0 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

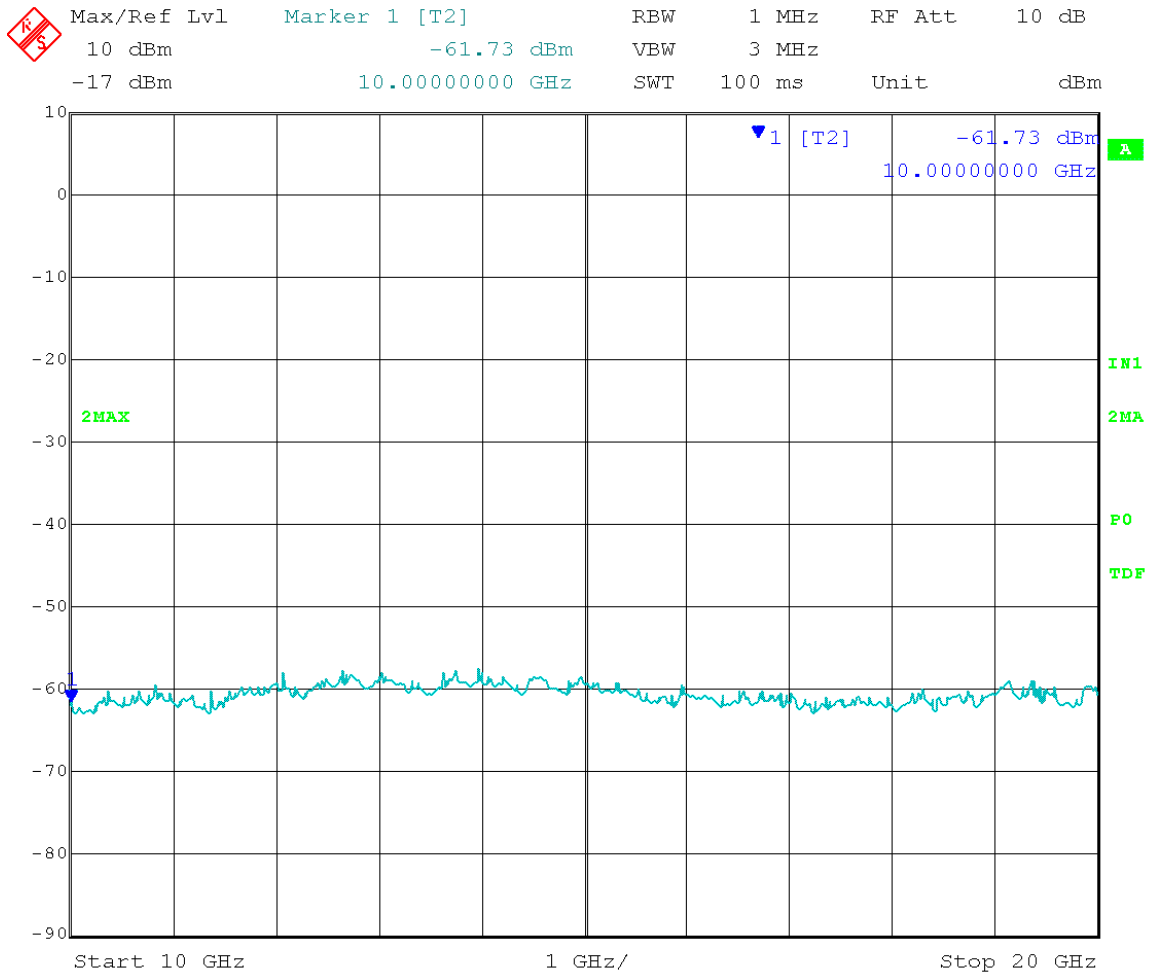


Date: 12.AUG.2013 11:43:53

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 0 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

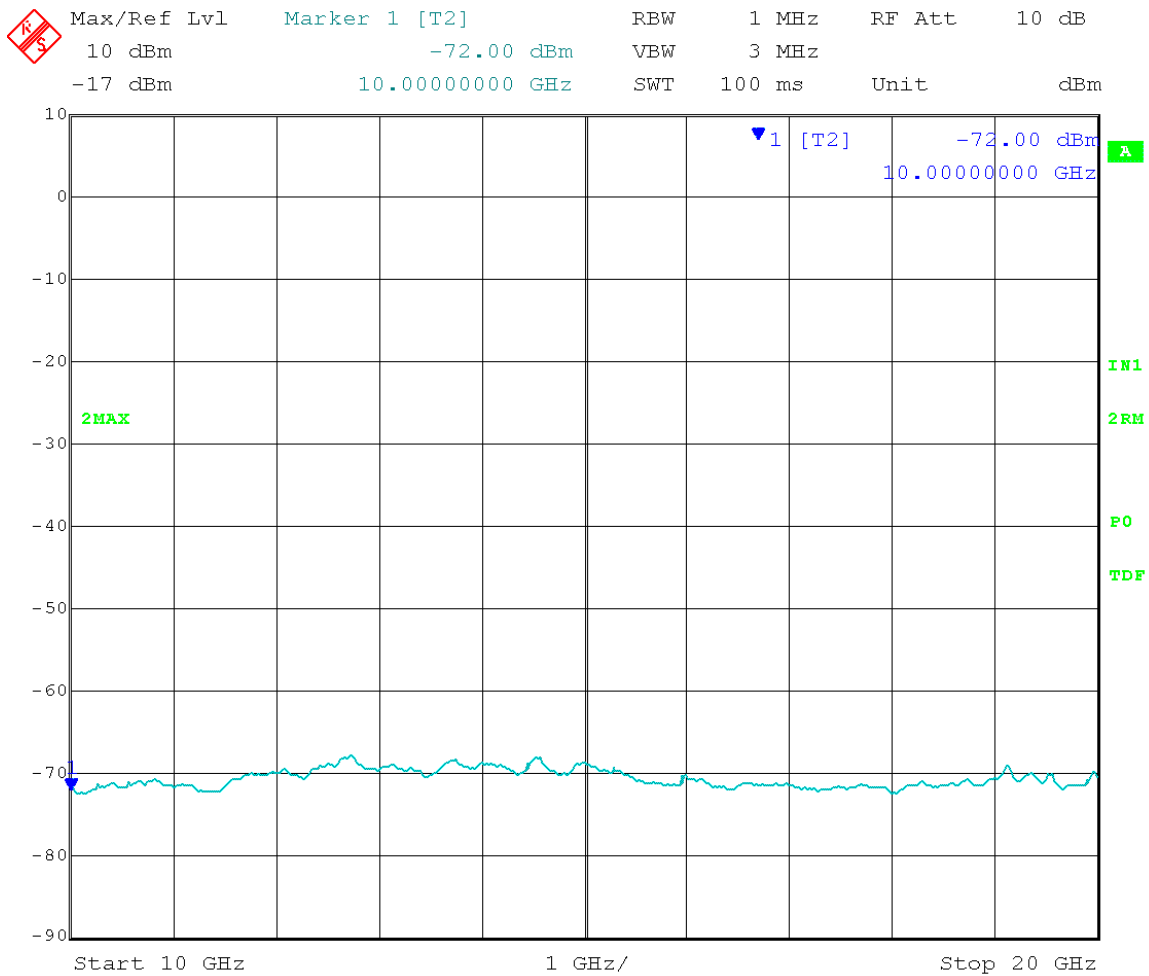


Date: 12.AUG.2013 11:43:26

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 1 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

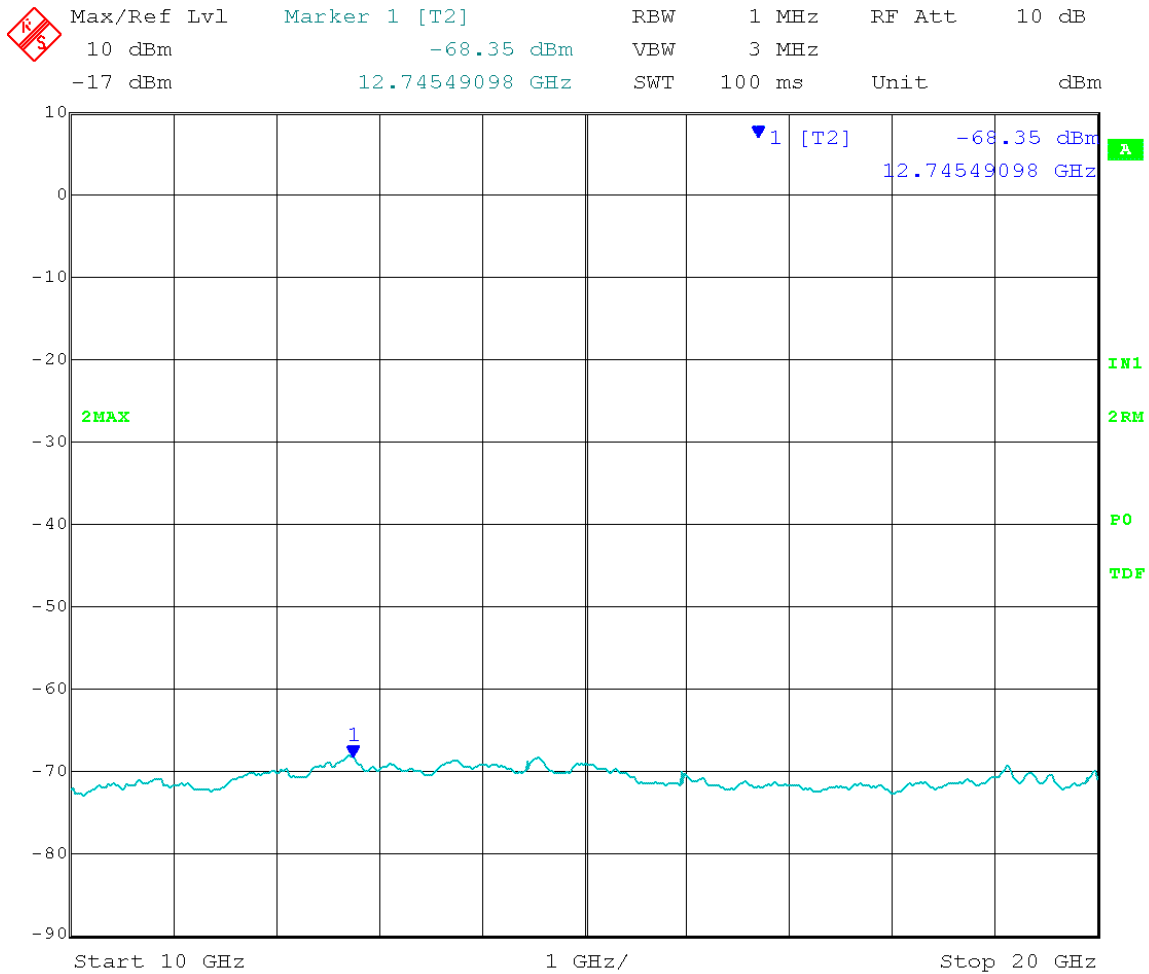


Date: 12.AUG.2013 11:47:41

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 0 Low Channel Frequency: 5.270 GHz
 Output Power Setting: 7 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 20 GHz to 30 GHz

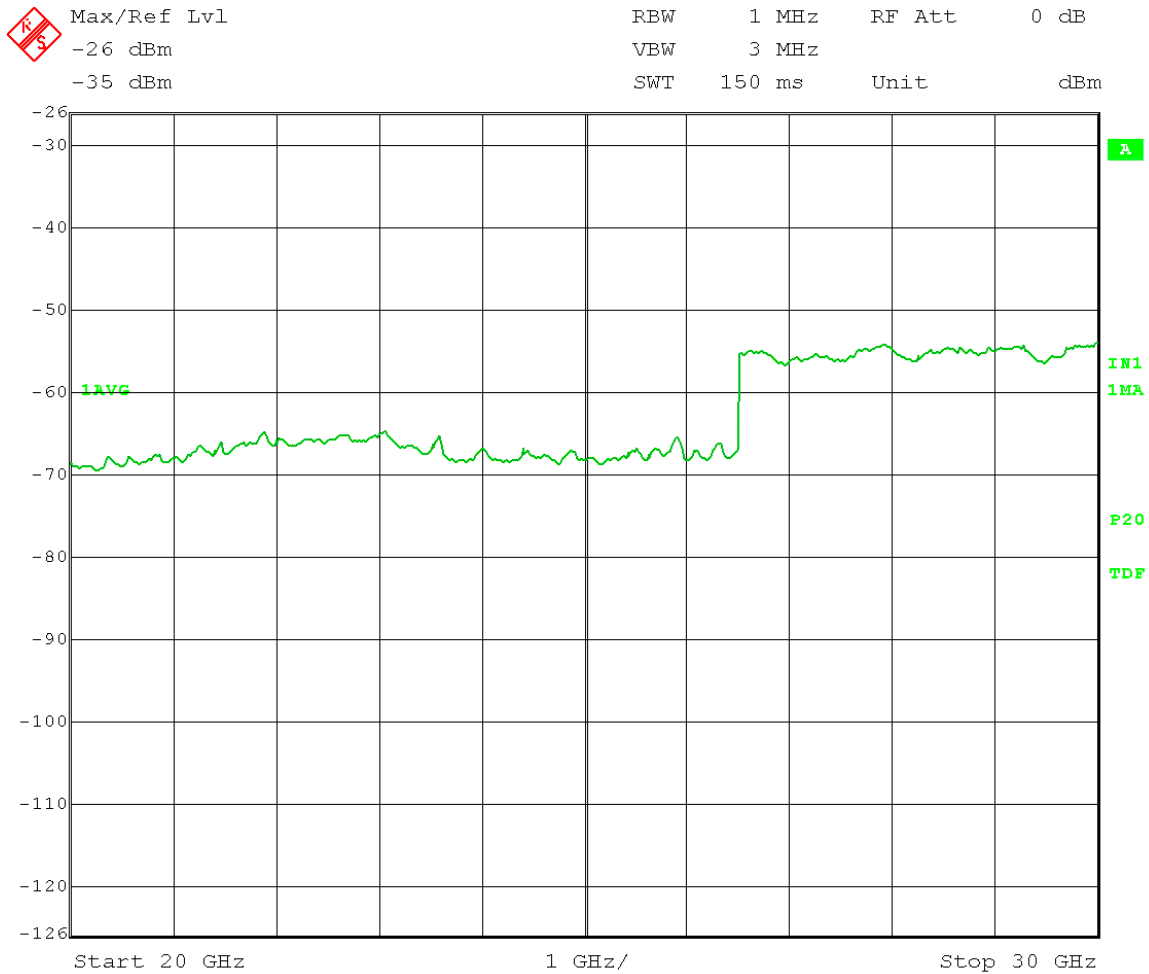


Date: 6.SEP.2013 12:09:15

All Emissions > 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
Output Port: Channel 1 Low Channel Frequency: 5.270 GHz
Output Power Setting:7 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 20 GHz to 30 GHz

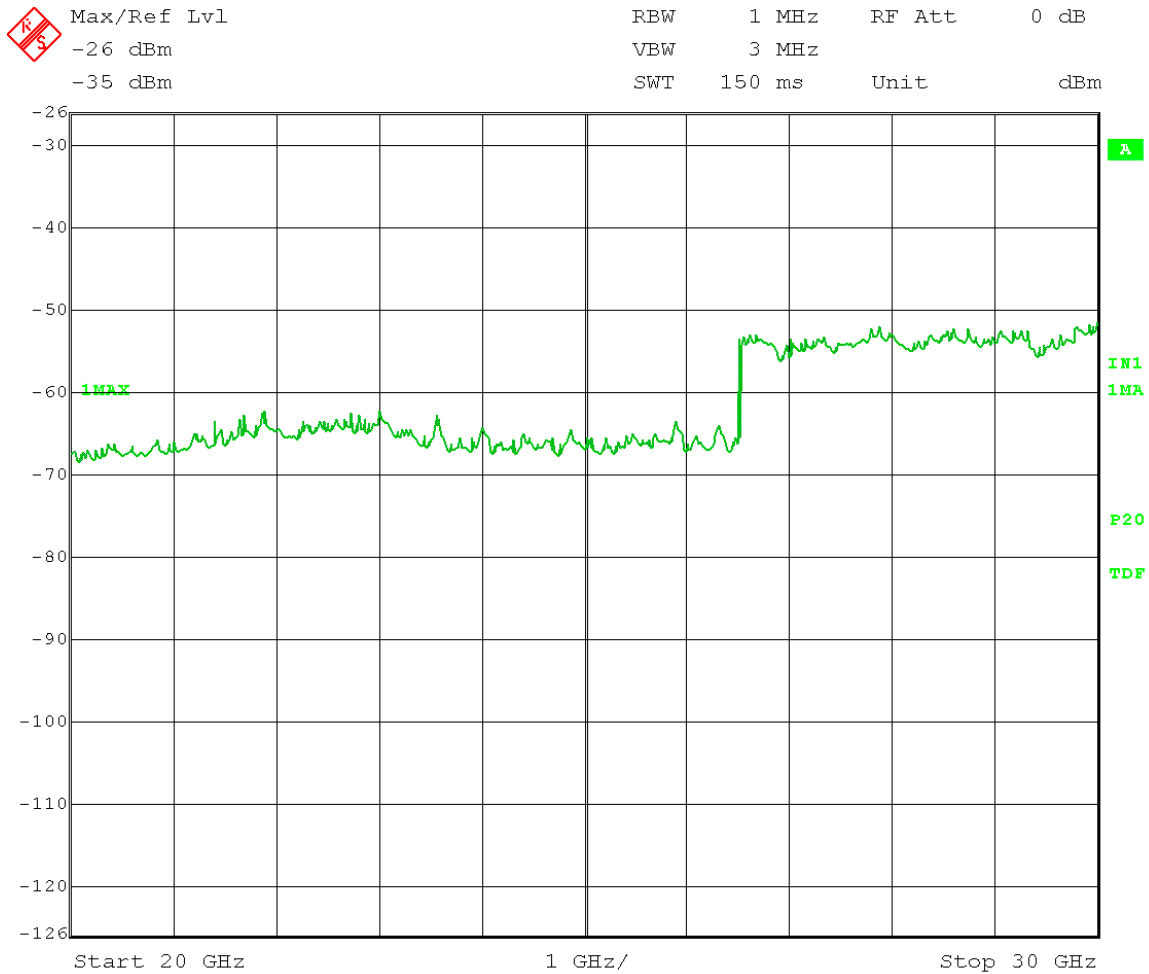


Date: 6.SEP.2013 12:09:37

All Emissions > 20dB below limit

Test Date: 09-09-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
Output Port: Channel 0 Low Channel Frequency: 5.270 GHz
Output Power Setting: 7 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

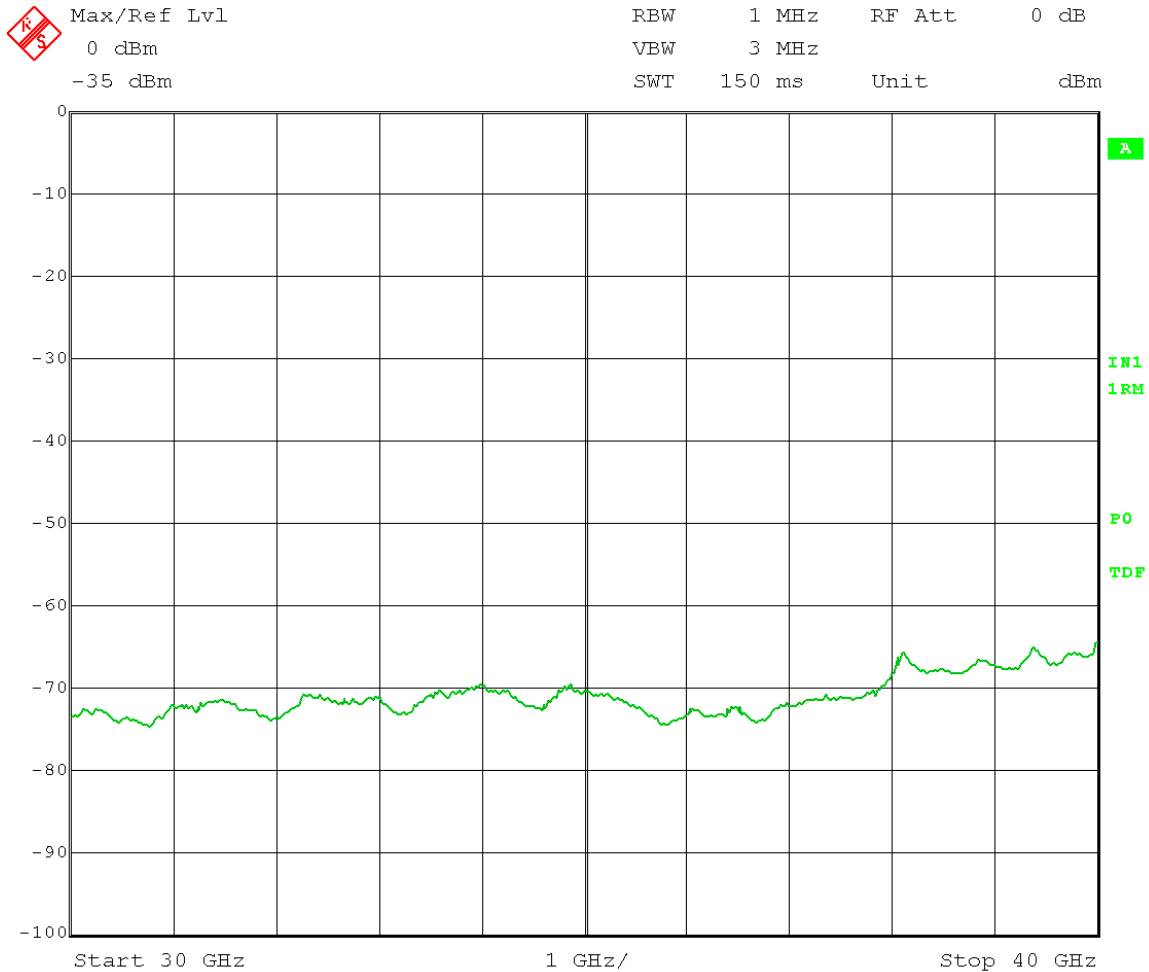


Date: 9.SEP.2013 10:47:34

All Emissions > 20dB below limit

Test Date: 09-09-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
Output Port: Channel 1 Low Channel Frequency: 5.270 GHz
Output Power Setting: 7 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

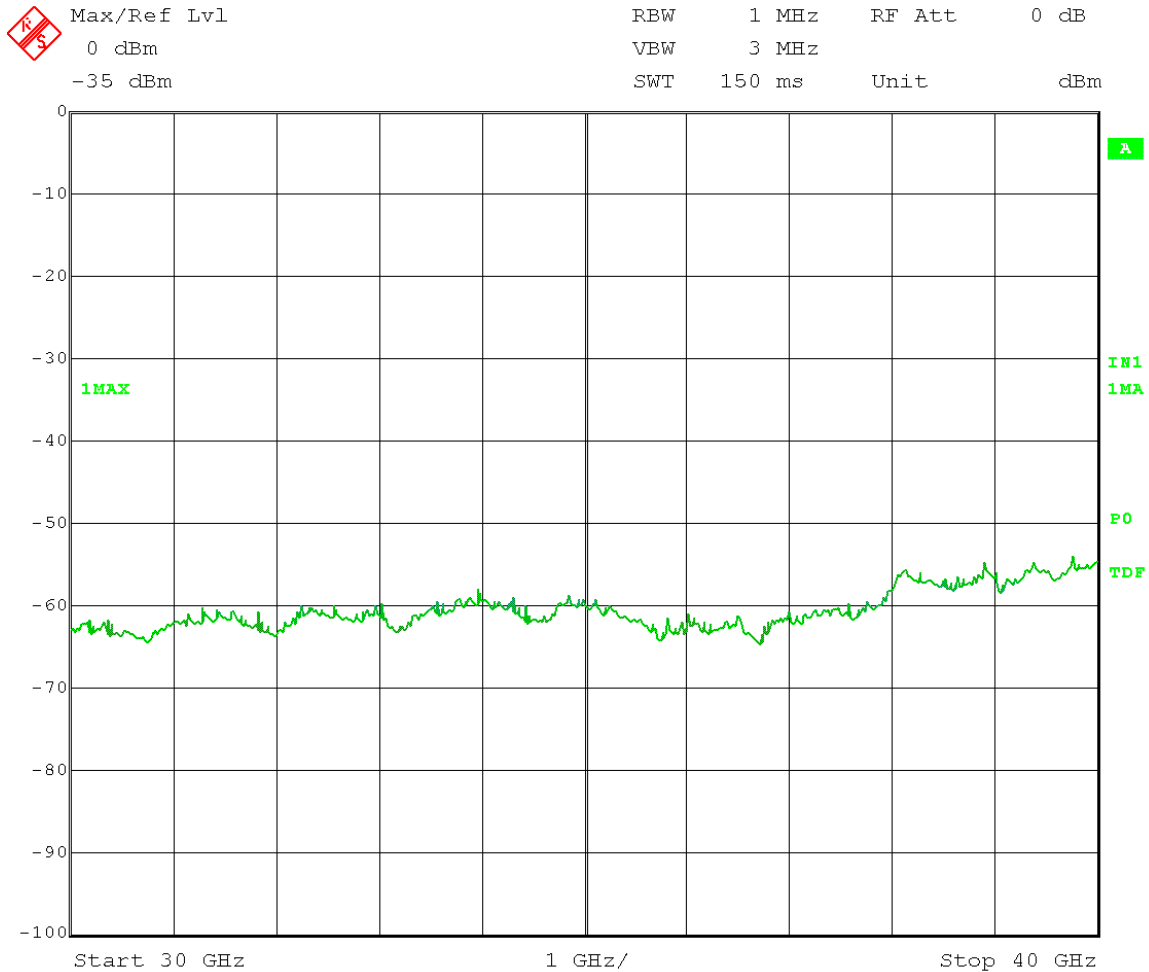


Date: 9.SEP.2013 10:48:26

All Emissions > 20dB below limit

Test Date: 9-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30MHz to 1 GHz

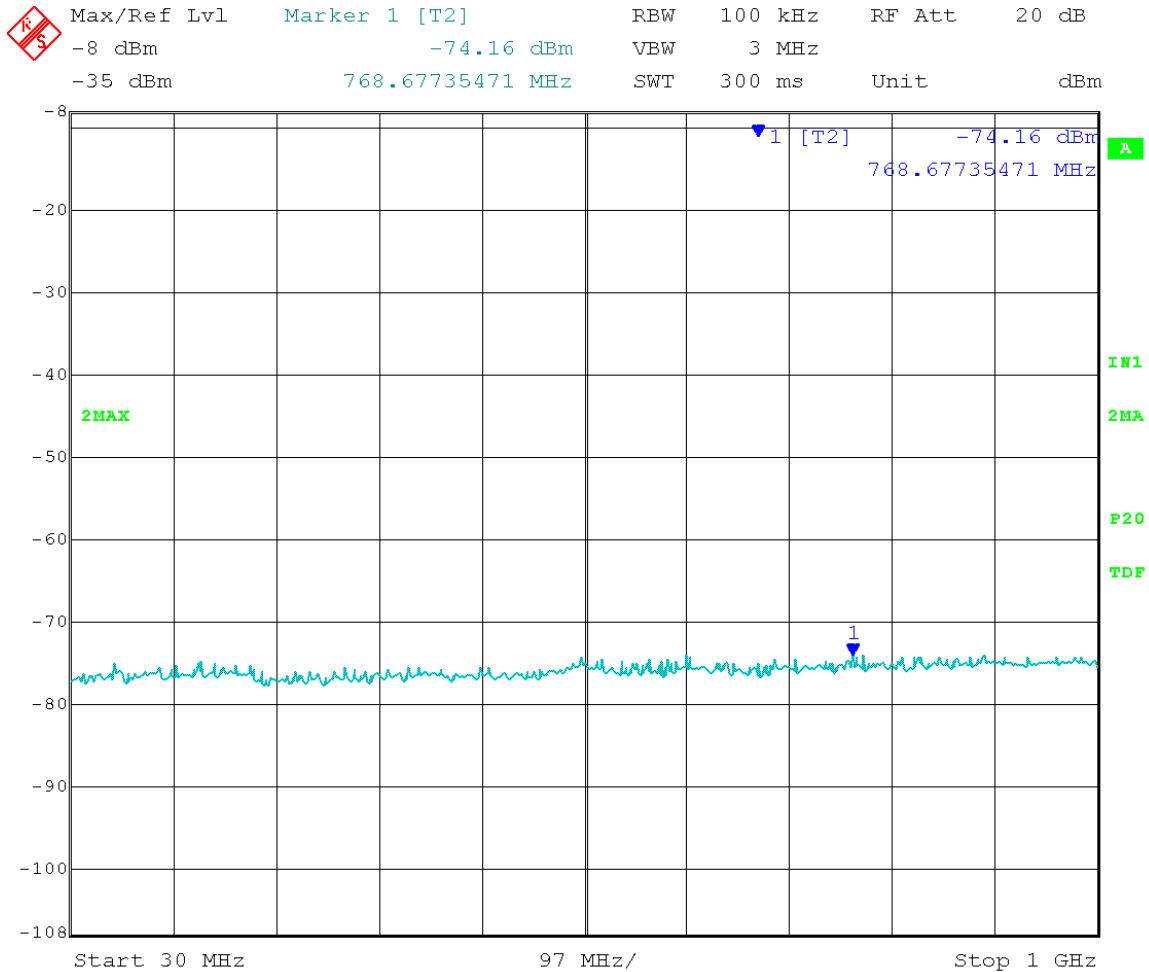


Date: 12.AUG.2013 13:45:47

Marker 1: Greater than 20dB below limit

Test Date: 9-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30MHz to 1 GHz

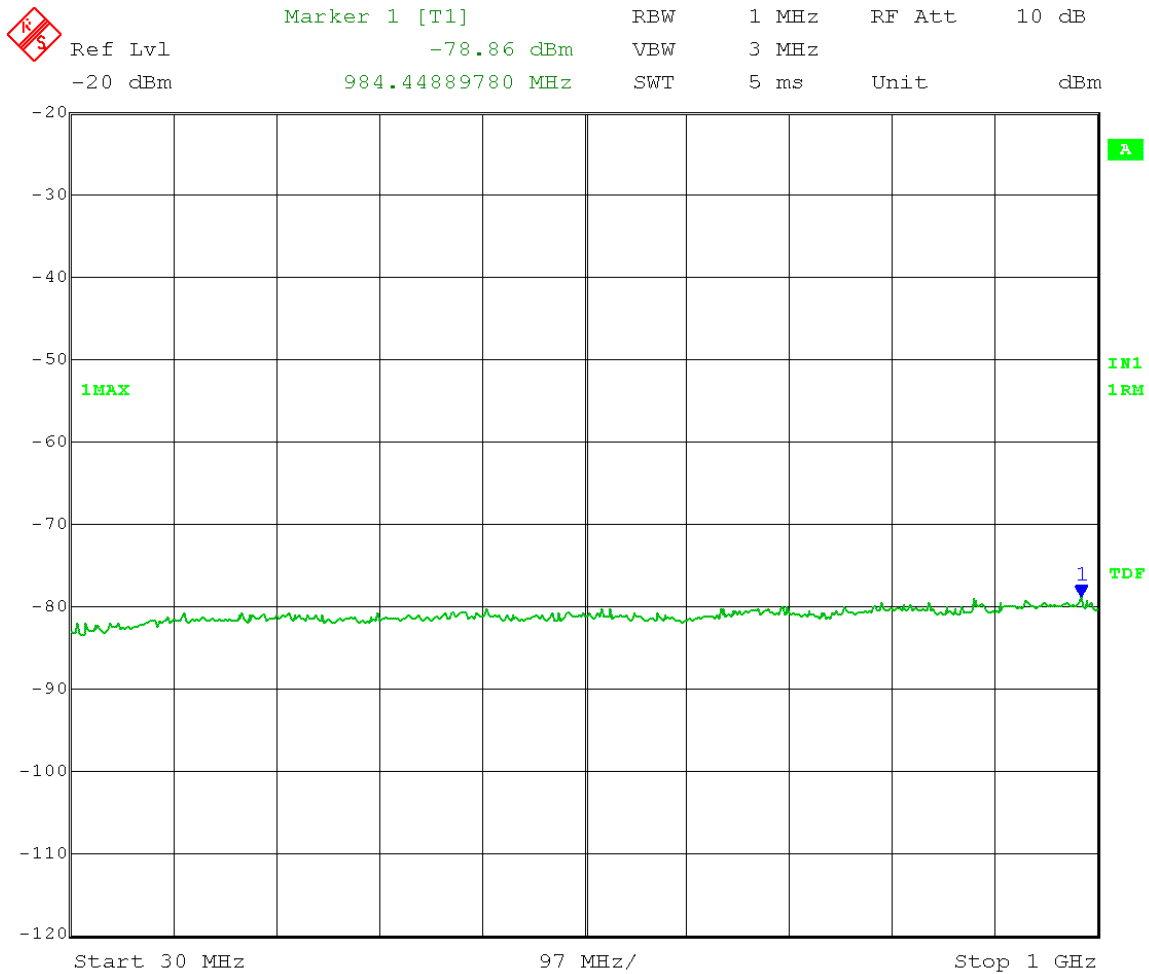


Date: 9.SEP.2013 10:03:30

Marker 1: Greater than 20dB below limit

Test Date: 9-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30MHz to 1 GHz

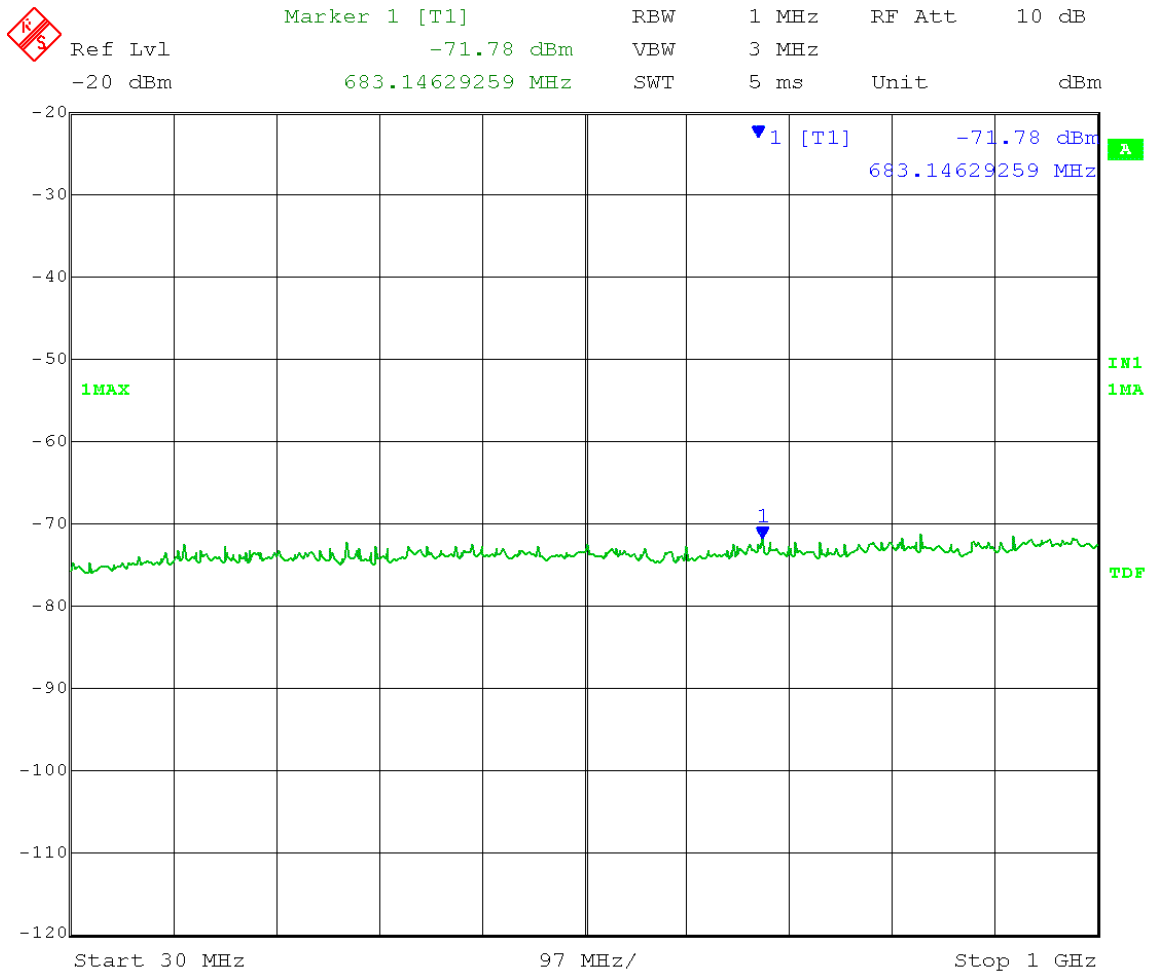


Date: 9.SEP.2013 10:05:52

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

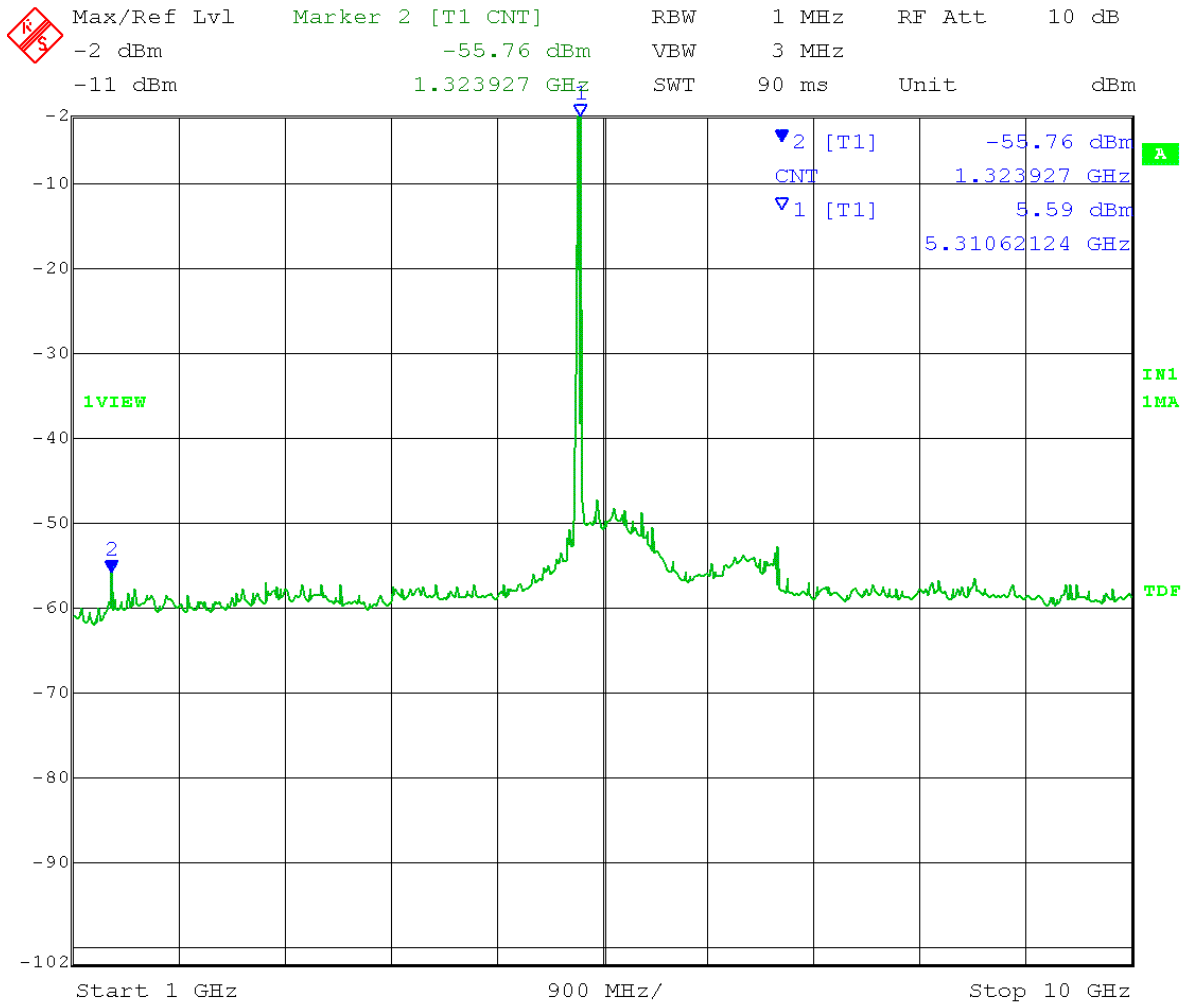


Date: 6.SEP.2013 10:29:28

Marker 2: Calculated Field Strength (Restricted Band) = -55.76 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 58.47dBμV/m Peak

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

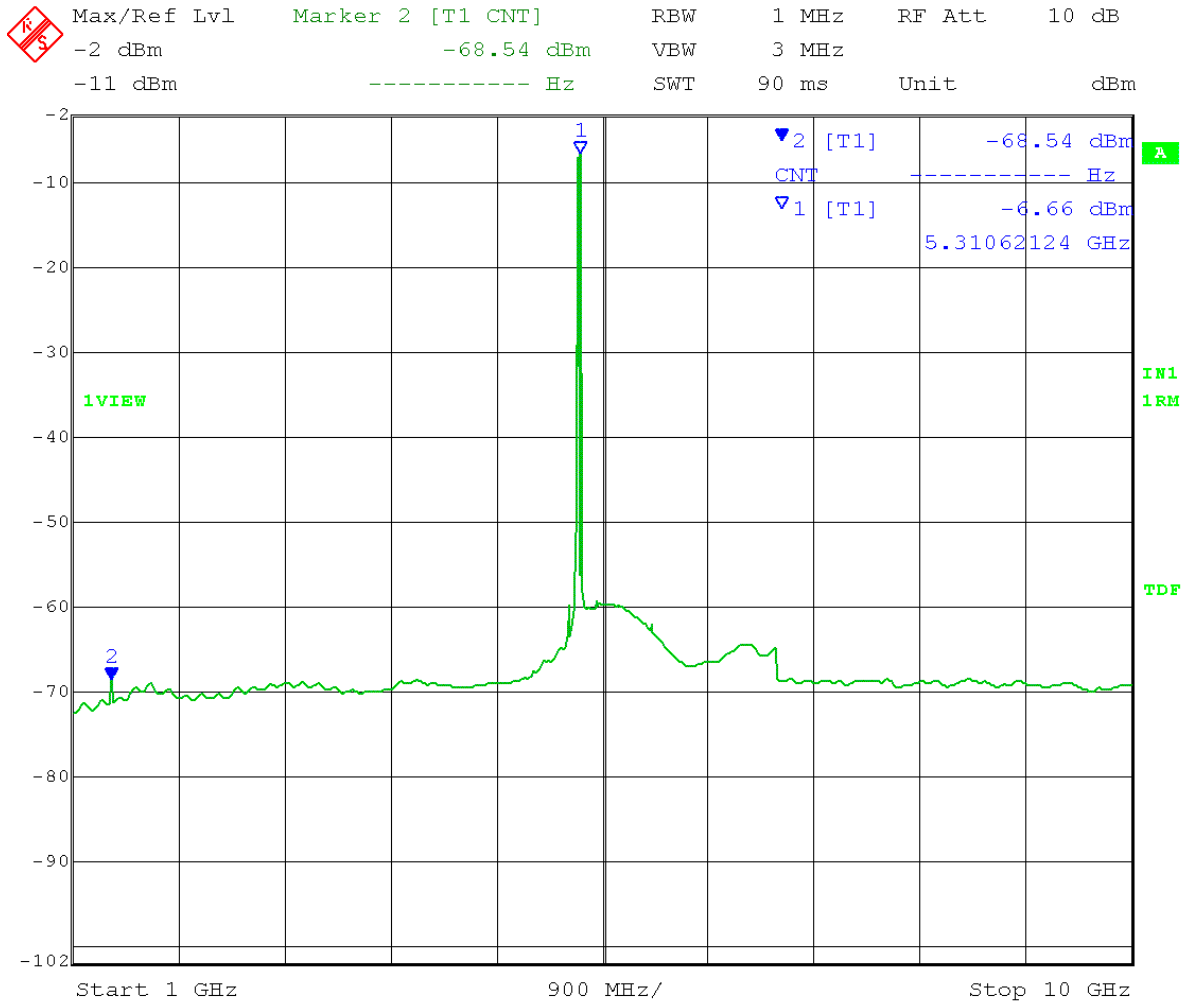


Date: 6.SEP.2013 10:25:56

Marker 2: Calculated Field Strength (Restricted Band) = -68.54 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 46.1dBμV/m Average

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

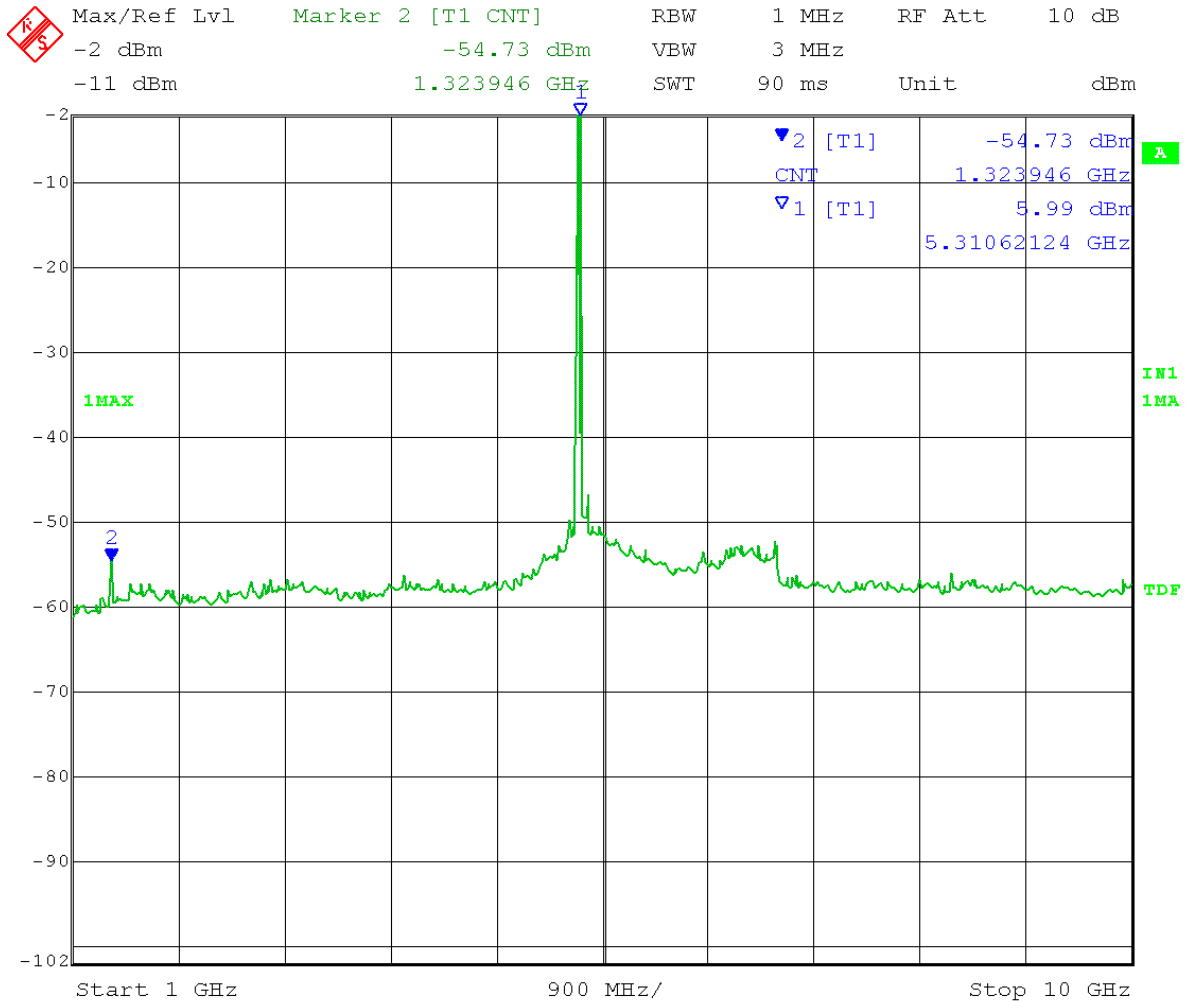


Date: 6.SEP.2013 10:32:35

Marker 2: Calculated Field Strength (Restricted Band) = -54.73 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 59.5dBμV/m Peak

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 1 GHz to 10 GHz

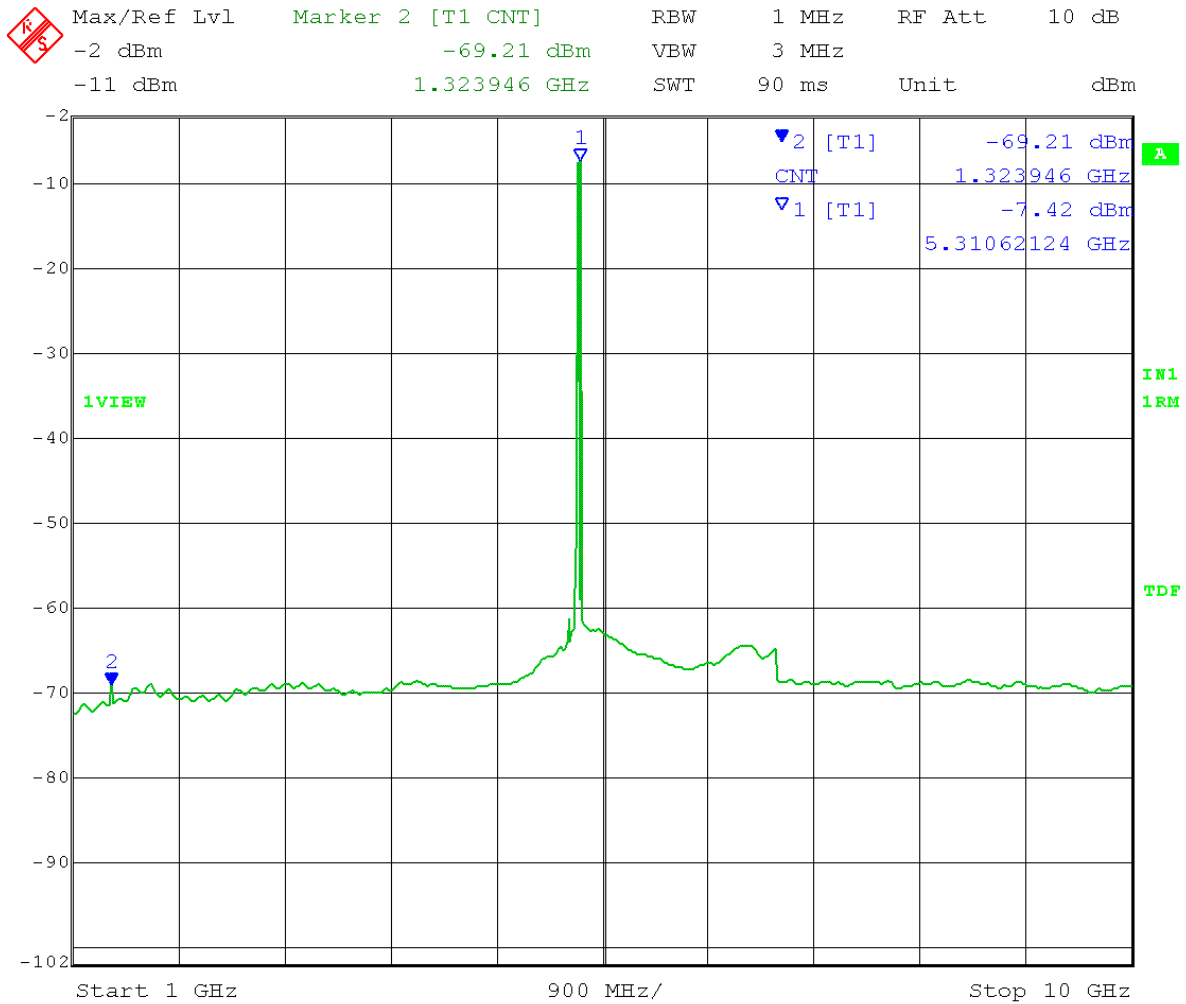


Date: 6.SEP.2013 10:35:31

Marker 2: Calculated Field Strength (Restricted Band) = -69.21 + 16dBi antenna gain
+ 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 45.02dBμV/m Average

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

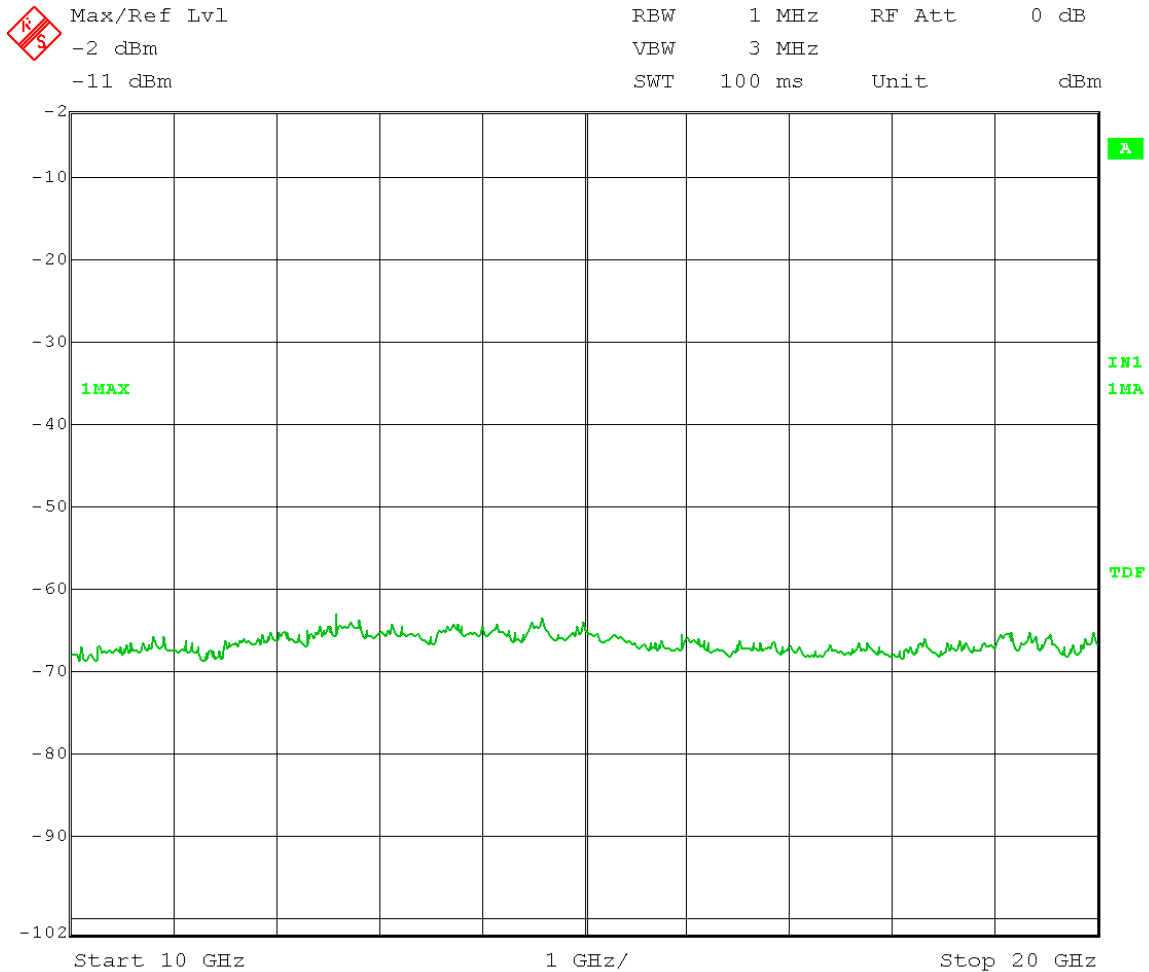


Date: 6.SEP.2013 10:54:28

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

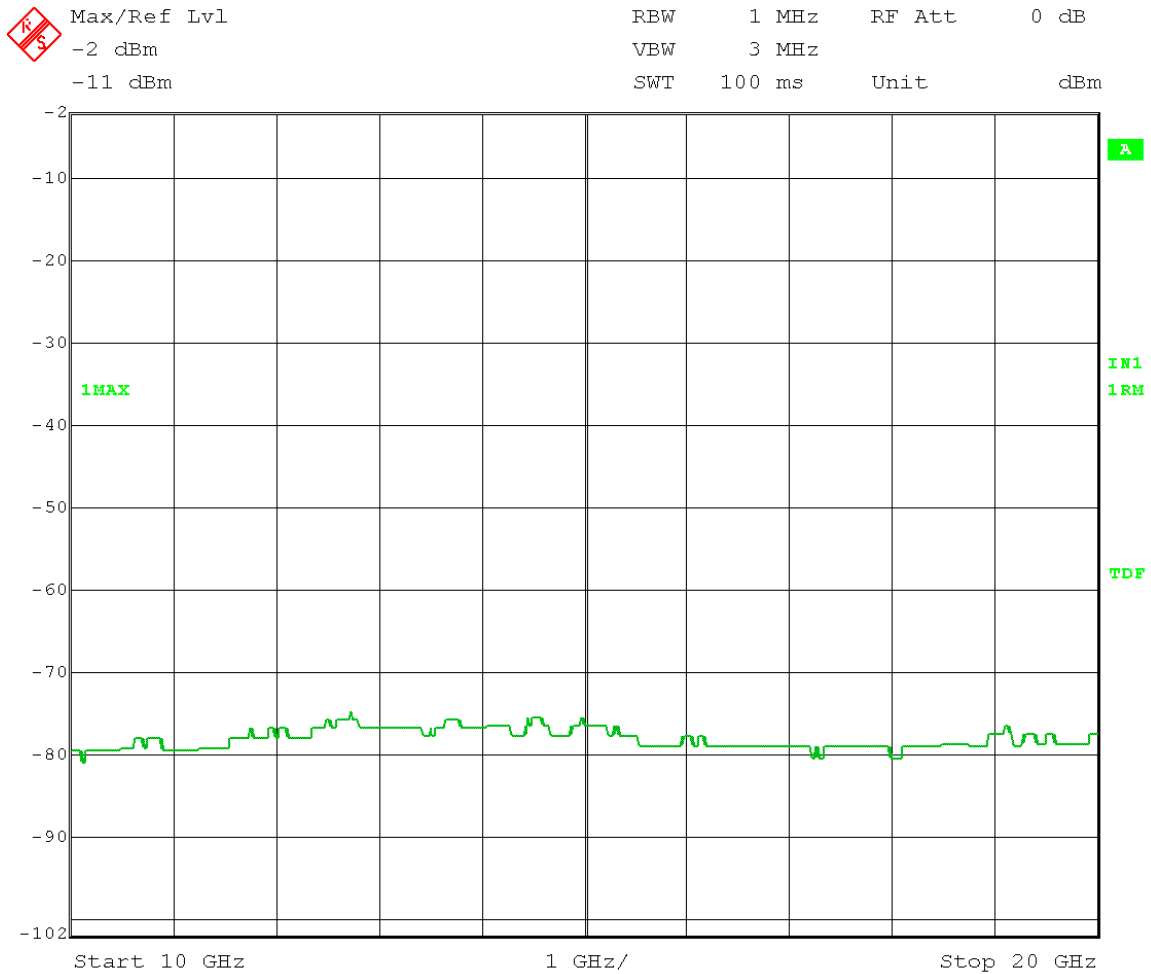


Date: 6.SEP.2013 10:55:54

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

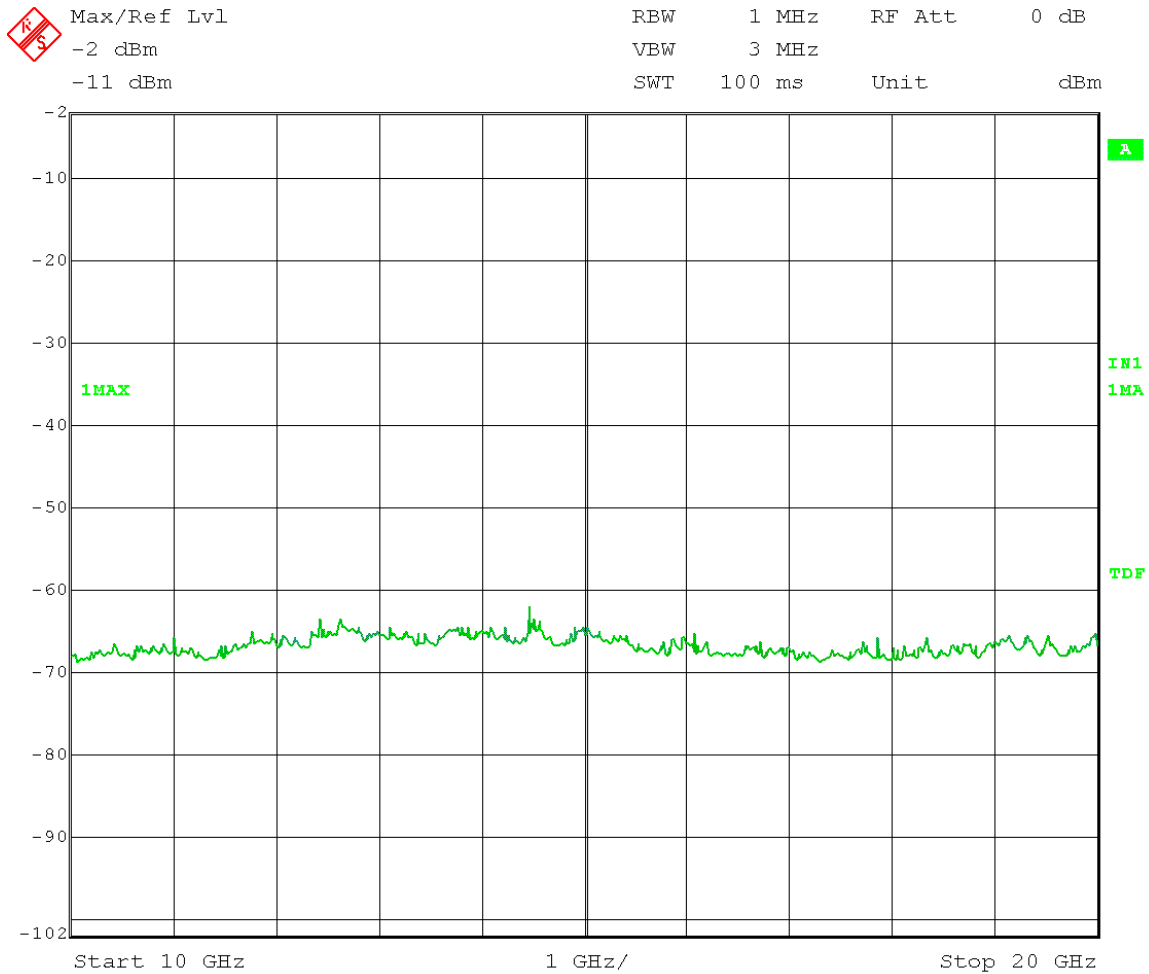


Date: 6.SEP.2013 10:54:46

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

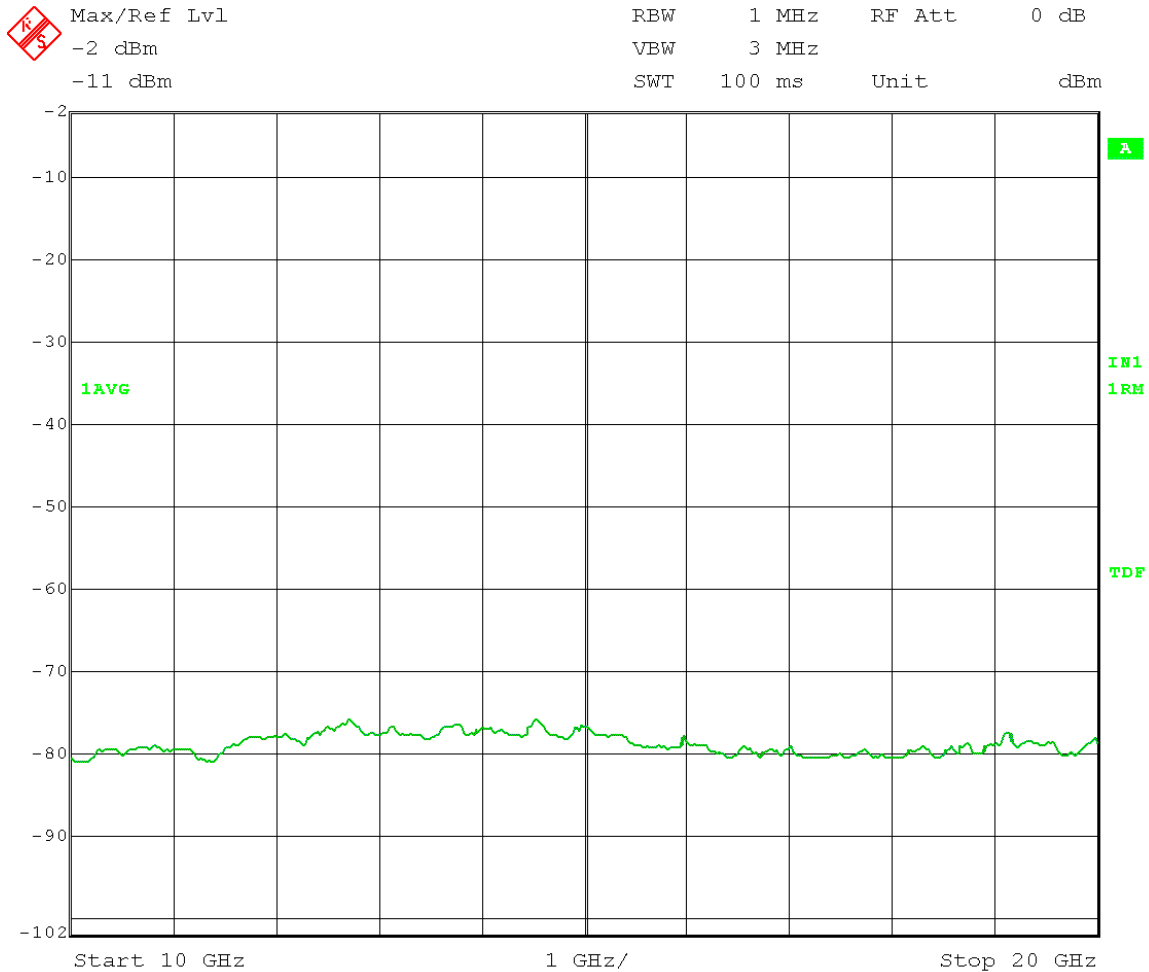


Date: 6.SEP.2013 10:56:25

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 20 GHz to 30 GHz

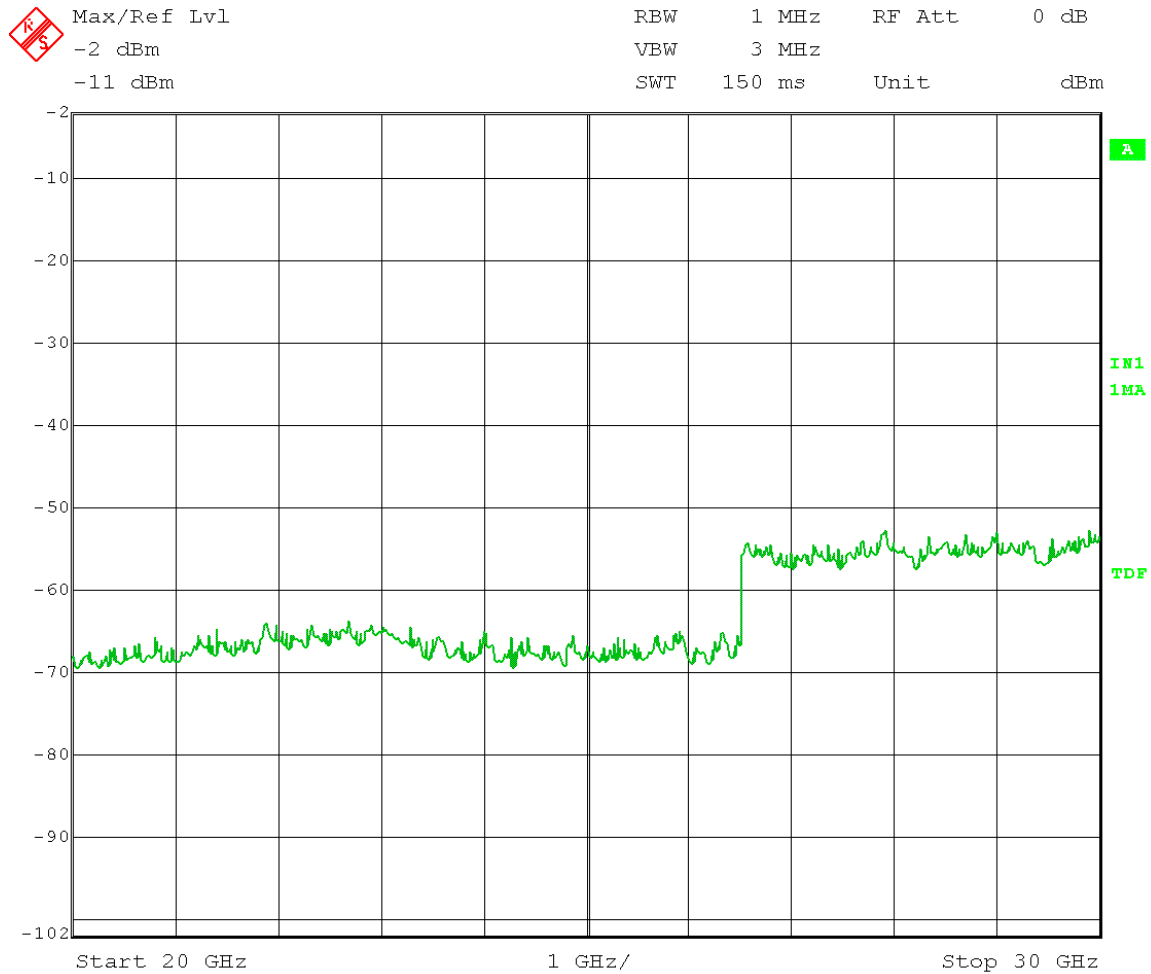


Date: 6.SEP.2013 11:00:52

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 20 GHz to 30 GHz

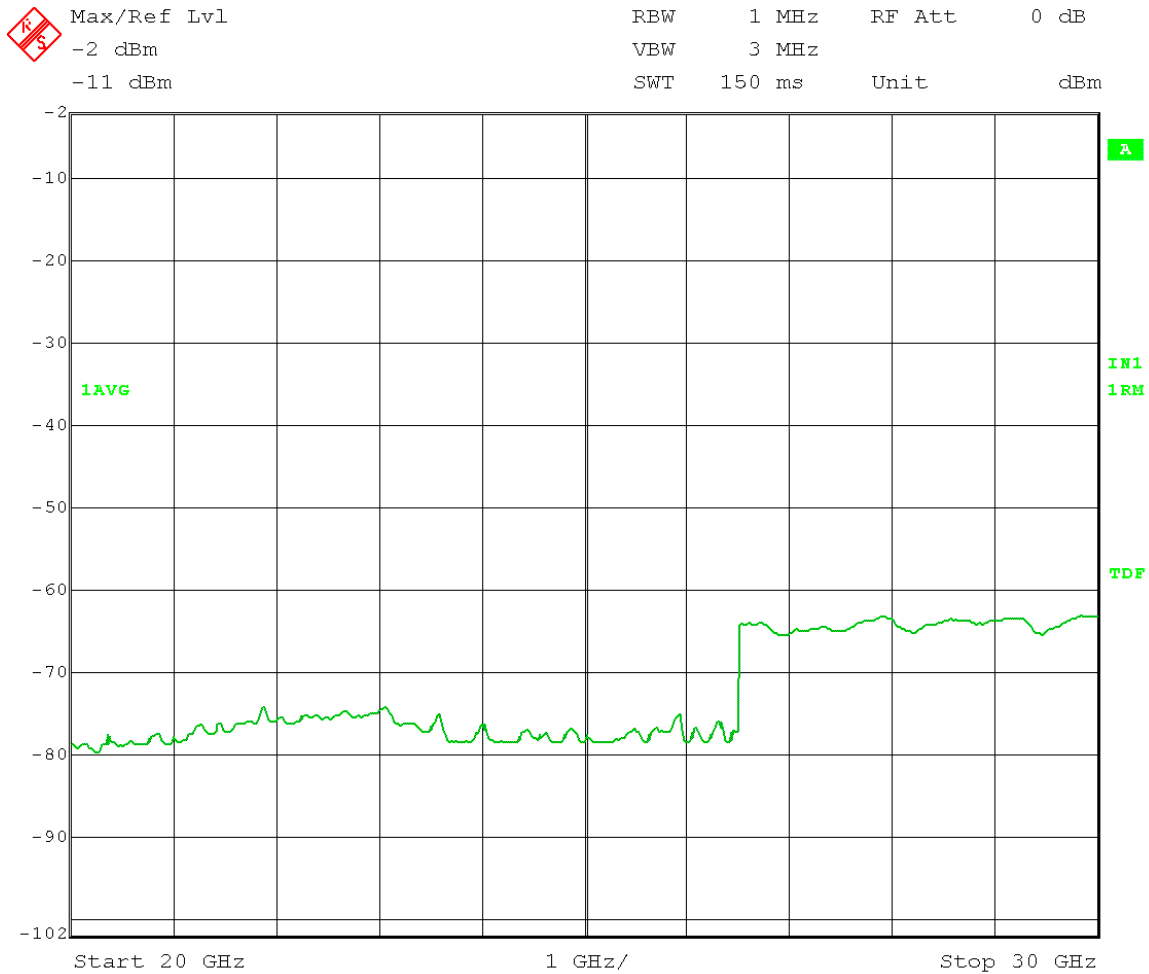


Date: 6.SEP.2013 10:59:57

Marker 1: Greater than 20dB below limit

Test Date: 9-09-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

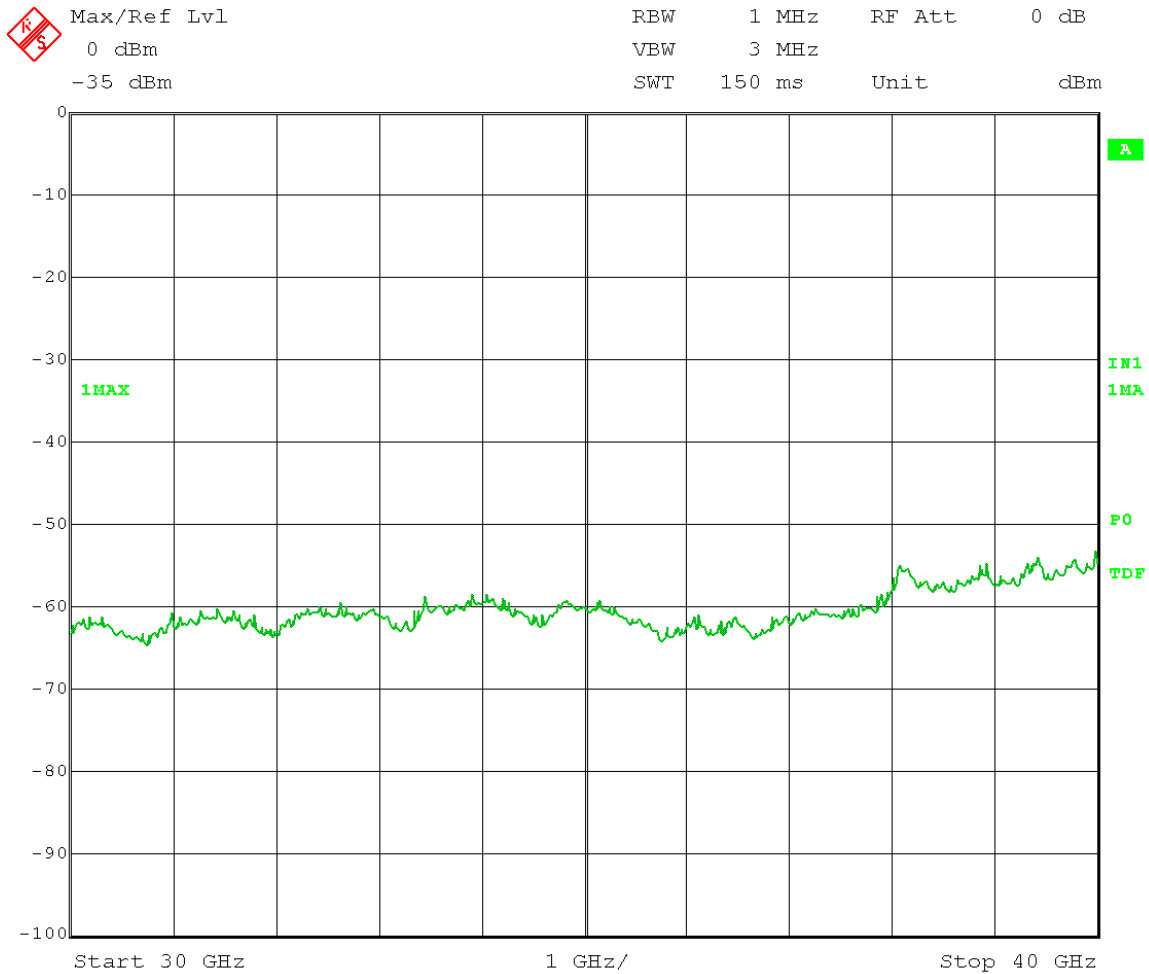


Date: 9.SEP.2013 10:52:52

All Emissions > 20dB below limit

Test Date: 9-09-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 GHz to 40 GHz

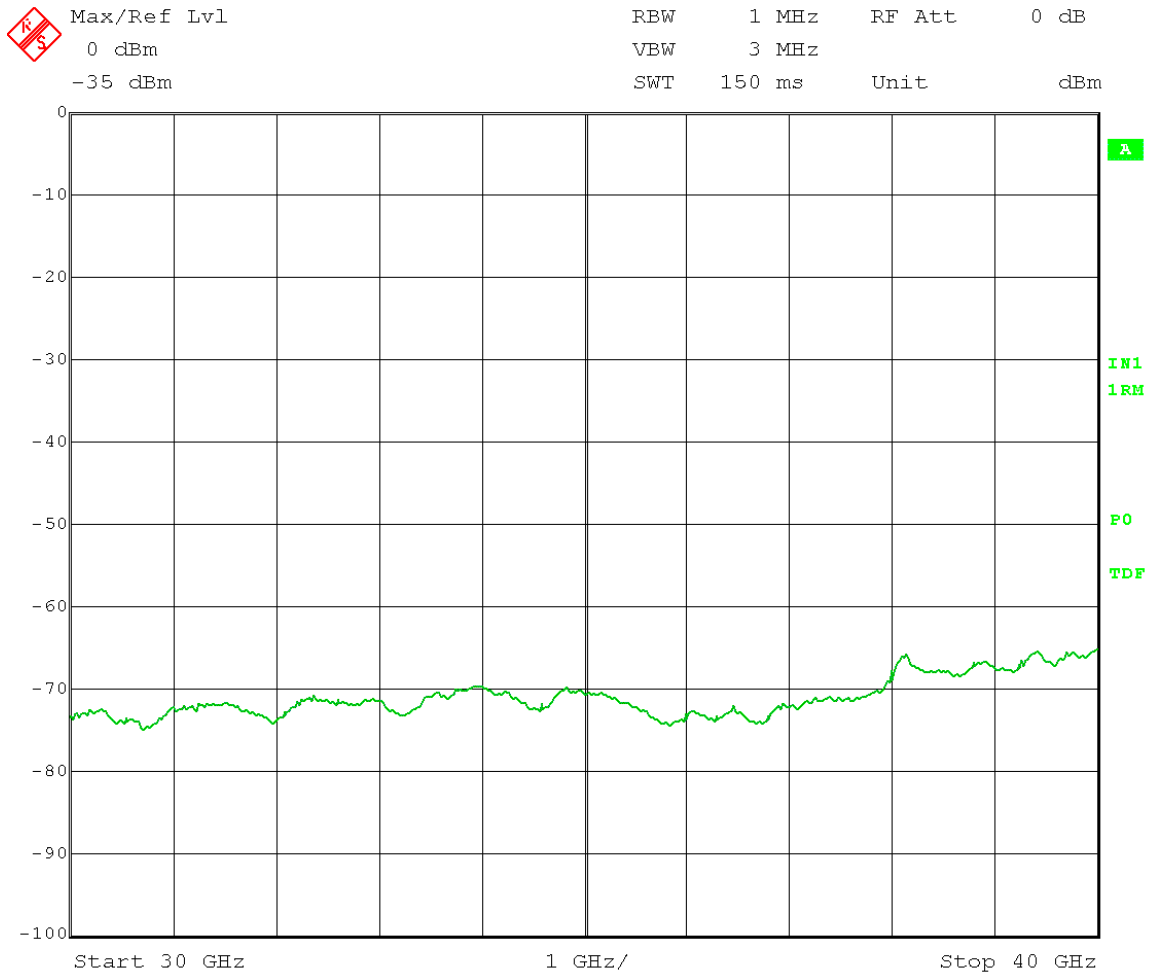


Date: 9.SEP.2013 10:55:14

All Emissions > 20dB below limit

Test Date: 9-092013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

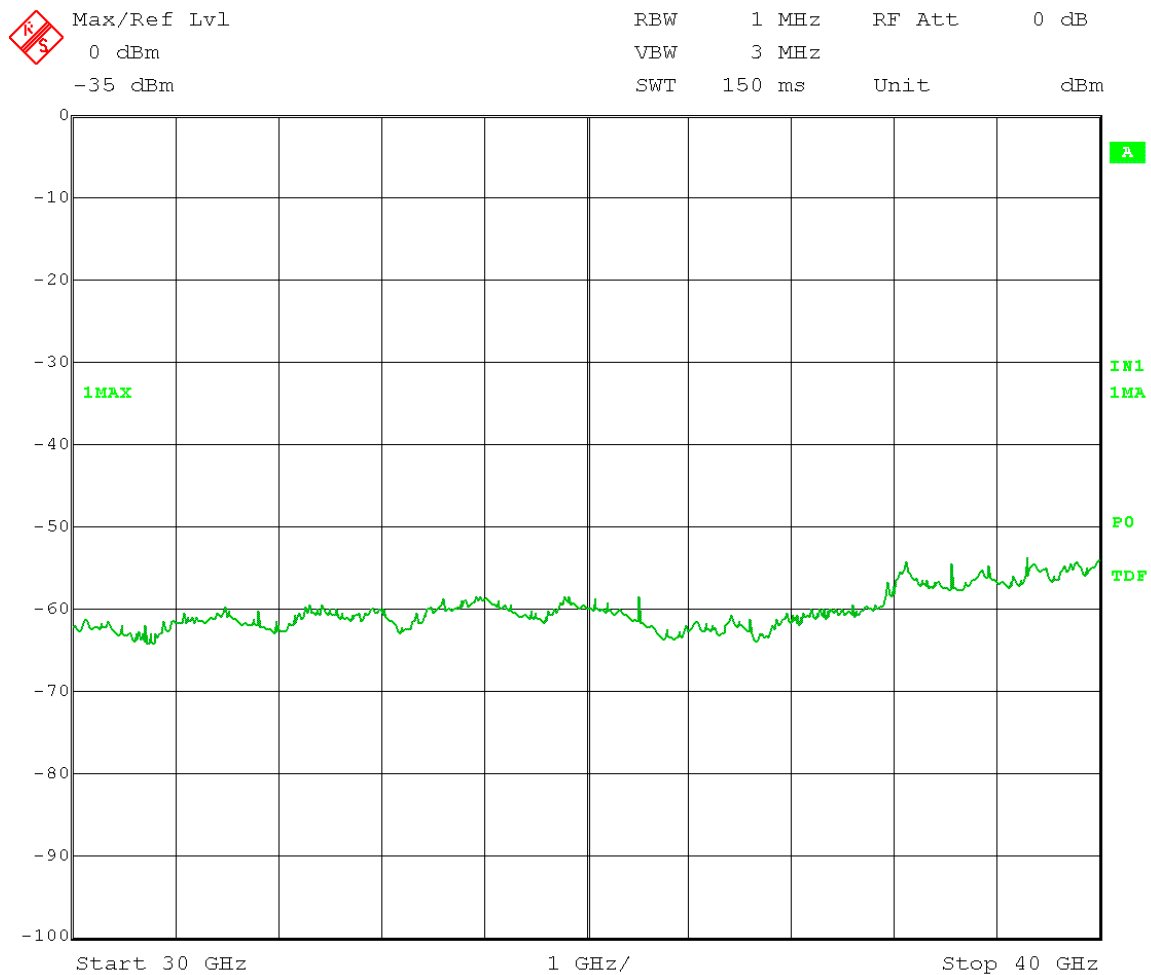


Date: 9.SEP.2013 10:54:20

All Emissions > 20dB below limit

Test Date: 9-09-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 GHz to 40 GHz

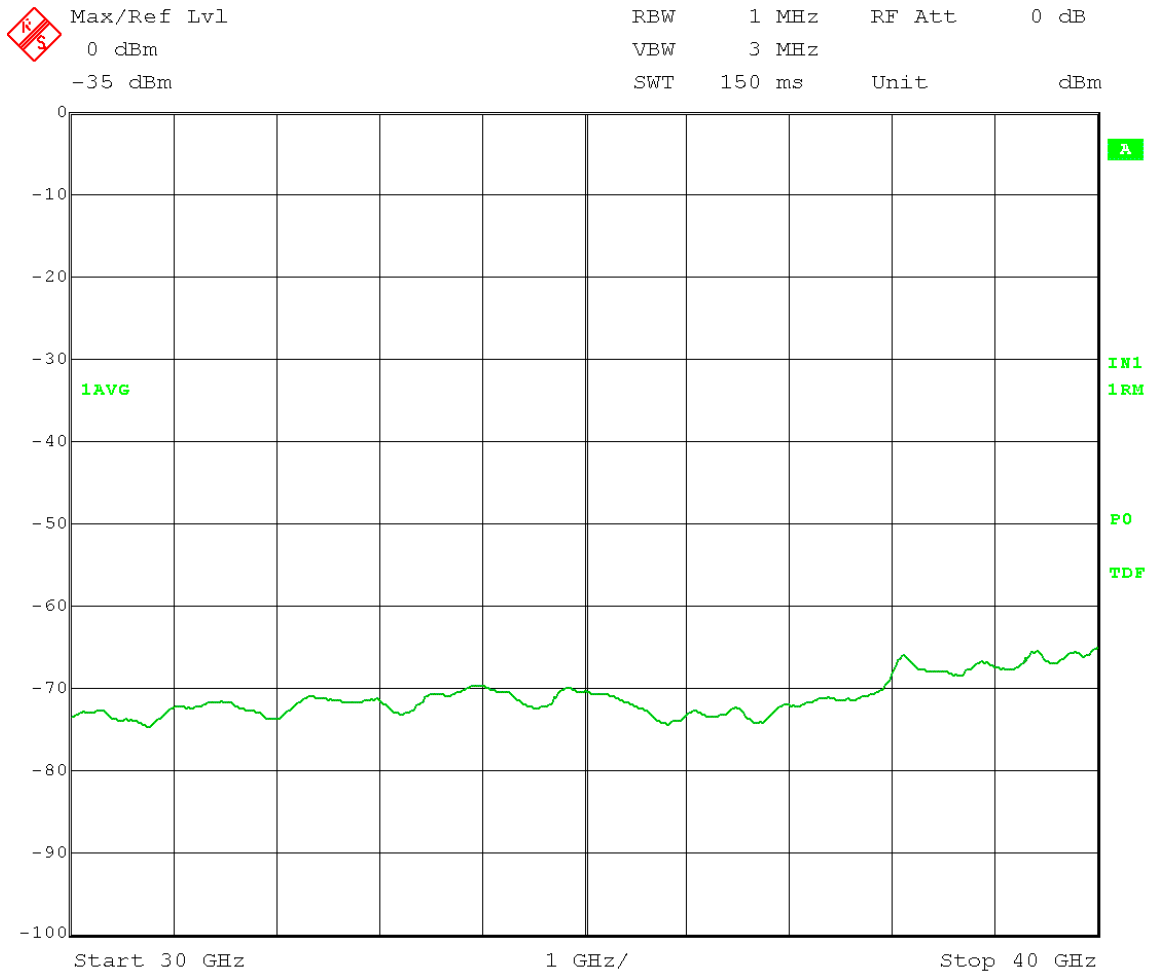


Date: 9.SEP.2013 10:55:49

All Emissions > 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz
Output Port: Channel 0
Output Power Setting: 7.5
Antenna Gain: 16dBi
Peak Detector
High Channel Frequency: 5.330 GHz
Modulation Type: OFDM
EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30MHz to 1 GHz

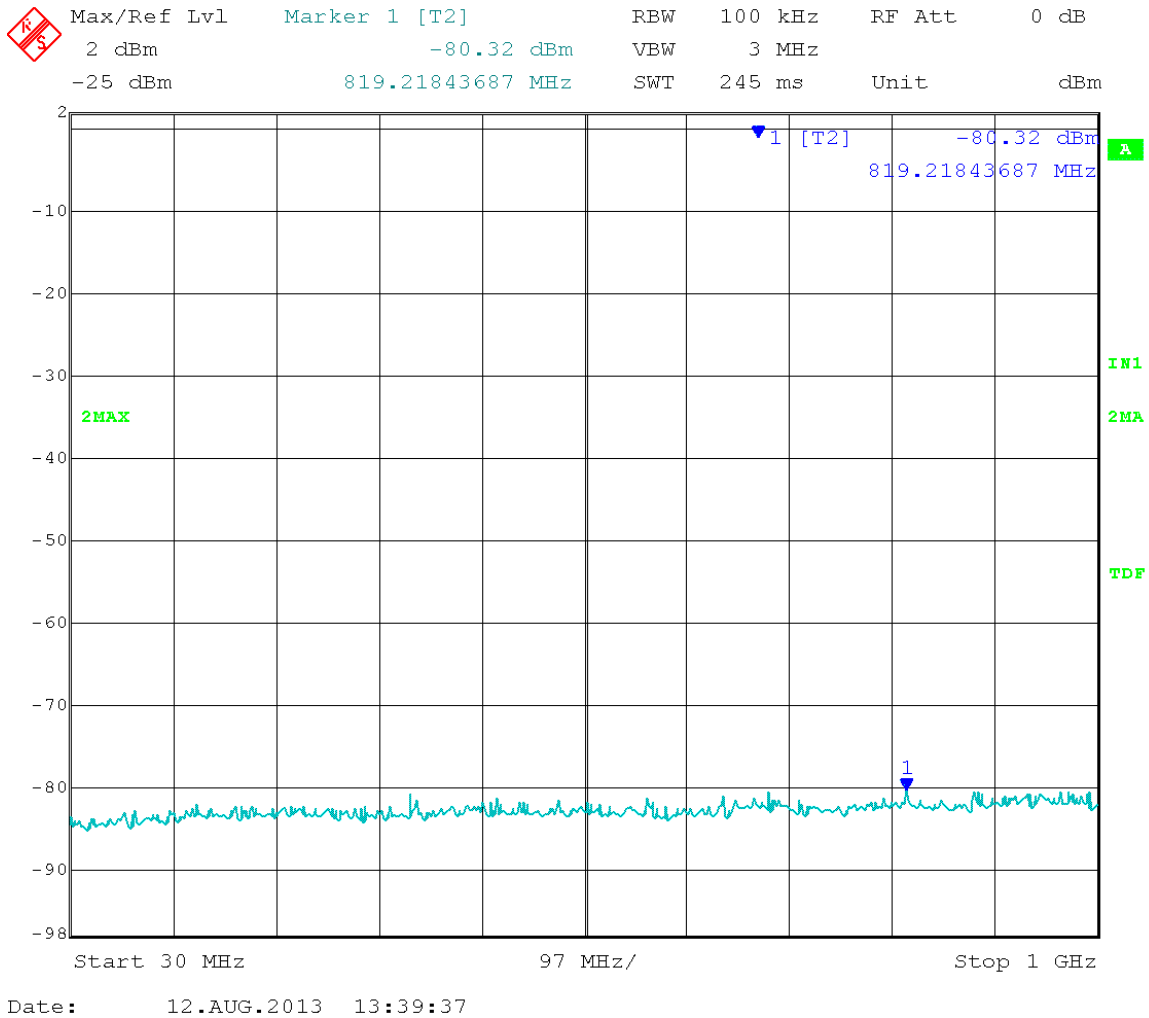


Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 0 High Channel Frequency: 5.330 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30MHz to 1 GHz

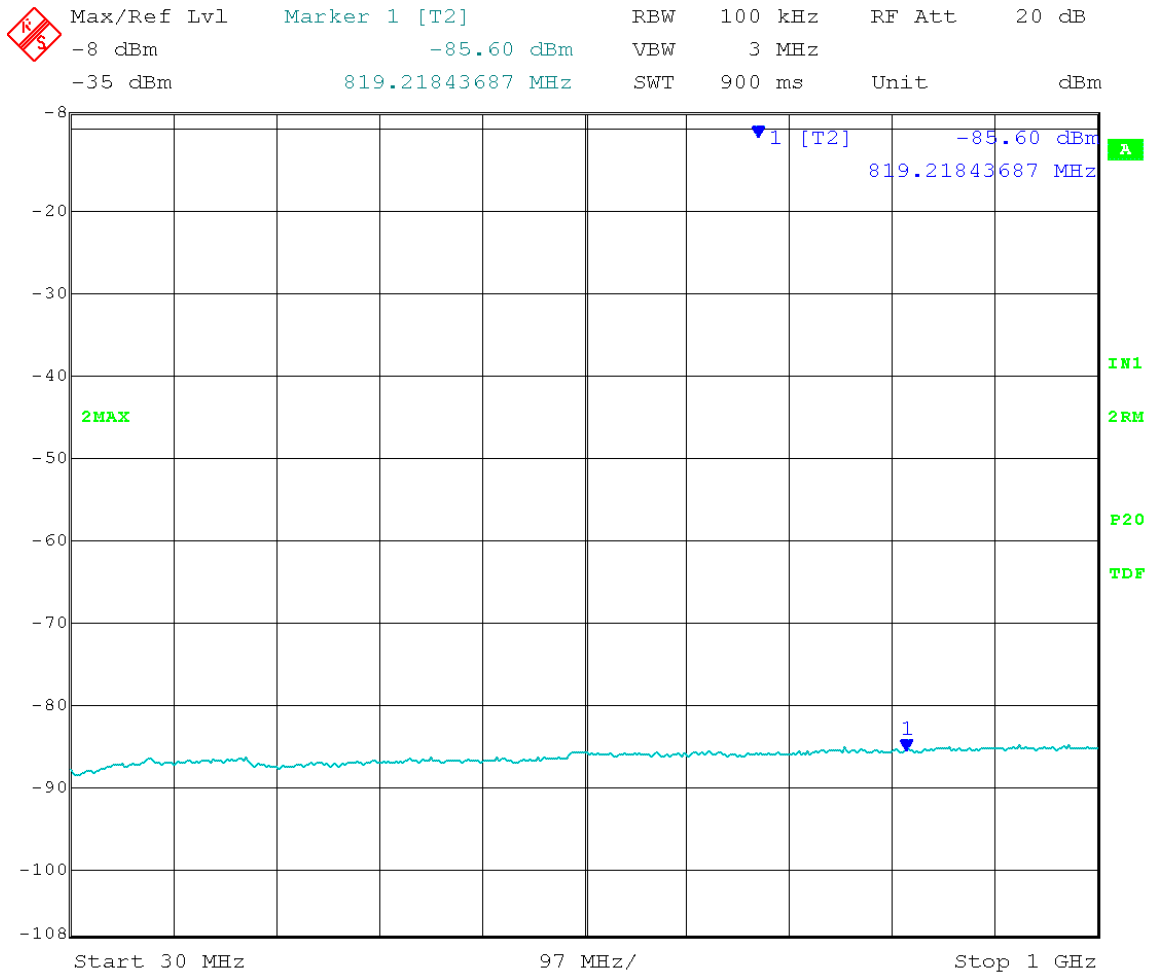


Date: 12.AUG.2013 13:40:56

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz
Output Port: Channel 1
Output Power Setting: 7.5
Antenna Gain: 16dBi
Peak Detector
High Channel Frequency: 5.330 GHz
Modulation Type: OFDM
EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30MHz to 1 GHz

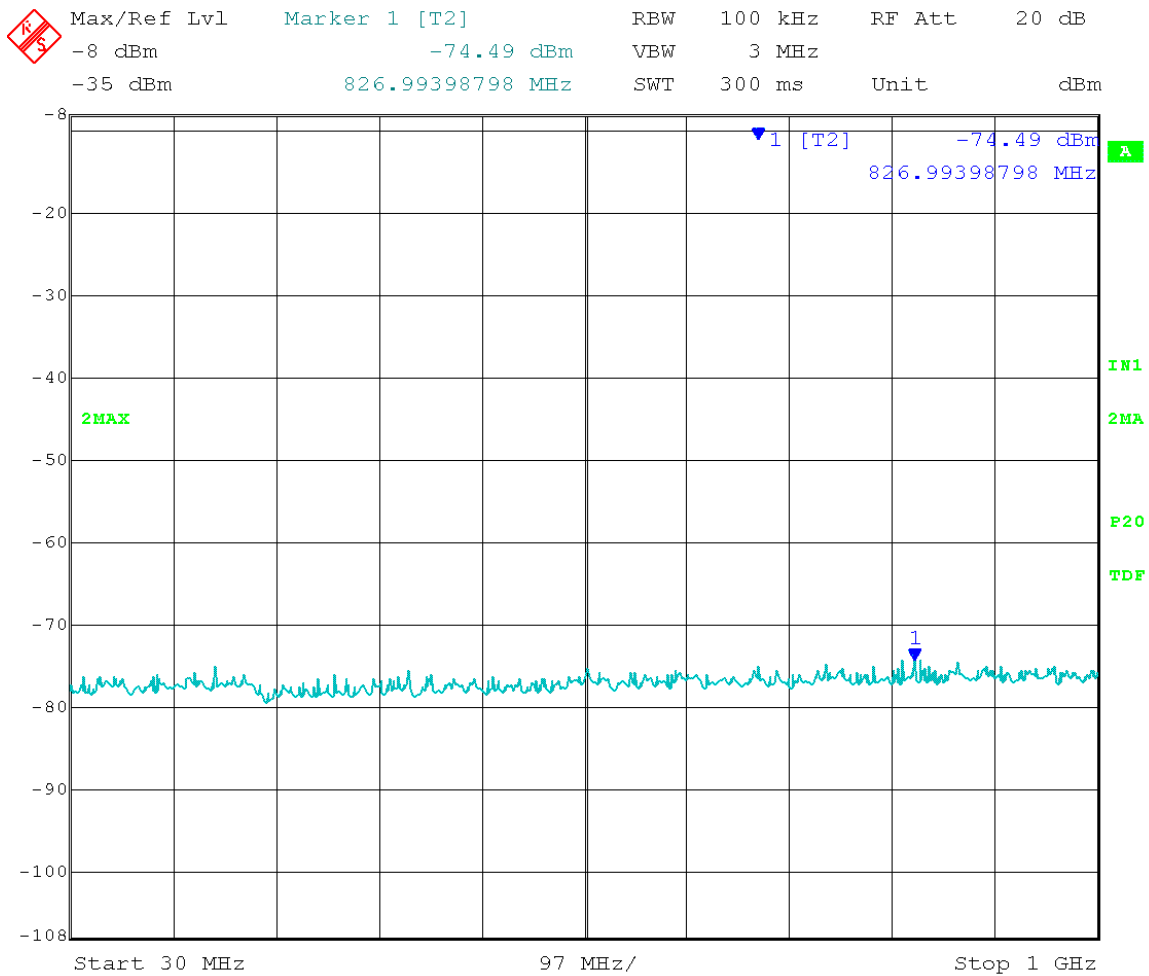


Date: 12.AUG.2013 13:42:28

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 1 High Channel Frequency: 5.330 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30MHz to 1 GHz

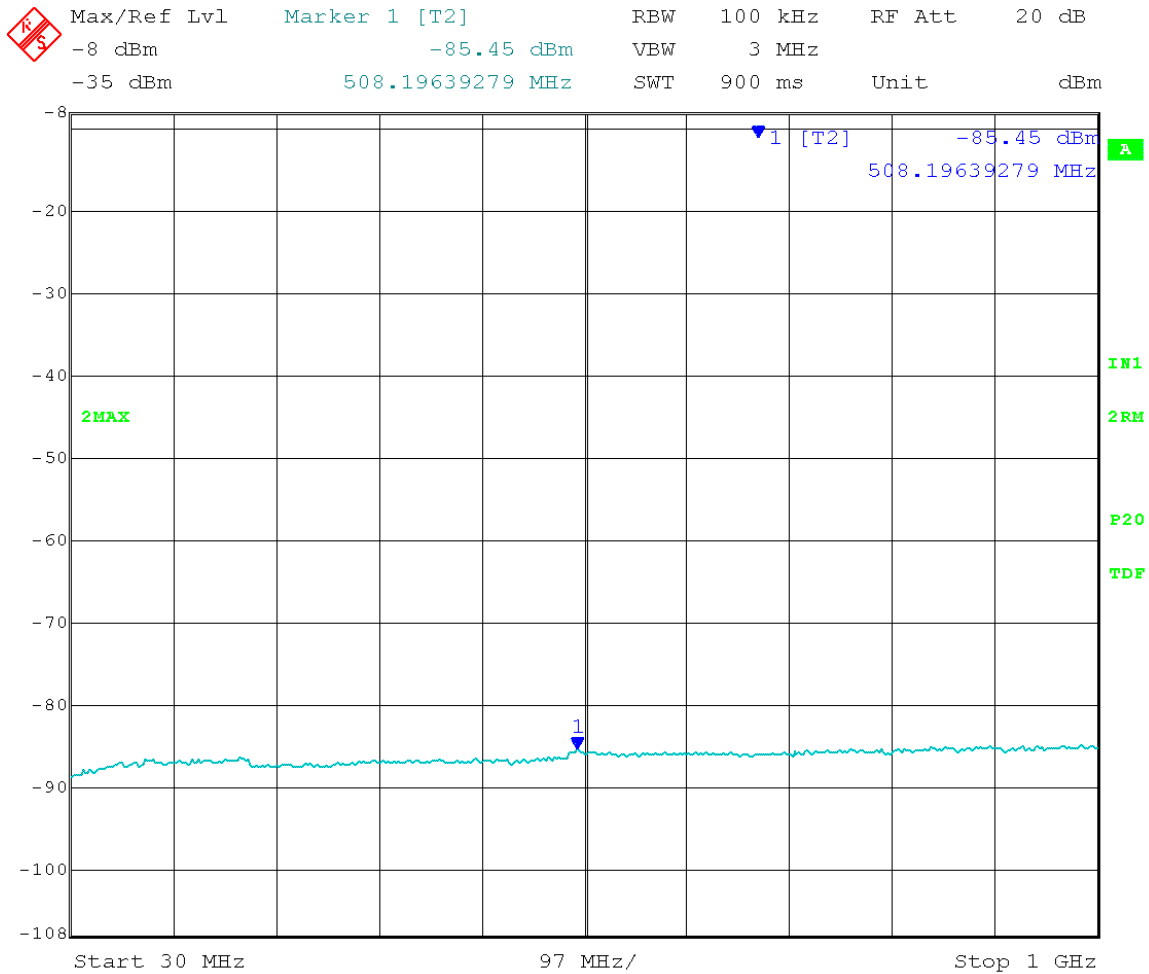


Date: 12.AUG.2013 13:41:36

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 1 High Channel Frequency: 5.330 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

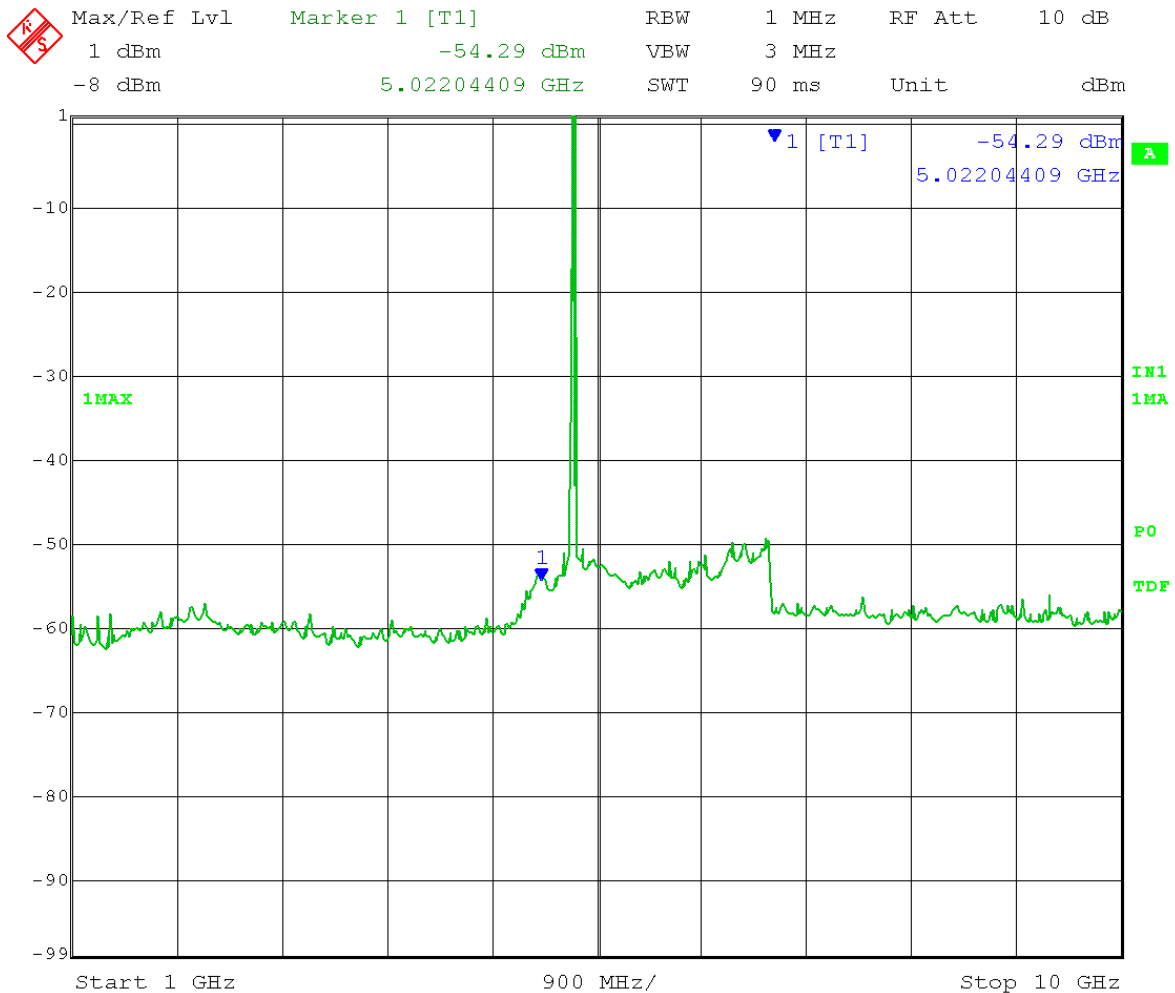


Date: 6.SEP.2013 11:39:05

Marker 1: Calculated Field Strength (Restricted Band) = -54.29 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 59.94dBμV/m Peak

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 1 High Channel Frequency: 5.330 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

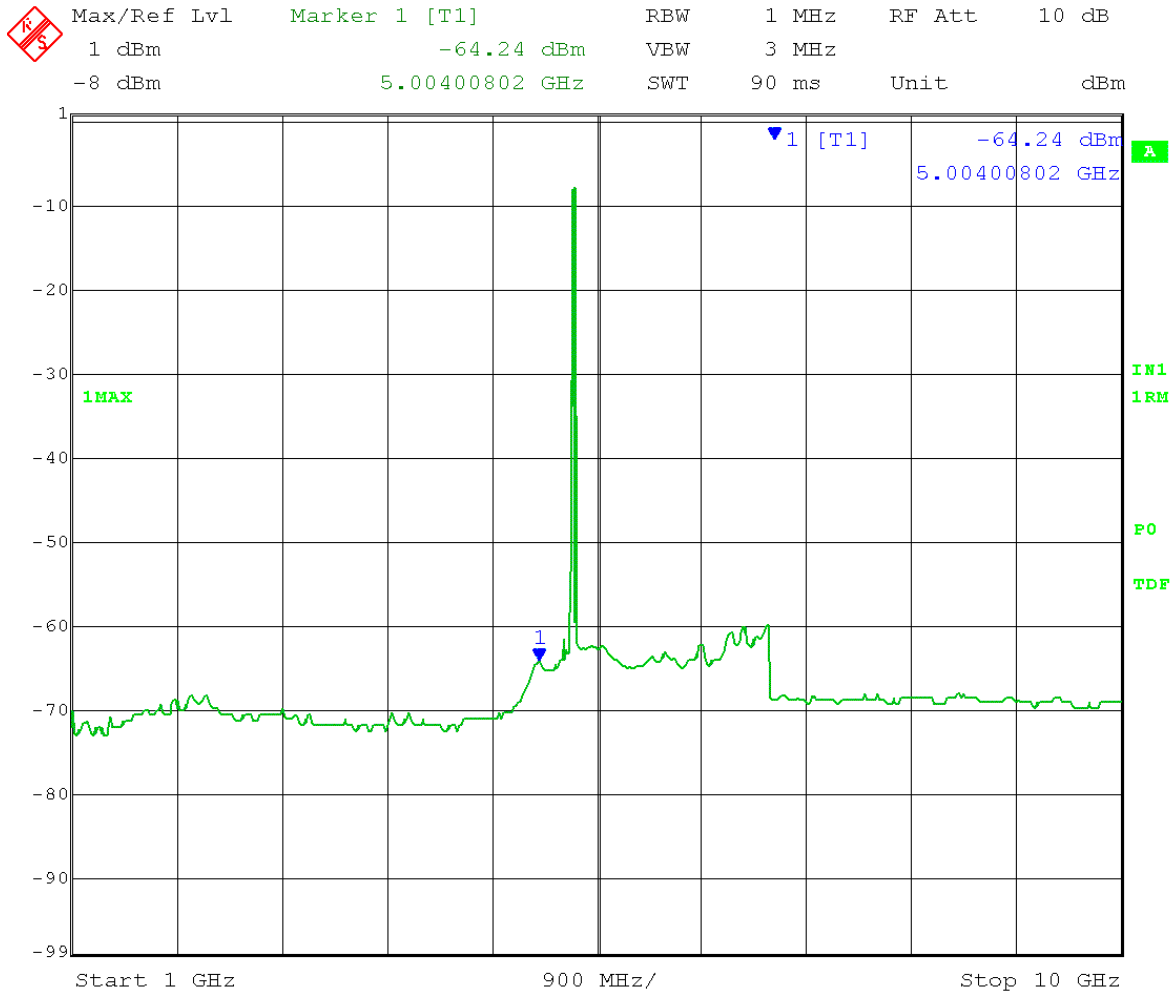


Date: 6.SEP.2013 11:32:43

Marker 1: Calculated Field Strength (Restricted Band) = -64.24 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 49.99dBμV/m Average

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
Output Port: Channel 0 High Channel Frequency: 5.330 GHz
Output Power Setting: 7.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 10 GHz to 20 GHz

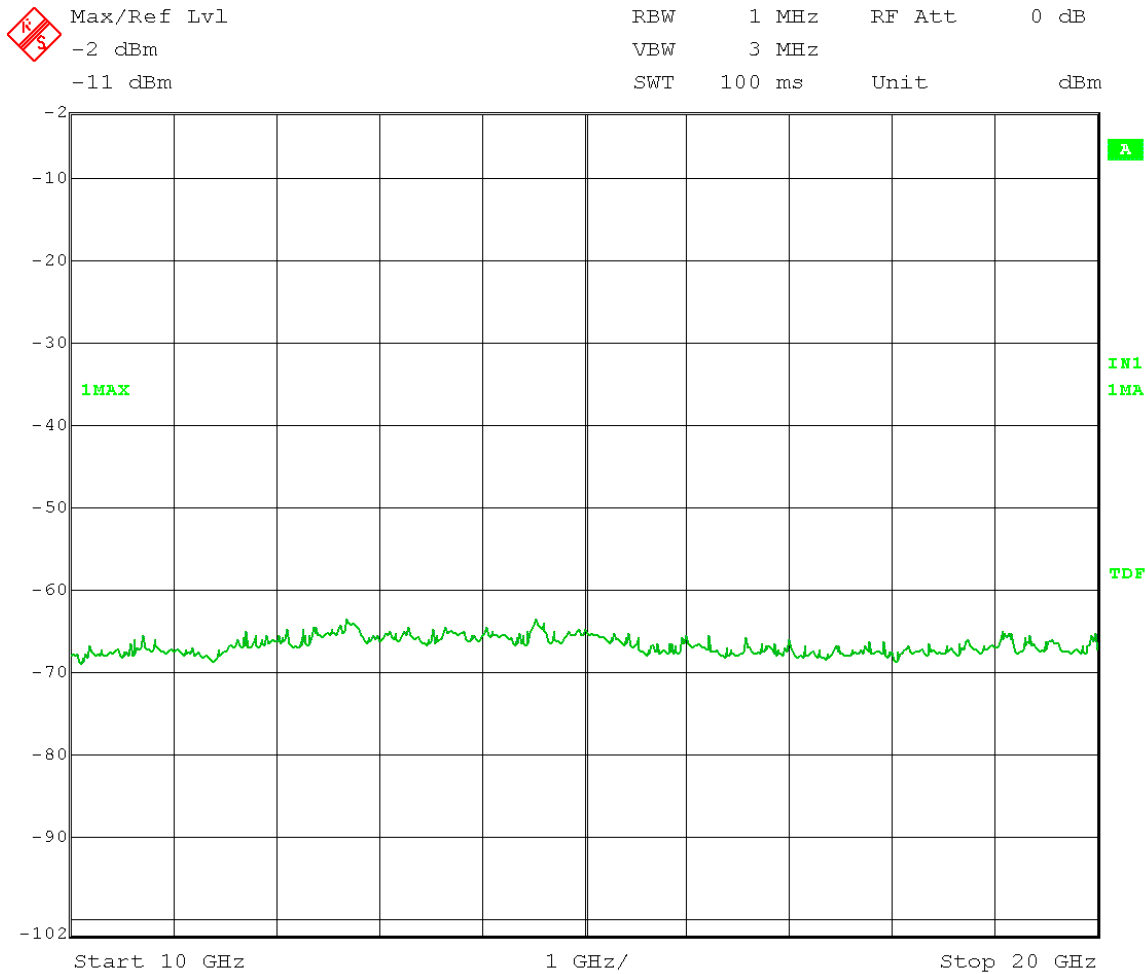


Date: 6.SEP.2013 11:09:56

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 1 High Channel Frequency: 5.330 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

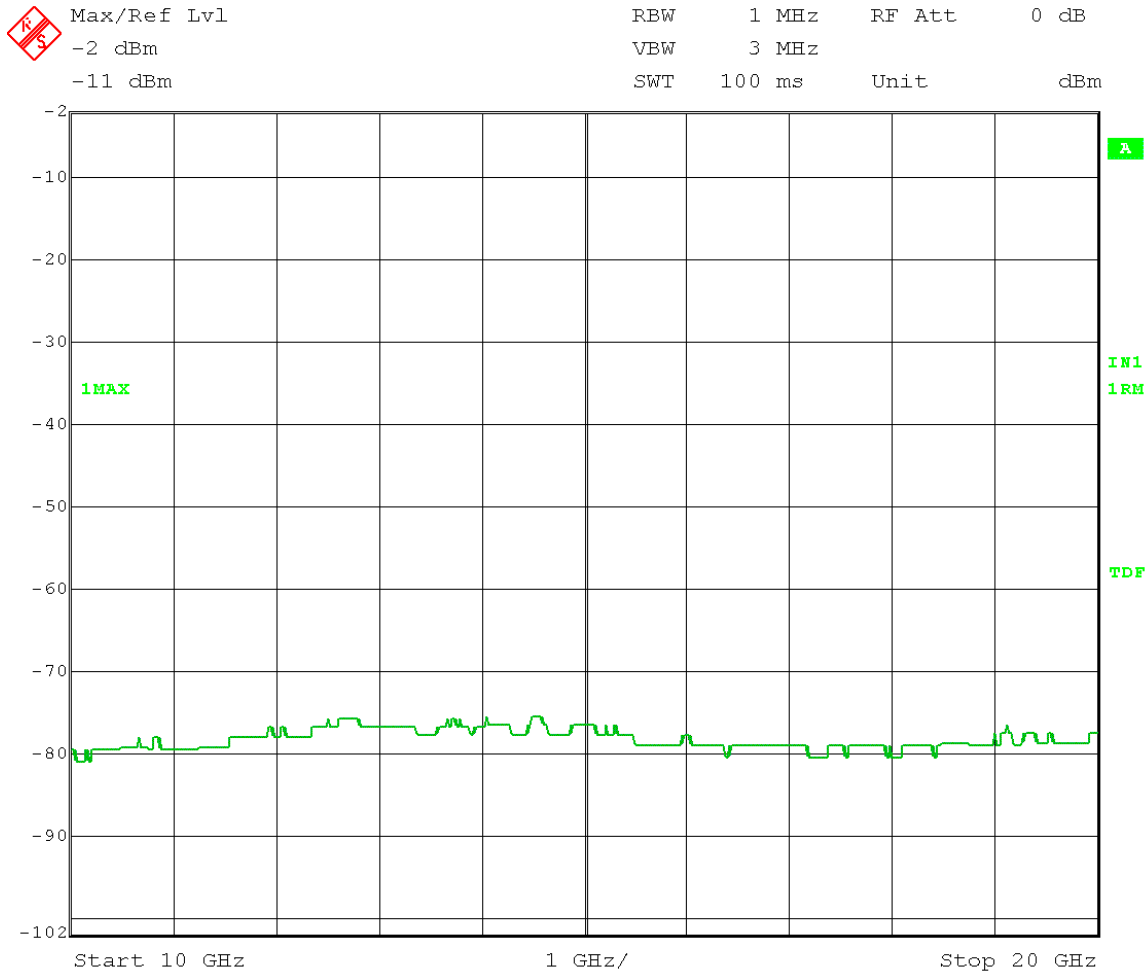


Date: 6.SEP.2013 11:12:19

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 0 High Channel Frequency: 5.330 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 20 GHz to 30 GHz

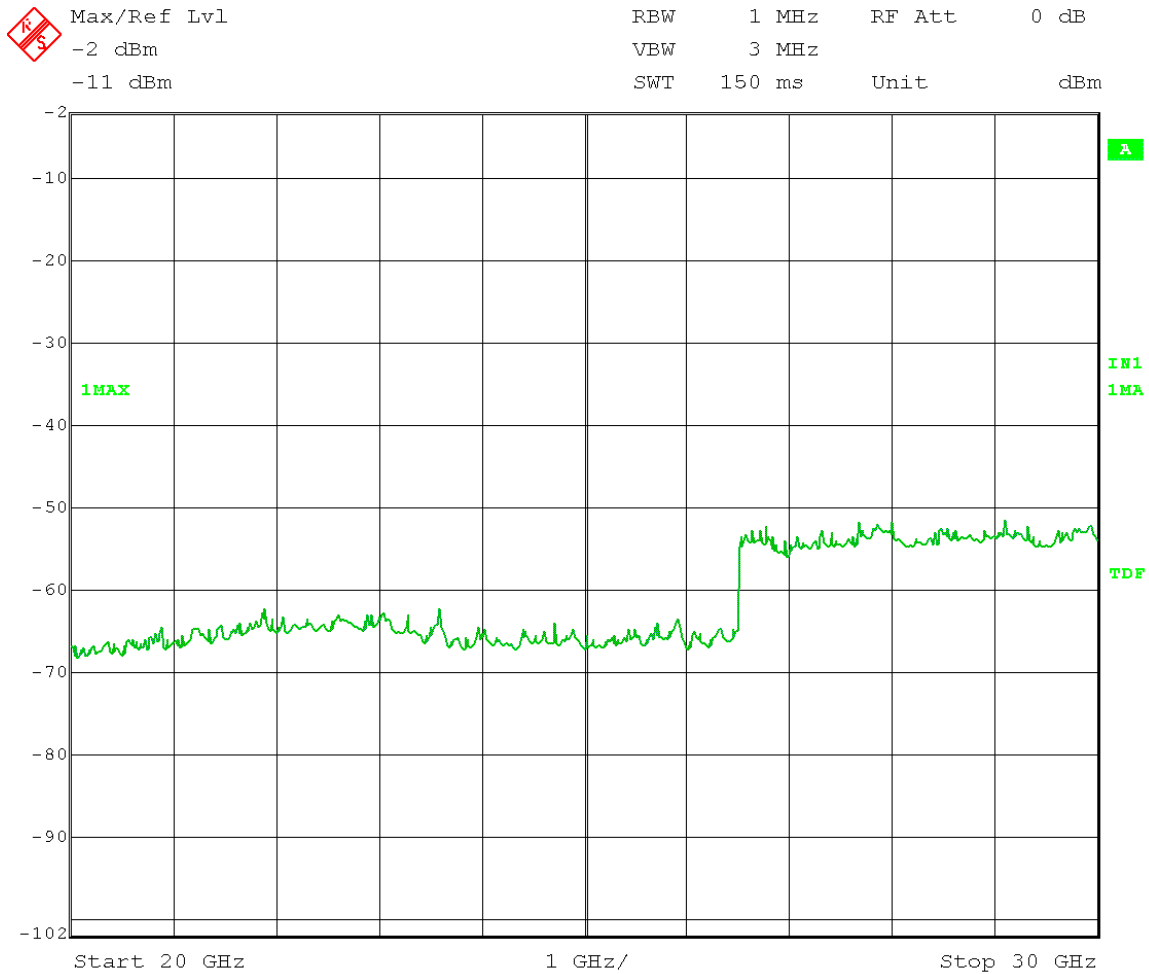


Date: 6.SEP.2013 11:17:57

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 0 High Channel Frequency: 5.330 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 20 GHz to 30 GHz

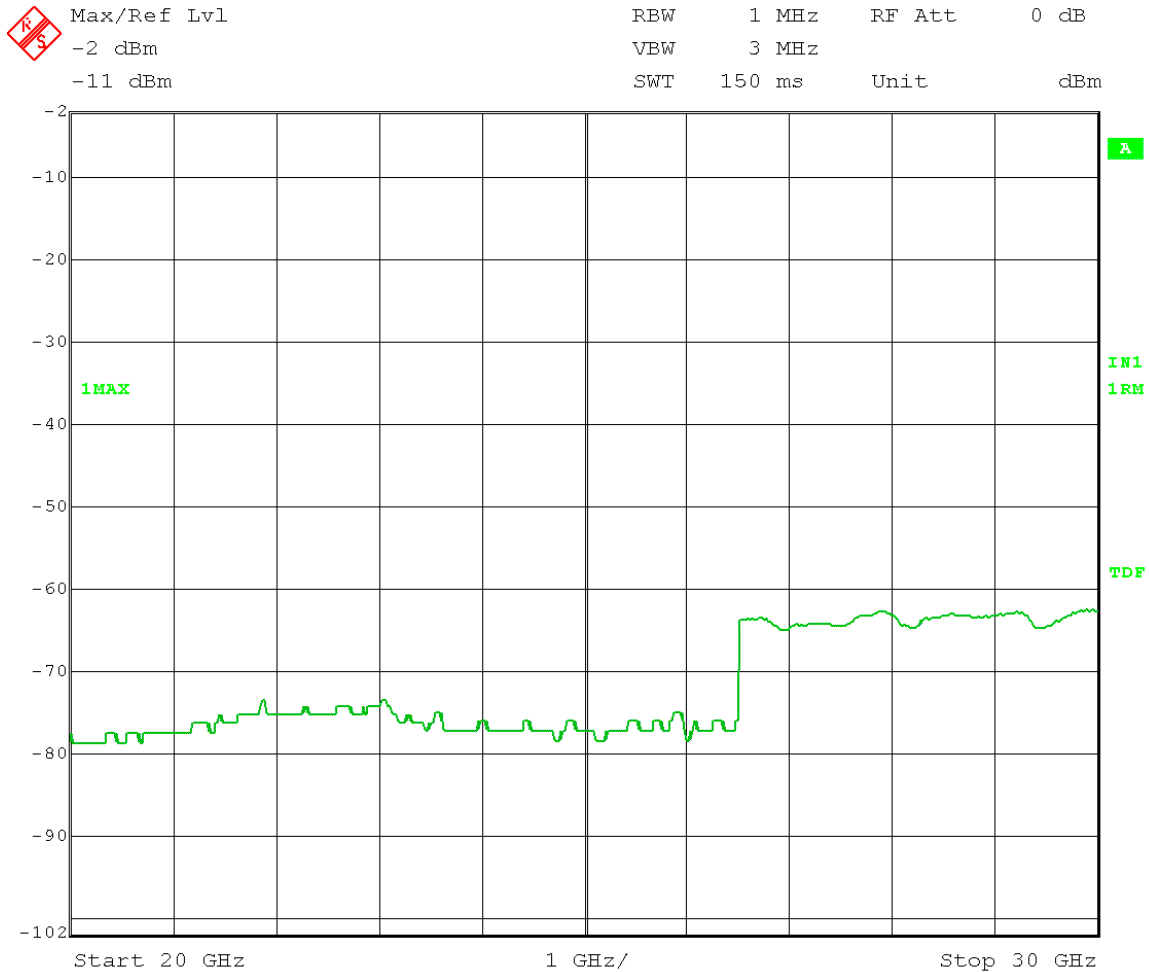


Date: 6.SEP.2013 11:16:35

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
Output Port: Channel 1 High Channel Frequency: 5.330 GHz
Output Power Setting: 7.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 20 GHz to 30 GHz

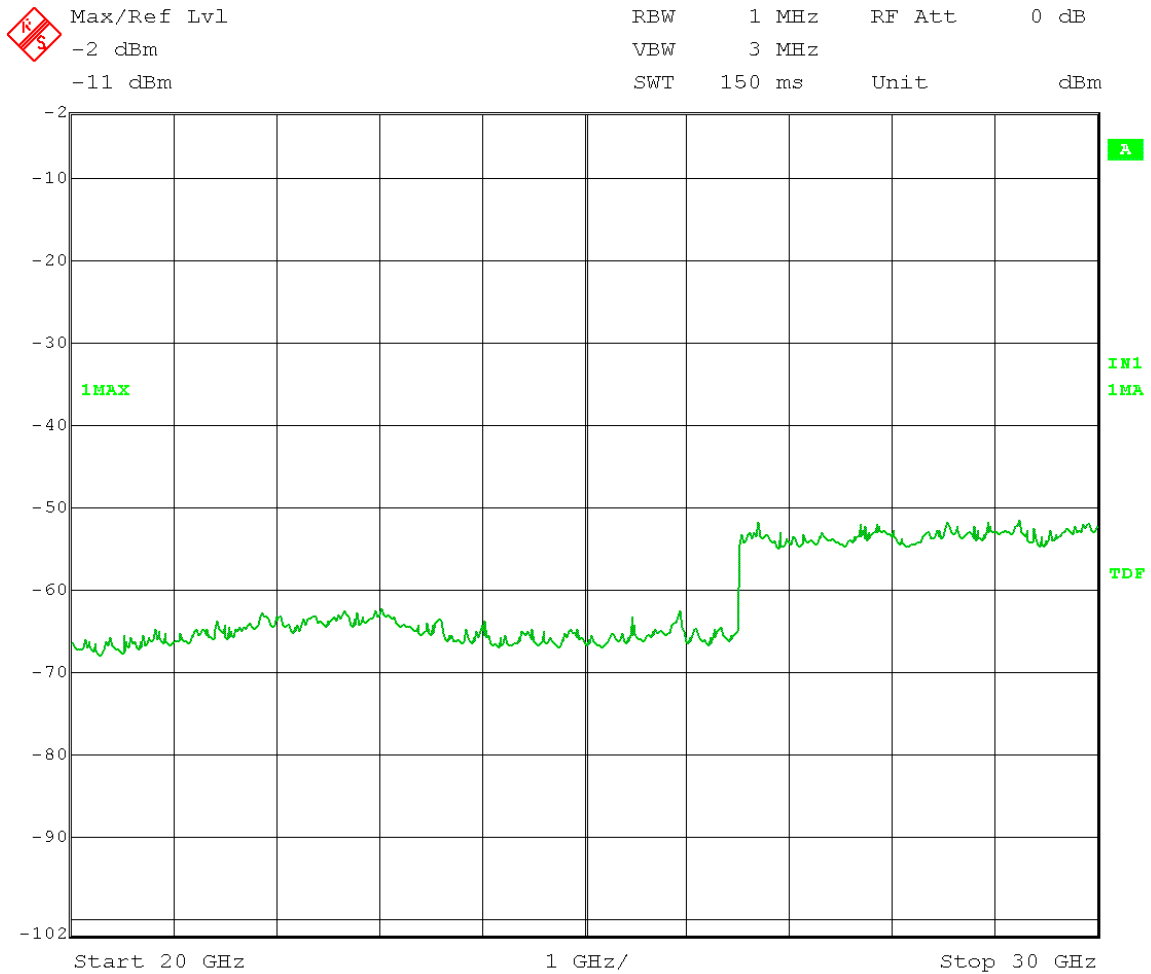


Date: 6.SEP.2013 11:17:39

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
Output Port: Channel 1 High Channel Frequency: 5.330 GHz
Output Power Setting: 7.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 20 GHz to 30 GHz

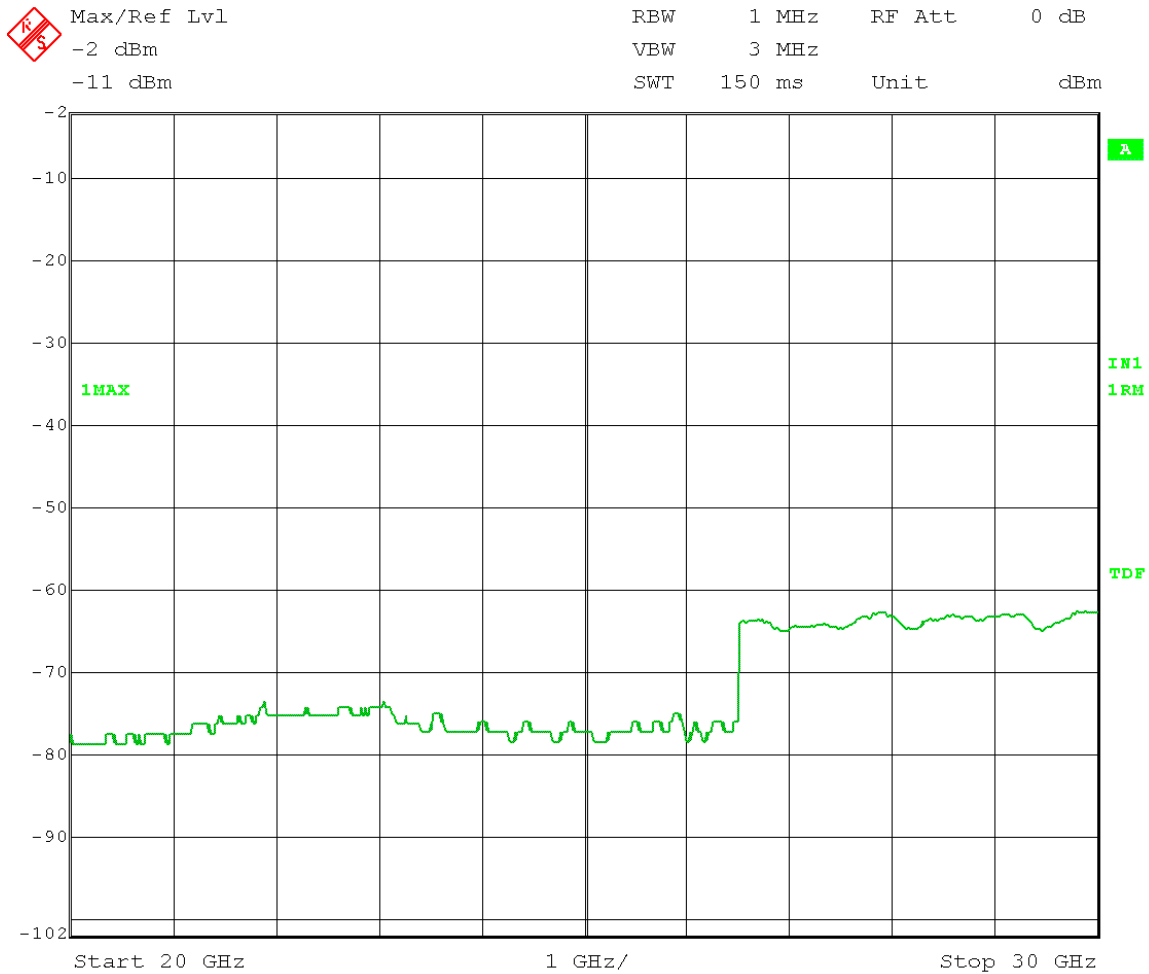


Date: 6.SEP.2013 11:17:11

Marker 1: Greater than 20dB below limit

Test Date: 09-09-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
Output Port: Channel 0 High Channel Frequency: 5.330 GHz
Output Power Setting: 7.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

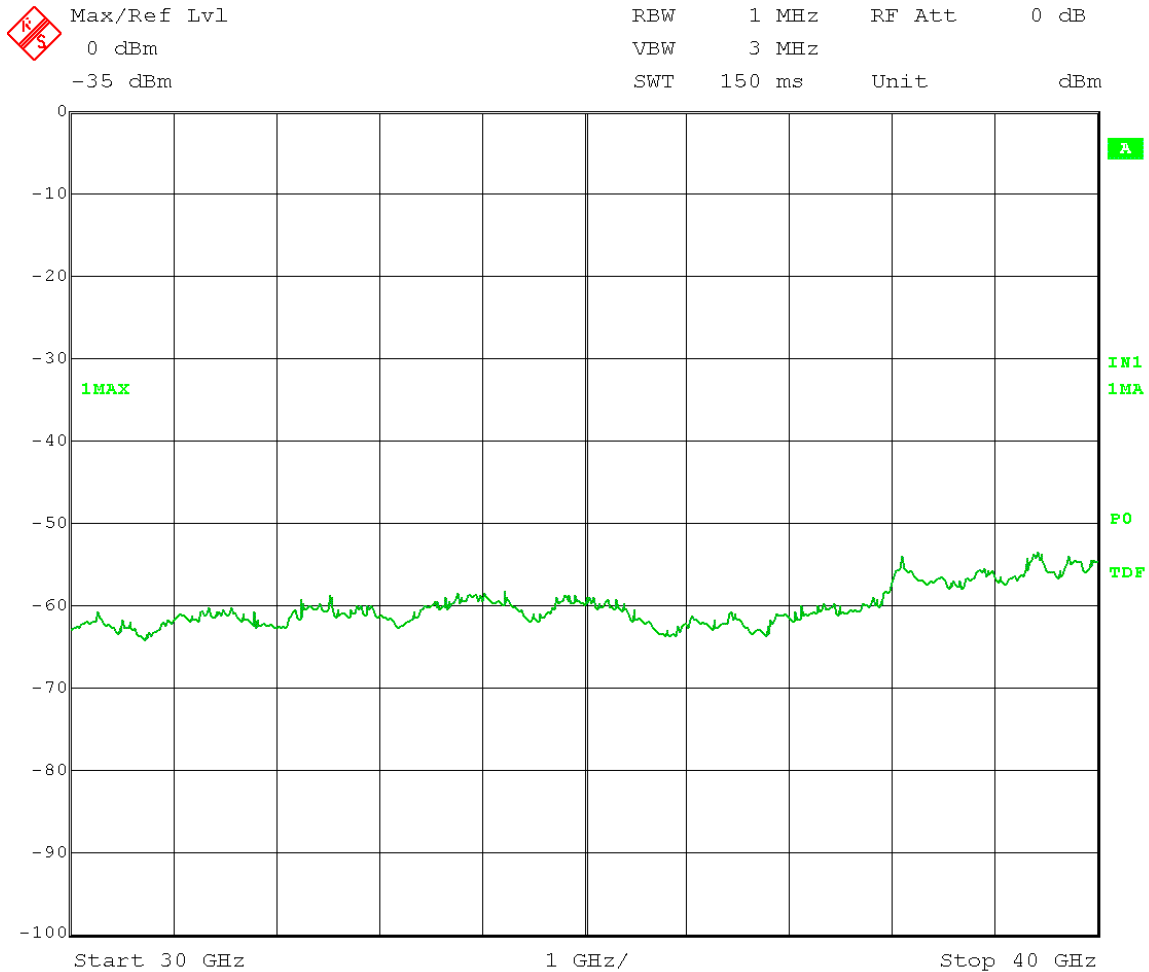


Date: 9.SEP.2013 10:41:07

Marker 1: Greater than 20dB below limit

Test Date: 09-09-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz Peak Detector
 Output Port: Channel 1 High Channel Frequency: 5.330 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 GHz to 40 GHz

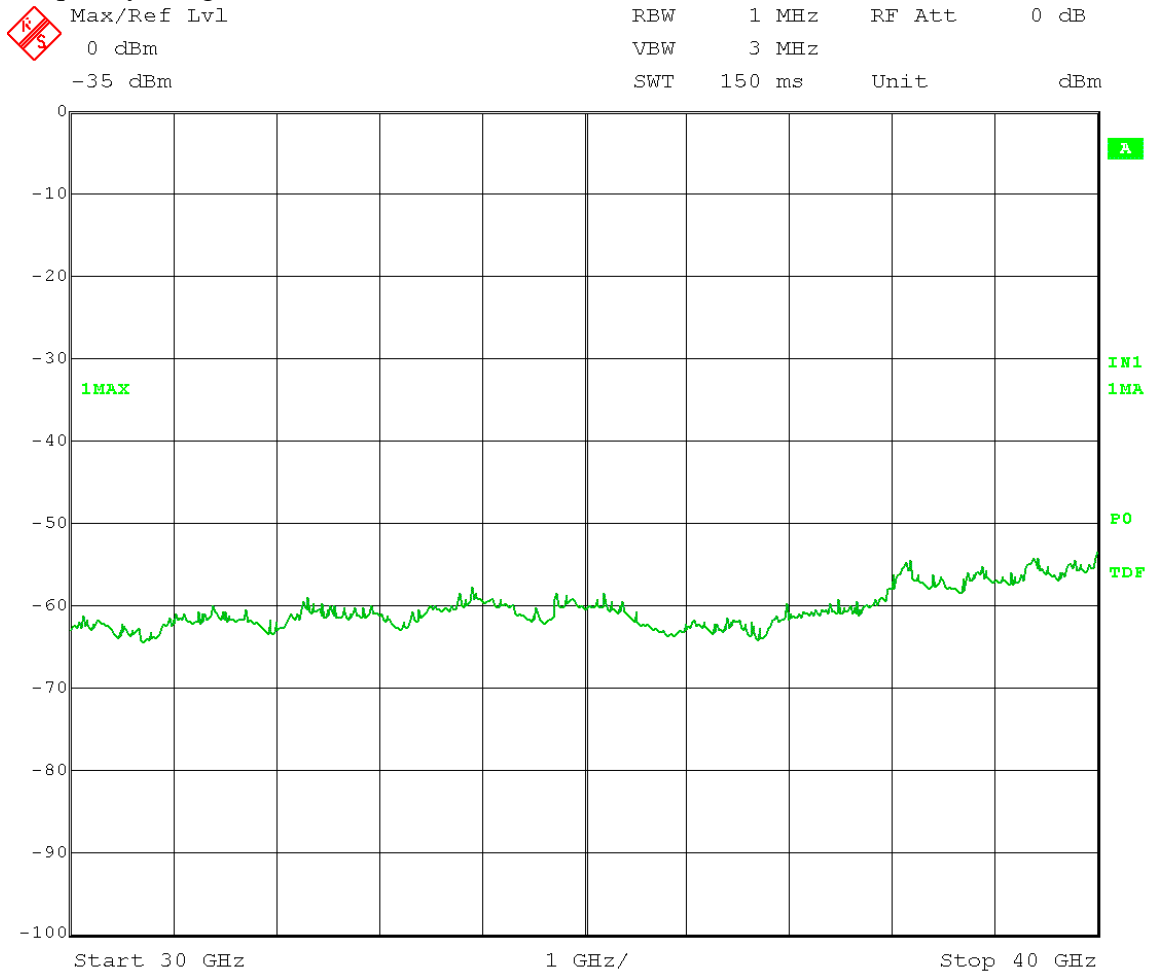


Date: 9.SEP.2013 10:41:30

Marker 1: Greater than 20dB below limit

Test Date: 09-09-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 20 MHz RMS Detector
 Output Port: Channel 1 High Channel Frequency: 5.330 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 GHz to 40 GHz

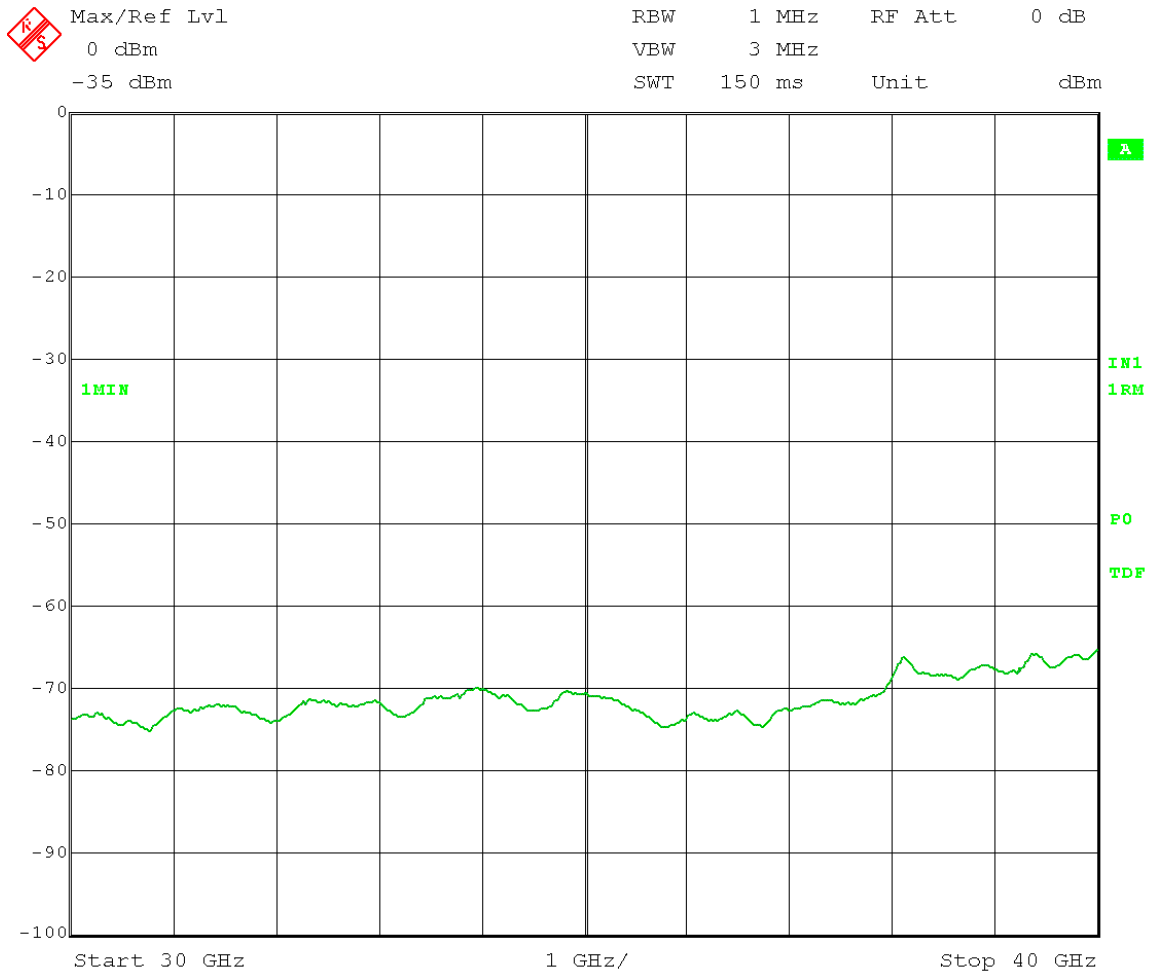


Date: 9.SEP.2013 10:42:32

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
Output Port: Channel 0 Low Channel Frequency: 5.280 GHz
Output Power Setting: 3.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 MHz to 1 GHz

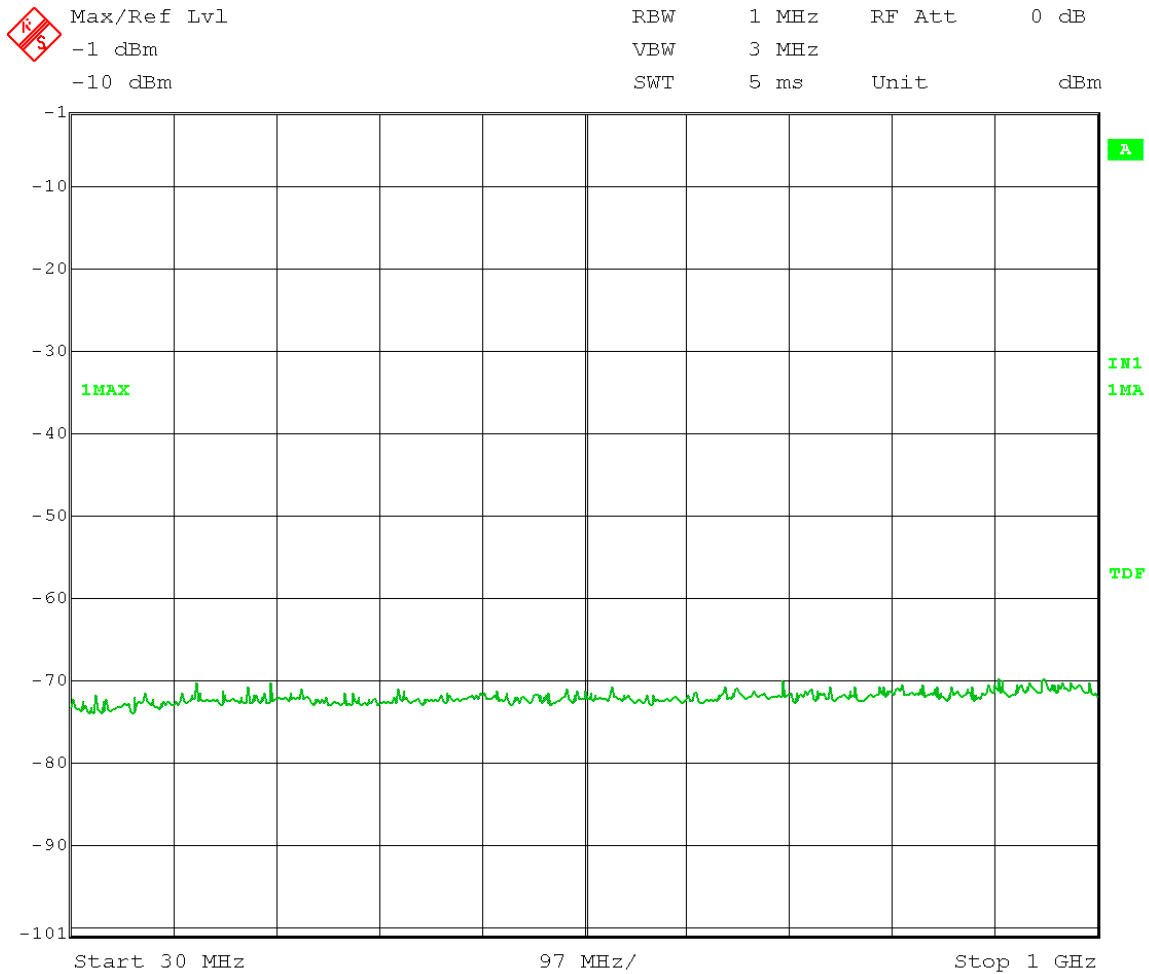


Date: 6.SEP.2013 14:40:15

All Emissions > 20dBm below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 0 Low Channel Frequency: 5.280 GHz
 Output Power Setting: 3.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 MHz to 1 GHz

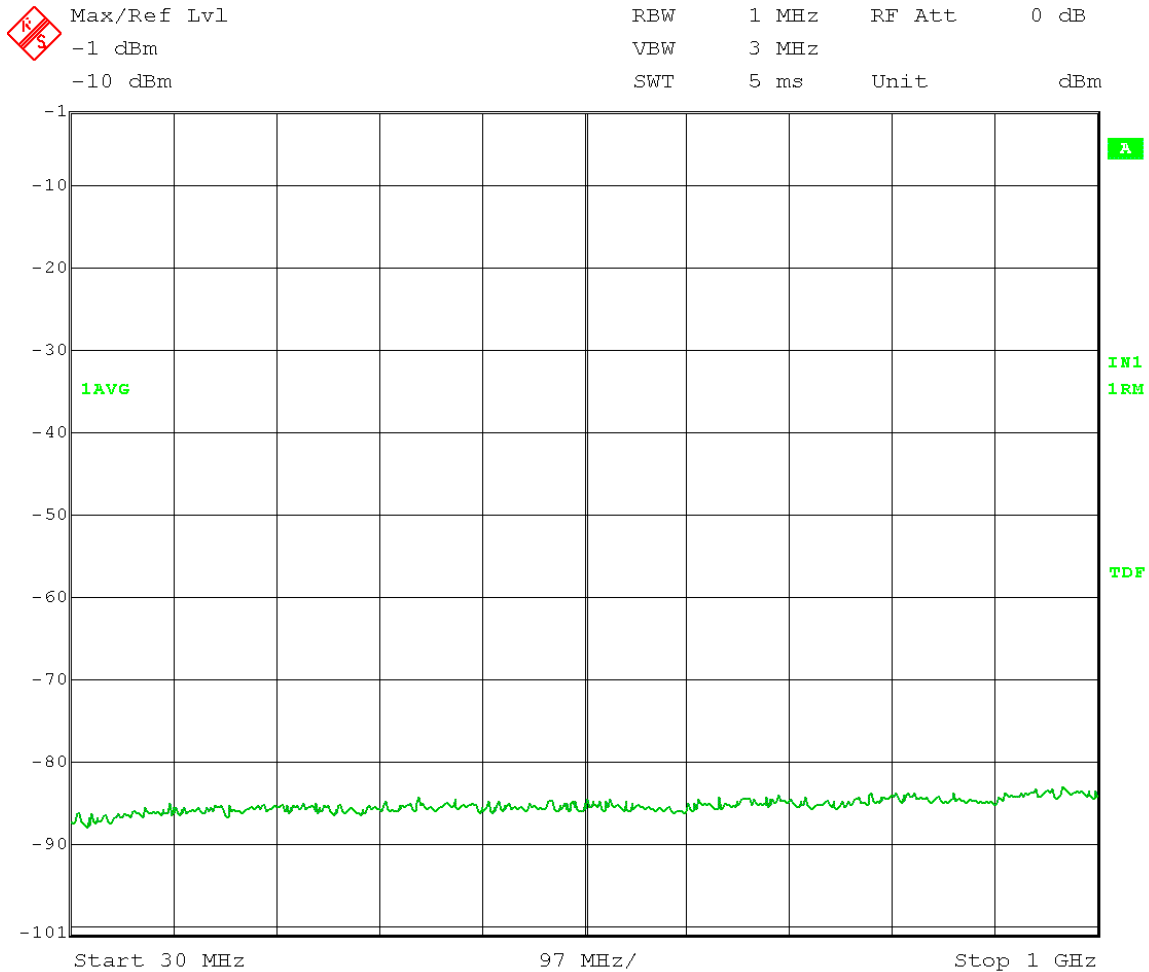


Date: 6.SEP.2013 14:41:05

All Emissions > 20dBm below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 1 Low Channel Frequency: 5.280 GHz
 Output Power Setting: 3.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 MHz to 1 GHz

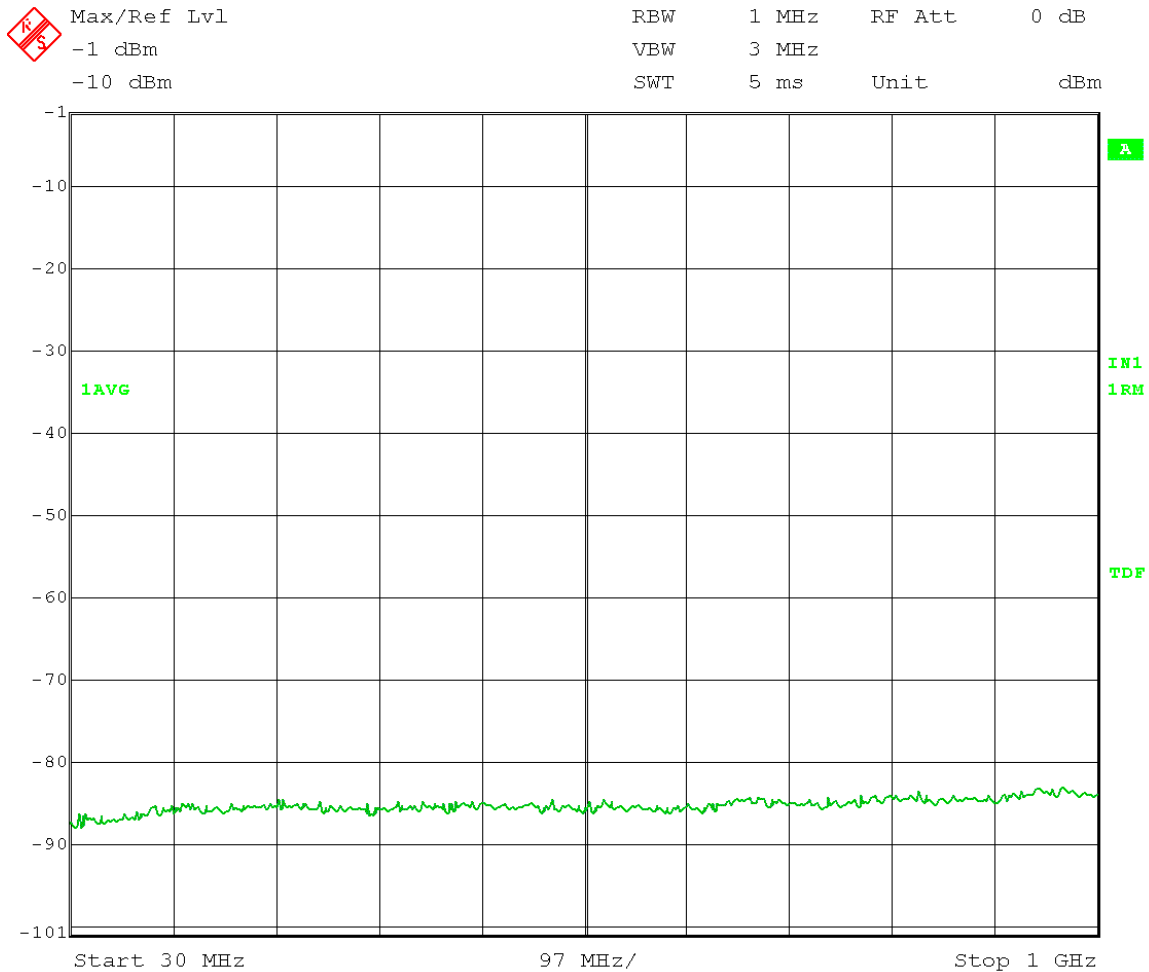


Date: 6.SEP.2013 14:41:32

All Emissions > 20dBm below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 0 Low Channel Frequency: 5.280 GHz
 Output Power Setting: 3.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

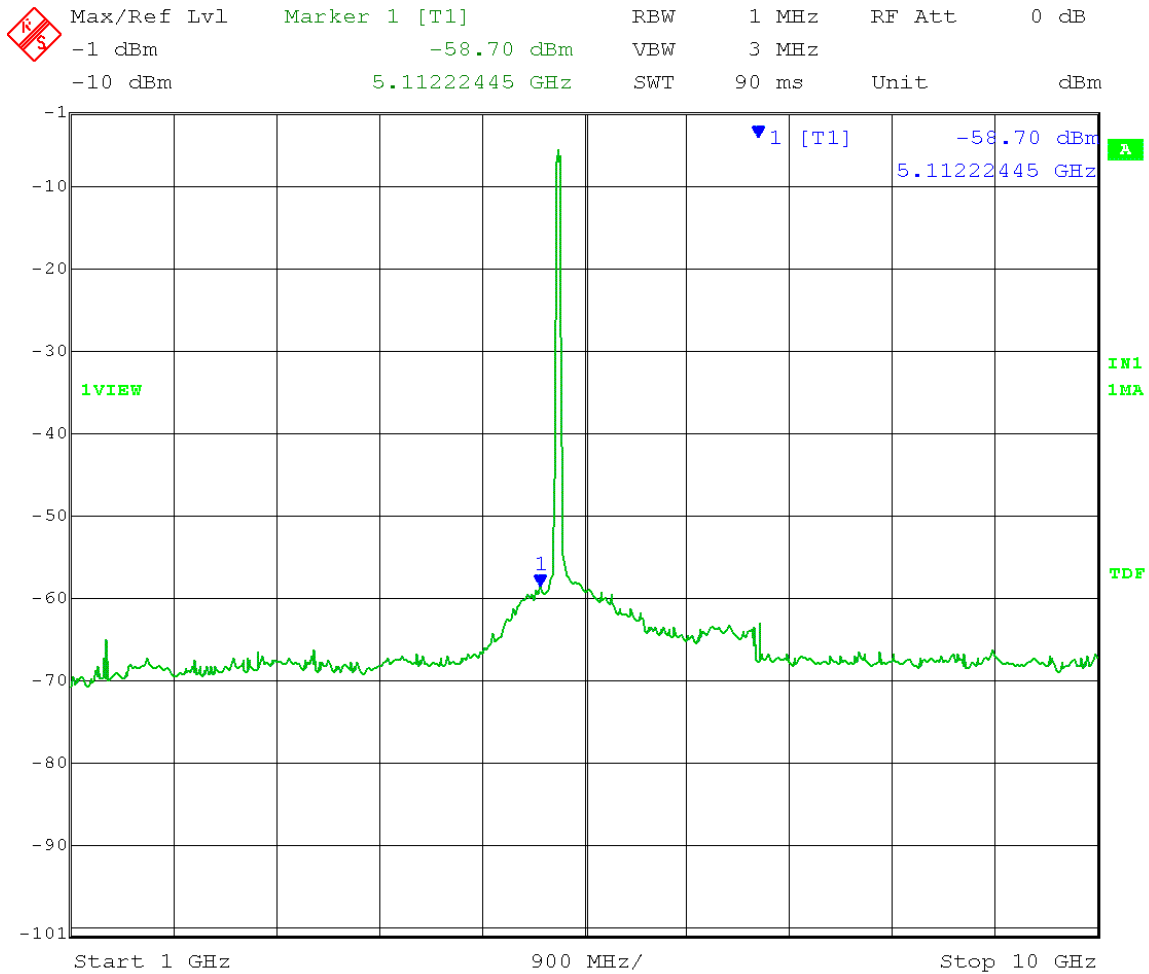


Date: 6.SEP.2013 14:51:53

Marker 1: Calculated Field Strength (Restricted Band) = $-58.70 + 16\text{dBi}$ antenna gain
 + 3 dB (MIMO) – $20 \log(3 \text{ meters}) + 104.77 = 55.53\text{dB}\mu\text{V/m}$ Peak

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 0 Low Channel Frequency: 5.280 GHz
 Output Power Setting: 3.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

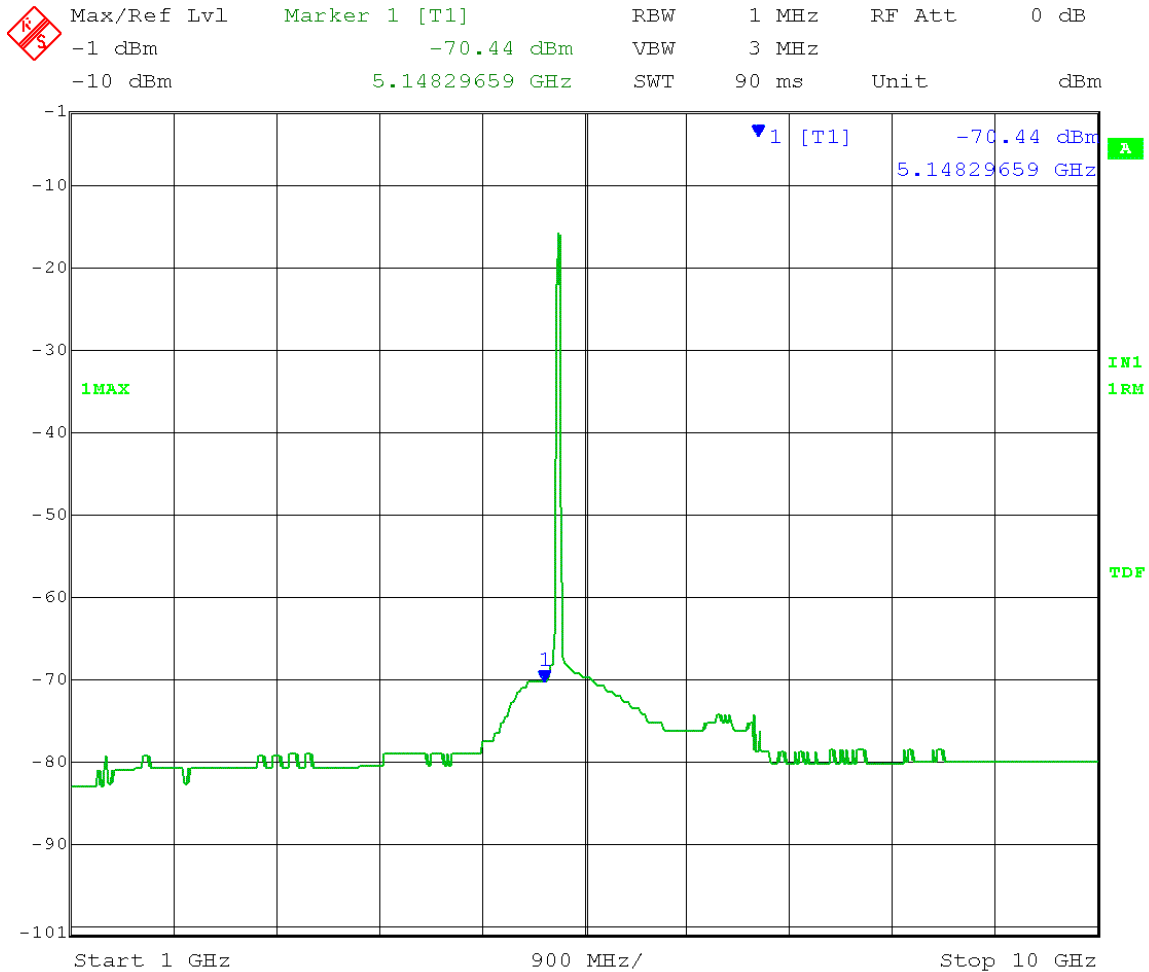

Date: 6.SEP.2013 14:55:01


Marker 1: Calculated Field Strength (Restricted Band) = -70.44 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 43.79dBμV/m Peak

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz
Output Port: Channel 1
Output Power Setting: 3.5
Antenna Gain: 16dBi

Peak Detector
Low Channel Frequency: 5.280 GHz
Modulation Type: OFDM
EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBµV/m Peak, 54dBµV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 1 GHz to 10 GHz

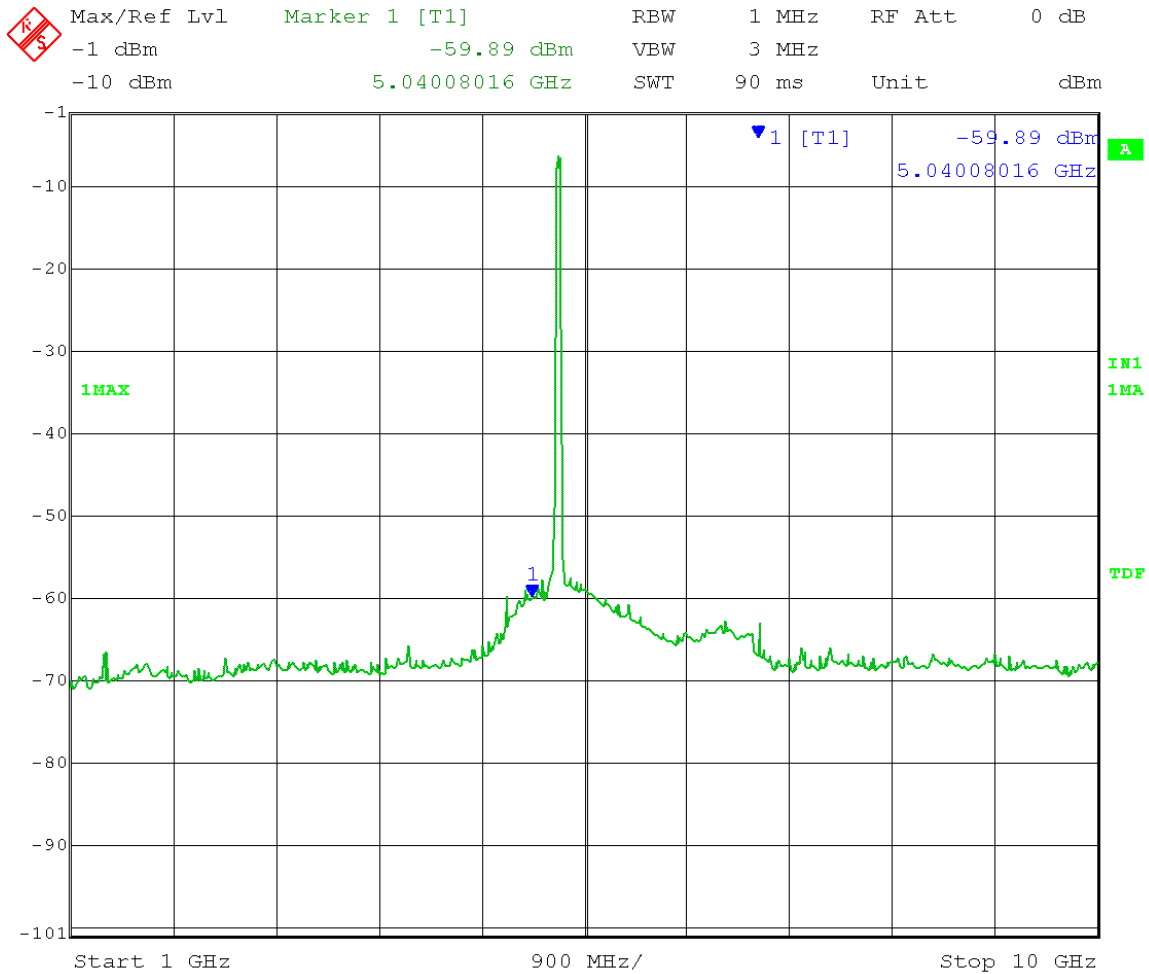


Date: 6.SEP.2013 14:53:17

Marker 1: Calculated Field Strength (Restricted Band) = $-59.89 + 16\text{dBi antenna gain} + 3\text{ dB (MIMO)} - 20\log(3\text{ meters}) + 104.77 = 54.34\text{dB}\mu\text{V/m Peak}$

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 1 Low Channel Frequency: 5.280 GHz
 Output Power Setting: 3.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

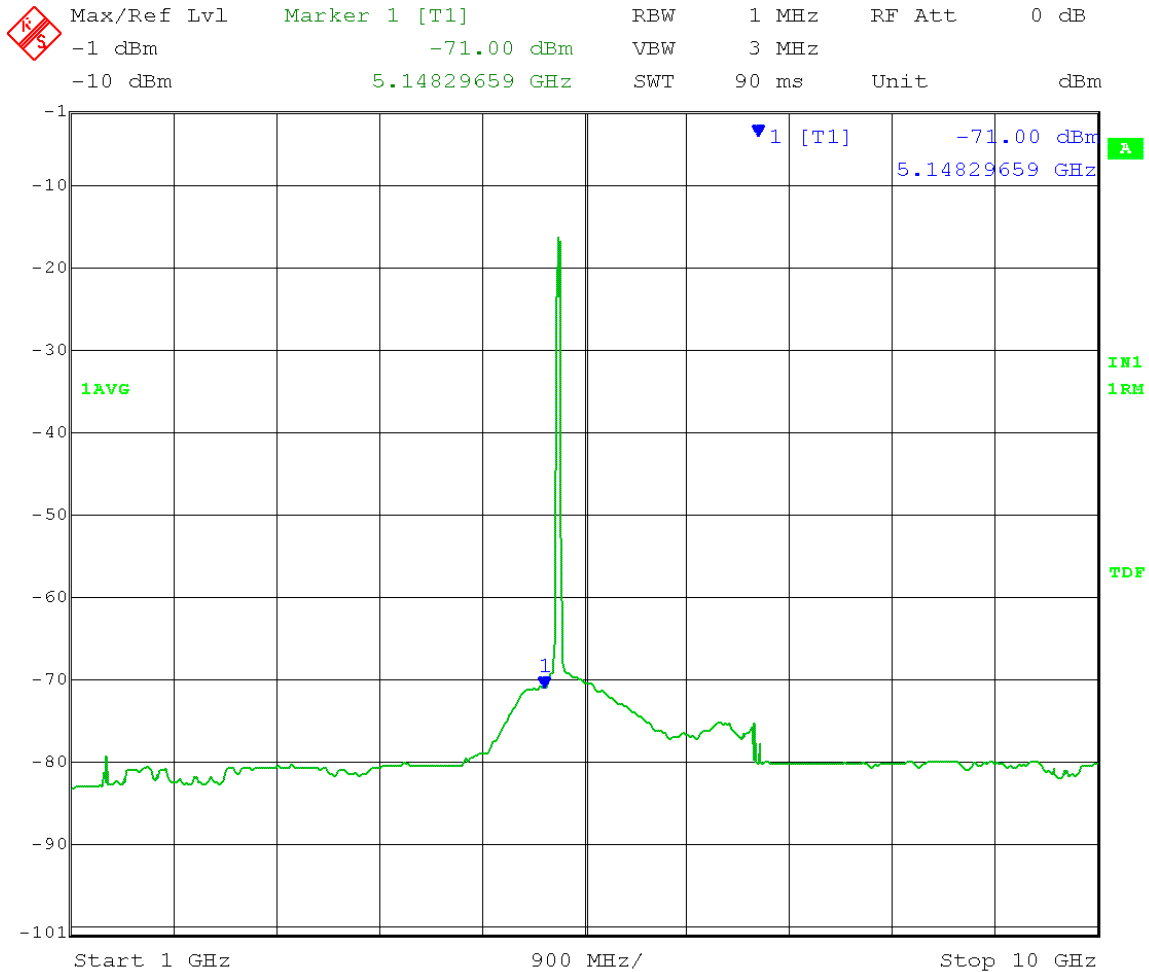


Date: 6.SEP.2013 14:56:13

Marker 1: Calculated Field Strength (Restricted Band) = -71.00 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 43.23dBμV/m Peak

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
Output Port: Channel 0 Low Channel Frequency: 5.280 GHz
Output Power Setting: 3.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 10 GHz to 20 GHz

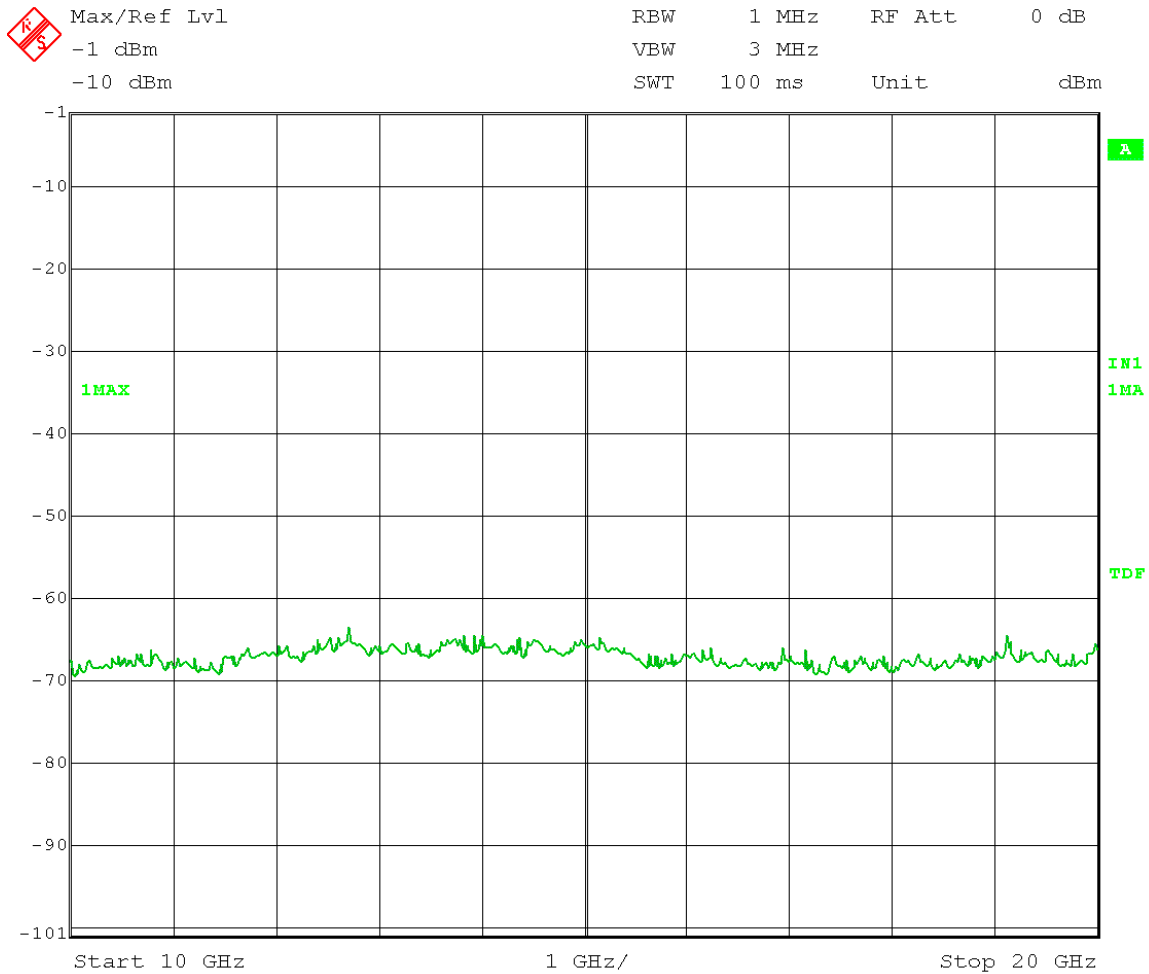


Date: 6.SEP.2013 14:37:55

All Emissions > 20dBm below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 0 Low Channel Frequency: 5.280 GHz
 Output Power Setting: 3.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

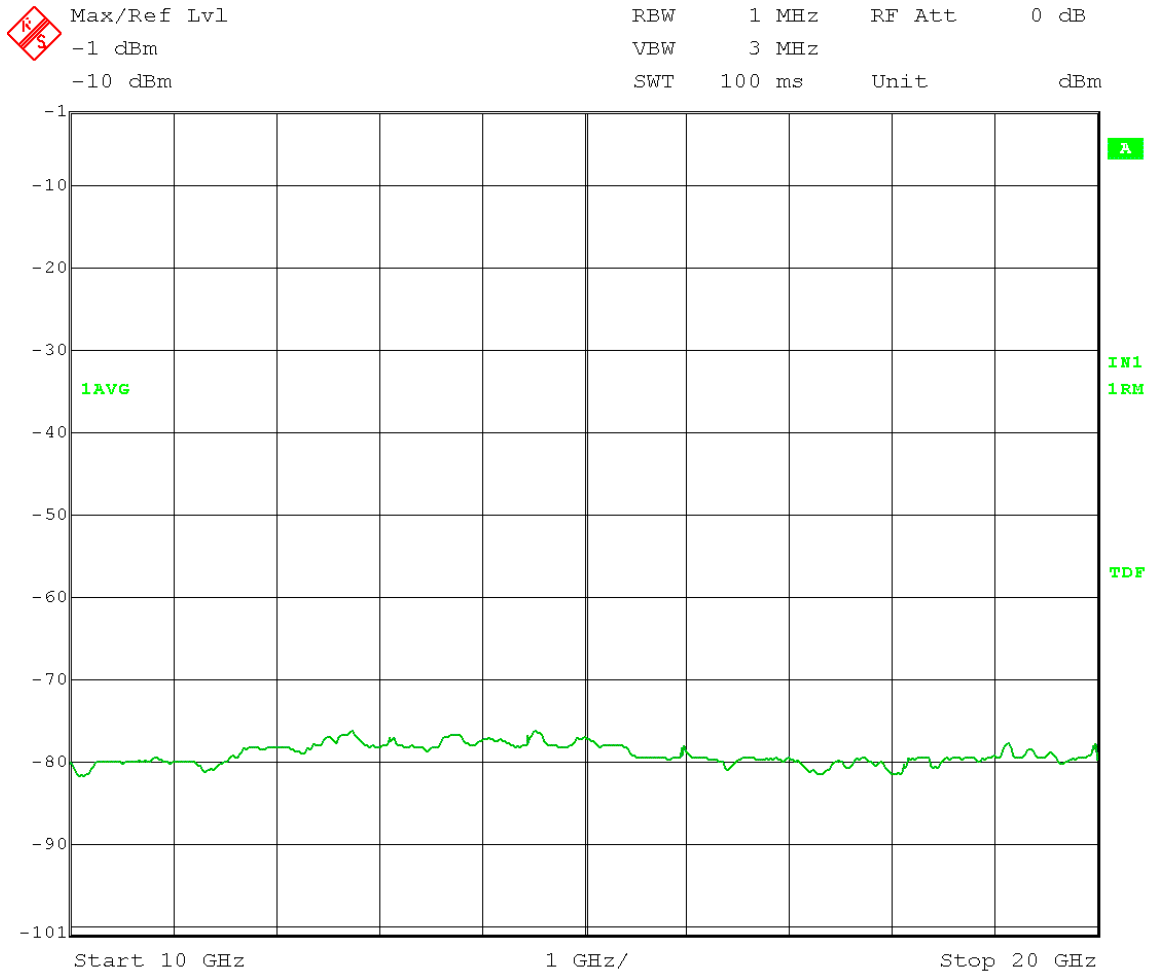


Date: 6.SEP.2013 14:36:50

All Emissions > 20dBm below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 1 Low Channel Frequency: 5.280 GHz
 Output Power Setting: 3.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

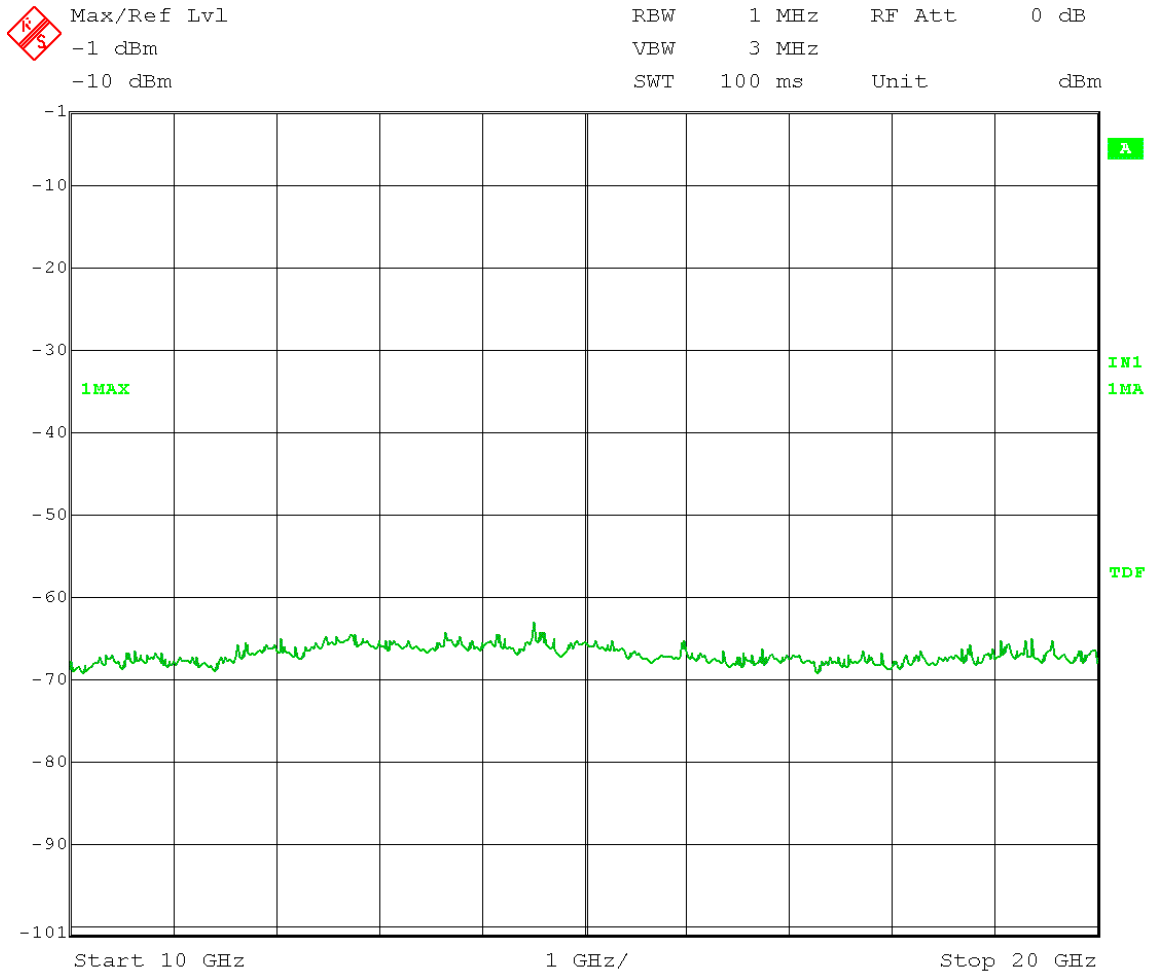


Date: 6.SEP.2013 14:37:36

All Emissions > 20dBm below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 1 Low Channel Frequency: 5.280 GHz
 Output Power Setting: 3.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

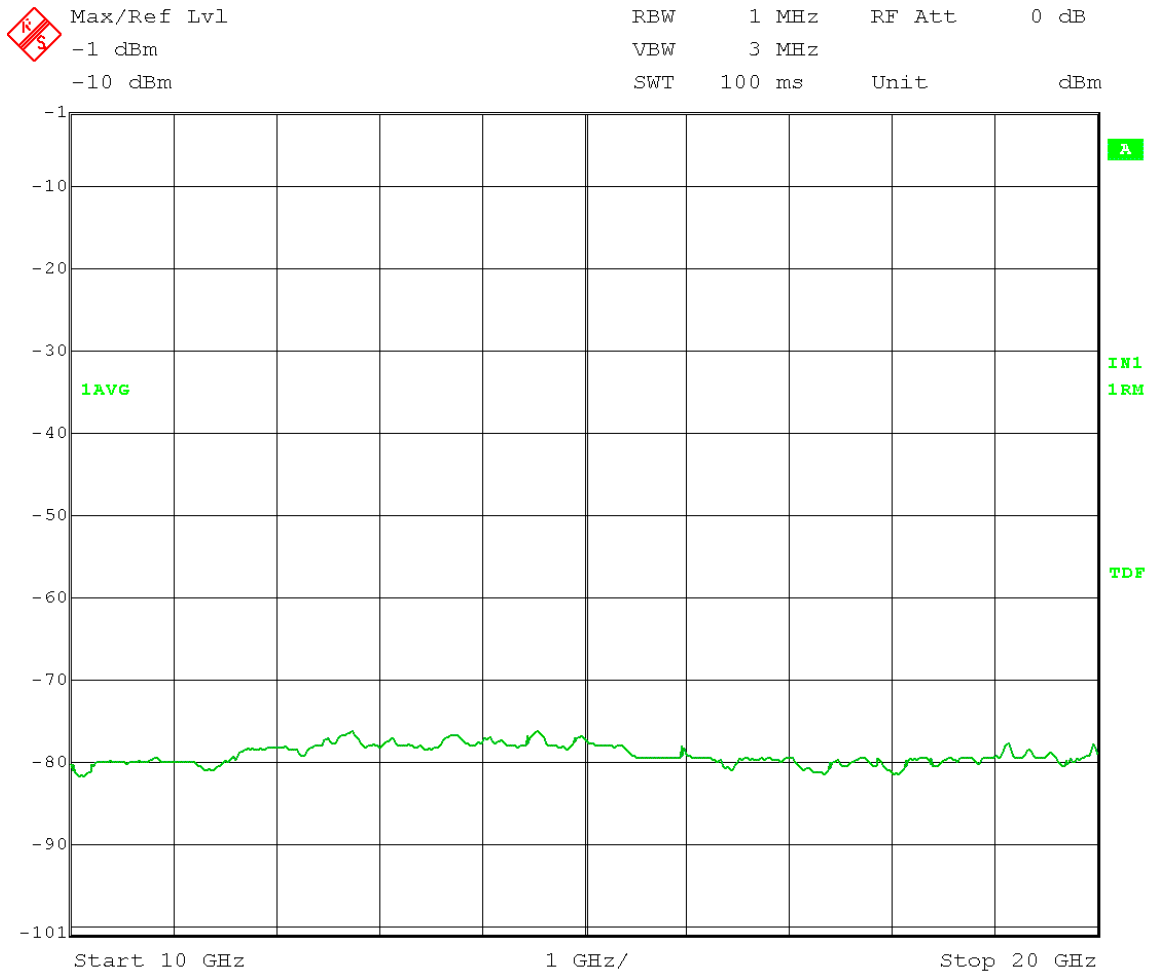


Date: 6.SEP.2013 14:37:16

All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
Output Port: Channel 0 Low Channel Frequency: 5.280 GHz
Output Power Setting: 3.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 20 GHz to 30 GHz

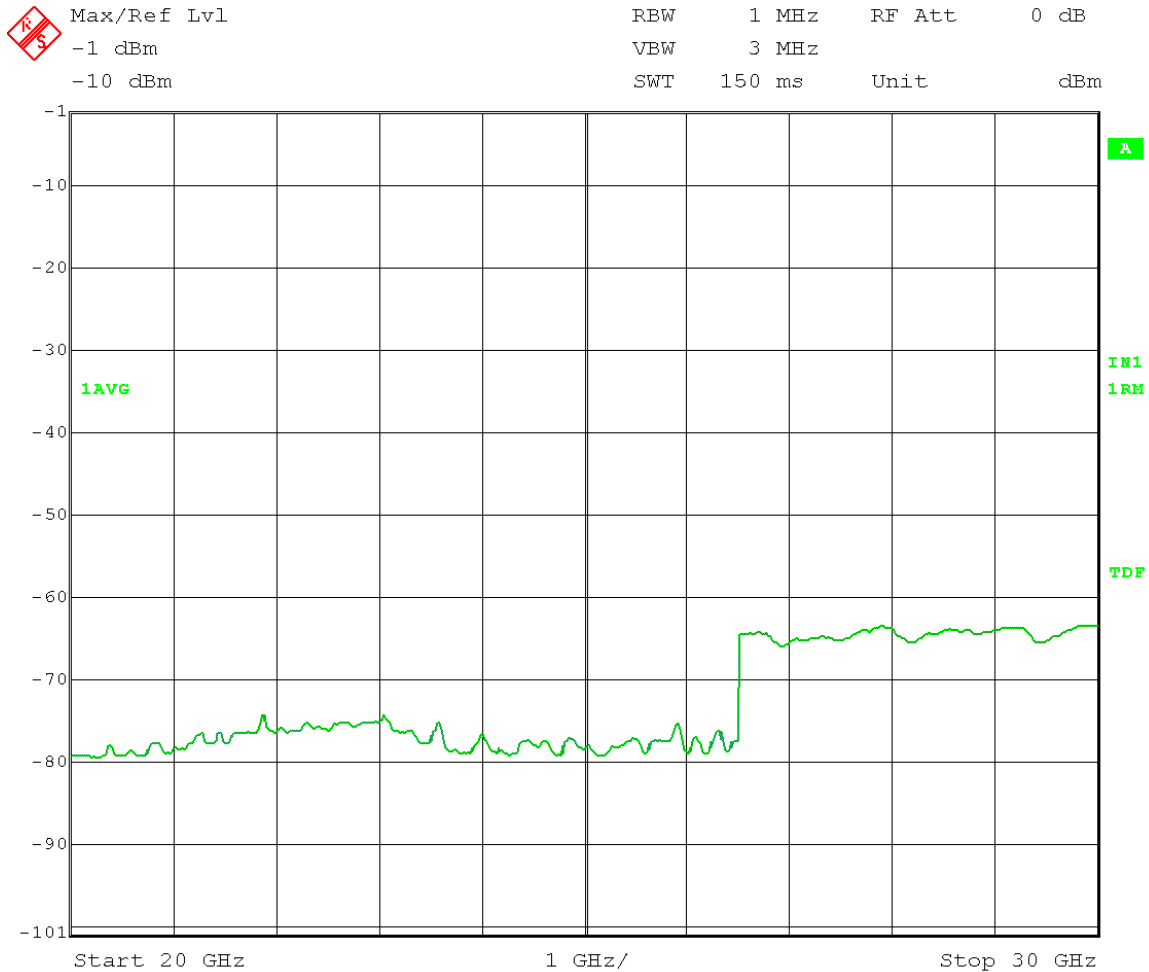


Date: 6.SEP.2013 14:28:16

All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
Output Port: Channel 1 Low Channel Frequency: 5.280 GHz
Output Power Setting: 3.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 20 GHz to 30 GHz

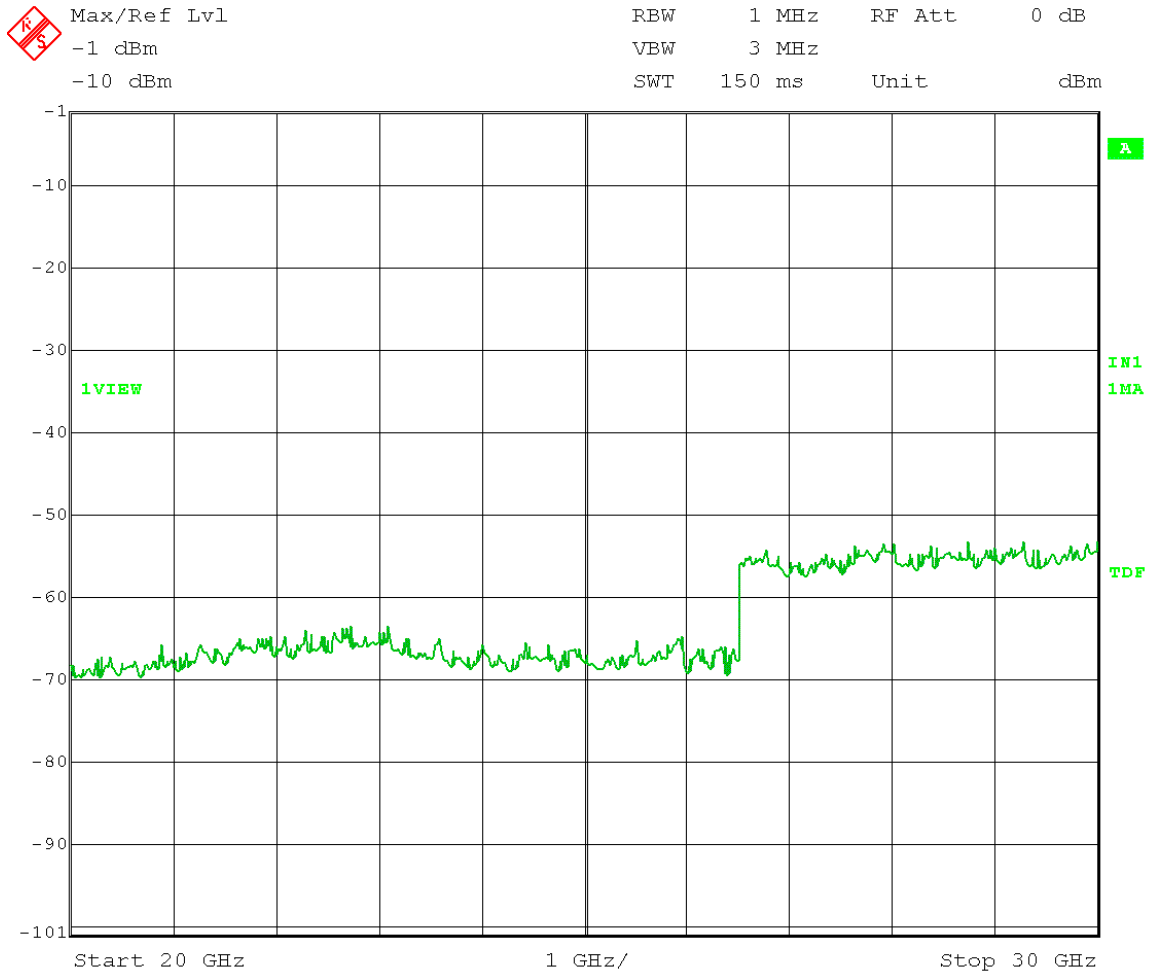


Date: 6.SEP.2013 14:27:45

All Emissions > 20dBm below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 1 Low Channel Frequency: 5.280 GHz
 Output Power Setting: 3.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 20 GHz to 30 GHz

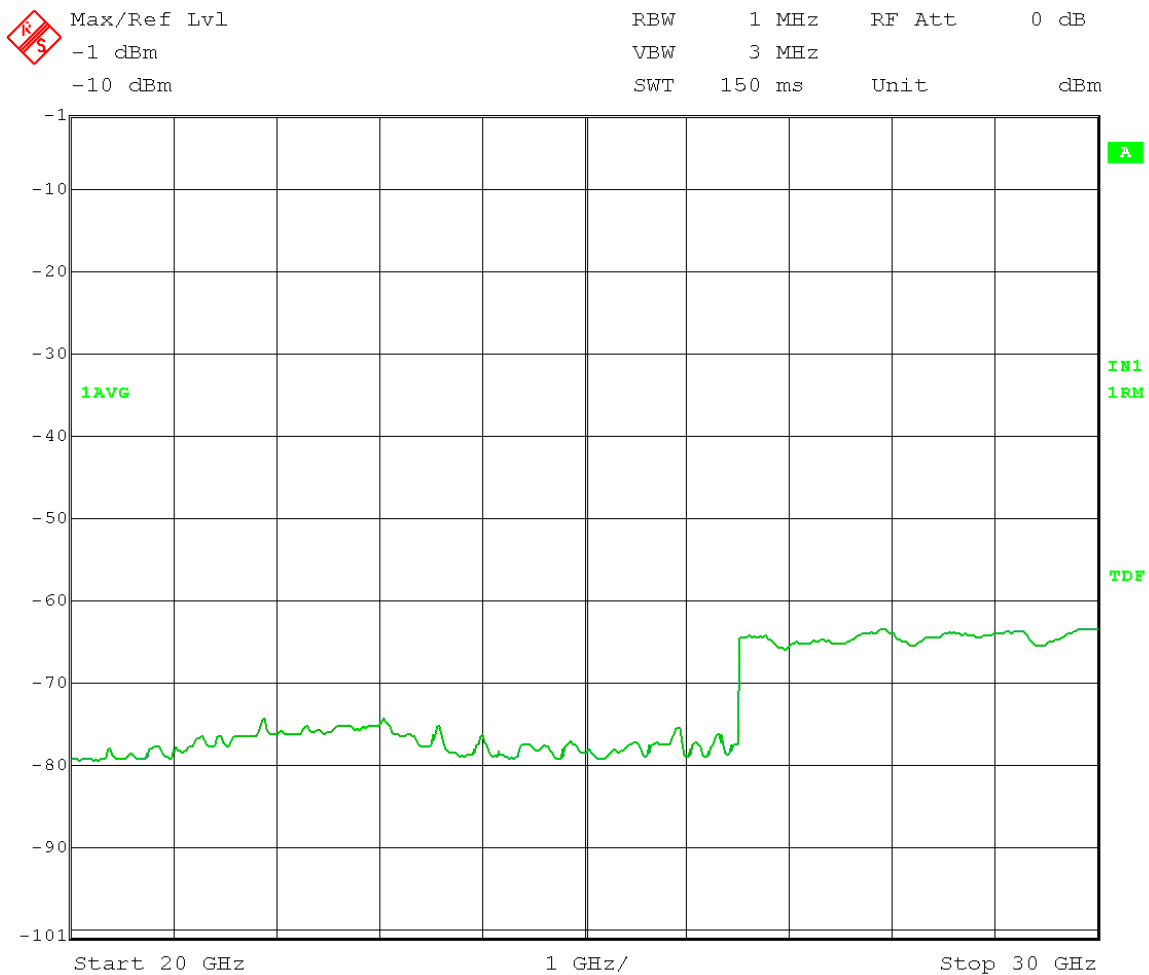


Date: 6.SEP.2013 14:29:07

All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz
Output Port: Channel 0
Output Power Setting: 3.5
Antenna Gain: 16dBi
Peak Detector
Low Channel Frequency: 5.280 GHz
Modulation Type: OFDM
EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

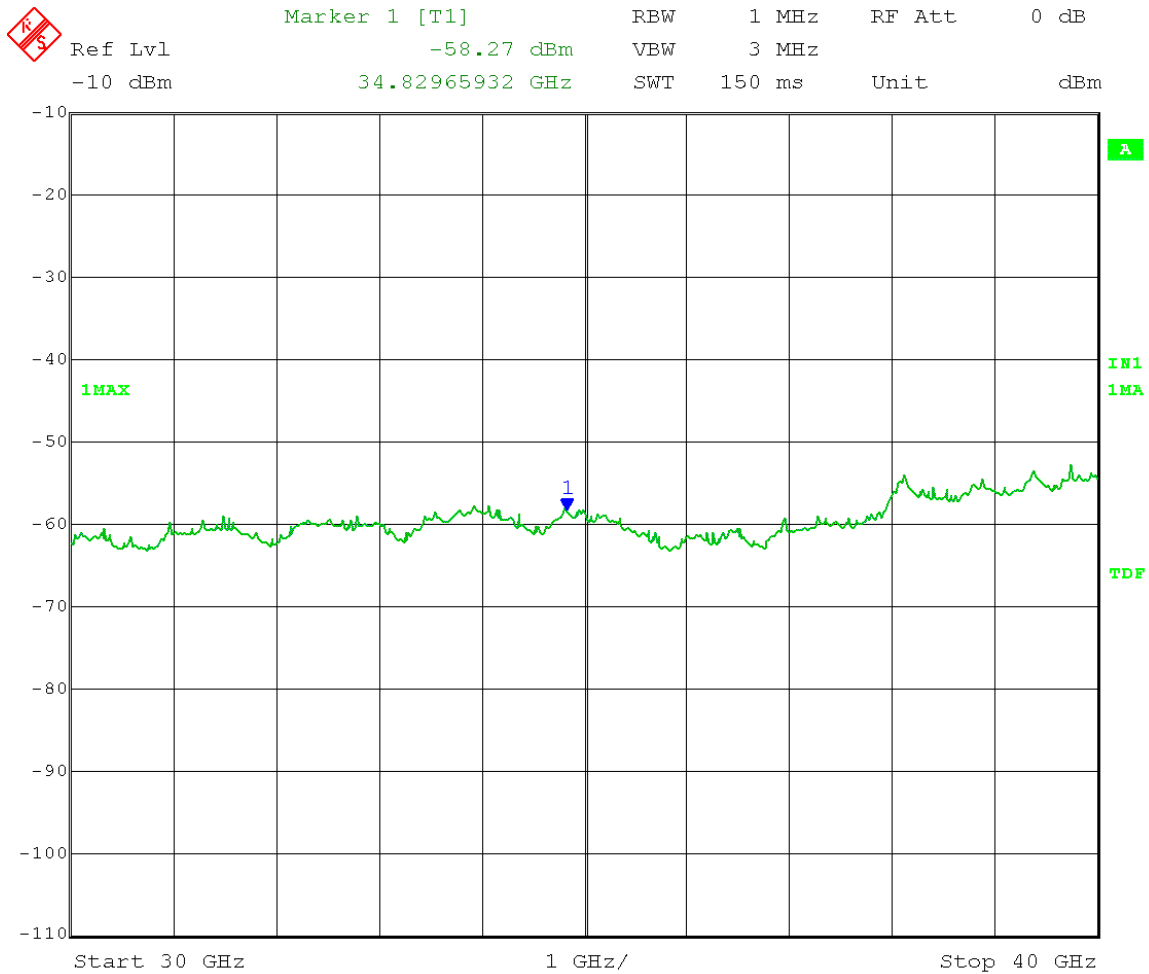


Date: 6.SEP.2013 15:31:13

All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
Output Port: Channel 0 Low Channel Frequency: 5.280 GHz
Output Power Setting: 3.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

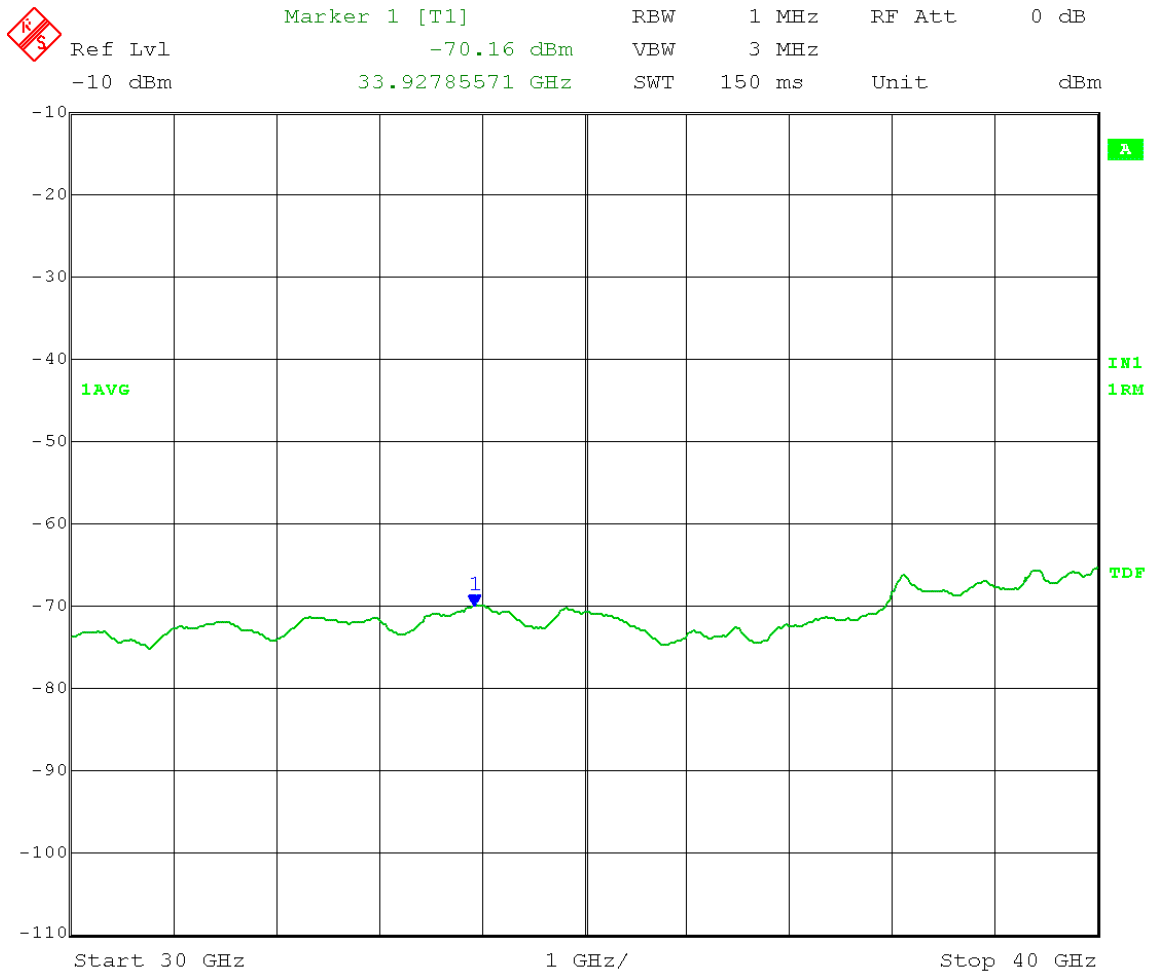


Date: 6.SEP.2013 15:32:24

All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
Output Port: Channel 1 Low Channel Frequency: 5.280 GHz
Output Power Setting: 3.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

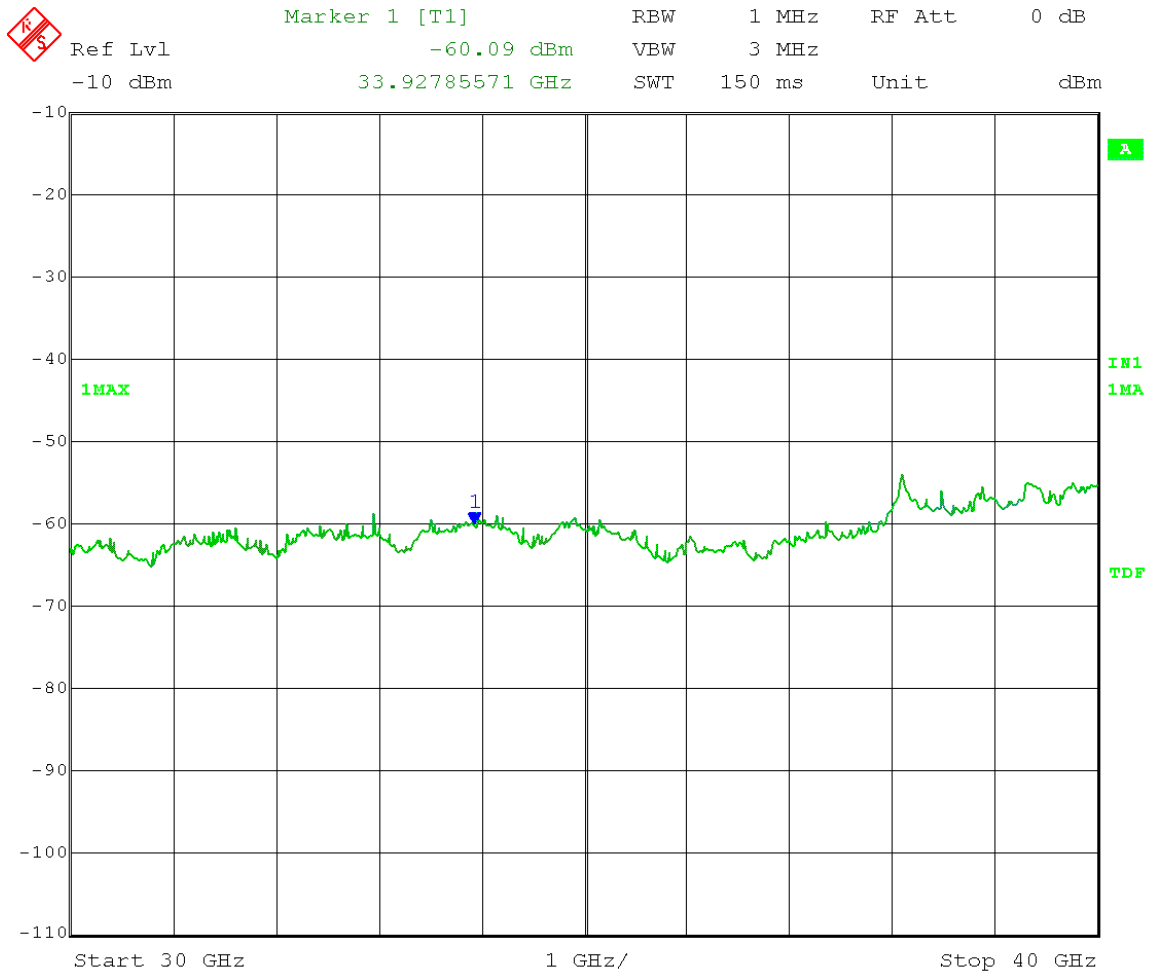


Date: 6.SEP.2013 15:31:44

All Emissions > 20dBm below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 MHz to 1 GHz

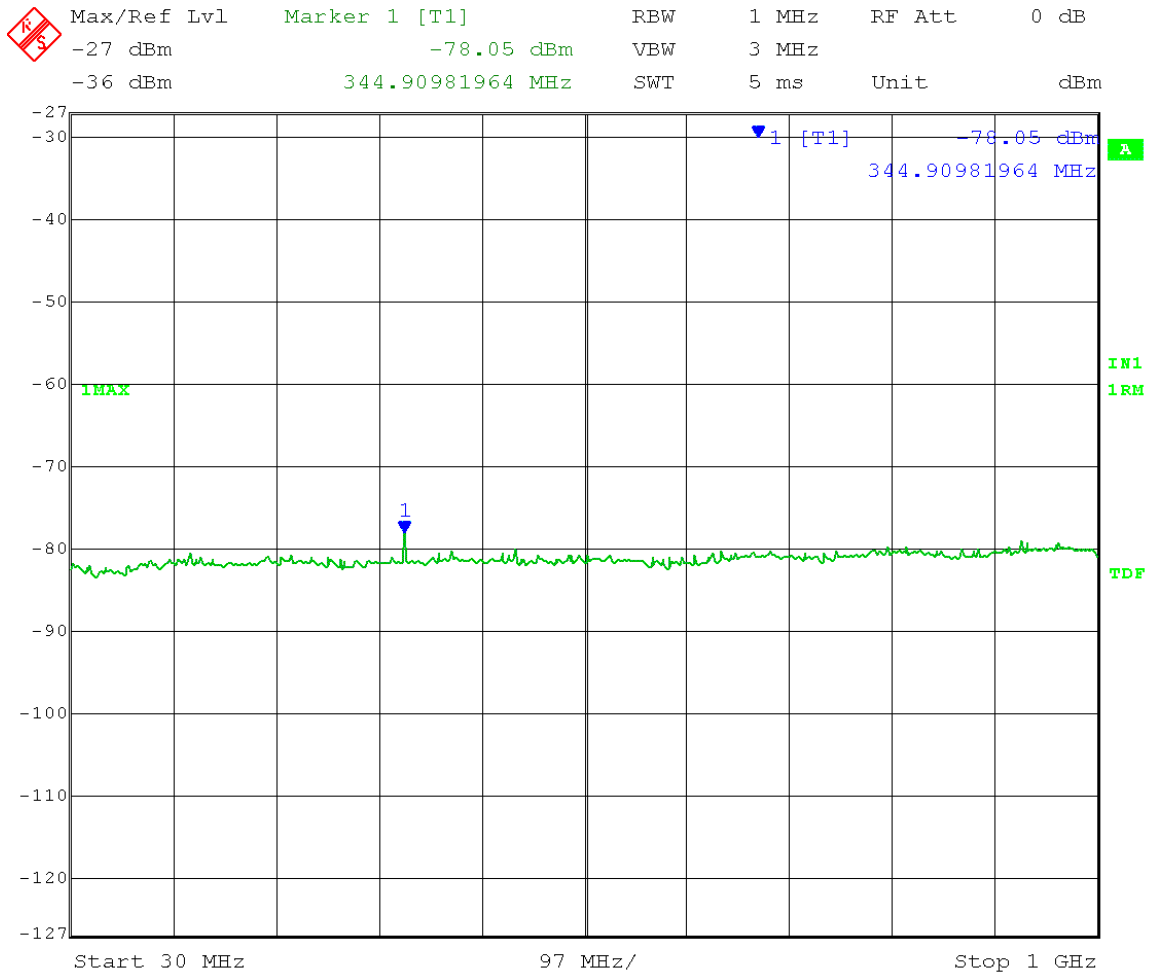


Date: 6.SEP.2013 13:50:54

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

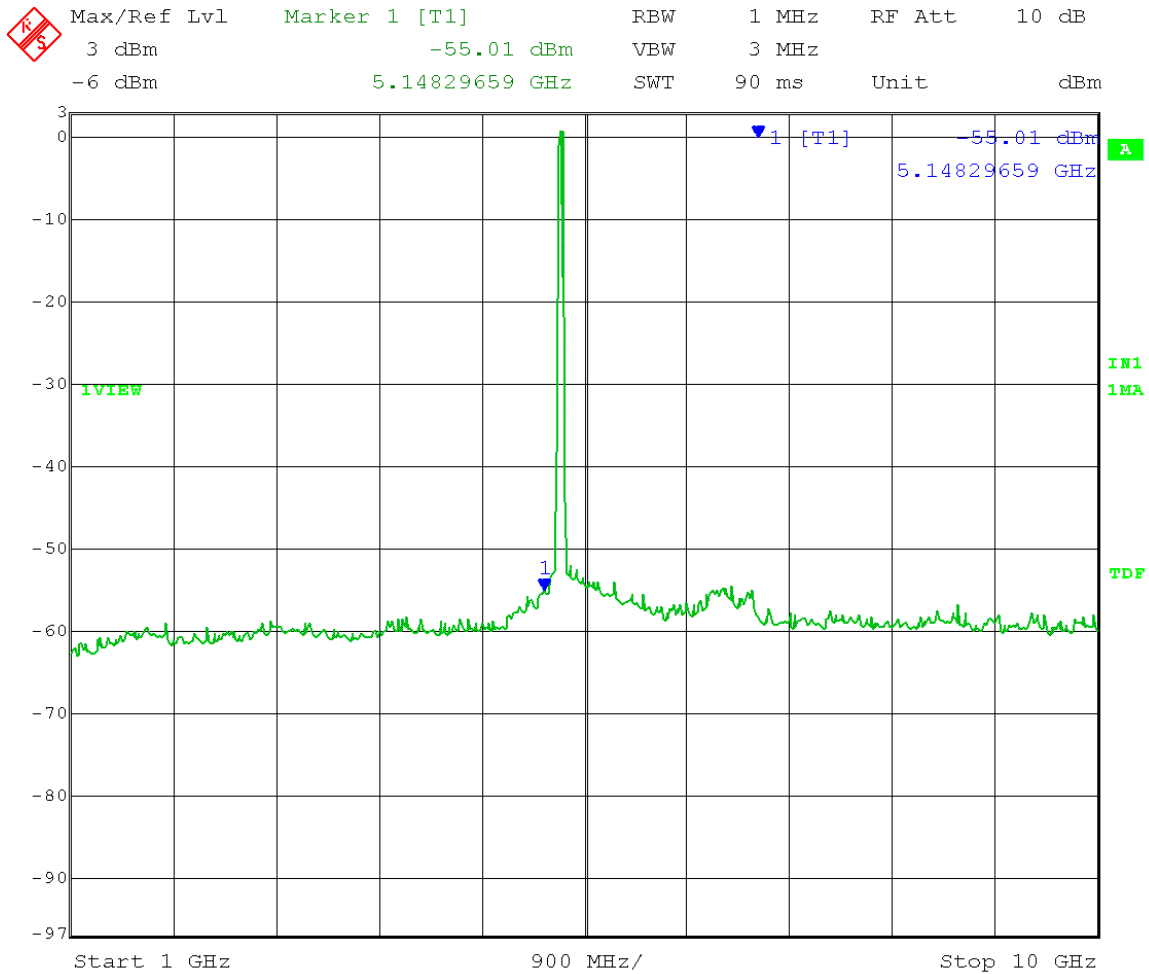


Date: 6.SEP.2013 13:58:33

Marker 1: Calculated Field Strength (Restricted Band) = -55.01 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 59.22dBμV/m Peak

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

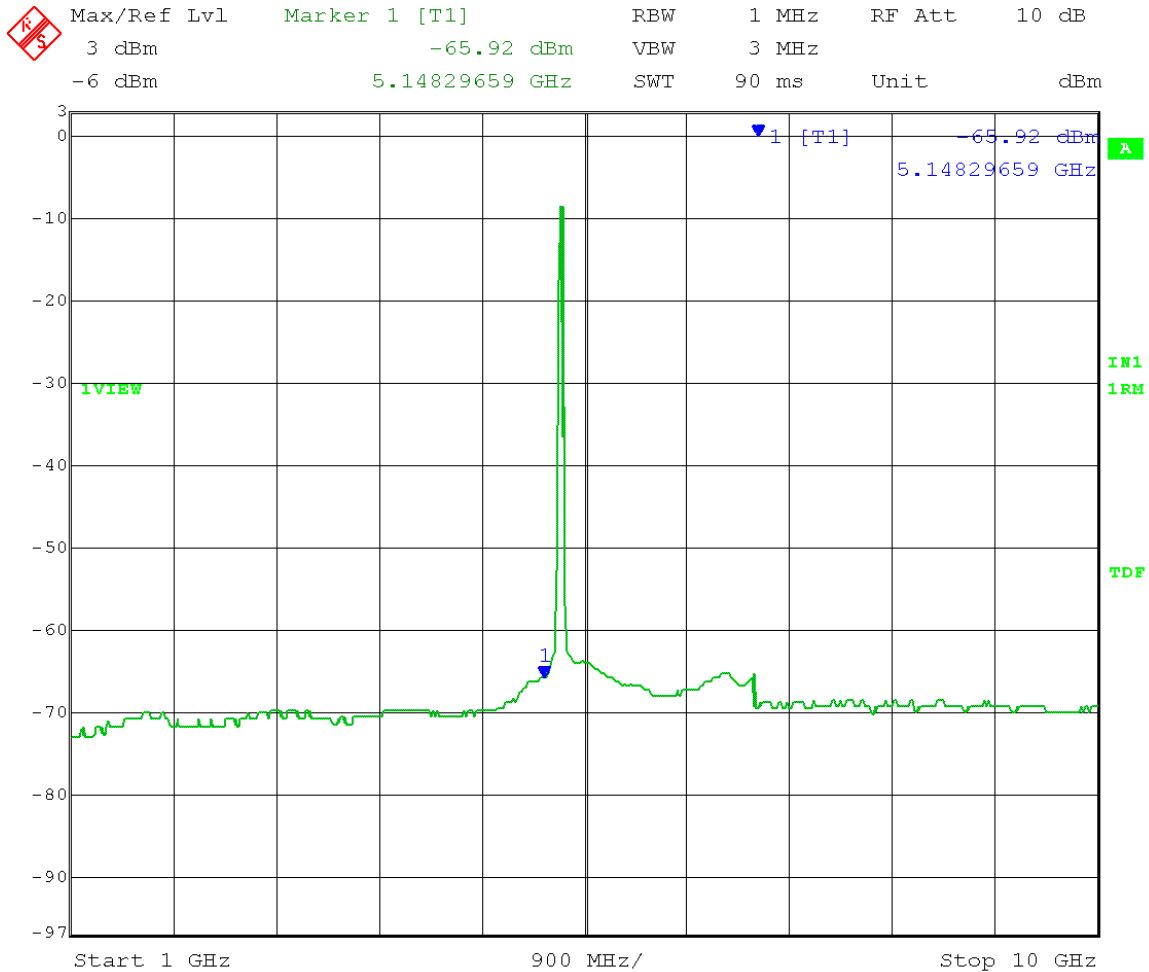

Date: 6.SEP.2013 14:02:11


Marker 1: Calculated Field Strength (Restricted Band) = $-65.92 + 16\text{dBi antenna gain} + 3\text{ dB (MIMO)} - 20\log(3\text{ meters}) + 104.77 = 48.31\text{dB}\mu\text{V/m Peak}$

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.

Frequency Range: 1 GHz to 10 GHz

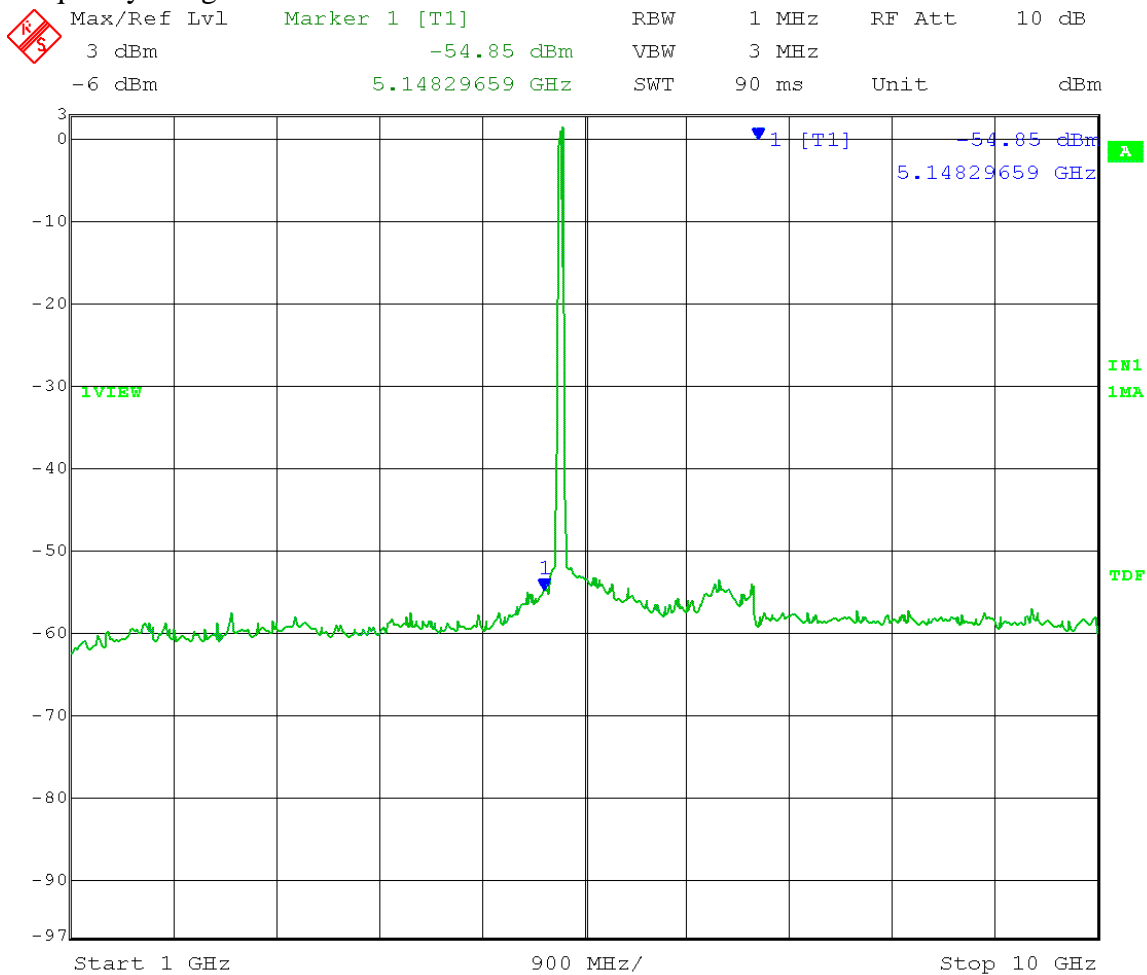


Date: 6.SEP.2013 14:00:13

Marker 1: Calculated Field Strength (Restricted Band) = $-54.85 + 16\text{dBi antenna gain} + 3\text{ dB (MIMO)} - 20\log(3\text{ meters}) + 104.77 = 59.38\text{dB}\mu\text{V/m Peak}$

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

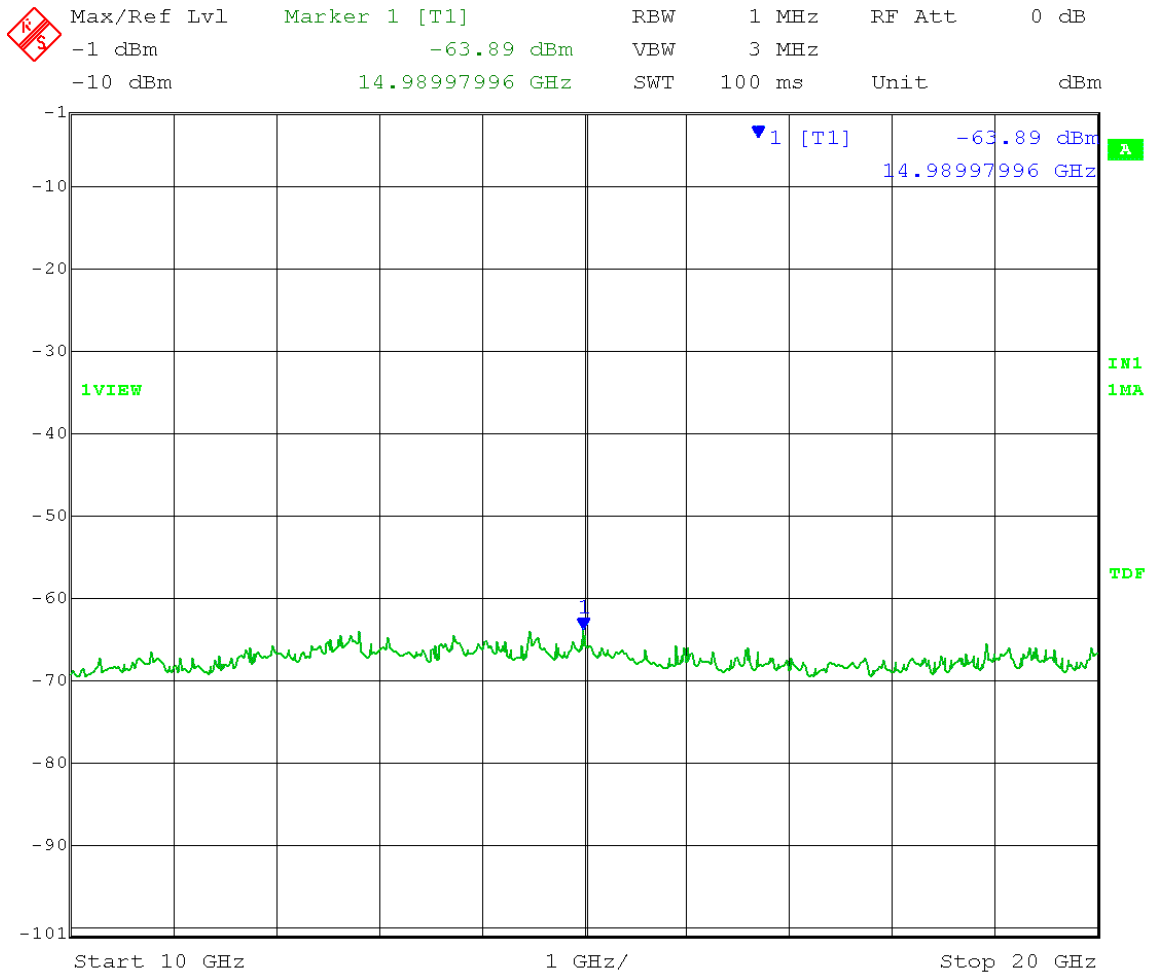


Date: 6.SEP.2013 14:10:05

Marker 1: 20dBm below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
 Output Power Setting: 10 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

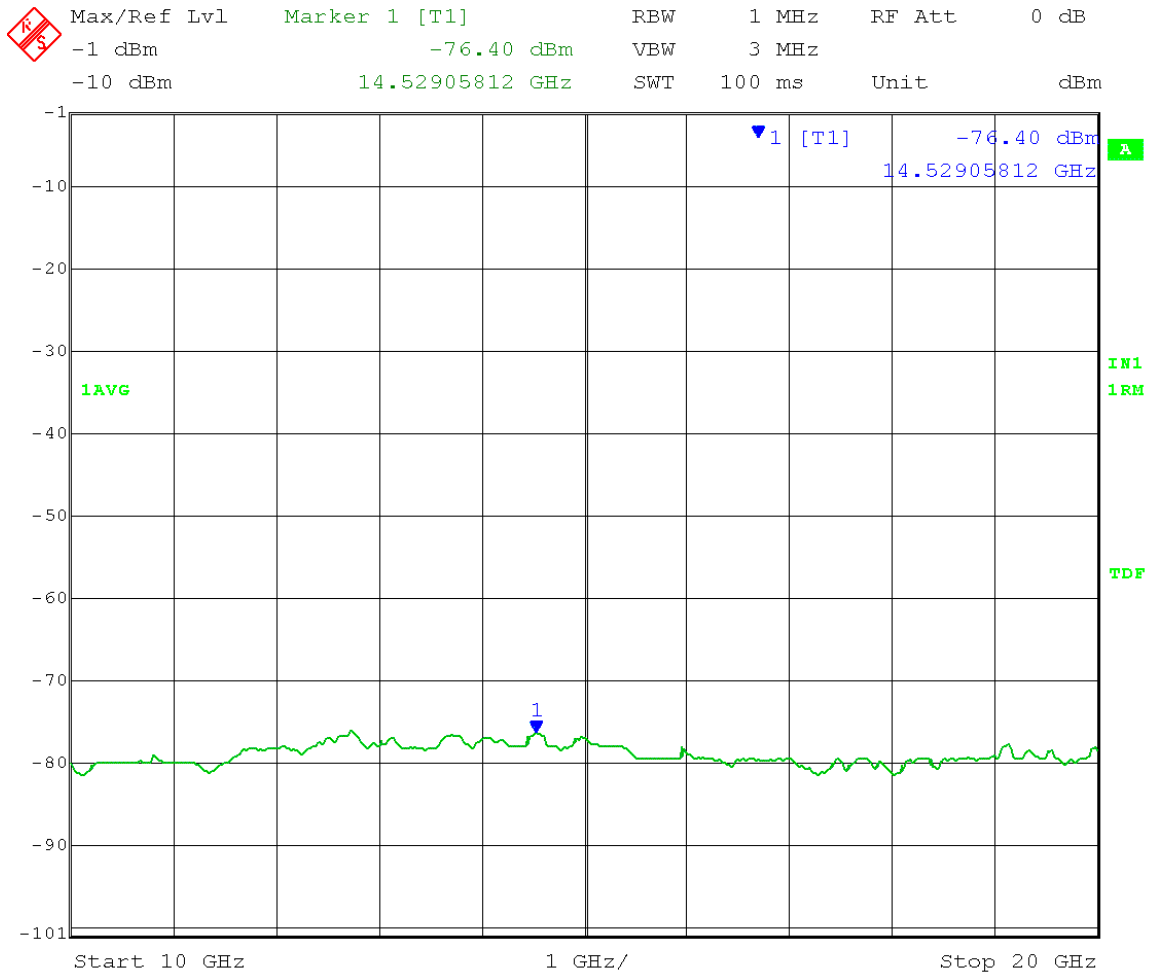


Date: 6.SEP.2013 14:12:09

Marker 1: 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 10 GHz to 20 GHz

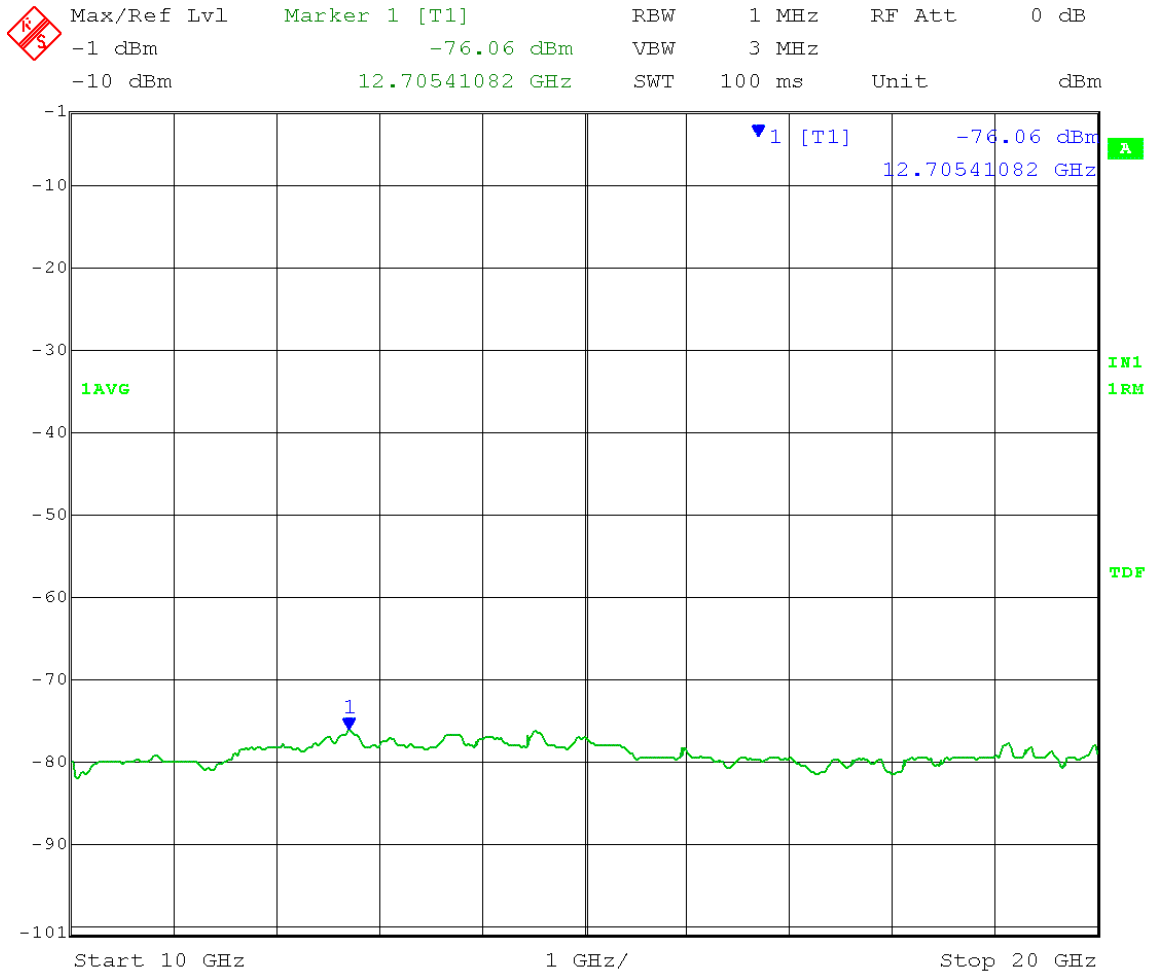


Date: 6.SEP.2013 14:13:04

Marker 1: 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 20 GHz to 30 GHz

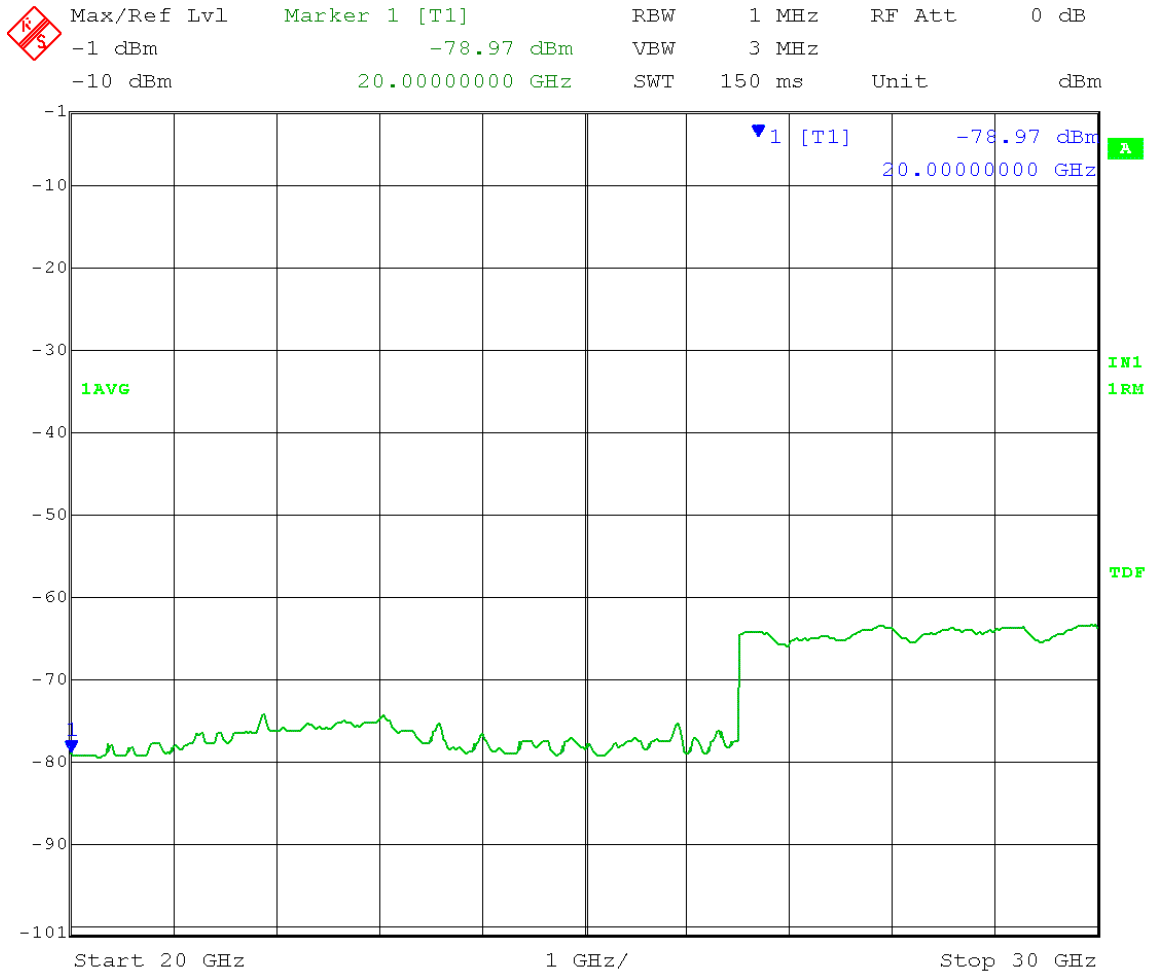


Date: 6.SEP.2013 14:17:37

All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 20 GHz to 30 GHz

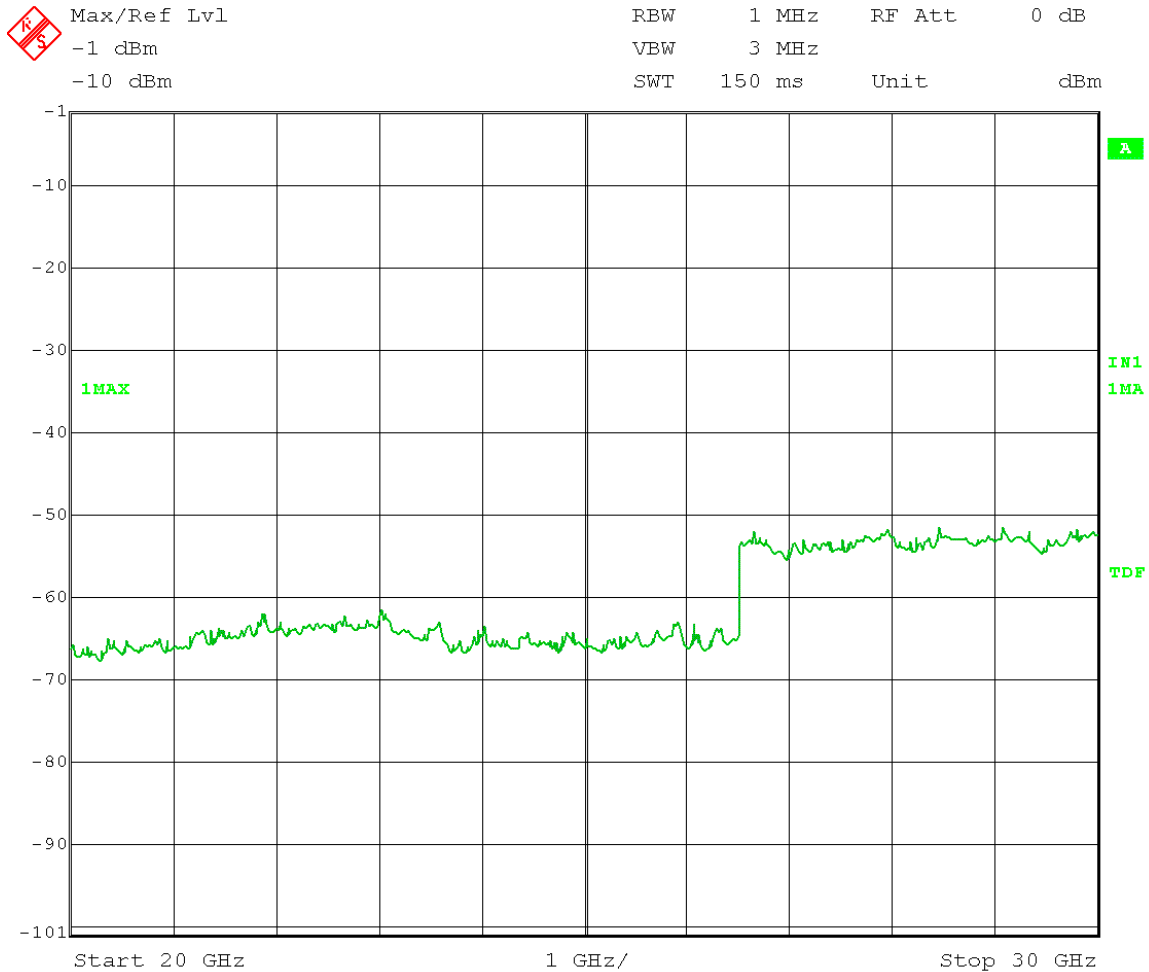


Date: 6.SEP.2013 14:20:59

All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 20 GHz to 30 GHz

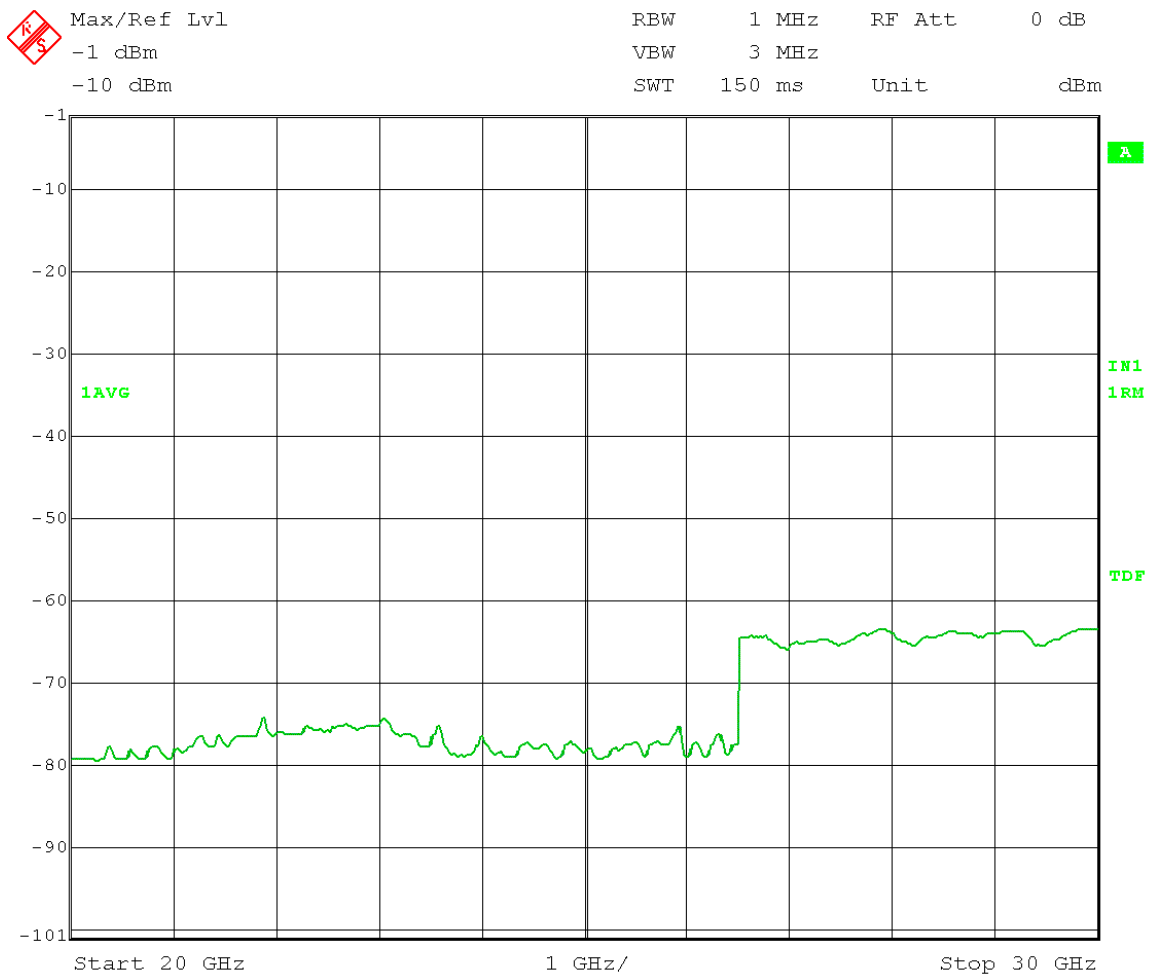


Date: 6.SEP.2013 14:18:10

All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

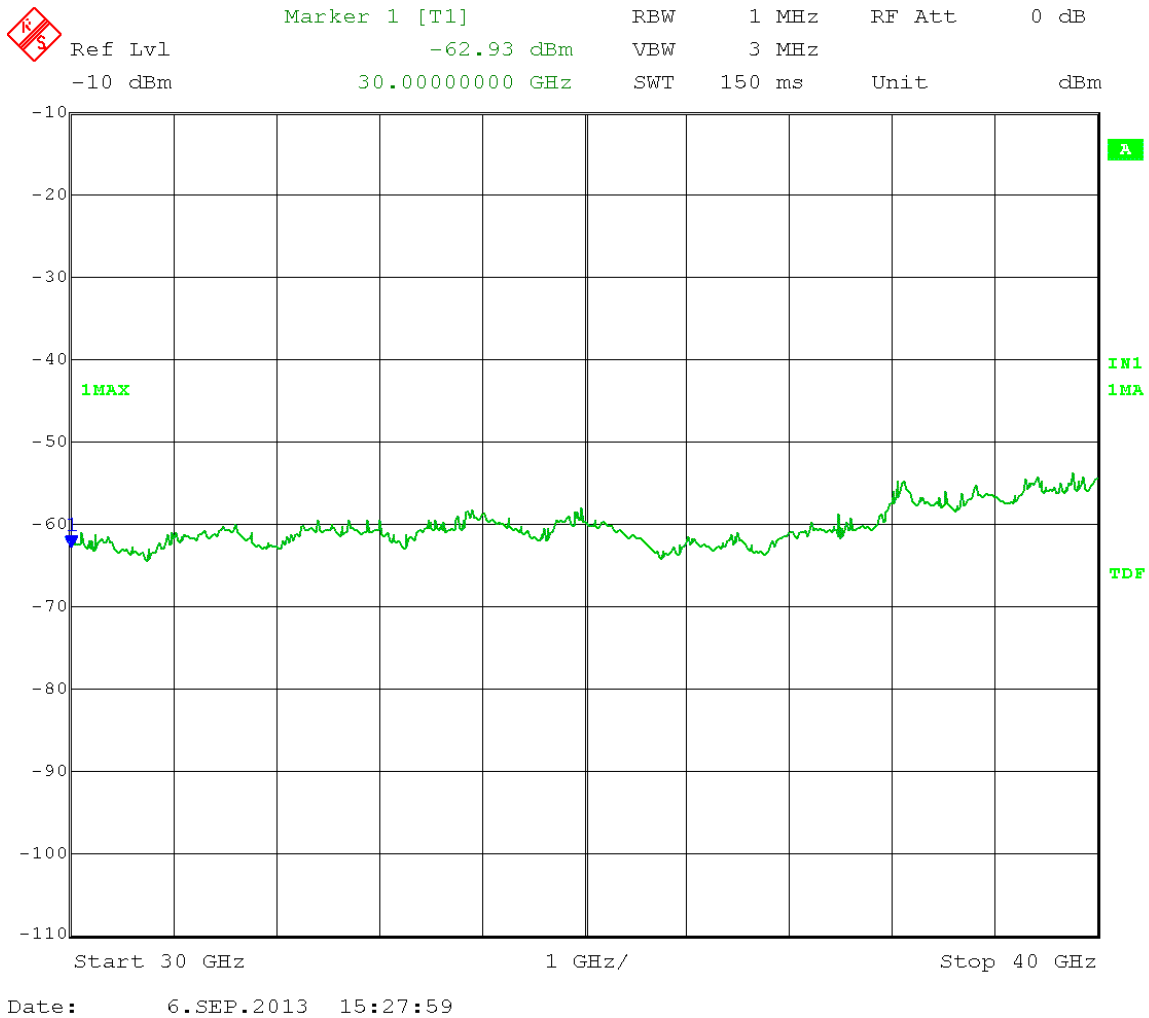


All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
Output Port: Channel 0 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

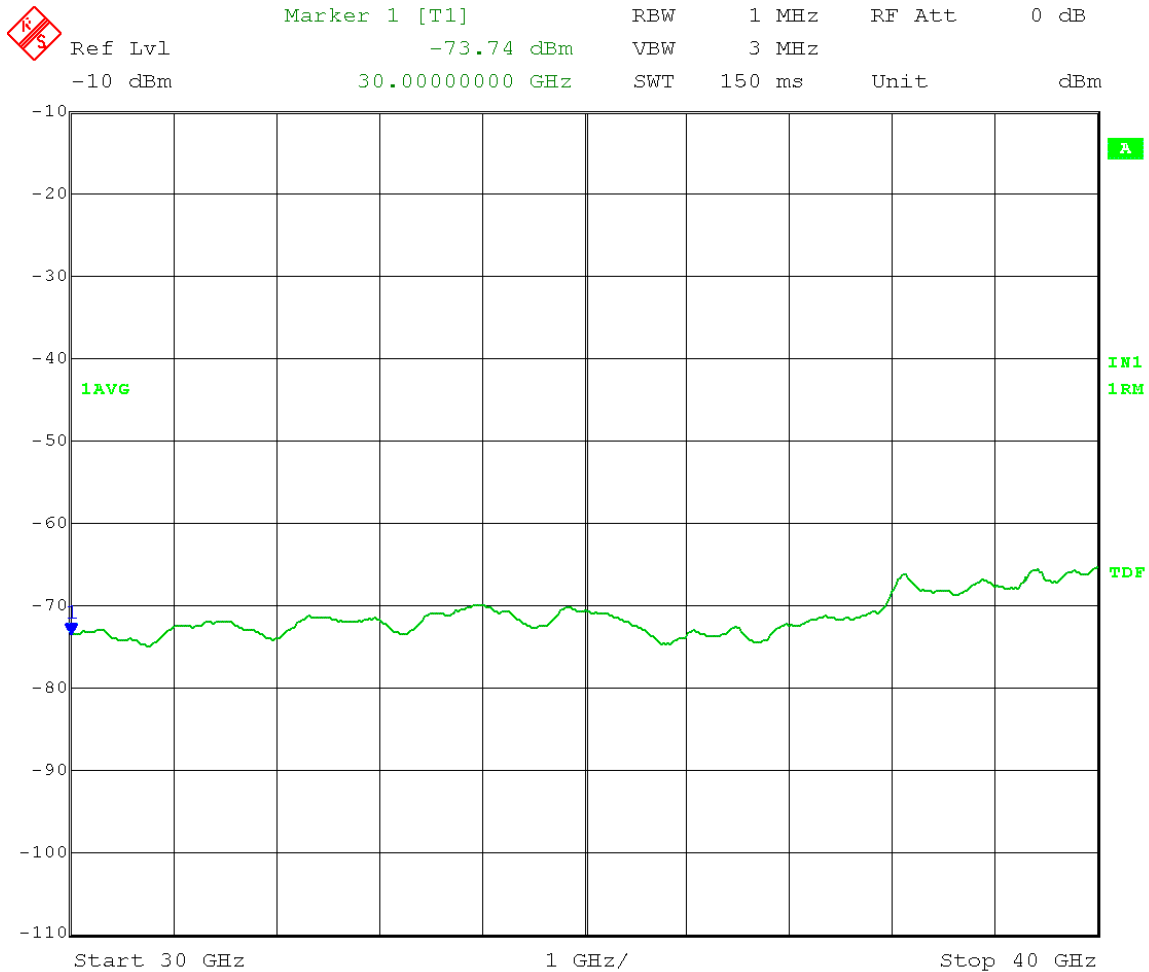


Date: 6.SEP.2013 15:27:02

All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz
Output Port: Channel 1
Output Power Setting: 10
Antenna Gain: 16dBi
Peak Detector
Mid Channel Frequency: 5.300 GHz
Modulation Type: OFDM
EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

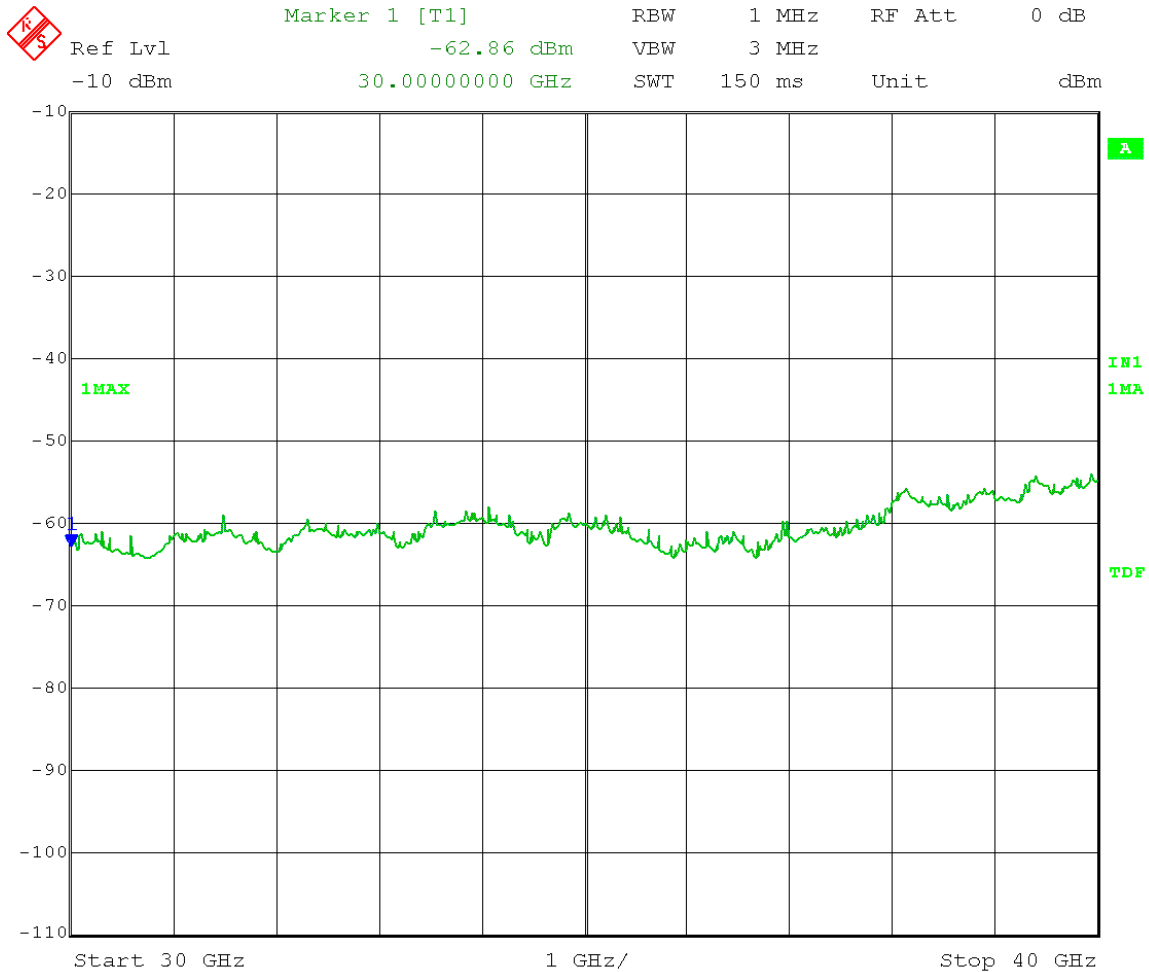


Date: 6.SEP.2013 15:28:20

All Emissions > 20dBm below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
Output Port: Channel 1 Mid Channel Frequency: 5.300 GHz
Output Power Setting: 10 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

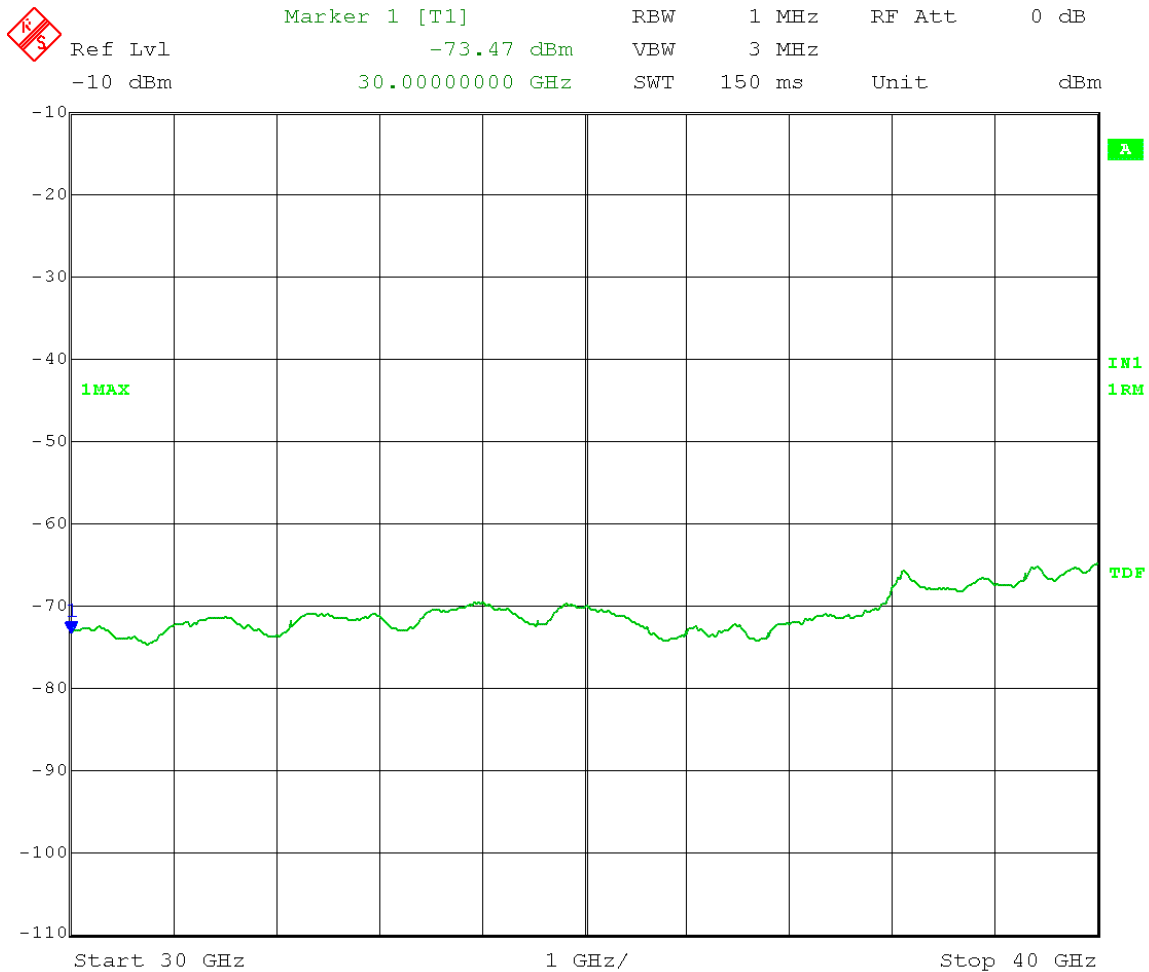


Date: 6.SEP.2013 15:27:34

All Emissions > 20dBm below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 0 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 MHz to 1 GHz

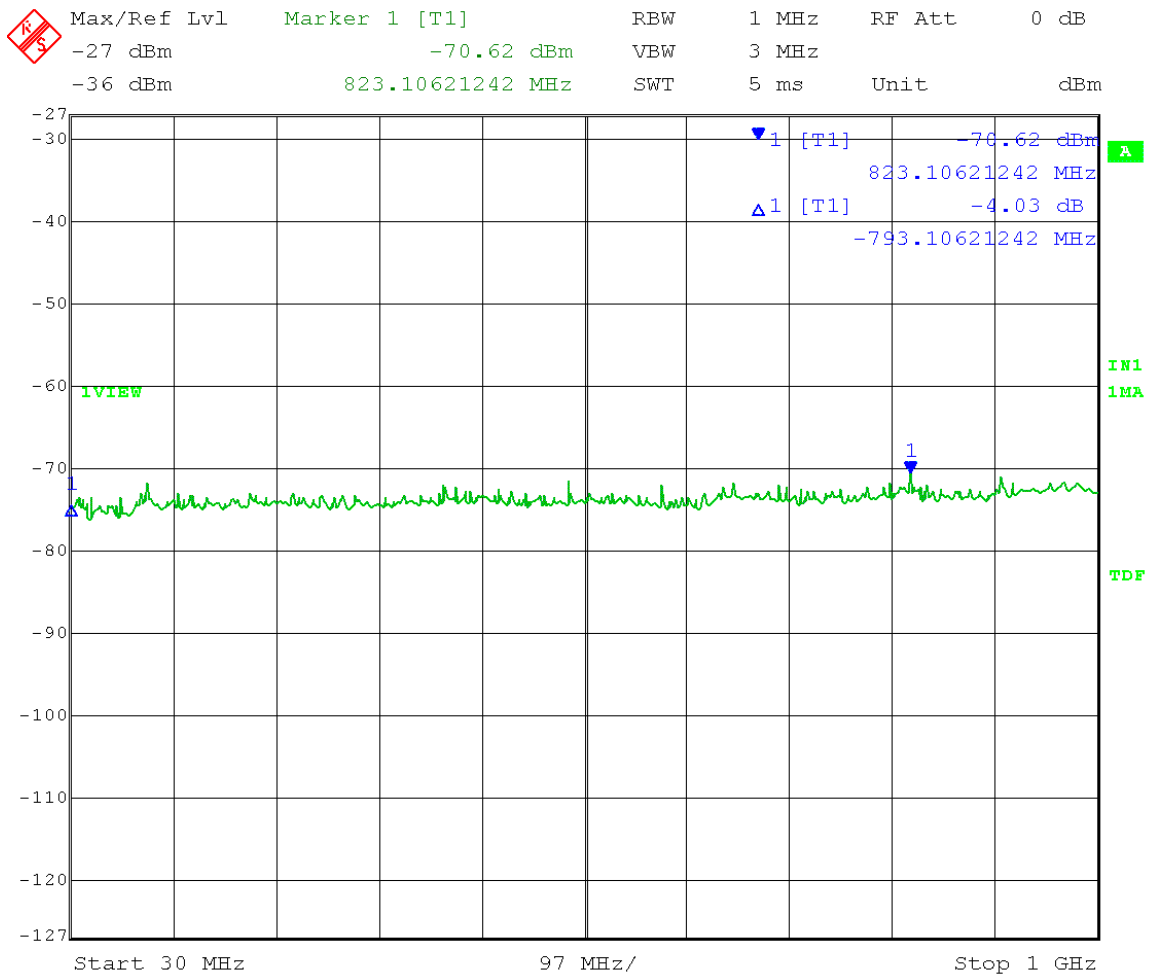


Date: 6.SEP.2013 13:42:21

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 0 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 MHz to 1 GHz

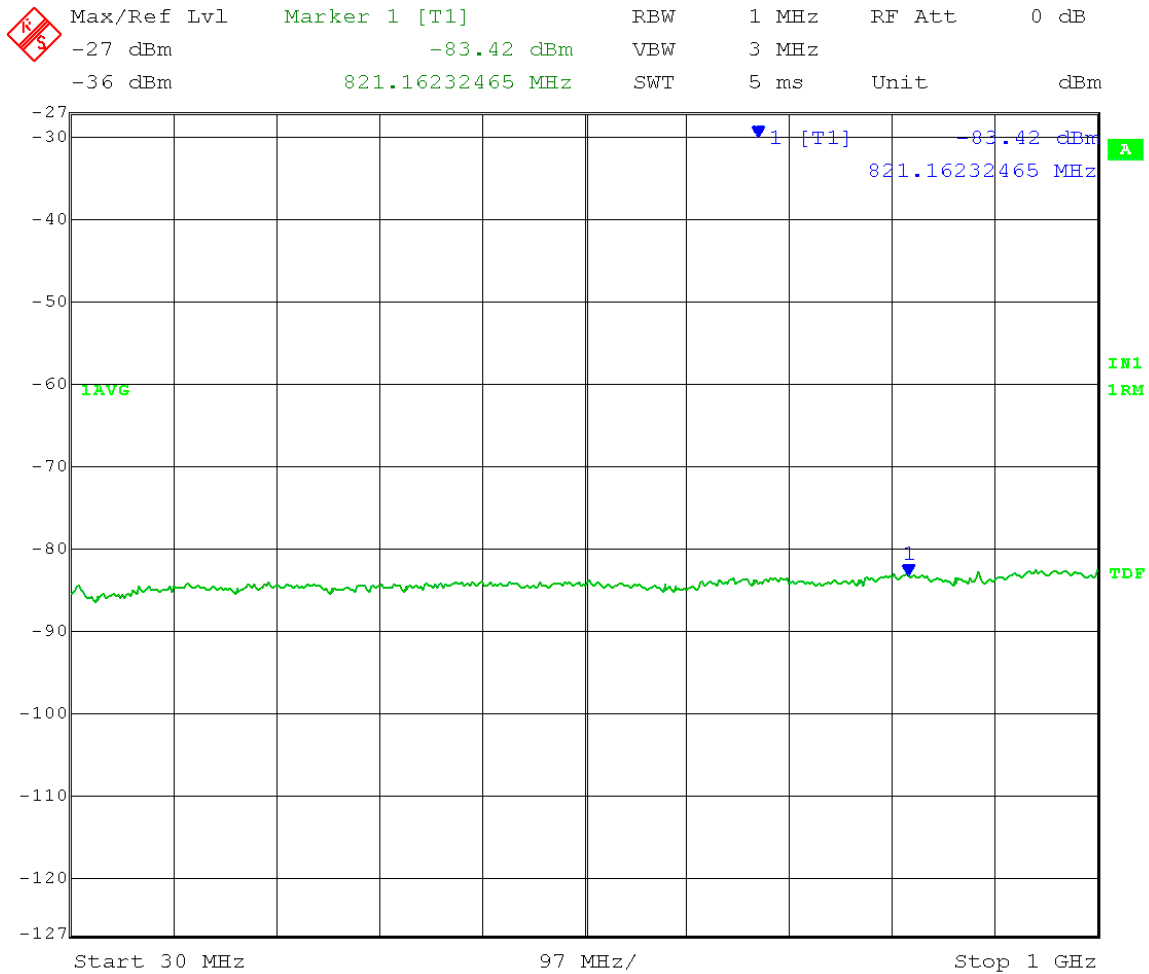


Date: 6.SEP.2013 13:44:40

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 1 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 MHz to 1 GHz

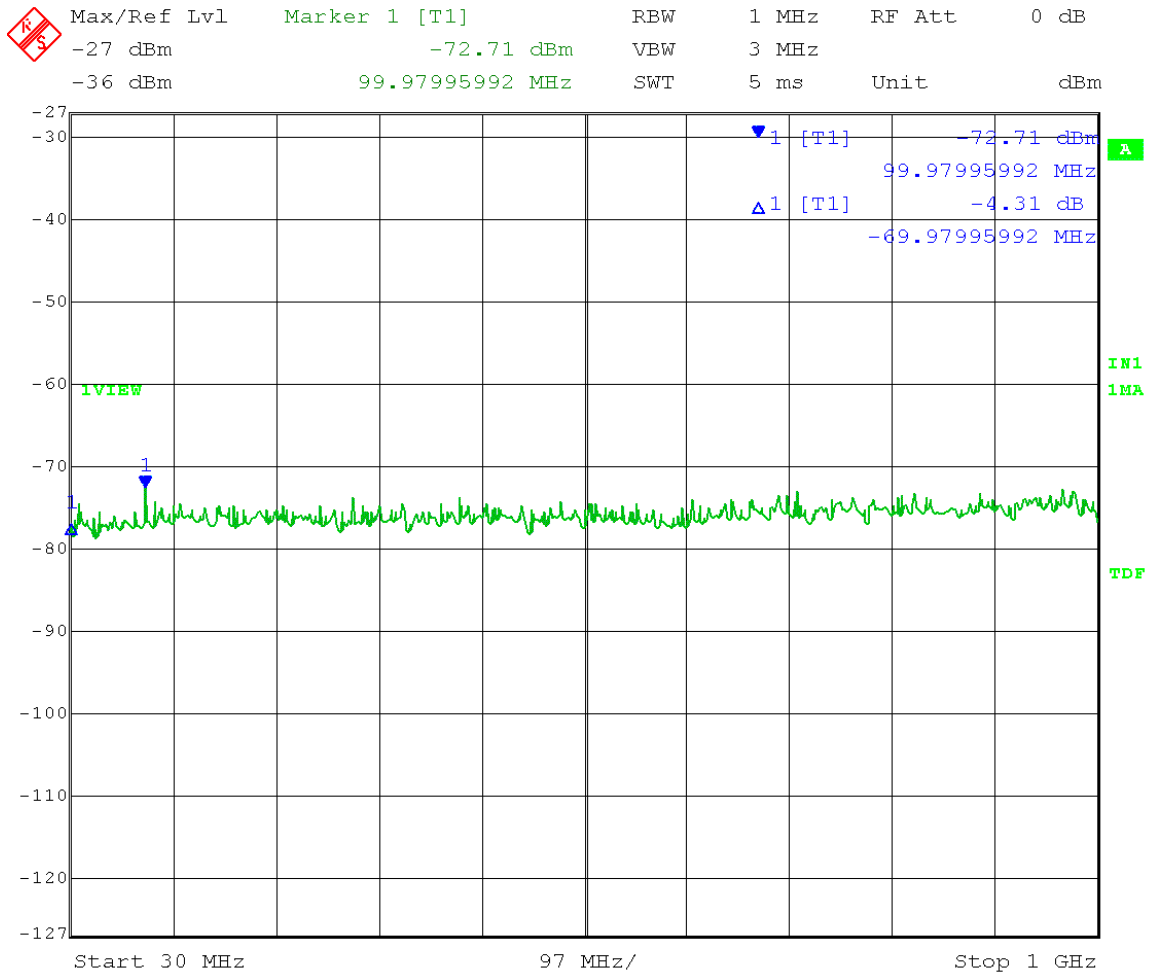


Date: 6.SEP.2013 13:43:02

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 0 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

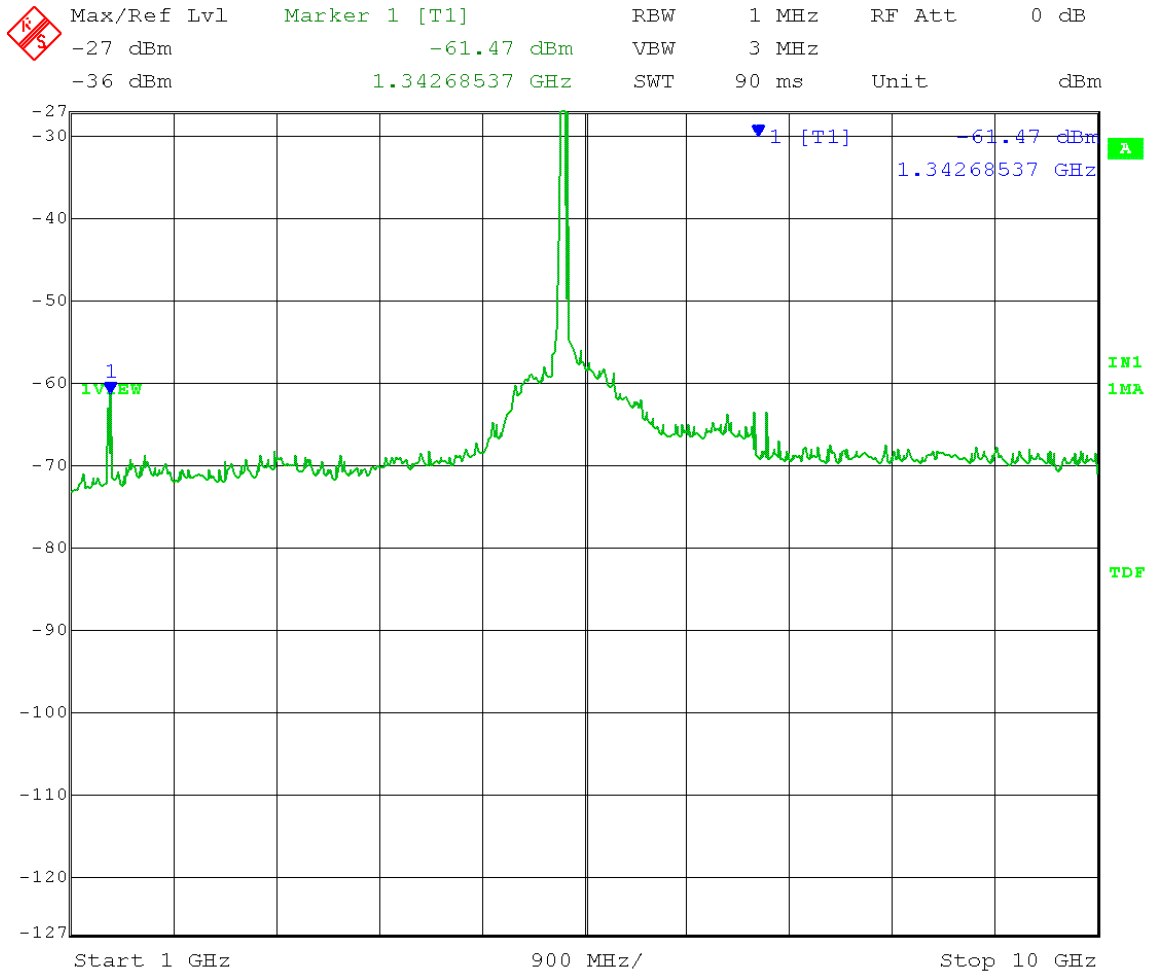


Date: 6.SEP.2013 13:21:04

Marker 1: Calculated Field Strength (Restricted Band) = -61.47 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 52.76dBμV/m Peak

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 0 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

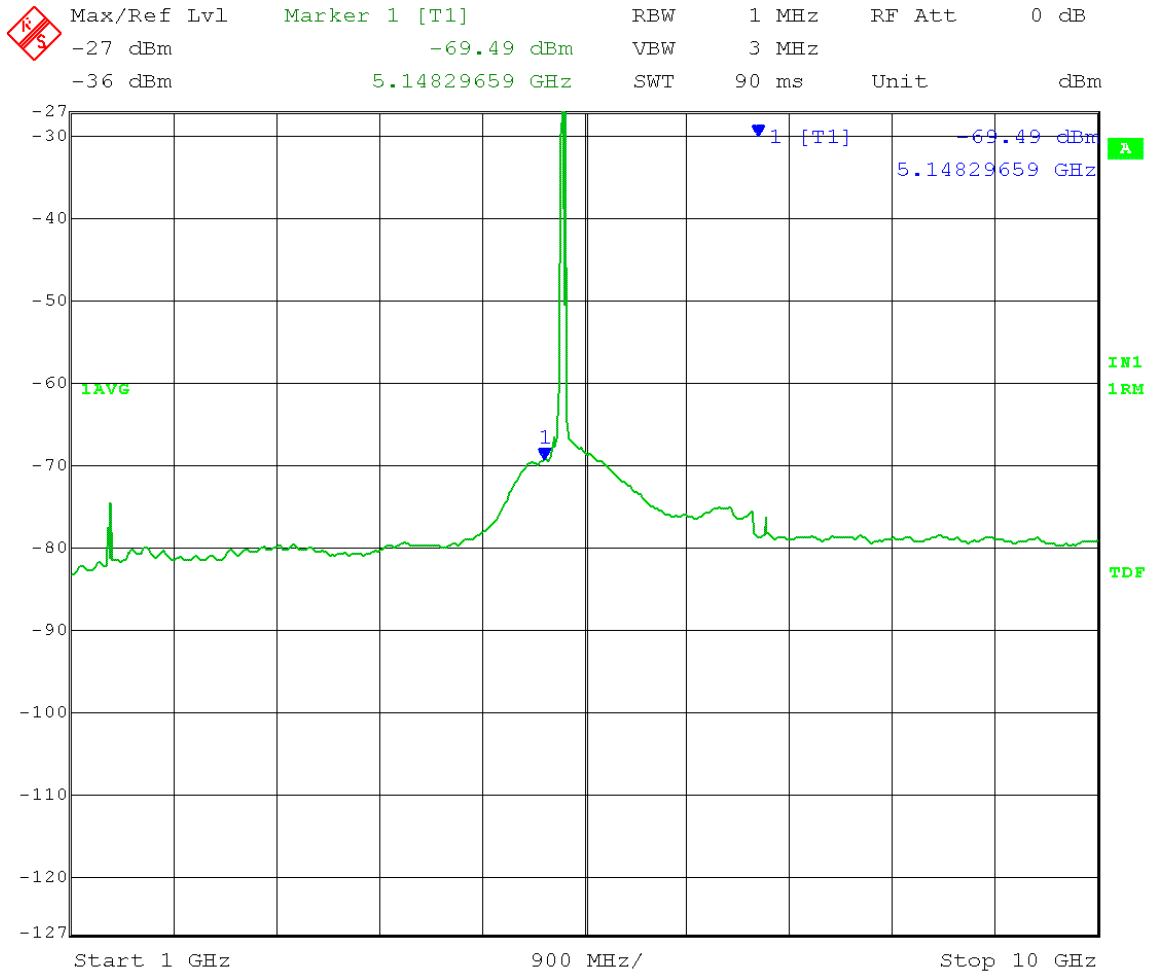


Date: 6.SEP.2013 13:25:42

Marker 1: Calculated Field Strength (Restricted Band) = -69.49 + 16dBi antenna gain
 + 3 dB (MIMO) – 20 log (3 meters) + 104.77 = 44.74dBμV/m Peak

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 1 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 1 GHz to 10 GHz

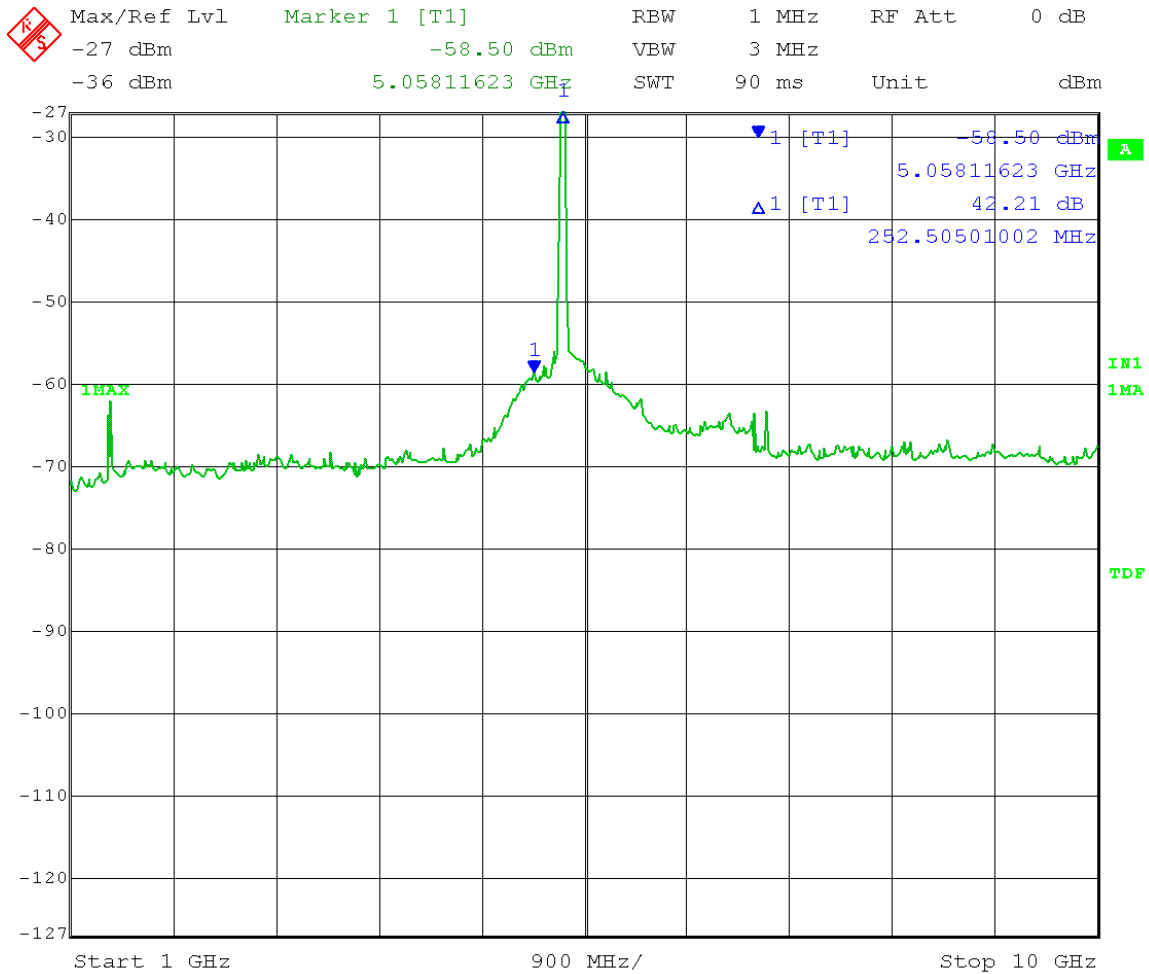

Date: 6.SEP.2013 13:29:42


Marker 1: Calculated Field Strength (Restricted Band) = $-58.50 + 16\text{dBi antenna gain} + 3\text{ dB (MIMO)} - 20\log(3\text{ meters}) + 104.77 = 55.73\text{dB}\mu\text{V/m Peak}$

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 1 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.

Frequency Range: 1 GHz to 10 GHz

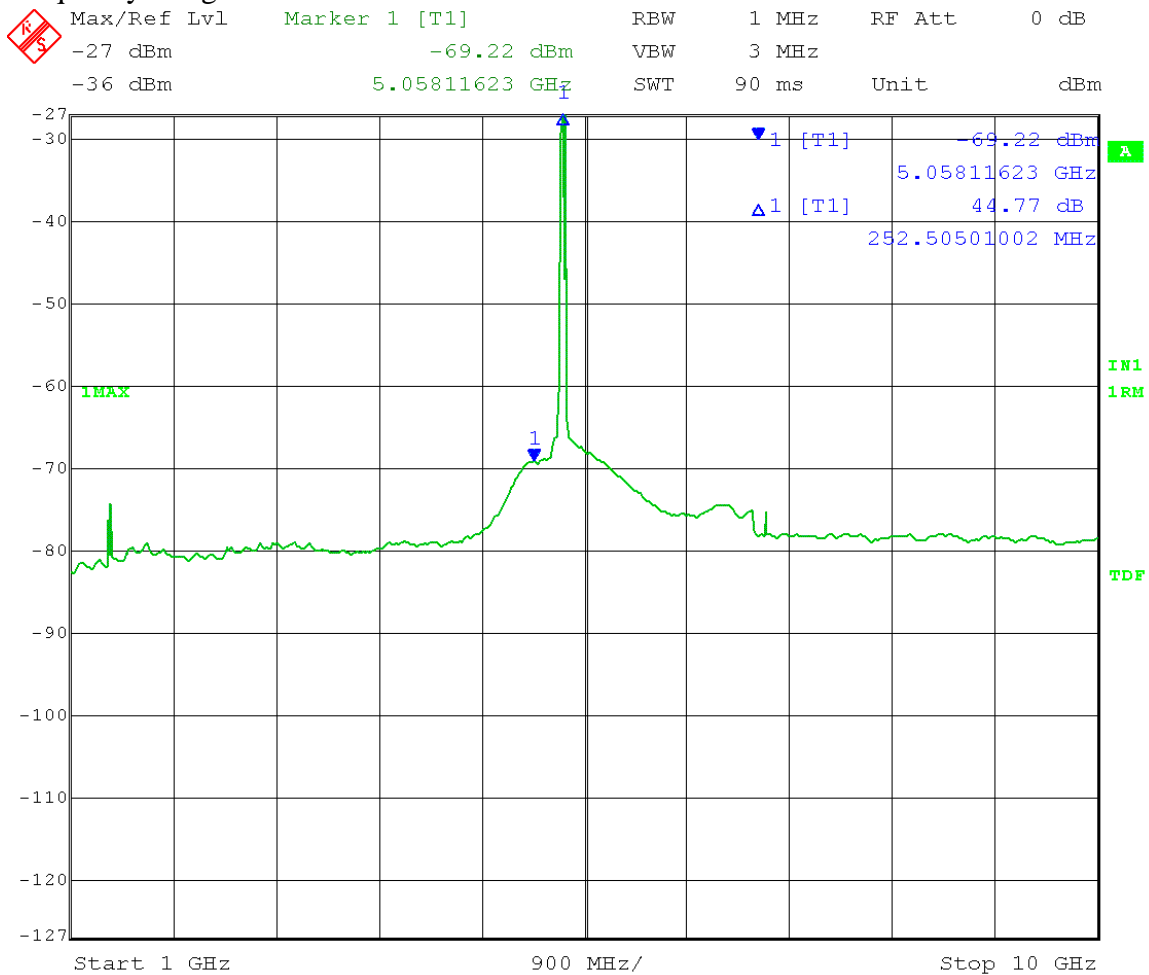


Date: 6.SEP.2013 13:28:03

Marker 1: Calculated Field Strength (Restricted Band) = $-69.20 + 16\text{dBi antenna gain} + 3\text{ dB (MIMO)} - 20\log(3\text{ meters}) + 104.77 = 45.03\text{dB}\mu\text{V/m Peak}$

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 0 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

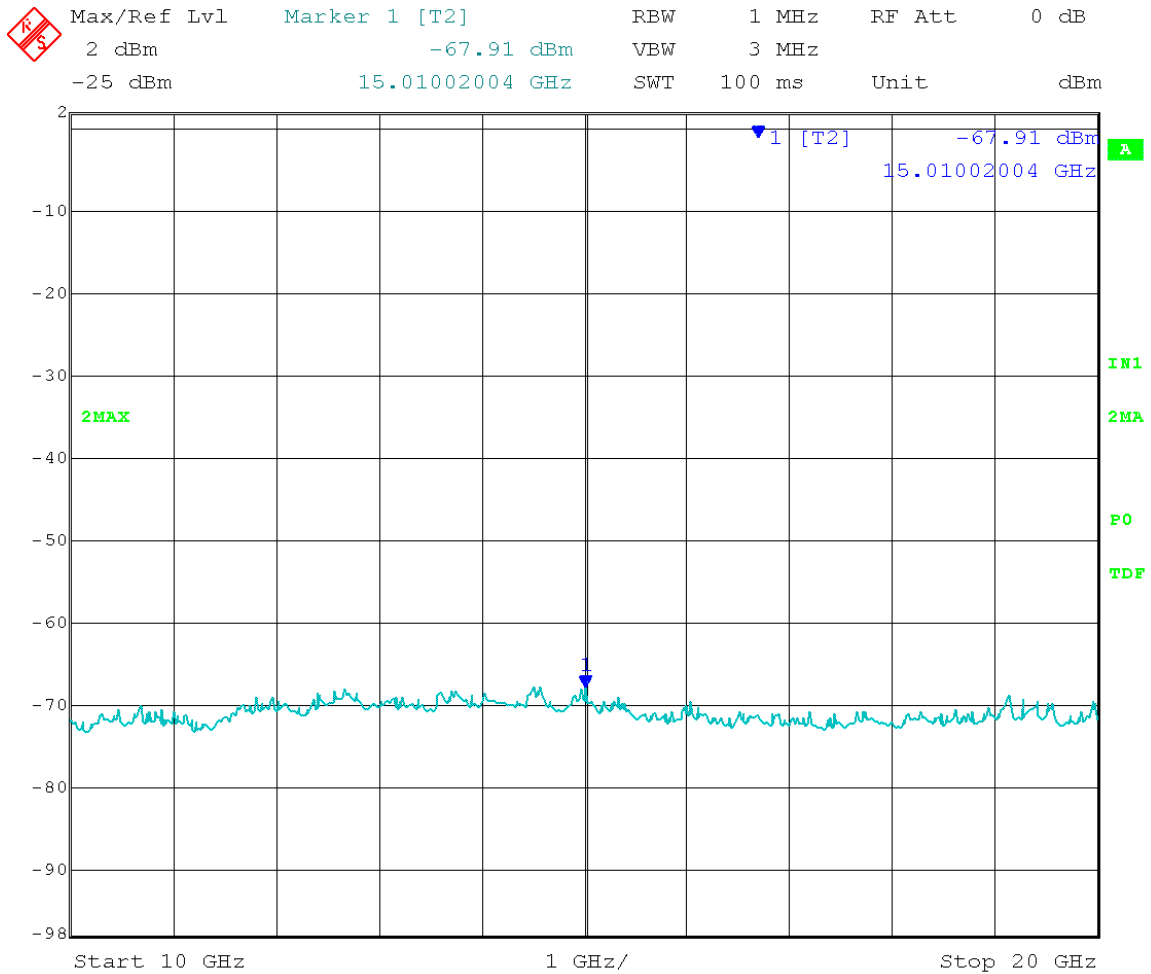


Date: 12.AUG.2013 15:21:26

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 0 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

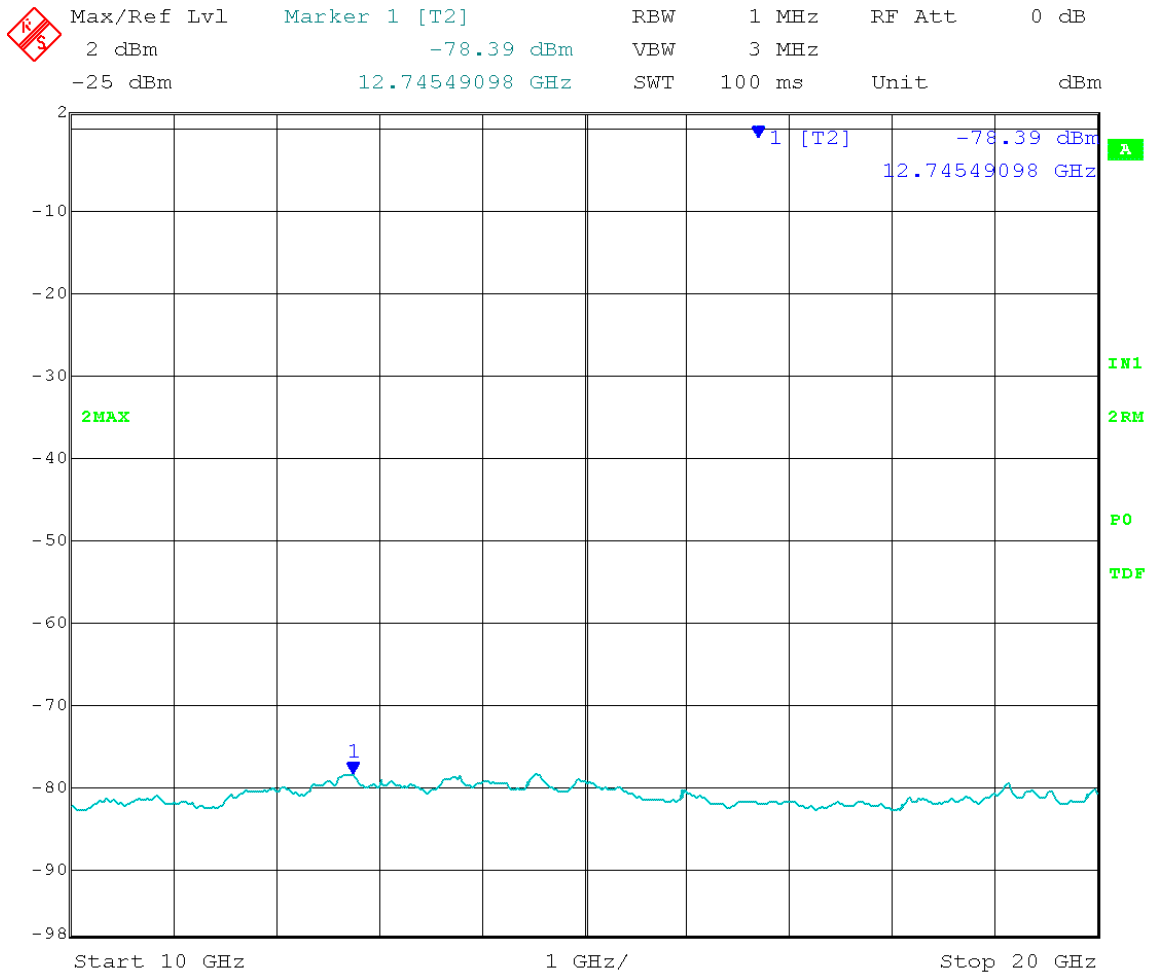


Date: 12.AUG.2013 15:20:52

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
 Output Port: Channel 1 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

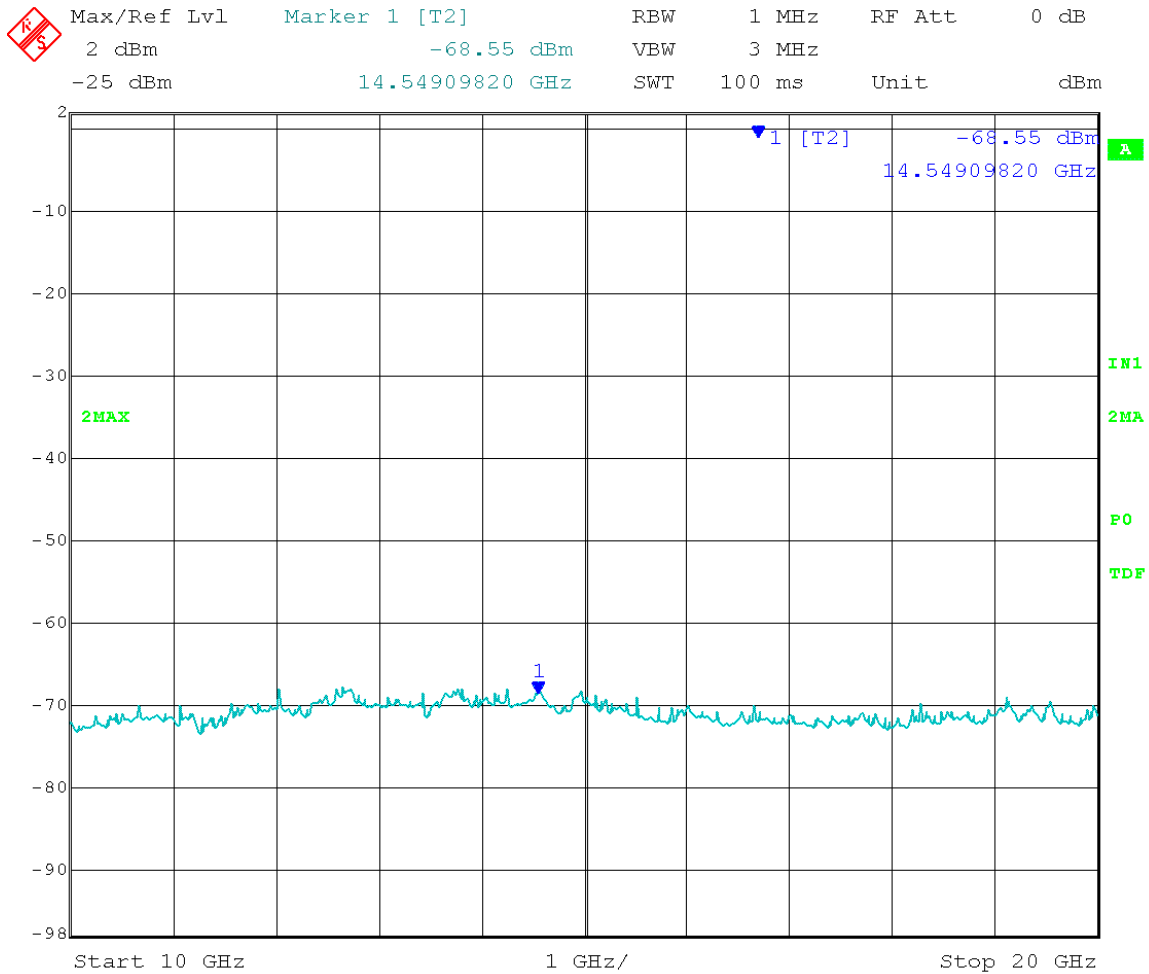


Date: 12.AUG.2013 15:22:44

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 1 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

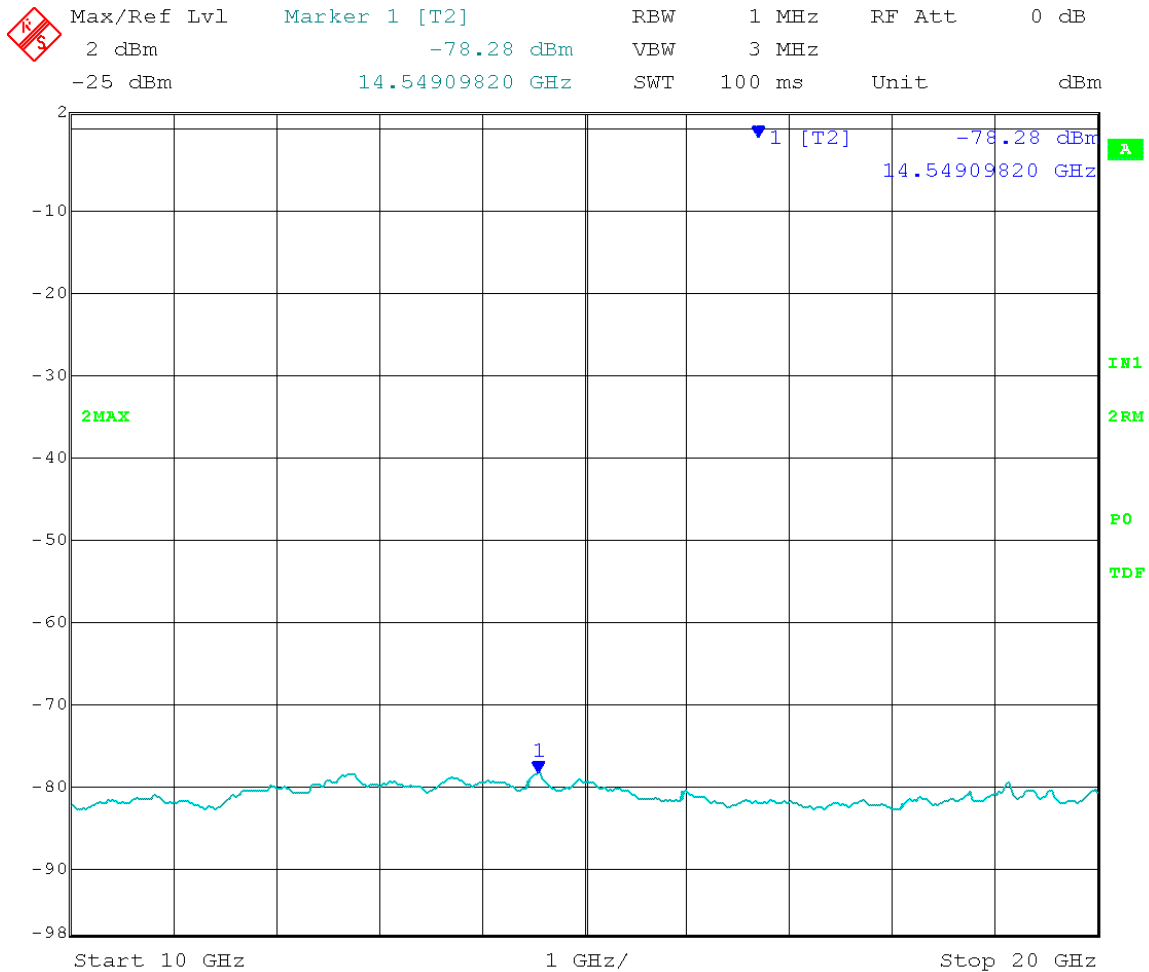


Date: 12.AUG.2013 15:22:16

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Lillian L

EUT Nominal Channel Bandwidth: 40 MHz
Output Port: Channel 0
Output Power Setting: 7.5
Antenna Gain: 16dBi
Peak Detector
High Channel Frequency: 5.315 GHz
Modulation Type: OFDM
EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 20 GHz to 30 GHz

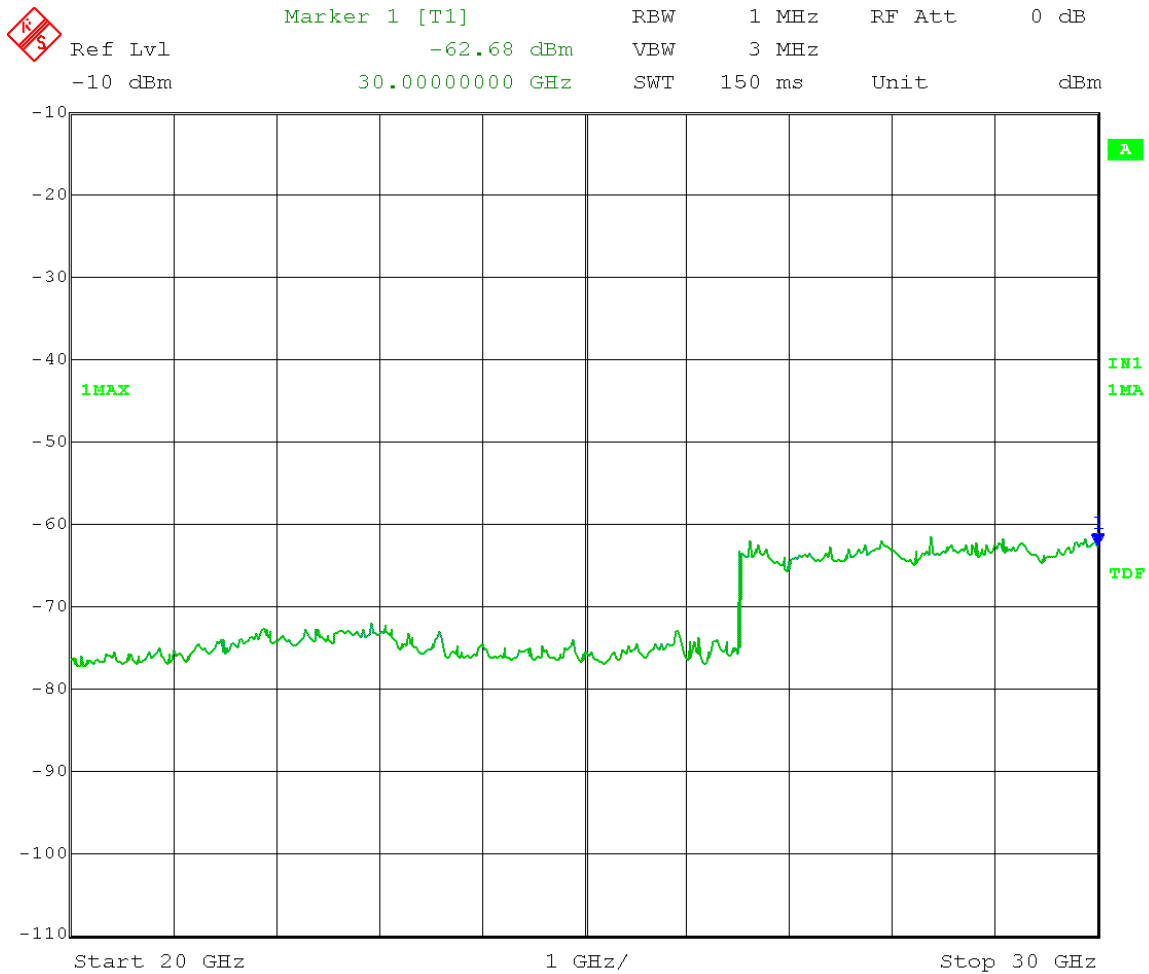


Date: 6.SEP.2013 15:22:42

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
Output Port: Channel 0 High Channel Frequency: 5.315 GHz
Output Power Setting: 7.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 10 GHz to 20 GHz

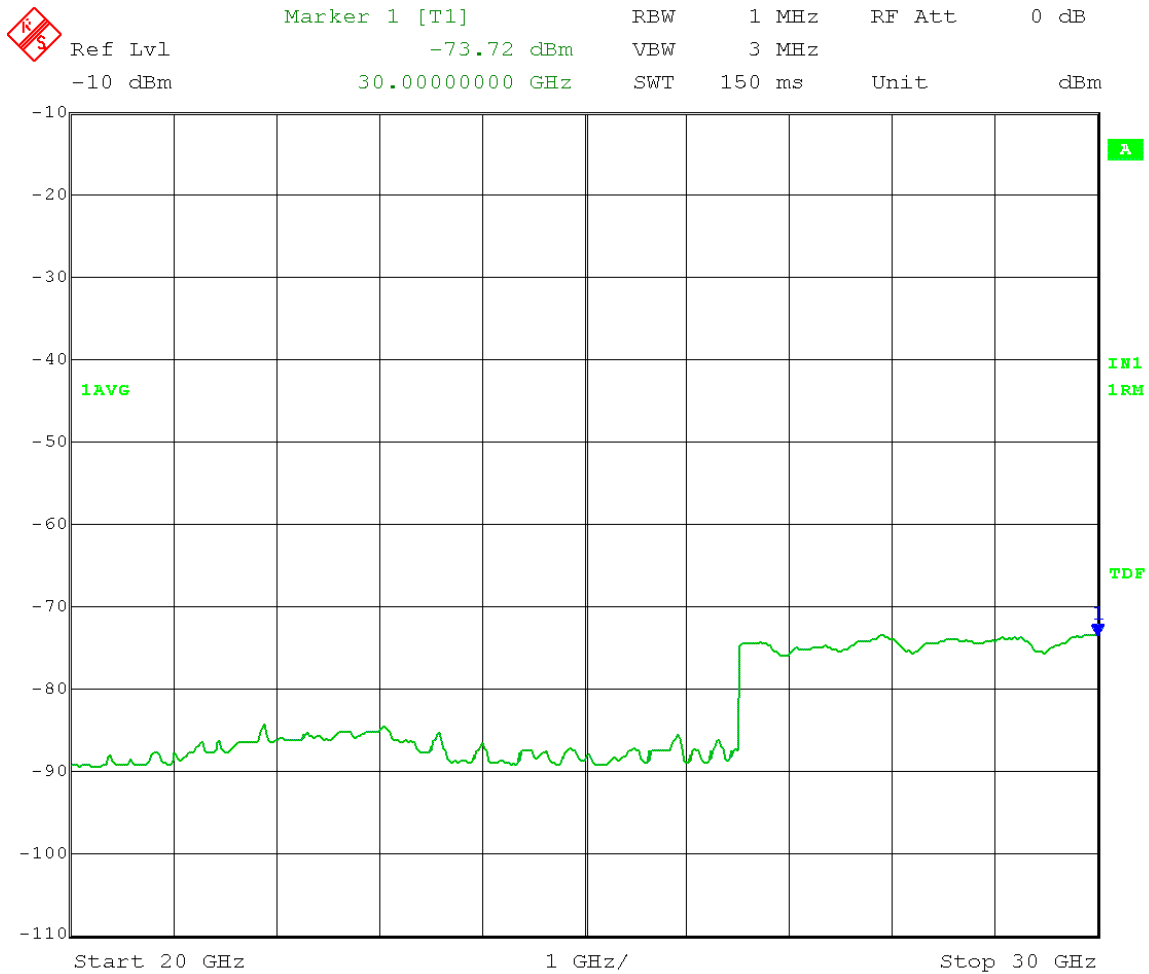


Date: 6.SEP.2013 15:23:23

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
Output Port: Channel 1 High Channel Frequency: 5.315 GHz
Output Power Setting: 7.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 10 GHz to 20 GHz

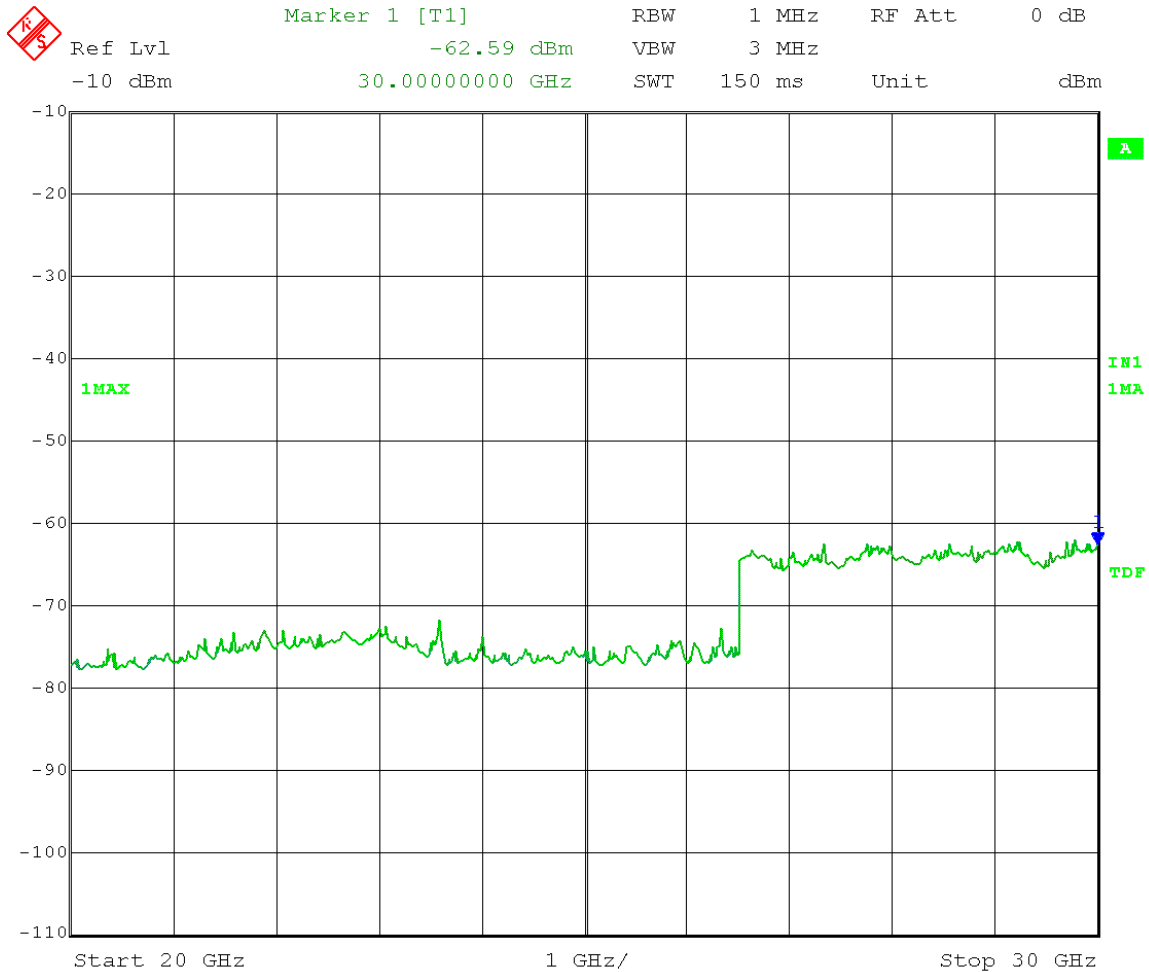


Date: 6.SEP.2013 15:23:02

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 1 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 10 GHz to 20 GHz

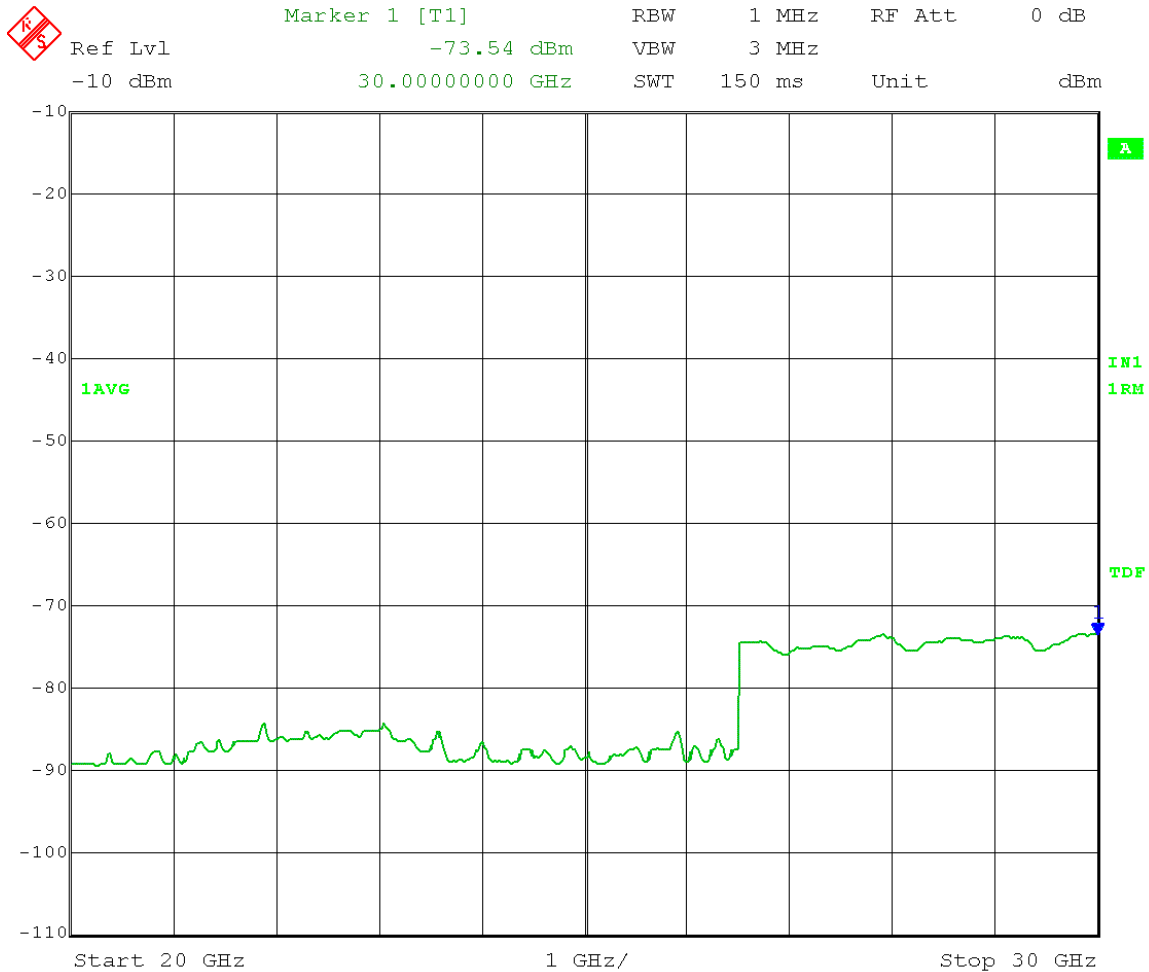


Date: 6.SEP.2013 15:24:09

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
 Company: Cambium Networks
 EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
 Test: Transmitter Unwanted Emissions – RF Conducted
 Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
 Output Port: Channel 0 High Channel Frequency: 5.315 GHz
 Output Power Setting: 7.5 Modulation Type: OFDM
 Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dBμV/m Peak, 54dBμV/m Average
 Corrected for external attenuation, cable and connector to antenna interface on radio.
 Frequency Range: 30 GHz to 40 GHz

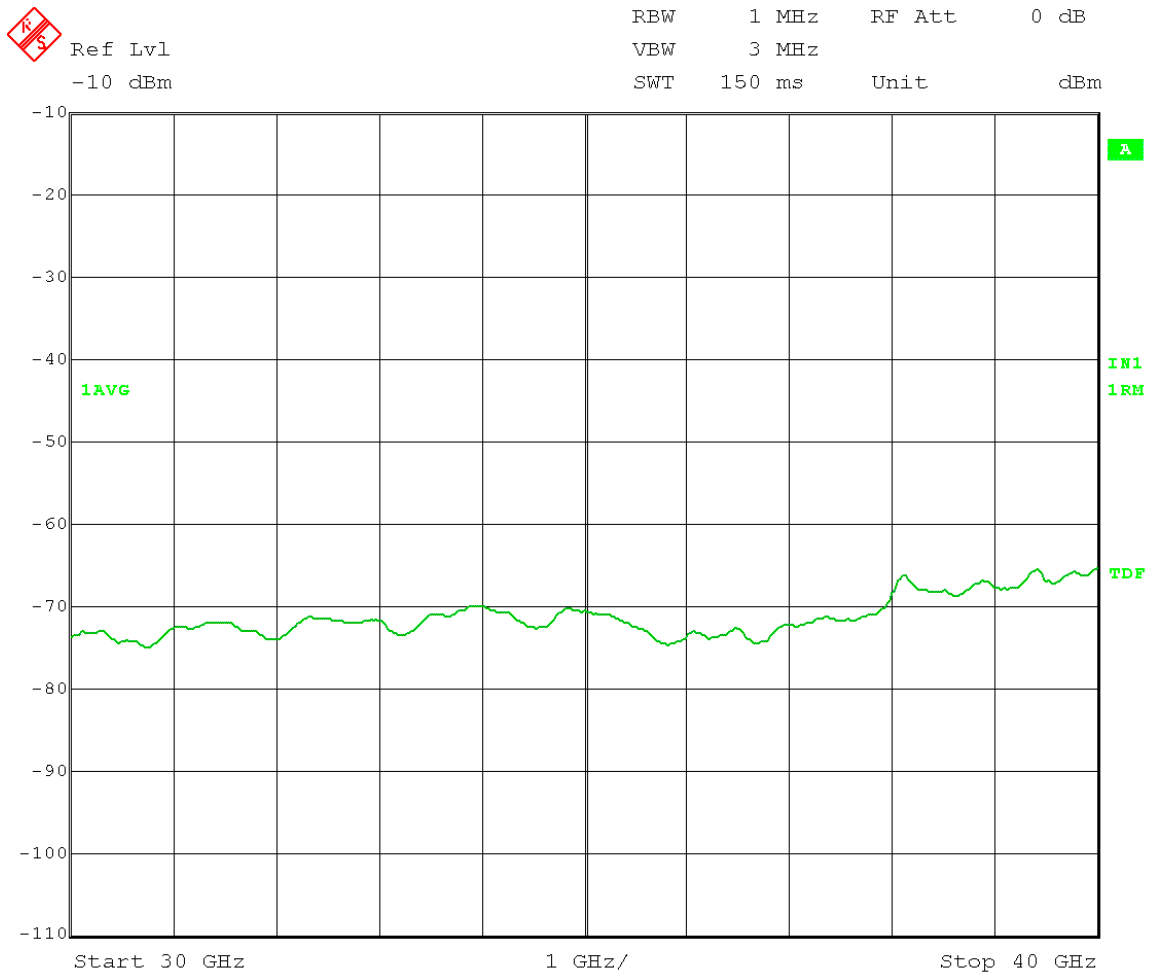


Date: 6.SEP.2013 15:19:45

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz Peak Detector
Output Port: Channel 1 High Channel Frequency: 5.315 GHz
Output Power Setting: 7.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

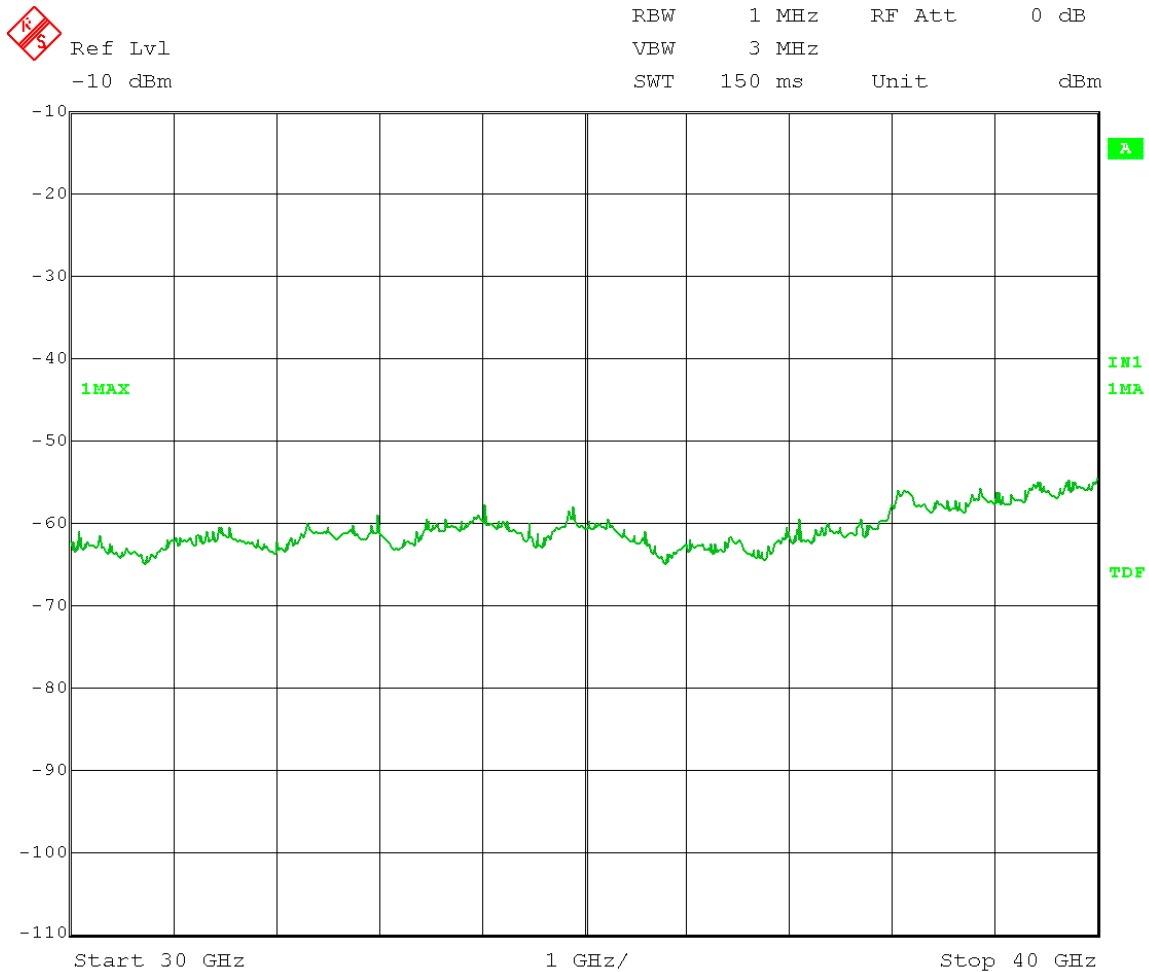


Date: 6.SEP.2013 15:20:48

Marker 1: Greater than 20dB below limit

Test Date: 09-06-2013
Company: Cambium Networks
EUT: Avenger AP 5.2 GHz (Pont-to-Multipoint)
Test: Transmitter Unwanted Emissions – RF Conducted
Operator: Jim O

EUT Nominal Channel Bandwidth: 40 MHz RMS Detector
Output Port: Channel 1 High Channel Frequency: 5.315 GHz
Output Power Setting: 7.5 Modulation Type: OFDM
Antenna Gain: 16dBi EIRP Limit: -27dBm/MHz

Field strength limit (3 meters; Restricted Bands): 74dB μ V/m Peak, 54dB μ V/m Average
Corrected for external attenuation, cable and connector to antenna interface on radio.
Frequency Range: 30 GHz to 40 GHz

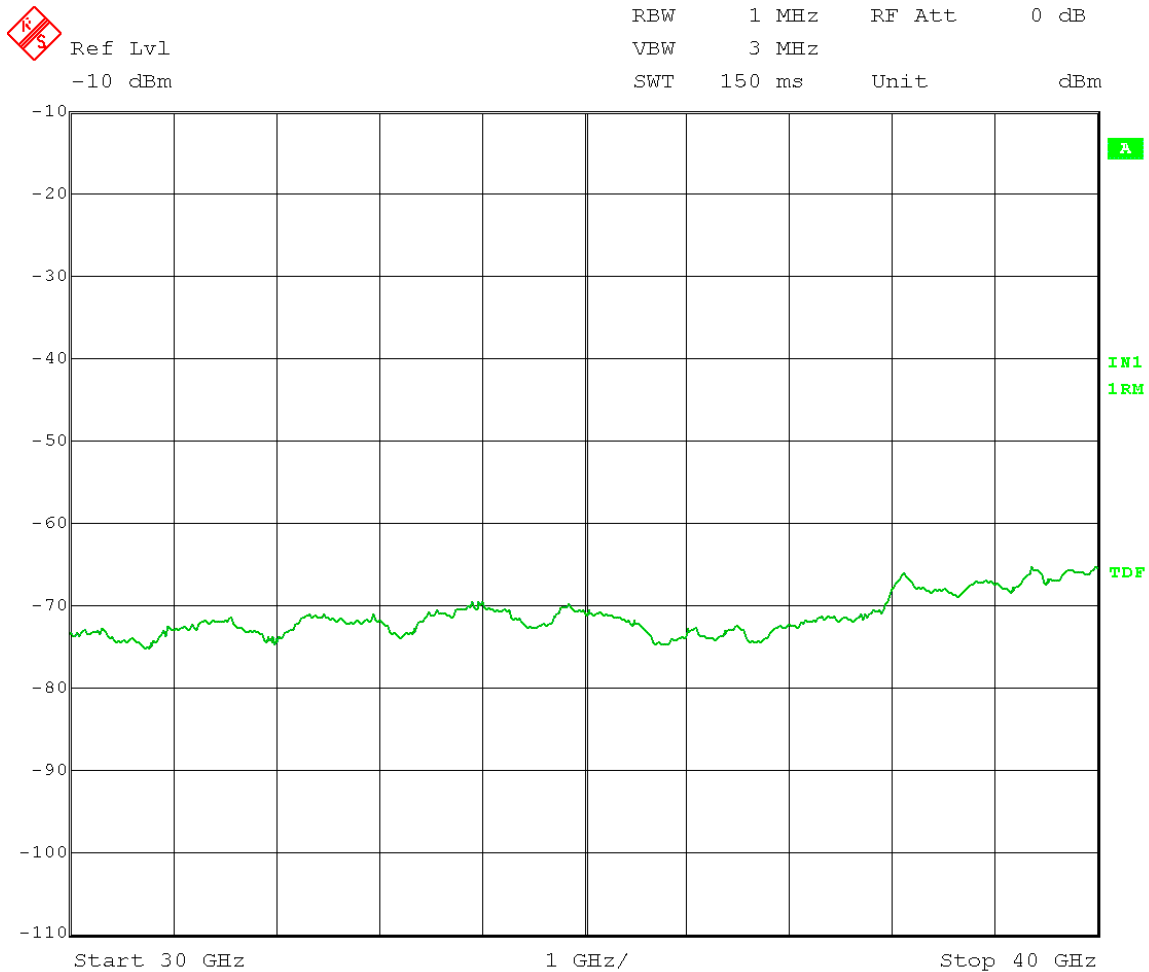

Date: 6.SEP.2013 15:19:19

Marker 1: Greater than 20dB below limit



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix B – Measurement Data

B9.0 Unwanted Emission Levels – Radiated from cabinet

Rule Section: Sections 15.407(b)(3) and 15.407(b)(6) / **RSS-210 A9.2(2)**

Test Procedure: FCC KDB 789033 D01 General UNII Test Procedures v01r03 – *Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E*
Section H(1) – Unwanted emissions in the restricted bands
Section H(2) – Unwanted emissions that fall outside of the restricted bands
Section H(3) – General Requirements for Unwanted Emissions Measurements
Section H(4) – Procedure for Unwanted Emissions Measurements Below 1 GHz
Section H(5) – Procedure for Peak Unwanted Emissions Measurements Above 1 GHz
Section H(6) – Procedure for Average Unwanted Emissions Measurements Above 1 GHz
Section H(6)(c) – Average Detection method

Below 1000 MHz

Detector = quasi-peak

Alternately, peak detector is permitted

Peak measurements above 1000 MHz

RBW = 1 MHz

VBW \geq 3 MHz

Detector = peak

Sweep time = auto; increased by a factor of (1 / duty cycle)

Trace mode = max hold

Average measurements above 1000 MHz (required for peak emissions that are above the average limits)

– Method AD (Average Detection)

RBW = 1 MHz

VBW \geq 3 MHz

Detector = RMS (span/(# of points in sweep) \leq RBW/2)

Averaging type = power

Sweep time = auto; increased by a factor of (1 / duty cycle)

Trace mode = trace average 100 sweeps; increased by a factor of (1 / duty cycle)

For a duty cycle less than 98%, add 10 log (1/duty cycle)

Limits: Outside restricted bands: Peak EIRP shall not exceed -27 dBm/MHz

Inside restricted bands: Peak and Average limits of FCC Part 15.209/**RSS-Gen 7.2.5**

Per Section H(2)(c)(i): “an out-of-band emission that complies with both the average and peak limits of 15.209/**RSS-Gen 7.2.5** is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.”

Results: Passed

Notes: Both transmit chains active and at maximum power during test.

Antenna ports were terminated with 50 Ohm terminations.

Measurements were taken for MCS15 OFDM modulation at the lowest, middle, and highest channels of operation. EUT was set to transmit continuously with 100% duty cycle.

Electric Field Strength

EUT: 5.2,5.4,5.7 GHz Avenger AP
Manufacturer: Cambium Networks
Operating Condition: 73 deg. F; 64% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig B
Test Specification: 29.5 V DC (POE); L, M, and H channles
Comment: 20 & 40 MHz ch BW's; both chains active at 20 dBm, MCS15
Date: 06-13-2013


TEXT: "Horz 3 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

Equations: $Total\ Level(dB\mu V/m) = Level(dB\mu V) + System\ Loss(dB) + Antenna\ Factor(dB\mu V/m)$
 $Margin(dB) = Limit(dB\mu V/m) - Total\ Level(dB\mu V/m)$

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average dector
Final maximized level using Peak detector

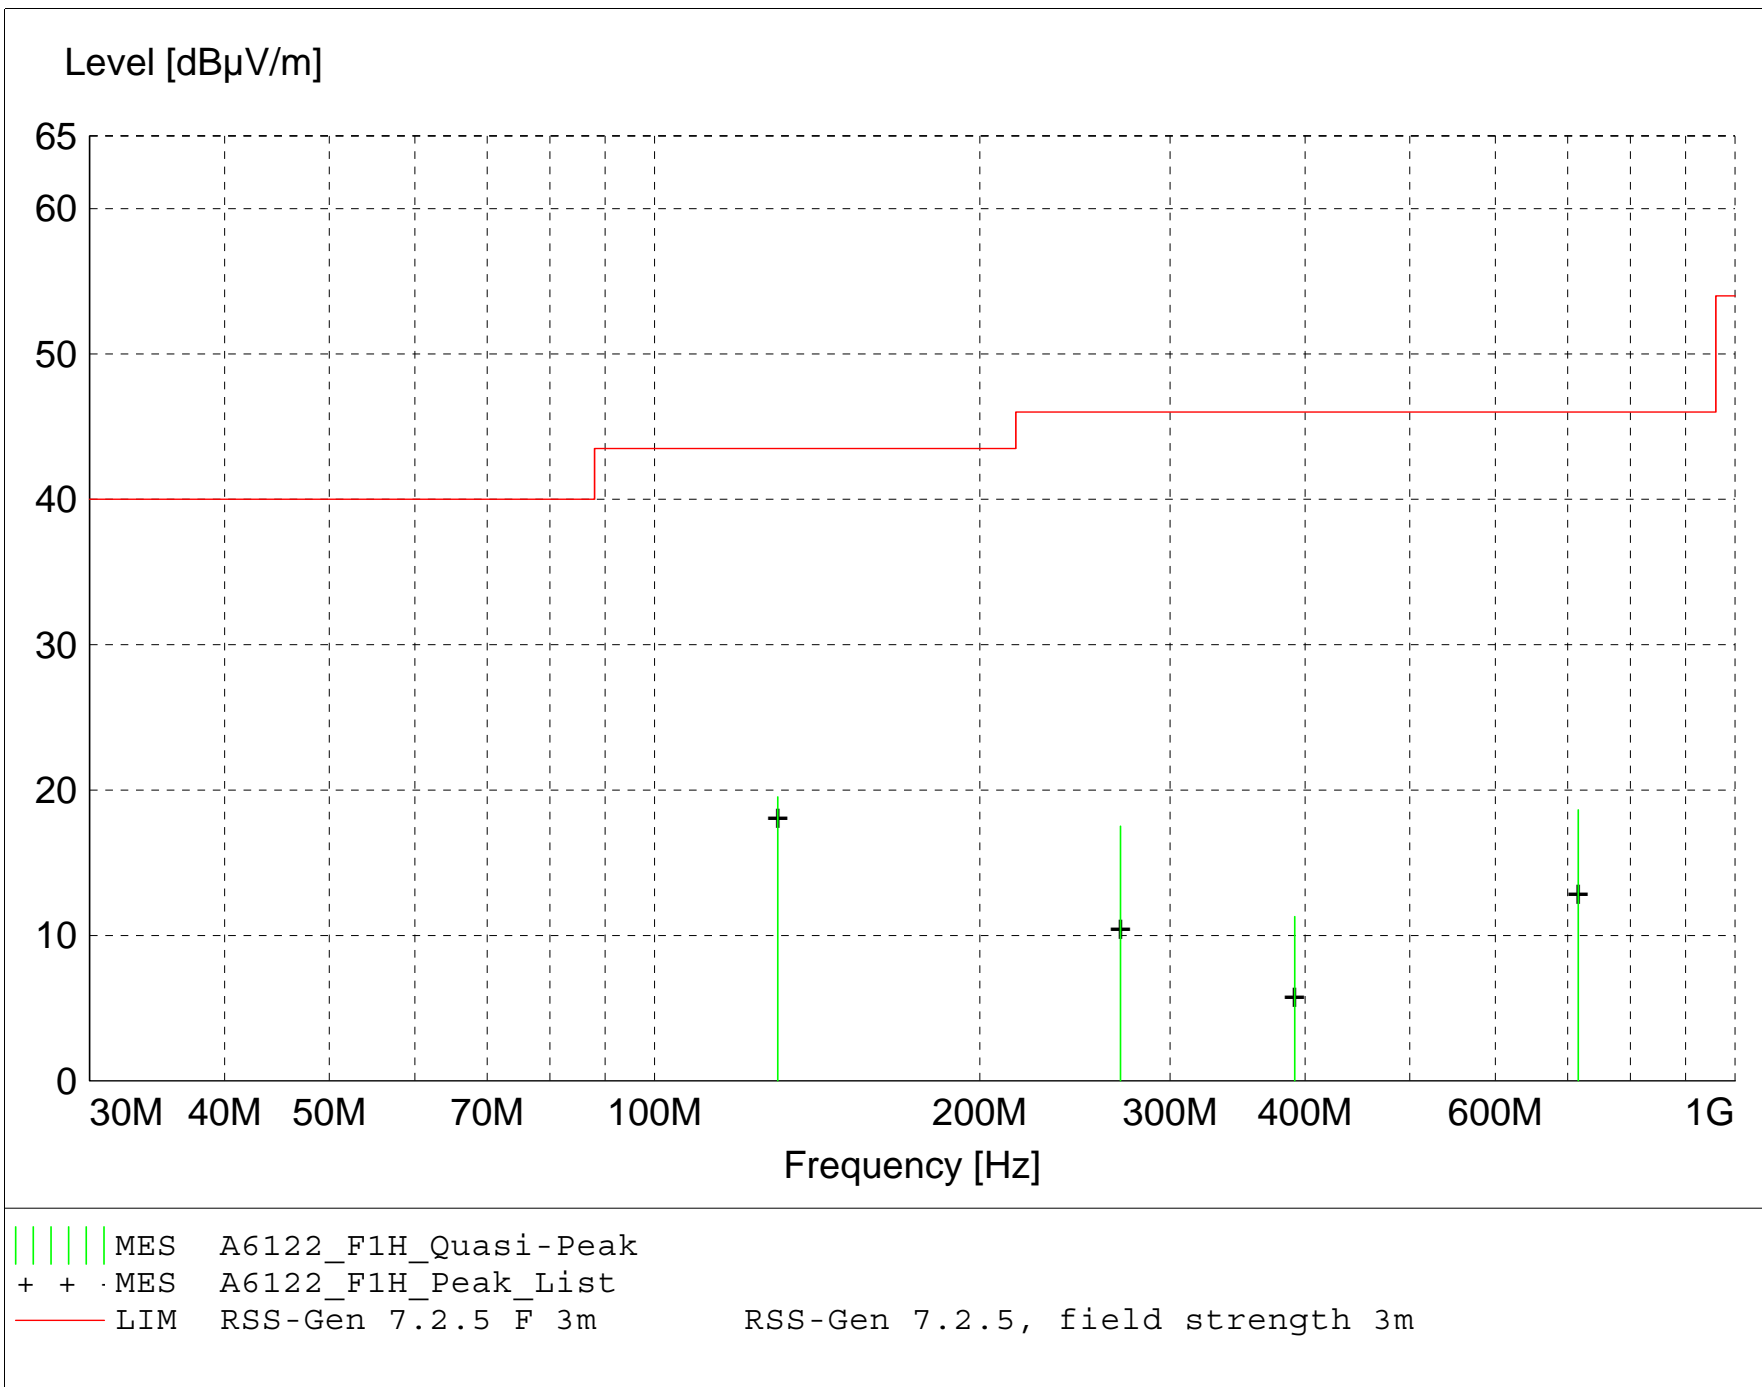

MEASUREMENT RESULT: "A6122_F1H_Final"

6/13/2013 10:03AM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dB μ V	Factor	Loss	Level	dB μ V/m	dB	Ant.	Angle	Detector	
		dB μ V/m	dB	dB μ V/m	dB μ V/m		m	deg		
130.000000	29.07	12.90	-22.4	19.5	43.5	24.0	1.30	250	QUASI-PEAK	broadband
715.970000	16.37	21.04	-18.8	18.6	46.0	27.4	1.50	45	QUASI-PEAK	noise floor
269.970000	25.44	13.40	-21.3	17.5	46.0	28.5	3.10	290	QUASI-PEAK	None
391.250000	16.10	15.83	-20.6	11.3	46.0	34.7	1.00	0	QUASI-PEAK	noise floor

RSS-210 A9.2(2)

Electric Field Strength

EUT: 5.2,5.4,5.7 GHz Avenger AP
Manufacturer: Cambium Networks
Operating Condition: 73 deg. F; 64% R.H.
Test Site: DLS O.F. Site 3
Operator: Craig B
Test Specification: 29.5 V DC (POE); L, M, and H channles
Comment: 20 & 40 MHz ch BW's; both chains active at 20 dBm, MCS15
Date: 06-13-2013


TEXT: "Vert 3 meters"

Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

Sample Equations: Total Level (dBµV/m) = Level (dBµV) + System Loss (dB) + Antenna Factor (dBµV/m)
24.6 = 35.51 + (-22.1) + 11.20
Margin (dB) = Limit (dBµV/m) - Total Level (dBµV/m)
15.4 = 40 - 24.6

Graph Markers: + Frequency marker (Level of marker not related to final level)
| Final maximized level using Quasi-Peak detector
X Final maximized level using Average dector
Final maximized level using Peak detector

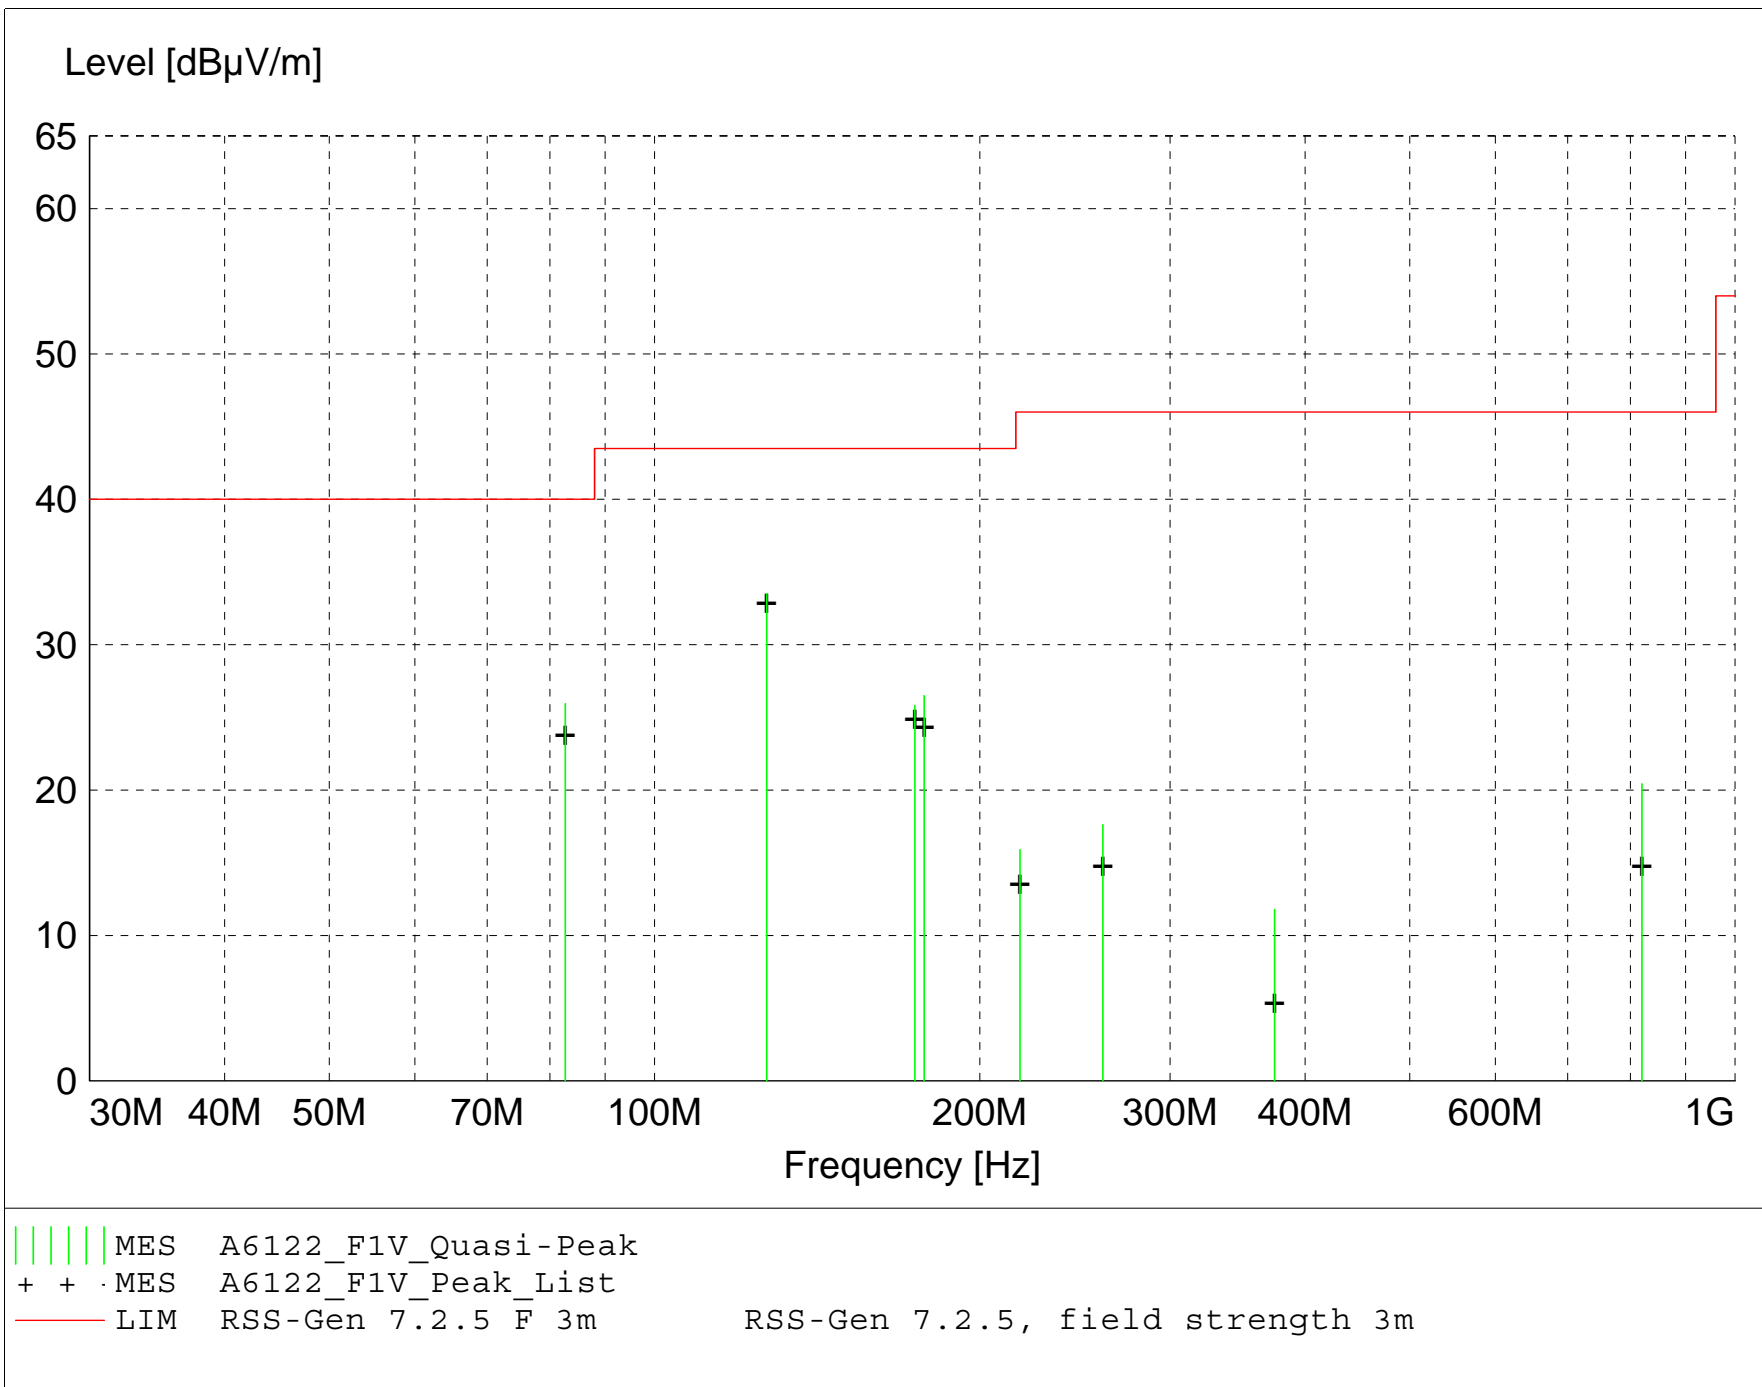

MEASUREMENT RESULT: "A6122_F1V_Final"

6/13/2013 10:09AM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dB μ V	Factor	Loss	Level	dB μ V/m	dB	Ant.	Angle	Detector	
		dB μ V/m	dB	dB μ V/m	dB μ V/m		m	deg		
127.005000	42.95	13.00	-22.5	33.5	43.5	10.0	1.00	260	QUASI-PEAK	broadband
82.675000	42.46	6.67	-23.2	25.9	40.0	14.1	1.20	315	QUASI-PEAK	broadband
177.640000	32.58	16.03	-22.1	26.5	43.5	17.0	1.00	290	QUASI-PEAK	broadband
174.135000	32.44	15.51	-22.1	25.8	43.5	17.7	1.00	270	QUASI-PEAK	broadband
819.980000	16.54	22.30	-18.4	20.4	46.0	25.6	1.00	0	QUASI-PEAK	noise floor
260.000000	26.13	13.00	-21.5	17.6	46.0	28.4	2.00	90	QUASI-PEAK	None
217.860000	26.11	11.54	-21.8	15.9	46.0	30.1	2.20	90	QUASI-PEAK	broadband
374.820000	17.14	15.29	-20.7	11.8	46.0	34.2	1.00	0	QUASI-PEAK	noise floor



166 South Carter, Genoa City, WI 53128

Company:	Cambium Networks
Model Tested:	C058900P112A
Report Number:	19275
DLS Project:	5949

**No measurable emissions were detected
from the EUT above 1GHz.**

**Radiated emissions testing was performed
up to 40GHz.**



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

Appendix B – Measurement Data

B10.0 AC Line Conducted Emissions

Rule Part: FCC Part 15.207
RSS-Gen 7.2.4

Test Procedure: ANSI C63.4-2009
RSS-Gen 7.2.4

Limit: FCC Part 15.207(a)
RSS-Gen 7.2.4, Table 4

Results: Compliant

Notes: This was an AC Conducted emissions measurement.
The EUT was powered from a representative AC Adapter with an input of
120 VAC 60 Hz.


RSS-Gen 7.2.4

Voltage Mains Test

EUT: Avenger AP Radio 5.2,5.4,5.7 GHz
 Manufacturer: Cambium Networks
 Operating Condition: 70 deg. F, 34% R.H.
 Test Site: DLS O.F. Screen Room
 Operator: Jim O/Lillian Li
 Test Specification: 120V, 60Hz
 Comment: Continuous TX; Line 1
 6-17-2013

SCAN TABLE: "Line Cond SR Final"

Short Description:		Line Conducted Emissions					Transducer
Start	Stop	Step	Detector	Meas. Time	IF Bandw.		
150.0 kHz	30.0 MHz	4.0 kHz	QuasiPeak	5.0 s	9 kHz	LISN DLS#128	
CISPR AV							

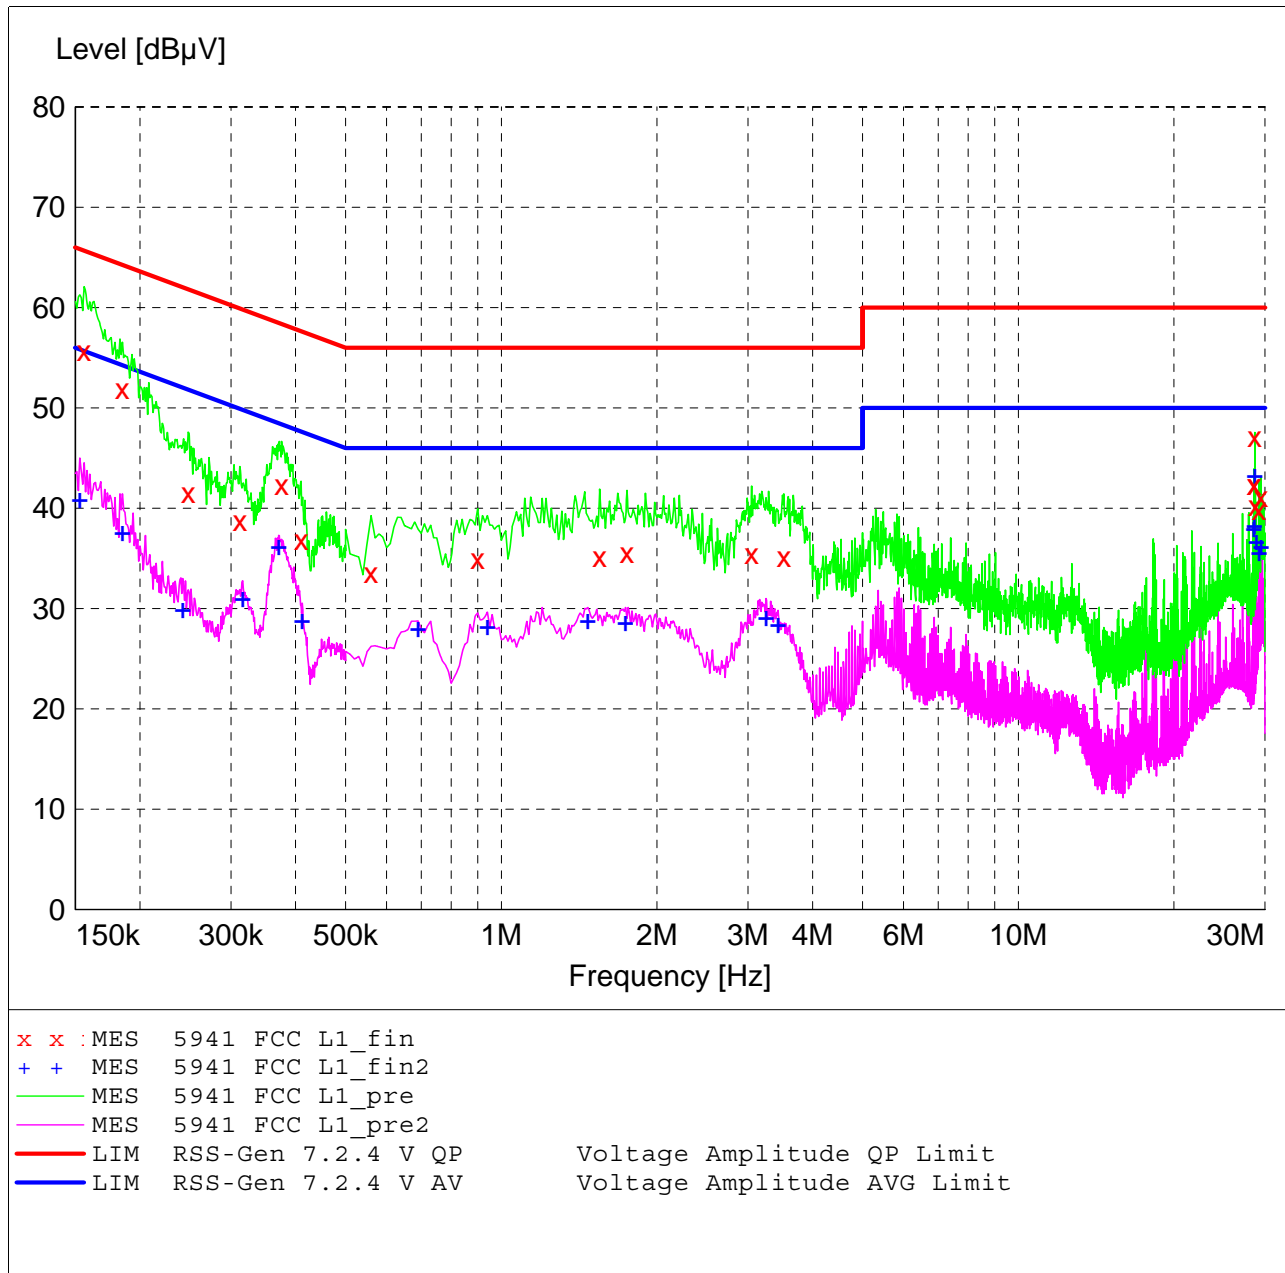

MEASUREMENT RESULT: "5947 FCC L1_fin"

6/17/2013 9:06AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector
0.156000	55.70	13.6	66	10.0	QP
0.185000	51.90	12.9	64	12.4	QP
0.248000	41.50	12.1	62	20.3	QP
0.312000	38.80	11.8	60	21.1	QP
0.376000	42.40	11.5	58	16.0	QP
0.410000	36.90	11.4	58	20.7	QP
0.560000	33.60	11.1	56	22.4	QP
0.900000	35.00	10.7	56	21.0	QP
1.550000	35.20	10.6	56	20.8	QP
1.750000	35.60	10.6	56	20.4	QP
3.050000	35.50	10.7	56	20.5	QP
3.520000	35.20	10.7	56	20.8	QP
28.565000	42.30	11.7	60	17.7	QP
28.625000	42.40	11.7	60	17.6	QP
28.685000	47.10	11.7	60	12.9	QP
28.745000	40.20	11.7	60	19.8	QP
29.240000	39.90	11.8	60	20.1	QP
29.480000	41.20	11.8	60	18.8	QP

MEASUREMENT RESULT: "5947 FCC L1_fin2"

6/17/2013 9:06AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector
0.153000	41.00	13.7	56	14.8	CAV
0.185000	37.70	12.9	54	16.6	CAV
0.242000	30.00	12.2	52	22.0	CAV
0.316000	31.10	11.8	50	18.7	CAV
0.371000	36.30	11.5	49	12.2	CAV
0.412000	28.90	11.4	48	18.7	CAV
0.690000	28.10	10.8	46	17.9	CAV
0.940000	28.30	10.7	46	17.7	CAV
1.470000	28.90	10.6	46	17.1	CAV
1.740000	28.70	10.6	46	17.3	CAV
3.250000	29.20	10.7	46	16.8	CAV
3.430000	28.50	10.7	46	17.5	CAV
28.565000	38.10	11.7	50	11.9	CAV
28.625000	38.30	11.7	50	11.7	CAV
28.685000	43.30	11.7	50	6.7	CAV
28.865000	36.80	11.7	50	13.2	CAV
29.240000	35.70	11.8	50	14.3	CAV
29.480000	36.30	11.8	50	13.7	CAV


RSS-Gen 7.2.4

Voltage Mains Test

EUT: Avenger AP Radio 5.2,5.4,5.7 GHz
 Manufacturer: Cambium Networks
 Operating Condition: 70 deg. F, 34% R.H.
 Test Site: DLS O.F. Screen Room
 Operator: Jim O/Lillian Li
 Test Specification: 120V, 60Hz
 Comment: Continuous TX; Line 2
 6-17-2013

SCAN TABLE: "Line Cond SR Final"

Short Description:		Line Conducted Emissions				Transducer
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	
150.0 kHz	30.0 MHz	4.0 kHz	QuasiPeak	5.0 s	9 kHz	LISN DLS#128
CISPR AV						

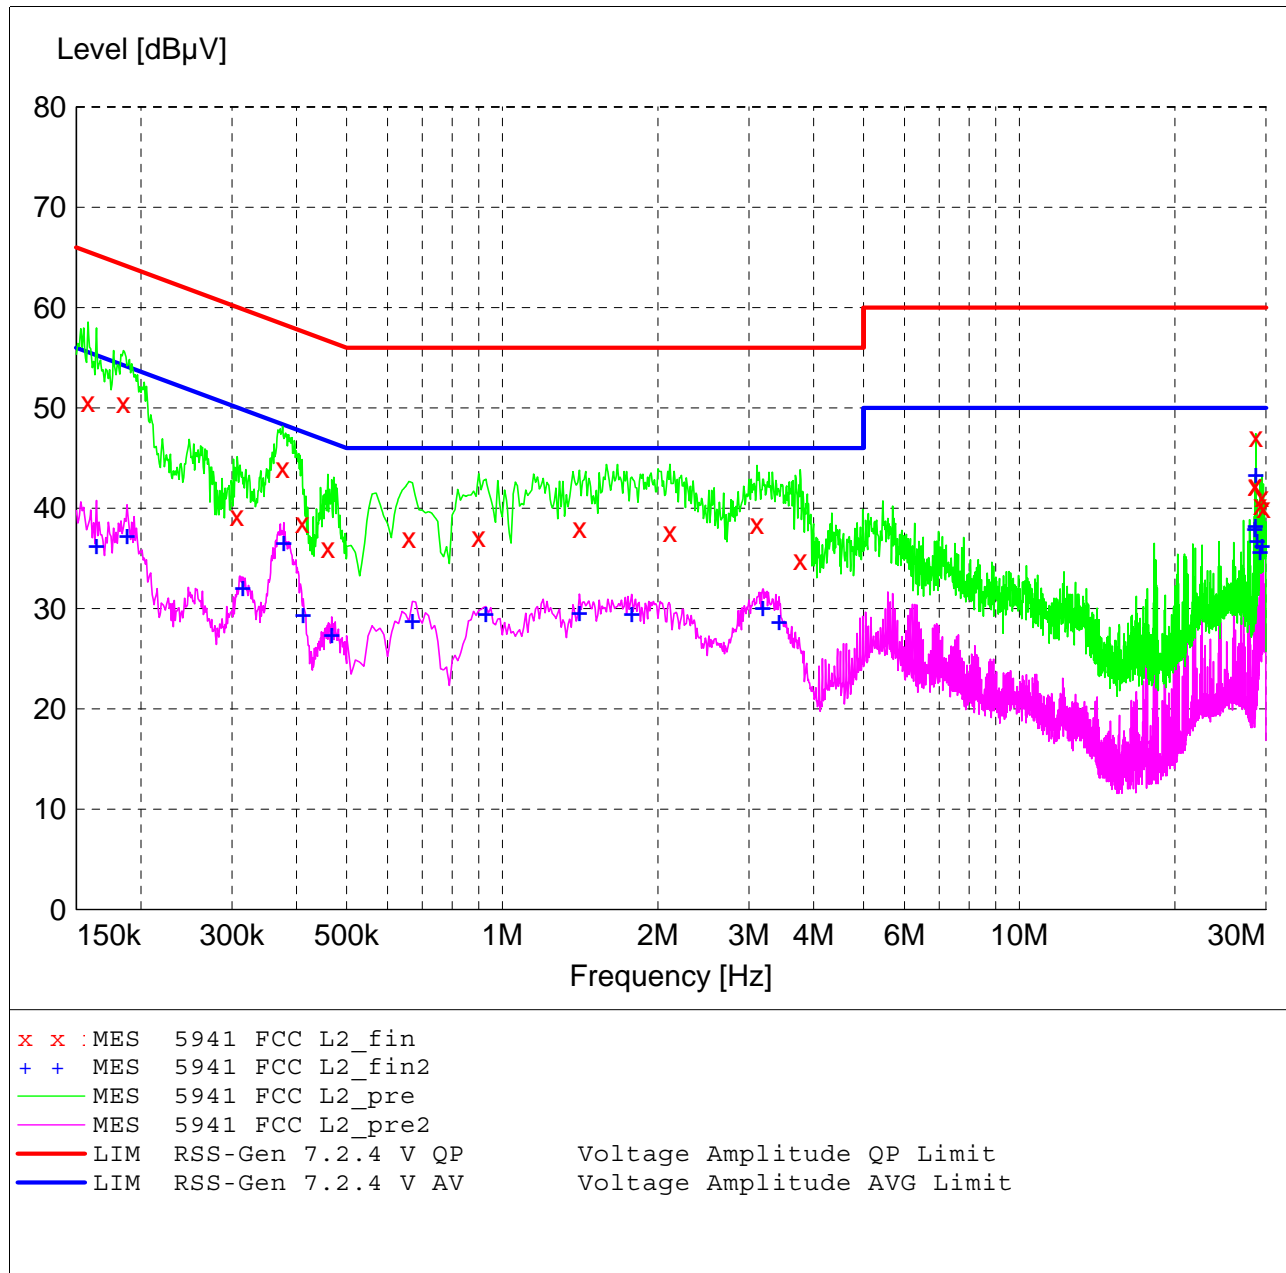

MEASUREMENT RESULT: "5947 FCC L2_fin"

6/17/2013 9:17AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector
0.158000	50.60	13.6	66	15.0	QP
0.185000	50.50	12.9	64	13.8	QP
0.307000	39.30	11.8	60	20.8	QP
0.376000	44.00	11.5	58	14.4	QP
0.410000	38.60	11.4	58	19.0	QP
0.460000	36.10	11.3	57	20.6	QP
0.660000	37.10	10.9	56	18.9	QP
0.900000	37.20	10.7	56	18.8	QP
1.410000	38.10	10.6	56	17.9	QP
2.110000	37.60	10.6	56	18.4	QP
3.110000	38.50	10.7	56	17.5	QP
3.770000	34.90	10.7	56	21.1	QP
28.565000	42.20	11.7	60	17.8	QP
28.625000	42.30	11.7	60	17.7	QP
28.685000	47.10	11.7	60	12.9	QP
29.240000	40.30	11.8	60	19.7	QP
29.480000	41.10	11.8	60	18.9	QP
29.660000	40.00	11.8	60	20.0	QP

MEASUREMENT RESULT: "5947 FCC L2_fin2"

6/17/2013 9:17AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector
0.164000	36.40	13.4	55	18.9	CAV
0.188000	37.40	12.9	54	16.7	CAV
0.315000	32.20	11.8	50	17.6	CAV
0.378000	36.70	11.5	48	11.6	CAV
0.412000	29.50	11.4	48	18.1	CAV
0.468000	27.50	11.3	47	19.0	CAV
0.670000	28.90	10.8	46	17.1	CAV
0.930000	29.60	10.7	46	16.4	CAV
1.410000	29.70	10.6	46	16.3	CAV
1.780000	29.60	10.6	46	16.4	CAV
3.190000	30.20	10.7	46	15.8	CAV
3.430000	28.80	10.7	46	17.2	CAV
28.565000	38.10	11.7	50	11.9	CAV
28.625000	38.30	11.7	50	11.7	CAV
28.685000	43.40	11.7	50	6.6	CAV
28.865000	36.90	11.7	50	13.1	CAV
29.240000	35.80	11.8	50	14.2	CAV
29.480000	36.40	11.8	50	13.6	CAV



166 South Carter, Genoa City, WI 53128

Company: Cambium Networks
Model Tested: C058900P112A
Report Number: 19275
DLS Project: 5949

END OF REPORT

Revision #	Date	Comments	By
1.0	9-; -2013	Preliminary Release	JS