Measurement of RF Emissions from an Model C036045C008A Canopy Radio Transmitter

For	Cambium Networks, Inc. 3800 Golf Road Rolling Meadows, IL 60714
P.O. Number	NP82696091 and NP82698087
Date Tested	December 3, 2018 through December 6, 2018
Test Personnel	Mark E. Longinotti
Test Specification	FCC "Code of Federal Regulations" Title 47 Part 96 Subpart E, Section 96.41 KDB 940660 January 29, 2018

Test Report By: MARK E. LONGINOTTI

Mark E. Longinotti
EMC Engineer

Requested By: Steve Payne
Cambium Networks, Inc.

Approved By: Raymond J Klouda

Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

Elite Electronic Engineering Inc.
1516 CENTRE CIRCLE
DOWNERS GROVE, IL 60515
TEL: 630 - 495 - 9770
FAX: 630 - 495 - 9785
www.elitetest.com

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1.	Introduction	5
1.1.	Scope of Tests	5
1.2.	Purpose	5
1.3.	Deviations, Additions and Exclusions	5
1.4.	EMC Laboratory Identification	5
1.5.	Laboratory Conditions	5
2.	Applicable Documents	5
3.	EUT Setup and Operation	6
3.1.	General Description	6
3.1.1.	Power Input	6
3.1.2.	Peripheral Equipment	6
3.1.3.	Signal Input/Output Leads	6
3.1.4.	Grounding	6
3.1.5.	Frequency of EUT	6
3.2.	Operational Mode	6
3.3.	EUT Modifications	6
4.	Test Facility and Test Instrumentation	6
4.1.	Shielded Enclosure	6
4.2.	Test Instrumentation	7
4.3.	Calibration Traceability	7
4.4.	Measurement Uncertainty	7
5.	Test Procedures	7
5.1.	FCC RF Power Output Measurements	7
5.1.1.	Requirements	7
5.1.1.1	FCC 96.41	7
5.1.2.	Procedures	7
5.1.2.1	EIRP/Average Conducted Output Power	7
5.1.3.	Results	8
5.2.	Emissions Outside the Fundamental	8
5.2.1.	Requirements	8
5.2.1.1	FCC 96.41	8
5.2.2.	Procedures	9
5.2.3.	Results	9
5.3.	Spurious Radiated Emissions	9
5.3.1.	Requirements	9
5.3.1.1	FCC 96.41	9
5.3.2.	Antenna Conducted Spurious Emissions - Procedures	9
5.3.3.	Spurious Radiated Emissions - Procedures	9
5.3.4.	Results	10
5.4.	Power Spectral Density	10
5.4.1.	Requirements	10

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
5.4.2.	Procedures	11
5.4.3.	Results	11
5.5.	Peak-to-Average Power Ratio (PAPR)	11
5.5.1.	Requirements	11
5.5.2.	Procedures	11
5.5.3.	Results	12
6.	Other Test Conditions	12
6.1.	Test Personnel and Witnesses	12
6.2.	Disposition of the EUT	12
7.	Conclusions	12
8.	Certification	12
9.	Equipment List	13

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

REVISION HISTORY

Revision	Date	Description
—	11 Jan 2019	Initial release
A	9 APR 2019 By Rick King	- Added Rev A to the report number on the cover and in the header of each page. - Added the applicable antenna information to section 1.1 which was originally listed section 3.1.2. - Added a table of the PSD results at the end of the PSD plots. - Corrected the EIRP output power table on pages 36 and 39 to read dBm/10MHz. - Added the EIRP bandwidth correction to the output power table on pages 36 and 39. - Added FCC ID Z8H89FT0009 to section 1.1.
B	17 JUN 2019 By Rick King	- Added Rev B to the report number on the cover and in the header of each page. - Included a reference to the Total Power table on page 8. - Added a Total Power Ports A+B table on pages 38 and 39.
C	25 JUN 2019 By Rick King	- Added Rev C to the report number on the cover and in the header of each page. - Corrected a Total Power Ports A +B table on page 38 and 39.
D	1 JULY 2019 By Rick King	- Added Rev D to the report number on the cover and in the header of each page. - Corrected frequencies on data pages 38 and 39.

Measurement of RF Emissions from a Canopy Radio Transmitter, Model No. C036045C008A

1. INTRODUCTION

1.1. Scope of Tests

This document represents the results of a series of radio interference measurements performed on a Cambium Networks, Inc. Canopy Radio Transmitter, Model No. C036045C008A, Serial No. 0A003E43311F (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was manufactured and submitted for testing by Cambium Networks, Inc. located in Rolling Meadows, IL.

Applicable antennas:
PMP 450 3 GHz Access Point Antenna / Winncom model C030045D901A, serial number 3011130004 3.3-3.8GHz 65 Deg. 17dBi gain antenna.

FCC ID: Z8H89FT0009

1.2. Purpose

The test series was performed to determine if the EUT would meet selected requirements of FCC Part 96, Subpart E, Section 96.41, for Citizens Broadband Radio Service. Testing was performed in accordance with KDB 940660 D01 Part 96 CBRS Eqpt v01 and IEEE C63.26-2015.

1.3. Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series.

1.4. EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the American Association for Laboratory Accreditation (A2LA), A2LA Lab Code: 1786-01.

1.5. Laboratory Conditions

The temperature at the time of the test was 23°C and the relative humidity was 18%.

2. APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 96, Subpart E, Section 96.41
- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 2
- IEEE C63.26-2015 “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services Accredited by the American National Standards Institute”
- FCC KDB 940660, " Certification and Test Procedures For Citizens Broadband Radio Service Devices Authorized Under PART 96", Released January 29, 2018

3. EUT Setup and Operation

3.1. General Description

The EUT is a Cambium Networks, Inc., Canopy Radio Transmitter, Model No. C036045C008A. A block diagram of the EUT setup is shown as Figure 1. A photograph of the EUT is shown as Figure 2.

3.1.1. Power Input

The EUT was powered by 30V from a Gigabit Compatible, Model No. PSA15M300 POE power supply.

3.1.2. Peripheral Equipment

The EUT was submitted with a PMP 450 3 GHz Access Point Antenna / Winncom model C030045D901A, serial number 3011130004 3.3-3.8GHz 65 Deg. 17dBi gain antenna. This antenna was used to establish the EIRP output power level.

3.1.3. Signal Input/Output Leads

No interconnect cables were submitted with the EUT.

3.1.4. Grounding

The EUT was not grounded.

3.1.5. Frequency of EUT

Per FCC CFR 47 Subpart J §2.1057 - Frequency spectrum to be investigated:

> (a) In all of the measurements set forth in §§2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:
>
> (1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

For this test series the frequency spectrum from 30MHz to 37GHz was investigated.

3.2. Operational Mode

All emissions tests were performed separately in the following modes:

Tx @ 3560MHz, 22dBm, 20MHz
Tx @ 3600MHz, 22dBm, 20MHz
Tx @ 3690MHz, 21dBm, 20MHz

Tx @ 3570MHz, 20dBm, 40MHz
Tx @ 3600MHz, 22dBm, 40MHz
Tx @ 3680MHz, 20dBm, 40MHz

3.3. EUT Modifications

No modifications were required for compliance.

4. Test Facility and Test Instrumentation

4.1. Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 and CISPR 16 for site attenuation.

4.2. Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1.

4.3. Calibration Traceability

Test equipment is maintained and calibrated on a regular basis with a calibration interval not greater than two years. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

4.4. Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

Values of Expanded Measurement Uncertainty (95% Confidence) are presented below:

Measurement Type	Expanded Measurement Uncertainty
Conducted disturbance (mains port) (150 kHz – 30 MHz)	2.7
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2

5. TEST PROCEDURES

5.1. FCC RF Power Output Measurements

5.1.1.Requirements

5.1.1.1 FCC 96.41

Per 96.41(b), Power limits. Unless otherwise specified in this section, the maximum effective isotropic radiated power (EIRP) and maximum Power Spectral Density (PSD) of any CBSD and End User Device must comply with the limits shown in the table in this paragraph (b):

Device	Maximum EIRP (dBm/10 megahertz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a
Category A CBSD	30	20
Category B CBSD[1]	47	37

[1]Category B CBSDs will only be authorized for use after an ESC is approved and commercially deployed consistent with §§96.15 and 96.67.

5.1.2.Procedures

5.1.2.1 EIRP/Average Conducted Output Power

5.2.4.3.2 Alternative procedure for measuring average power of a narrowband signal with a constant duty cycle using a spectrum/signal analyzer or EMI receiver.

In accordance with paragraph 5.2.4.3.2 of C63.26: 2015 Alternative procedure for measuring average power of a narrowband signal with a constant duty cycle using a spectrum/signal analyzer or EMI receiver.

When the fundamental condition for average power measurements cannot be realized (i.e., the EUT cannot be configured to transmit at full-power on a continuous basis (i.e., duty cycle < 98%) and the instrumentation cannot be configured to measure only during active full-power transmissions), then the following procedure can be used if the EUT duty cycle is constant (i.e., duty cycle variations are less than or equal to ±2%):

a) Set span to 2 × to 3 × the OBW.
b) Set RBW ≥ OBW.
c) Set VBW ≥ 3 × RBW.
d) Set number of measurement points in sweep ≥ 2 × span / RBW.
e) Sweep time:
   1) Set = auto-couple, or
   2) Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
f) Detector = power averaging (rms).
g) Set sweep trigger to “free run.”
h) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
i) Use the peak marker function to determine the maximum amplitude level.
j) Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

5.1.3. Results

The conducted output power data are shown on pages 24 through 35. All output power readings from the EUT were below the limits of FCC 96.41. The EIRP output power is shown on pages 36 through 39. As can be seen from the data all emissions measured were within the specification limits.

5.2. Emissions Outside the Fundamental

5.2.1. Requirements

5.2.1.1 FCC 96.41

Emission and interference limits—Confirm that the device satisfies the emission limits specified in Section 96.41(e) for all declared channel sizes, at the lowest and highest edges of the band, and in the middle of the band.

3.5 GHz Emissions and Interference Limits—(1) General protection levels. Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by the SAS to CBSDs, the conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed −13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed −25 dBm/MHz. The upper and lower SAS assigned channel edges are the upper and lower limits of any channel assigned to a CBSD by an SAS, or in the case of multiple contiguous channels, the upper and lower limits of the combined contiguous channels.

Emissions outside the fundamental—The limits for emission outside the fundamental are as follows:

- Within 0 MHz to 10 MHz above and below the assigned channel ≤ -13 dBm/MHz.
- Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz.

- Any emission below 3530 MHz and above 3720 MHz ≤ -40 dBm/MHz.

5.2.2.Procedures

When the fundamental condition for average power measurements cannot be realized (i.e., the EUT cannot be configured to transmit at full-power on a continuous basis (i.e., duty cycle < 98%) and the instrumentation cannot be configured to measure only during active full-power transmissions), then the following procedure can be used if the EUT duty cycle is constant (i.e., duty cycle variations are less than or equal to ±2%):

a) Set span to 2 × to 3 × the OBW.
b) Set RBW ≥ OBW.
c) Set VBW ≥ 3 × RBW.
d) Set number of measurement points in sweep ≥ 2 × span / RBW.
e) Sweep time:
    1) Set = auto-couple, or
    2) Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
f) Detector = power averaging (rms).
g) Set sweep trigger to “free run.”
h) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
i) Use the peak marker function to determine the maximum amplitude level.

5.2.3.Results

The plots for emissions outside the fundamental are presented on pages 40 through 75. All emissions measured from the EUT were within the specification limits.

5.3. Spurious Radiated Emissions

5.3.1.Requirements

5.3.1.1 FCC 96.41

Emission and interference limits—Confirm that the device satisfies the emission limits specified in Section 96.41(e) for all declared channel sizes, at the lowest and highest edges of the band, and in the middle of the band.

Emissions outside the fundamental—The limits for emission outside the fundamental are as follows.

- Any emission below 3530 MHz and above 3720 MHz ≤ -40 dBm/MHz.

5.3.2. Antenna Conducted Spurious Emissions - Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 30dB of attenuation. The emissions in the frequency range from 30MHz to 40GHz were observed and plotted separately with the EUT transmitting at low, middle and high hopping frequencies.

a) Set RBW 1MHz.
b) Set VBW ≥ 3 × RBW.
c) Sweep time:
    1) Set = auto-couple
d) Detector = power averaging (rms).
e) Use the peak marker function to determine the maximum amplitude level.

5.3.3.Spurious Radiated Emissions - Procedures

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The

walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with CISPR 16 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

1. Preliminary radiated measurements were performed to determine the frequencies where the significant emissions might be found. The EUT was placed on a 1.5 meter high, non-conductive stand and set to transmit. With the EUT at one set position and the measurement antenna at a set height (i.e. without maximizing), the radiated emissions were measured using a peak detector and automatically plotted. The broadband measuring antenna was positioned at a 3 meter distance (1 meter test distance above 1GHz) from the EUT. This data was then automatically plotted up through the tenth harmonic of the transmit frequency of the EUT. All preliminary tests were performed separately with the EUT operating in the modes listed in paragraph 3.2.

2. All significant broadband and narrowband signals found in the preliminary sweeps were then maximized. For all measurements below 1GHz, a bilog antenna was used as the measurement antenna. For all tests an RMS average detector was used. For all measurements above 1GHz, a horn antenna was used as the measurement antenna. An average detector was used for all tests above 1GHz.

3. To ensure that maximum emission levels were measured, the following steps were taken:

   a. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
   b. Since the measuring antennas are linearly polarized, both horizontal and vertical field components were measured.
   c. The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.

The equivalent power was determined from the field intensity levels measured at 3 meters (1 meter above 1GHz) using the substitution method. To determine the emission power, another antenna was set in place of the EUT and connected to a calibrated signal generator. (A tuned dipole was used for all measurements below 1GHz and a double ridged waveguide antenna was used for all measurements above 1GHz.) The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was corrected to compensate for cable loss, as required, and for frequencies above 1GHz, increased by the gain of the waveguide.

5.3.4. Results

The plots of the RMS average antenna conducted emissions are presented on pages 76 through 99. All antenna conducted spurious emissions measured from the EUT were within the specification limits.

The plots of the peak preliminary spurious radiated emissions and the final tabular average spurious radiated emissions results are presented on pages 100 through 152. All spurious radiated emissions measured from the EUT were within the specification limits.

Photographs of the test configuration which yielded the highest or worst case, radiated emissions levels are shown as Figure 3 through Figure 6.

5.4. Power Spectral Density

5.4.1. Requirements

Per 96.41(b), Power limits. Unless otherwise specified in this section, the maximum effective isotropic radiated power (EIRP) and maximum Power Spectral Density (PSD) of any CBSD and End User Device must comply with the limits shown in the table in this paragraph (b):

Device	Maximum EIRP (dBm/10 megahertz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a
Category A CBSD	30	20
Category B CBSD[1]	47	37

[1]Category B CBSDs will only be authorized for use after an ESC is approved and commercially deployed consistent with §§96.15 and 96.67.

5.4.2.Procedures

In accordance with paragraph 5.2.4.3.2 of C63.26: 2015 Alternative procedure for measuring average power of a narrowband signal with a constant duty cycle using a spectrum/signal analyzer or EMI receiver.

When the fundamental condition for average power measurements cannot be realized (i.e., the EUT cannot be configured to transmit at full-power on a continuous basis (i.e., duty cycle < 98%) and the instrumentation cannot be configured to measure only during active full-power transmissions), then the following procedure can be used if the EUT duty cycle is constant (i.e., duty cycle variations are less than or equal to ±2%):

a) Set span to 2 × to 3 × the OBW.
b) Set RBW 1MHz.
c) Set VBW ≥ 3 × RBW.
d) Set number of measurement points in sweep ≥ 2 × span / RBW.
e) Sweep time:
   1) Set = auto-couple, or
   2) Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
f) Detector = power averaging (rms).
g) Set sweep trigger to “free run.”
h) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
i) Use the peak marker function to determine the maximum amplitude level.
j) Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

5.4.3.Results

The power spectral density plots and table with the EUT transmitting are shown on pages 153 through 166. As can be seen from the data, the power spectral density levels from the EUT are within the limits.

5.5. Peak-to-Average Power Ratio (PAPR)

5.5.1.Requirements

Power measurement: The peak-to-average power ratio (PAPR) of any CBSD transmitter output power must not exceed 13 dB. PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities or another Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

5.5.2.Procedures

In accordance with paragraph 5.2.4.3.2 of C63.26: 2015 Alternative procedure for measuring average power of

a narrowband signal with a constant duty cycle using a spectrum/signal analyzer or EMI receiver. The average power was measured and recorded.

See 5.1.2.1 for the measurement procedure.

In accordance with paragraph 5.2.3.3 of C63.26: 2015 Measurement of peak power in a narrowband signal with a spectrum/signal analyzer or EMI receiver

This procedure can be used to measure the peak power in either a CW-like or noise-like narrowband RF signal. The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW ≥ 3 × RBW.

a) Set the RBW ≥ OBW.
b) Set VBW ≥ 3 × RBW.
c) Set span ≥ 2 × OBW.
d) Sweep time ≥ 10 × (number of points in sweep) × (transmission symbol period).
e) Detector = peak.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use the peak marker function to determine the peak amplitude level.

5.5.3.Results

The results are presented on data pages 167 and 168. As can be seen from the data the peak to average ratio is less than the 13 dB limit.

6. Other Test Conditions

6.1. Test Personnel and Witnesses

All tests were performed by qualified personnel from Elite Electronic Engineering Incorporated.

6.2. Disposition of the EUT

The EUT and all associated equipment were returned to Cambium Networks, Inc. upon completion of the tests.

7. Conclusions

The Cambium Networks, Inc. Canopy Radio Transmitter, Model No. C036045C008A, Serial No. 0A003E43311F did fully meet the output EIRP power, power spectral density, peak-to-average power ratio, spurious emissions and emissions outside the fundamental requirements of the FCC "Code of Federal Regulations" Title 47, Part 96, Subpart E and FCC KDB 940660 when tested per IEEE C63.26-2015.

8. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test date. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST or any agency of the Federal Government.

9. EQUIPMENT LIST

Table 9-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW0	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-30-20G20R6G	PL2926/0646	20GHZ-26.5GHZ	4/5/2018	4/5/2019
APW11	PREAMPLIFIER	PMI	PE2-35-120-5R0-10-12-SFF	PL11685/1241	1GHZ-20GHZ	4/5/2018	4/5/2019
APW4	PREAMPLIFIER	PLANAR	PE2-36-2D540G-5R0-10	PL3043/0651	26.5GHZ-40GHZ	7/3/2018	7/3/2019
CDX8	COMPUTER	ELITE	WORKSTATION			N/A	
NHG0	STANDARD GAIN HORN ANTENNA	NARDA	638	---	18-26.5GHZ	NOTE 1	
NHG1	STANDARD GAIN HORN ANTENNA	NARDA	638	---	18-26.5GHZ	NOTE 1	
NHH0	STANDARD GAIN HORN ANTENNA	NARDA	V637	---	26.5-40GHZ	NOTE 1	
NHH1	STANDARD GAIN HORN ANTENNA	NARDA	V637	---	26.5-40GHZ	NOTE 1	
NWQ0	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66657	1GHZ-18GHZ	5/31/2018	5/31/2020
NWQ2	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66659	1GHZ-18GHZ	3/22/2018	3/22/2020
RBG2	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101591	2HZ-44GHZ	2/23/2018	2/23/2019
T1ED	10DB 25W ATTENUATOR	WEINSCHEL	46-10-34	BN2320	DC-18GHZ	4/24/2018	4/24/2020
T2SA	20DB 25W ATTENUATOR	WEINSCHEL	46-20-34	CD5015	DC-18GHZ	4/23/2018	4/23/2020
T2SE	20DB 25W ATTENUATOR	WEINSCHEL	46-20-34	CD5019	DC-18GHZ	5/3/2018	5/3/2020
XLJ11	50 OHM, 2W TERMINATION	JFW INDUSTRIES	50T-199	---	DC-2GHZ	6/29/2017	6/29/2019
XLTV	5W, 50 OHM TERMINATION	JFW INDUSTRIES	50T-052	---	DC-2GHZ	5/25/2018	5/25/2020
XOA1	WAVE-TO-COAX ADAPTER	HEWLETT PACKARD	R281A	02119	26.5-65GHZ	NOTE 1	
XOA2	WAVE-TO-COAX ADAPTER	HEWLETT PACKARD	R281B	01138	26.5-65GHZ	NOTE 1	
XOB1	ADAPTER	HEWLETT PACKARD	K281C	10422	18-26.5GHZ	NOTE 1	
XOB2	ADAPTER	HEWLETT PACKARD	K281C,012	09407	18-26.5GHZ	NOTE 1	

I/O: Initial Only
N/A: Not Applicable
Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

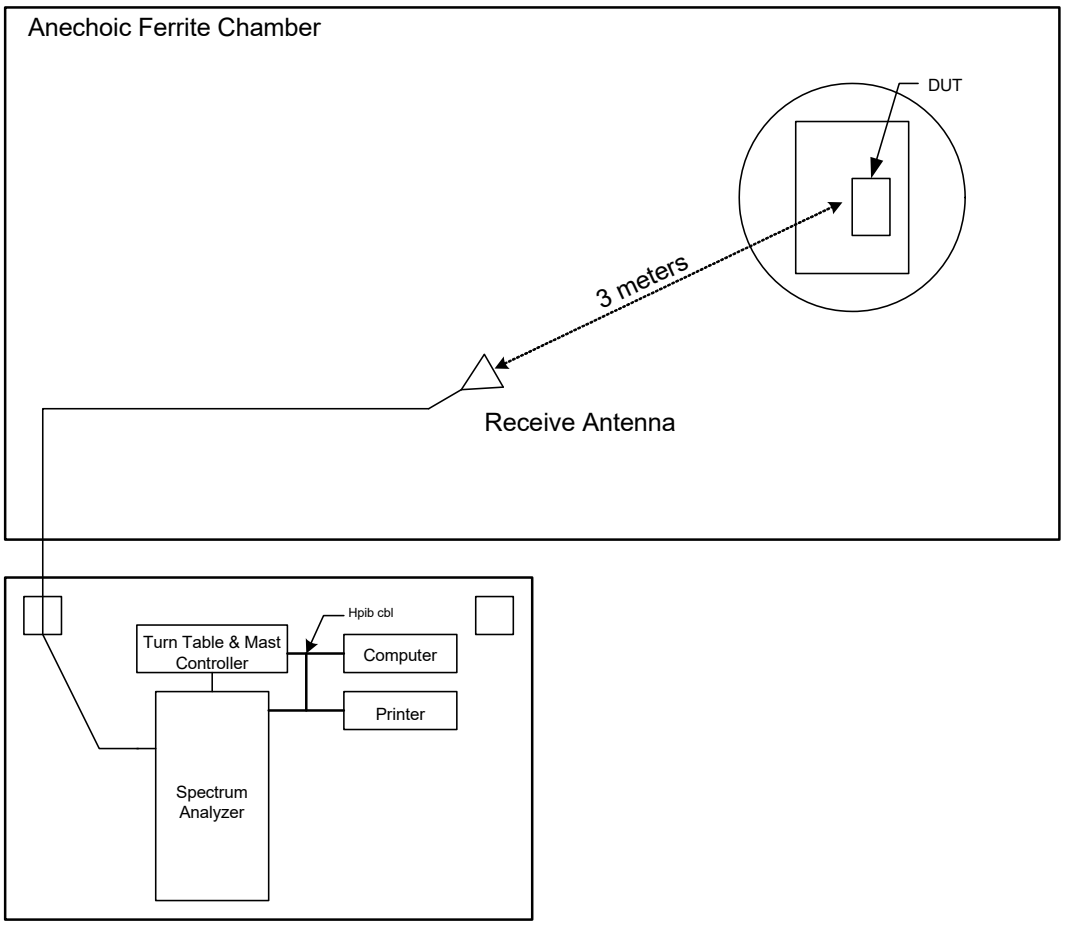

FIGURE 1 BLOCKDIAGRAM OF TEST SETUP

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41 - Compute the Average to 100% duty cycle
DATE : December 3, 2018
MODE : Transmit at 3600MHz , 20MHz
NOTES : On time = 4msec

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41 - Compute the Average to 100% duty cycle
DATE	: December 3, 2018
MODE	: Transmit at 3600MHz , 20MHz
NOTES	: Add (10 log (1/duty cycle)) = 10*log(1/0.8) = .97dB

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

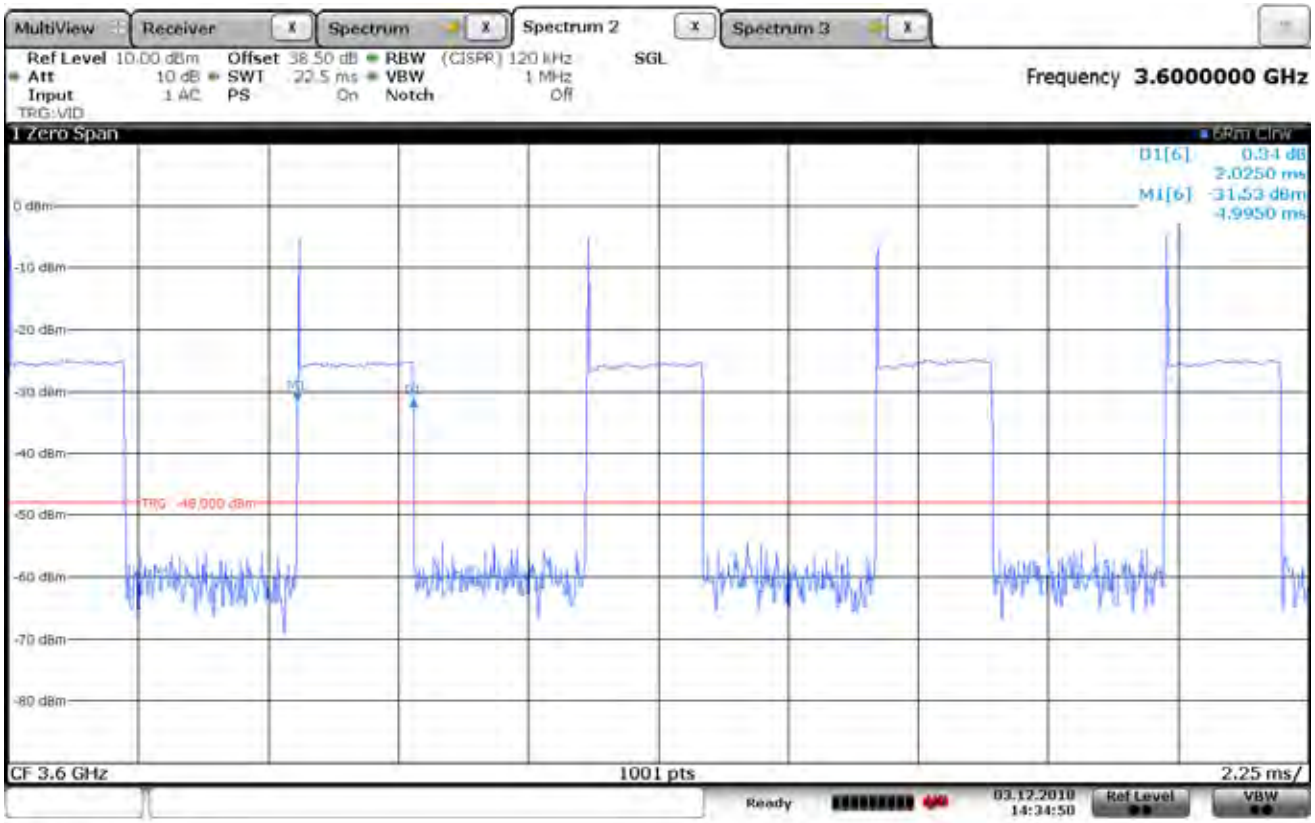

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41 - Compute the Average to 100% duty cycle
DATE	: December 3, 2018
MODE	: Transmit at 3600MHz , 40MHz
NOTES	: On time = 2msec

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

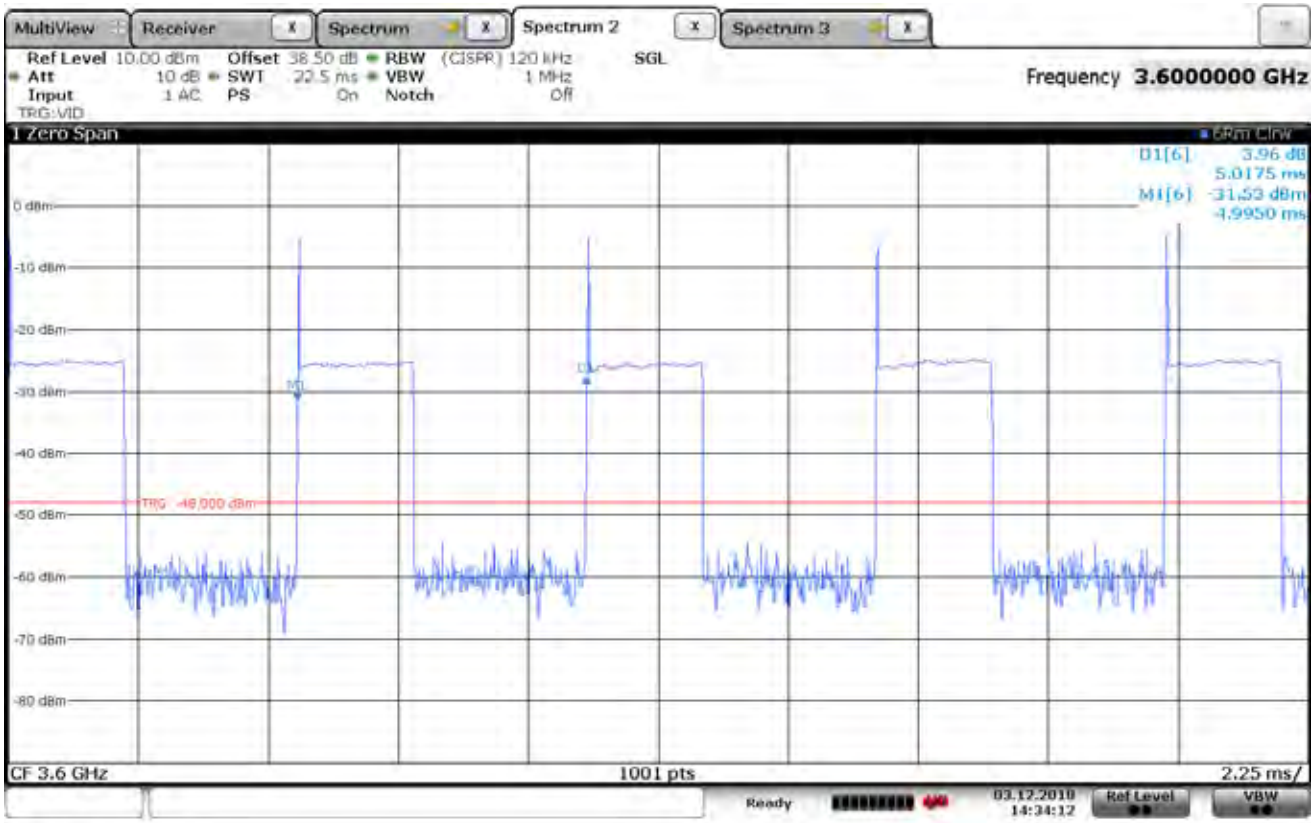

Date: 3.DEC.2018 14:34:12

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41 - Compute the Average to 100% duty cycle
DATE	: December 3, 2018
MODE	: Transmit at 3600MHz , 40MHz
NOTES	: Add (10 log (1/duty cycle)) = 10*log(1/0.4) = 3.98dB

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

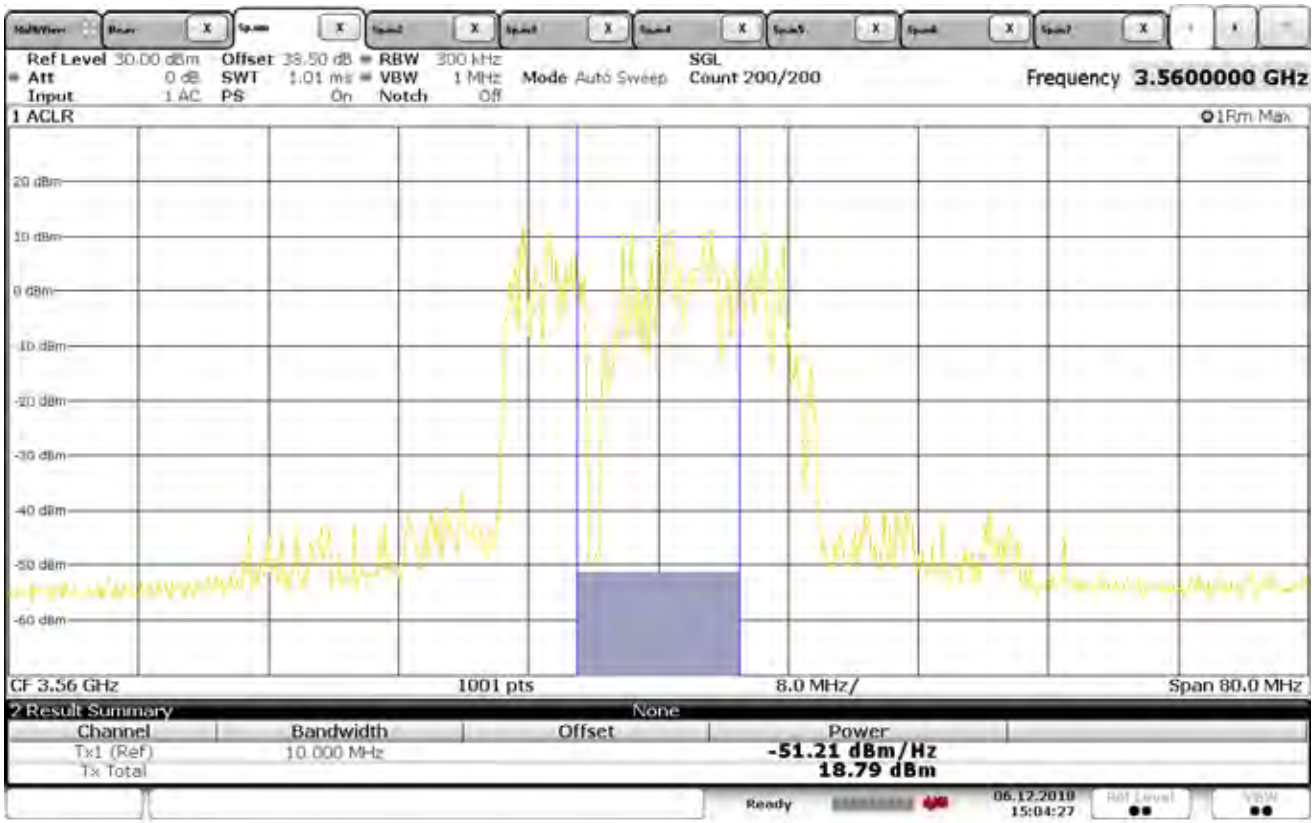

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Conducted Output Power
DATE : December 4, 2018
MODE : Transmit at 3560MHz Channel A, 20MHz Channel
NOTES : AVG Conducted Output Power = 18.79dBm + .97dB = 19.76dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

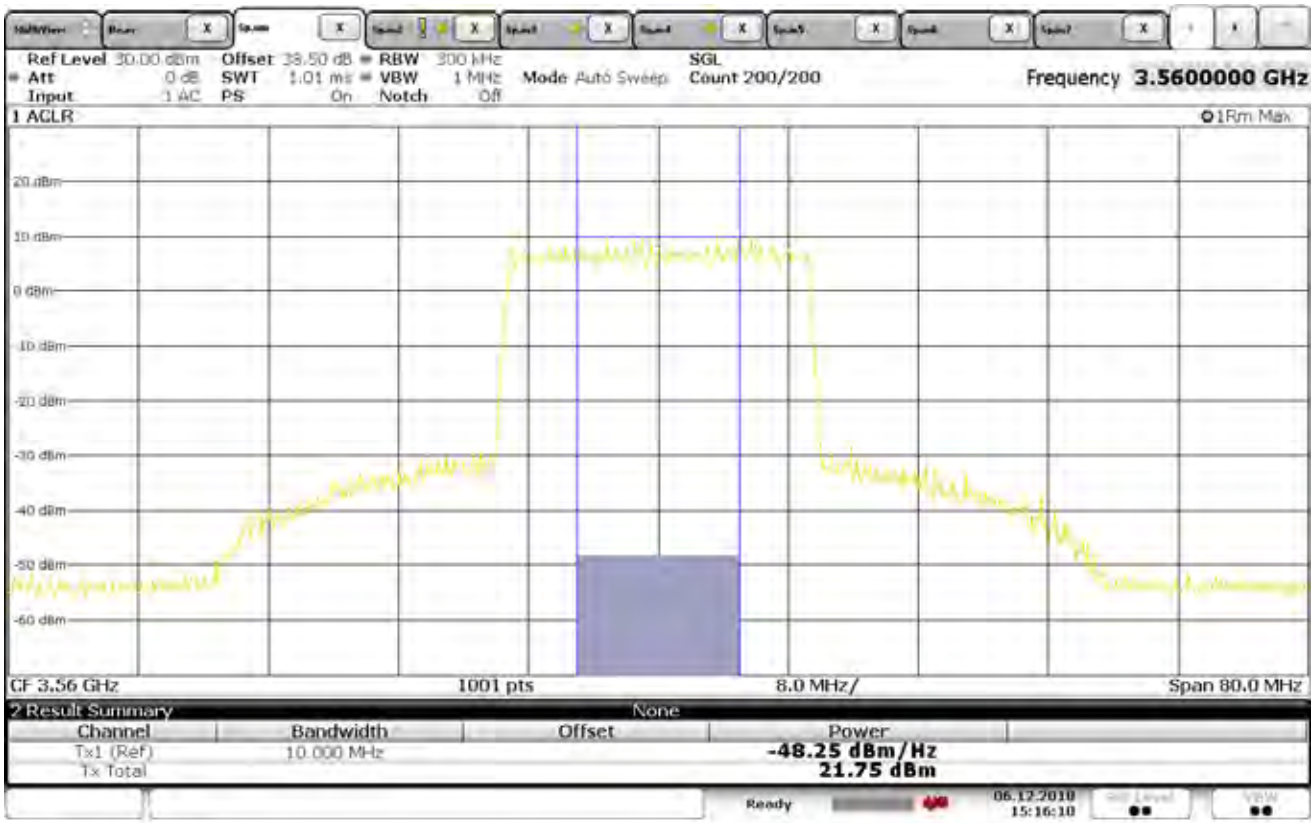

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Conducted Output Power
DATE	: December 4, 2018
MODE	: Transmit at 3560MHz Channel B, 20MHz Channel
NOTES	: AVG Conducted Output Power = 21.75dBm + .97dB = 22.72dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

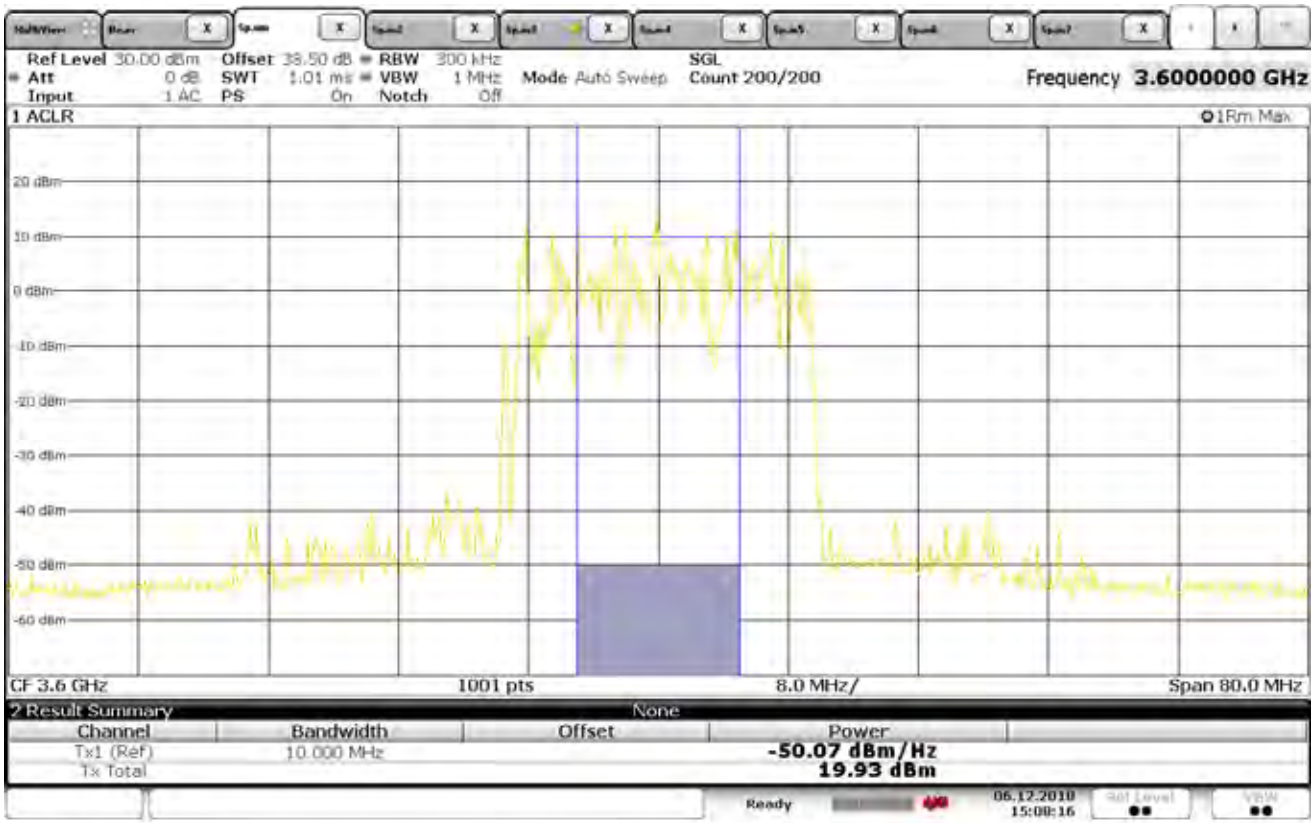

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Conducted Output Power
DATE	: December 4, 2018
MODE	: Transmit at 3600MHz Channel A, 20MHz Channel
NOTES	: AVG Conducted Output Power = 19.93dBm + .97dB = 20.90dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

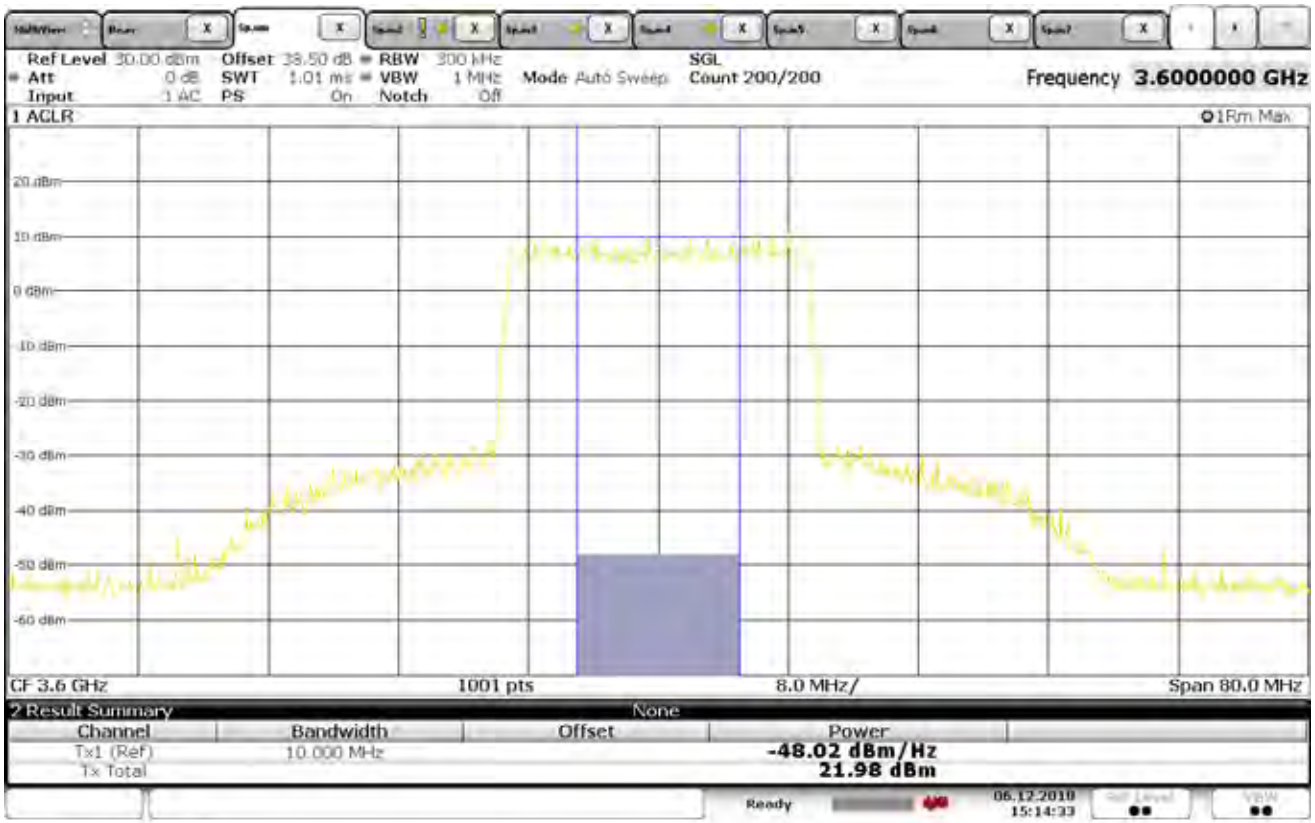

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Conducted Output Power
DATE : December 4, 2018
MODE : Transmit at 3600MHz Channel B, 20MHz Channel
NOTES : AVG Conducted Output Power = 21.98dBm + .97dB = 25.14dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

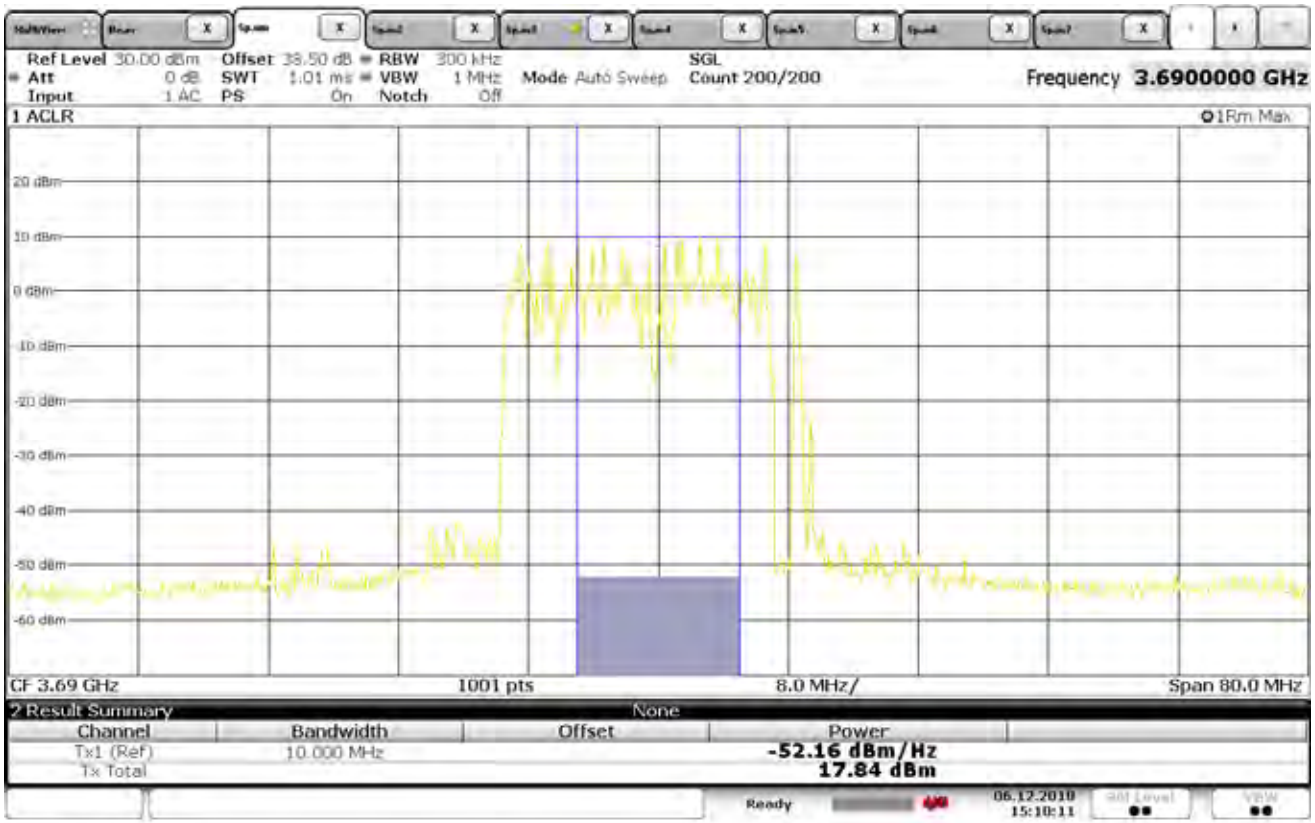

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Conducted Output Power
DATE	: December 4, 2018
MODE	: Transmit at 3690MHz Channel A, 20MHz Channel
NOTES	: AVG Conducted Output Power = 17.84dBm + .97dB = 18.81dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

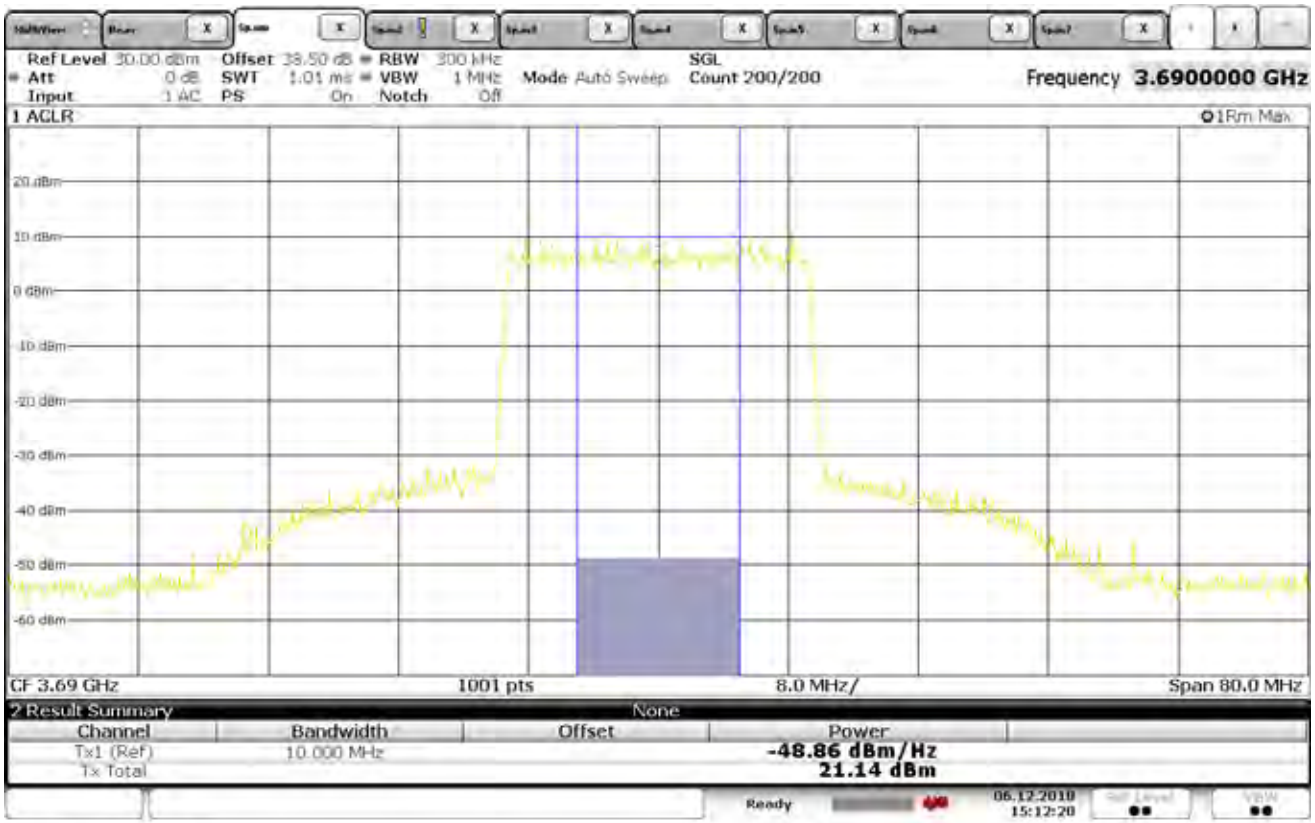

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Conducted Output Power
DATE	: December 4, 2018
MODE	: Transmit at 3690MHz Channel B, 20MHz Channel
NOTES	: AVG Conducted Output Power = 21.14dBm + .97dB = 22.11dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

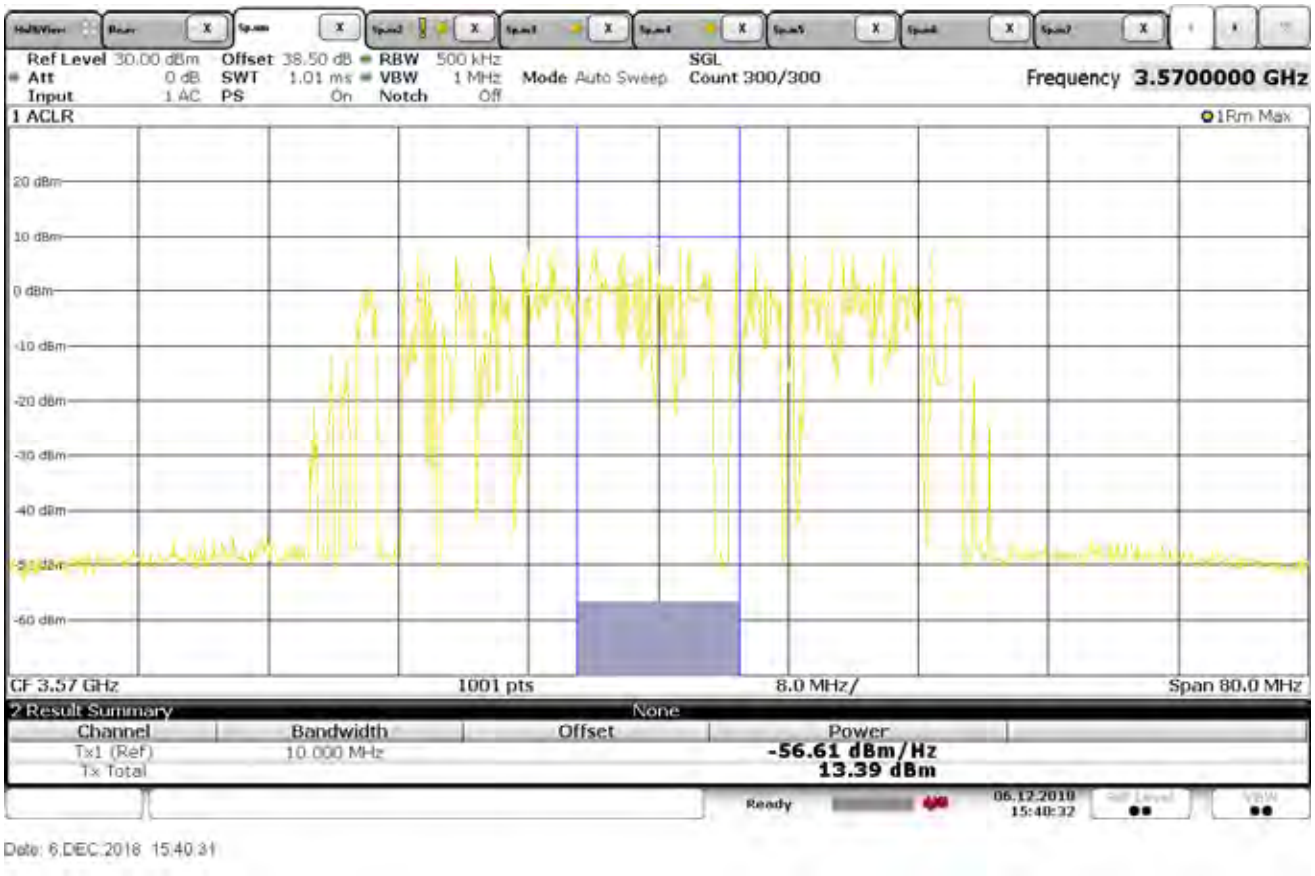

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Conducted Output Power
DATE : December 4, 2018
MODE : Transmit at 3570MHz Channel A, 40MHz Channel
NOTES : AVG Conducted Output Power = 13.39dBm + 3.98dB = 17.37dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

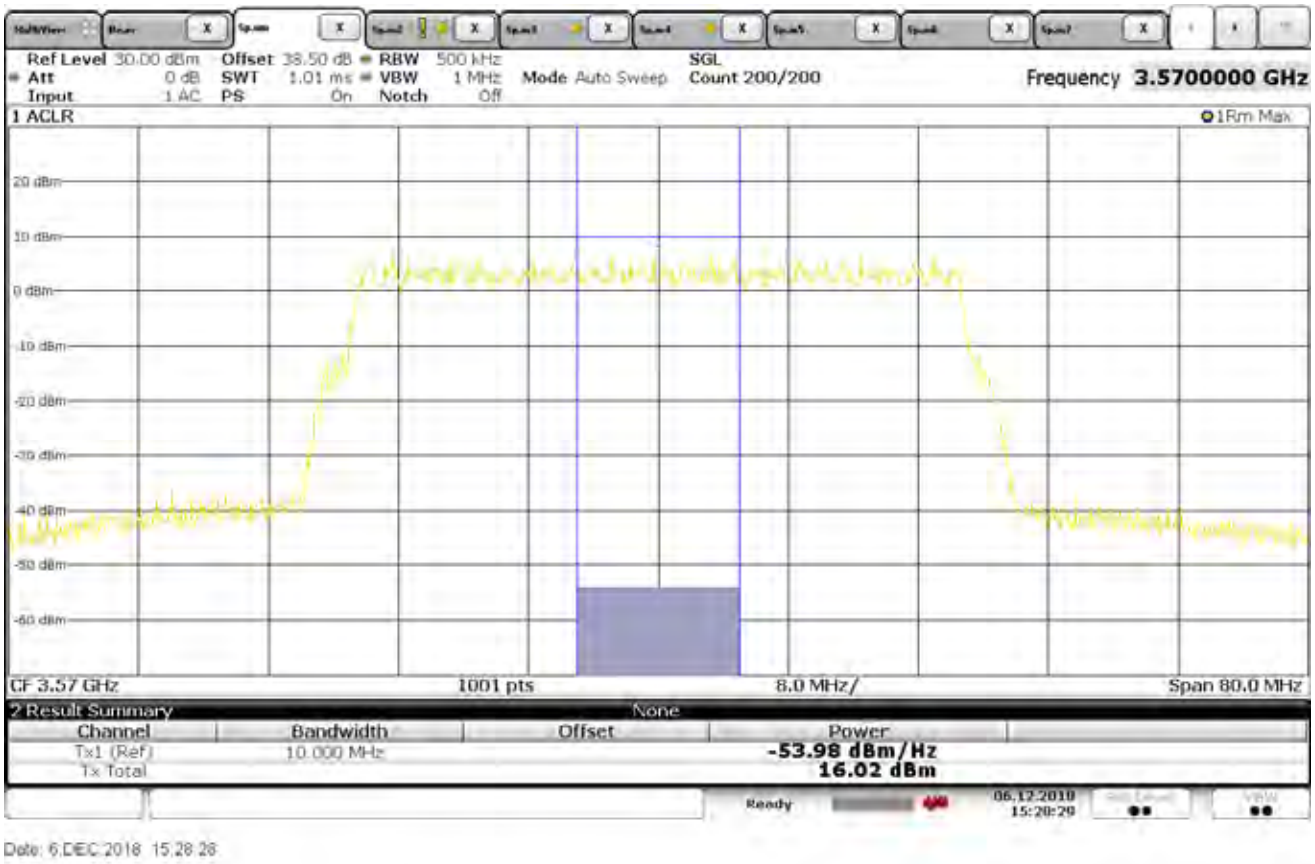

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Conducted Output Power
DATE : December 4, 2018
MODE : Transmit at 3570MHz Channel B, 40MHz Channel
NOTES : AVG Conducted Output Power = 16.02dBm + 3.98dB = 20.00dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

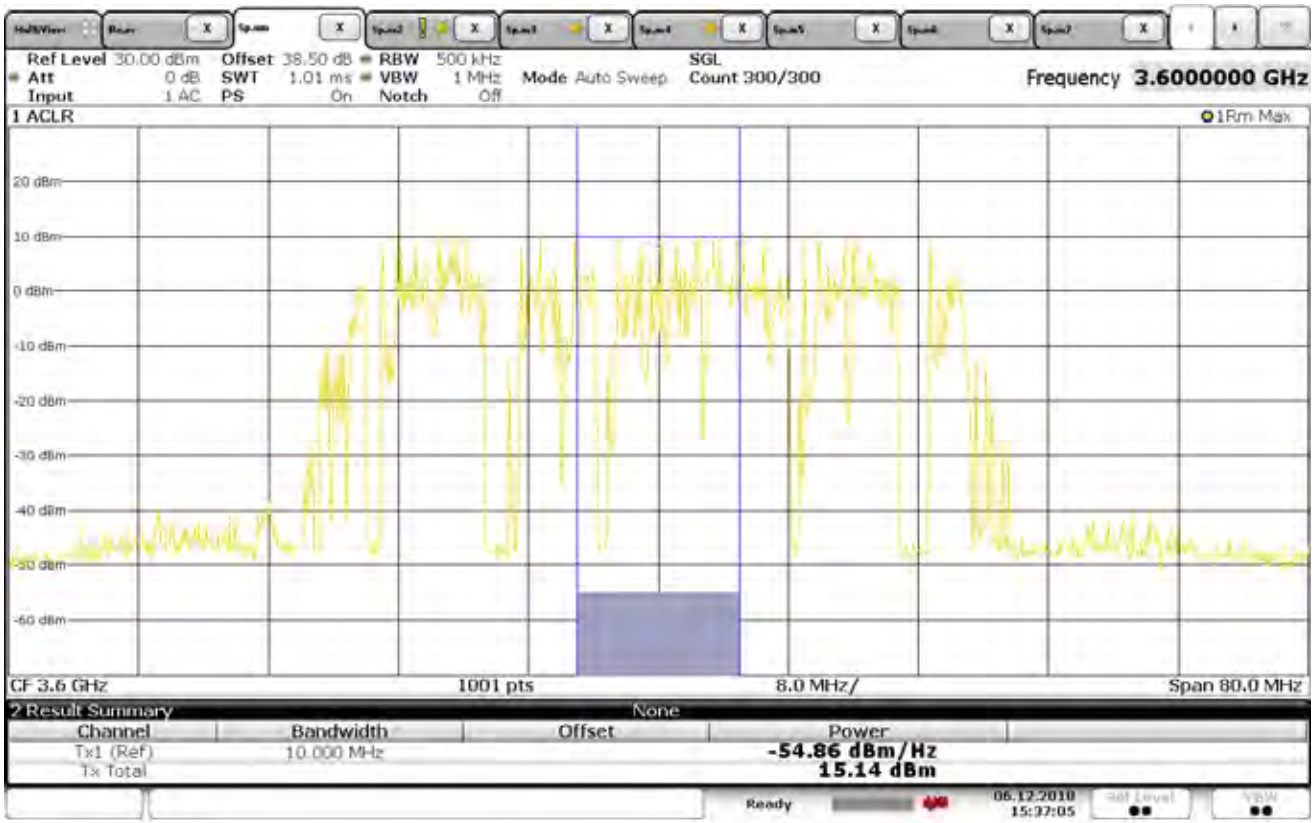

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Conducted Output Power
DATE : December 4, 2018
MODE : Transmit at 3600MHz Channel A, 40MHz Channel
NOTES : AVG Conducted Output Power = 15.14dBm + 3.98dB = 19.12dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

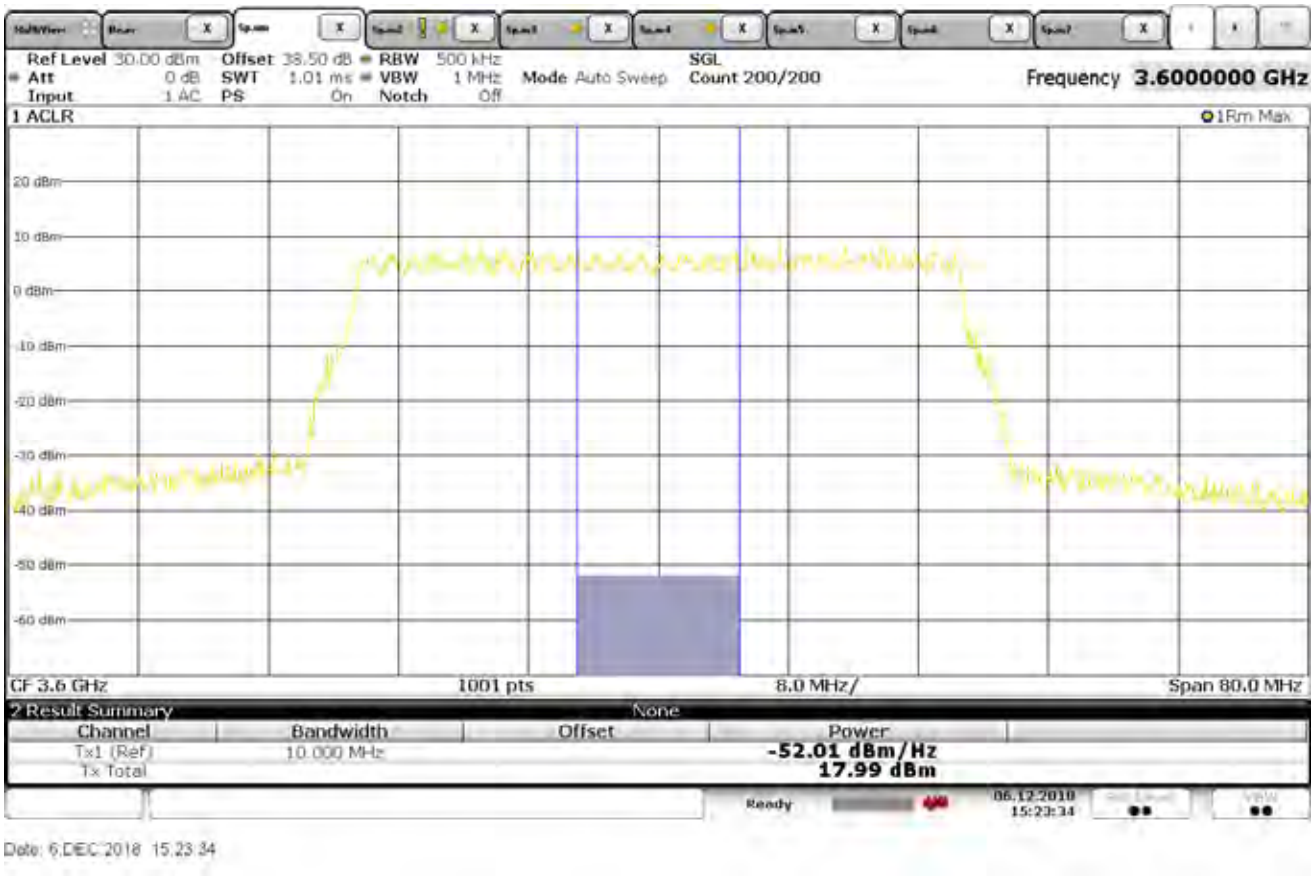

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Conducted Output Power
DATE : December 4, 2018
MODE : Transmit at 3600MHz Channel B, 40MHz Channel
NOTES : AVG Conducted Output Power = 17.99dBm + 3.98dB = 21.97dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

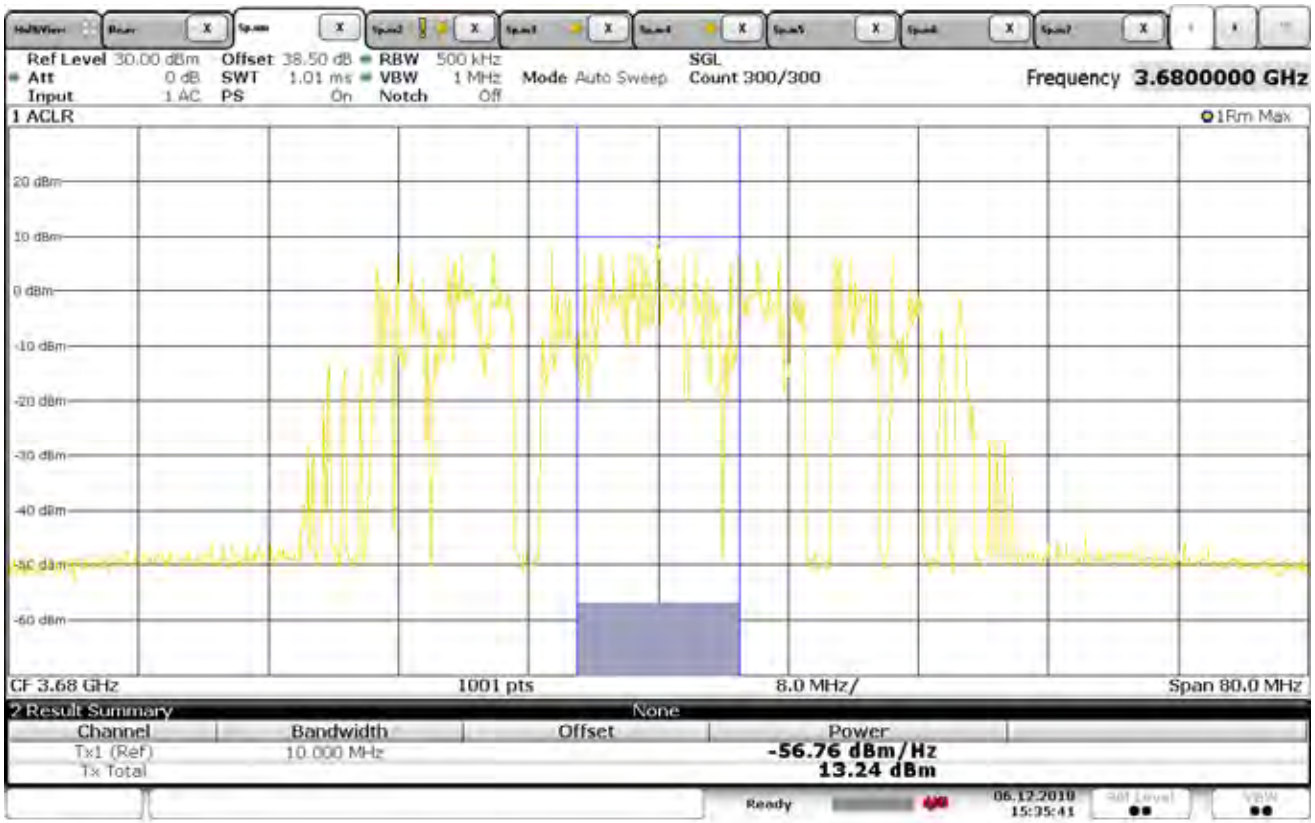

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Conducted Output Power
DATE : December 4, 2018
MODE : Transmit at 3680MHz Channel A, 40MHz Channel
NOTES : AVG Conducted Output Power = 13.24dBm + 3.98dB = 17.22dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

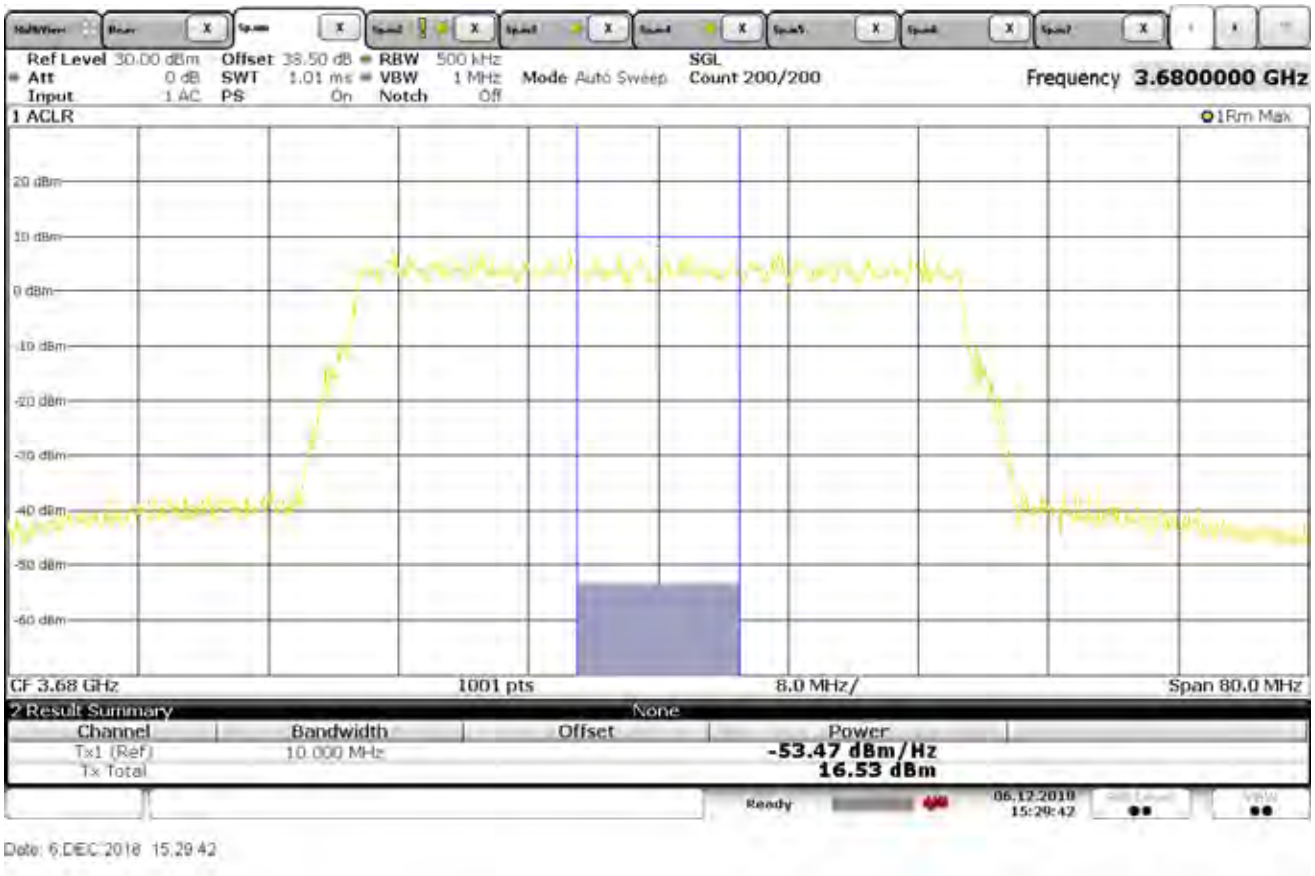

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Conducted Output Power
DATE	: December 3, 2018
MODE	: Transmit at 3680MHz Channel B, 40MHz Channel
NOTES	: AVG Conducted Output Power = 16.53dBm + 3.98dB = 20.51dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) EIRP
DATE : December 3, 2018
NOTES : 20MHz Channel

Frequency MHz	Antenna Port	RMS Average Meter Reading (dBm)	Duty Cycle Correction dB	Antenna Gain (dBi)	Bandwidth Correction	EIRP Total (dBm/10MHz)	EIRP Limit (dBm/10MHz)	Margin (dB)
3560	A	18.79	0.97	17	3	39.76	47	-7.25
3560	B	21.75	0.97	17	3	42.72	47	-4.28
3600	A	19.93	0.97	17	3	40.90	47	-6.1
3600	B	21.98	0.97	17	3	42.95	47	-4.05
3690	A	17.84	0.97	17	3	38.81	47	-8.19
3690	B	21.14	0.97	17	3	42.11	47	-4.89

EIRP (dBm) = RMS AVG Meter Reading + Duty Cycle Correction + Antenna Gain + Bandwidth Correction
Bandwidth Correction = 10 * Log (20/10) = 3dB

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) EIRP
DATE : December 3, 2018
NOTES : 40MHz Channel

Frequency MHz	Antenna Port	RMS Average Meter Reading (dBm)	Duty Cycle Correction dB	Antenna Gain (dBi)	Bandwidth Correction	EIRP Total (dBm/10MHz)	EIRP Limit (dBm/10MHz)	Margin (dB)
3570	A	13.39	3.98	17	6	40.37	47	-6.63
3570	B	16.02	3.98	17	6	43.00	47	-4.00
3600	A	15.14	3.98	17	6	42.12	47	-4.88
3600	B	17.99	3.98	17	6	44.97	47	-2.03
3680	A	13.24	3.98	17	6	40.22	47	-6.78
3680	B	16.53	3.98	17	6	43.51	47	-3.49

EIRP (dBm) = RMS AVG Meter Reading + Duty Cycle Correction + Antenna Gain + Bandwidth Correction
Bandwidth Correction = 10 * Log (40/10) = 6dB

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Total Power (Ports A+B)
DATE : December 3, 2018
NOTES : 20MHz Channel

Frequency MHz	RMS Average Meter Readings Antenna Ports A and B (dBm)		RMS Total Average Meter Readings Ports A + B (dBm)	Duty Cycle Correction dB	Antenna Gain (dBi)	Bandwidth Correction	EIRP Total Ports A+B (dBm/10MHz)	EIRP Limit (dBm/10MHz)
	A	B						
3560	18.79	21.75	23.5	0.97	17	3	44.47	50
3600	19.93	21.98	24.1	0.97	17	3	45.07	50
3690	17.84	21.14	22.8	0.97	17	3	43.77	50

EIRP (dBm) = RMS AVG Meter Reading (Ports A+B) + Duty Cycle Correction + Antenna Gain + Bandwidth Correction
Bandwidth Correction = 10 * Log (20/10) = 3dB

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Total Power (Ports A+B)
DATE : December 3, 2018
NOTES : 40MHz Channel

Frequency MHz	RMS Average Meter Readings Antenna Ports A and B (dBm)		RMS Total Average Meter Readings Ports A + B (dBm)	Duty Cycle Correction dB	Antenna Gain (dBi)	Bandwidth Correction	EIRP Total Ports A+B (dBm/10MHz)	EIRP Limit (dBm/10MHz)
	A	B						
3570	13.39	16.02	17.8	3.98	17	6	44.78	53
3600	15.14	17.99	19.8	3.98	17	6	46.78	53
3680	13.24	16.53	18.2	3.98	17	6	45.18	53

EIRP (dBm) = RMS AVG Meter Reading + Duty Cycle Correction + Antenna Gain + Bandwidth Correction
Bandwidth Correction = 10 * Log (40/10) = 6dB

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

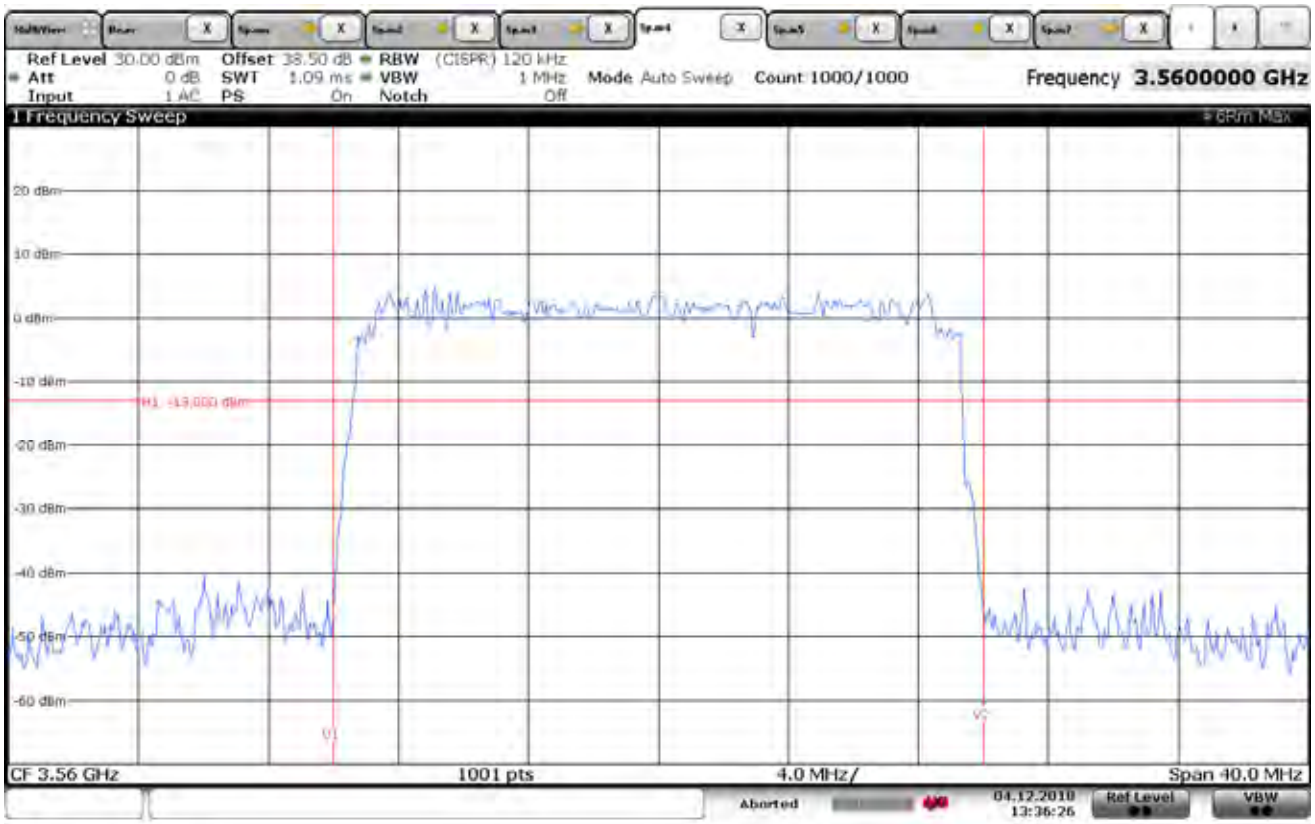

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3560MHz, 20MHz Channel, Channel A
NOTES	: V1- low edge of the assigned channel minus 10MHz = 3550MHz
	: V2- high edge of the assigned channel plus 10MHz = 3570MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

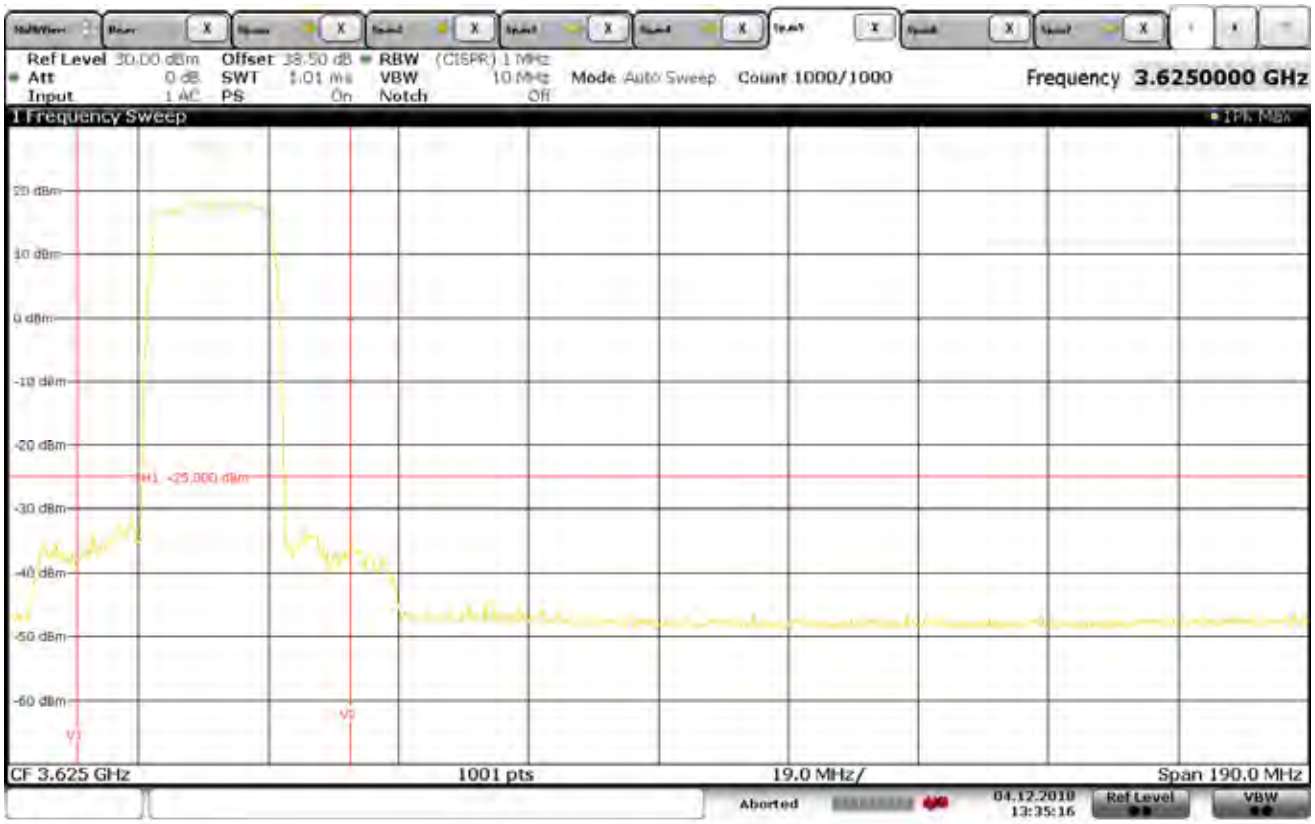

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3560MHz, 20MHz Channel, Channel A
NOTES : V1- Greater than 10MHz below assigned channel = 3540MHz
: V2- Greater than 10MHz above assigned channel = 3590MHz

Checked By: Mark E. Longinotti

Mark E. Longinotti

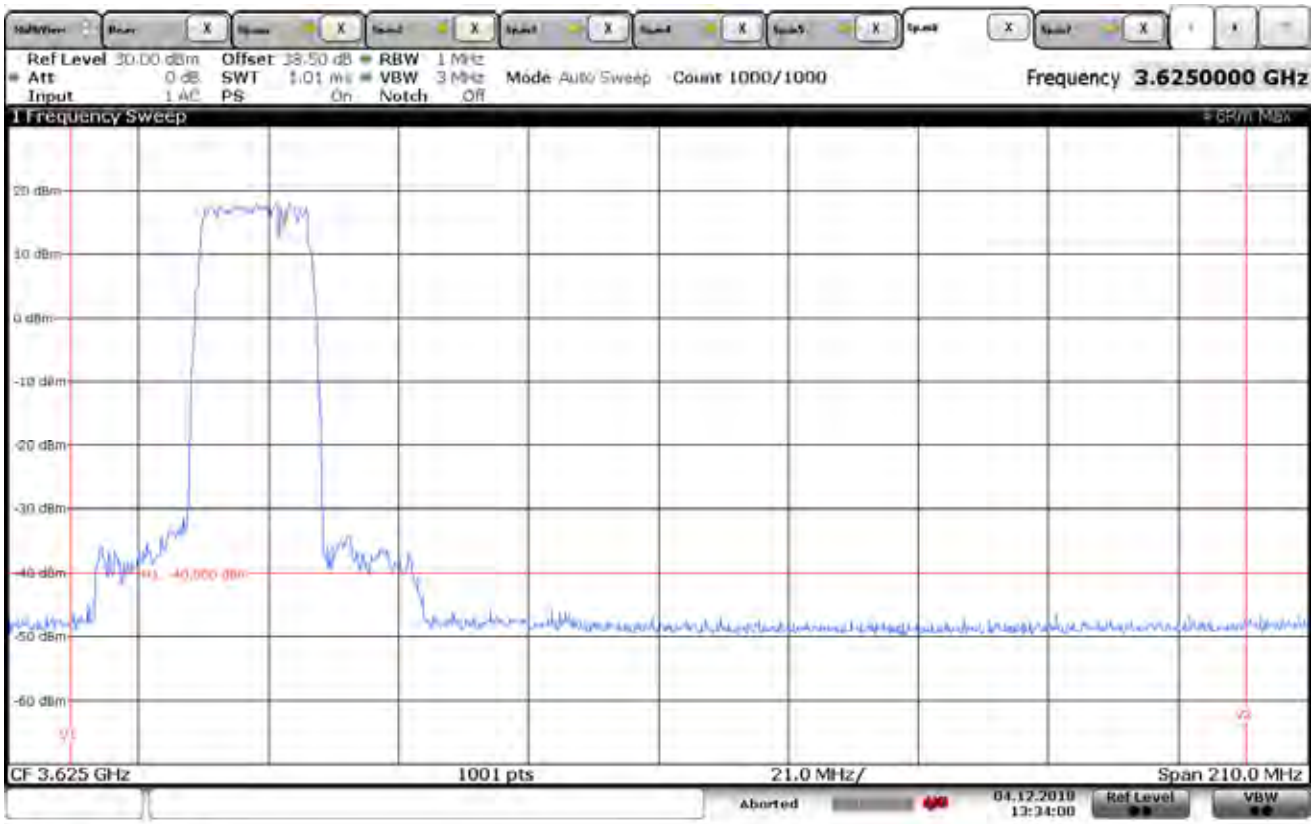

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3560MHz, 20MHz Channel, Channel A
NOTES : V1- 3530MHz
: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

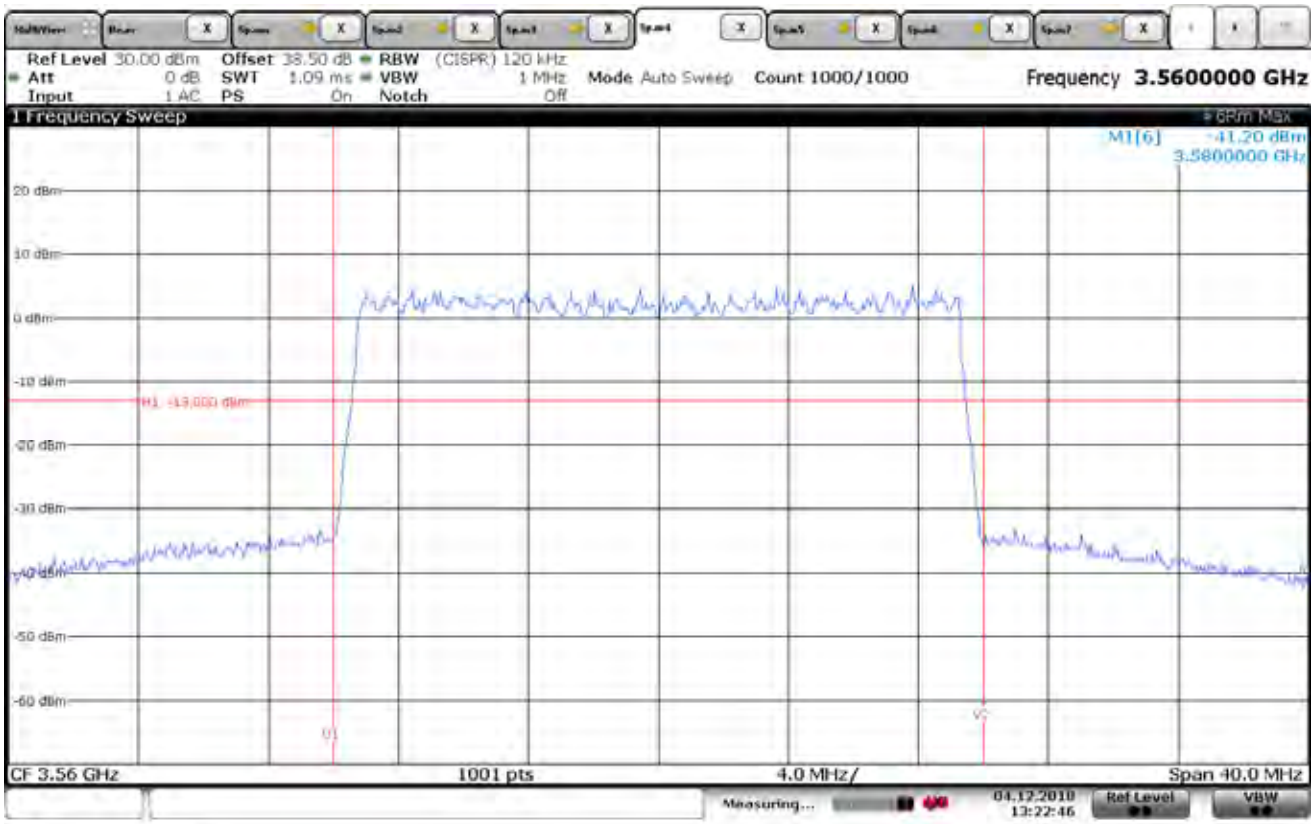

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3560MHz, 20MHz Channel, Channel B
NOTES : V1- low edge of the assigned channel minus 10MHz = 3550MHz
: V2- high edge of the assigned channel plus 10MHz = 3570MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

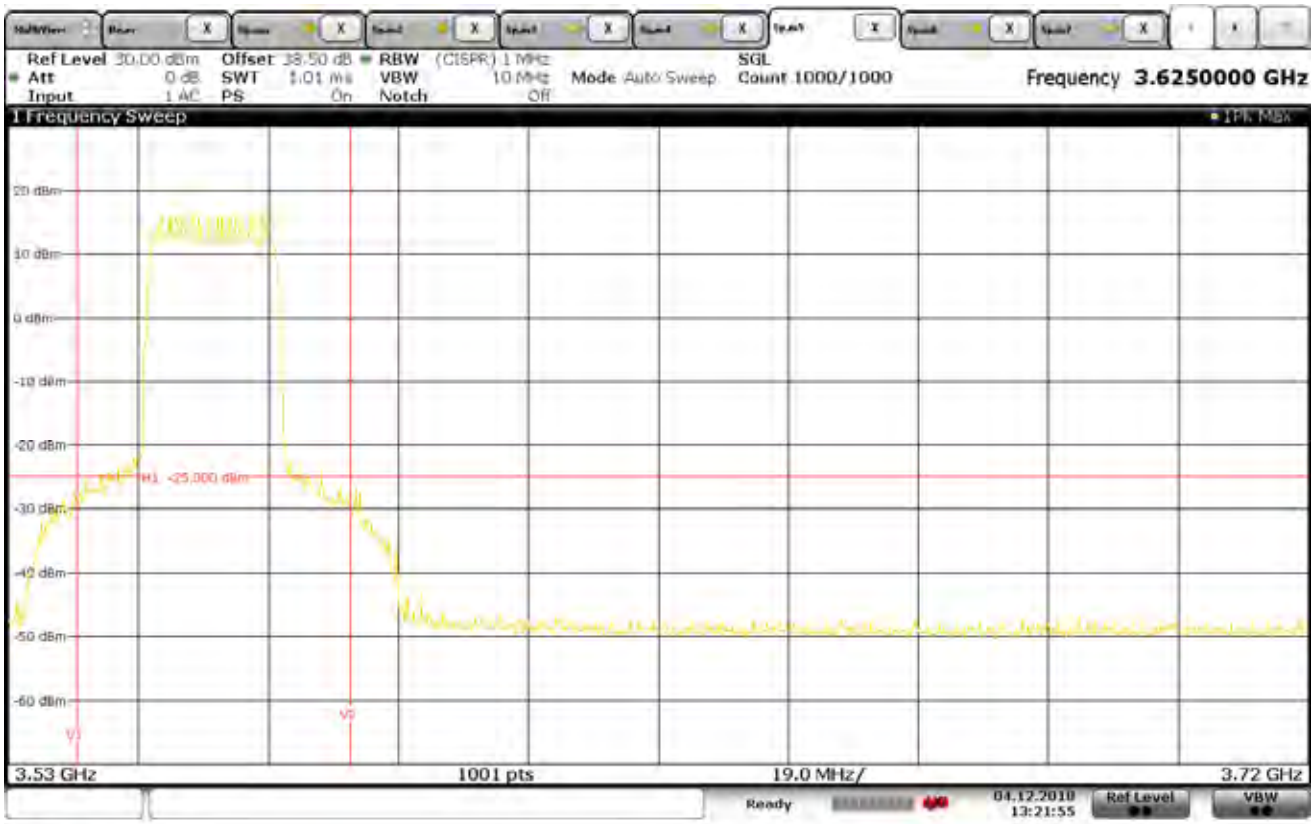

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3560MHz, 20MHz Channel, Channel B
NOTES	: V1- Greater than 10MHz below assigned channel = 3540MHz
	: V2- Greater than 10MHz above assigned channel = 3590MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

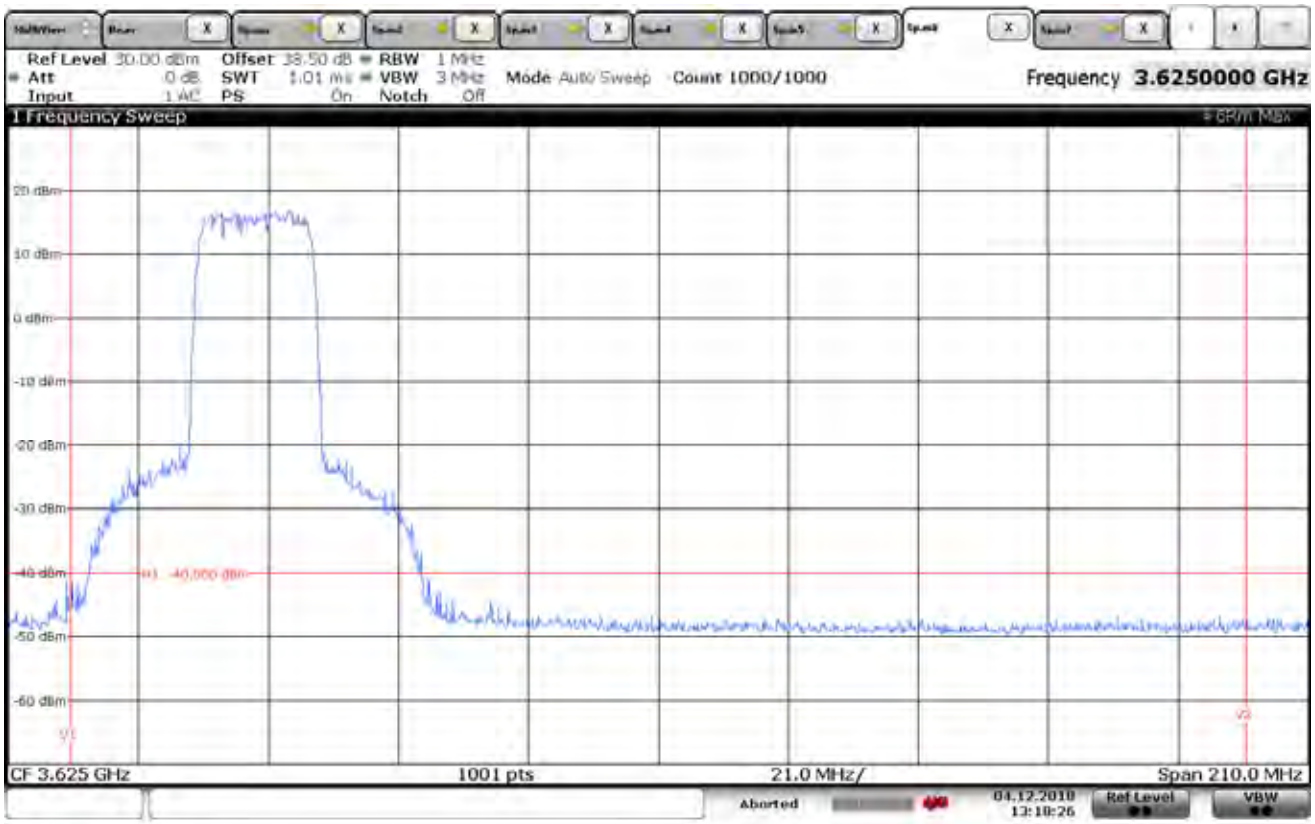

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3560MHz, 20MHz Channel, Channel B
NOTES : V1- 3530MHz
: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

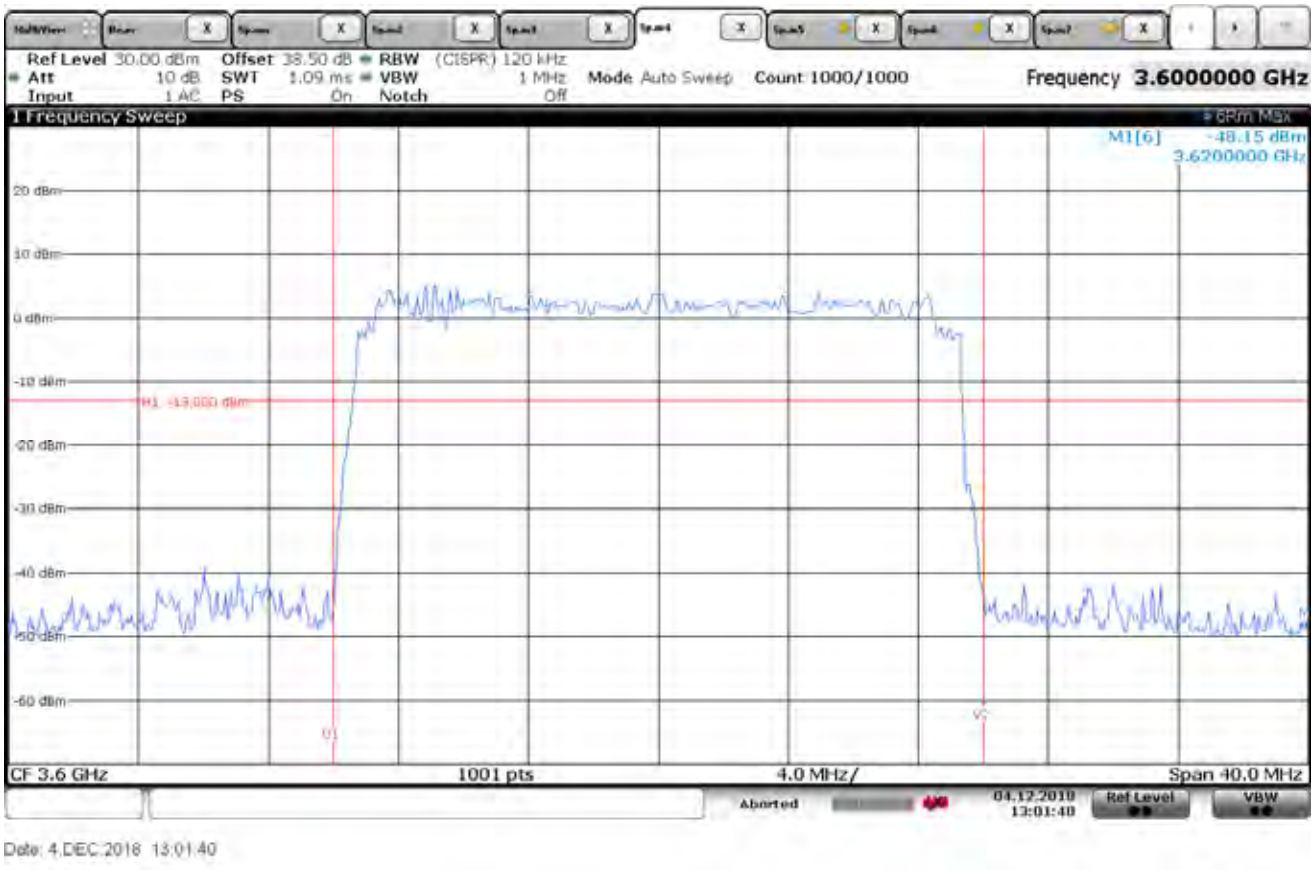

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3600MHz, 20MHz Channel, Channel A
NOTES : V1- low edge of the assigned channel minus 10MHz = 3590MHz
: V2- high edge of the assigned channel plus 10MHz = 3610MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

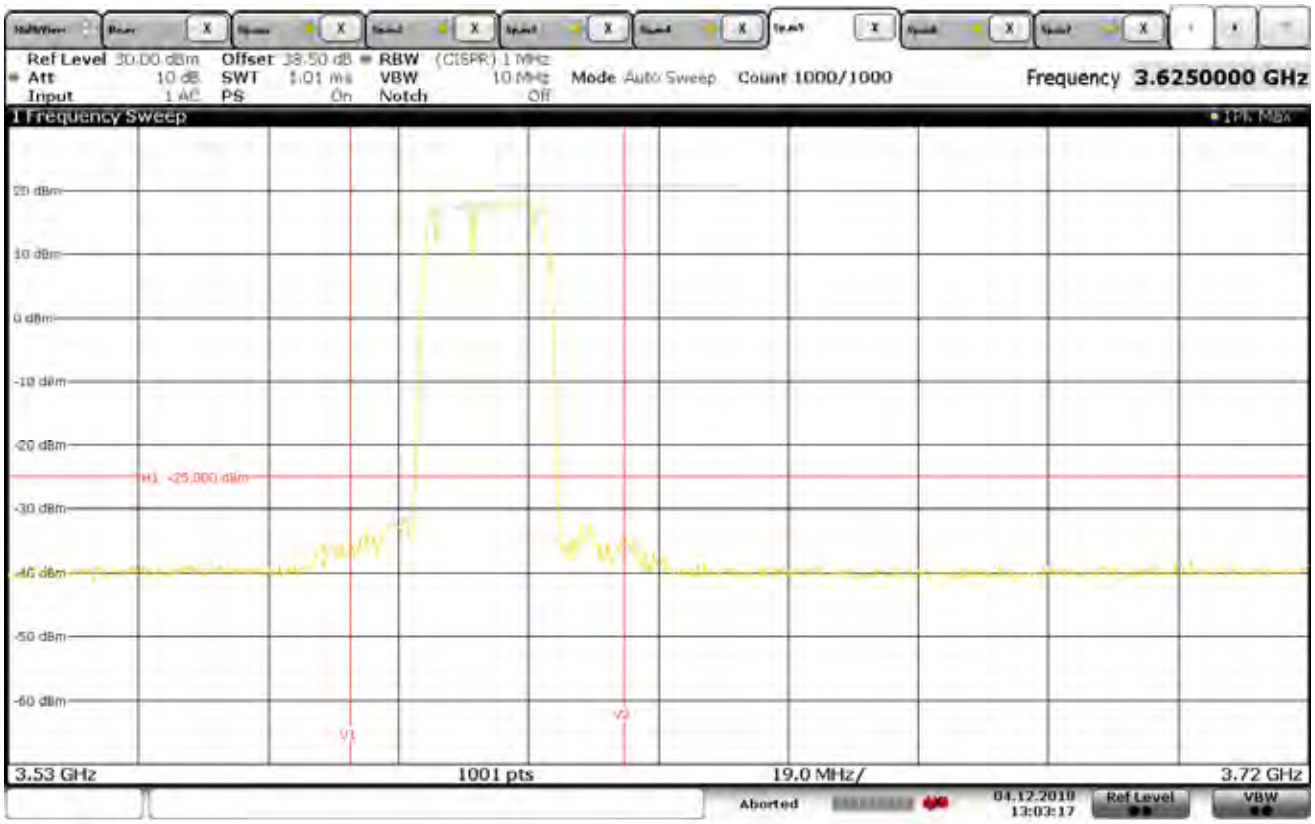

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3600MHz, 20MHz Channel, Channel A
NOTES	: V1- Greater than 10MHz below assigned channel = 3580MHz
	: V2- Greater than 10MHz above assigned channel = 3620MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

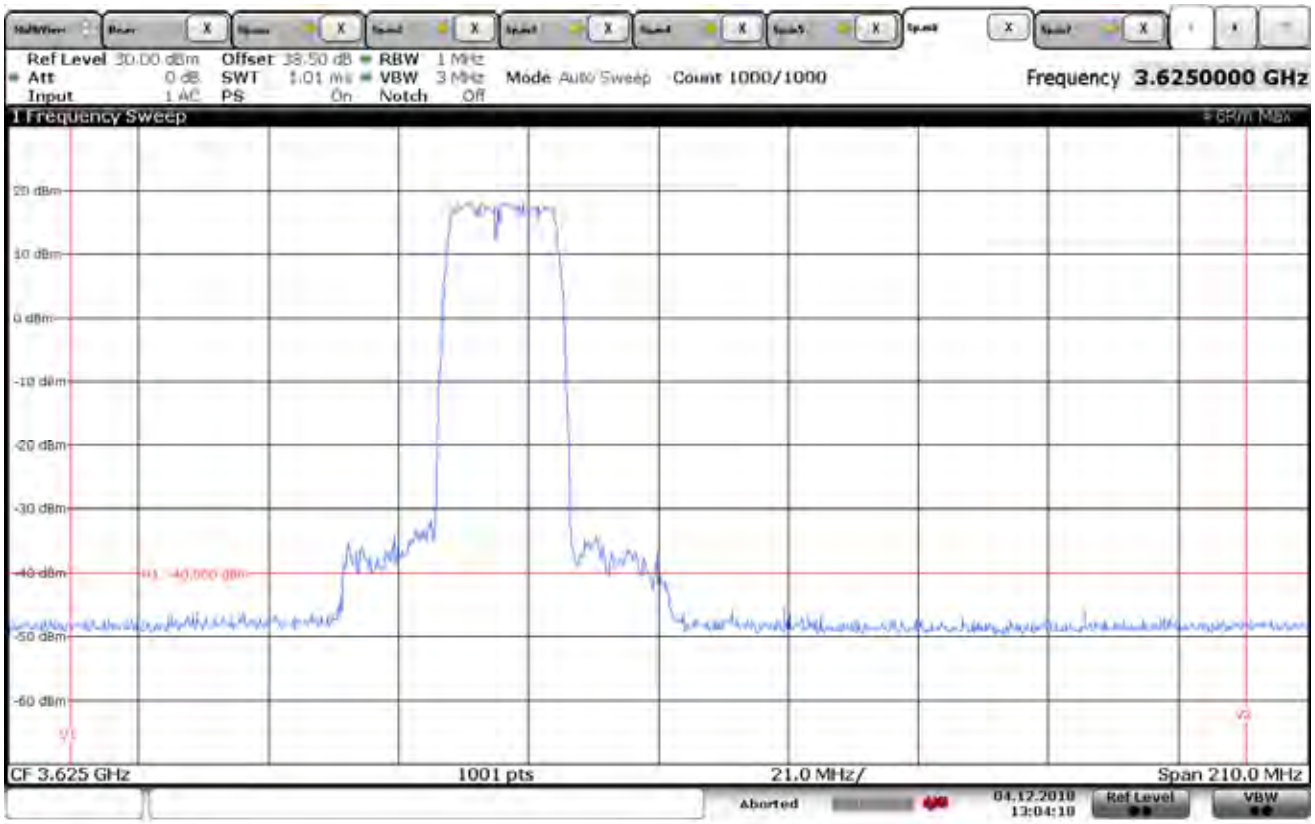

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3600MHz, 20MHz Channel, Channel A
NOTES : V1- 3530MHz
: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

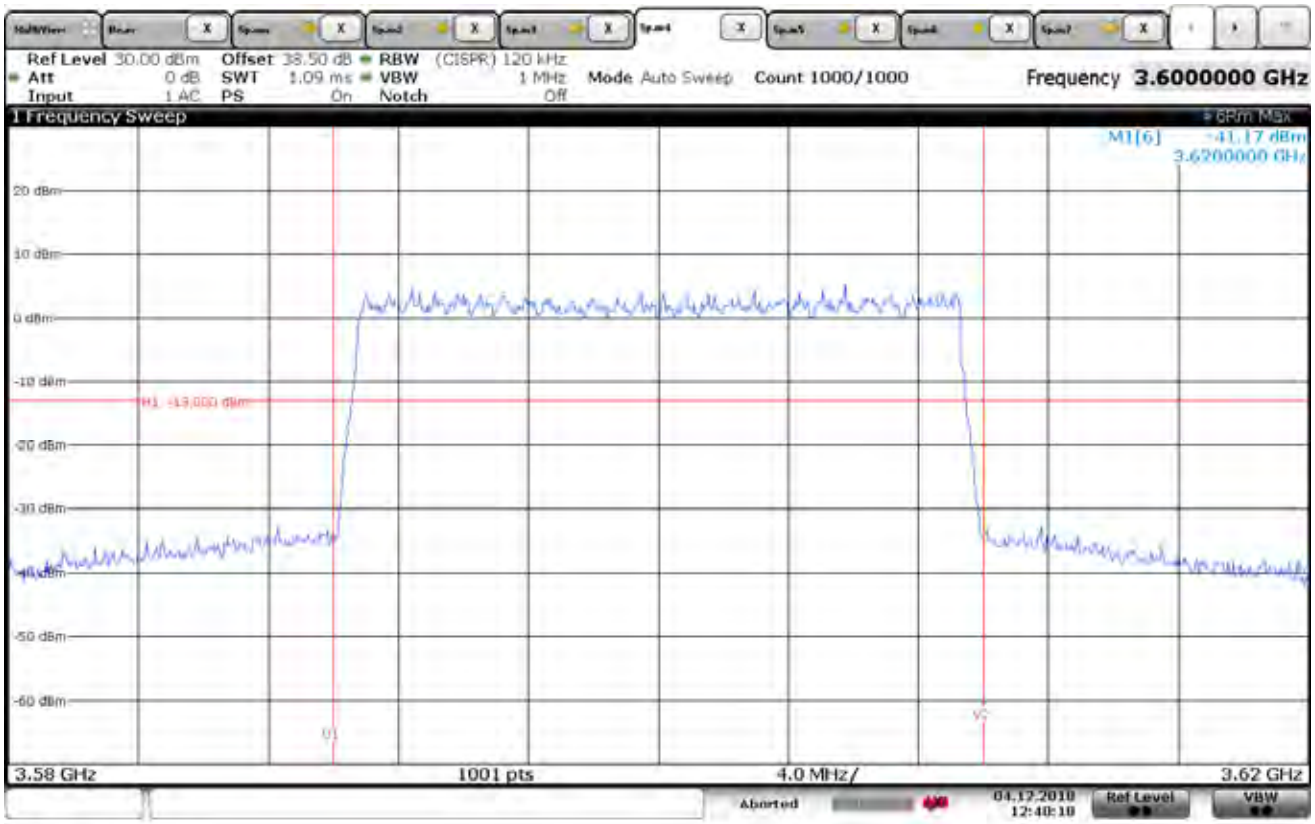

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3600MHz, 20MHz Channel, Channel B
NOTES	: V1- low edge of the assigned channel minus 10MHz = 3590MHz
	: V2- high edge of the assigned channel plus 10MHz = 3610MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

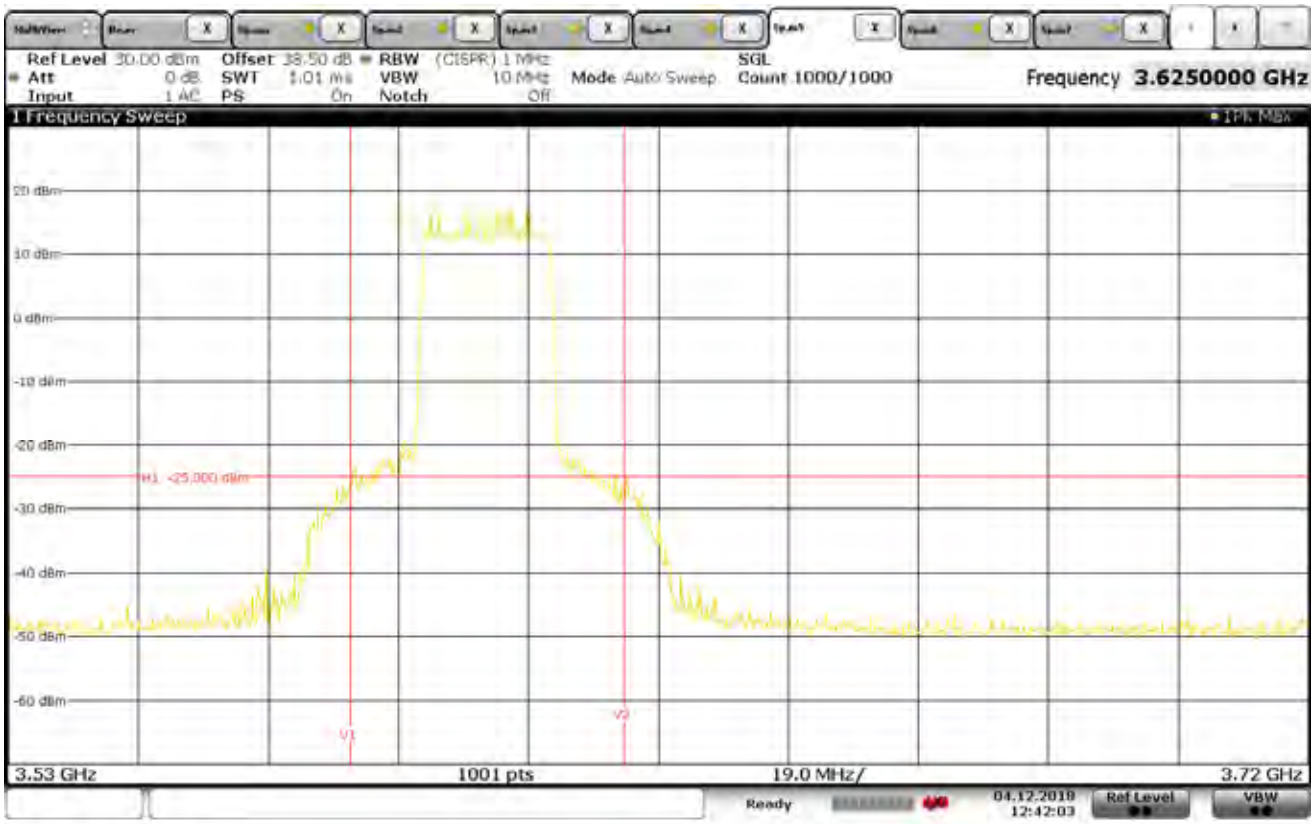

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3600MHz, 20MHz Channel, Channel B
NOTES : V1- Greater than 10MHz below assigned channel = 3580MHz
: V2- Greater than 10MHz above assigned channel = 3620MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

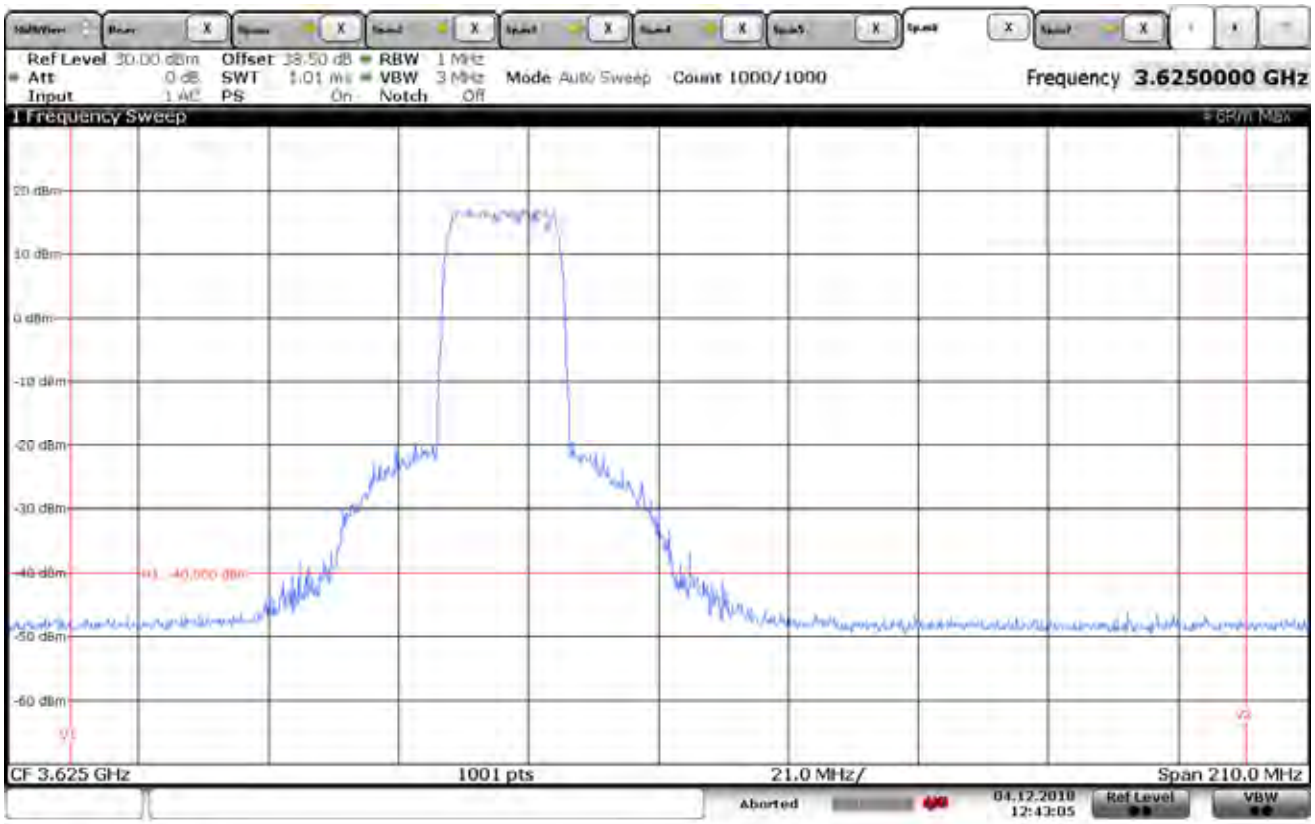

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3600MHz, 20MHz Channel, Channel B
NOTES	: V1- 3530MHz
	: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

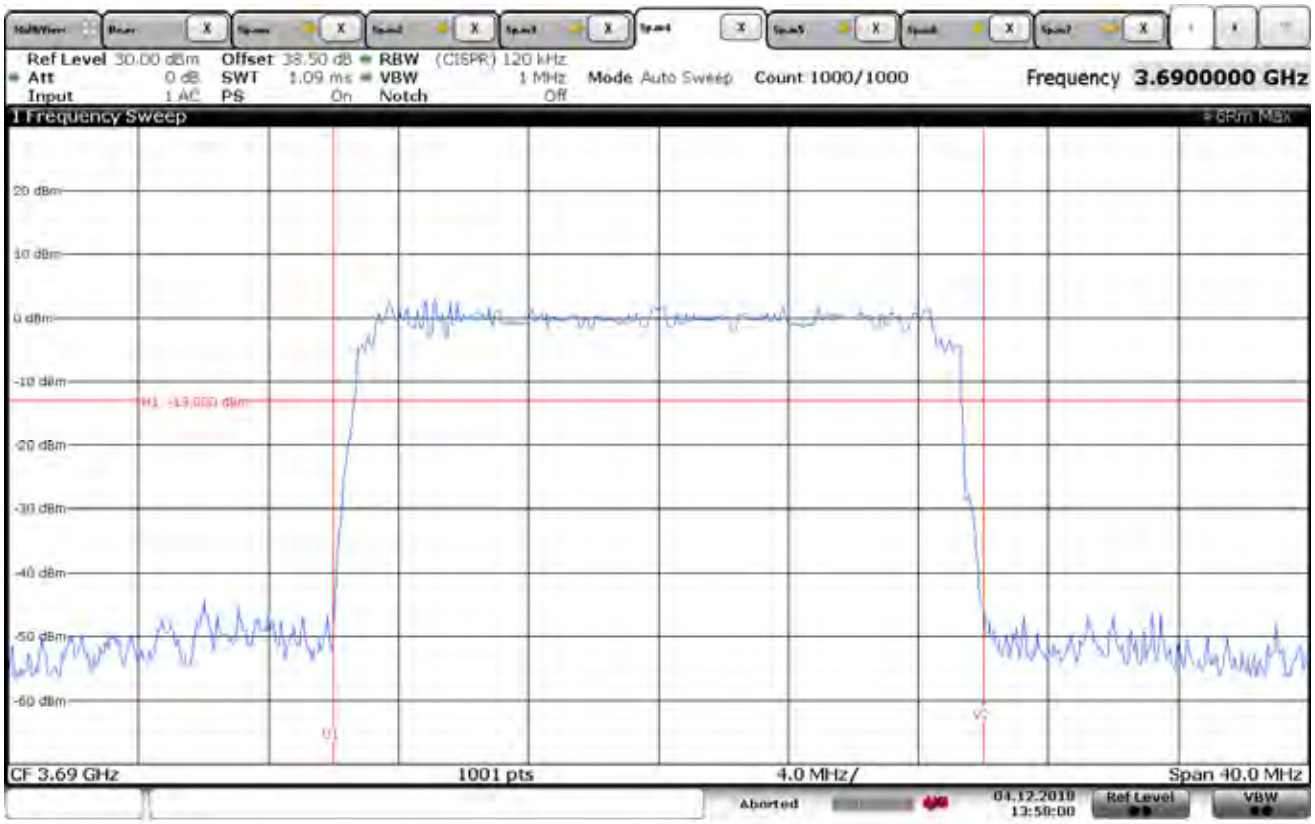

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3690MHz, 20MHz Channel, Channel A
NOTES	: V1- low edge of the assigned channel minus 10MHz = 3680MHz
	: V2- high edge of the assigned channel plus 10MHz = 3700MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

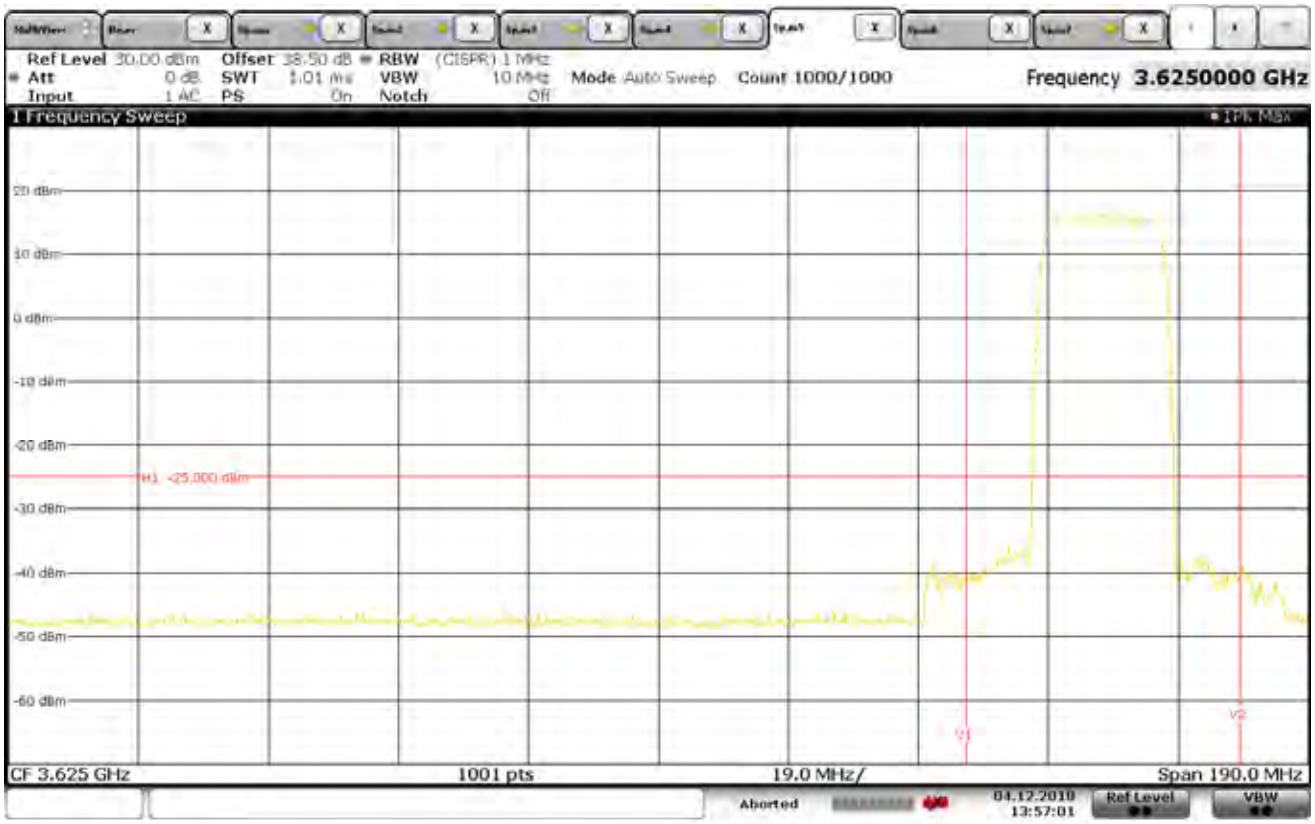

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3690MHz, 20MHz Channel, Channel A
NOTES	: V1- Greater than 10MHz below assigned channel = 3670MHz
	: V2- Greater than 10MHz above assigned channel = 3710MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

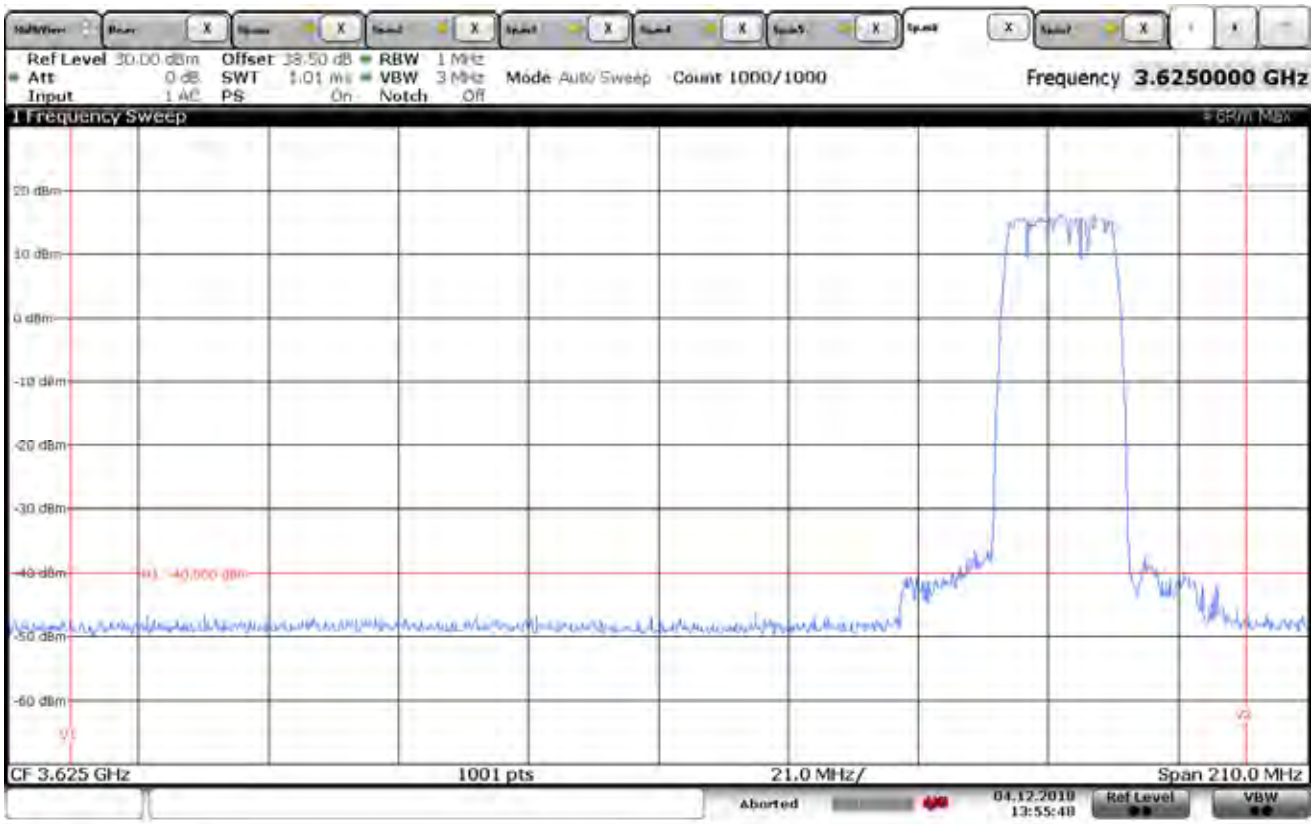

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3690MHz, 20MHz Channel, Channel A
NOTES : V1- 3530MHz
: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

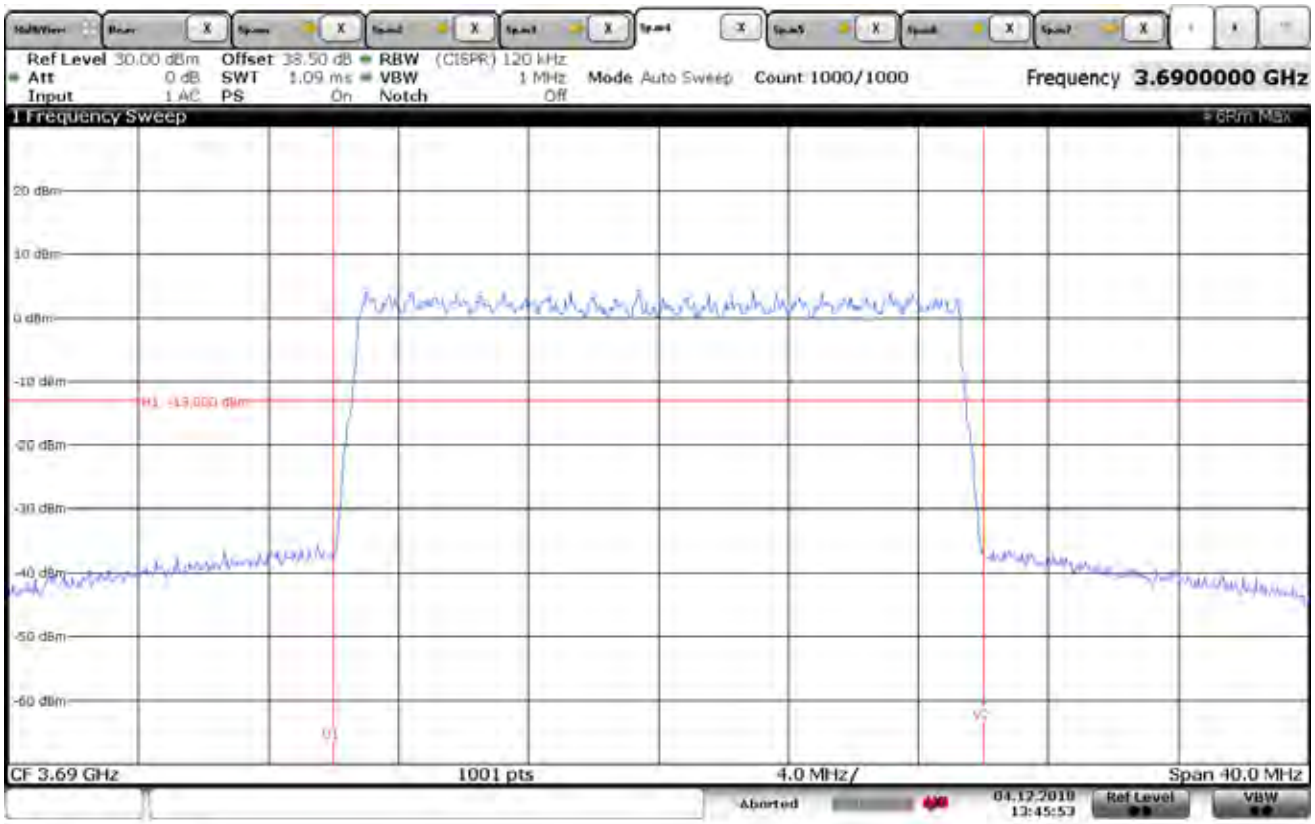

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3690MHz, 20MHz Channel, Channel B
NOTES : V1- low edge of the assigned channel minus 10MHz = 3680MHz
: V2- high edge of the assigned channel plus 10MHz = 3700MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

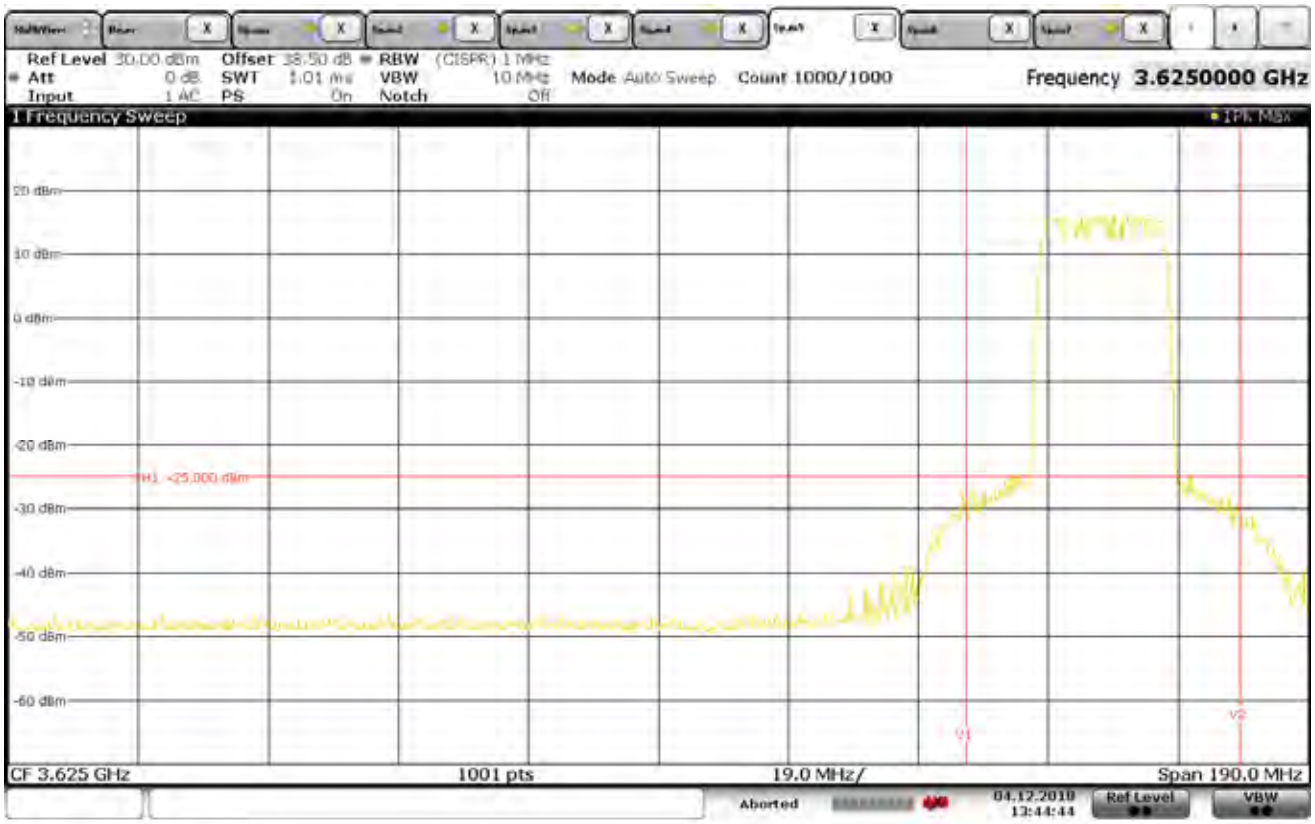

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3690MHz, 20MHz Channel, Channel B
NOTES : V1- Greater than 10MHz below assigned channel = 3670MHz
: V2- Greater than 10MHz above assigned channel = 3710MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

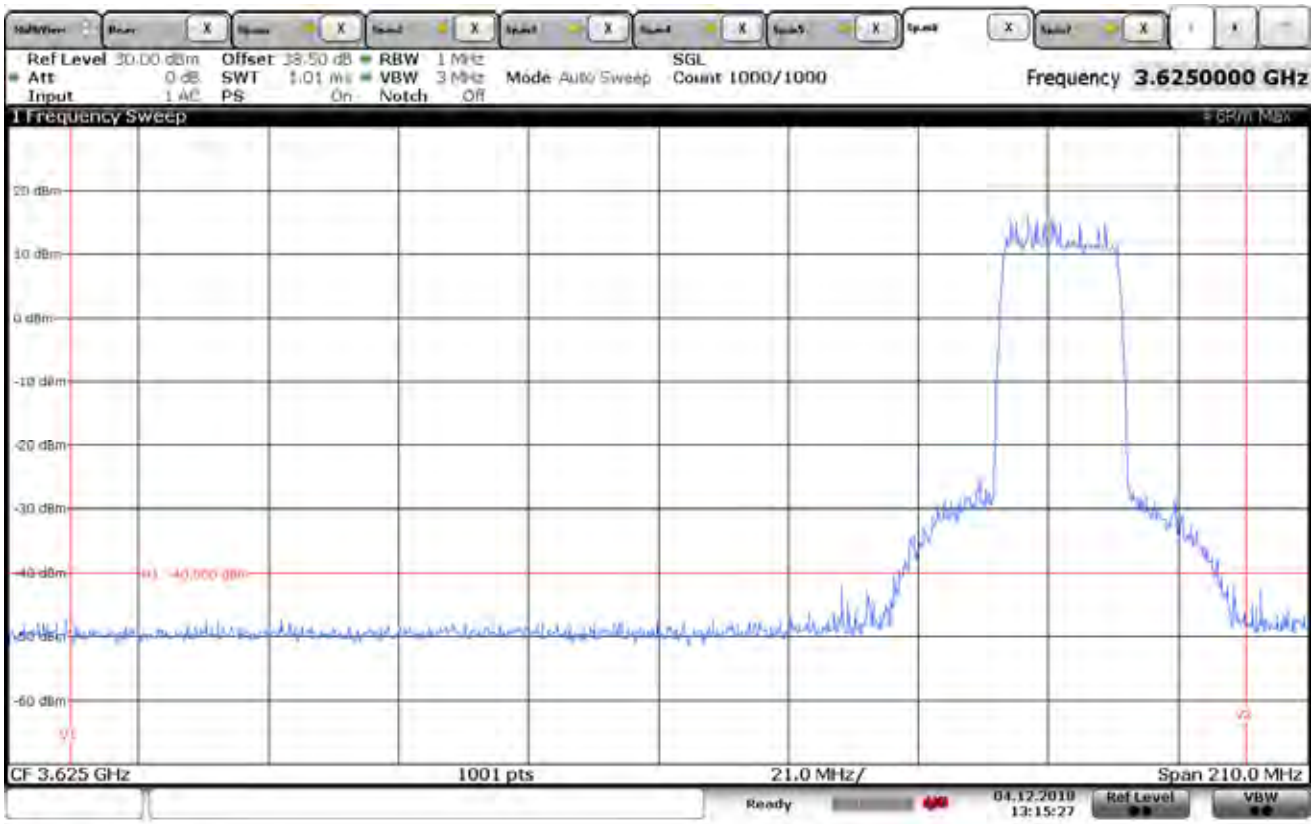

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3690MHz, 20MHz Channel, Channel B
NOTES	: V1- 3530MHz
	: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

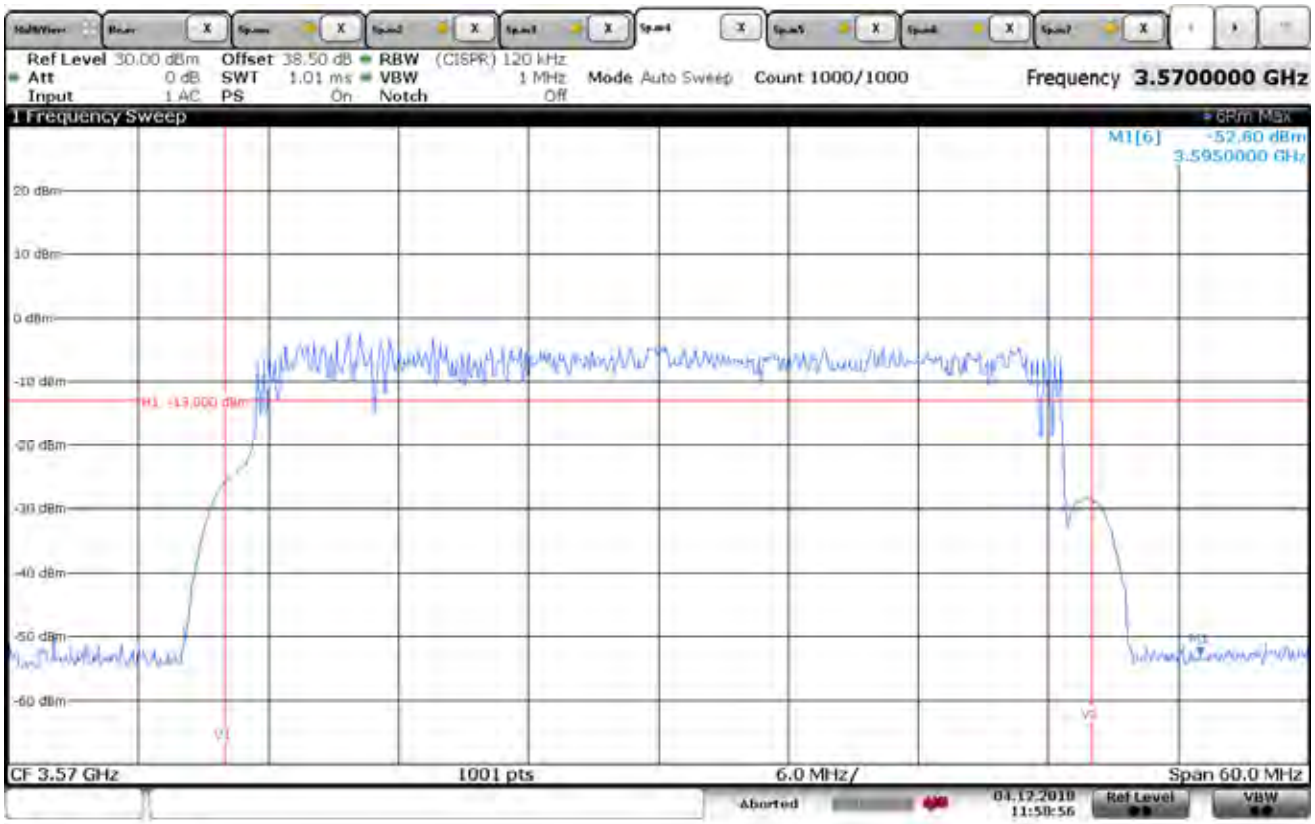

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3570MHz, 40MHz Channel, Channel A
NOTES	: V1- low edge of the assigned channel minus 20MHz = 3550MHz
	: V2- high edge of the assigned channel plus 20MHz = 3590MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

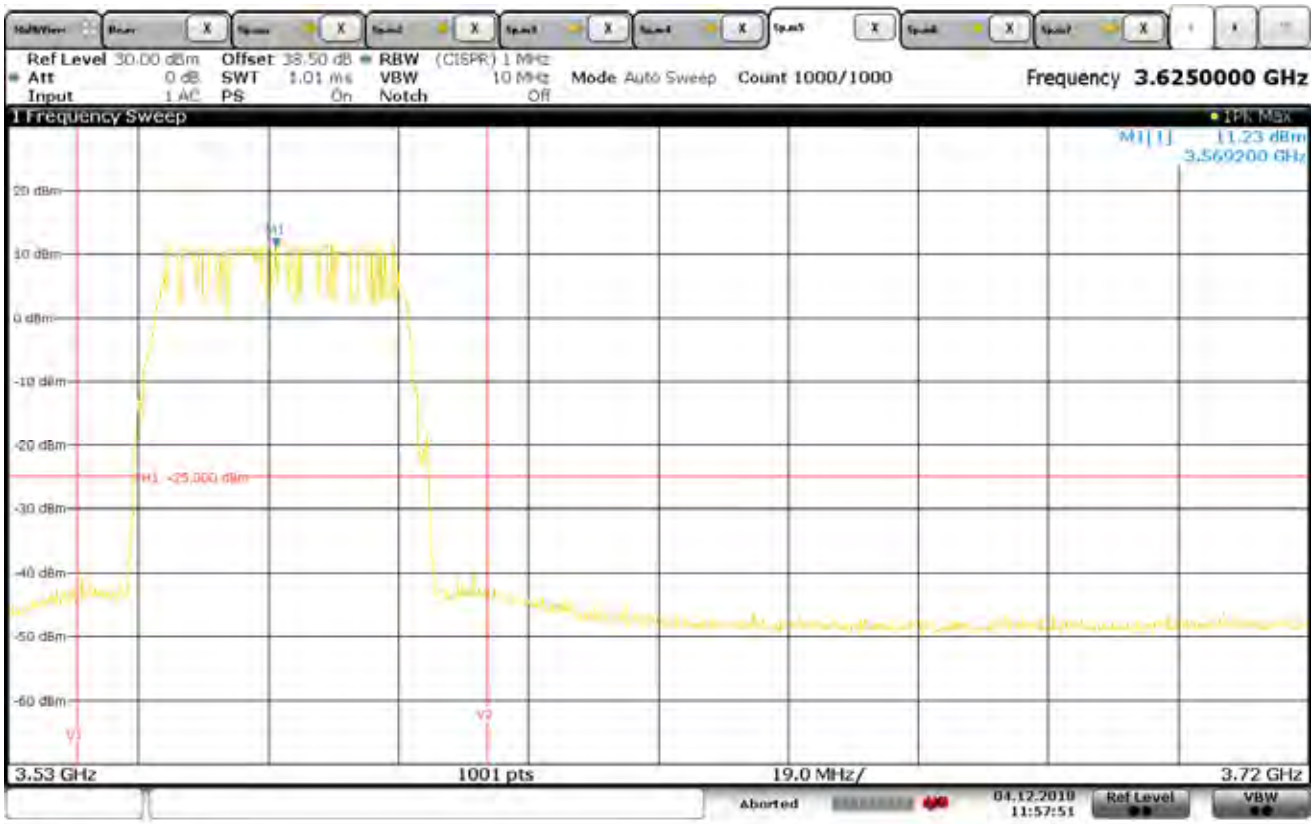

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3570MHz, 40MHz Channel, Channel A
NOTES : V1- Greater than 10MHz below assigned channel = 3540MHz
: V2- Greater than 10MHz above assigned channel = 3600MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

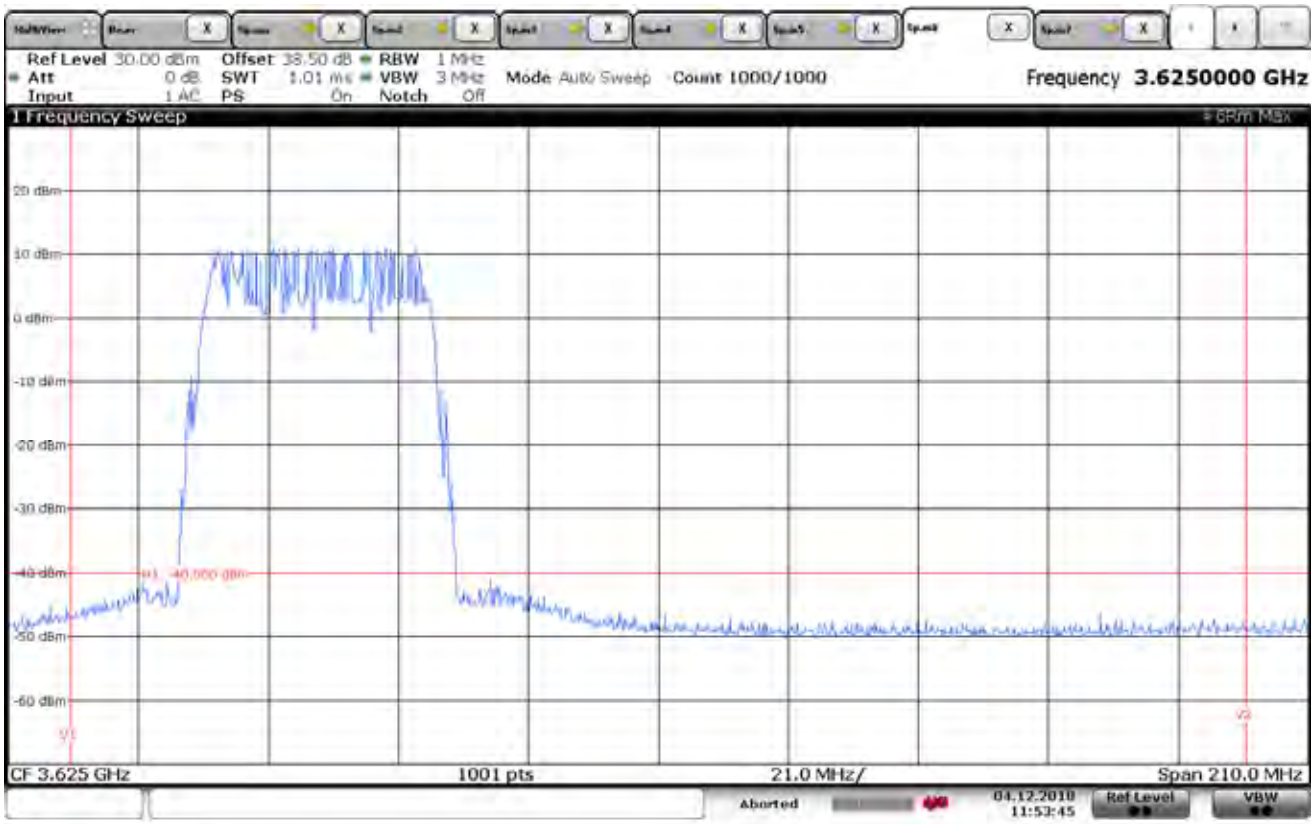

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3570MHz, 40MHz Channel, Channel A
NOTES : V1- 3530MHz
: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

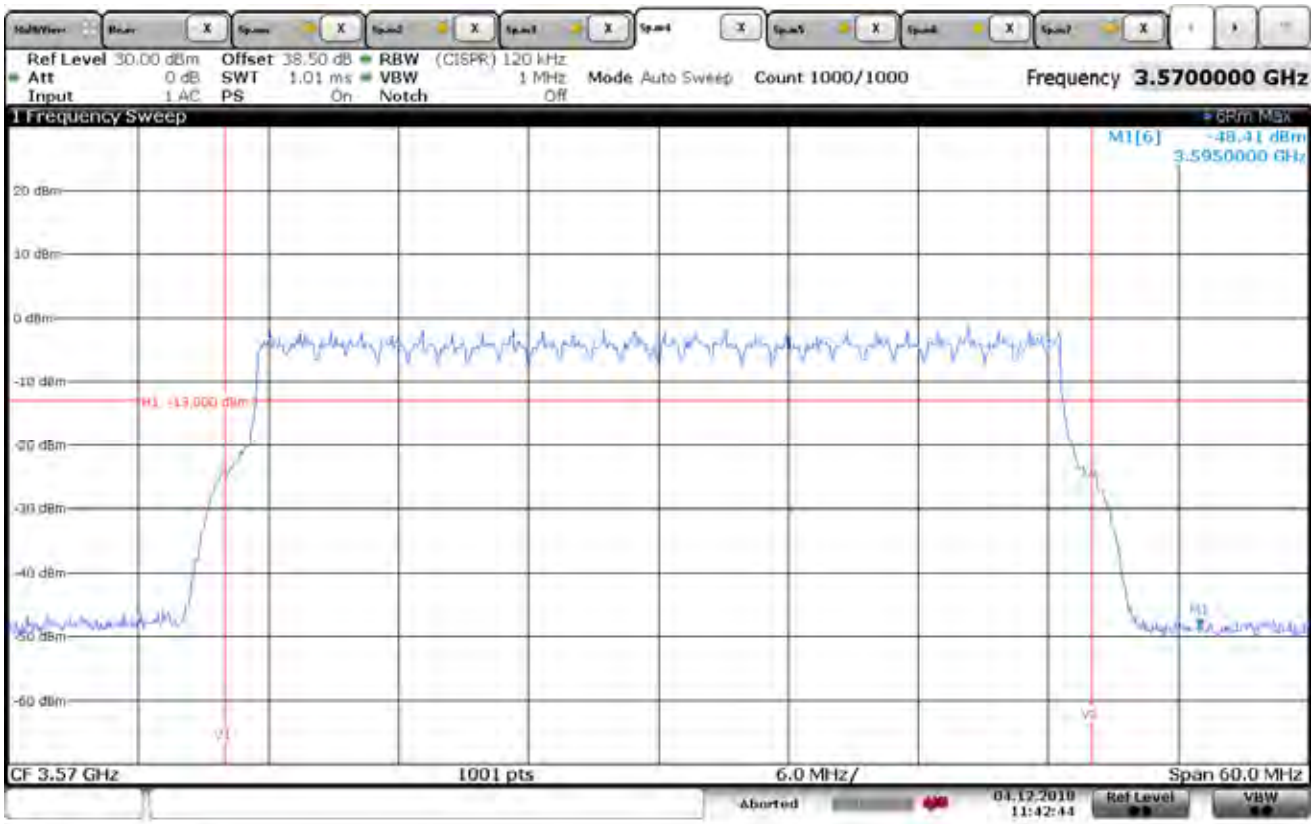

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3570MHz, 40MHz Channel, Channel B
NOTES : V1- low edge of the assigned channel minus 20MHz = 3550MHz
: V2- high edge of the assigned channel plus 20MHz = 3590MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

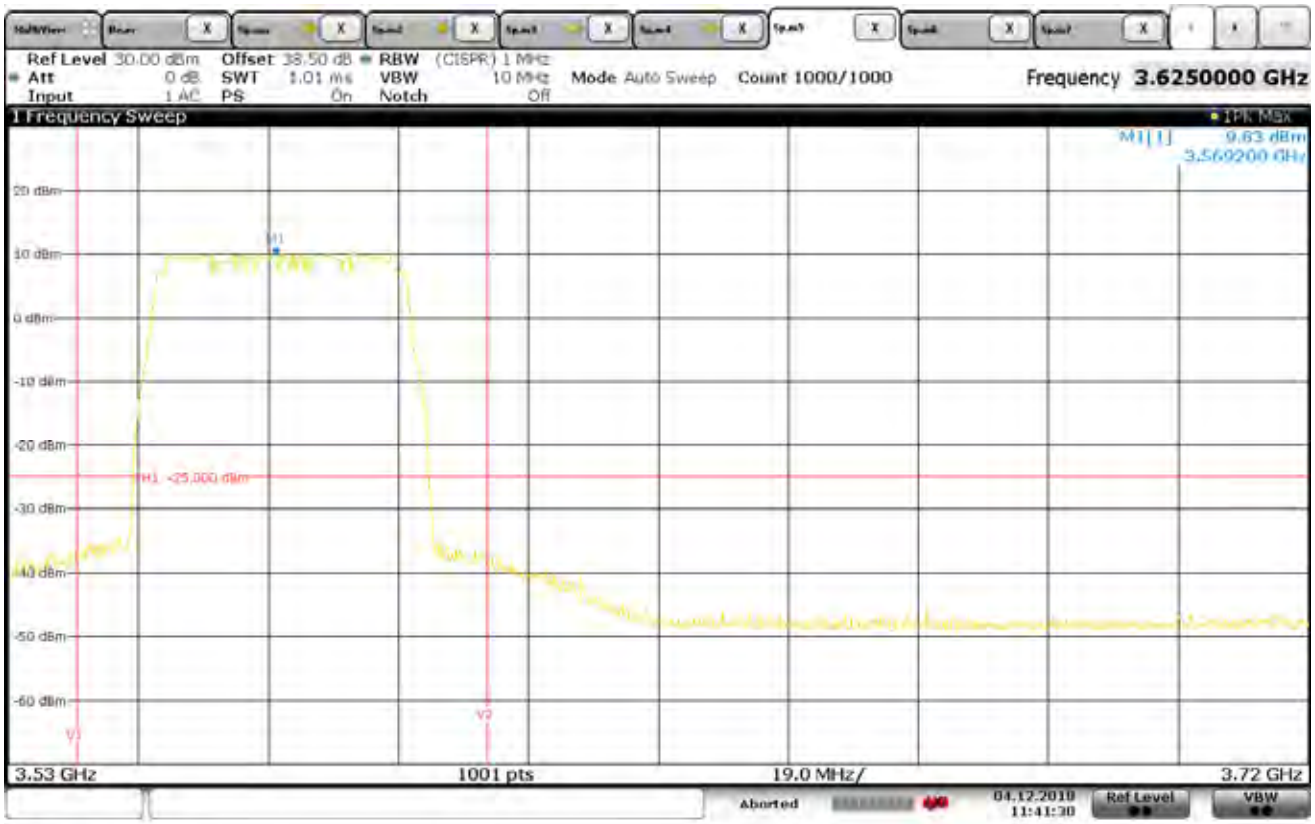

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3570MHz, 40MHz Channel, Channel B
NOTES	: V1- Greater than 10MHz below assigned channel = 3540MHz
	: V2- Greater than 10MHz above assigned channel = 3600MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

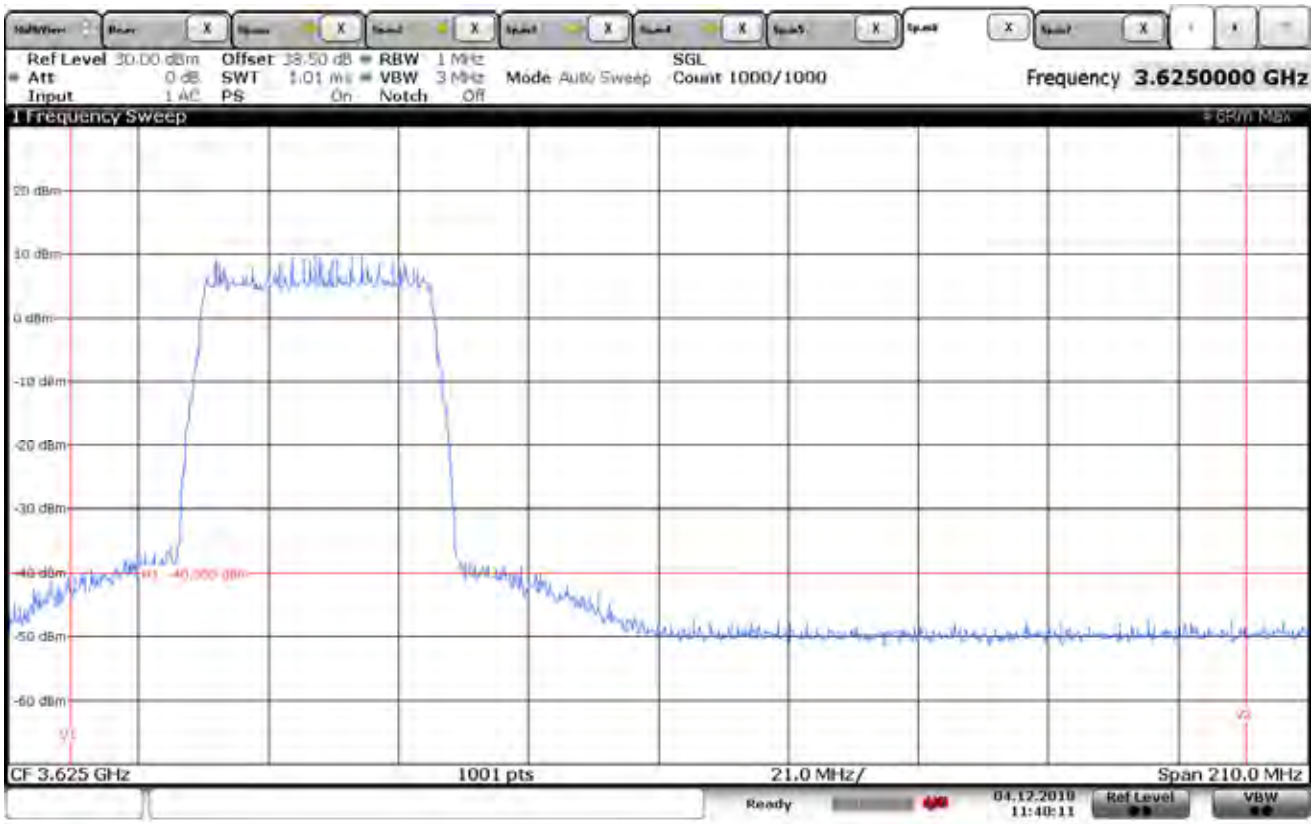

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3570MHz, 40MHz Channel, Channel B
NOTES	: V1- 3530MHz
	: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

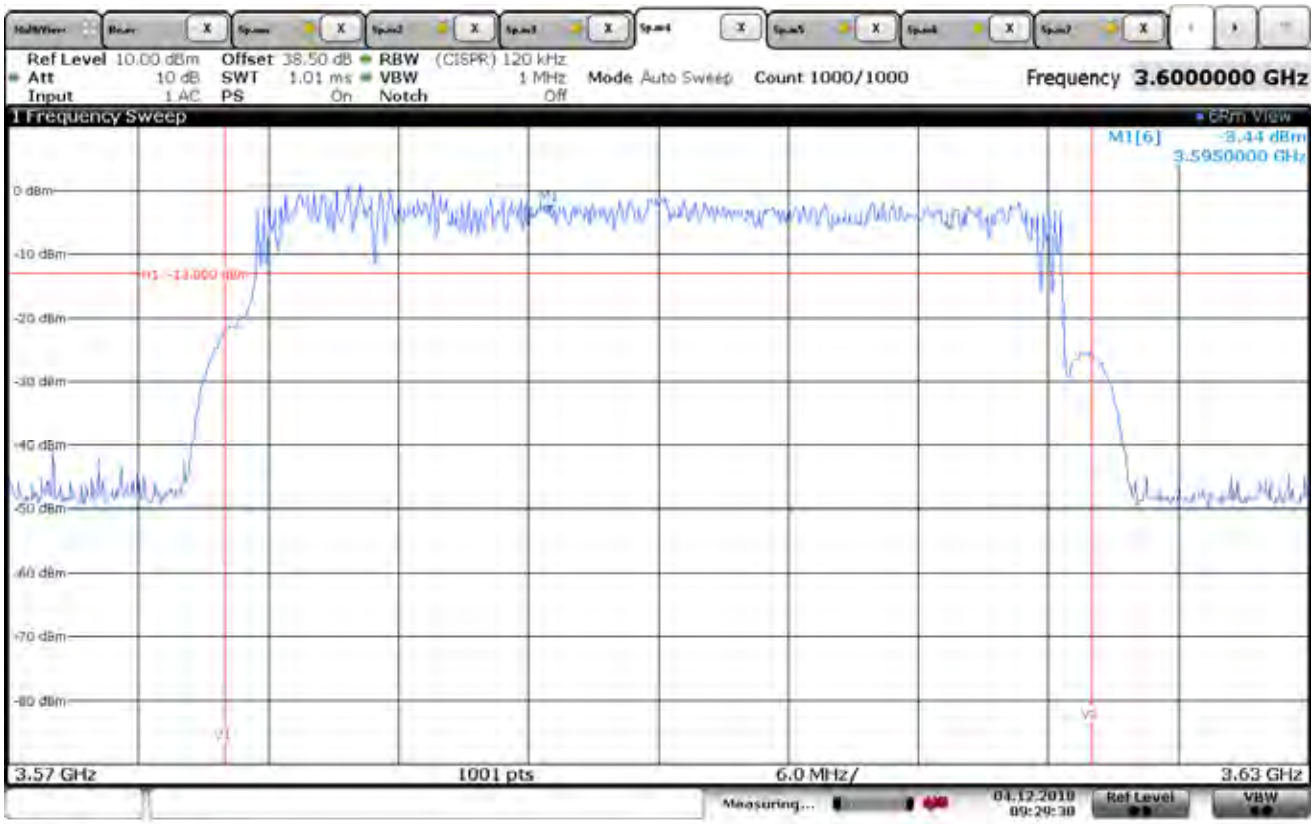

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3600MHz, 40MHz Channel, Channel A
NOTES	: V1- low edge of the assigned channel minus 20MHz = 3580MHz
	: V2- high edge of the assigned channel plus 20MHz = 3620MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

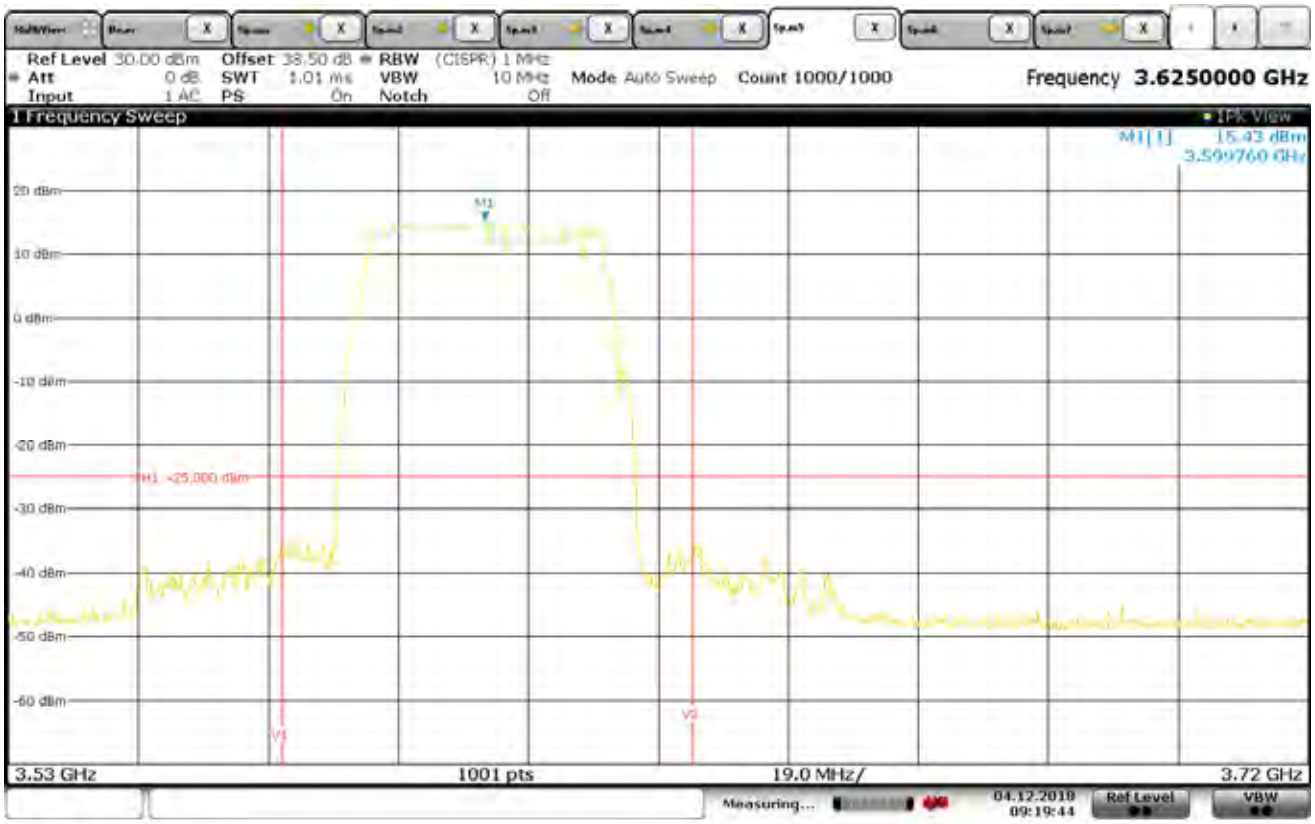

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3600MHz, 40MHz Channel, Channel A
NOTES	: V1- Greater than 10MHz below assigned channel = 3570MHz
	: V2- Greater than 10MHz above assigned channel = 3630MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

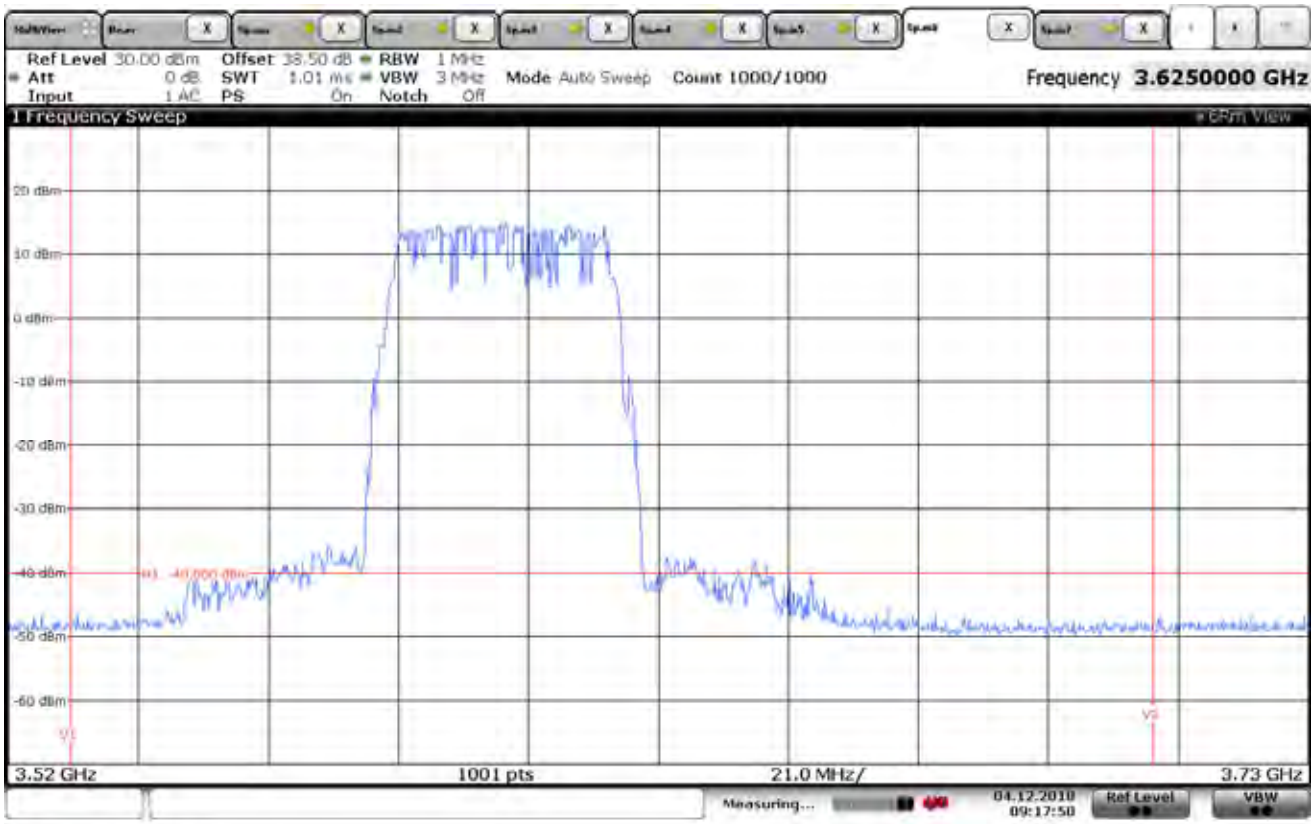

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3600MHz, 40MHz Channel, Channel A
NOTES : V1- 3530MHz
: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3600MHz, 40MHz Channel, Channel B
NOTES : V1- low edge of the assigned channel minus 20MHz = 3580MHz
: V2- high edge of the assigned channel plus 20MHz = 3620MHz

Checked By: Mark E. Longinotti

Mark E. Longinotti

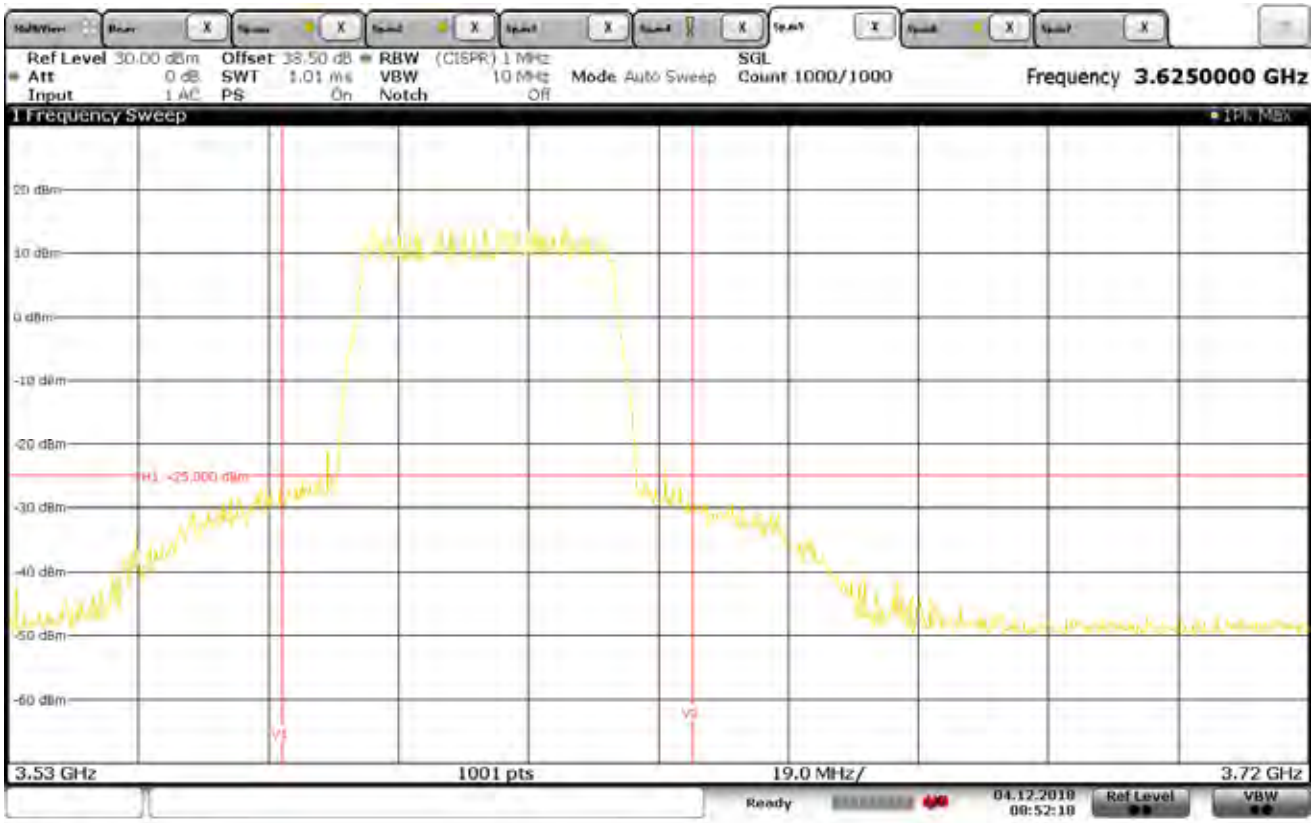

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3600MHz, 40MHz Channel, Channel B
NOTES	: V1- Greater than 10MHz below assigned channel = 3570MHz
	: V2- Greater than 10MHz above assigned channel = 3630MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

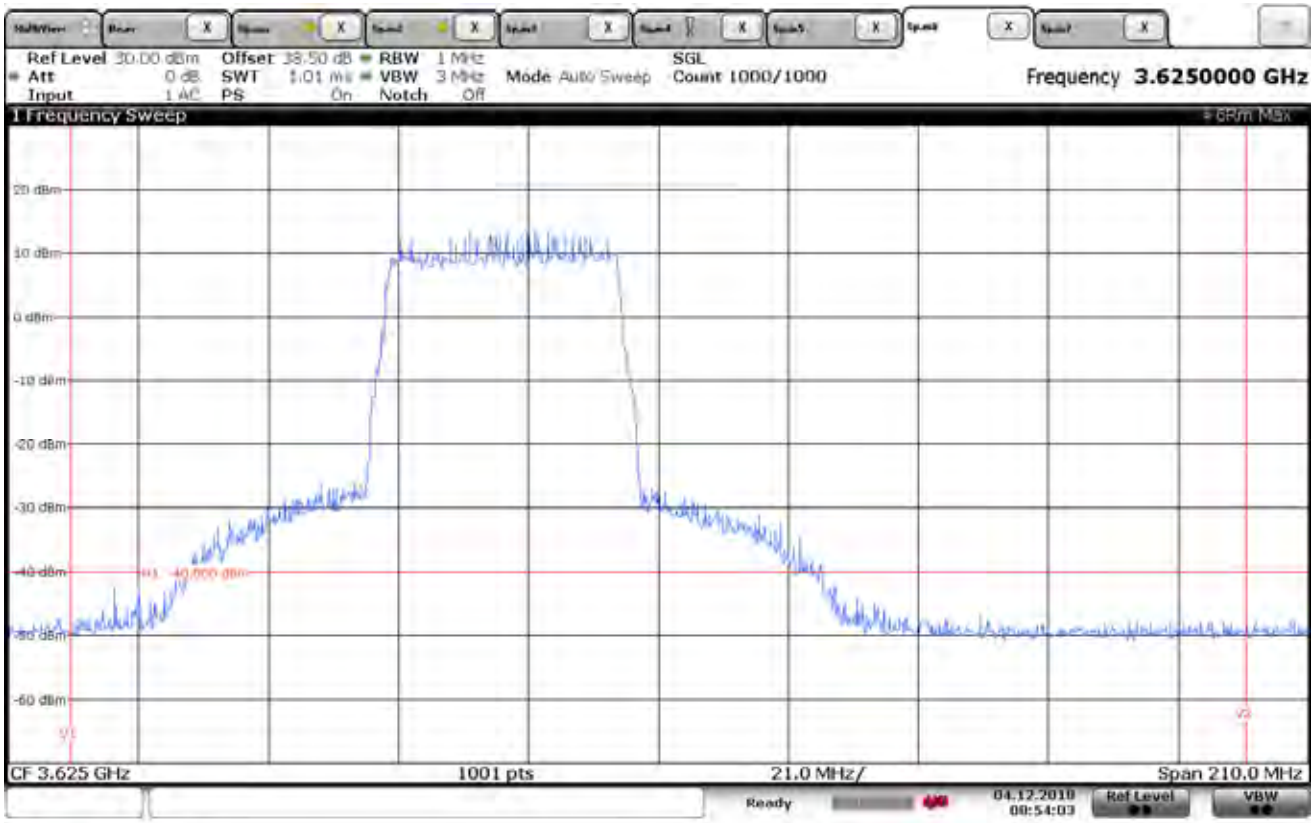

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3600MHz, 40MHz Channel, Channel B
NOTES : V1- 3530MHz
: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

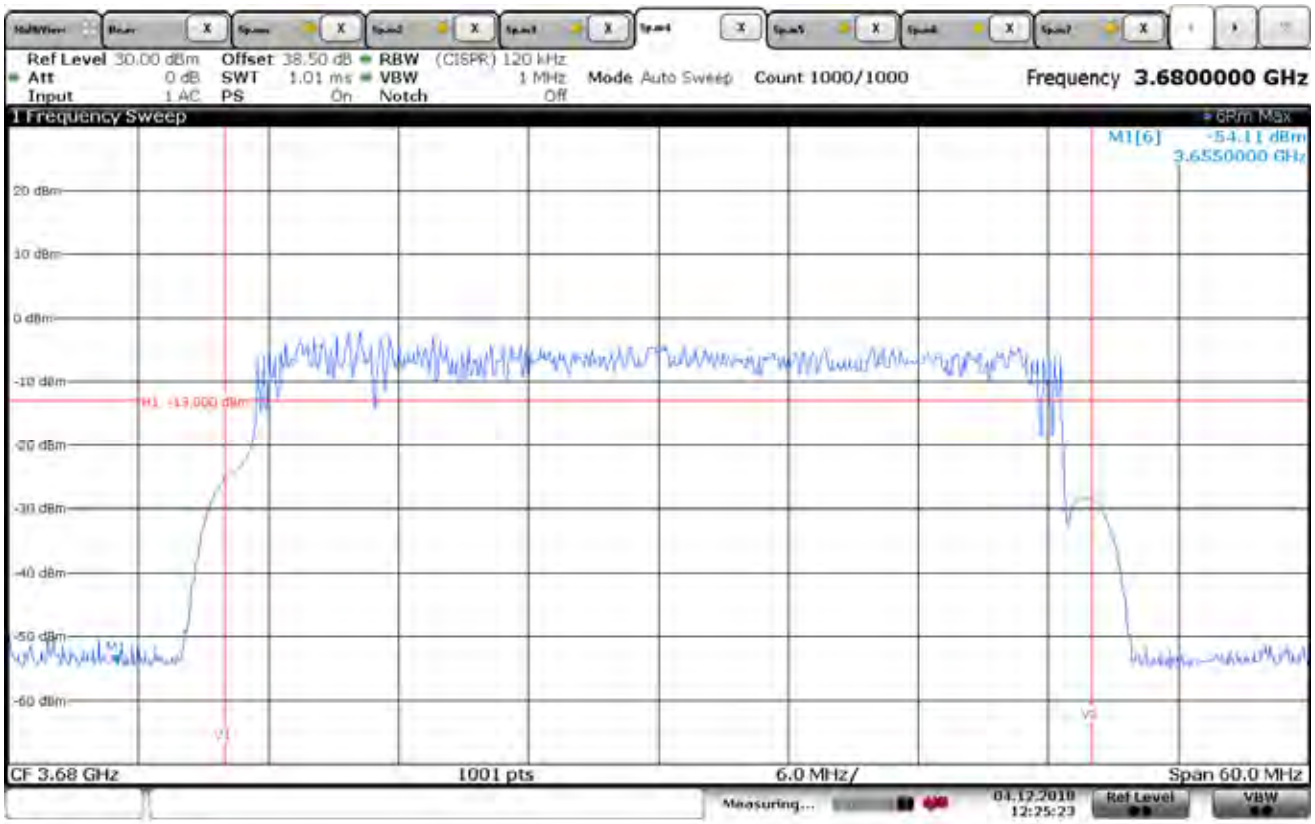

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3680MHz, 40MHz Channel, Channel A
NOTES	: V1- low edge of the assigned channel minus 20MHz = 3660MHz
	: V2- high edge of the assigned channel plus 20MHz = 3700MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

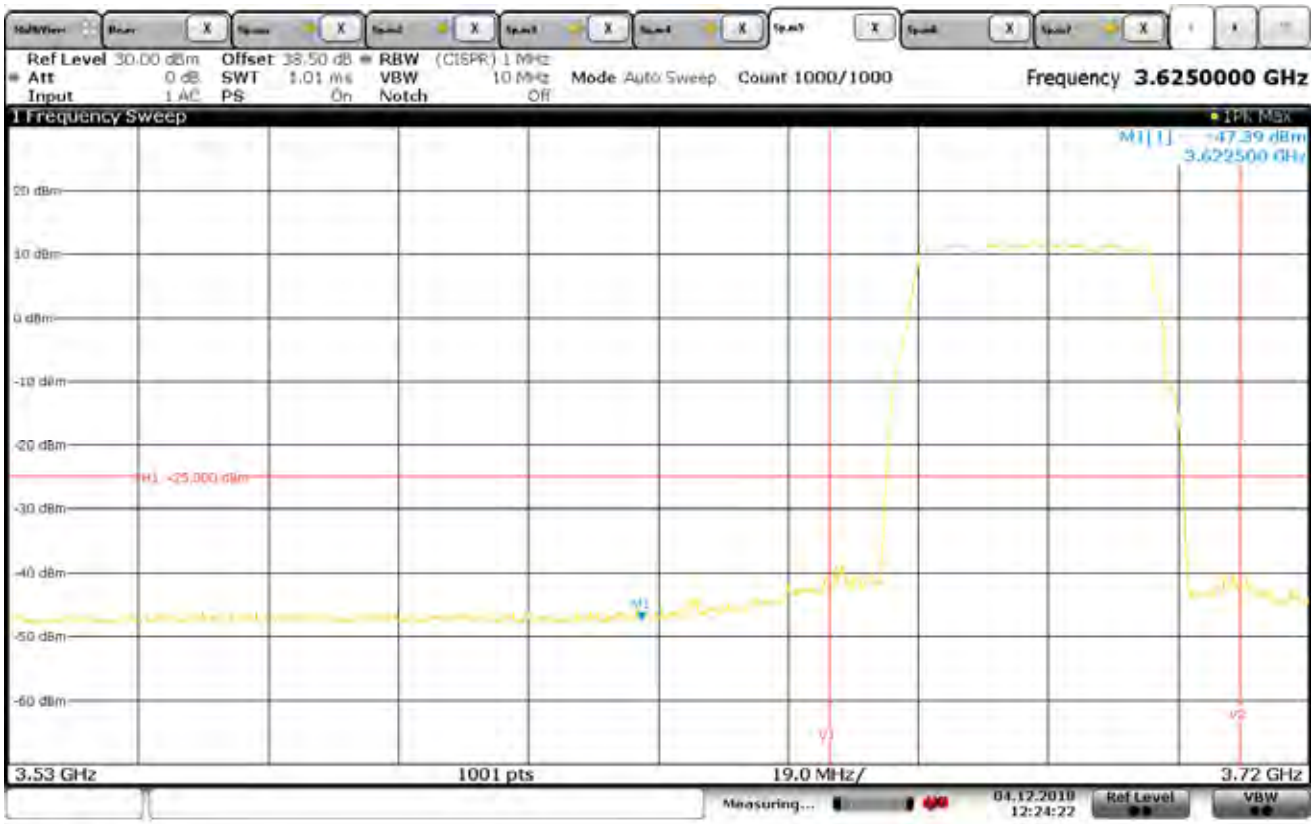

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3680MHz, 40MHz Channel, Channel A
NOTES	: V1- Greater than 10MHz below assigned channel = 3650MHz
	: V2- Greater than 10MHz above assigned channel = 3710MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

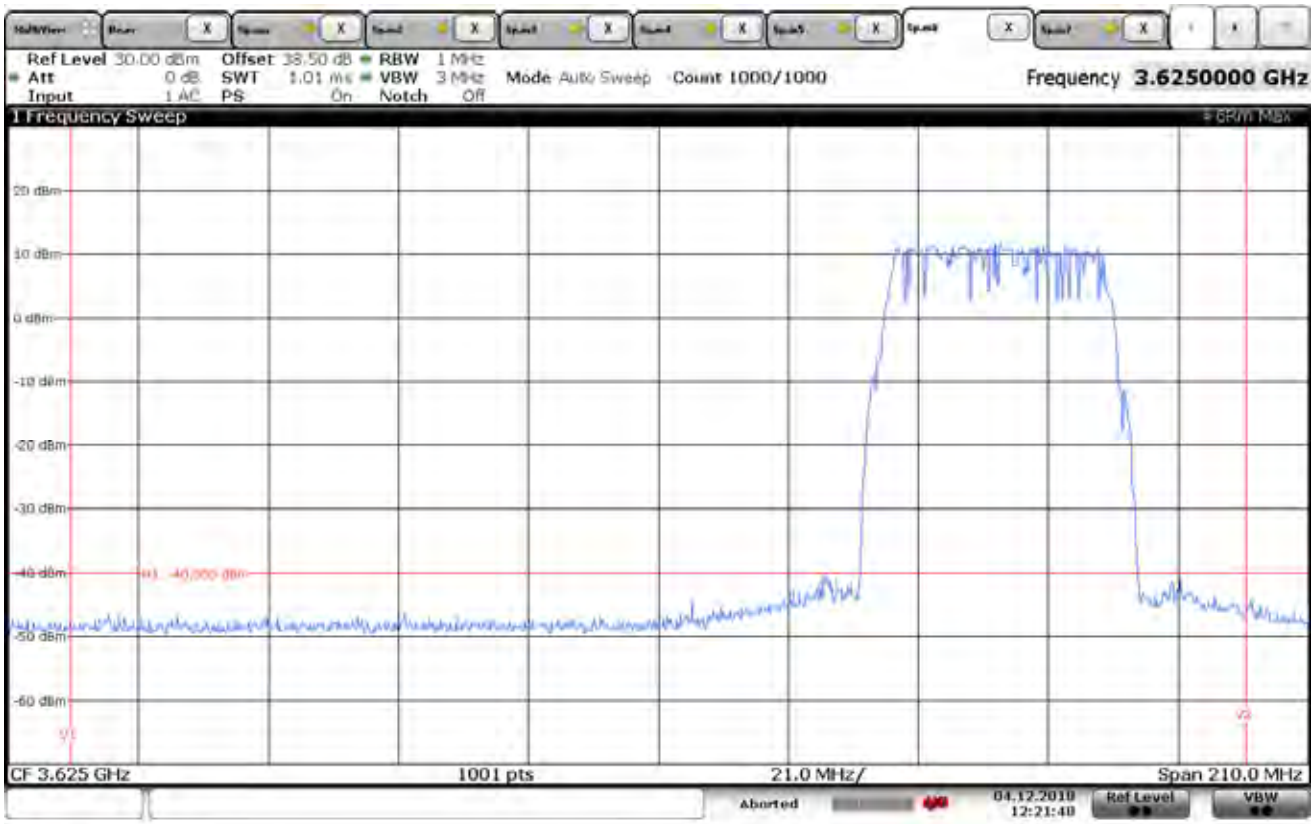

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Emissions outside the fundamental
DATE : December 3, 2018
MODE : Transmit at 3680MHz, 40MHz Channel, Channel A
NOTES : V1- 3530MHz
: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

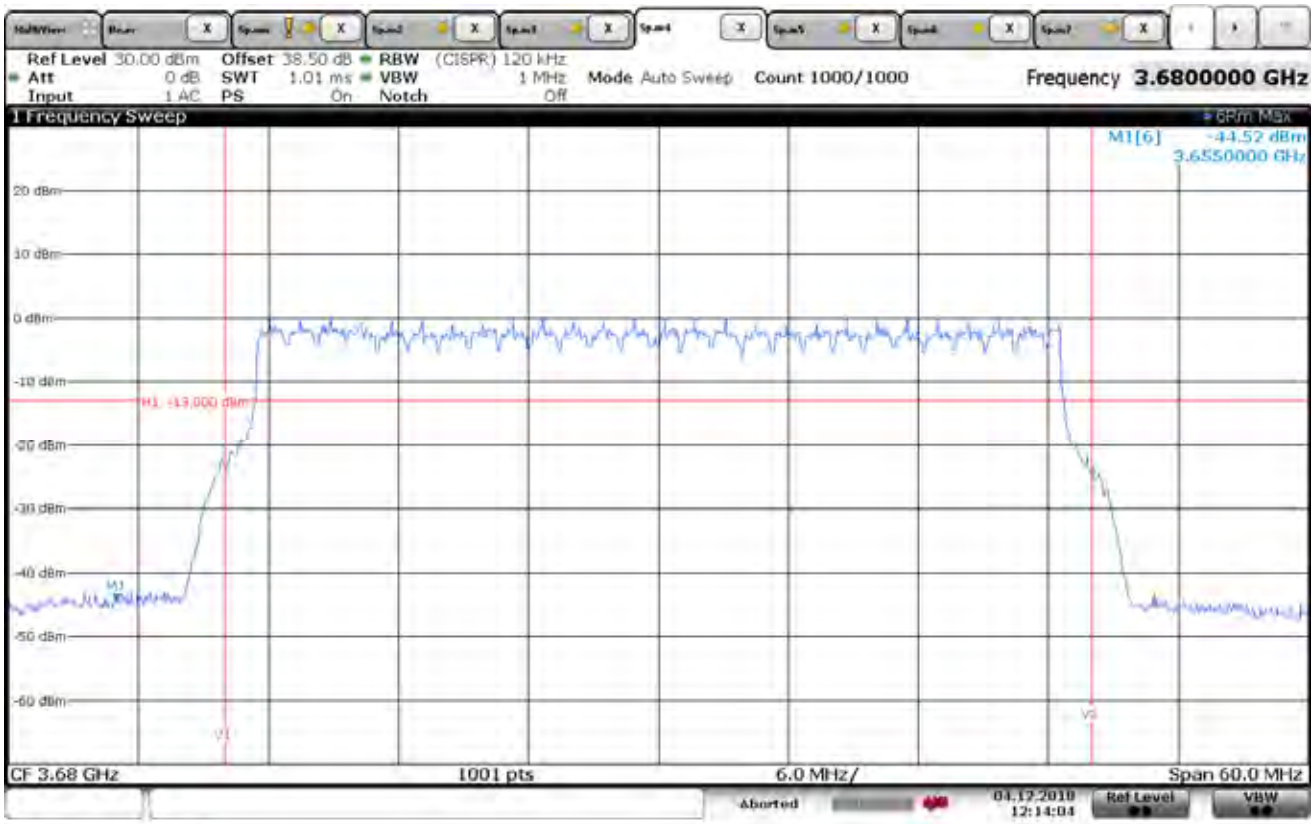

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3680MHz, 40MHz Channel, Channel B
NOTES	: V1- low edge of the assigned channel minus 20MHz = 3660MHz
	: V2- high edge of the assigned channel plus 20MHz = 3700MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

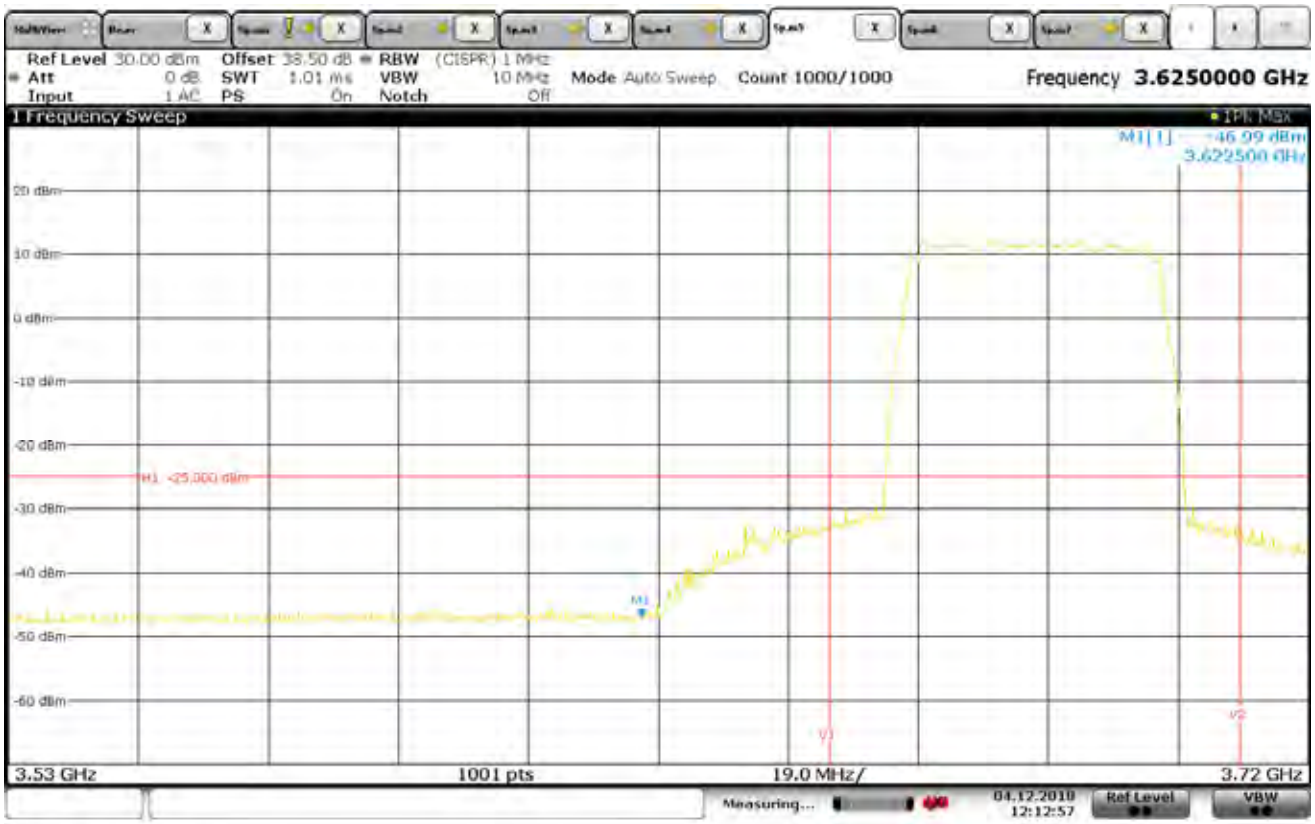

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3680MHz, 40MHz Channel, Channel B
NOTES	: V1- Greater than 10MHz below assigned channel = 3650MHz
	: V2- Greater than 10MHz above assigned channel = 3710MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

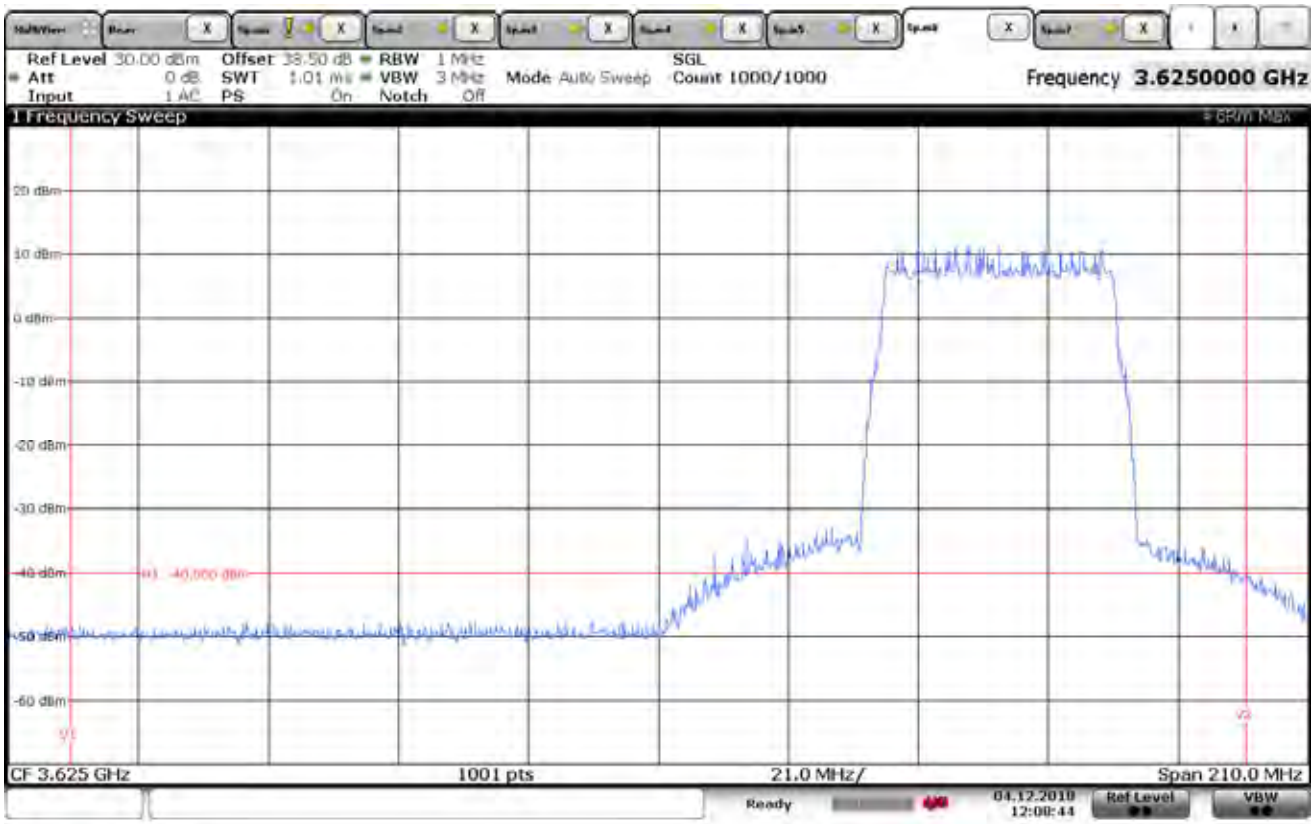

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Emissions outside the fundamental
DATE	: December 3, 2018
MODE	: Transmit at 3680MHz, 40MHz Channel, Channel B
NOTES	: V1- 3530MHz
	: V2- 3720MHz

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

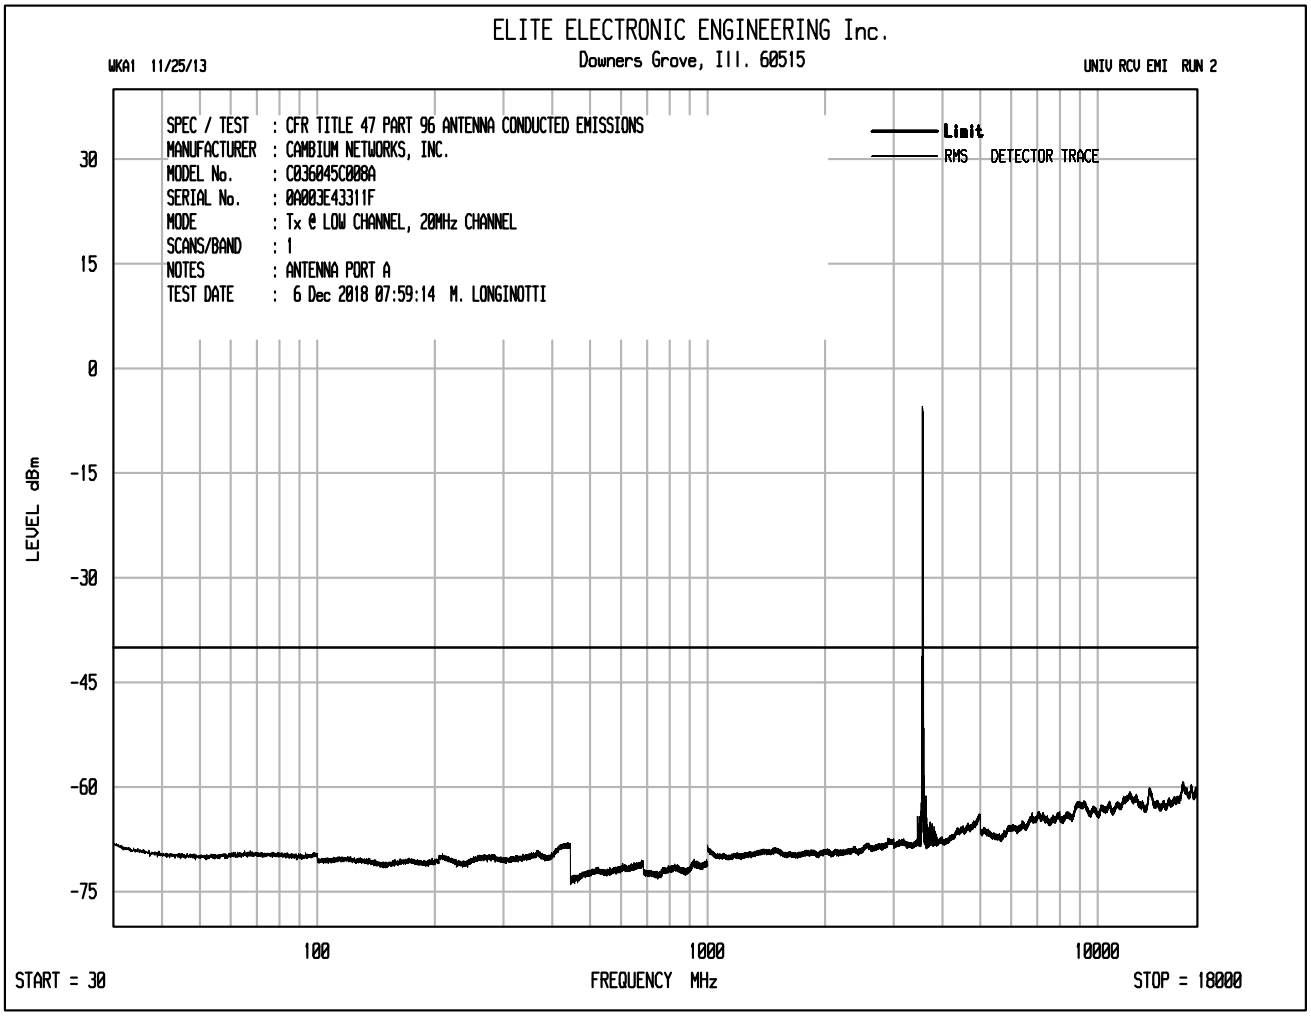
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 2
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 07:59:14 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

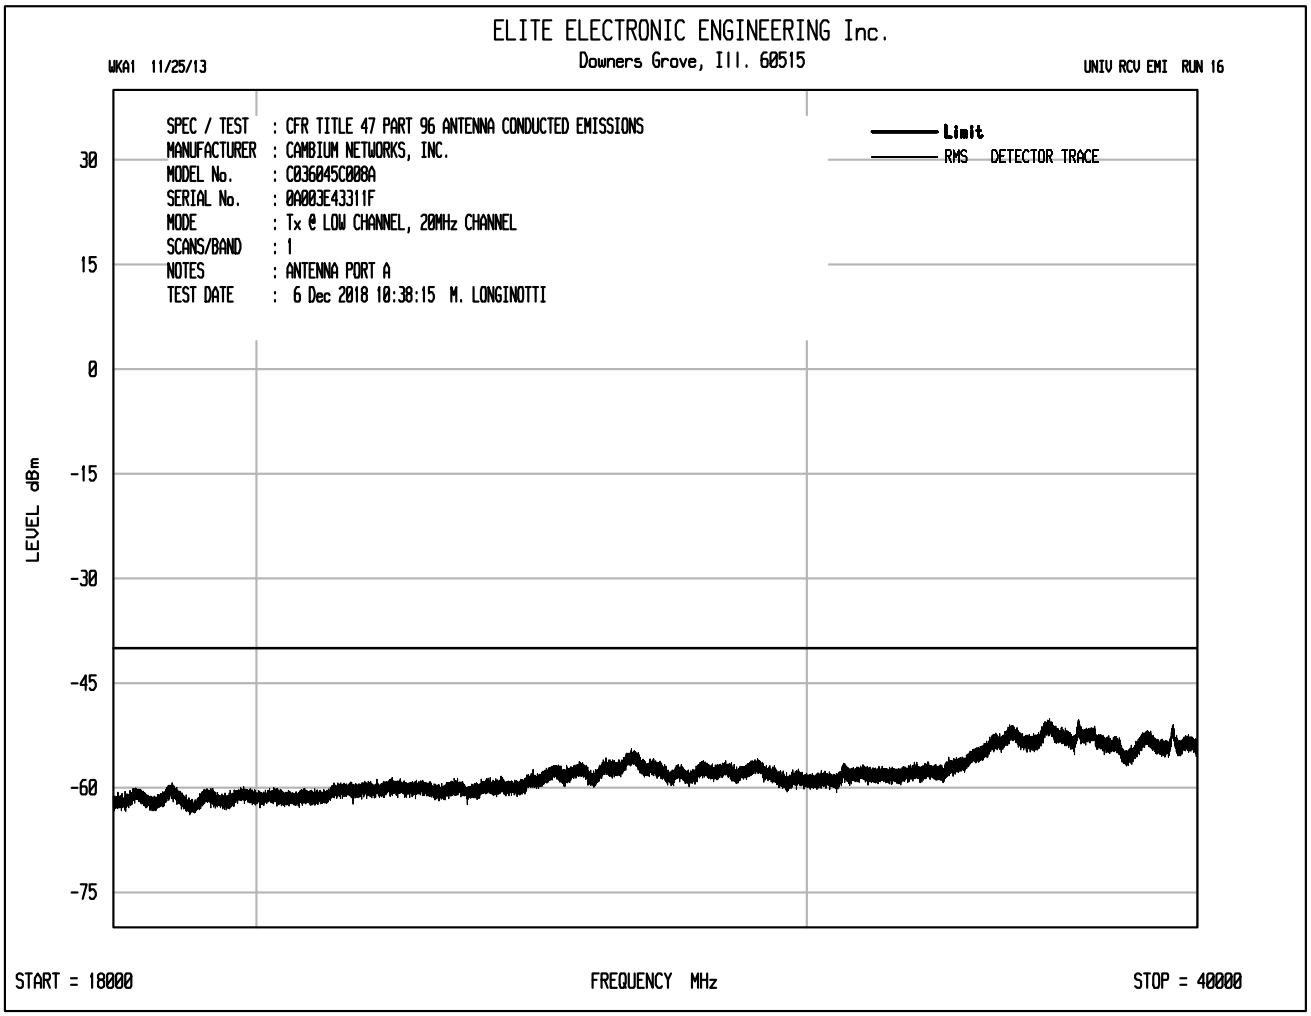
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 16
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 10:38:15 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

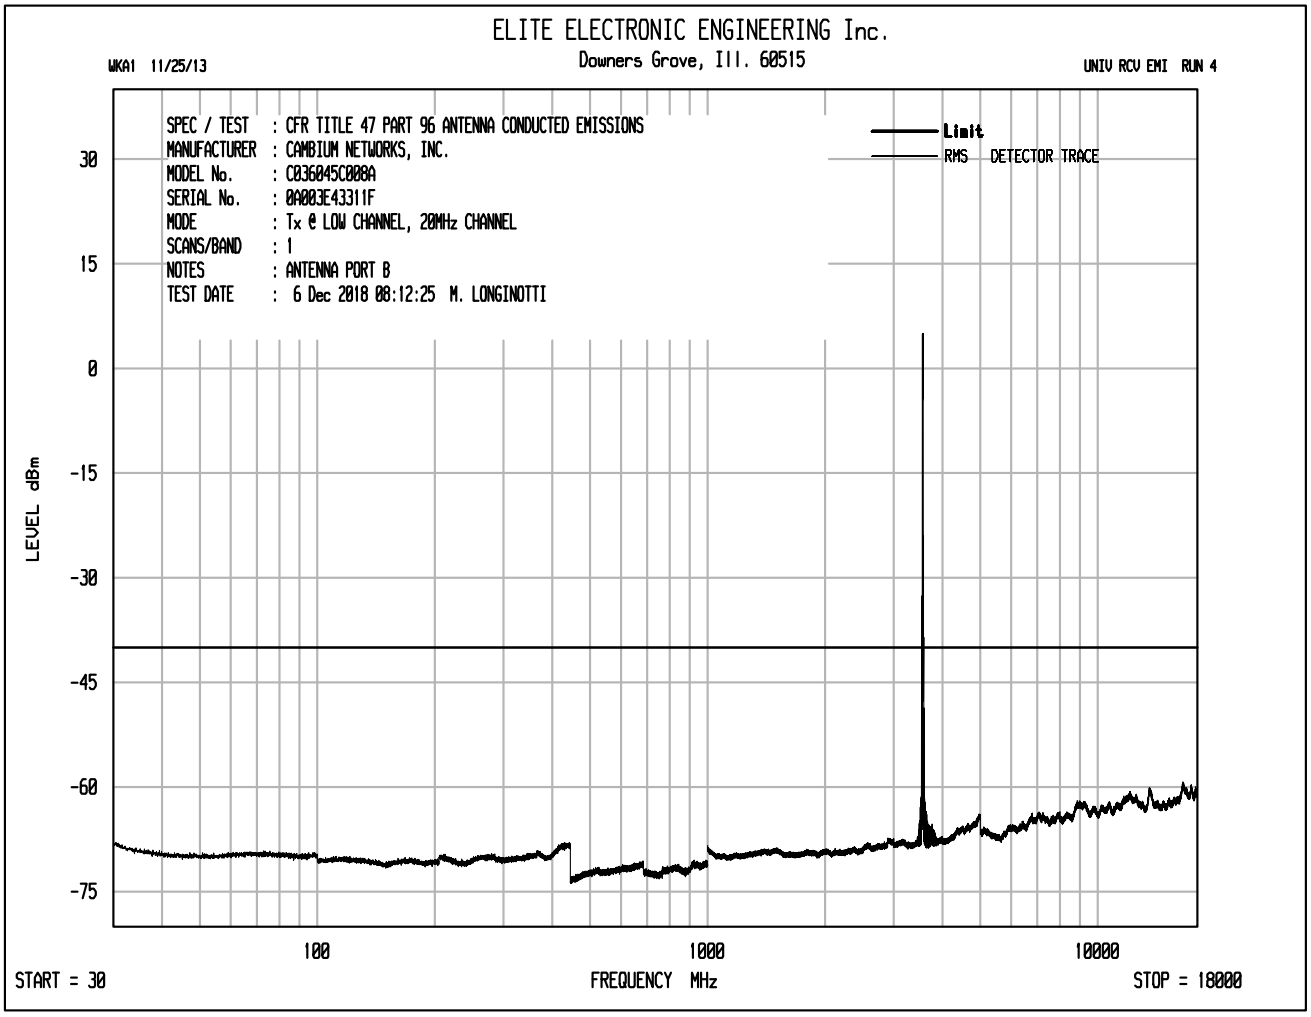
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 4
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 08:12:25 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

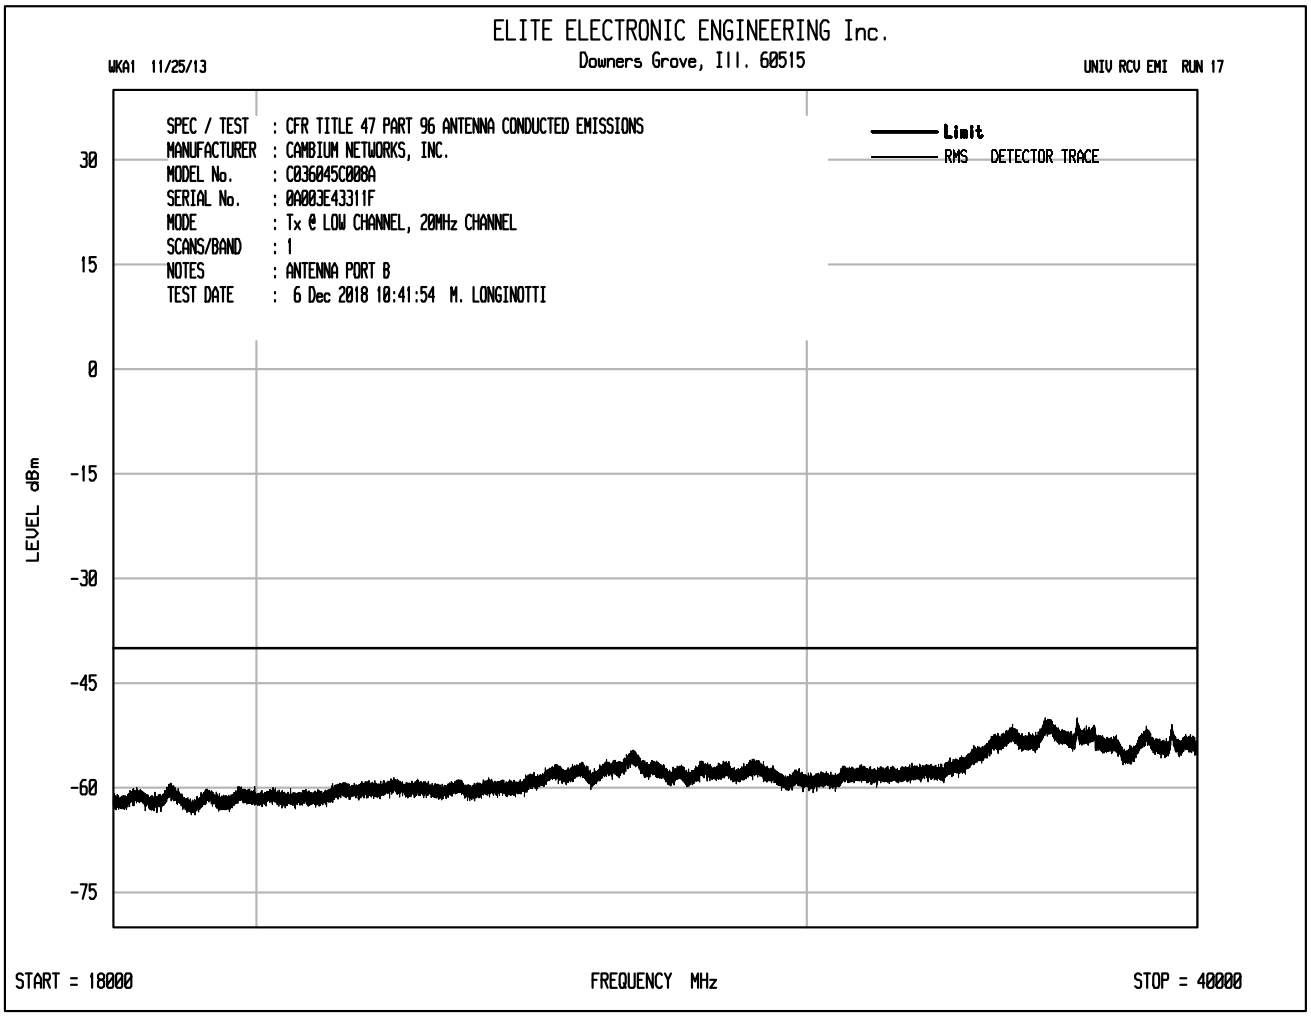
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 17
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 10:41:54 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

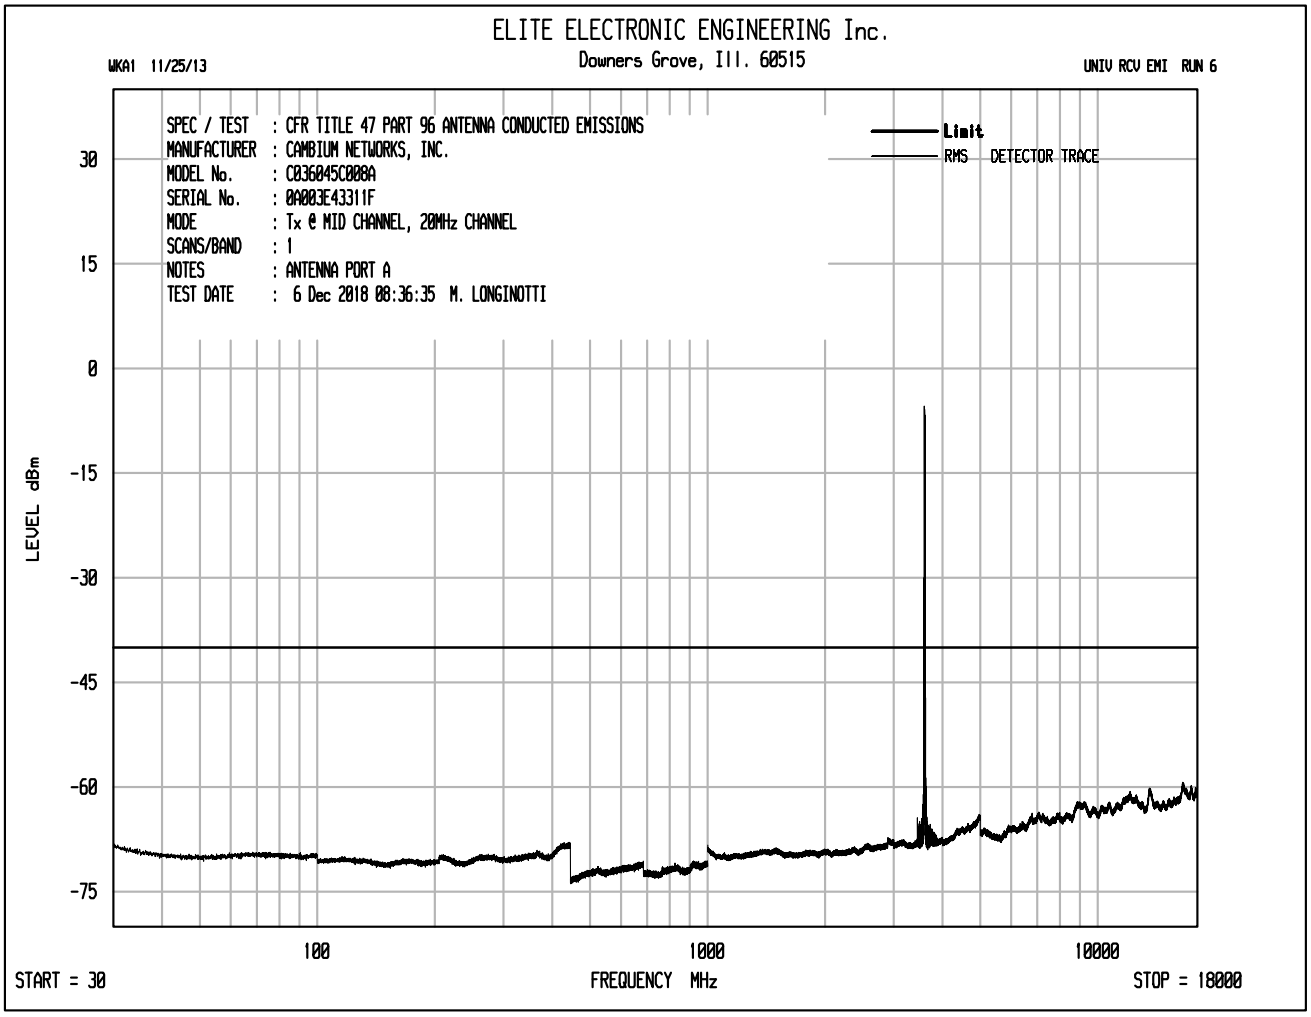
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 6
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 08:36:35 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

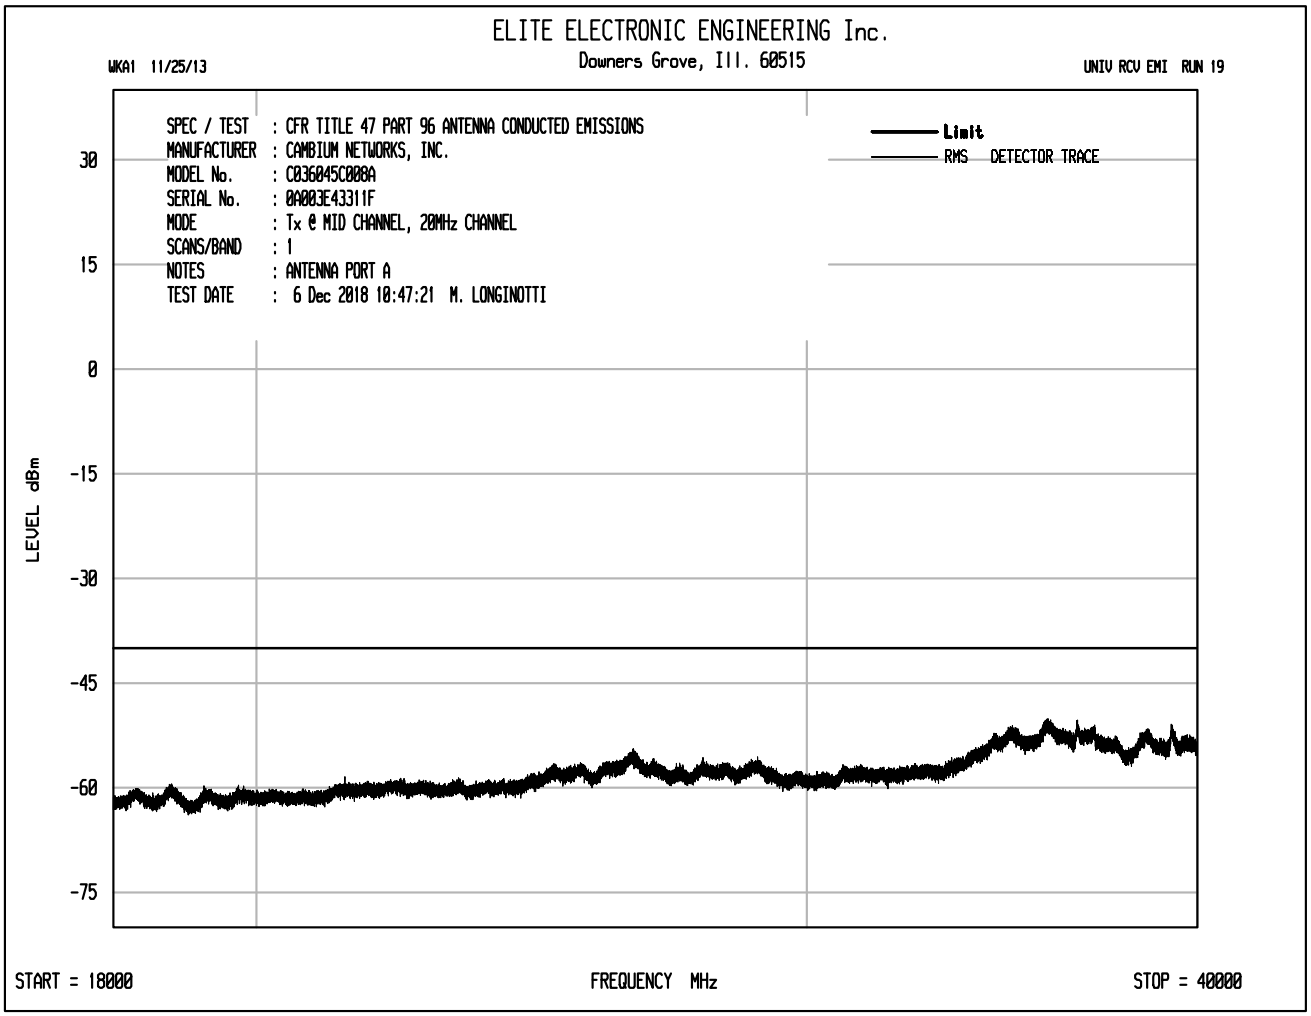
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 19
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 10:47:21 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

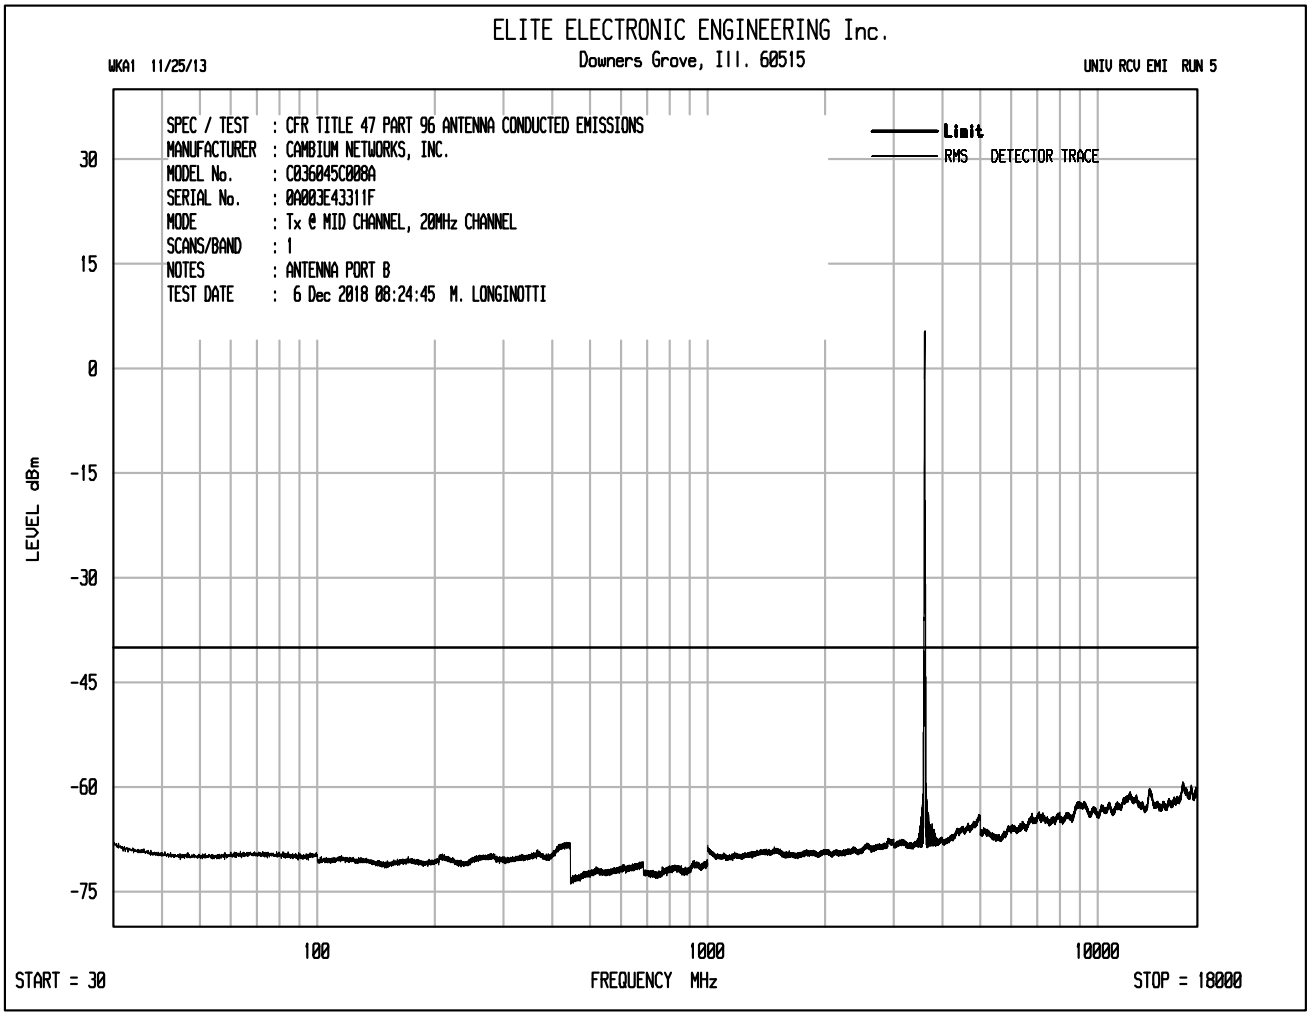
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 5
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 08:24:45 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

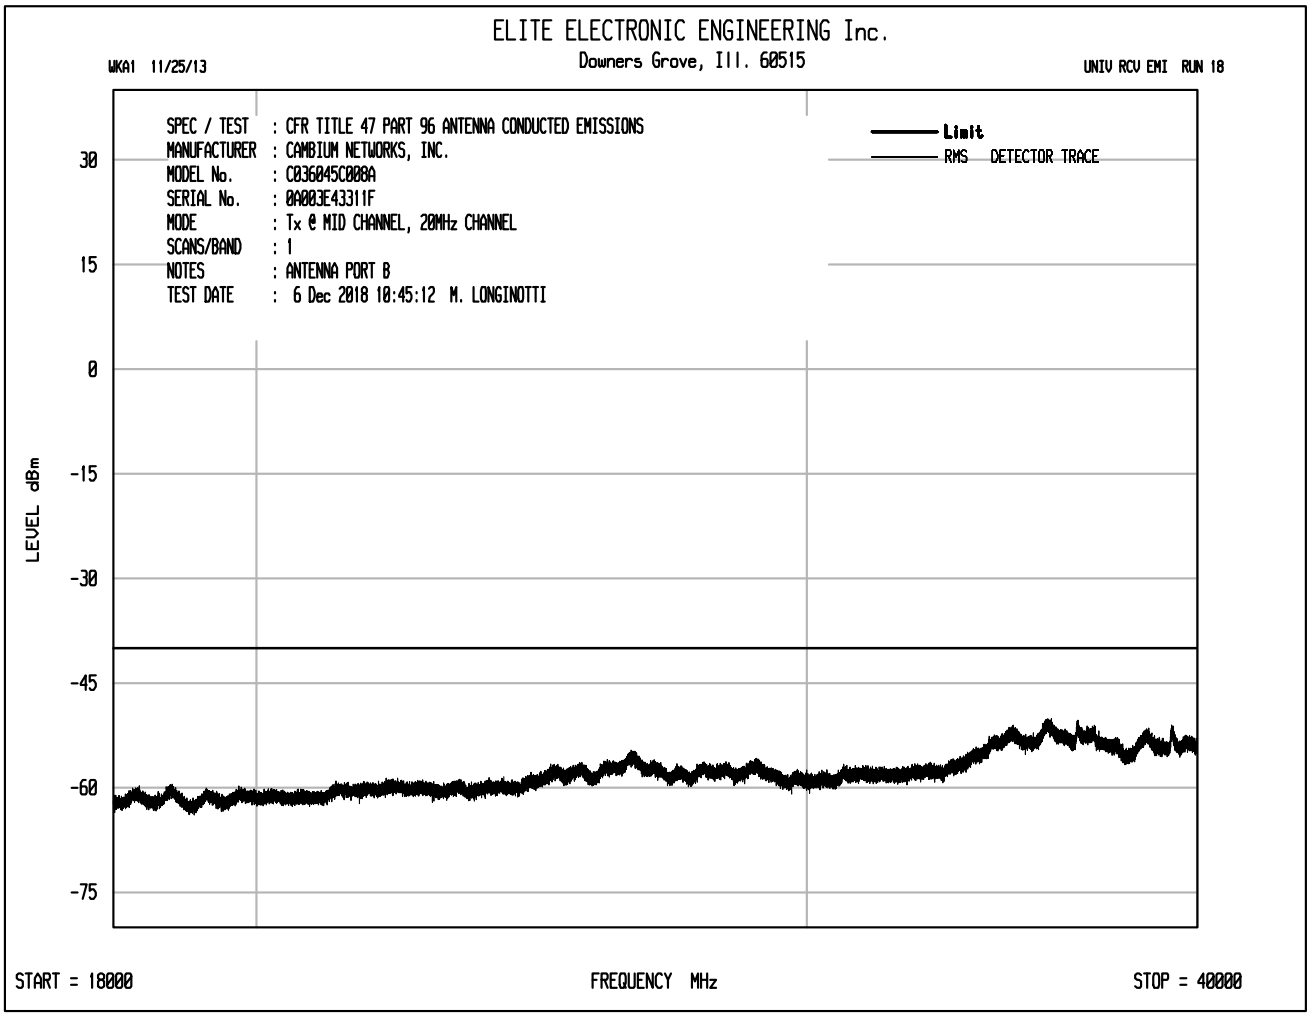
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 18
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 10:45:12 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

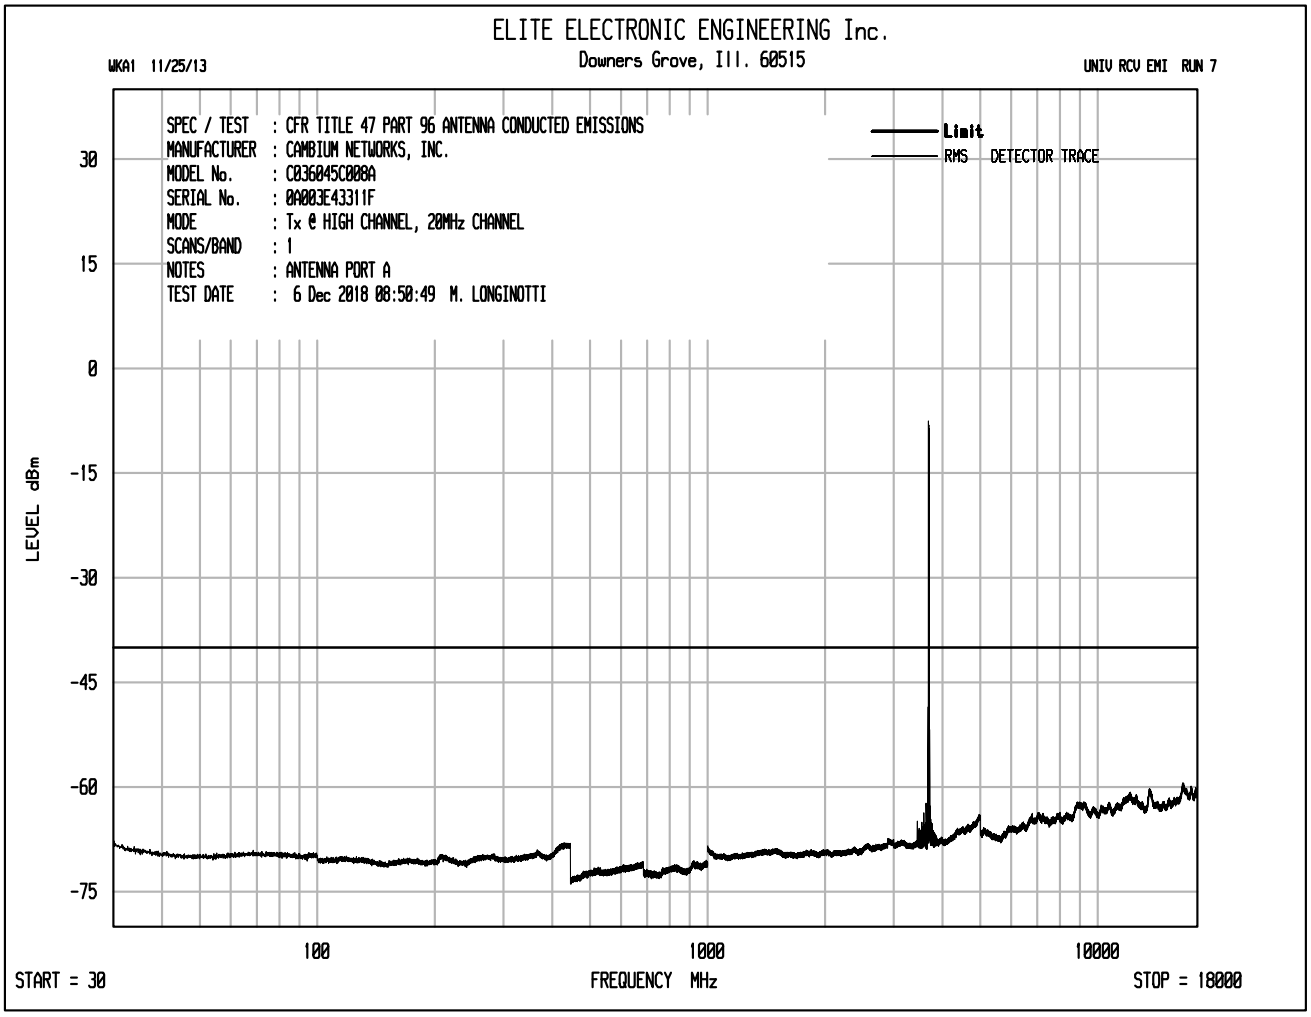
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 7
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 08:50:49 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

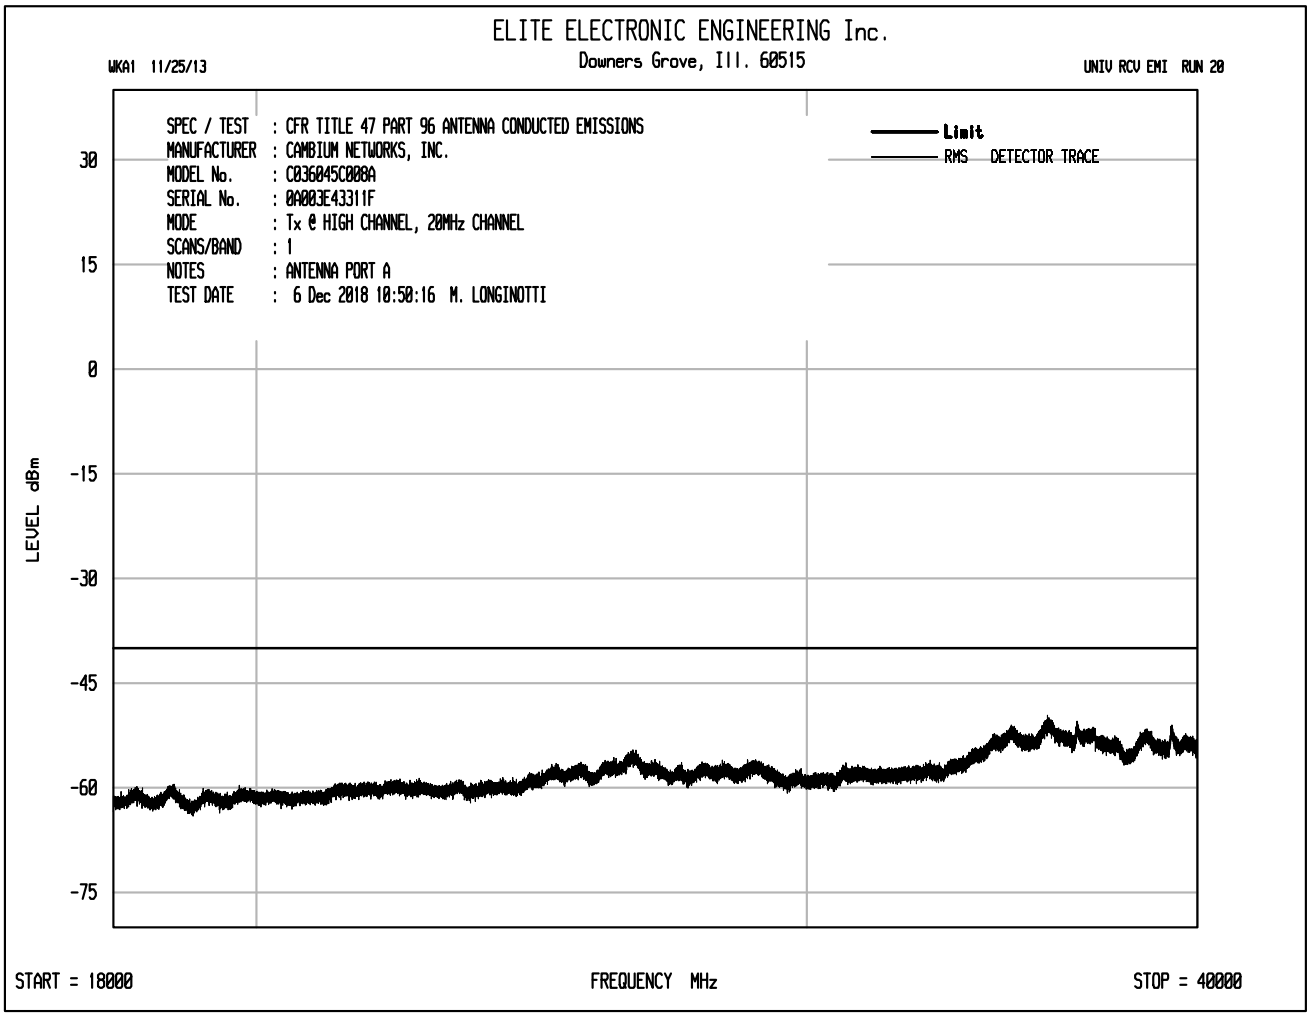
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 20
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 10:50:16 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

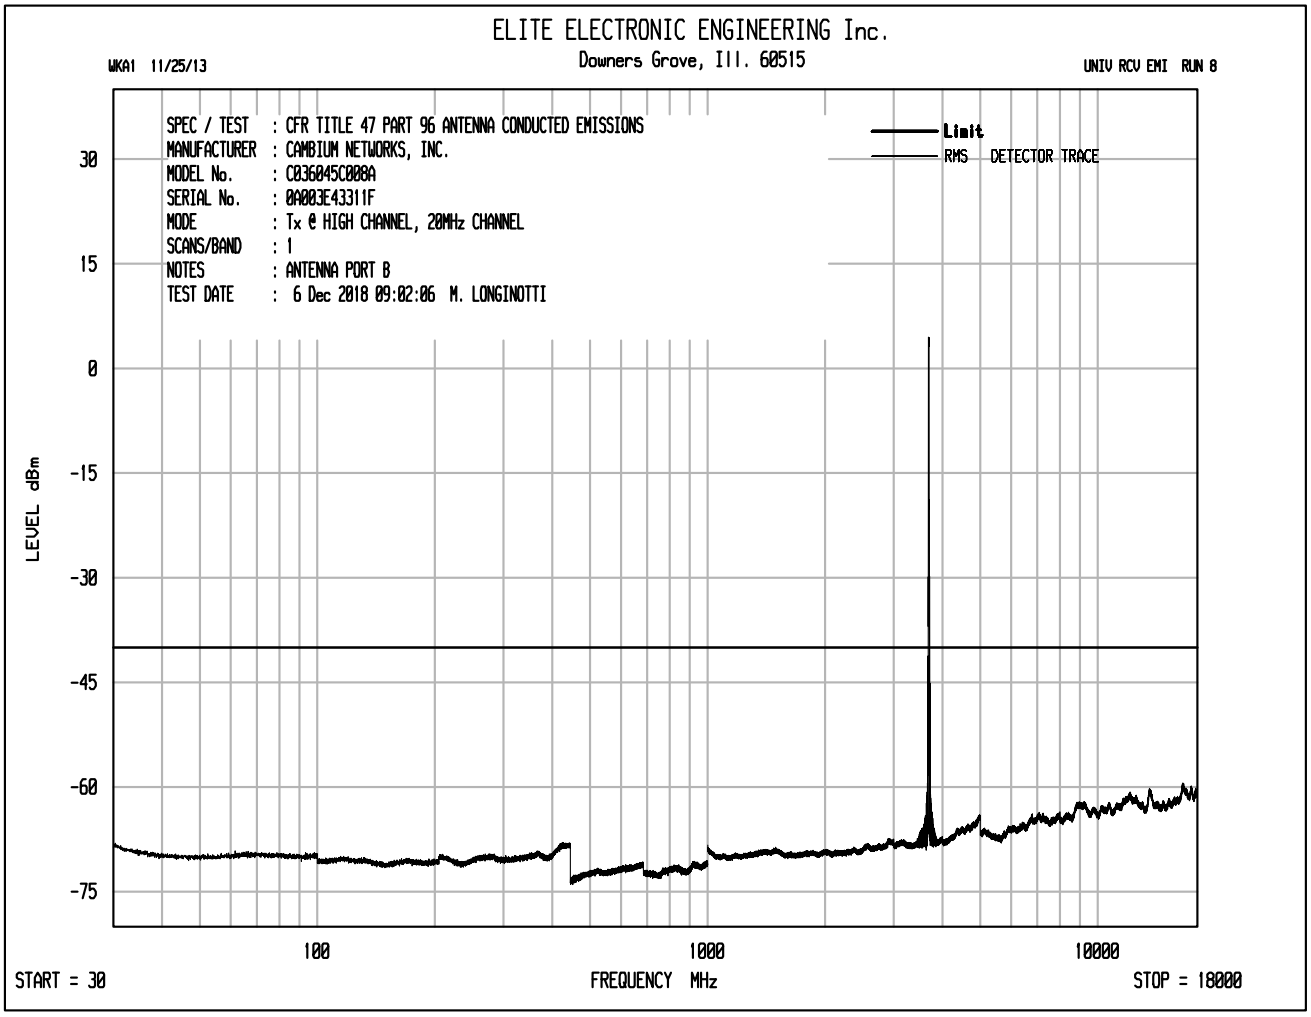
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 8
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 09:02:06 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

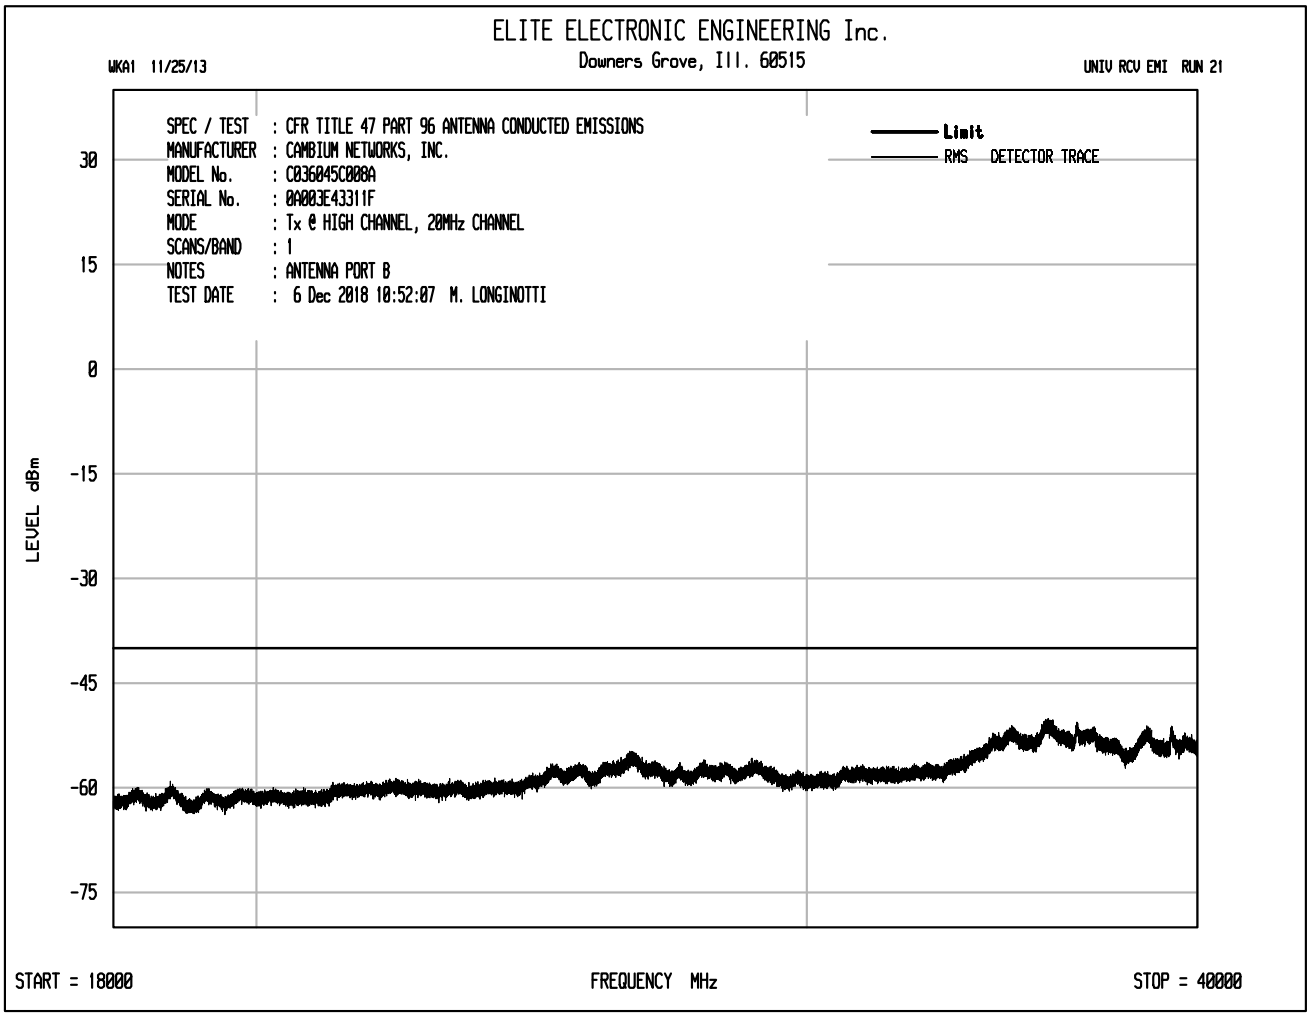
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 21
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL, 20MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 10:52:07 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

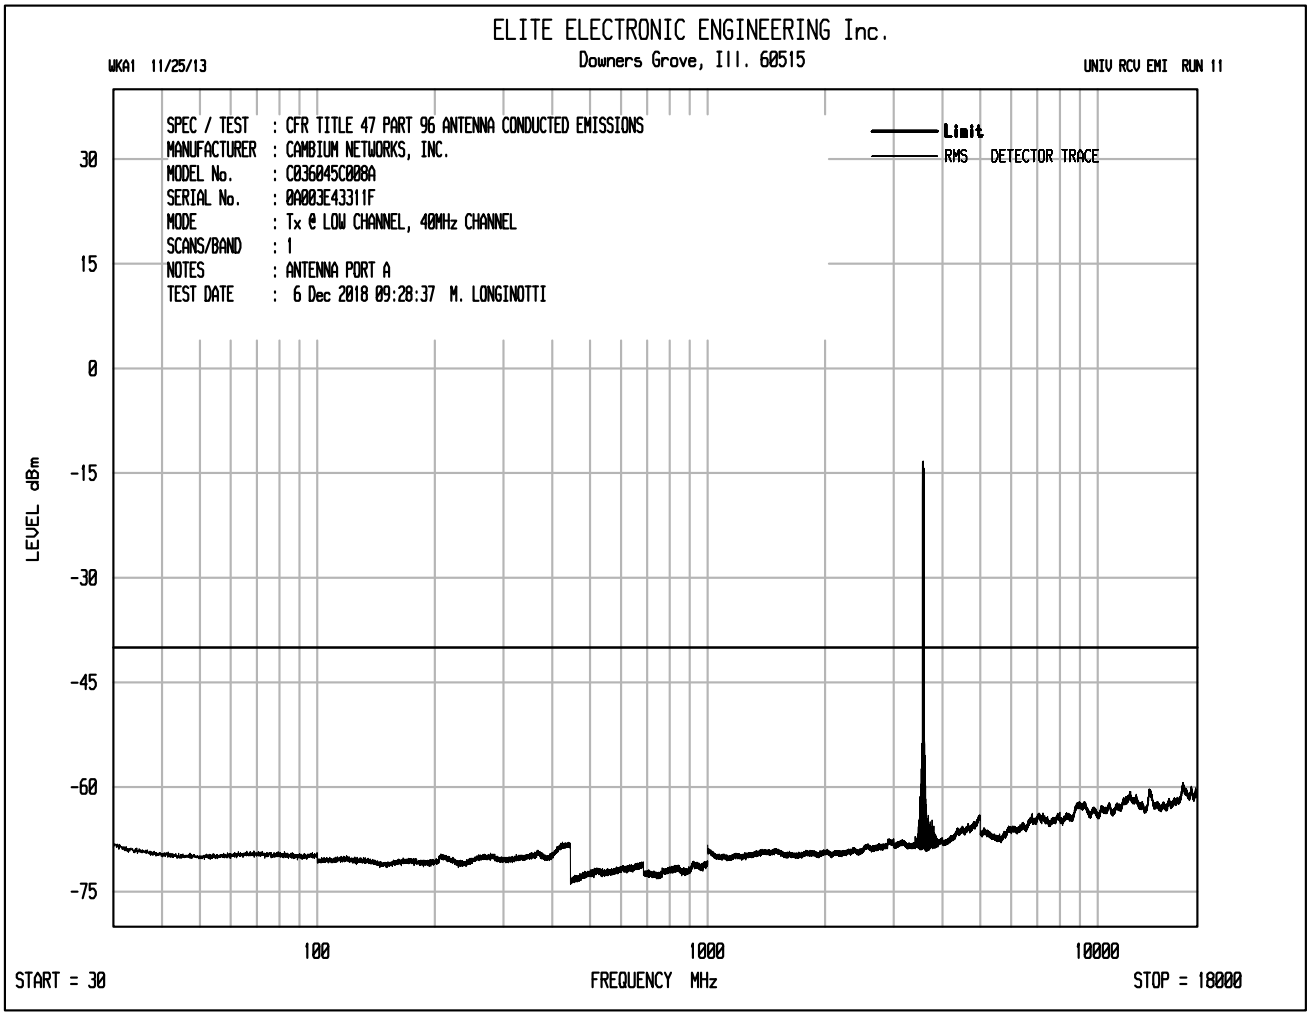
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 11
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 09:28:37 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

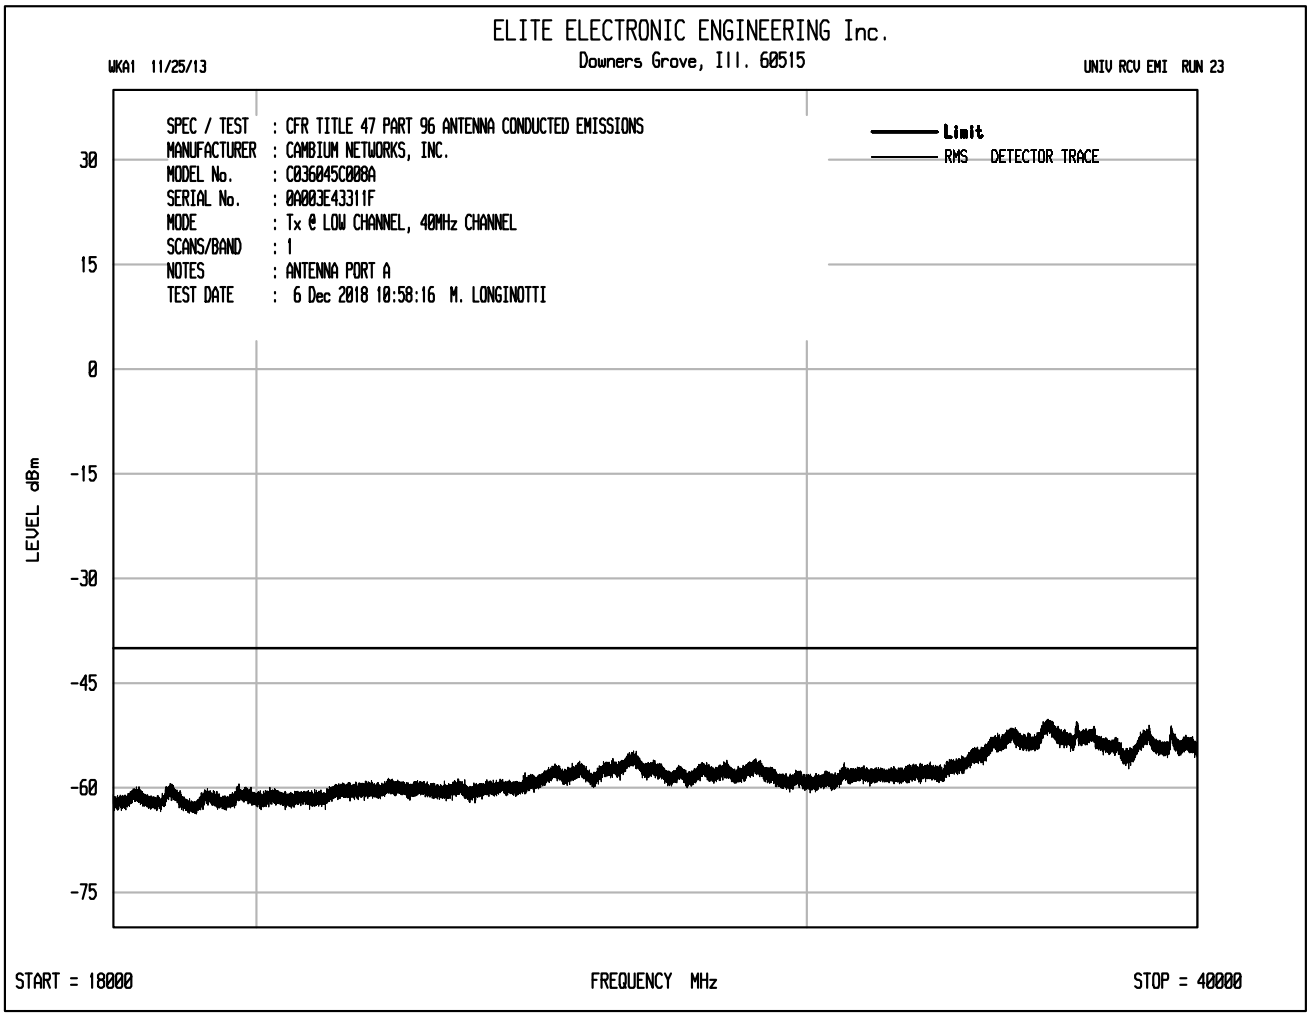
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 23
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 10:58:16 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

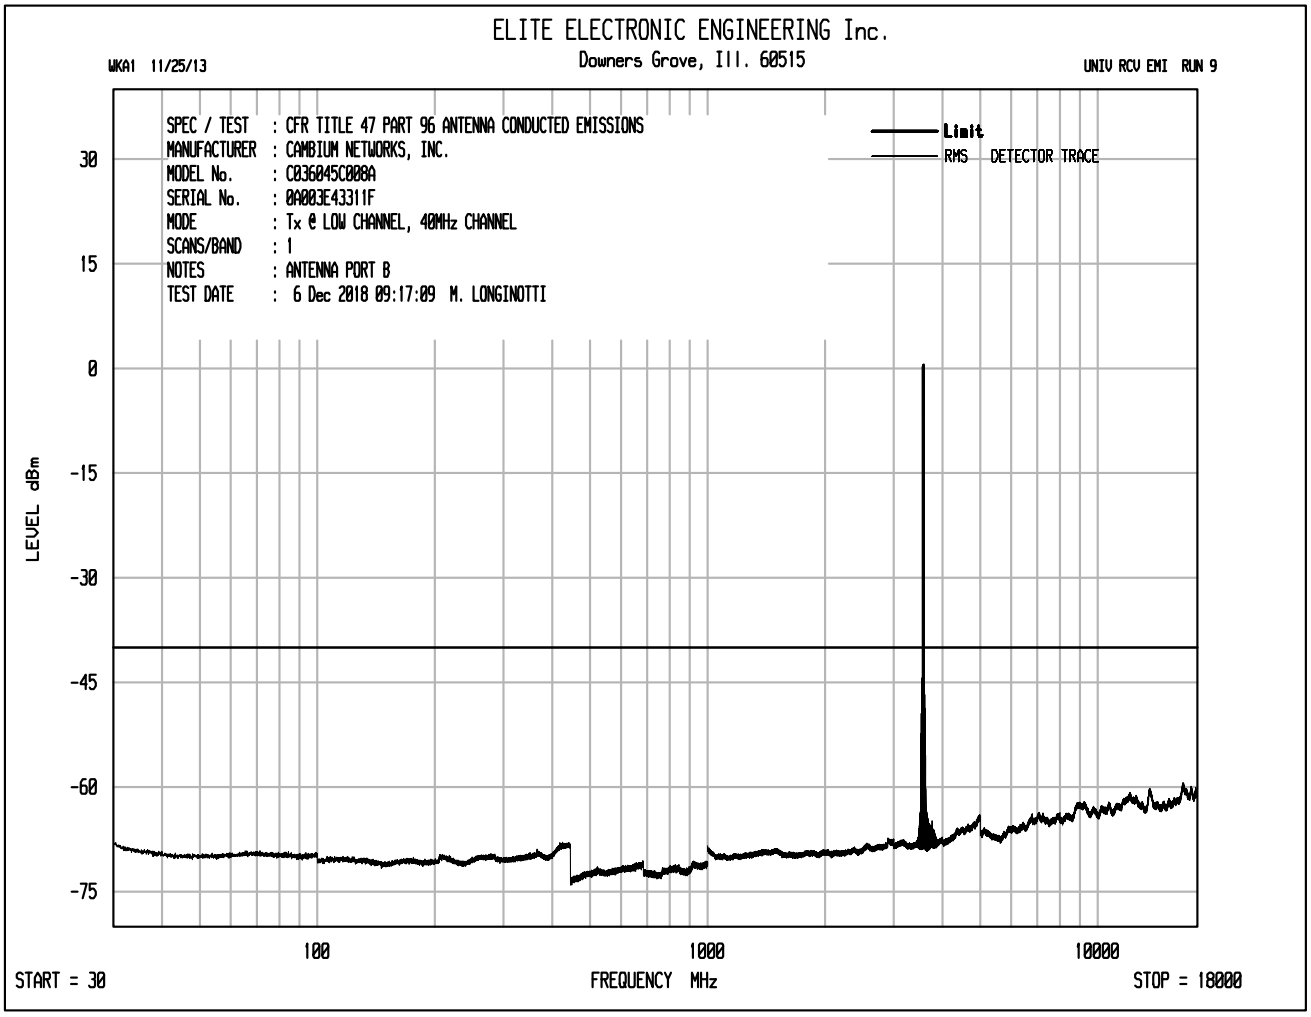
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 9
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 09:17:09 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

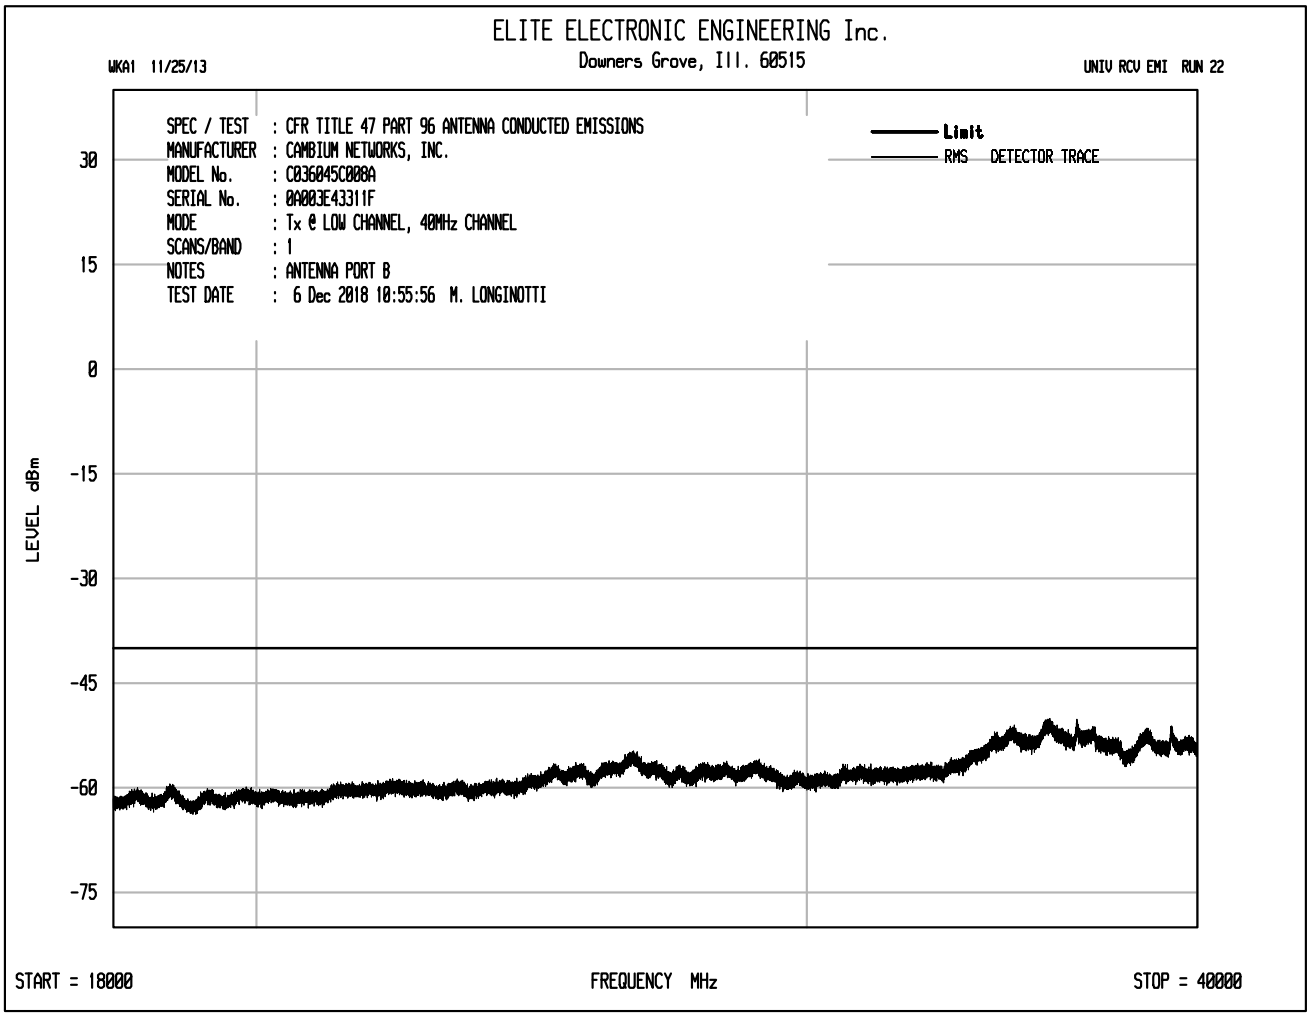
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 22
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 10:55:56 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

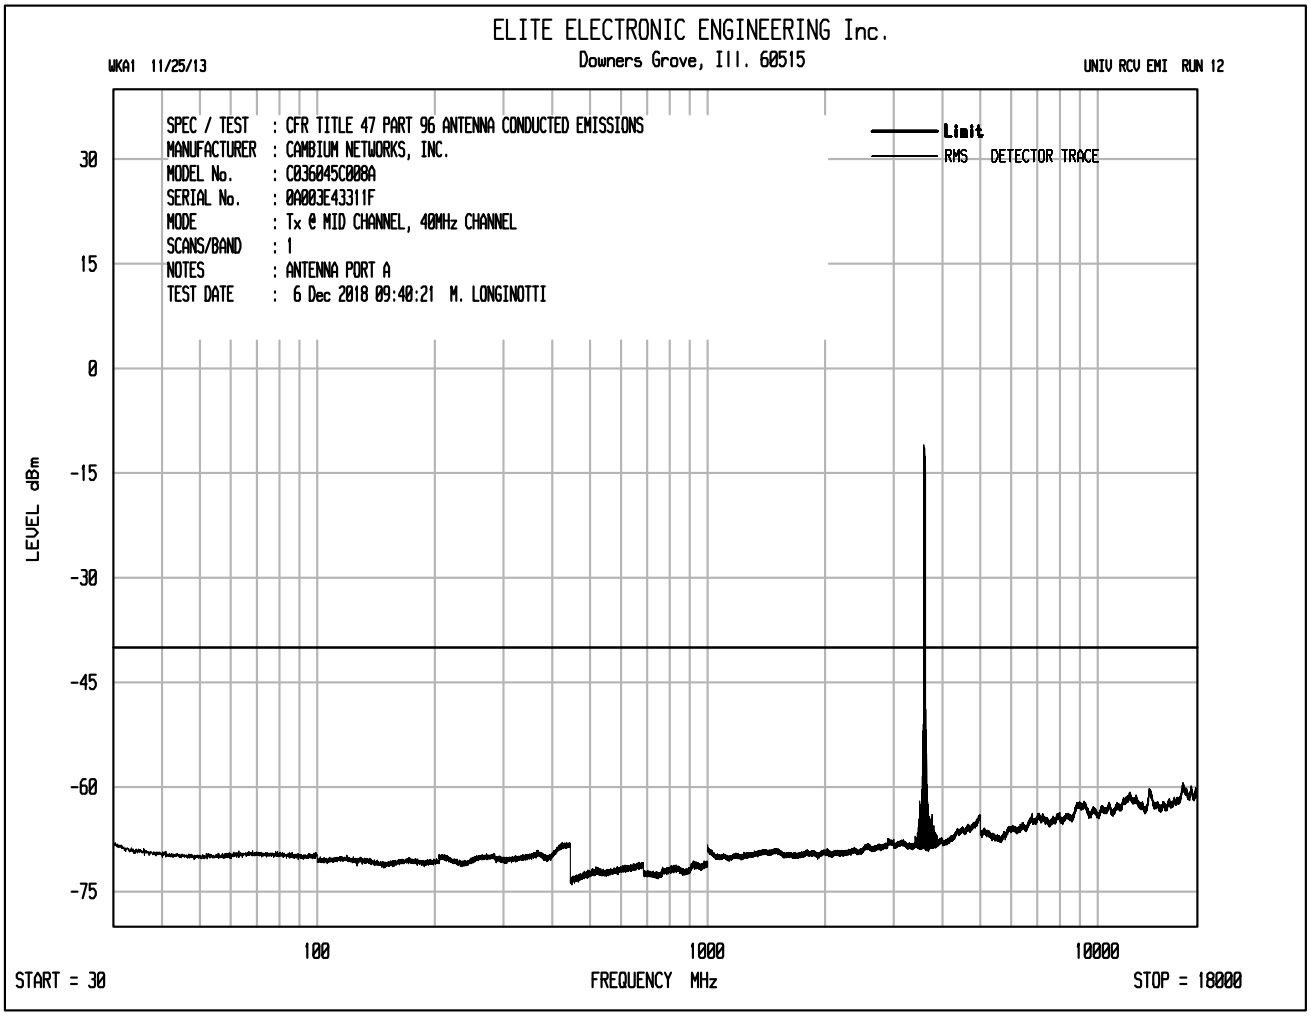
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 12
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 09:40:21 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

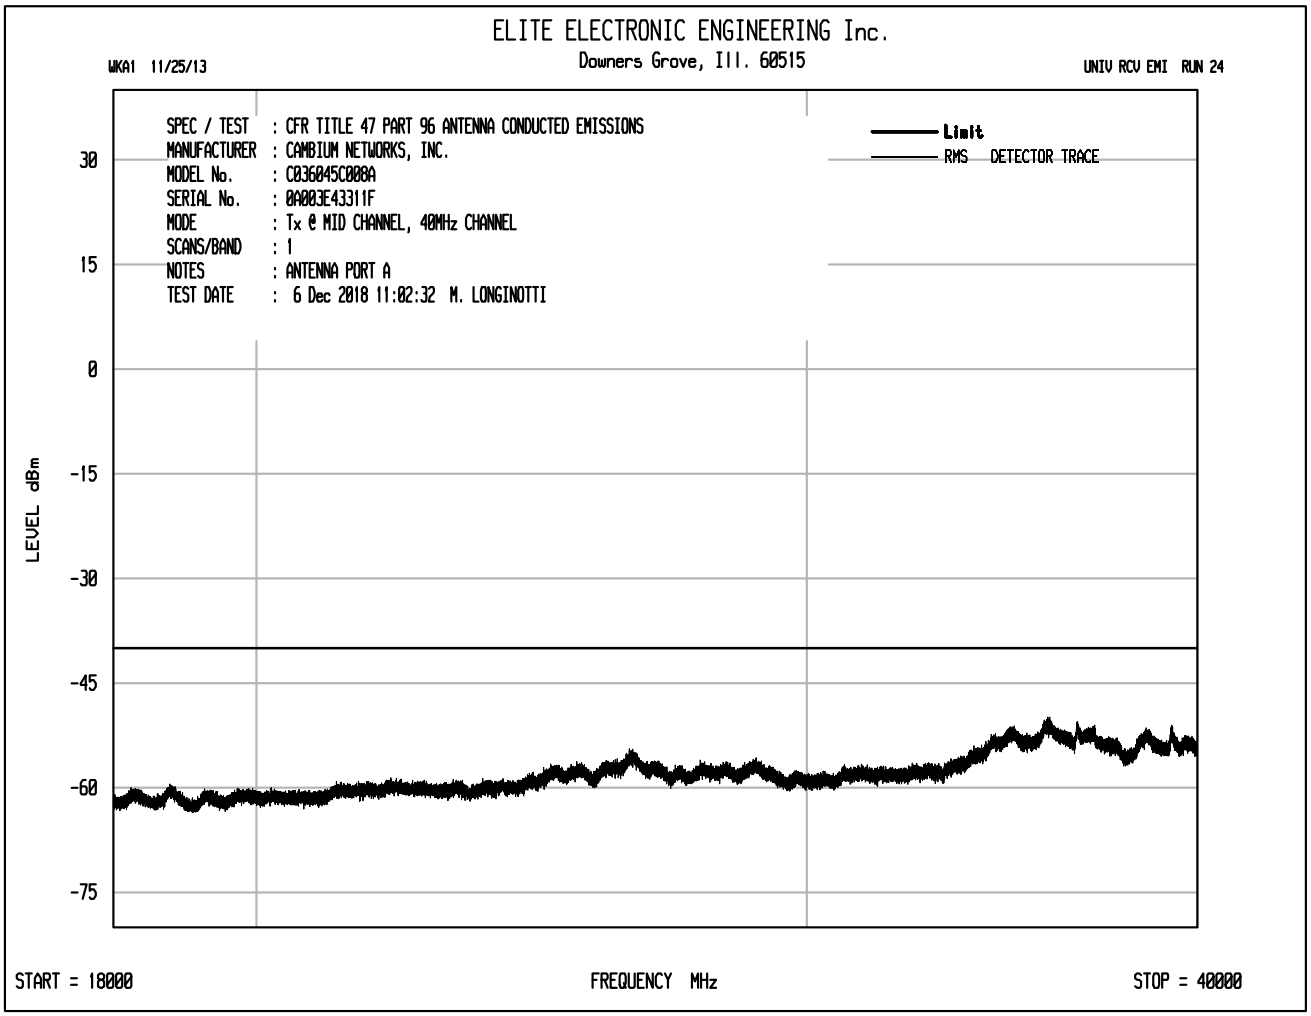
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 24
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 11:02:32 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

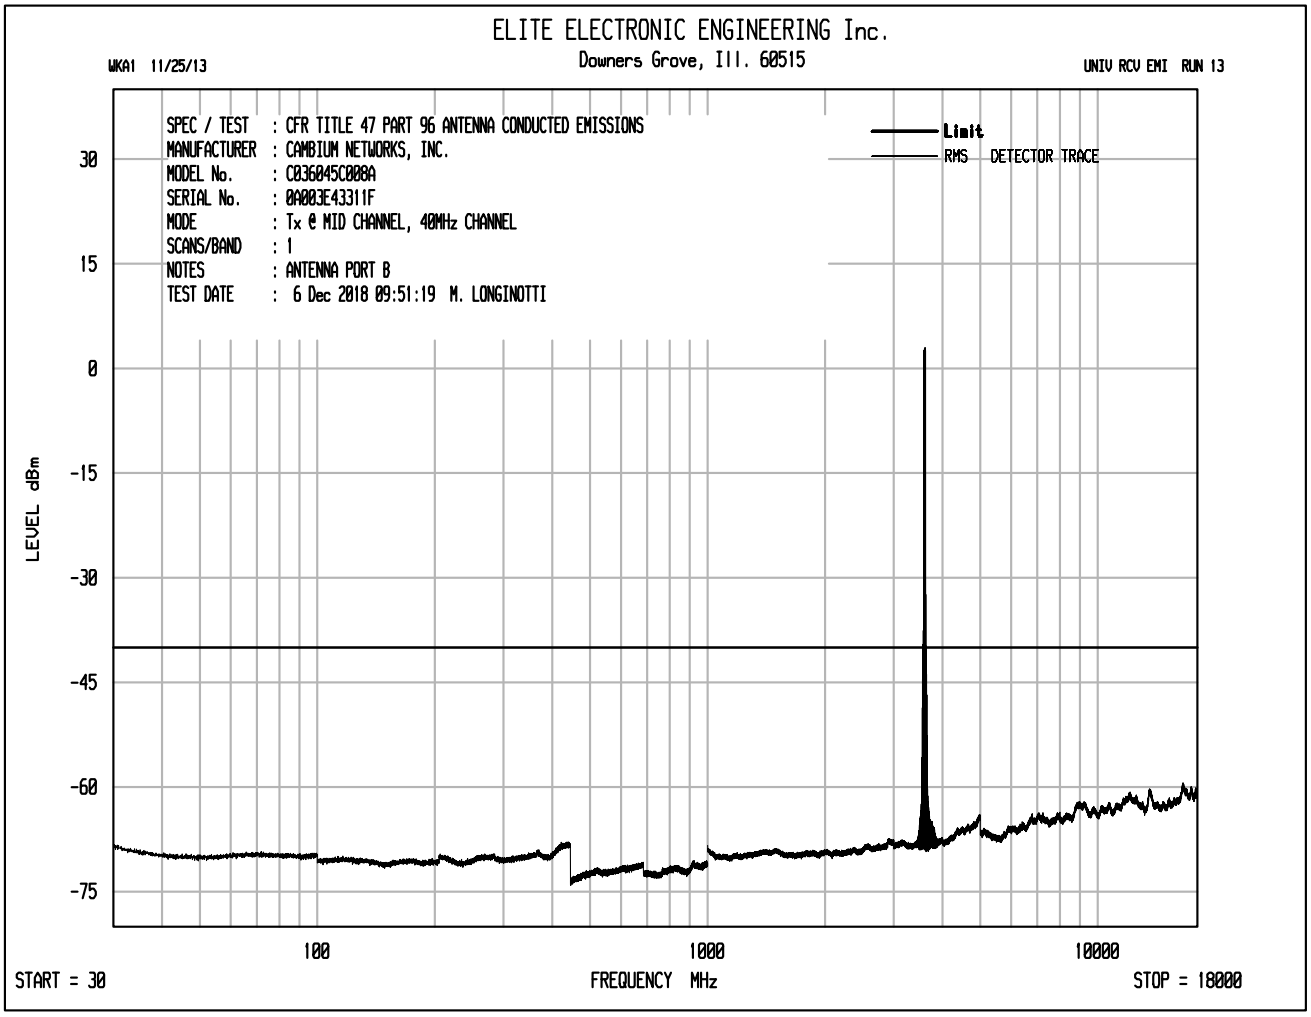
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 13
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 09:51:19 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

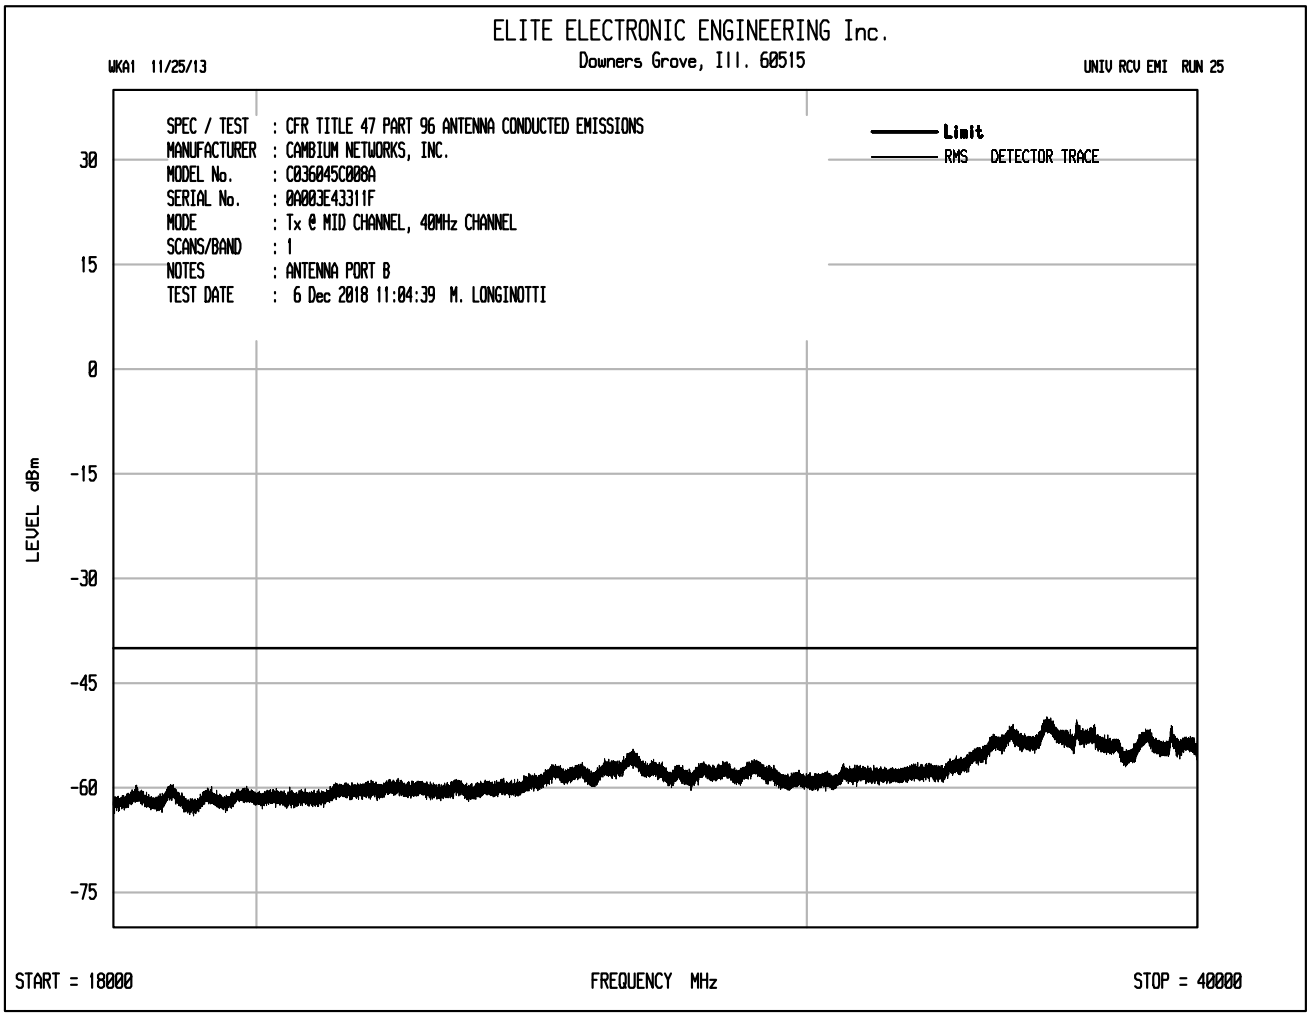
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 25
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 11:04:39 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
30
15
0
-15
-30
-45
-60
-75
LEVEL dBm
START = 18000
FREQUENCY MHz
STOP = 40000

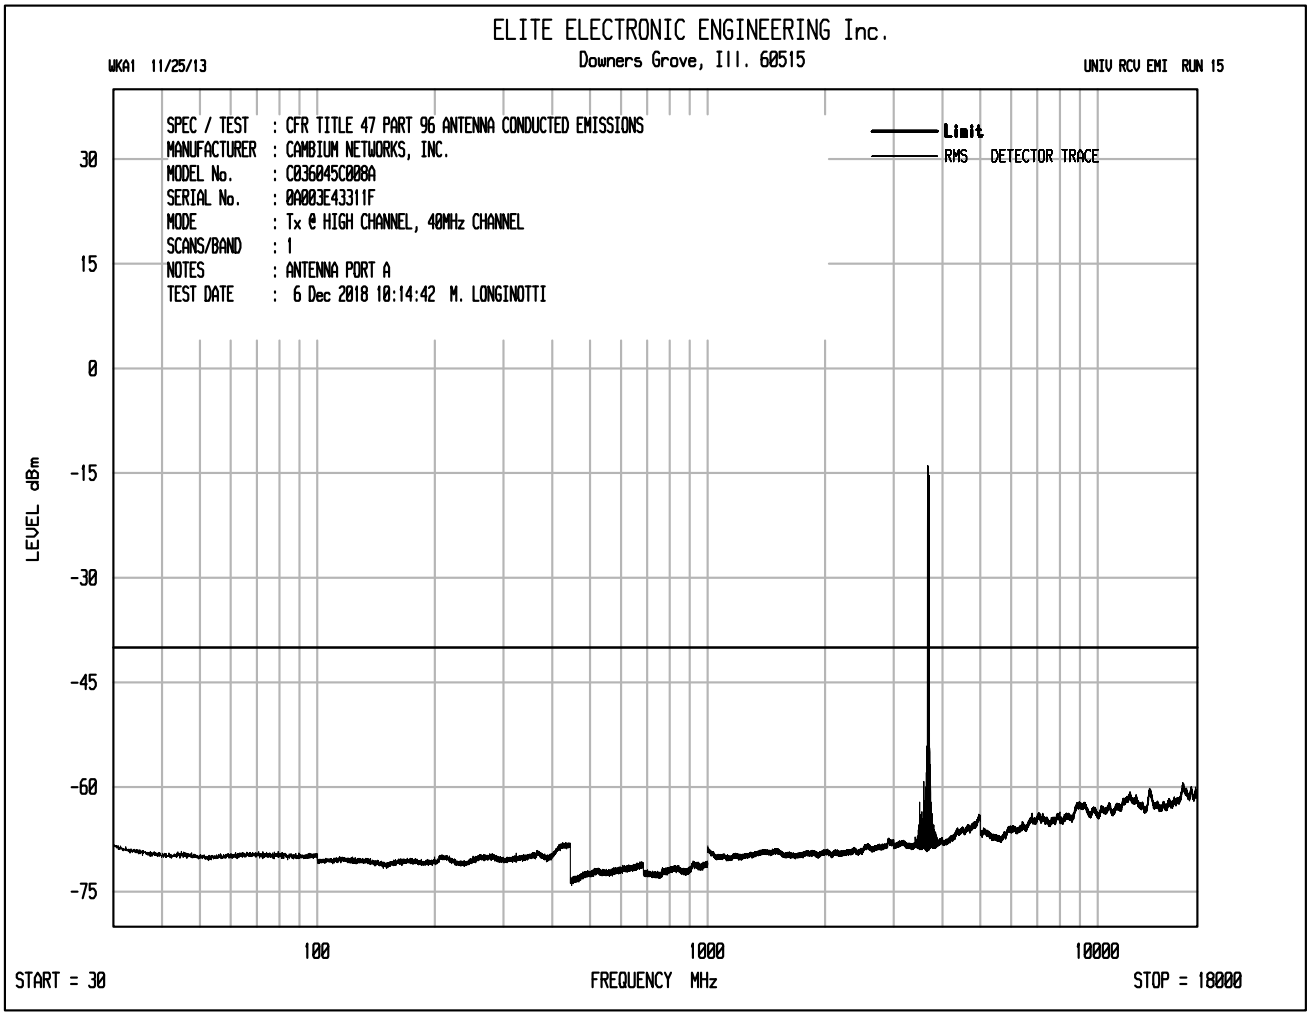
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 15
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 10:14:42 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

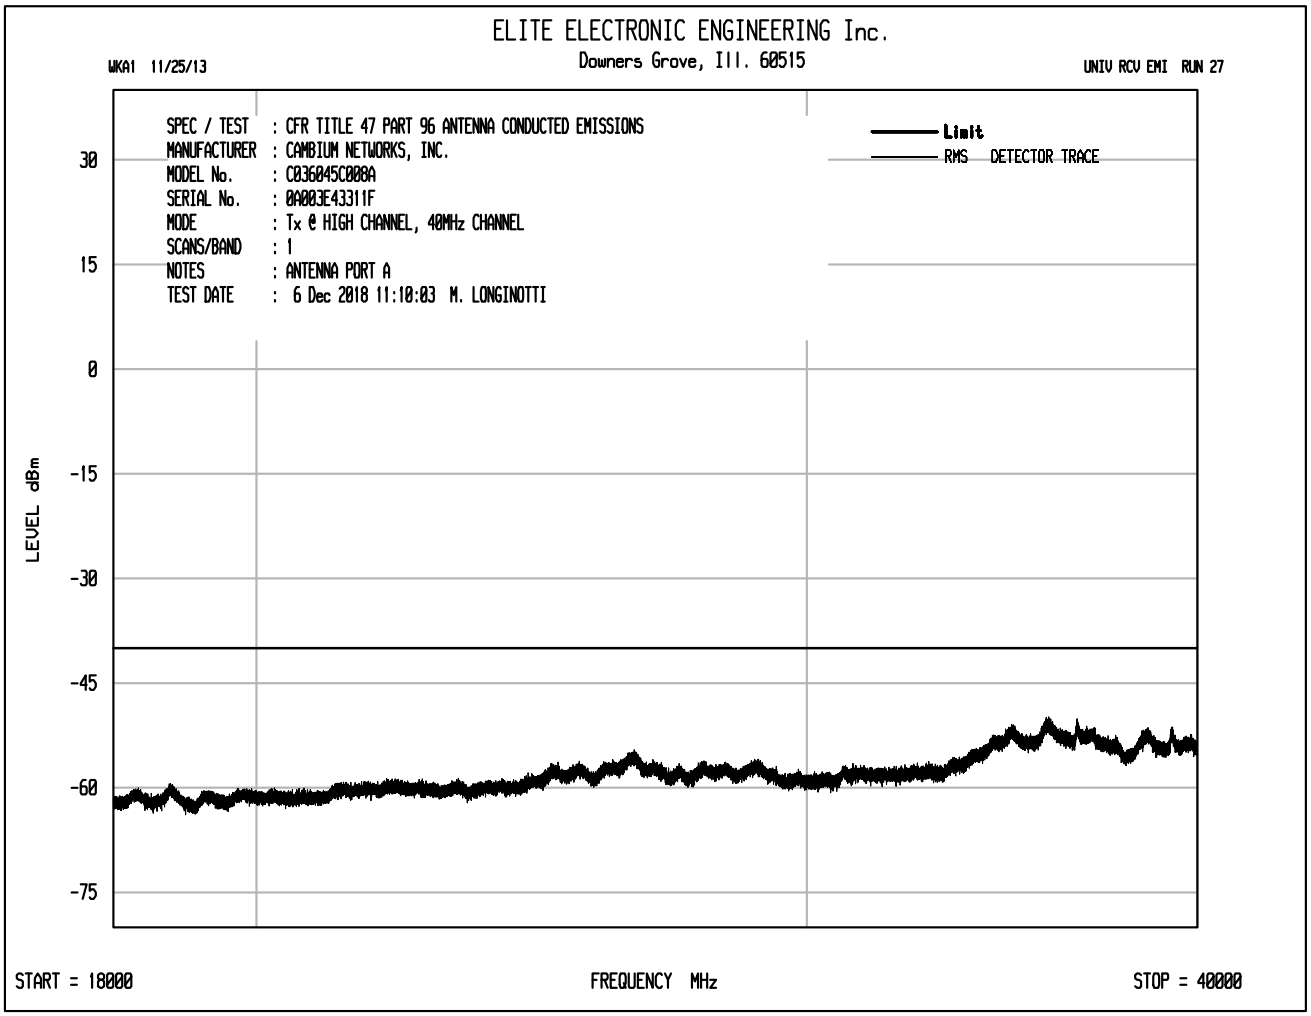
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 27
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT A
TEST DATE : 6 Dec 2018 11:10:03 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

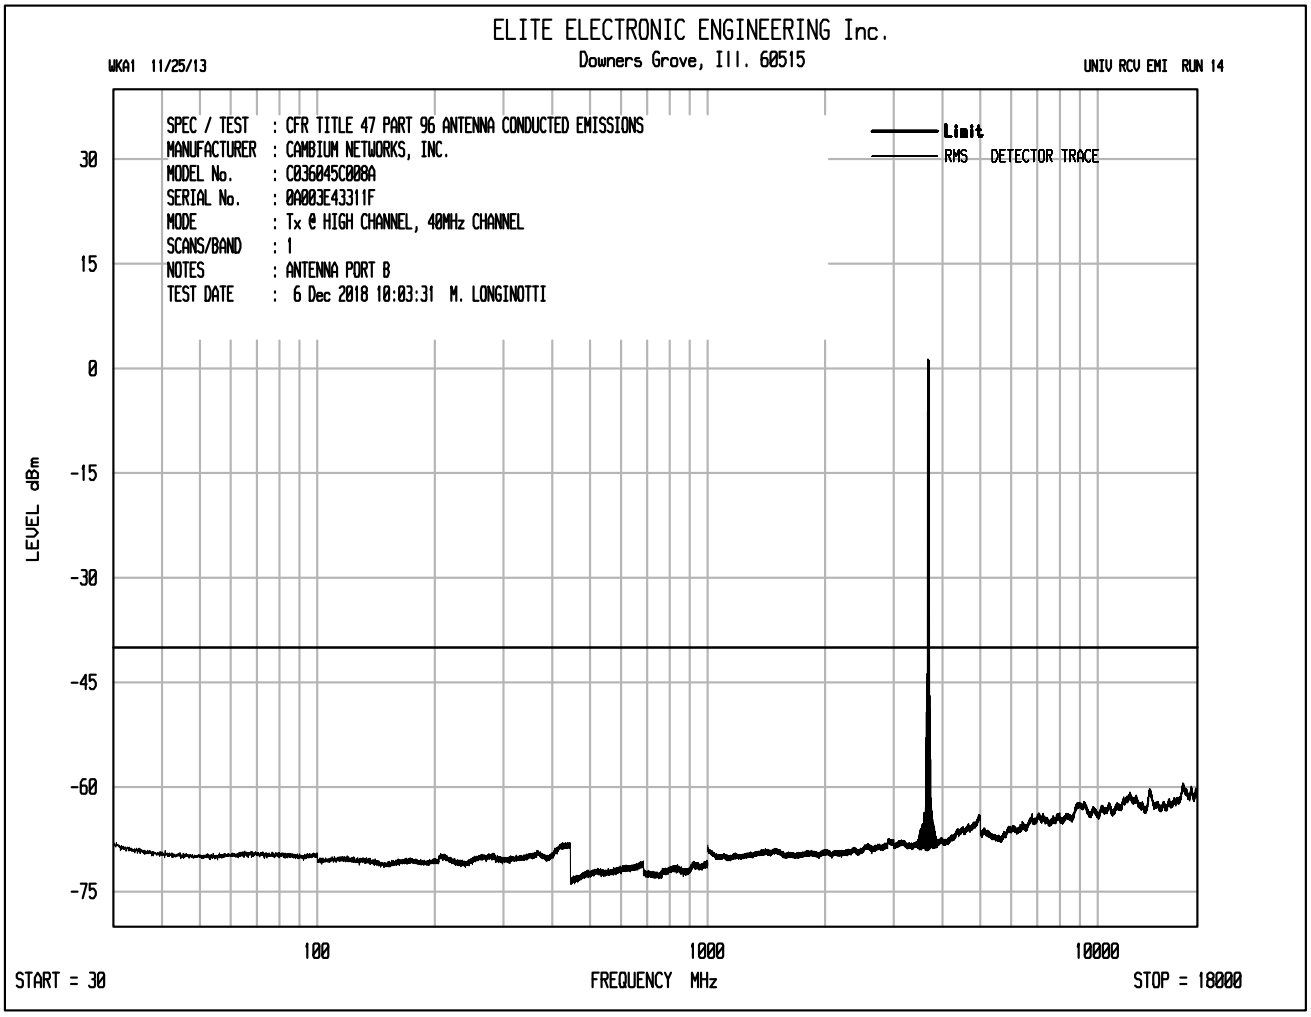
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 14
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 10:03:31 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
100
1000
10000
START = 30
FREQUENCY MHz
STOP = 18000

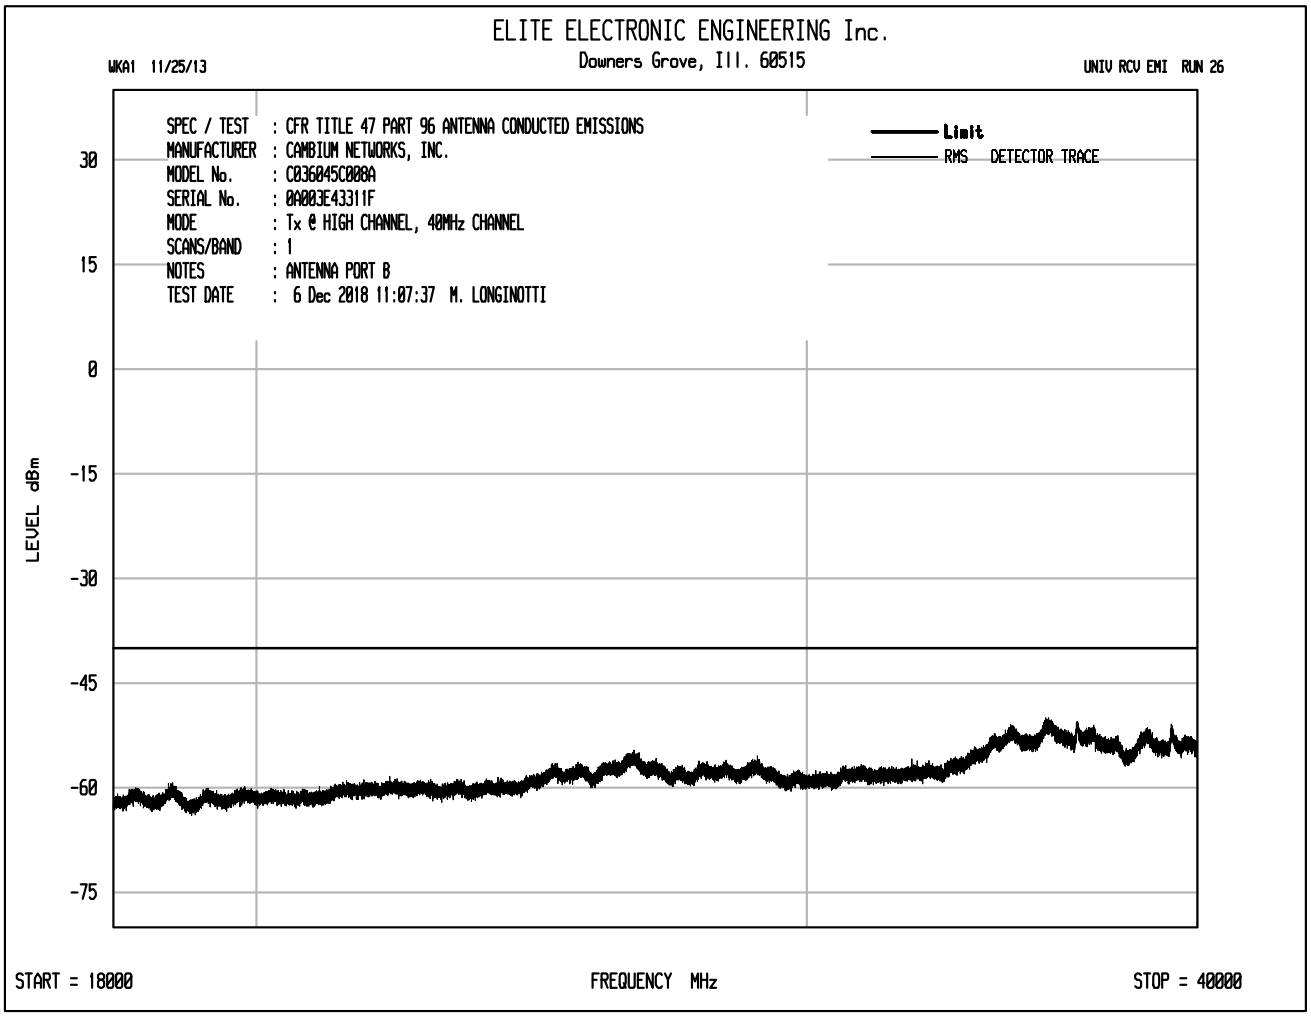
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 26
SPEC / TEST : CFR TITLE 47 PART 96 ANTENNA CONDUCTED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS, INC.
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL, 40MHz CHANNEL
SCANS/BAND : 1
NOTES : ANTENNA PORT B
TEST DATE : 6 Dec 2018 11:07:37 M. LONGINOTTI
Limit
RMS DETECTOR TRACE
LEVEL dBm
30
15
0
-15
-30
-45
-60
-75
START = 18000
FREQUENCY MHz
STOP = 40000

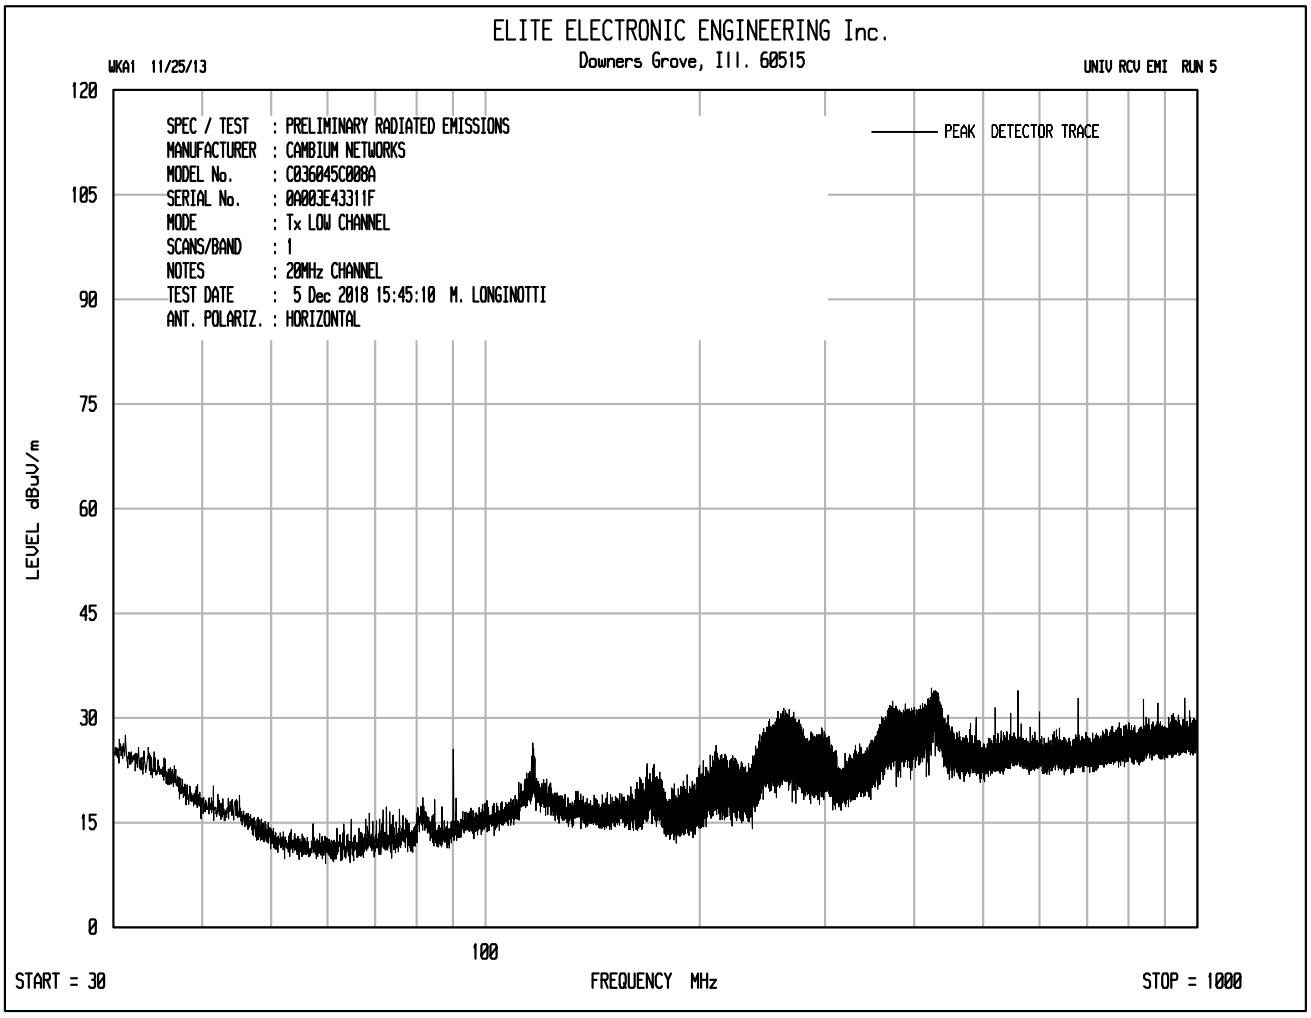
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 5
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx LOW CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 15:45:10 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

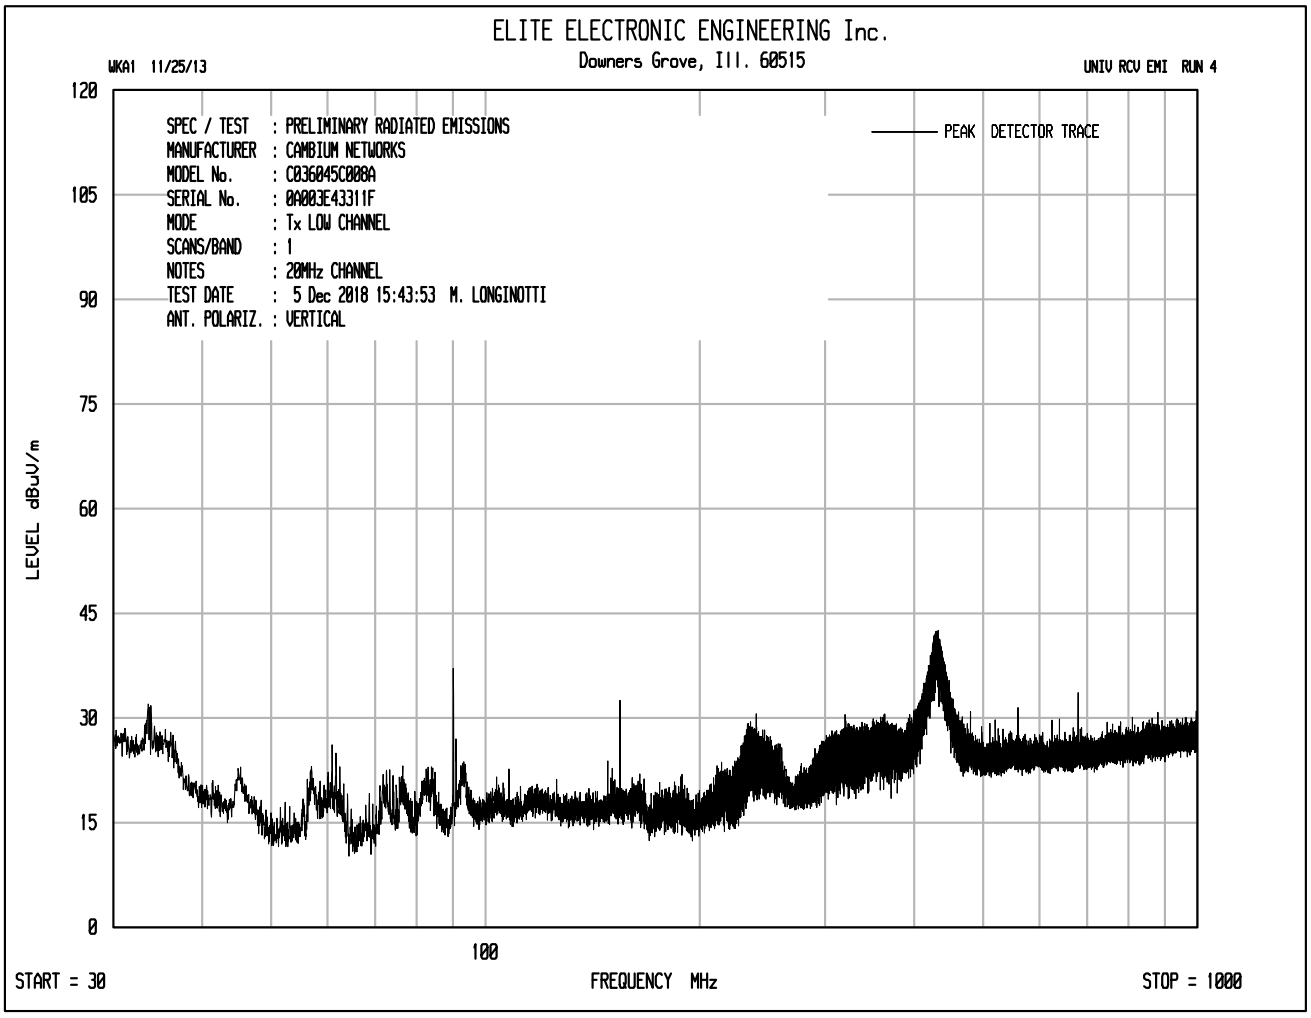
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 4
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx LOW CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 15:43:53 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

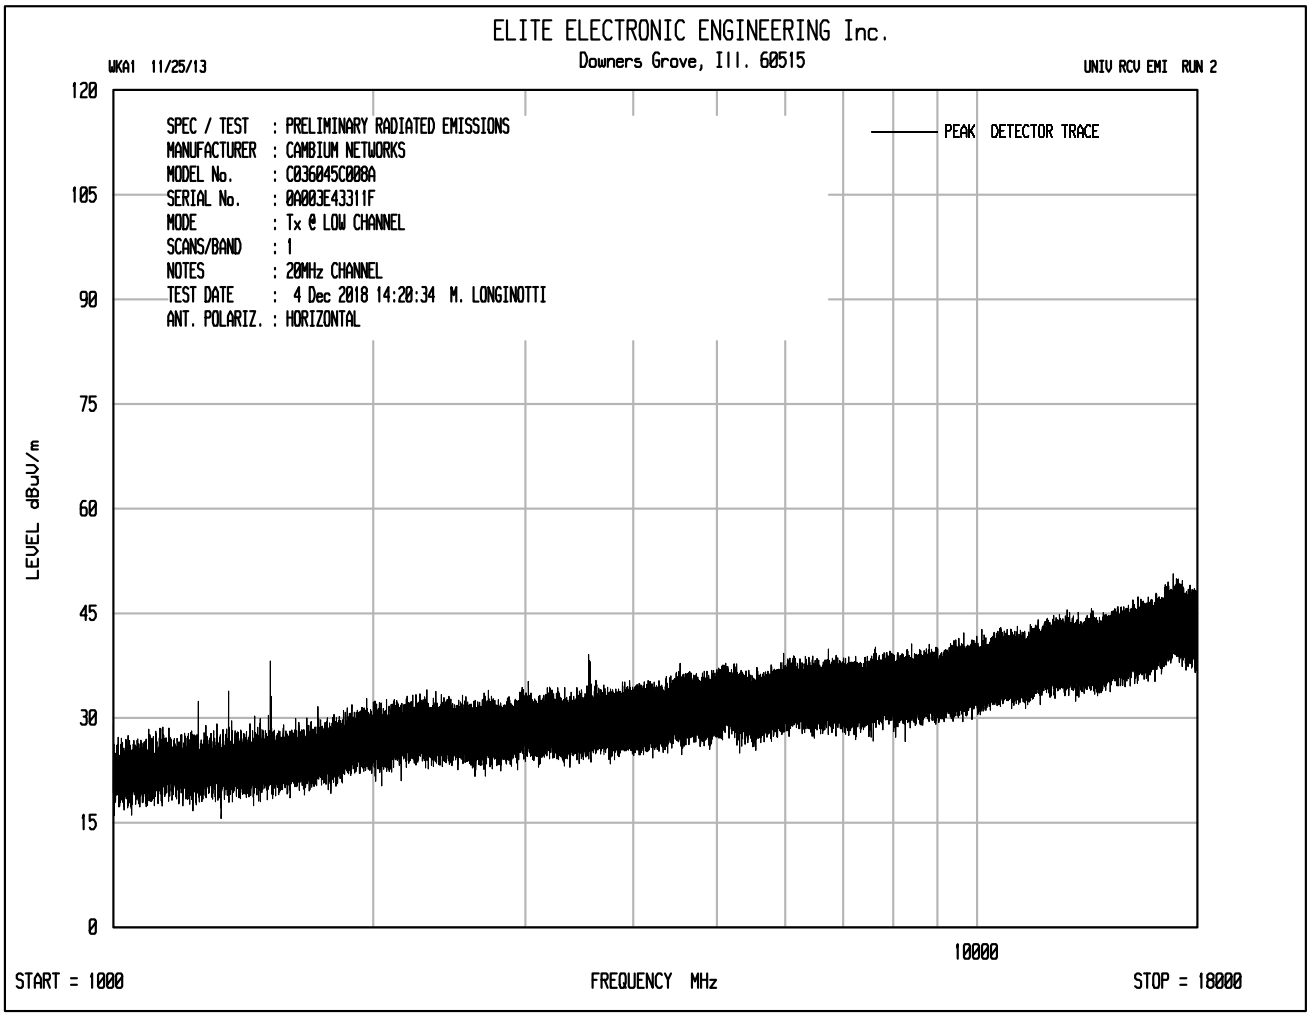
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 2
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 4 Dec 2018 14:20:34 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

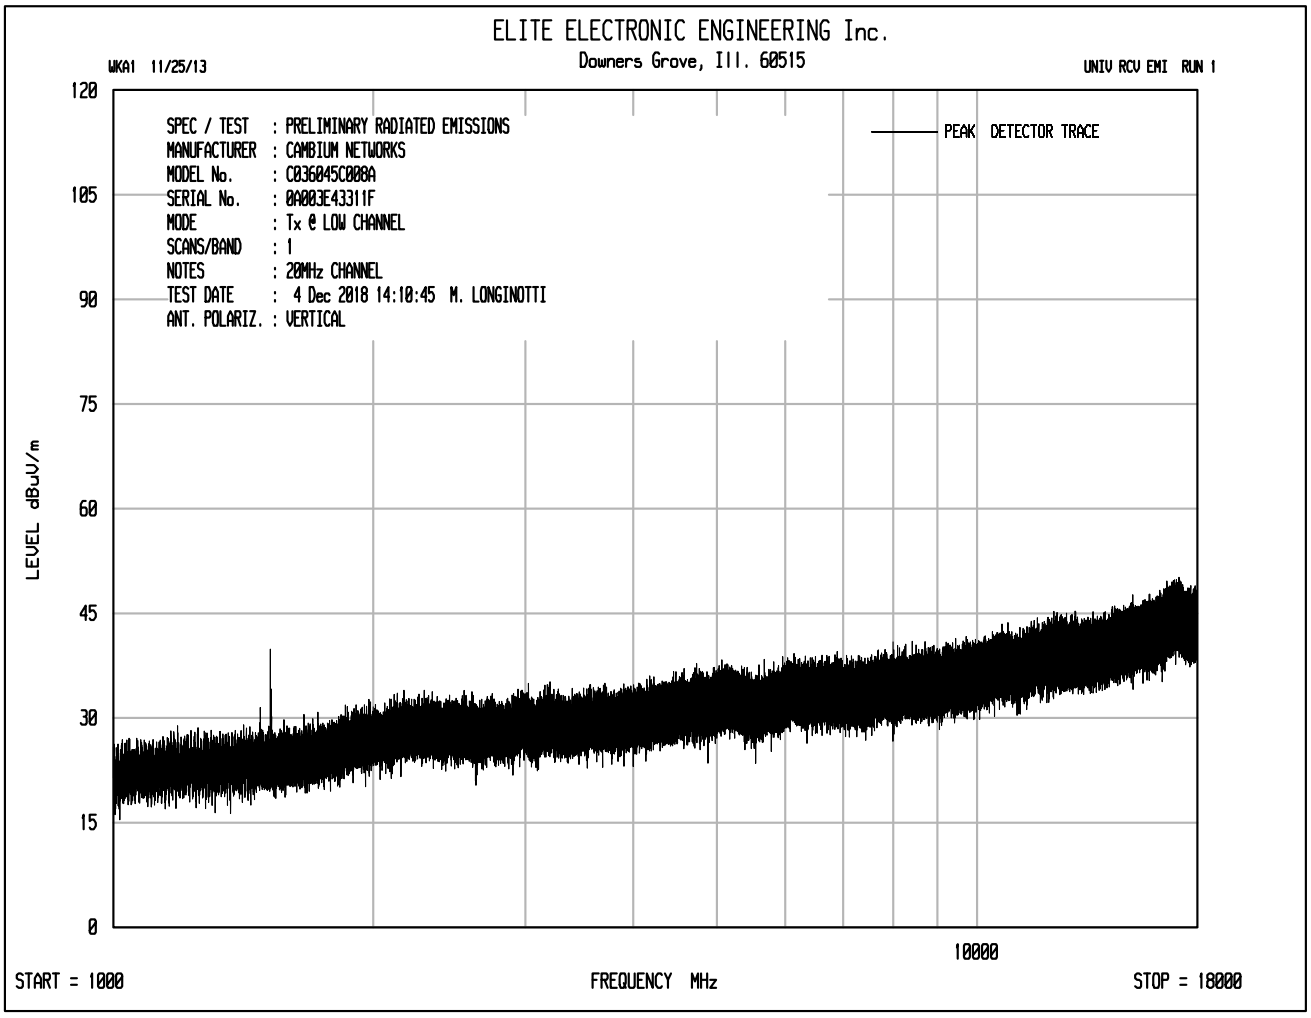
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 1
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 4 Dec 2018 14:10:45 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

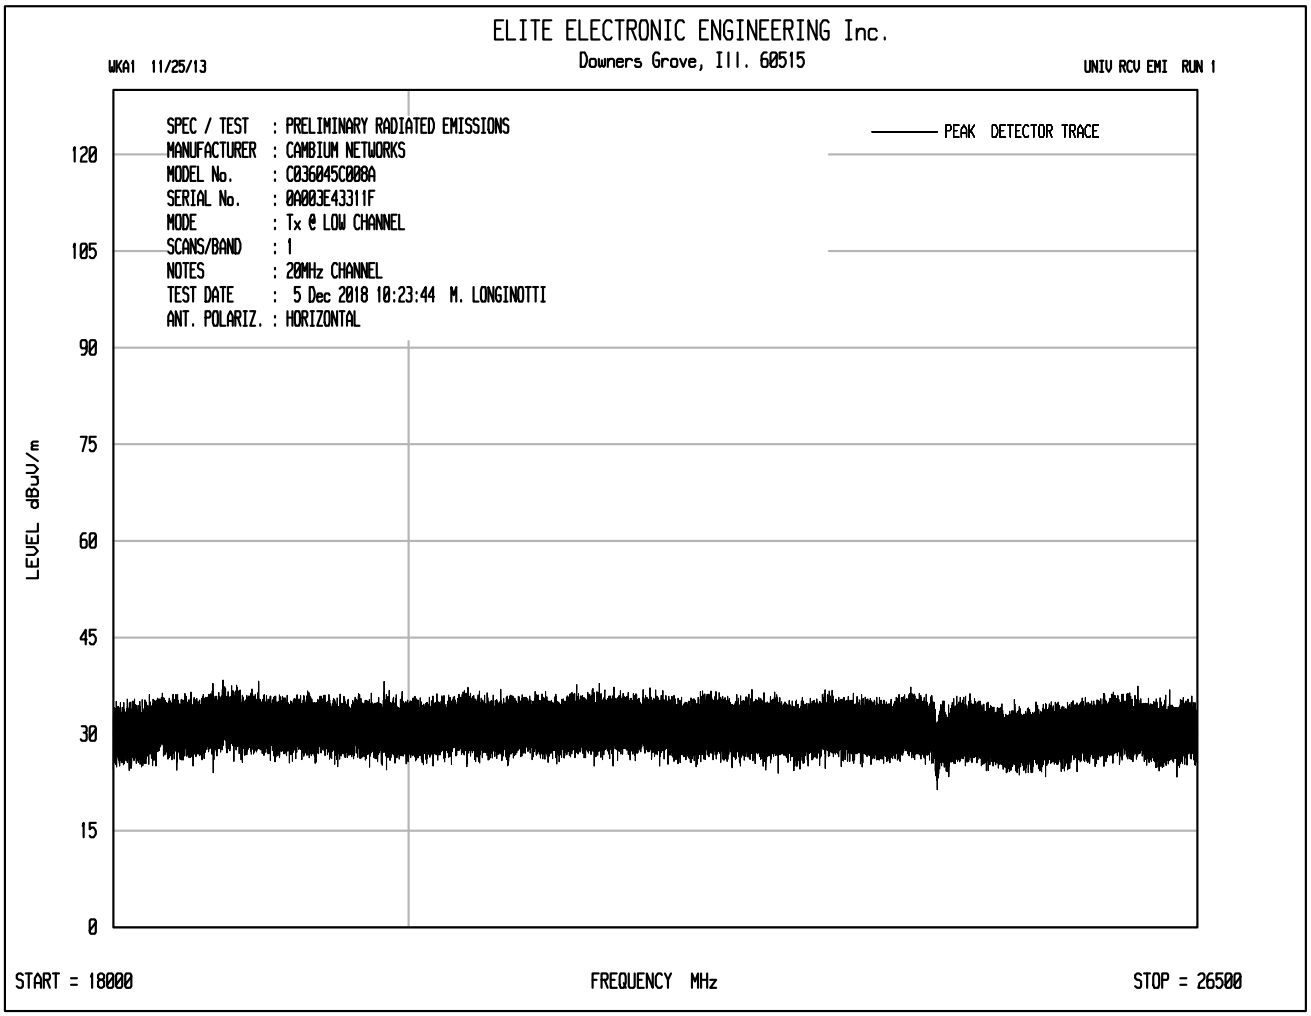
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 1
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 10:23:44 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

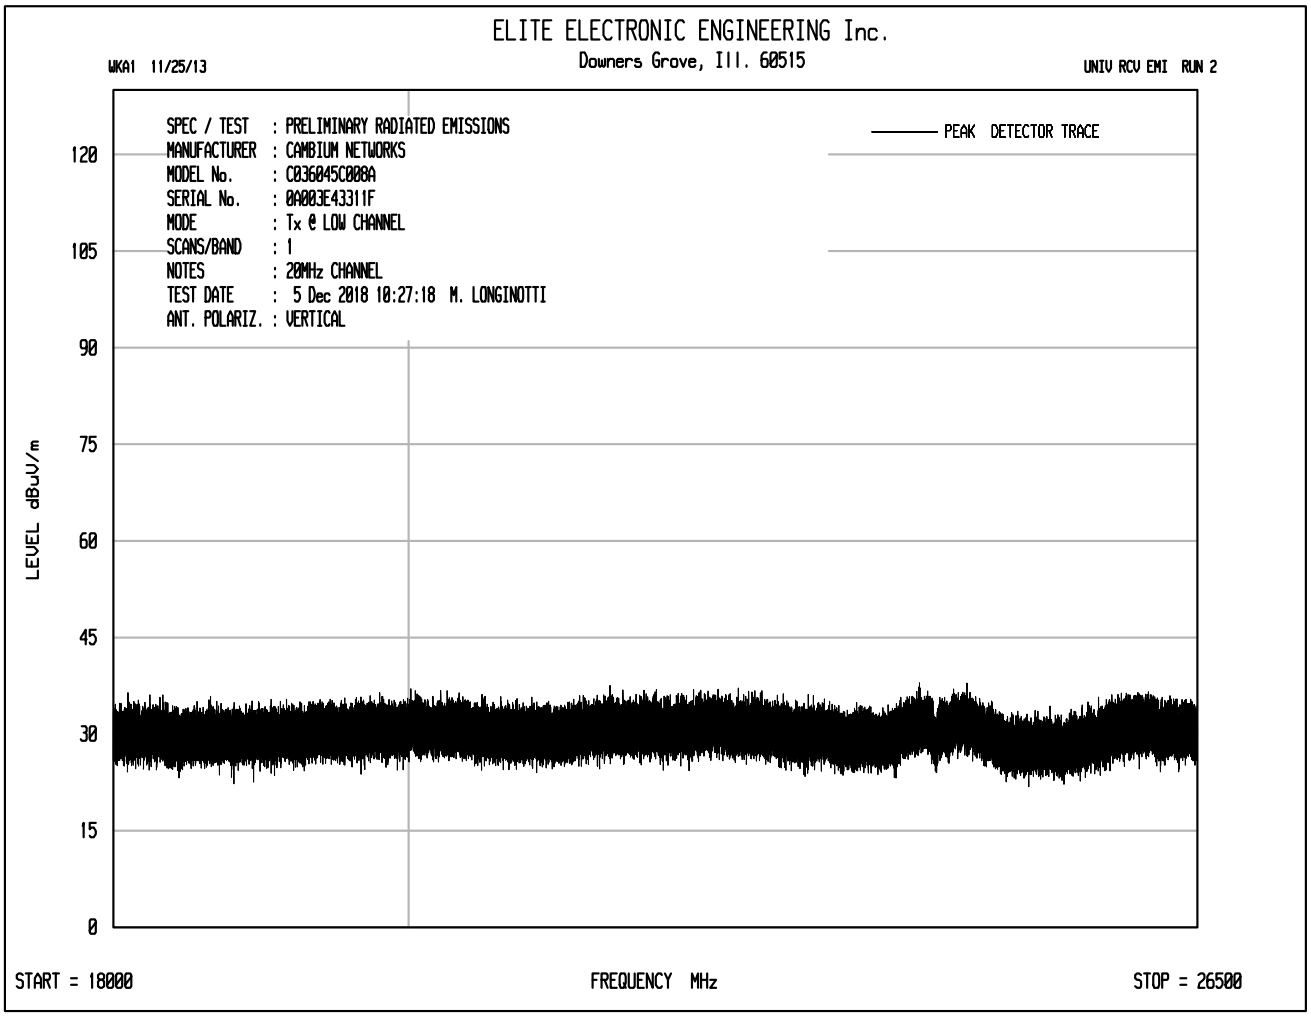
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 2
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 10:27:18 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

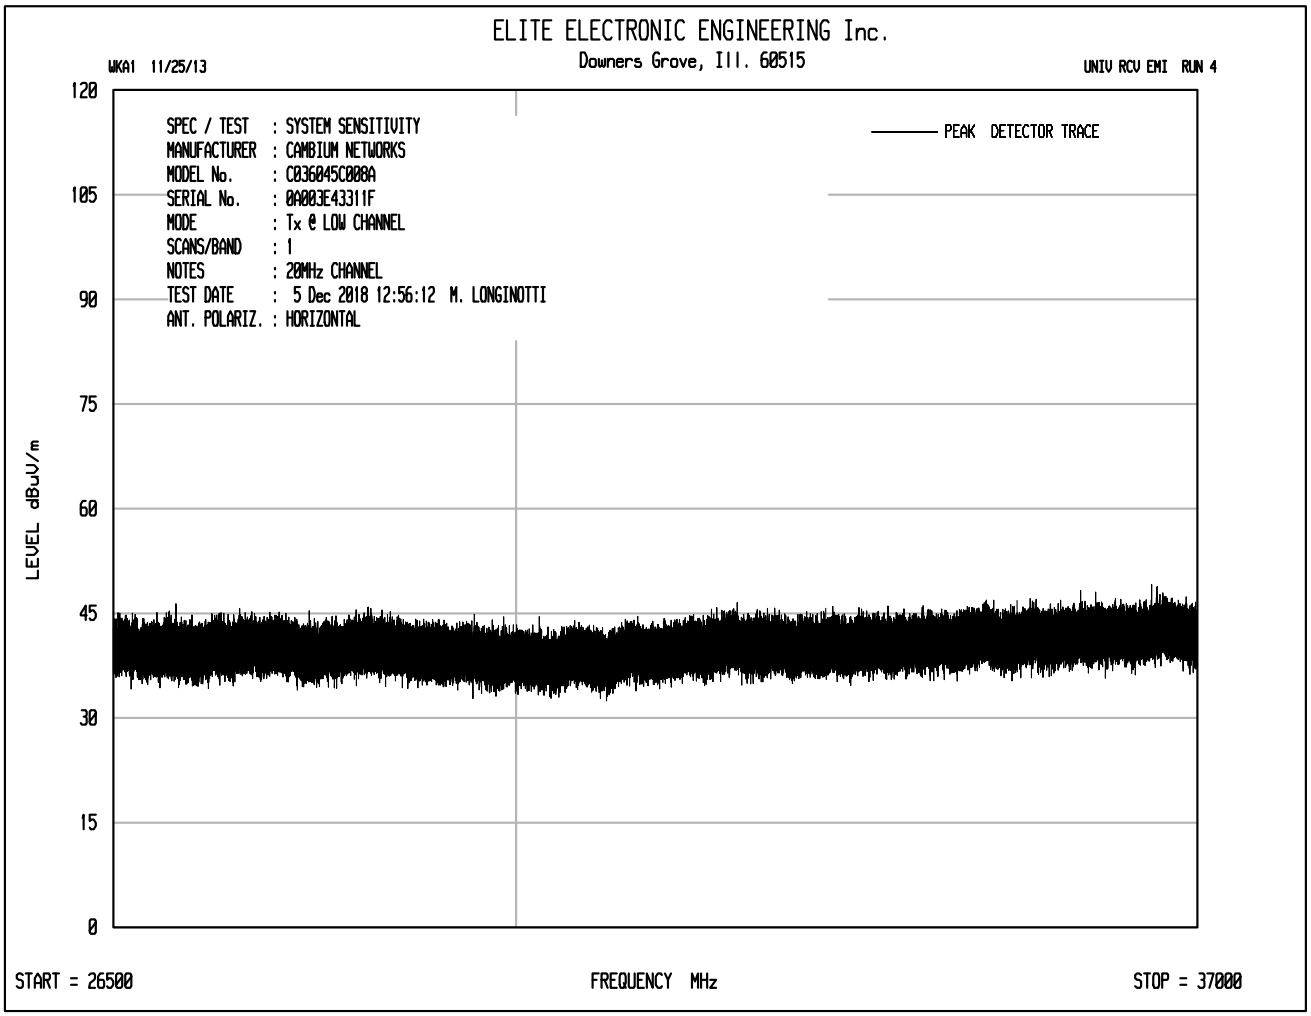
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 4
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 12:56:12 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

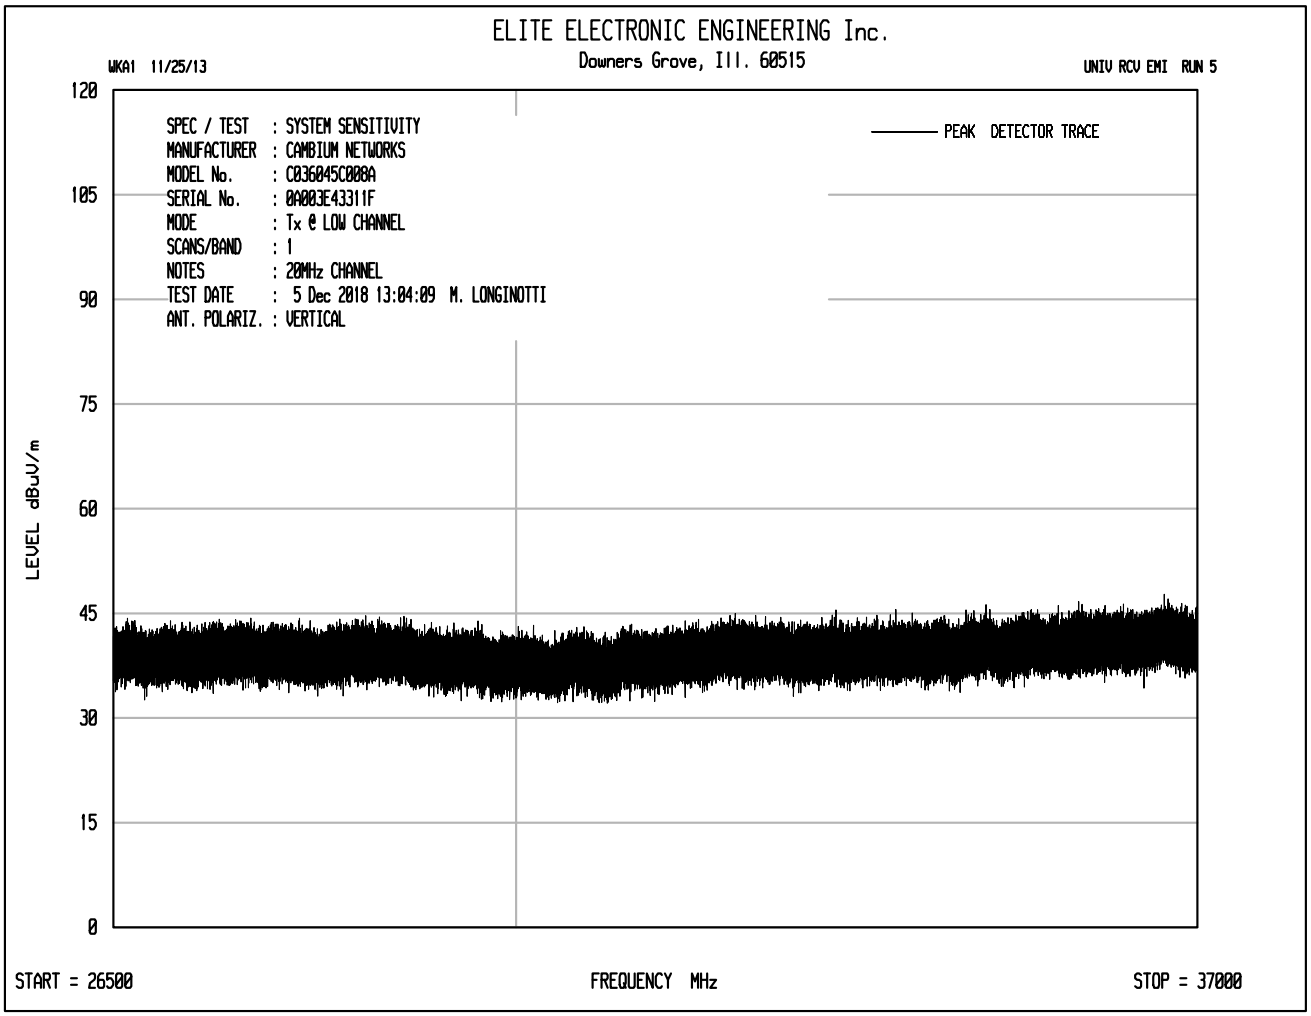
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 5
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 13:04:09 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

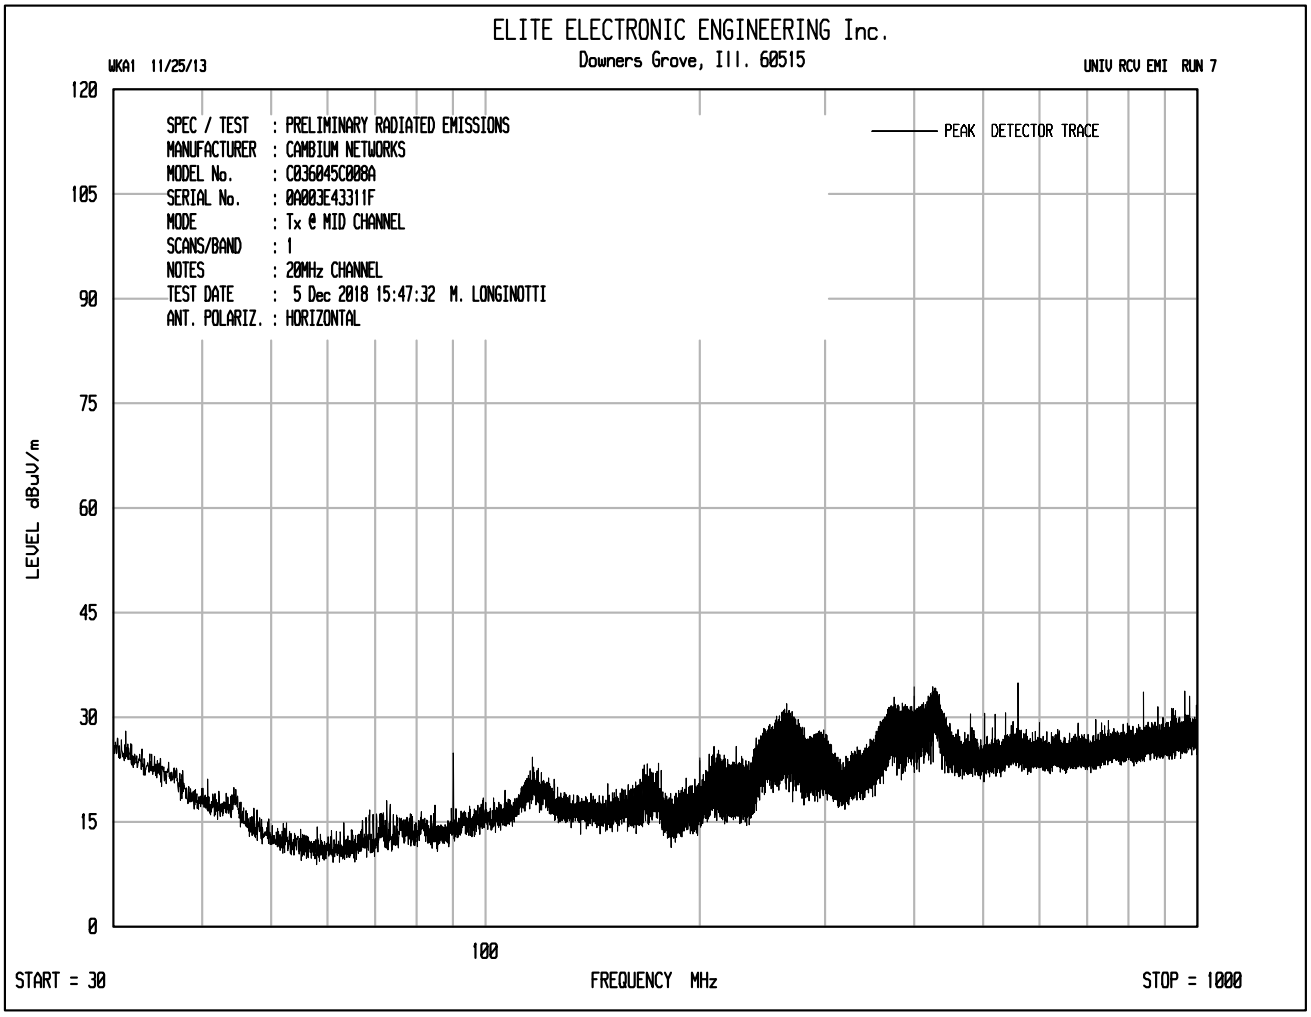
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 7
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 15:47:32 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

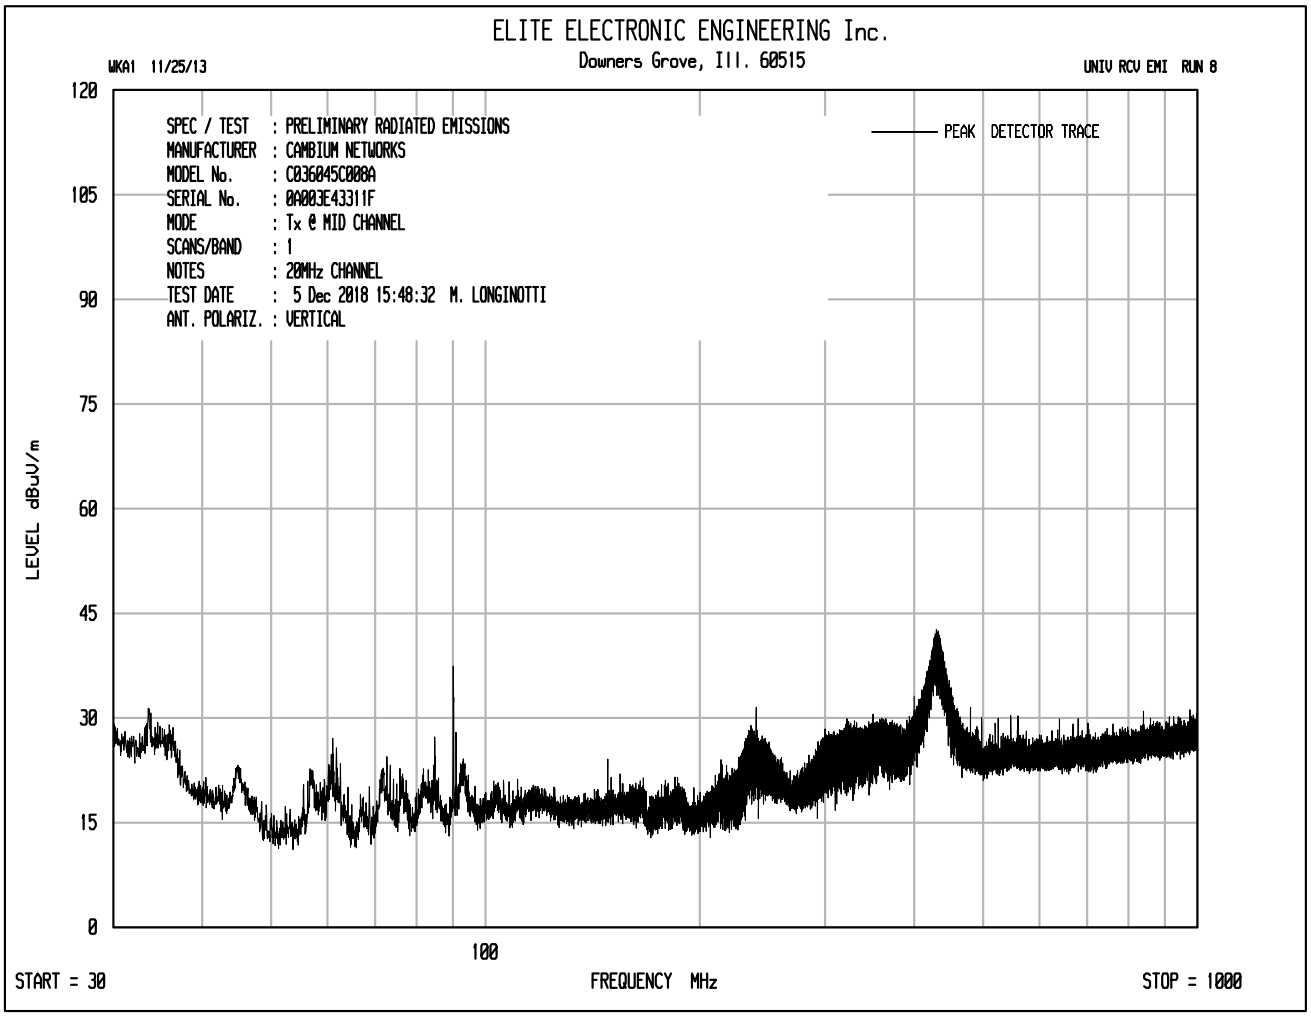
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 8
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 15:48:32 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

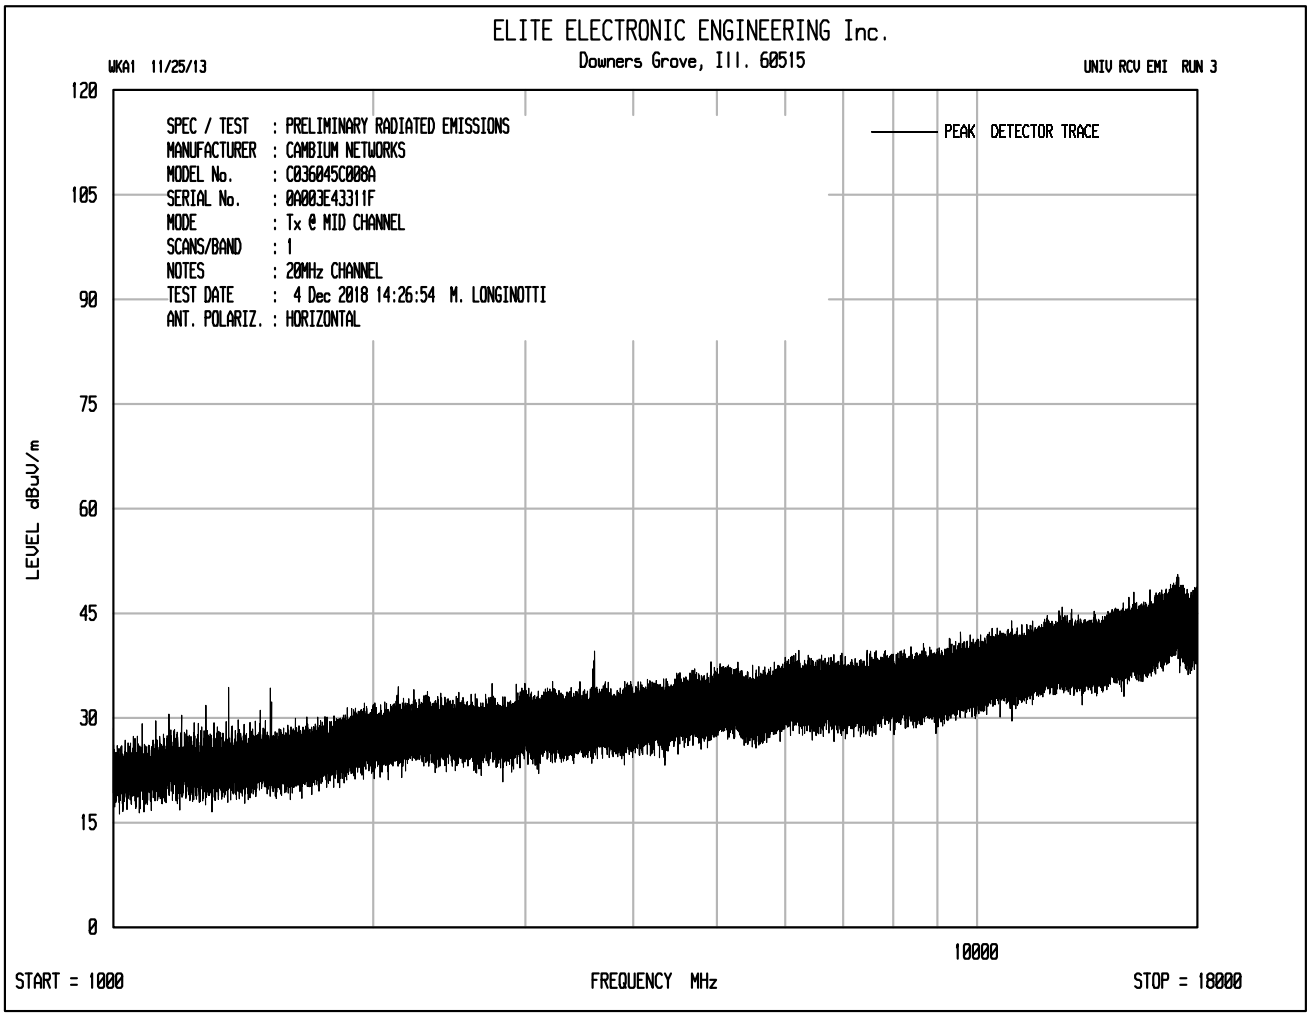
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 3
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 4 Dec 2018 14:26:54 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

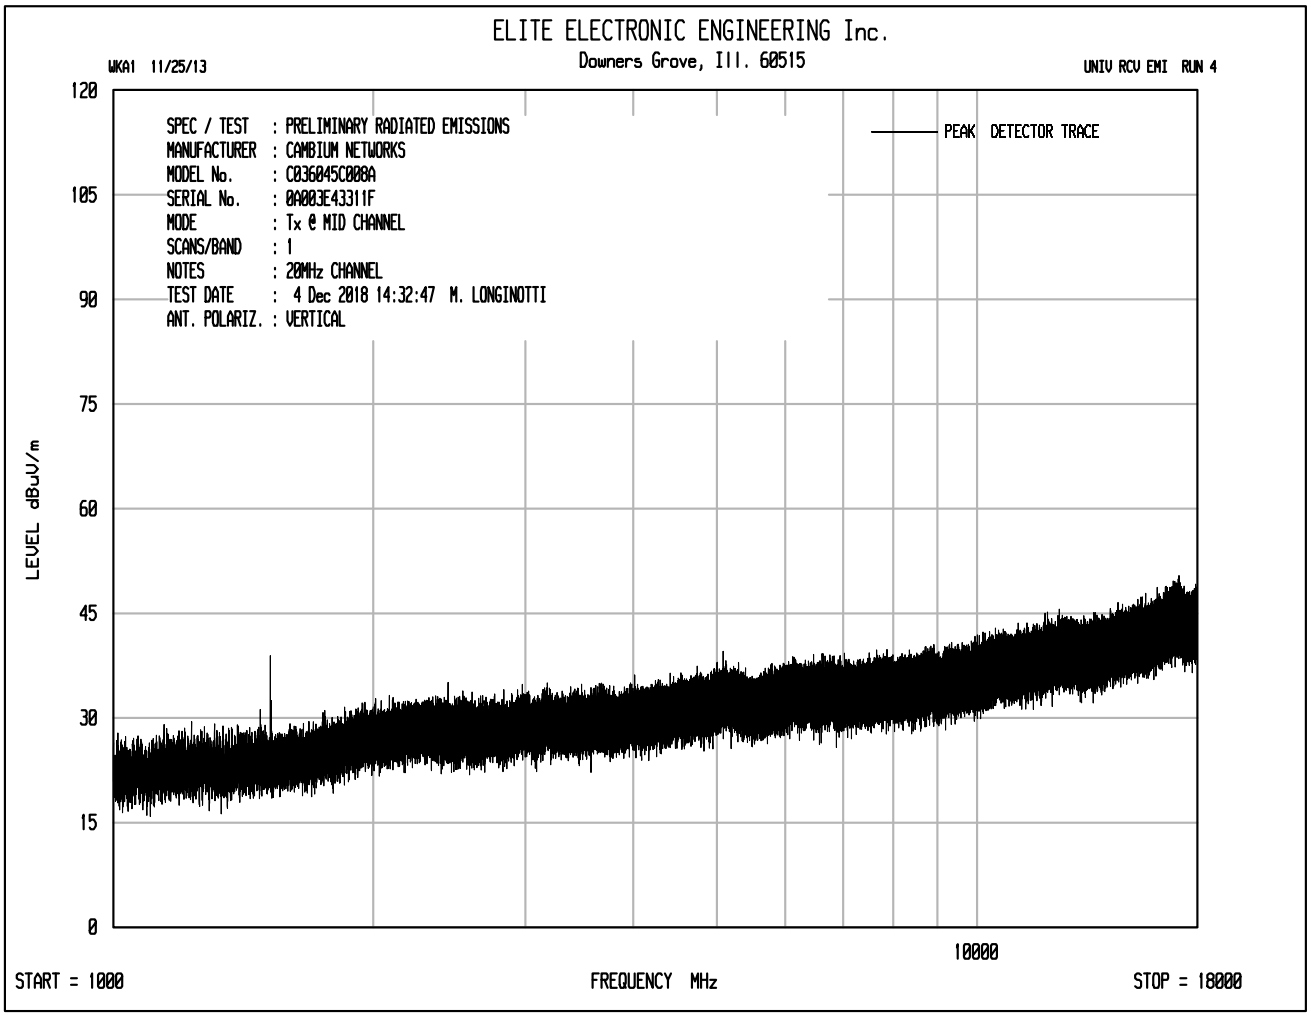
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 4
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 4 Dec 2018 14:32:47 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

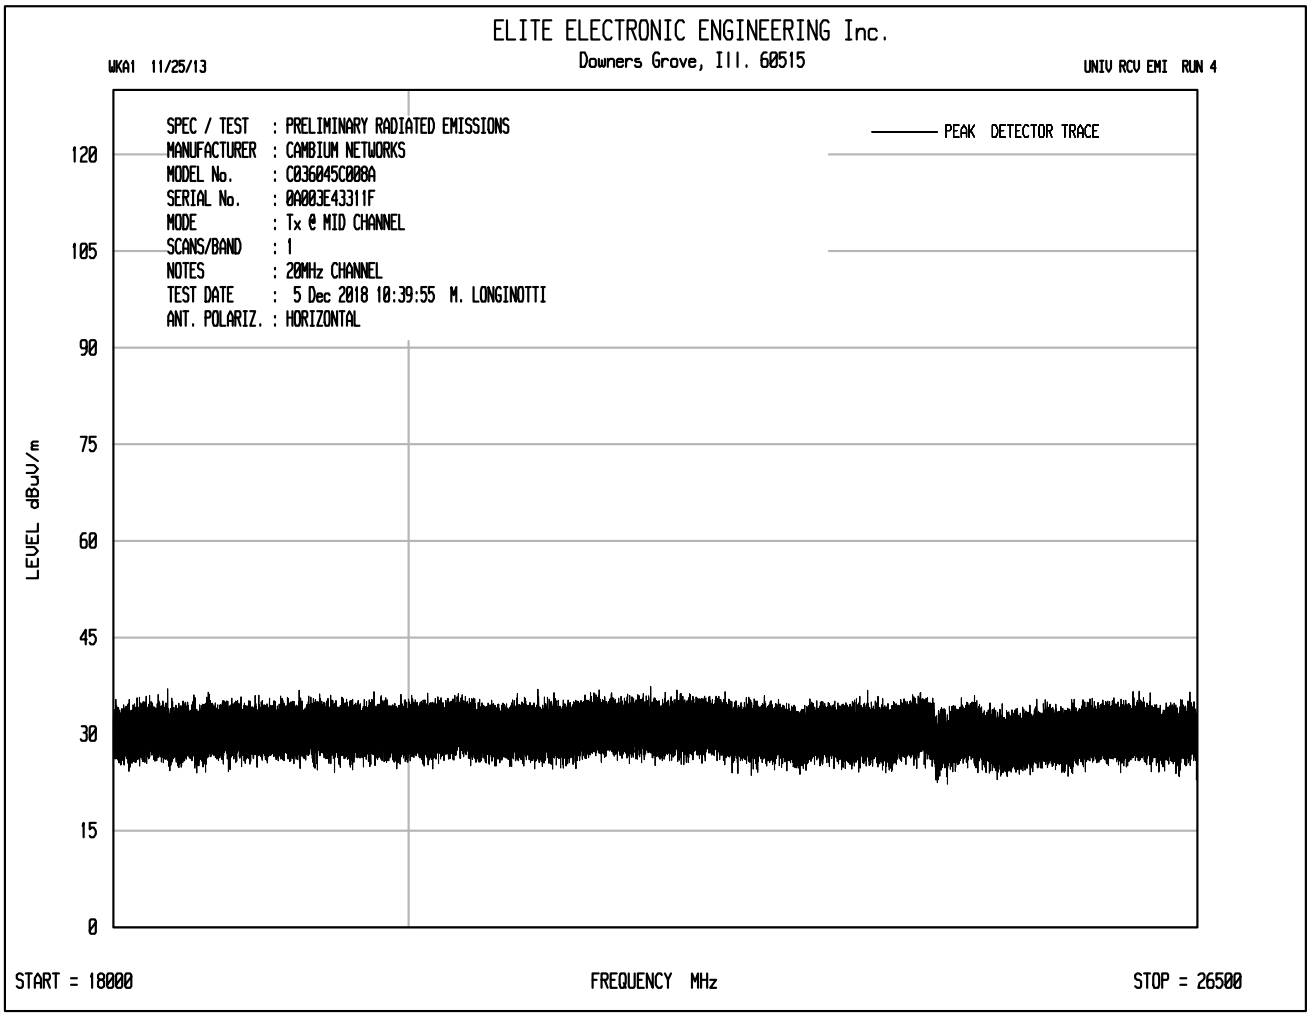
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 4
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 10:39:55 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

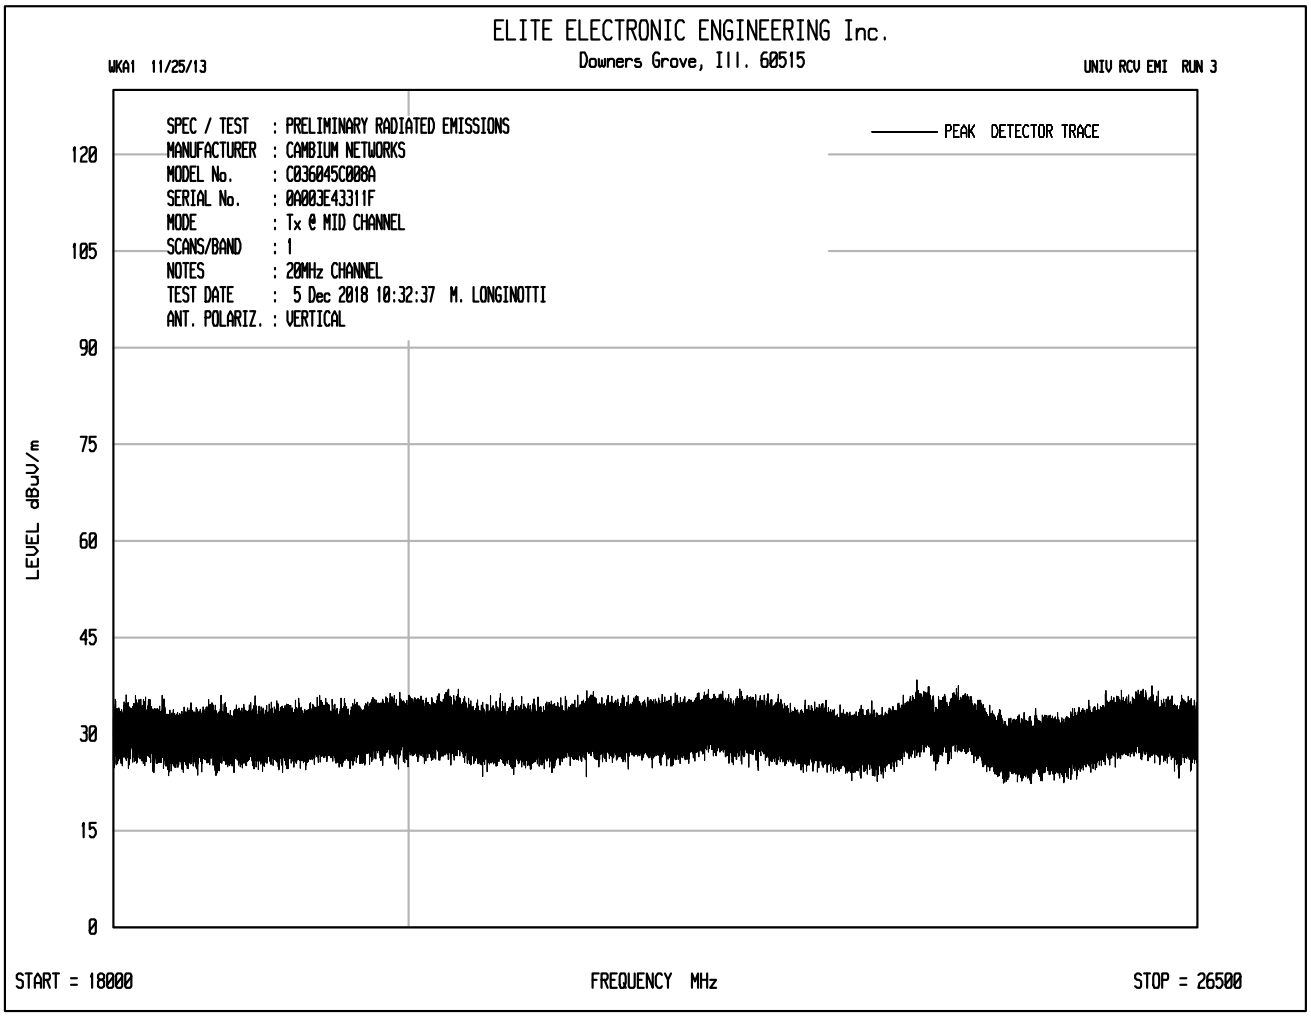
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 3
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 10:32:37 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

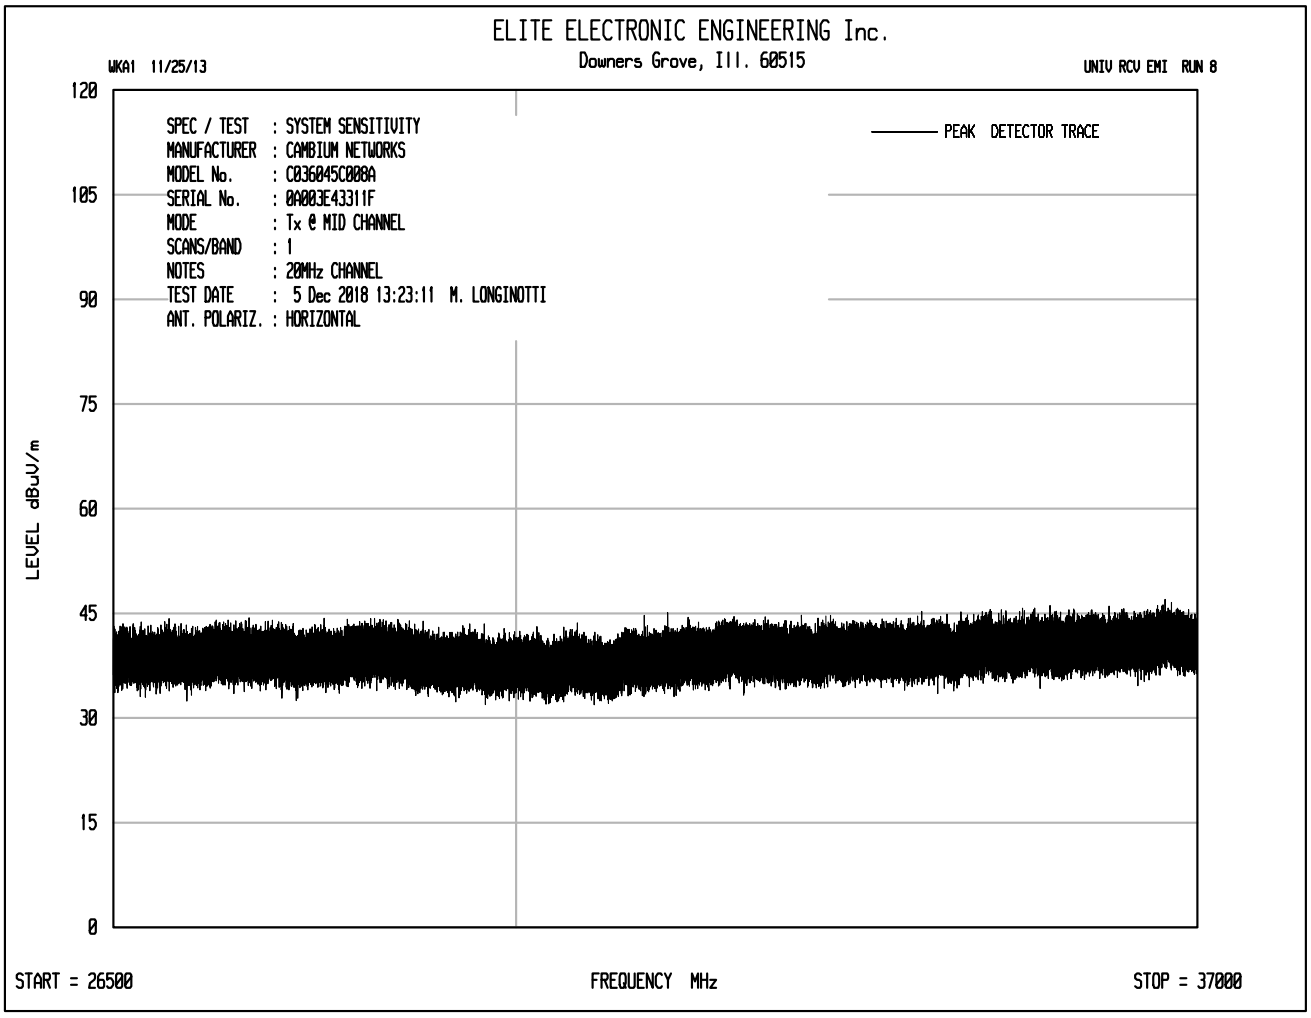
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 8
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 13:23:11 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

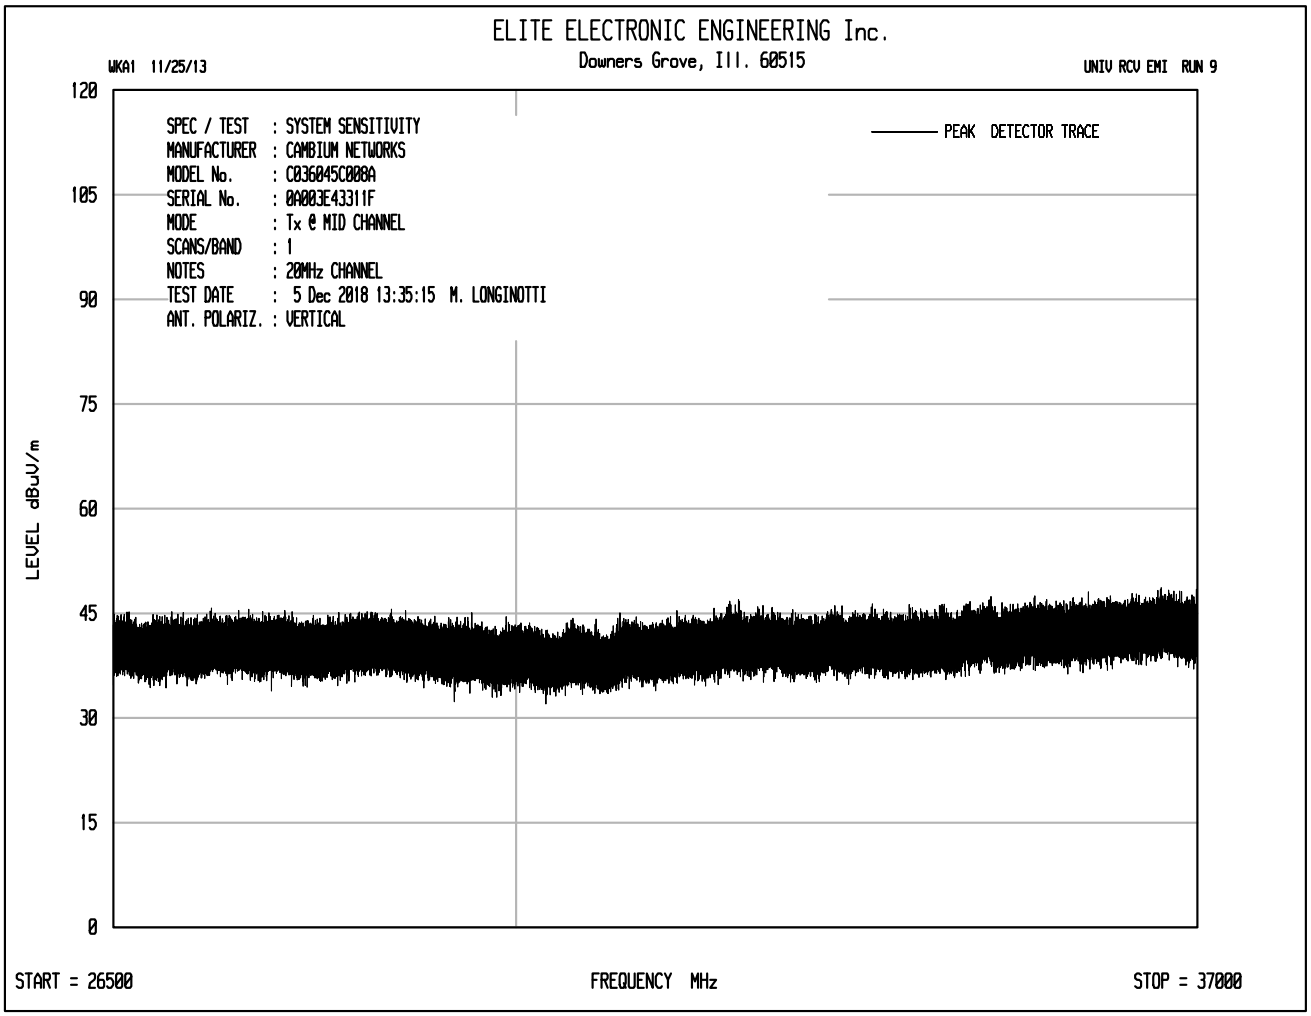
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 9
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 13:35:15 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

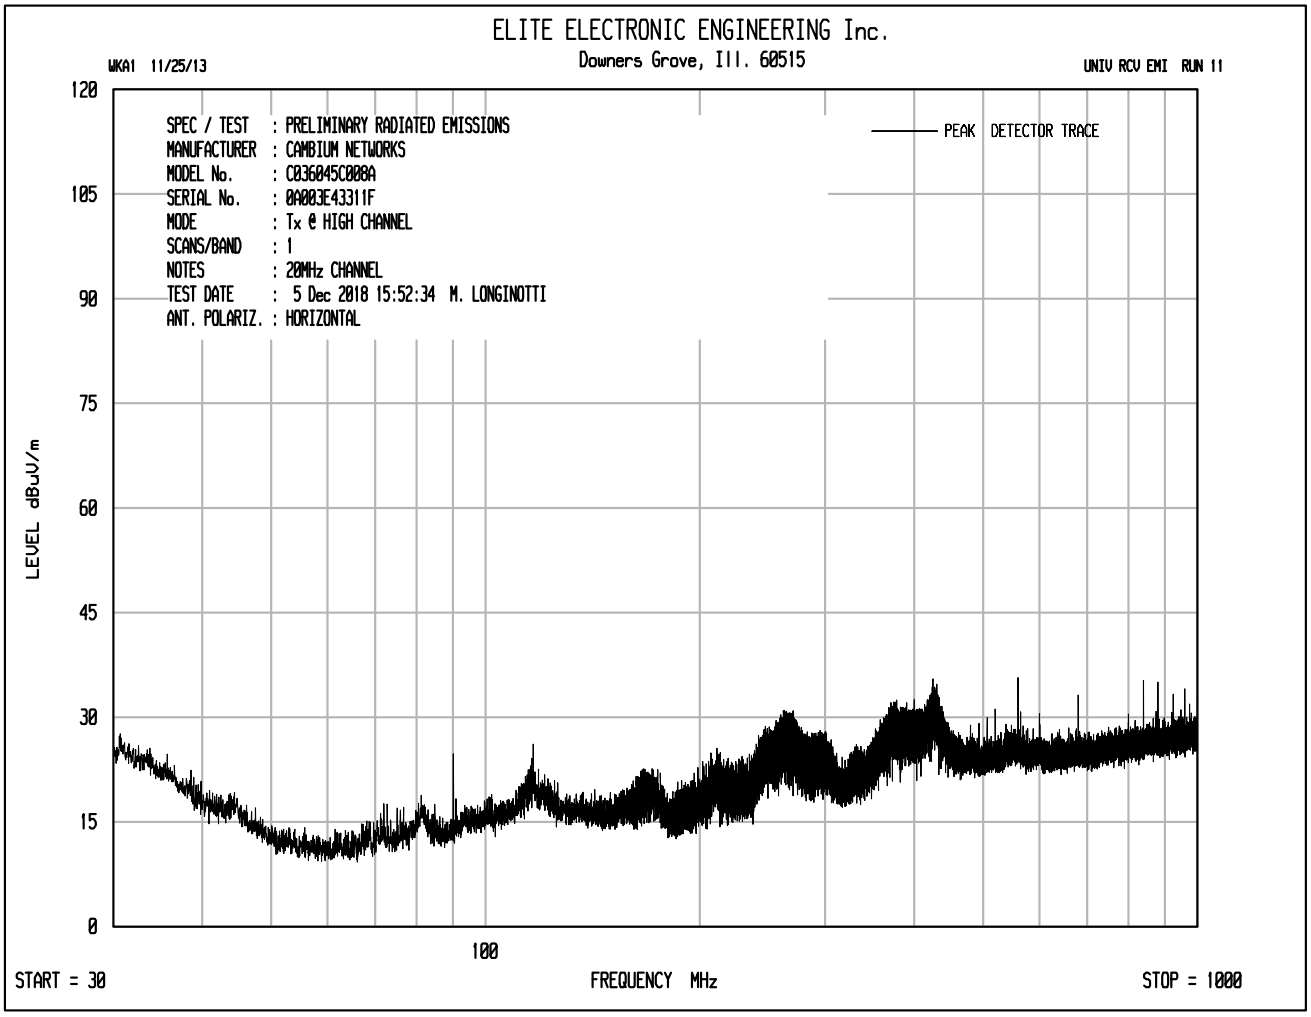
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 11
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 15:52:34 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

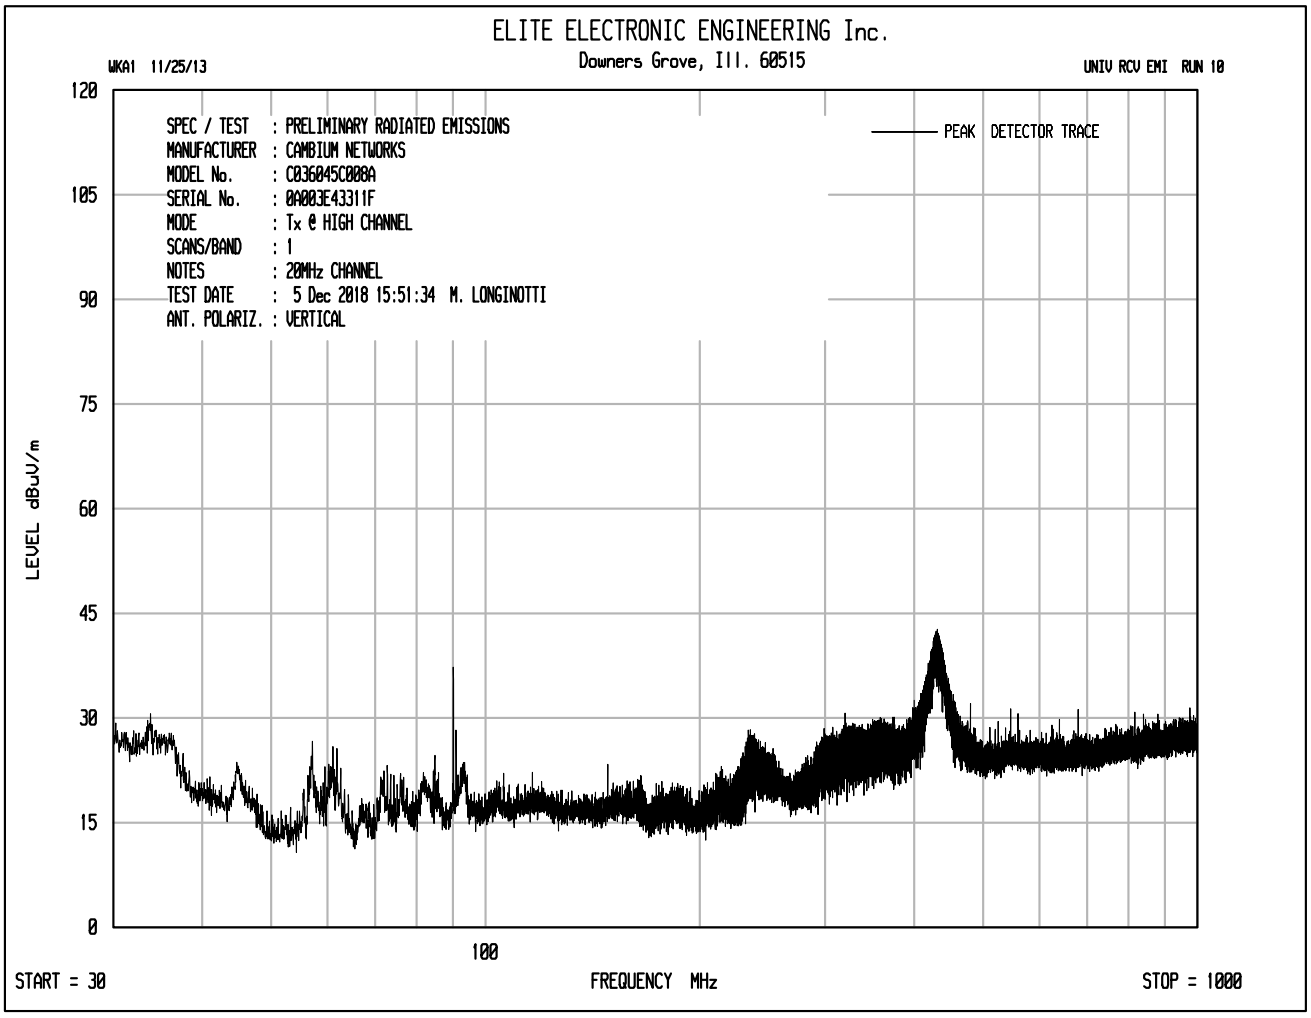
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 10
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 15:51:34 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

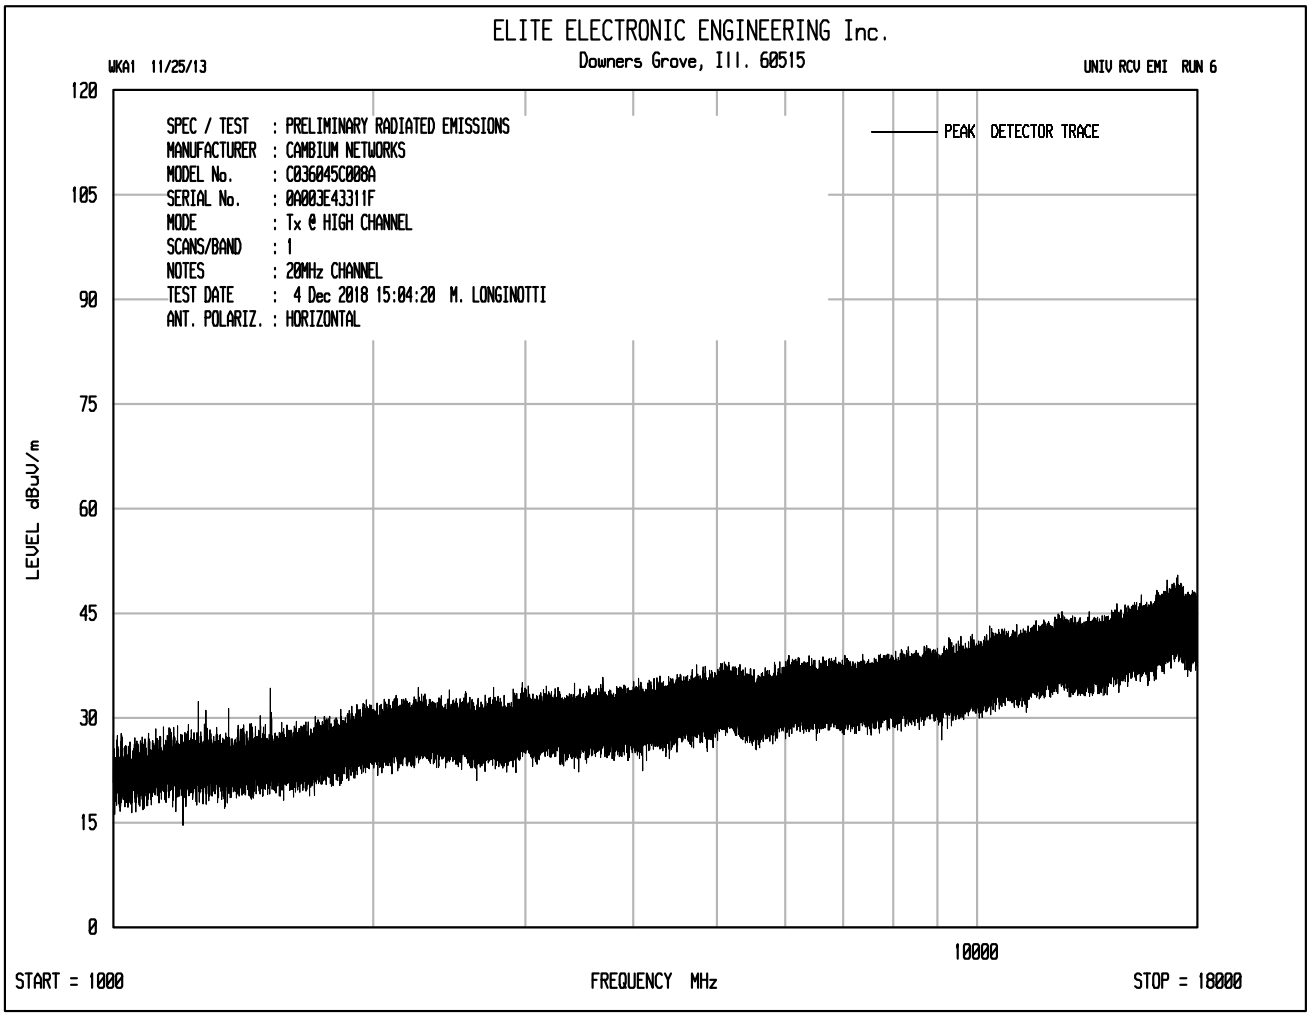
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 6
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 4 Dec 2018 15:04:20 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

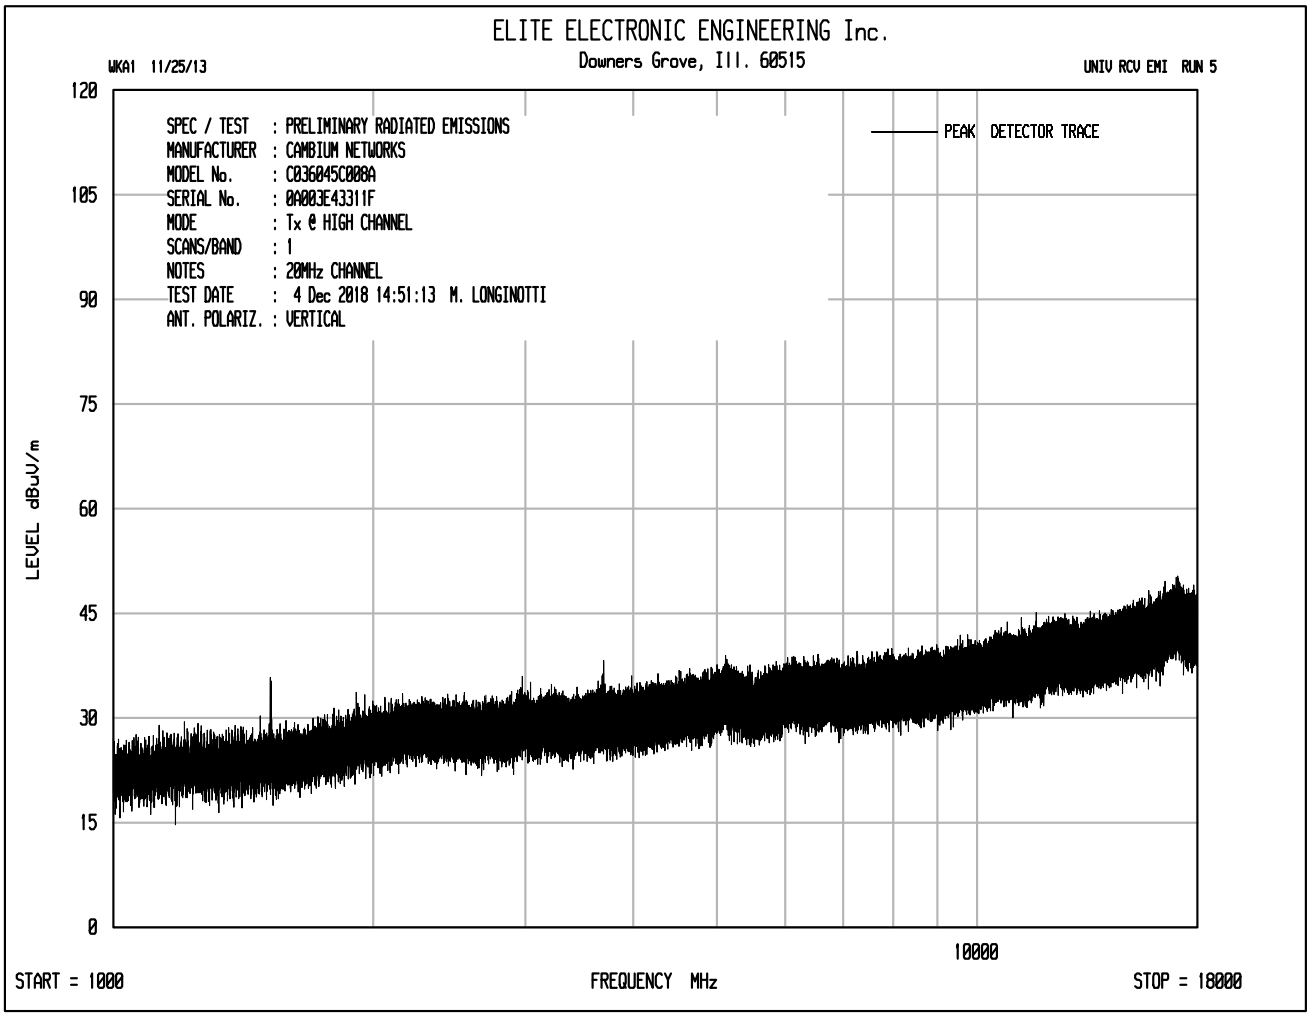
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 5
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 4 Dec 2018 14:51:13 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

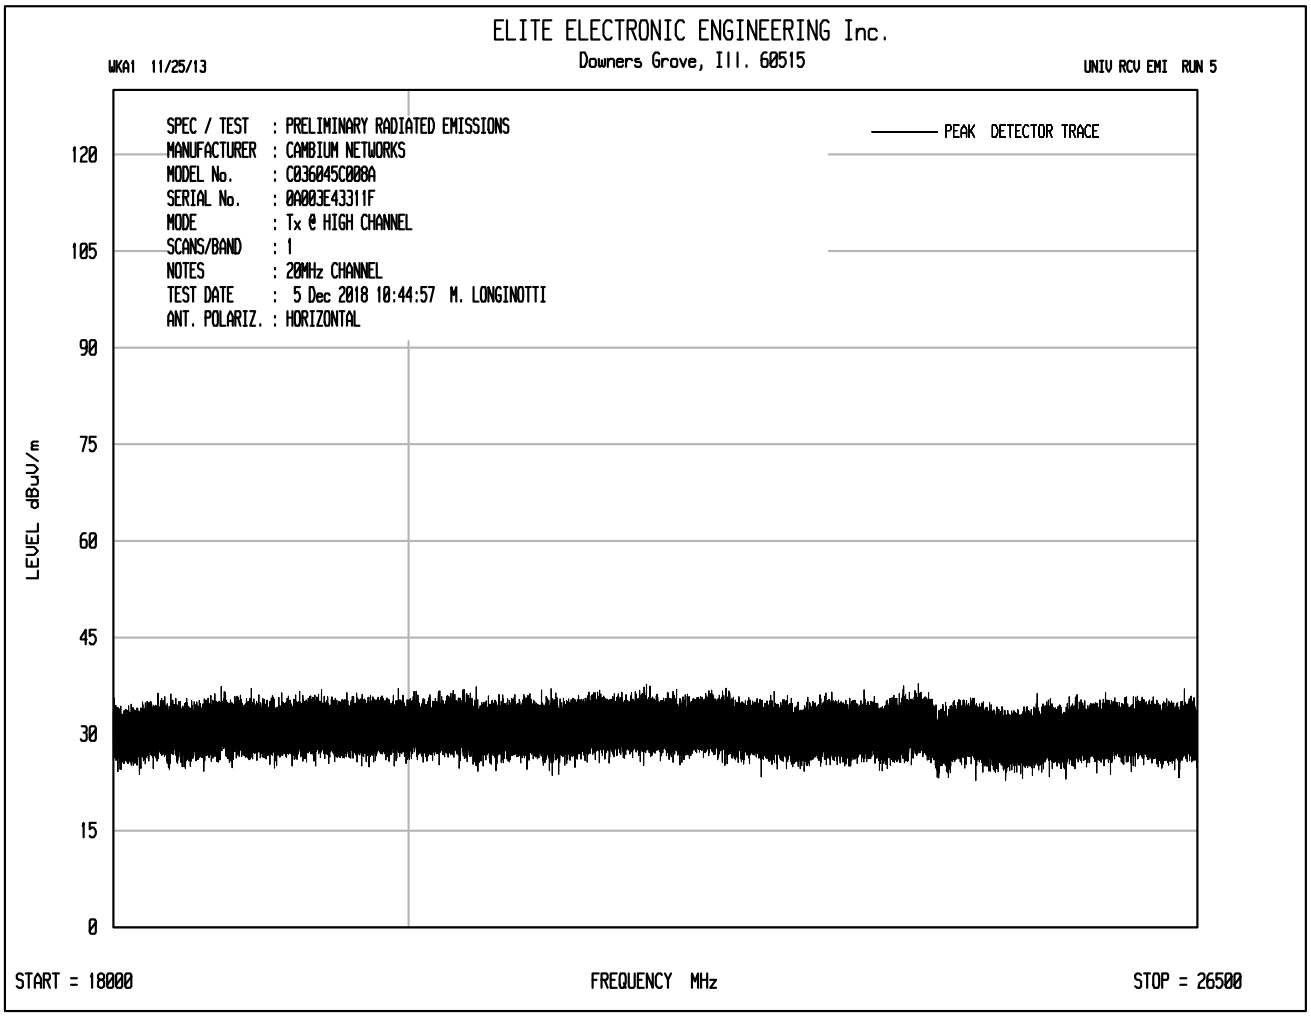
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 5
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 10:44:57 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

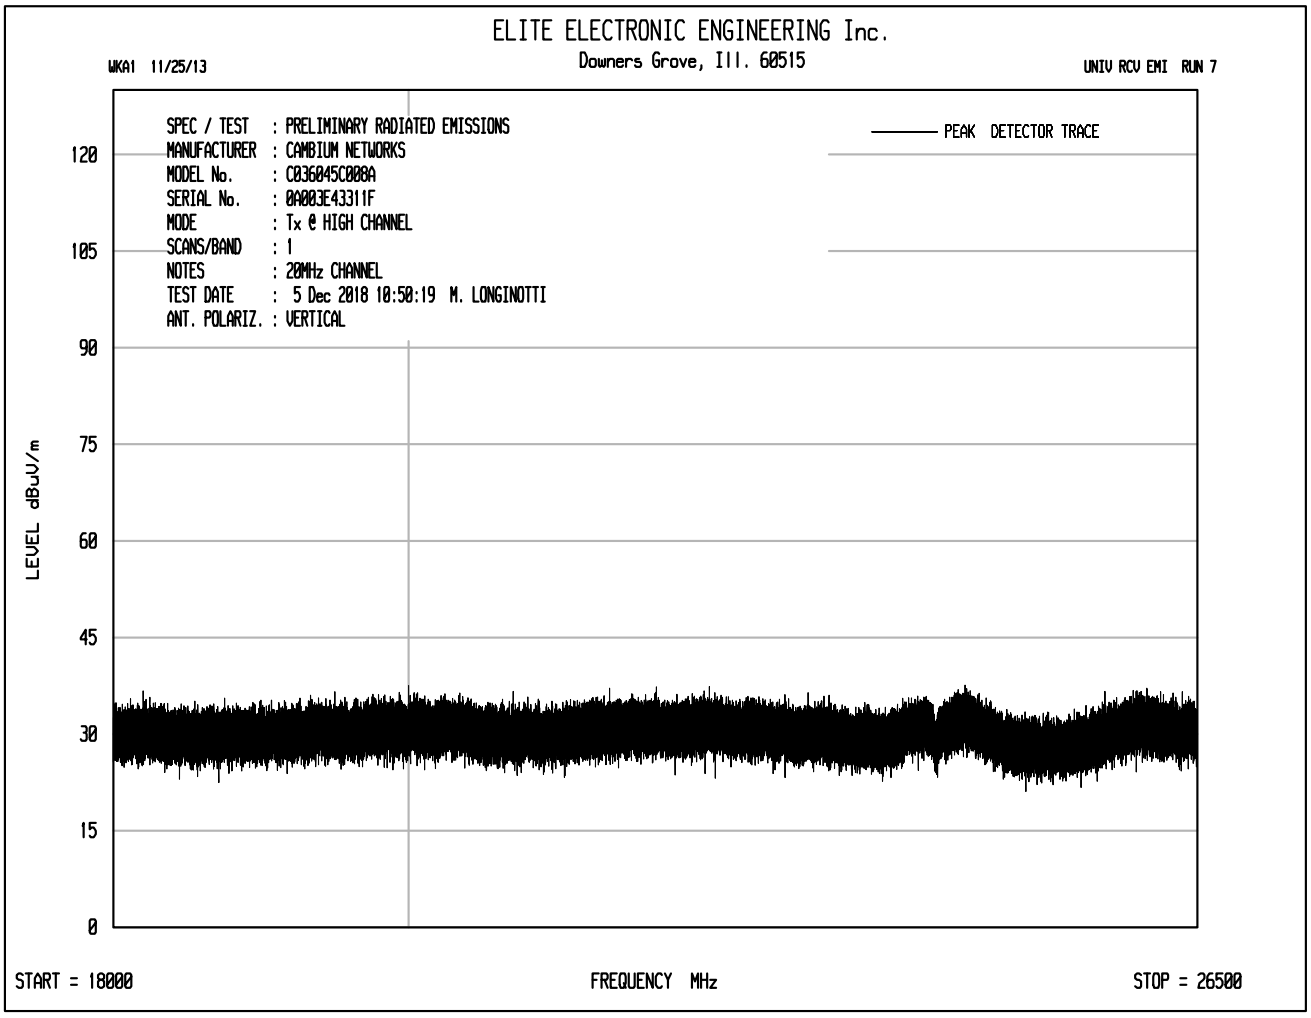
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 7
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 10:50:19 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

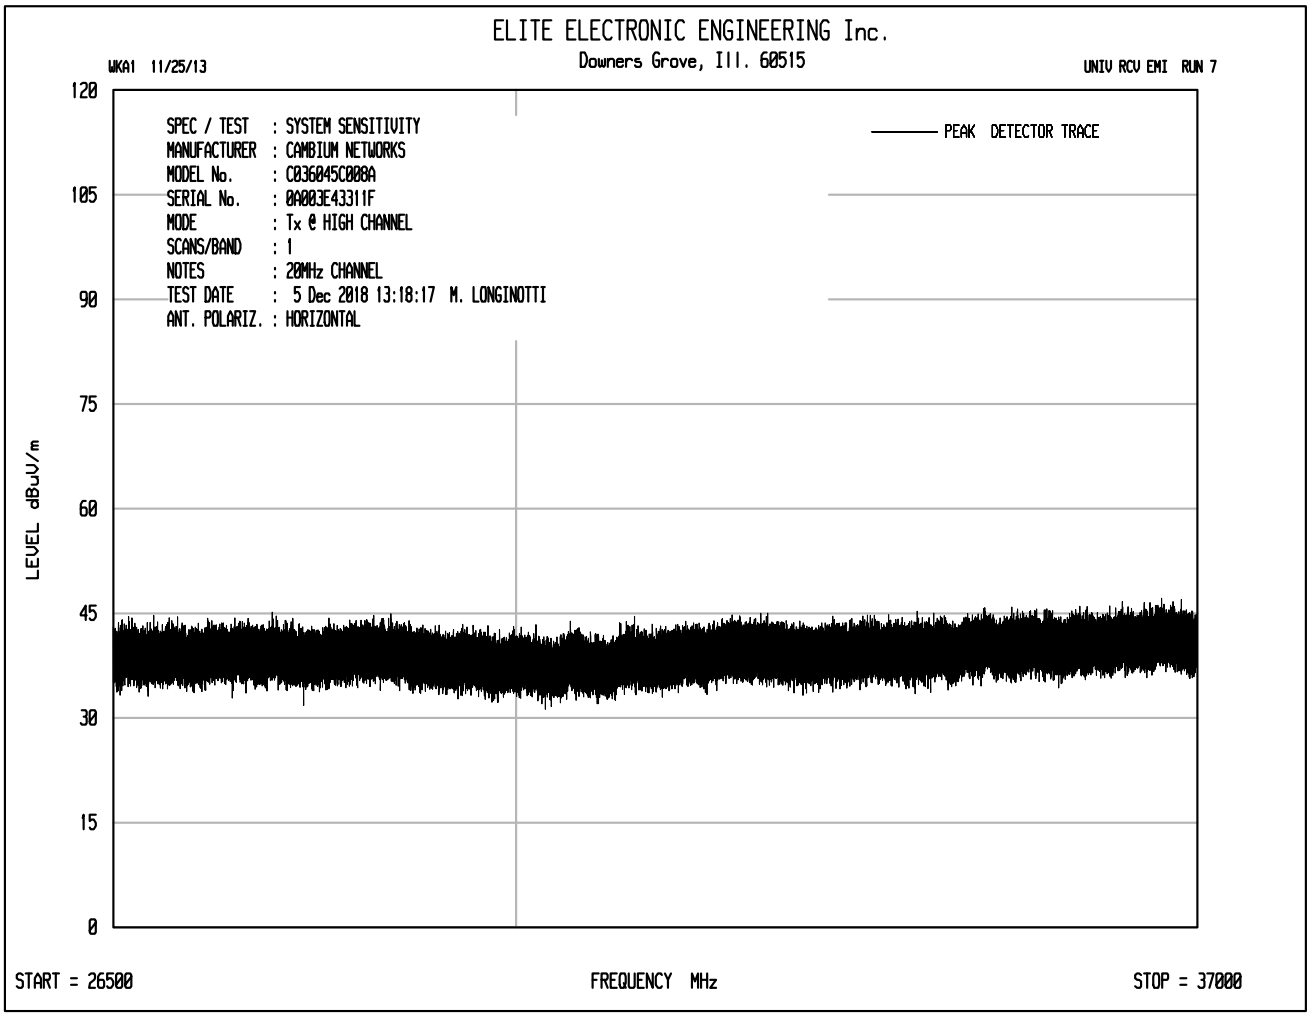
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 7
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 13:18:17 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

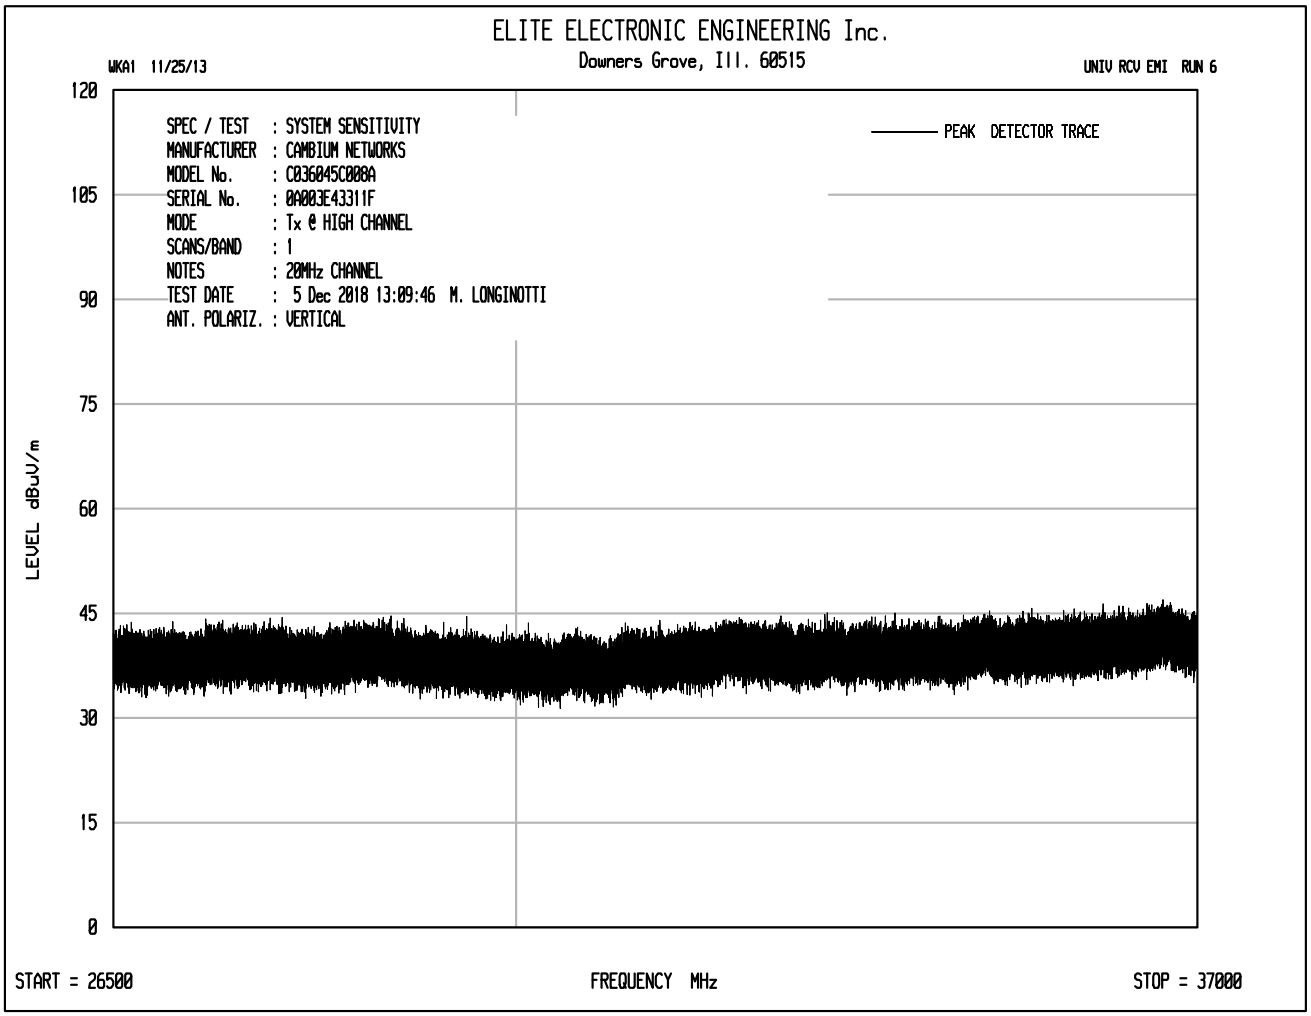
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 6
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 20MHz CHANNEL
TEST DATE : 5 Dec 2018 13:09:46 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

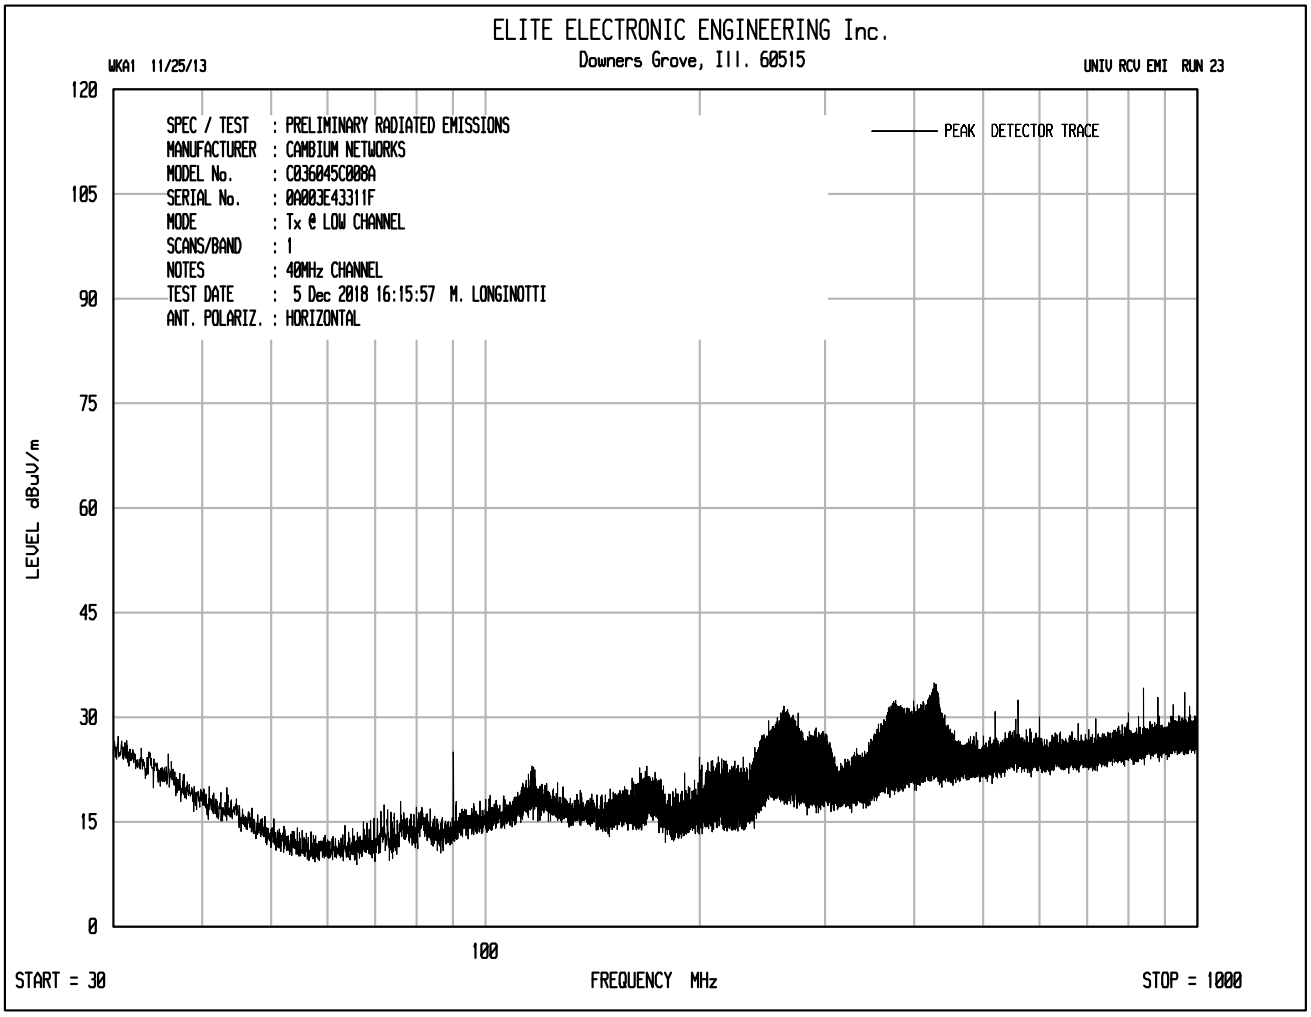
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 23
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 16:15:57 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

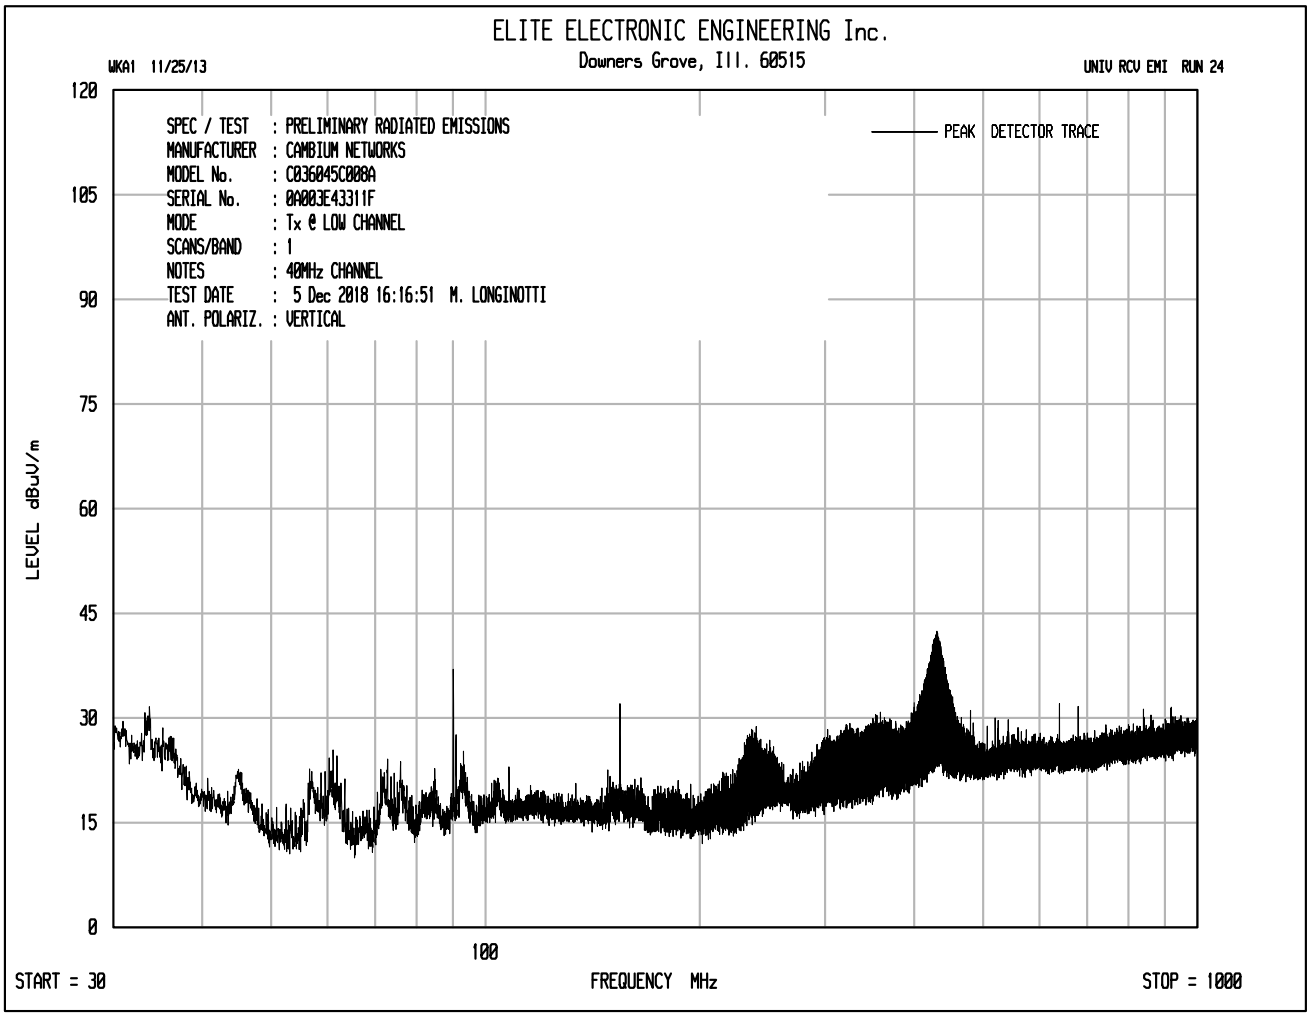
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 24
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 16:16:51 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

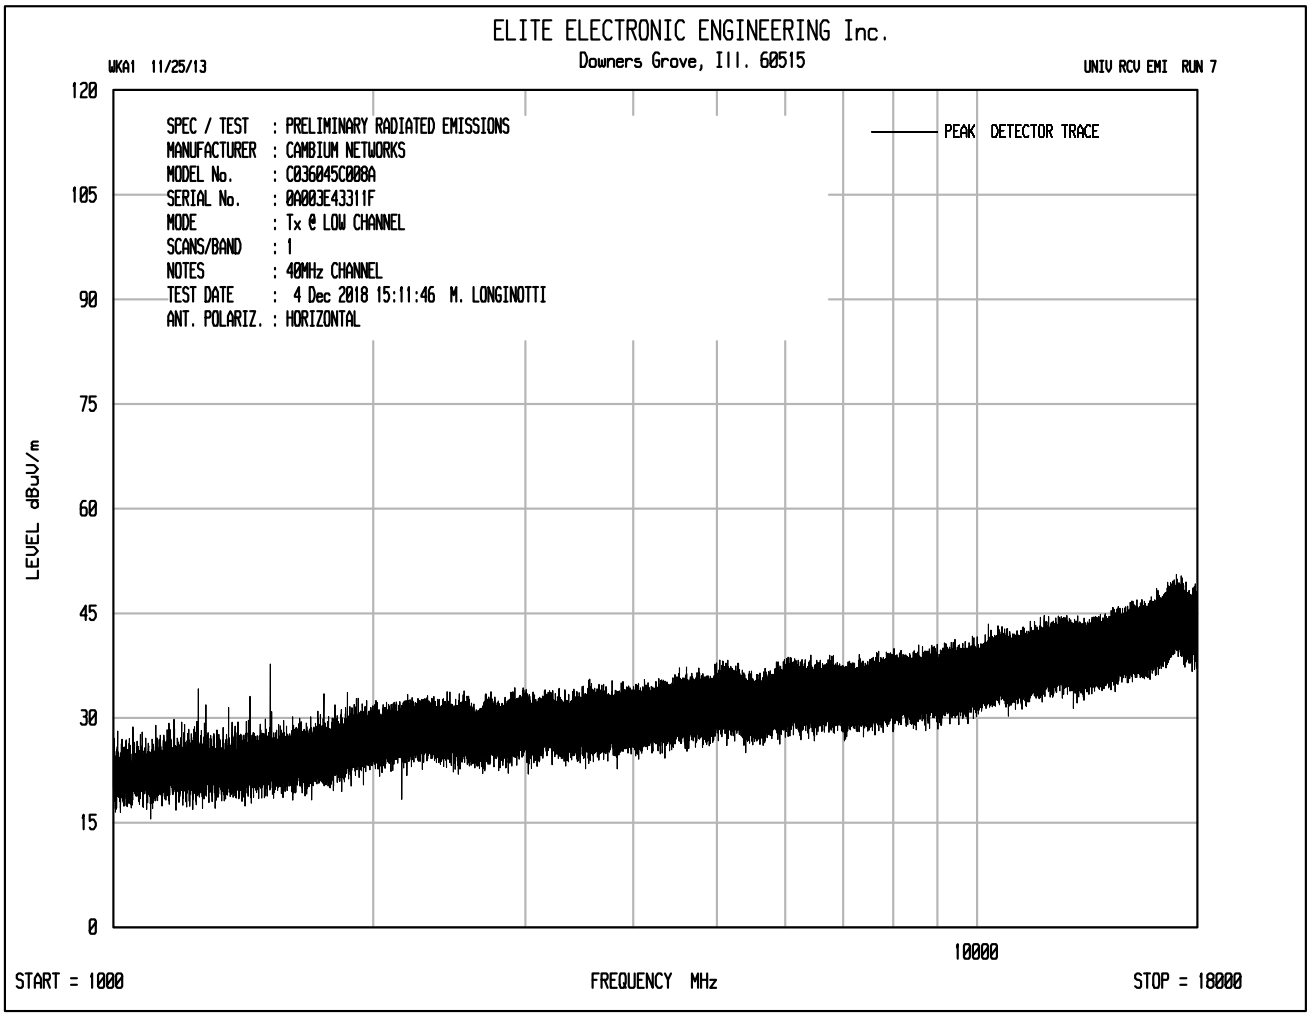
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 7
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 4 Dec 2018 15:11:46 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

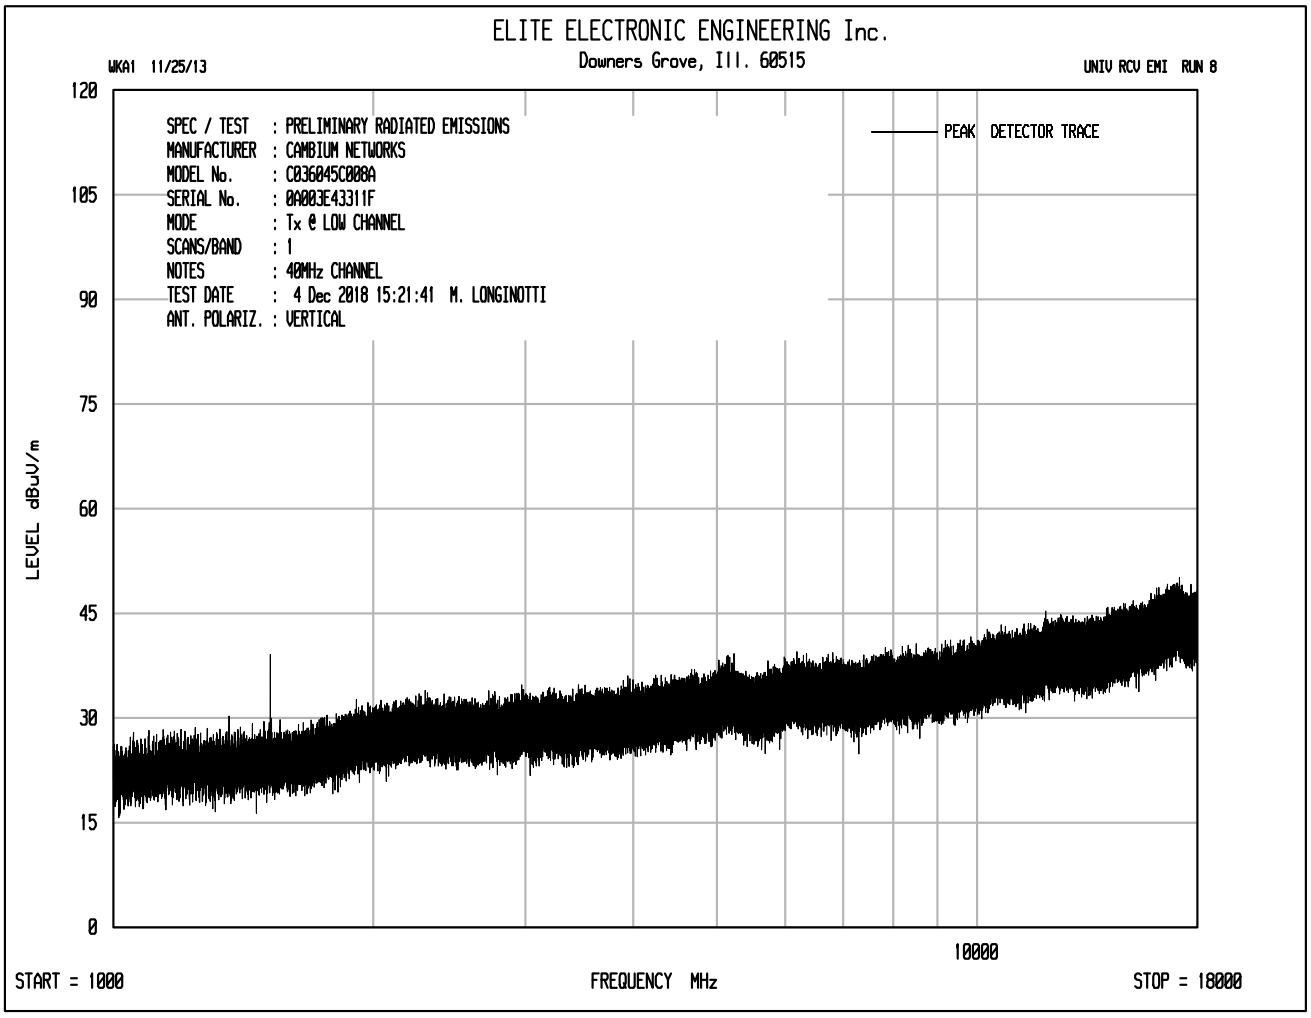
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 8
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 4 Dec 2018 15:21:41 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

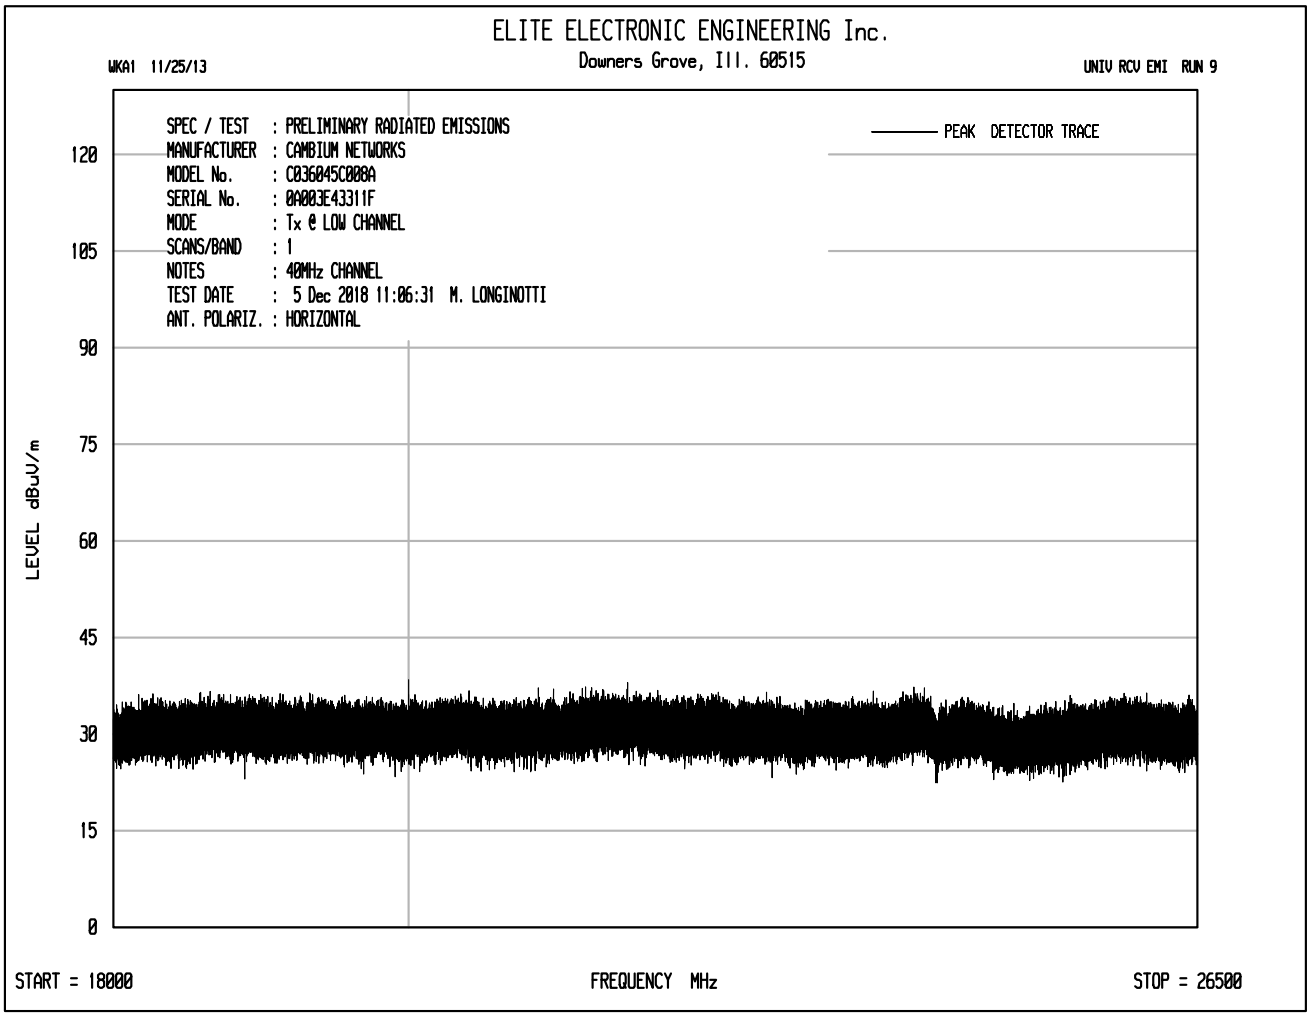
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 9
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 11:06:31 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

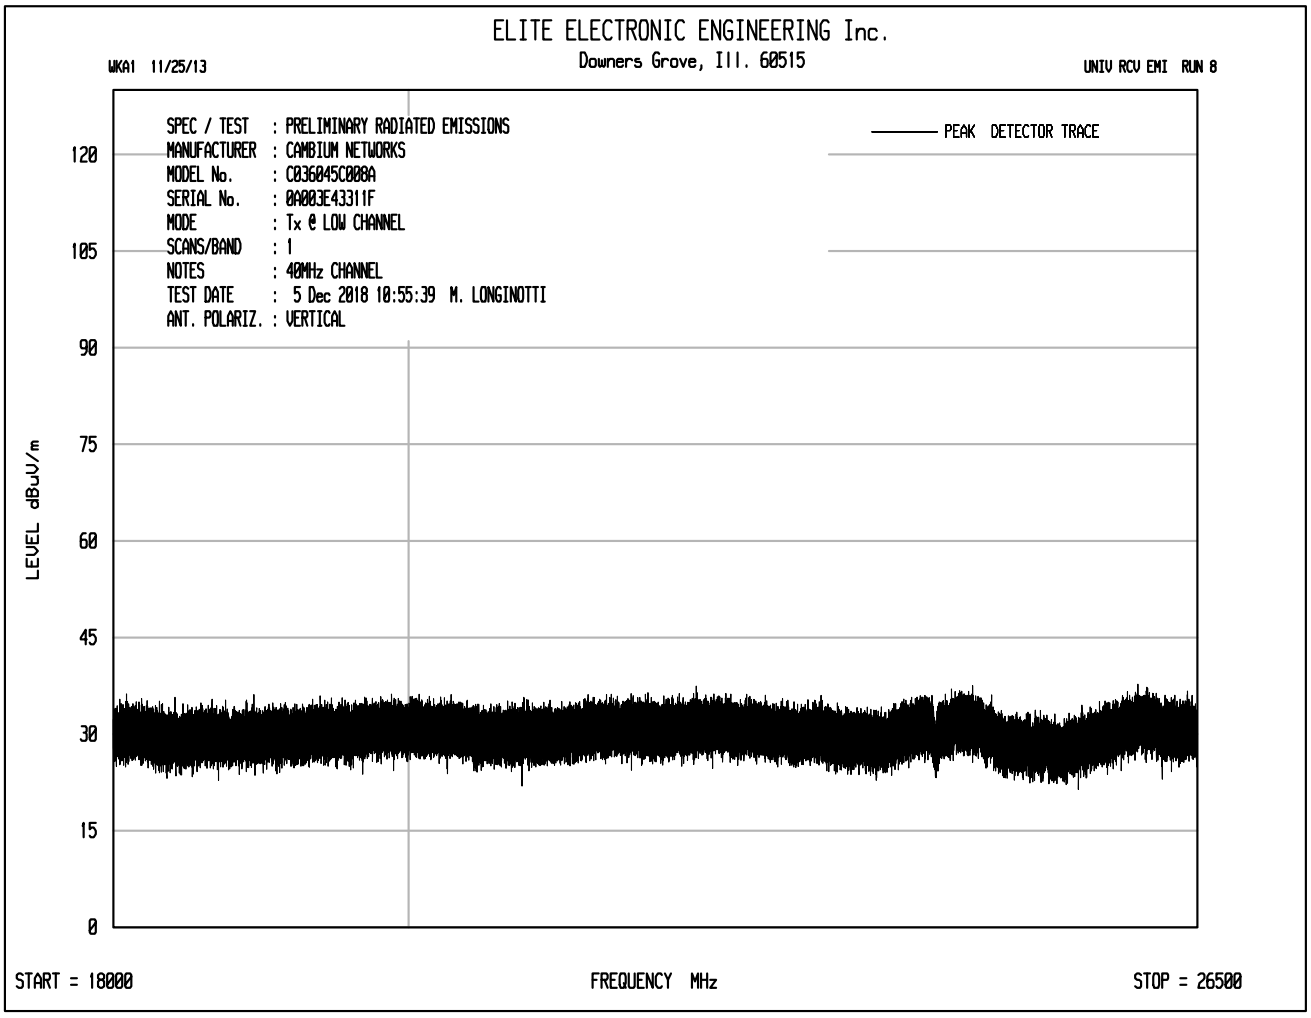
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 8
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 10:55:39 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

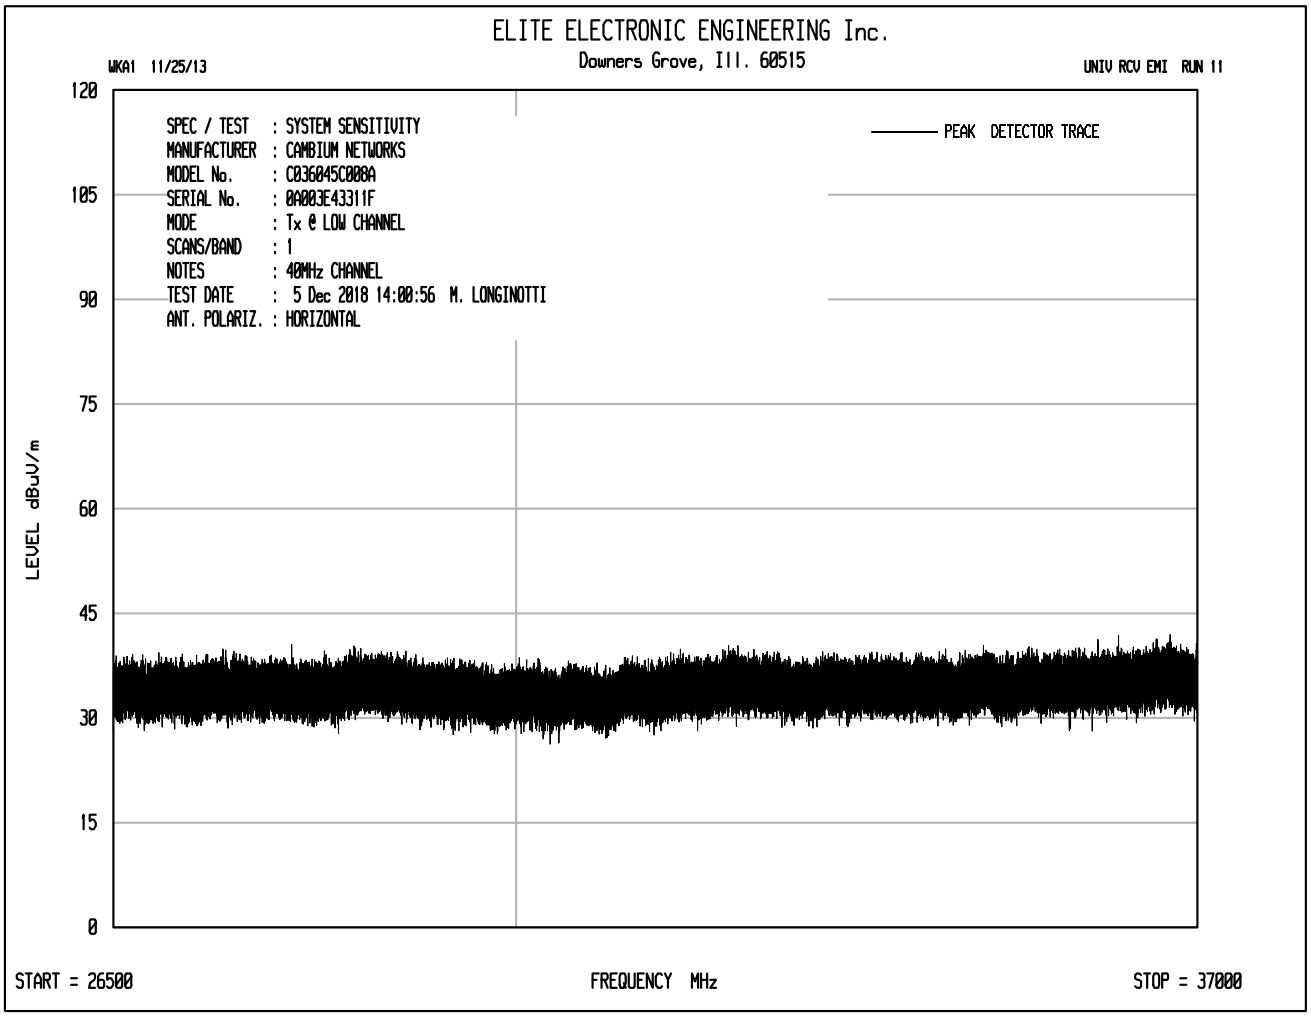
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 11
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 14:00:56 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

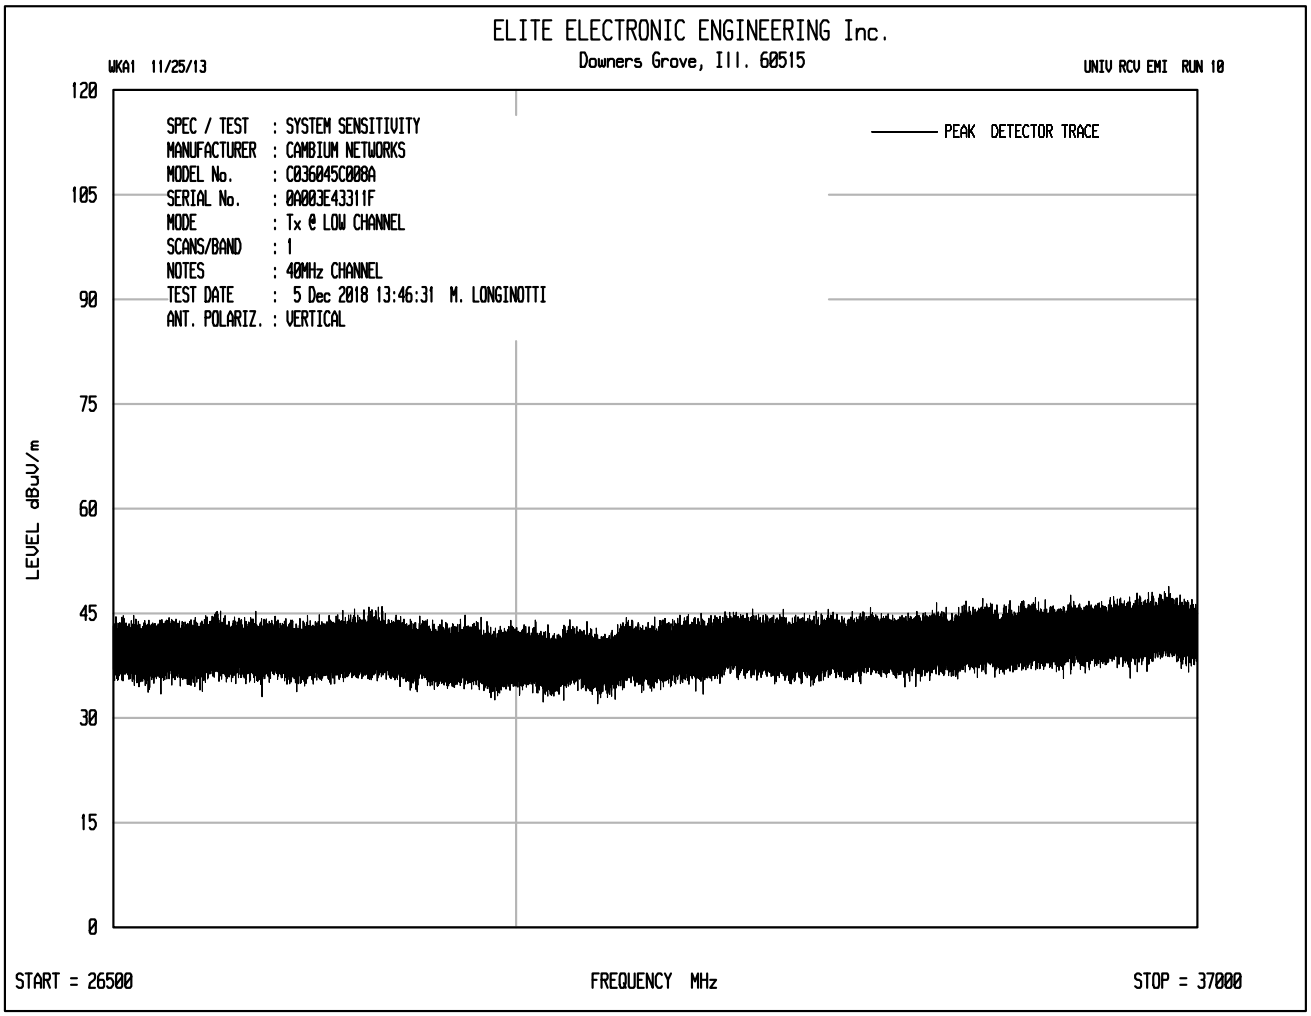
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 10
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ LOW CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 13:46:31 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

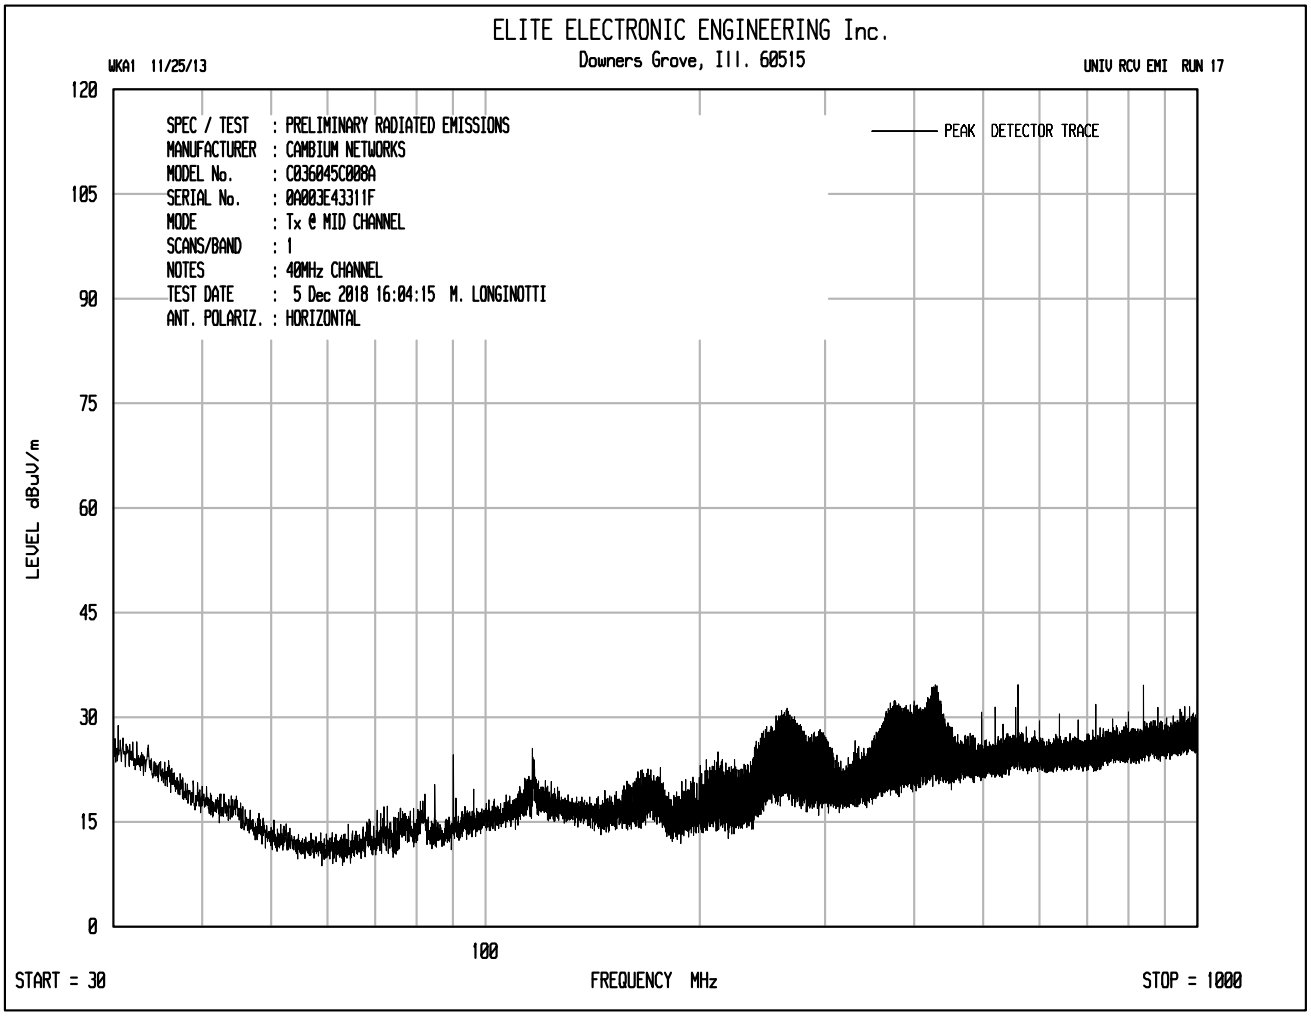
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 17
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 16:04:15 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

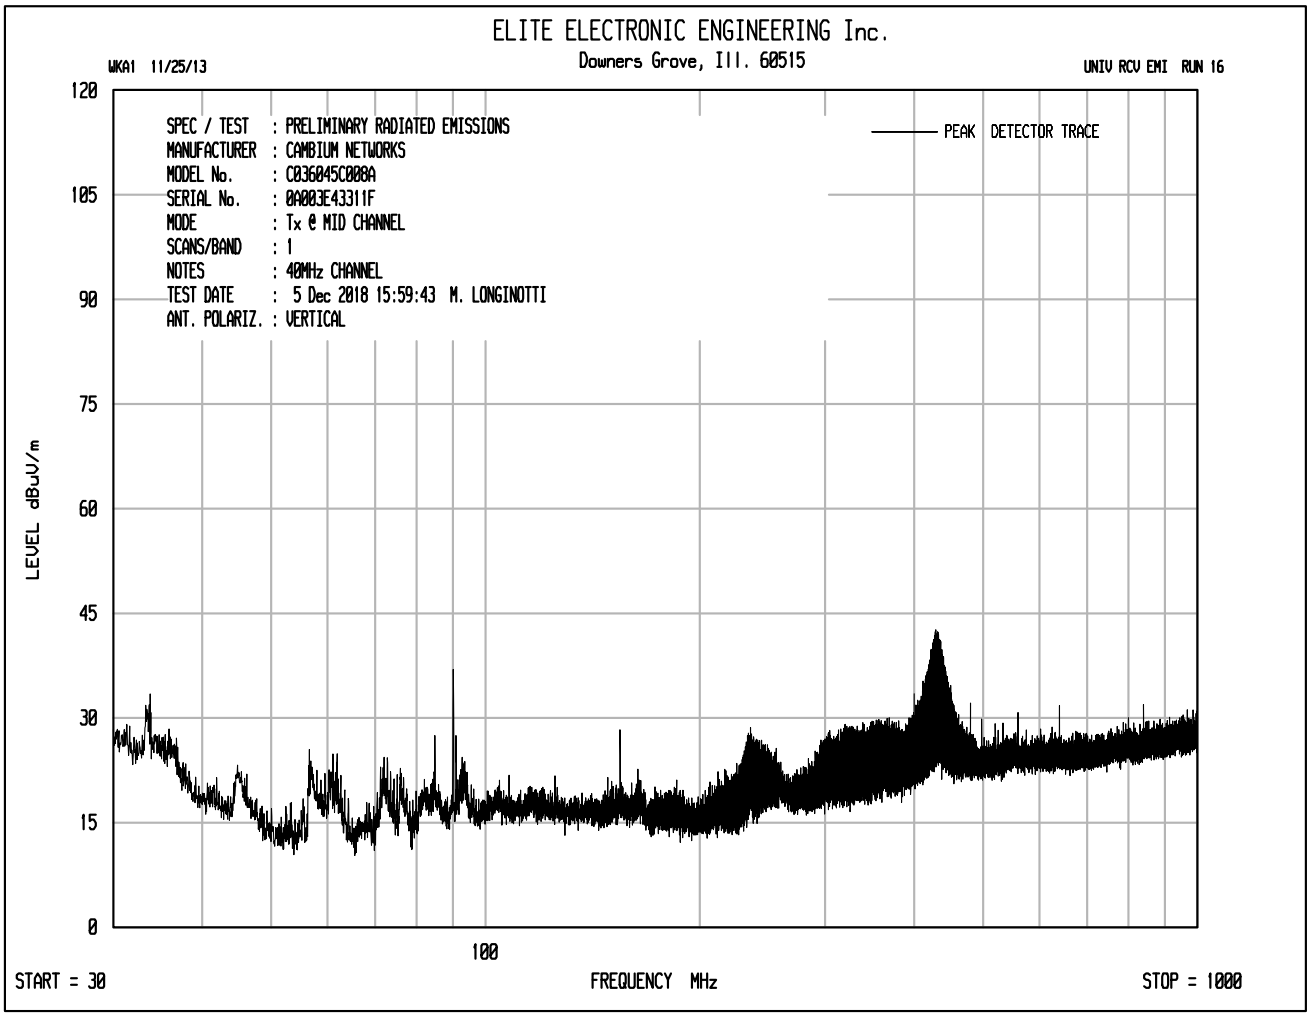
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 16
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 15:59:43 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

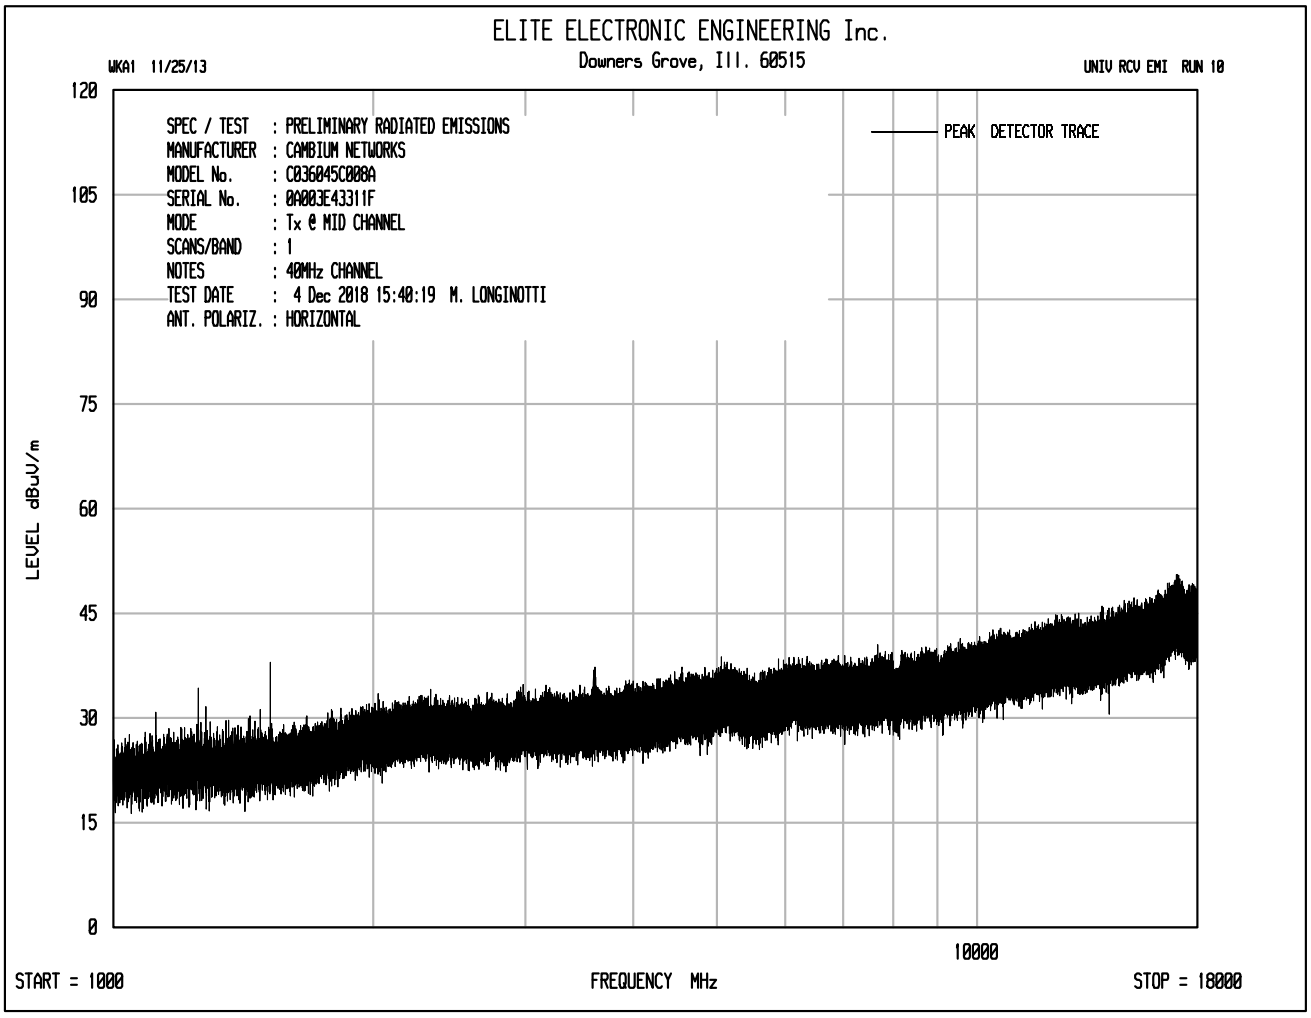
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 10
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 4 Dec 2018 15:40:19 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

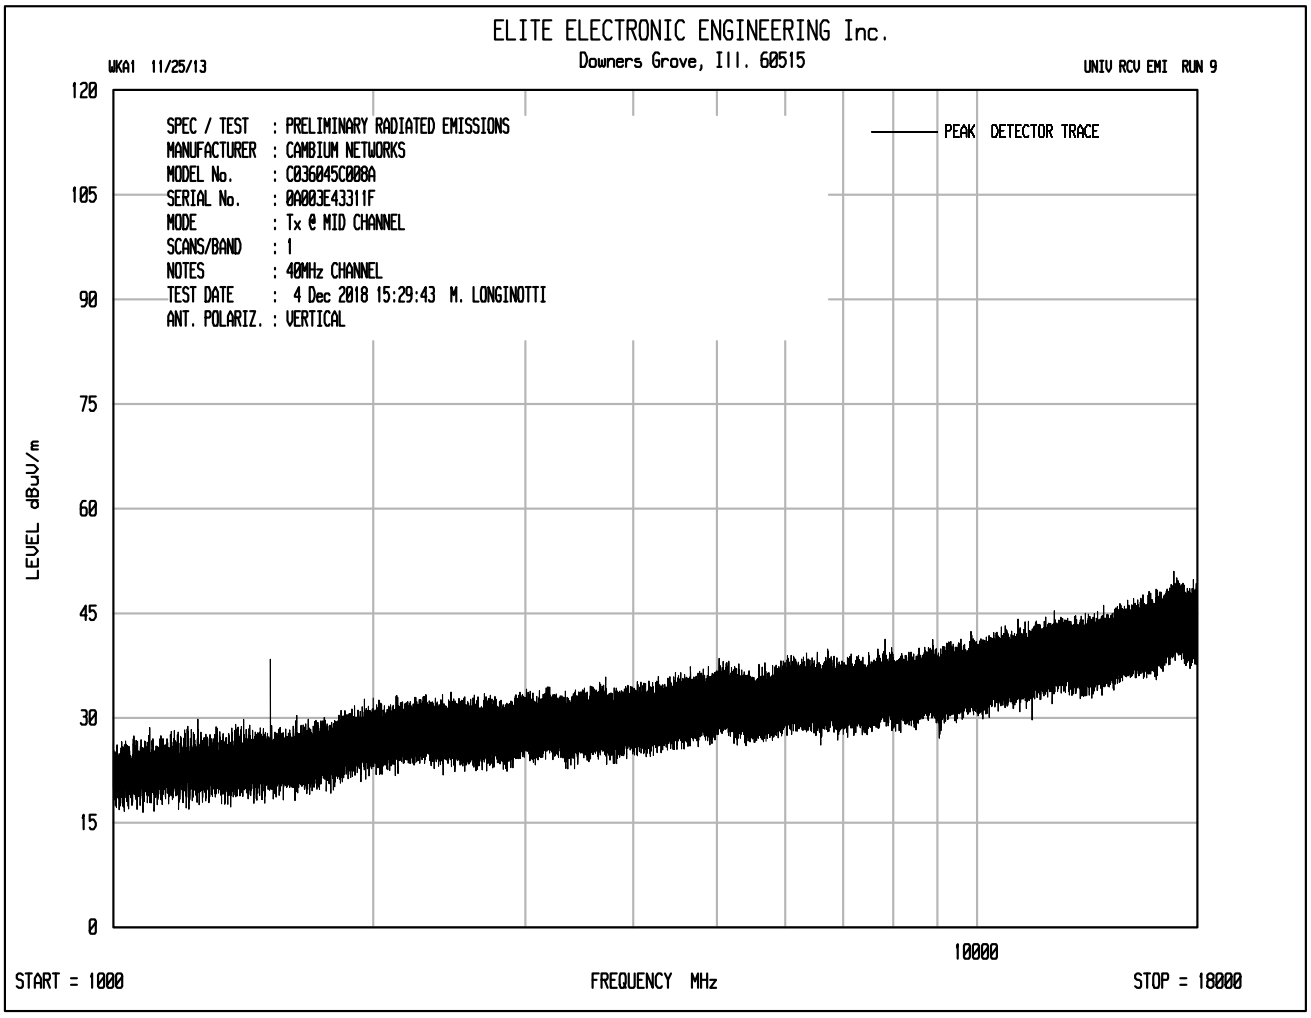
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 9
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 4 Dec 2018 15:29:43 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

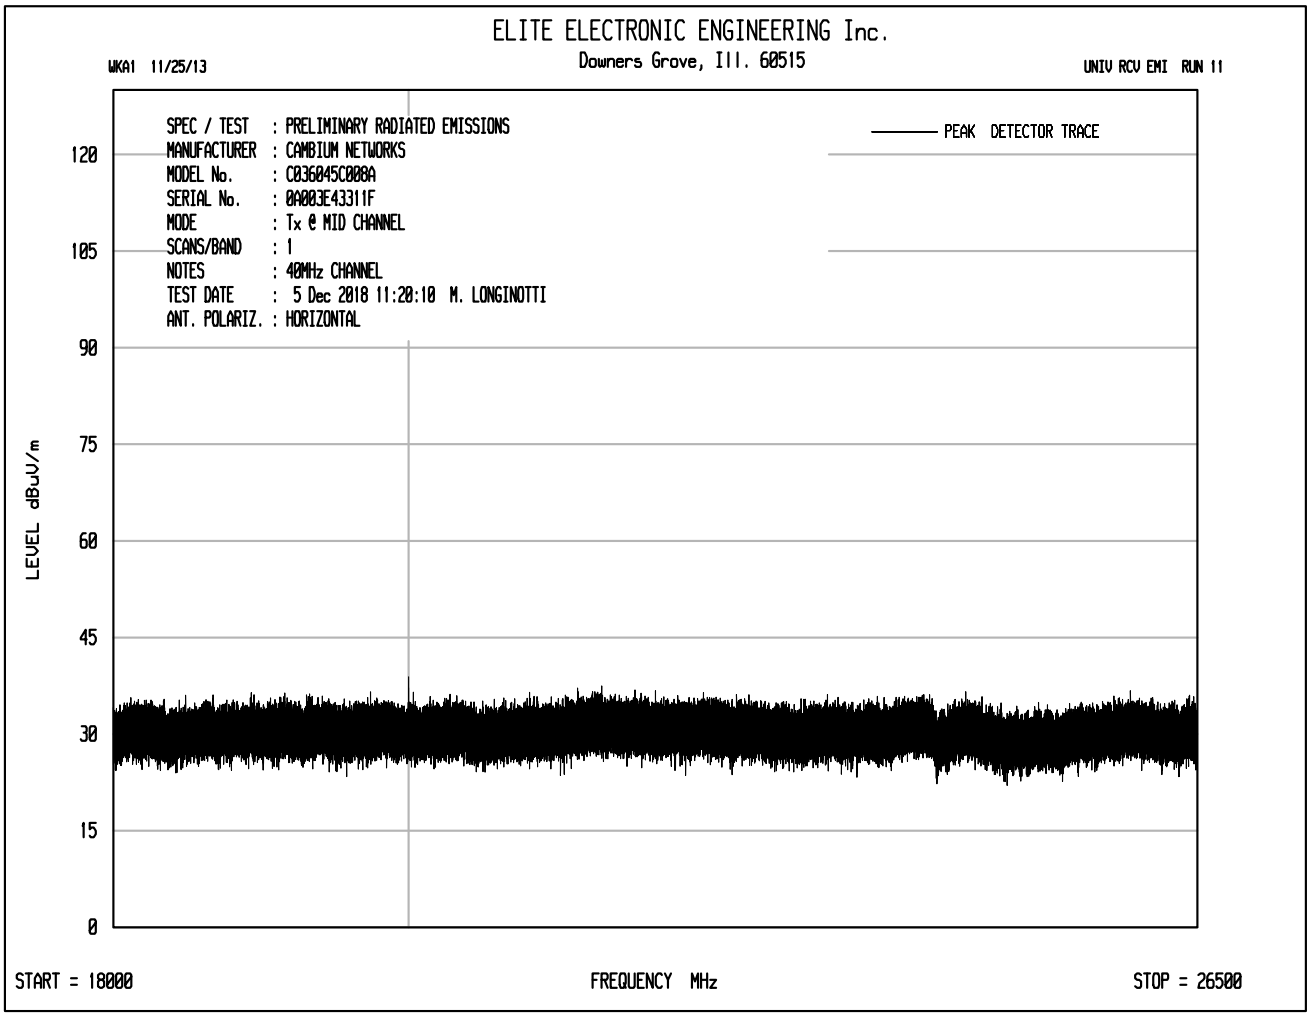
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 11
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 11:20:10 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

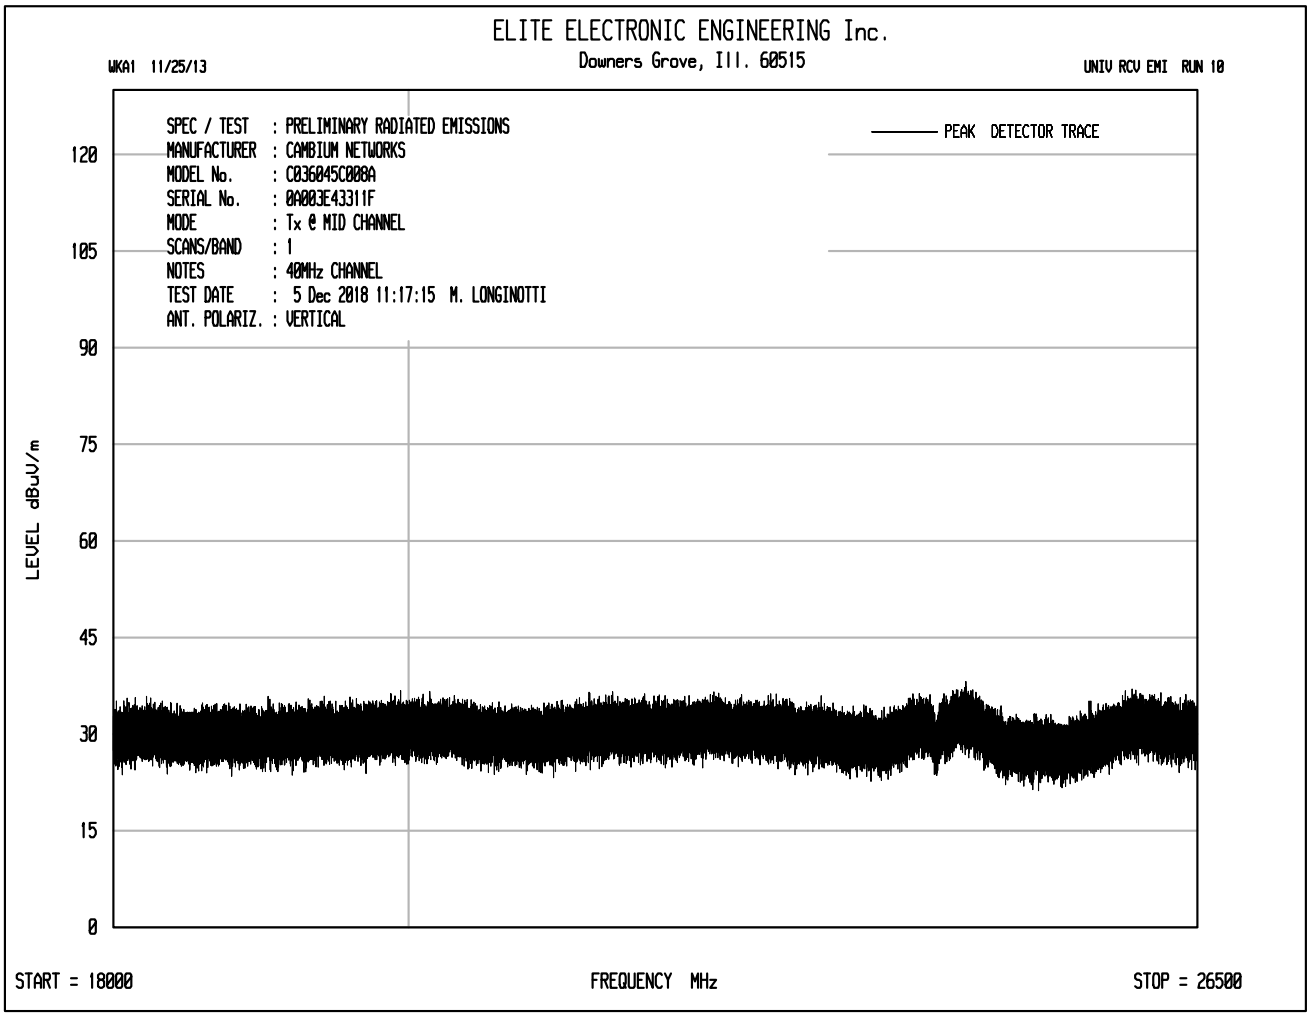
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 10
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 11:17:15 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

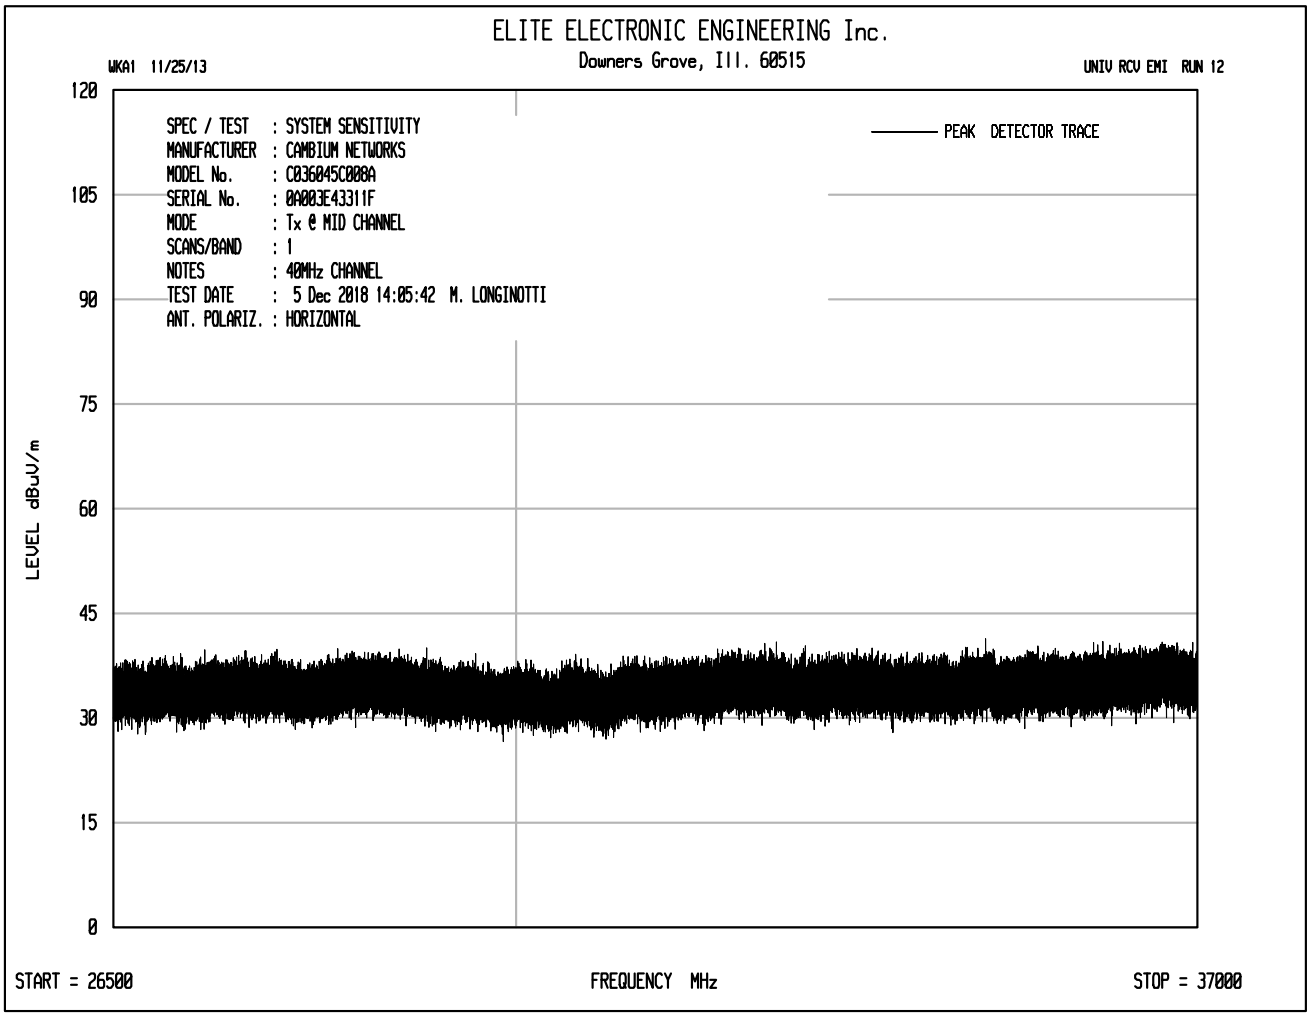
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 12
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 14:05:42 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

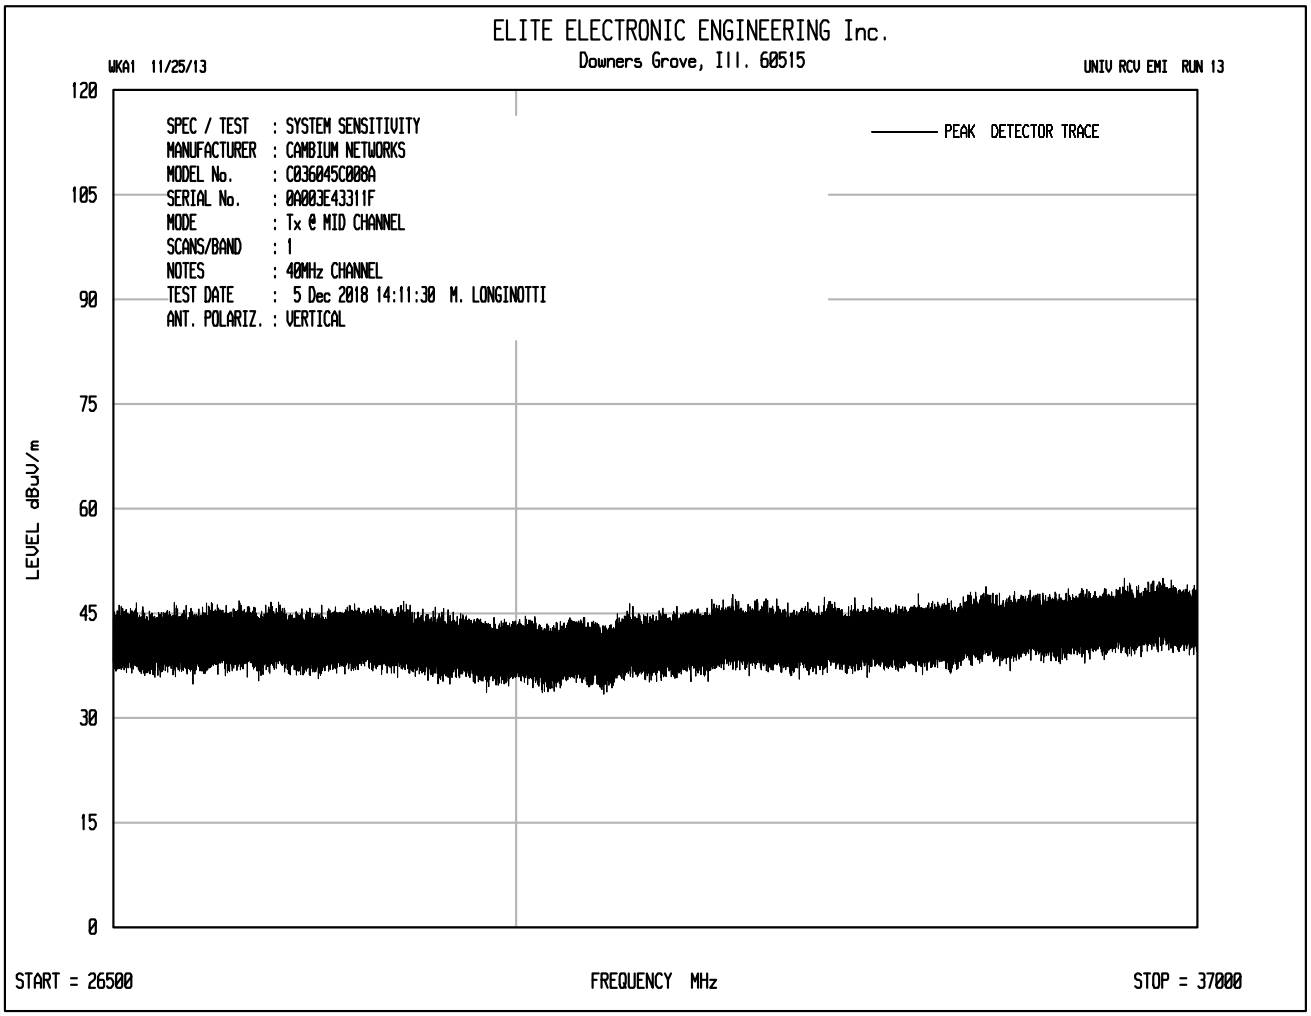
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 13
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ MID CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 14:11:30 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

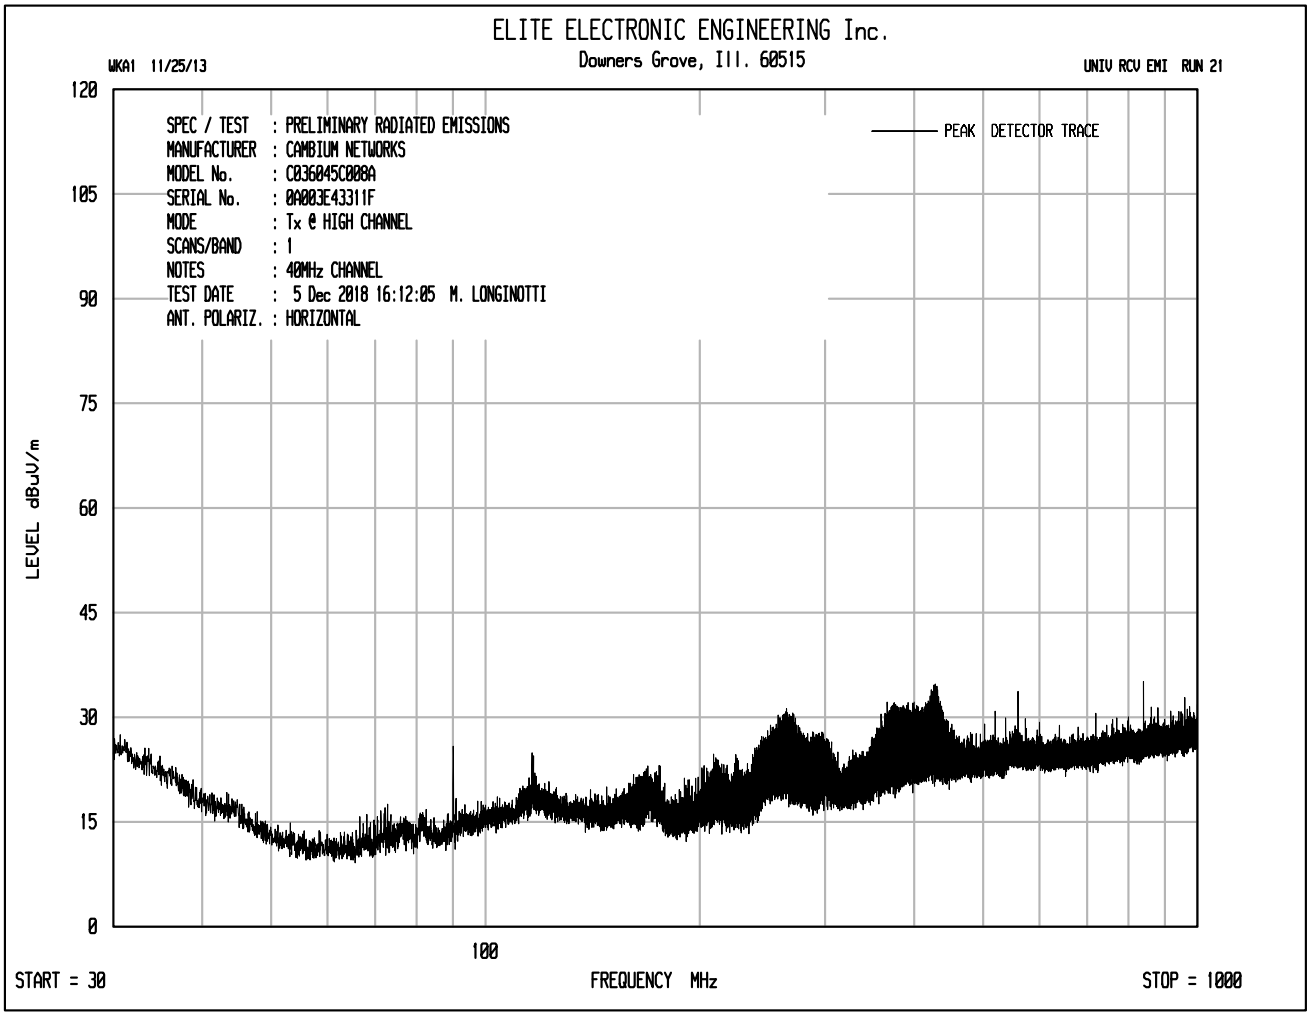
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 21
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 16:12:05 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

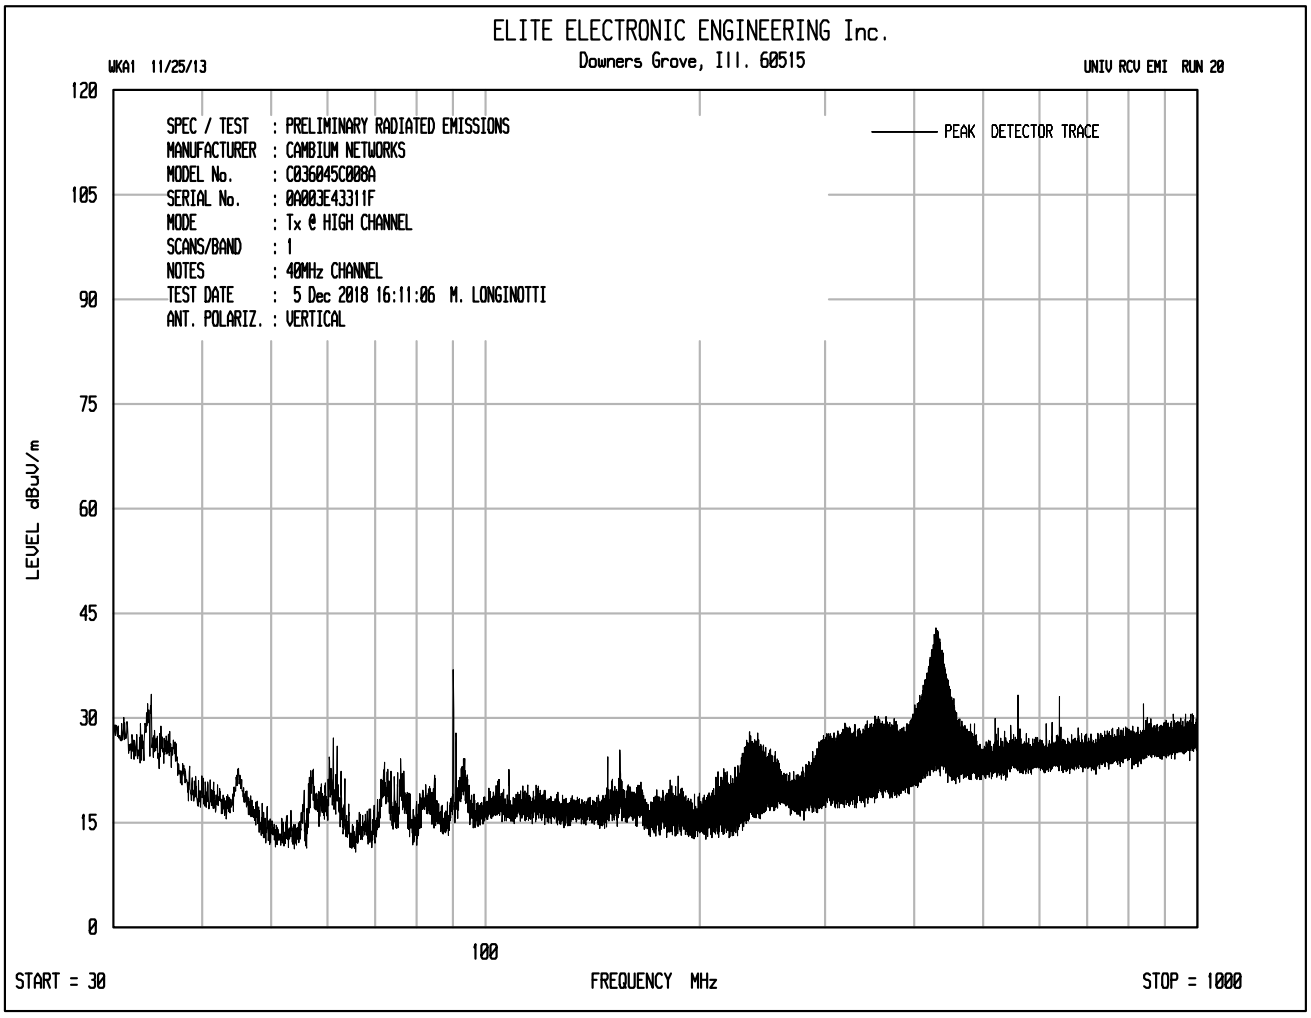
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 20
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 16:11:06 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
100
START = 30
FREQUENCY MHz
STOP = 1000

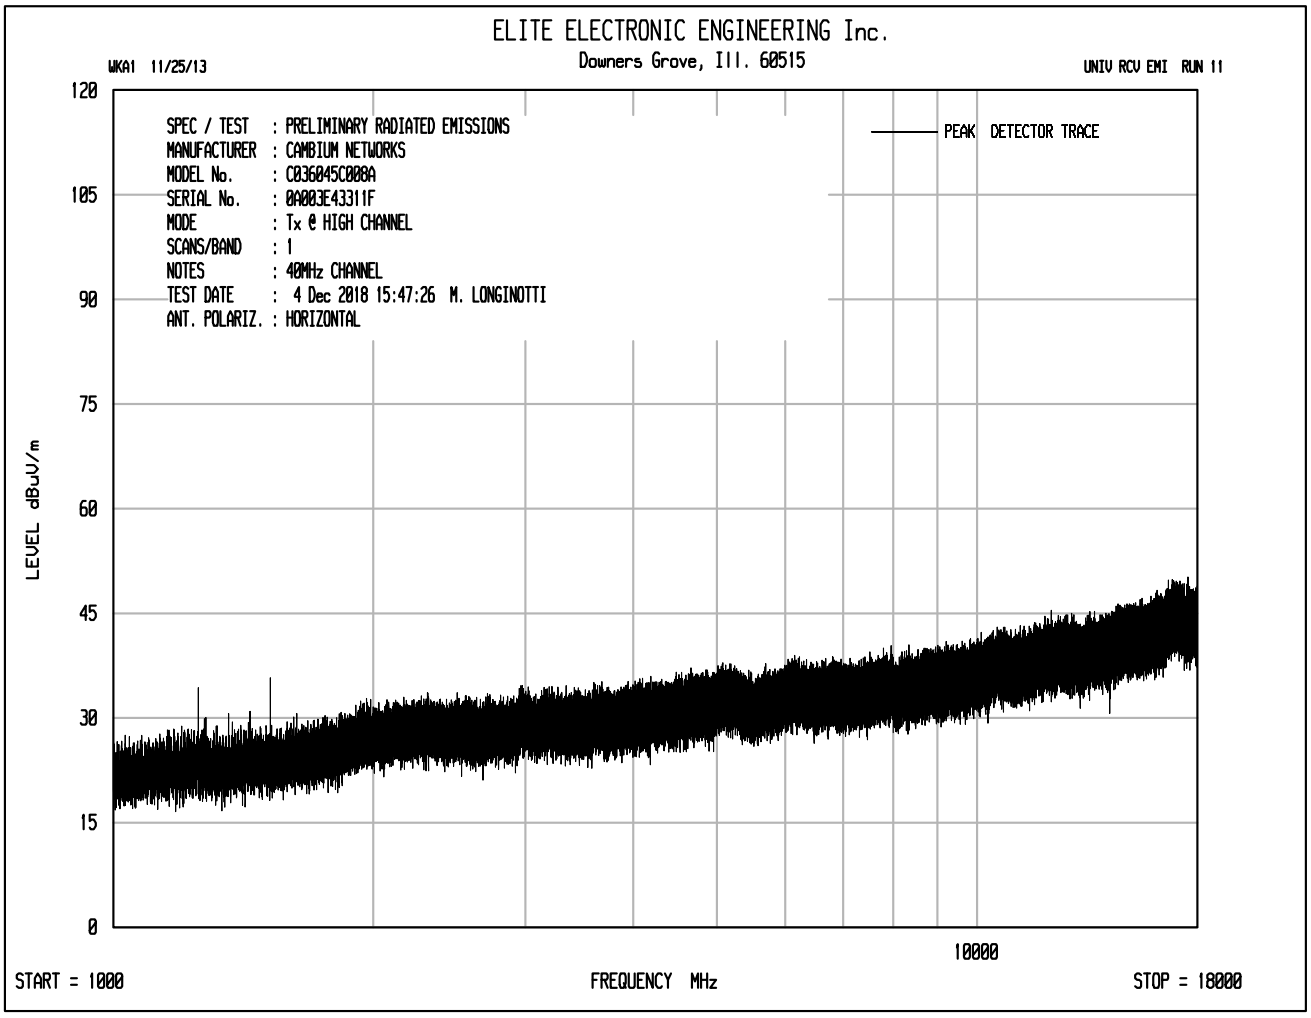
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 11
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 4 Dec 2018 15:47:26 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

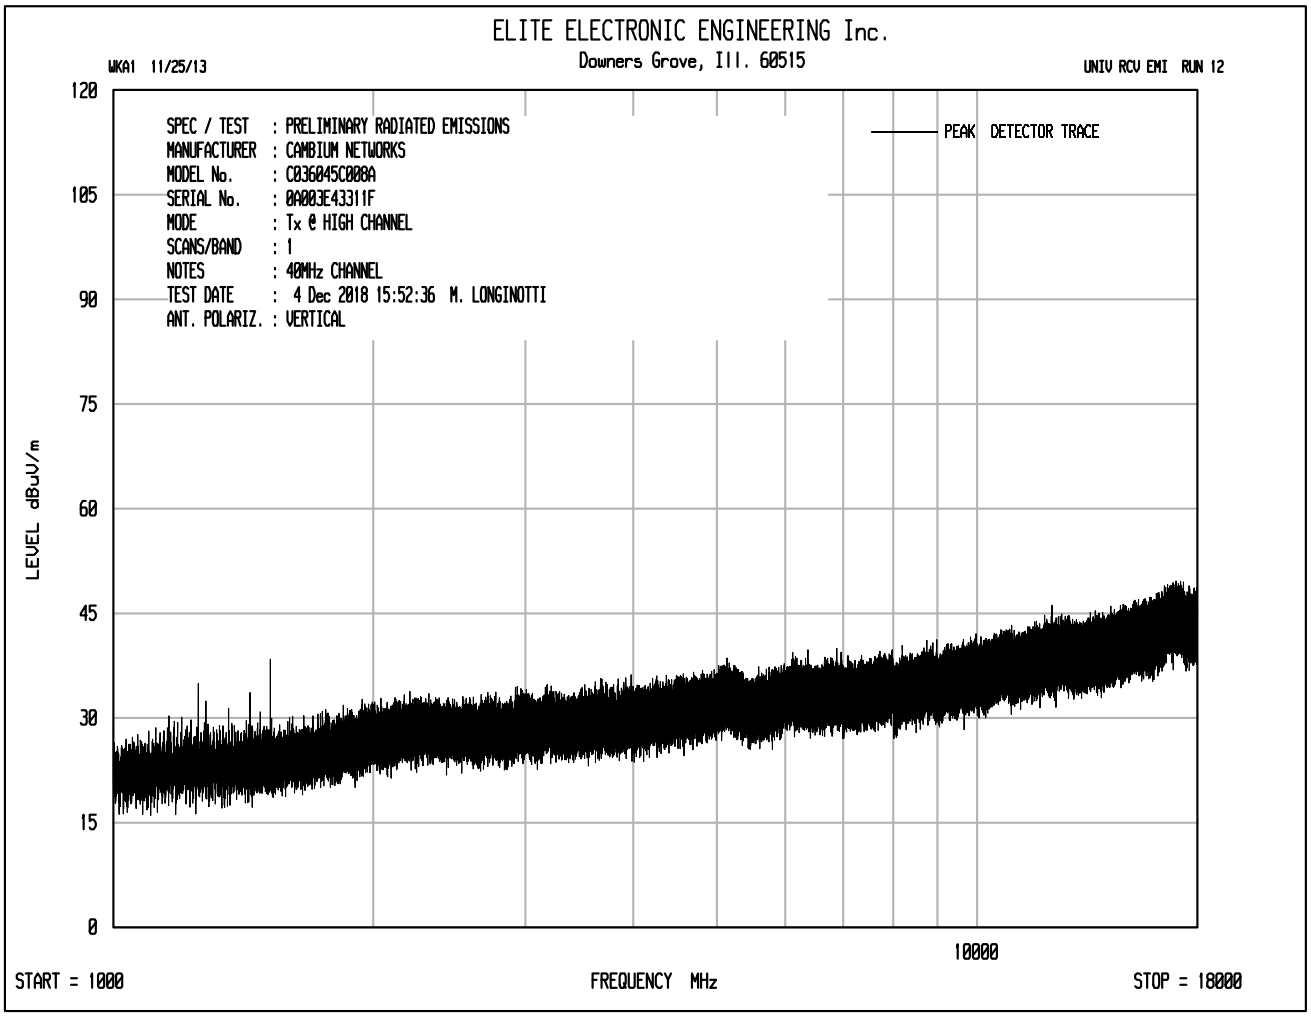
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 12
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 4 Dec 2018 15:52:36 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
10000
START = 1000
FREQUENCY MHz
STOP = 18000

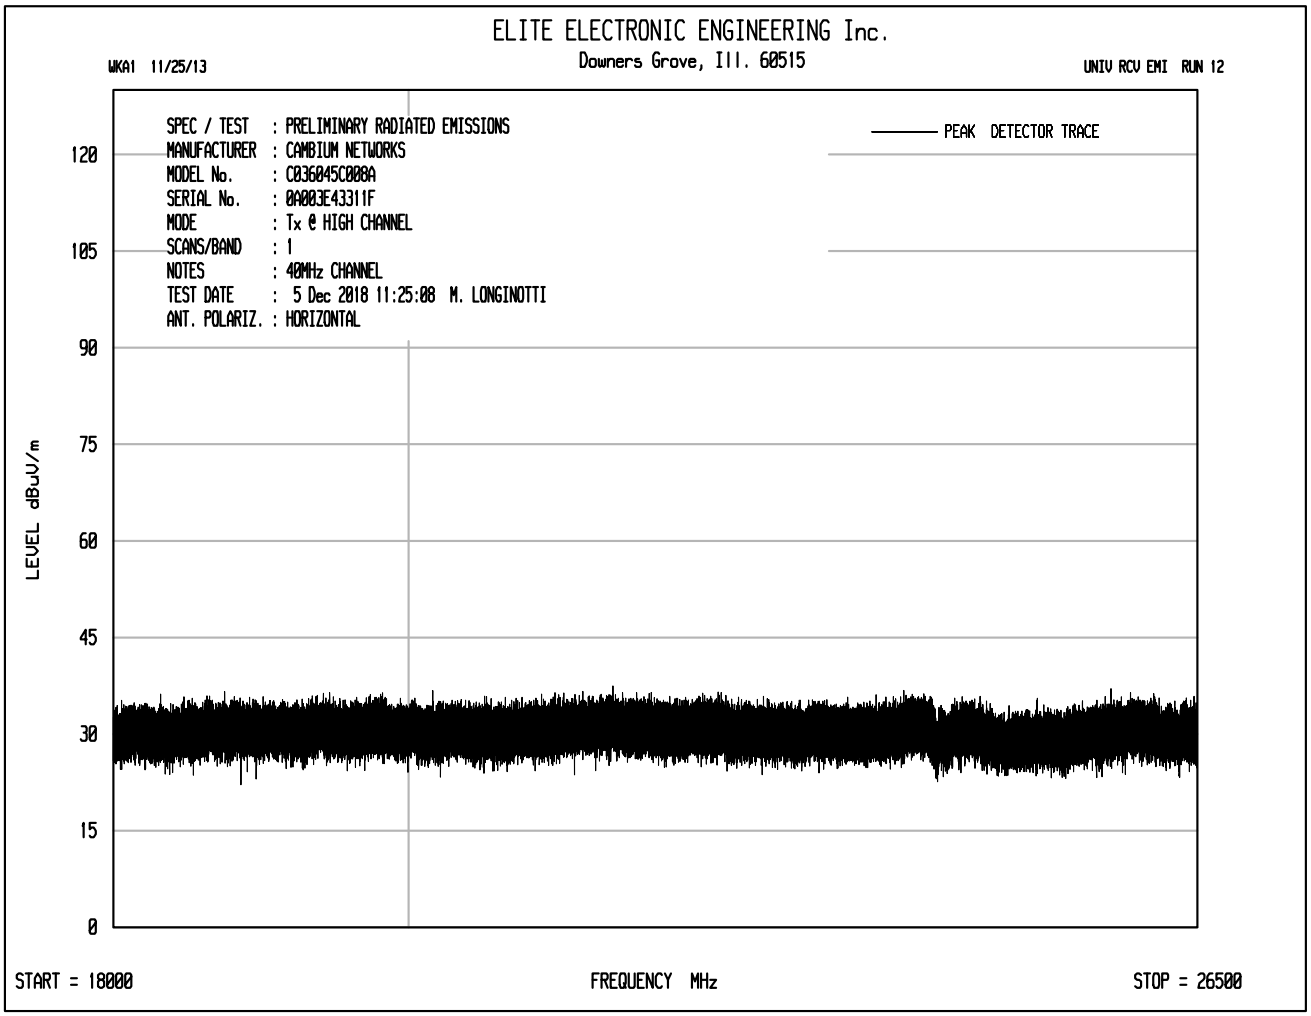
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 12
SPEC / TEST : PRELIMINARY RADIATED EMISSIONS
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 11:25:08 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 18000
FREQUENCY MHz
STOP = 26500

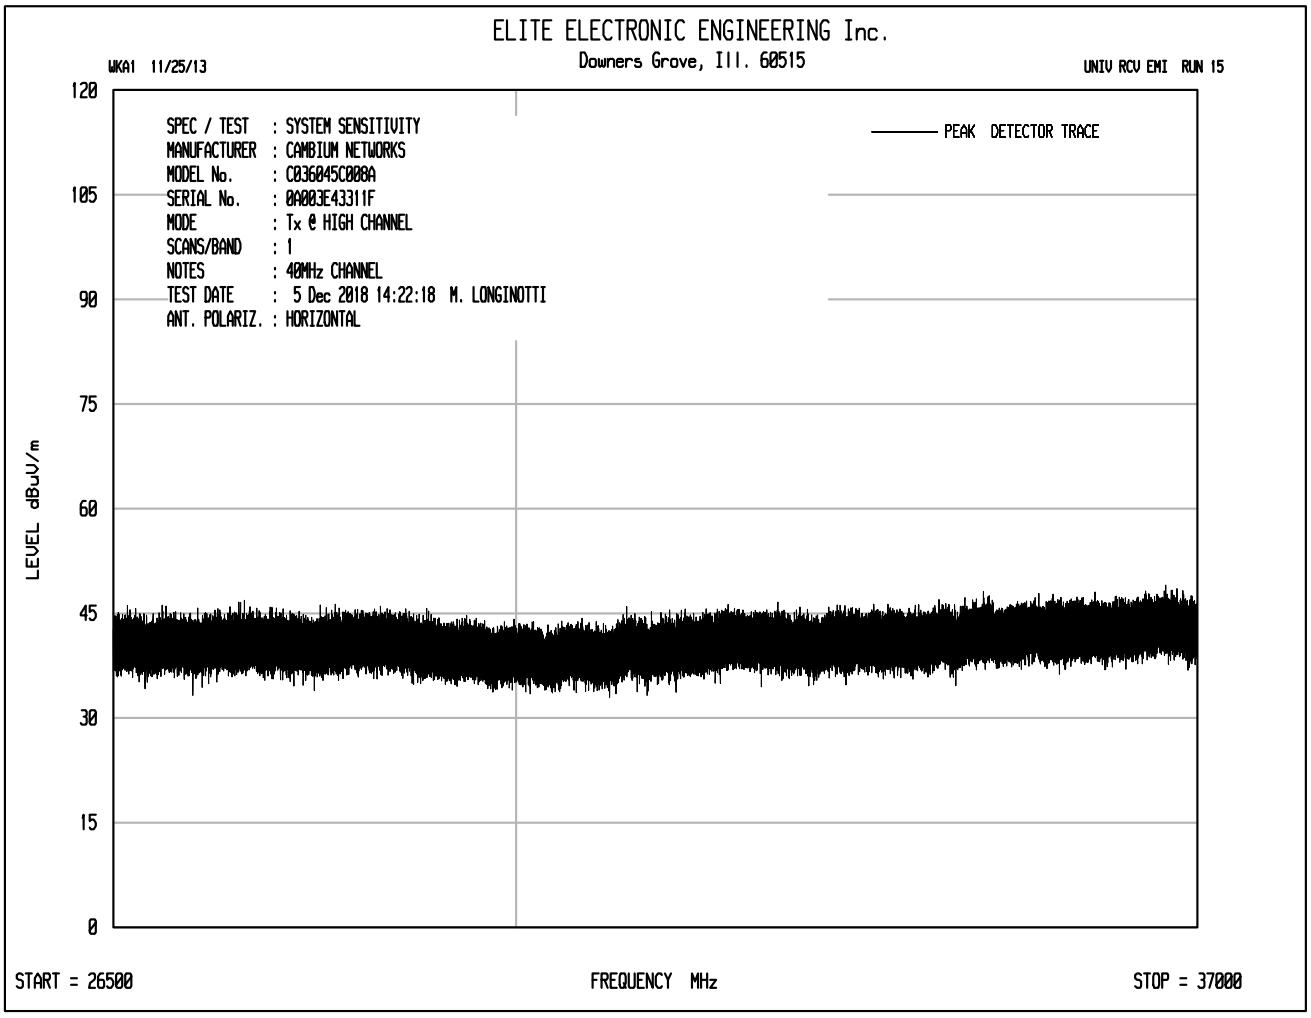
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 15
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 14:22:18 M. LONGINOTTI
ANT. POLARIZ. : HORIZONTAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

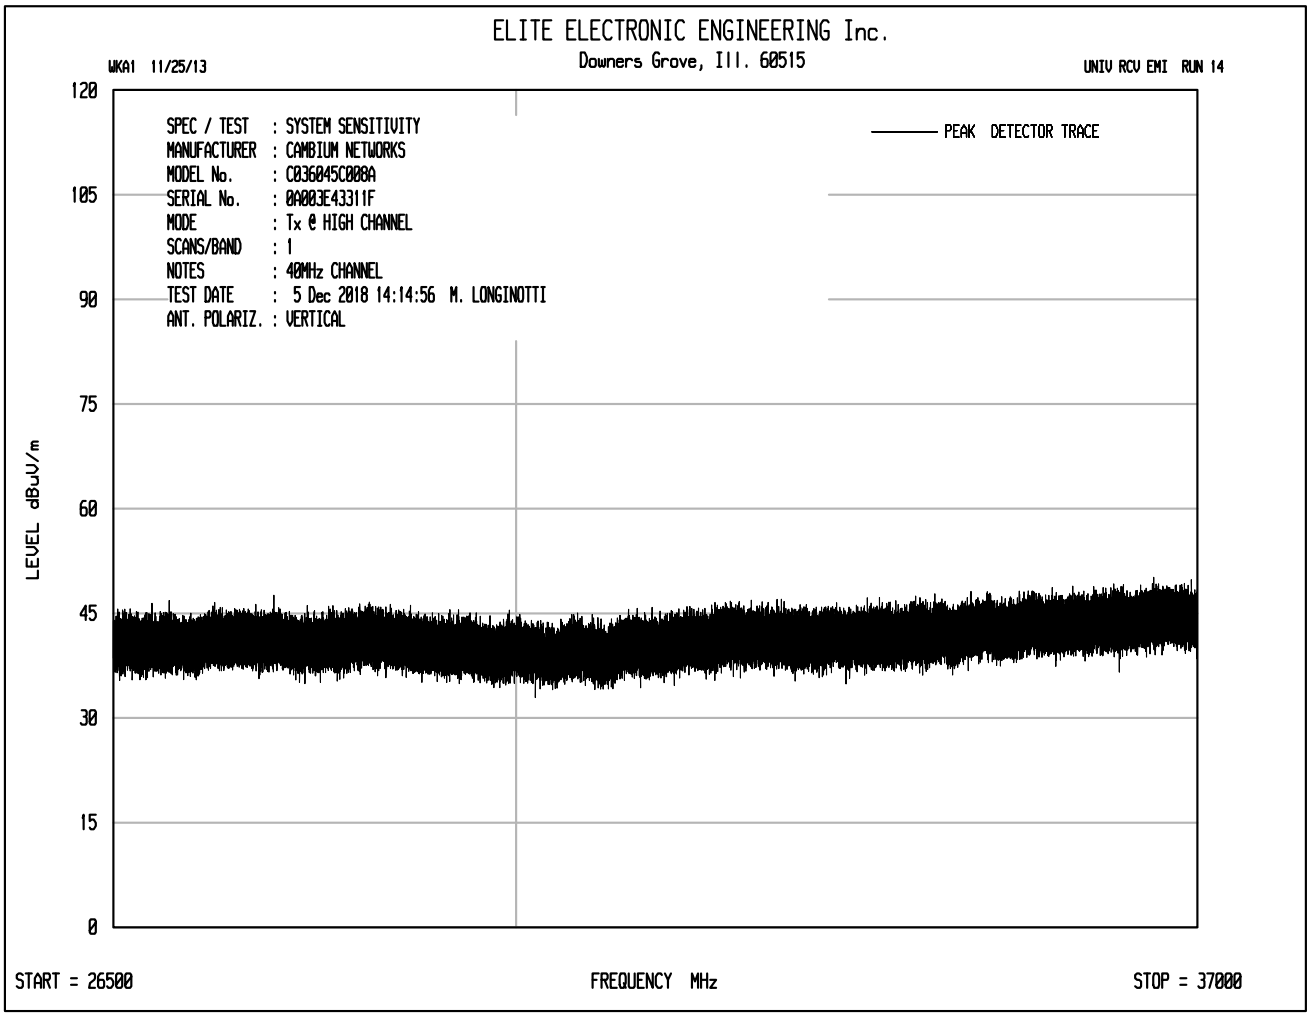
ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515
WKA1 11/25/13
UNIV RCV EMI RUN 14
SPEC / TEST : SYSTEM SENSITIVITY
MANUFACTURER : CAMBIUM NETWORKS
MODEL No. : C036045C008A
SERIAL No. : 0A003E43311F
MODE : Tx @ HIGH CHANNEL
SCANS/BAND : 1
NOTES : 40MHz CHANNEL
TEST DATE : 5 Dec 2018 14:14:56 M. LONGINOTTI
ANT. POLARIZ. : VERTICAL
PEAK DETECTOR TRACE
LEVEL dBuV/m
120
105
90
75
60
45
30
15
0
START = 26500
FREQUENCY MHz
STOP = 37000

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Spurious Radiated Emissions
DATE : December 4 and 5, 2018
MODE : Transmit at 3560MHz, 20MHz Channel
NOTES :

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm/MHz)	ERP Limit (dBm/MHz)
7120.00	H	46.2	Ambient	-62.0	9.2	6.1	-58.8	-40.0
7120.00	V	46.3	Ambient	-61.4	9.2	6.1	-58.2	-40.0
10680.00	H	44.2	Ambient	-58.8	10.9	7.4	-55.3	-40.0
10680.00	V	44.2	Ambient	-59.6	10.9	7.4	-56.1	-40.0
14240.00	H	44.2	Ambient	-54.2	11.7	8.6	-51.2	-40.0
14240.00	V	44.5	Ambient	-53.8	11.7	8.6	-50.8	-40.0
17800.00	H	44.3	Ambient	-50.0	11.2	9.9	-48.7	-40.0
17800.00	V	44.4	Ambient	-50.0	11.2	9.9	-48.7	-40.0
21360.00	H	32.9	Ambient	-69.1	14.3	11.4	-66.2	-40.0
21360.00	V	33.3	Ambient	-67.3	14.3	11.4	-64.4	-40.0
24920.00	H	33.0	Ambient	-68.6	15.3	11.0	-64.3	-40.0
24920.00	V	32.7	Ambient	-66.8	15.3	11.0	-62.5	-40.0
28480.00	H	30.3	Ambient	-65.0	13.4	11.7	-63.3	-40.0
28480.00	V	36.7	Ambient	-56.2	13.4	11.7	-54.5	-40.0
32040.00	H	31.0	Ambient	-64.4	14.2	12.8	-63.0	-40.0
32040.00	V	38.0	Ambient	-54.8	14.2	12.8	-53.4	-40.0
35600.00	H	33.3	Ambient	-57.8	15.0	13.5	-56.3	-40.0
35600.00	V	35.8	Ambient	-54.2	15.0	13.5	-52.7	-40.0

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Spurious Radiated Emissions
DATE : December 4 and 5, 2018
MODE : Transmit at 3600MHz, 20MHz Channel
NOTES :

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm/MHz)	ERP Limit (dBm/MHz)
7200.00	H	45.9	Ambient	-62.6	9.3	6.1	-59.4	-40.0
7200.00	V	46.3	Ambient	-61.3	9.3	6.1	-58.1	-40.0
10800.00	H	45.0	Ambient	-59.0	10.9	7.4	-55.5	-40.0
10800.00	V	44.3	Ambient	-60.0	10.9	7.4	-56.5	-40.0
14400.00	H	43.8	Ambient	-54.9	11.7	8.7	-51.9	-40.0
14400.00	V	44.4	Ambient	-54.4	11.7	8.7	-51.4	-40.0
18000.00	H	45.2	Ambient	-48.6	11.0	10.0	-47.6	-40.0
18000.00	V	45.4	Ambient	-48.8	11.0	10.0	-47.8	-40.0
21600.00	H	32.7	Ambient	-68.9	14.2	11.2	-65.9	-40.0
21600.00	V	32.9	Ambient	-67.9	14.2	11.2	-64.9	-40.0
25200.00	H	32.2	Ambient	-69.6	15.4	11.0	-65.2	-40.0
25200.00	V	30.7	Ambient	-68.8	15.4	11.0	-64.4	-40.0
28800.00	H	30.2	Ambient	-64.4	13.4	11.8	-62.7	-40.0
28800.00	V	37.4	Ambient	-55.4	13.4	11.8	-53.7	-40.0
32400.00	H	30.5	Ambient	-64.8	14.3	12.9	-63.4	-40.0
32400.00	V	38.6	Ambient	-54.3	14.3	12.9	-52.9	-40.0
36000.00	H	27.4	Ambient	-65.0	15.1	13.6	-63.5	-40.0
36000.00	V	36.8	Ambient	-52.4	15.1	13.6	-50.9	-40.0

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Spurious Radiated Emissions
DATE : December 4 and 5, 2018
MODE : Transmit at 3690MHz, 20MHz Channel
NOTES :

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm/MHz)	ERP Limit (dBm/MHz)
7380.00	H	45.4	Ambient	-63.1	9.6	6.2	-59.7	-40.0
7380.00	V	45.8	Ambient	-61.4	9.6	6.2	-58.0	-40.0
11070.00	H	44.6	Ambient	-58.8	11.0	7.6	-55.3	-40.0
11070.00	V	45.0	Ambient	-58.7	11.0	7.6	-55.2	-40.0
14760.00	H	44.7	Ambient	-54.4	11.7	8.9	-51.6	-40.0
14760.00	V	43.7	Ambient	-55.4	11.7	8.9	-52.6	-40.0
18450.00	H	33.9	Ambient	-68.0	13.0	10.9	-65.8	-40.0
18450.00	V	31.7	Ambient	-69.8	13.0	10.9	-67.6	-40.0
22140.00	H	32.6	Ambient	-69.4	14.4	11.1	-66.1	-40.0
22140.00	V	32.6	Ambient	-69.0	14.4	11.1	-65.7	-40.0
25830.00	H	33.0	Ambient	-69.6	15.6	11.2	-65.1	-40.0
25830.00	V	33.4	Ambient	-69.8	15.6	11.2	-65.3	-40.0
29520.00	H	36.4	Ambient	-57.2	13.6	12.0	-55.6	-40.0
29520.00	V	31.0	Ambient	-62.6	13.6	12.0	-61.0	-40.0
33210.00	H	37.3	Ambient	-55.6	14.5	13.0	-54.2	-40.0
33210.00	V	30.8	Ambient	-61.8	14.5	13.0	-60.4	-40.0
36900.00	H	34.6	Ambient	-55.4	15.3	14.0	-54.1	-40.0
36900.00	V	28.3	Ambient	-61.8	15.3	14.0	-60.5	-40.0

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Spurious Radiated Emissions
DATE : December 4 and 5, 2018
MODE : Transmit at 3570MHz, 40MHz Channel
NOTES :

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm/MHz)	ERP Limit (dBm/MHz)
7140.00	H	46.1	Ambient	-62.4	9.2	6.1	-59.2	-40.0
7140.00	V	46.6	Ambient	-61.2	9.2	6.1	-58.0	-40.0
10710.00	H	45.0	Ambient	-59.2	10.9	7.4	-55.7	-40.0
10710.00	V	45.2	Ambient	-58.8	10.9	7.4	-55.3	-40.0
14280.00	H	43.8	Ambient	-55.4	11.7	8.6	-52.4	-40.0
14280.00	V	44.5	Ambient	-54.0	11.7	8.6	-51.0	-40.0
17850.00	H	44.9	Ambient	-49.0	11.2	9.9	-47.7	-40.0
17850.00	V	44.7	Ambient	-49.0	11.2	9.9	-47.7	-40.0
21420.00	H	33.0	Ambient	-69.1	14.2	11.3	-66.2	-40.0
21420.00	V	33.1	Ambient	-67.7	14.2	11.3	-64.8	-40.0
24990.00	H	33.0	Ambient	-68.7	15.4	11.0	-64.3	-40.0
24990.00	V	30.7	Ambient	-68.8	15.4	11.0	-64.4	-40.0
28560.00	H	36.7	Ambient	-56.8	13.4	11.7	-55.1	-40.0
28560.00	V	37.6	Ambient	-55.0	13.4	11.7	-53.3	-40.0
32130.00	H	37.1	Ambient	-56.8	14.2	12.8	-55.4	-40.0
32130.00	V	37.8	Ambient	-55.0	14.2	12.8	-53.6	-40.0
35700.00	H	37.4	Ambient	-53.6	15.0	13.5	-52.1	-40.0
35700.00	V	37.7	Ambient	-52.2	15.0	13.5	-50.7	-40.0

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Spurious Radiated Emissions
DATE : December 4 and 5, 2018
MODE : Transmit at 3600MHz, 40MHz Channel
NOTES :

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm/MHz)	ERP Limit (dBm/MHz)
7200.00	H	46.5	Ambient	-62.0	9.3	6.1	-58.8	-40.0
7200.00	V	46.2	Ambient	-61.4	9.3	6.1	-58.2	-40.0
10800.00	H	44.4	Ambient	-59.6	10.9	7.4	-56.1	-40.0
10800.00	V	44.6	Ambient	-59.7	10.9	7.4	-56.2	-40.0
14400.00	H	44.6	Ambient	-54.0	11.7	8.7	-51.0	-40.0
14400.00	V	44.9	Ambient	-53.9	11.7	8.7	-50.9	-40.0
18000.00	H	45.8	Ambient	-48.0	11.0	10.0	-47.0	-40.0
18000.00	V	44.8	Ambient	-49.6	11.0	10.0	-48.6	-40.0
21600.00	H	32.8	Ambient	-68.8	14.2	11.2	-65.8	-40.0
21600.00	V	32.0	Ambient	-68.8	14.2	11.2	-65.8	-40.0
25200.00	H	33.0	Ambient	-68.8	15.4	11.0	-64.4	-40.0
25200.00	V	29.9	Ambient	-69.7	15.4	11.0	-65.3	-40.0
28800.00	H	31.0	Ambient	-63.8	13.4	11.8	-62.1	-40.0
28800.00	V	39.1	Ambient	-53.4	13.4	11.8	-51.7	-40.0
32400.00	H	32.1	Ambient	-63.0	14.3	12.9	-61.6	-40.0
32400.00	V	38.7	Ambient	-54.2	14.3	12.9	-52.8	-40.0
36000.00	H	29.5	Ambient	-62.2	15.1	13.6	-60.7	-40.0
36000.00	V	37.9	Ambient	-51.4	15.1	13.6	-49.9	-40.0

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Spurious Radiated Emissions
DATE : December 4 and 5, 2018
MODE : Transmit at 3680MHz, 40MHz Channel
NOTES :

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm/MHz)	ERP Limit (dBm/MHz)
7360.00	H	45.9	Ambient	-62.2	9.5	6.2	-58.8	-40.0
7360.00	V	45.6	Ambient	-61.8	9.5	6.2	-58.4	-40.0
11040.00	H	44.4	Ambient	-59.0	11.0	7.5	-55.5	-40.0
11040.00	V	44.9	Ambient	-59.6	11.0	7.5	-56.1	-40.0
14720.00	H	44.0	Ambient	-54.8	11.7	8.9	-52.0	-40.0
14720.00	V	44.5	Ambient	-54.0	11.7	8.9	-51.2	-40.0
18400.00	H	34.0	Ambient	-68.0	13.0	10.9	-65.9	-40.0
18400.00	V	33.4	Ambient	-68.3	13.0	10.9	-66.2	-40.0
22080.00	H	34.0	Ambient	-67.4	14.4	11.0	-64.1	-40.0
22080.00	V	33.3	Ambient	-68.2	14.4	11.0	-64.9	-40.0
25760.00	H	34.9	Ambient	-68.1	15.6	11.2	-63.6	-40.0
25760.00	V	34.7	Ambient	-68.3	15.6	11.2	-63.8	-40.0
29440.00	H	38.6	Ambient	-54.6	13.6	12.0	-53.0	-40.0
29440.00	V	38.5	Ambient	-54.2	13.6	12.0	-52.6	-40.0
33120.00	H	39.3	Ambient	-53.7	14.5	13.0	-52.3	-40.0
33120.00	V	38.7	Ambient	-53.6	14.5	13.0	-52.2	-40.0
36800.00	H	38.2	Ambient	-52.2	15.2	13.9	-50.9	-40.0
36800.00	V	37.9	Ambient	-51.4	15.2	13.9	-50.1	-40.0

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3560MHz, 20MHz Channel, Channel A
NOTES	: Power Spectral Density = 18.38dBm + 0.97dB = 19.35dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

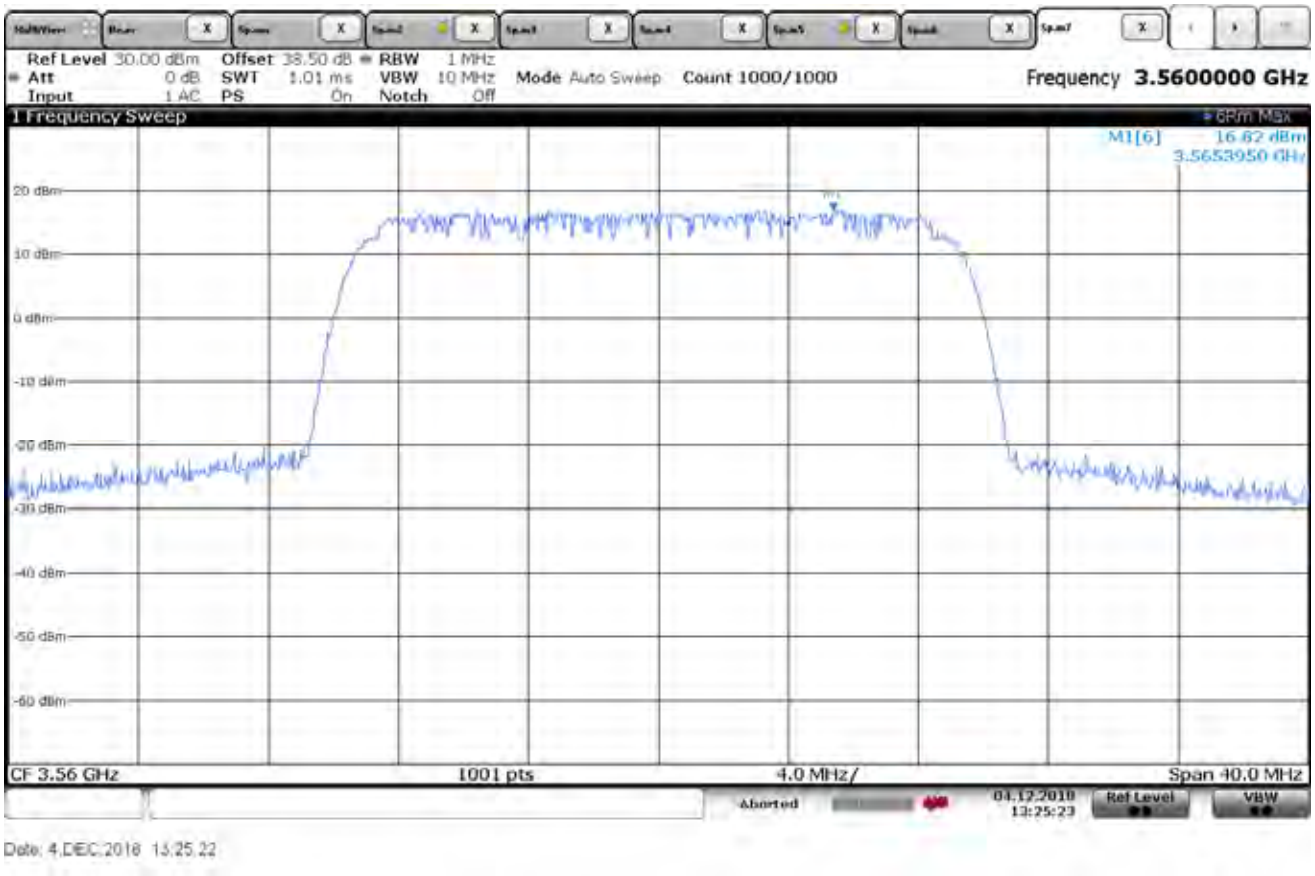

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3560MHz, 20MHz Channel, Channel B
NOTES	: Power Spectral Density = 16.82dBm + 0.97dB = 17.79dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

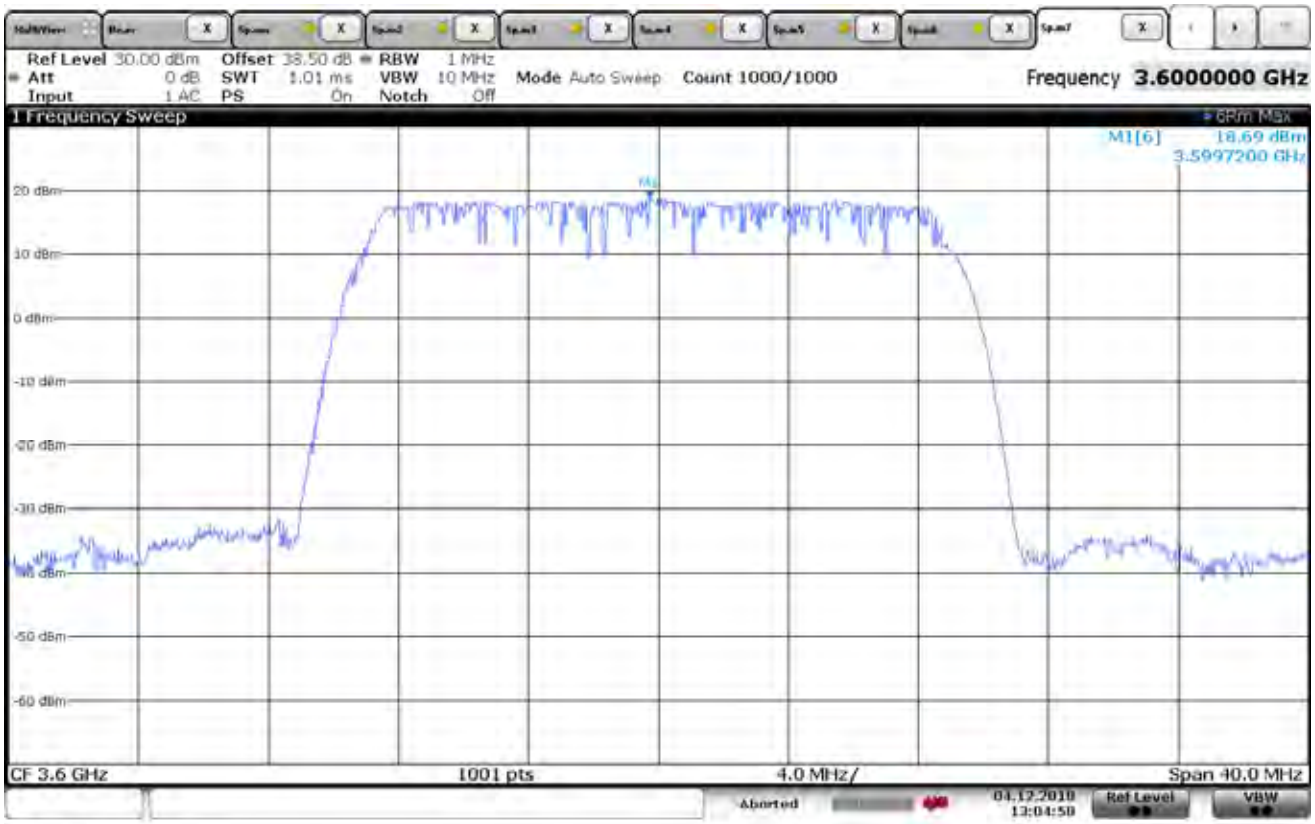

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3600MHz, 20MHz Channel, Channel A
NOTES	: Power Spectral Density = 18.69dBm + 0.97dB = 19.66dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

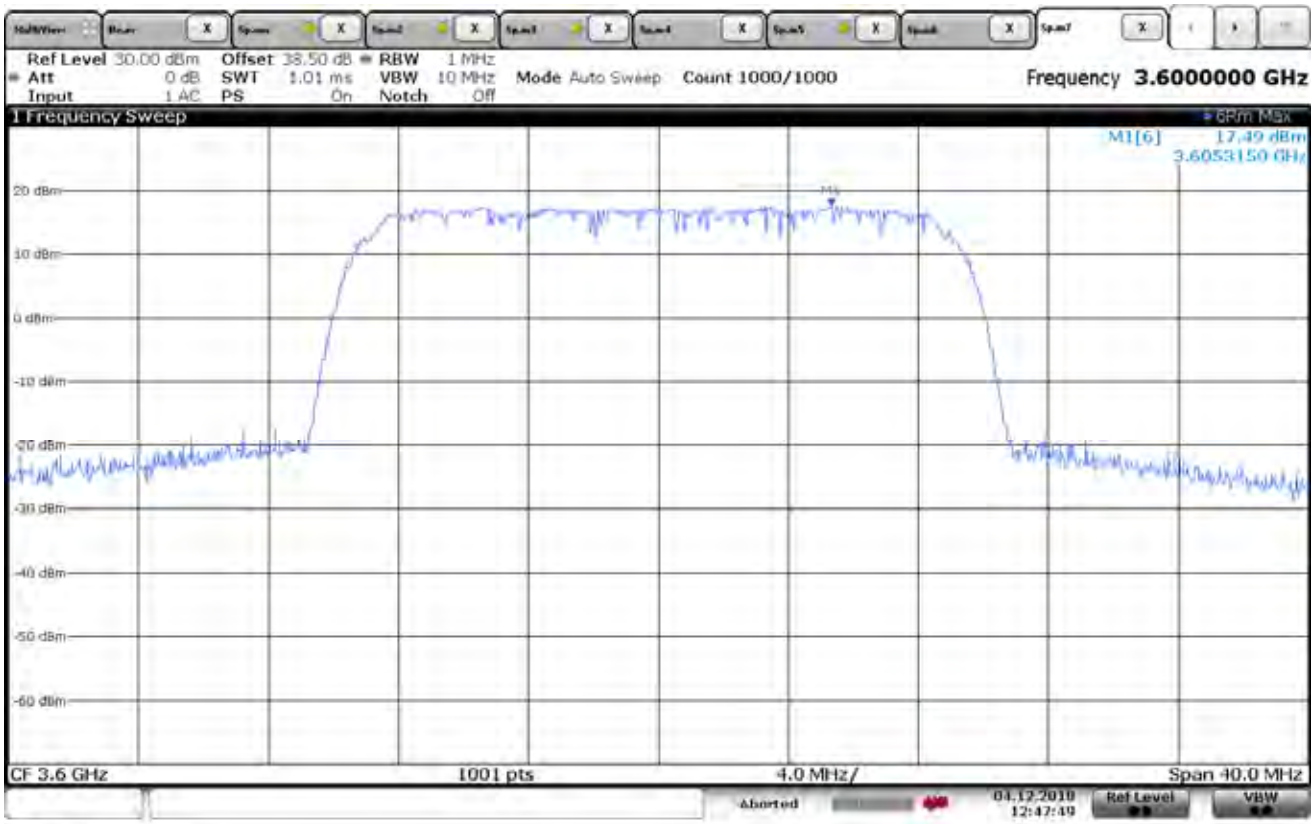

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3600MHz, 20MHz Channel, Channel B
NOTES	: Power Spectral Density = 17.49dBm + 0.97dB = 18.46dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3690MHz, 20MHz Channel, Channel A
NOTES	: Power Spectral Density = 16.58dBm + 0.97dB = 17.56dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

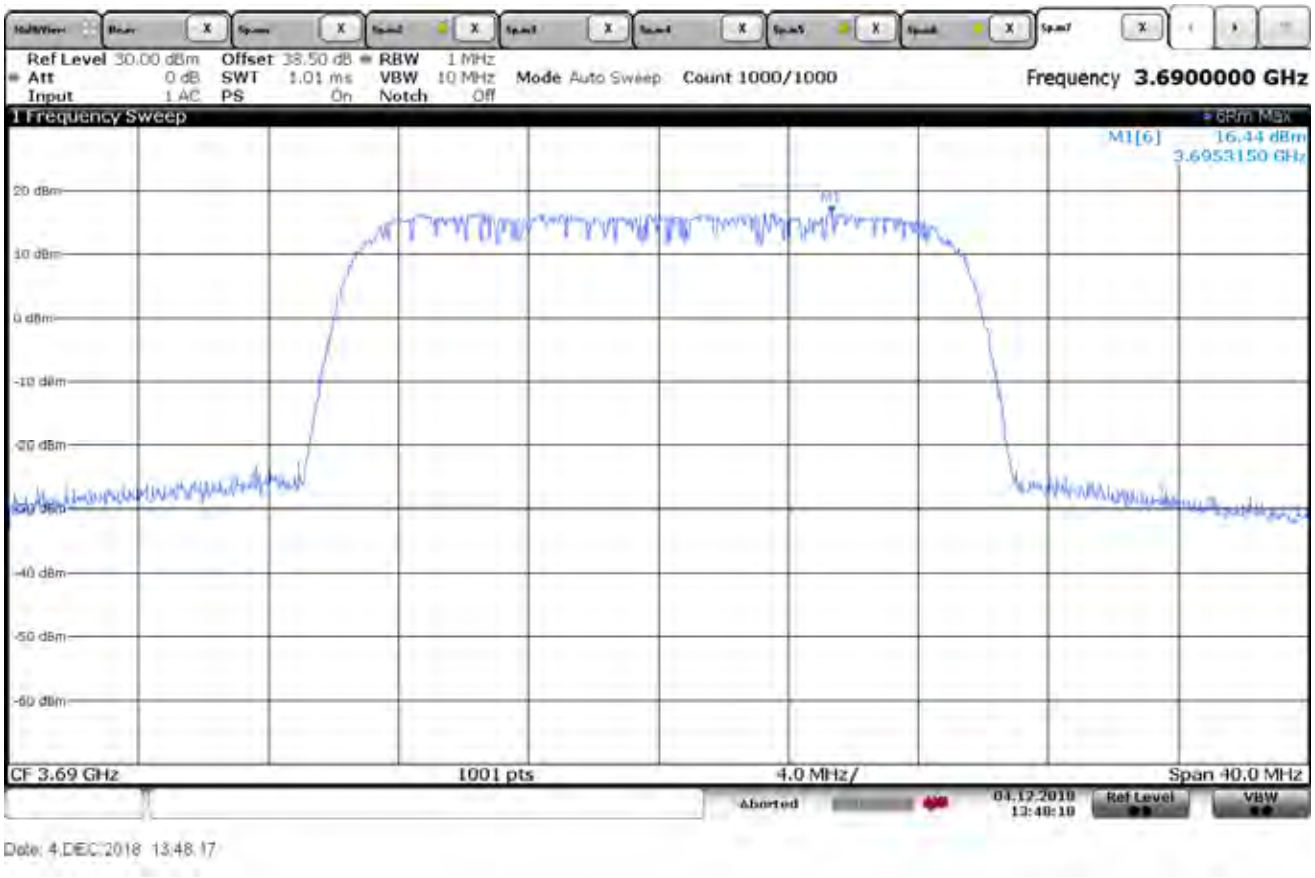

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3690MHz, 20MHz Channel, Channel B
NOTES	: Power Spectral Density = 16.44dBm + 0.97dB = 17.41dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

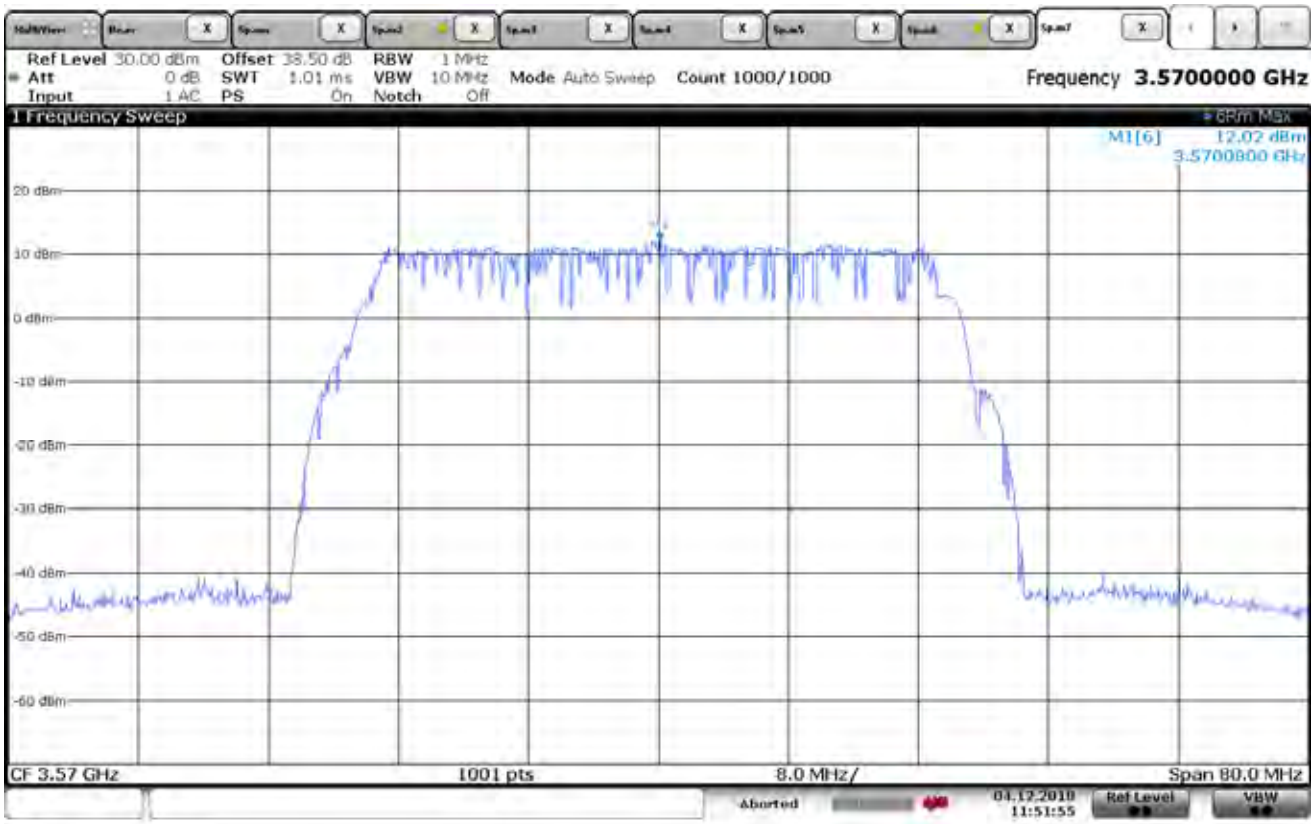

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3570MHz, 40MHz Channel, Channel A
NOTES	: Power Spectral Density = 12.02dBm + 3.98dB = 16.00dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

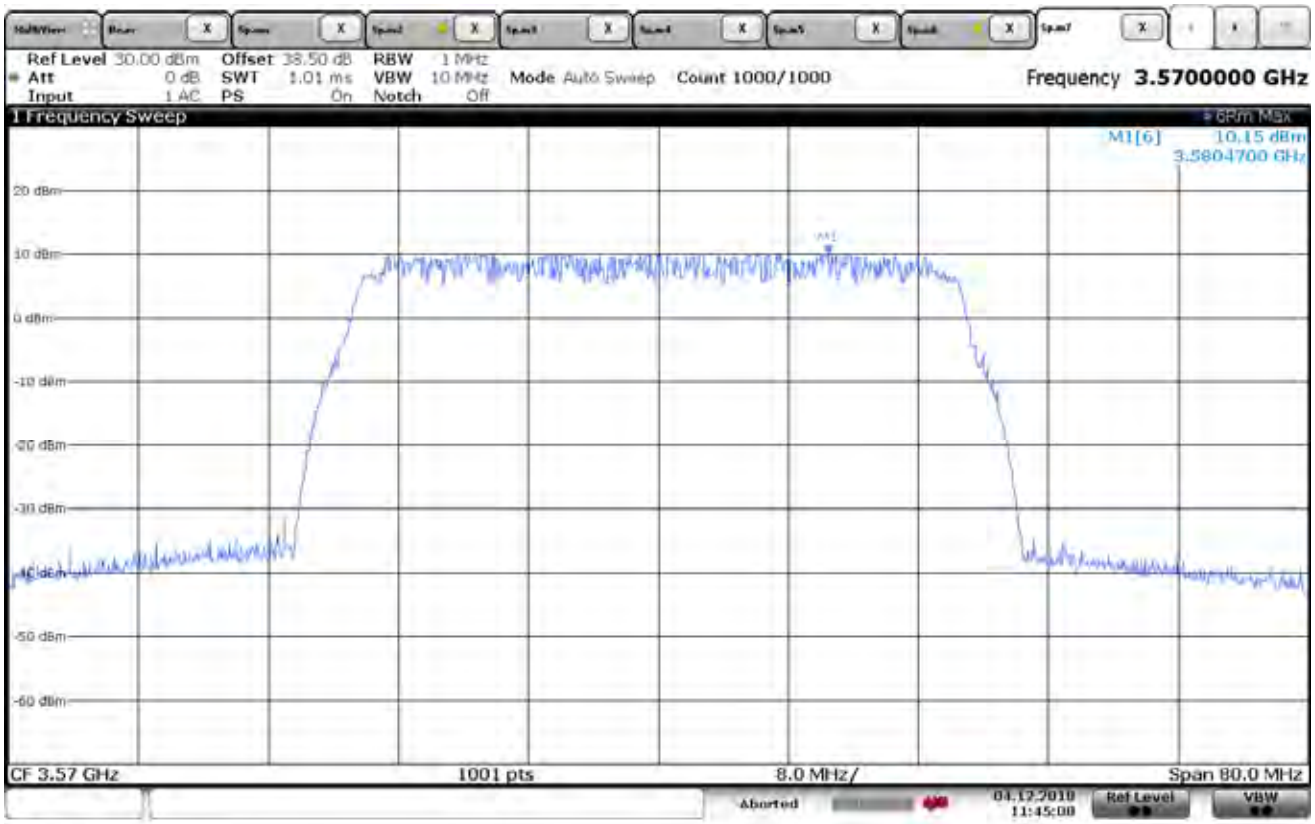

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Power Spectral Density
DATE : December 4, 2018
MODE : Transmit at 3570MHz, 40MHz Channel, Channel B
NOTES : Power Spectral Density = 10.15dBm + 3.98dB = 14.13dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

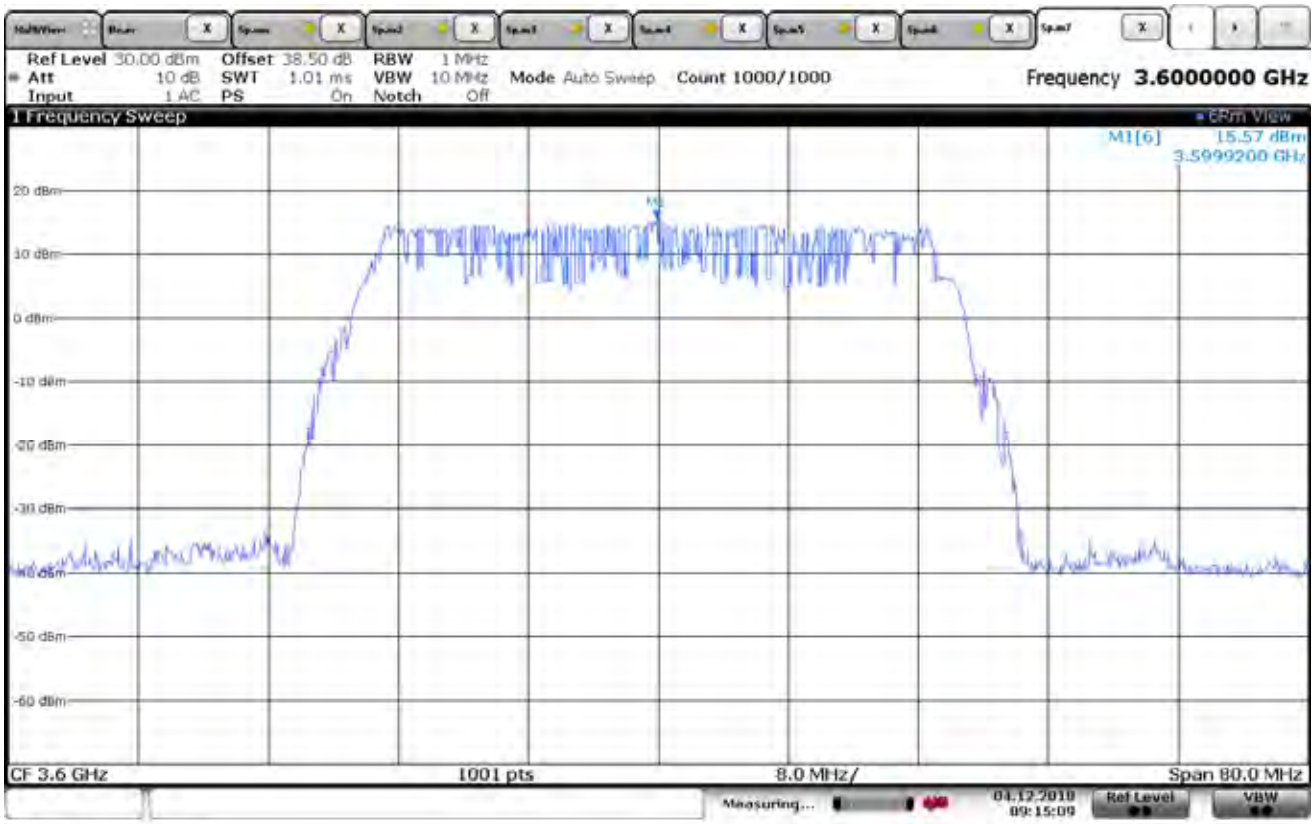

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3600MHz, 40MHz Channel, Channel A
NOTES	: Power Spectral Density = 15.57dBm + 3.98dB = 19.55dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

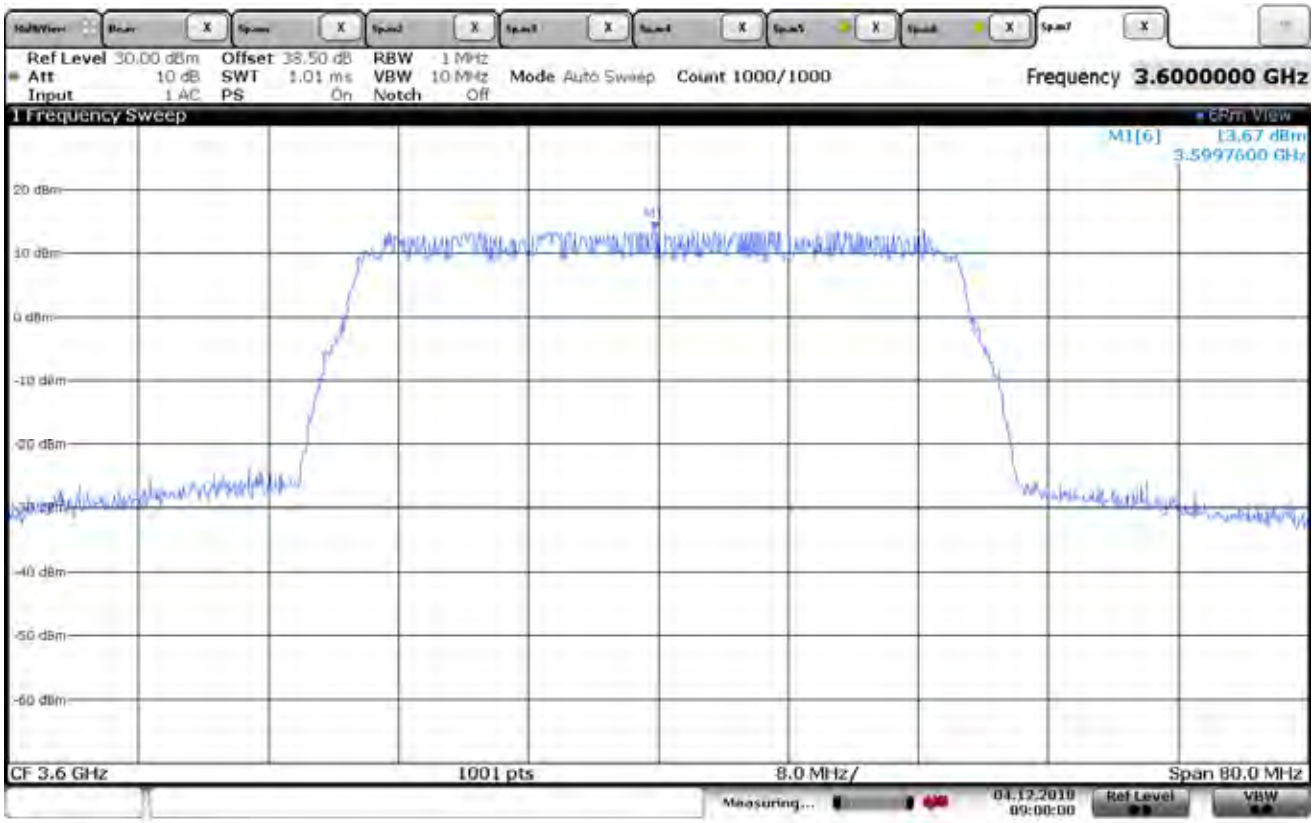

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3600MHz, 40MHz Channel, Channel B
NOTES	: Power Spectral Density = 13.67dBm + 3.98dB = 17.65dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

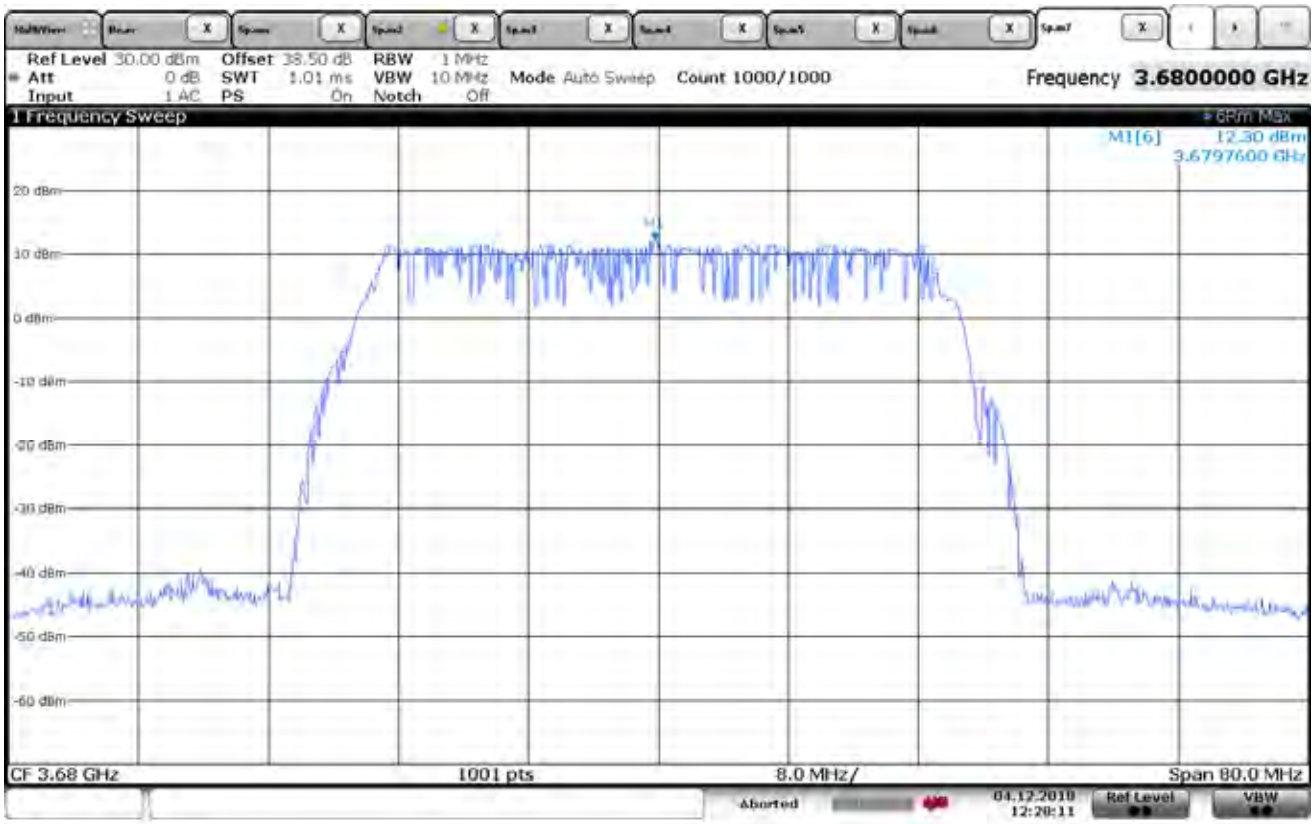

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3680MHz, 40MHz Channel, Channel A
NOTES	: Power Spectral Density = 12.30dBm + 3.98dB = 16.28dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

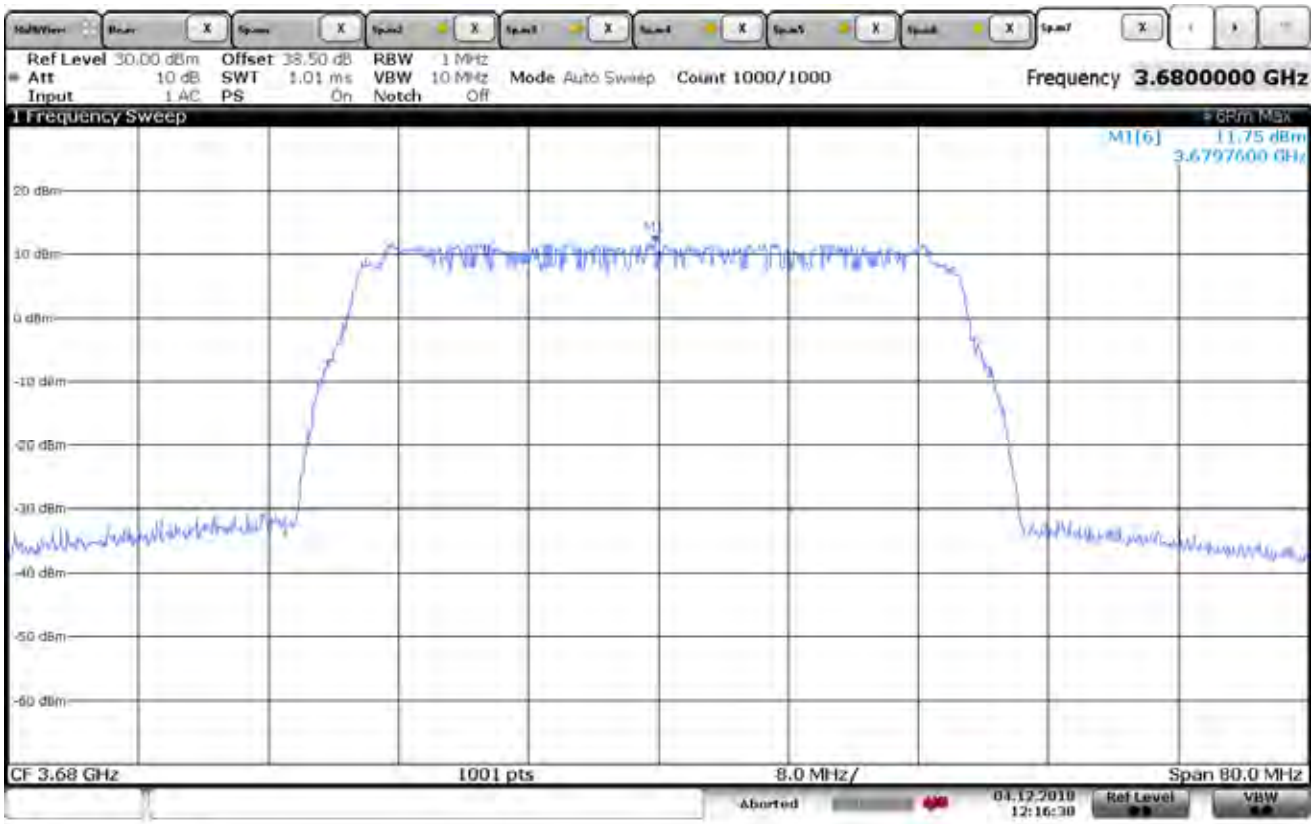

MANUFACTURER	: Cambium Networks, Inc.
MODEL NO.	: C036045C008A
SERIAL NO.	: 0A003E43311F
SPECIFICATION	: FCC 96.41(e) Power Spectral Density
DATE	: December 4, 2018
MODE	: Transmit at 3680MHz, 40MHz Channel, Channel B
NOTES	: Power Spectral Density = 11.75dBm + 3.98dB = 15.73dBm

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Power Spectral Density
DATE : December 4, 2018
NOTES : 20MHz channel

Frequency MHz	Antenna Port	Meter Reading (dBm)	Duty Cycle Correction dB	Total PSD (dBm/MHz)	Maximum PSD (dBm/MHz)	Margin (dB)
3560	A	18.38	0.97	19.35	37	-17.65
3560	B	16.82	0.97	17.79	37	-19.21
3600	A	18.69	0.97	19.66	37	-17.34
3600	B	17.49	0.97	18.46	37	-18.54
3690	A	16.58	0.97	17.55	37	-19.45
3690	B	16.44	0.97	17.41	37	-19.59

PSD = Meter Reading + Duty Cycle Correction

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E431A31
SPECIFICATION : FCC 96.41(e) Power Spectral Density
DATE : December 4, 2018
NOTES : 40MHz channel

Frequency MHz	Antenna Port	Meter Reading (dBm)	Duty Cycle Correction dB	Total PSD (dBm/MHz)	Maximum PSD (dBm/MHz)	Margin (dB)
3570	A	12.02	3.98	16.00	37	-21.00
3570	B	10.15	3.98	14.13	37	-22.87
3600	A	15.57	3.98	19.55	37	-17.45
3600	B	13.67	3.98	17.65	37	-19.35
3680	A	12.3	3.98	16.28	37	-20.72
3680	B	11.75	3.98	15.73	37	-21.27

PSD = Meter Reading + Duty Cycle Correction

Checked BY Richard E. King :

Richard E. King

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Peak to Average Ratio
DATE : December 4, 2018
NOTES : 20MHz Channel

Frequency (MHZ)	Antenna Port	Peak Meter Reading (dBm)	Average Meter Reading (dBm)	Peak to Average Total (dB)	Peak to Average Limit (dB)	Margin (dB)
3560	A	22.01	19.76	2.25	13	-10.75
3560	B	25.99	22.72	3.27	13	-9.73
3600	A	22.46	20.90	1.56	13	-11.44
3600	B	26.49	22.95	3.54	13	-9.46
3690	A	20.32	18.81	1.51	13	-11.49
3690	B	25.74	22.11	3.63	13	-9.37

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti

MANUFACTURER : Cambium Networks, Inc.
MODEL NO. : C036045C008A
SERIAL NO. : 0A003E43311F
SPECIFICATION : FCC 96.41(e) Peak to Average Ratio
DATE : December 4, 2018
NOTES : 40MHz Channel

Frequency (MHZ)	Antenna Port	Peak Meter Reading (dBm)	Average Meter Reading (dBm)	Peak to Average Total (dB)	Peak to Average Limit (dB)	Margin (dB)
3570	A	19.50	17.37	2.13	13	-10.87
3570	B	24.13	20.00	4.13	13	-8.87
3600	A	22.86	19.12	3.74	13	-9.26
3600	B	27.23	21.97	5.26	13	-7.74
3680	A	19.80	17.22	2.58	13	-10.42
3680	B	25.98	20.51	5.47	13	-7.53

Checked By: MARK E. LONGINOTTI

Mark E. Longinotti