



FCC RADIO EXPOSURE TEST REPORT

FCC ID : Z8H89FT0048

Equipment : ePMP 5GHz Force 300-13 SM /ePMP 5GHz Force 300-19 SM /ePMP 5GHz Force 300-19R SM

Brand Name : Cambium Networks

Model Name : ePMP 5GHz Force 300-13 SM /ePMP 5GHz Force 300-19 SM /ePMP 5GHz Force 300-19R SM

Model Number : C058900P701A/C058900P801A/C058900P901A

Applicant : Cambium Networks Inc.
3800 Golf Road, Suite 360 Rolling Meadows, IL 60008, USA

Manufacturer : Cambium Networks, Ltd.
Ashburton, TQ13 7UP, UK

Standard : 47 CFR Part 2.1091

Test Frequencies : 5180MHz~5240MHz
5745MHz ~5825MHz

The product was received on Apr. 19, 2019, and testing was started from Apr. 25, 2019 and completed on Jul. 12, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091, KDB447498 D01 General RF Exposure Guidance v06 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.


Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 EUT General Information5

1.2 Table for Multiple Listing5

1.3 Table for Test Mode6

1.4 Testing Location6

2 Maximum Permissible Exposure7

2.1 Limit of Maximum Permissible Exposure7

2.2 MPE Calculation Method.....8

2.3 Calculated Result and Limit.....9

2.4 MPE Measurement Method.....10

2.5 Measurement Result and Limit.....11

2.6 List of Measuring Equipments31

Appendix A. Test Photos

Photographs of EUT v02



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: **Cliff Chang**

Report Producer: **Emily Chen**



1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)

1.2 Table for Multiple Listing

The difference for each equipment names/model names is shown as below:

EUT	Equipment Name	Model Name	Model Number	Equip antenna	Chip	Description
1	ePMP 5GHz Force 300-13 SM	ePMP 5GHz Force 300-13 SM	C058900P701A	Ant. 1 / 2 / 3	IPQ4019	The difference served as marketing strategy.
2	ePMP 5GHz Force 300-19 SM	ePMP 5GHz Force 300-19 SM	C058900P801A	Ant. 1 / 2 / 3	IPQ4019	
3	ePMP 5GHz Force 300-19R SM	ePMP 5GHz Force 300-19R SM	C058900P901A	Ant. 1 / 3	IPQ4029	Note 1

Note 1:

IPQ4029 and IPQ4019 are electrically and structurally identical and comply with following conditions:

- Both IPQ4029 and IPQ4019 components are pin-for-pin compatible.
- Both IPQ4029 and IPQ4019 have the same basic function.
- Both IPQ4029 and IPQ4019 are indential in radio parameters.

Note 2: The above information was declared by manufacturer.

Note 3: From the above models, model: ePMP 5GHz Force 300-13 SM and ePMP 5GHz Force 300-19R SM were selected as representative model for the test and its data was recorded in this report.



1.3 Table for Test Mode

1	EUT 1 + Ant. 1
2	EUT 1 + Ant. 2
3	EUT 1 + Ant. 3
4	EUT 3 + Ant. 1
5	EUT 3 + Ant. 3

1.4 Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086B with Industry Canada.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density



2.2 MPE Calculation Method

For Test Mode 1:

The MPE was calculated at 20 cm to show compliance with the power density limit.

For Test Mode 2:

The MPE was calculated at 40 cm to show compliance with the power density limit.

For Test Mode 3:

The MPE was calculated at 51 cm to show compliance with the power density limit.

For Test Mode 4:

The MPE was calculated at 20 cm to show compliance with the power density limit.

For Test Mode 5:

The MPE was calculated at 39 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For Test Mode 1: EUT 1 + Ant. 1

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	2.00	29.94	31.94	0.50	32.44	1.75388	20	0.34892	1.00000
5.8G;D1D	2.00	29.43	31.43	0.50	31.93	1.55955	20	0.31026	1.00000

For Test Mode 2: EUT 1 + Ant. 2

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	13.00	22.90	35.90	0.50	36.40	4.36516	40	0.21711	1.00000

For Test Mode 3: EUT 1 + Ant. 3

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	19.00	13.85	32.85	0.50	33.35	2.16272	51	0.06617	1.00000


For Test Mode 4: EUT 3 + Ant. 1

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	2.00	29.18	31.18	0.50	31.68	1.47231	20	0.29291	1.00000
5.8G;D1D	2.00	29.04	31.04	0.50	31.54	1.42561	20	0.28362	1.00000

For Test Mode 5: EUT 3 + Ant. 3

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	19.00	12.33	31.33	0.50	31.83	1.52405	39	0.07974	1.00000

2.4 MPE Measurement Method

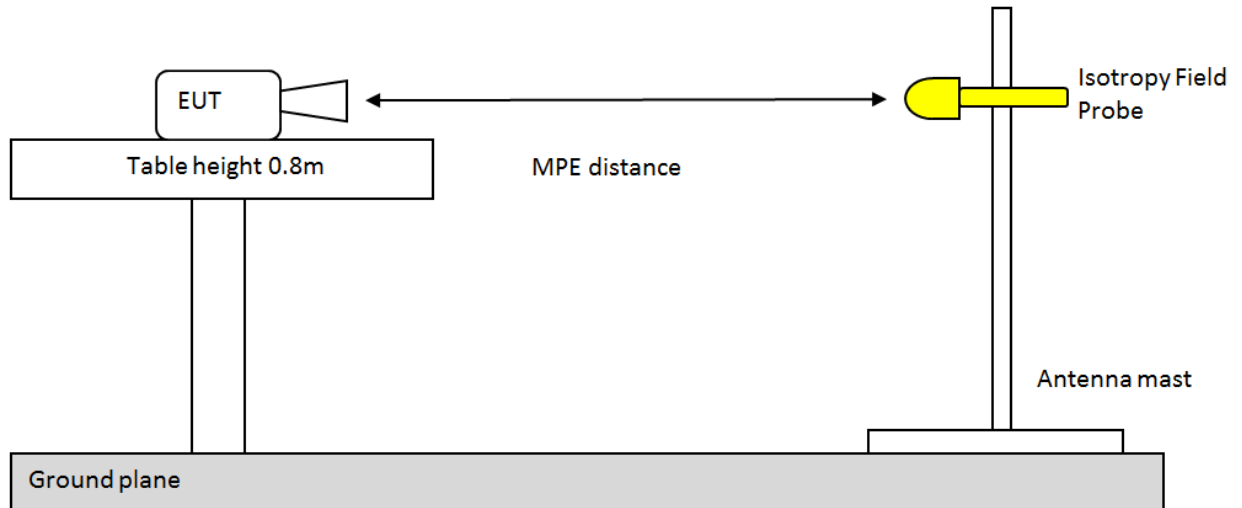

Horizontal Plane

1. Align Probe with antenna axis. Probe should same height as Antenna axis.
And take power density measurement with Probe.
2. Rotate table 45 degree (30 degree if MPE distance is more 60cm).
Take power density measurement again.
3. Repeat step 2, until complete 360 degree.
Each measured power density should be less than MPE limit.

Vertical Plane

1. Align Probe with antenna axis. Move probe to height of 10cm above ground plane.
Take power density measurement.
Then repeat measure with 10cm increment of probe height until 180 cm.
2. Rotate table 45 degree (30 degree if MPE distance is more 60cm).
Repeat the power density measure from 10cm to 180cm
3. Repeat step 2, until complete 360 degree.
Spatial Average of same vertical plane should be less then MPE limit.

For Probe or measurement equipment requirement, please see FCC OET Bulletin 65 97-01

Note:

Either peak or spatially averaged results may be applied to determine compliance; and with respect to plane-wave equivalent power density limits when ≥ 300 MHz, and electric and magnetic field strength limits when < 300 MHz.



2.5 Measurement Result and Limit

For Test Mode 2: EUT 1 + Ant. 2 / 5.8G; D1D

Test Mode	a	Test Frequency (MHz)	5745	MPE Distance (cm)	40	Power Setting	29		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	
185	0.00012	0.00130	0.00844	0.69569	0.73251	0.00723	0.00055	0.00028	
Max PSD (mW/cm ²)	0.73251								
MPE Limit (mW/cm ²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	
10	0.00044	0.00025	0.00013	0.00014	0.00015	0.00015	0.00042	0.00021	
20	0.00046	0.00026	0.00043	0.00027	0.00036	0.00031	0.00030	0.00035	
30	0.00017	0.00037	0.00033	0.00037	0.00024	0.00033	0.00018	0.00026	
40	0.00031	0.00030	0.00023	0.00047	0.00046	0.00040	0.00045	0.00026	
50	0.00039	0.00018	0.00041	0.00040	0.00031	0.00026	0.00024	0.00026	
60	0.00039	0.00020	0.00189	0.00867	0.00244	0.00021	0.00042	0.00035	
70	0.00037	0.00029	0.08734	0.05402	0.07340	0.04811	0.00039	0.00037	
80	0.00027	0.00048	0.00356	0.00335	0.00241	0.00415	0.00017	0.00049	
90	0.00016	0.00014	0.04260	0.62152	0.56544	0.04828	0.00019	0.00015	
100	0.00017	0.00014	0.00440	0.00251	0.00284	0.00335	0.00011	0.00035	
110	0.00021	0.00020	0.00871	0.00124	0.00738	0.00513	0.00030	0.00033	
120	0.00030	0.00036	0.00736	0.00577	0.00859	0.00372	0.00041	0.00017	
130	0.00011	0.00013	0.00633	0.00299	0.00589	0.00339	0.00039	0.00034	
140	0.00029	0.00017	0.00050	0.00035	0.00075	0.00022	0.00039	0.00012	
150	0.00019	0.00030	0.00022	0.00046	0.00026	0.00026	0.00015	0.00017	
160	0.00016	0.00024	0.00030	0.00050	0.00019	0.00015	0.00034	0.00018	
170	0.00043	0.00033	0.00041	0.00027	0.00028	0.00043	0.00015	0.00028	
180	0.00047	0.00028	0.00039	0.00039	0.00035	0.00042	0.00026	0.00040	
Spatial Average (mW/cm ²)	0.00029	0.00026	0.00920	0.03909	0.03732	0.00663	0.00029	0.00028	
Max Spatial Average (mW/cm ²)	0.03909								
MPE Limit (mW/cm ²)	1								



Test Mode	a	Test Frequency (MHz)	5785	MPE Distance (cm)	40	Power Setting	29	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
185	0.00025	0.00116	0.00827	0.71950	0.72297	0.00927	0.00082	0.00043
Max PSD (mW/cm ²)	0.72297							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00027	0.00036	0.00011	0.00045	0.00019	0.00032	0.00050	0.00036
20	0.00021	0.00028	0.00044	0.00027	0.00015	0.00010	0.00016	0.00018
30	0.00029	0.00031	0.00021	0.00012	0.00036	0.00037	0.00019	0.00045
40	0.00043	0.00018	0.00028	0.00024	0.00041	0.00030	0.00020	0.00017
50	0.00032	0.00045	0.00034	0.00032	0.00016	0.00042	0.00034	0.00034
60	0.00018	0.00013	0.00893	0.00608	0.00765	0.00072	0.00012	0.00016
70	0.00040	0.00030	0.01488	0.08585	0.09237	0.02799	0.00042	0.00029
80	0.00047	0.00049	0.00823	0.00708	0.00765	0.00530	0.00034	0.00029
90	0.00047	0.00012	0.01915	0.51574	0.52127	0.08026	0.00029	0.00048
100	0.00034	0.00032	0.00789	0.00368	0.00888	0.00107	0.00021	0.00028
110	0.00013	0.00043	0.00625	0.00155	0.00153	0.00243	0.00042	0.00015
120	0.00034	0.00033	0.00279	0.00384	0.00817	0.00338	0.00022	0.00025
130	0.00038	0.00043	0.00546	0.00403	0.00664	0.00623	0.00045	0.00016
140	0.00018	0.00036	0.00026	0.00050	0.00078	0.00036	0.00029	0.00012
150	0.00026	0.00036	0.00023	0.00014	0.00039	0.00039	0.00022	0.00048
160	0.00018	0.00032	0.00022	0.00020	0.00018	0.00023	0.00014	0.00042
170	0.00016	0.00017	0.00018	0.00013	0.00015	0.00037	0.00013	0.00030
180	0.00049	0.00034	0.00049	0.00034	0.00050	0.00027	0.00012	0.00033
Spatial Average (mW/cm ²)	0.00031	0.00032	0.00424	0.03503	0.03652	0.00725	0.00026	0.00029
Max Spatial Average (mW/cm ²)	0.03652							
MPE Limit (mW/cm ²)	1							



Test Mode	a	Test Frequency (MHz)	5825	MPE Distance (cm)	40	Power Setting	29		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	
185	0.00044	0.00215	0.00560	0.70464	0.63559	0.01138	0.00054	0.00032	
Max PSD (mW/cm ²)	0.70464								
MPE Limit (mW/cm ²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	
10	0.00028	0.00017	0.00024	0.00037	0.00020	0.00039	0.00013	0.00014	
20	0.00047	0.00038	0.00024	0.00042	0.00013	0.00045	0.00014	0.00024	
30	0.00013	0.00040	0.00027	0.00040	0.00016	0.00032	0.00023	0.00015	
40	0.00014	0.00025	0.00024	0.00014	0.00016	0.00049	0.00025	0.00028	
50	0.00023	0.00034	0.00011	0.00037	0.00039	0.00042	0.00016	0.00044	
60	0.00016	0.00024	0.00773	0.00759	0.00469	0.00043	0.00019	0.00042	
70	0.00040	0.00030	0.08224	0.04438	0.06247	0.05212	0.00048	0.00019	
80	0.00049	0.00025	0.00133	0.00761	0.00496	0.00625	0.00026	0.00026	
90	0.00035	0.00012	0.06659	0.54292	0.56137	0.02085	0.00011	0.00023	
100	0.00026	0.00034	0.00179	0.00890	0.00761	0.00280	0.00043	0.00027	
110	0.00018	0.00029	0.00729	0.00365	0.00317	0.00319	0.00014	0.00044	
120	0.00027	0.00013	0.00690	0.00626	0.00252	0.00404	0.00020	0.00033	
130	0.00034	0.00025	0.00330	0.00761	0.00243	0.00255	0.00038	0.00014	
140	0.00019	0.00016	0.00060	0.00023	0.00082	0.00024	0.00042	0.00020	
150	0.00019	0.00041	0.00027	0.00015	0.00048	0.00011	0.00045	0.00017	
160	0.00032	0.00047	0.00032	0.00025	0.00022	0.00024	0.00040	0.00011	
170	0.00023	0.00040	0.00036	0.00047	0.00042	0.00014	0.00029	0.00020	
180	0.00027	0.00024	0.00033	0.00022	0.00011	0.00026	0.00030	0.00014	
Spatial Average (mW/cm ²)	0.00027	0.00029	0.01001	0.03511	0.03624	0.00529	0.00028	0.00024	
Max Spatial Average (mW/cm ²)	0.03624								
MPE Limit (mW/cm ²)	1								



Test Mode	VHT20	Test Frequency (MHz)	5745	MPE Distance (cm)	40	Power Setting	29	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
185	0.00013	0.00155	0.00791	0.71151	0.69580	0.00991	0.00060	0.00048
Max PSD (mW/cm ²)	0.71151							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00031	0.00011	0.00043	0.00047	0.00039	0.00017	0.00039	0.00022
20	0.00035	0.00024	0.00018	0.00026	0.00034	0.00050	0.00029	0.00038
30	0.00040	0.00015	0.00044	0.00024	0.00032	0.00013	0.00017	0.00049
40	0.00046	0.00047	0.00019	0.00025	0.00032	0.00030	0.00037	0.00033
50	0.00026	0.00017	0.00036	0.00038	0.00044	0.00031	0.00018	0.00032
60	0.00032	0.00021	0.00831	0.00799	0.00740	0.00057	0.00038	0.00029
70	0.00034	0.00040	0.08595	0.02141	0.02849	0.06938	0.00038	0.00019
80	0.00011	0.00016	0.00351	0.00189	0.00447	0.00736	0.00019	0.00030
90	0.00030	0.00026	0.01729	0.54717	0.54392	0.01275	0.00048	0.00043
100	0.00047	0.00039	0.00675	0.00633	0.00774	0.00875	0.00013	0.00018
110	0.00024	0.00012	0.00424	0.00632	0.00294	0.00815	0.00041	0.00038
120	0.00028	0.00021	0.00309	0.00615	0.00461	0.00777	0.00019	0.00020
130	0.00034	0.00043	0.00187	0.00771	0.00702	0.00597	0.00032	0.00012
140	0.00049	0.00044	0.00090	0.00039	0.00010	0.00065	0.00039	0.00015
150	0.00039	0.00034	0.00017	0.00043	0.00041	0.00036	0.00021	0.00022
160	0.00019	0.00038	0.00037	0.00047	0.00032	0.00026	0.00015	0.00024
170	0.00014	0.00028	0.00049	0.00016	0.00041	0.00011	0.00013	0.00045
180	0.00012	0.00042	0.00024	0.00028	0.00041	0.00014	0.00018	0.00022
Spatial Average (mW/cm ²)	0.00031	0.00029	0.00749	0.03379	0.03389	0.00687	0.00027	0.00028
Max Spatial Average (mW/cm ²)	0.03389							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT20	Test Frequency (MHz)	5785	MPE Distance (cm)	40	Power Setting	29	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
185	0.00035	0.00135	0.00545	0.66528	0.64628	0.01052	0.00089	0.00022
Max PSD (mW/cm ²)	0.66528							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00019	0.00024	0.00011	0.00034	0.00027	0.00036	0.00033	0.00049
20	0.00039	0.00015	0.00035	0.00038	0.00015	0.00017	0.00021	0.00038
30	0.00024	0.00044	0.00044	0.00047	0.00033	0.00030	0.00019	0.00029
40	0.00032	0.00012	0.00015	0.00044	0.00029	0.00037	0.00046	0.00014
50	0.00011	0.00013	0.00022	0.00038	0.00013	0.00037	0.00012	0.00042
60	0.00023	0.00035	0.00833	0.00655	0.00458	0.00078	0.00021	0.00025
70	0.00021	0.00017	0.07688	0.04740	0.08687	0.05902	0.00050	0.00049
80	0.00026	0.00023	0.00538	0.00406	0.00211	0.00350	0.00036	0.00048
90	0.00048	0.00034	0.07594	0.63995	0.57213	0.01104	0.00012	0.00039
100	0.00020	0.00035	0.00601	0.00843	0.00308	0.00224	0.00023	0.00044
110	0.00045	0.00034	0.00385	0.00886	0.00162	0.00893	0.00043	0.00044
120	0.00021	0.00037	0.00143	0.00390	0.00297	0.00149	0.00010	0.00042
130	0.00016	0.00020	0.00575	0.00115	0.00336	0.00771	0.00049	0.00041
140	0.00031	0.00017	0.00022	0.00042	0.00074	0.00037	0.00013	0.00015
150	0.00048	0.00041	0.00042	0.00045	0.00045	0.00023	0.00023	0.00049
160	0.00018	0.00040	0.00012	0.00017	0.00043	0.00039	0.00041	0.00045
170	0.00020	0.00032	0.00041	0.00010	0.00039	0.00050	0.00048	0.00017
180	0.00034	0.00038	0.00030	0.00033	0.00011	0.00036	0.00043	0.00047
Spatial Average (mW/cm ²)	0.00028	0.00028	0.01035	0.04021	0.03778	0.00545	0.00030	0.00038
Max Spatial Average (mW/cm ²)	0.04021							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT20	Test Frequency (MHz)	5825	MPE Distance (cm)	40	Power Setting	29	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
185	0.00045	0.00243	0.00644	0.73859	0.69549	0.01184	0.00081	0.00042
Max PSD (mW/cm²)	0.73859							
MPE Limit (mW/cm²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00035	0.00029	0.00015	0.00024	0.00022	0.00033	0.00039	0.00043
20	0.00032	0.00037	0.00024	0.00019	0.00023	0.00016	0.00016	0.00017
30	0.00039	0.00046	0.00042	0.00043	0.00012	0.00029	0.00038	0.00022
40	0.00022	0.00035	0.00023	0.00013	0.00046	0.00038	0.00036	0.00013
50	0.00041	0.00031	0.00038	0.00020	0.00023	0.00020	0.00026	0.00046
60	0.00031	0.00027	0.00258	0.00145	0.00306	0.00050	0.00029	0.00048
70	0.00047	0.00021	0.04327	0.09290	0.08401	0.06414	0.00013	0.00021
80	0.00016	0.00030	0.00296	0.00222	0.00317	0.00497	0.00031	0.00049
90	0.00031	0.00018	0.04380	0.59206	0.50011	0.04332	0.00024	0.00045
100	0.00034	0.00025	0.00603	0.00715	0.00385	0.00650	0.00027	0.00045
110	0.00025	0.00038	0.00142	0.00682	0.00889	0.00453	0.00027	0.00039
120	0.00043	0.00046	0.00544	0.00455	0.00250	0.00663	0.00036	0.00025
130	0.00022	0.00032	0.00368	0.00673	0.00185	0.00239	0.00036	0.00015
140	0.00024	0.00046	0.00078	0.00064	0.00061	0.00046	0.00042	0.00045
150	0.00022	0.00029	0.00041	0.00032	0.00013	0.00016	0.00014	0.00014
160	0.00035	0.00040	0.00011	0.00023	0.00010	0.00036	0.00017	0.00022
170	0.00028	0.00039	0.00037	0.00038	0.00037	0.00044	0.00046	0.00012
180	0.00014	0.00016	0.00017	0.00043	0.00046	0.00045	0.00016	0.00016
Spatial Average (mW/cm²)	0.00030	0.00033	0.00625	0.03984	0.03391	0.00757	0.00029	0.00030
Max Spatial Average (mW/cm²)	0.03984							
MPE Limit (mW/cm²)	1							



Test Mode	VHT80	Test Frequency (MHz)	5775	MPE Distance (cm)	40	Power Setting	21	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
185	0.00027	0.00184	0.00837	0.62008	0.66291	0.01122	0.00082	0.00048
Max PSD (mW/cm ²)	0.66291							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00034	0.00014	0.00046	0.00027	0.00036	0.00047	0.00026	0.00048
20	0.00045	0.00044	0.00040	0.00030	0.00035	0.00035	0.00038	0.00020
30	0.00022	0.00047	0.00045	0.00010	0.00011	0.00016	0.00033	0.00026
40	0.00019	0.00013	0.00049	0.00016	0.00037	0.00022	0.00030	0.00024
50	0.00023	0.00026	0.00019	0.00015	0.00045	0.00021	0.00013	0.00013
60	0.00028	0.00015	0.00270	0.00260	0.00140	0.00019	0.00049	0.00042
70	0.00028	0.00036	0.02025	0.02440	0.07472	0.06670	0.00038	0.00034
80	0.00017	0.00041	0.00179	0.00717	0.00128	0.00898	0.00036	0.00041
90	0.00022	0.00011	0.01330	0.60617	0.53906	0.06022	0.00016	0.00035
100	0.00046	0.00048	0.00146	0.00794	0.00303	0.00257	0.00046	0.00033
110	0.00025	0.00010	0.00379	0.00164	0.00837	0.00854	0.00016	0.00019
120	0.00015	0.00019	0.00513	0.00128	0.00395	0.00161	0.00036	0.00031
130	0.00034	0.00033	0.00485	0.00209	0.00789	0.00273	0.00021	0.00021
140	0.00018	0.00042	0.00063	0.00012	0.00050	0.00047	0.00014	0.00034
150	0.00038	0.00044	0.00024	0.00016	0.00016	0.00041	0.00022	0.00022
160	0.00049	0.00018	0.00029	0.00027	0.00019	0.00038	0.00037	0.00047
170	0.00037	0.00039	0.00010	0.00020	0.00029	0.00025	0.00042	0.00016
180	0.00031	0.00048	0.00017	0.00023	0.00046	0.00026	0.00037	0.00045
Spatial Average (mW/cm ²)	0.00029	0.00031	0.00315	0.03640	0.03572	0.00860	0.00030	0.00031
Max Spatial Average (mW/cm ²)	0.03640							
MPE Limit (mW/cm ²)	1							



For Test Mode 3: EUT 1 + Ant. 3 / 5.8G; D1D

Test Mode	a	Test Frequency (MHz)	5745	MPE Distance (cm)	51	Power Setting	19	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
186	0.00031	0.00074	0.00721	0.55844	0.51803	0.01361	0.00031	0.00015
Max PSD (mW/cm²)	0.55844							
MPE Limit (mW/cm²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00027	0.00037	0.00048	0.00044	0.00049	0.00037	0.00044	0.00033
20	0.00028	0.00039	0.00096	0.00185	0.00123	0.00048	0.00063	0.00034
30	0.00026	0.00034	0.00175	0.00337	0.00268	0.00112	0.00058	0.00031
40	0.00029	0.00042	0.00633	0.00711	0.00524	0.00369	0.00052	0.00029
50	0.00023	0.00046	0.00055	0.00084	0.00338	0.00391	0.00043	0.00024
60	0.00025	0.00051	0.00066	0.00064	0.01167	0.00478	0.00044	0.00038
70	0.00048	0.00063	0.00063	0.00092	0.00876	0.00241	0.00051	0.00041
80	0.00058	0.00066	0.00098	0.00198	0.11162	0.00178	0.00055	0.00056
90	0.00047	0.00077	0.00121	0.00373	0.35119	0.00233	0.00067	0.00048
100	0.00049	0.00056	0.00105	0.00298	0.02642	0.00211	0.00058	0.00042
110	0.00058	0.00063	0.00089	0.00695	0.00651	0.00174	0.00052	0.00047
120	0.00044	0.00051	0.00088	0.00231	0.00339	0.00102	0.00048	0.00043
130	0.00026	0.00068	0.00084	0.00214	0.00324	0.00078	0.00047	0.00055
140	0.00056	0.00048	0.00082	0.00139	0.00431	0.00051	0.00039	0.00048
150	0.00048	0.00052	0.00073	0.00064	0.00299	0.00047	0.00038	0.00054
160	0.00025	0.00055	0.00650	0.00051	0.00148	0.00044	0.00048	0.00051
170	0.00051	0.00047	0.00033	0.00035	0.00086	0.00041	0.00046	0.00042
180	0.00026	0.00041	0.00026	0.00025	0.00042	0.00037	0.00055	0.00037
Spatial Average (mW/cm²)	0.00039	0.00052	0.00144	0.00213	0.03033	0.00160	0.00050	0.00042
Max Spatial Average (mW/cm²)	0.03033							
MPE Limit (mW/cm²)	1							



Test Mode	a	Test Frequency (MHz)	5785	MPE Distance (cm)	51	Power Setting	19	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
186	0.00046	0.00106	0.00561	0.50999	0.51432	0.01287	0.00022	0.00019
Max PSD (mW/cm ²)	0.51432							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00029	0.00046	0.00035	0.00028	0.00028	0.00041	0.00034	0.00037
20	0.00014	0.00032	0.00044	0.00049	0.00044	0.00043	0.00022	0.00017
30	0.00026	0.00034	0.00043	0.00010	0.00021	0.00019	0.00023	0.00043
40	0.00025	0.00014	0.00019	0.00034	0.00043	0.00030	0.00039	0.00017
50	0.00018	0.00049	0.00040	0.00029	0.00030	0.00041	0.00041	0.00033
60	0.00026	0.00027	0.00280	0.00339	0.00483	0.00040	0.00049	0.00048
70	0.00015	0.00020	0.02197	0.04344	0.02775	0.05997	0.00047	0.00046
80	0.00031	0.00035	0.00769	0.00552	0.00295	0.00475	0.00049	0.00015
90	0.00012	0.00015	0.05749	0.49028	0.46187	0.02804	0.00017	0.00035
100	0.00045	0.00029	0.00224	0.00800	0.00843	0.00712	0.00034	0.00019
110	0.00040	0.00029	0.00484	0.00484	0.00131	0.00386	0.00044	0.00043
120	0.00021	0.00035	0.00620	0.00529	0.00129	0.00585	0.00026	0.00038
130	0.00041	0.00034	0.00304	0.00655	0.00166	0.00467	0.00049	0.00019
140	0.00049	0.00041	0.00039	0.00071	0.00074	0.00039	0.00013	0.00021
150	0.00044	0.00046	0.00019	0.00036	0.00041	0.00016	0.00022	0.00022
160	0.00042	0.00024	0.00042	0.00023	0.00046	0.00019	0.00025	0.00014
170	0.00018	0.00045	0.00012	0.00018	0.00048	0.00031	0.00035	0.00043
180	0.00031	0.00041	0.00019	0.00035	0.00031	0.00012	0.00029	0.00039
Spatial Average (mW/cm ²)	0.00029	0.00033	0.00608	0.03170	0.02856	0.00653	0.00033	0.00031
Max Spatial Average (mW/cm ²)	0.03170							
MPE Limit (mW/cm ²)	1							



Test Mode	a	Test Frequency (MHz)	5825	MPE Distance (cm)	51	Power Setting	19	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
186	0.00046	0.00102	0.00488	0.53673	0.49905	0.01421	0.00051	0.00027
Max PSD (mW/cm ²)	0.53673							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00048	0.00029	0.00046	0.00046	0.00014	0.00036	0.00049	0.00034
20	0.00046	0.00011	0.00046	0.00033	0.00050	0.00017	0.00013	0.00030
30	0.00034	0.00021	0.00024	0.00011	0.00026	0.00031	0.00015	0.00028
40	0.00017	0.00024	0.00038	0.00037	0.00049	0.00038	0.00029	0.00021
50	0.00047	0.00021	0.00015	0.00028	0.00028	0.00030	0.00041	0.00043
60	0.00010	0.00016	0.00163	0.00485	0.00262	0.00033	0.00048	0.00024
70	0.00026	0.00029	0.01933	0.02949	0.05188	0.02349	0.00049	0.00031
80	0.00048	0.00044	0.00852	0.00792	0.00198	0.00787	0.00048	0.00033
90	0.00015	0.00048	0.07126	0.52736	0.43577	0.08309	0.00036	0.00048
100	0.00037	0.00043	0.00332	0.00297	0.00764	0.00339	0.00026	0.00038
110	0.00043	0.00024	0.00143	0.00433	0.00269	0.00865	0.00020	0.00039
120	0.00041	0.00035	0.00411	0.00738	0.00129	0.00270	0.00021	0.00035
130	0.00028	0.00044	0.00801	0.00216	0.00757	0.00745	0.00011	0.00034
140	0.00041	0.00013	0.00084	0.00086	0.00014	0.00012	0.00034	0.00031
150	0.00026	0.00027	0.00027	0.00047	0.00043	0.00026	0.00030	0.00014
160	0.00042	0.00030	0.00049	0.00026	0.00042	0.00013	0.00019	0.00035
170	0.00012	0.00021	0.00032	0.00042	0.00045	0.00031	0.00025	0.00023
180	0.00033	0.00015	0.00023	0.00049	0.00024	0.00011	0.00047	0.00030
Spatial Average (mW/cm ²)	0.00033	0.00027	0.00675	0.03281	0.02860	0.00775	0.00031	0.00032
Max Spatial Average (mW/cm ²)	0.03281							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT20	Test Frequency (MHz)	5745	MPE Distance (cm)	51	Power Setting	19	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
186	0.00031	0.00089	0.00909	0.55157	0.54668	0.01343	0.00028	0.00022
Max PSD (mW/cm ²)	0.55157							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00030	0.00019	0.00023	0.00017	0.00032	0.00034	0.00030	0.00046
20	0.00043	0.00011	0.00012	0.00039	0.00039	0.00023	0.00022	0.00036
30	0.00017	0.00036	0.00018	0.00021	0.00048	0.00025	0.00018	0.00034
40	0.00010	0.00030	0.00022	0.00030	0.00023	0.00019	0.00028	0.00020
50	0.00048	0.00016	0.00025	0.00033	0.00039	0.00033	0.00047	0.00023
60	0.00027	0.00046	0.00307	0.00422	0.00167	0.00069	0.00032	0.00048
70	0.00039	0.00014	0.04038	0.02614	0.06773	0.05186	0.00019	0.00044
80	0.00025	0.00028	0.00381	0.00105	0.00379	0.00583	0.00015	0.00024
90	0.00046	0.00012	0.03518	0.46314	0.50274	0.08975	0.00044	0.00030
100	0.00041	0.00012	0.00170	0.00413	0.00494	0.00256	0.00025	0.00030
110	0.00050	0.00042	0.00178	0.00564	0.00314	0.00167	0.00015	0.00020
120	0.00034	0.00028	0.00125	0.00369	0.00531	0.00652	0.00013	0.00012
130	0.00042	0.00034	0.00532	0.00259	0.00344	0.00601	0.00049	0.00029
140	0.00027	0.00021	0.00033	0.00064	0.00023	0.00038	0.00026	0.00037
150	0.00042	0.00039	0.00040	0.00033	0.00035	0.00041	0.00049	0.00040
160	0.00047	0.00049	0.00017	0.00027	0.00023	0.00042	0.00012	0.00027
170	0.00040	0.00041	0.00026	0.00012	0.00014	0.00050	0.00030	0.00035
180	0.00044	0.00014	0.00033	0.00044	0.00037	0.00018	0.00042	0.00013
Spatial Average (mW/cm ²)	0.00036	0.00027	0.00528	0.02854	0.03311	0.00934	0.00029	0.00030
Max Spatial Average (mW/cm ²)	0.03311							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT20	Test Frequency (MHz)	5785	MPE Distance (cm)	51	Power Setting	19	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
186	0.00055	0.00113	0.00737	0.56807	0.53304	0.01278	0.00044	0.00024
Max PSD (mW/cm ²)	0.56807							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00020	0.00044	0.00046	0.00050	0.00031	0.00019	0.00017	0.00030
20	0.00030	0.00038	0.00050	0.00041	0.00041	0.00017	0.00011	0.00023
30	0.00034	0.00038	0.00033	0.00046	0.00028	0.00042	0.00045	0.00020
40	0.00041	0.00021	0.00020	0.00013	0.00043	0.00025	0.00018	0.00026
50	0.00028	0.00050	0.00027	0.00030	0.00034	0.00025	0.00023	0.00038
60	0.00023	0.00033	0.00501	0.00872	0.00895	0.00061	0.00031	0.00048
70	0.00024	0.00028	0.01453	0.08507	0.06057	0.03860	0.00022	0.00029
80	0.00017	0.00038	0.00441	0.00374	0.00200	0.00783	0.00026	0.00029
90	0.00023	0.00035	0.07696	0.49096	0.46892	0.08010	0.00018	0.00013
100	0.00039	0.00023	0.00606	0.00732	0.00216	0.00346	0.00018	0.00033
110	0.00027	0.00018	0.00742	0.00321	0.00419	0.00887	0.00021	0.00039
120	0.00021	0.00032	0.00602	0.00564	0.00690	0.00258	0.00013	0.00023
130	0.00033	0.00043	0.00409	0.00280	0.00531	0.00632	0.00032	0.00043
140	0.00012	0.00015	0.00050	0.00032	0.00014	0.00044	0.00042	0.00048
150	0.00043	0.00029	0.00029	0.00037	0.00038	0.00013	0.00028	0.00014
160	0.00046	0.00029	0.00050	0.00046	0.00041	0.00010	0.00035	0.00014
170	0.00011	0.00037	0.00036	0.00041	0.00018	0.00031	0.00038	0.00013
180	0.00032	0.00034	0.00032	0.00015	0.00015	0.00023	0.00048	0.00046
Spatial Average (mW/cm ²)	0.00028	0.00032	0.00712	0.03394	0.03122	0.00838	0.00027	0.00029
Max Spatial Average (mW/cm ²)	0.03394							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT20	Test Frequency (MHz)	5825	MPE Distance (cm)	51	Power Setting	19	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
186	0.00029	0.00096	0.00148	0.52818	0.49921	0.01441	0.00048	0.00018
Max PSD (mW/cm ²)	0.52818							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00023	0.00036	0.00023	0.00036	0.00025	0.00049	0.00038	0.00019
20	0.00033	0.00048	0.00039	0.00018	0.00035	0.00026	0.00021	0.00049
30	0.00025	0.00032	0.00030	0.00028	0.00035	0.00011	0.00022	0.00050
40	0.00014	0.00031	0.00026	0.00025	0.00039	0.00015	0.00048	0.00020
50	0.00015	0.00024	0.00040	0.00013	0.00024	0.00012	0.00040	0.00013
60	0.00050	0.00011	0.00782	0.00718	0.00132	0.00062	0.00037	0.00019
70	0.00032	0.00049	0.08286	0.02160	0.04909	0.08716	0.00031	0.00015
80	0.00034	0.00042	0.00328	0.00555	0.00663	0.00897	0.00036	0.00048
90	0.00016	0.00046	0.03413	0.54171	0.53978	0.02727	0.00013	0.00045
100	0.00048	0.00023	0.00661	0.00273	0.00170	0.00151	0.00050	0.00028
110	0.00046	0.00022	0.00847	0.00212	0.00426	0.00271	0.00031	0.00040
120	0.00027	0.00026	0.00526	0.00680	0.00833	0.00605	0.00022	0.00013
130	0.00037	0.00029	0.00670	0.00699	0.00811	0.00785	0.00018	0.00031
140	0.00031	0.00039	0.00028	0.00089	0.00015	0.00011	0.00044	0.00047
150	0.00031	0.00011	0.00048	0.00016	0.00022	0.00026	0.00034	0.00023
160	0.00031	0.00027	0.00021	0.00026	0.00049	0.00048	0.00041	0.00049
170	0.00011	0.00012	0.00013	0.00032	0.00022	0.00018	0.00039	0.00017
180	0.00012	0.00029	0.00033	0.00044	0.00019	0.00029	0.00047	0.00042
Spatial Average (mW/cm ²)	0.00029	0.00030	0.00879	0.03322	0.03456	0.00803	0.00034	0.00032
Max Spatial Average (mW/cm ²)	0.03456							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT80	Test Frequency (MHz)	5775	MPE Distance (cm)	51	Power Setting	17.5	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
186	0.00025	0.00101	0.00627	0.55321	0.56171	0.01393	0.00035	0.00026
Max PSD (mW/cm ²)	0.56171							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00046	0.00010	0.00044	0.00033	0.00041	0.00032	0.00019	0.00031
20	0.00034	0.00027	0.00050	0.00041	0.00049	0.00048	0.00031	0.00014
30	0.00044	0.00034	0.00011	0.00021	0.00011	0.00043	0.00045	0.00035
40	0.00038	0.00044	0.00011	0.00043	0.00021	0.00027	0.00037	0.00030
50	0.00019	0.00050	0.00041	0.00034	0.00047	0.00020	0.00027	0.00019
60	0.00049	0.00026	0.00877	0.00555	0.00625	0.00016	0.00032	0.00039
70	0.00041	0.00043	0.06218	0.09844	0.04219	0.08064	0.00045	0.00018
80	0.00041	0.00040	0.00757	0.00719	0.00232	0.00499	0.00021	0.00048
90	0.00026	0.00016	0.05107	0.54060	0.40116	0.05214	0.00031	0.00044
100	0.00013	0.00033	0.00219	0.00569	0.00795	0.00433	0.00046	0.00018
110	0.00036	0.00027	0.00505	0.00686	0.00265	0.00709	0.00027	0.00030
120	0.00028	0.00018	0.00505	0.00585	0.00396	0.00272	0.00031	0.00041
130	0.00042	0.00028	0.00428	0.00443	0.00474	0.00470	0.00026	0.00020
140	0.00030	0.00048	0.00056	0.00023	0.00056	0.00022	0.00014	0.00037
150	0.00039	0.00026	0.00030	0.00014	0.00041	0.00043	0.00022	0.00023
160	0.00041	0.00021	0.00037	0.00042	0.00035	0.00030	0.00019	0.00039
170	0.00017	0.00027	0.00045	0.00042	0.00036	0.00031	0.00013	0.00032
180	0.00039	0.00032	0.00021	0.00046	0.00027	0.00037	0.00023	0.00046
Spatial Average (mW/cm ²)	0.00035	0.00030	0.00831	0.03767	0.02638	0.00889	0.00028	0.00031
Max Spatial Average (mW/cm ²)	0.03767							
MPE Limit (mW/cm ²)	1							



For Test Mode 5: EUT 3 + Ant. 3 / 5.8G; D1D

Test Mode	a	Test Frequency (MHz)	5745	MPE Distance (cm)	39	Power Setting	20	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
188	0.00024	0.00114	0.00778	0.61127	0.57665	0.00736	0.00087	0.00048
Max PSD (mW/cm ²)	0.61127							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00035	0.00038	0.00021	0.00028	0.00015	0.00040	0.00029	0.00021
20	0.00020	0.00021	0.00044	0.00036	0.00024	0.00031	0.00028	0.00023
30	0.00011	0.00014	0.00018	0.00046	0.00029	0.00038	0.00039	0.00039
40	0.00012	0.00050	0.00049	0.00019	0.00012	0.00012	0.00045	0.00019
50	0.00015	0.00041	0.00043	0.00032	0.00029	0.00025	0.00021	0.00020
60	0.00035	0.00021	0.00436	0.00587	0.00145	0.00015	0.00035	0.00040
70	0.00036	0.00042	0.08735	0.05968	0.08122	0.02267	0.00022	0.00043
80	0.00040	0.00040	0.00808	0.00581	0.00117	0.00826	0.00042	0.00041
90	0.00029	0.00030	0.05245	0.48761	0.50483	0.06931	0.00044	0.00031
100	0.00036	0.00034	0.00893	0.00360	0.00725	0.00542	0.00028	0.00039
110	0.00032	0.00013	0.00218	0.00252	0.00494	0.00458	0.00018	0.00026
120	0.00028	0.00020	0.00776	0.00124	0.00178	0.00239	0.00012	0.00014
130	0.00021	0.00032	0.00182	0.00231	0.00835	0.00472	0.00013	0.00024
140	0.00046	0.00019	0.00027	0.00078	0.00072	0.00046	0.00029	0.00032
150	0.00023	0.00032	0.00034	0.00044	0.00013	0.00021	0.00038	0.00012
160	0.00018	0.00018	0.00016	0.00034	0.00035	0.00019	0.00012	0.00034
170	0.00028	0.00050	0.00043	0.00038	0.00028	0.00020	0.00019	0.00041
180	0.00014	0.00019	0.00014	0.00012	0.00043	0.00038	0.00034	0.00026
Spatial Average (mW/cm ²)	0.00027	0.00030	0.00978	0.03180	0.03411	0.00669	0.00028	0.00029
Max Spatial Average (mW/cm ²)	0.03411							
MPE Limit (mW/cm ²)	1							



Test Mode	a	Test Frequency (MHz)	5785	MPE Distance (cm)	39	Power Setting	19	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
188	0.00046	0.00179	0.00812	0.58576	0.66257	0.00728	0.00078	0.00049
Max PSD (mW/cm ²)	0.66257							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00021	0.00033	0.00029	0.00021	0.00011	0.00027	0.00043	0.00039
20	0.00032	0.00025	0.00040	0.00039	0.00033	0.00038	0.00033	0.00020
30	0.00027	0.00019	0.00033	0.00011	0.00012	0.00036	0.00019	0.00044
40	0.00022	0.00021	0.00044	0.00044	0.00046	0.00030	0.00035	0.00028
50	0.00020	0.00021	0.00049	0.00014	0.00048	0.00041	0.00016	0.00031
60	0.00012	0.00031	0.00163	0.00683	0.00183	0.00012	0.00047	0.00026
70	0.00030	0.00020	0.04510	0.06018	0.09945	0.03032	0.00042	0.00038
80	0.00045	0.00046	0.00705	0.00169	0.00435	0.00687	0.00028	0.00047
90	0.00010	0.00026	0.02703	0.52012	0.53361	0.03052	0.00047	0.00015
100	0.00019	0.00023	0.00803	0.00116	0.00472	0.00367	0.00025	0.00049
110	0.00043	0.00047	0.00115	0.00276	0.00670	0.00270	0.00027	0.00016
120	0.00040	0.00010	0.00349	0.00656	0.00877	0.00692	0.00016	0.00031
130	0.00036	0.00011	0.00440	0.00355	0.00876	0.00371	0.00041	0.00028
140	0.00017	0.00050	0.00029	0.00066	0.00065	0.00028	0.00042	0.00042
150	0.00033	0.00045	0.00042	0.00032	0.00025	0.00028	0.00011	0.00048
160	0.00036	0.00024	0.00026	0.00037	0.00014	0.00041	0.00017	0.00015
170	0.00017	0.00020	0.00014	0.00026	0.00010	0.00036	0.00015	0.00013
180	0.00016	0.00042	0.00033	0.00028	0.00032	0.00021	0.00028	0.00037
Spatial Average (mW/cm ²)	0.00026	0.00029	0.00563	0.03367	0.03729	0.00489	0.00029	0.00031
Max Spatial Average (mW/cm ²)	0.03729							
MPE Limit (mW/cm ²)	1							



Test Mode	a	Test Frequency (MHz)	5825	MPE Distance (cm)	39	Power Setting	17	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
188	0.00014	0.00239	0.00431	0.64030	0.63473	0.01183	0.00086	0.00039
Max PSD (mW/cm ²)	0.64030							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00012	0.00011	0.00023	0.00021	0.00013	0.00028	0.00023	0.00030
20	0.00015	0.00015	0.00032	0.00013	0.00046	0.00044	0.00016	0.00015
30	0.00029	0.00011	0.00018	0.00028	0.00020	0.00050	0.00027	0.00012
40	0.00039	0.00039	0.00039	0.00032	0.00015	0.00033	0.00030	0.00030
50	0.00024	0.00020	0.00025	0.00037	0.00017	0.00046	0.00025	0.00042
60	0.00045	0.00047	0.00541	0.00272	0.00687	0.00022	0.00048	0.00036
70	0.00012	0.00027	0.08036	0.07571	0.03222	0.05962	0.00012	0.00049
80	0.00050	0.00022	0.00439	0.00531	0.00578	0.00626	0.00045	0.00044
90	0.00027	0.00040	0.02565	0.42279	0.43981	0.03268	0.00040	0.00018
100	0.00028	0.00021	0.00856	0.00508	0.00463	0.00254	0.00033	0.00015
110	0.00035	0.00029	0.00527	0.00253	0.00759	0.00194	0.00022	0.00022
120	0.00024	0.00035	0.00210	0.00212	0.00440	0.00444	0.00011	0.00035
130	0.00022	0.00022	0.00747	0.00811	0.00435	0.00643	0.00012	0.00022
140	0.00023	0.00040	0.00024	0.00082	0.00019	0.00013	0.00042	0.00017
150	0.00032	0.00037	0.00032	0.00047	0.00019	0.00039	0.00044	0.00010
160	0.00037	0.00011	0.00030	0.00046	0.00011	0.00049	0.00049	0.00026
170	0.00021	0.00017	0.00035	0.00032	0.00019	0.00012	0.00010	0.00013
180	0.00048	0.00033	0.00011	0.00045	0.00030	0.00039	0.00032	0.00012
Spatial Average (mW/cm ²)	0.00029	0.00027	0.00788	0.02934	0.02821	0.00654	0.00029	0.00025
Max Spatial Average (mW/cm ²)	0.02934							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT20	Test Frequency (MHz)	5745	MPE Distance (cm)	39	Power Setting	20	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
188	0.00045	0.00190	0.00611	0.66366	0.51901	0.00873	0.00087	0.00037
Max PSD (mW/cm ²)	0.66366							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00016	0.00014	0.00011	0.00019	0.00048	0.00018	0.00021	0.00045
20	0.00032	0.00014	0.00031	0.00014	0.00015	0.00045	0.00030	0.00030
30	0.00022	0.00027	0.00018	0.00038	0.00048	0.00029	0.00028	0.00019
40	0.00035	0.00042	0.00018	0.00020	0.00023	0.00035	0.00030	0.00026
50	0.00049	0.00039	0.00027	0.00028	0.00040	0.00030	0.00036	0.00020
60	0.00010	0.00041	0.00399	0.00423	0.00882	0.00072	0.00019	0.00036
70	0.00046	0.00038	0.08697	0.03181	0.02592	0.01678	0.00049	0.00041
80	0.00034	0.00024	0.00453	0.00804	0.00145	0.00409	0.00014	0.00038
90	0.00027	0.00029	0.05062	0.42539	0.52364	0.06758	0.00040	0.00033
100	0.00046	0.00018	0.00538	0.00457	0.00238	0.00611	0.00042	0.00027
110	0.00036	0.00017	0.00467	0.00175	0.00287	0.00305	0.00033	0.00033
120	0.00041	0.00048	0.00174	0.00283	0.00604	0.00714	0.00035	0.00049
130	0.00013	0.00032	0.00465	0.00119	0.00444	0.00515	0.00024	0.00028
140	0.00048	0.00024	0.00077	0.00063	0.00057	0.00055	0.00025	0.00038
150	0.00047	0.00044	0.00012	0.00013	0.00040	0.00022	0.00034	0.00026
160	0.00046	0.00048	0.00044	0.00030	0.00032	0.00018	0.00032	0.00011
170	0.00014	0.00025	0.00027	0.00012	0.00024	0.00013	0.00012	0.00030
180	0.00043	0.00037	0.00021	0.00037	0.00029	0.00031	0.00043	0.00045
Spatial Average (mW/cm ²)	0.00034	0.00031	0.00919	0.02681	0.03217	0.00631	0.00030	0.00032
Max Spatial Average (mW/cm ²)	0.03217							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT20	Test Frequency (MHz)	5785	MPE Distance (cm)	39	Power Setting	19	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
188	0.00023	0.00150	0.00839	0.66382	0.54363	0.00982	0.00064	0.00037
Max PSD (mW/cm ²)	0.66382							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00014	0.00034	0.00047	0.00036	0.00013	0.00014	0.00038	0.00017
20	0.00032	0.00031	0.00047	0.00022	0.00026	0.00027	0.00018	0.00043
30	0.00021	0.00041	0.00040	0.00028	0.00033	0.00050	0.00047	0.00036
40	0.00020	0.00026	0.00031	0.00047	0.00019	0.00029	0.00029	0.00015
50	0.00050	0.00030	0.00035	0.00014	0.00038	0.00044	0.00035	0.00025
60	0.00034	0.00033	0.00336	0.00298	0.00551	0.00084	0.00036	0.00023
70	0.00042	0.00027	0.08521	0.02429	0.07005	0.05778	0.00024	0.00044
80	0.00043	0.00037	0.00516	0.00757	0.00162	0.00881	0.00037	0.00036
90	0.00014	0.00016	0.04332	0.43659	0.46651	0.08160	0.00033	0.00016
100	0.00017	0.00049	0.00490	0.00493	0.00237	0.00385	0.00043	0.00024
110	0.00035	0.00048	0.00689	0.00514	0.00765	0.00496	0.00019	0.00017
120	0.00024	0.00017	0.00661	0.00730	0.00566	0.00259	0.00039	0.00044
130	0.00049	0.00013	0.00705	0.00240	0.00138	0.00393	0.00046	0.00049
140	0.00049	0.00044	0.00076	0.00012	0.00023	0.00015	0.00044	0.00020
150	0.00026	0.00045	0.00041	0.00032	0.00039	0.00016	0.00041	0.00014
160	0.00032	0.00031	0.00046	0.00045	0.00030	0.00021	0.00019	0.00035
170	0.00048	0.00046	0.00039	0.00020	0.00038	0.00047	0.00031	0.00013
180	0.00034	0.00021	0.00032	0.00039	0.00029	0.00012	0.00032	0.00030
Spatial Average (mW/cm ²)	0.00032	0.00033	0.00927	0.02745	0.03131	0.00928	0.00034	0.00028
Max Spatial Average (mW/cm ²)	0.03131							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT20	Test Frequency (MHz)	5825	MPE Distance (cm)	39	Power Setting	17	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
188	0.00024	0.00202	0.00747	0.57881	0.58107	0.00517	0.00063	0.00035
Max PSD (mW/cm ²)	0.58107							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00049	0.00017	0.00020	0.00034	0.00012	0.00014	0.00014	0.00034
20	0.00022	0.00025	0.00012	0.00016	0.00017	0.00035	0.00041	0.00014
30	0.00018	0.00039	0.00030	0.00035	0.00016	0.00023	0.00033	0.00028
40	0.00046	0.00038	0.00024	0.00032	0.00030	0.00010	0.00049	0.00022
50	0.00042	0.00021	0.00034	0.00017	0.00024	0.00032	0.00029	0.00038
60	0.00034	0.00024	0.00232	0.00298	0.00632	0.00028	0.00044	0.00044
70	0.00041	0.00035	0.09408	0.08189	0.08616	0.09231	0.00015	0.00017
80	0.00039	0.00031	0.00667	0.00476	0.00813	0.00563	0.00049	0.00029
90	0.00042	0.00027	0.04949	0.49765	0.52657	0.03278	0.00028	0.00032
100	0.00037	0.00028	0.00205	0.00203	0.00135	0.00480	0.00042	0.00012
110	0.00018	0.00045	0.00504	0.00535	0.00281	0.00875	0.00034	0.00033
120	0.00014	0.00014	0.00218	0.00883	0.00647	0.00423	0.00043	0.00038
130	0.00046	0.00021	0.00606	0.00672	0.00727	0.00482	0.00018	0.00049
140	0.00043	0.00043	0.00055	0.00035	0.00054	0.00017	0.00038	0.00036
150	0.00045	0.00035	0.00024	0.00042	0.00028	0.00044	0.00012	0.00014
160	0.00024	0.00027	0.00041	0.00015	0.00013	0.00017	0.00039	0.00024
170	0.00015	0.00033	0.00049	0.00037	0.00024	0.00033	0.00041	0.00048
180	0.00020	0.00018	0.00037	0.00036	0.00016	0.00032	0.00025	0.00043
Spatial Average (mW/cm ²)	0.00033	0.00029	0.00951	0.03407	0.03597	0.00868	0.00033	0.00031
Max Spatial Average (mW/cm ²)	0.03597							
MPE Limit (mW/cm ²)	1							



2.6 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Isotropic Probe	ETS-LINDGREN	HI-6105	00130664	100kHz-6GHz	Oct. 31, 2018	Oct. 30, 2019	03CH01-CB

Note: Calibration Interval of instrument listed above is one year.