




RADIO TEST REPORT

FCC ID : Z8H-89FT0067
Equipment : XE3-4 Wi-Fi 6e Indoor Access Point
Brand Name : Cambium Networks
Model Name : XE3-4
Applicant : Cambium Networks Inc.
3800 Golf Road, Suite 360 Rolling Meadows, IL
60008, USA
Manufacturer : Cambium Networks, Ltd.
Ashburton, TQ13 7UP, UK
Standard : 47 CFR FCC Part 15.247

The product was received on Aug. 13, 2021, and testing was started from Aug. 17, 2021 and completed on Sep. 27, 2021. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

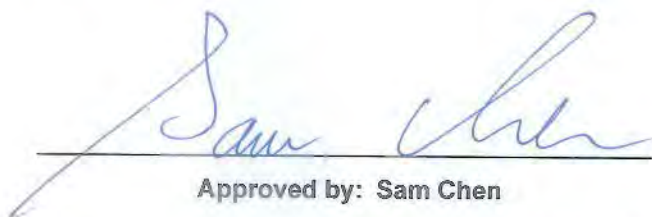

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	8
1.3 Testing Location Information	8
1.4 Measurement Uncertainty	8
2 Test Configuration of EUT.....	9
2.1 Test Channel Mode	9
2.2 The Worst Case Measurement Configuration.....	10
2.3 EUT Operation during Test	11
2.4 Accessories	12
2.5 Support Equipment.....	12
2.6 Test Setup Diagram	13
3 Transmitter Test Result	16
3.1 AC Power-line Conducted Emissions	16
3.2 DTS Bandwidth	18
3.3 Maximum Conducted Output Power	19
3.4 Power Spectral Density	22
3.5 Emissions in Non-restricted Frequency Bands	24
3.6 Emissions in Restricted Frequency Bands.....	25
4 Test Equipment and Calibration Data	29
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_6 Ver1.3

Page Number : 3 of 30
Issued Date : Nov. 08, 2021
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Wendy Pan



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	Port				Brand	Model Name	Antenna Type	Connector	Gain (dBi)				Remark
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Blue tooth					WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Blue tooth	
1	2	2	-	-	Accton	EAP9219A-6 E-1120-CAM	PIFA	I-PEX	4.85	5.60	-	-	Radio 1
2	1	1	-	-	Accton	EAP9219A-6 E-1120-CAM	PIFA	I-PEX	4.85	5.40	-	-	Radio 1
3	-	4	4	-	Accton	EAP9219A-6 E-1120-CAM	PIFA	I-PEX	-	Note 1	5.84	-	Radio 2
4	-	2	2	-	Accton	EAP9219A-6 E-1120-CAM	PIFA	I-PEX	-		6.29	-	Radio 2
5	-	3	3	-	Accton	EAP9219A-6 E-1120-CAM	PIFA	I-PEX	-		6.06	-	Radio 2
6	-	1	1	-	Accton	EAP9219A-6 E-1120-CAM	PIFA	I-PEX	-		5.99	-	Radio 2
7	-	-	-	1	Accton	EAP9219A-6 E-1120-CAM	Chip	N/A	-	-	-	3.39	Radio 3

Note1:

Ant.	Port	Antenna Gain (dBi)		Remark
	WLAN 5GHz	UNII 1	UNII 3	
3	4	2.3	5.21	Radio 2
4	2	4.12	4.93	Radio 2
5	3	2.91	2.81	Radio 2
6	1	3.88	4.24	Radio 2

Radio 2 / Directional Gain (dBi)	
WLAN 5GHz UNII 1, 4T1S	WLAN 5GHz UNII 3, 4T1S
4.55	5.95

Note2: The above information was declared by manufacturer.

WLAN 2.4GHz, 5GHz (Radio 1), 6GHz: The directional gain is calculated which follows the procedure of KDB 662911 D01.

WLAN 5GHz (Radio 2): The directional gain is measured which follows the procedure of KDB 662911 D03. The antenna report is provided in the operational description for this application.

For Radio 1:**For 2.4GHz function:****For IEEE 802.11b/g/n/VHT/ax (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:**For IEEE 802.11a/n/ac/ax (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Radio 2:**For 5GHz function:****For IEEE 802.11a/n/ac/ax (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 6GHz function:**For IEEE 802.11ax (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For Bluetooth Function:**For Bluetooth mode (1TX/1RX)**

Only Port 1 can be use as transmit and receive antenna.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
BT-LE(1Mbps)	0.635	1.97	410.625u	3k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE			
Function	☒	Point-to-multipoint	☐	Point-to-point
Test Software Version	QRCT V4.0.00182.0			
Support Mode	☒	LE 1M PHY: 1 Mb/s		
	☐	LE Coded PHY (S=2): 500 Kb/s		
	☐	LE Coded PHY (S=8): 125 Kb/s		
	☐	LE 2M PHY: 2 Mb/s		

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information				
Test Lab. : Sporton International Inc. Hsinchu Laboratory				
Hsinchu ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)				
(TAF: 3787) TEL: 886-3-656-9065 FAX: 886-3-656-9085				
Test site Designation No. TW3787 with FCC.				
Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.				

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Serway Lee	23.3~24.3 / 54~57	Sep. 01, 2021 ~ Sep. 27, 2021
Radiated<1GHz	10CH01-CB	Wei Li	22~24 / 54~58	Aug. 17, 2021
Radiated>1GHz	03CH04-CB	RJ Huang	24.4-25.5 / 55-58	Aug. 24, 2021 ~ Sep. 02, 2021
AC Conduction	CO01-CB	Wei Li	23~25 / 54~57	Aug. 18, 2021

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.5 dB	Confidence levels of 95%
Bandwidth Measurement	0.9%	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT+PoE

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link The EUT was performed at X axis, Y axis and Z axis position, and the worst case was found at Z axis. So the measurement will follow this same test configuration.
1	EUT in Z axis+PoE
Operating Mode > 1GHz	CTX The EUT was performed at X axis, Y axis and Z axis position, and the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	Radio 1: WLAN 2.4GHz + WLAN 5GHz + Radio 2: WLAN 5GHz + WLAN 6GHz + Radio 3: Bluetooth
Refer to Sporton Test Report No.: FA140924-01 for Co-location RF Exposure Evaluation.	

Note: The PoE is for measurement only, would not be marketed.

Support Unit	Brand	Model
PoE	Cambium	NET-P60-56IN

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the following programs under Win 7 were executed:

The remote PC executed "ping.exe" to link with the EUT to maintain the connection by LAN.

The remote notebook executed "ping.exe" to link with the EUT to maintain the connection by LAN and WLAN 2.4GHz and WLAN 5GHz.

The remote notebook executed "Telnet" to enable the Bluetooth function of EUT.

The remote Smart phone executed "nRF Connect" to link with the EUT to maintain the connection by Bluetooth.



2.4 Accessories

Wall Bracket*1

2.5 Support Equipment

For AC Conduction and Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 2.5G PC	DELL	T3400	N/A
B	LAN NB	DELL	E6430	N/A
C	R1 NB-1	DELL	E6430	N/A
D	PoE	Cambium	NET-P60-56IN	N/A
E	Smart phone	Samsung	Galaxy J2	N/A
F	Flash disk3.0	Transcend	JetFlash-700	N/A
G	R1 NB-2	DELL	E6430	N/A
H	R2 NB	DELL	E6430	N/A


For Radiated (above 1GHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	Cambium	NET-P60-56IN	N/A
B	Notebook	DELL	E4300	N/A

For RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE	Cambium	NET-P60-56IN	N/A

2.6 Test Setup Diagram

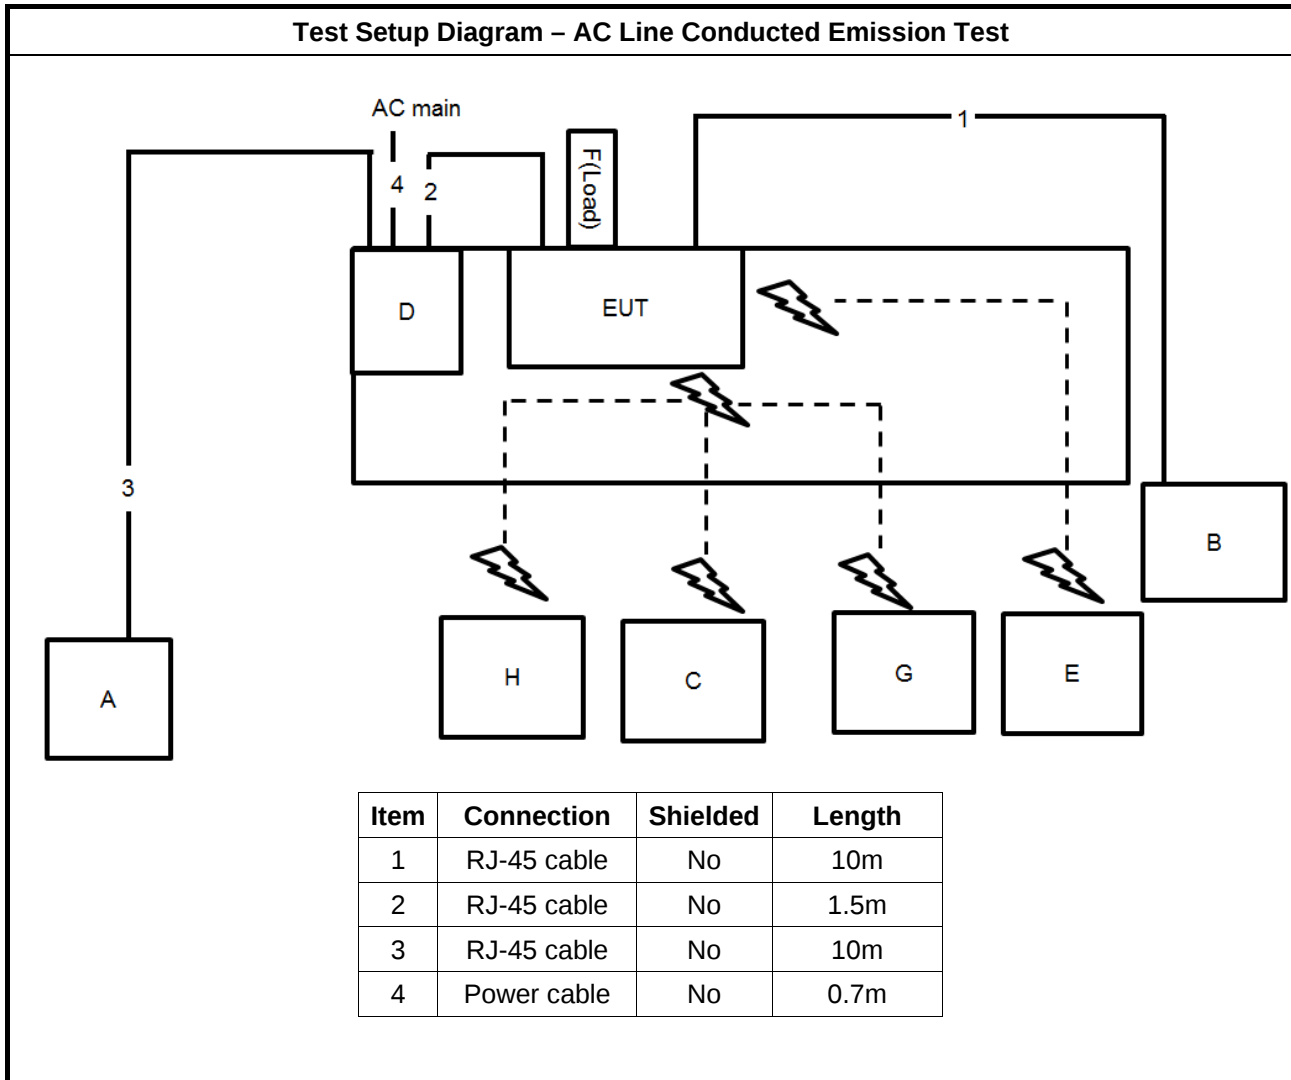

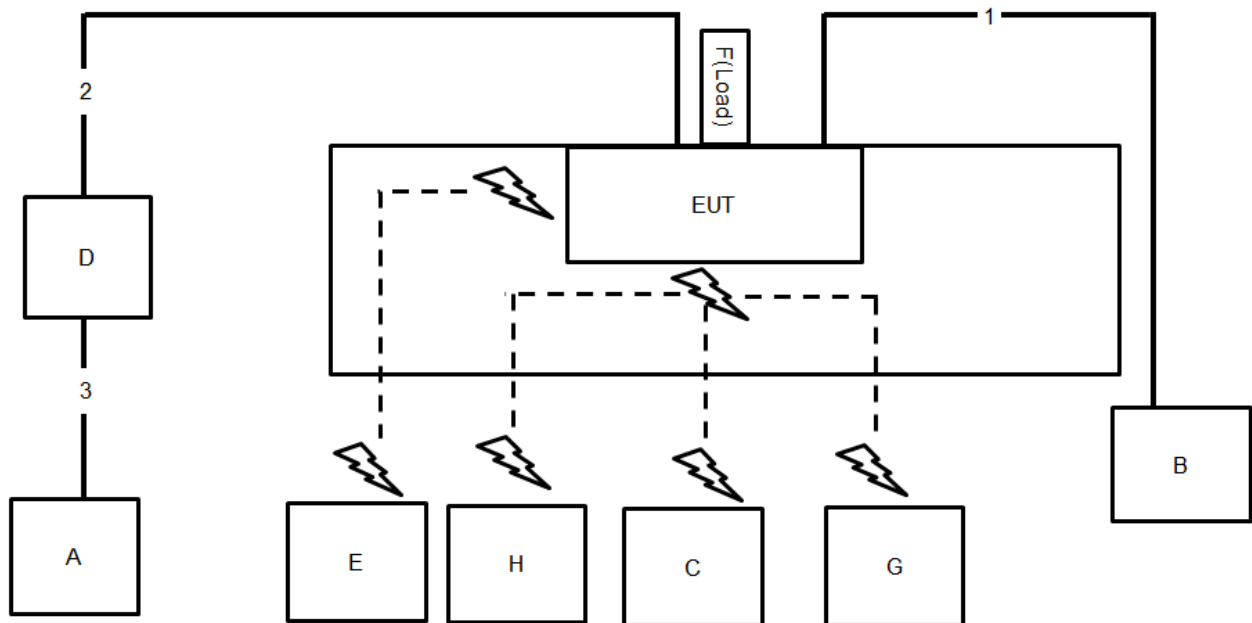Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	3m

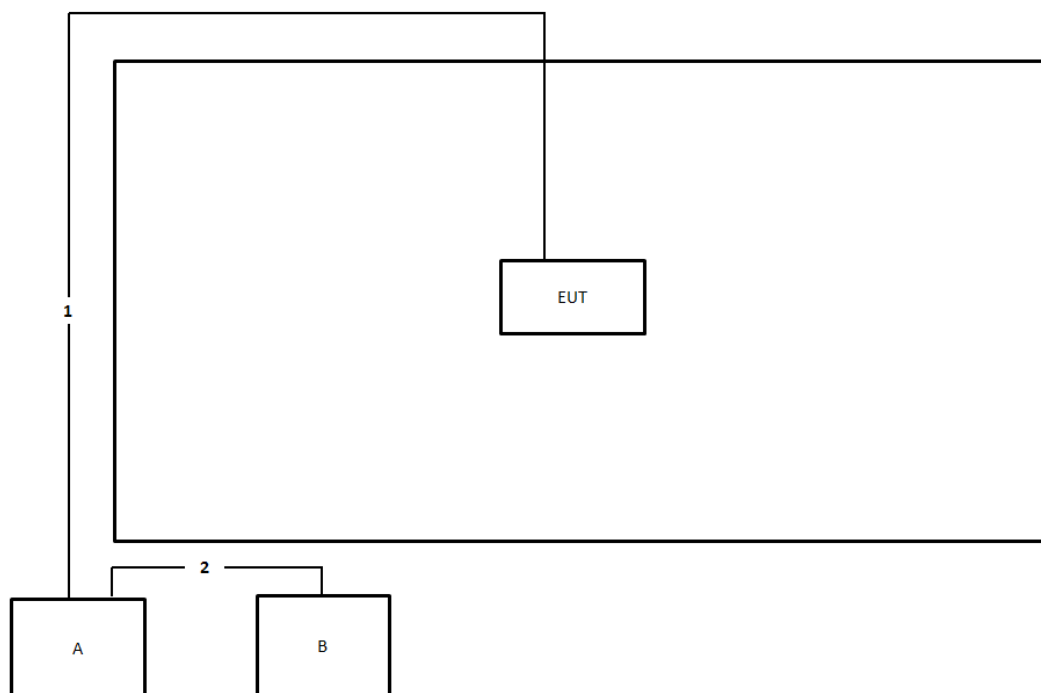Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

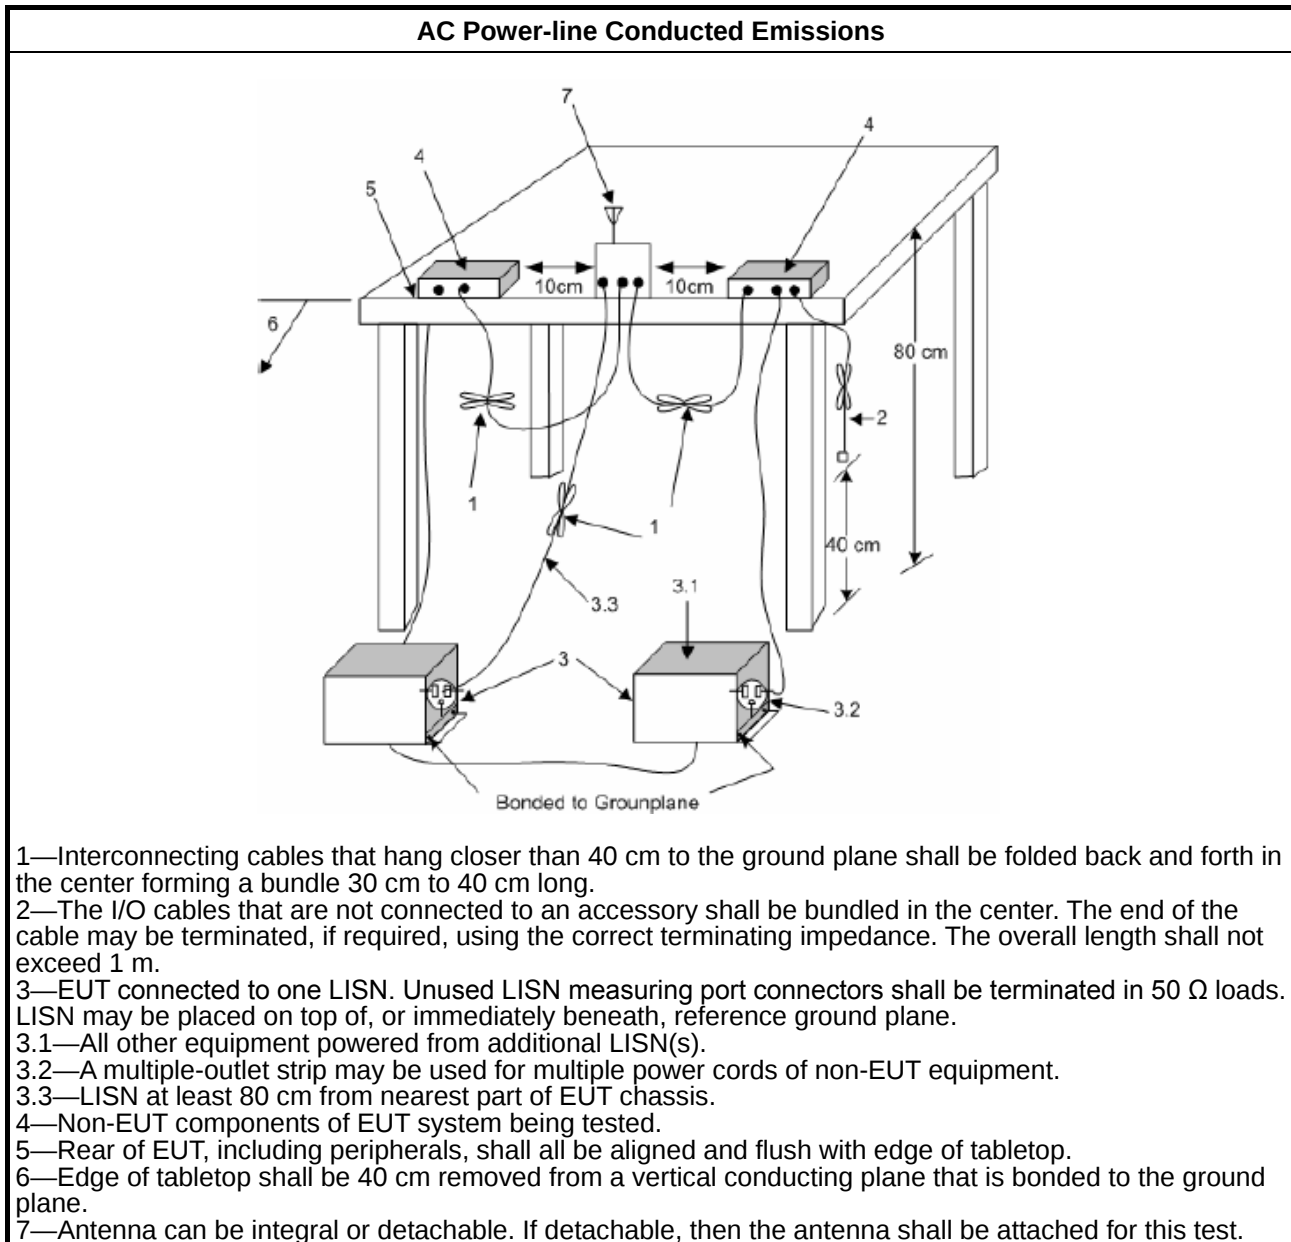

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

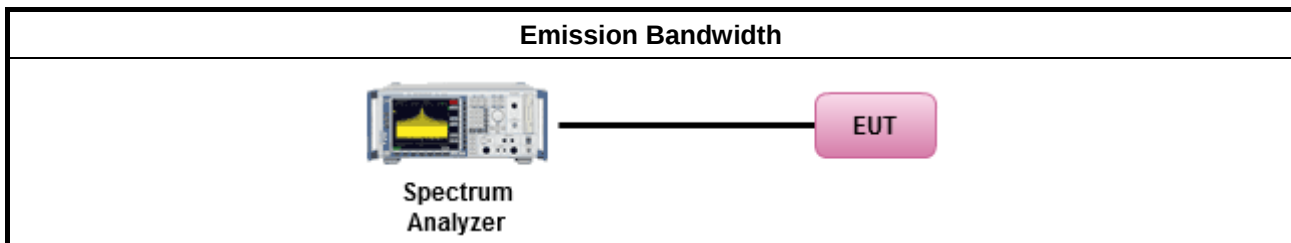

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

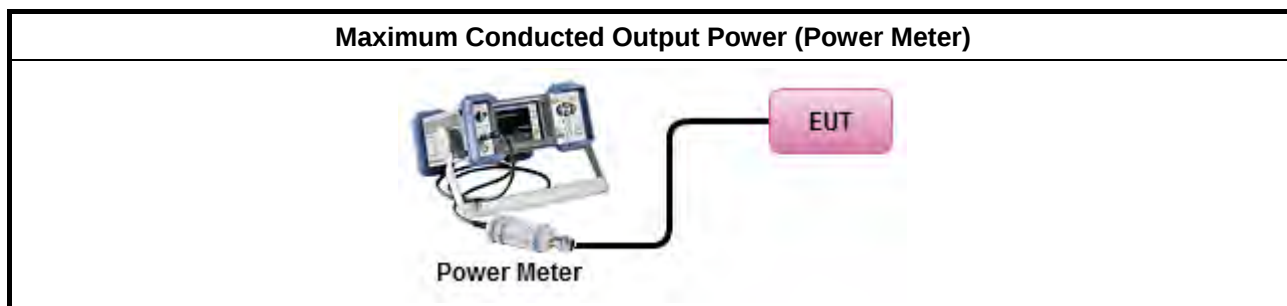

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD. [duty cycle $\geq 98\%$ or external video / power trigger]
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

3.4.4 Test Setup

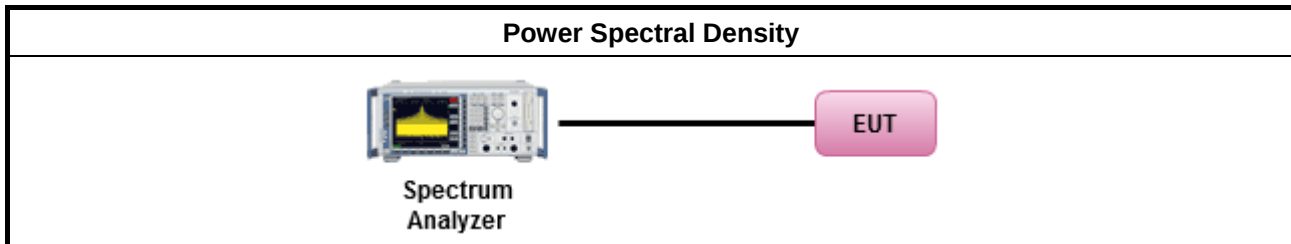

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

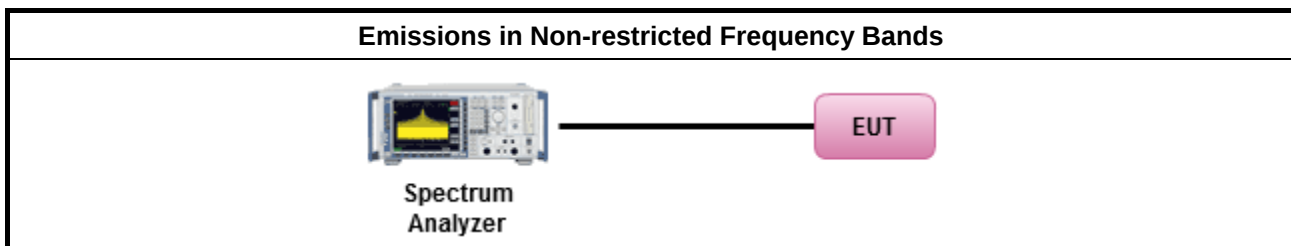

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

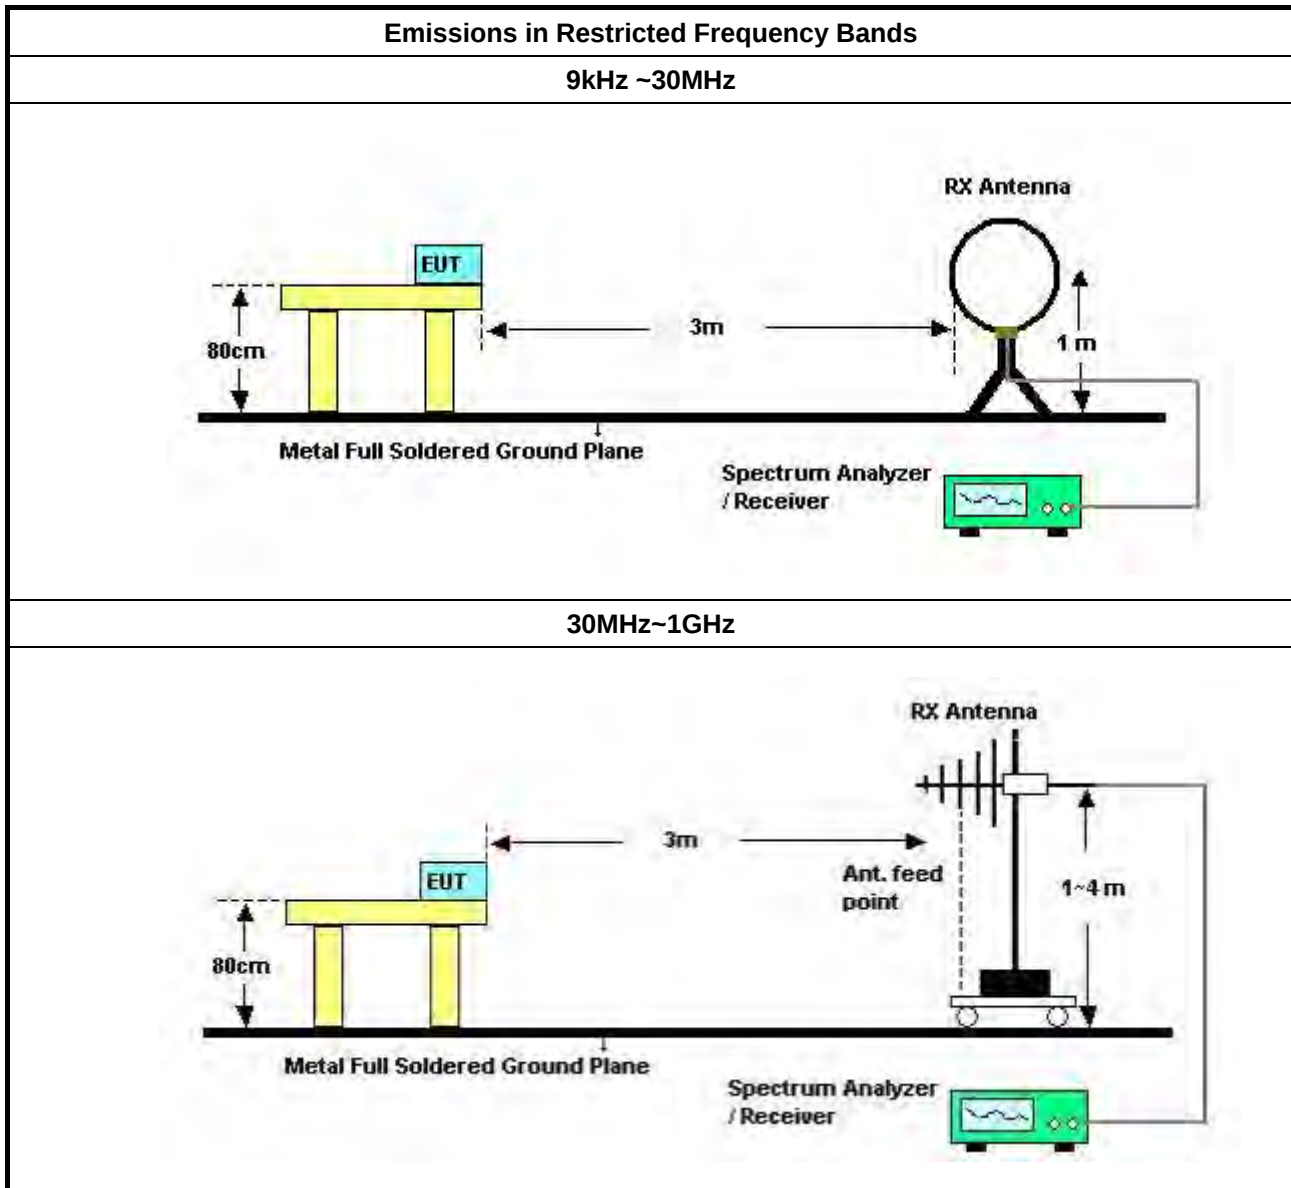

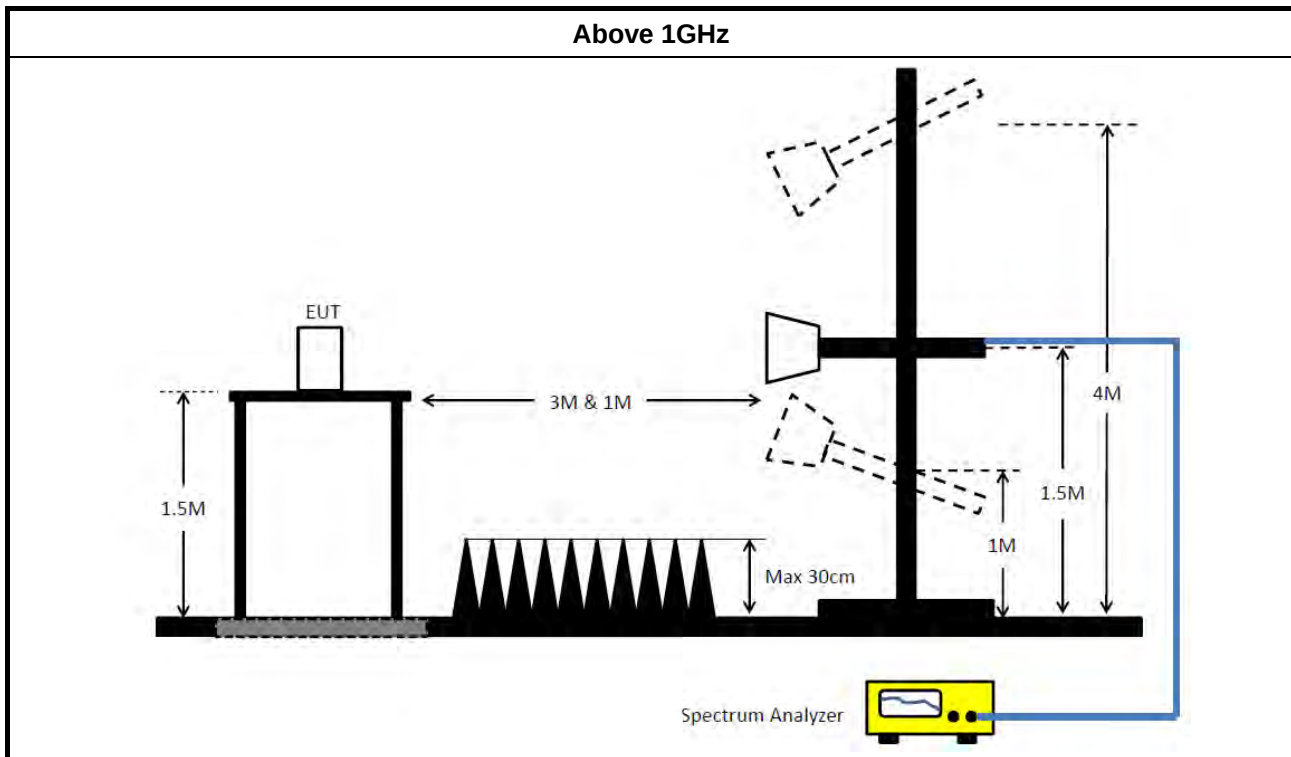

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 03, 2021	Mar. 02, 2022	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Jan. 06, 2021	Jan. 05, 2022	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Mar. 07, 2021	Mar. 06, 2022	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Jan. 30, 2021	Jan. 29, 2022	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 19, 2021	May 18, 2022	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 14, 2021	Apr. 13, 2022	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 28, 2021	Jan. 27, 2022	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 11, 2021	Mar. 10, 2022	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 11, 2021	Mar. 10, 2022	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 20, 2020	Oct. 19, 2021	Radiation (10CH01-CB)
High Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 20, 2020	Oct. 19, 2021	Radiation (10CH01-CB)
Bilog Antenna with 6dB Attenuator	Chase & EMCI	CBL6111A &N-6-06	1543 &AT-N0609	30MHz ~ 1GHz	Jul. 01, 2021	Jun. 30, 2022	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESCI	100186	9kHz ~ 3GHz	Jul. 12, 2021	Jul. 11, 2022	Radiation (10CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	May 03, 2021	May 02, 2022	Radiation (10CH01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 25, 2021	Feb. 24, 2022	Radiation (03CH04-CB)
Horn Antenna	ETS • Lindgren	3115	00143147	750MHz~18GHz	Oct. 23, 2020	Oct. 22, 2021	Radiation (03CH04-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jun. 18, 2021	Jun. 17, 2022	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	83017A	MY53270063	0.5GHz ~ 26.5GHz	Jul. 12, 2021	Jul. 11, 2022	Radiation (03CH04-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 13, 2021	Jul. 12, 2022	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Feb. 19, 2021	Feb. 18, 2022	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Nov. 05, 2020	Nov. 04, 2021	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 15, 2021	Jul. 14, 2022	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 15, 2021	Jul. 14, 2022	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH04-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 21, 2021	May 20, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz –26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 23, 2021	Feb. 22, 2022	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 23, 2021	Feb. 22, 2022	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.



Conducted Emissions at Powerline


Appendix A

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	447k	32.80	46.94	-14.14	Neutral

Mode 1


18/08/2021

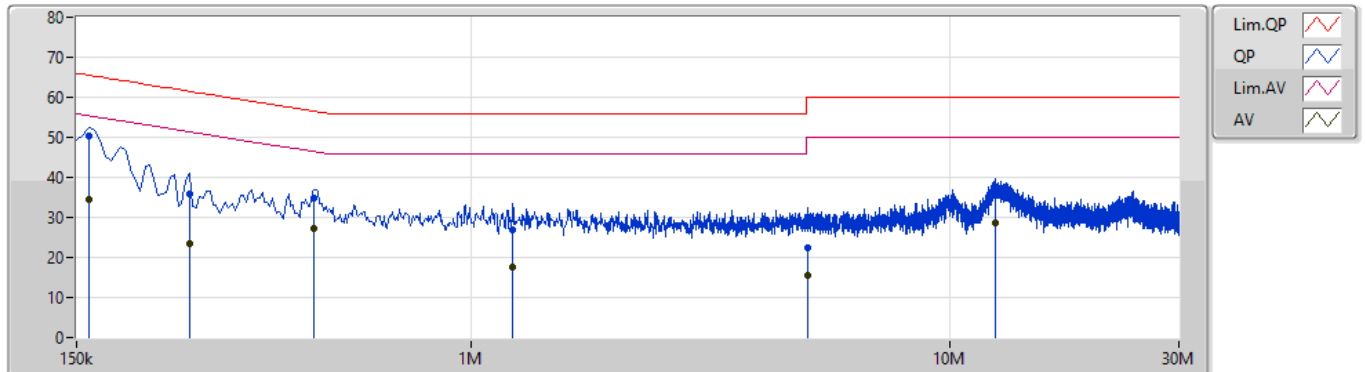

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	159k	50.49	65.52	-15.03	9.89	Line	"Worst"	40.60	0.04	0.04	9.81			
AV	159k	34.36	55.52	-21.16	9.89	Line	-	24.47	0.04	0.04	9.81			
QP	258k	35.76	61.49	-25.73	9.89	Line	-	25.87	0.04	0.04	9.81			
AV	258k	23.36	51.49	-28.13	9.89	Line	-	13.47	0.04	0.04	9.81			
QP	469.5k	34.79	56.52	-21.73	9.90	Line	-	24.89	0.04	0.04	9.82			
AV	469.5k	27.15	46.52	-19.37	9.90	Line	-	17.25	0.04	0.04	9.82			
QP	1.221M	26.85	56.00	-29.15	9.95	Line	-	16.90	0.07	0.05	9.83			
AV	1.221M	17.55	46.00	-28.45	9.95	Line	-	7.60	0.07	0.05	9.83			
QP	5.037M	22.46	60.00	-37.54	10.16	Line	-	12.30	0.15	0.13	9.88			
AV	5.037M	15.62	50.00	-34.38	10.16	Line	-	5.46	0.15	0.13	9.88			
QP	12.426M	35.41	60.00	-24.59	10.33	Line	-	25.08	0.25	0.17	9.91			
AV	12.426M	28.56	50.00	-21.44	10.33	Line	-	18.23	0.25	0.17	9.91			

Mode 1

18/08/2021

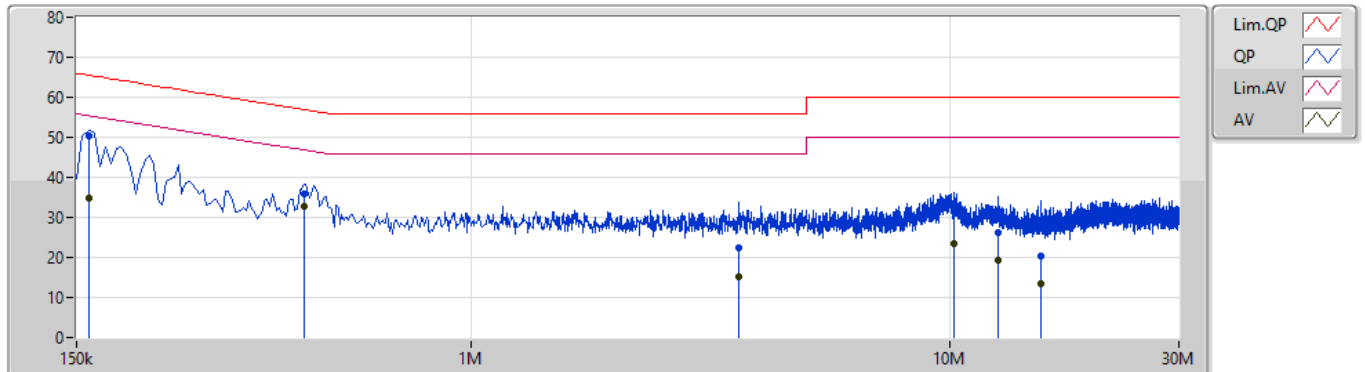

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	159k	50.45	65.52	-15.07	9.88	Neutral	-	40.57	0.03	0.04	9.81			
AV	159k	34.83	55.52	-20.69	9.88	Neutral	-	24.95	0.03	0.04	9.81			
QP	447k	35.84	56.94	-21.10	9.89	Neutral	-	25.95	0.03	0.04	9.82			
AV	447k	32.80	46.94	-14.14	9.89	Neutral	"Worst"	22.91	0.03	0.04	9.82			
QP	3.611M	22.38	56.00	-33.62	10.07	Neutral	-	12.31	0.10	0.11	9.86			
AV	3.611M	15.28	46.00	-30.72	10.07	Neutral	-	5.21	0.10	0.11	9.86			
QP	10.158M	31.49	60.00	-28.51	10.26	Neutral	-	21.23	0.20	0.16	9.90			
AV	10.158M	23.49	50.00	-26.51	10.26	Neutral	-	13.23	0.20	0.16	9.90			
QP	12.57M	26.21	60.00	-33.79	10.31	Neutral	-	15.90	0.23	0.17	9.91			
AV	12.57M	19.24	50.00	-30.76	10.31	Neutral	-	8.93	0.23	0.17	9.91			
QP	15.437M	20.28	60.00	-39.72	10.36	Neutral	-	9.92	0.26	0.18	9.92			
AV	15.437M	13.33	50.00	-36.67	10.36	Neutral	-	2.97	0.26	0.18	9.92			



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	697.5k	1.028M	1M03F1D	692.5k	1.024M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	697.5k	1.028M
2440MHz	Pass	500k	697.5k	1.024M
2480MHz	Pass	500k	692.5k	1.026M


Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

BT-LE(1Mbps)
2402MHz
EBW-DTS

06/09/2021

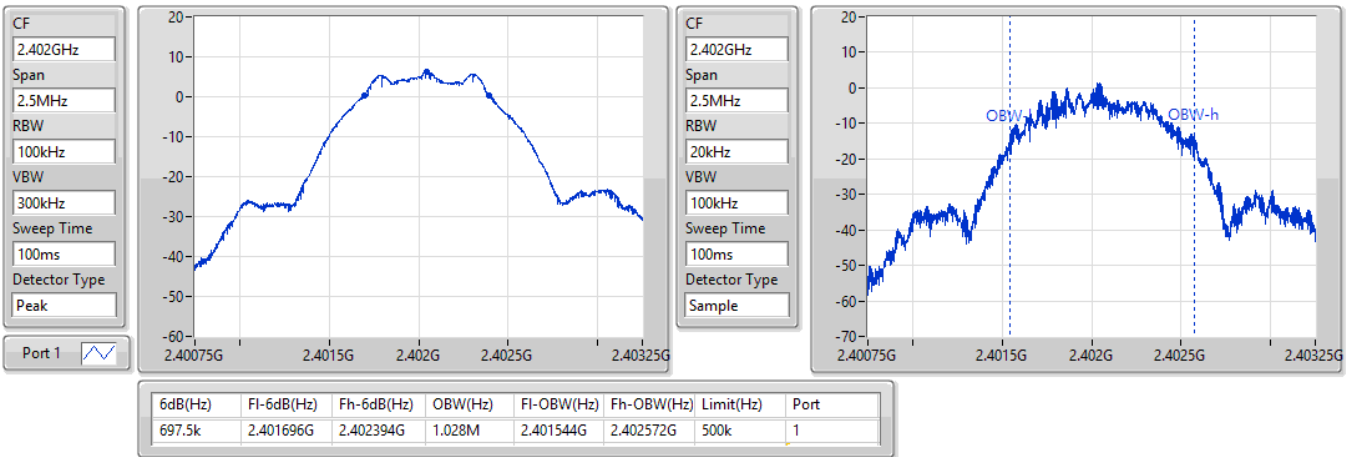

BT-LE(1Mbps)
2440MHz
EBW-DTS

06/09/2021

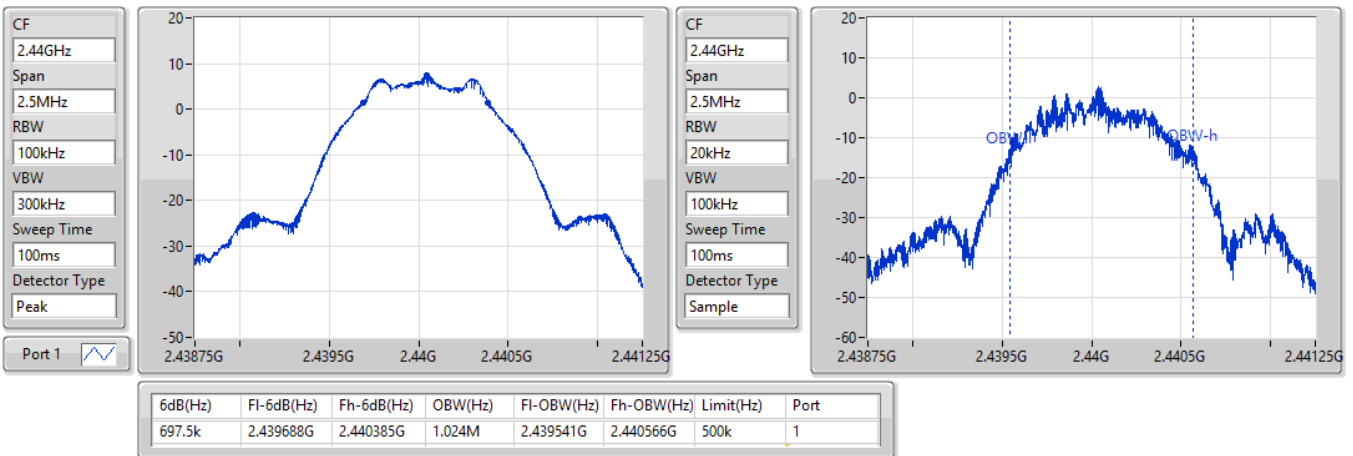

BT-LE(1Mbps)


2480MHz

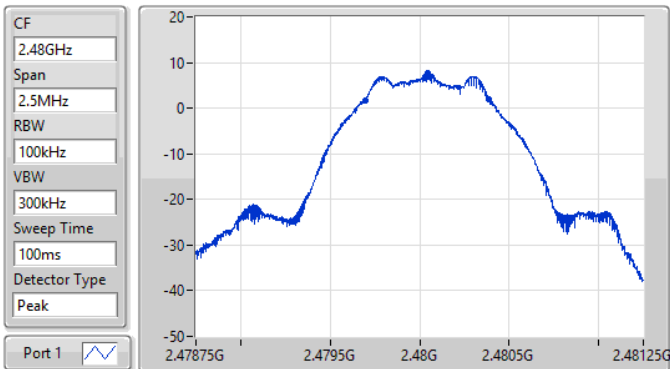

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
692.5k	2.479696G	2.480389G	1.026M	2.479543G	2.480568G	500k	1

EBW-DTS

06/09/2021

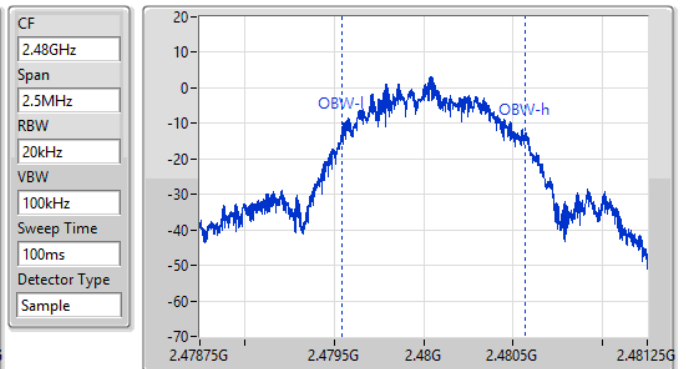



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	8.63	0.00729



Average Power-DTS

Appendix C

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.39	7.14	30.00
2440MHz	Pass	3.39	8.41	30.00
2480MHz	Pass	3.39	8.63	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LF(1Mbps)	-7.92

RBW = 3kHz;

Result


Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.39	-9.35	8.00
2440MHz	Pass	3.39	-8.67	8.00
2480MHz	Pass	3.39	-7.92	8.00

DG = Directional Gain; RBW = 3kHz;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

BT-LE(1Mbps)

2402MHz


06/09/2021

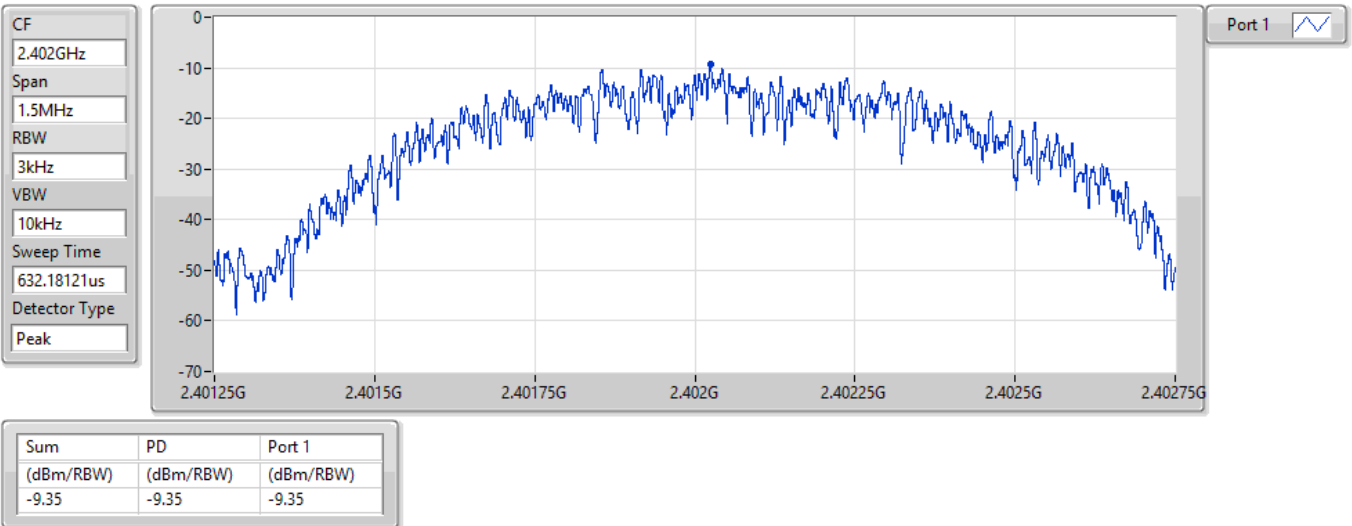

BT-LE(1Mbps)

2440MHz

06/09/2021

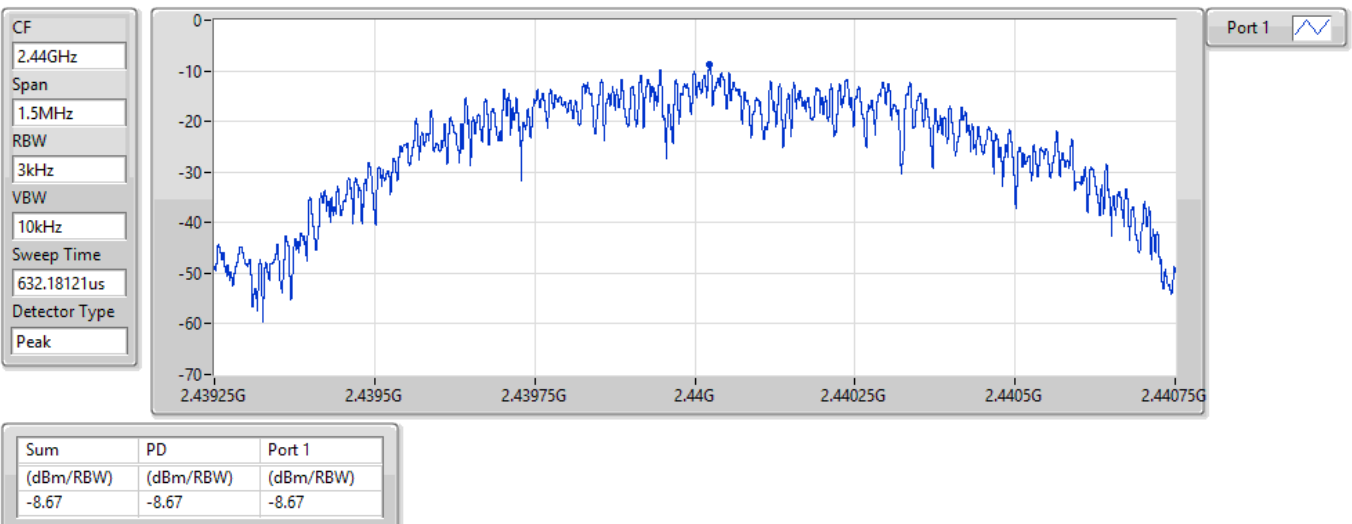


BT-LE(1Mbps)

2480MHz

06/09/2021

Port 1

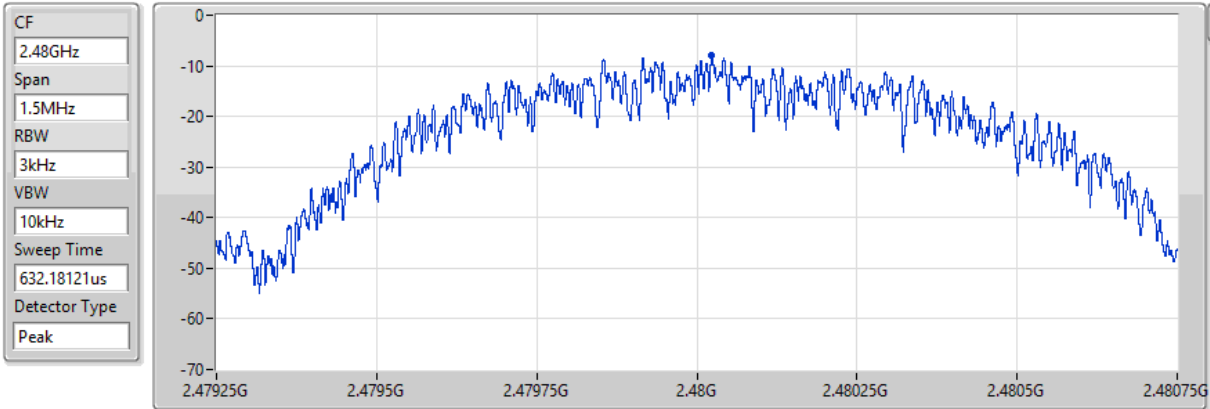

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.92	-7.92	-7.92



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.48008G	7.20	-22.80	957.37M	-53.99	2.39878G	-43.41	2.4G	-41.33	2.49829G	-51.42	2.55693G	-43.54	1




Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.48008G	7.20	-22.80	957.37M	-53.99	2.39878G	-43.41	2.4G	-41.33	2.49829G	-51.42	2.55693G	-43.54	1
2440MHz	Pass	2.48008G	7.20	-22.80	1.97933G	-53.62	2.39124G	-52.90	2.4835G	-55.54	2.50183G	-51.76	24.96063G	-43.73	1
2480MHz	Pass	2.48008G	7.20	-22.80	927.99M	-53.04	2.39625G	-52.89	2.4835G	-50.90	2.48405G	-50.42	24.96344G	-43.44	1

BT-LE(1Mbps)

CSEndB-DTS


2402MHz

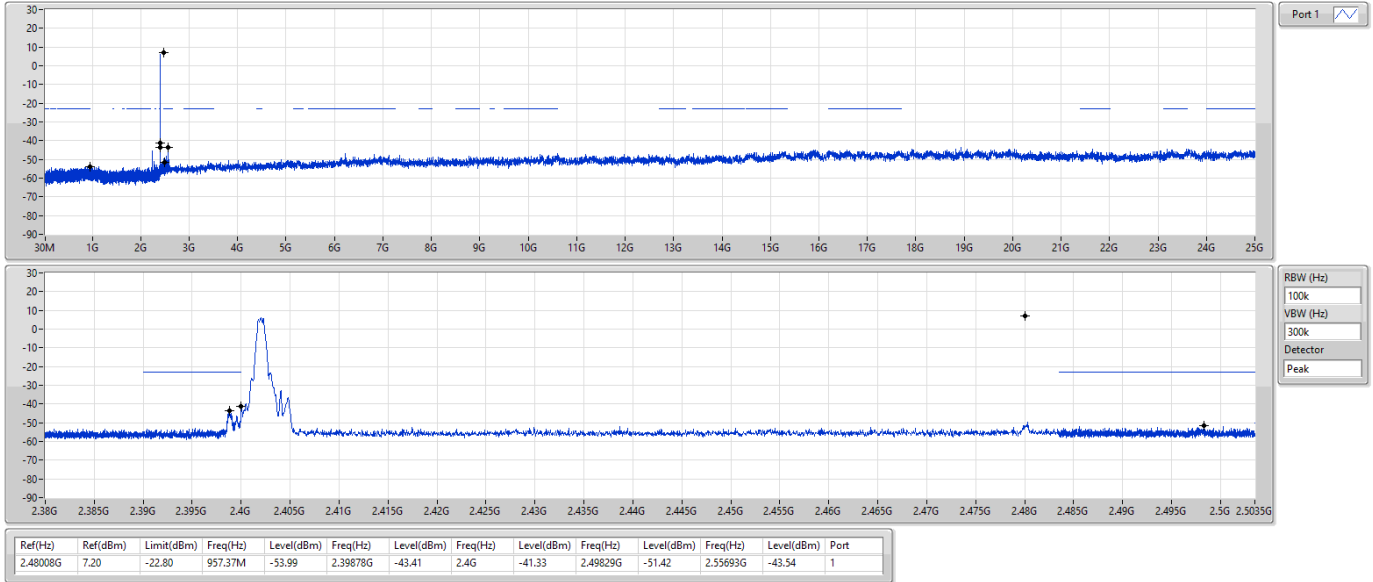

BT-LE(1Mbps)

CSEndB-DTS

2440MHz

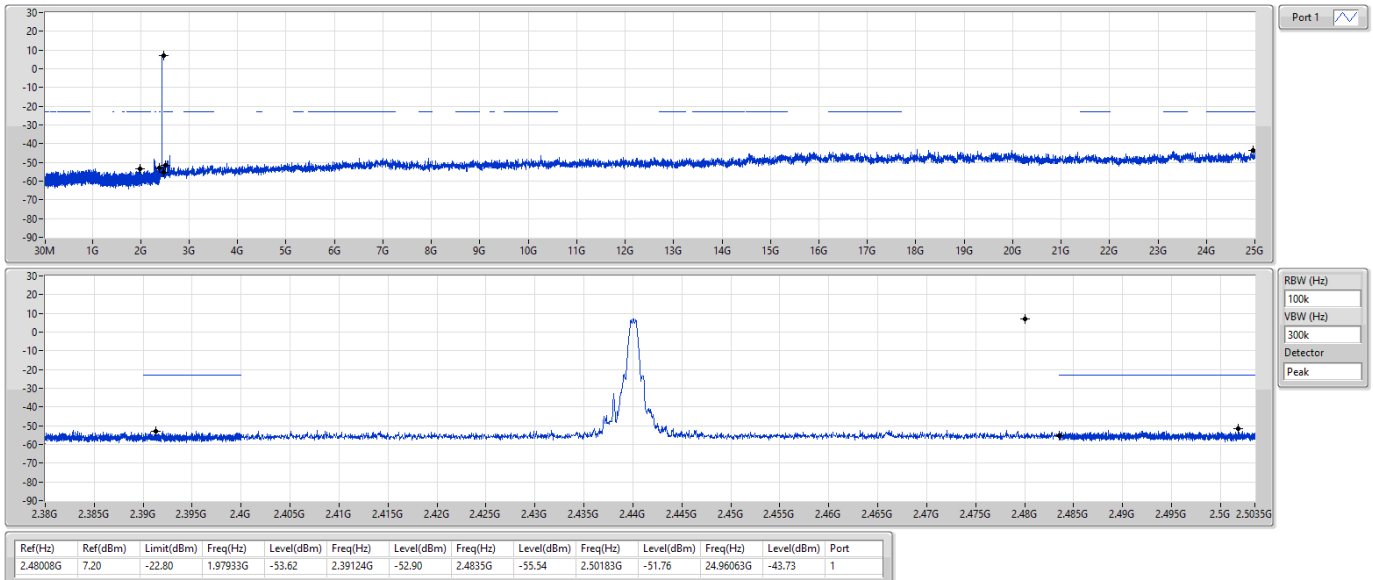


BT-LE(1Mbps)

CSEndB-DTS

2480MHz

06/09/2021

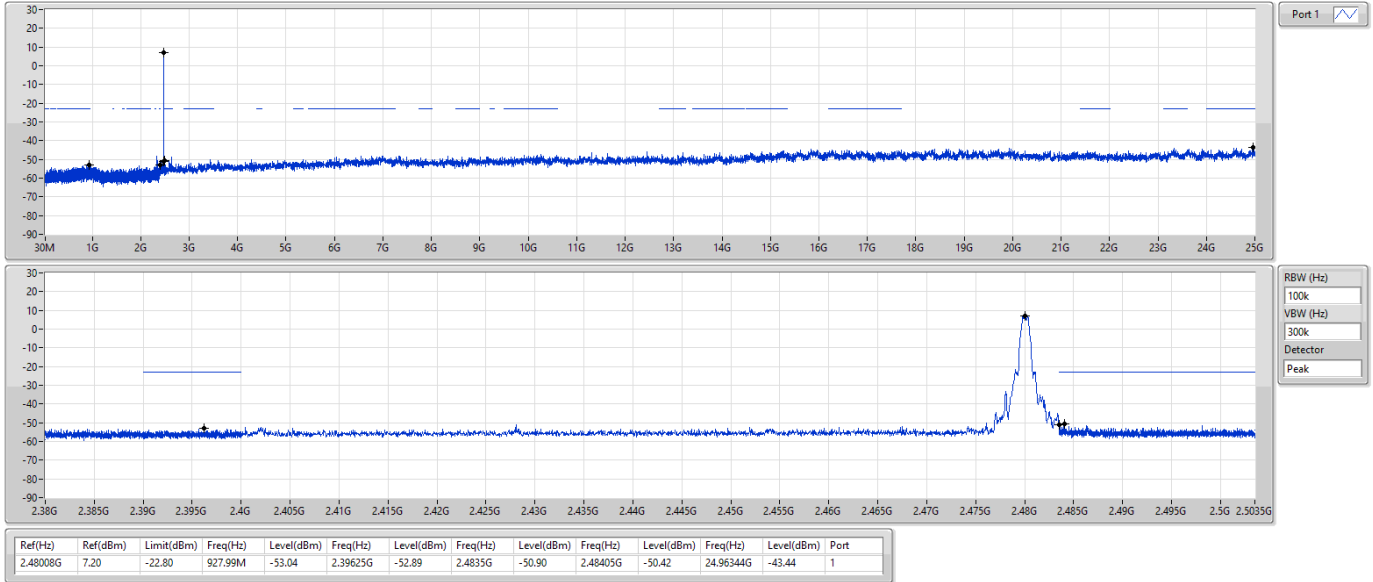



Radiated Emissions below 1GHz


Appendix F.1

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	46.66M	37.00	40.00	-3.00	Vertical

17/08/2021


Mode 1

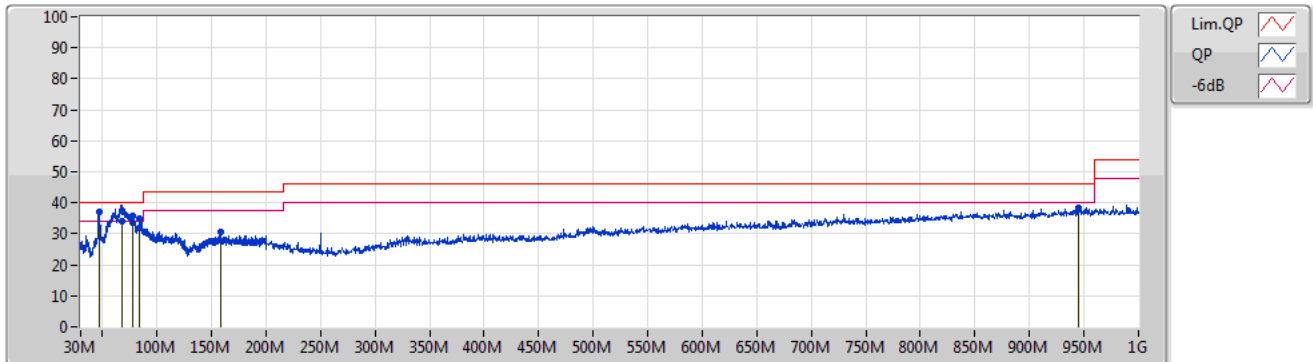

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	46.66M	37.00	40.00	-3.00	-15.77	3	Vertical	353	2.00	"Worst"	52.77	10.74	1.43	27.94
QP	67.83M	34.00	40.00	-6.00	-16.64	3	Vertical	272	2.00	-	50.64	9.33	1.86	27.83
PK	77.6M	35.76	40.00	-4.24	-16.70	3	Vertical	156	2.00	-	52.46	9.08	2.05	27.83
PK	83.98M	34.91	40.00	-5.09	-16.47	3	Vertical	351	4.00	-	51.38	9.20	2.18	27.85
PK	158.61M	30.74	43.50	-12.76	-12.43	3	Vertical	112	1.00	-	43.17	11.90	3.19	27.52
PK	944.8M	38.48	46.00	-7.52	2.82	3	Vertical	109	4.00	-	35.66	22.23	6.96	26.37

17/08/2021

Mode 1

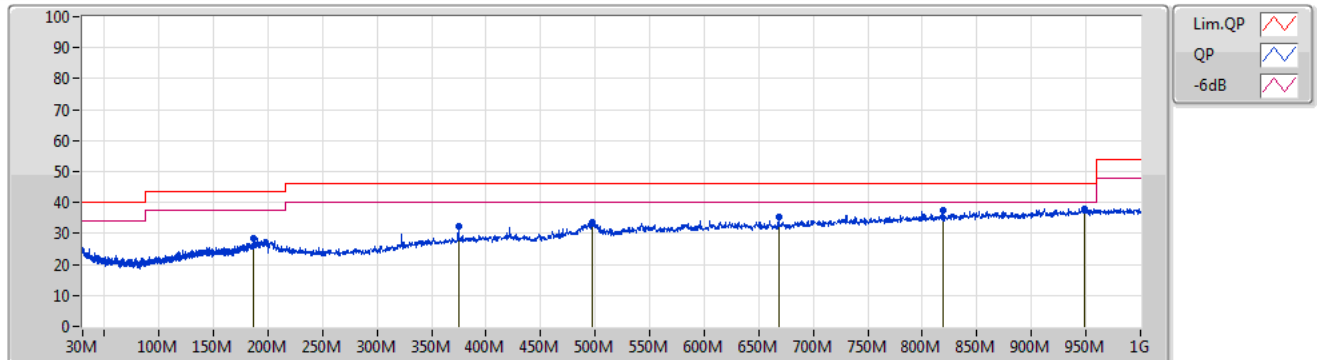

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	186.32M	28.40	43.50	-15.10	-10.15	3	Horizontal	162	2.00	-	38.55	13.63	3.56	27.34
PK	374.4M	32.29	46.00	-13.71	-7.38	3	Horizontal	0	1.00	-	39.67	15.53	4.20	27.11
PK	497.6M	33.83	46.00	-12.17	-5.64	3	Horizontal	164	2.00	-	39.47	17.46	4.79	27.89
PK	668.4M	35.42	46.00	-10.58	-2.72	3	Horizontal	108	3.00	-	38.14	19.32	5.67	27.71
PK	819.2M	37.56	46.00	-8.44	0.31	3	Horizontal	311	1.00	-	37.25	20.95	6.38	27.02
PK	948.8M	38.04	46.00	-7.96	2.81	3	Horizontal	356	4.00	"Worst"	35.23	22.17	6.99	26.35




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.4835G	45.92	54.00	-8.08	3	Horizontal	44	2.73	-

BT-LE(1Mbps)

2402MHz_TX

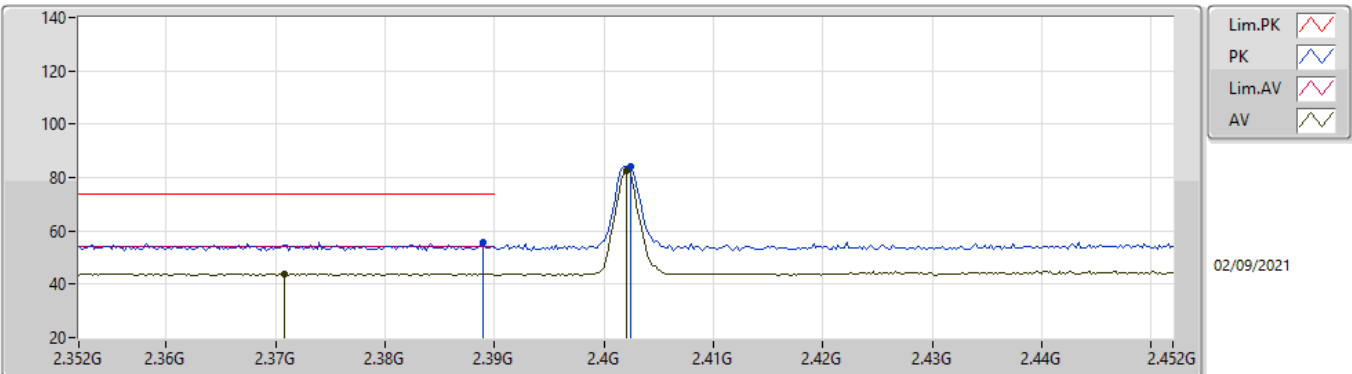


EUT Y_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.389G	55.67	74.00	-18.33	24.99	3	Vertical	360	1.28	-	27.48	3.20	-	
AV	2.3708G	44.04	54.00	-9.96	13.40	3	Vertical	360	1.28	-	27.44	3.20	-	
PK	2.4024G	84.33	Inf	-Inf	53.63	3	Vertical	360	1.28	-	27.50	3.20	-	
AV	2.402G	82.72	Inf	-Inf	52.02	3	Vertical	360	1.28	-	27.50	3.20	-	

BT-LE(1Mbps)

2402MHz_TX

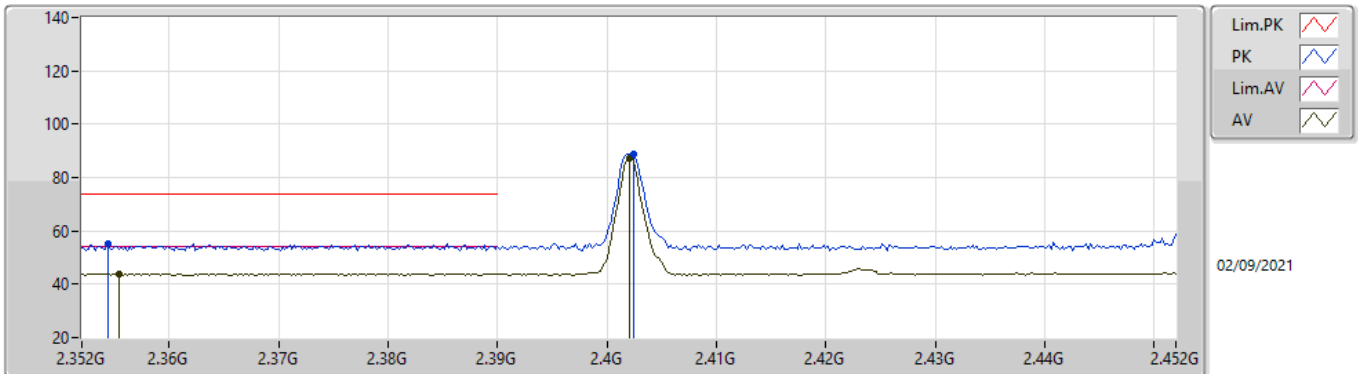


EUT_Y_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.3544G	55.24	74.00	-18.76	24.63	3	Horizontal	317	2.77	-	27.41	3.20	-	
AV	2.3554G	44.01	54.00	-9.99	13.40	3	Horizontal	317	2.77	-	27.41	3.20	-	
PK	2.4024G	89.01	Inf	-Inf	58.31	3	Horizontal	317	2.77	-	27.50	3.20	-	
AV	2.402G	87.47	Inf	-Inf	56.77	3	Horizontal	317	2.77	-	27.50	3.20	-	

BT-LE(1Mbps)

2402MHz_TX

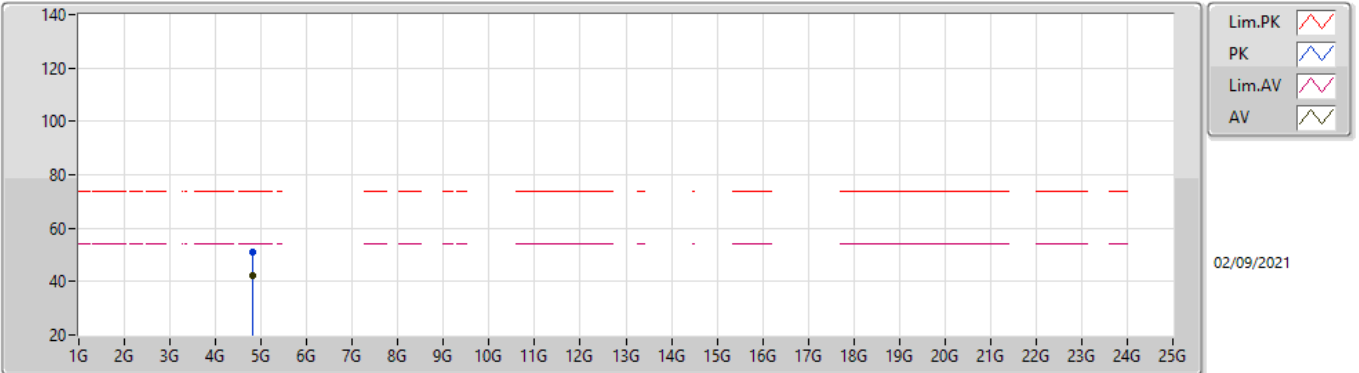


EUT Y_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80356G	51.21	74.00	-22.79	46.65	3	Vertical	344	1.47	-	32.42	5.40	33.26
AV	4.80393G	42.24	54.00	-11.76	37.68	3	Vertical	344	1.47	-	32.42	5.40	33.26

BT-LE(1Mbps)

2402MHz_TX

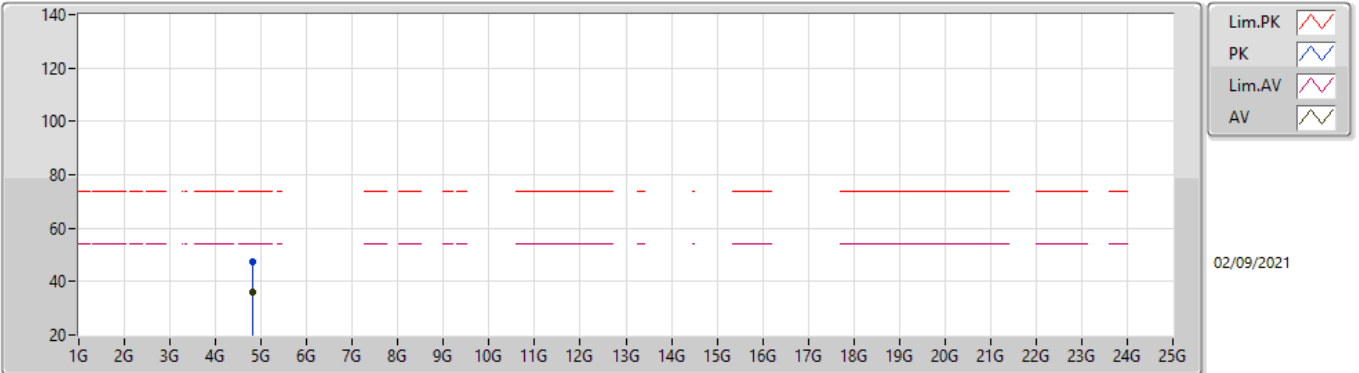


EUT Y_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80332G	47.25	74.00	-26.75	42.69	3	Horizontal	301	1.80	-	32.42	5.40	33.26
AV	4.80372G	36.11	54.00	-17.89	31.55	3	Horizontal	301	1.80	-	32.42	5.40	33.26

BT-LE(1Mbps)

2440MHz_TX

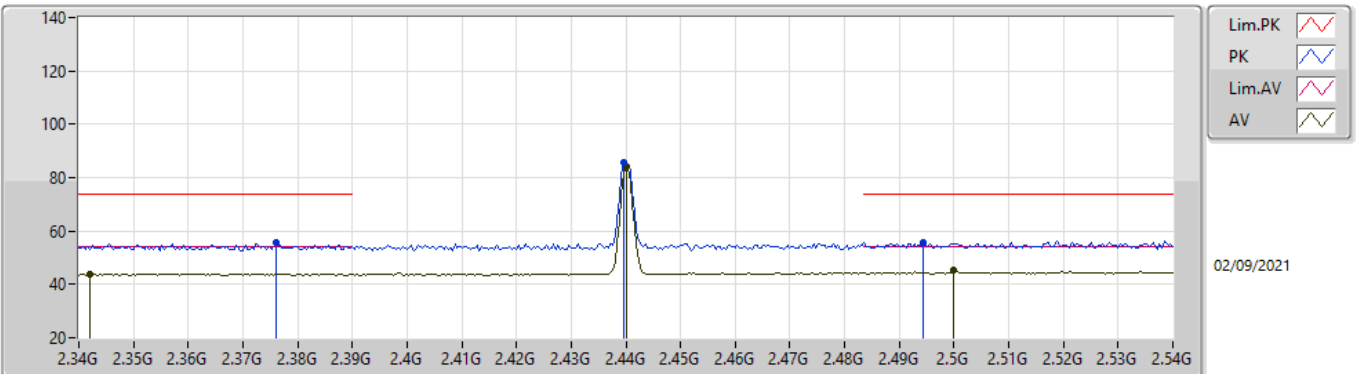


EUT_Y_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.376G	55.57	74.00	-18.43	24.92	3	Vertical	200	1.64	-	27.45	3.20	-	
AV	2.342G	44.04	54.00	-9.96	13.44	3	Vertical	200	1.64	-	27.40	3.20	-	
PK	2.4396G	85.47	Inf	-Inf	54.65	3	Vertical	200	1.64	-	27.58	3.24	-	
AV	2.44G	84.03	Inf	-Inf	53.21	3	Vertical	200	1.64	-	27.58	3.24	-	
PK	2.4944G	55.53	74.00	-18.47	24.46	3	Vertical	200	1.64	-	27.78	3.29	-	
AV	2.5G	45.25	54.00	-8.75	14.15	3	Vertical	200	1.64	-	27.80	3.30	-	

BT-LE(1Mbps)

2440MHz_TX

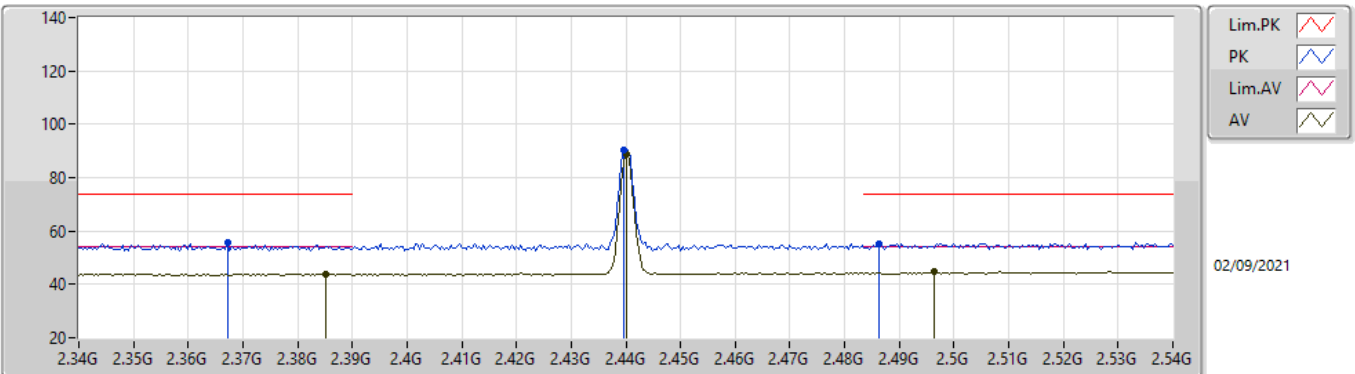


EUT_V_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.3672G	55.79	74.00	-18.21	25.16	3	Horizontal	47	1.34	-	27.43	3.20	-	
AV	2.3852G	43.99	54.00	-10.01	13.32	3	Horizontal	47	1.34	-	27.47	3.20	-	
PK	2.4396G	90.26	Inf	-Inf	59.44	3	Horizontal	47	1.34	-	27.58	3.24	-	
AV	2.44G	88.79	Inf	-Inf	57.97	3	Horizontal	47	1.34	-	27.58	3.24	-	
PK	2.4864G	55.39	74.00	-18.61	24.35	3	Horizontal	47	1.34	-	27.75	3.29	-	
AV	2.4964G	44.57	54.00	-9.43	13.48	3	Horizontal	47	1.34	-	27.79	3.30	-	

BT-LE(1Mbps)

2440MHz_TX

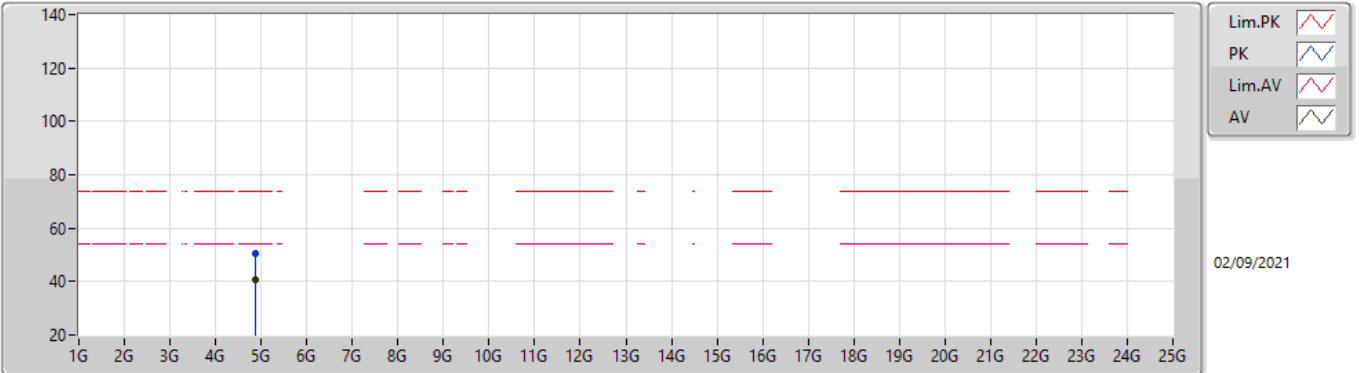


EUT Y_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87972G	50.37	74.00	-23.63	45.39	3	Vertical	346	2.99	-	32.76	5.44	33.22
AV	4.88023G	40.78	54.00	-13.22	35.80	3	Vertical	346	2.99	-	32.76	5.44	33.22

BT-LE(1Mbps)

2440MHz_TX

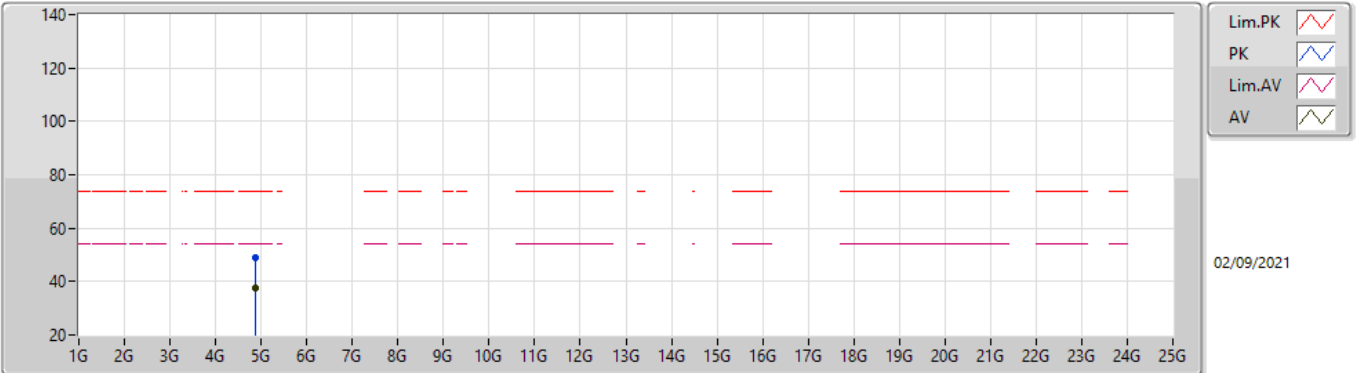


EUTY_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.87964G	48.75	74.00	-25.25	43.77	3	Horizontal	353	2.99	-	32.76	5.44	33.22	
AV	4.87971G	37.58	54.00	-16.42	32.60	3	Horizontal	353	2.99	-	32.76	5.44	33.22	

BT-LE(1Mbps)

2480MHz_TX

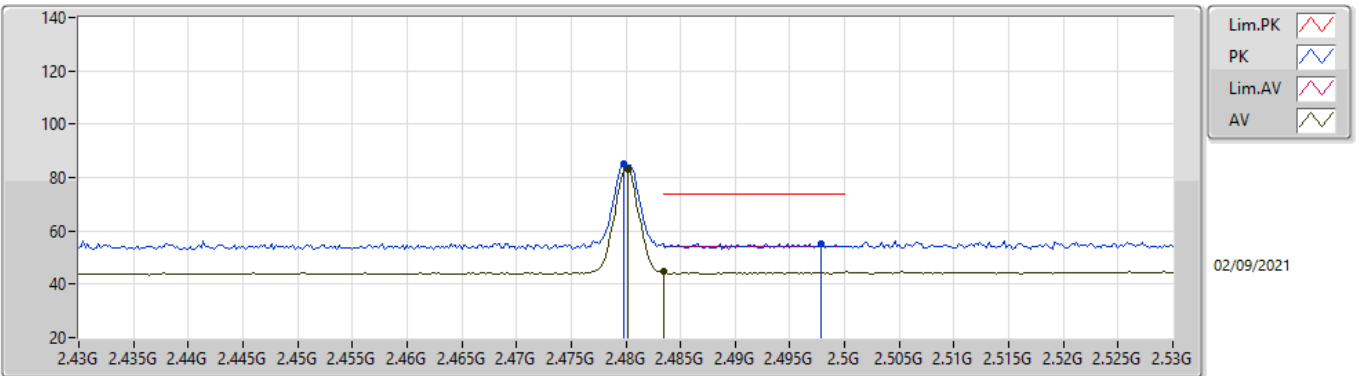


EUT Y_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.4798G	85.05	Inf	-Inf	54.05	3	Vertical	200	1.74	-	27.72	3.28	-	
AV	2.4802G	83.36	Inf	-Inf	52.36	3	Vertical	200	1.74	-	27.72	3.28	-	
PK	2.4978G	55.27	74.00	-18.73	24.18	3	Vertical	200	1.74	-	27.79	3.30	-	
AV	2.4835G	44.73	54.00	-9.27	13.72	3	Vertical	200	1.74	-	27.73	3.28	-	

BT-LE(1Mbps)

2480MHz_TX

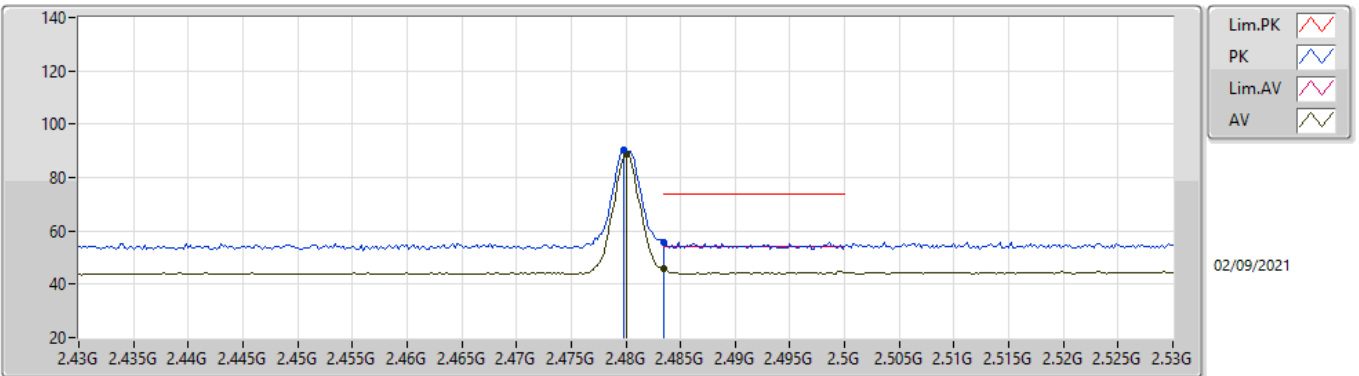


EUT_Y_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.4798G	90.09	Inf	-Inf	59.09	3	Horizontal	44	2.73	-	27.72	3.28	-	
AV	2.48G	88.65	Inf	-Inf	57.65	3	Horizontal	44	2.73	-	27.72	3.28	-	
PK	2.4835G	55.79	74.00	-18.21	24.78	3	Horizontal	44	2.73	-	27.73	3.28	-	
AV	2.4835G	45.92	54.00	-8.08	14.91	3	Horizontal	44	2.73	-	27.73	3.28	-	

BT-LE(1Mbps)

2480MHz_TX

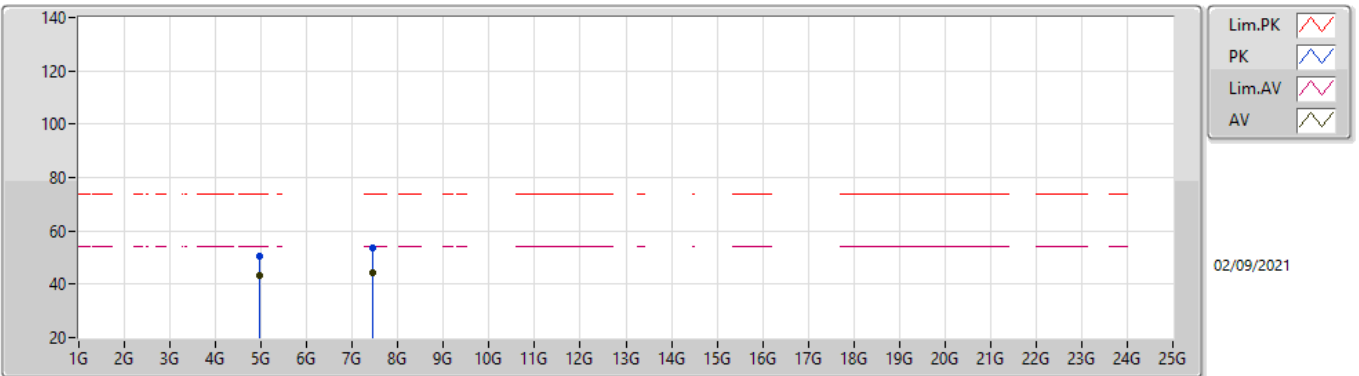


EUT_Y_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.96052G	50.72	74.00	-23.28	45.44	3	Vertical	318	1.03	-	32.98	5.48	33.18	
AV	4.96014G	43.22	54.00	-10.78	37.94	3	Vertical	318	1.03	-	32.98	5.48	33.18	
PK	7.43994G	53.86	74.00	-20.14	43.26	3	Vertical	13	1.72	-	37.48	6.94	33.82	
AV	7.43942G	44.06	54.00	-9.94	33.46	3	Vertical	13	1.72	-	37.48	6.94	33.82	

BT-LE(1Mbps)

2480MHz_TX

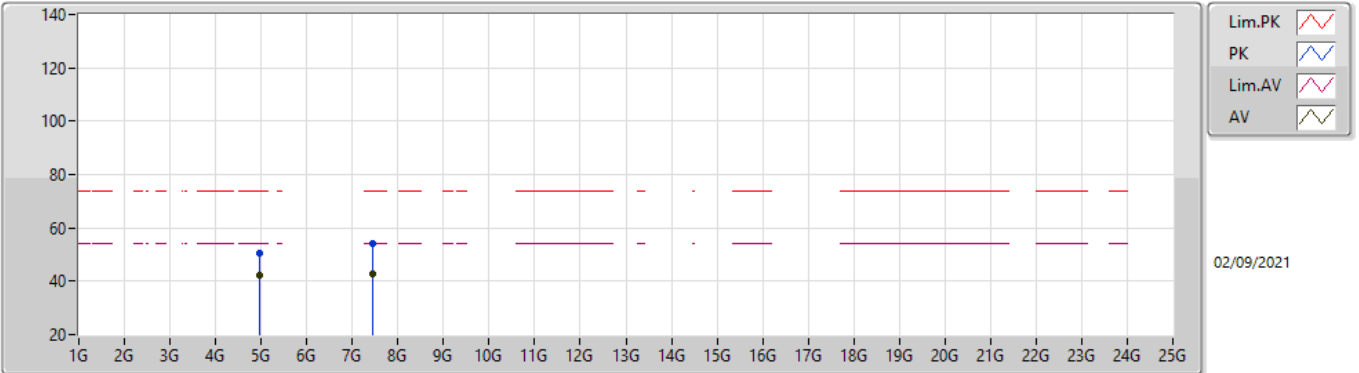

EUT_Y_1TX
Setting Default
04-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.95946G	50.54	74.00	-23.46	45.26	3	Horizontal	39	2.84	-	32.98	5.48	33.18	
AV	4.96006G	42.39	54.00	-11.61	37.11	3	Horizontal	39	2.84	-	32.98	5.48	33.18	
PK	7.44G	54.13	74.00	-19.87	43.53	3	Horizontal	308	2.20	-	37.48	6.94	33.82	
AV	7.43934G	42.94	54.00	-11.06	32.34	3	Horizontal	308	2.20	-	37.48	6.94	33.82	