

Zhong Shan City Richsound Electronic
Industrial Ltd.

TEST REPORT

SCOPE OF WORK

FCC TESTING–TB523DW3, 100069413

REPORT NUMBER

211018055SZN-002

ISSUE DATE

20 DECEMBER 2021

PAGES

27

DOCUMENT CONTROL NUMBER

FCC ID 249_C

© 2017 INTERTEK



Zhong Shan City Richsound Electronic Industrial Ltd.

Application for Certification

FCC ID: Z8M-TB523DW3**onn. 3.1 Atmos soundbar, Wireless Subwoofer****Model: TB523DW3, 100069413****Brand name: RSR, onn.**

2.4GHz Transmitter

Report No.: 211018055SZN-002

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-20]

Prepared and Checked by:

Approved by:

Ryan Chen
Project Engineer

Sewen Guo
Senior Project Engineer
Date: 20 December 2021

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Service Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community GuanHu Subdistrict, LongHua District, Shenzhen, People's Republic of China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one) Original Grant Class II Change

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-20 Edition] provision.

Report prepared by:

Ryan Chen
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community GuanHu Subdistrict, LongHua District, Shenzhen,
People's Republic of China
Tel / Fax: 86-755-8614 0682/86-755-8601 6751

Table of Contents

1.0 Summary of Test Result	4
2.0 General Description	5
2.1 Product Description	5
2.2 Related Submittal(s) Grants	5
2.3 Test Methodology	5
2.4 Test Facility	5
3.0 System Test Configuration	6
3.1 Justification	6
3.2 EUT Exercising Software	6
3.3 Special Accessories	6
3.4 Equipment Modification	6
3.5 Measurement Uncertainty	7
3.6 Support Equipment List and Description	7
4.0 Emission Results	8
4.1 Radiated Test Results	8
4.1.1 Field Strength Calculation	8
4.1.2 Radiated Emission Configuration Photograph	9
4.1.3 Radiated Emissions	9
4.1.4 Transmitter Spurious Emissions	12
4.2 Conducted Emission Configuration Photograph	16
4.2.1 Conducted Emission	16
5.0 Equipment Photographs	19
6.0 Product Labelling	19
7.0 Technical Specifications	19
8.0 Instruction Manual	19
9.0 Miscellaneous Information	20
9.1 Bandedge Plot	20
9.2 20dB Bandwidth	23
9.3 Discussion of Pulse Desensitization	24
9.4 Calculation of Average Factor	24
9.5 Emissions Test Procedures	25
10.0 Test Equipment List	27

1.0 Summary of Test Result

Applicant: Zhong Shan City Richsound Electronic Industrial Ltd.

Applicant Address: No.16, East Shagang Road, Gangkou, ZHONGSHAN, Guangdong 528447, China.

Manufacturer: Zhong Shan City Richsound Electronic Industrial Ltd.

Manufacturer Address: No.16, East Shagang Road, Gangkou, ZHONGSHAN, Guangdong 528447, China.

MODEL: TB523DW3, 100069413

FCC ID: Z8M-TB523DW3

Test Specification	Reference	Results
Transmitter Radiated Emission Band edge	15.249 &15.209 &15.205	Pass
Conducted Emission	15.207	Pass
20dB Bandwidth	15.215(c)	Pass

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2.0 General Description

2.1 Product Description

The equipment under test (EUT) is a onn. 3.1 Atmos soundbar, Wireless Subwoofer with Bluetooth FHSS technology operating in 2402-2480MHz and SRD 2.4GHz transmitting function operating in 2406-2474MHz. The EUT can be powered by AC 100-240V~ 50/60Hz. For more detail information pls. refer to the user manual.

Antenna Type: Integral antenna

Modulation Type: GFSK

Antenna Gain: 0dBi

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

The Model: 100069413 is the same as the Model: TB523DW3 in hardware aspect. The difference in model number and band name serves as marketing strategy.

2.2 Related Submittal(s) Grants

This is an application for certification of controller unit for the onn. 3.1 Atmos soundbar, Wireless Subwoofer.

The related report number is:

Bluetooth FHSS function: 211018055SZN-001.

Other digital functions were reported in the verification report: 211018055SZN-003.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are Intertek Testing Services Shenzhen Ltd. Longhua Branch and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

3.0 System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by AC120V, 60Hz during the test, only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The EUT and transmitting antenna was centered on the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

3.2 EUT Exercising Software

EMI_Test_Tool.exe.

3.3 Special Accessories

No special accessories used.

3.4 Equipment Modification

Any modifications installed previous to testing by Zhong Shan City Richsound Electronic Industrial Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Longhua Branch.

3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

3.6 Support Equipment List and Description

Description	Manufacturer	Model No.
Mobile Phone (Provided by Intertek)	SAMSUNG	SM-G9300
Test TV (Provided by Intertek)	SONY	KDL-24EX520
Dummy Load (Provided by Intertek)	N/A	1k Ω for audio port, 100 Ω for HDMI port
USB Memory (Provided by Applicant)	TOSHIBA	UHYBS-004G-BL
AUX In Cable (Provided by Applicant)	Richsound	Unshielded, Length 150cm
HDMI In Cable (Provided by Applicant)	Richsound	Shielded, Length 200cm
HDMI In Cable*2 (Provided by Intertek)	N/A	Unshielded, Length 200cm
Detached AC power cord (Provided by Applicant)	Richsound	Unshielded, Length 150cm
Optical Cable with Load (Provided by Applicant)	Richsound	Unshielded, Length 120cm

4.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB/m
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB/m
CF = 1.6 dB
AG = 29.0 dB
PD = 0 dB
AV = -10 dB
FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 dB μ V/m

Level in μ V/m = Common Antilogarithm [(42 dB μ V/m)/20] = 125.9 μ V/m

4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

4.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
155.130000 MHz

Judgement: Passed by 11.2 dB

TEST PERSONNEL:

Sign on file

Ryan Chen, Project Engineer
Typed/Printed Name

03 November 2021
Date

Applicant: Zhong Shan City Richsound Electronic Industrial Ltd.

Date of Test: 03 November 2021


Model: TB523DW3

Worst Case Operating Mode:

Synchronous transmission

ANT Polarity: Horizontal

FCC Part 15

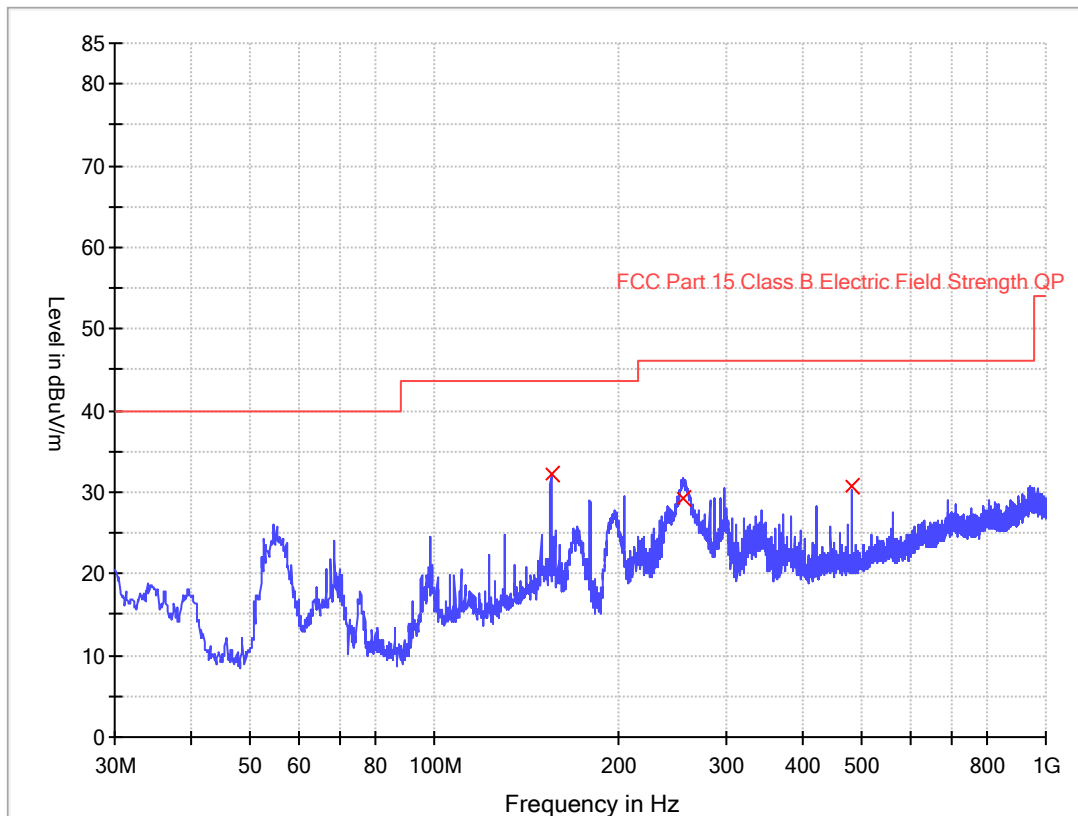

Frequency (MHz)	Quasi Peak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
155.130000	32.3	1000.0	120.000	H	11.8	11.2	43.5
255.040000	29.3	1000.0	120.000	H	15.2	16.7	46.0
479.958750	30.8	1000.0	120.000	H	21.7	15.2	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Quasi Peak (dB μ V/m) = Corr. (dB/m) + Read Level (dB μ V)
3. Margin (dB) = Limit Line (dB μ V/m) – Level (dB μ V/m)

Applicant: Zhong Shan City Richsound Electronic Industrial Ltd.

Date of Test: 03 November 2021


Model: TB523DW3

Worst Case Operating Mode:

Synchronous transmission

ANT Polarity: Vertical

FCC Part 15

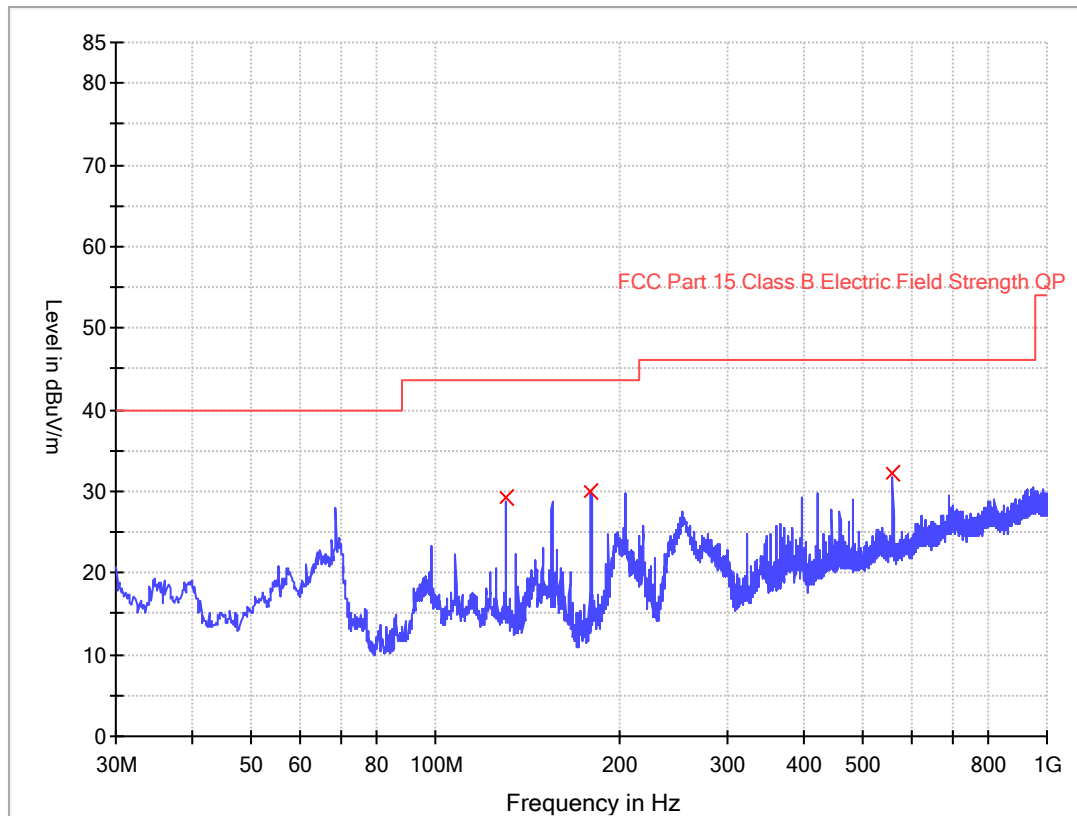

Frequency (MHz)	Quasi Peak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
130.516250	29.2	1000.0	120.000	V	10.2	14.3	43.5
179.703500	30.1	1000.0	120.000	V	12.2	13.4	43.5
559.983750	32.3	1000.0	120.000	V	23.2	13.7	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Quasi Peak (dB μ V/m) = Corr. (dB/m) + Read Level (dB μ V)
3. Margin (dB) = Limit Line (dB μ V/m) – Level (dB μ V/m)

4.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission
at
4892.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 7.3 dB

TEST PERSONNEL:

Sign on file

Ryan Chen, Project Engineer

Typed/Printed Name

03 November 2021

Date

Applicant: Zhong Shan City Richsound Electronic Industrial Ltd.

Date of Test: 03 November 2021

Model: TB523DW3

Worst Case Operating Mode:

Transmitting

Table 1

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2406.000	60.0	36.7	28.1	99.6	114.0	-14.4
Horizontal	4812.000	57.4	36.7	35.5	58.8	74.0	-15.2
Horizontal	7218.000	0.0	36.8	35.6	56.2	74.0	-17.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2406.000	87.1	36.7	28.1	78.5	94.0	-15.5
Horizontal	4812.000	47.7	36.7	35.5	46.5	54.0	-7.5
Horizontal	7218.000	46.0	36.8	35.6	44.8	54.0	-9.2

Notes: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Applicant: Zhong Shan City Richsound Electronic Industrial Ltd.
 Date of Test: 03 November 2021 Model: TB523DW3
 Worst Case Operating Mode: Transmitting

Table 2

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	2442.000	59.5	36.7	28.1	98.1	114.0	-15.9
Horizontal	4884.000	56.3	36.7	35.5	58.3	74.0	-15.7
Horizontal	7326.000	0.0	36.8	35.6	55.1	74.0	-18.9

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Average Factor (-dB)	Net at 3m (dBµV/m)	Margin (dB)
Horizontal	2442.000	87.1	36.7	28.1	78.5	94.0	-15.5
Horizontal	4884.000	47.9	36.7	35.5	46.7	54.0	-7.3
Horizontal	7326.000	45.7	36.8	35.6	44.5	54.0	-9.5

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.

Applicant: Zhong Shan City Richsound Electronic Industrial Ltd.
 Date of Test: 03 November 2021 Model: TB523DW3
 Worst Case Operating Mode: Transmitting

Table 3

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	2474.000	58.5	36.7	28.1	98.3	114.0	-15.7
Horizontal	4948.000	56.2	36.7	35.5	57.3	74.0	-16.7
Horizontal	7422.000	0.0	36.8	35.6	55.0	74.0	-19.0

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Average Factor (-dB)	Net at 3m (dBµV/m)	Margin (dB)
Horizontal	2474.000	85.9	36.7	28.1	77.3	94.0	-16.7
Horizontal	4948.000	43.7	36.7	35.5	42.5	54.0	-11.5
Horizontal	7422.000	45.8	36.8	35.6	44.6	54.0	-9.4

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.

4.2 Conducted Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

4.2.1 Conducted Emission

Worst Case Conducted Configuration
at
0.306000MHz

Judgement: Passed by 16.2dB margin

TEST PERSONNEL:

Sign on file


Ryan Chen, Project Engineer
Typed/Printed Name

03 November 2021
Date

Applicant: Zhong Shan City Richsound Electronic Industrial Ltd.
 Date of Test: 03 November 2021 Model: TB523DW3
 Worst Case Operating Mode: Synchronous transmission
 Phase: Live

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

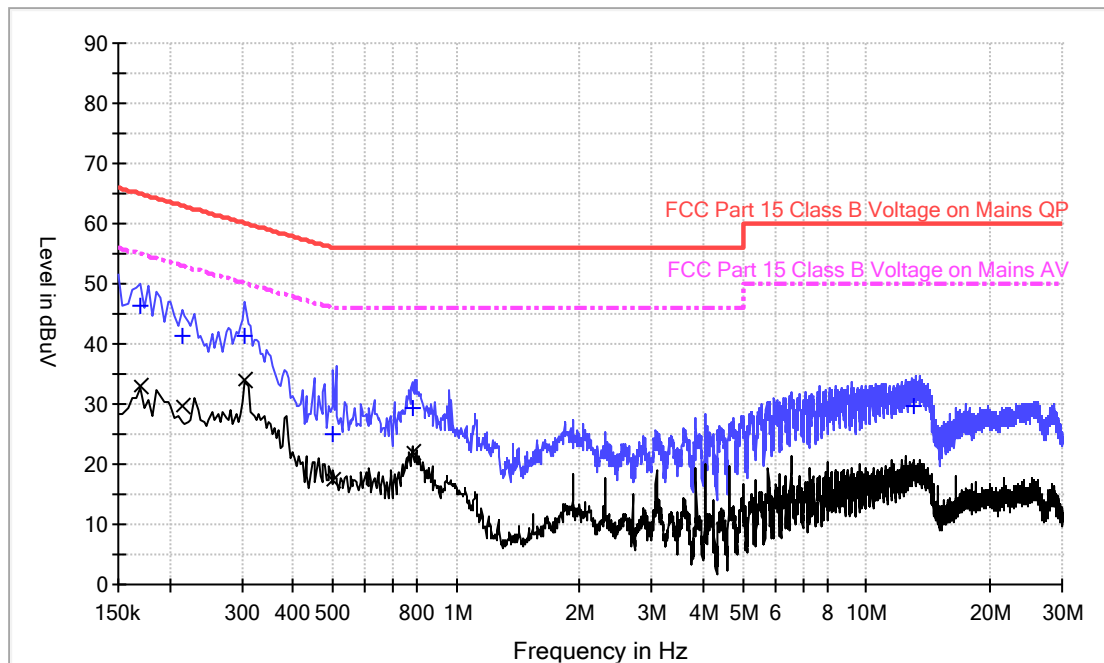

Result Table QP

Frequency (MHz)	Quasi Peak (dBµ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµ)
0.170000	46.4	9.000	L1	9.6	18.6	65.0
0.214000	41.2	9.000	L1	9.6	21.8	63.0
0.306000	41.2	9.000	L1	9.6	18.9	60.1
0.502000	24.9	9.000	L1	9.6	31.1	56.0
0.782000	29.4	9.000	L1	9.6	26.6	56.0
13.102000	29.6	9.000	L1	9.9	30.4	60.0


Result Table AV

Frequency (MHz)	Average (dBµ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµ)
0.170000	32.9	9.000	L1	9.6	22.1	55.0
0.214000	29.7	9.000	L1	9.6	23.3	53.0
0.306000	33.9	9.000	L1	9.6	16.2	50.1
0.502000	17.2	9.000	L1	9.6	28.8	46.0
0.782000	22.1	9.000	L1	9.6	23.9	46.0
13.102000	18.5	9.000	L1	9.9	31.5	50.0

Applicant: Zhong Shan City Richsound Electronic Industrial Ltd.
 Date of Test: 03 November 2021 Model: TB523DW3
 Worst Case Operating Mode: Synchronous transmission
 Phase: Neutral

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

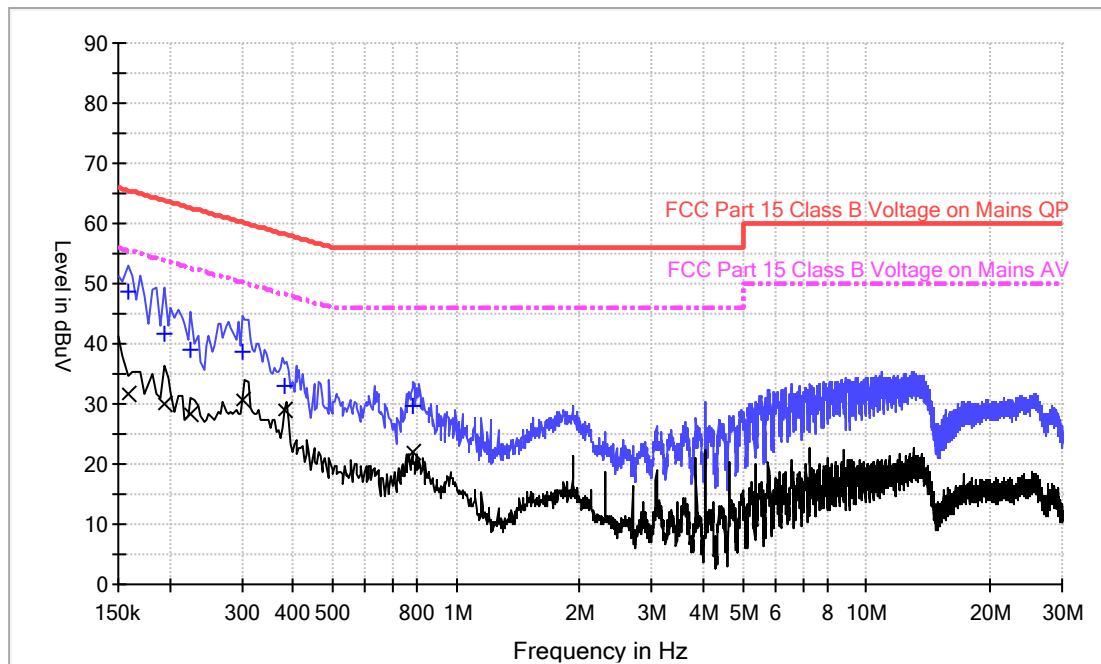

Result Table QP

Frequency (MHz)	Quasi Peak (dBu V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBu V)
0.158000	48.8	9.000	N	9.5	16.8	65.6
0.194000	41.8	9.000	N	9.5	22.1	63.9
0.226000	38.9	9.000	N	9.5	23.7	62.6
0.302000	38.7	9.000	N	9.5	21.5	60.2
0.382000	33.2	9.000	N	9.5	25.0	58.2
0.782000	29.8	9.000	N	9.5	26.2	56.0

Result Table AV

Frequency (MHz)	Average (dBu V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBu V)
0.158000	31.7	9.000	N	9.5	23.9	55.6
0.194000	30.0	9.000	N	9.5	23.9	53.9
0.226000	28.3	9.000	N	9.5	24.3	52.6
0.302000	30.6	9.000	N	9.5	19.6	50.2
0.382000	29.1	9.000	N	9.5	19.1	48.2
0.782000	22.1	9.000	N	9.5	23.9	46.0

5.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

6.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

7.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

9.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, 20dB Bandwidth, the test procedure and calculation of factor such as pulse desensitization.

9.1 Band edge Plot

The test plots are attached as below. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Restricted-band band-edge tests shall be performed as radiated measurements, i.e (Band-edge Plot).

(i) Lower channel 2406.000 MHz:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2.399967500	63.4	36.7	28.2	54.9	74.0	-19.10

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2.399967500	54.6	36.7	28.2	46.1	54.0	-7.90


(ii) Upper channel 2474.000 MHz:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2.483501500	61.7	36.8	29.2	54.06	74.0	-19.94


Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2.483501500	52.6	36.8	29.2	45.0	54.0	-9.00

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB μ v/m (Peak Limit) and 54dB μ v/m (Average Limit).

Lowest frequency Channel


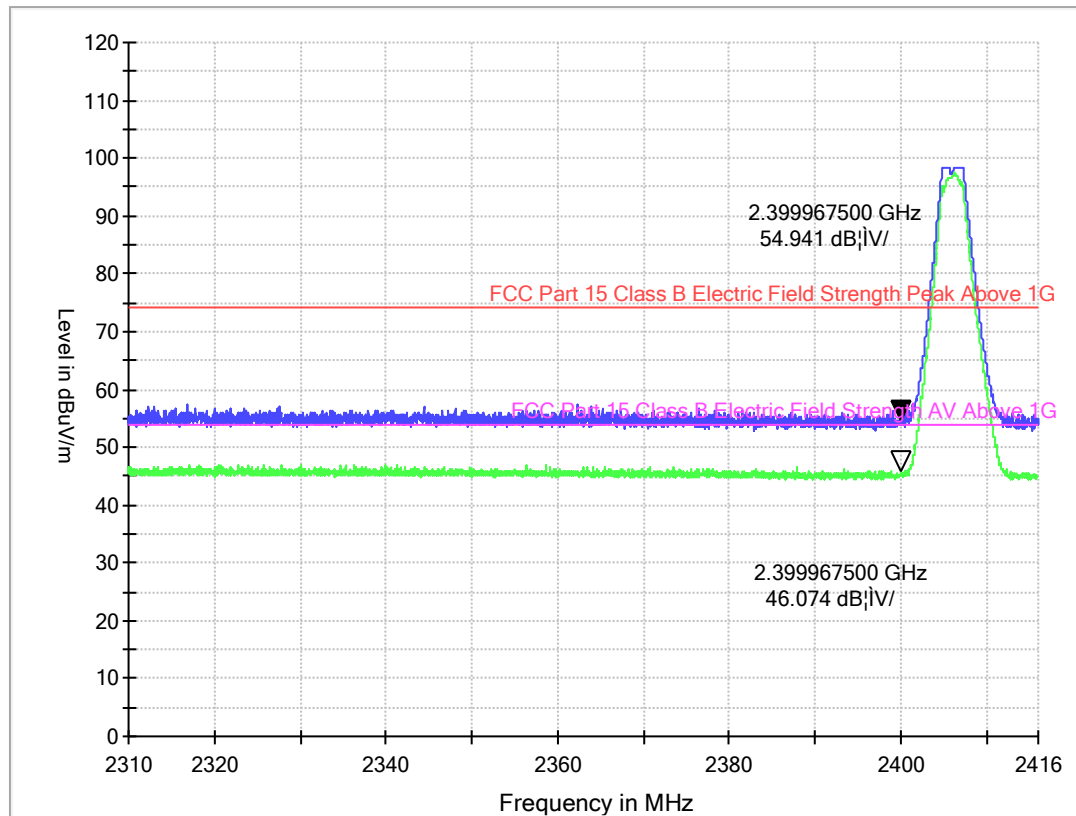


Highest frequency Channel

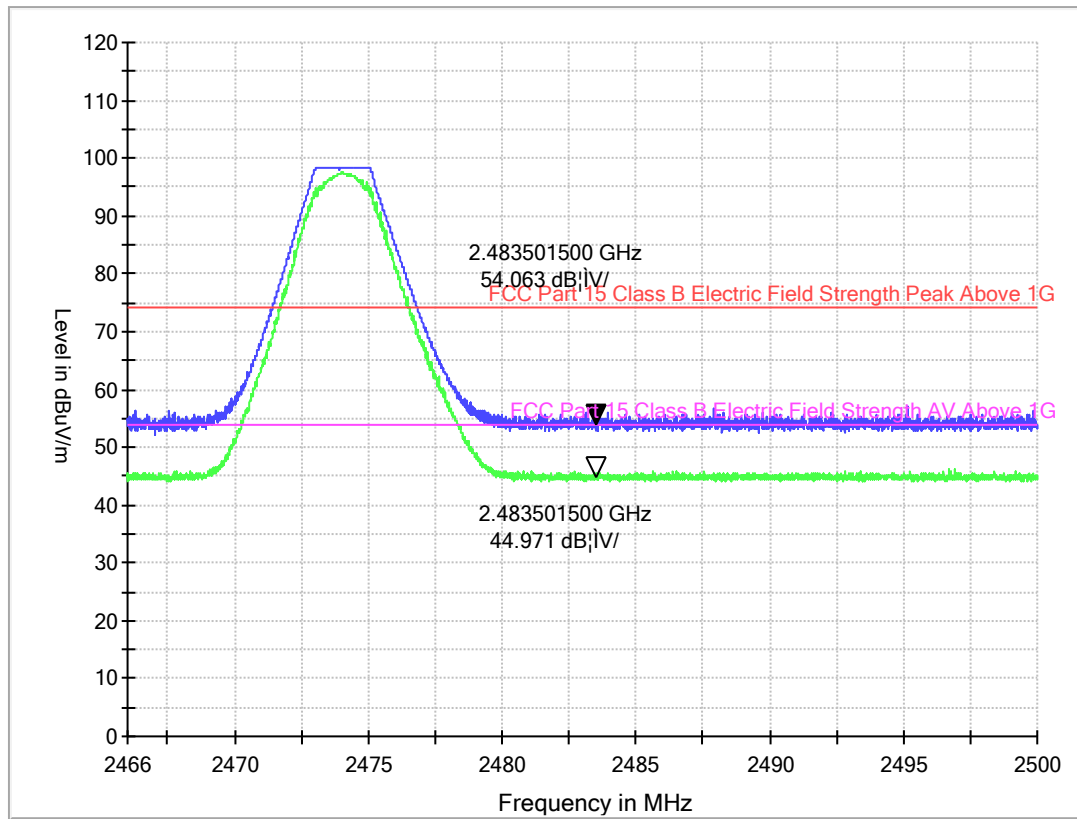

9.2 20dB Bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered. The test plots are reported as below.

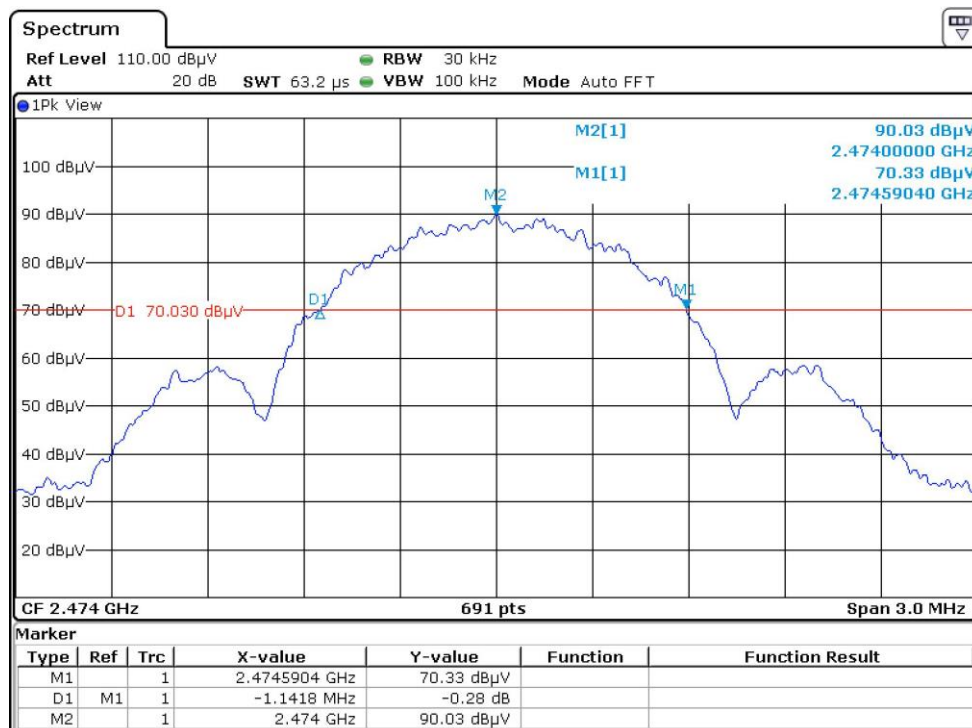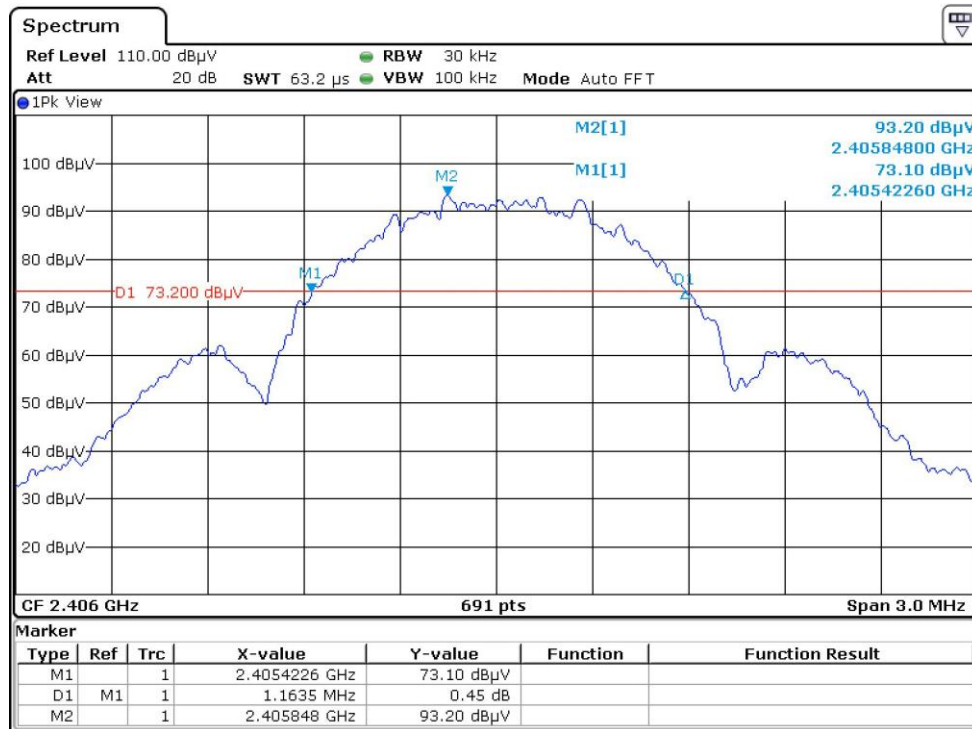

9.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

9.4 Calculation of Average Factor

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

9.5 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Section 9.4.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

9.5 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Section 9.3). Above 1000 MHz, a resolution bandwidth of 1 MHz is used, RBW 3MHz used for fundamental emission.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	2021-08-04	2024-08-04
SZ185-02	EMI Receiver	R&S	ESCI	100547	2021-07-12	2022-07-12
SZ061-08	Horn Antenna	ETS	3115	00092346	2021-09-05	2024-09-05
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	2021-05-18	2023-05-18
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	2021-05-10	2022-05-10
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	2020-12-22	2021-12-22
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	2021-05-10	2022-05-10
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	2018-12-15	2021-12-15
SZ062-24	RF Cable	RADIALL	SF104PE	MY4263/4PE	2021-10-26	2022-10-26
SZ062-25	RF Cable	RADIALL	SF104PE	MY4555/4PE	2021-10-26	2022-10-26
SZ062-38	RF Cable	RADIALL	A50-3.5M3.5M-8M	21051695	2021-06-04	2022-06-04
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	--	2021-05-11	2022-05-11
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	2021-07-12	2022-07-12
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	2020-10-27 2021-10-27	2021-10-27 2022-10-27
SZ187-02	Two-Line V-Network	R&S	ENV216	100072	2021-05-12	2022-05-12
SZ062-16	RF Cable	HUBER+SUHNER	CBL2-BN-1m	110127-2231000	2021-10-26	2022-10-26
SZ188-03	Shielding Room	ETS	RFD-100	4100	2020-01-07	2023-01-07