



STC Test Report

Date : 2011-10-20

Page 1 of 19

No. : MH184516

Applicant (C01492): SHENZHEN DBK ELECTRONICS CO., LTD.
DBK Industrial Park Zone, North of LongGuan Rd, SanLian
Community, LongHua, 518109, SHENZHEN, CHINA

Description of Sample(s): Submitted sample(s) said to be
Product: Wireless Style Remote Control
Brand Name: N/A
Model Number: UWX2000-TX
FCC ID: Z8WUWX2000-TX

Date Sample(s) Received: 2010-09-10

Date Tested: 2010-09-14, 2011-10-12

Investigation Requested: Perform ElectroMagnetic Interference measurement in
accordance with FCC 47CFR [Codes of Federal Regulations]
Part 15: 2010 and ANSI C63.4:2009 for FCC Certification.

Conclusion(s): The submitted product COMPLIED with the requirements of
Federal Communications Commission [FCC] Rules and
Regulations Part 15. The tests were performed in accordance
with the standards described above and on Section 2.2 in this
Test Report.

Remark(s): For additional models details, see page 5.

Dr. LEE Kam Chuen
Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of
The Hong Kong Standards and Testing Centre Ltd.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2011-10-20

Page 2 of 19

No. : MH184516

CONTENT:

Cover	Page 1 of 19
Content	Page 2-3 of 199
<u>1.0</u> <u>General Details</u>	
1.1 Equipment Under Test [EUT] Description of EUT operation	Page 4 of 19
1.2 Date of Order	Page 4 of 19
1.3 Submitted Samples	Page 4 of 19
1.4 Test Duration	Page 4 of 19
1.5 Country of Origin	Page 4 of 19
<u>2.0</u> <u>Technical Details</u>	
2.1 Investigations Requested	Page 5 of 19
2.2 Test Standards and Results Summary	Page 5 of 19
<u>3.0</u> <u>Test Results</u>	
3.1 Emission	Page 6-9 of 19
3.2 Bandwidth Measurement	Page 10-11 of 19

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2011-10-20

Page 3 of 19

No. : MH184516

Appendix A

List of Measurement Equipment

Page 12 of 19

Appendix B

Duty Cycle Correction During 100 msec

Page 13-16 of 19

Appendix C

A manually Operation

Page 17 of 19

Appendix D

Photographs of EUT

Page 18-19 of 19

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2011-10-20

Page 4 of 19

No. : MH184516

1.0 General Details

1.1 Equipment Under Test [EUT]

Description of Sample(s)

Submitted sample(s) said to be

Product: Wireless Style Remote Control

Manufacturer: SHENZHEN DBK ELECTRONICS CO., LTD.

DBK Industrial Park Zone, North of LongGuan Rd, SanLian
Community, LongHua, 518109, SHENZHEN, CHINA

Brand Name: N/A

Model Number: UWX2000-TX

Rating: Battery 12Vd.c. ("23A" size battery x 1)

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a SHENZHEN DBK ELECTRONICS CO., LTD., 433MHz Wireless Style Remote Control. The transmitter is a manually operated transmitter. The EUT will automatically cease transmission after one packet has been sent. It is a pulse transmitter. Modulation by IC; and type is ASK modulation.

1.3 Date of Order

2010-09-10

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2010-09-14, 2011-10-12

1.6 Country of Origin

China

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, TaiPo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2011-10-20

Page 5 of 19

No. : MH184516

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 2010 and ANSI C63.4:2009 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Failed	N/A
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.231a	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2011-10-20

Page 6 of 19

No. : MH184516

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions


Test Requirement: FCC 47CFR 15.231a
Test Method: ANSI C63.4:2009
Test Date: 2011-10-12
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

Test Setup:

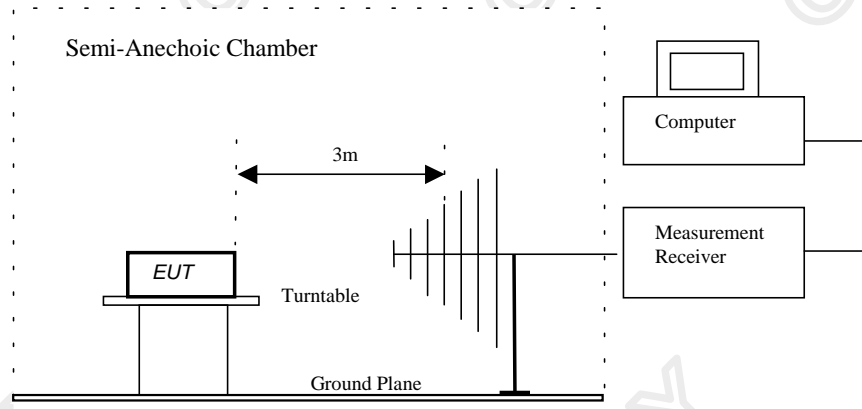

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2011-10-20

Page 7 of 19

No. : MH184516

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.231a]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [$\mu\text{V/m}$]	Field Strength of Spurious Emission [Average] [$\mu\text{V/m}$]
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,750 *	125 to 375 *
174-260	3,750	375
260-470	3,750 to 12,500 *	375 to 1,250 *
Above 470	12,500	1,250

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

Results:

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Measured Level @3m dB μV	Correction Factor dB/m	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
433.97	61.3	18.9	80.2	10232.9	109,987.6	Horizontal

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB μV	Correction Factor dB/m	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
+ 1301.91	20.4	31.2	51.6	380.2	5,000.0	Vertical
1735.88	< 1.0	32.2	< 33.2	< 45.7	10,998.8	Vertical
2169.85	< 1.0	38.8	< 39.8	< 97.7	10,998.8	Vertical
2603.82	< 1.0	17.4	< 18.4	< 8.3	10,998.8	Vertical
3037.79	< 1.0	17.2	< 18.2	< 8.1	10,998.8	Vertical
3471.76	< 1.0	18.8	< 19.8	< 9.8	10,998.8	Vertical
+ 3905.73	< 1.0	19.7	< 20.7	< 10.8	5,000.0	Vertical
+ 4339.70	< 1.0	20.6	< 21.6	< 12.0	5,000.0	Vertical

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2011-10-20

Page 8 of 19

No. : MH184516

Results:

Field Strength of Fundamental Emissions						
Average Value						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Field Strength	Limit @3m	E-Field Polarity
MHz	dB μ V	dB/m	dB μ V/m	μ V/m	μ V/m	
* 433.97	53.4	18.9	72.3	4121.0	10,998.8	Horizontal

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured Level @3m	Correction Factor	Field Strength	Field Strength	Limit @3m	E-Field Polarity
MHz	dB μ V	dB/m	dB μ V/m	μ V/m	μ V/m	
+ 1301.91	12.5	31.2	43.7	153.1	500.0	Vertical
1735.88	< 1.0	32.2	< 33.2	< 45.7	1,099.9	Vertical
2169.85	< 1.0	38.8	< 39.8	< 97.7	1,099.9	Vertical
2603.82	< 1.0	17.4	< 18.4	< 8.3	1,099.9	Vertical
3037.79	< 1.0	17.2	< 18.2	< 8.1	1,099.9	Vertical
3471.76	< 1.0	18.8	< 19.8	< 9.8	1,099.9	Vertical
+ 3905.73	< 1.0	19.7	< 20.7	< 10.8	500.0	Vertical
+ 4339.70	< 1.0	20.6	< 21.6	< 12.0	500.0	Vertical

Remarks:

*: Adjusted by Duty Cycle = -7.6dB

FCC Limit for Average Measurement = $41.6667(434.0\text{MHz}) - 7083.3333 = 11000.01\mu\text{V/m}$

+: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 were not adjusted for averaging and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2011-10-20

Page 9 of 19

No. : MH184516

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V/m}$]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of on mode (9 kHz to 30MHz): PASS

Emissions detected are more than 20 dB below the limit line(s).

Result of on mode: PASS

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB $\mu\text{V/m}$	Limit @3m dB $\mu\text{V/m}$	Level @3m $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$
447.5	Vertical	38.2	46.0	81.3	200
695.7	Vertical	38.4	46.0	83.2	200
867.9	Vertical	56.5	60.8	668.3	1099.9

Remark:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: 30MHz to 1GHz 5.1dB

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



STC Test Report

Date : 2011-10-20

Page 10 of 19

No. : MH184516

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.231a
Test Method: ANSI C63.4:2009 (Section 13.1.7)
Test Date: 2010-09-14
Mode of Operation: Tx mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2011-10-20

Page 11 of 19


No. : MH184516

Limits for 20 dB Bandwidth of Fundamental Emission:

Frequency Range [MHz]	20dB Bandwidth [kHz]	FCC Limits * [KHz]
433.9748	48.8	1085

*: FCC Limit for Bandwidth measurement = (0.25%)(Center Frequency)
=(0.0025)(434.0)
= 1085kHz

20dB Bandwidth of Fundamental Emission

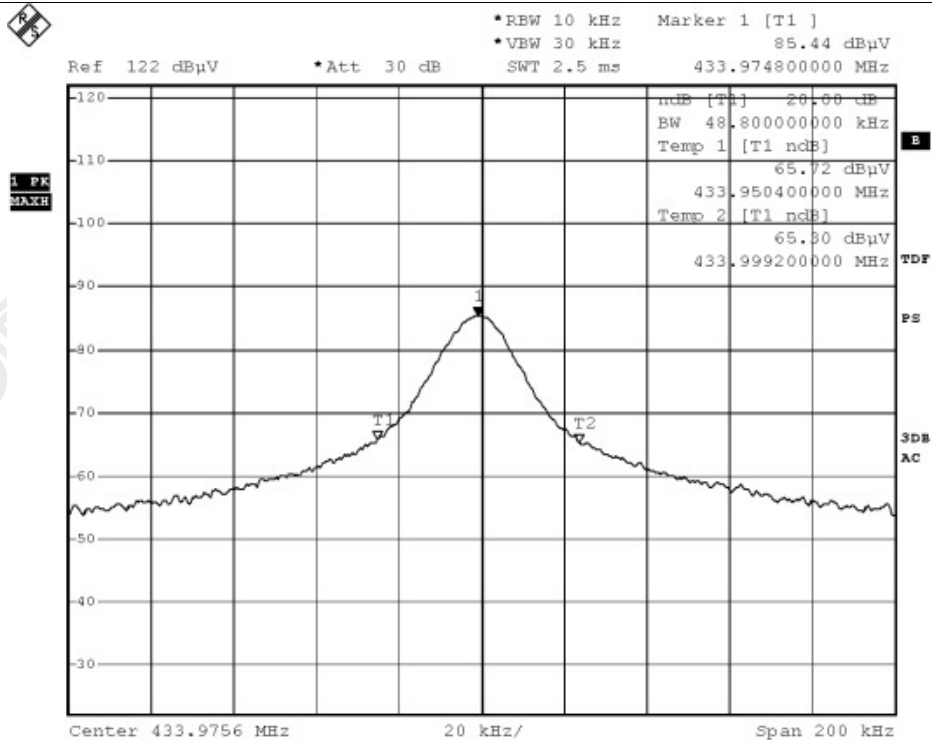

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2011-10-20

Page 12 of 19

No. : MH184516

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM194	BICONILOG ANTENNA	EMCO	3142B	1795	2010/10/06	2012/10/06
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	--	2010/10/25	2011/10/25
EM174	BICONILOG ANTENNA	EMCO	3142B	1671	2010/02/09	2012/02/09
EM229	EMI Test Receiver	R&S	ESIB40	100248	2011/04/26	2012/04/26

Remarks:-

CM Corrective Maintenance

N/A Not Applicable

TBD To Be Determined

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2011-10-20

Page 13 of 19

No. : MH184516

Appendix B

Duty Cycle Correction During 100msec


Each packet period (100msec) never exceeds a series of 32 long (0.84msec), 32 short (0.42msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered $33 \times 0.84\text{msec} + 33 \times 0.42\text{msec}$ per 100msec = 41.58% duty cycle. Figure A through C shows the characteristics of the pulses train for one of these functions.

Remarks:

Duty Cycle Correction = $20\text{Log}(0.4032) = -7.89\text{dB}$

The following figures [Figure A to Figure C] showed the characteristics of the pulse train for one of these functions.

Figure A [Pulse Train]

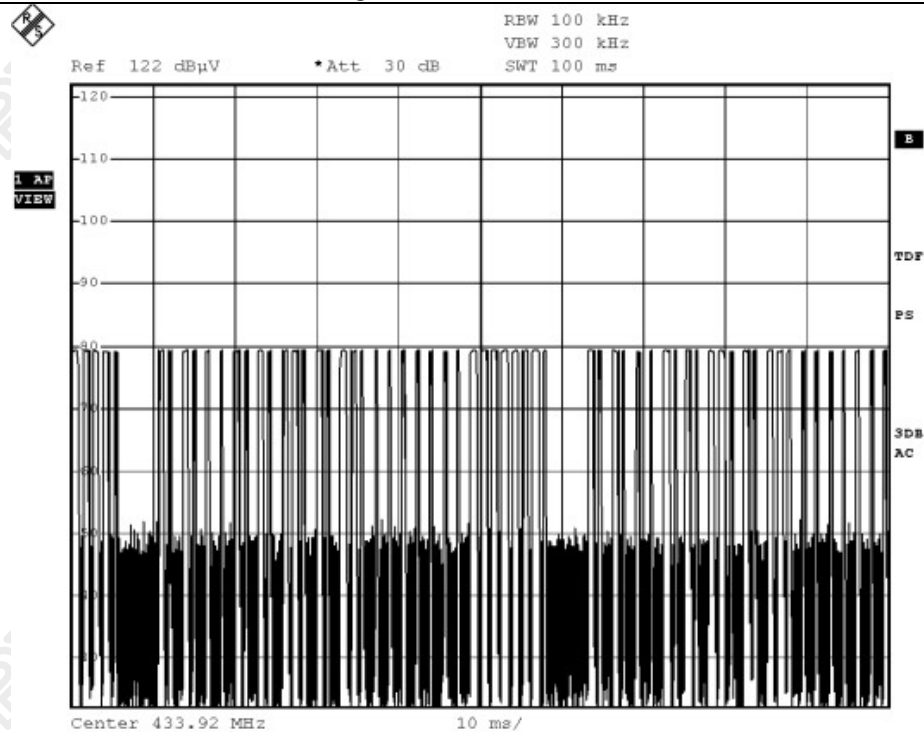

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2011-10-20

Page 14 of 19

No. : MH184516

Figure B [Long Pulse]

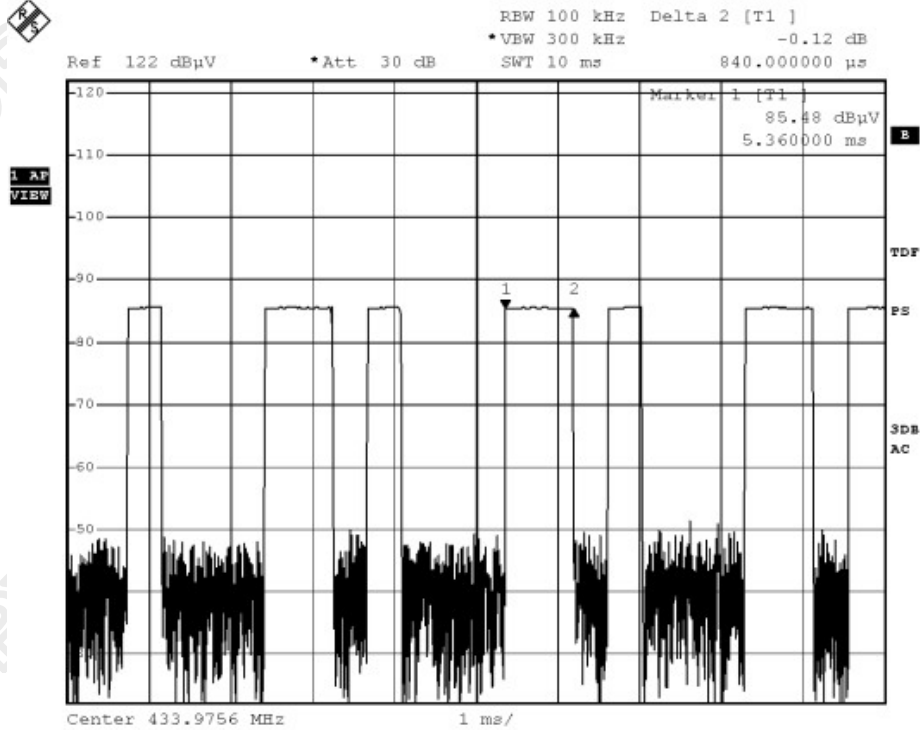

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Tai Po Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2011-10-20

Page 15 of 19

No. : MH184516

Figure C [Short Pulse]

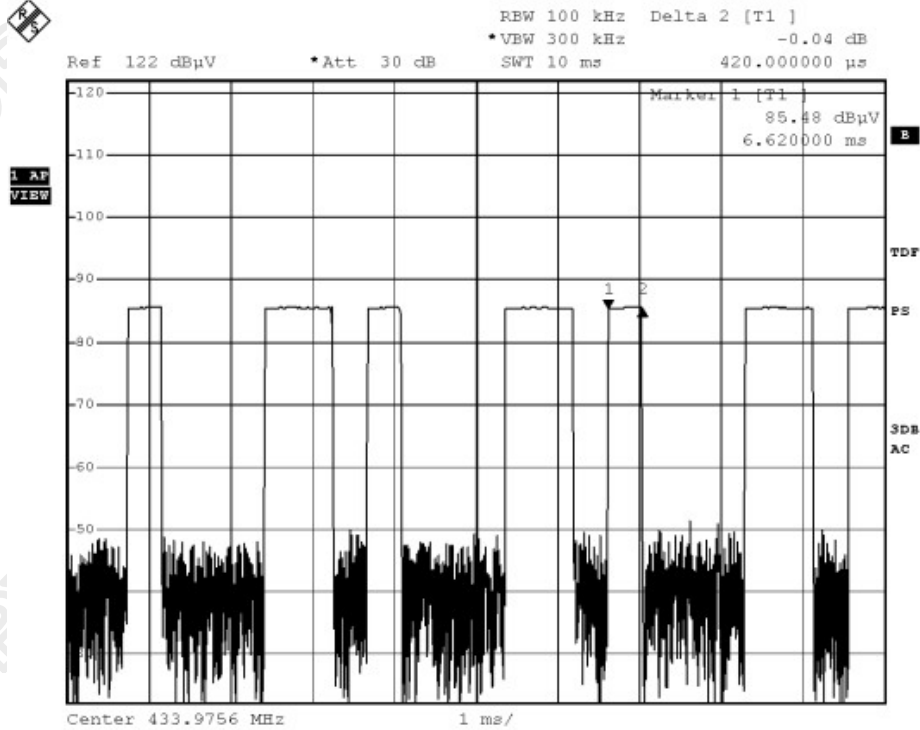

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Tai Po Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




STC Test Report

Date : 2011-10-20

Page 16 of 19

No. : MH184516

Figure D Transmission cease within 3.71s (<5s) after deactivated

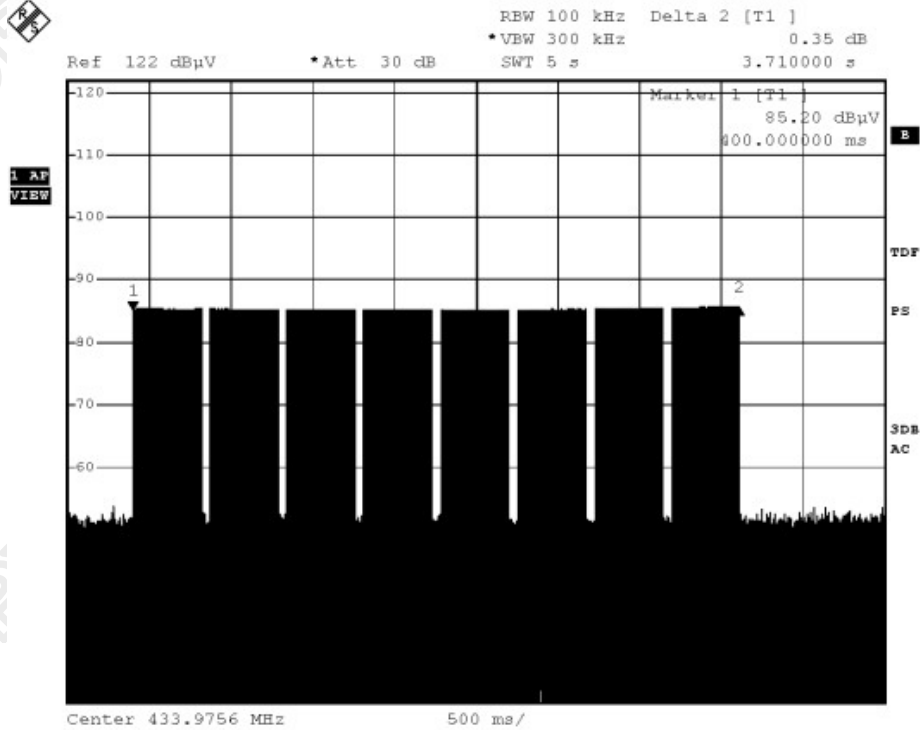

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2011-10-20

Page 17 of 19

No. : MH184516

Appendix C

Periodic Operation [FCC 47CFR 15.231(a2)]

The device is a manual operated transmitter, as refer to Figure D of Appendix B, the transmission stop within 3.71 seconds after activation and fulfills hereby the requirement 15.231(a) the transmitter within not more than 5 seconds of being released.

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report

Date : 2011-10-20

Page 18 of 19

No. : MH184516

Appendix D

Photographs of EUT

Front View of the product




Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View

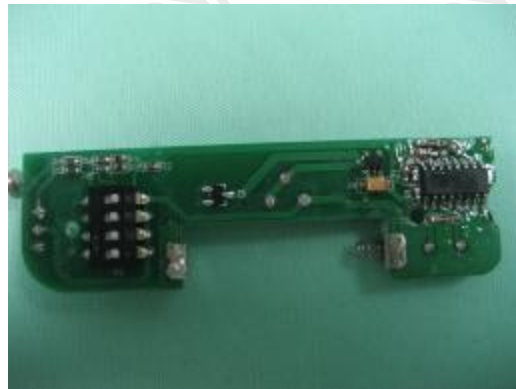

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



STC Test Report


Date : 2011-10-20

Page 19 of 19

No. : MH184516

Photographs of EUT

Measurement of Radiated Emission Test Set Up

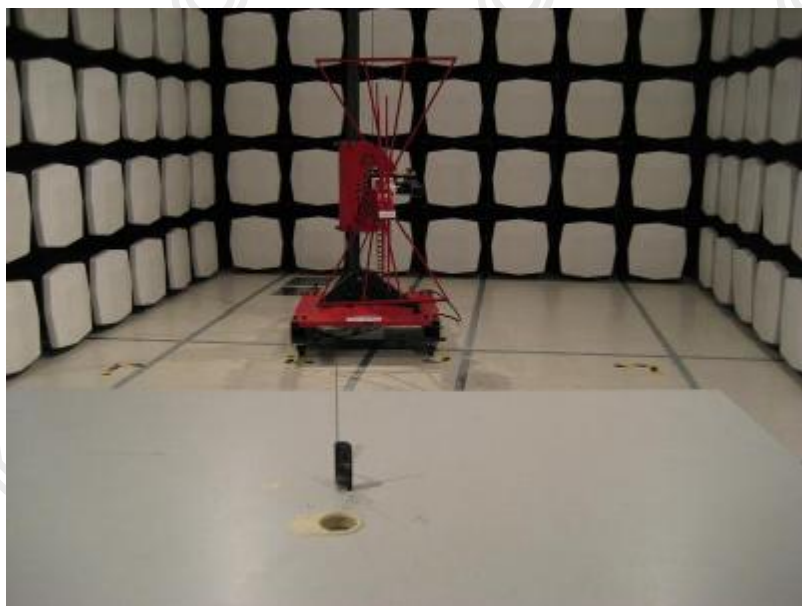

**** End of Test Report ****

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taiipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage