

MODEL: BT-5630V2

CDMA-EV-DO A



Class I, Div. 2,  
Groups A, B, C & D

IND.CONT.EQ. for HAZ.LOC.

Surrounding Air Temp: T4 @ 70C

This device complies with Part 15 of FCC Rules and with ICES-003 of Industry Canada Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interferences, and
- (2) This device must accept any interference received including interference that may cause undesired operation.

This device contains a radio transmitter with the following approvals:

Max. Ratings:

1.215 A @ 30 VDC



Contains FCC ID: **N7N-MC5725**

Contains IC: **2417C-MC5725**

FCC ID: **Z8Z-BT5X30V2**

IC: **2991A-BT5X30V2**

SIXNET, INC [www.sixnet.com](http://www.sixnet.com)

Factory ID: 23



MODEL: BT-5830V2

GSM-HSPA



Class I, Div. 2,  
Groups A, B, C & D

IND.CONT.EQ. for HAZ.LOC.

Surrounding Air Temp: T4 @ 70C

This device complies with Part 15 of FCC Rules and with ICES-003 of Industry Canada Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interferences, and
- (2) This device must accept any interference received including interference that may cause undesired operation.

This device contains a radio transmitter with the following approvals:

Max. Ratings:

1.215 A @ 30 VDC



Contains FCC ID: **N7N-MC8790**

Contains IC: **2417C-MC8790**

FCC ID: **Z8Z-BT5X30V2**


IC: **2991A-BT5X30V2**

SIXNET, INC [www.sixnet.com](http://www.sixnet.com)

Factory ID: 23



BOTTOM SIDE OF UNIT

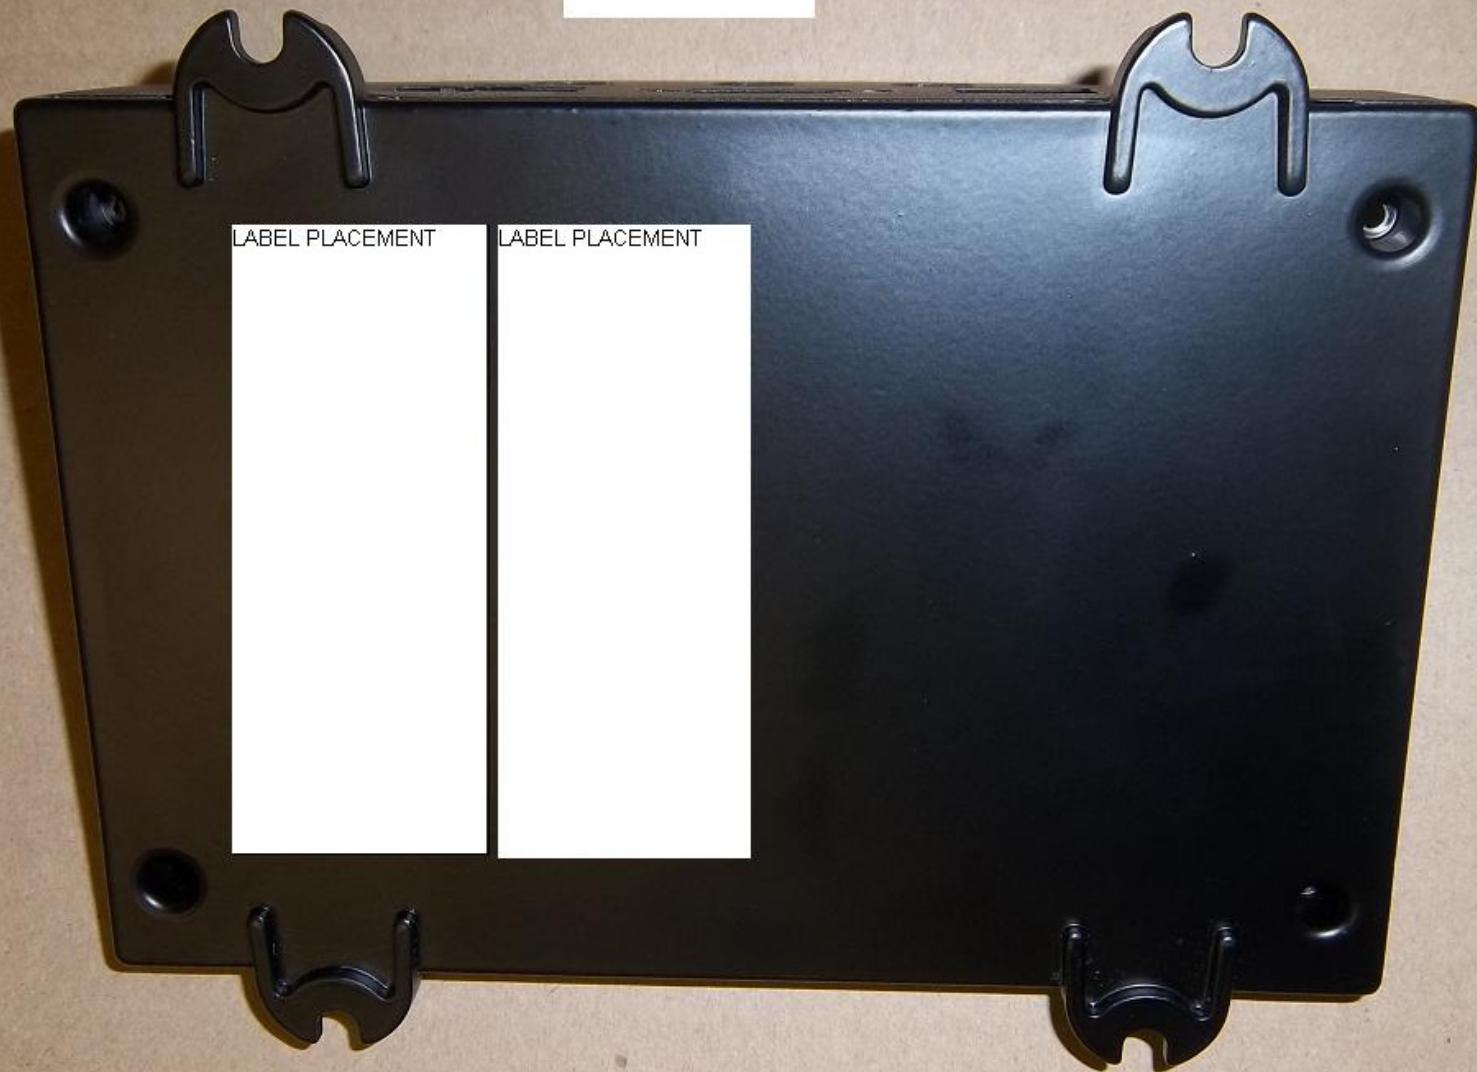



INDUSTRIAL MARKING SYSTEMS  
IDENTIFICATION FOR TODAY AND BEYOND

## *PermaPrint 3S00*

### Permanent Acrylic Adhesive



#### **Description:**

This is a topcoated thermal transfer printable metallized silver matte polyester film coated with a permanent pressure sensitive acrylic adhesive and backed with a semi bleached kraft release liner. This is a CSA listed (groups I, II, III, V, VI, VII, VIII) and UL recognized product.

#### **Suggested Applications:**

- CSA/UL labelling (nameplates)
- Permanent labelling
- Outdoor usage

#### **Usage:**

- Service Temperature Range: -40°C to -150°C (-40°F to 302°F)
- Shelf Life: 2 years
- Recommended Storage Conditions: 21°C (70°F) at 50% HR

#### **Facestock:**

- Type: Matte polyester film
- Caliper: 2.0 mil ± 10%
- Colour: Metallized silver

#### **Adhesive:**

- Type: Permanent acrylic
- Application Temperature (Minimum): 10°C (50°F)

#### **Liner:**

- Type: #50 semi-bleached kraft paper
- Caliper: 3.1 mil ± 10%

#### **Total Construction Thickness:**

- 0.0059" mil ± 10%