

# TEST REPORT

**ACCORDING TO: FCC 47CFR part 15 subpart C § 15.209;  
RSS-210 issue 8 section 2.5.1**

FOR:

**Lumenis Ltd.  
RFID reader for Lumenis systems  
Model:LT-LFS03-SYS-07  
FCC ID:Z97-1149466**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines .....	5
6.3	Support and test equipment .....	5
6.4	Changes made in EUT .....	5
6.5	Test configuration.....	6
6.6	Transmitter characteristics .....	7
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements .....	8
7.1	Field strength of emissions.....	8
7.2	Conducted emissions .....	16
7.3	Antenna requirements .....	19
8	APPENDIX A Test equipment and ancillaries used for tests.....	20
9	APPENDIX B Measurement uncertainties.....	21
10	APPENDIX C Test laboratory description .....	22
11	APPENDIX D Specification references .....	22
12	APPENDIX E Test equipment correction factors.....	23
13	APPENDIX F Abbreviations and acronyms.....	29

## 1 Applicant information

**Client name:** Lumenis Ltd.  
**Address:** P.O. Box 240, Yokneam Industrial Park, Yokneam 2069204, Israel  
**Telephone:** +972 4 9599000  
**Fax:** +972 4 9599050  
**E-mail:** Moshe.Elazar@lumenis.com  
**Contact name:** Mr. Moshe Elazar

## 2 Equipment under test attributes

**Product name:** RFID Reader for Lumenis systems  
**Model(s):** LT-LFS03-SYS-07  
**Serial number:** L-LFS3-0515-IT-178  
**Hardware version:** LT-LFS03 rev.C01  
**Software release:** 6.01.05  
**Receipt date** 18-Oct-16

## 3 Manufacturer information

**Manufacturer name:** Lumenis Ltd.  
**Address:** P.O. Box 240, Yokneam Industrial Park, Yokneam 2069204, Israel  
**Telephone:** +972 4 9599000  
**Fax:** +972 4 9599050  
**E-Mail:** Moshe.Elazar@lumenis.com  
**Contact name:** Mr. Moshe Elazar

## 4 Test details

**Project ID:** 28528  
**Location:** Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel  
**Test started:** 18-Oct-16  
**Test completed:** 20-Oct-16  
**Test specification(s):** FCC 47CFR part 15, subpart C, §15.209;  
RSS-210 issue 8 section 2.5.1, RSS-Gen issue 4, ICES-003 issue 6:2016

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
FCC section 15.209, RSS-210 section 2.5.1, Field strength of emissions	Pass
FCC Part 15, Section 207, RSS-Gen, Section 8.8, Conducted emission	Pass
FCC section 15.203, RSS-Gen section 8.3, Antenna requirement	Pass

The EUT certified by FCC under FCC ID:Z97-1149466 was revised with the following changes:

- 1) additional ceramic resistor 47.5 Ohm 1206 1%, capacitor 470 pF 1206, capacitor 12 pF 0805 were installed on the tuning board;
- 2) additional configuration of antenna: 53-59 mm with inductance 610  $\mu$ H instead of 980  $\mu$ H.

The relevant tests were performed to support Application for Class II permissive changes certification.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mrs. E. Pitt, test engineer	October 20, 2016	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	October 25, 2016	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and radio group leader	November 3, 2016	

## 6 EUT description

### 6.1 General information

The EUT, RFID transmitter operating at 125 kHz, is a functional component of Lumenis systems, intended for medical purposes.

### 6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Signal	USB	EUT	PC	1	Shielded	1.8
Antenna	Antenna	EUT	Antenna	1	Unshielded	0.4
Power +data	Power+PS232				Not in use	
Signal	Sw burning				Not in use	
Signal	Signal				Not in use	

### 6.3 Support and test equipment


Description	Manufacturer	Model number	Serial number
Laptop	DELL	DELL 620	80045559823233
AC adapter for laptop	DELL	PA-10	71615-82B-3456

### 6.4 Changes made in EUT

No changes were implemented in the EUT during the testing.



## 6.5 Test configuration

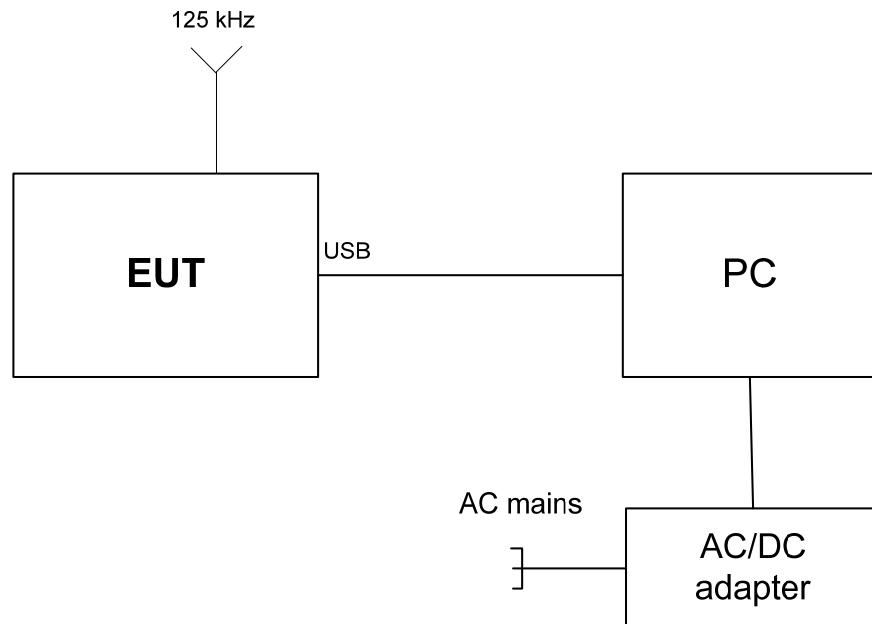



## 6.6 Transmitter characteristics

Type of equipment				
<input checked="" type="checkbox"/> V	Stand-alone (Equipment with or without its own control provisions)			
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)			
	Plug-in card (Equipment intended for a variety of host systems)			
Operating frequencies:				
Maximum field strength		70.86 dB( $\mu$ V/m) at 3 m test distance		
Is transmitter output power variable?		<input checked="" type="checkbox"/> V	No	
		<input type="checkbox"/> Yes	continuous variable	
			stepped variable with stepsize, software controlled	dB
Antenna connection				
unique coupling	standard connector	<input checked="" type="checkbox"/> V	Integral	<input type="checkbox"/> V with temporary RF connector <input checked="" type="checkbox"/> V without temporary RF connector
Antenna/s technical characteristics				
Type	Manufacturer	Model number		Gain
External	LogiTag	Loop		Not defined
Type of modulation				
Transmitter duty cycle supplied for test		100%		
Transmitter power source				
Battery	Nominal rated voltage	Battery type		
<input checked="" type="checkbox"/> V DC	5 VDC from PC			
	Rated voltage			
AC mains	Nominal rated voltage	Frequency		
Common power source for transmitter and receiver		<input checked="" type="checkbox"/> V	yes	<input type="checkbox"/> no



HERMON LABORATORIES

<b>Test specification:</b> Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions		
<b>Test procedure:</b> ANSI C63.10, Sections 6.4, 6.5		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 18-Oct-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Remarks:</b>		

## 7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements

### 7.1 Field strength of emissions

#### 7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given Table 7.1.1 and Table 7.1.2.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, kHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
125	125.69	105.69

Table 7.1.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)		
	Within restricted bands		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705		73.8 – 63.0**	
1.705 – 30.0*		69.5	
30 – 88		40.0	
88 – 216		43.5	
216 – 960		46.0	
960 – 1000		54.0	
1000 – 10 <sup>th</sup> harmonic	74.0	NA	54.0

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log \left( \frac{S_1}{S_2} \right),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\*- The limit decreases linearly with the logarithm of frequency.

#### 7.1.2 Test procedure for fundamental and spurious emission field strength measurements in 9 kHz to 30 MHz

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The specified frequency range was investigated with a loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis. The measuring antenna polarization was switched from vertical to horizontal.

7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.3 and shown in the associated plots.

#### 7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.1.3.3 The worst test results (the lowest margins) were recorded in Table 7.1.4 and shown in the associated plots.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions		
<b>Test procedure:</b> ANSI C63.10, Sections 6.4, 6.5		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 18-Oct-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Power:</b> 5 VDC		
<b>Remarks:</b>		

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz


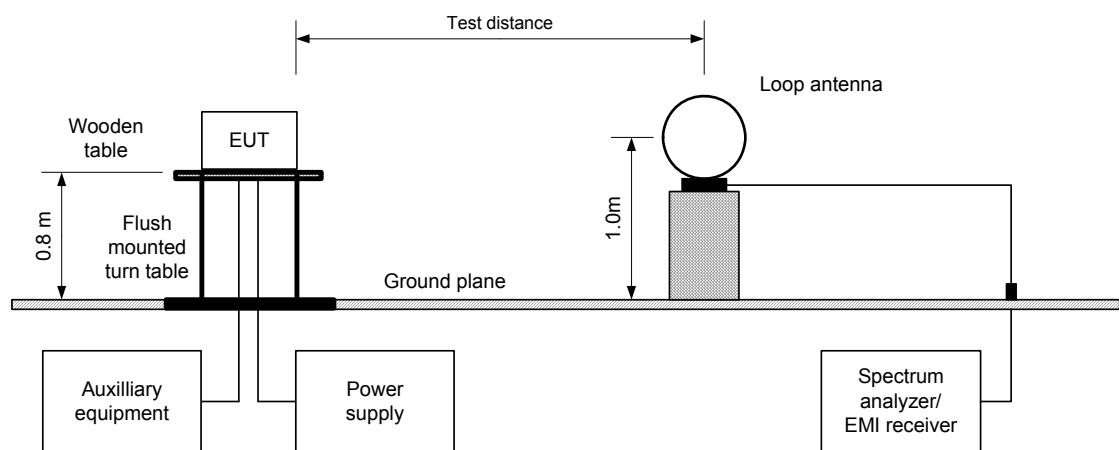


Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz



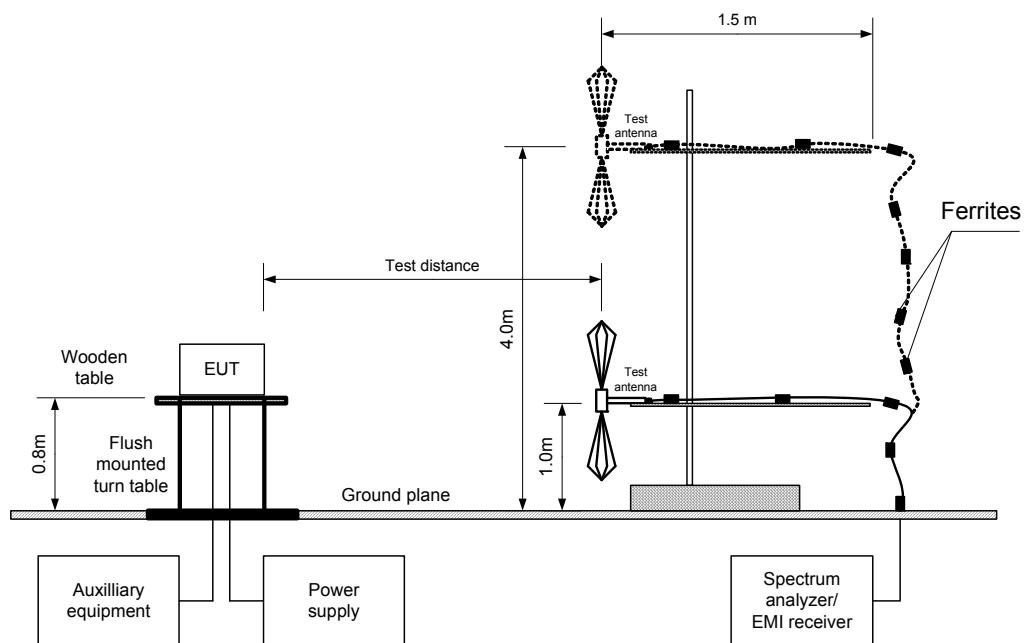

HERMON LABORATORIES

<b>Test specification:</b> Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions		
<b>Test procedure:</b> ANSI C63.10, Sections 6.4, 6.5		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b>	18-Oct-16	
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Power:</b> 5 VDC		
<b>Remarks:</b>		

**Table 7.1.3 Field strength of fundamental emission**

TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT POSITION:	Typical (Horizontal)
ANTENNA POSITION	Typical (Vertical)
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1 kHz (9 kHz – 150 kHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz)

F, kHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
125	Vert.	1.0	0	70.86	125.7	-54.84	70.86	105.69	-34.84	Pass

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin (dB) = measured result - specification limit.

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 4353	HL 5101				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions		
<b>Test procedure:</b> ANSI C63.10, Sections 6.4, 6.5		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b>	18-Oct-16	
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Power:</b> 5 VDC		
<b>Remarks:</b>		

**Table 7.1.4 Field strength of spurious emissions**

TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT POSITION:	Typical (Horizontal)
ANTENNA POSITION	Typical ( Vertical )
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	200 Hz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
48.0	34.7	30.5	40	-9.5	Vertical	1.0	0	Pass
250.0	35.9	34.6	46	-11.4	Horizontal	1.1	70	
272.0	36.7	34.3	46	-11.7	Horizontal	1.1	70	
366.0	34.1	30.5	46	-15.5	Vertical	1.0	0	
432.0	37.7	35.5	46	-10.5	Vertical	1.0	0	
832.5	35.4	30.5	46	-15.5	Vertical	1.0	0	

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 0604	HL 4353	HL 5101			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions					
<b>Test procedure:</b> ANSI C63.10, Sections 6.4, 6.5					
<b>Test mode:</b> Compliance				<b>Verdict:</b>	PASS
<b>Date(s):</b> 18-Oct-16					
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %		<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 5 VDC	
<b>Remarks:</b>					

**Table 7.1.5 Restricted bands according to FCC 15, Section 205**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

**Table 7.1.6 Restricted bands according to RSS-Gen, Table 3**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6



HERMON LABORATORIES


<b>Test specification:</b> Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions		
<b>Test procedure:</b> ANSI C63.10, Sections 6.4, 6.5		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 18-Oct-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Power:</b> 5 VDC		
<b>Remarks:</b>		

**Plot 7.1.1 Radiated emission measurements at the fundamental frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m



ACTV DET: PEAK  
MEAS DET: PEAK OR AVG  
MRR 125.15 kHz  
70.86 dB $\mu$ V/m

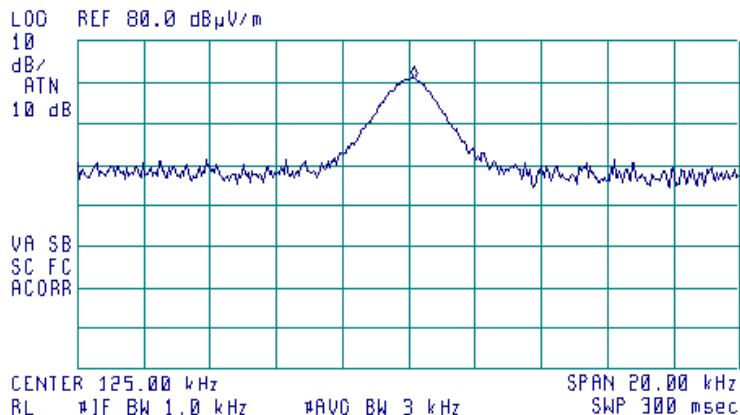



HERMON LABORATORIES


<b>Test specification:</b> Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions		
<b>Test procedure:</b> ANSI C63.10, Sections 6.4, 6.5		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 18-Oct-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Remarks:</b>		<b>Power:</b> 5 VDC

**Plot 7.1.2 Radiated emission measurements from 9 to 150 kHz**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 124.8 kHz  
70.19 dB $\mu$ V/m

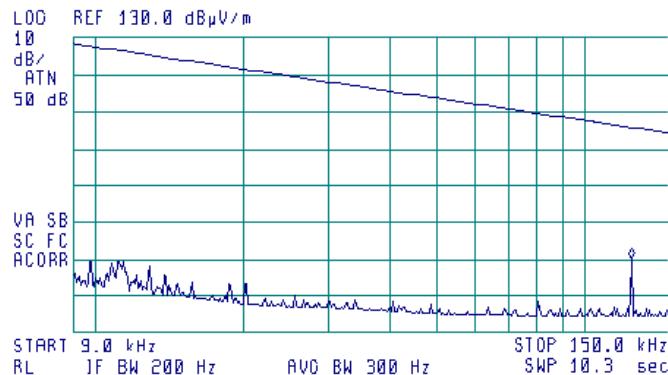


**Plot 7.1.3 Radiated emission measurements from 0.15 to 30 MHz**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 160 kHz  
55.68 dB $\mu$ V/m

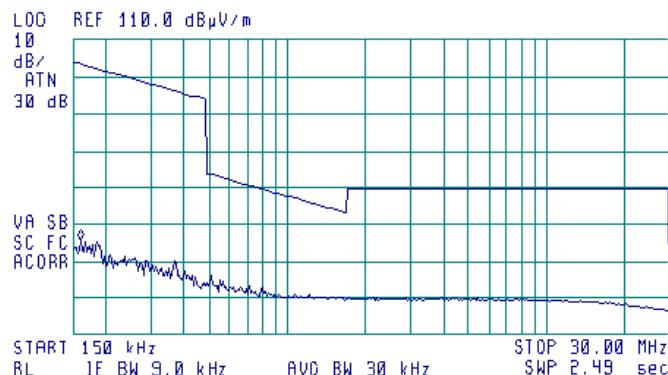




HERMON LABORATORIES

<b>Test specification:</b> Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions		
<b>Test procedure:</b> ANSI C63.10, Sections 6.4, 6.5		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 18-Oct-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Remarks:</b>		<b>Power:</b> 5 VDC


**Plot 7.1.4 Radiated emission measurements from 30 to 1000 MHz**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

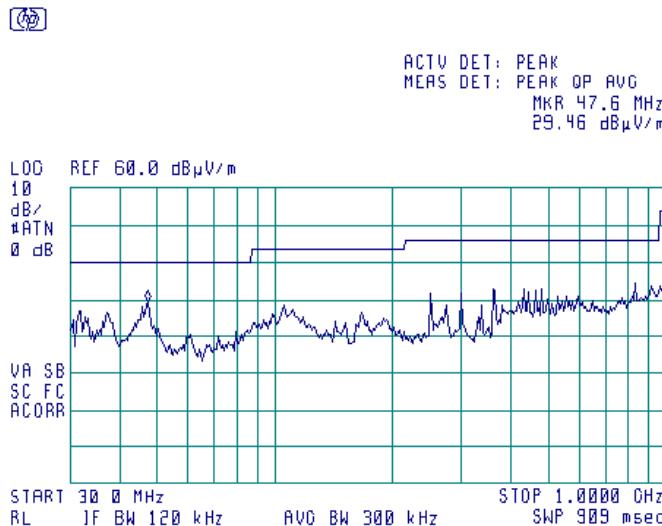

**Plot 7.1.5 Radiated emission measurements from 30 to 1000 MHz**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

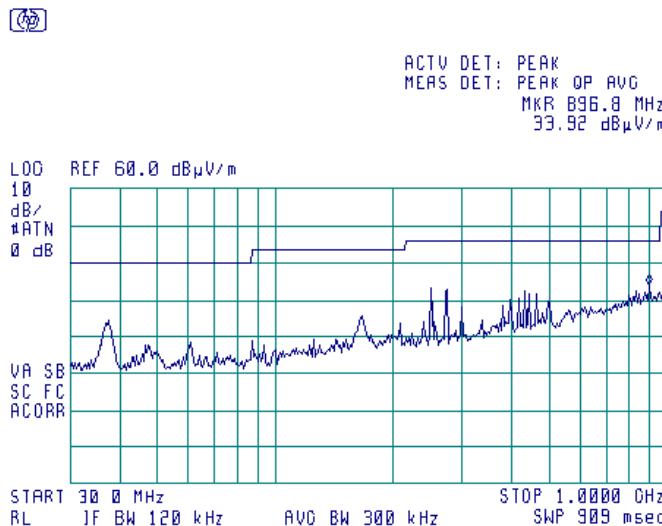



HERMON LABORATORIES

<b>Test specification:</b> Section 15.207 / RSS-Gen, Section 8.8, Conducted emission at AC power port		
<b>Test procedure:</b> ANSI C63.10, Section 6.2		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 19-Oct-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Remarks:</b>		

## 7.2 Conducted emissions

### 7.2.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(µV)		Class A limit, dB(µV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

\* - The limit decreases linearly with the logarithm of frequency.

### 7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1 and associated photographs, energized and the performance check was conducted.
- 7.2.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer while unused coaxial connector of the LISN was terminated with 50 Ohm.
- 7.2.2.3 The position of the device cables was varied to determine maximum emission level.
- 7.2.2.4 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.

Figure 7.2.1 Setup for conducted emission measurements, table-top equipment

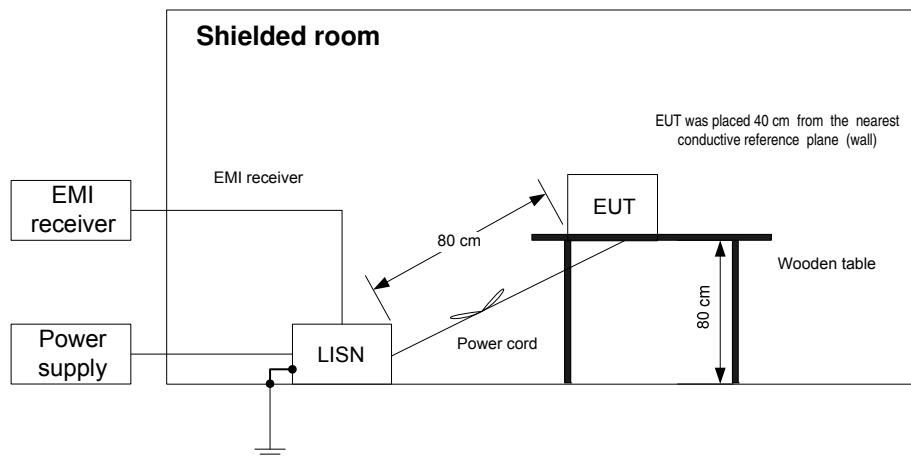



HERMON LABORATORIES

<b>Test specification:</b> Section 15.207 / RSS-Gen, Section 8.8, Conducted emission at AC power port	
<b>Test procedure:</b>	ANSI C63.10, Section 6.2
<b>Test mode:</b>	Compliance
<b>Date(s):</b>	19-Oct-16
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %
<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 120 VAC
<b>Remarks:</b>	

Table 7.2.2 Conducted emission test results

LINE: AC mains  
 EUT OPERATING MODE: Transmitter and receive  
 EUT SET UP: TABLE-TOP  
 TEST SITE: SHIELDED ROOM  
 FREQUENCY RANGE: 150 kHz - 30 MHz  
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.195	61.2	57.0	63.5	-6.5	49.0	53.5	-4.5	L1	Pass
0.275	59.1	54.6	61.0	-6.4	47.9	51.0	-3.1		
0.308	58.7	55.0	60.0	-5.0	48.5	50.0	-1.5		
0.580	56.4	51.6	56.0	-4.4	43.7	46.0	-2.3		
0.922	50.2	47.4	56.0	-8.6	32.4	46.0	-13.6		
0.195	60.2	56.8	63.8	-7.0	48.0	53.8	-5.8		
0.275	59.7	54.8	61.0	-6.2	49.1	51.0	-1.9		
0.308	59.9	56.9	60.1	-3.2	49.3	50.1	-0.8		
0.576	55.7	52.2	56.0	-3.8	43.3	46.0	-2.7		
0.922	50.0	47.2	56.0	-8.8	34.1	46.0	-11.9		

\*- Margin = Measured emission - specification limit.

## Reference numbers of test equipment used

HL 0787	HL 1553	HL 3016	HL 3612	HL 4778		
---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b> Section 15.207 / RSS-Gen, Section 8.8, Conducted emission at AC power port		
<b>Test procedure:</b> ANSI C63.10, Section 6.2		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 19-Oct-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Remarks:</b>		


#### Plot 7.2.1 Conducted emission measurements

LINE: L1  
LIMIT: Class B  
EUT OPERATING MODE: Transmitter and receive  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

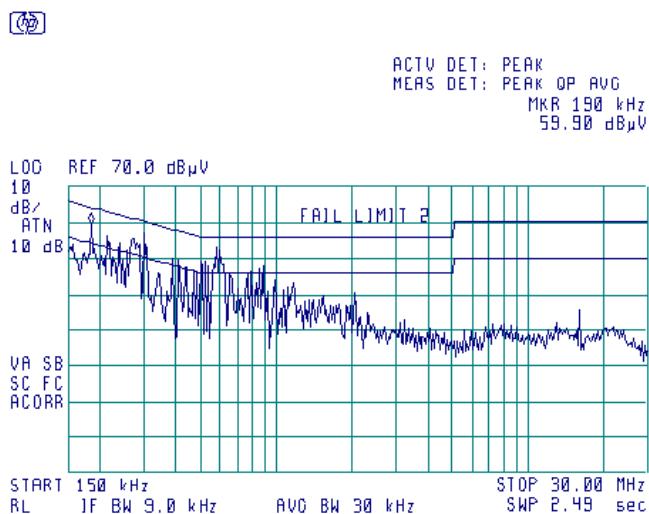

#### Plot 7.2.2 Conducted emission measurements

LINE: L2  
LIMIT: Class B  
EUT OPERATING MODE: Transmitter and receive  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK

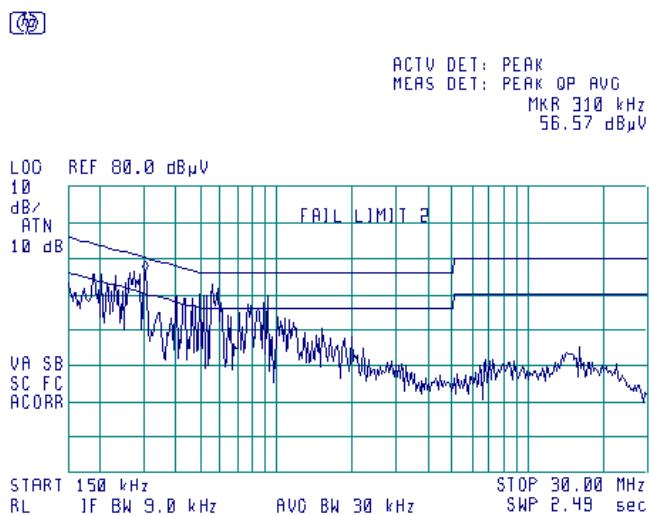



HERMON LABORATORIES

<b>Test specification:</b> Section 15.203 / RSS-Gen, Section 8.3, Antenna requirements		
<b>Test procedure:</b> Visual inspection/supplier declaration		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 19-Oct-16		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Power:</b> 5 VDC		
<b>Remarks:</b>		

### 7.3 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.3.1.

Table 7.3.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	NA	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	Visual inspection	

Photograph 7.3.1 Antenna assembly

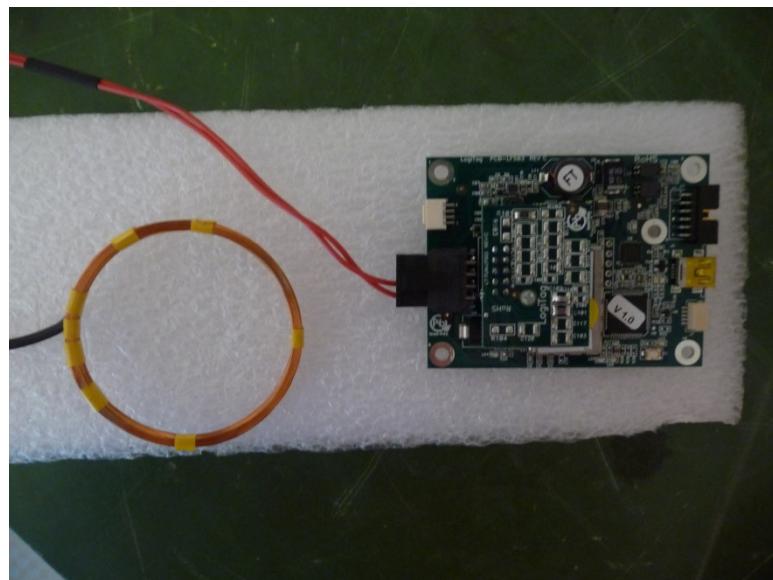



HERMON LABORATORIES

## 8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	18-Jan-16	18-Jan-17
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Oct-15	27-Oct-16
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	12-Oct-16	12-Oct-17
1553	Cable RF, 3.5 m, N/N-type	Alpha Wire	RG-214	1553	30-Dec-15	30-Dec-16
3016	LISN, Two-line V-network, 9 kHz to 30 MHz, (50 uH+5 Ohm), CISPR16-1, MIL-461E	Rohde & Schwarz	ESH 3-Z5	892239/00 2	11-Jan-16	11-Jan-17
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	07-Dec-15	07-Dec-16
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-16	15-Mar-17
4778	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL4777	Hewlett Packard	8542E	30807A00 262, 3427A001 23	05-Nov-15	05-Nov-16
5101	RF cable, 18 GHz, 6 m, N-type	Huber-Suhner	SF106A/1 1N/11N/6 000MM	500847/6A	26-Jul-16	26-Jul-17



HERMON LABORATORIES

## 9 APPENDIX B Measurement uncertainties

### Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 10 m measuring distance Horizontal polarization	Biconilog antenna: $\pm 5.0$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.1$ dB Double ridged horn antenna: $\pm 5.3$ dB
Vertical polarization	Biconilog antenna: $\pm 5.5$ dB Biconical antenna: $\pm 5.5$ dB Log periodic antenna: $\pm 5.6$ dB Double ridged horn antenna: $\pm 5.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB
Vertical polarization	Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Occupied bandwidth	$\pm 8.0$ %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

## 10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports). The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 11 APPENDIX D Specification references

FCC 47CFR part 15: 2015	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices



HERMON LABORATORIES

## 12 APPENDIX E Test equipment correction factors

Antenna factor  
Active loop antenna  
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



HERMON LABORATORIES

**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**



Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



HERMON LABORATORIES

Correction factor  
Line impedance stabilization network  
Model ESH 3-Z5, Rhode&Schwarz, HL 3016

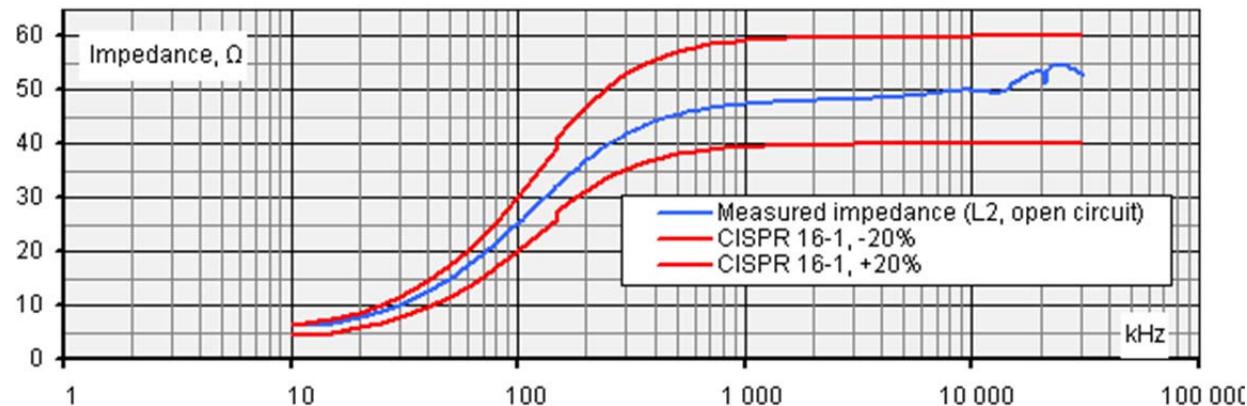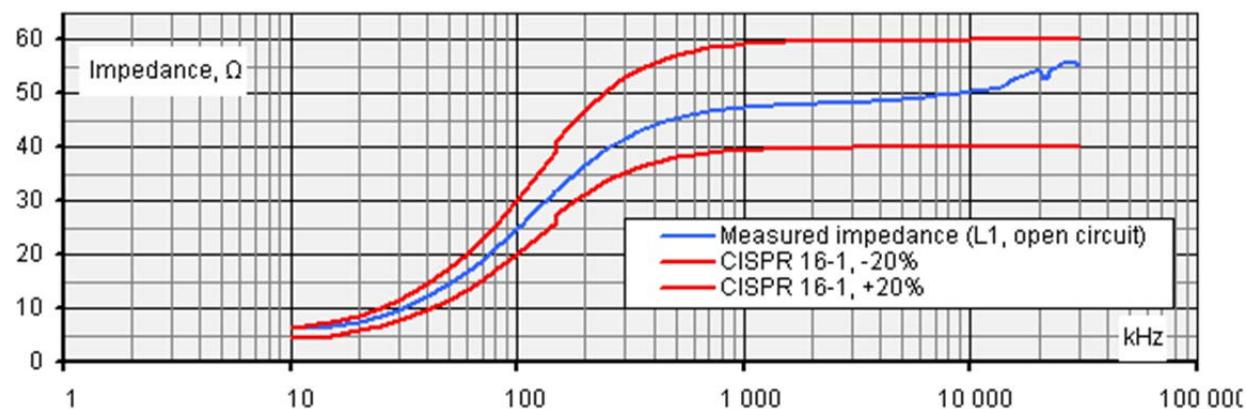



HERMON LABORATORIES

**Cable loss**  
**Cable coaxial, RG-214/U, N type-N type, 17 m**  
**Teldor, HL 3612**

Frequency, MHz	Cable loss, dB
0.1	0.05
0.5	0.07
1	0.10
3	0.22
5	0.29
10	0.39
30	0.68
50	0.90
100	1.27
150	1.58
200	1.80
250	2.12
300	2.36
350	2.60
400	2.82
450	2.99
500	3.23
550	3.40
600	3.56
650	3.71
700	3.90
750	4.04
800	4.23
850	4.39
900	4.55
950	4.65
1000	4.79



HERMON LABORATORIES

**Cable loss**  
**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,**  
**NC29-N1N1-244S/N 12025101 003,**  
**HL 4353**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



HERMON LABORATORIES

**Cable loss**  
**RF Cable, Huber-Suhner, 18 GHz, 6 m, N- type,**  
**SF106A/11N/11N/6000MM, S/N 500847/6A**  
**HL 5101**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.01	5500	2.42
50	0.22	6000	2.53
100	0.31	6500	2.65
200	0.43	7000	2.76
300	0.53	7500	2.86
400	0.62	8000	2.96
500	0.69	8500	3.06
600	0.76	9000	3.16
700	0.82	9500	3.26
800	0.87	10000	3.35
900	0.93	10500	3.44
1000	0.98	11000	3.54
1100	1.03	11500	3.62
1200	1.08	12000	3.70
1300	1.12	12500	3.80
1400	1.17	13000	3.88
1500	1.21	13500	3.97
1600	1.25	14000	4.04
1700	1.29	14500	4.13
1800	1.33	15000	4.22
1900	1.37	15500	4.31
2000	1.41	16000	4.39
2500	1.59	16500	4.47
3000	1.75	17000	4.54
3500	1.90	17500	4.61
4000	2.04	18000	4.68
4500	2.17		
5000	2.30		



HERMON LABORATORIES

## 13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT