

TEST REPORT

**ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 (a) and
RSS-210 issue 8 Annex 1**

FOR:

**LogiTag Systems Ltd.
One Channel Exciter
Model: LTG2-04
Single Location Unit
Model: LTG2-04-PRF
FCC ID:Z97LTG2-04**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Changes made in the EUT	5
6.4	Test configuration.....	6
6.5	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements	8
7.1	Periodic operation requirements	8
7.2	Field strength of emissions, UHF3 transmitter	11
7.3	Field strength of emissions, UHF1 transmitter	36
7.4	Occupied bandwidth test.....	61
7.5	Conducted emissions	65
7.6	Antenna requirements	68
8	APPENDIX A Test equipment and ancillaries used for tests.....	69
9	APPENDIX B Measurement uncertainties.....	70
10	APPENDIX C Test laboratory description	71
11	APPENDIX D Specification references	71
12	APPENDIX E Test equipment correction factors.....	72
13	APPENDIX F Abbreviations and acronyms.....	79
14	APPENDIX G Manufacturer's declaration of identity	80

1 Applicant information

Client name: LogiTag Systems Ltd.
Address: 1st Floor, Building 9, 29 Yad Harutzim street, Poleg Industrial Zone, P.O.B. 8249, Netanya 4250473, Israel
Telephone: +972 9835 4848
Fax: +972 9865 6262
E-mail: golank@Logi-tag.com
Contact name: Mr. Golan Kormian

2 Equipment under test attributes

Product name: One Channel Exciter
Model: LTG2-04
Serial number: LTG2-04-1312-078
Hardware version: C01
Software release: V2.00
Receipt date 17-Apr-14

3 Manufacturer information

Manufacturer name: LogiTag Systems Ltd.
Address: 1st Floor, Building 9, 29 Yad Harutzim street, Poleg Industrial Zone, P.O.B. 8249, Netanya 4250473, Israel
Telephone: +972 9835 4848
Fax: +972 9865 6262
E-Mail: golank@Logi-tag.com
Contact name: Mr. Golan Kormian

4 Test details

Project ID: 25494
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 17-Apr-14
Test completed: 04-May-14
Test specification(s): FCC 47CFR part 15, subpart C, §15.231(a);
RSS-210 issue 8 Annex 1



5 Tests summary

Test	Status
Transmitter characteristics	
FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements	Pass
FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions	Pass
FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth	Pass
FCC Part 15, Section 207 / RSS-Gen, Section 7.2.4, Conducted emission	Pass
FCC Part 15, Section 203 / RSS-Gen, Section 7.1.2, Antenna requirements	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer Mr. A. Chaplik, test engineer	May 4, 2014	A handwritten signature in blue ink, appearing to read 'Pitt' and 'A. Chaplik' below it.
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	May 20, 2014	A handwritten signature in blue ink, appearing to read 'Cherniavsky'.
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	November 2, 2014	A handwritten signature in blue ink, appearing to read 'Nikishin'.



6 EUT description

6.1 General information

The EUT, One Channel Exciter, has 2 main functions:

- To generate RF field at 125 kHz. The One Channel Exciter carries a unique number as identifier to the location/area where the RF field is operated.
- To communicate with RFID tags and a Base Station unit

The Exciter is a system which generates the RF field at 125 kHz, when RFID tag is within the range of the field, the tag is awaked and communicates with the Exciter via wireless transmitter at frequency of 433 MHz.

The Exciter communicates with the Base Station unit wireless at UHF frequency (902-928 MHz). The Exciter has an internal 125 kHz antenna, and has option to connect to external LF antenna (Ceiling or Door antenna). Only one antenna can transmit.

The EUT has the following features/ports:

- 1) The 125 kHz antenna driver outputs, 3 kinds of antennas: integrated, Ceiling and Door;
- 2) Transceivers
 - a) Tx/Rx with a base station in 902-928 MHz (UHF4)
 - b) Tx/Rx with a tamper tag at 433 MHz (UHF3)
 - c) Tx to tag at 433 MHz (UHF1)
 - d) Rx from tag at 433 MHz (UHF2);
- 3) General use relay;
- 4) USB ports;
- 5) Digital input.

According to manufacturer's declaration of identity provided in Appendix G of the test report, both One Channel Exciter, model LTG2-04 and Single Location Unit, model LTG2-04-PRF are electronically/electrically/mechanically identical and have only different design of Led lexan and different cover shape. That is why only model LTG2-04 was tested.

The present test report involves the test results for certification of 433 MHz transmitters as a part of a composite application for certification.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	AC power	AC mains	AC/DC adapter	1	Unshielded	1.5
Power	DC	AC/DC adapter	EUT	1	Unshielded	3
Control	Input	EUT	Open circuit	1	Unshielded	3
Control	Relay	EUT	Open circuit	1	Unshielded	3
Control	USB	EUT	No used	1	NA	NA
RF	Antenna	EUT	Antenna	4	NA	NA

6.3 Changes made in the EUT


To withstand the standard requirements the following changes were implemented in the EUT:

- 1) an inductor of 68 μ H was installed instead of L4;
- 2) a 10 μ F/50 V capacitor was added between pins of J5;
- 3) a 1nF/250 V capacitor was added between the following pins:
 - J8 pin 1 to J1 pin 2
 - J8 pin 2 to J1 pin 2
 - between pins of J1;
- 4) capacitors C150=1 μ F/25 V, C141=1 nF/50 V
- 5) a toroid p/n 5975004901 with 2x10 turns was connected between J5 and D13.

It is manufacturer responsibility to implement the change in the production version of the EUT. In any case the test report applies to the tested item only.



6.4 Test configuration

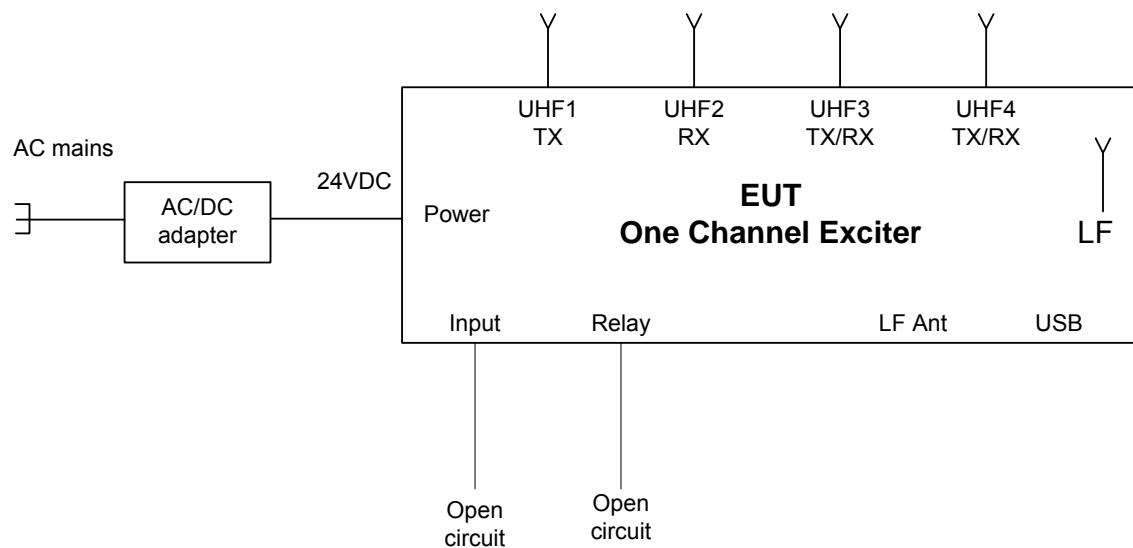



6.5 Transmitter characteristics

Type of equipment									
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)								
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)								
	Plug-in card (Equipment intended for a variety of host systems)								
Operating frequency									
		433.26 MHz, 434.52 MHz							
Maximum rated output power									
		At transmitter 50 Ω RF output connector			dBm				
		Field strength at 3 m distance			95.1 dB(µV/m) – peak 55.1 dB(µV/m) -average				
Is transmitter output power variable?									
		X	No						
		Yes		continuous variable					
				stepped variable with stepsize		dB			
				minimum RF power		dBm			
				maximum RF power		dBm			
Antenna connection									
		unique coupling		standard connector		X			
				integral		X			
				with temporary RF connector					
				without temporary RF connector					
Antenna/s technical characteristics									
Type		Manufacturer		Model number		Gain			
External		APM		AGP-I43302SM-1		2 dBi			
External		APM		AGP-I433SM		2 dBi			
Type of modulation									
Bit rate		160 kbps							
Transmitter power source									
		Battery	Nominal rated voltage						
<input checked="" type="checkbox"/>		DC	Nominal rated voltage	24 VDC via AC/DC adapter					
		AC mains	Nominal rated voltage						
Common power source for transmitter and receiver				X	yes	no			



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in Plot 7.1.1.

Figure 7.1.1 Setup for transmitter shut down test





HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

Table 7.1.1 Periodic operation requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	NA	NA
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1, Plot 7.1.2	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	NA	NA
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	NA	NA




HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.231.docx


Date of Issue: 20-May-14

Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict: PASS	
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

Plot 7.1.1 Transmitter shut down test result, UHF1 transmitter

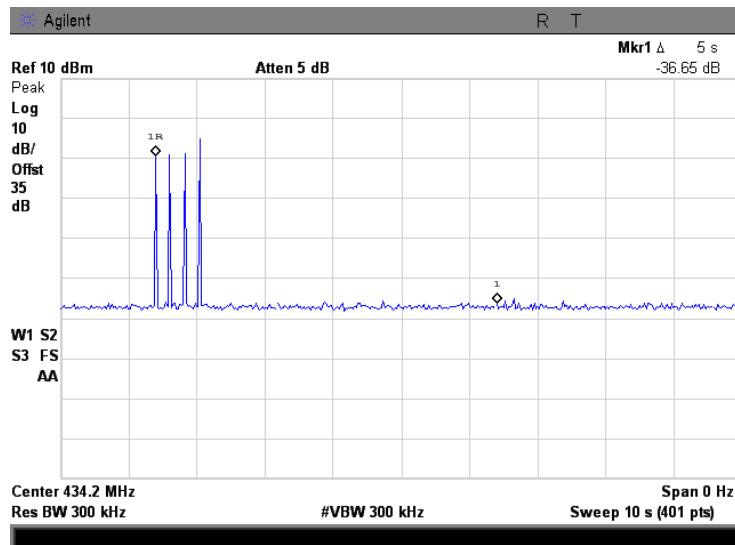

Plot 7.1.2 Transmitter shut down test result, UHF3 transmitter

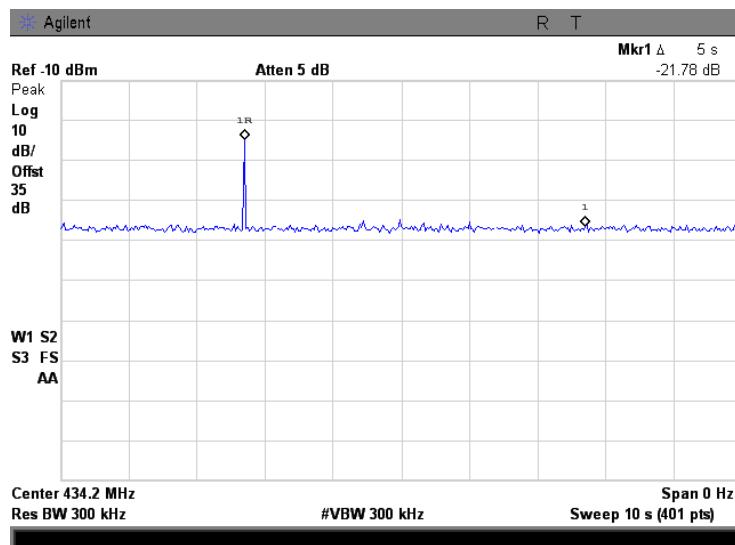

Reference numbers of test equipment used

HL 2780						
---------	--	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

7.2 Field strength of emissions, UHF3 transmitter

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
433.26	100.80	80.80
434.52	100.84	80.84

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**		
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705		73.8 – 63.0**			
1.705 – 30.0*		69.5			
30 – 88	NA	40.0	NA		
88 – 216		43.5			
216 – 960		46.0			
960 – 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S2} = Lim_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(µV/m) was calculated as follows:

$$Lim_{AVR} = 20 \times \log (56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$Lim_{AVR} = 20 \times \log (41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.
- 7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.
- 7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- 7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

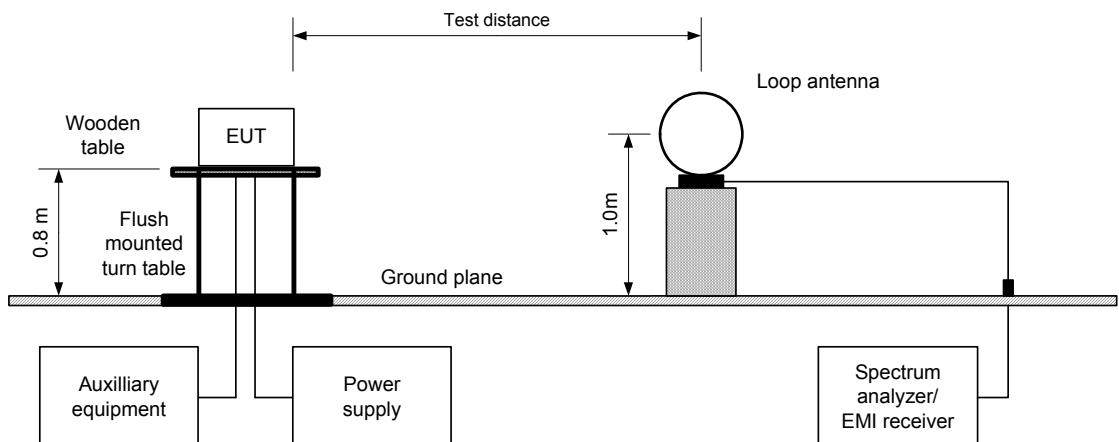




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz

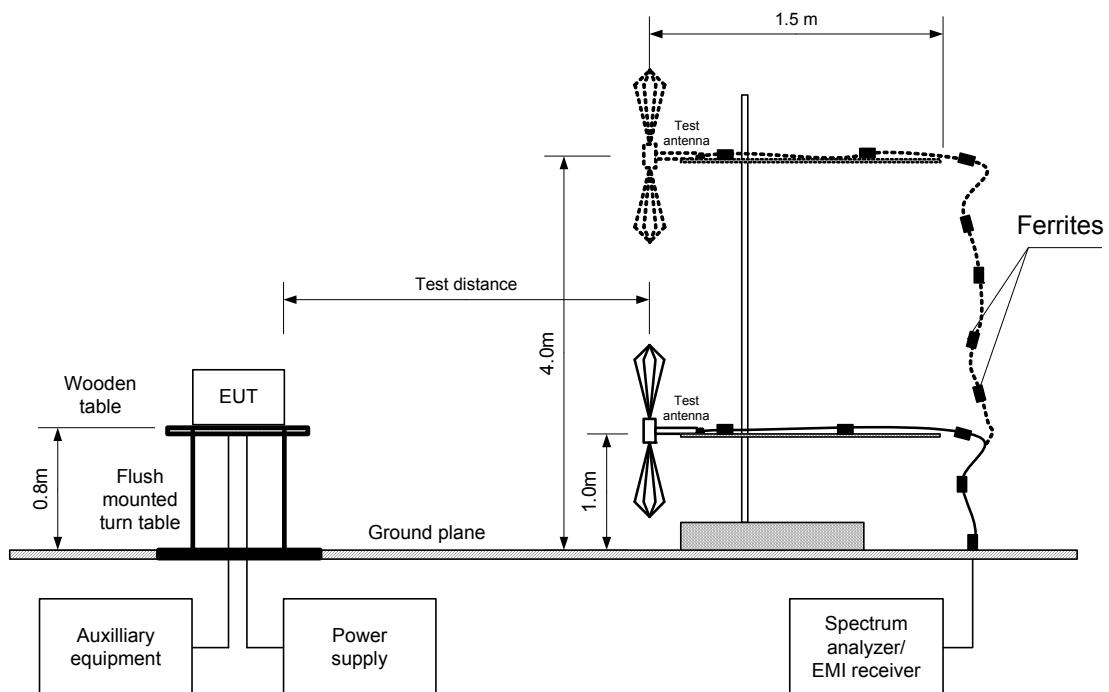



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE:	3 m
EUT POSITION:	Vertical & Horizontal
MODULATION:	GFSK
BIT RATE:	160 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 - 4400 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	Active loop (9 kHz – 30 MHz)
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict	
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)		
Fundamental emission 433.26 MHz											
433.180	H	1.0	150	95.06	100.80	-5.74	95.06	55.06	80.80	-25.74	Pass
Spurious emissions											
866.365	H	1.0	60	61.85	80.80	-18.95	61.85	21.85	60.80	-38.95	Pass
1299.793	H	1.0	360	54.15	80.80	-26.65	54.15	14.15	60.80	-46.65	
1733.003	H	1.0	230	67.97	80.80	-12.83	67.97	27.97	60.80	-32.83	
2166.225	H	1.0	330	58.80	80.80	-22.00	58.80	18.80	60.80	-42.00	
2599.485	V	1.0	200	67.01	80.80	-13.79	67.01	27.01	60.80	-33.79	
3032.808	H	1.0	330	70.64	80.80	-10.16	70.64	30.64	60.80	-30.16	
3466.105	V	1.0	220	71.42	80.80	-9.38	71.42	31.42	60.80	-29.38	
3899.365	H	1.0	160	69.76	74.00	-4.24	69.76	29.76	54.00	-24.24	
4332.563	V	1.0	360	56.79	74.00	-17.21	56.79	16.79	54.00	-37.21	
Fundamental emission 434.52 MHz											
434.443	H	1.0	360	95.10	100.84	-75.74	95.10	55.10	80.84	-25.74	Pass
Spurious emissions											
868.883	H	1.0	80	62.11	80.84	-18.73	62.11	22.11	60.84	-38.73	Pass
1303.585	H	1.0	360	55.65	74.00	-18.35	55.65	15.65	54.00	-38.35	
1738.030	H	1.0	250	67.78	80.84	-13.06	67.78	27.78	60.84	-33.06	
2172.600	H	1.0	300	58.85	80.84	-21.99	58.85	18.85	60.84	-41.99	
2607.083	V	1.0	190	66.04	80.84	-14.80	66.04	26.04	60.84	-34.80	
3041.578	H	1.0	310	68.80	80.84	-12.04	68.80	28.80	60.84	-32.04	
3476.148	V	1.0	200	71.35	80.84	-9.49	71.35	31.35	60.84	-29.49	
3910.730	H	1.0	175	70.52	74.00	-3.48	70.52	30.52	54.00	-23.48	
4345.138	V	1.0	30	58.14	74.00	-15.86	58.14	18.14	54.00	-35.86	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(µV/m)-Limit, dB(µV/m)



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Number of pulses during 100 msec	Duration, ms	Period, ms		
1	1	NA	NA	NA	-40

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 0521	HL 0604	HL 1984	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE:	3 m
EUT POSITION:	Typical (Vertical & Horizontal)
MODULATION:	GFSK
BIT RATE:	160 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	Active loop (9 kHz – 30 MHz)
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
No emissions were found								

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.231.docx

Date of Issue: 20-May-14

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions				
Test procedure:	ANSI C63.4, Section 13.1.4				
Test mode:	Compliance				Verdict: PASS
Date(s):	17-Apr-14 - 01-May-14				
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %		Power Supply: 24 VDC	
Remarks: UHF3 transmitter					

Table 7.2.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.2.7 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.1 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Horizontal

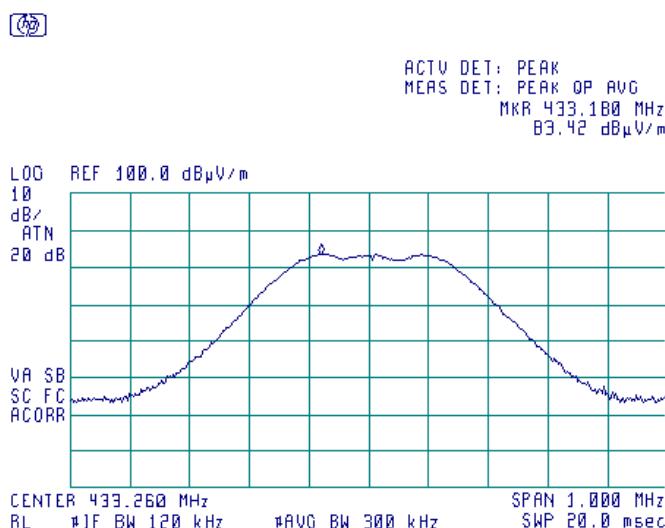

Plot 7.2.2 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Horizontal

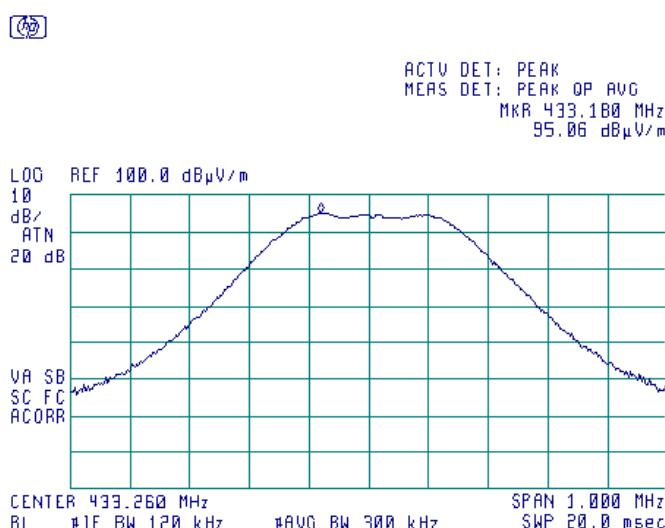



HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.3 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.180 MHz
94.69 dB μ V/m

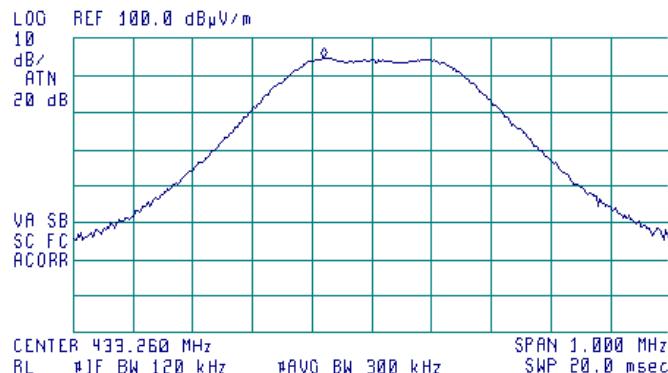


Plot 7.2.4 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.180 MHz
92.48 dB μ V/m

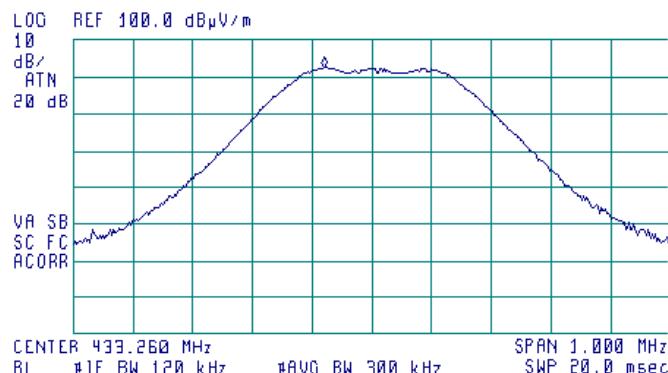



HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.5 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 434.443 MHz
95.10 dB μ V/m

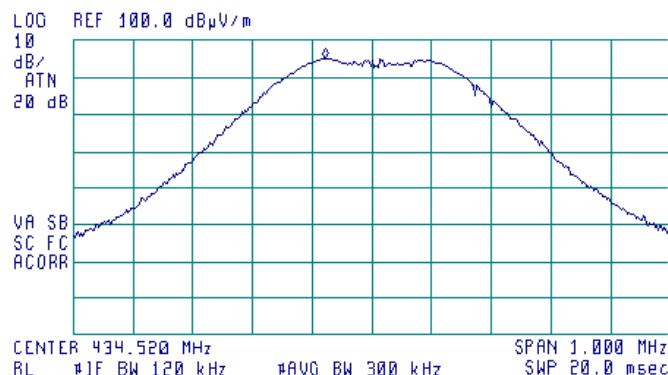


Plot 7.2.6 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 434.445 MHz
93.15 dB μ V/m

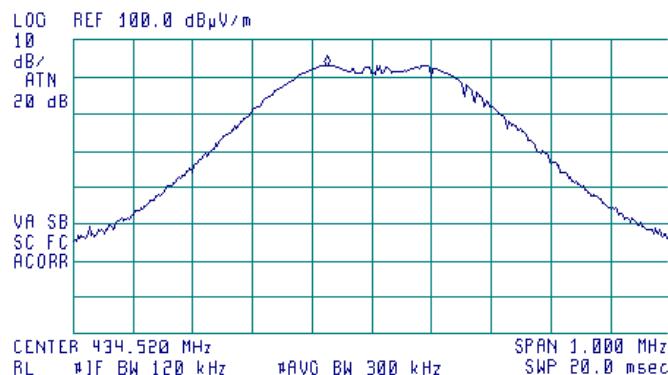



HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.7 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 434.445 MHz
81.70 dB μ V/m

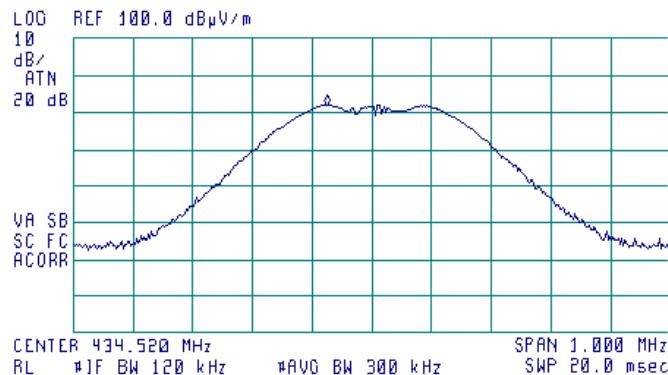


Plot 7.2.8 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 434.448 MHz
94.57 dB μ V/m

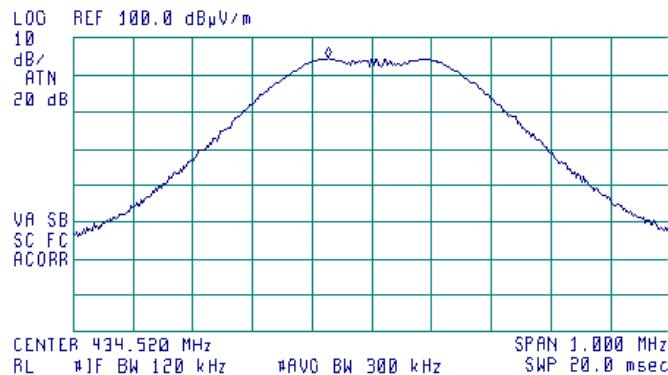



HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.9 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 10.5 kHz
63.52 dB μ V/m

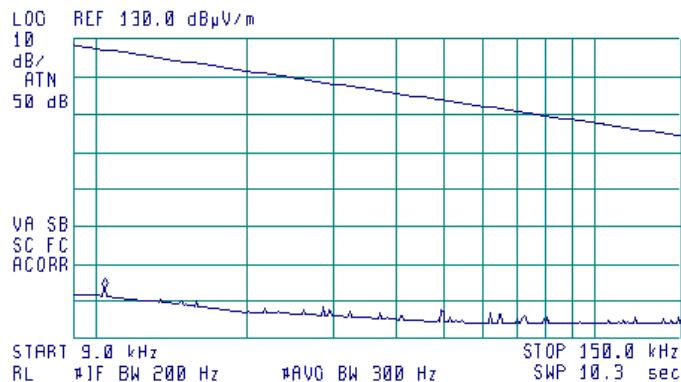


Plot 7.2.10 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 150 kHz
57.42 dB μ V/m

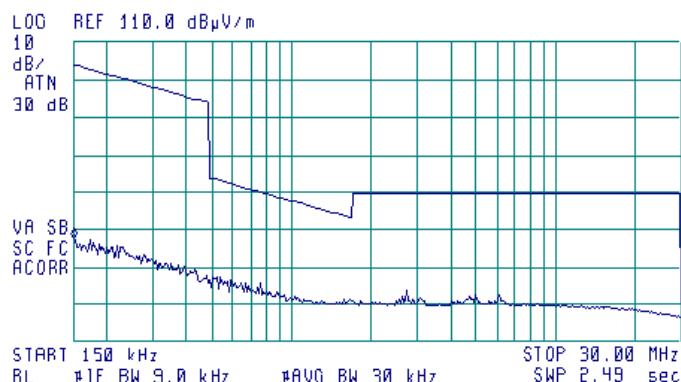




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.11 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Vertical and Horizontal

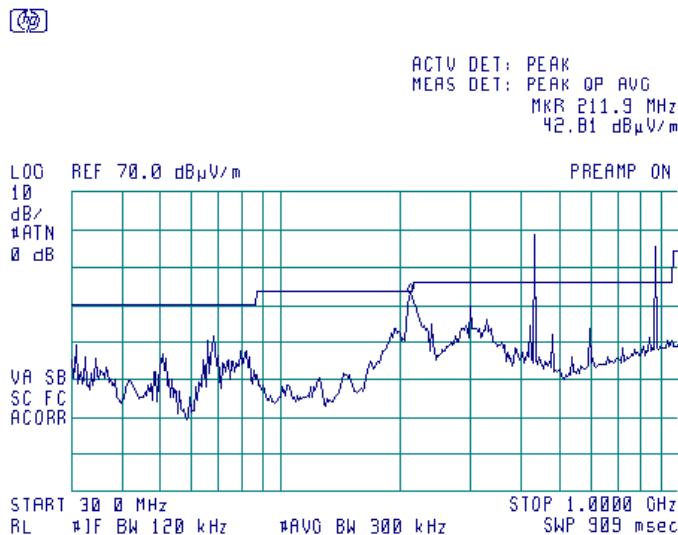





HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			



Plot 7.2.12 Radiated emission measurements from 1000 to 4400 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Vertical and Horizontal
OPERATING FREQUENCY: 433.26 MHz

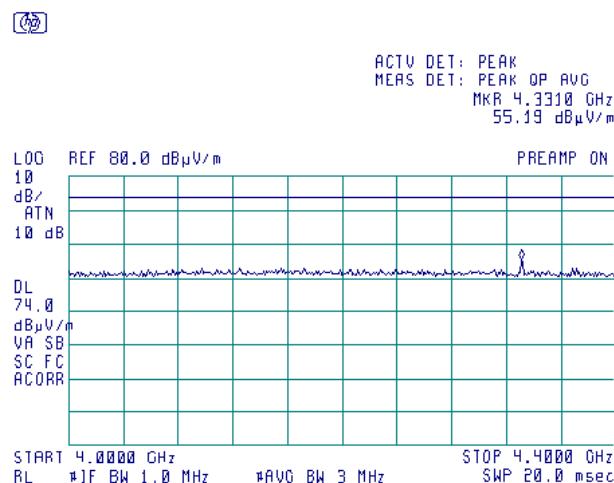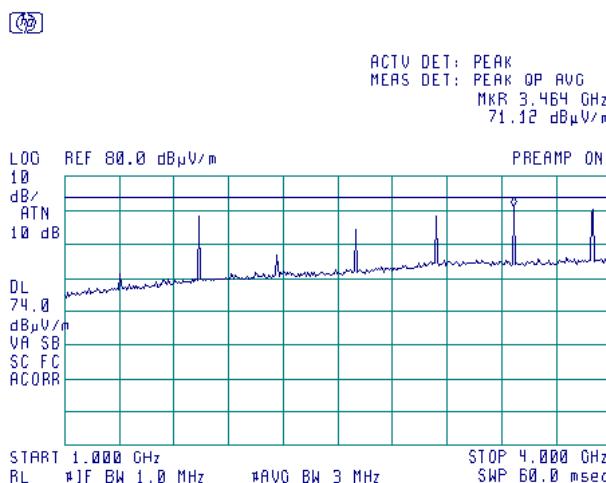

Plot 7.2.13 Radiated emission measurements from 1000 to 4400 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Vertical and Horizontal
OPERATING FREQUENCY: 434.52 MHz

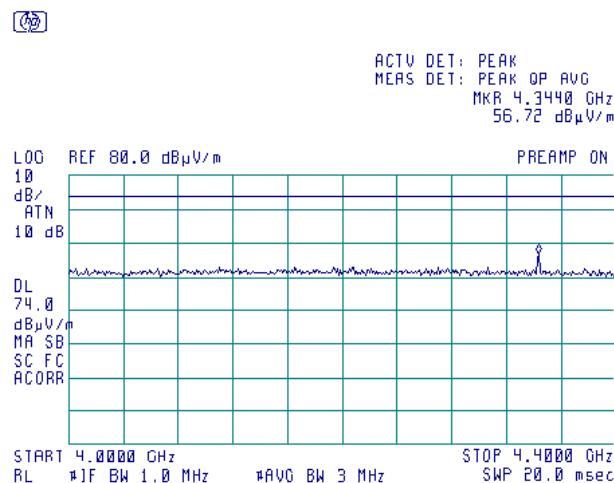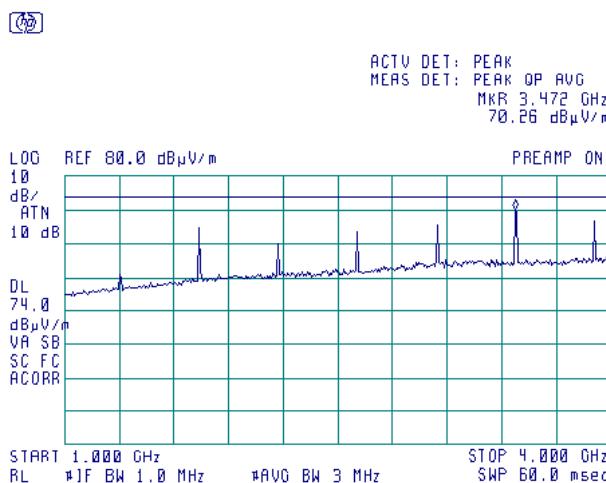




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.14 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical& Horizontal
OPERATING FREQUENCY: 433.26 MHz

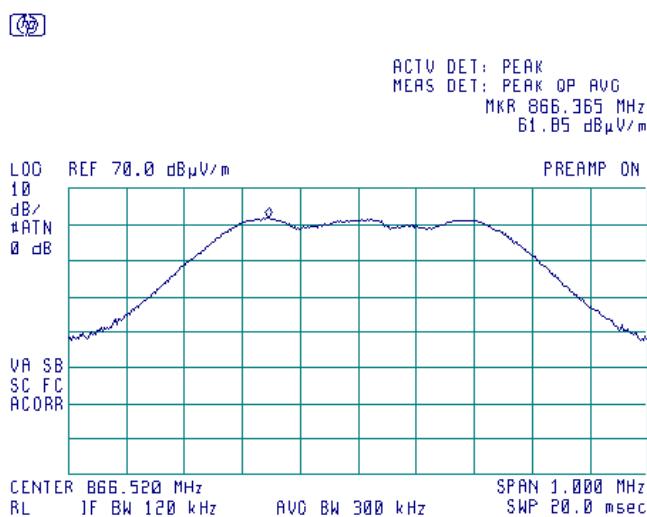

Plot 7.2.15 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical& Horizontal
OPERATING FREQUENCY: 434.52 MHz

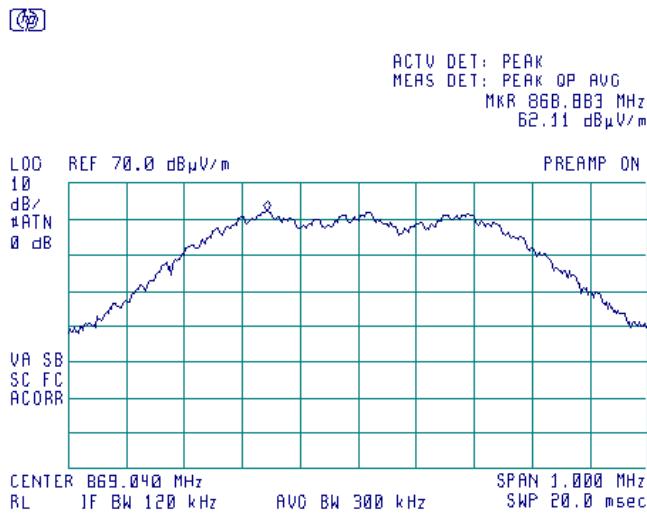




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.16 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical & Horizontal
 OPERATING FREQUENCY 433.26 MHz

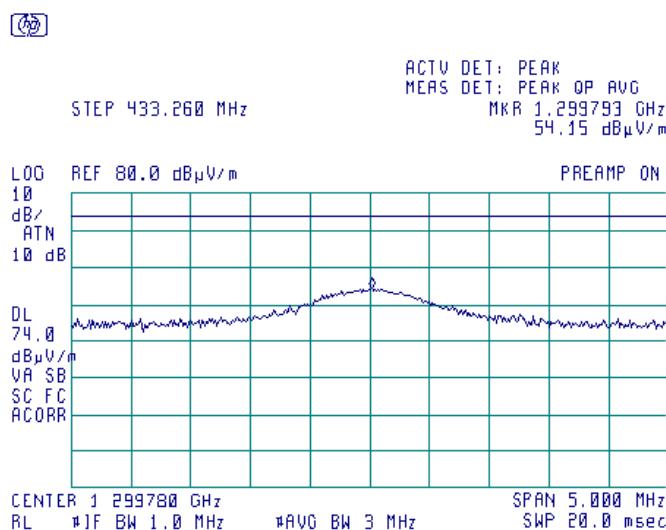**Plot 7.2.17 Radiated emission measurements at the third harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical & Horizontal
 OPERATING FREQUENCY 434.52 MHz

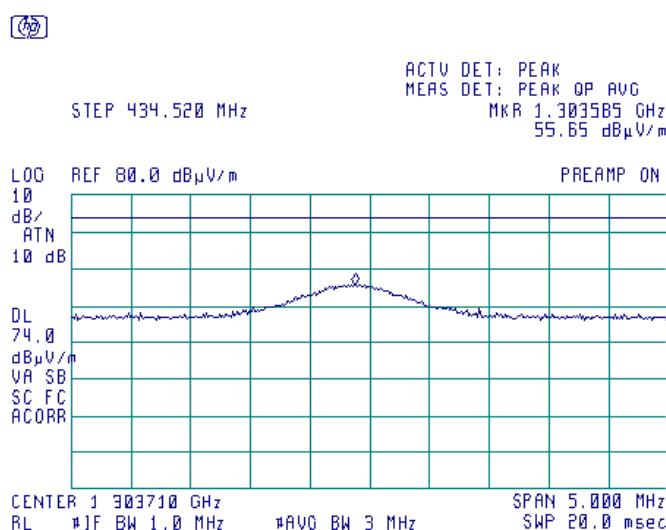




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.18 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

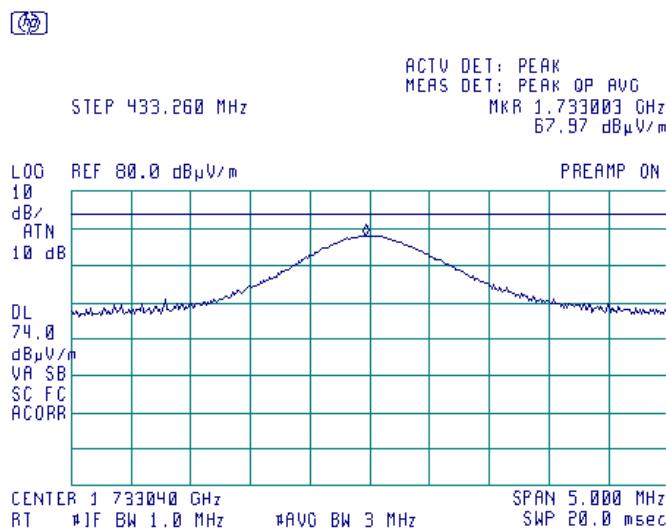**Plot 7.2.19 Radiated emission measurements at the fourth harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

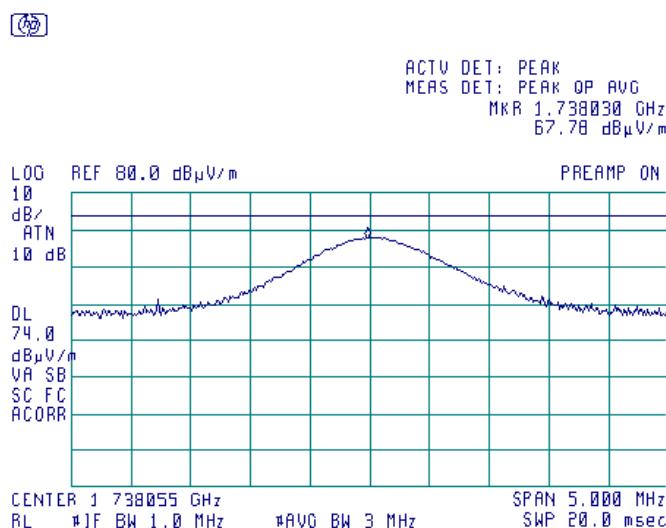




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.20 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

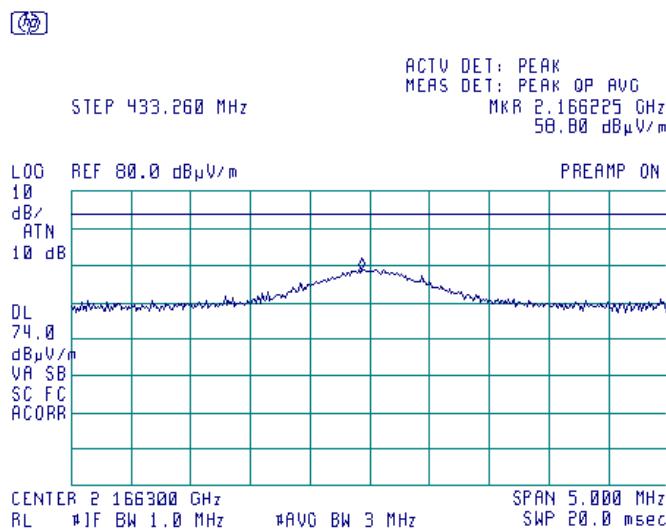**Plot 7.2.21 Radiated emission measurements at the fifth harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

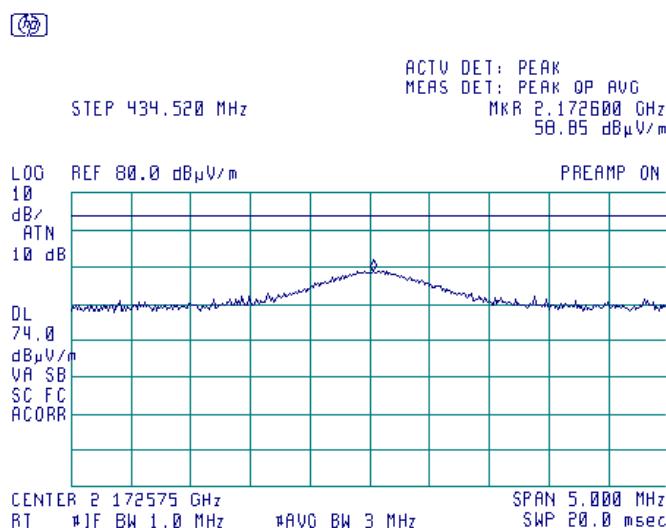




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.22 Radiated emission measurements at the sixth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

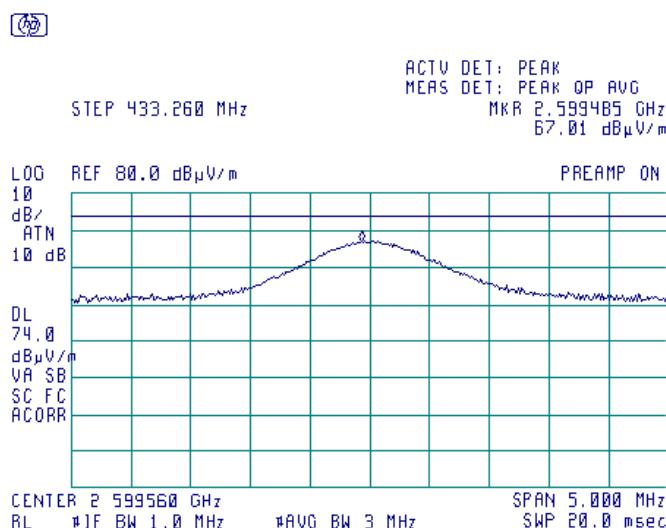**Plot 7.2.23 Radiated emission measurements at the sixth harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

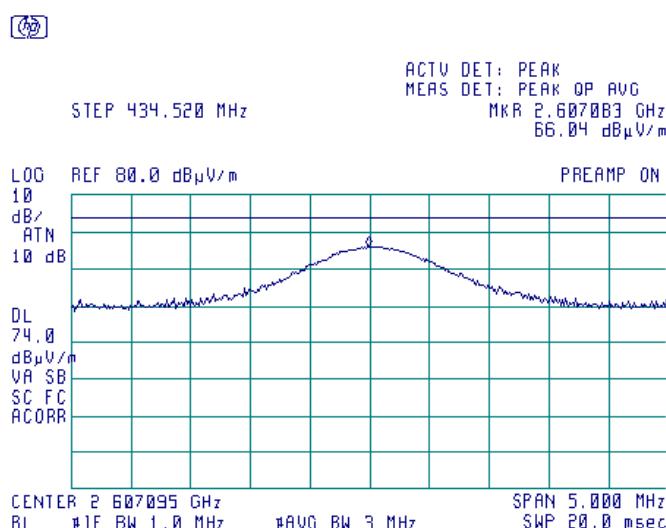




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.24 Radiated emission measurements at the seventh harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

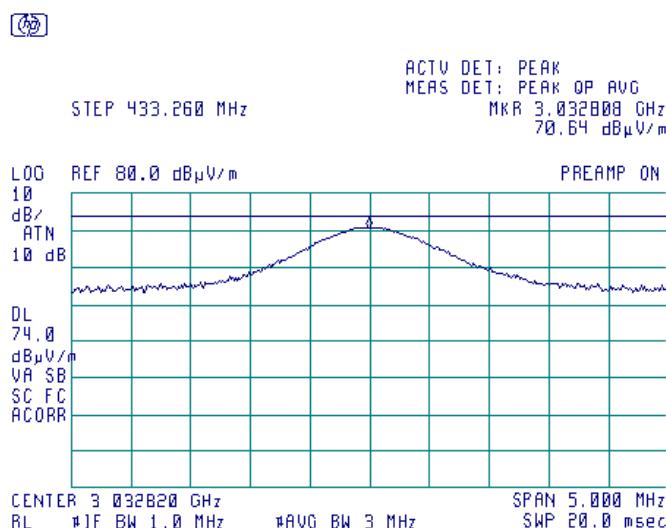**Plot 7.2.25 Radiated emission measurements at the seventh harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

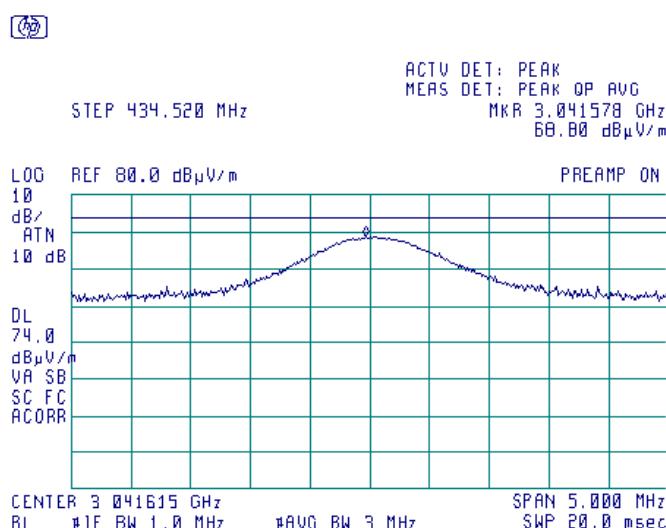



HERMON LABORATORIES


Report ID: LOGRAD_FCC.25494_15.231.docx

Date of Issue: 20-May-14

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.26 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

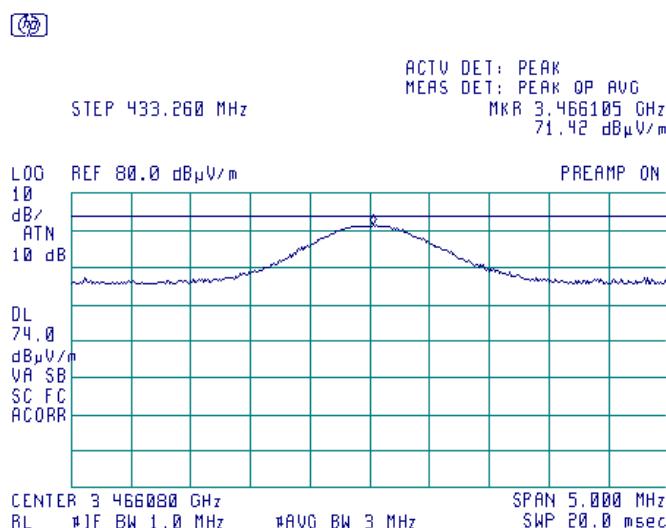

Plot 7.2.27 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

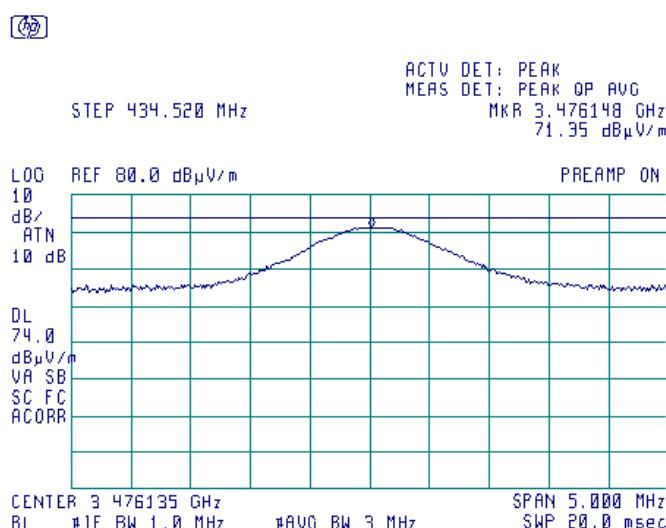



HERMON LABORATORIES


Report ID: LOGRAD_FCC.25494_15.231.docx

Date of Issue: 20-May-14

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			


Plot 7.2.28 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

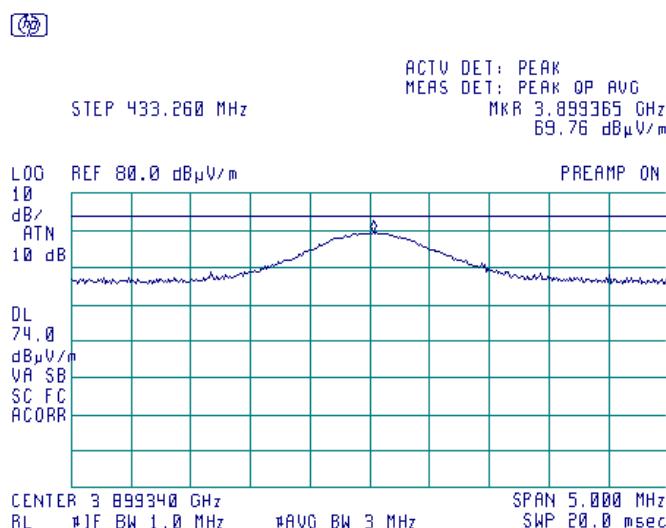

Plot 7.2.29 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

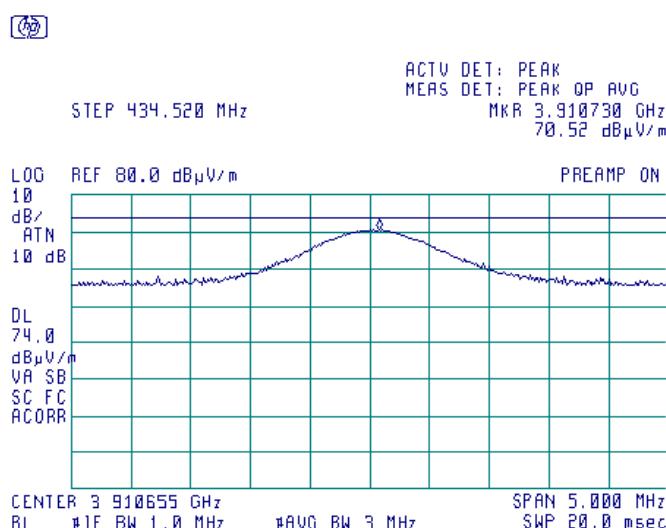




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.30 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

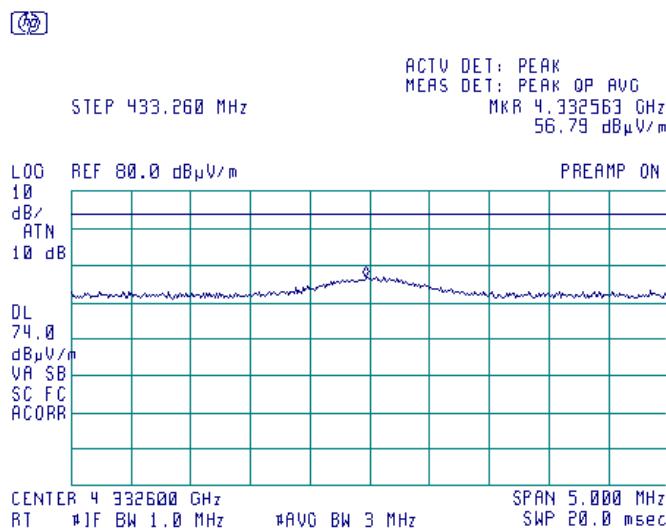**Plot 7.2.31 Radiated emission measurements at the tenth harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

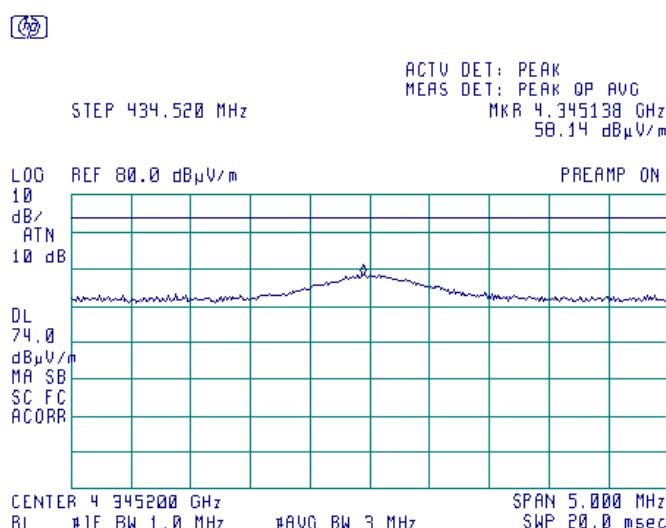




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.32 Transmission pulse duration

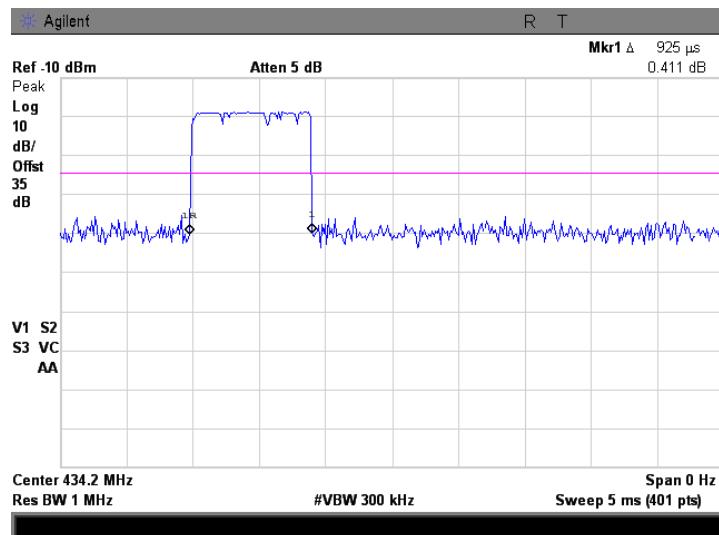





HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF3 transmitter			

Plot 7.2.33 Transmission pulse period

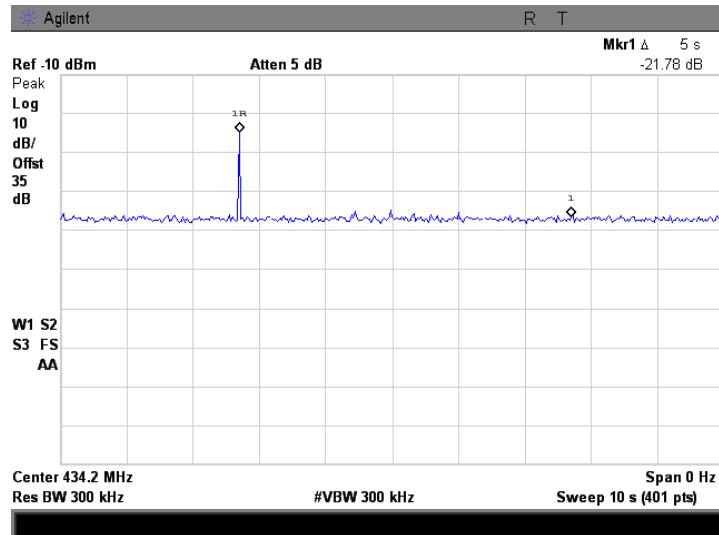

Plot 7.2.34 Transmission pulse period

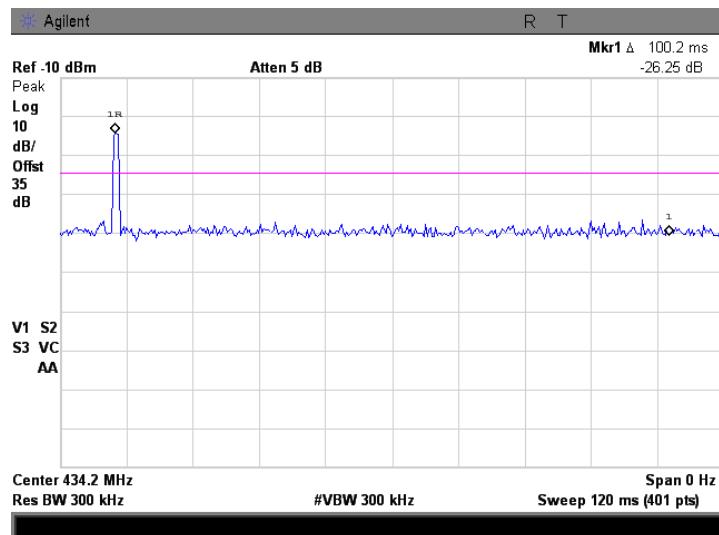



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

7.3 Field strength of emissions, UHF1 transmitter

7.3.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.3.1 and Table 7.3.2.

Table 7.3.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
433.26	100.80	80.80
434.52	100.84	80.84

Table 7.3.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**		
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705		73.8 – 63.0**			
1.705 – 30.0*		69.5			
30 – 88	NA	40.0	NA		
88 – 216		43.5			
216 – 960		46.0			
960 – 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S2} = Lim_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(µV/m) was calculated as follows:

$$Lim_{AVR} = 20 \times \log (56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$Lim_{AVR} = 20 \times \log (41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.
- 7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.3.2.3 The worst test results (the lowest margins) were recorded in Table 7.3.3, Table 7.3.5 and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.3.3.1 The EUT was set up as shown in Figure 7.3.2, energized and the performance check was conducted.
- 7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- 7.3.3.3 The worst test results (the lowest margins) were recorded in Table 7.3.3, Table 7.3.5 and shown in the associated plots.

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz

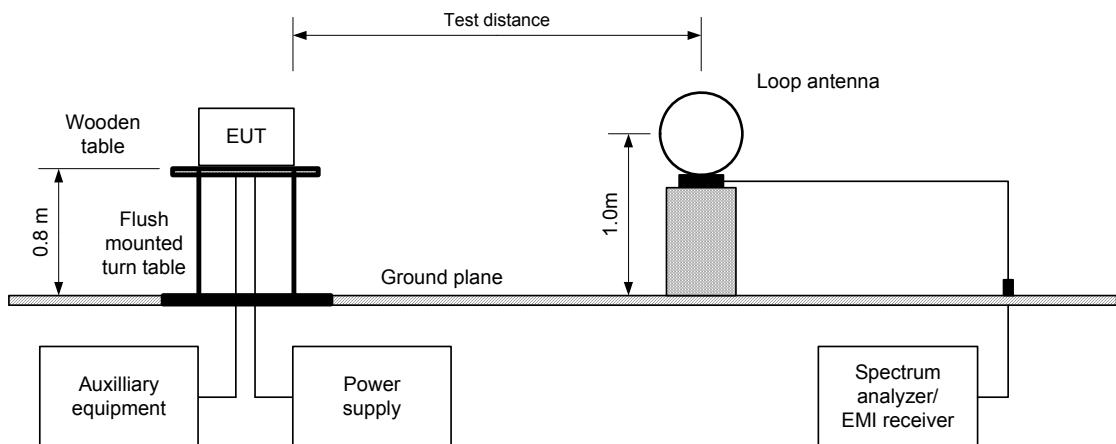




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz

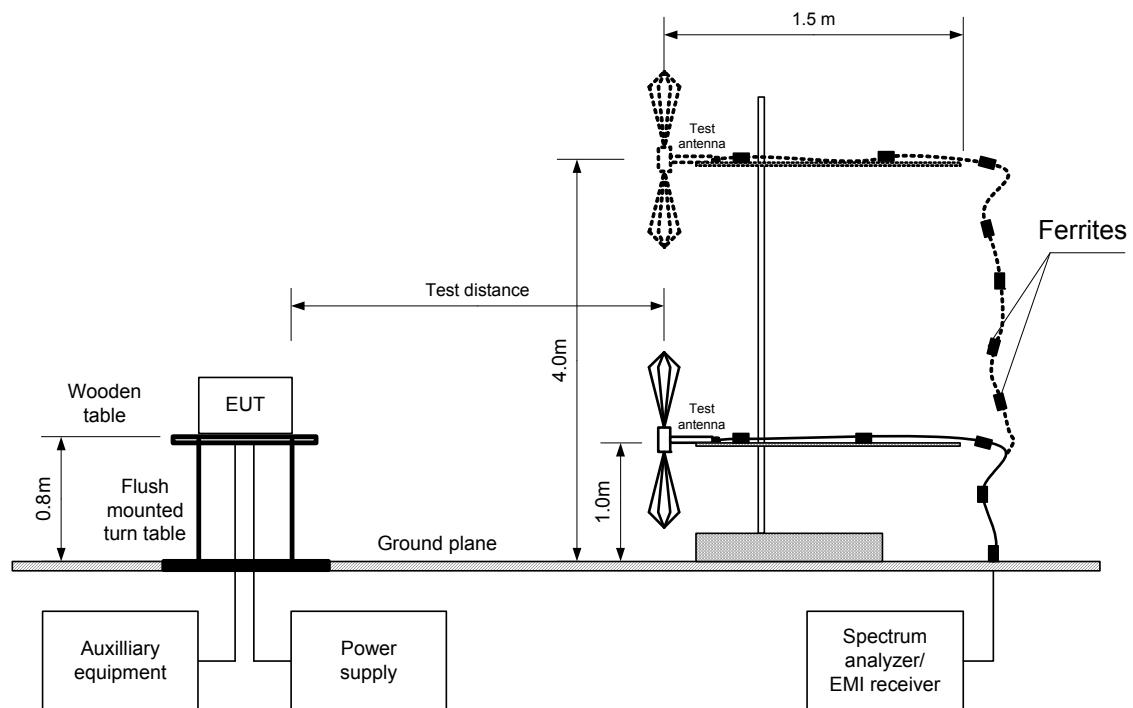



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Table 7.3.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE:	3 m
EUT POSITION:	Typical (Vertical/ Horizontal)
MODULATION:	GFSK
BIT RATE:	160 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 - 4400 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	9.0 kHz (150 kHz – 30 MHz)
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict	
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)		
Fundamental emission 433.26 MHz											
433.180	H	1.0	220	93.59	100.80	-7.21	93.59	53.59	80.80	-27.21	Pass
Spurious emissions											
866.355	H	1.0	60	69.72	80.80	-11.08	69.72	29.72	60.80	-31.08	Pass
4332.563	H	1.0	360	55.15	74.00	-18.85	55.15	15.15	54.00	-38.85	
Fundamental emission 434.52 MHz											
434.438	H	1.0	160	93.17	100.84	-7.67	93.17	53.17	80.84	-27.63	Pass
Spurious emissions											
868.880	H	1.0	80	70.21	80.84	-10.63	70.21	30.21	60.84	-30.63	Pass
4345.188	H	1.0	360	55.56	74.00	-18.44	55.56	15.56	54.00	-38.44	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(µV/m)-Limit, dB(µV/m)

Table 7.3.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Number of pulses during 100 msec	Duration, ms	Period, ms		
1	1	NA	NA	NA	-40

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 0521	HL 0604	HL 1984	HL 2871	HL 4353		
---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Table 7.3.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE:	3 m
EUT POSITION:	Typical (Vertical/ Horizontal)
MODULATION:	GFSK
BIT RATE:	160 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	Active loop (9 kHz – 30 MHz)
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
240.0	34.8	33.2	46.0	-12.8	Vertical	1.0	180	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions				
Test procedure:	ANSI C63.4, Section 13.1.4				
Test mode:	Compliance				Verdict: PASS
Date(s):	17-Apr-14 - 01-May-14				
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %		Power Supply: 24 VDC	
Remarks: UHF1 transmitter					

Table 7.3.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.3.7 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6



HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Plot 7.3.1 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.180 MHz
86.35 dB μ V/m

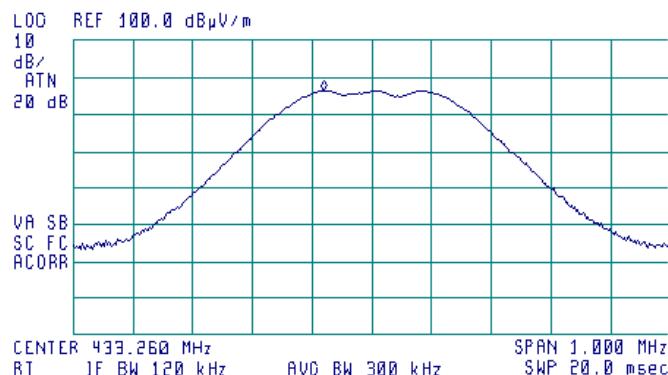


Plot 7.3.2 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.180 MHz
93.59 dB μ V/m

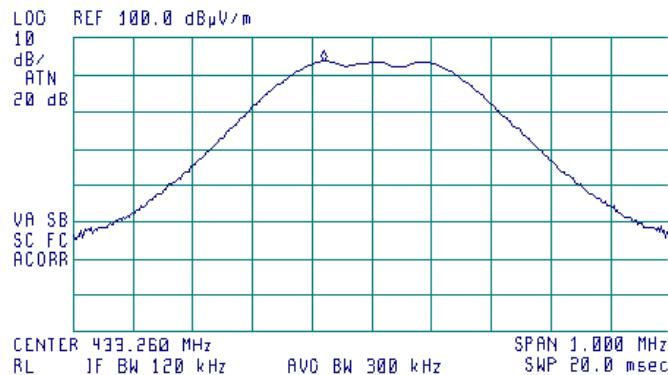



HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Plot 7.3.3 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.180 MHz
88.12 dB μ V/m

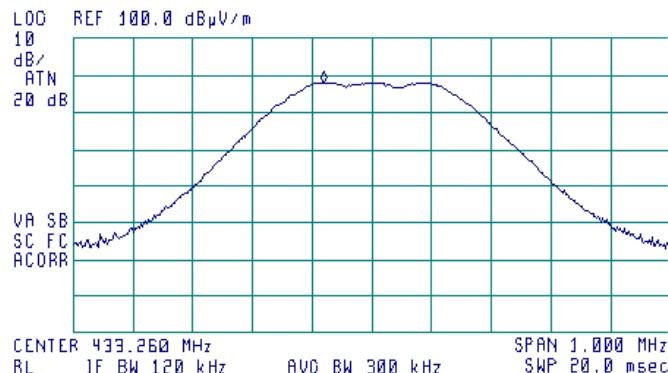


Plot 7.3.4 Radiated emission measurements at the fundamental frequency 433.26 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.180 MHz
90.05 dB μ V/m

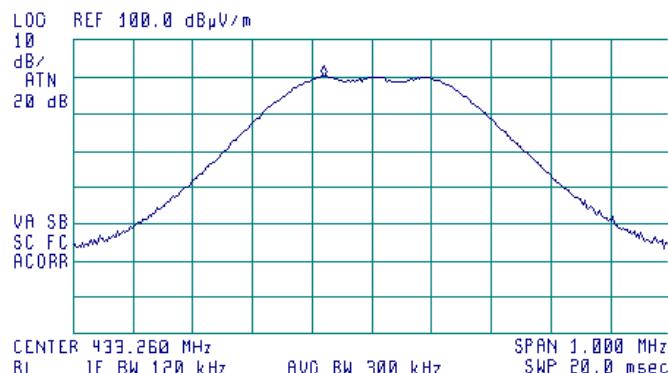



HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Plot 7.3.5 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 434.438 MHz
84.09 dB μ V/m

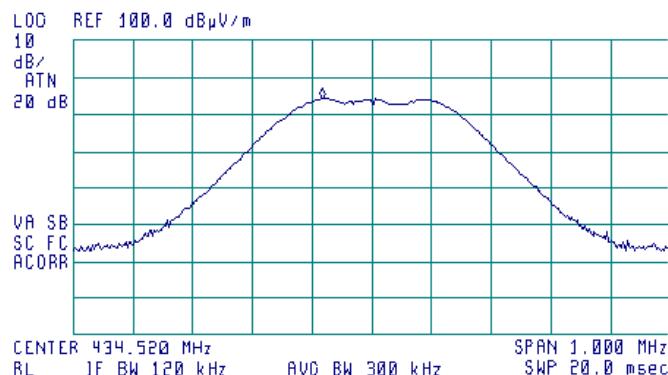


Plot 7.3.6 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 434.438 MHz
93.17 dB μ V/m

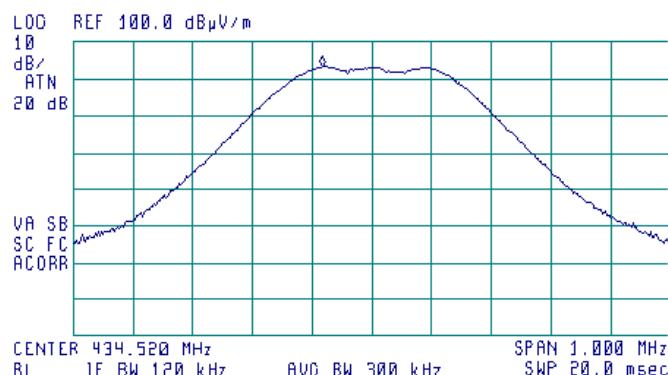



HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Plot 7.3.7 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 434.440 MHz
88.19 dB μ V/m

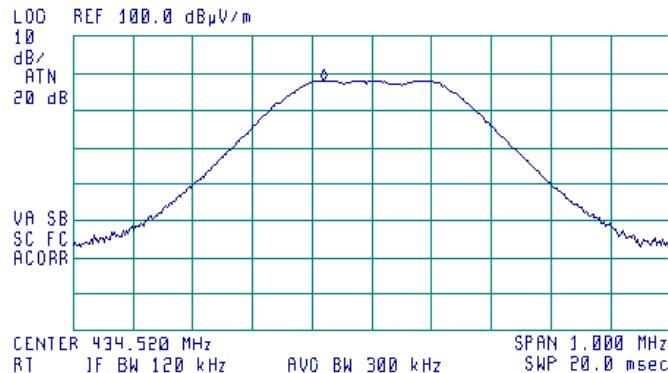


Plot 7.3.8 Radiated emission measurements at the fundamental frequency 434.52 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 434.440 MHz
90.24 dB μ V/m

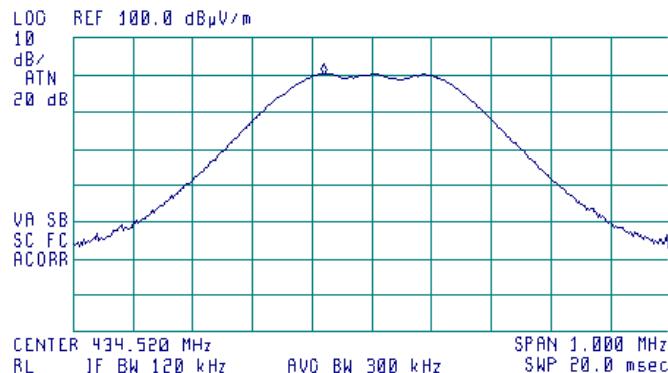



HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Plot 7.3.9 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 10.7 kHz
62.55 dB μ V/m

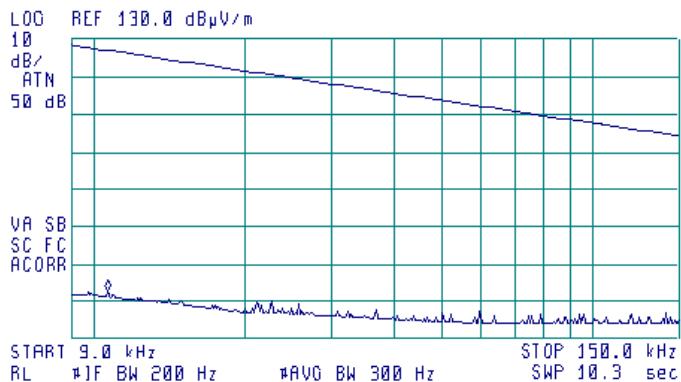


Plot 7.3.10 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 170 kHz
57.93 dB μ V/m

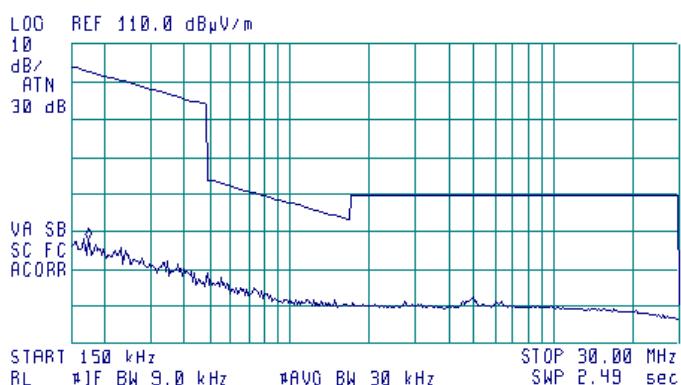




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.11 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Vertical and Horizontal
EUT FREQUENCY: 433.26 MHz

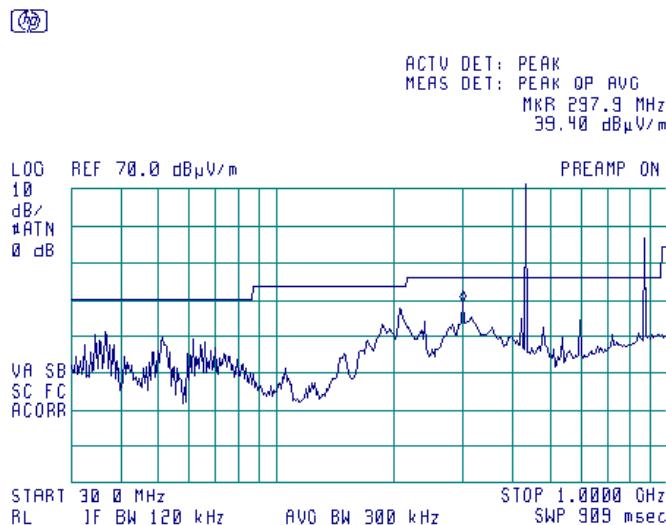

Plot 7.3.12 Radiated emission measurements from 1000 to 4400 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Vertical and Horizontal
EUT FREQUENCY: 433.26 MHz

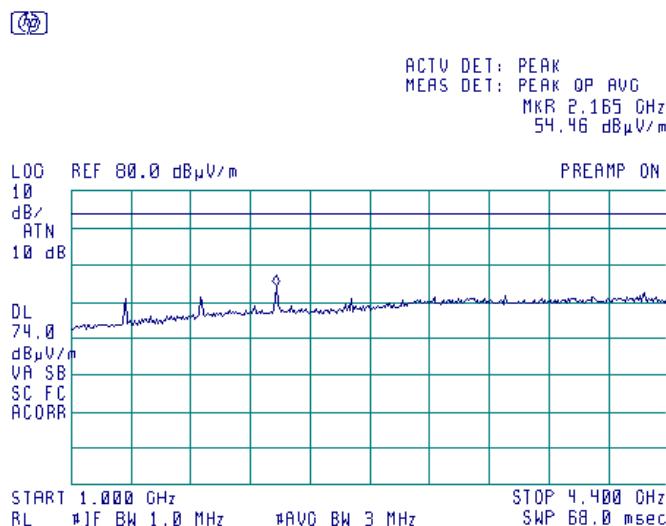




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.13 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Vertical and Horizontal
EUT FREQUENCY: 434.52 MHz

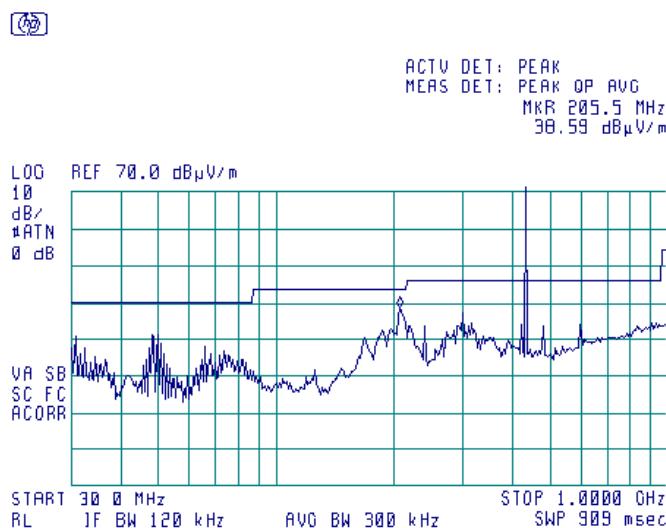

Plot 7.3.14 Radiated emission measurements from 1000 to 4400 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Vertical and Horizontal
EUT FREQUENCY: 434.52 MHz

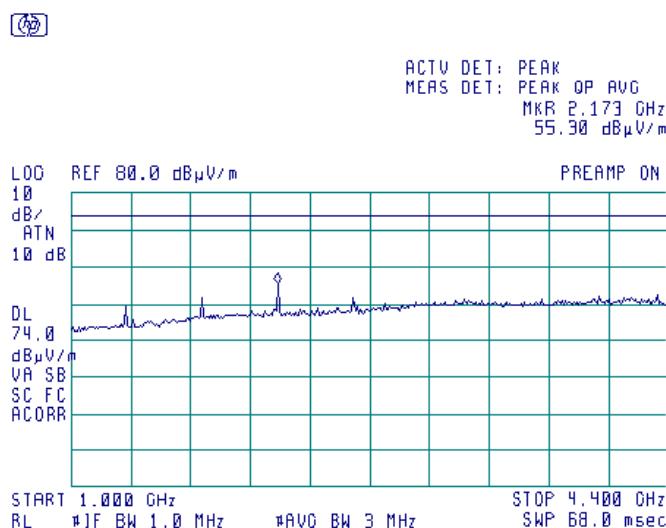




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.15 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Vertical and Horizontal
EUT FREQUENCY: 433.26 MHz

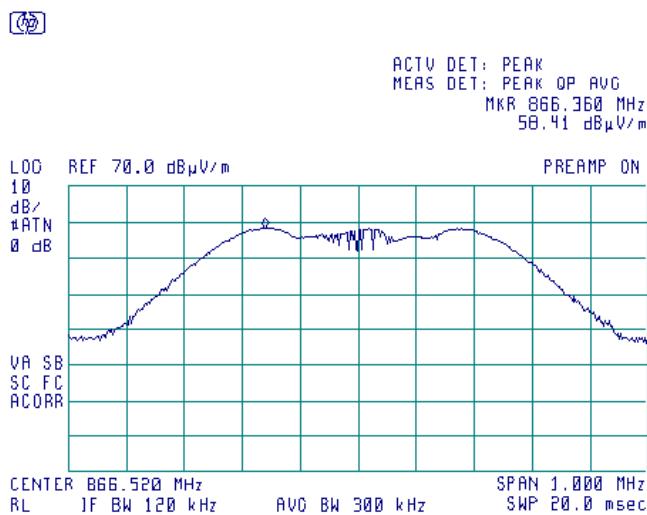

Plot 7.3.16 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Vertical and Horizontal
EUT FREQUENCY: 433.26 MHz

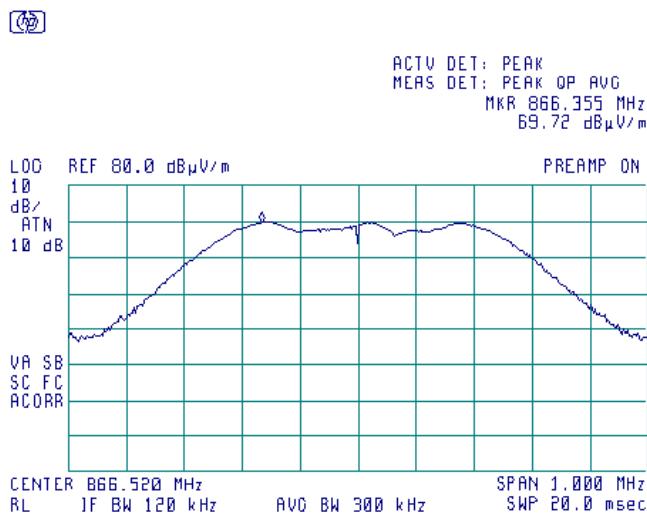




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.17 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Vertical and Horizontal
EUT FREQUENCY: 434.52 MHz

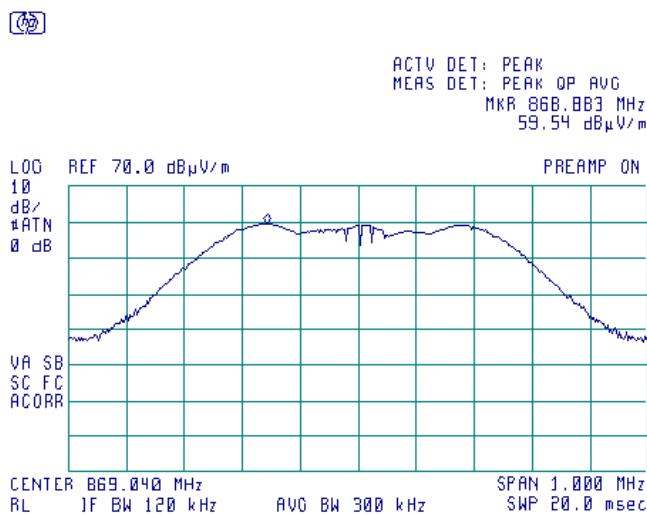

Plot 7.3.18 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Vertical and Horizontal
EUT FREQUENCY: 434.52 MHz

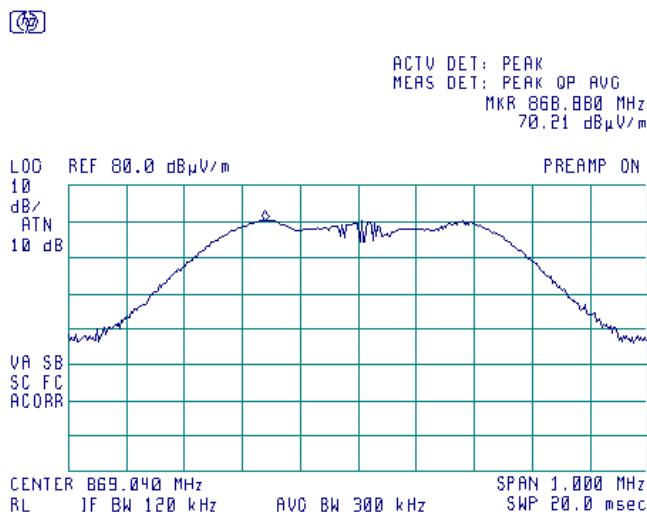




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.19 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
OPERATING FREQUENCY 433.26 MHz

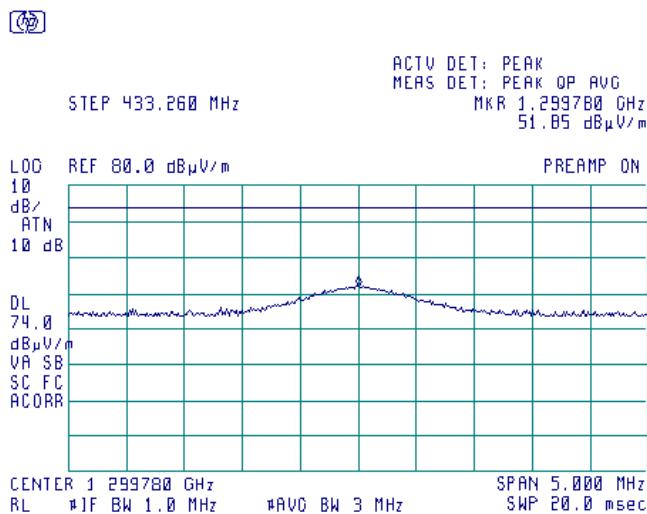

Plot 7.3.20 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
OPERATING FREQUENCY 434.52 MHz

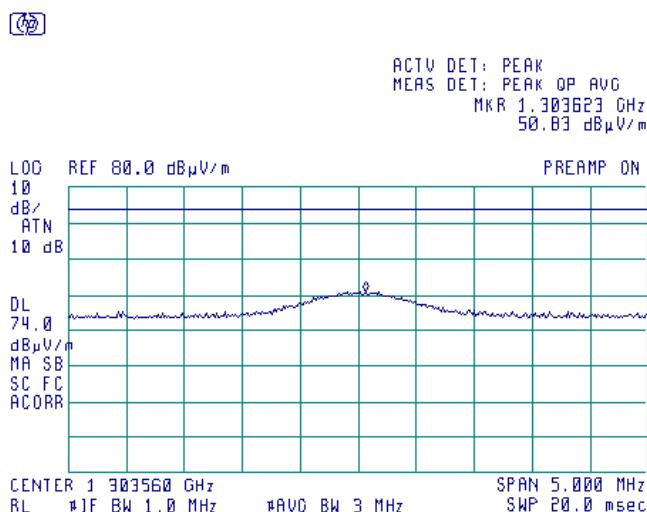




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.21 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical& Horizontal
OPERATING FREQUENCY: 433.26 MHz

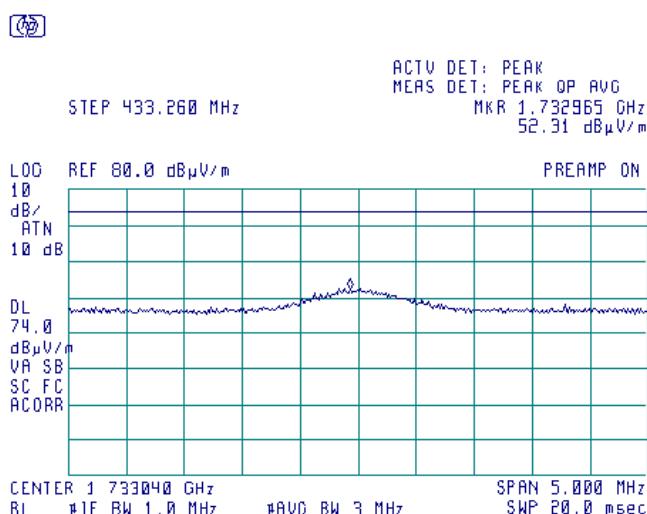

Plot 7.3.22 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical& Horizontal
OPERATING FREQUENCY: 434.52 MHz

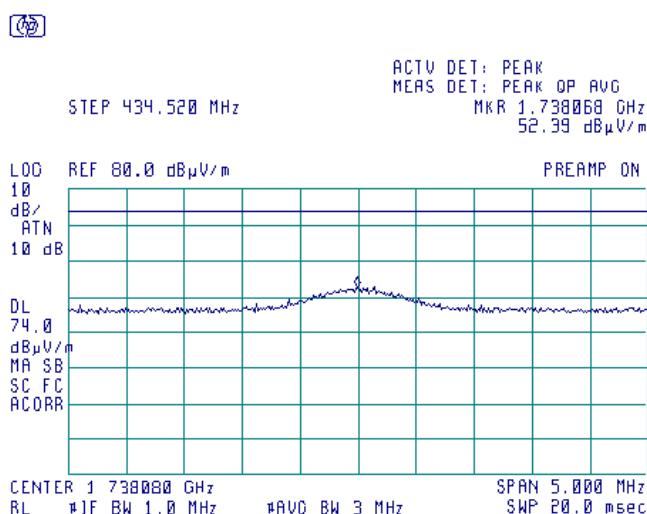




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Plot 7.3.23 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

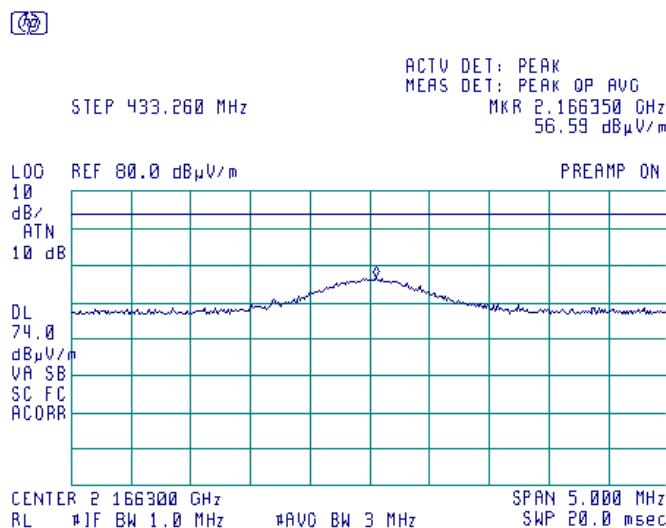**Plot 7.3.24 Radiated emission measurements at the fifth harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

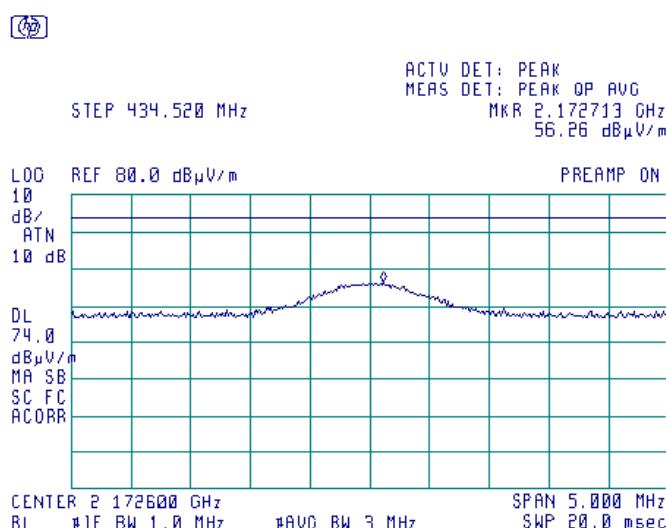




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Plot 7.3.25 Radiated emission measurements at the sixth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

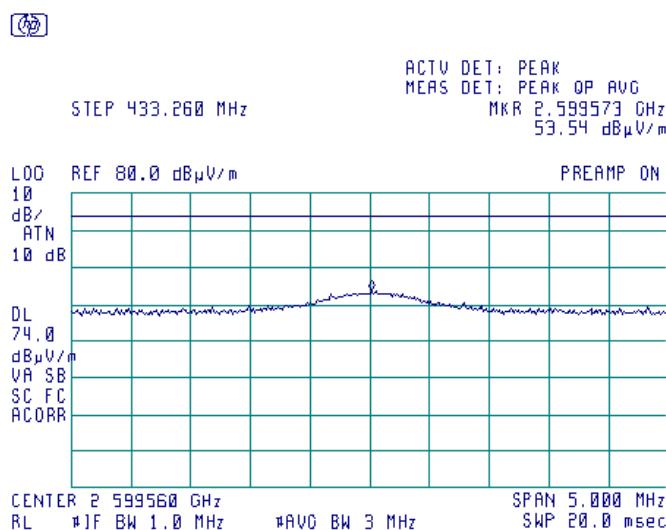**Plot 7.3.26 Radiated emission measurements at the sixth harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

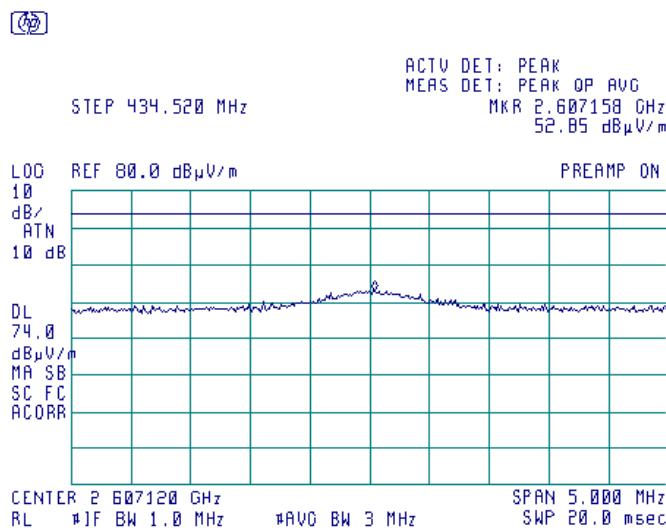




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Plot 7.3.27 Radiated emission measurements at the seventh harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

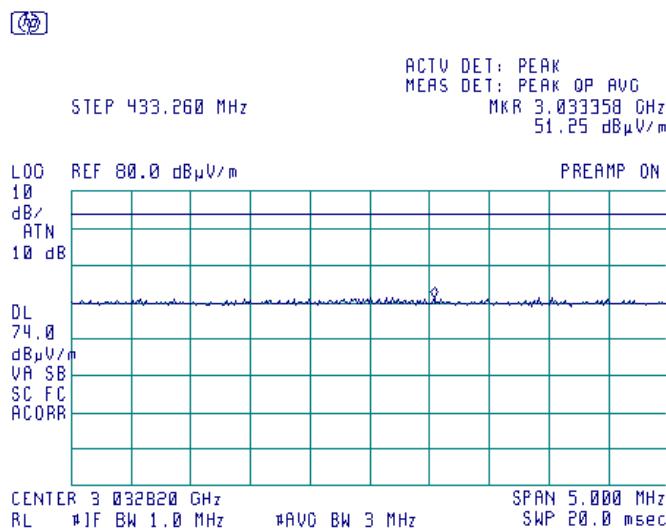**Plot 7.3.28 Radiated emission measurements at the seventh harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

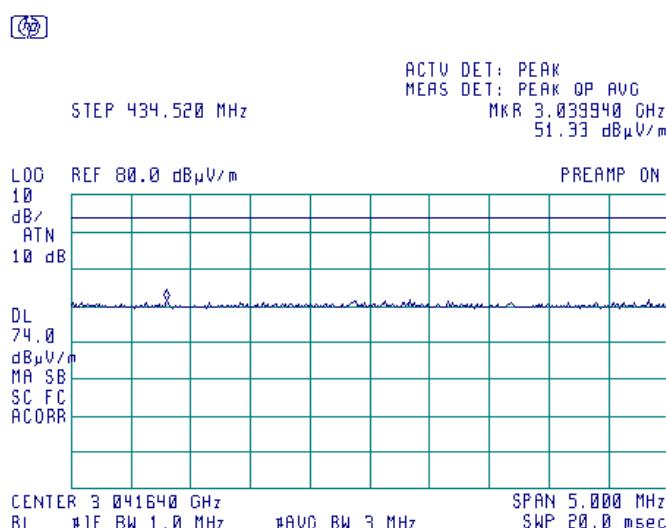




Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.29 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical& Horizontal
OPERATING FREQUENCY: 433.26 MHz

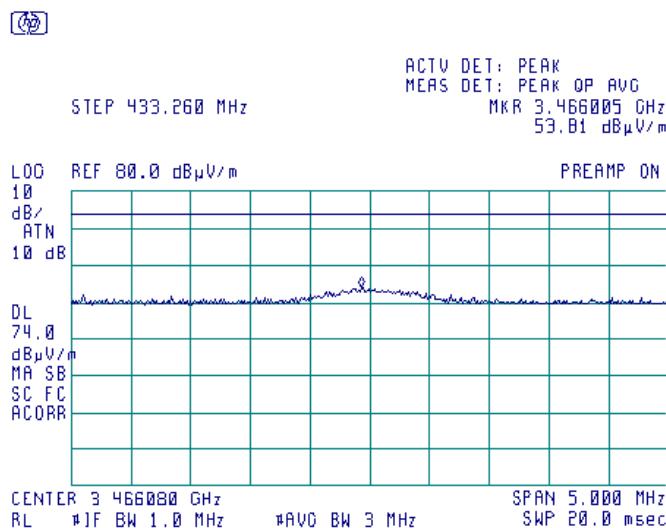

Plot 7.3.30 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical& Horizontal
OPERATING FREQUENCY: 434.52 MHz

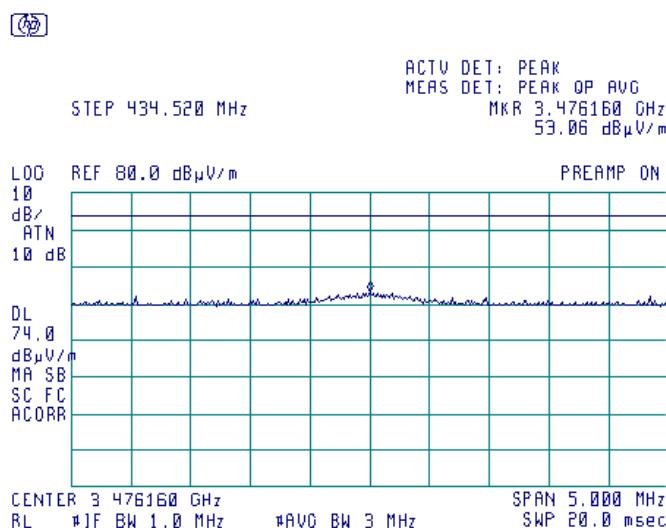




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance		
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.31 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical& Horizontal
OPERATING FREQUENCY: 433.26 MHz

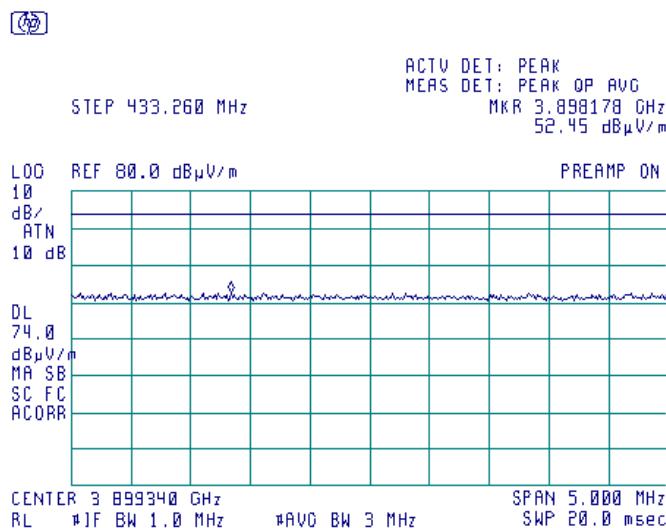

Plot 7.3.32 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical& Horizontal
OPERATING FREQUENCY: 434.52 MHz

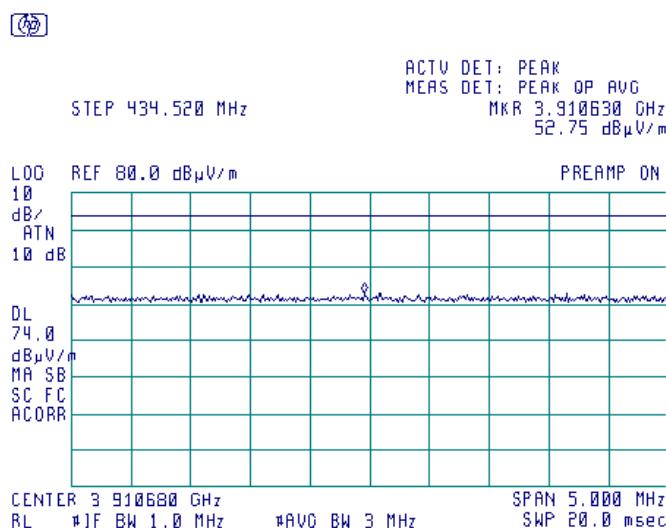



HERMON LABORATORIES


Report ID: LOGRAD_FCC.25494_15.231.docx

Date of Issue: 20-May-14

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			


Plot 7.3.33 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 433.26 MHz

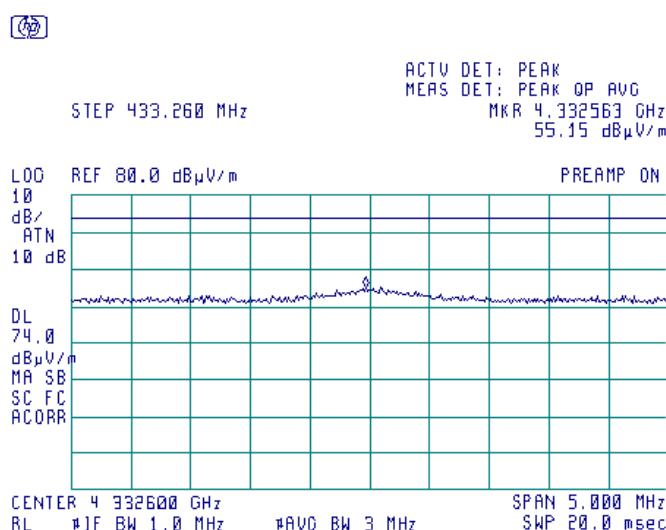

Plot 7.3.34 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical& Horizontal
 OPERATING FREQUENCY: 434.52 MHz

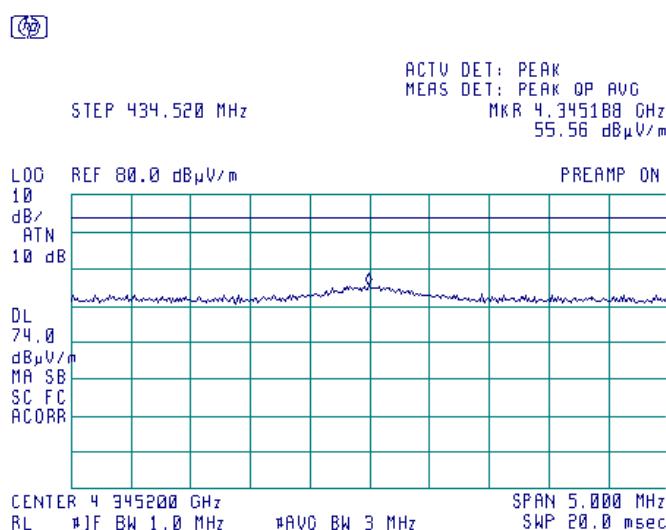





HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Plot 7.3.35 Transmission pulse duration

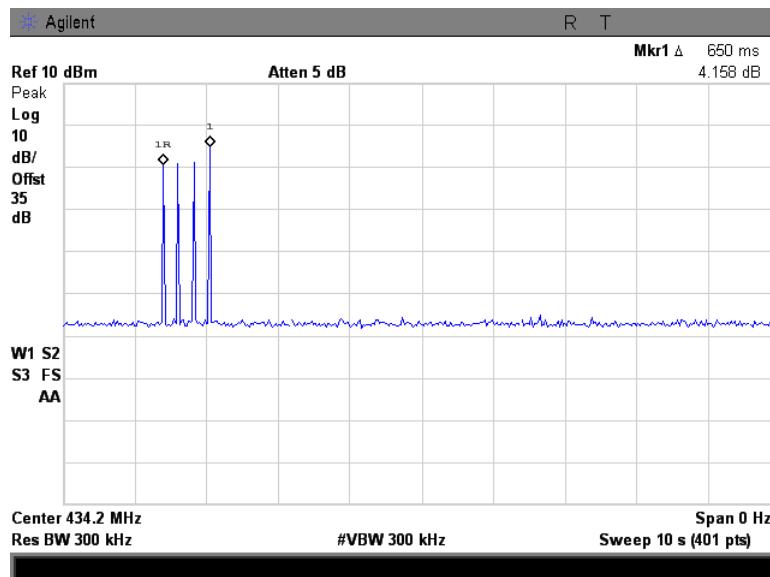

Plot 7.3.36 Transmission pulse duration

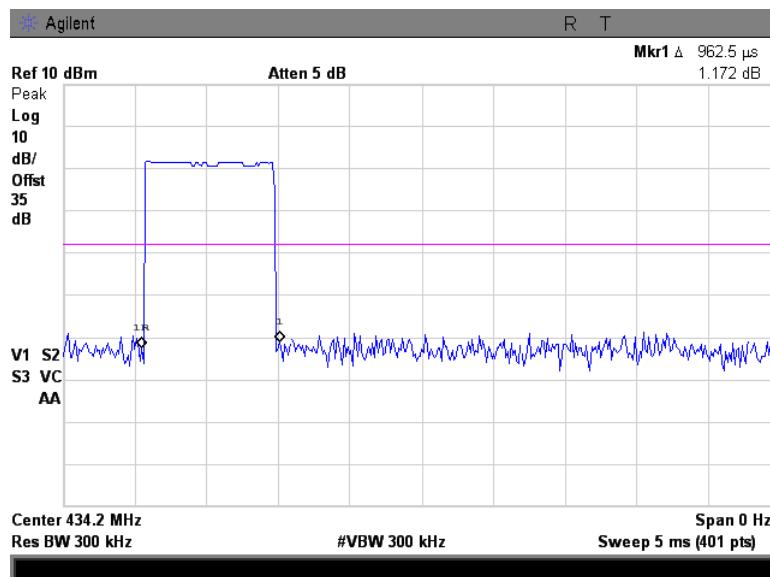




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-14 - 01-May-14		
Temperature: 23.1 °C	Air Pressure: 1015 hPa	Relative Humidity: 53 %	Power Supply: 24 VDC
Remarks: UHF1 transmitter			

Plot 7.3.37 Transmission pulse period

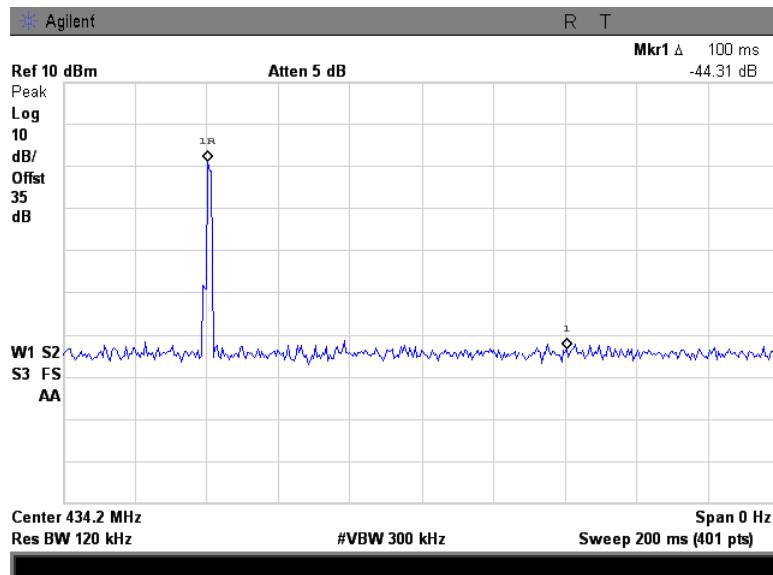



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Apr-14		
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

7.4 Occupied bandwidth test

7.4.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900		0.25
Above 900	20.0	0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The EUT was set to transmit modulated carrier.

7.4.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.4.2 and associated plot.

Figure 7.4.1 Occupied bandwidth test setup





HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.231.docx

Date of Issue: 20-May-14

Test specification:	FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict: PASS	
Date(s):	29-Apr-14		
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

Table 7.4.2 Occupied bandwidth test results, UHF1 transmitter

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 10 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: GFSK
 BIT RATE: 160 kbps

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.26	280.0	0.25	1083.15	-803.15	Pass
434.52	340.0	0.25	1086.30	-746.30	Pass

Table 7.4.3 Occupied bandwidth test results, UHF3 transmitter

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 10 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: GFSK
 BIT RATE: 160 kbps

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.26	305.0	0.25	1083.15	-778.15	Pass
434.52	337.5	0.25	1086.30	-749.30	Pass

Reference numbers of test equipment used

HL 2909							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.







HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.231.docx

Date of Issue: 20-May-14

Test specification:	FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Apr-14		
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

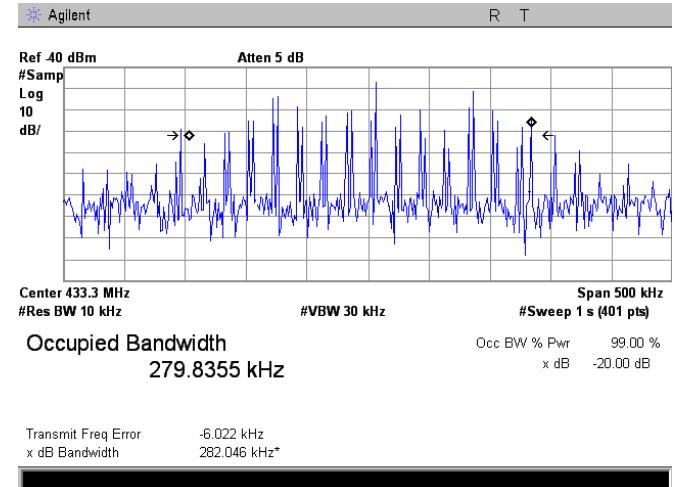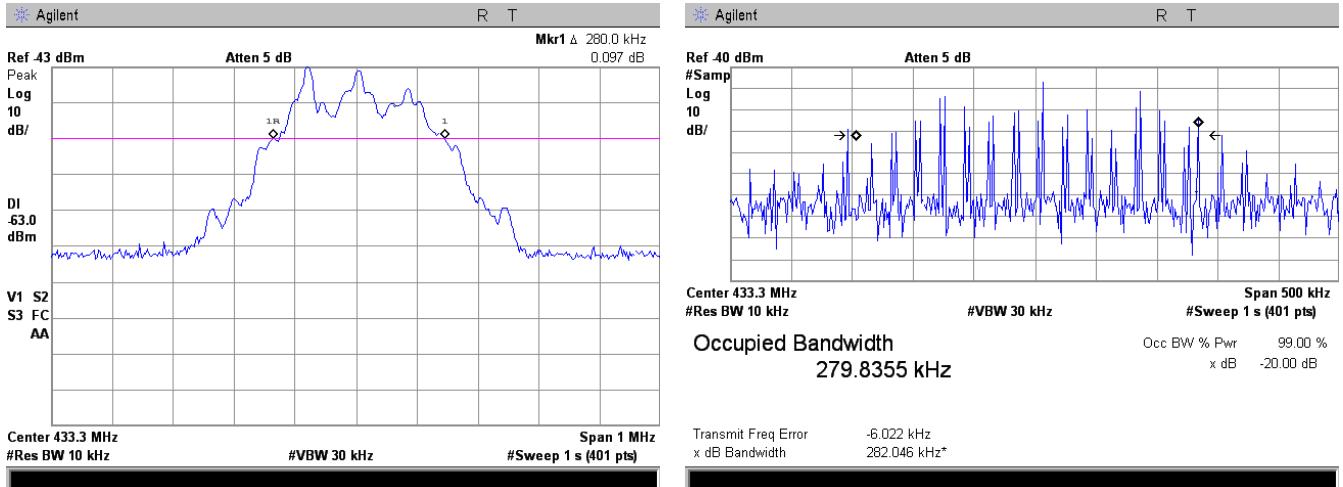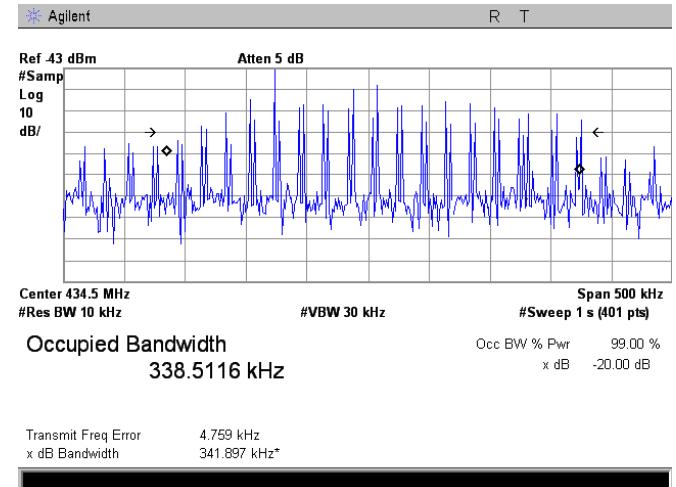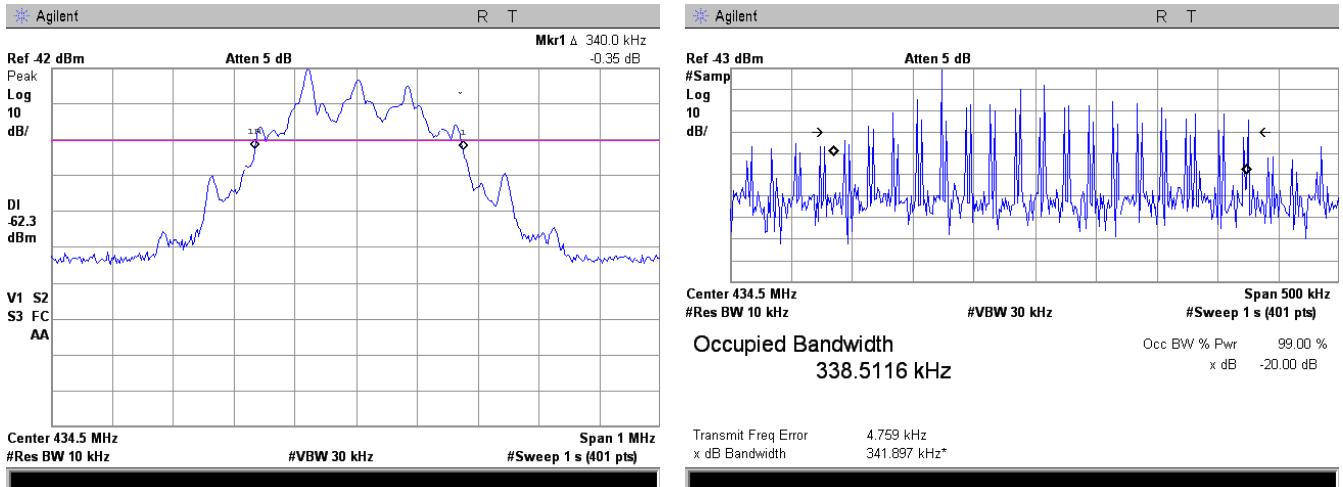Plot 7.4.1 Occupied bandwidth test result at 433.26 MHz, UHF1 transmitter**Plot 7.4.2 Occupied bandwidth test result at 434.52 MHz, UHF1 transmitter**





HERMON LABORATORIES

Report ID: LOGRAD_FCC.25494_15.231.docx

Date of Issue: 20-May-14

Test specification:	FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Apr-14		
Temperature: 24 °C	Air Pressure: 1008 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

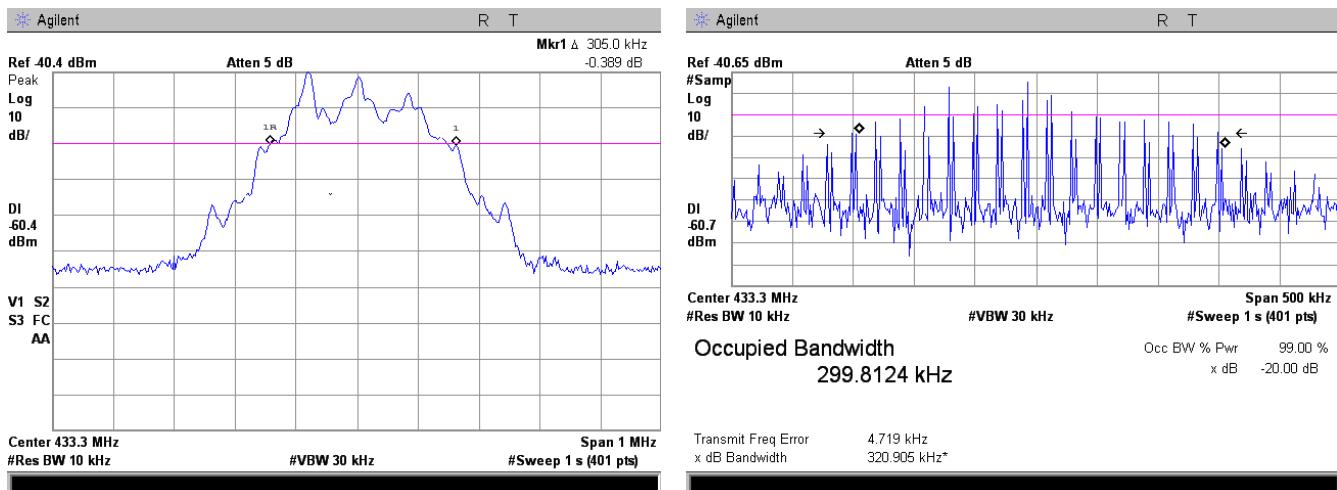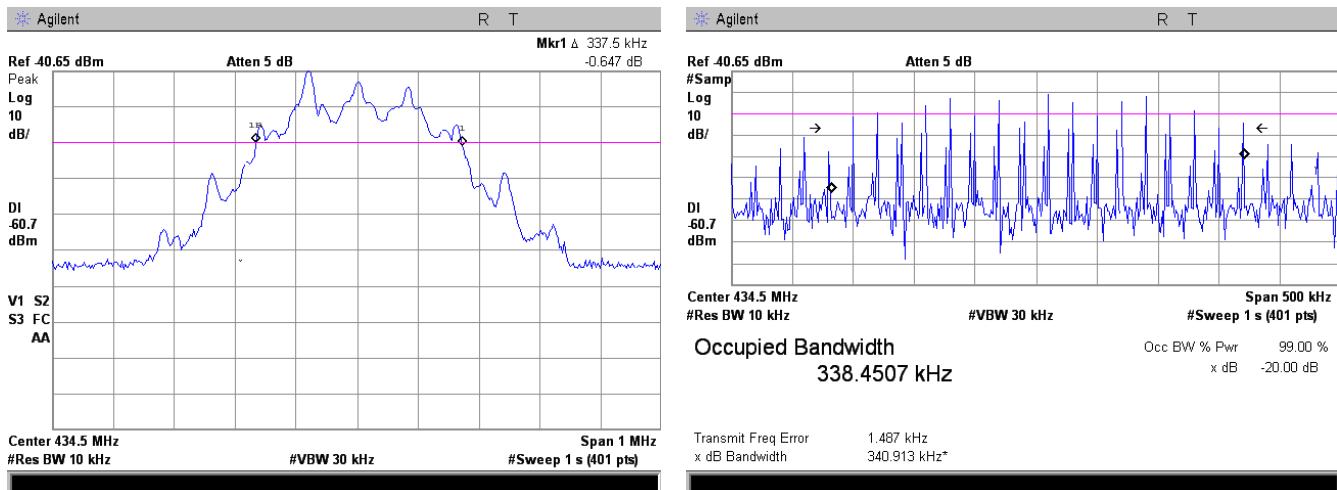Plot 7.4.3 Occupied bandwidth test result at 433.26 MHz, UHF3 transmitter**Plot 7.4.4 Occupied bandwidth test result at 434.52 MHz, UHF3 transmitter**



HERMON LABORATORIES

Test specification:	Section 15.207(a) / RSS-Gen, Section 7.2.4, Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 120 VAC
Remarks:			

7.5 Conducted emissions

7.5.1 General

This test was performed to measure common mode conducted emissions at the EUT power port. The specification test limits are given in Table 7.5.1.

Table 7.5.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(μV)		Class A limit, dB(μV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

* The limit decreases linearly with the logarithm of frequency.

7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and the EUT performance was checked.
- 7.5.2.2 The measurements were performed at the EUT power terminals with the LISN, connected to the EMI receiver in the frequency range referred to in Table 7.5.2. The unused coaxial connector of the LISN was terminated with 50 Ohm.
- 7.5.2.3 The position of the EUT cables was varied to find the highest emission.
- 7.5.2.4 The worst test results with respect to the limits were recorded in Table 7.5.2 and shown in the associated plots.

Figure 7.5.1 Setup for conducted emission measurements, table-top EUT

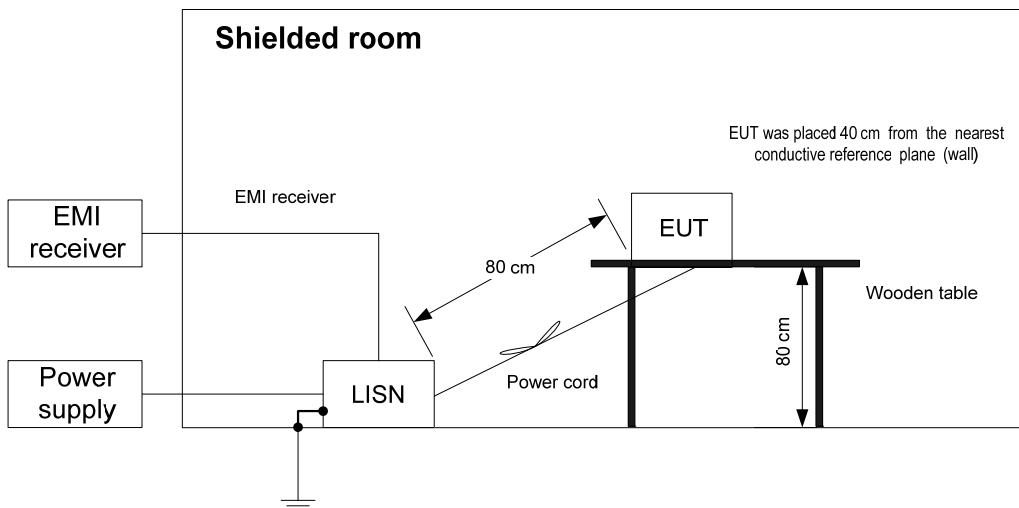



HERMON LABORATORIES

Test specification:	Section 15.207(a) / RSS-Gen, Section 7.2.4, Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict: PASS	
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 120 VAC
Remarks:			

Table 7.5.2 Conducted emission test results

LINE: AC mains
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.194963	41.76	38.48	63.85	-25.37	27.94	53.85	-25.91	L1	Pass
0.352538	44.21	41.96	58.96	-17.00	25.70	48.96	-23.26		
0.423950	49.38	46.32	57.42	-11.10	29.03	47.42	-18.39		
0.444825	45.06	42.06	57.03	-14.97	24.27	47.03	-22.76		
0.508600	44.08	41.59	56.00	-14.41	24.45	46.00	-21.55		
0.989000	45.52	42.60	56.00	-13.40	27.47	46.00	-18.53		
0.354010	46.51	43.81	58.93	-15.12	25.45	48.93	-23.48		
0.415030	50.70	47.59	57.59	-10.00	33.47	47.59	-14.12		
0.444875	45.90	43.07	57.03	-13.96	24.26	47.03	-22.77		
0.759580	45.66	38.90	56.00	-17.10	25.59	46.00	-20.41		
0.919675	46.47	41.97	56.00	-14.03	25.43	46.00	-20.57		
1.074950	45.22	40.67	56.00	-15.33	31.70	46.00	-14.30		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 0787	HL 1425	HL 1513	HL 3612			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	Section 15.207(a) / RSS-Gen, Section 7.2.4, Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 120 VAC
Remarks:			


Plot 7.5.1 Conducted emission measurements

LINE:
LIMIT:
DETECTOR:

L1
QUASI-PEAK, AVERAGE
PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 420 kHz
47.67 dB μ V/m

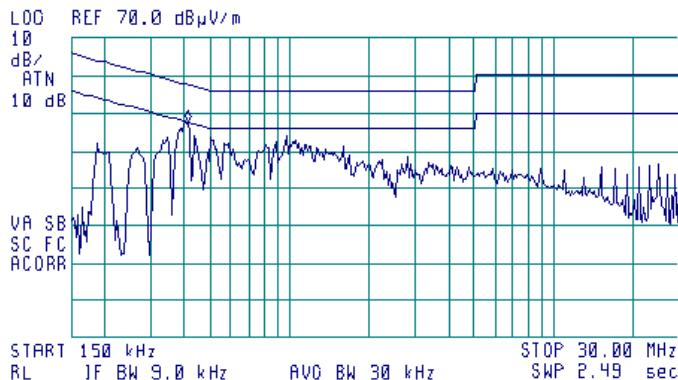


Plot 7.5.2 Conducted emission measurements

LINE:
LIMIT:
DETECTOR:

L2
QUASI-PEAK, AVERAGE
PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 410 kHz
48.53 dB μ V/m

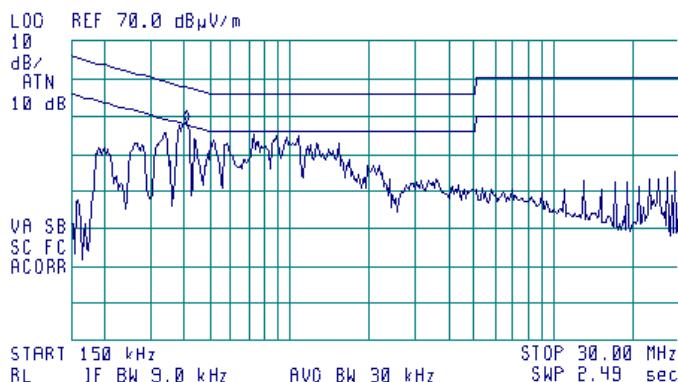



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 203 / RSS-Gen, Section 7.1.2, Antenna requirements		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	30-Apr-14		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 41 %	Power Supply: 24 VDC
Remarks:			

7.6 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	NA	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	Supplier declaration provided in the User manual exhibit	

Photograph 7.6.1 Antenna assembly

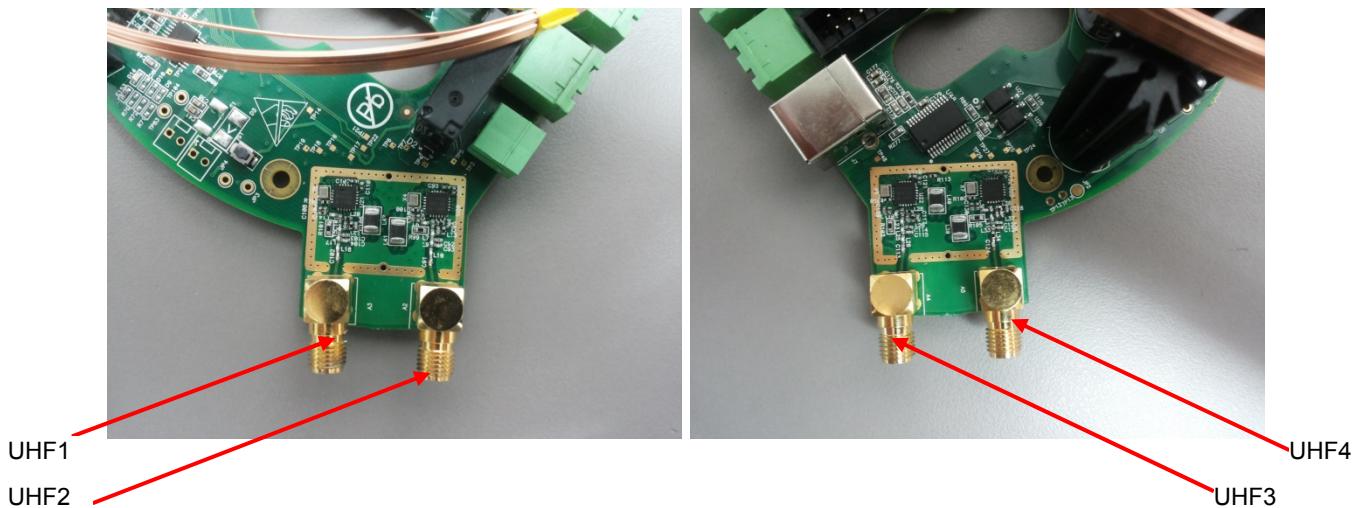



HERMON LABORATORIES

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	21-Jan-14	21-Jan-15
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 - 1	066	23-Oct-13	23-Oct-14
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	28-Oct-13	28-Oct-14
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	04-Jun-13	04-Jun-14
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	13-Oct-13	13-Oct-14
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	25-Oct-13	25-Dec-14
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	05-Nov-13	05-Nov-14
1791	Laboratory DC Power Supply, Dual Tracking Output	RACOM	PS-404	8800692	13-Oct-13	13-Oct-14
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	03-Jan-14	03-Jan-15
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	04-Dec-13	04-Dec-14
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	23-Dec-13	23-Dec-14
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	3612	05-Dec-13	05-Dec-14
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	16-Mar-14	16-Mar-15



HERMON LABORATORIES

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2013	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment
ICES-003 issue 5:2012	Information Technology Equipment (ITE) – Limits and methods of measurement



HERMON LABORATORIES

12 APPENDIX E Test equipment correction factors

Correction factor
Line impedance stabilization network
Model LISN 16 - 1
Hermon Laboratories, HL 0447

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.



HERMON LABORATORIES

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

Cable loss
**Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55



HERMON LABORATORIES

Cable loss
Cable coaxial, RG-214/U, N type-N type, 17 m
Teldor, HL 3612

Frequency, MHz	Cable loss, dB
0.1	0.05
0.5	0.07
1	0.10
3	0.22
5	0.29
10	0.39
30	0.68
50	0.90
100	1.27
150	1.58
200	1.80
250	2.12
300	2.36
350	2.60
400	2.82
450	2.99
500	3.23
550	3.40
600	3.56
650	3.71
700	3.90
750	4.04
800	4.23
850	4.39
900	4.55
950	4.65
1000	4.79



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



HERMON LABORATORIES

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF TEST REPORT

14 APPENDIX G Manufacturer's declaration of identity



Declaration of Identity

We, the undersigned,

Company: LOGITAG SYSTEMS

Address: Hamelach 2 Ntanya

Country: Israel

Telephone number: 972-9-8354848

Fax number: 972-9-8656262

Declare under our sole responsibility that the following equipment:

Brand/Item	Type/Model	Short Product description
One Channel Exciter	LTG2-04	Exciter and transceiver console for active RFID transponders

is electronically/electrically/mechanically identical to the following equipment (including Software/Hardware version(s)):

Brand/Item	Type/Model	Short Product description
Single Location Unit	LTG2-04-PRF	Exciter and transceiver console for active RFID transponders

The reason for name change is: **different design of Led lexan**

...28/05/2014.....

(date)

Headoffice | LogiTag Systems Ltd.

2 Hamelacha St. Poleg Industrial Zone. P.O. Box 8249, Netanya 42504, Israel
+ 972 9 835 4848 | + 972 9 865 6262 | info@logi-tag.com

www.logi-tag.com



... Golan Kormian.....

(signature)

(printed name)

Logitag systems.....

... Engineering manager.....

(company stamp)

(position)

Headoffice | LogiTag Systems Ltd.

2 Hamelacha St. Poleg Industrial Zone. P.O. Box 8249, Netanya 42504, Israel
+ 972 9 835 4848 | + 972 9 865 6262 | info@logi-tag.com

www.logi-tag.com

END OF DOCUMENT