

## User's Manual

TPMS-C is the transmitter module in the TPMS system.

1、 Appearance as below, the user can install the corresponding matching valve in the tire on the rim.




## 2、 Testing Methods

Testing Tools: Wakeup Handle

Testing Steps:

- a)、 Direct the front of the wakeup handle at the transmitter module
- b)、 Turn on the power of the wakeup handle




Arrow Pointing 1.Read Sensor→Press ENTER, then step into the

submenu



Through Pgdown, Arrow Pointing 2.RF On-Off→Then Press  
ENTER

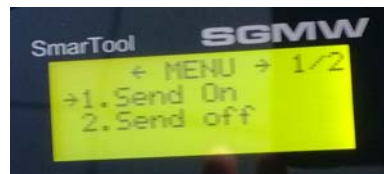

Step into power ON/OFF MENU of the transmitter, then to power  
on/off the transmitter through the following two options to enter into  
the working model or exit:

1. Send On
2. Send Off

c)、when select 1.Send on, press ENTER, then shows ID number  
on the screen of the handle, which means that the transmitter is in  
the state of continuous sending(picture as below ) , send cycle is 3  
frames per 15second .



d)、 when testing finished, select 2.Send off, press ENTER, then shows ID number on the screen of the handle, which means that the transmitter is in dormant state, no data is transmitted then.

Note: the transmitter shall be in the Sendoff model after the testing for each sample.

#### FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate this equipment.

For the Canadian market, please make sure the following regulatory text is placed in the user documentation before marketing the device in Canada:

## CANADA

### Industry Canada Statement:

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following

two conditions: 1) this device may not cause interference and 2) this device must accept any interference, including interference that may cause undesired operation of the device.

IC Radiation Exposure Statement: This equipment complies with IC radiation exposure limits set forth

for an uncontrolled environment.

### Avis d'Industrie Canada:

Cet appareil est conforme à la norme CNR-210 des règlements d'Industrie Canada. Son fonctionnement est sujet aux deux conditions suivantes:

1) Cet appareil ne doit pas provoquer d'interférences et 2) Cet appareil doit accepter toutes les interférences, y compris celles pouvant entraîner son dysfonctionnement.

Avis d'Industrie Canada sur l'exposition aux Rayonnements: Cet appareil est conforme aux limites

d'exposition aux rayonnements d'Industrie Canada pour un environnement non contrôlé.