



3DH5 Number of Hopping Channels – Right Earbud


2402 ~ 2421MHz

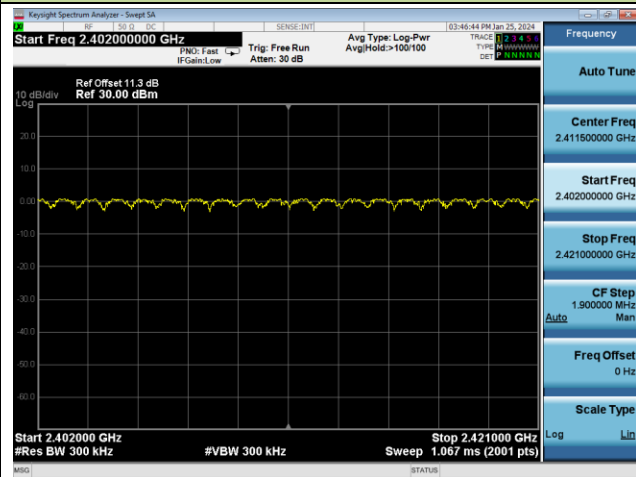


2422 ~ 2441MHz

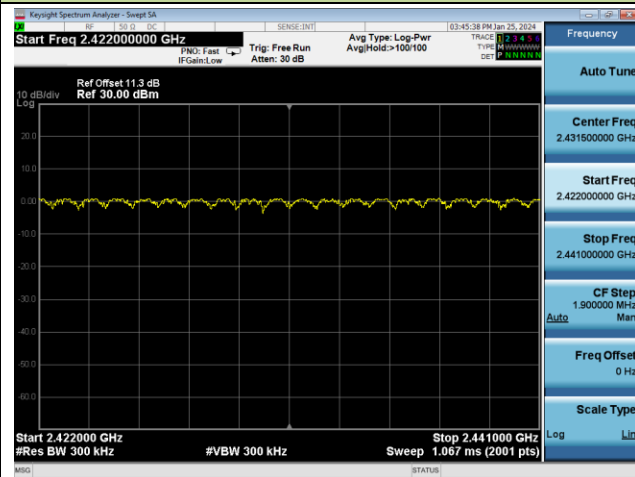

2442 ~ 2461MHz

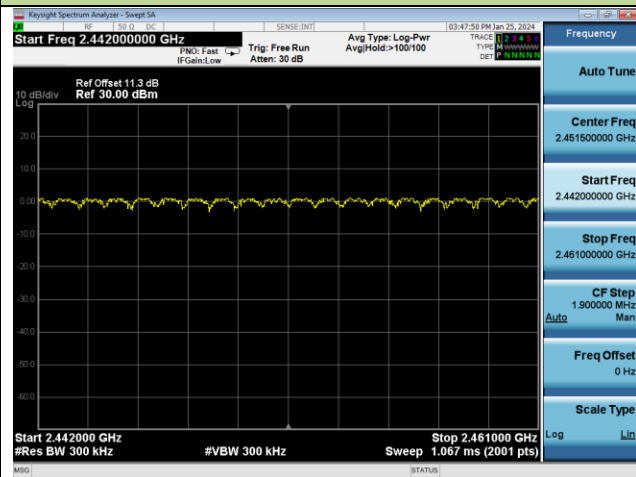

2462 ~ 2480MHz

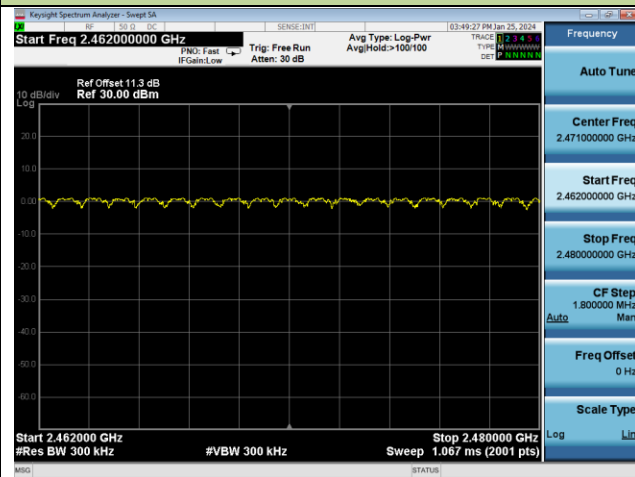

A.6 Time of Occupancy Test Result

Test Site	NS-TR2	Test Engineer	Summer Tang
Test Date	2024-01-25 ~ 2024-01-29		


Test Mode	Channel No.	Frequency (MHz)	Transmit Time Per Hop (ms)	Observation Period (s)	Number of Hops in Sweep Time	Number of Hops in Observation Period	Time of Occupancy (ms)	Limit (ms)	Result
Left Earbud									
3DH1	00~78	2402~2480	0.380	31.6	60	316	120.080	≤ 400	Pass
3DH3	00~78	2402~2480	1.639	31.6	30	158	258.962	≤ 400	Pass
3DH5	00~78	2402~2480	2.858	31.6	23	121	345.818	≤ 400	Pass
Right Earbud									
3DH1	00~78	2402~2480	0.3825	31.6	60	316	120.870	≤ 400	Pass
3DH3	00~78	2402~2480	1.629	31.6	32	168	273.672	≤ 400	Pass
3DH5	00~78	2402~2480	2.875	31.6	19	100	287.500	≤ 400	Pass

Notes:


- Number of Hops in Observation Period = Number of Hops in Sweep Time * (Observation Period / Sweep Time), Sweep Time = 6.002s.
- Time of Occupancy (ms) = Number of Hops in Sweep Time (ms) * Number of Hops in Observation Period

Transmit Time Per Hop – Left Earbud


3DH1

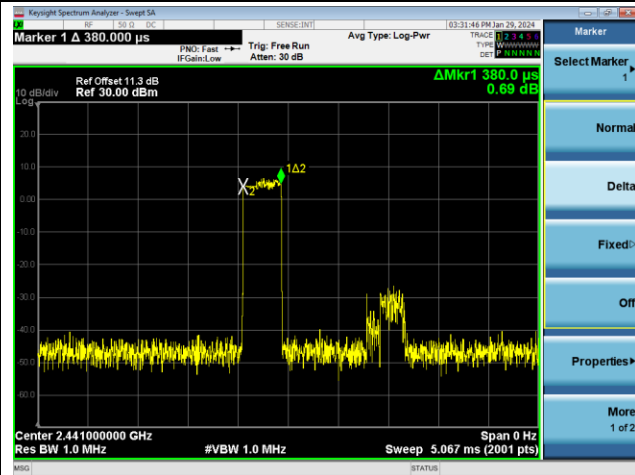

3DH3

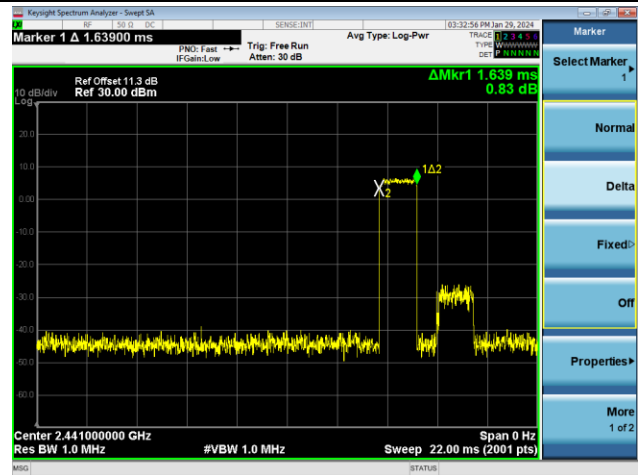


3DH5

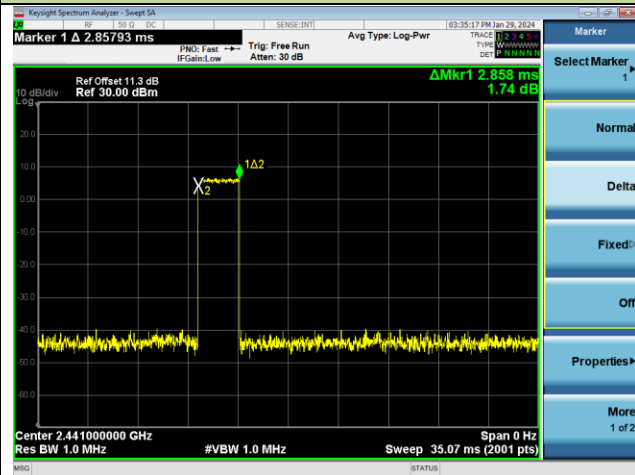


Number of Hops in Sweep Time – Left Earbud


3DH1

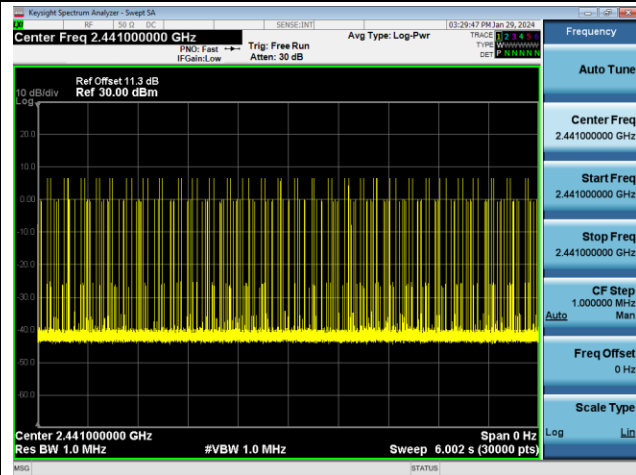

3DH3

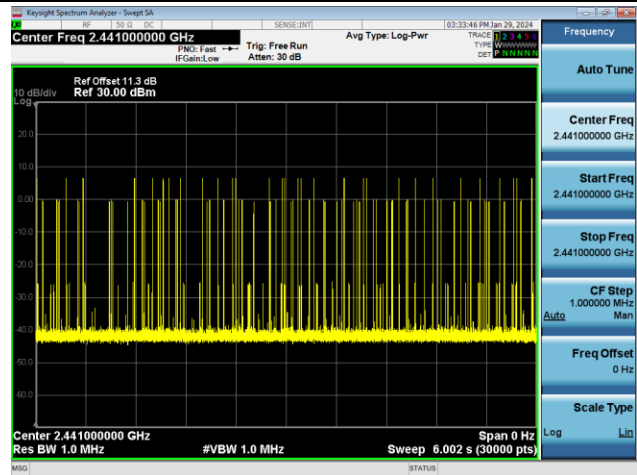


3DH5

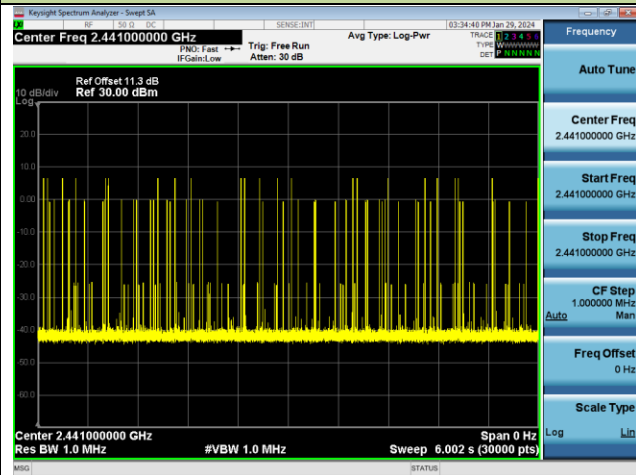


Transmit Time Per Hop – Right Earbud


3DH1

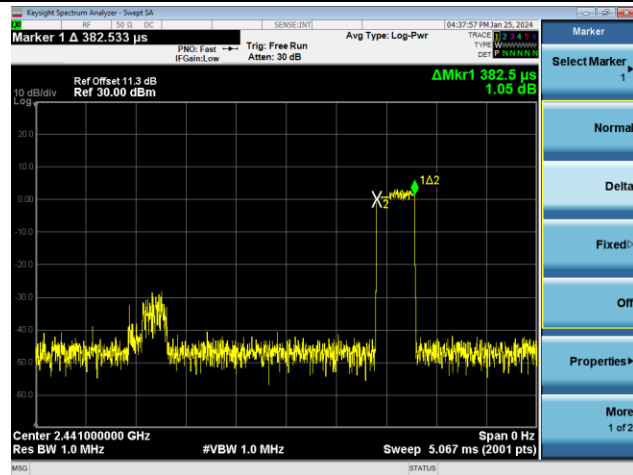

3DH3

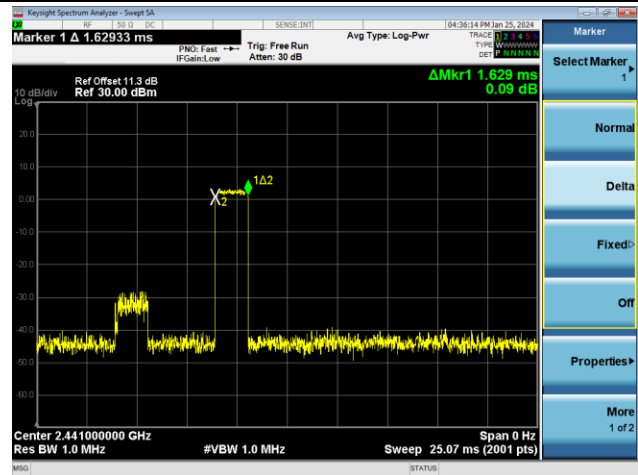


3DH5

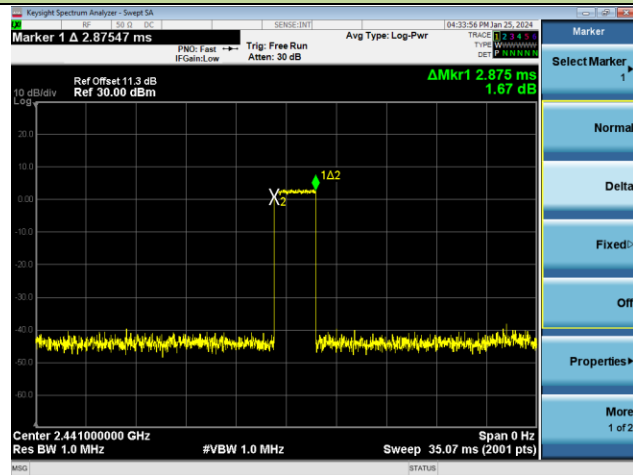

Number of Hops in Sweep Time – Right Earbud


3DH1

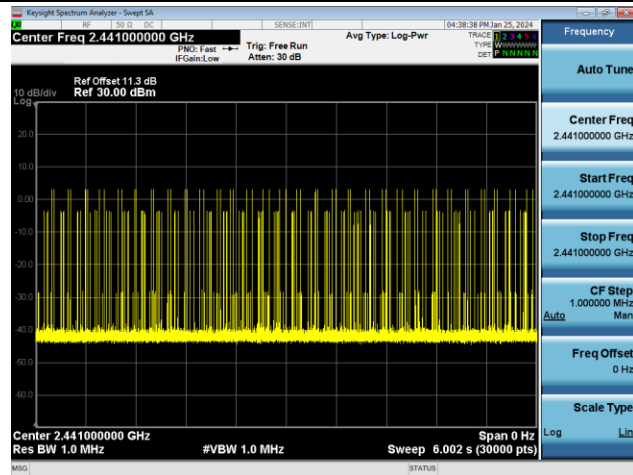

3DH3



3DH5

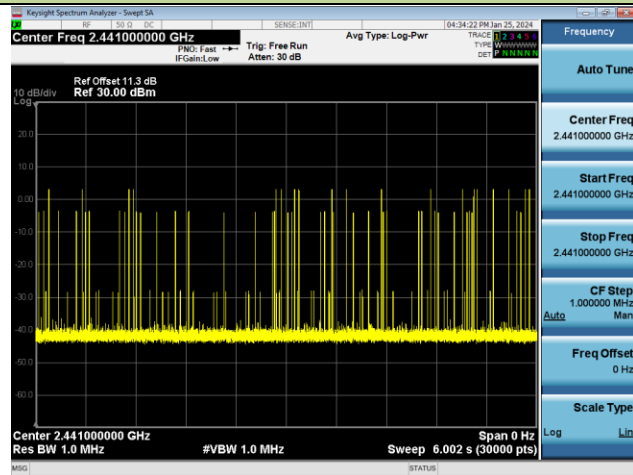


A.7 Band-edge Compliance Test Result

Test Site	NS-TR2	Test Engineer	Summer Tang
Test Date	2024-01-25 ~ 2024-02-07		


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
Left Earbud				
DH5	00	2402	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	78	2480	20dBc	Pass
Right Earbud				
DH5	00	2402	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	78	2480	20dBc	Pass

Band-edge Compliance – Left Earbud


DH5 - Channel 00 (2402MHz)

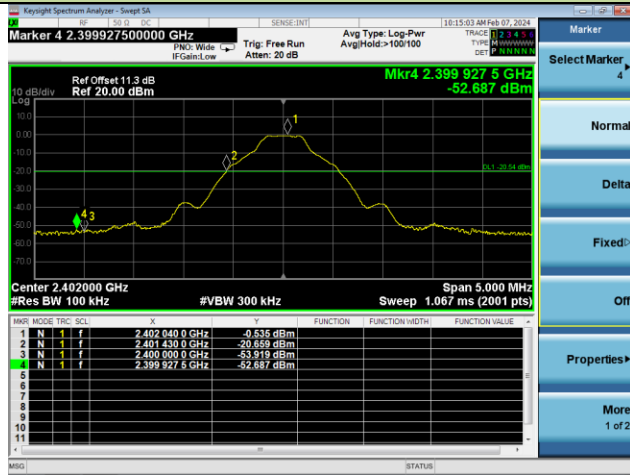


DH5 - Channel 78 (2480MHz)

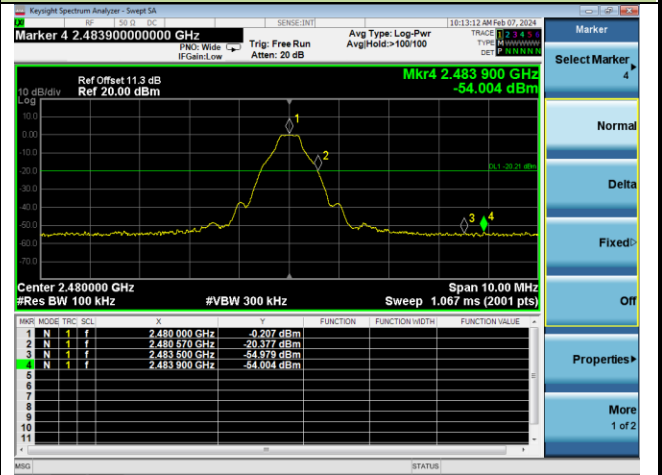


2DH5 - Channel 00 (2402MHz)

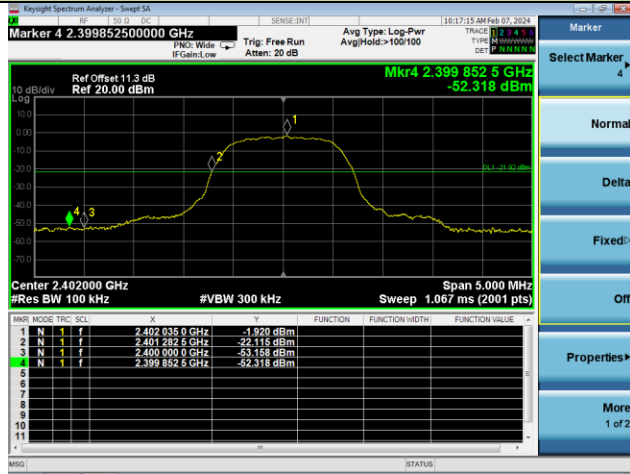


2DH5 - Channel 78 (2480MHz)

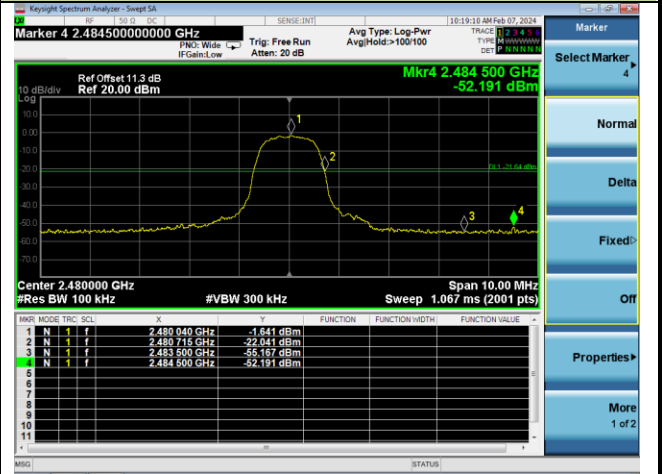

3DH5 - Channel 00 (2402MHz)

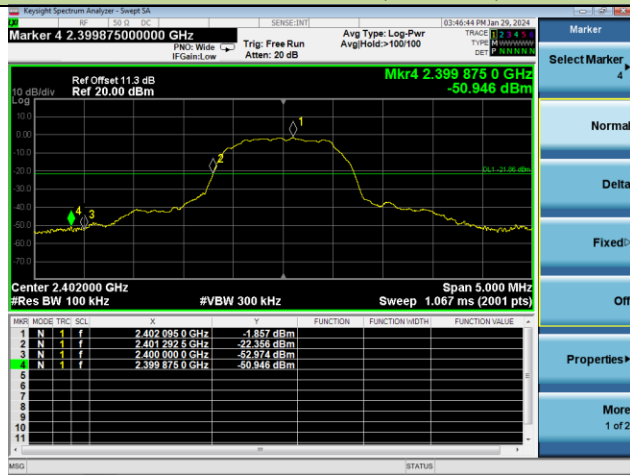


3DH5 - Channel 78 (2480MHz)

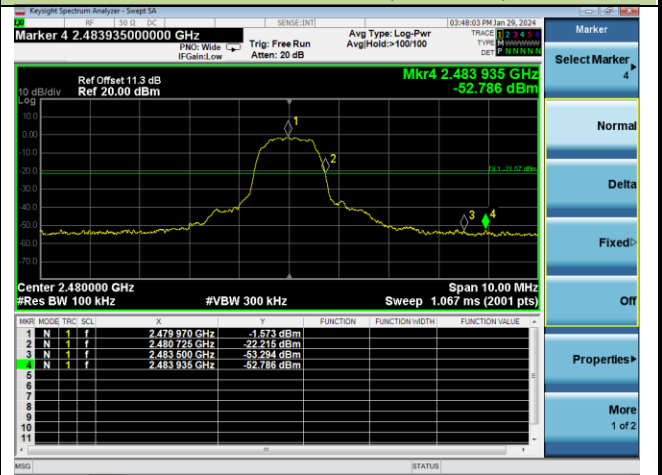


Operation Frequency Range of 20dB Bandwidth within Hopping Mode – Left Earbud


DH5 - Channel 00 (2402MHz)

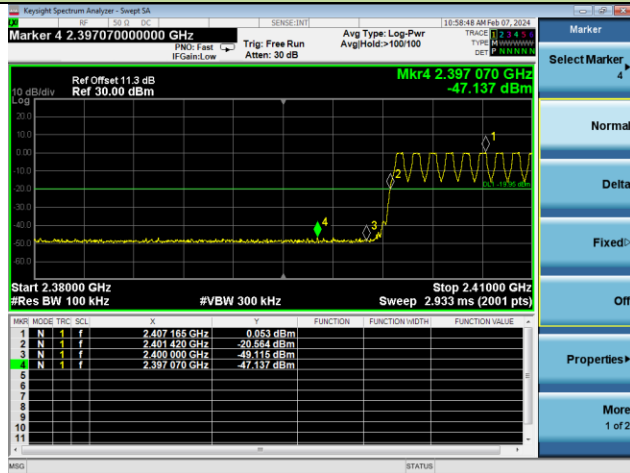


DH5 - Channel 78 (2480MHz)

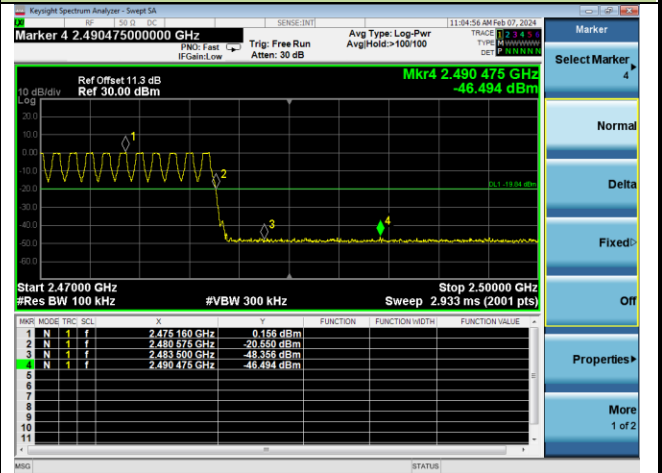


2DH5 - Channel 00 (2402MHz)

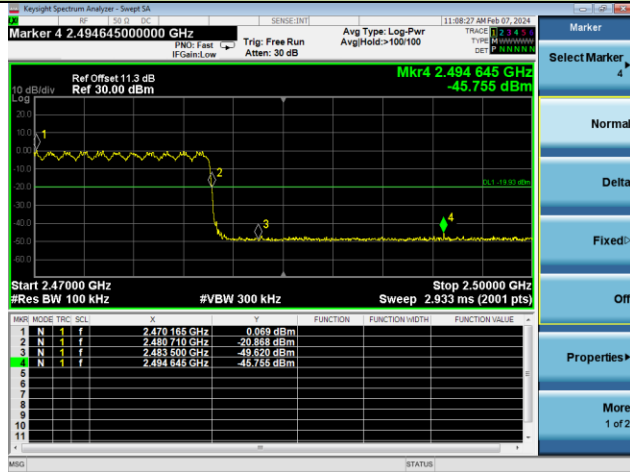


2DH5 - Channel 78 (2480MHz)

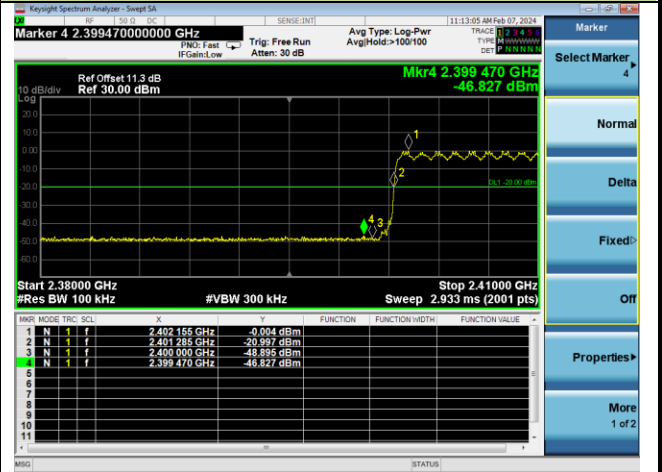

3DH5 - Channel 00 (2402MHz)

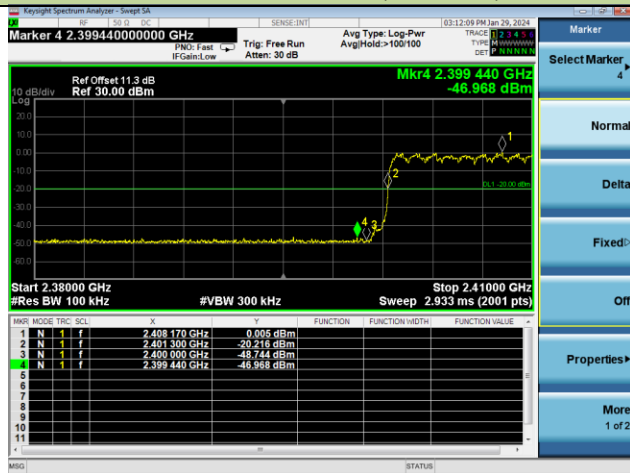


3DH5 - Channel 78 (2480MHz)

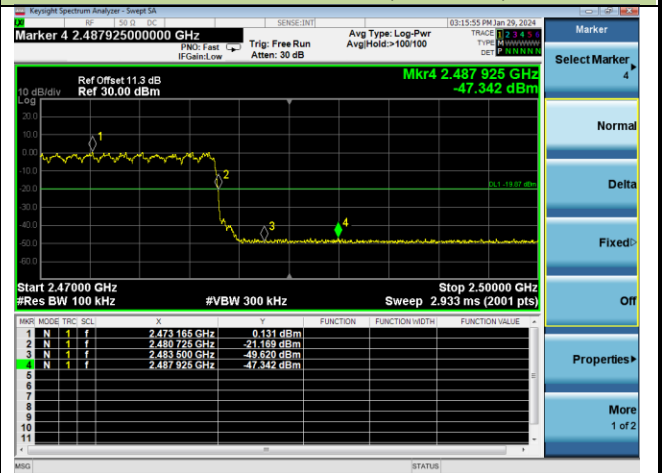


Band-edge Compliance – Right Earbud


DH5 - Channel 00 (2402MHz)

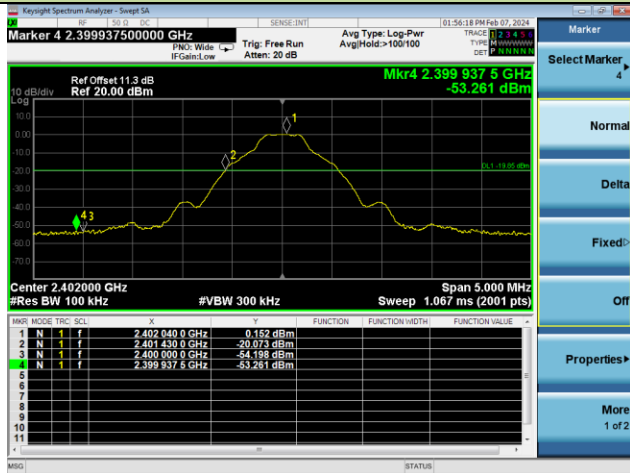


DH5 - Channel 78 (2480MHz)

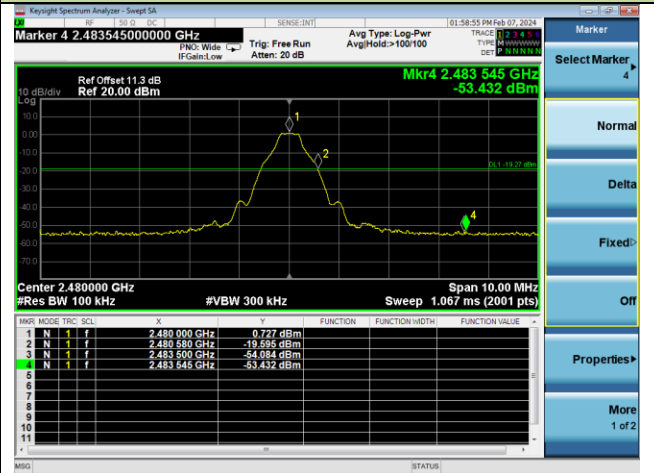


2DH5 - Channel 00 (2402MHz)

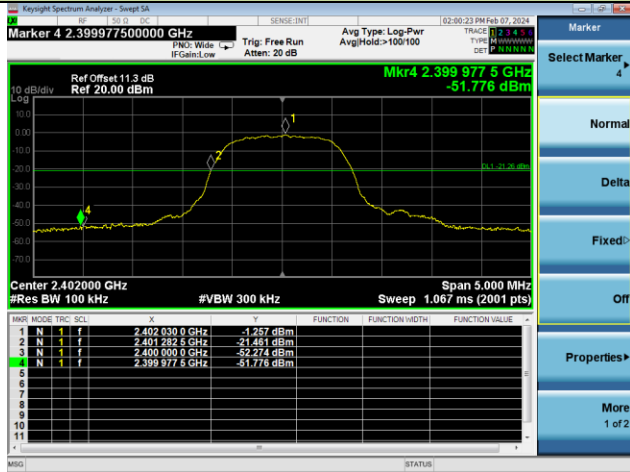


2DH5 - Channel 78 (2480MHz)

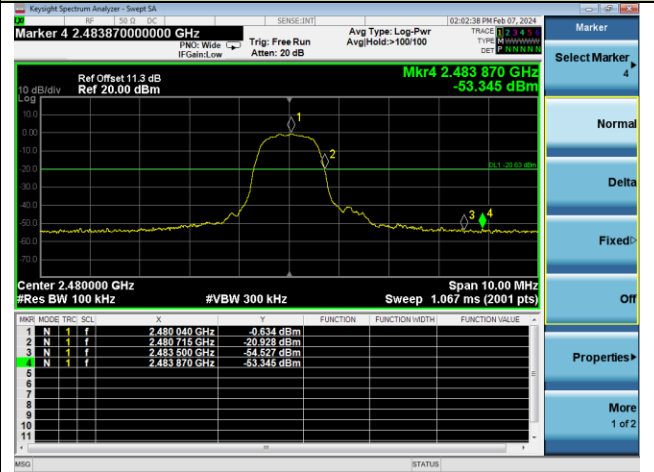

3DH5 - Channel 00 (2402MHz)

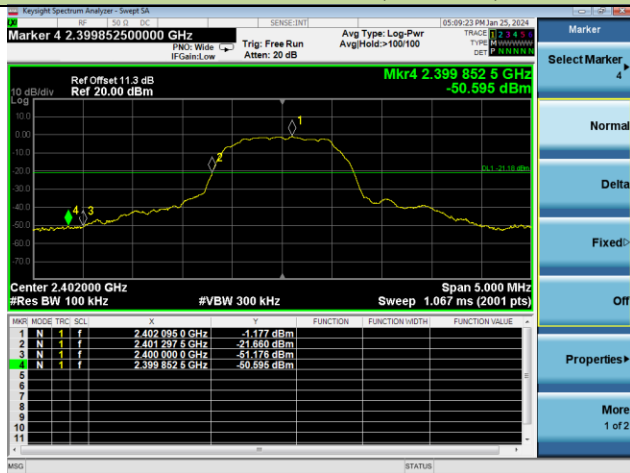


3DH5 - Channel 78 (2480MHz)

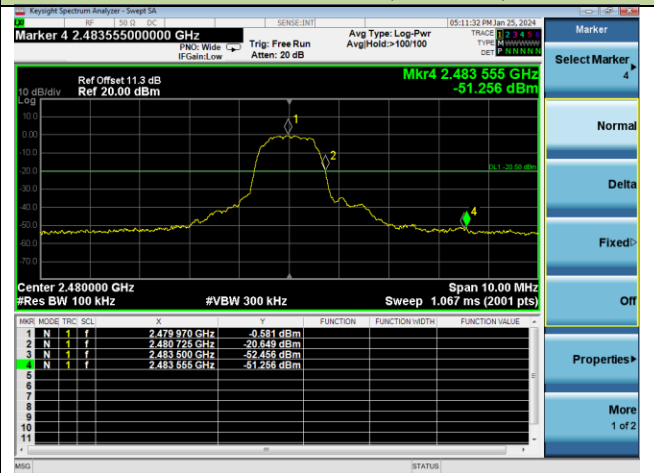


Operation Frequency Range of 20dB Bandwidth within Hopping Mode – Right Earbud


DH5 - Channel 00 (2402MHz)

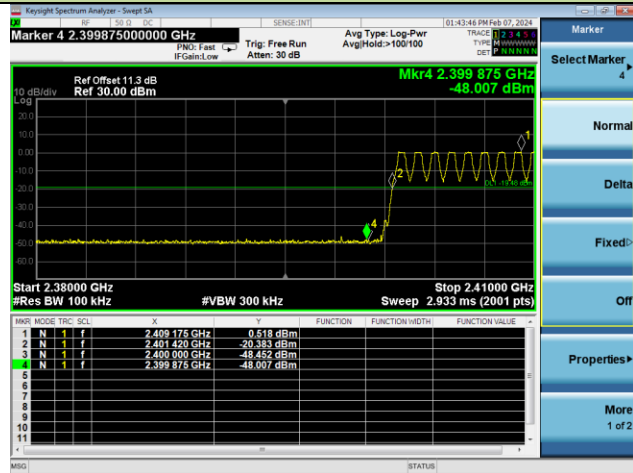


DH5 - Channel 78 (2480MHz)

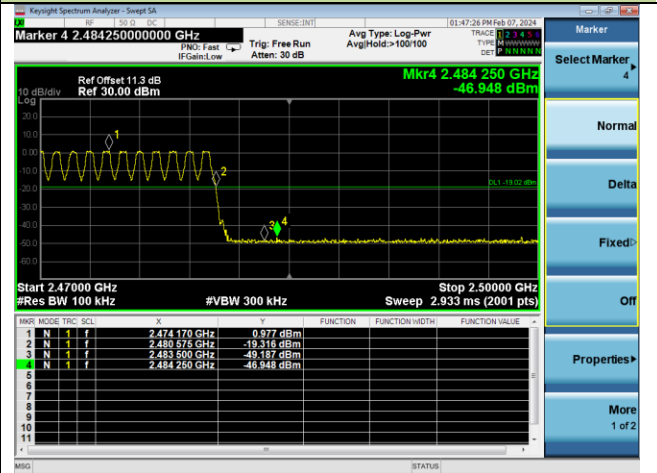


2DH5 - Channel 00 (2402MHz)

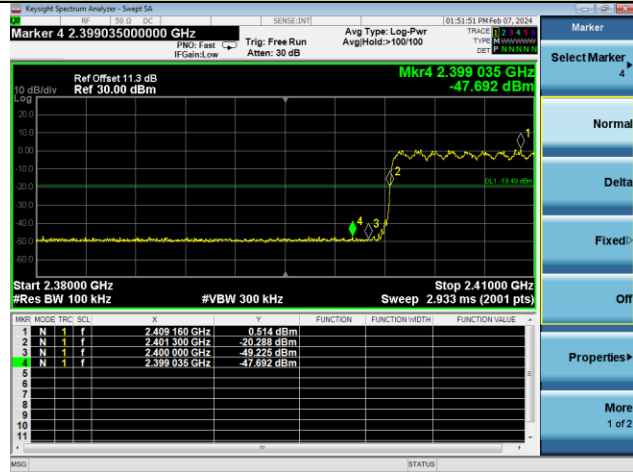


2DH5 - Channel 78 (2480MHz)

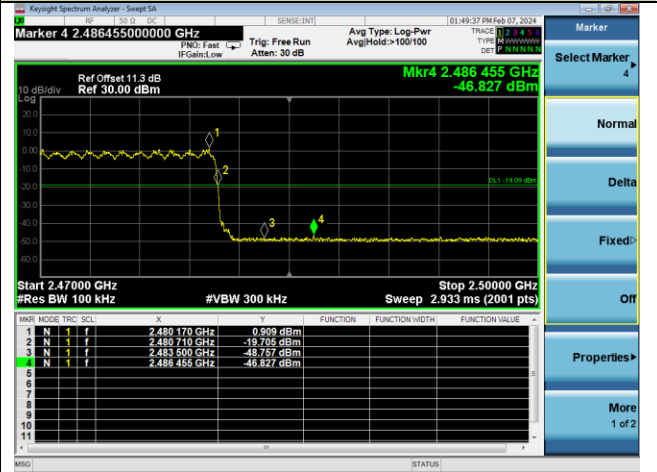

3DH5 - Channel 00 (2402MHz)

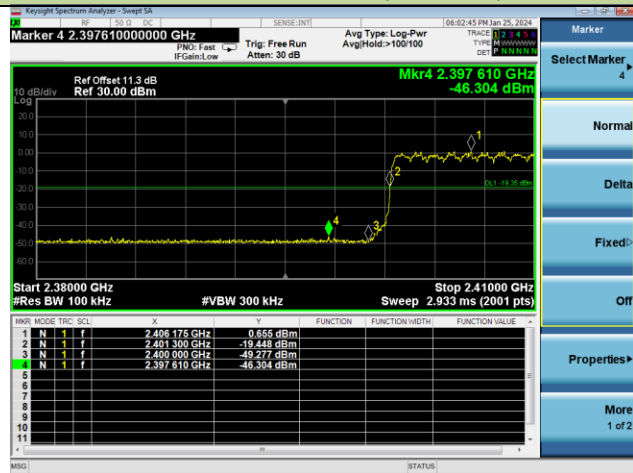

3DH5 - Channel 78 (2480MHz)

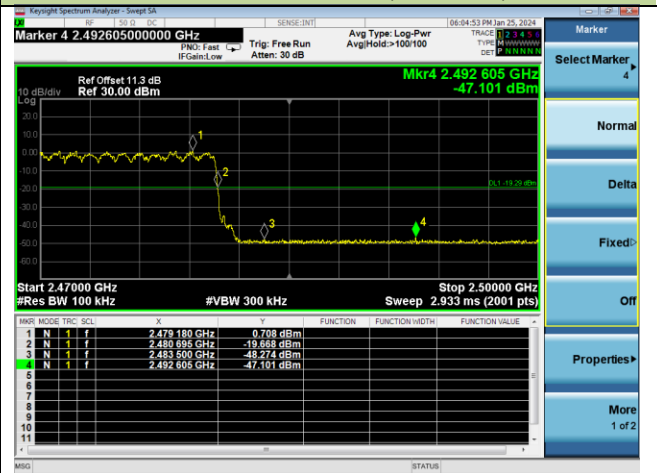


A.8 Conducted Spurious Emissions Test Result

Test Site	NS-TR2	Test Engineer	Summer Tang
Test Date	2024-01-25 ~ 2024-02-07		


Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
Left Earbud				
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass
Left Earbud				
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions – Left Earbud


Channel 00 (2402MHz)

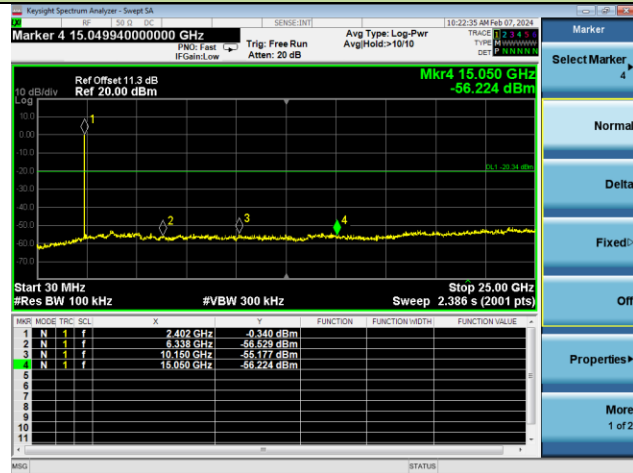

Channel 39 (2441MHz)

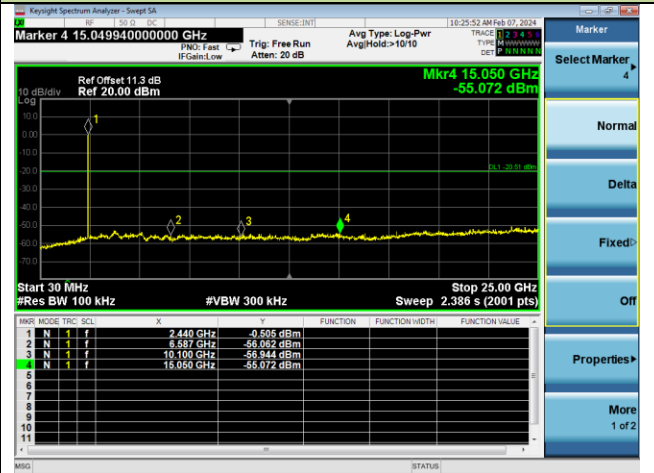


Channel 78 (2480MHz)

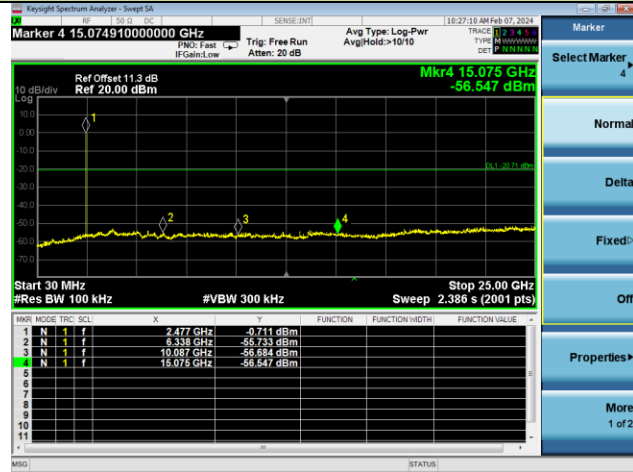


2DH5 Conducted Spurious Emissions – Left Earbud


Channel 00 (2402MHz)

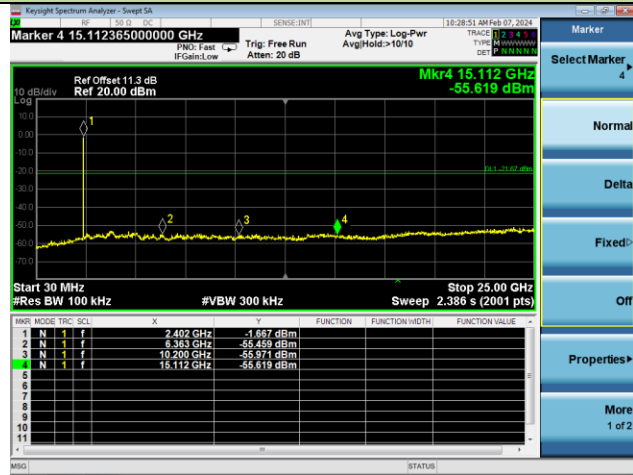



Channel 39 (2441MHz)

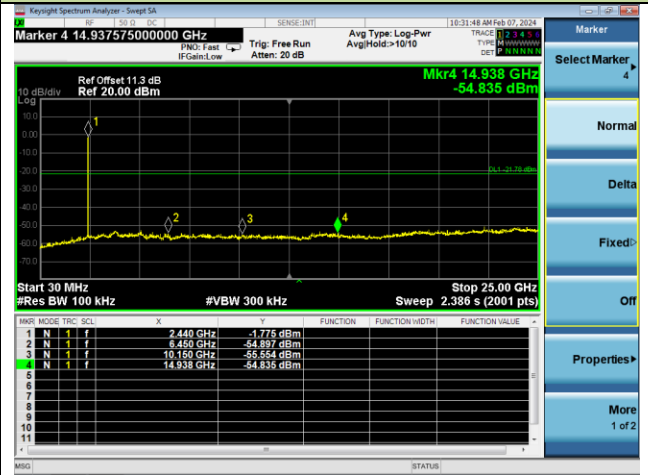

Channel 78 (2480MHz)

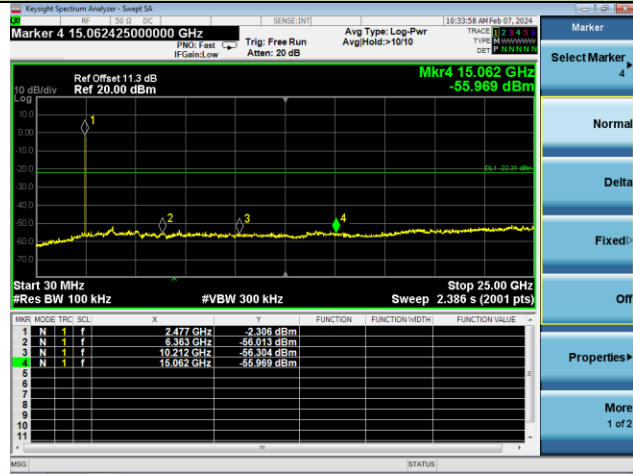


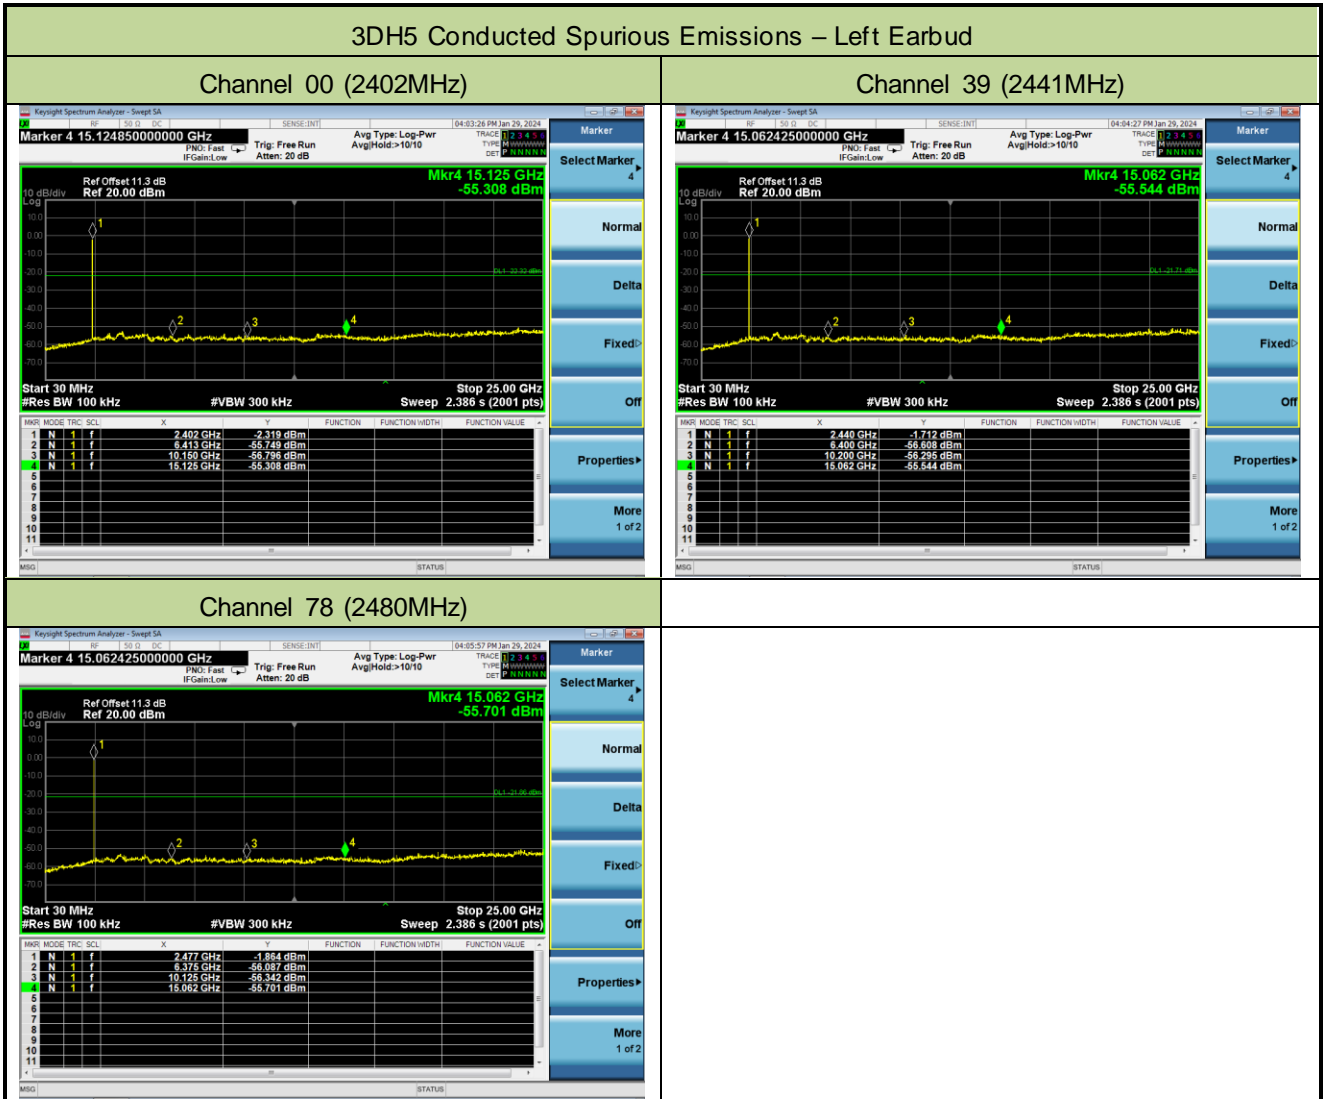

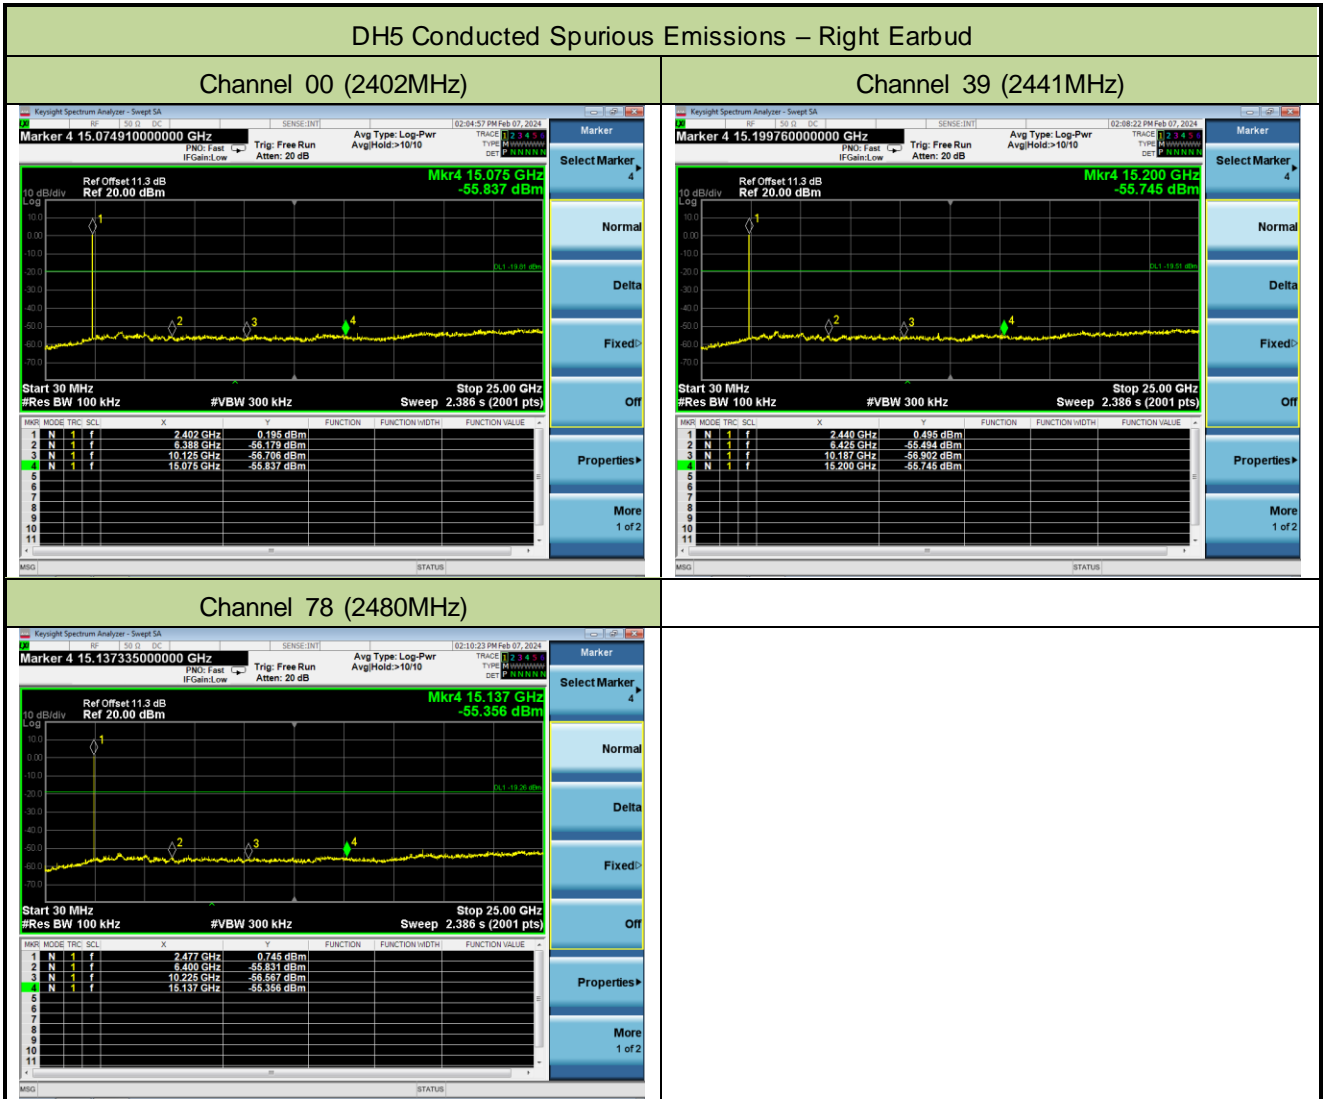


2DH5 Conducted Spurious Emissions – Right Earbud


Channel 00 (2402MHz)

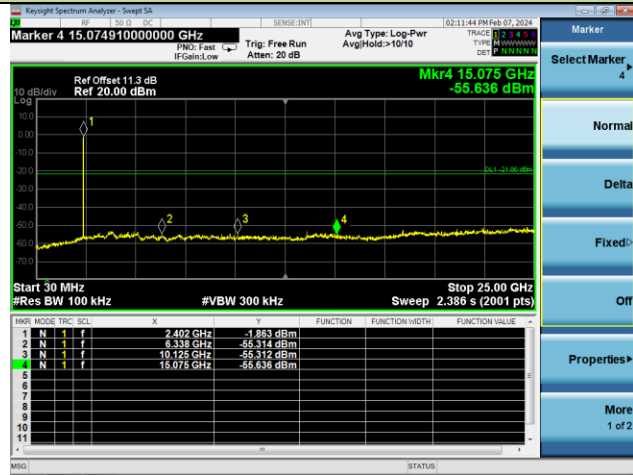

Channel 39 (2441MHz)

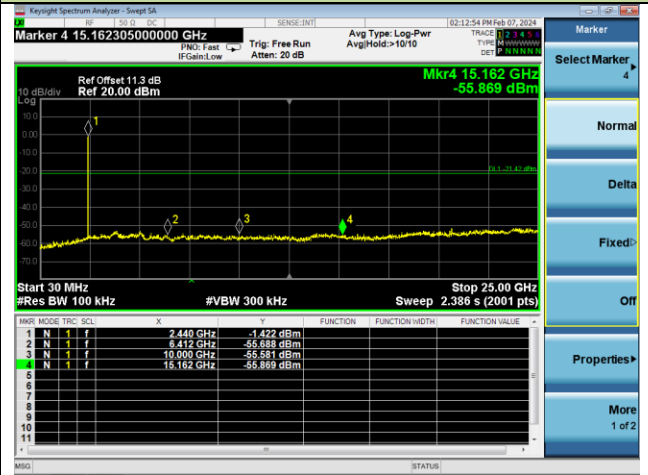


Channel 78 (2480MHz)

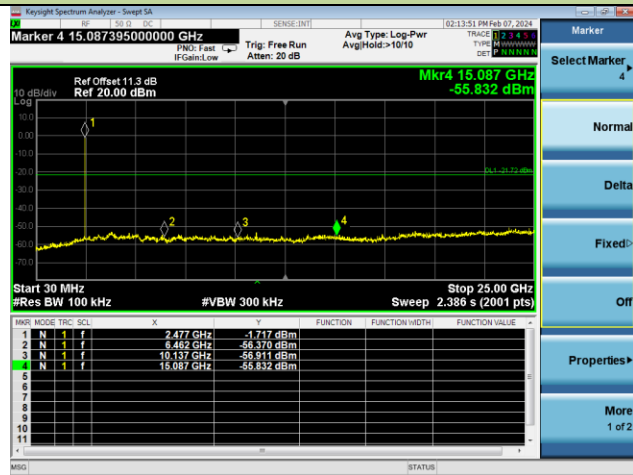


3DH5 Conducted Spurious Emissions – Right Earbud


Channel 00 (2402MHz)

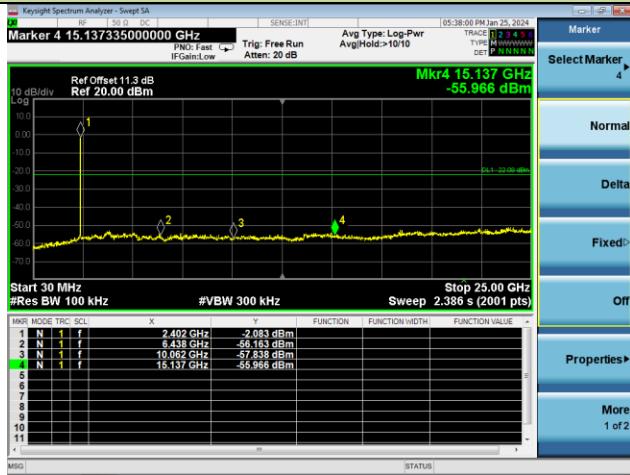

Channel 39 (2441MHz)

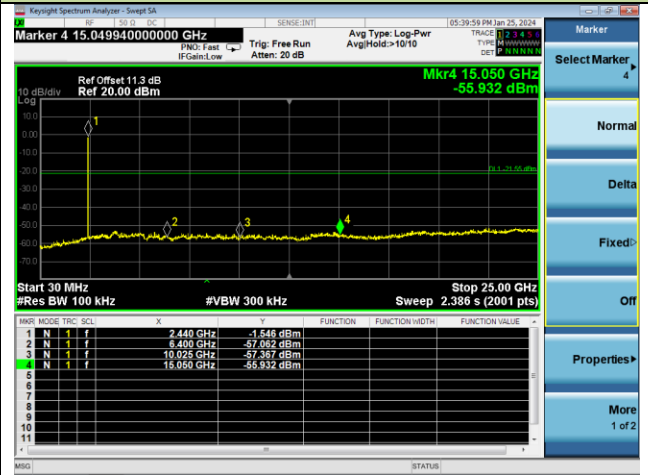

Channel 78 (2480MHz)

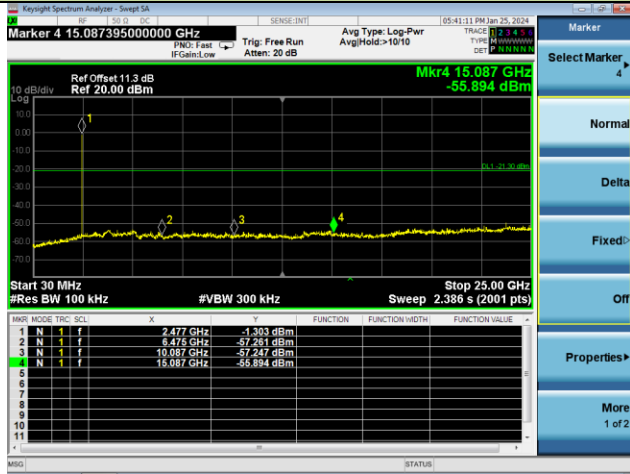

A.9 Radiated Spurious Emission Test Result

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2024-04-09	Test Mode:	DH5 - Left Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
00	4808.0	44.8	1.3	46.1	74.0	-27.9	Peak	Horizontal
	7528.0	35.9	9.9	45.8	74.0	-28.2	Peak	Horizontal
	10885.5	34.1	15.0	49.1	74.0	-24.9	Peak	Horizontal
	4808.0	43.6	1.3	44.9	74.0	-29.1	Peak	Vertical
	9338.5	35.8	15.3	51.1	74.0	-22.9	Peak	Vertical
	11030.0	34.6	15.3	49.9	74.0	-24.1	Peak	Vertical
39	4884.5	43.7	1.3	45.0	74.0	-29.0	Peak	Horizontal
	8063.5	36.7	9.1	45.8	74.0	-28.2	Peak	Horizontal
	11132.0	35.8	15.6	51.4	74.0	-22.6	Peak	Horizontal
	4884.5	42.3	1.3	43.6	74.0	-30.4	Peak	Vertical
	7383.5	35.4	9.8	45.2	74.0	-28.8	Peak	Vertical
	10690.0	35.4	14.5	49.9	74.0	-24.1	Peak	Vertical
78	4961.0	38.8	1.6	40.4	74.0	-33.6	Peak	Horizontal
	8089.0	36.7	9.2	45.9	74.0	-28.1	Peak	Horizontal
	10962.0	36.4	15.5	51.9	74.0	-22.1	Peak	Horizontal
	4961.0	38.6	1.6	40.2	74.0	-33.8	Peak	Vertical
	8140.0	36.3	8.9	45.2	74.0	-28.8	Peak	Vertical
	11064.0	34.9	15.9	50.8	74.0	-23.2	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2024-04-09	Test Mode:	2DH5 - Left Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4799.5	43.1	1.3	44.4	74.0	-29.6	Peak	Horizontal
	8097.5	36.5	9.1	45.6	74.0	-28.4	Peak	Horizontal
	11285.0	34.7	15.6	50.3	74.0	-23.7	Peak	Horizontal
	4799.5	43.9	1.3	45.2	74.0	-28.8	Peak	Vertical
	8310.0	37.5	9.2	46.7	74.0	-27.3	Peak	Vertical
	11132.0	34.6	15.6	50.2	74.0	-23.8	Peak	Vertical
39	4884.5	43.4	1.3	44.7	74.0	-29.3	Peak	Horizontal
	7647.0	36.2	9.1	45.3	74.0	-28.7	Peak	Horizontal
	11081.0	33.8	16.2	50.0	74.0	-24.0	Peak	Horizontal
	4884.5	43.6	1.3	44.9	74.0	-29.1	Peak	Vertical
	9058.0	36.2	11.6	47.8	74.0	-26.2	Peak	Vertical
	11064.0	34.9	15.9	50.8	74.0	-23.2	Peak	Vertical
78	4961.0	40.2	1.6	41.8	74.0	-32.2	Peak	Horizontal
	7307.0	36.4	9.3	45.7	74.0	-28.3	Peak	Horizontal
	10877.0	35.5	14.8	50.3	74.0	-23.7	Peak	Horizontal
	4961.0	40.5	1.6	42.1	74.0	-31.9	Peak	Vertical
	8063.5	36.8	9.1	45.9	74.0	-28.1	Peak	Vertical
	10809.0	35.1	15.0	50.1	74.0	-23.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2024-04-09	Test Mode:	3DH5 - Left Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4799.5	43.9	1.3	45.2	74.0	-28.8	Peak	Horizontal
	8403.5	34.9	9.7	44.6	74.0	-29.4	Peak	Horizontal
	10945.0	34.8	15.2	50.0	74.0	-24.0	Peak	Horizontal
	4808.0	45.3	1.3	46.6	74.0	-27.4	Peak	Vertical
	7672.5	36.4	9.3	45.7	74.0	-28.3	Peak	Vertical
	11064.0	34.8	15.9	50.7	74.0	-23.3	Peak	Vertical
39	4884.5	43.2	1.3	44.5	74.0	-29.5	Peak	Horizontal
	9007.0	35.5	12.6	48.1	74.0	-25.9	Peak	Horizontal
	10945.0	36.1	15.2	51.3	74.0	-22.7	Peak	Horizontal
	4884.5	43.3	1.3	44.6	74.0	-29.4	Peak	Vertical
	8403.5	35.8	9.7	45.5	74.0	-28.5	Peak	Vertical
	11038.5	35.0	15.2	50.2	74.0	-23.8	Peak	Vertical
78	4961.0	39.8	1.6	41.4	74.0	-32.6	Peak	Horizontal
	9092.0	35.7	12.5	48.2	74.0	-25.8	Peak	Horizontal
	10962.0	34.7	15.5	50.2	74.0	-23.8	Peak	Horizontal
	4961.0	39.8	1.6	41.4	74.0	-32.6	Peak	Vertical
	9092.0	35.7	12.5	48.2	74.0	-25.8	Peak	Vertical
	11038.5	35.6	15.2	50.8	74.0	-23.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2024-04-10	Test Mode:	DH5 - Right Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4808.0	49.2	1.3	50.5	74.0	-23.5	Peak	Horizontal
	9075.0	35.0	12.1	47.1	74.0	-26.9	Peak	Horizontal
	11030.0	35.4	15.3	50.7	74.0	-23.3	Peak	Horizontal
	4808.0	45.1	1.3	46.4	74.0	-27.6	Peak	Vertical
	9083.5	34.2	12.3	46.5	74.0	-27.5	Peak	Vertical
	11064.0	34.9	15.9	50.8	74.0	-23.2	Peak	Vertical
39	4884.5	47.4	1.3	48.7	74.0	-25.3	Peak	Horizontal
	9007.0	34.4	12.6	47.0	74.0	-27.0	Peak	Horizontal
	10945.0	35.0	15.2	50.2	74.0	-23.8	Peak	Horizontal
	4884.5	43.3	1.3	44.6	74.0	-29.4	Peak	Vertical
	7434.5	34.5	10.1	44.6	74.0	-29.4	Peak	Vertical
	10936.5	34.7	15.0	49.7	74.0	-24.3	Peak	Vertical
78	4961.0	43.9	1.6	45.5	74.0	-28.5	Peak	Horizontal
	8471.5	34.9	10.4	45.3	74.0	-28.7	Peak	Horizontal
	12381.5	35.5	14.4	49.9	74.0	-24.1	Peak	Horizontal
	4961.0	41.0	1.6	42.6	74.0	-31.4	Peak	Vertical
	7613.0	35.1	9.6	44.7	74.0	-29.3	Peak	Vertical
	11072.5	33.7	16.1	49.8	74.0	-24.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2024-04-10	Test Mode:	2DH5 - Right Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4808.0	49.0	1.3	50.3	74.0	-23.7	Peak	Horizontal
	9083.5	35.6	12.3	47.9	74.0	-26.1	Peak	Horizontal
	11072.5	34.8	16.1	50.9	74.0	-23.1	Peak	Horizontal
	4808.0	45.4	1.3	46.7	74.0	-27.3	Peak	Vertical
	7672.5	36.1	9.3	45.4	74.0	-28.6	Peak	Vertical
	11098.0	35.0	15.3	50.3	74.0	-23.7	Peak	Vertical
39	4884.5	47.4	1.3	48.7	74.0	-25.3	Peak	Horizontal
	8089.0	37.3	9.2	46.5	74.0	-27.5	Peak	Horizontal
	11081.0	34.8	16.2	51.0	74.0	-23.0	Peak	Horizontal
	4884.5	43.9	1.3	45.2	74.0	-28.8	Peak	Vertical
	9389.5	35.9	11.6	47.5	74.0	-26.5	Peak	Vertical
	11497.5	34.0	15.8	49.8	74.0	-24.2	Peak	Vertical
78	4961.0	44.0	1.6	45.6	74.0	-28.4	Peak	Horizontal
	8089.0	37.5	9.2	46.7	74.0	-27.3	Peak	Horizontal
	11064.0	35.2	15.9	51.1	74.0	-22.9	Peak	Horizontal
	4961.0	40.3	1.6	41.9	74.0	-32.1	Peak	Vertical
	9007.0	34.5	12.6	47.1	74.0	-26.9	Peak	Vertical
	11472.0	34.6	15.9	50.5	74.0	-23.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2024-04-10	Test Mode:	3DH5 - Right Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4808.0	48.8	1.3	50.1	74.0	-23.9	Peak	Horizontal
	9381.0	35.9	11.5	47.4	74.0	-26.6	Peak	Horizontal
	10945.0	35.4	15.2	50.6	74.0	-23.4	Peak	Horizontal
	4808.0	44.7	1.3	46.0	74.0	-28.0	Peak	Vertical
	7477.0	36.0	10.0	46.0	74.0	-28.0	Peak	Vertical
	11021.5	35.1	15.1	50.2	74.0	-23.8	Peak	Vertical
39	3686.0	39.2	-1.5	37.7	74.0	-36.3	Peak	Horizontal
	4884.5	47.5	1.3	48.8	74.0	-25.2	Peak	Horizontal
	11030.0	35.1	15.3	50.4	74.0	-23.6	Peak	Horizontal
	4884.5	43.7	1.3	45.0	74.0	-29.0	Peak	Vertical
	7749.0	36.8	8.9	45.7	74.0	-28.3	Peak	Vertical
	11055.5	34.8	15.5	50.3	74.0	-23.7	Peak	Vertical
78	4961.0	44.3	1.6	45.9	74.0	-28.1	Peak	Horizontal
	7417.5	35.3	10.2	45.5	74.0	-28.5	Peak	Horizontal
	11565.5	34.1	15.8	49.9	74.0	-24.1	Peak	Horizontal
	4961.0	40.3	1.6	41.9	74.0	-32.1	Peak	Vertical
	7519.5	36.1	9.8	45.9	74.0	-28.1	Peak	Vertical
	10953.5	35.0	15.4	50.4	74.0	-23.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: NS-AC1	Test Date: 2024-04-10
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_VULB9162	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Right Earbud	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz	

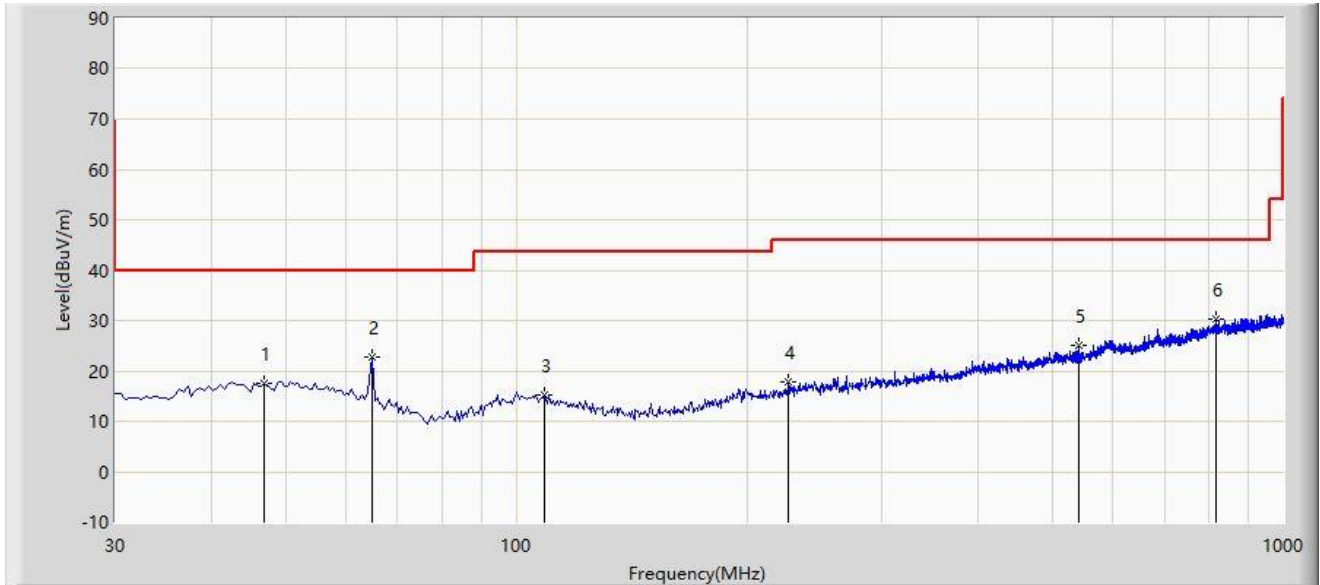

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		46.975	17.535	-0.901	-22.465	40.000	18.436	PK
2		64.920	22.613	6.773	-17.387	40.000	15.840	PK
3		109.055	15.229	-0.524	-28.271	43.500	15.753	PK
4		226.425	17.892	1.313	-28.108	46.000	16.579	PK
5		541.675	24.930	1.870	-21.070	46.000	23.060	PK
6	*	819.095	30.348	2.171	-15.652	46.000	28.178	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: NS-AC1	Test Date: 2024-04-10
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Right Earbud	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz	

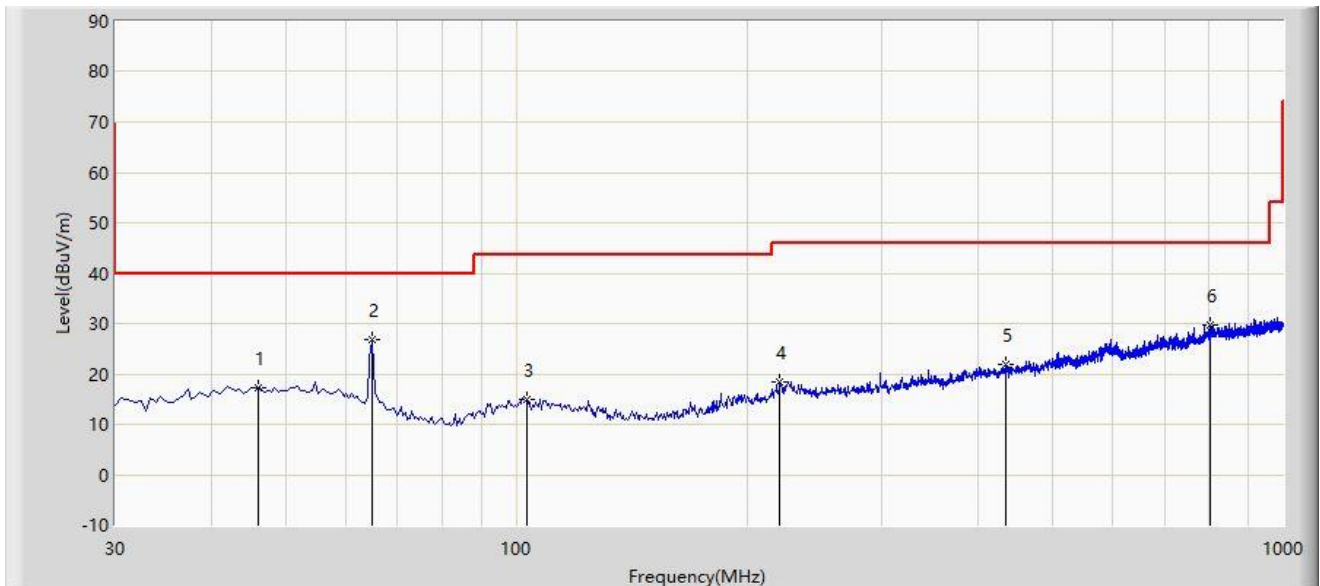

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		46.005	17.338	-1.008	-22.662	40.000	18.346	PK
2	*	64.920	26.756	10.916	-13.244	40.000	15.840	PK
3		103.235	15.010	-1.041	-28.490	43.500	16.051	PK
4		220.605	18.274	2.061	-27.726	46.000	16.213	PK
5		434.975	21.837	0.566	-24.163	46.000	21.271	PK
6		804.545	29.762	1.888	-16.238	46.000	27.874	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.10 Radiated Restricted Band Edge Test Result

Site: NS-AC1	Test Date: 2024-04-08
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

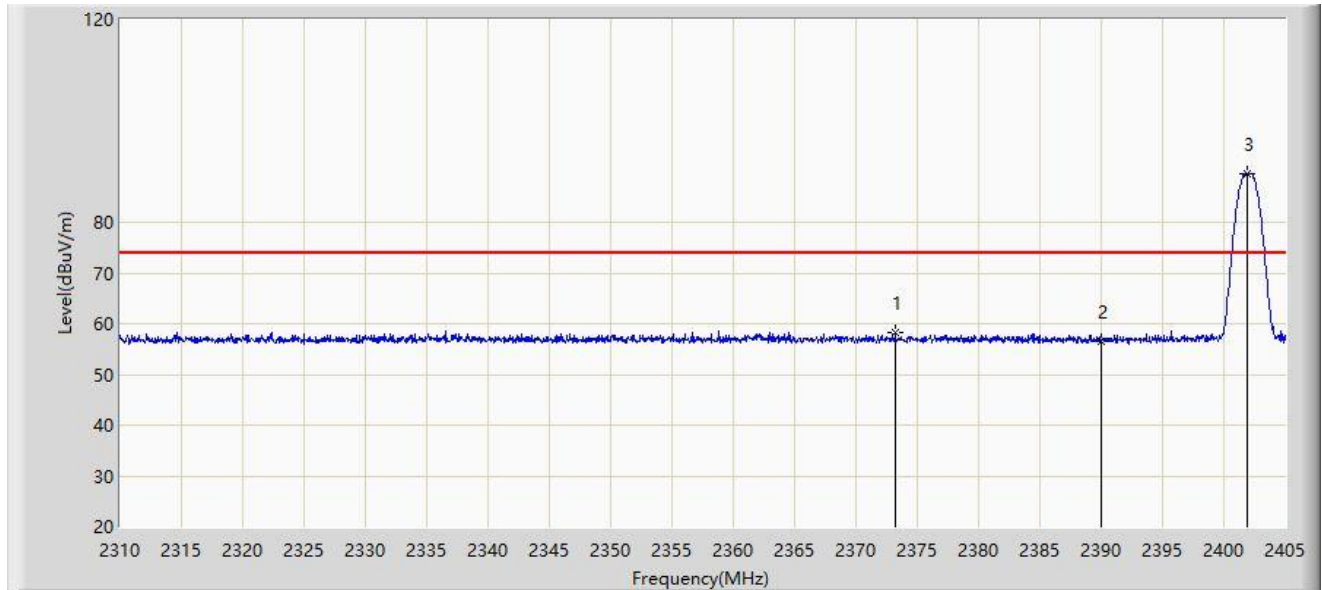


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2373.222	58.297	27.559	-15.703	74.000	30.737	PK
2		2390.000	56.405	25.754	-17.595	74.000	30.651	PK
3		2401.865	89.703	59.049	N/A	N/A	30.653	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-08
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

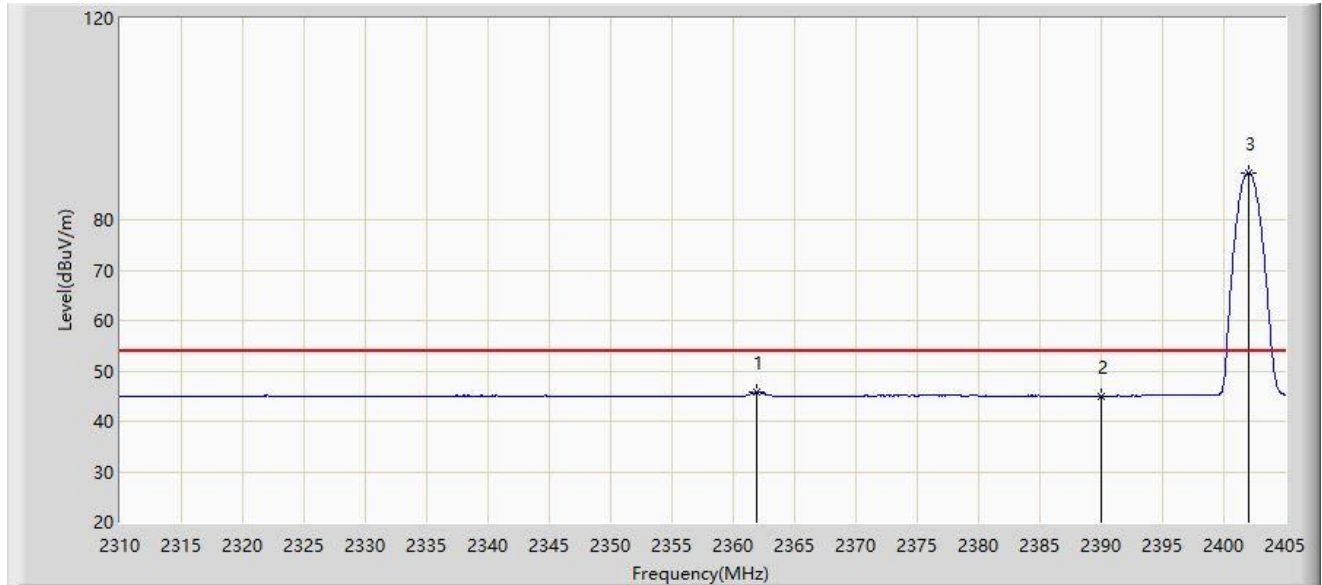


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2361.917	45.784	15.102	-8.216	54.000	30.682	AV
2		2390.000	45.049	14.398	-8.951	54.000	30.651	AV
3		2402.008	89.390	58.736	N/A	N/A	30.654	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-08
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

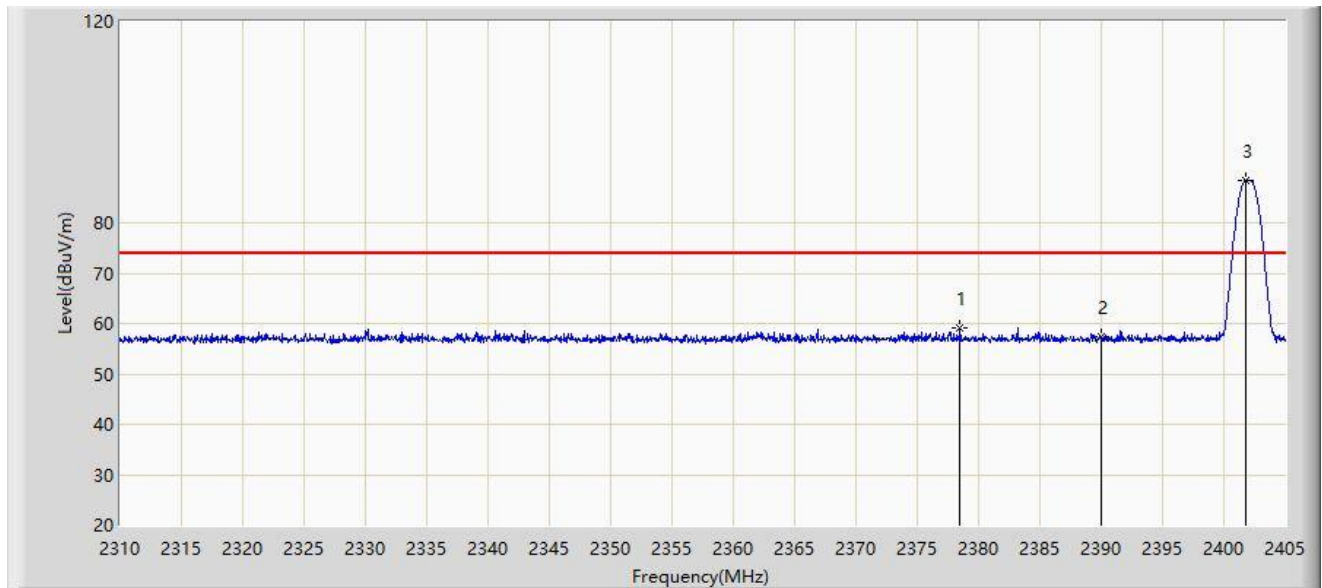


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2378.448	59.111	28.367	-14.889	74.000	30.744	PK
2		2390.000	57.353	26.702	-16.647	74.000	30.651	PK
3		2401.817	88.409	57.756	N/A	N/A	30.653	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-08
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

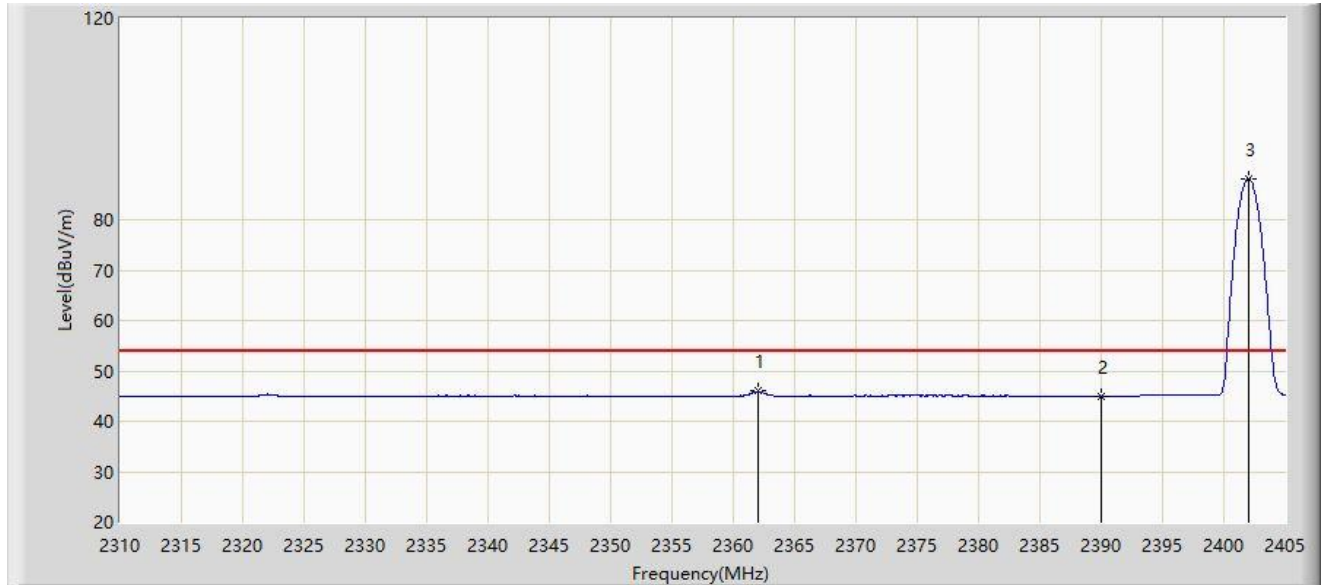


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2361.965	45.951	15.268	-8.049	54.000	30.683	AV
2		2390.000	45.009	14.358	-8.991	54.000	30.651	AV
3		2402.008	88.079	57.425	N/A	N/A	30.654	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-08
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

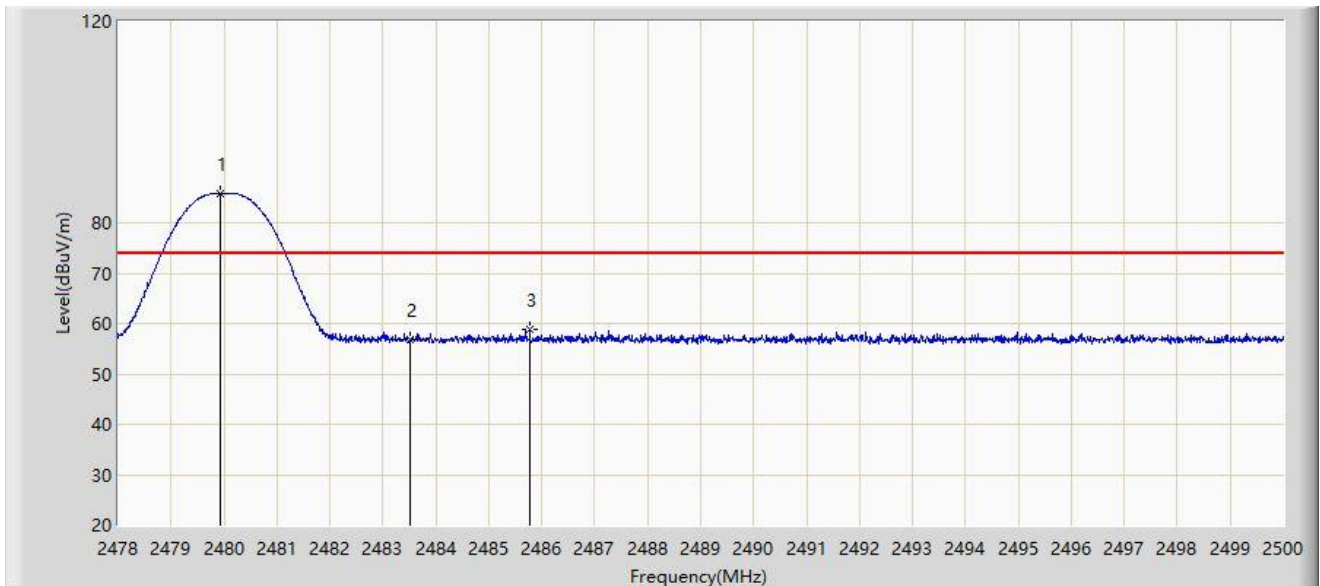


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.936	85.805	55.230	N/A	N/A	30.575	PK
2		2483.500	56.734	26.154	-17.266	74.000	30.580	PK
3	*	2485.777	58.920	28.336	-15.080	74.000	30.584	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-08
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

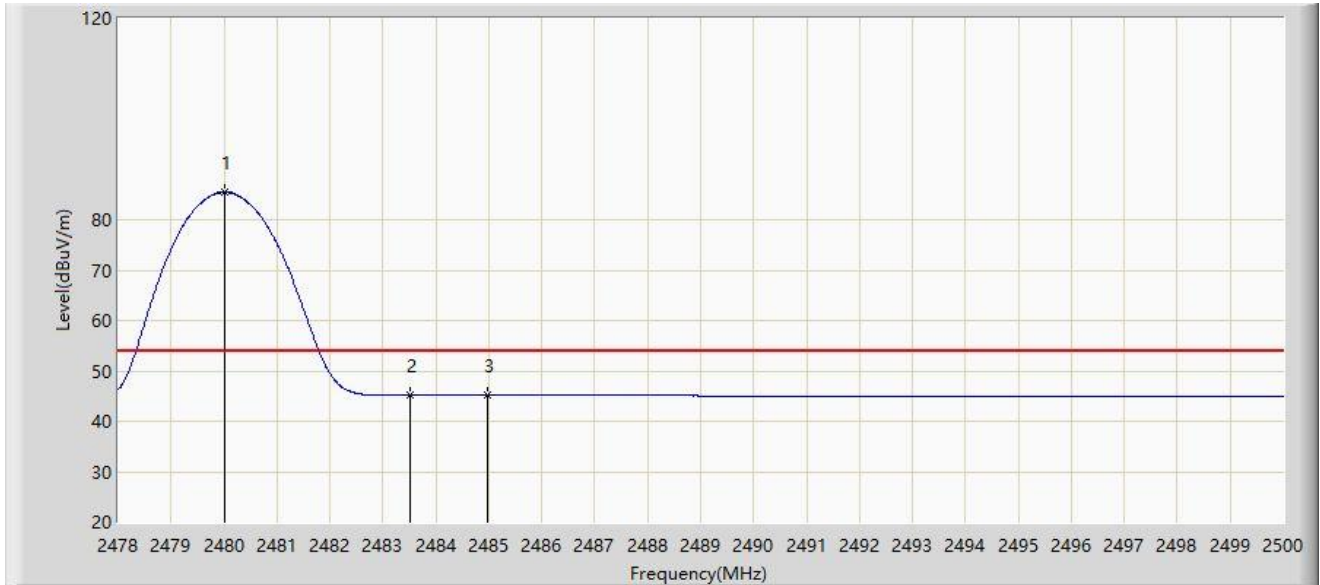


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.002	85.438	54.863	N/A	N/A	30.575	AV
2		2483.500	45.109	14.529	-8.891	54.000	30.580	AV
3	*	2484.963	45.142	14.560	-8.858	54.000	30.582	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-08
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

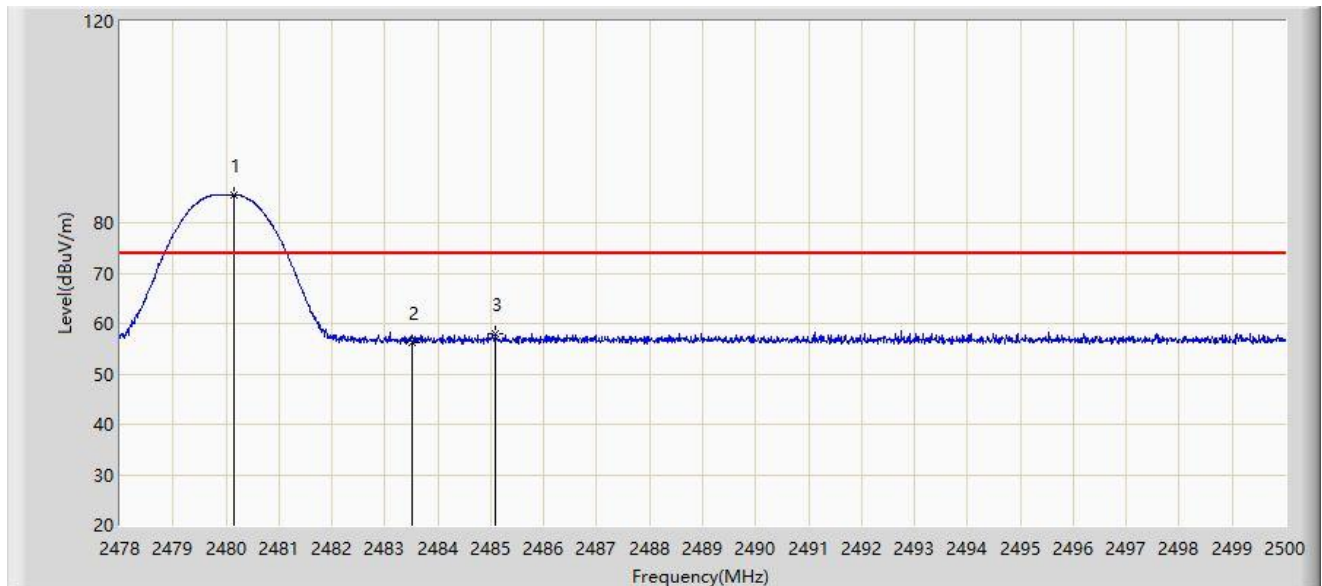


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.156	85.568	54.992	N/A	N/A	30.575	PK
2		2483.500	56.277	25.697	-17.723	74.000	30.580	PK
3	*	2485.095	58.101	27.518	-15.899	74.000	30.583	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-08
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

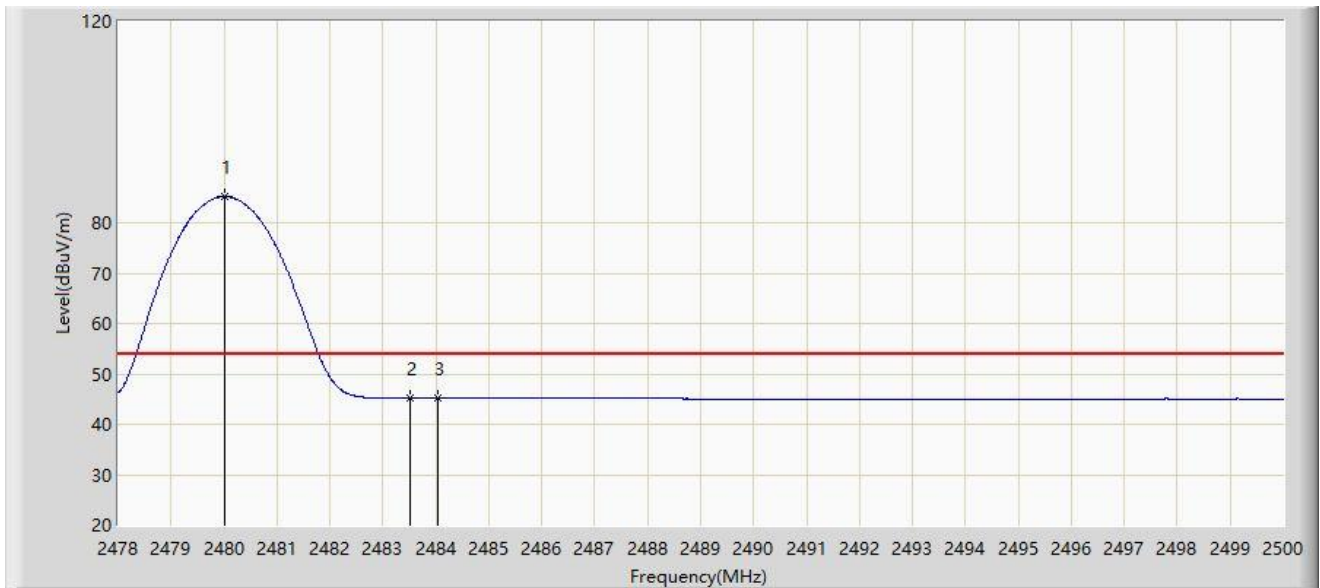


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.002	85.170	54.595	N/A	N/A	30.575	AV
2		2483.500	45.124	14.544	-8.876	54.000	30.580	AV
3	*	2484.039	45.144	14.563	-8.856	54.000	30.581	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

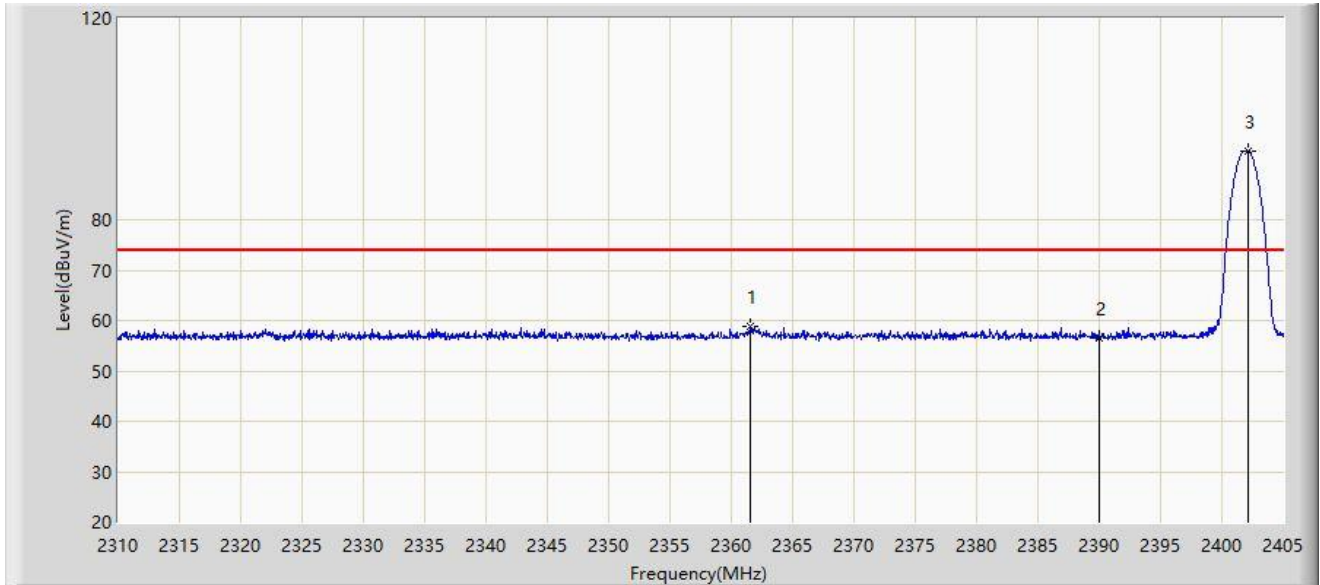


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2361.538	58.826	28.145	-15.174	74.000	30.680	PK
2		2390.000	56.656	26.005	-17.344	74.000	30.651	PK
3		2402.103	93.717	63.062	N/A	N/A	30.654	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

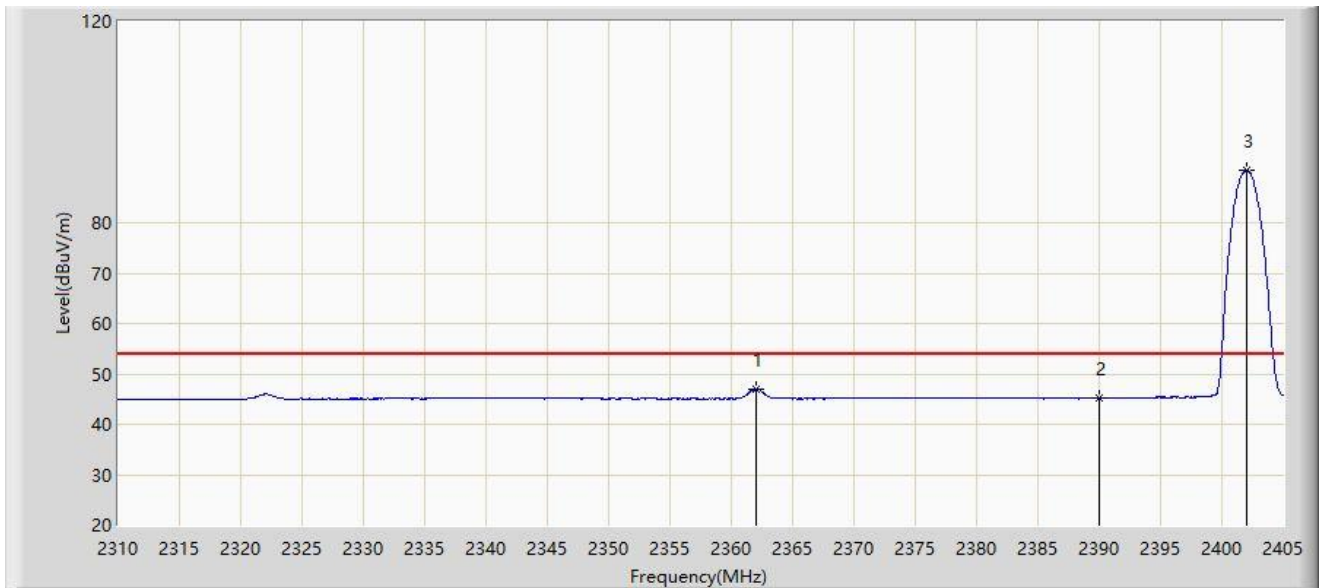


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2362.060	47.011	16.328	-6.989	54.000	30.683	AV
2		2390.000	45.151	14.500	-8.849	54.000	30.651	AV
3		2402.008	90.527	59.873	N/A	N/A	30.654	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

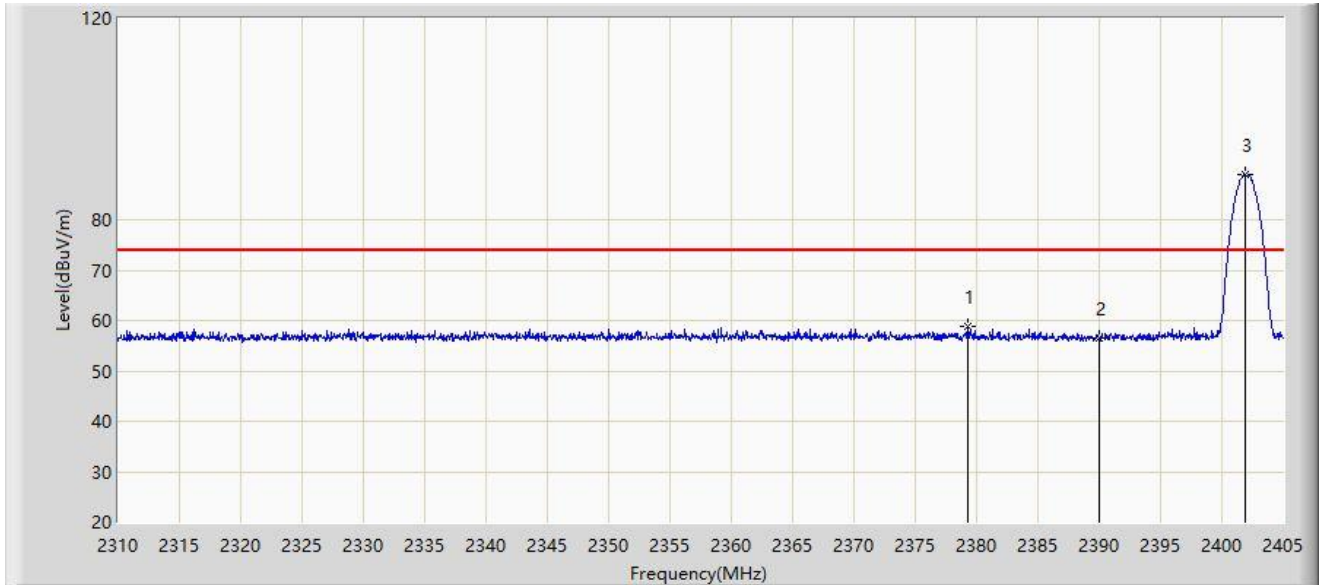


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2379.302	58.716	27.979	-15.284	74.000	30.738	PK
2		2390.000	56.483	25.832	-17.517	74.000	30.651	PK
3		2401.865	88.884	58.230	N/A	N/A	30.653	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

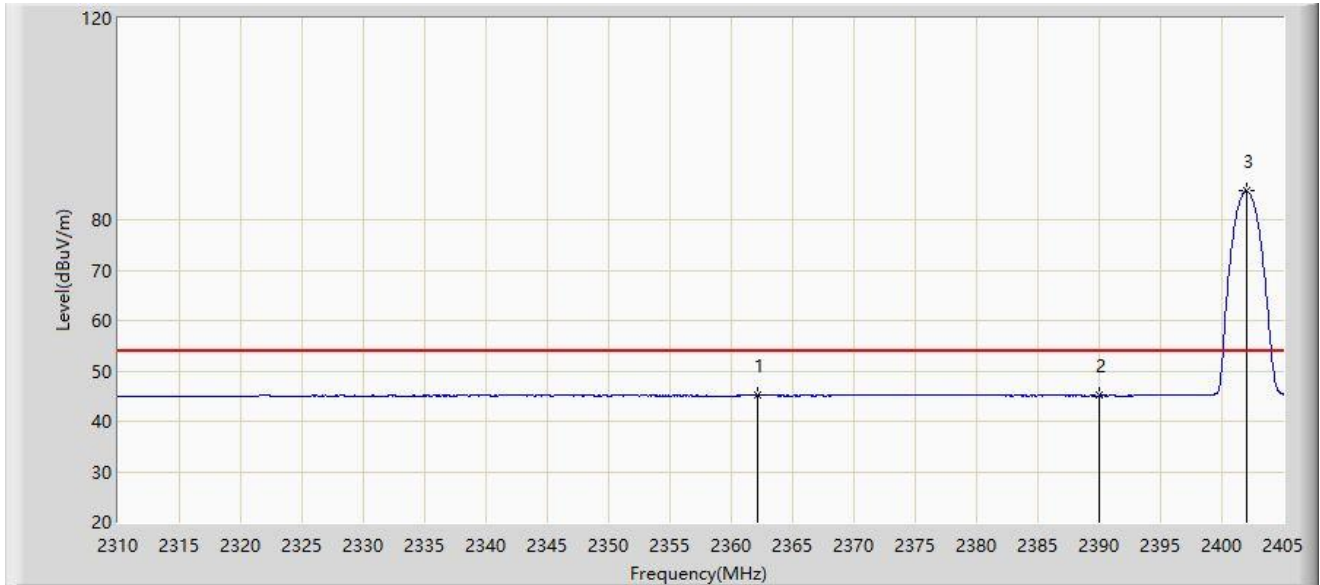


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2362.202	45.361	14.677	-8.639	54.000	30.684	AV
2		2390.000	45.096	14.445	-8.904	54.000	30.651	AV
3		2402.008	85.691	55.037	N/A	N/A	30.654	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

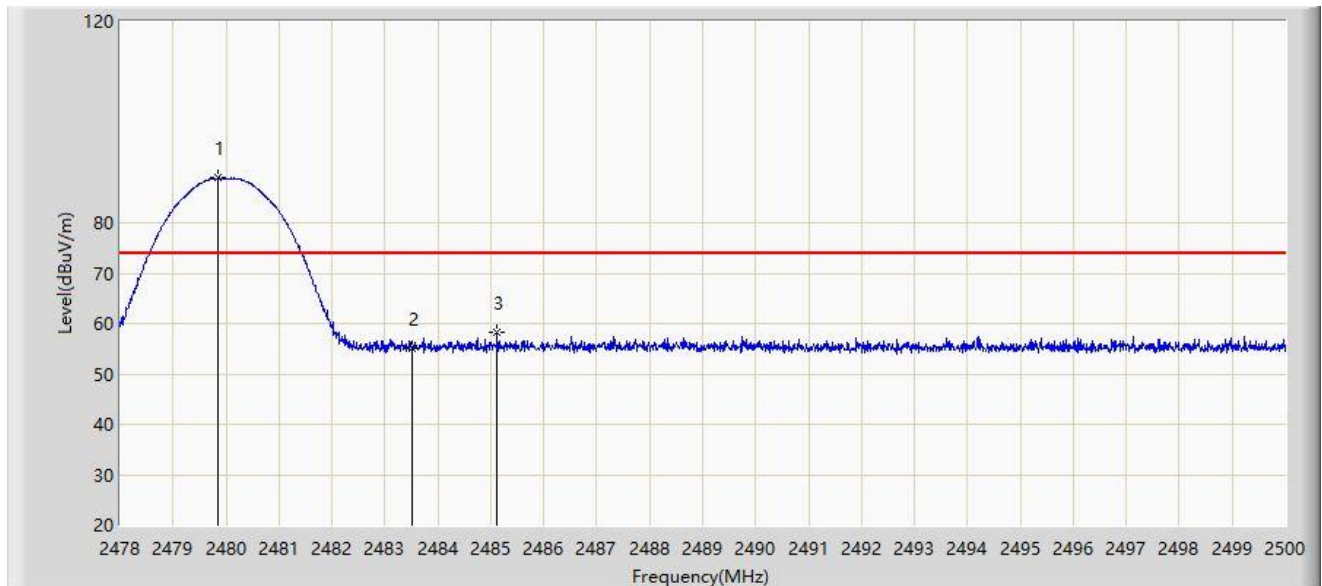


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.848	88.899	58.324	N/A	N/A	30.575	PK
2		2483.500	55.154	24.574	-18.846	74.000	30.580	PK
3	*	2485.117	58.127	27.544	-15.873	74.000	30.583	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

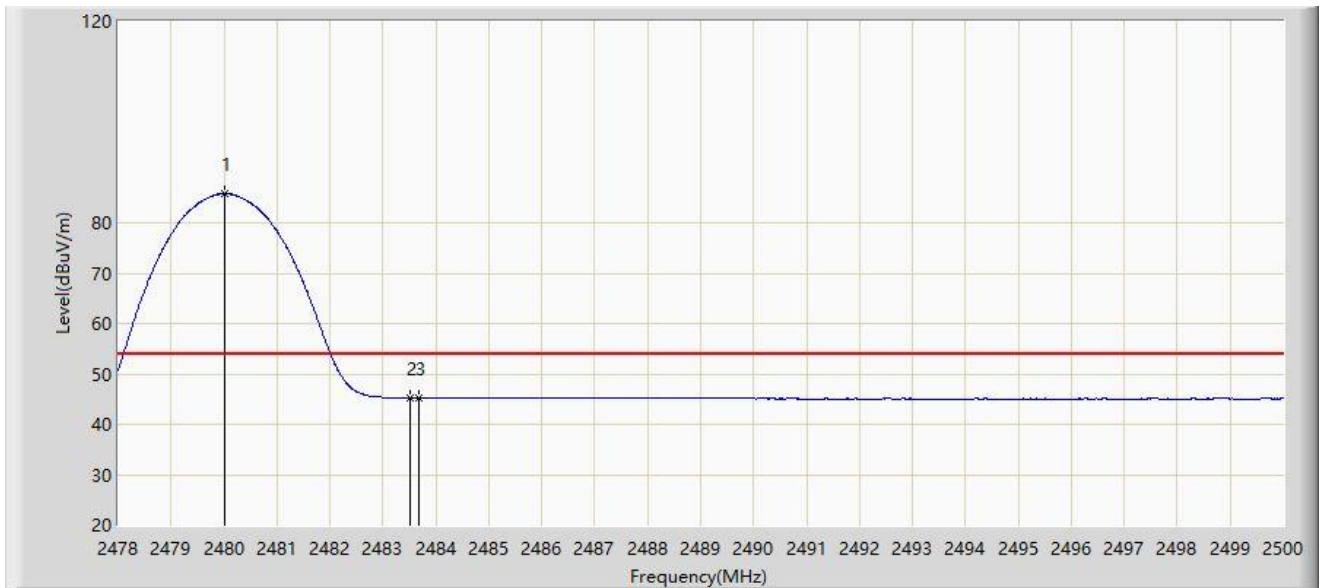


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.002	85.734	55.159	N/A	N/A	30.575	AV
2		2483.500	45.172	14.592	-8.828	54.000	30.580	AV
3	*	2483.687	45.203	14.622	-8.797	54.000	30.581	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

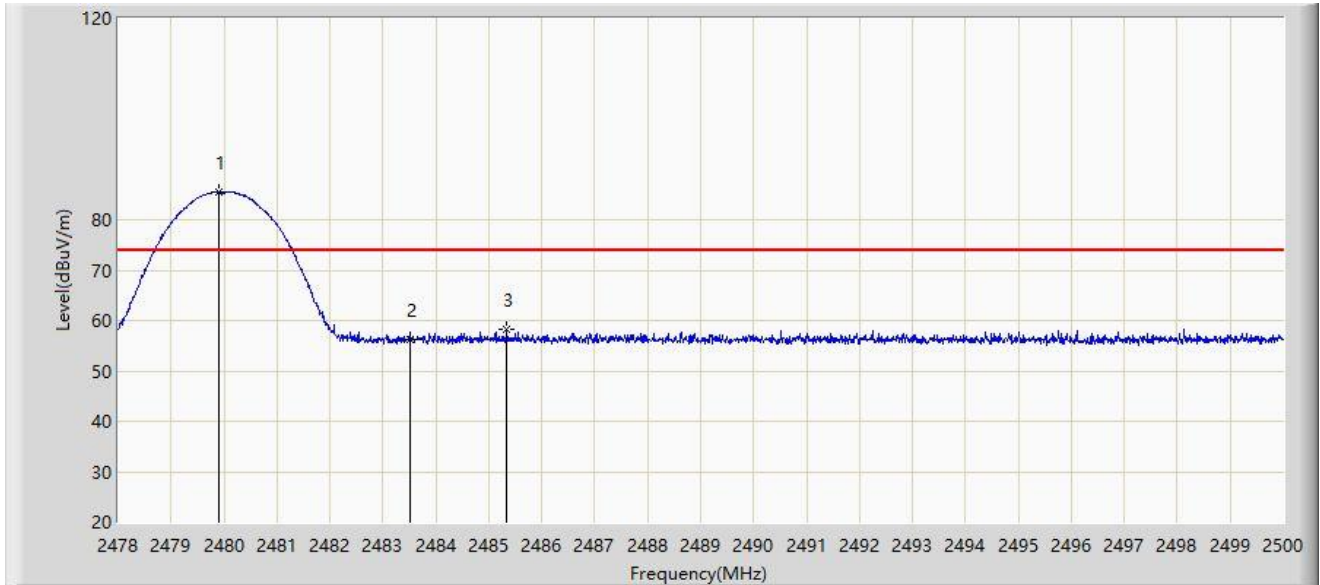


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.903	85.484	54.909	N/A	N/A	30.575	PK
2		2483.500	56.293	25.713	-17.707	74.000	30.580	PK
3	*	2485.337	58.398	27.815	-15.602	74.000	30.583	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

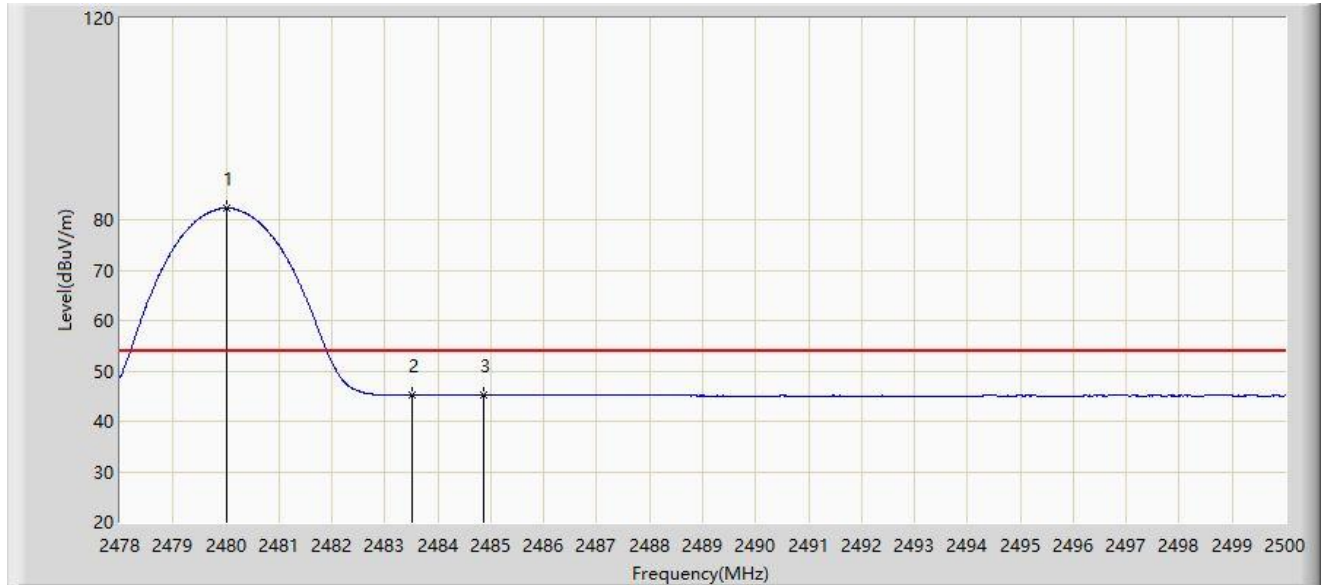


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.002	82.291	51.716	N/A	N/A	30.575	AV
2		2483.500	45.127	14.547	-8.873	54.000	30.580	AV
3	*	2484.864	45.167	14.585	-8.833	54.000	30.582	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz	

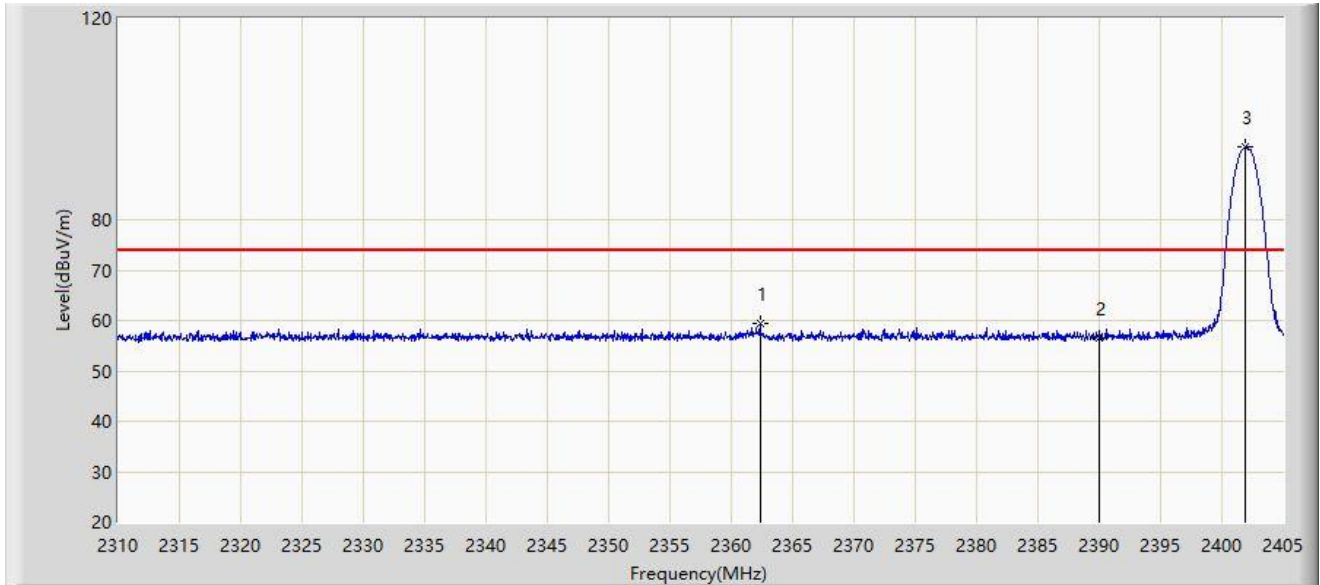


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2362.345	59.314	28.630	-14.686	74.000	30.685	PK
2		2390.000	56.618	25.967	-17.382	74.000	30.651	PK
3		2401.960	94.508	63.854	N/A	N/A	30.654	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz	

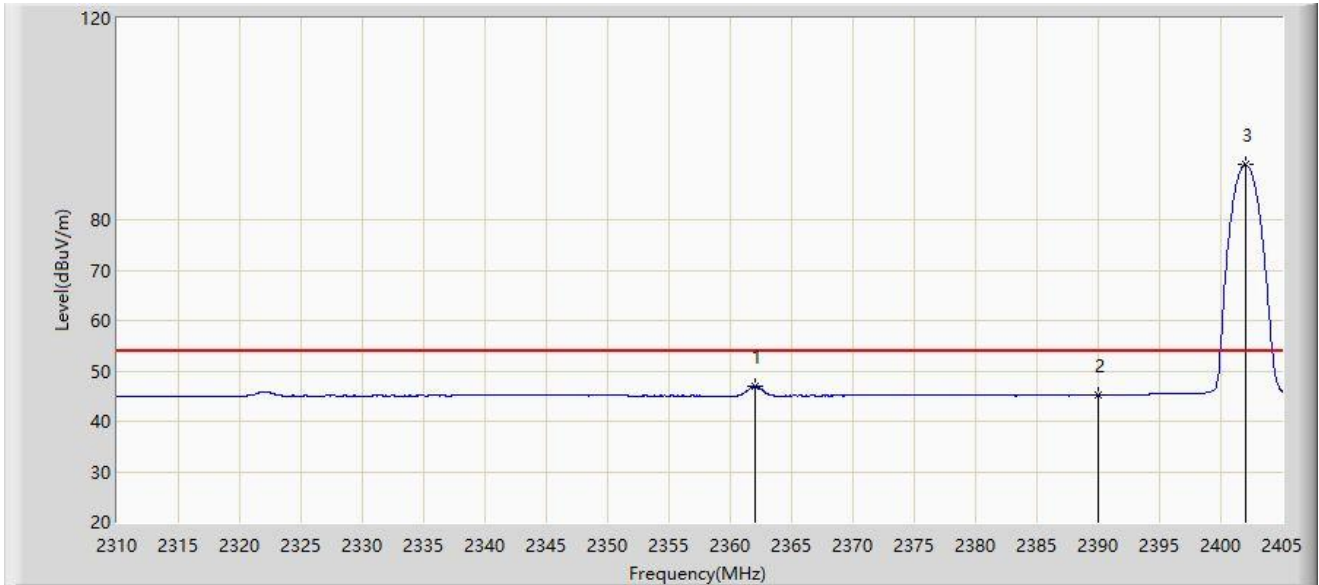


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2362.012	46.897	16.214	-7.103	54.000	30.683	AV
2		2390.000	45.185	14.534	-8.815	54.000	30.651	AV
3		2402.008	90.898	60.244	N/A	N/A	30.654	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz	

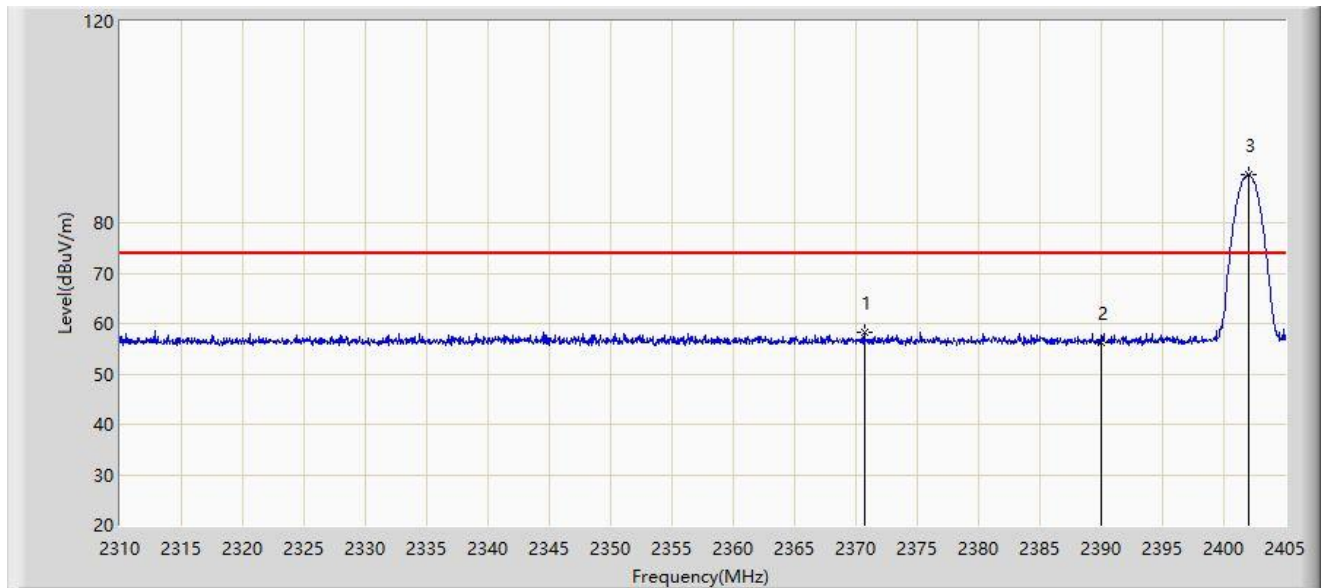


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2370.705	58.159	27.434	-15.841	74.000	30.725	PK
2		2390.000	56.278	25.627	-17.722	74.000	30.651	PK
3		2402.055	89.528	58.873	N/A	N/A	30.654	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz	

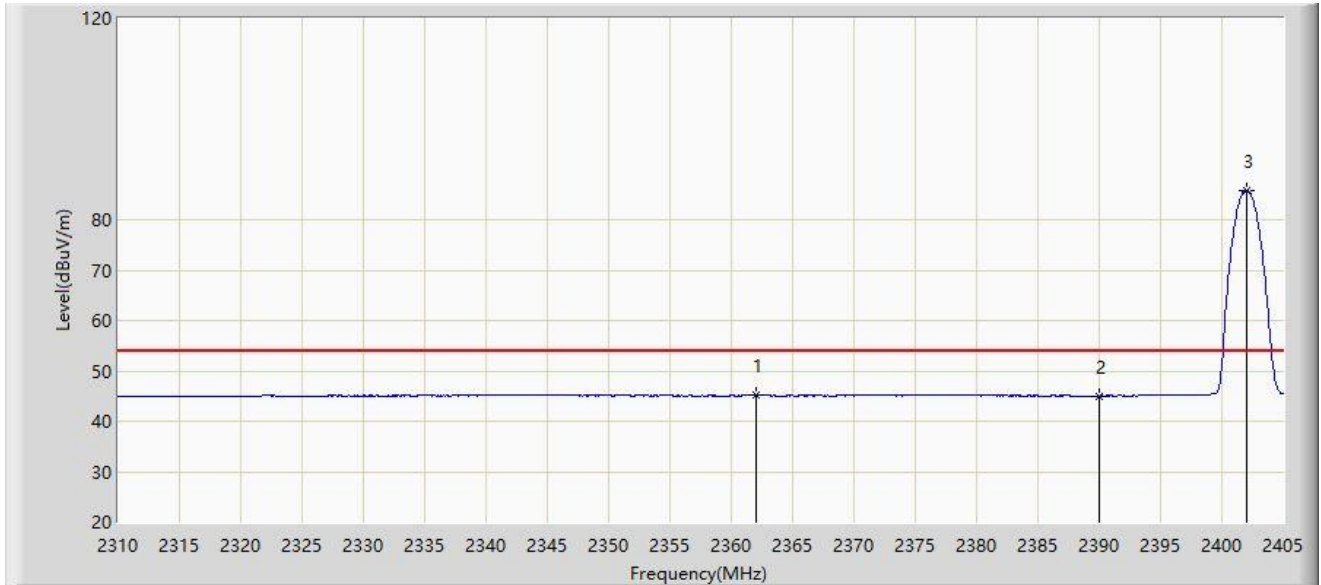


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2361.965	45.341	14.658	-8.659	54.000	30.683	AV
2		2390.000	45.060	14.409	-8.940	54.000	30.651	AV
3		2402.008	85.900	55.246	N/A	N/A	30.654	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz	

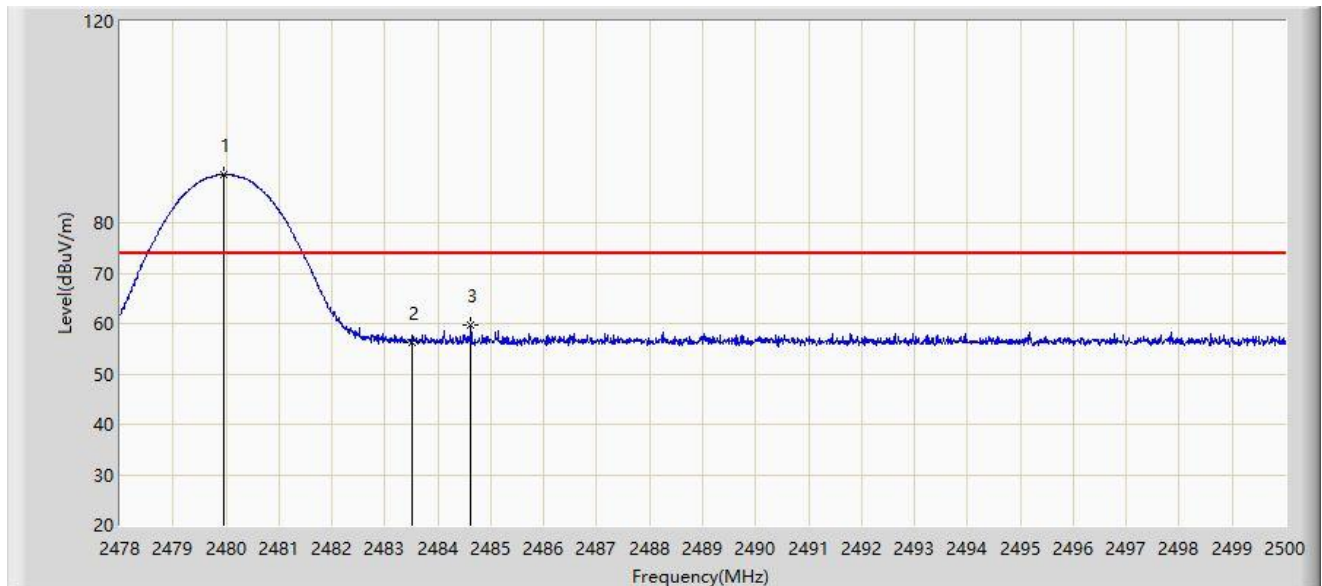


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.958	89.653	59.078	N/A	N/A	30.575	PK
2		2483.500	56.125	25.545	-17.875	74.000	30.580	PK
3	*	2484.622	59.716	29.134	-14.284	74.000	30.582	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz	

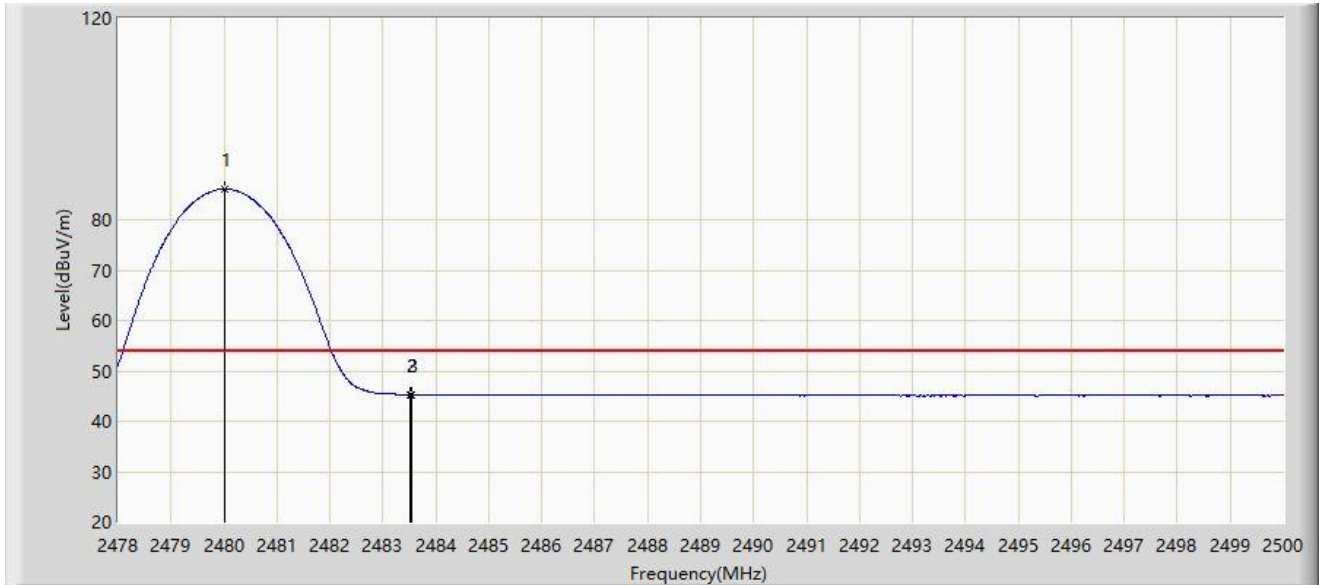


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.013	86.117	55.542	N/A	N/A	30.575	AV
2		2483.500	45.289	14.709	-8.711	54.000	30.580	AV
3	*	2483.533	45.297	14.717	-8.703	54.000	30.581	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz	

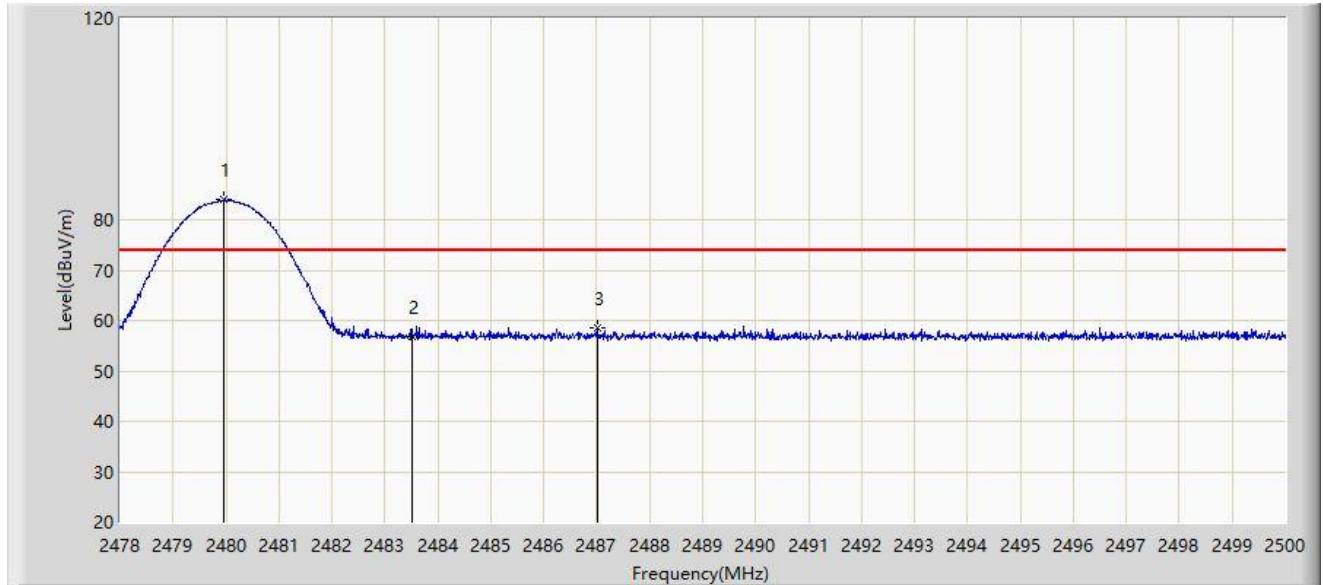


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.969	83.975	53.400	N/A	N/A	30.575	PK
2		2483.500	56.770	26.190	-17.230	74.000	30.580	PK
3	*	2487.009	58.573	27.988	-15.427	74.000	30.585	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-04-09
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Planar Magnetic Earbuds with Active Noise Cancellation - Left Earbud	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz	

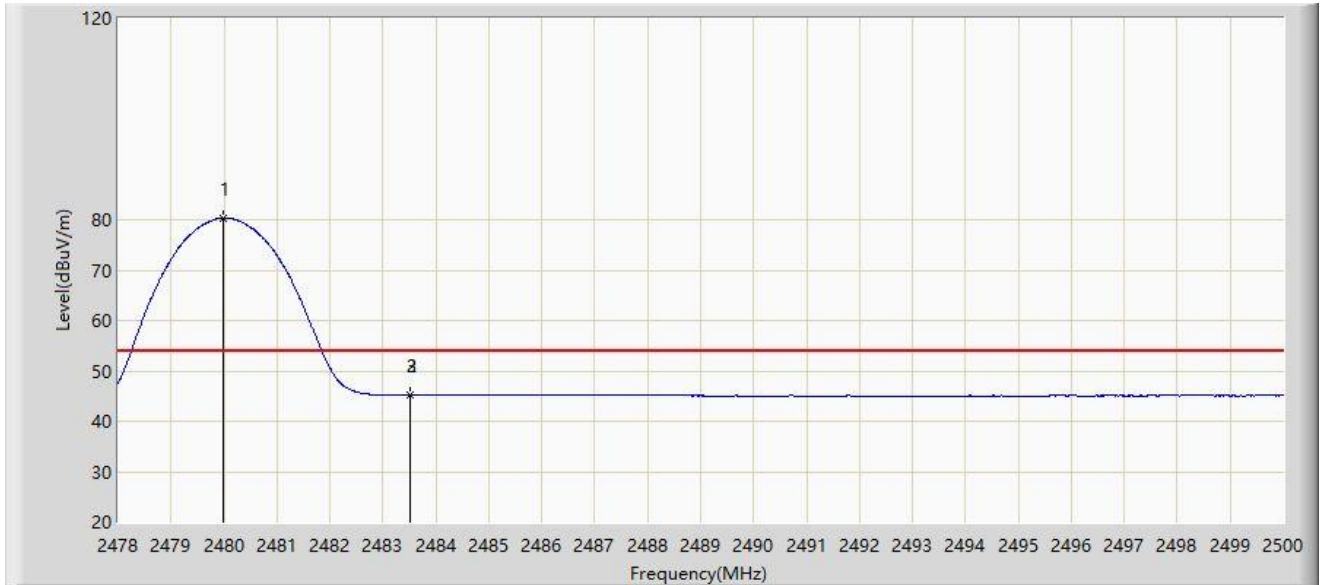

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.991	80.329	49.754	N/A	N/A	30.575	AV
2		2483.500	45.145	14.565	-8.855	54.000	30.580	AV
3	*	2483.511	45.152	14.572	-8.848	54.000	30.581	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).