
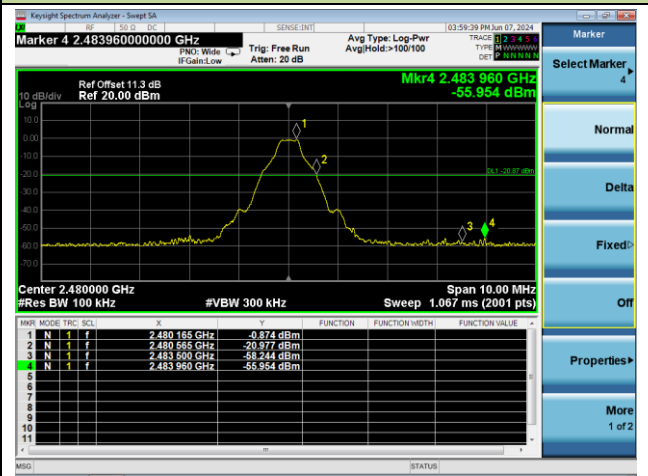


Left Earbud

Band-edge Compliance



DH5 - Channel 00 (2402MHz)

DH5 - Channel 78 (2480MHz)

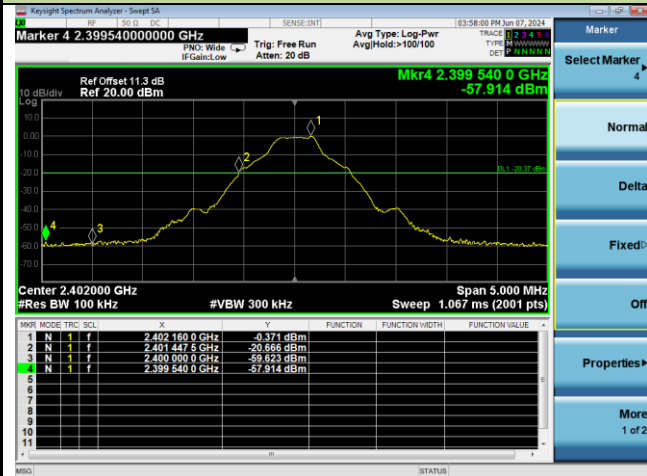

2DH5 - Channel 00 (2402MHz)


2DH5 - Channel 78 (2480MHz)

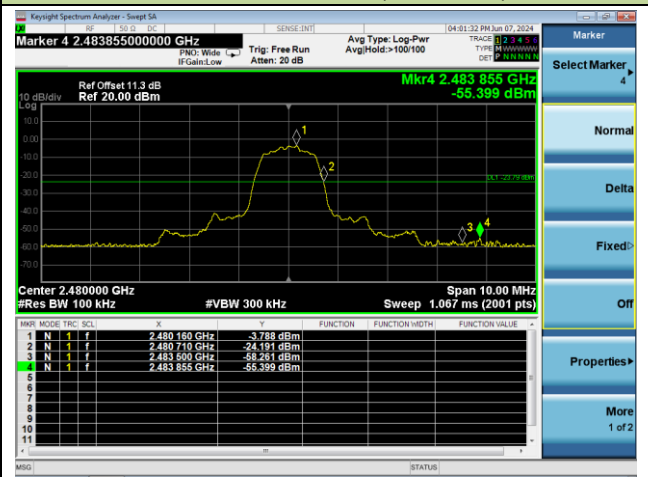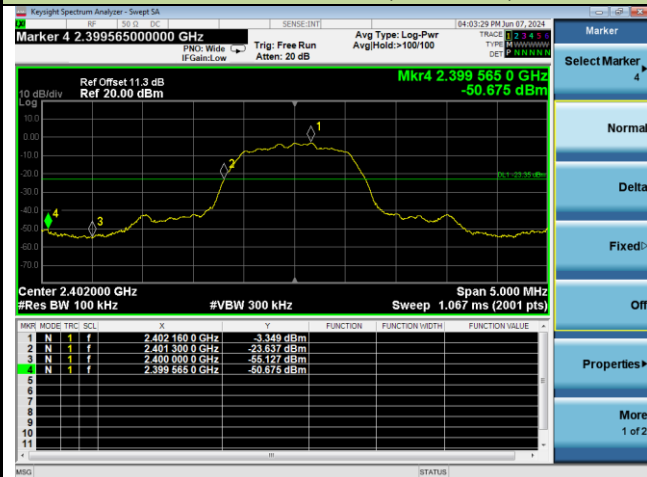


Right Earbud

Band-edge Compliance


DH5 - Channel 00 (2402MHz)

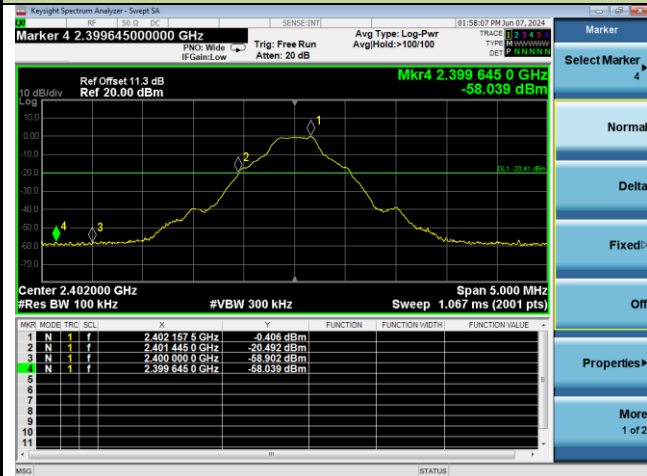


DH5 - Channel 78 (2480MHz)

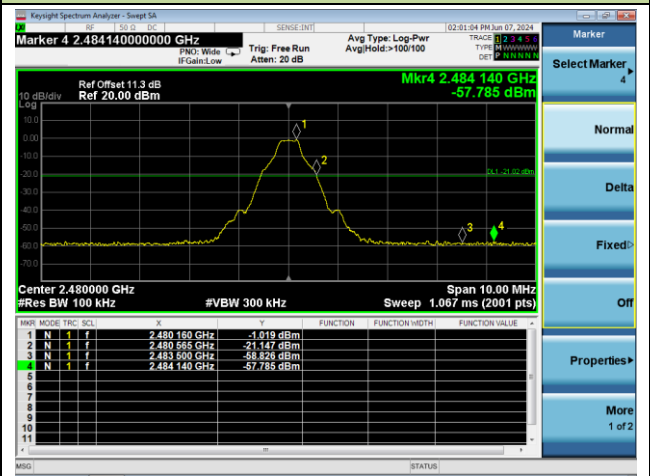

2DH5 - Channel 00 (2402MHz)

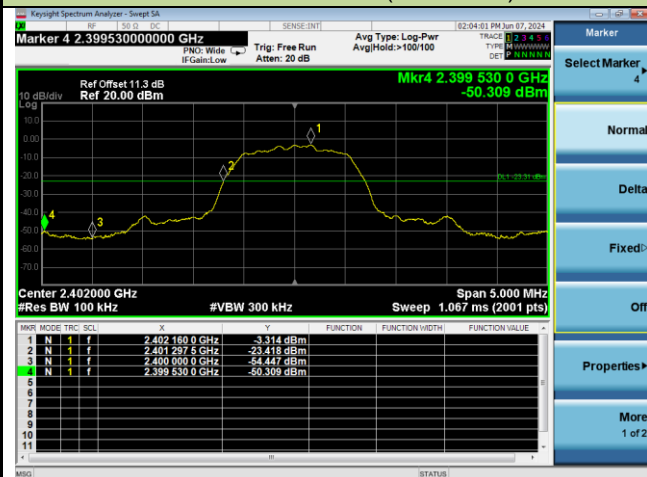

2DH5 - Channel 78 (2480MHz)


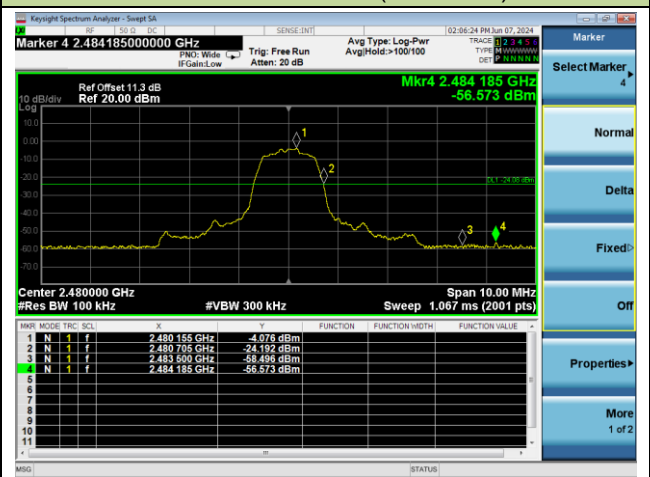


Left Earbud

Operation Frequency Range of 20dB Bandwidth within Hopping Mode



DH5 - Channel 00 (2402MHz)

DH5 - Channel 78 (2480MHz)

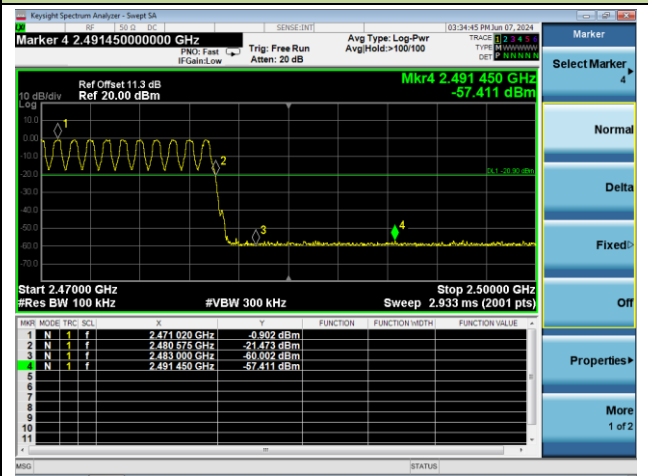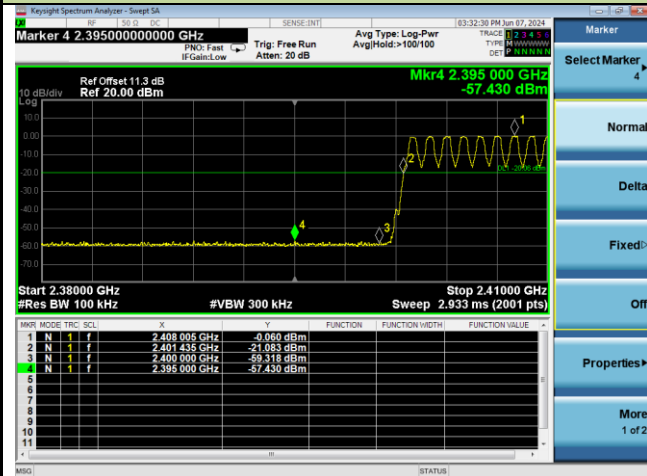

2DH5 - Channel 00 (2402MHz)


2DH5 - Channel 78 (2480MHz)

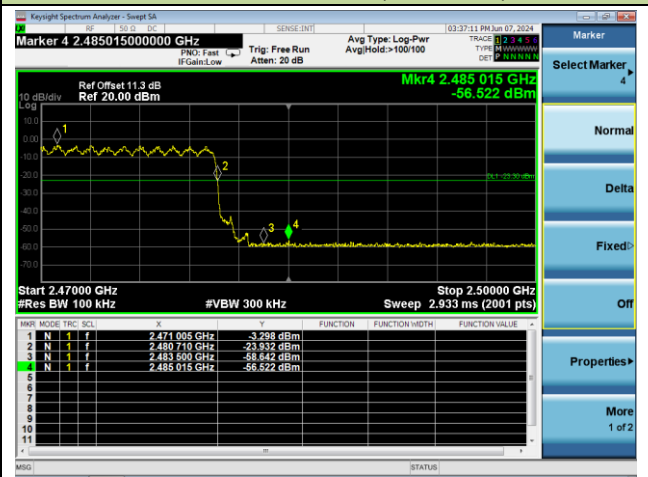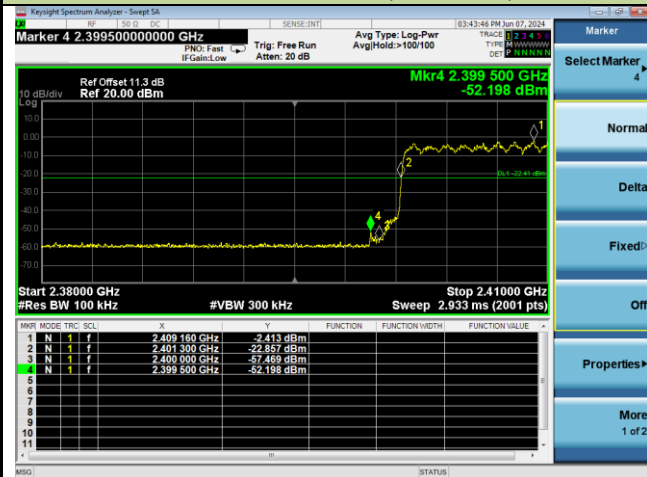


Right Earbud

Operation Frequency Range of 20dB Bandwidth within Hopping Mode


DH5 - Channel 00 (2402MHz)

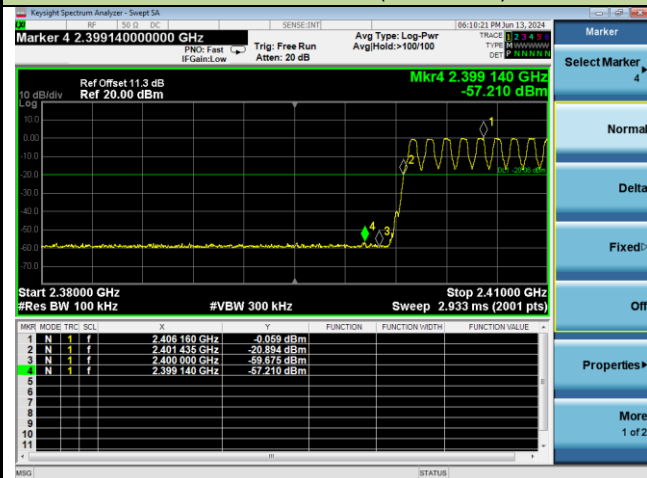


DH5 - Channel 78 (2480MHz)

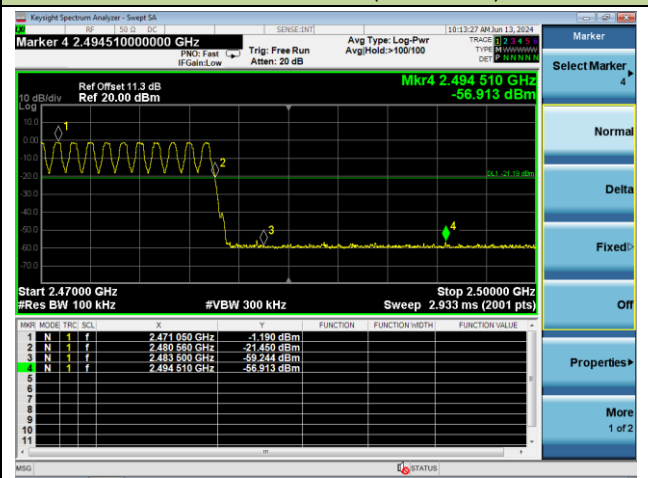

2DH5 - Channel 00 (2402MHz)

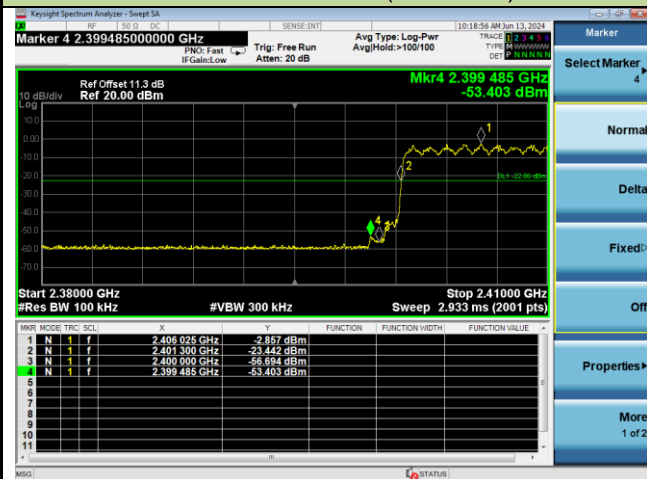

2DH5 - Channel 78 (2480MHz)

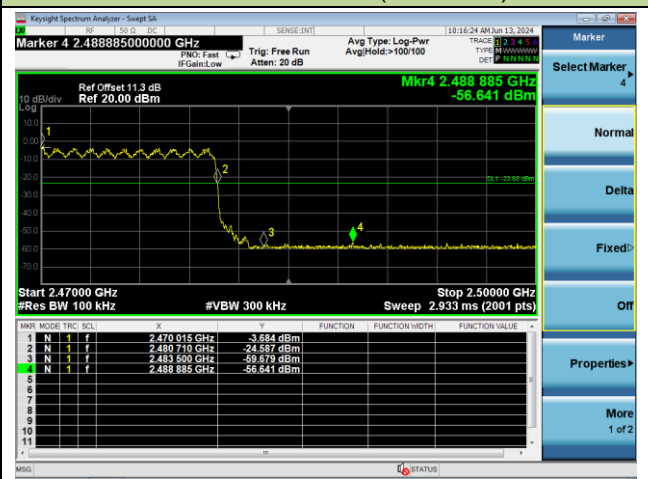


**A.8 Conducted Spurious Emissions Test Result**

Test Site	NS-SR1	Test Engineer	Summer Tang
Test Date	2024-06-07 ~ 2024-06-11		


Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass

Left Earbud DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

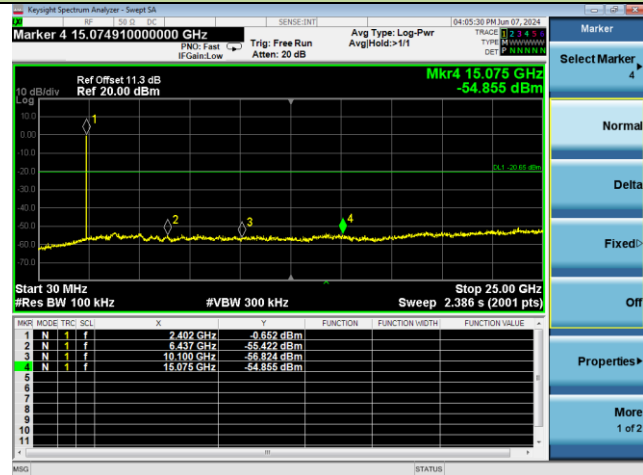

Channel 39 (2441MHz)

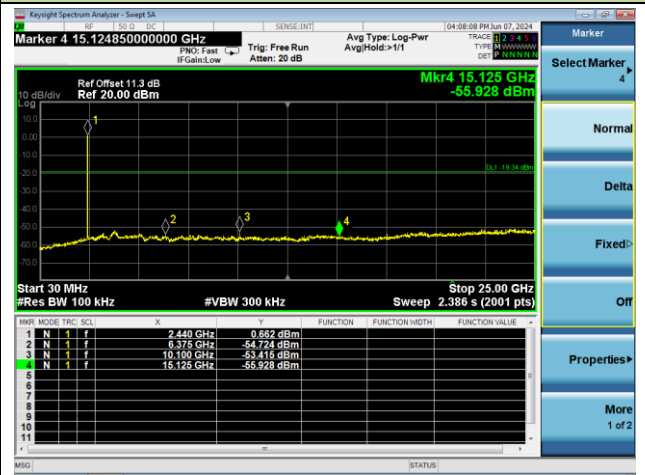


Channel 78 (2480MHz)

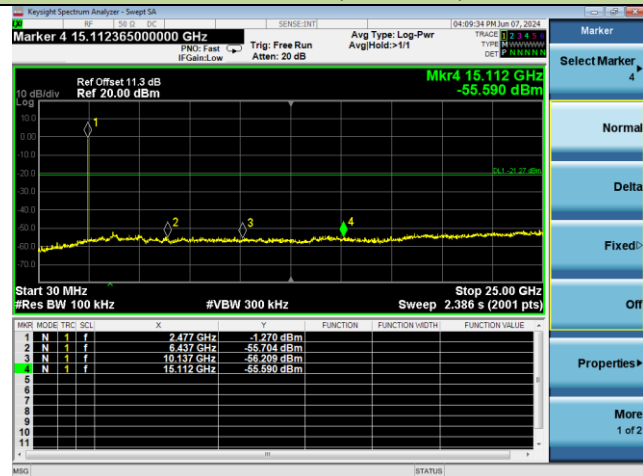


Left Earbud 2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

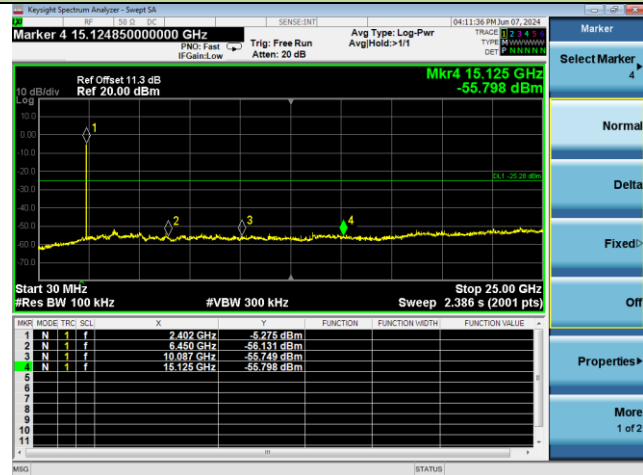

Channel 39 (2441MHz)

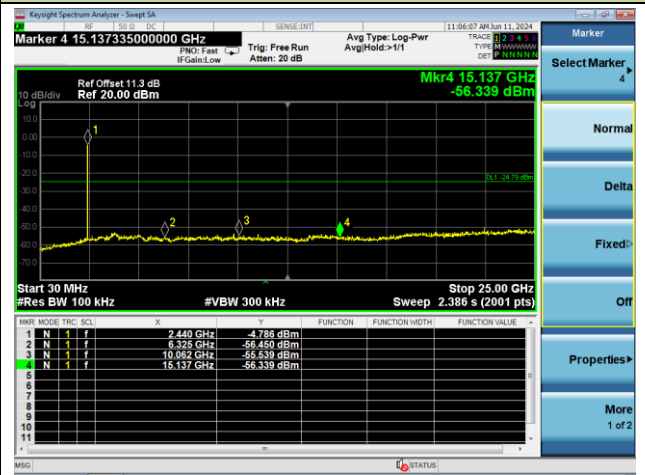


Channel 78 (2480MHz)

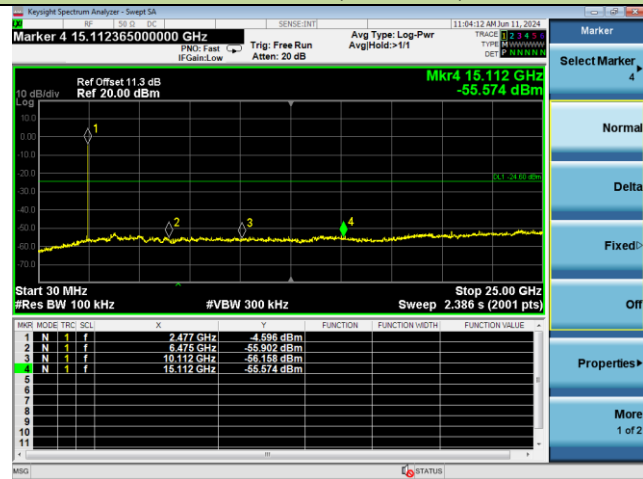


### Right Earbud DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

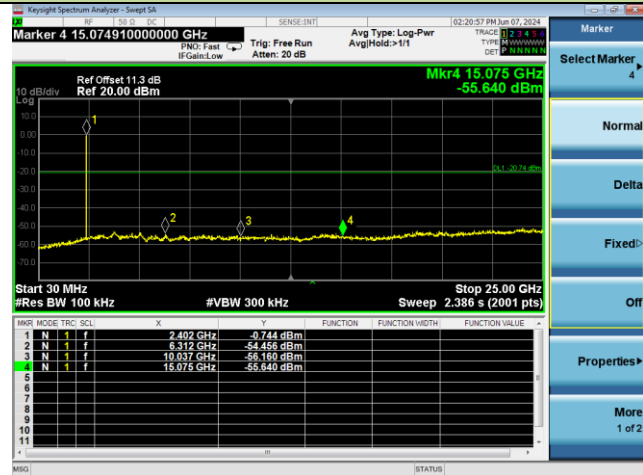

Channel 39 (2441MHz)

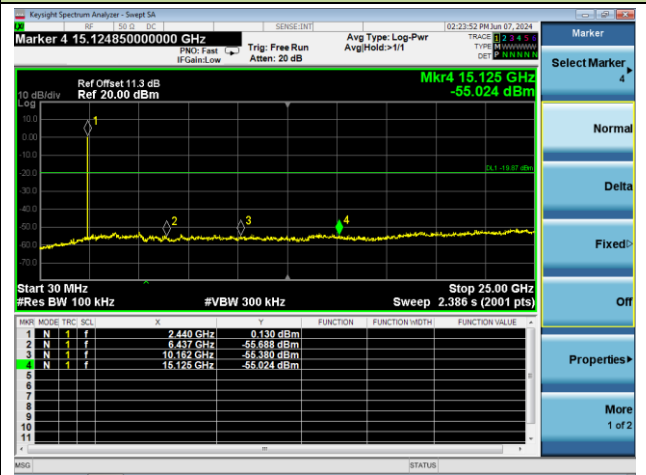


Channel 78 (2480MHz)

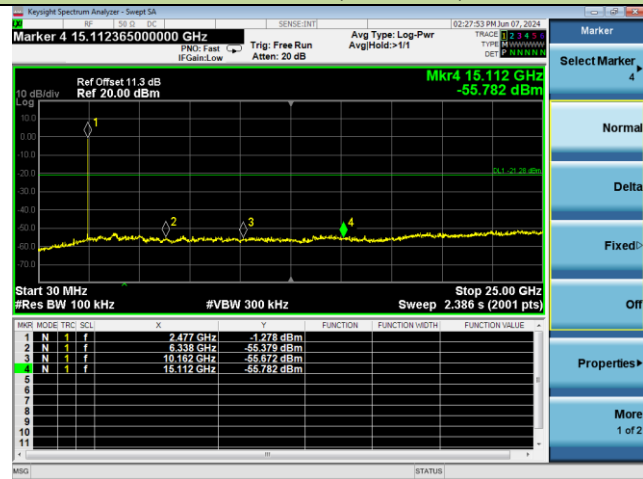




Right Earbud 2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

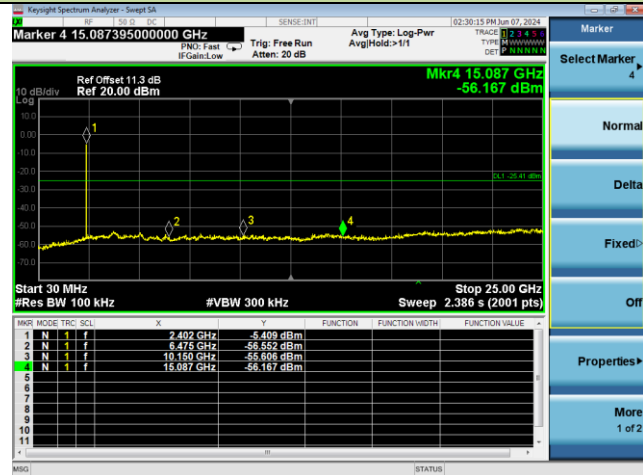

Channel 39 (2441MHz)

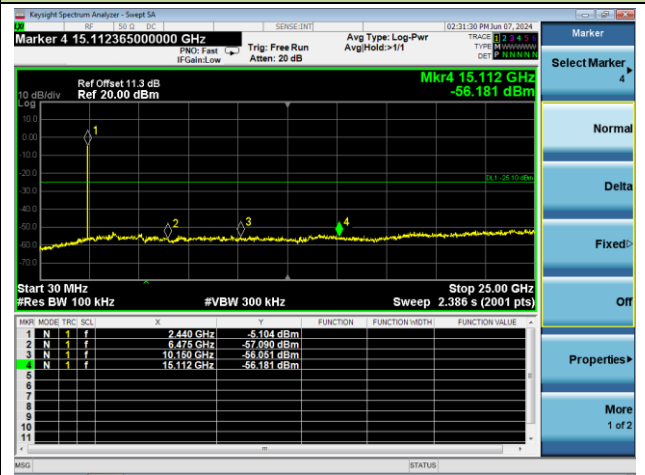

Channel 78 (2480MHz)

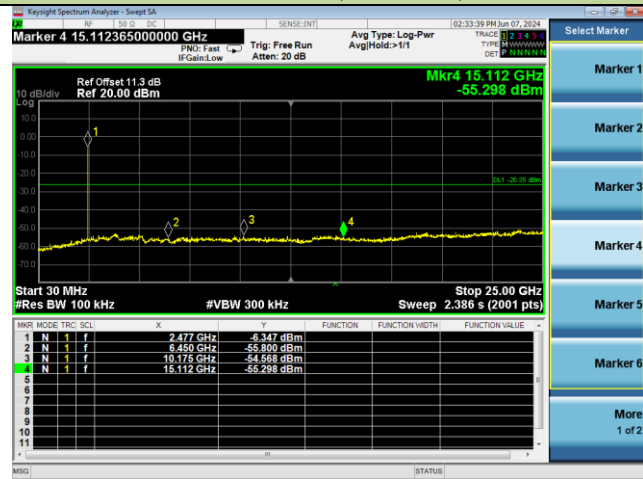

**A.9 Radiated Spurious Emission Test Result**

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2024-06-05	Test Mode:	DH5-Left Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4357.5	37.6	2.0	39.6	74.0	-34.4	Peak	Horizontal
	9389.5	34.9	14.4	49.3	74.0	-24.7	Peak	Horizontal
	11098.0	32.1	18.2	50.3	74.0	-23.7	Peak	Horizontal
	5420.0	35.2	4.3	39.5	74.0	-34.5	Peak	Vertical
	8046.5	34.7	11.9	46.6	74.0	-27.4	Peak	Vertical
	11489.0	32.4	18.7	51.1	74.0	-22.9	Peak	Vertical
39	4689.0	36.6	3.7	40.3	74.0	-33.7	Peak	Horizontal
	9092.0	33.1	15.0	48.1	74.0	-25.9	Peak	Horizontal
	11727.0	32.8	17.9	50.7	74.0	-23.3	Peak	Horizontal
	4816.5	37.2	3.5	40.7	74.0	-33.3	Peak	Vertical
	8403.5	34.2	12.4	46.6	74.0	-27.4	Peak	Vertical
	11557.0	32.2	18.8	51.0	74.0	-23.0	Peak	Vertical
78	5037.5	36.8	4.1	40.9	74.0	-33.1	Peak	Horizontal
	9134.5	33.9	14.8	48.7	74.0	-25.3	Peak	Horizontal
	11115.0	33.0	17.9	50.9	74.0	-23.1	Peak	Horizontal
	5088.5	36.1	4.5	40.6	74.0	-33.4	Peak	Vertical
	9151.5	33.3	14.9	48.2	74.0	-25.8	Peak	Vertical
	11157.5	32.8	18.4	51.2	74.0	-22.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2024-06-05	Test Mode:	2DH5-Left Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4638.0	36.3	3.5	39.8	74.0	-34.2	Peak	Horizontal
	7417.5	33.8	13.2	47.0	74.0	-27.0	Peak	Horizontal
	11548.5	32.4	18.6	51.0	74.0	-23.0	Peak	Horizontal
	4816.5	36.6	3.5	40.1	74.0	-33.9	Peak	Vertical
	7417.5	33.0	13.2	46.2	74.0	-27.8	Peak	Vertical
	11608.0	32.4	18.7	51.1	74.0	-22.9	Peak	Vertical
39	5029.0	36.1	4.1	40.2	74.0	-33.8	Peak	Horizontal
	8106.0	35.3	11.6	46.9	74.0	-27.1	Peak	Horizontal
	11081.0	32.8	18.3	51.1	74.0	-22.9	Peak	Horizontal
	3805.0	38.9	0.3	39.2	74.0	-34.8	Peak	Vertical
	8097.5	35.7	11.8	47.5	74.0	-26.5	Peak	Vertical
	11098.0	32.6	18.2	50.8	74.0	-23.2	Peak	Vertical
78	5063.0	36.1	4.1	40.2	74.0	-33.8	Peak	Horizontal
	7681.0	34.5	12.2	46.7	74.0	-27.3	Peak	Horizontal
	11557.0	32.1	18.8	50.9	74.0	-23.1	Peak	Horizontal
	4978.0	36.4	3.8	40.2	74.0	-33.8	Peak	Vertical
	9092.0	33.6	15.0	48.6	74.0	-25.4	Peak	Vertical
	10885.5	32.9	17.9	50.8	74.0	-23.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2024-06-04	Test Mode:	DH5-Right Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	5105.5	35.1	4.5	39.6	74.0	-34.4	Peak	Horizontal
	9364.0	33.5	14.3	47.8	74.0	-26.2	Peak	Horizontal
	10885.5	31.2	17.9	49.1	74.0	-24.9	Peak	Horizontal
	5411.5	33.7	4.2	37.9	74.0	-36.1	Peak	Vertical
	9151.5	31.6	14.9	46.5	74.0	-27.5	Peak	Vertical
	11463.5	31.3	18.5	49.8	74.0	-24.2	Peak	Vertical
39	4986.5	35.9	3.8	39.7	74.0	-34.3	Peak	Horizontal
	8080.5	33.8	11.8	45.6	74.0	-28.4	Peak	Horizontal
	11387.0	30.7	18.3	49.0	74.0	-25.0	Peak	Horizontal
	4663.5	37.0	3.4	40.4	74.0	-33.6	Peak	Vertical
	9474.5	33.0	14.3	47.3	74.0	-26.7	Peak	Vertical
	11030.0	31.5	17.9	49.4	74.0	-24.6	Peak	Vertical
78	5131.0	34.4	4.3	38.7	74.0	-35.3	Peak	Horizontal
	8310.0	32.5	11.9	44.4	74.0	-29.6	Peak	Horizontal
	11089.5	30.7	18.3	49.0	74.0	-25.0	Peak	Horizontal
	5046.0	34.0	4.0	38.0	74.0	-36.0	Peak	Vertical
	9415.0	33.0	14.4	47.4	74.0	-26.6	Peak	Vertical
	10987.5	32.2	17.6	49.8	74.0	-24.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2024-06-04	Test Mode:	2DH5-Right Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	7264.5	33.0	12.3	45.3	74.0	-28.7	Peak	Horizontal
	8335.5	32.2	12.1	44.3	74.0	-29.7	Peak	Horizontal
	11684.5	30.9	18.6	49.5	74.0	-24.5	Peak	Horizontal
	5148.0	33.7	4.6	38.3	74.0	-35.7	Peak	Vertical
	7485.5	31.5	13.0	44.5	74.0	-29.5	Peak	Vertical
	10877.0	30.8	17.7	48.5	74.0	-25.5	Peak	Vertical
39	5148.0	35.6	4.6	40.2	74.0	-33.8	Peak	Horizontal
	7426.0	32.2	13.3	45.5	74.0	-28.5	Peak	Horizontal
	10894.0	31.7	18.0	49.7	74.0	-24.3	Peak	Horizontal
	3856.0	36.7	0.2	36.9	74.0	-37.1	Peak	Vertical
	8335.5	32.7	12.1	44.8	74.0	-29.2	Peak	Vertical
	11472.0	30.6	18.6	49.2	74.0	-24.8	Peak	Vertical
78	5063.0	35.1	4.1	39.2	74.0	-34.8	Peak	Horizontal
	8318.5	34.2	11.9	46.1	74.0	-27.9	Peak	Horizontal
	11480.5	31.1	18.7	49.8	74.0	-24.2	Peak	Horizontal
	4357.5	36.2	2.0	38.2	74.0	-35.8	Peak	Vertical
	8106.0	33.2	11.6	44.8	74.0	-29.2	Peak	Vertical
	10962.0	31.4	17.7	49.1	74.0	-24.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

Site: NS-AC1	Test Date: 2024-06-05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_VULB9162	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2441MHz	

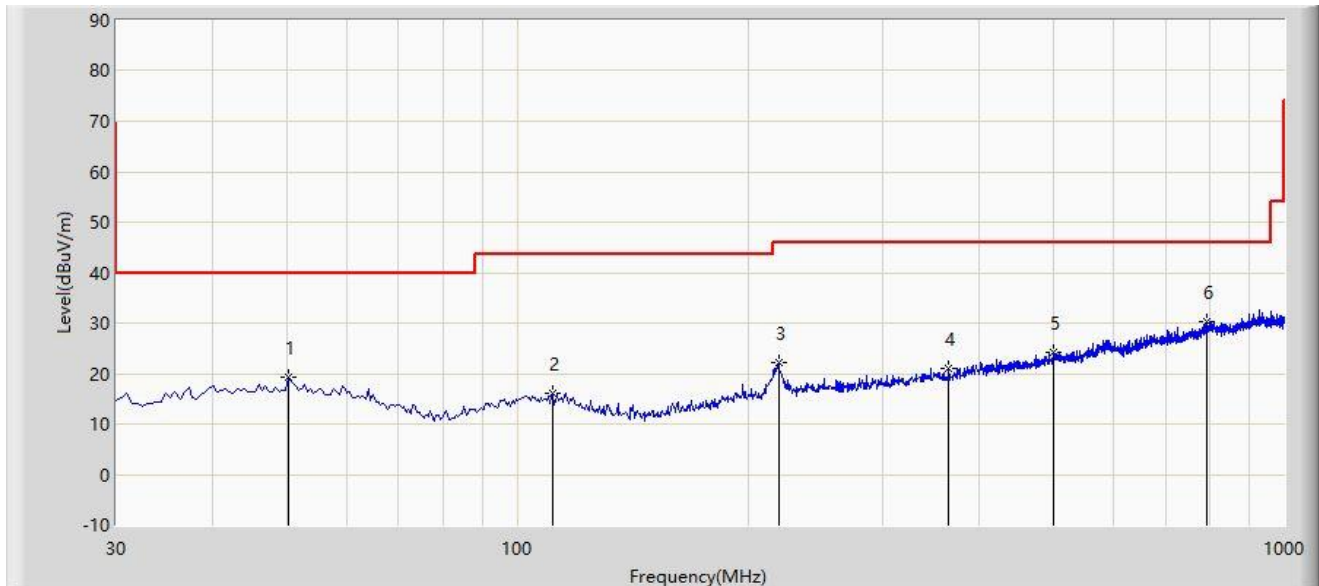

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		50.370	19.230	0.369	-20.770	40.000	18.861	PK
2		111.480	15.988	-0.518	-27.512	43.500	16.506	PK
3		219.150	22.141	5.261	-23.859	46.000	16.880	PK
4		365.620	21.012	0.567	-24.988	46.000	20.445	PK
5		500.935	24.064	0.424	-21.936	46.000	23.640	PK
6	*	792.420	30.231	1.257	-15.769	46.000	28.974	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: NS-AC1	Test Date: 2024-06-05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2441MHz	

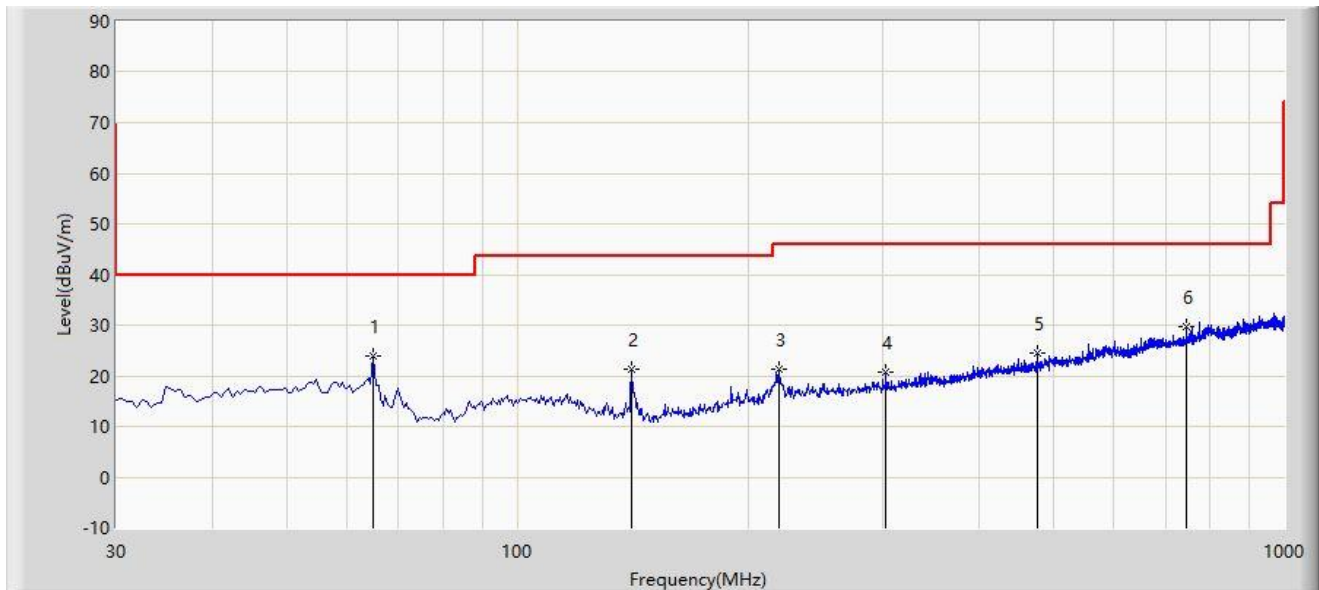

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	64.920	23.893	7.495	-16.107	40.000	16.398	PK
2		141.065	21.346	8.111	-22.154	43.500	13.236	PK
3		219.635	21.269	4.359	-24.731	46.000	16.909	PK
4		302.085	20.768	1.581	-25.232	46.000	19.187	PK
5		476.685	24.386	1.578	-21.614	46.000	22.808	PK
6		745.860	29.566	1.890	-16.434	46.000	27.677	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: NS-AC1	Test Date: 2024-06-05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_VULB9162	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2441MHz	

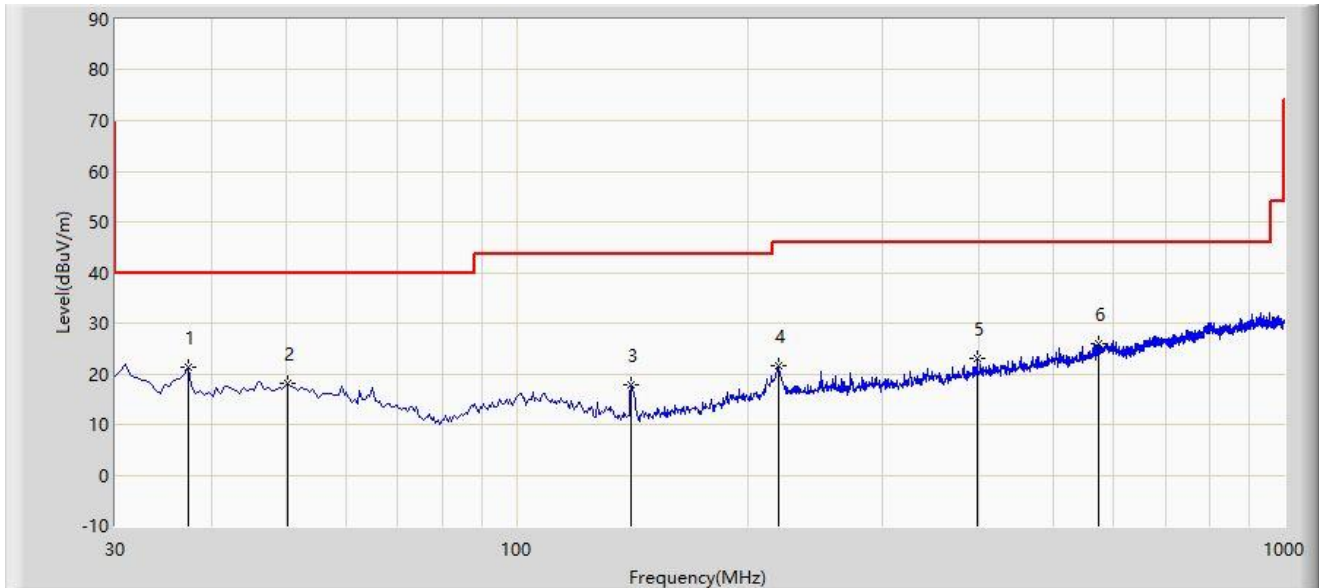

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	37.275	21.296	4.379	-18.704	40.000	16.917	PK
2		50.370	18.199	-0.662	-21.801	40.000	18.861	PK
3		141.065	17.824	4.589	-25.676	43.500	13.236	PK
4		219.150	21.675	4.795	-24.325	46.000	16.880	PK
5		398.115	22.925	1.105	-23.075	46.000	21.820	PK
6		574.170	25.948	0.918	-20.052	46.000	25.031	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.



Site: NS-AC1	Test Date: 2024-06-05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2441MHz	

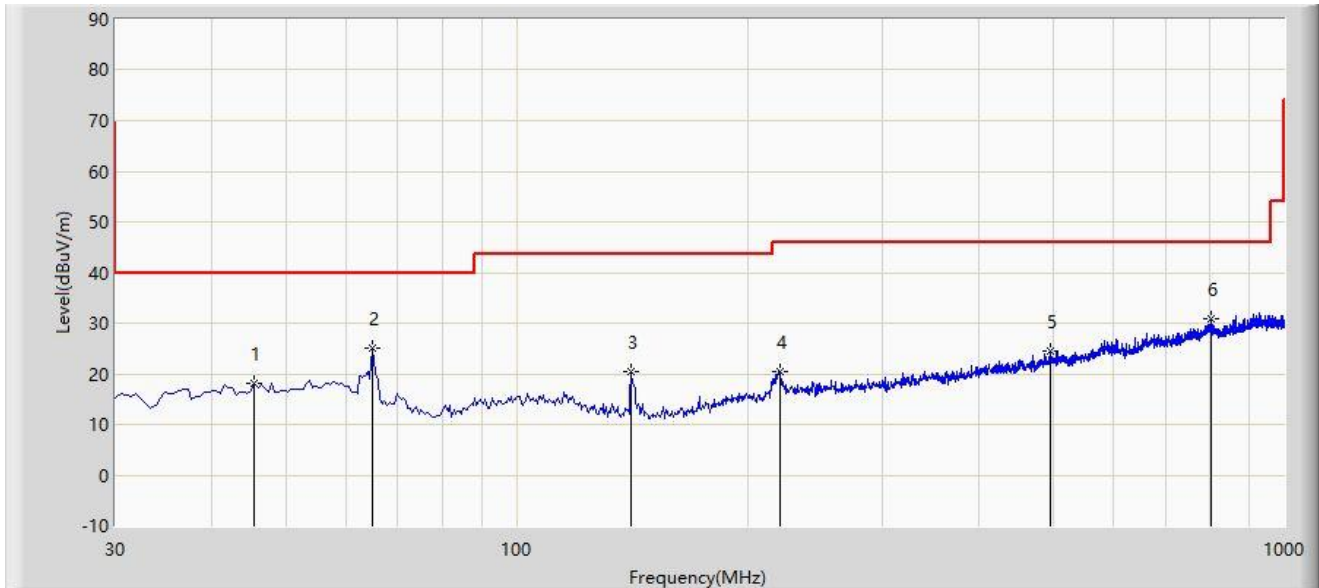

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		45.520	18.160	-0.575	-21.840	40.000	18.735	PK
2	*	64.920	25.122	8.724	-14.878	40.000	16.398	PK
3		141.065	20.314	7.079	-23.186	43.500	13.236	PK
4		220.605	20.567	3.595	-25.433	46.000	16.972	PK
5		495.115	24.467	0.944	-21.533	46.000	23.523	PK
6		802.605	30.728	1.727	-15.272	46.000	29.001	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

**A.10 Radiated Restricted Band Edge Test Result**

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

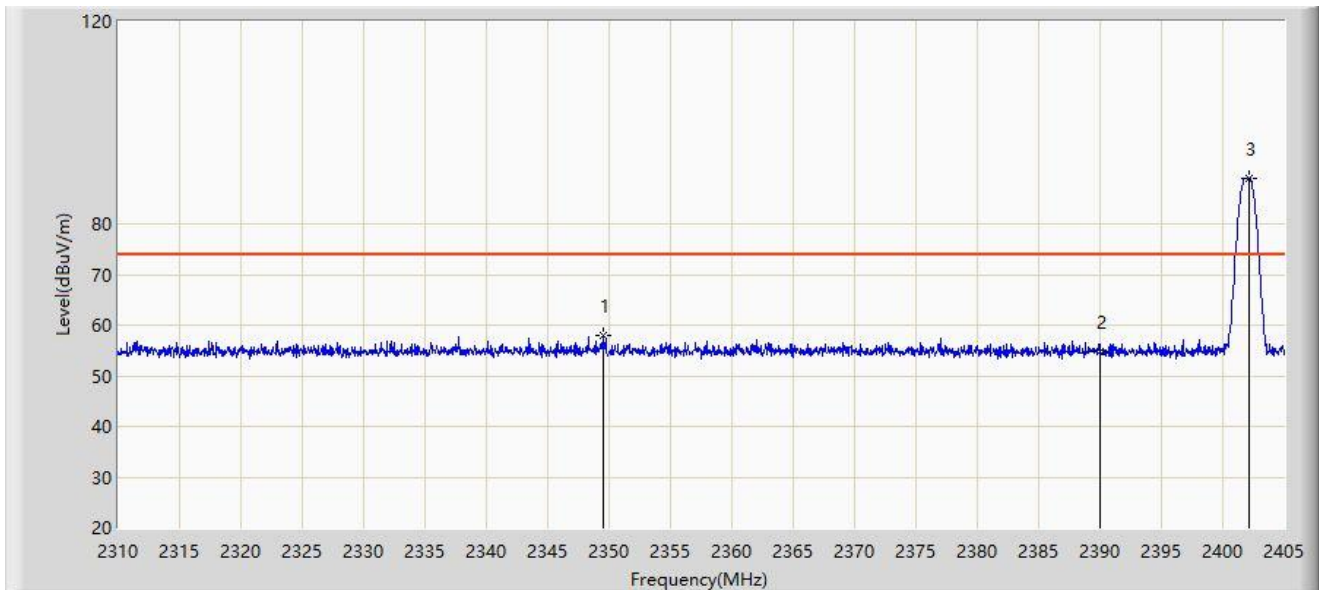


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2349.567	57.983	25.723	-16.017	74.000	32.260	PK
2		2390.000	54.639	22.481	-19.361	74.000	32.159	PK
3		2402.150	89.008	56.855	N/A	N/A	32.153	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

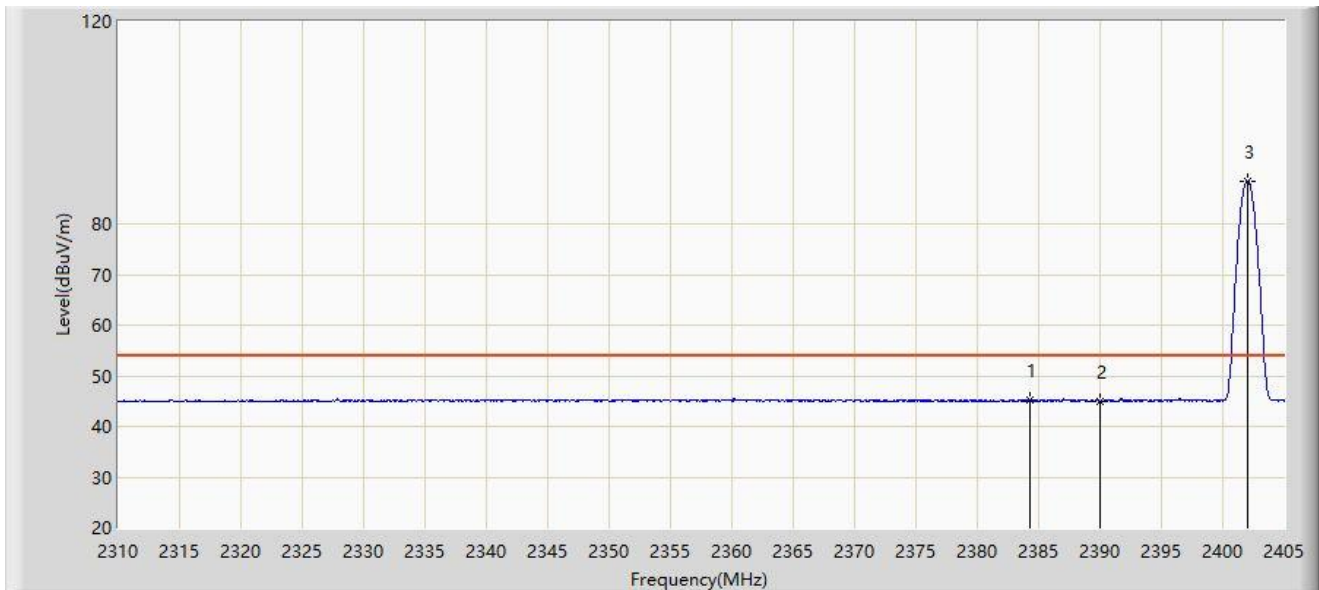


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2384.337	45.315	13.168	-8.685	54.000	32.147	AV
2		2390.000	44.985	12.827	-9.015	54.000	32.159	AV
3		2402.008	88.508	56.355	N/A	N/A	32.153	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

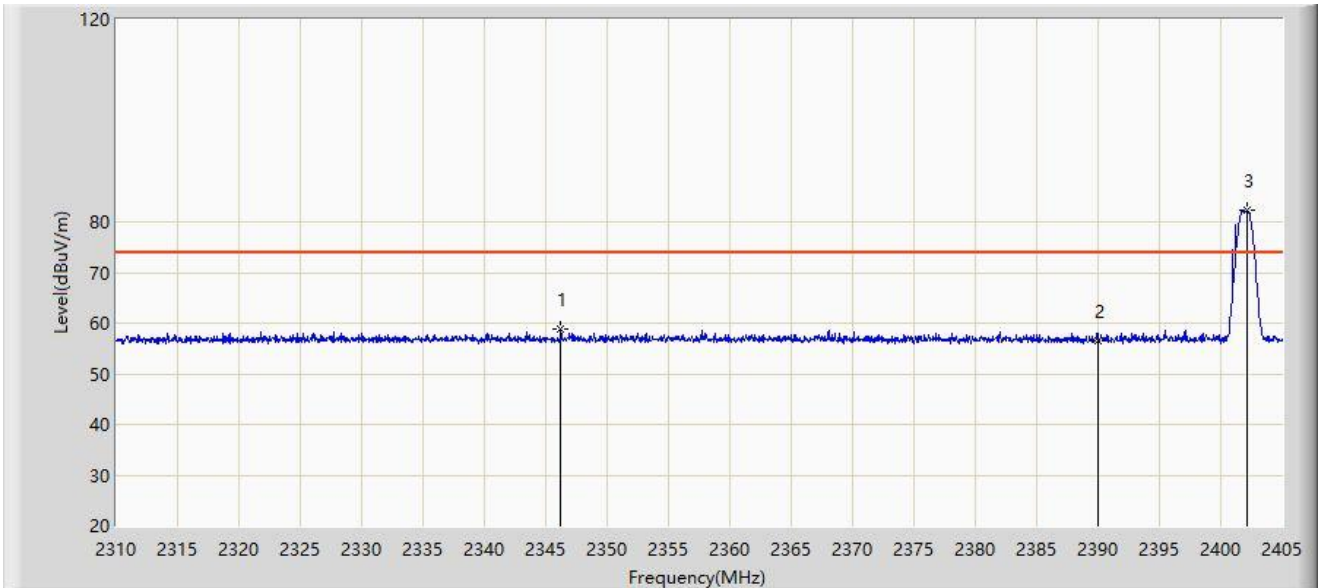


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2346.242	58.880	26.606	-15.120	74.000	32.274	PK
2		2390.000	56.626	24.468	-17.374	74.000	32.159	PK
3		2402.198	82.276	50.123	N/A	N/A	32.153	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

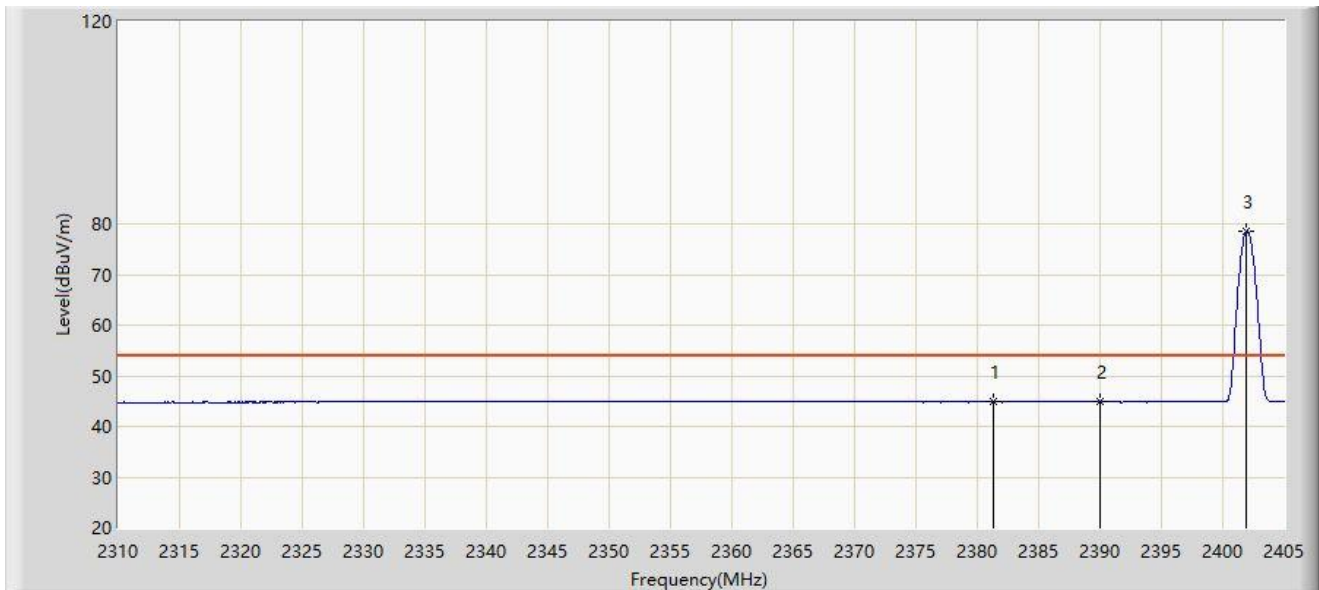


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2381.298	44.821	12.681	-9.179	54.000	32.141	AV
2		2390.000	44.803	12.645	-9.197	54.000	32.159	AV
3		2401.960	78.616	46.462	N/A	N/A	32.153	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

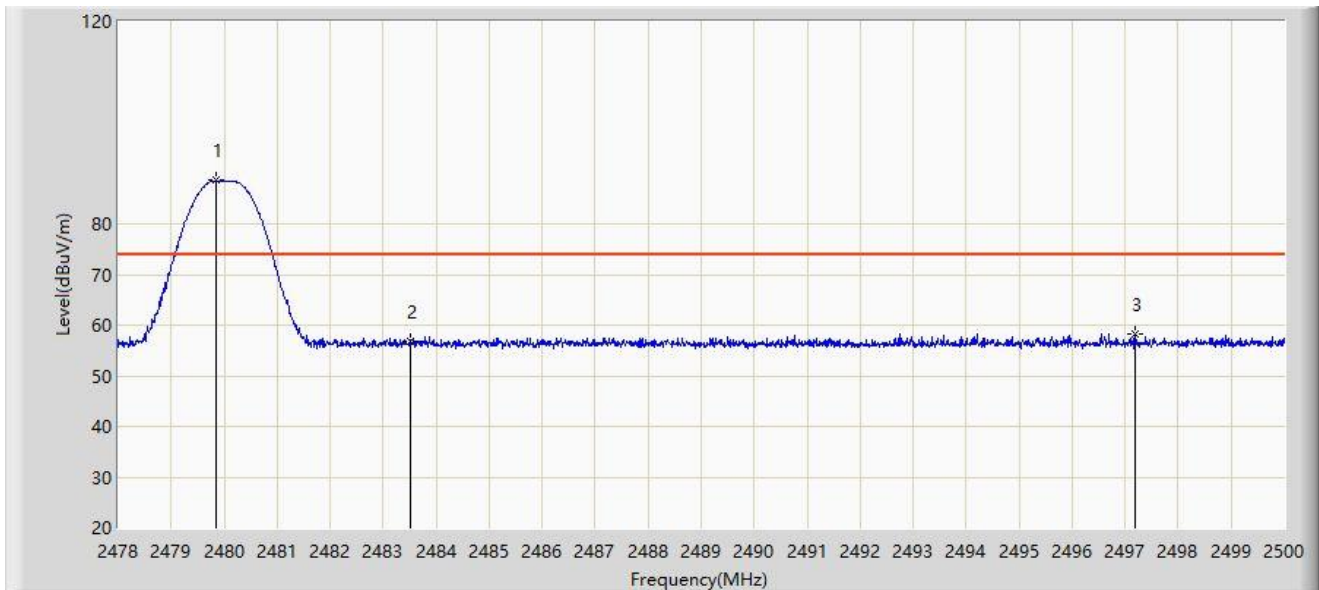


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.859	88.594	56.467	N/A	N/A	32.126	PK
2		2483.500	56.675	24.539	-17.325	74.000	32.136	PK
3	*	2497.195	58.403	26.236	-15.597	74.000	32.168	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

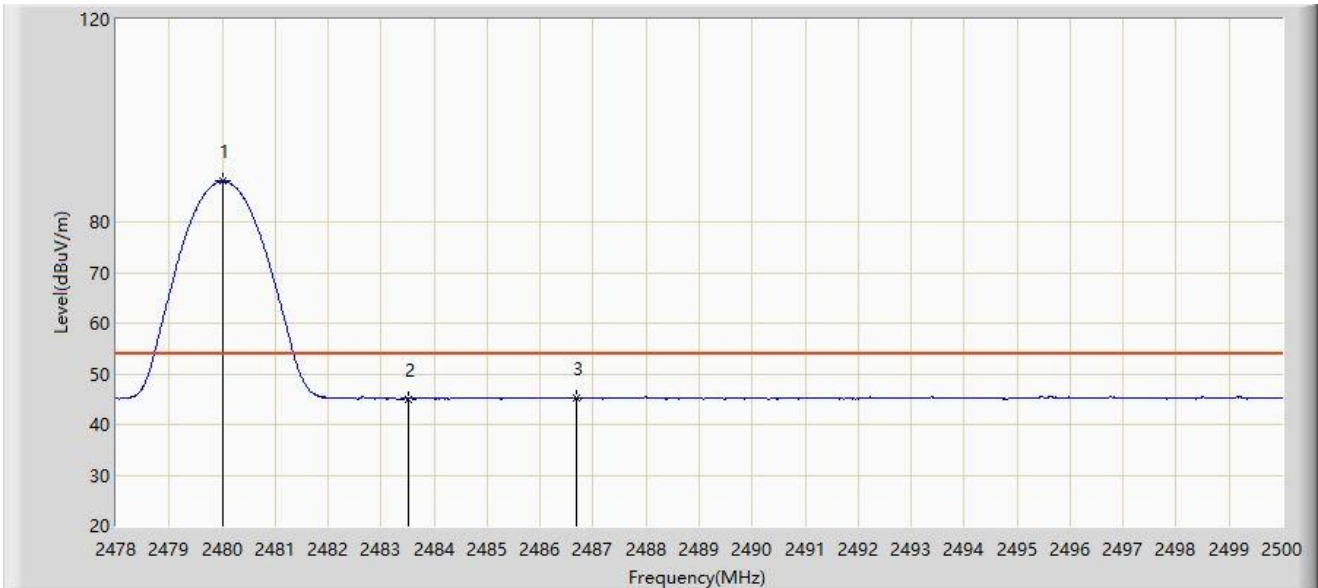


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	88.039	55.912	N/A	N/A	32.127	AV
2		2483.500	45.072	12.936	-8.928	54.000	32.136	AV
3	*	2486.690	45.311	13.167	-8.689	54.000	32.143	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

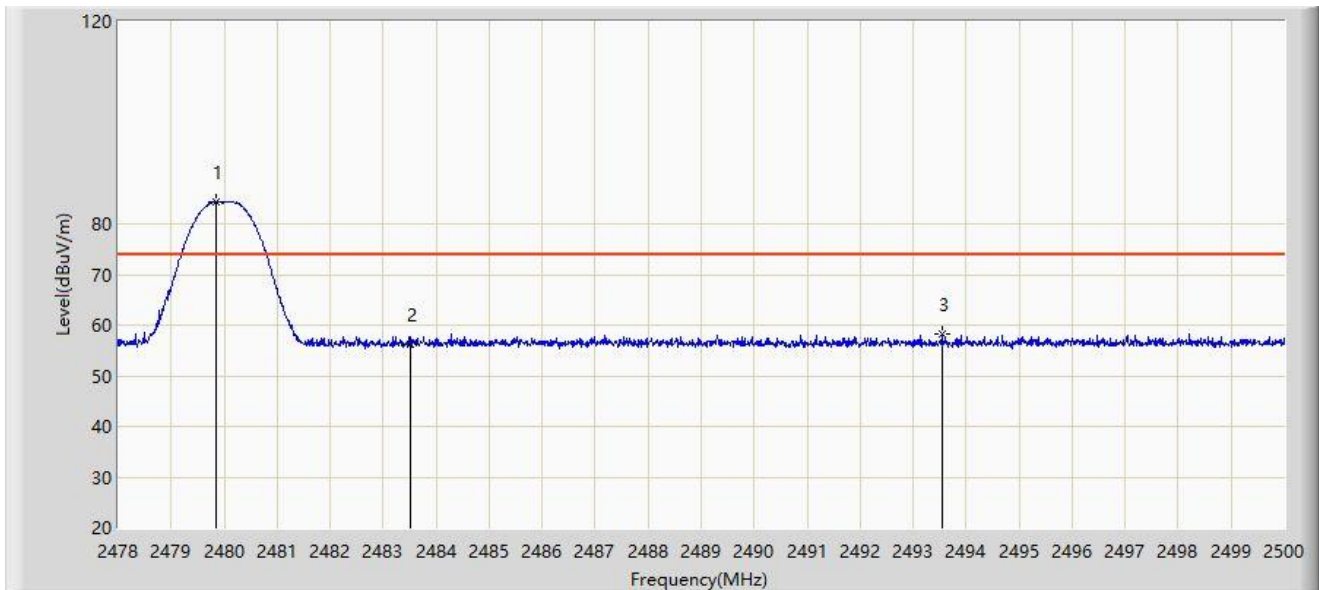

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.848	84.380	52.253	N/A	N/A	32.126	PK
2		2483.500	56.242	24.106	-17.758	74.000	32.136	PK
3	*	2493.543	58.253	26.092	-15.747	74.000	32.161	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

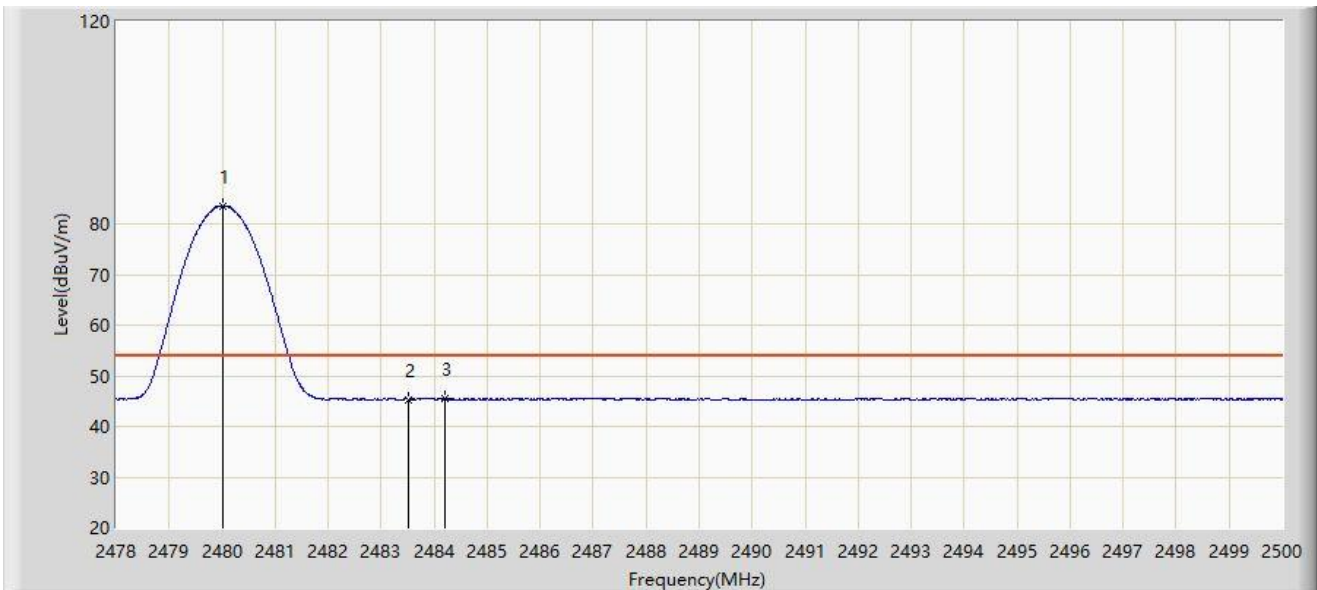


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2480.024	83.592	51.465	N/A	N/A	32.127	AV
2		2483.500	45.317	13.181	-8.683	54.000	32.136	AV
3	*	2484.193	45.484	13.347	-8.516	54.000	32.137	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

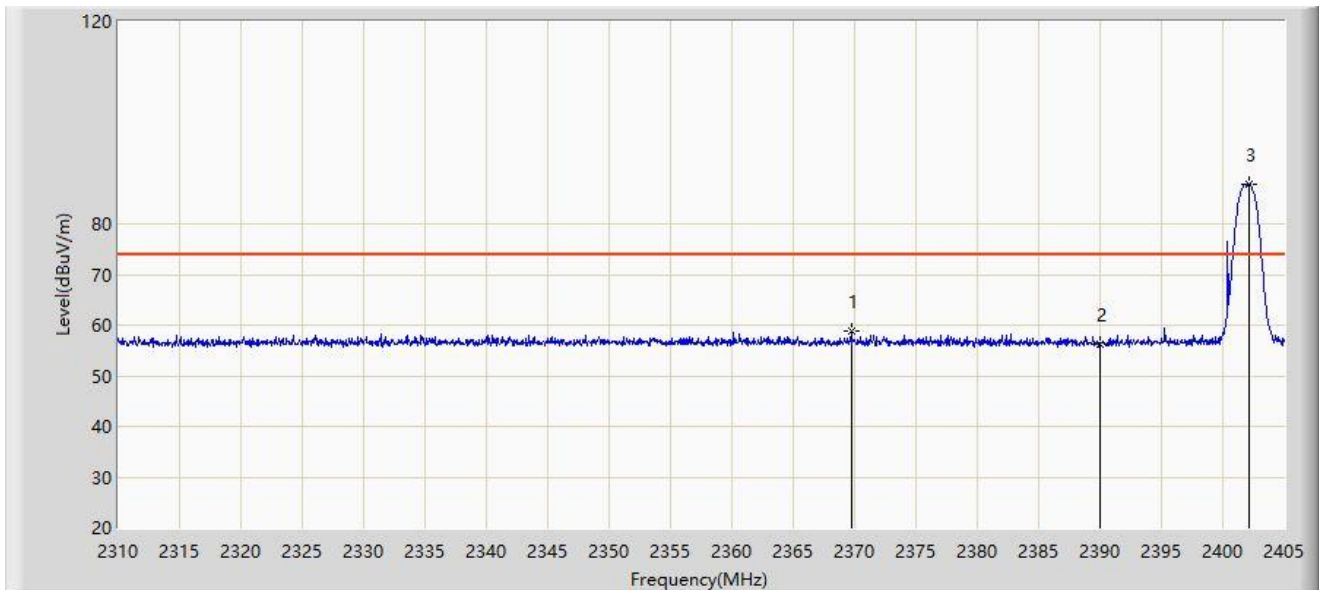


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2369.755	58.810	26.642	-15.190	74.000	32.167	PK
2		2390.000	56.219	24.061	-17.781	74.000	32.159	PK
3		2402.103	87.869	55.716	N/A	N/A	32.153	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

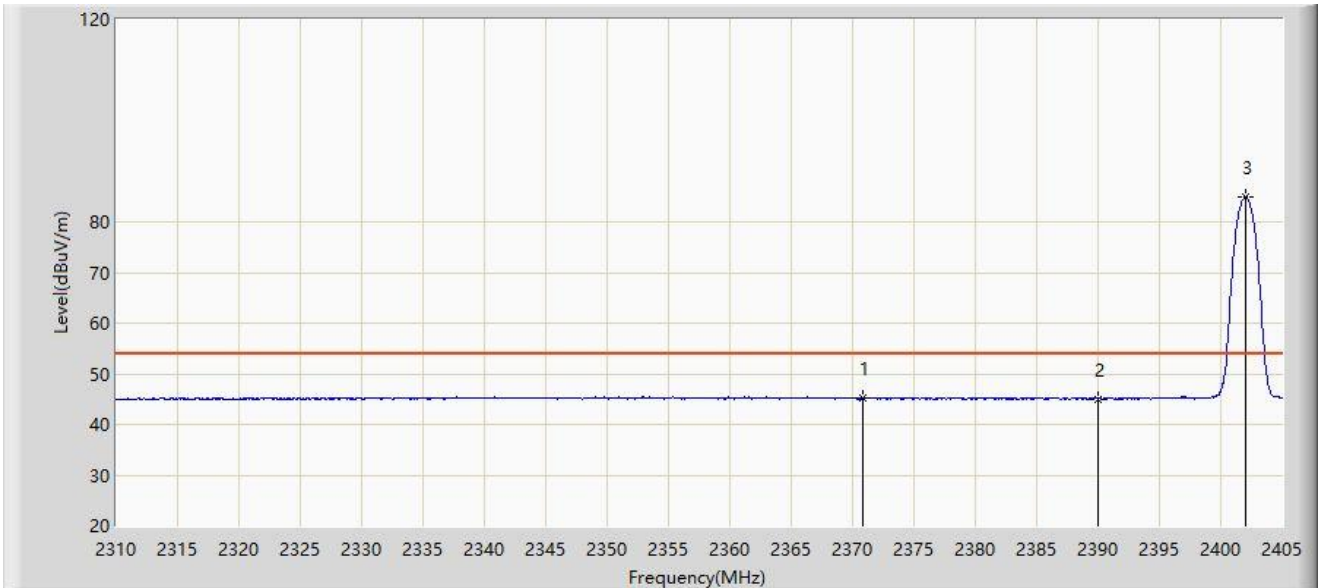


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2370.847	45.312	13.150	-8.688	54.000	32.162	AV
2		2390.000	45.059	12.901	-8.941	54.000	32.159	AV
3		2402.008	84.888	52.735	N/A	N/A	32.153	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

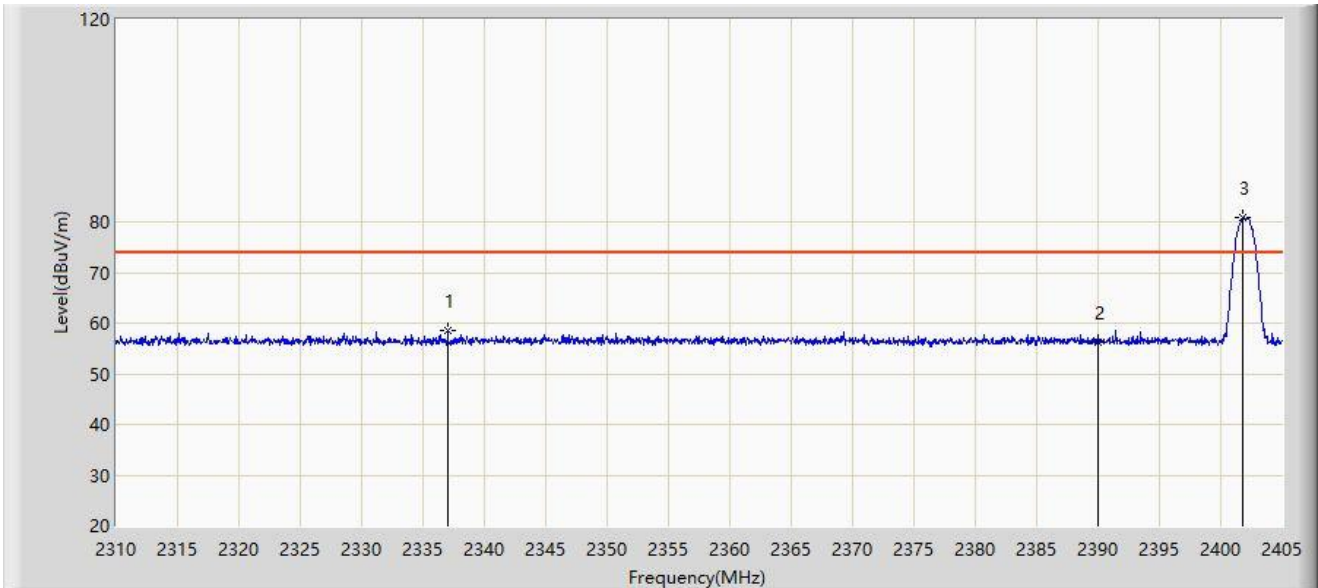


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2337.028	58.471	26.166	-15.529	74.000	32.306	PK
2		2390.000	56.178	24.020	-17.822	74.000	32.159	PK
3		2401.817	80.777	48.623	N/A	N/A	32.153	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

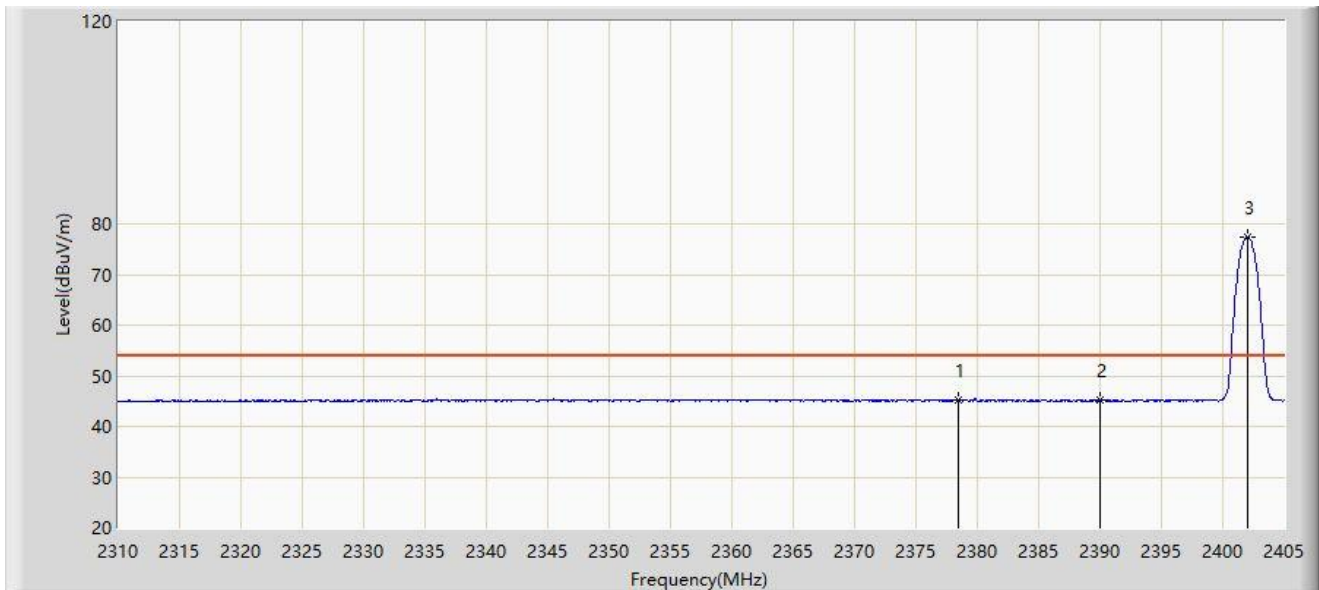


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2378.495	45.322	13.187	-8.678	54.000	32.135	AV
2		2390.000	45.200	13.042	-8.800	54.000	32.159	AV
3		2402.008	77.405	45.252	N/A	N/A	32.153	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

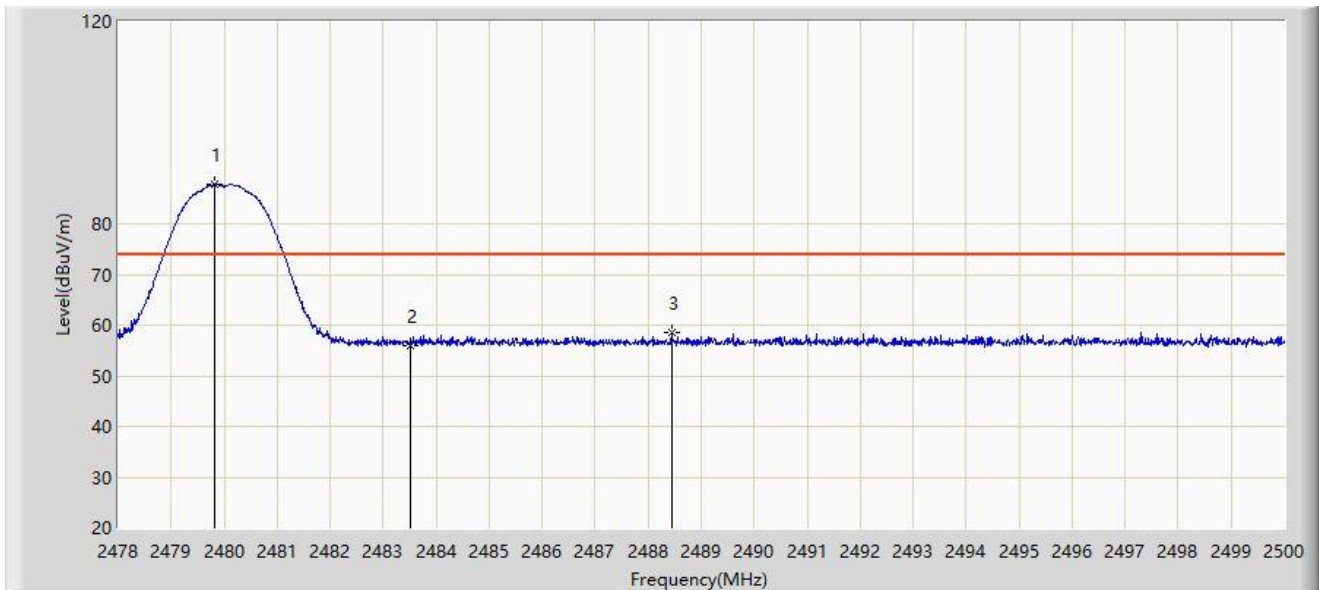


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.826	87.892	55.765	N/A	N/A	32.126	PK
2		2483.500	55.944	23.808	-18.056	74.000	32.136	PK
3	*	2488.439	58.657	26.509	-15.343	74.000	32.148	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

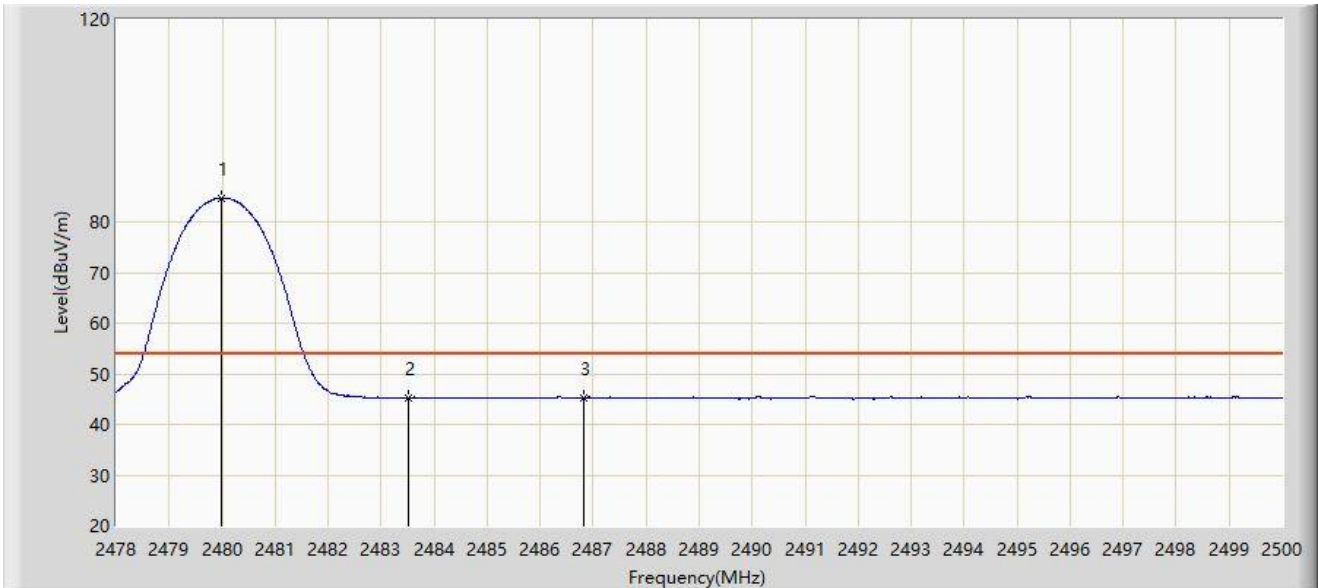


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.991	84.743	52.616	N/A	N/A	32.127	AV
2		2483.500	45.131	12.995	-8.869	54.000	32.136	AV
3	*	2486.822	45.333	13.189	-8.667	54.000	32.144	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

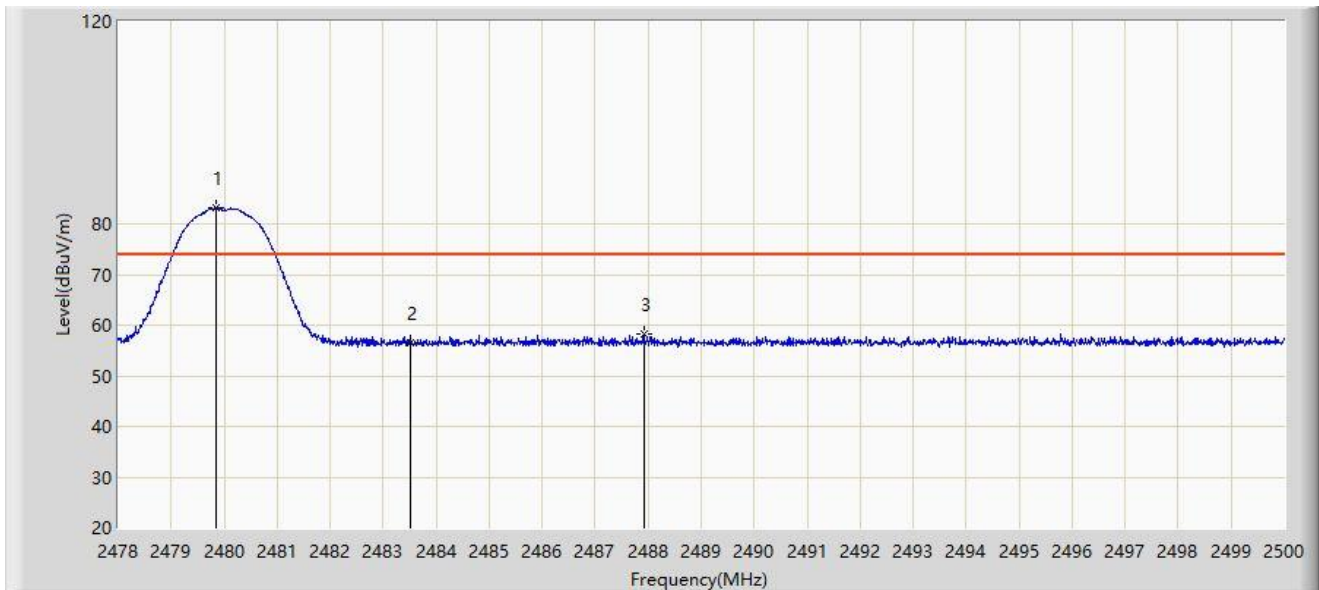

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.837	83.169	51.042	N/A	N/A	32.126	PK
2		2483.500	56.433	24.297	-17.567	74.000	32.136	PK
3	*	2487.922	58.196	26.049	-15.804	74.000	32.147	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Left Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

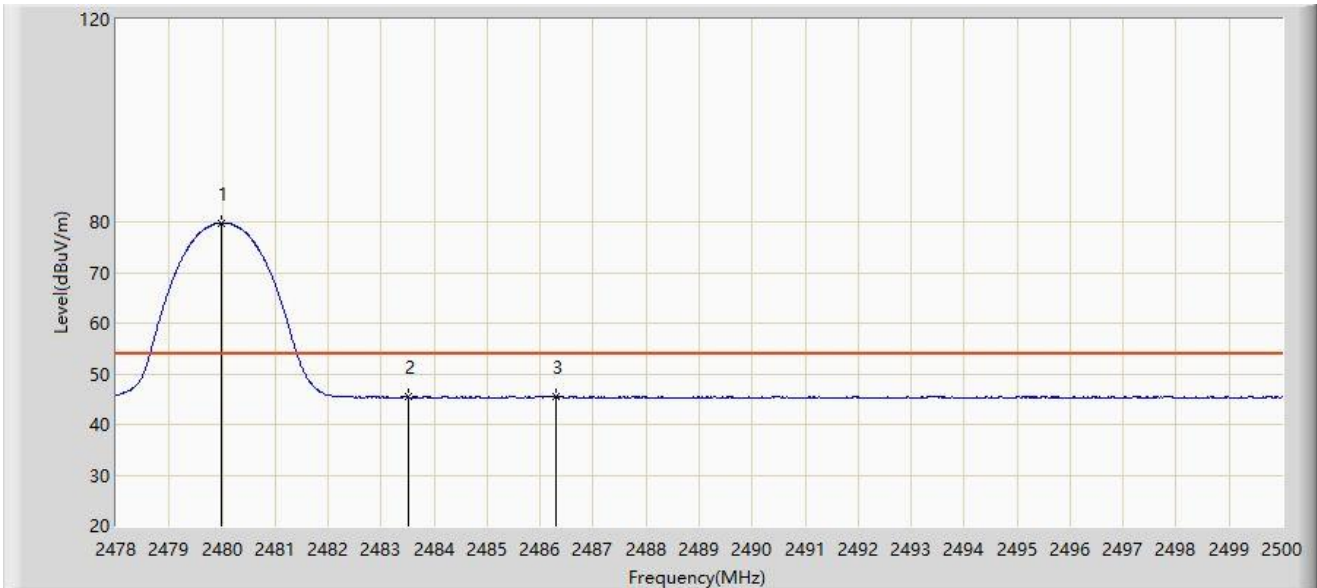


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2479.991	79.840	47.713	N/A	N/A	32.127	AV
2		2483.500	45.380	13.244	-8.620	54.000	32.136	AV
3	*	2486.305	45.465	13.322	-8.535	54.000	32.143	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

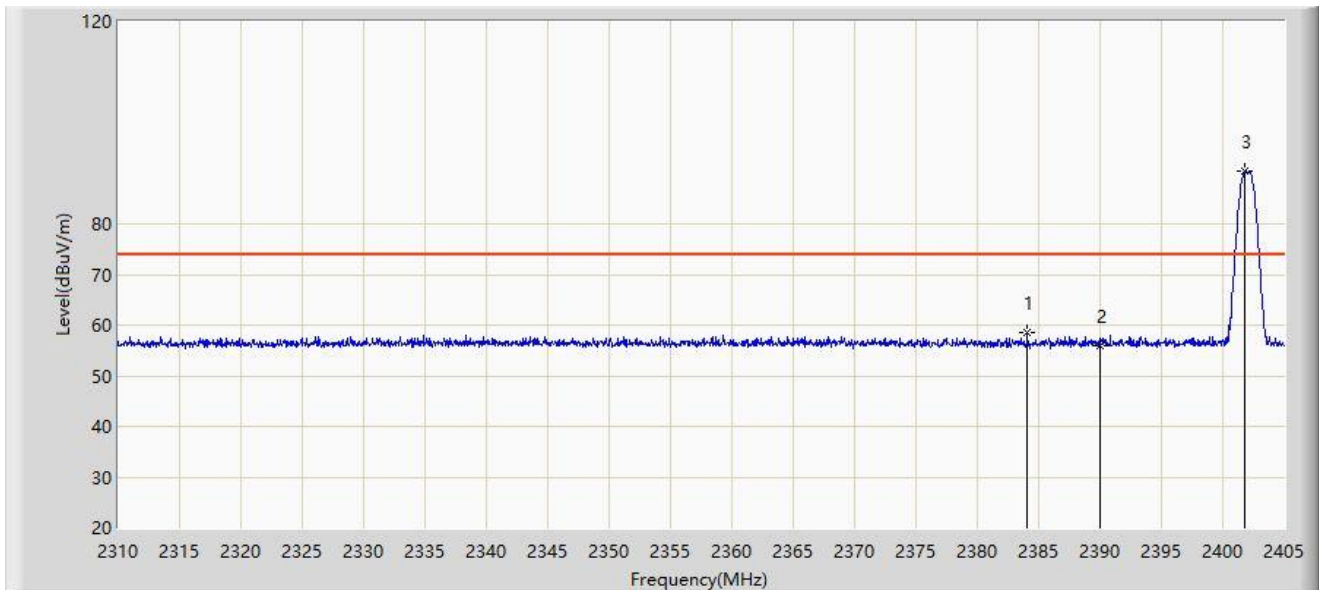


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.052	58.505	26.359	-15.495	74.000	32.147	PK
2		2390.000	56.009	23.851	-17.991	74.000	32.159	PK
3		2401.817	90.303	58.149	N/A	N/A	32.153	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

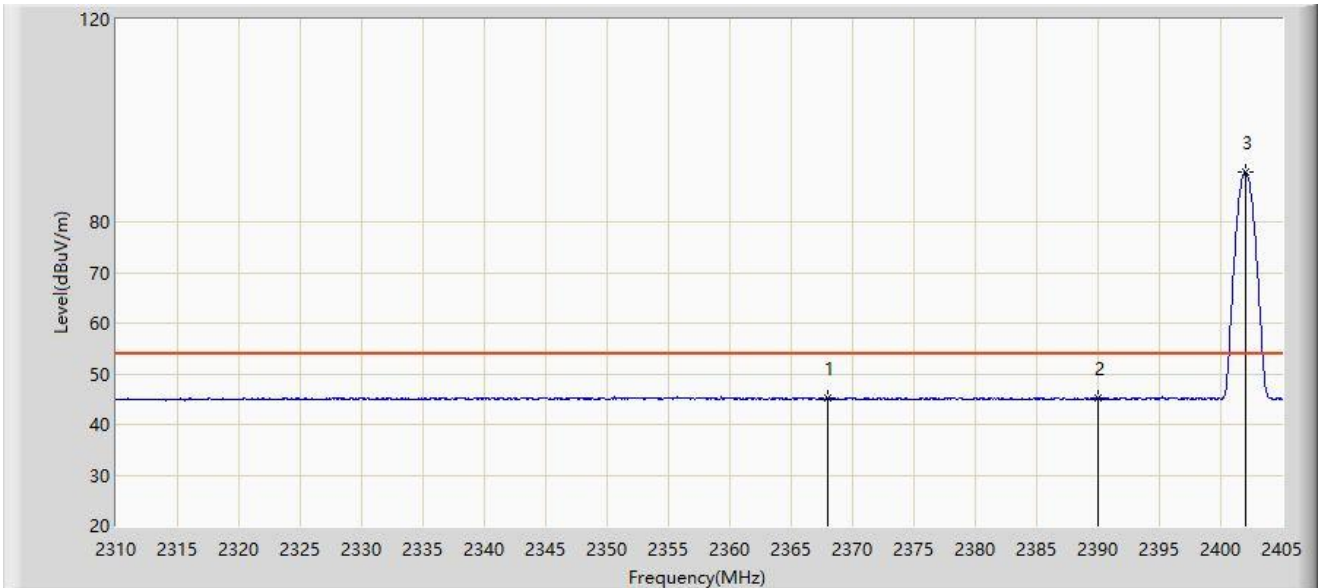


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2367.998	45.329	13.152	-8.671	54.000	32.177	AV
2		2390.000	45.078	12.920	-8.922	54.000	32.159	AV
3		2402.008	89.757	57.604	N/A	N/A	32.153	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

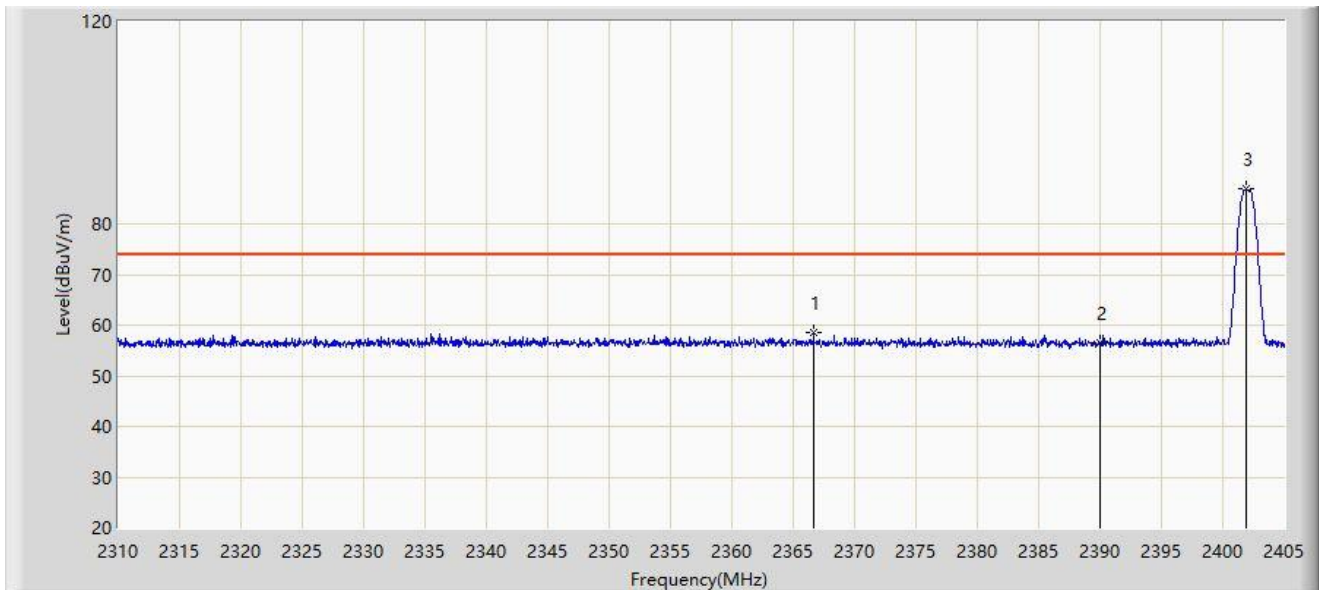


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2366.667	58.574	26.390	-15.426	74.000	32.184	PK
2		2390.000	56.498	24.340	-17.502	74.000	32.159	PK
3		2401.865	86.814	54.660	N/A	N/A	32.153	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz	

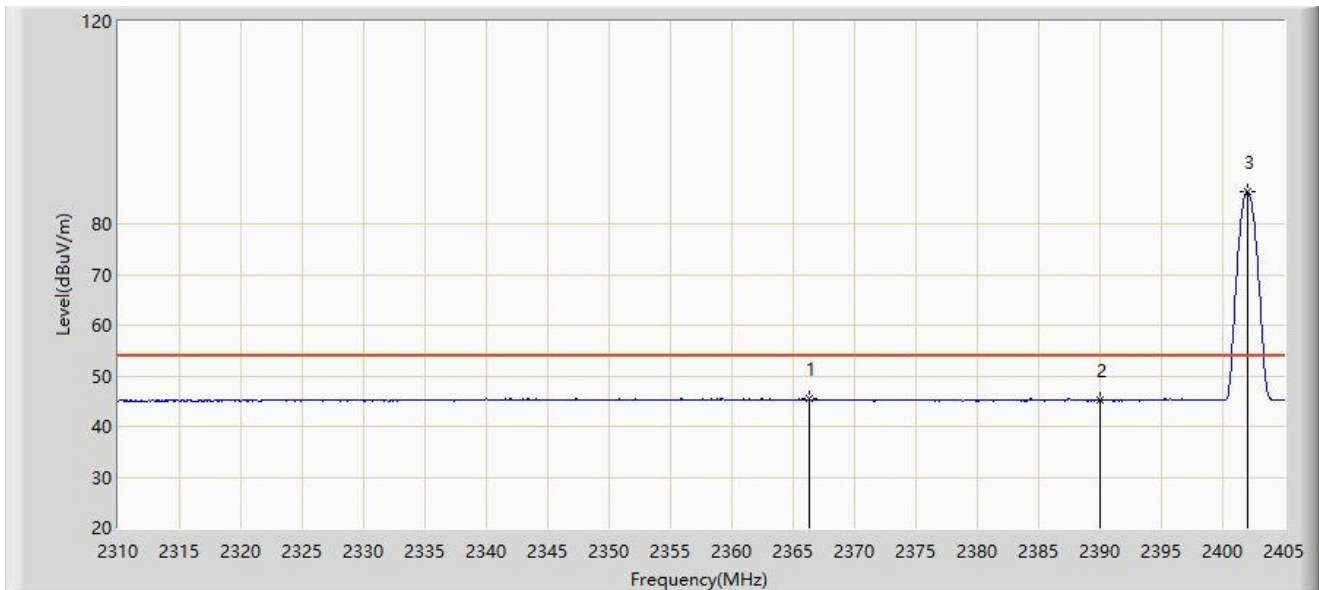


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2366.288	45.383	13.198	-8.617	54.000	32.186	AV
2		2390.000	45.117	12.959	-8.883	54.000	32.159	AV
3		2402.008	86.284	54.131	N/A	N/A	32.153	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

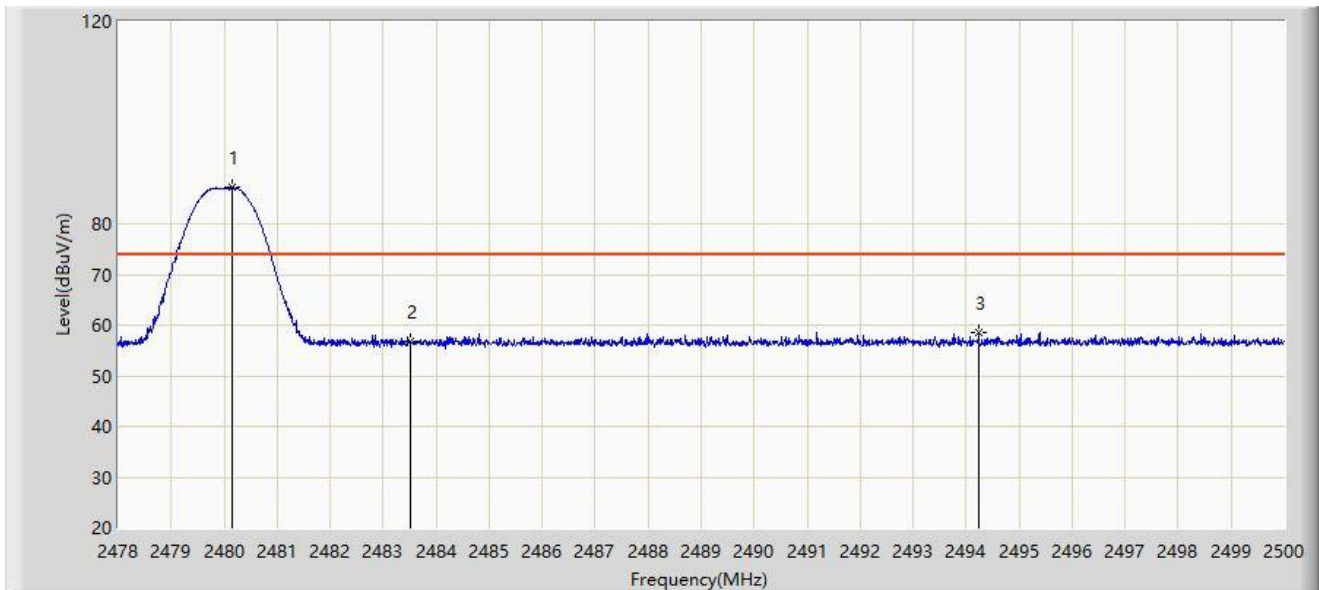


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2480.156	87.166	55.039	N/A	N/A	32.127	PK
2		2483.500	56.872	24.736	-17.128	74.000	32.136	PK
3	*	2494.236	58.601	26.439	-15.399	74.000	32.162	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

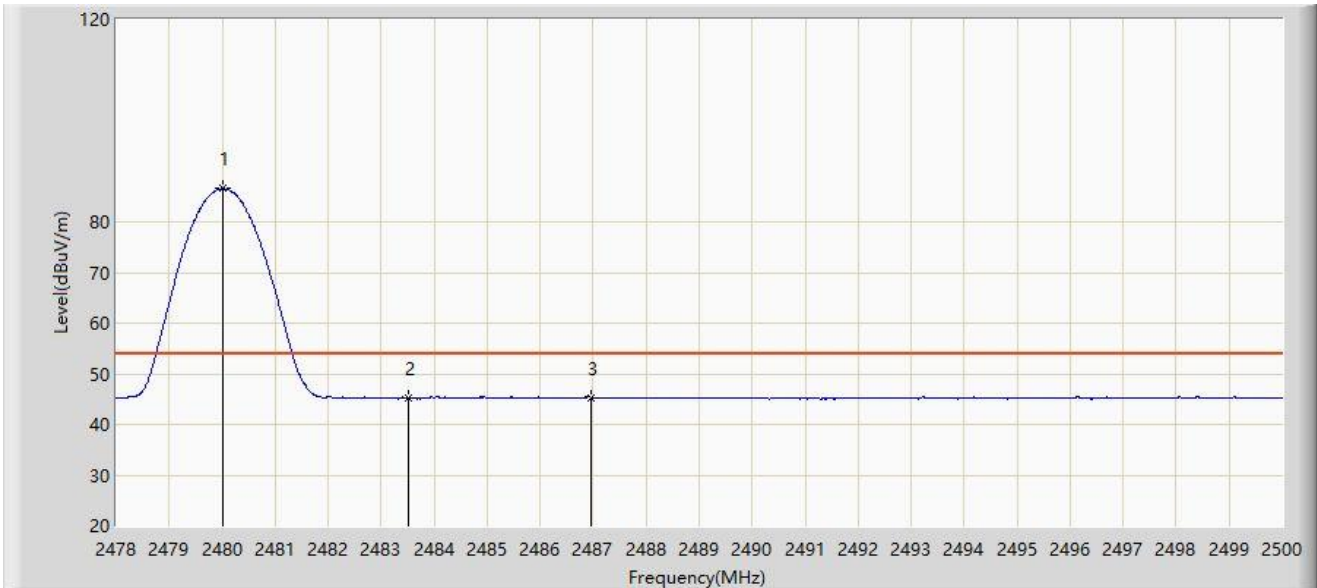


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2480.002	86.544	54.417	N/A	N/A	32.127	AV
2		2483.500	45.073	12.937	-8.927	54.000	32.136	AV
3	*	2486.954	45.358	13.214	-8.642	54.000	32.144	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

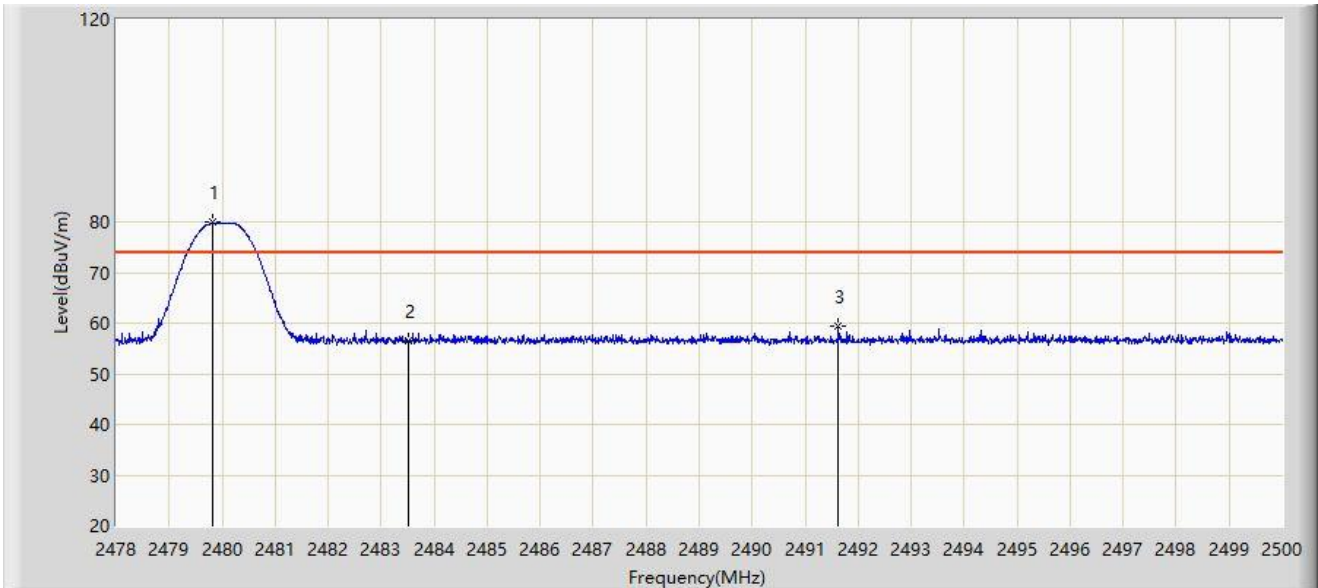

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.826	79.894	47.767	N/A	N/A	32.126	PK
2		2483.500	56.426	24.290	-17.574	74.000	32.136	PK
3	*	2491.629	59.360	27.204	-14.640	74.000	32.156	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz	

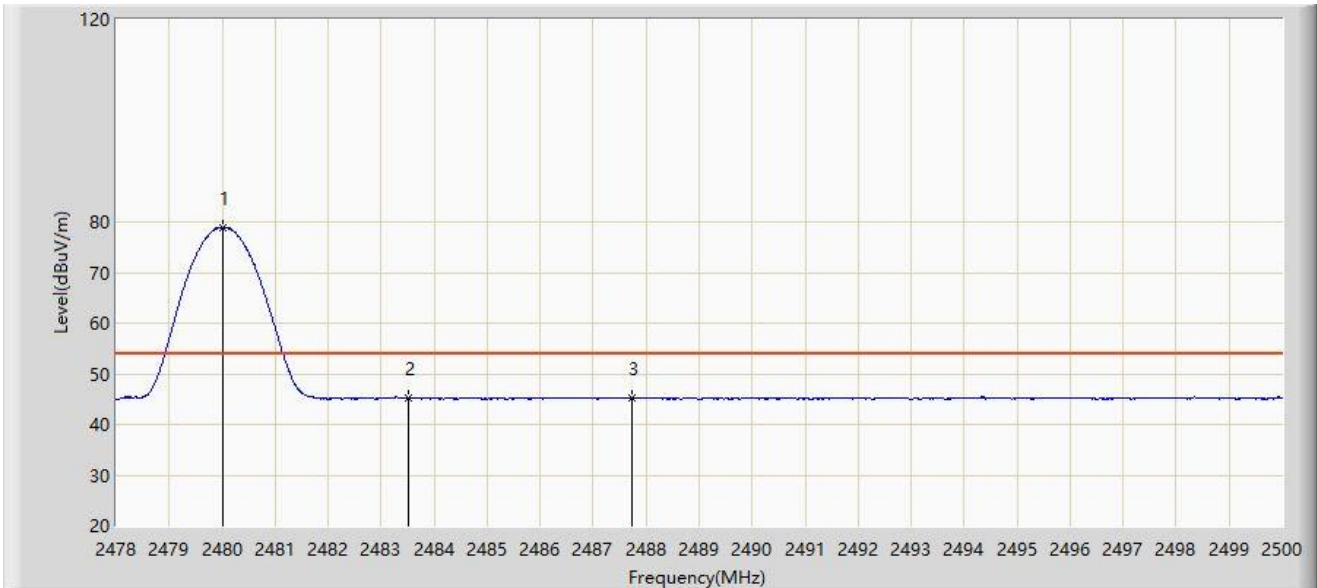


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2480.002	78.958	46.831	N/A	N/A	32.127	AV
2		2483.500	45.155	13.019	-8.845	54.000	32.136	AV
3	*	2487.724	45.339	13.193	-8.661	54.000	32.147	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

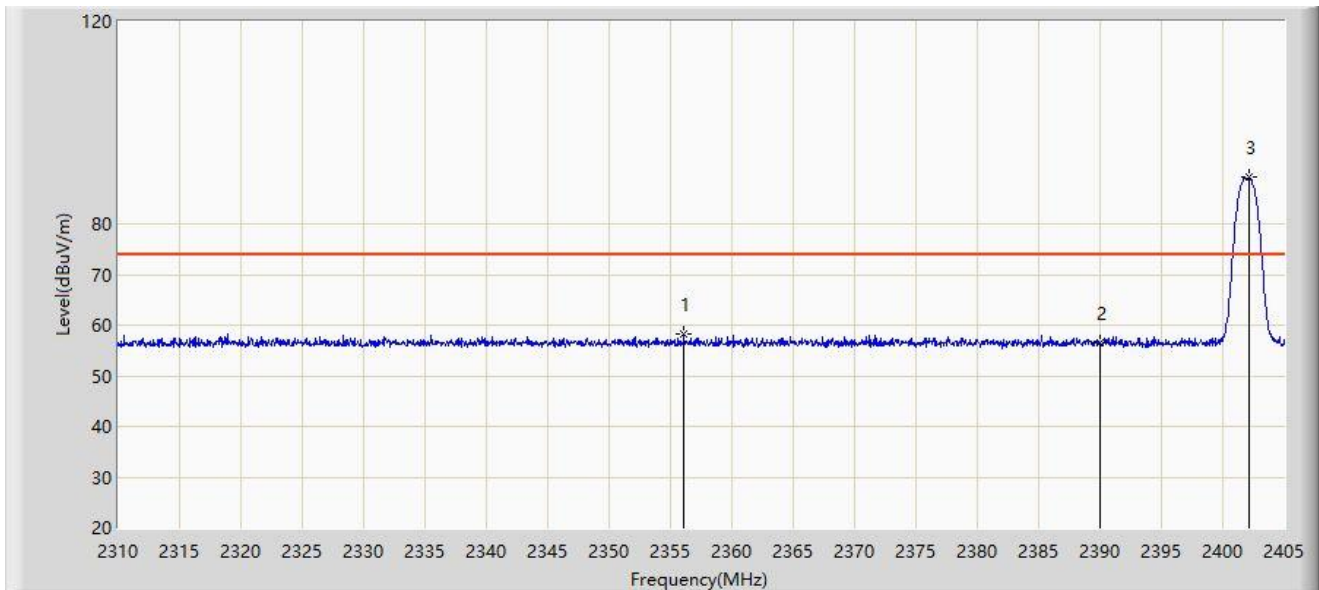


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2356.075	58.256	26.023	-15.744	74.000	32.233	PK
2		2390.000	56.435	24.277	-17.565	74.000	32.159	PK
3		2402.103	89.149	56.996	N/A	N/A	32.153	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

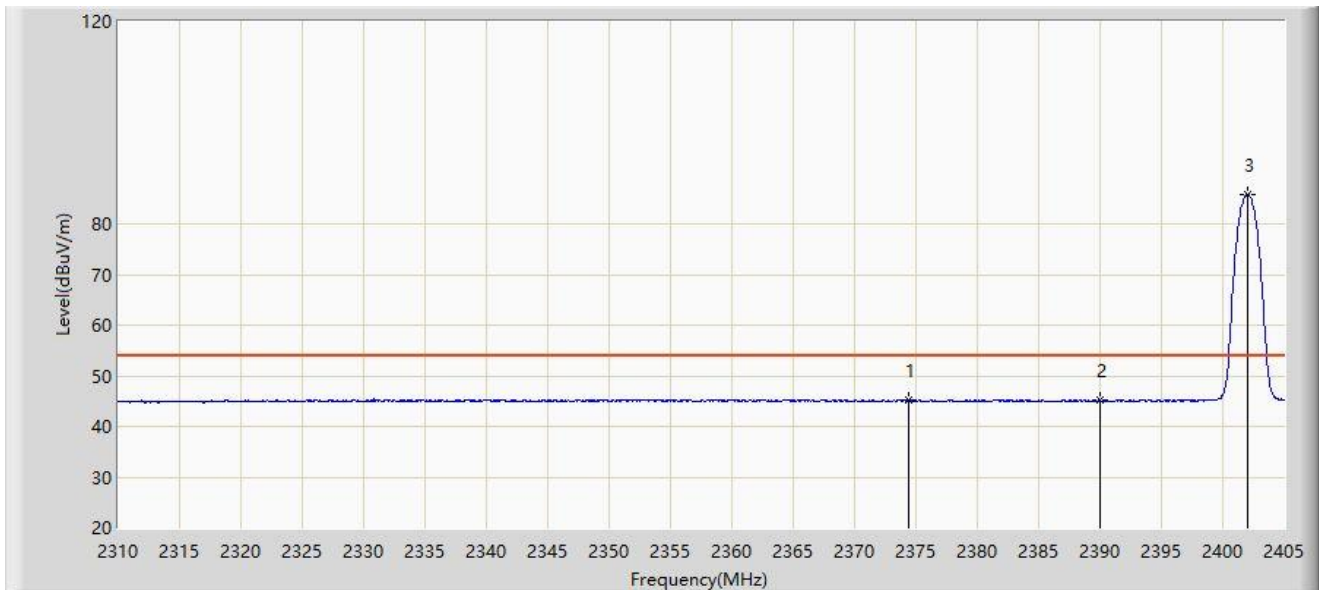


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2374.363	45.272	13.127	-8.728	54.000	32.145	AV
2		2390.000	45.113	12.955	-8.887	54.000	32.159	AV
3		2402.008	85.827	53.674	N/A	N/A	32.153	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

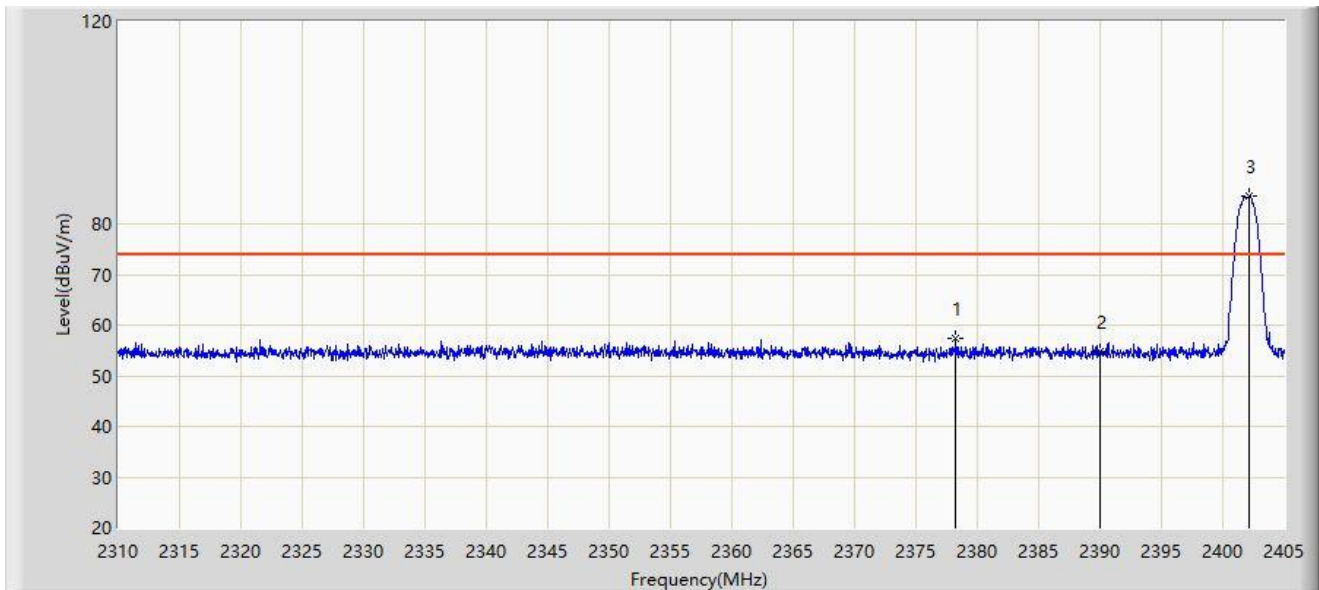


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2378.258	57.470	25.336	-16.530	74.000	32.134	PK
2		2390.000	54.689	22.531	-19.311	74.000	32.159	PK
3		2402.150	85.423	53.270	N/A	N/A	32.153	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz	

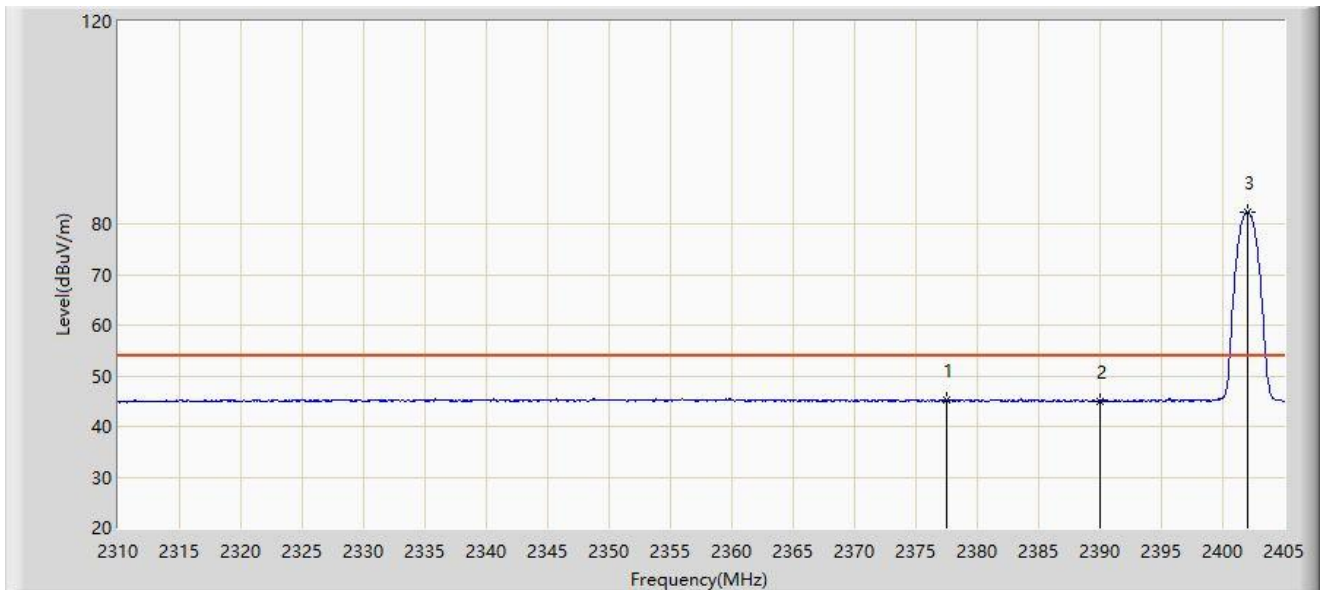


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2377.450	45.317	13.185	-8.683	54.000	32.132	AV
2		2390.000	44.959	12.801	-9.041	54.000	32.159	AV
3		2402.008	82.352	50.199	N/A	N/A	32.153	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

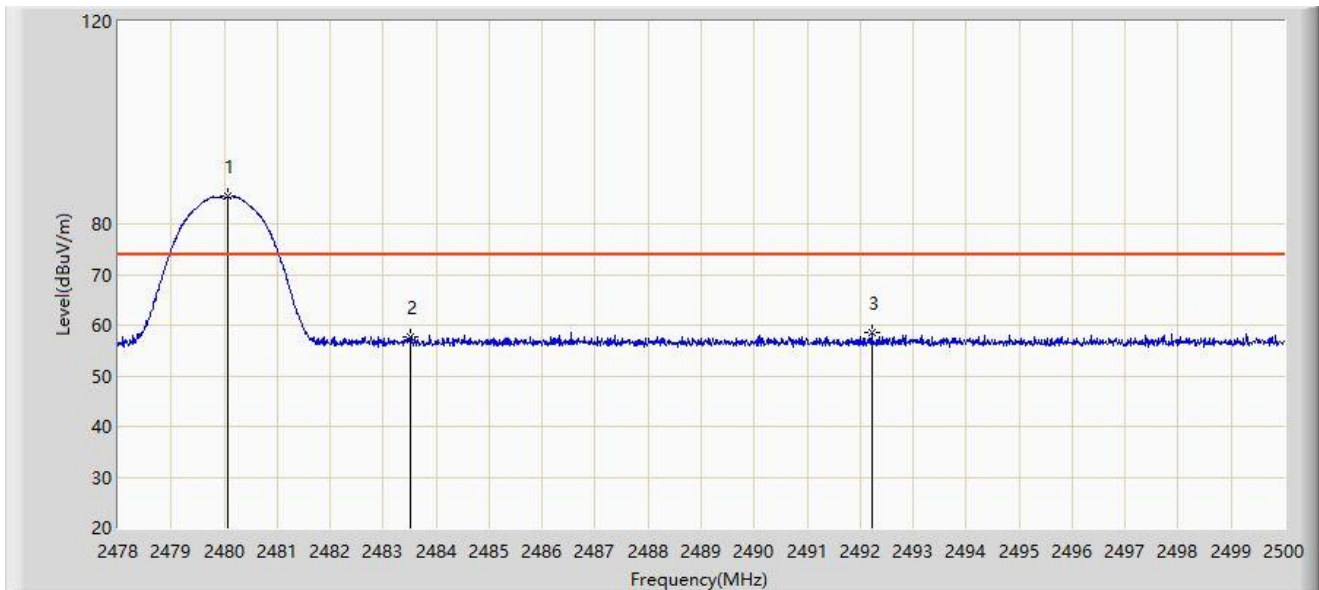


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2480.068	85.428	53.301	N/A	N/A	32.127	PK
2		2483.500	57.557	25.421	-16.443	74.000	32.136	PK
3	*	2492.212	58.676	26.519	-15.324	74.000	32.157	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

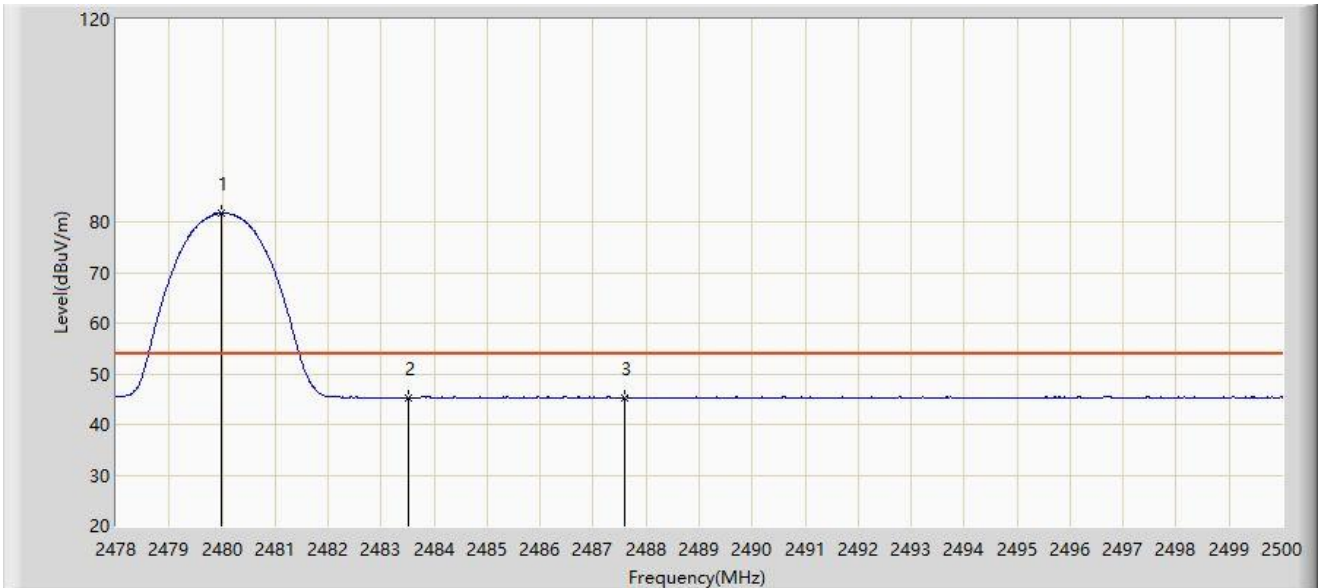


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.991	81.748	49.621	N/A	N/A	32.127	AV
2		2483.500	45.275	13.139	-8.725	54.000	32.136	AV
3	*	2487.592	45.312	13.166	-8.688	54.000	32.146	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

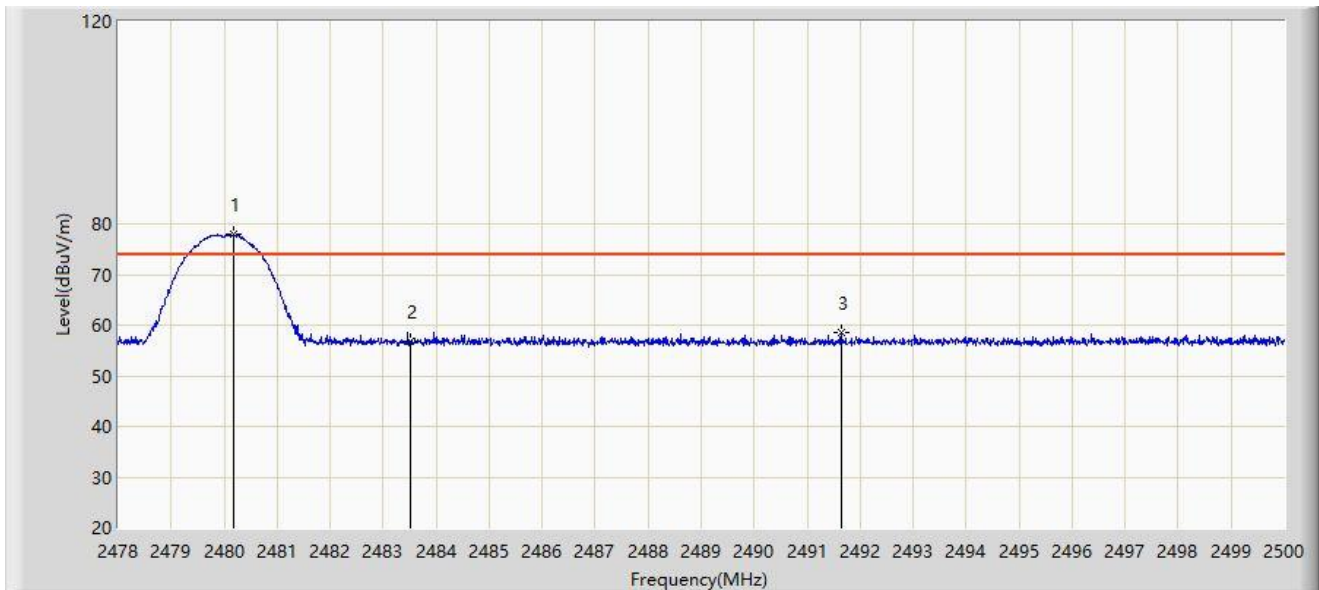

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2480.189	77.999	45.872	N/A	N/A	32.127	PK
2		2483.500	56.809	24.673	-17.191	74.000	32.136	PK
3	*	2491.640	58.673	26.517	-15.327	74.000	32.156	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: NS-AC1	Test Date: 2024-06-04
Limit: FCC_2.4G_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Earbuds with Active Noise Cancellation (Right Earbud)	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz	

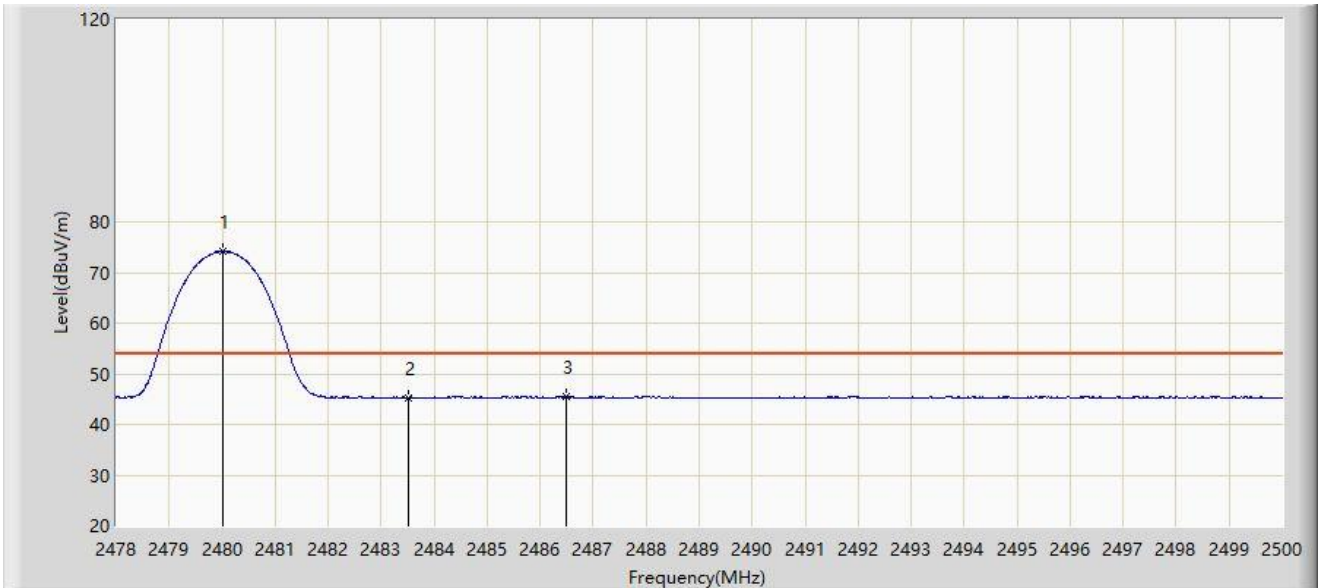

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.024	74.133	42.006	N/A	N/A	32.127	AV
2		2483.500	45.340	13.204	-8.660	54.000	32.136	AV
3	*	2486.503	45.555	13.412	-8.445	54.000	32.143	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

## Appendix B - Test Setup Photograph

Refer to "2406RSZ004-UT" file.

## Appendix C - EUT Photograph

Refer to “ 2406RSZ004-UE” file.

\_\_\_\_\_ The End \_\_\_\_\_