

---

# FCC Test Report

---

Report No.: AGC04796170204FE04

**FCC ID** : Z9G-EDF42  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Portable Speaker  
**BRAND NAME** : EDIFIER  
**MODEL NAME** : MP280, M300, Kaleidoscope  
**CLIENT** : Edifier International Limited  
**DATE OF ISSUE** : Feb.28, 2017  
**STANDARD(S)** : FCC Part 15 Subpart C Section 15.247  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Feb.28, 2017	Valid	Original Report

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>5</b>
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1. PRODUCT DESCRIPTION .....	6
2.2. TABLE OF CARRIER FREQUENCIES .....	6
2.3. RECEIVER INPUT BANDWIDTH.....	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE .....	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR.....	7
2.6. RELATED SUBMITTAL(S) / GRANT (S) .....	8
2.7. TEST METHOD .....	8
2.8. SPECIAL ACCESSORIES .....	8
2.9. EQUIPMENT MODIFICATIONS.....	8
<b>3. MEASUREMENT UNCERTAINTY.....</b>	<b>8</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>9</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>11</b>
5.1. CONFIGURATION OF EUT SYSTEM.....	11
5.2. EQUIPMENT USED IN EUT SYSTEM.....	11
5.3. SUMMARY OF TEST RESULTS.....	12
<b>6. TEST FACILITY .....</b>	<b>13</b>
<b>7. TEST EQUIPMENT LIST .....</b>	<b>13</b>
<b>8. PEAK OUTPUT POWER .....</b>	<b>14</b>
8.1. MEASUREMENT PROCEDURE.....	14
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	14
8.3. LIMITS AND MEASUREMENT RESULT .....	15
<b>9. BANDWIDTH .....</b>	<b>21</b>
9.1. MEASUREMENT PROCEDURE.....	21
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	21
9.3. LIMITS AND MEASUREMENT RESULTS.....	21
<b>10. CONDUCTED SPURIOUS EMISSION .....</b>	<b>28</b>
10.1. MEASUREMENT PROCEDURE.....	28
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	28
10.3. LIMITS AND MEASUREMENT RESULT .....	28
<b>11. RADIATED EMISSION .....</b>	<b>32</b>
11.1. TEST LIMIT .....	32
11.2. MEASUREMENT PROCEDURE .....	32
11.3. TEST SETUP .....	34

11.4. TEST RESULT .....	36
<b>12. BAND EDGE EMISSION .....</b>	<b>48</b>
12.1. MEASUREMENT PROCEDURE.....	48
12.2. TEST SET-UP.....	48
12.3. TEST RESULT .....	49
<b>13. NUMBER OF HOPPING FREQUENCY.....</b>	<b>53</b>
13.1. MEASUREMENT PROCEDURE.....	53
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....	53
13.3. LIMITS AND MEASUREMENT RESULT .....	53
<b>14. TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>55</b>
14.1. MEASUREMENT PROCEDURE.....	55
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....	55
14.3. LIMITS AND MEASUREMENT RESULT .....	55
<b>15. FREQUENCY SEPARATION .....</b>	<b>58</b>
15.1. MEASUREMENT PROCEDURE.....	58
15.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....	58
15.3. LIMITS AND MEASUREMENT RESULT .....	58
<b>16. LINE CONDUCTED EMISSION TEST.....</b>	<b>60</b>
16.1. LIMITS OF LINE CONDUCTED EMISSION TEST .....	60
16.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....	60
16.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	61
16.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	61
16.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....	62
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>64</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>67</b>

## 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	Edifier International Limited
<b>Address</b>	Room 2207-9,Tower Two,Lippo Centre 89 Queensway,HongKong
<b>Manufacturer</b>	Beijing Edifier Technology Co., Ltd.
<b>Address</b>	8th floor,ZuoAn Building,NO.68 BeiSiHuanXiLu,Haidian District, Beijing 100080,CHINA
<b>Product Designation</b>	Portable Speaker
<b>Brand Name</b>	EDIFIER
<b>Test Model</b>	MP280
<b>Series Model</b>	M300, Kaleidoscope
<b>Difference Description</b>	All the same except for the appearance color
<b>Date of test</b>	Feb.22, 2017 to Feb.23, 2017
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Report Template</b>	AGCRT-US-BR/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.247.

Tested By Strive Liang  
Strive Liang(Liang Faqiang) Feb.23, 2017

Reviewed By Forrest Lei  
Forrest Lei(Lei Yonggang) Feb.28, 2017

Approved By Solger Zhang  
Solger Zhang(Zhang Hongyi)  
Authorized Officer Feb.28, 2017

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is “Portable Speaker” designed as a “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>RF Output Power</b>	3.37dBm(Max)
<b>Bluetooth Version</b>	V4.0
<b>Modulation</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK for BR/EDR
<b>Number of channels</b>	79
<b>Hardware Version</b>	V1.0
<b>Software Version</b>	V1.0
<b>Antenna Designation</b>	Ceramic Antenna
<b>Antenna Gain</b>	2.5dBi
<b>Power Supply</b>	DC3.7V by Battery
Note: The USB port only used for charging and can't be used to transfer data with PC.	

### 2.2. TABLE OF CARRIER FREQUENCIES

Frequency Band	Channel Number	Frequency
2402~2480MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz. In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multislotted packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be sent on the same frequency, it is sent on the next frequency of the hopping sequence.

### 2.4. EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67  
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59  
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75  
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06  
01, 51, 03, 55, 05, 04

### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD\_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day (23h30). In most cases it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With these input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmissions is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5us). The hopping sequence will always differ from the first one.

## **2.6. RELATED SUBMITTAL(S) / GRANT (S)**

This submittal(s) (test report) is intended for **FCC ID: Z9G-EDF42**, filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## **2.7. TEST METHOD**

All measurements contained in this report were conducted with ANSI C63.10-2013.

## **2.8. SPECIAL ACCESSORIES**

Refer to section 5.2.

## **2.9. EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.

## **3. MEASUREMENT UNCERTAINTY**

Conducted measurement: +/- 2.75dB

Radiated measurement: +/- 3.2dB



#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi$ /4-DQPSK
5	Middle channel $\pi$ /4-DQPSK
6	High channel $\pi$ /4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

Software Setting

The image shows the BlueTest3 software interface. It has a blue title bar with the text 'BlueTest3' and standard window controls. The main area is divided into several sections:


- Test Mode:** A list box containing 'PAUSE', 'RADIO STATUS', 'RADIO STATUS FULL', 'TXSTART', 'TXDATA1' (highlighted), 'TXDATA2', 'TXDATA3', 'TXDATA4', 'RXSTART1', 'RXSTART2', and 'RXDATA1'. There are up and down arrow buttons on the right.
- Test Arguments:** Two input fields. 'LO Freq. (MHz)' is set to '2402'. 'Power (Ext, Int)' has '255' in the first field and '50' in the second.
- Buttons:** 'Close', 'Execute', 'Cold Reset', and 'Warm Reset' are located on the right side.
- Test Results:** A section with a 'Save to file' checkbox (unchecked), a 'Browse for file' button, and a 'Display' section with 'Standard' selected (radio button) and 'Bit Error' unselected. Below this is a text field containing '.\logfile.txt'.
- Log:** A large text area at the bottom showing the following text:

```
Opening USB SPI (602250).  
Transport active.  
dal (Hardware ID 0x332) firmware version 8648.  
Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000  
Radio Test TXDATA1 successful
```

## 5. SYSTEM TEST CONFIGURATION


### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

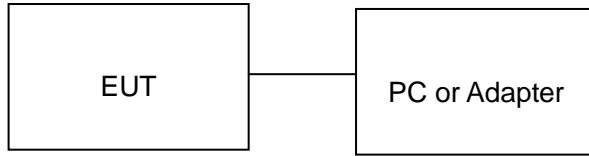

**Note:** Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

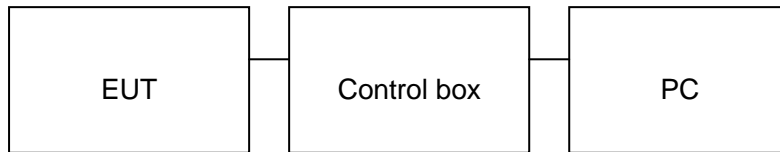

### 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Portable Speaker	EDIFIER	MP280	EUT
2	Battery	DAD	18650	Accessory
3	PC	Sony	E1412AYCW	A.E
4	Control box	CSR	N/A	A.E
5	Adapter	IPRO	NTR-S01	A.E
6	Temporary Antenna Connector	T10	N/A	A.E

### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247 b(1)	Peak Output Power	Compliant
§15.247 a(1)	20 dB Bandwidth	Compliant
§15.247 d	Conducted Spurious Emission	Compliant
§15.247 d §15.209	Radiated Emission	Compliant
§15.247 d	Band Edges	Compliant
§15.247 a(1)(iii)	Number of hopping frequency	Compliant
§15.247 a(1)(iii)	Time of Occupancy	Compliant
§15.247 a(1)	Frequency Separation	Compliant
§15.207	Line conduction Emission	Compliant

## 6. TEST FACILITY

<b>Site</b>	Dongguan Precise Testing Service Co., Ltd.
<b>Location</b>	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
<b>FCC Registration No.</b>	371540
<b>Description</b>	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

## 7. TEST EQUIPMENT LIST


TEST EQUIPMENT LIST					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2016	June 5, 2017
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2016	June 5, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 4, 2016	July 3, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 4, 2016	July 3, 2017
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2016	June 5, 2017
Artificial Mains Network	NARDA	L2-16B	000WX31025	July 8, 2016	July 7, 2017
Artificial Mains Network (AUX)	NARDA	L2-16B	000WX31026	July 8, 2016	July 7, 2017
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2016	July 3, 2017
Shielded Room	CHENGYU	843	PTS-002	June 6, 2016	June 5, 2017
Conduction Cable	MXT	SE1	S003	June 6, 2016	June 5, 2017

## 8. PEAK OUTPUT POWER

### 8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
3.  $RBW > \text{the 20 dB bandwidth of the emission being measured}$ ,  $VBW \geq RBW$ .
4. Record the maximum power from the Spectrum Analyzer.


### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

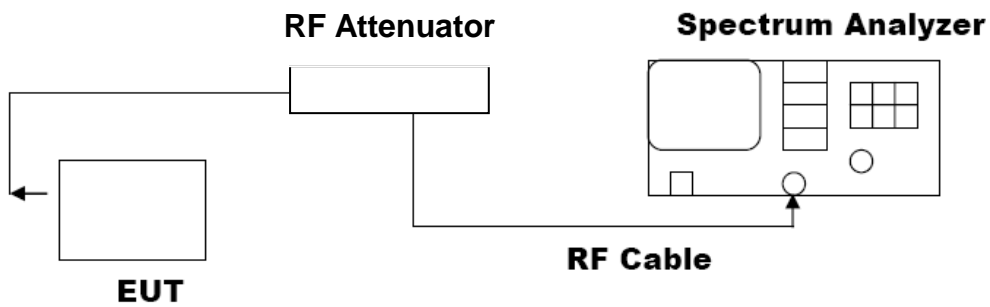


8.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	-1.53	21	Pass
2.441	3.37	21	Pass
2.480	3.32	21	Pass


CH0

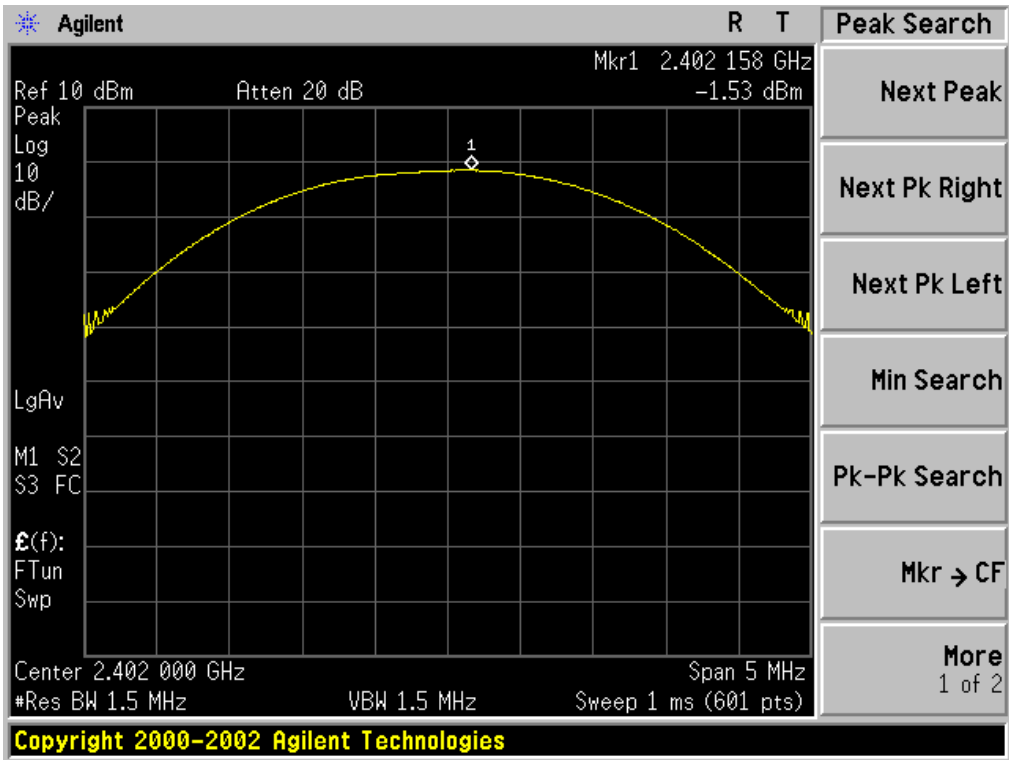

CH39

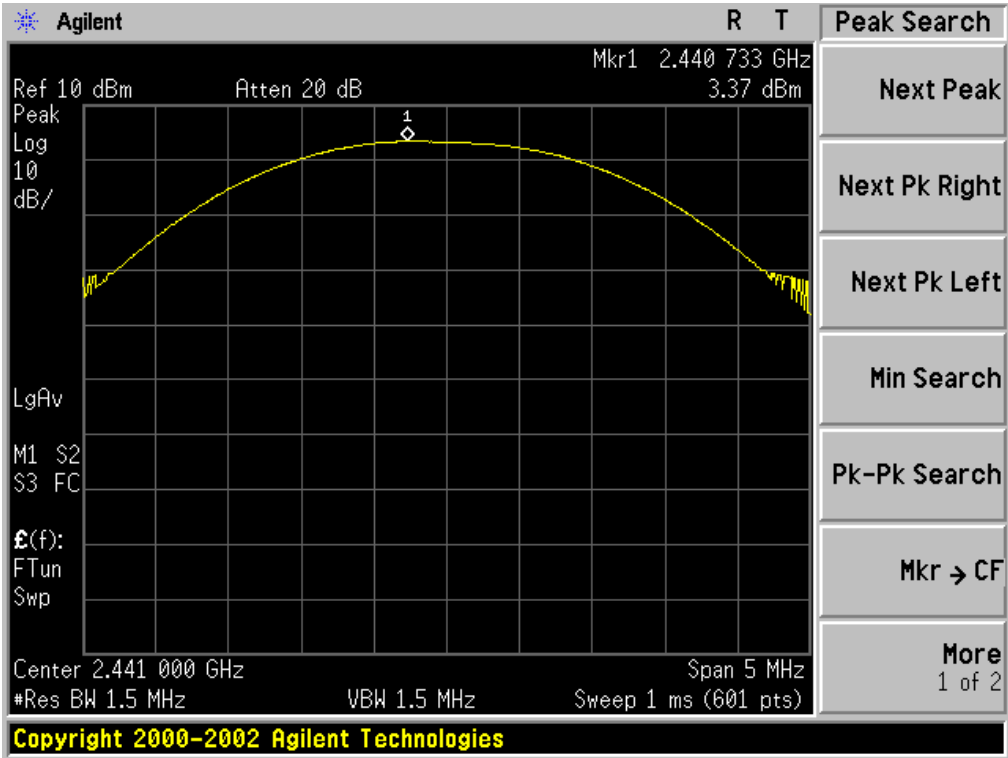


CH78

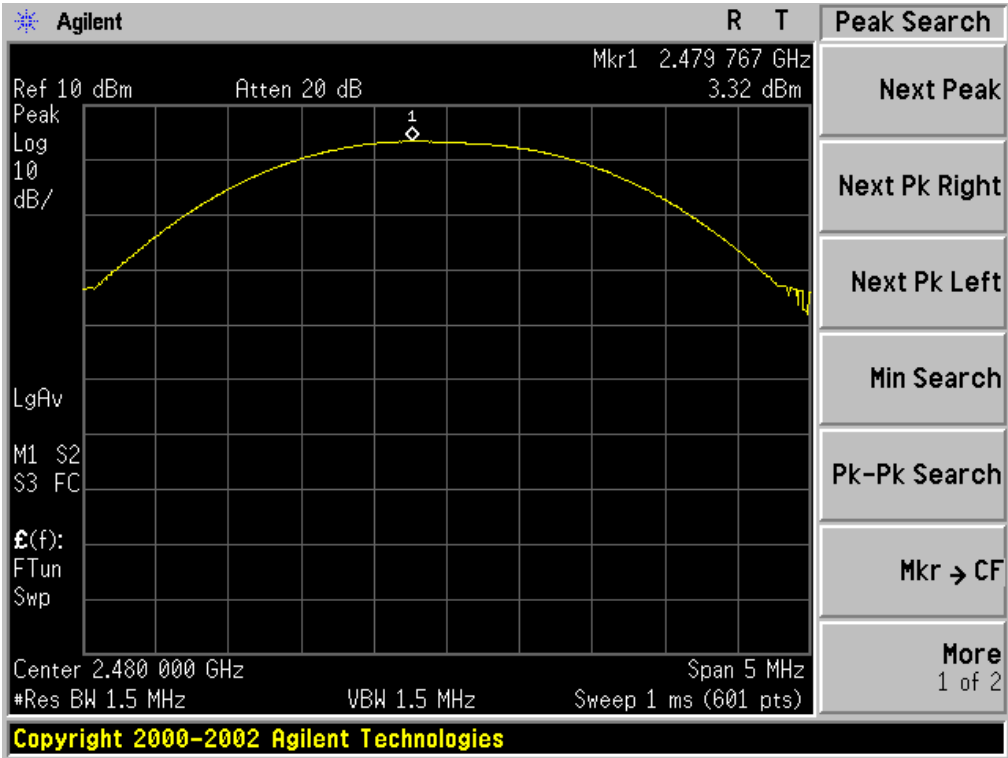




PEAK OUTPUT POWER MEASUREMENT RESULT FOR Π /4-DQPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	-6.41	21	Pass
2.441	-0.72	21	Pass
2.480	-1.17	21	Pass


CH0

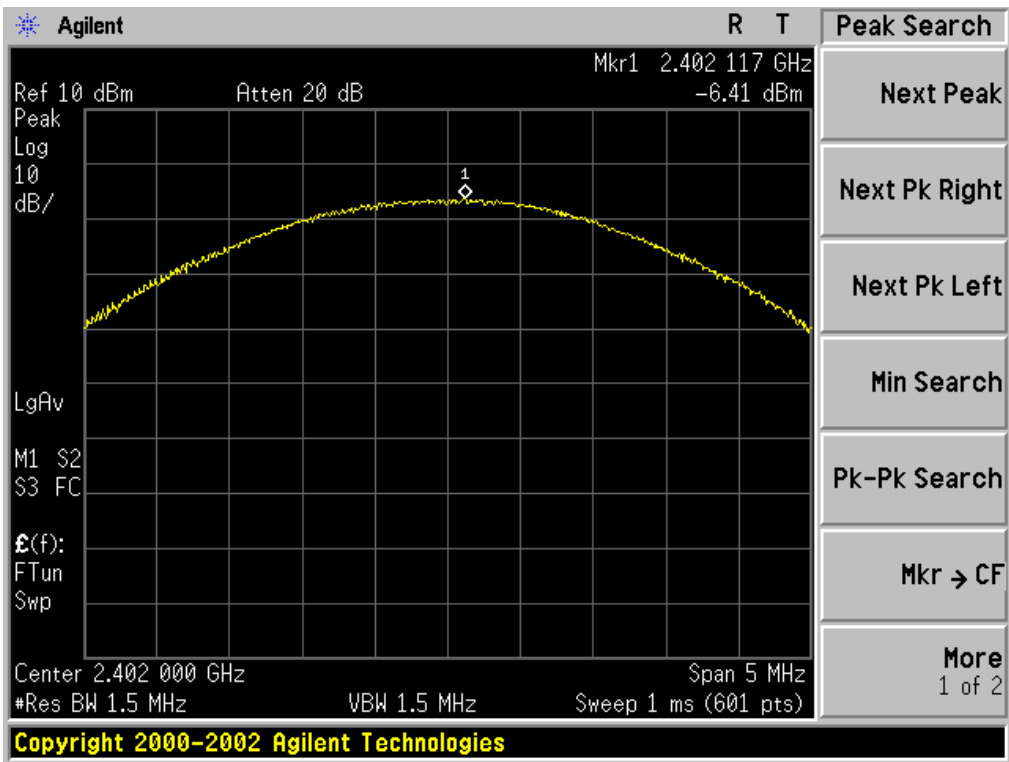

CH39

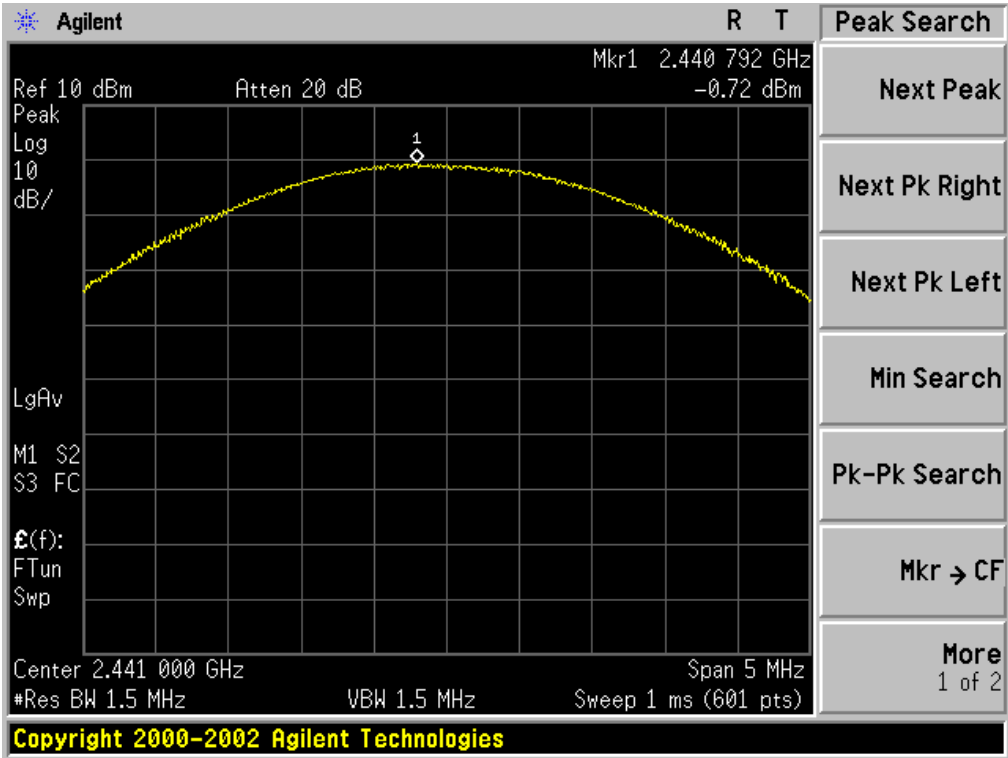


CH78

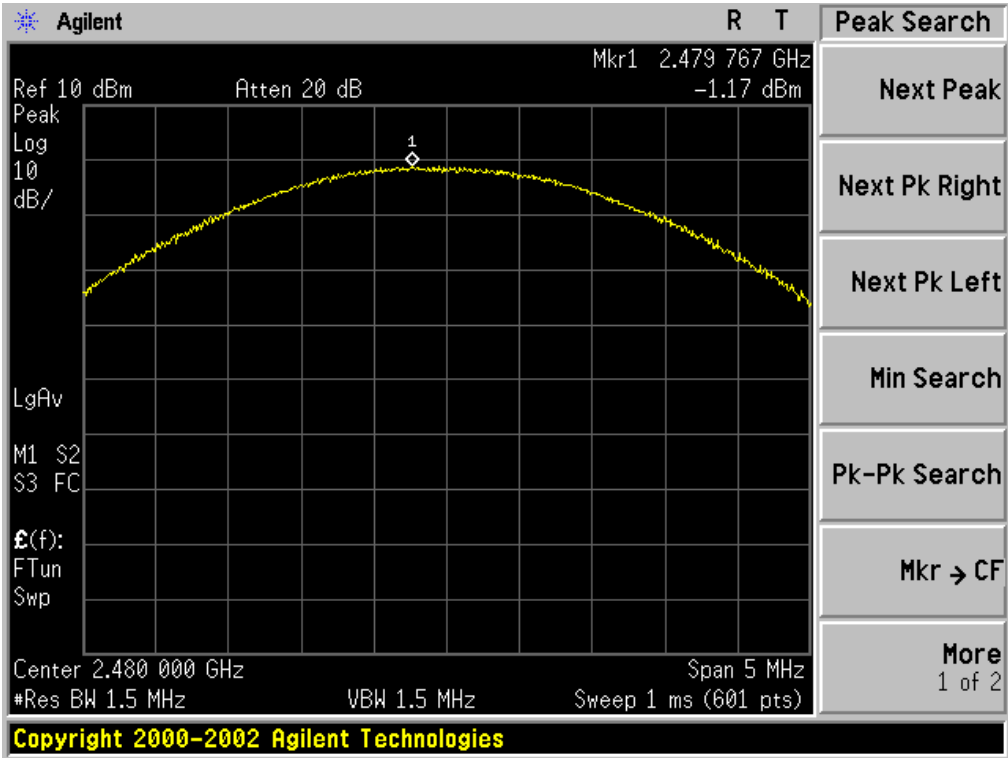


PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8-DPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	-5.61	21	Pass
2.441	-0.23	21	Pass
2.480	-0.61	21	Pass


CH0

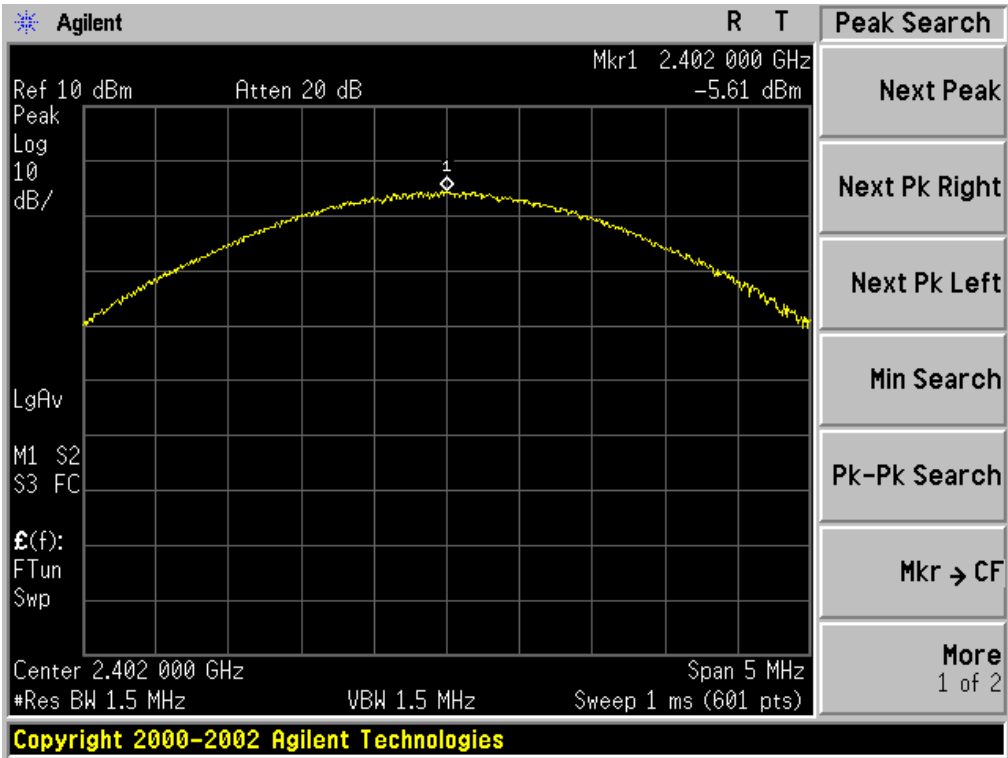

CH39

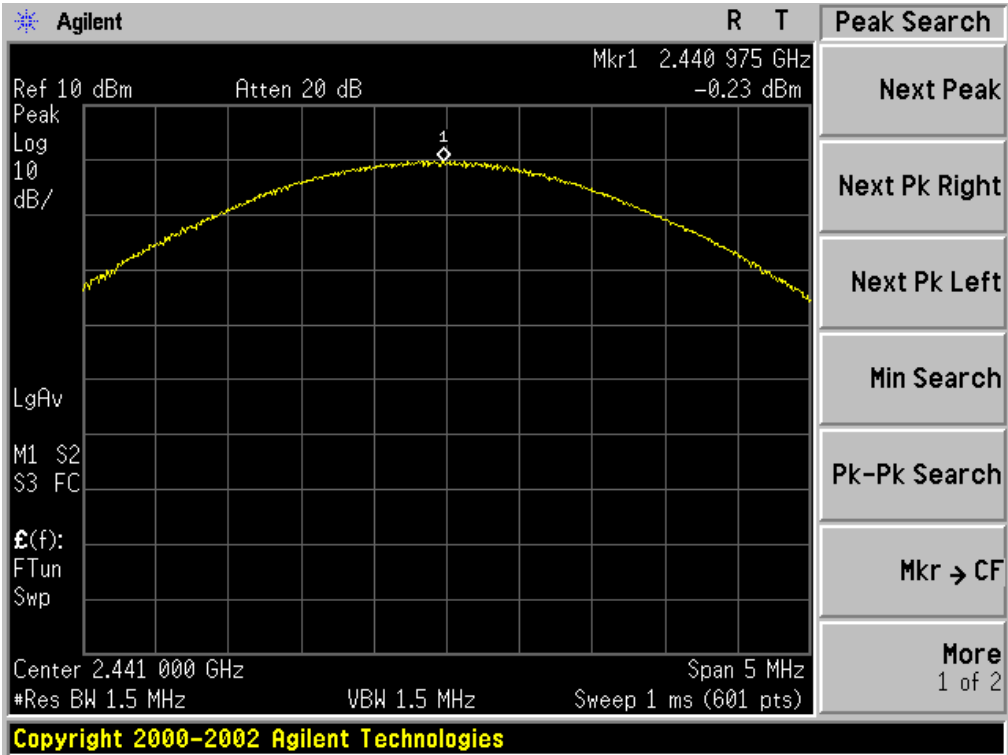

CH78

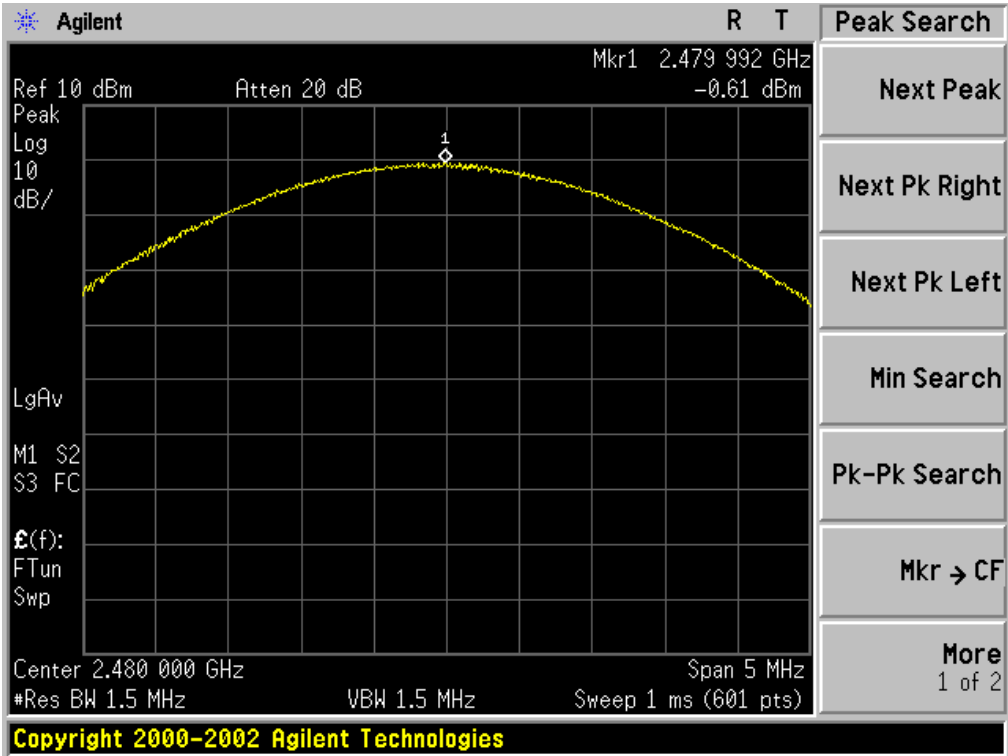


## 9. BANDWIDTH

### 9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

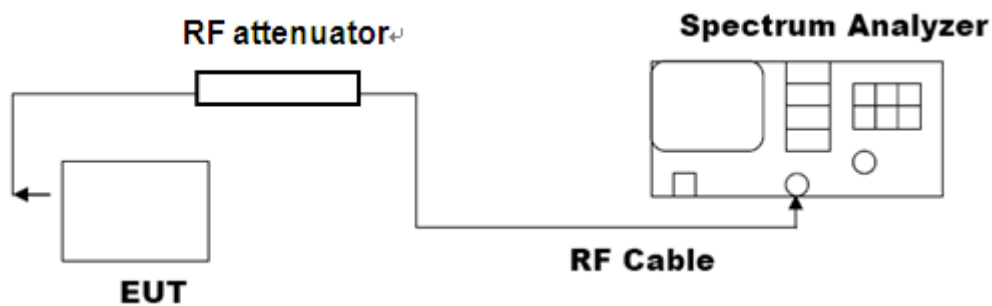


Note: The EUT has been used temporary antenna connector for testing.


### 9.3. LIMITS AND MEASUREMENT RESULTS

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.943	1.112	PASS
	Middle Channel	0.922	1.098	PASS
	High Channel	0.931	1.098	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

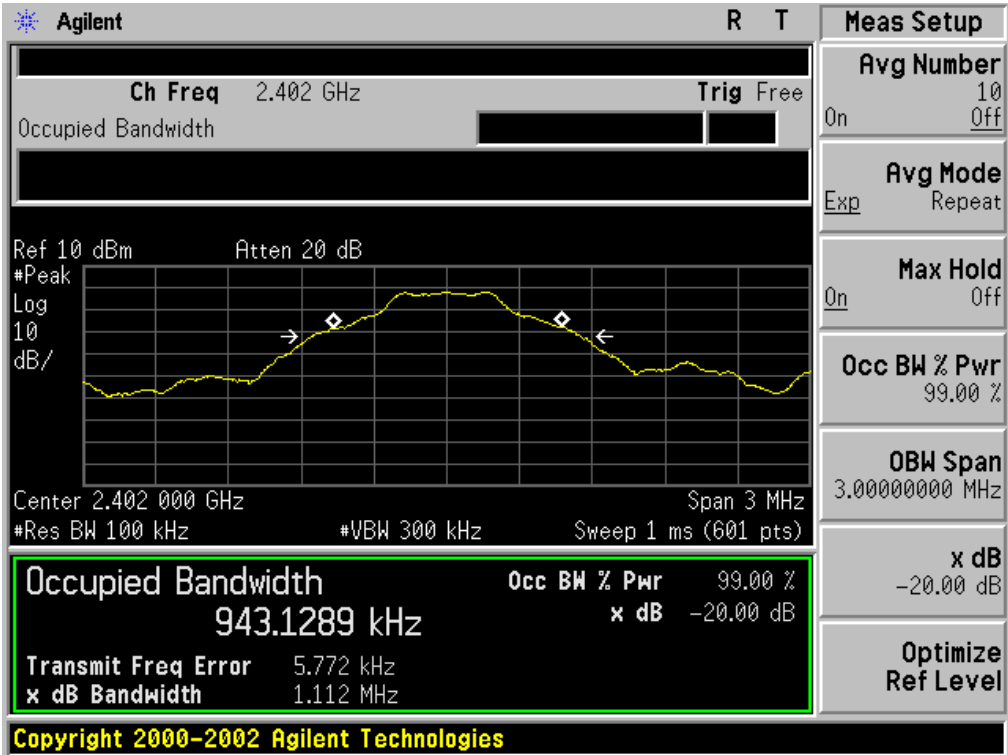

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

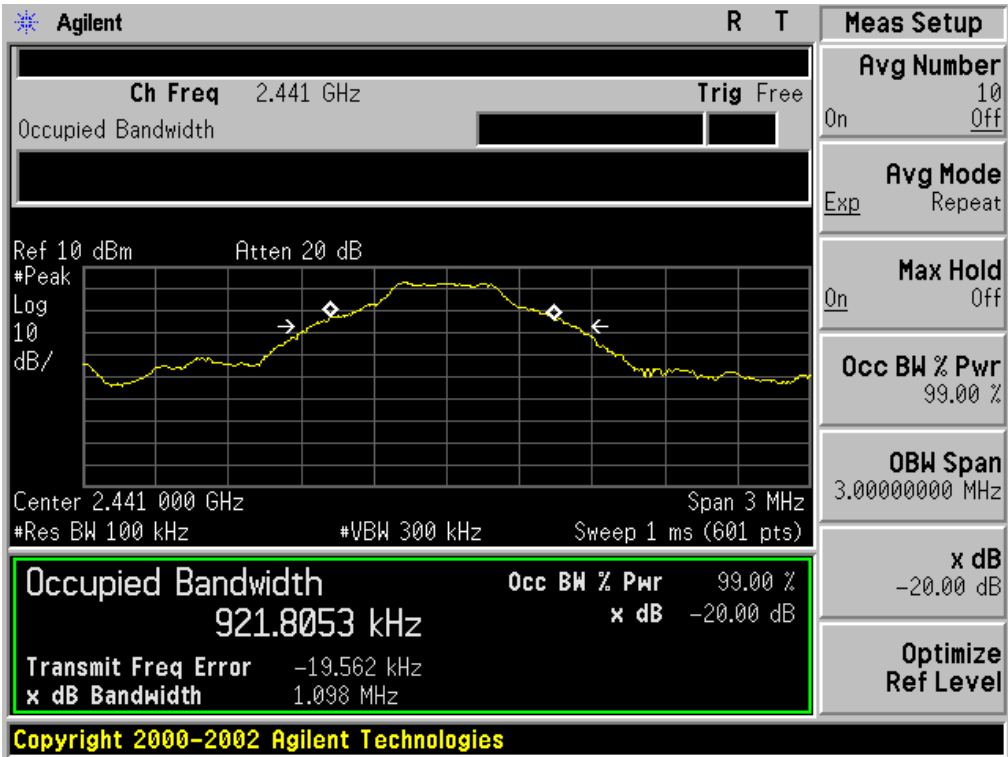


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

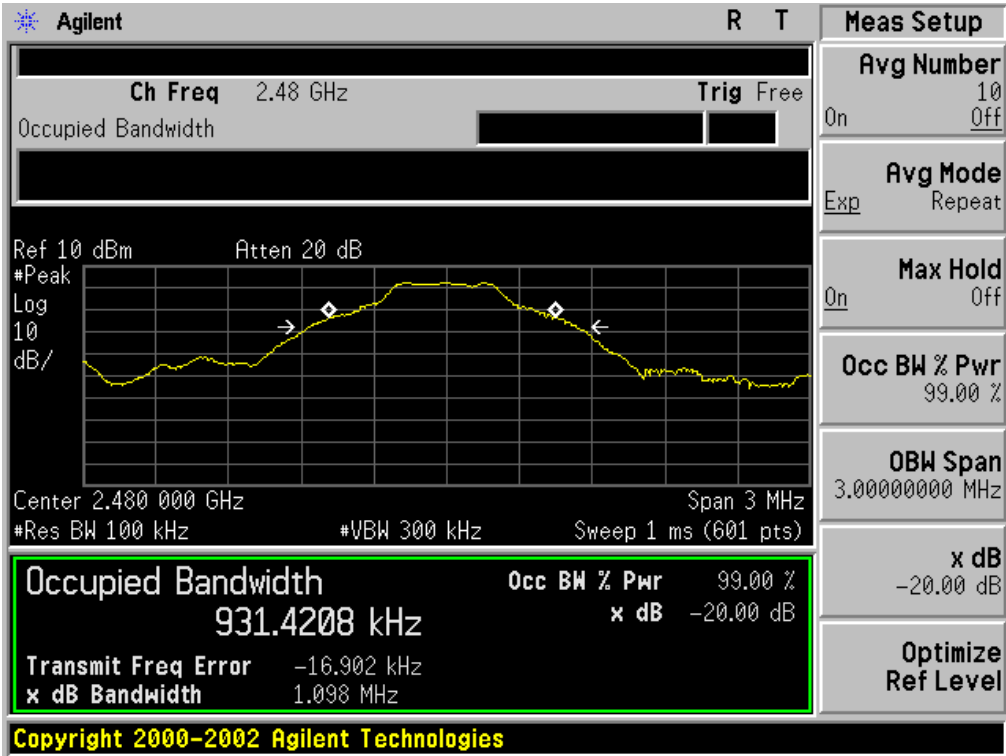


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.617	1.388	PASS
	Middle Channel	1.529	1.378	PASS
	High Channel	1.527	1.384	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

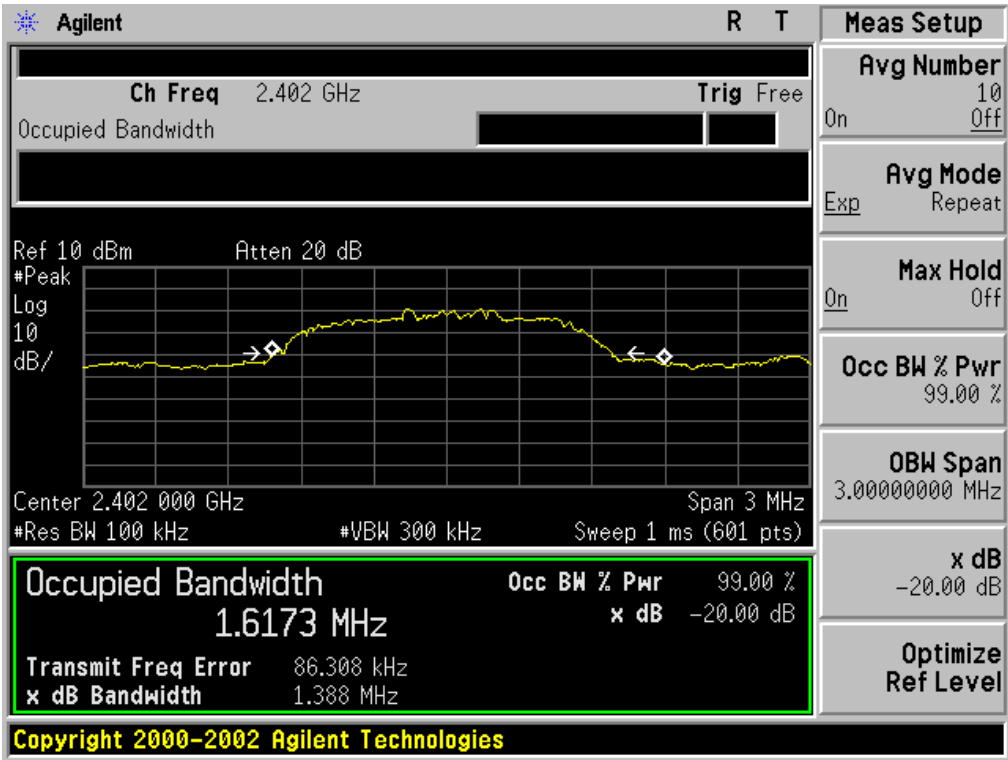




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

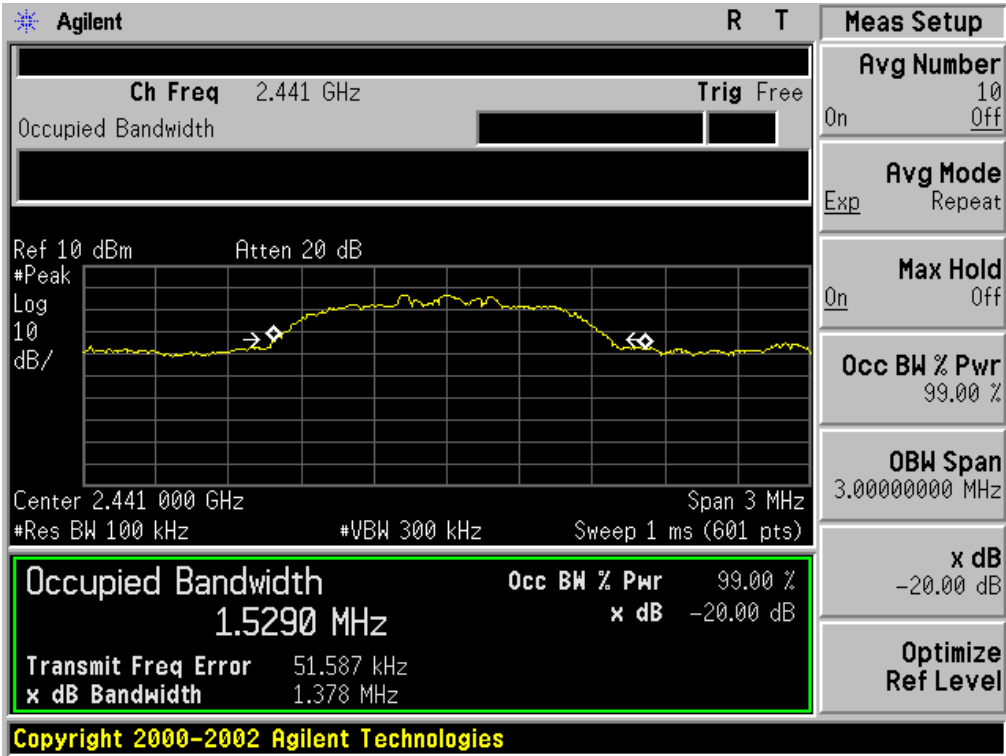


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

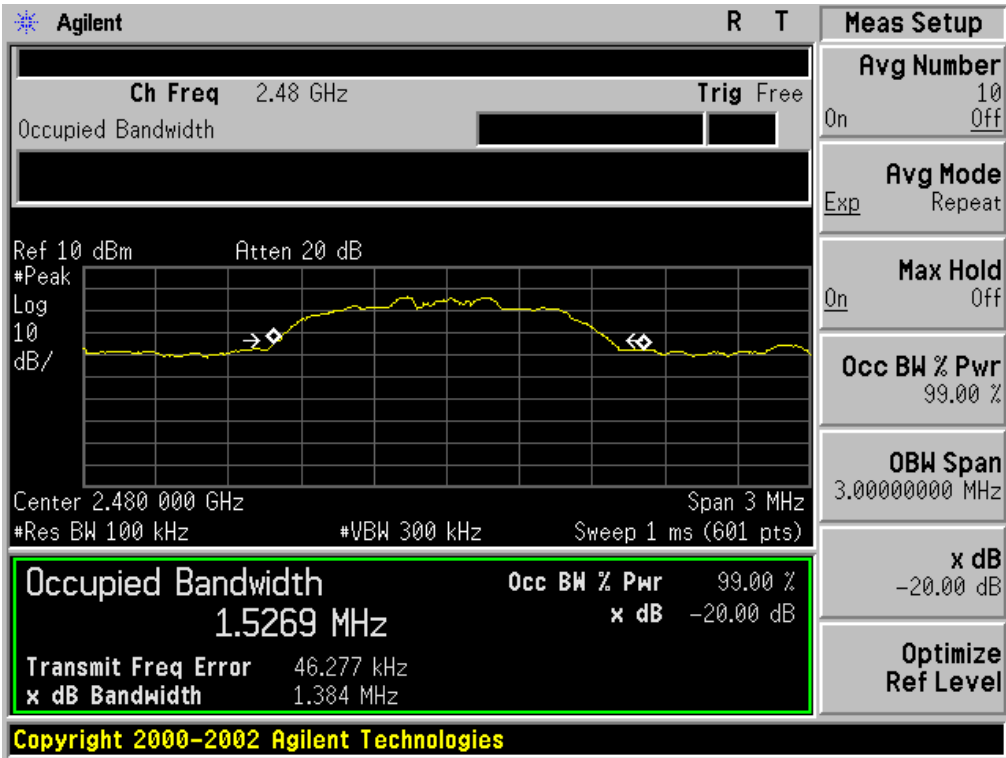


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.611	1.391	PASS
	Middle Channel	1.630	1.373	PASS
	High Channel	1.580	1.376	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

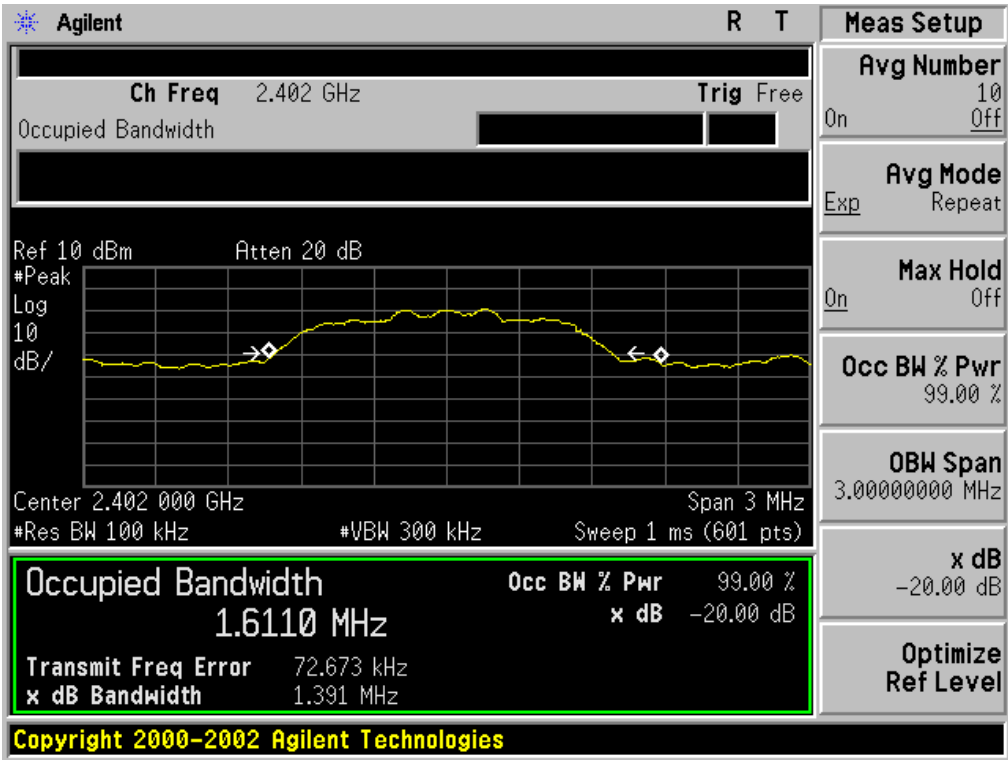

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

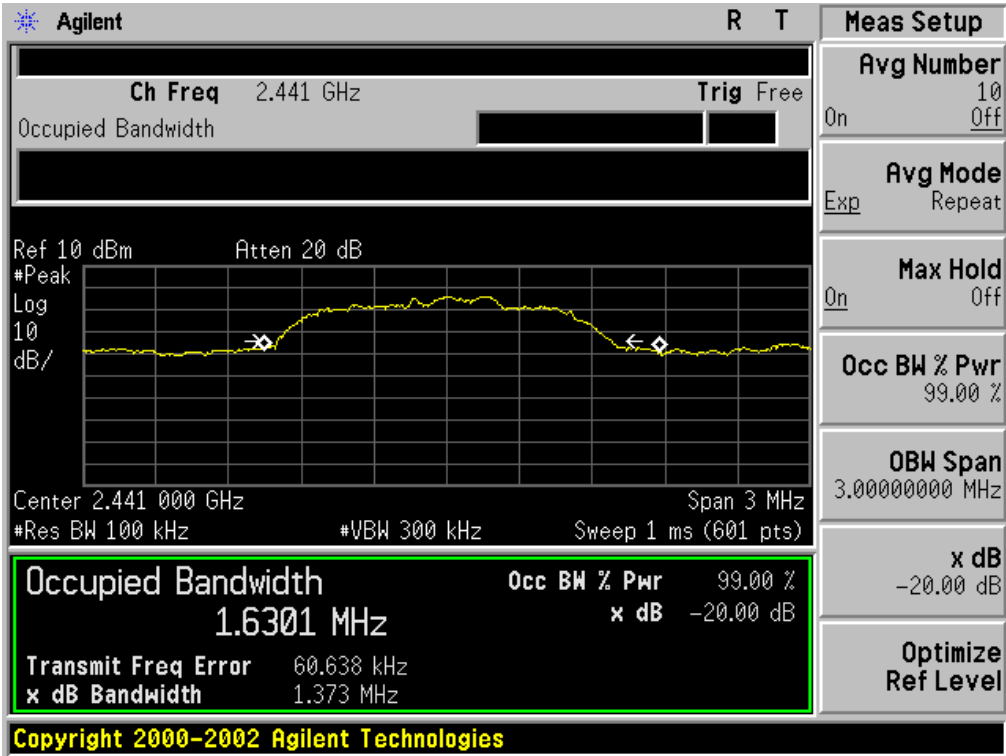

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

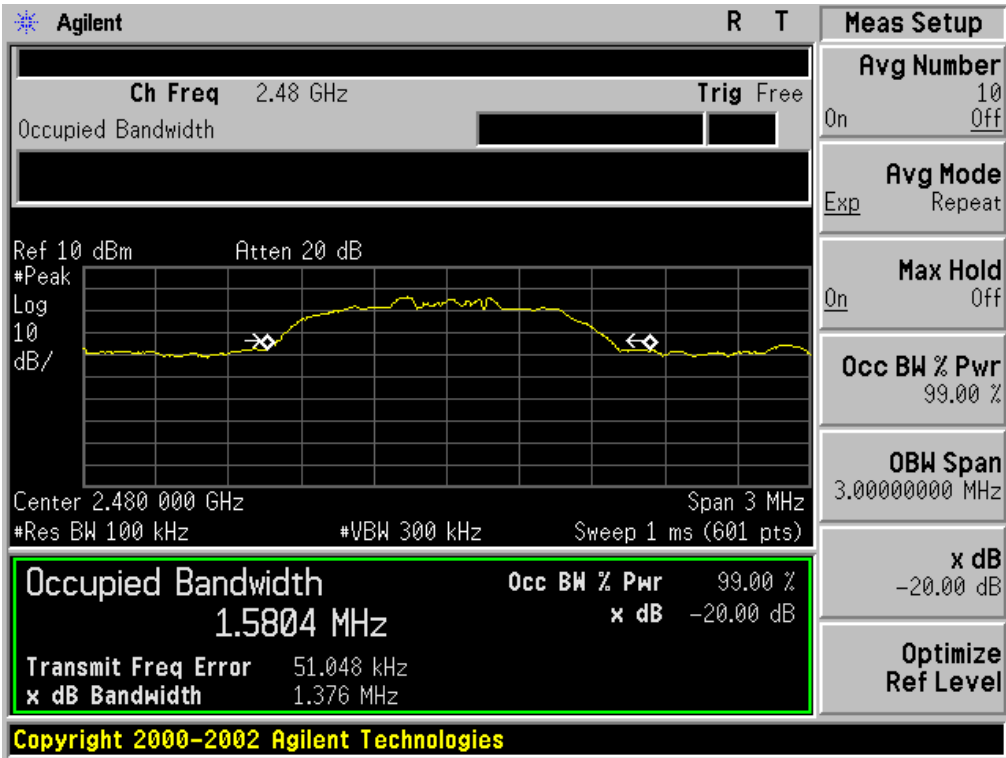


10. CONDUCTED SPURIOUS EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.  
RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.



10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

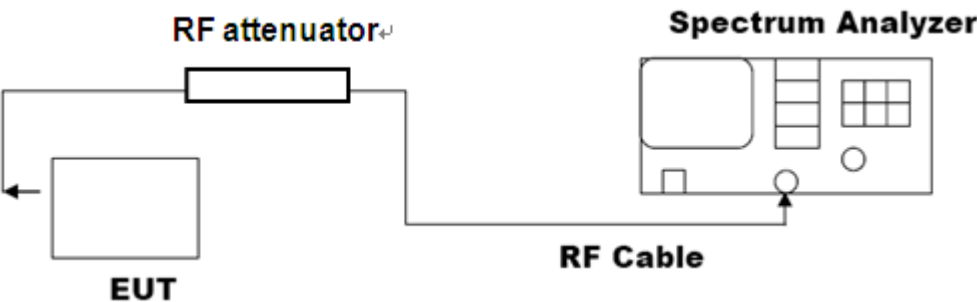



10.3. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Result
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
	At least -20dBc than the limit Specified on the TOP Channel	PASS



TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE  
OF GFSK MODULATION IN LOW CHANNEL

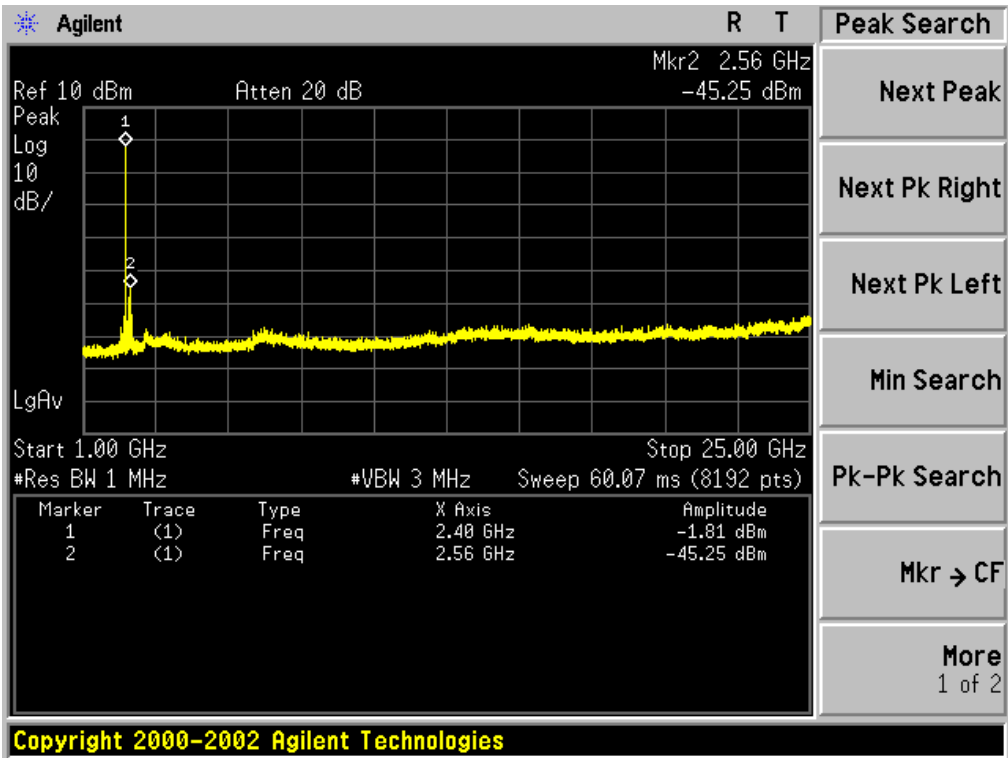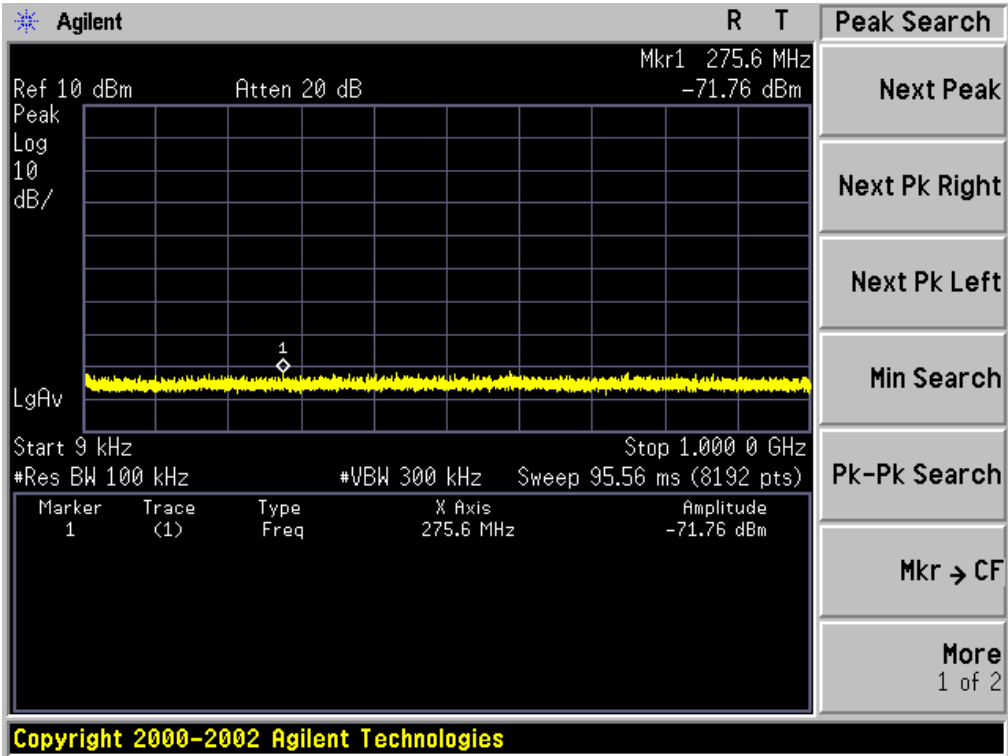

TEST PLOT OF OUT OF BAND EMISSIONS  
OF GFSK MODULATION IN MIDDLE CHANNEL

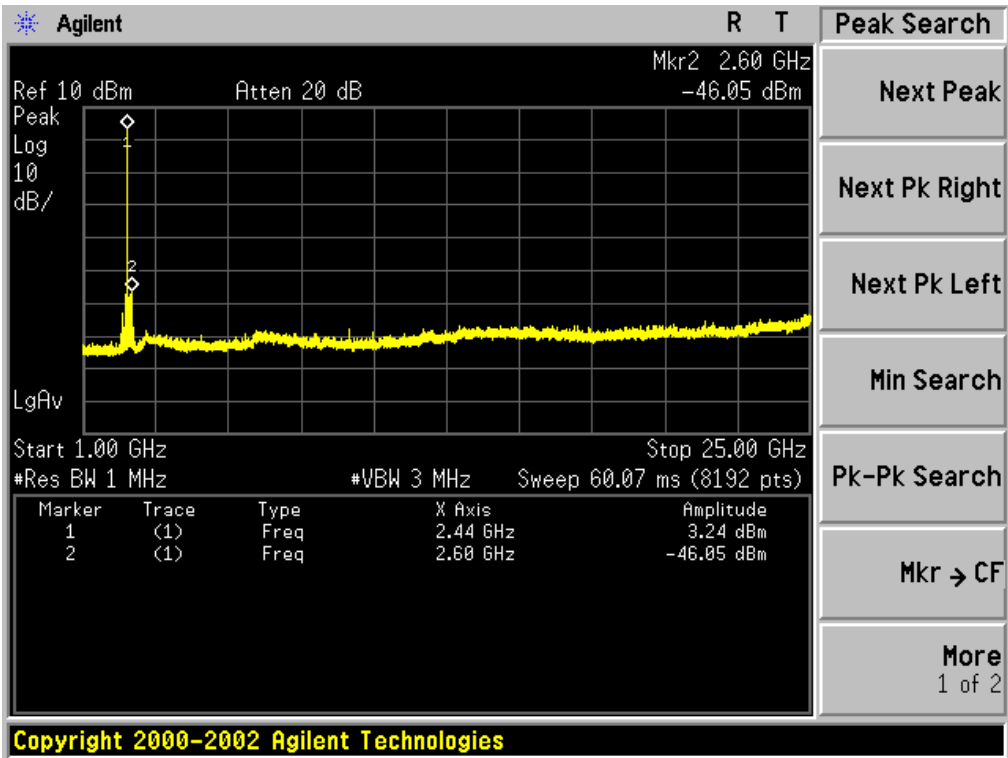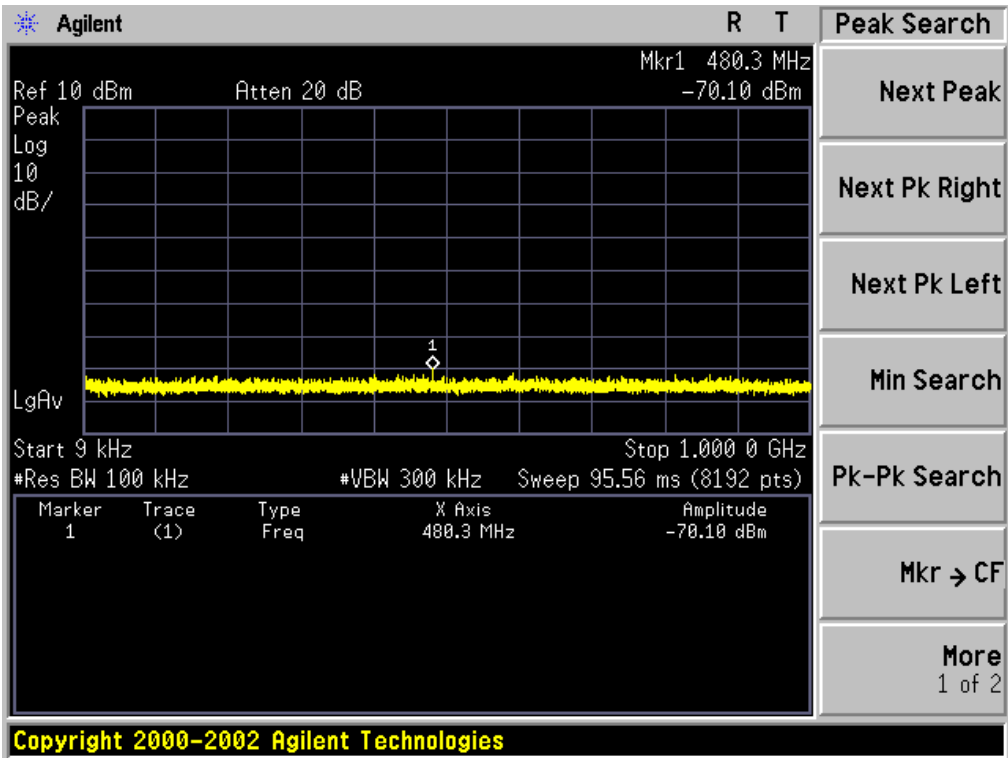

TEST PLOT OF OUT OF BAND EMISSIONS  
OF GFSK MODULATION IN HIGH CHANNEL

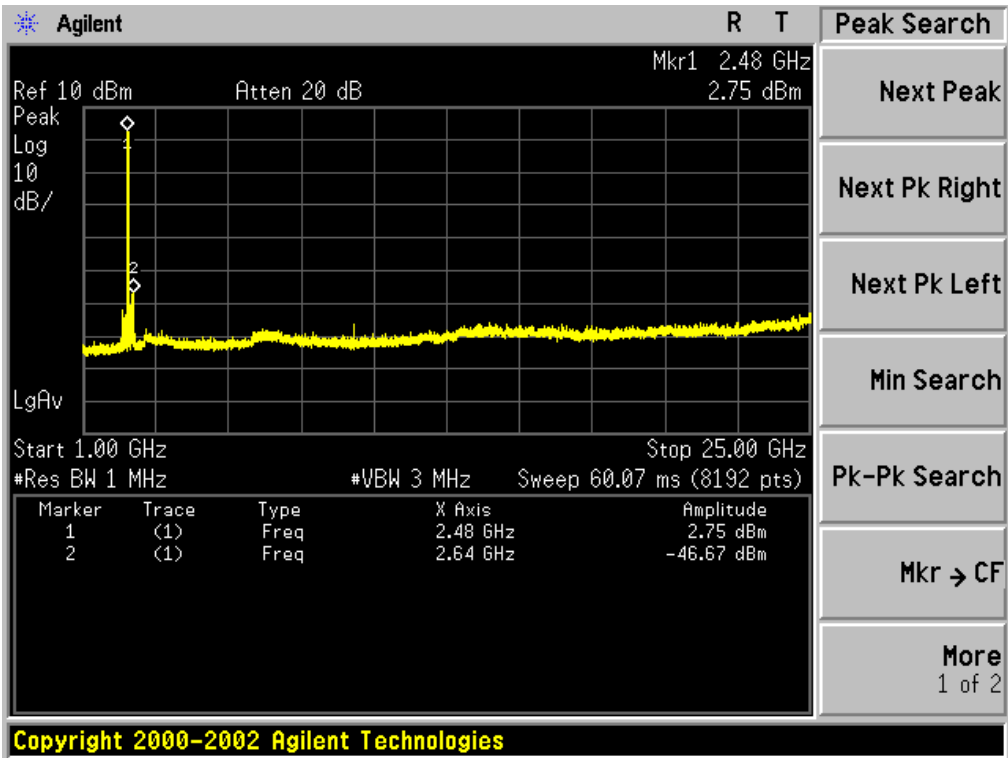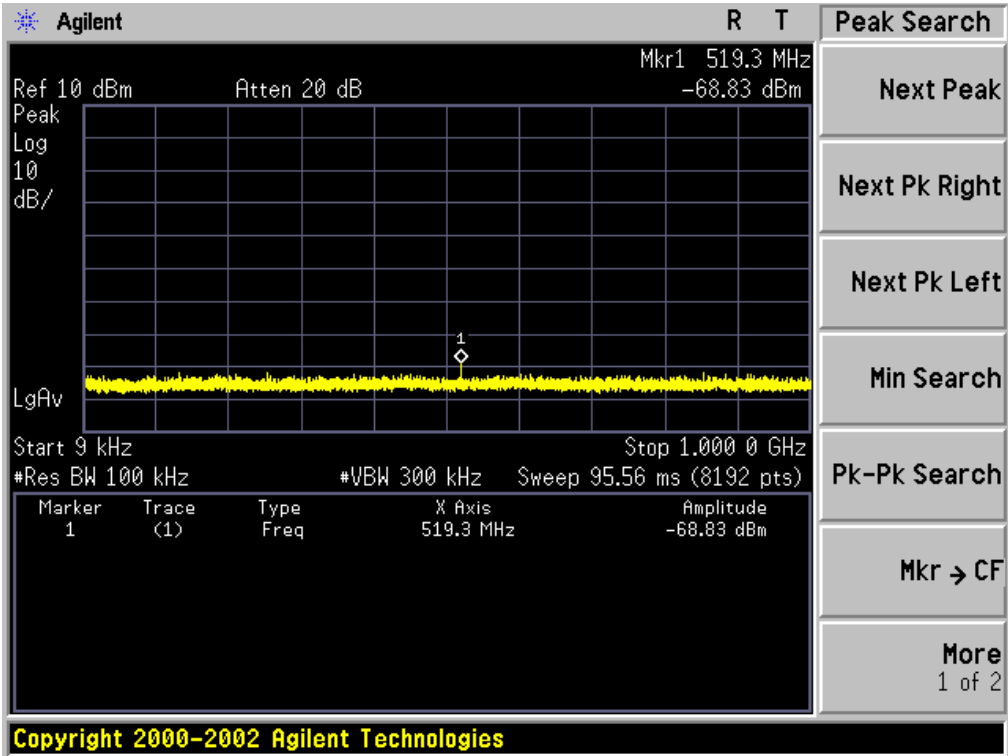

## 11. RADIATED EMISSION

### 11.1. TEST LIMIT

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	
Remark: (1) Emission level dBμ V = 20 log Emission level μ V/m (2) The smaller limit shall apply at the cross point between two frequency bands. (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.			

### 11.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)




The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

### 11.3. TEST SETUP


#### RADIATED EMISSION TEST SETUP BELOW 30MHz

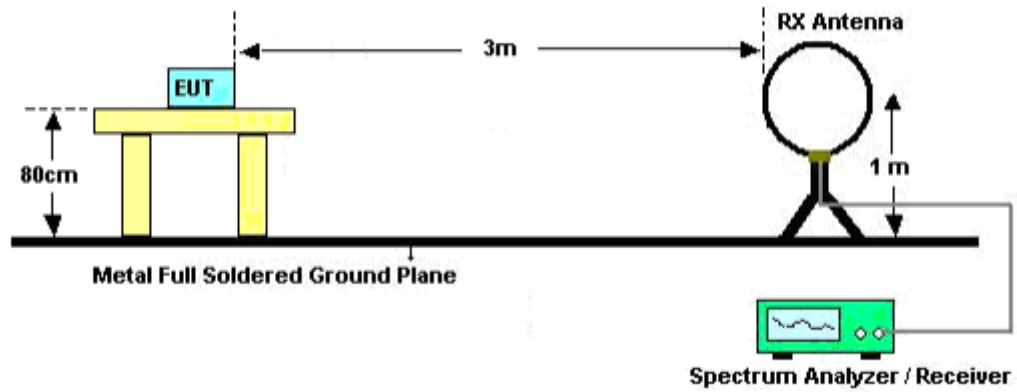

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

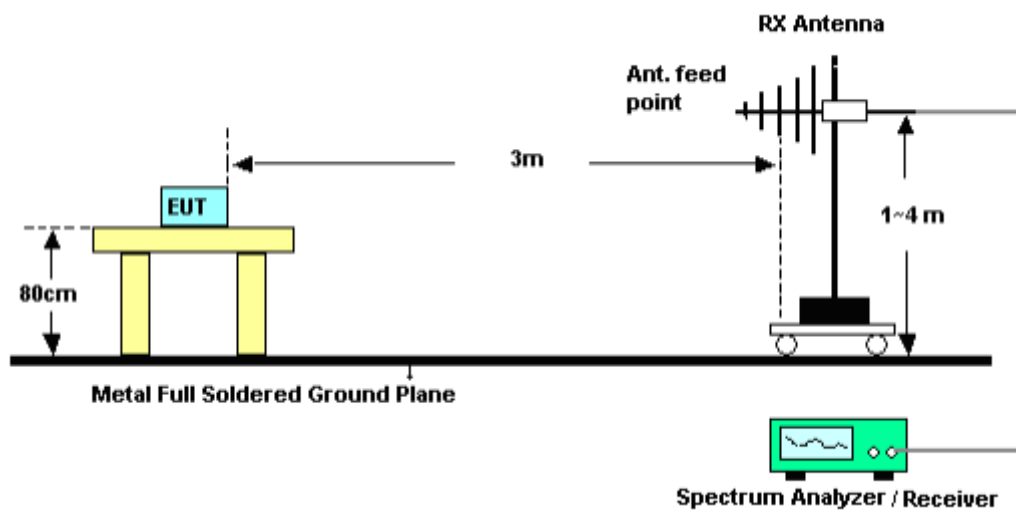

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

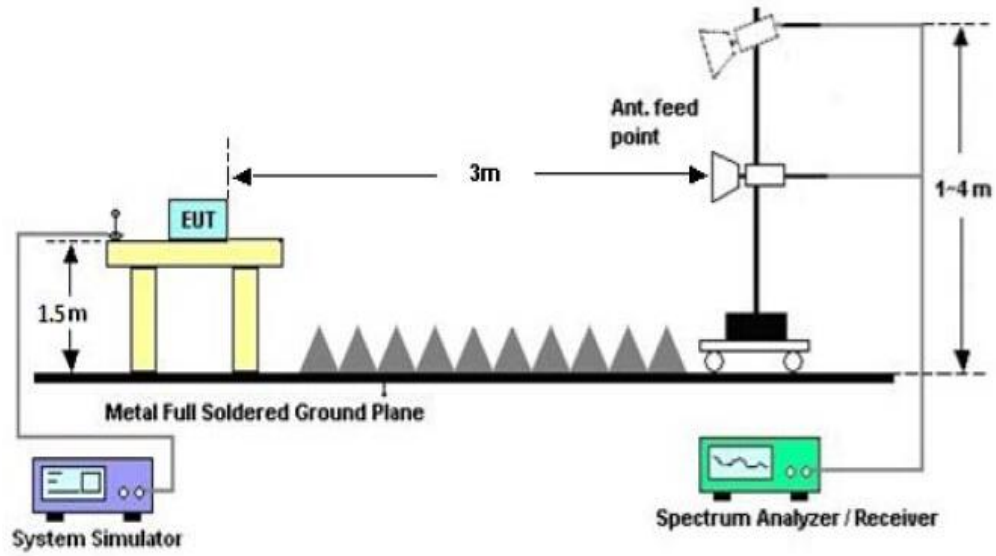


**11.4. TEST RESULT**

(Worst Modulation: GFSK)

**RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

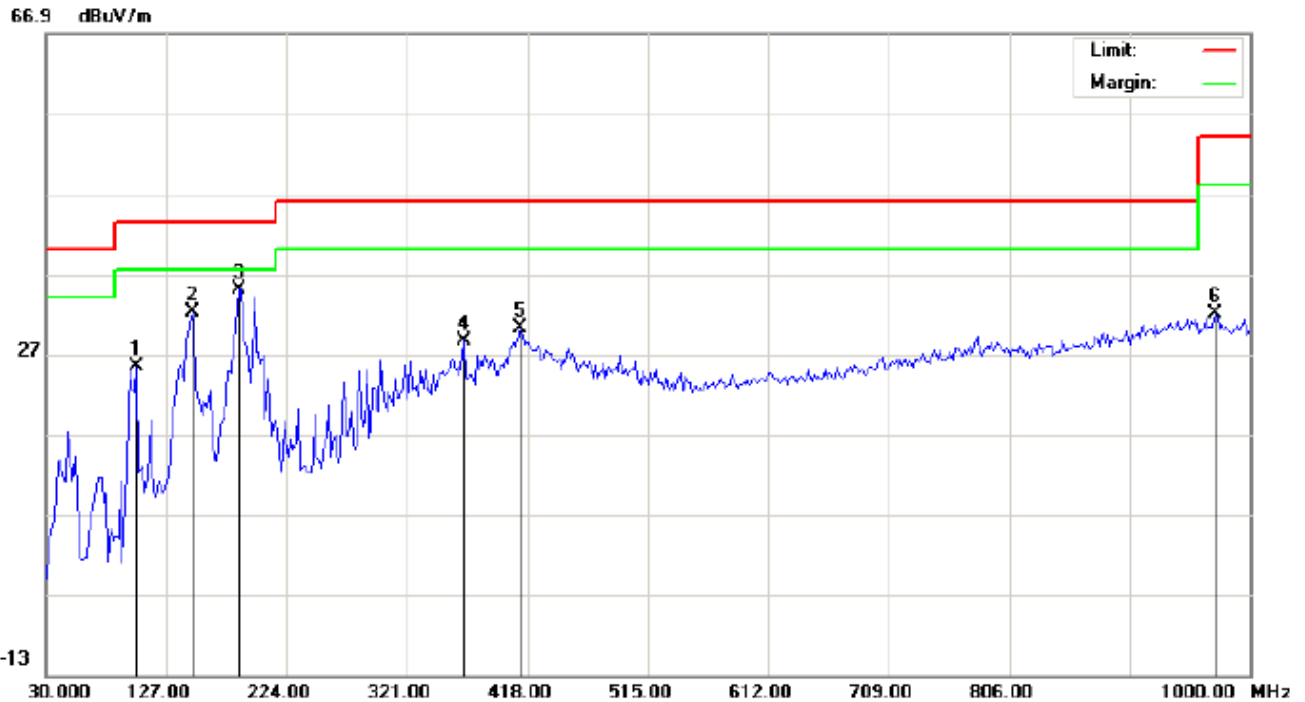**RADIATED EMISSION BELOW 1GHz****RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL**

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Portable Speaker

M/N: MP280

Mode:Low Channel TX

Note:

Polarization: *Horizontal*

Power:

Distance:


Temperature: 24.9

Humidity: 53.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		102.7500	15.65	9.84	25.49	43.50	-18.01	peak			
2		148.0167	18.92	13.25	32.17	43.50	-11.33	peak			
3	*	185.2000	23.76	11.31	35.07	43.50	-8.43	peak			
4		366.2667	9.84	18.85	28.69	46.00	-17.31	peak			
5		411.5333	10.72	19.42	30.14	46.00	-15.86	peak			
6		972.5167	2.13	29.78	31.91	54.00	-22.09	peak			

**RESULT: PASS**

**RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL**

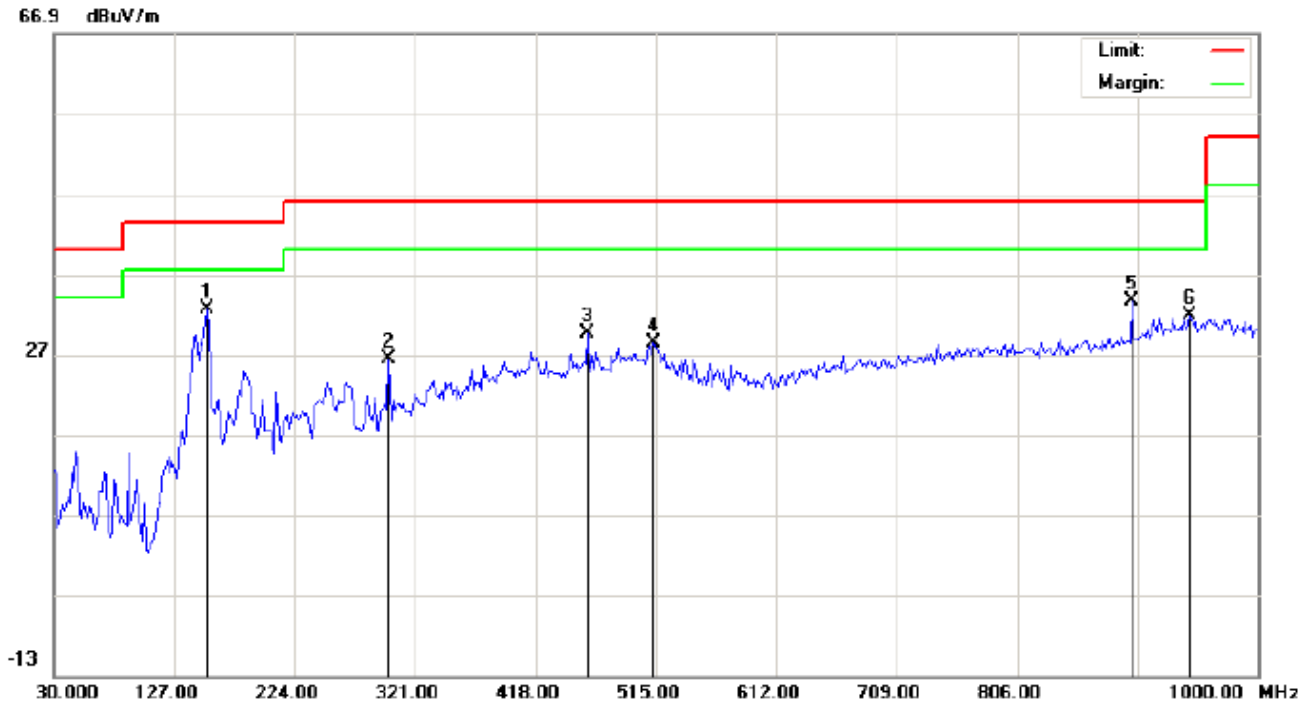

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: Portable Speaker  
M/N: MP280  
Mode:Low Channel TX  
Note:

Polarization: **Vertical**  
Power:  
Distance:

Temperature: 24.9  
Humidity: 53.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	152.8667	17.29	15.28	32.57	43.50	-10.93	peak			
2		299.9833	11.05	15.41	26.46	46.00	-19.54	peak			
3		460.0333	8.96	20.70	29.66	46.00	-16.34	peak			
4		513.3833	6.86	21.49	28.35	46.00	-17.65	peak			
5		898.1500	4.95	28.56	33.51	46.00	-12.49	peak			
6		945.0333	2.00	29.86	31.86	46.00	-14.14	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

## RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL



Site: site #1

Polarization: *Horizontal*

Temperature: 24.9

Limit: FCC Class B 3M Radiation

Power:

Humidity: 53.7 %

EUT: Portable Speaker

Distance:

M/N: MP280


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		99.5167	19.69	10.00	29.69	43.50	-13.81	peak			
2		148.0167	17.01	13.25	30.26	43.50	-13.24	peak			
3	*	186.8167	21.17	11.39	32.56	43.50	-10.94	peak			
4		306.4500	18.05	15.84	33.89	46.00	-12.11	peak			
5		419.6167	14.06	19.67	33.73	46.00	-12.27	peak			
6		949.8833	1.61	30.00	31.61	46.00	-14.39	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

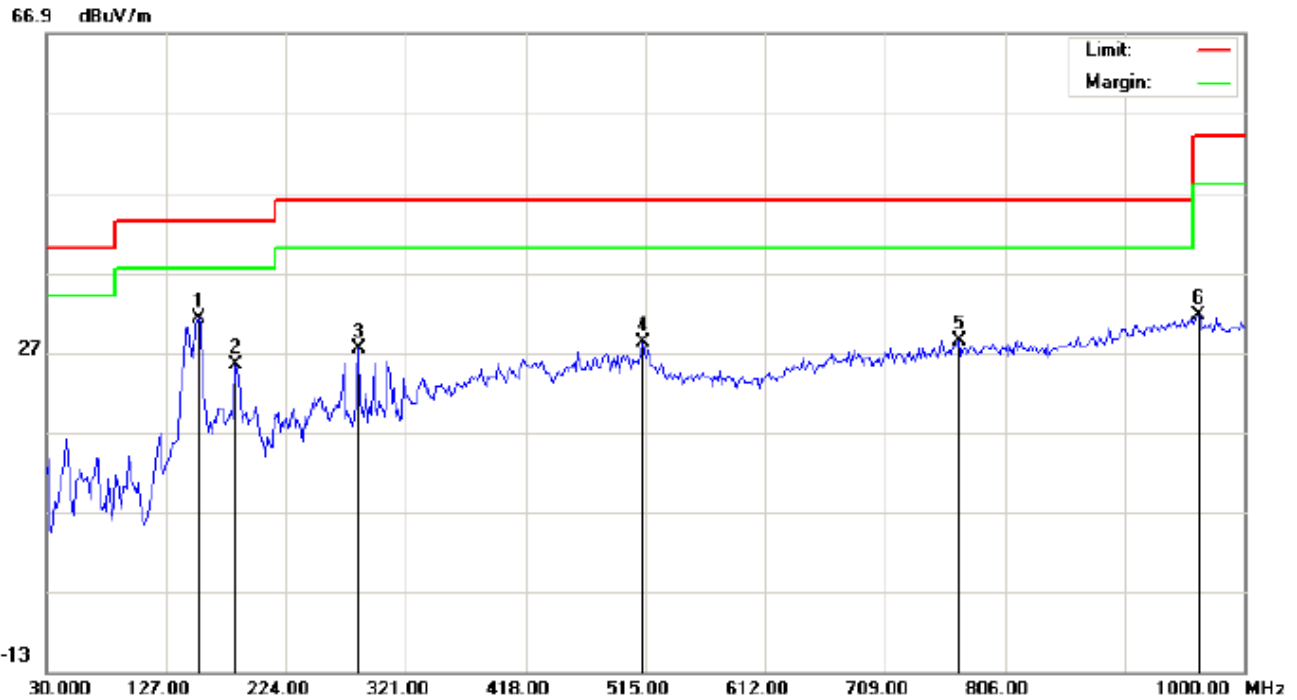

Site: site #1

Polarization: *Vertical*

Temperature: 24.9

Limit: FCC Class B 3M Radiation

Power:

Humidity: 53.7 %

EUT: Portable Speaker

Distance:

M/N: MP280

Mode: Middle Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	152.8667	15.87	15.28	31.15	43.50	-12.35	peak			
2		183.5833	12.22	13.16	25.38	43.50	-18.12	peak			
3		282.2000	12.50	14.87	27.37	46.00	-18.63	peak			
4		513.3833	6.77	21.49	28.26	46.00	-17.74	peak			
5		768.8167	1.57	26.89	28.46	46.00	-17.54	peak			
6		962.8167	1.81	29.88	31.69	54.00	-22.31	peak			

**RESULT: PASS****Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

## RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

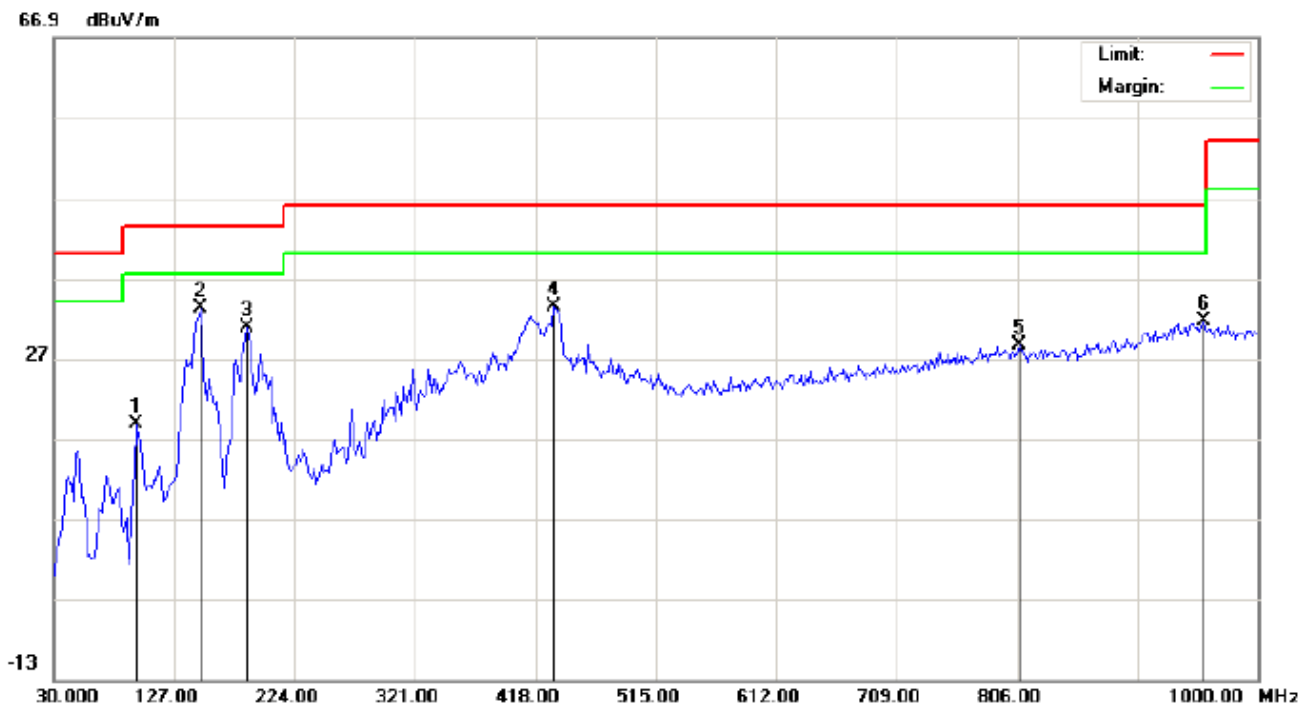

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Portable Speaker

M/N: MP280

Mode: High Channel TX

Note:

Polarization: *Horizontal*

Power:

Distance:

Temperature: 24.9


Humidity: 53.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		96.2833	11.99	6.77	18.76	43.50	-24.74	peak			
2	*	148.0167	20.04	13.25	33.29	43.50	-10.21	peak			
3		185.2000	19.42	11.31	30.73	43.50	-12.77	peak			
4		432.5500	13.34	20.06	33.40	46.00	-12.60	peak			
5		807.6167	1.23	27.32	28.55	46.00	-17.45	peak			
6		956.3500	1.67	29.94	31.61	46.00	-14.39	peak			

**RESULT: PASS**



## RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

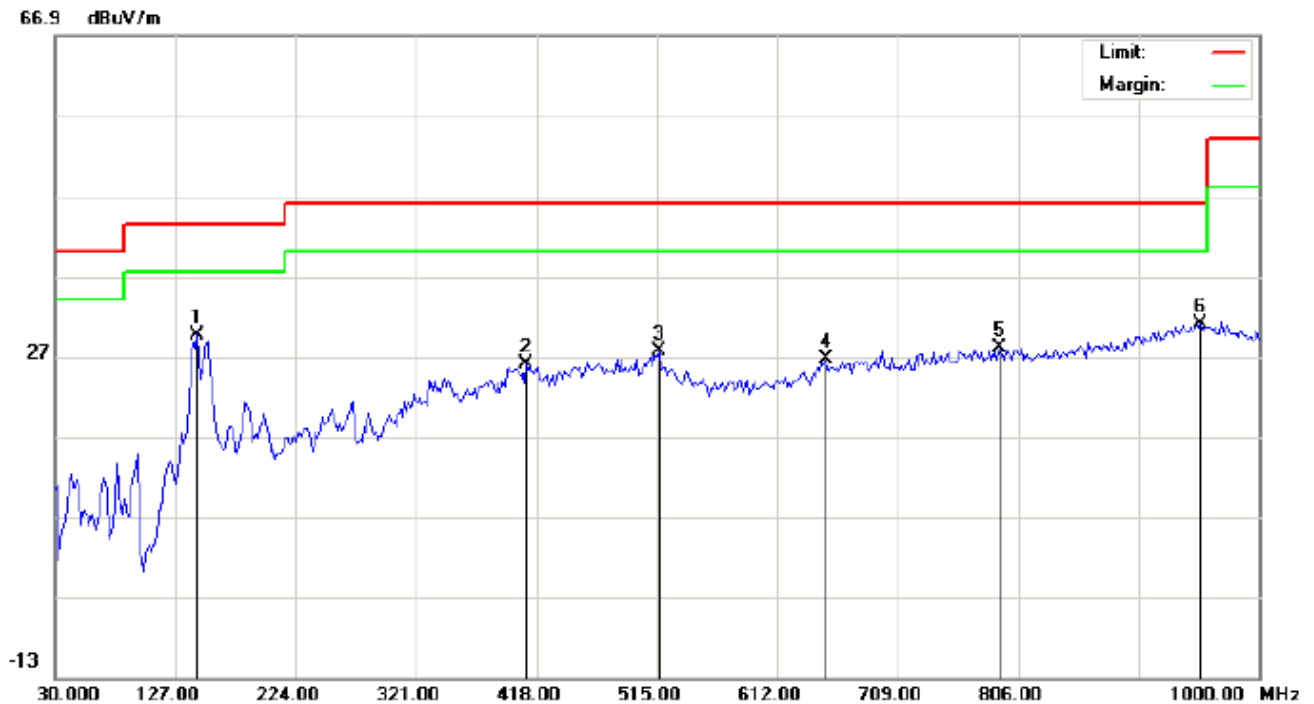

Site: site #1

Polarization: *Vertical*

Temperature: 24.9

Limit: FCC Class B 3M Radiation

Power:

Humidity: 53.7 %

EUT: Portable Speaker

Distance:

M/N: MP280


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	144.7833	14.47	15.23	29.70	43.50	-13.80	peak			
2		409.9167	6.64	19.37	26.01	46.00	-19.99	peak			
3		516.6167	6.01	21.58	27.59	46.00	-18.41	peak			
4		650.8000	2.79	23.87	26.66	46.00	-19.34	peak			
5		791.4500	0.84	27.20	28.04	46.00	-17.96	peak			
6		953.1167	1.07	29.97	31.04	46.00	-14.96	peak			

**RESULT: PASS****Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

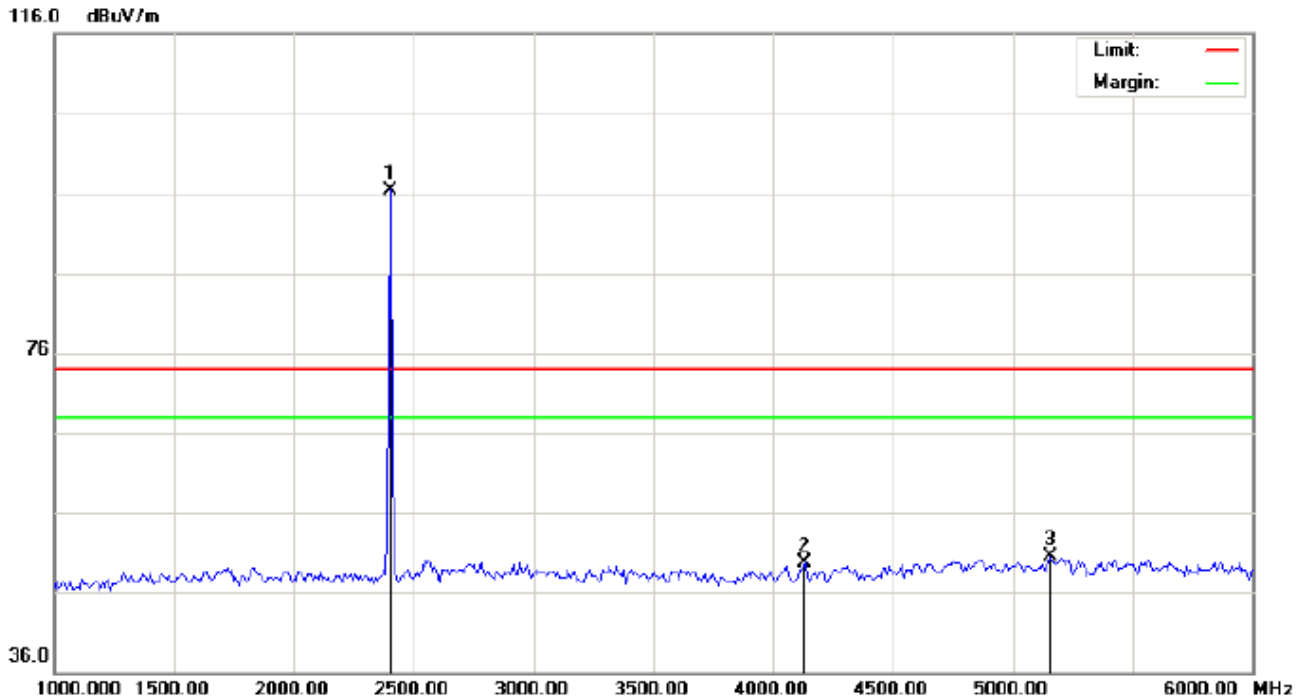**RADIATED EMISSION ABOVE 1GHz****RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics)-LOW CHANNEL-HORIZONTAL**

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT:Portable Speaker

Distance:


M/N:MP280

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	86.00	10.32	96.32	74.00	22.32	peak			
2		4133.333	36.66	12.98	49.64	74.00	-24.36	peak			
3		5158.333	45.52	5.03	50.55	74.00	-23.45	peak			

**RESULT: PASS**

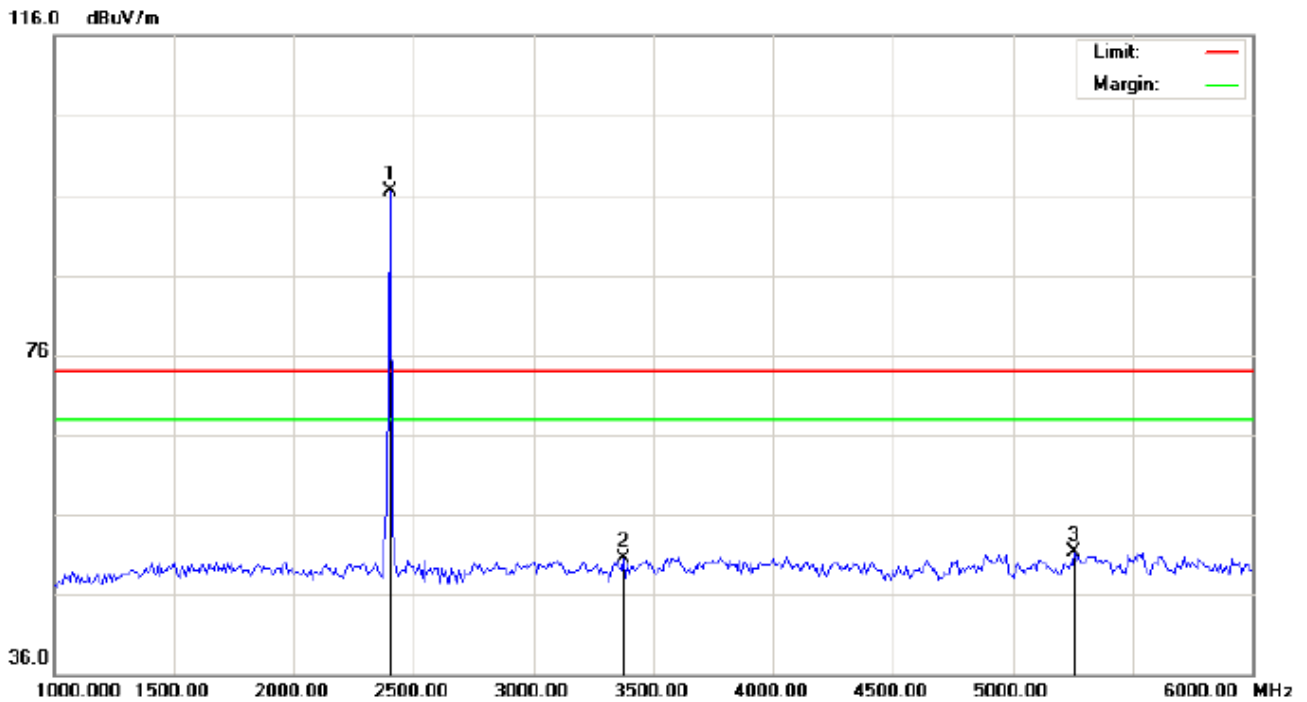RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics)-LOW CHANNEL –VERTICAL

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT: Portable Speaker

Distance:


M/N: MP280

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	86.09	10.32	96.41	74.00	22.41	peak			
2		3375.000	38.51	11.99	50.50	74.00	-23.50	peak			
3		5258.333	48.23	3.03	51.26	74.00	-22.74	peak			

**RESULT: PASS**

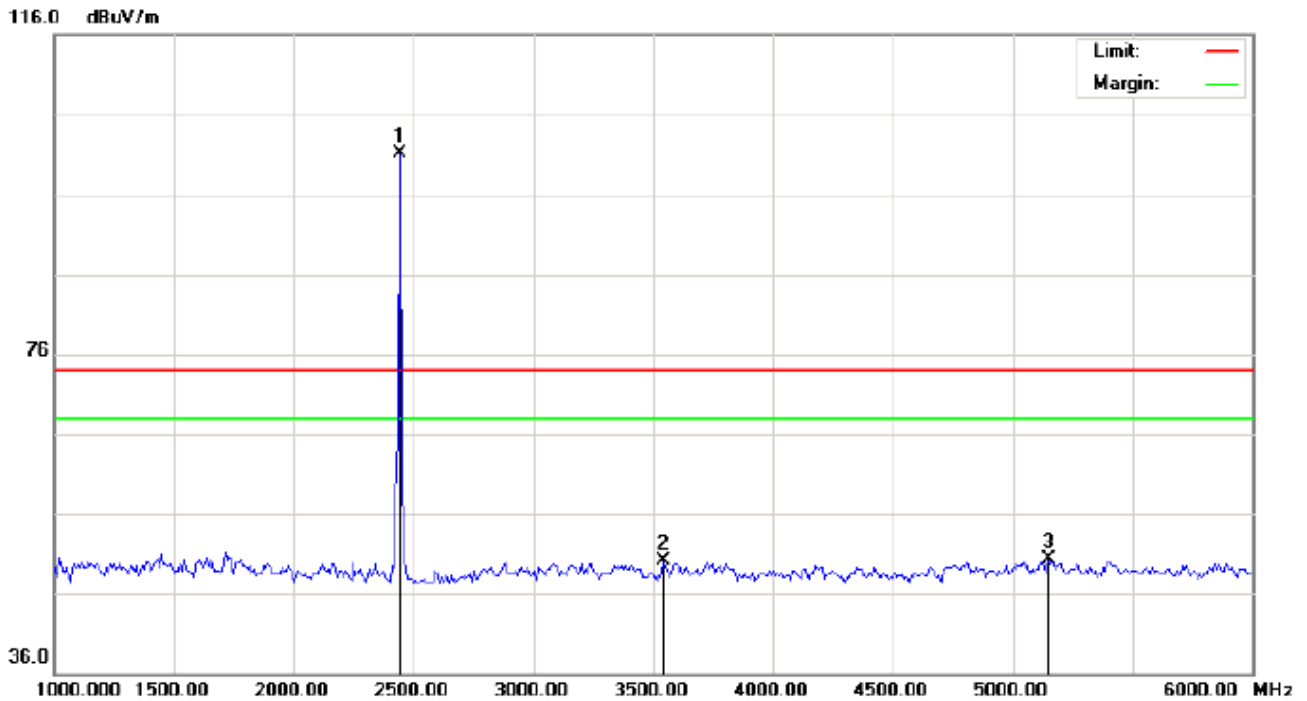RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics)-MIDDLE CHANNEL-HORIZONTAL

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT:Portable Speaker

Distance:


M/N:MP280

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	90.73	10.36	101.09	74.00	27.09	peak			
2		3541.667	37.68	12.37	50.05	74.00	-23.95	peak			
3		5150.000	45.07	5.20	50.27	74.00	-23.73	peak			

**RESULT: PASS**

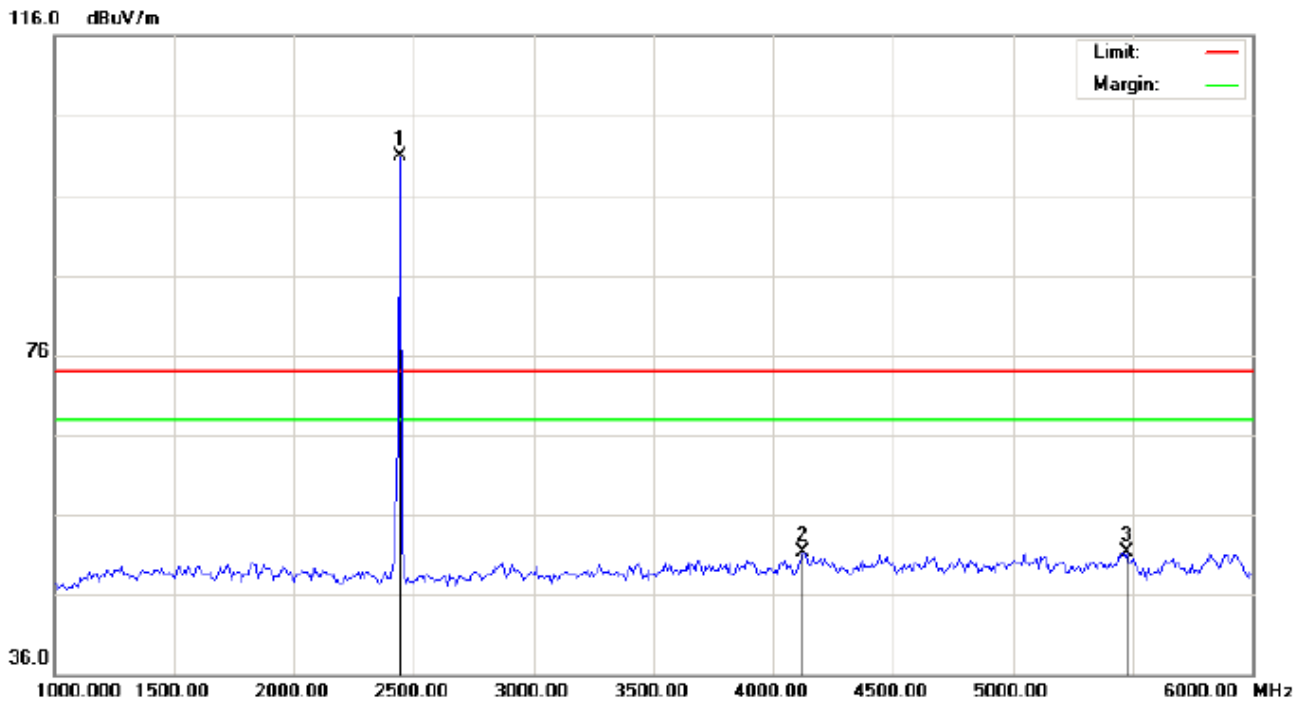RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics) - MIDDLE CHANNEL –VERTICAL

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHz(PK)

EUT:Portable Speaker

M/N:MP280

Mode: Middle Channel TX

Note:

Polarization: *Vertical*

Power:


Distance:

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	90.49	10.36	100.85	74.00	26.85	peak			
2		4125.000	38.13	13.11	51.24	74.00	-22.76	peak			
3		5475.000	52.64	-1.31	51.33	74.00	-22.67	peak			

**RESULT: PASS**

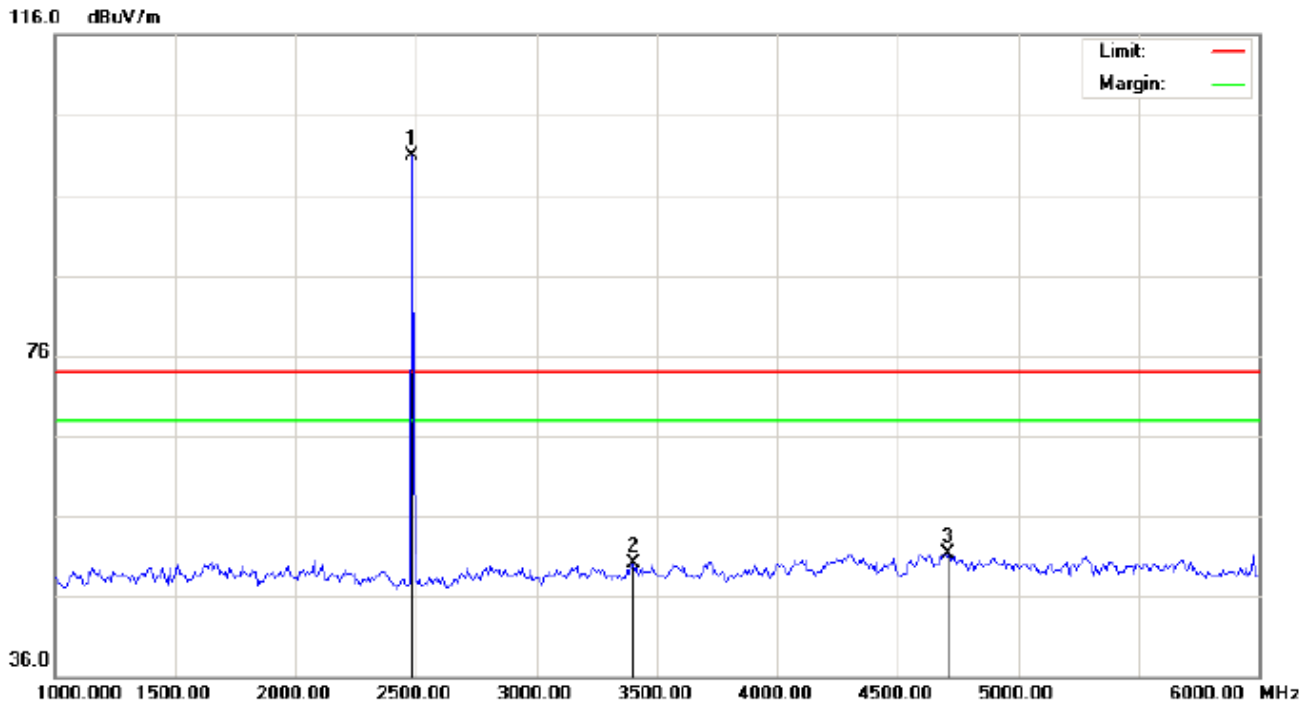RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics)-HIGH CHANNEL-HORIZONTAL

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT:Portable Speaker

Distance:


M/N:MP280

Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	90.55	10.41	100.96	74.00	26.96	peak			
2		3400.000	38.02	12.02	50.04	74.00	-23.96	peak			
3		4708.333	43.83	7.44	51.27	74.00	-22.73	peak			

**RESULT: PASS**

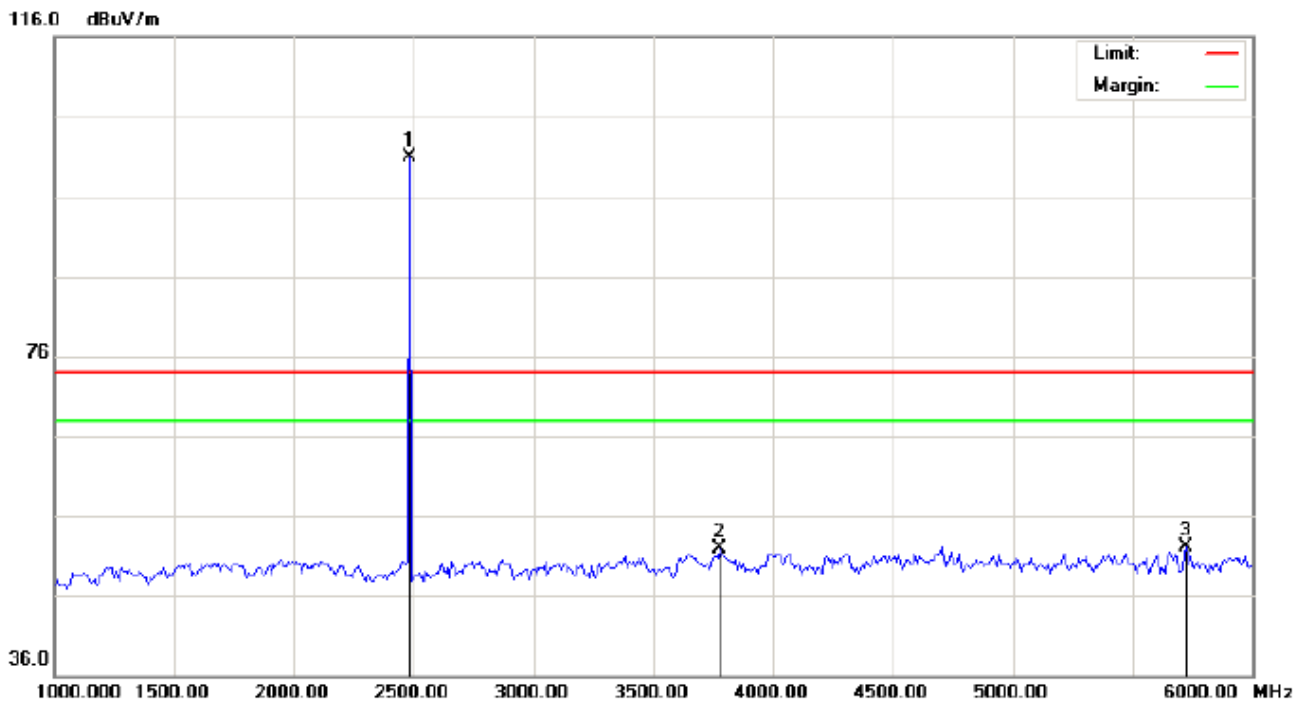RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics)-HIGH CHANNEL –VERTICAL

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT:Portable Speaker

Distance:

M/N:MP280

Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	90.54	10.41	100.95	74.00	26.95	peak			
2		3775.000	38.03	13.80	51.83	74.00	-22.17	peak			
3		5725.000	53.79	-1.71	52.08	74.00	-21.92	peak			

**RESULT: PASS****Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

## 12. BAND EDGE EMISSION

### 12.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency=Operation Frequency,  $RBW \geq 100\text{kHz}$ ,  $VBW \geq 3 \cdot RBW$ ,  
Center frequency =Operation frequency
3. The band edges was measured and recorded.

### 12.2. TEST SET-UP

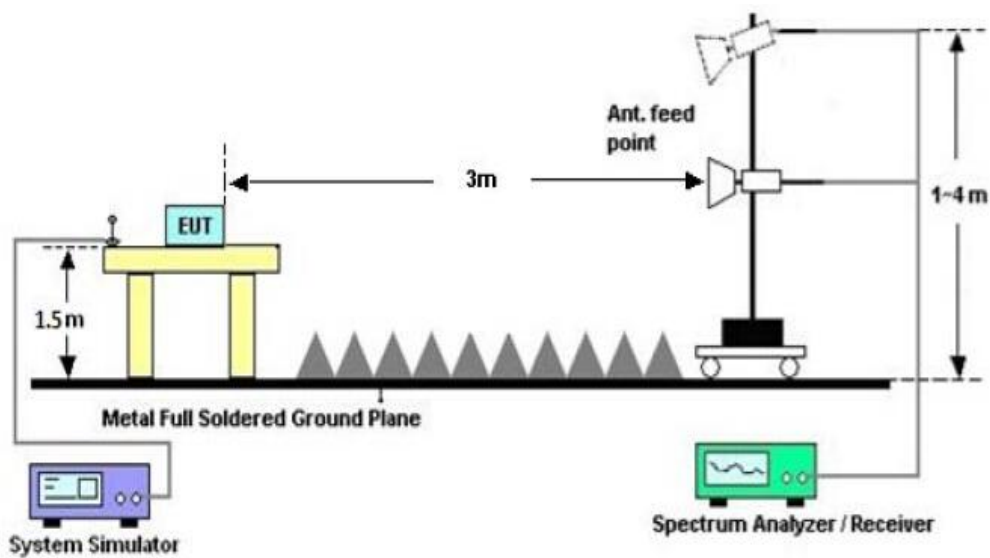




12.3. TEST RESULT

(Worst Modulation: GFSK)


TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Horizontal

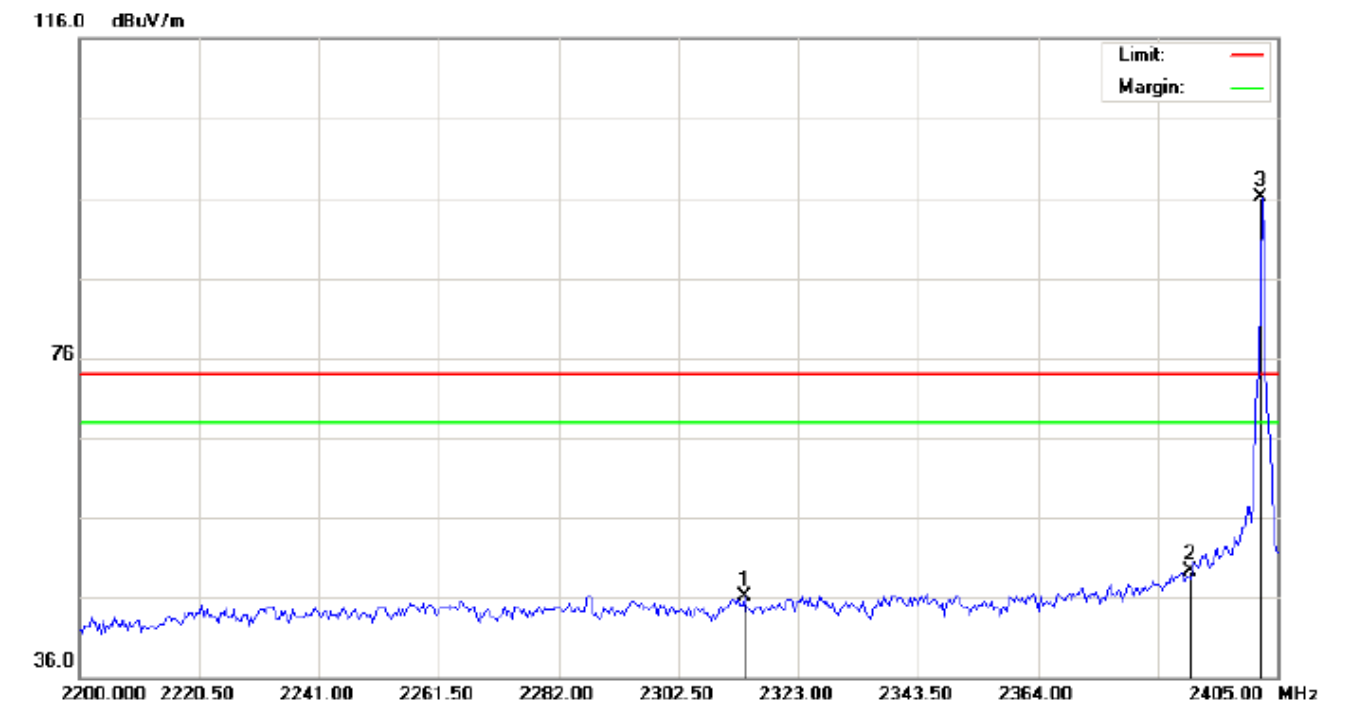

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Portable Speaker	Distance:	
M/N: MP280		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2313.775	35.85	10.23	46.08	74.00	-27.92	peak			
2		2390.000	39.00	10.31	49.31	74.00	-24.69	peak			
3	*	2402.000	85.82	10.32	96.14	74.00	22.14	peak			

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Vertical

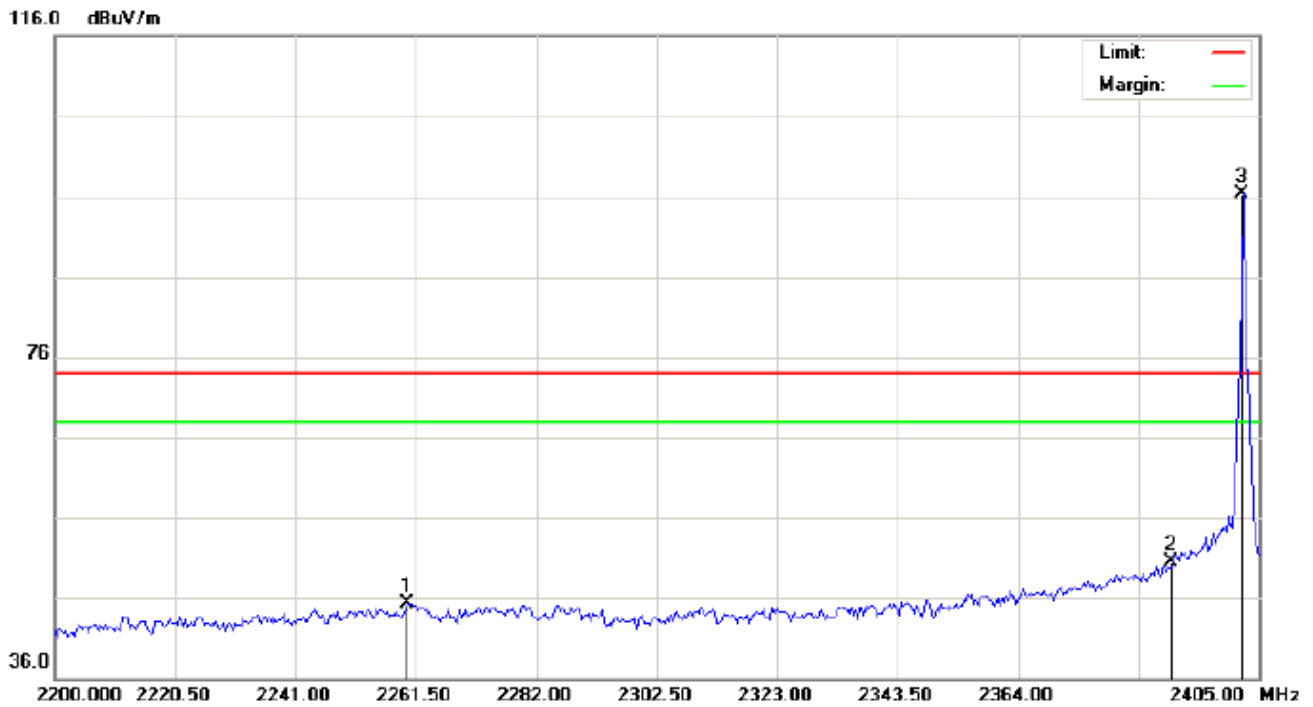

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT:Portable Speaker

Distance:


M/N:MP280

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2260.133	35.10	10.17	45.27	74.00	-28.73	peak			
2		2390.000	40.21	10.31	50.52	74.00	-23.48	peak			
3	*	2402.000	85.99	10.32	96.31	74.00	22.31	peak			

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Horizontal

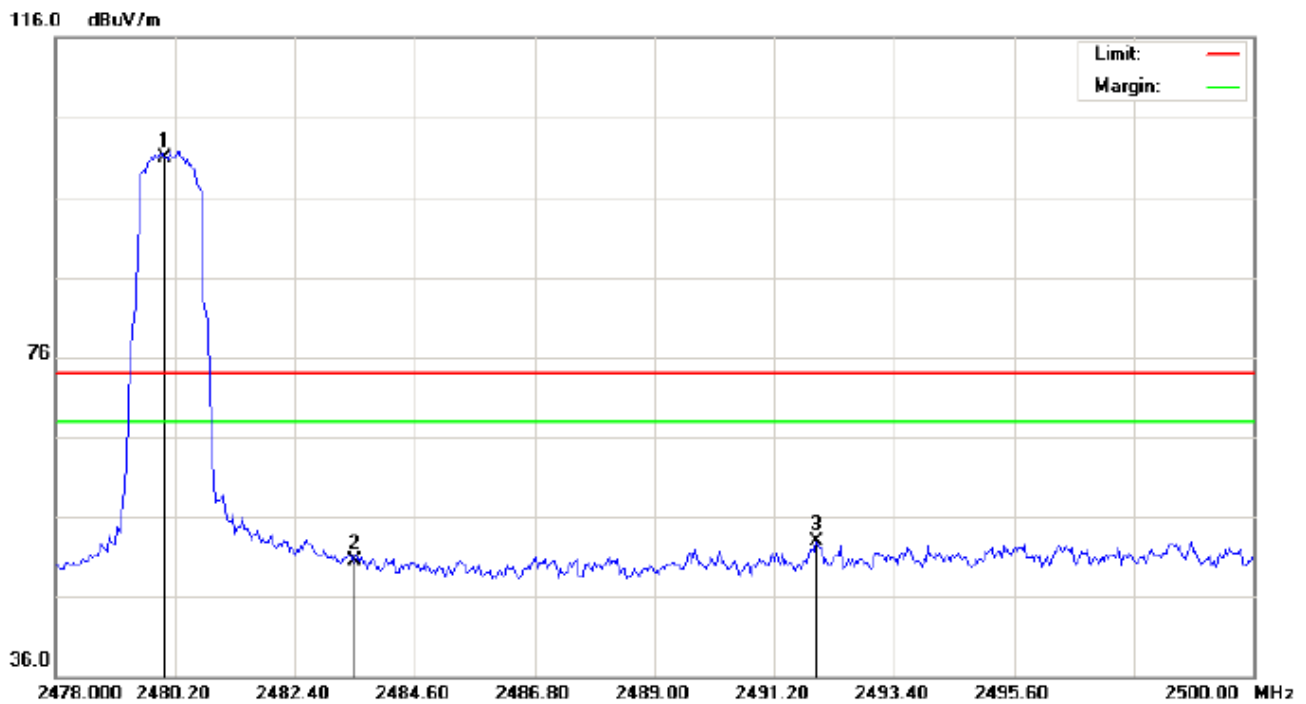

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT:Portable Speaker

Distance:


M/N:MP280

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	90.57	10.41	100.98	74.00	26.98	peak			
2		2483.500	40.19	10.41	50.60	74.00	-23.40	peak			
3		2491.970	42.48	10.42	52.90	74.00	-21.10	peak			

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Vertical

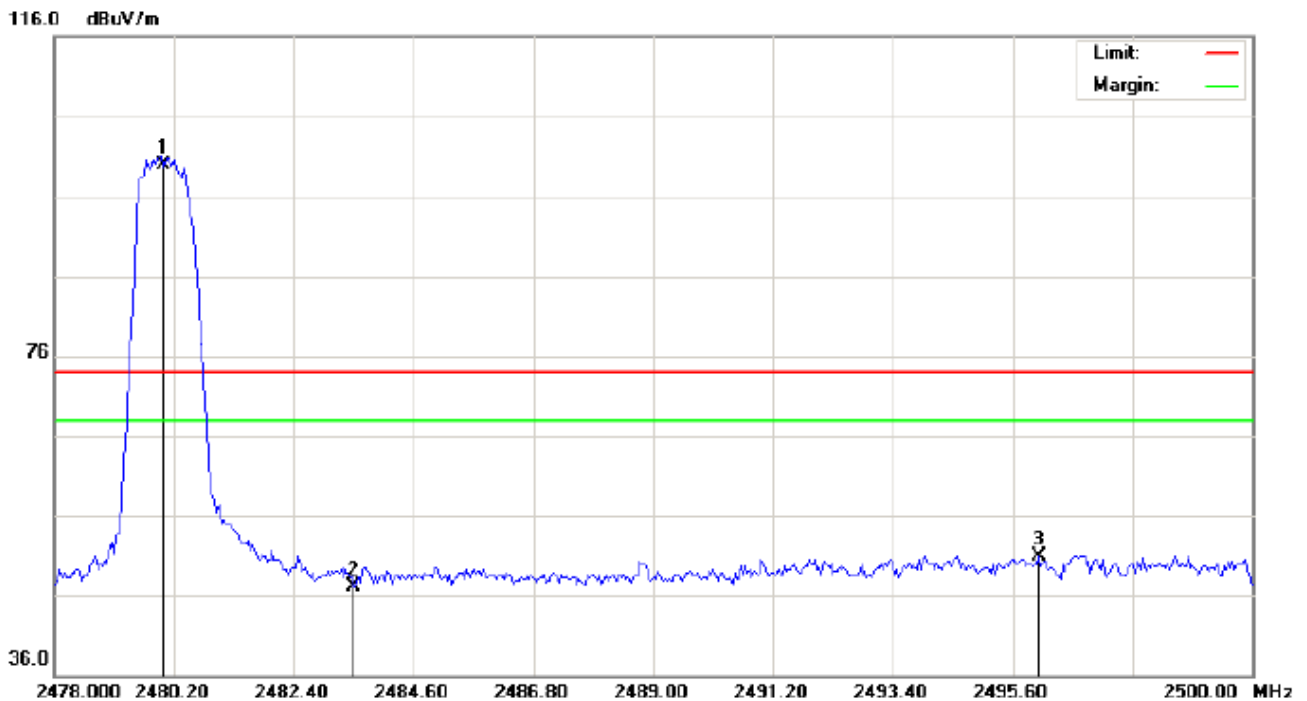

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT: Portable Speaker

Distance:

M/N: MP280

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	89.48	10.41	99.89	74.00	25.89	peak			
2		2483.500	36.76	10.41	47.17	74.00	-26.83	peak			
3		2496.077	40.40	10.43	50.83	74.00	-23.17	peak			

**RESULT: PASS****Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


3. Hopping off and Hopping on have been tested and only worst case recorded

### 13. NUMBER OF HOPPING FREQUENCY

#### 13.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
4. Set the Spectrum Analyzer as RBW $\geq$ 1%span, VBW $\geq$ RBW.


#### 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

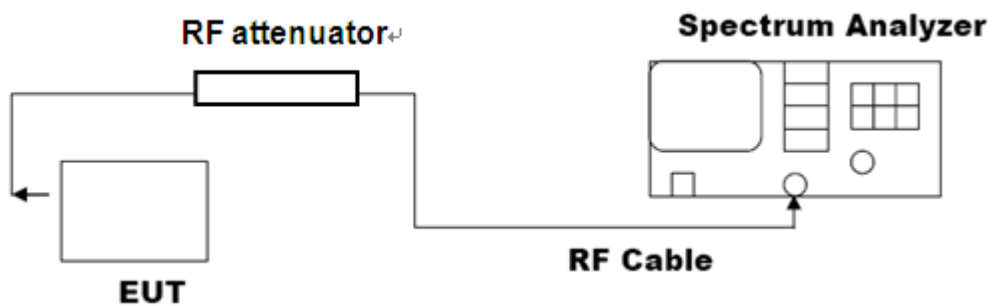

#### 13.3. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	$\geq 15$	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS

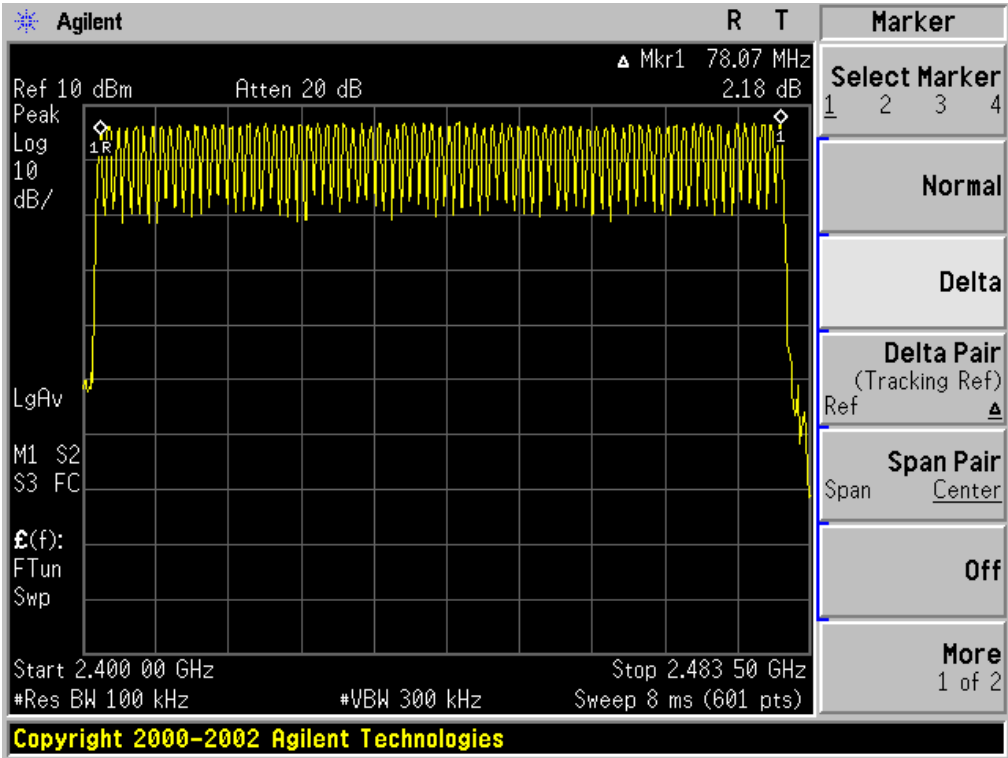


## 14. TIME OF OCCUPANCY (DWELL TIME)

### 14.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set Span = zero span, centered on a hopping channel
4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

### 14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

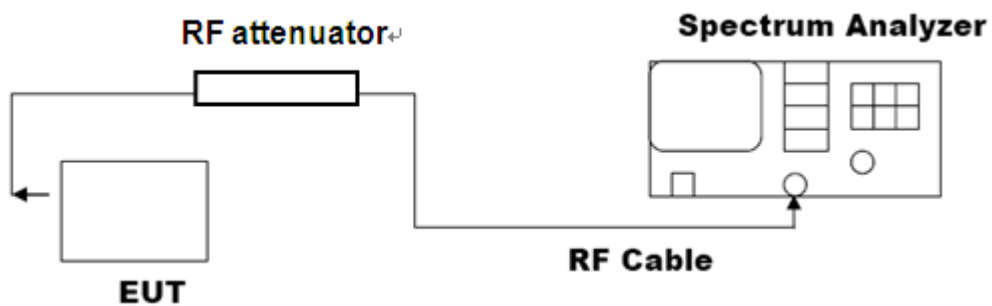

### 14.3. LIMITS AND MEASUREMENT RESULT

#### The Worst Case (3Mbps)

Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.884	31.6	307.63	400
Middle	2.898	31.6	309.12	400
High	2.884	31.6	307.63	400

Low Channel Time

$$2.884 * (1600/6) / 79 * 31.6 = 307.63 \text{ms}$$


Middle Channel Time

$$2.898 * (1600/6) / 79 * 31.6 = 309.12 \text{ms}$$


High Channel Time

$$2.884 * (1600/6) / 79 * 31.6 = 307.63 \text{ms}$$

TEST PLOT OF LOW CHANNEL

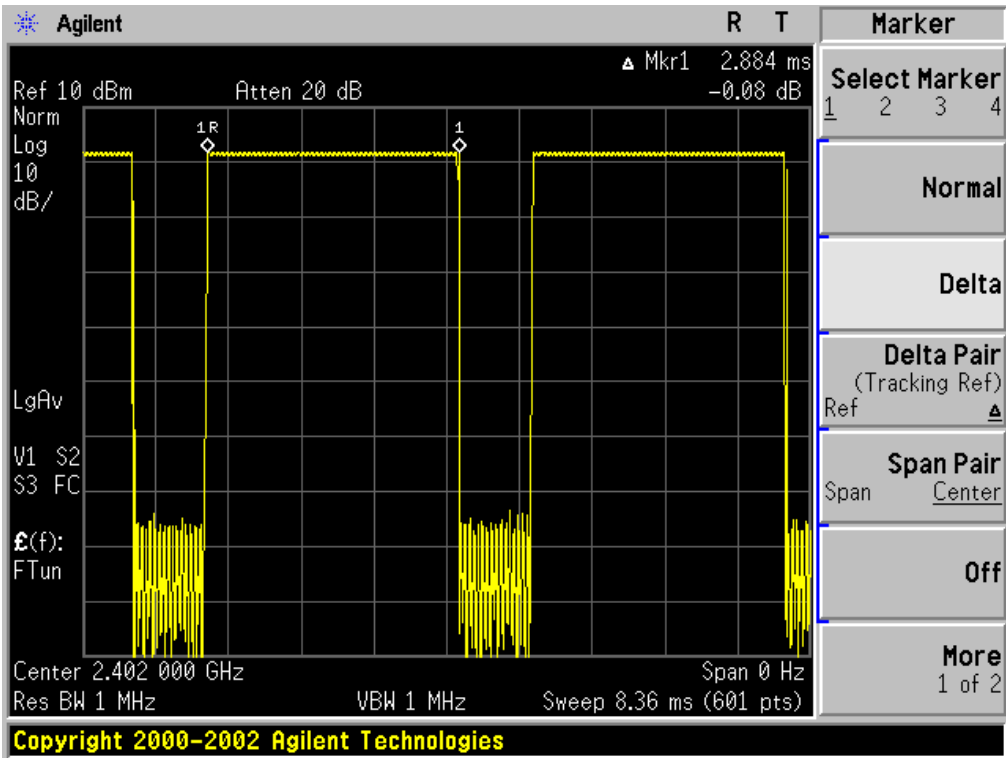


TEST PLOT OF MIDDLE CHANNEL

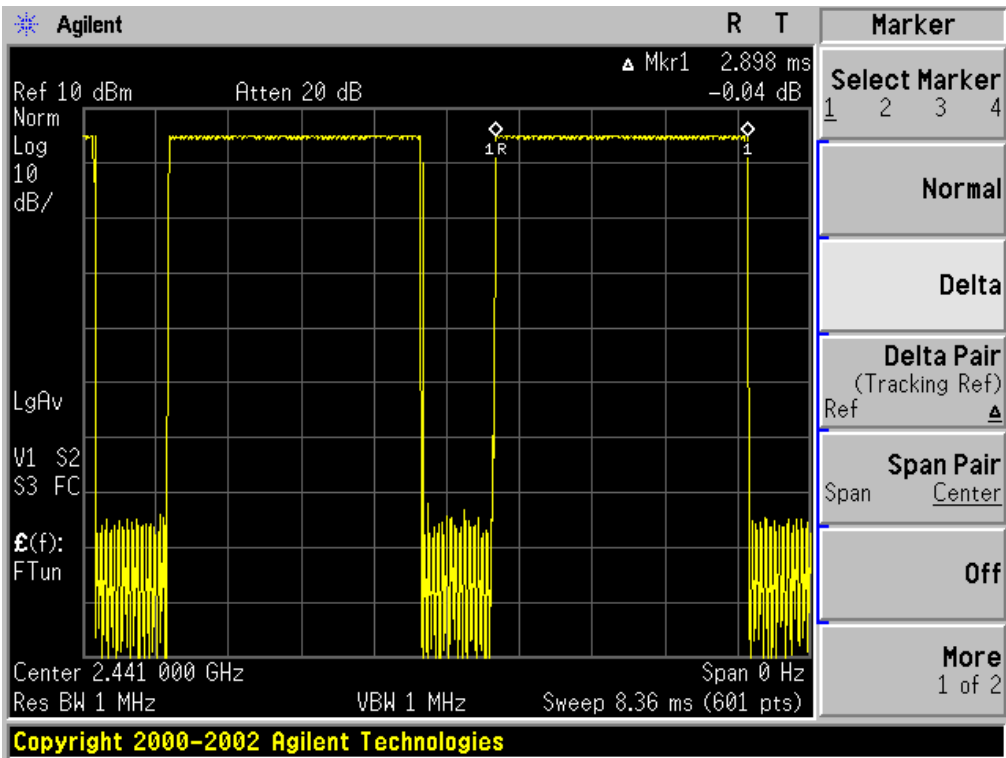



TEST PLOT OF HIGH CHANNEL

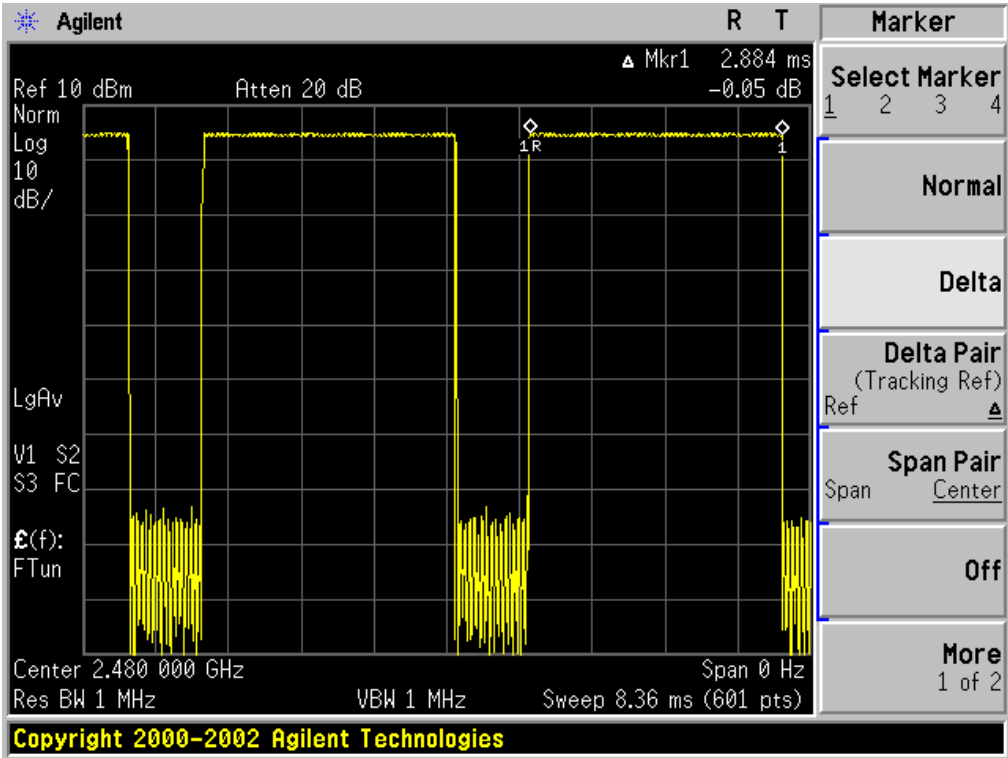


15. FREQUENCY SEPARATION

15.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold


15.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

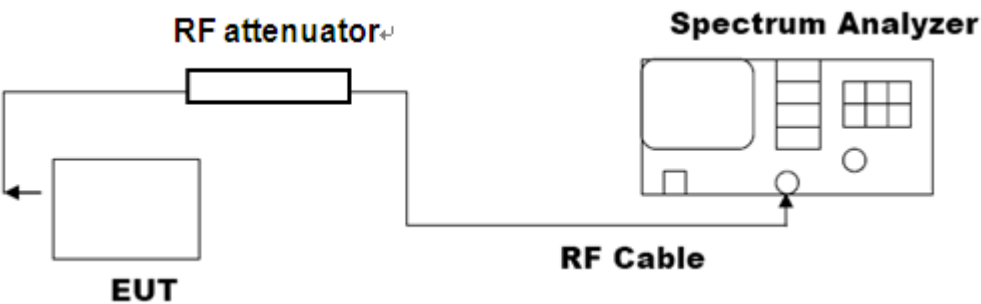

15.3. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	
CH00-CH01	1016	$\geq 25$ KHz or 2/3 20 dB BW	Pass

TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

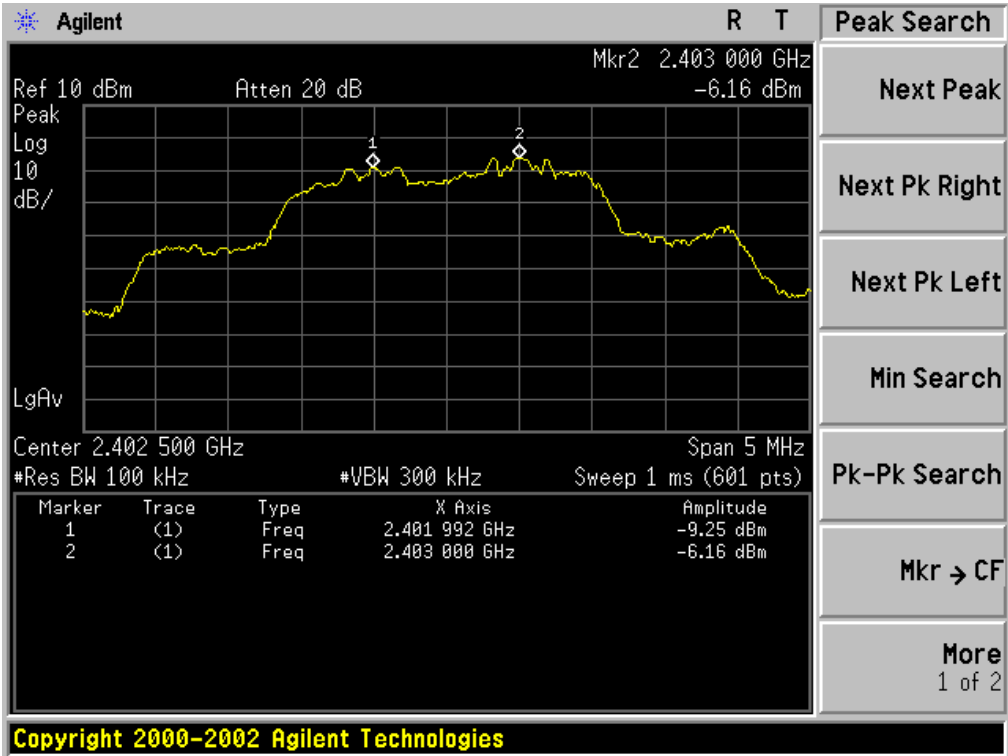

## 16. LINE CONDUCTED EMISSION TEST


### 16.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 16.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

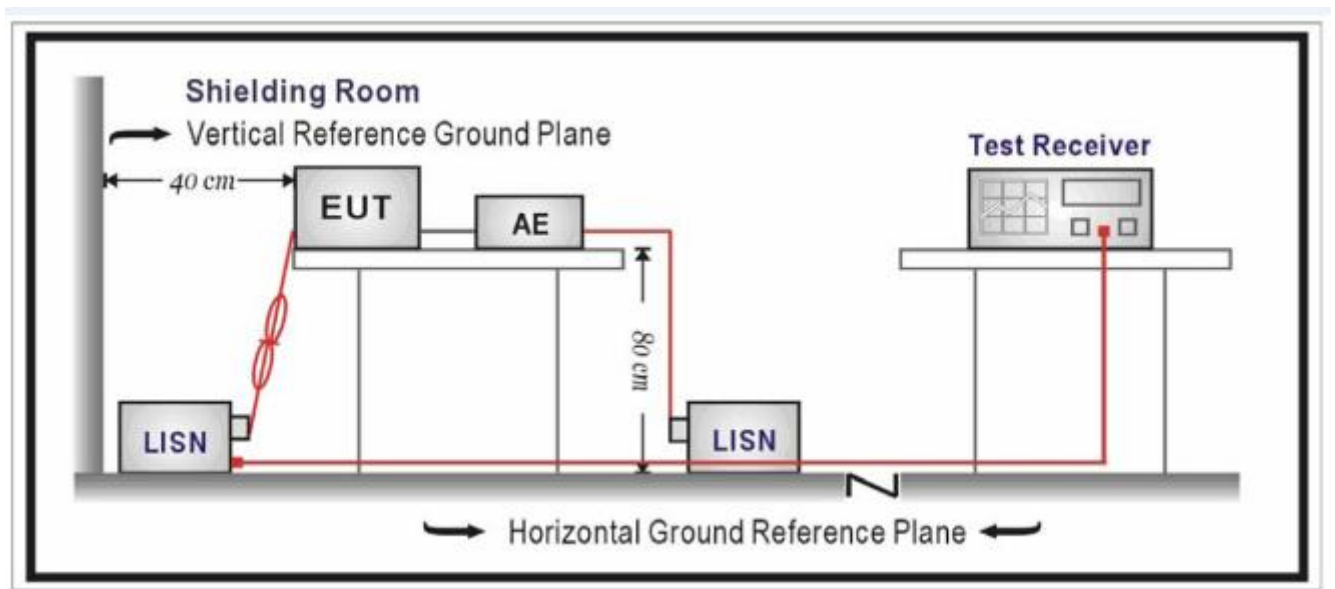

### **16.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### **16.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST**


1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

## 16.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter (worst case)

FOR BR/EDR

Line Conducted Emission Test Line 1-L

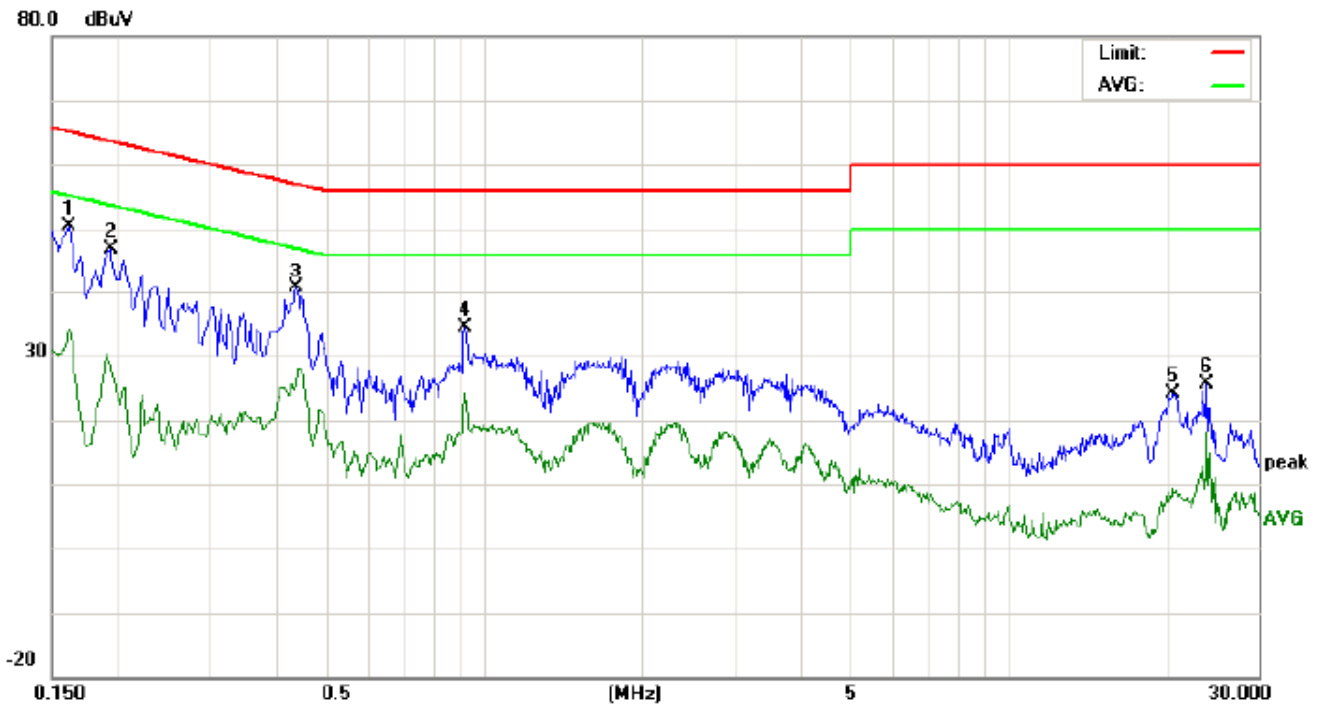

Site: Conduction

Phase: **L1**

Temperature: 21.5

Limit: FCC Class B Conduction(QP)

Power:

Humidity: 50.4 %

EUT: Portable Speaker


M/N: MP280

Mode: BT Link with charging

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	50.31		34.14	0.00	50.31		34.14	65.36	55.36	-15.05	-21.22	P	
2	0.1940	46.95		28.38	0.00	46.95		28.38	63.86	53.86	-16.91	-25.48	P	
3	0.4380	40.73		25.36	0.00	40.73		25.36	57.10	47.10	-16.37	-21.74	P	
4	0.9220	34.35		24.22	0.00	34.35		24.22	56.00	46.00	-21.65	-21.78	P	
5	20.6700	24.19		9.39	0.00	24.19		9.39	60.00	50.00	-35.81	-40.61	P	
6	24.0020	25.68		18.10	0.00	25.68		18.10	60.00	50.00	-34.32	-31.90	P	

Line Conducted Emission Test Line 2-N

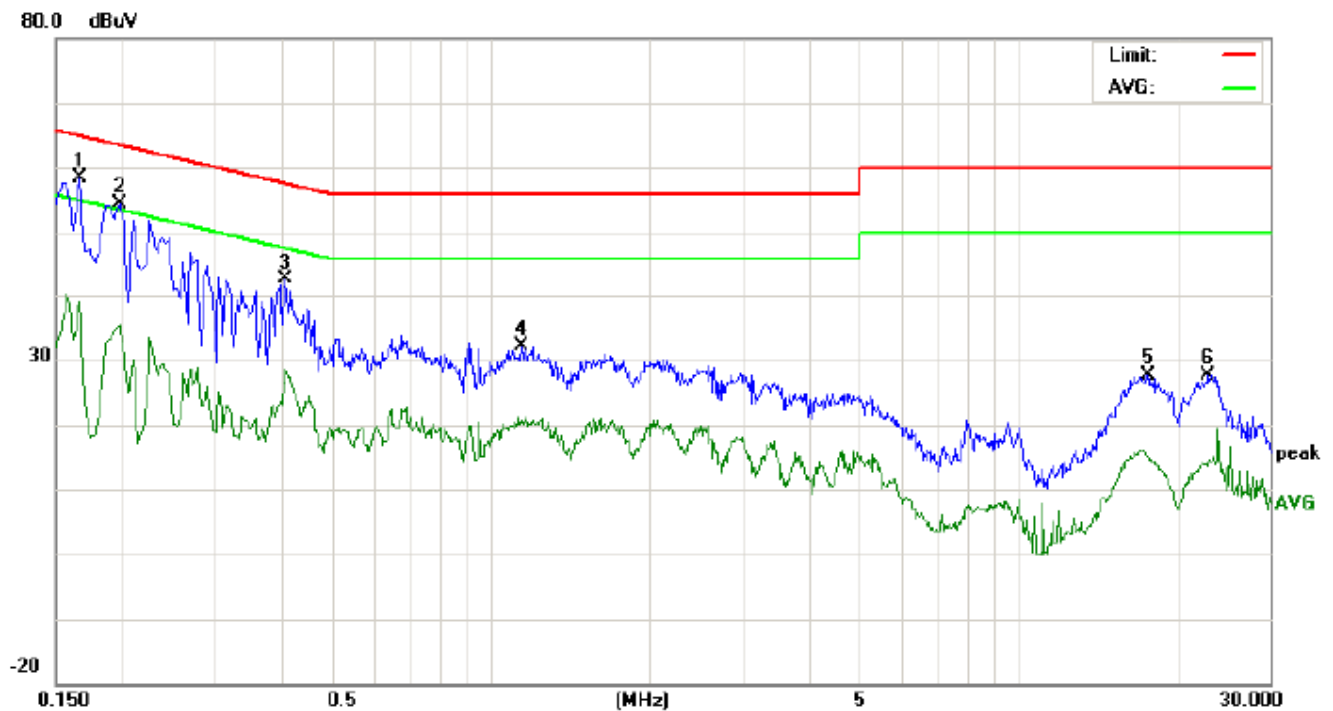

Site: Conduction

Phase: **N**

Temperature: 21.5

Limit: FCC Class B Conduction(QP)

Power:

Humidity: 50.4 %

EUT: Portable Speaker

M/N: MP280


Mode: BT Link with charging

Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	58.29		39.03	0.00	58.29		39.03	65.15	55.15	-6.86	-16.12	P	
2	0.1980	54.36		35.34	0.00	54.36		35.34	63.69	53.69	-9.33	-18.35	P	
3	0.4100	42.73		28.50	0.00	42.73		28.50	57.65	47.65	-14.92	-19.15	P	
4	1.1460	32.06		20.58	0.00	32.06		20.58	56.00	46.00	-23.94	-25.42	P	
5	17.5740	27.74		15.21	0.00	27.74		15.21	60.00	50.00	-32.26	-34.79	P	
6	22.8980	27.65		13.75	0.00	27.65		13.75	60.00	50.00	-32.35	-36.25	P	

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP



### FCC LINE CONDUCTED EMISSION TEST SETUP

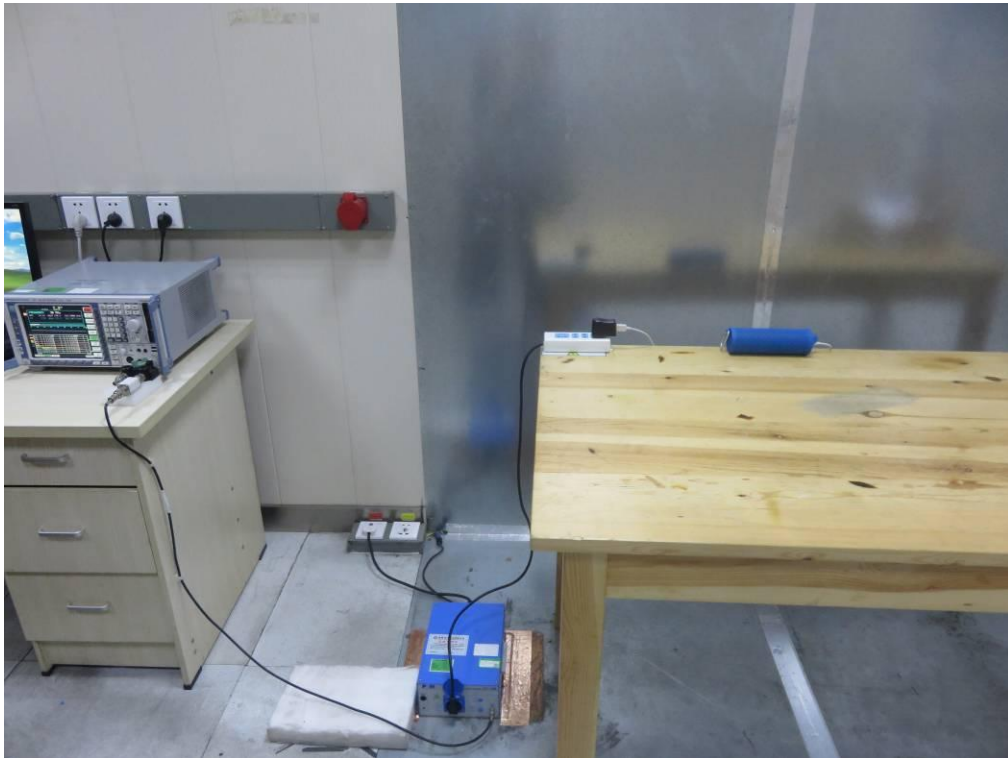


### FCC RADIATED EMISSION TEST SETUP

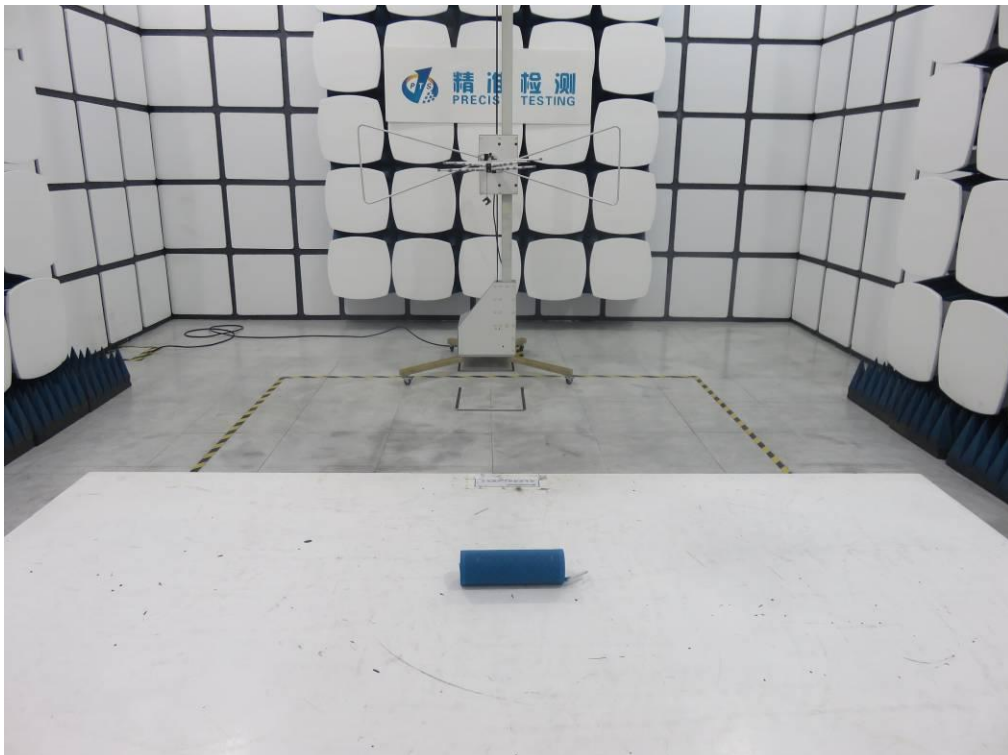




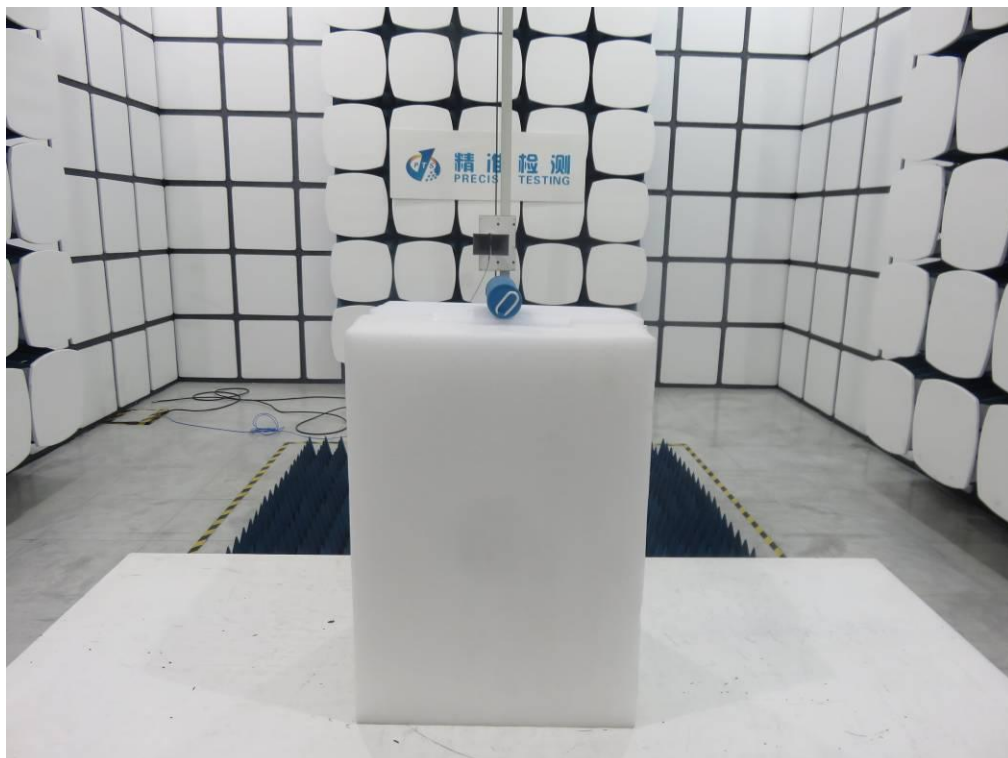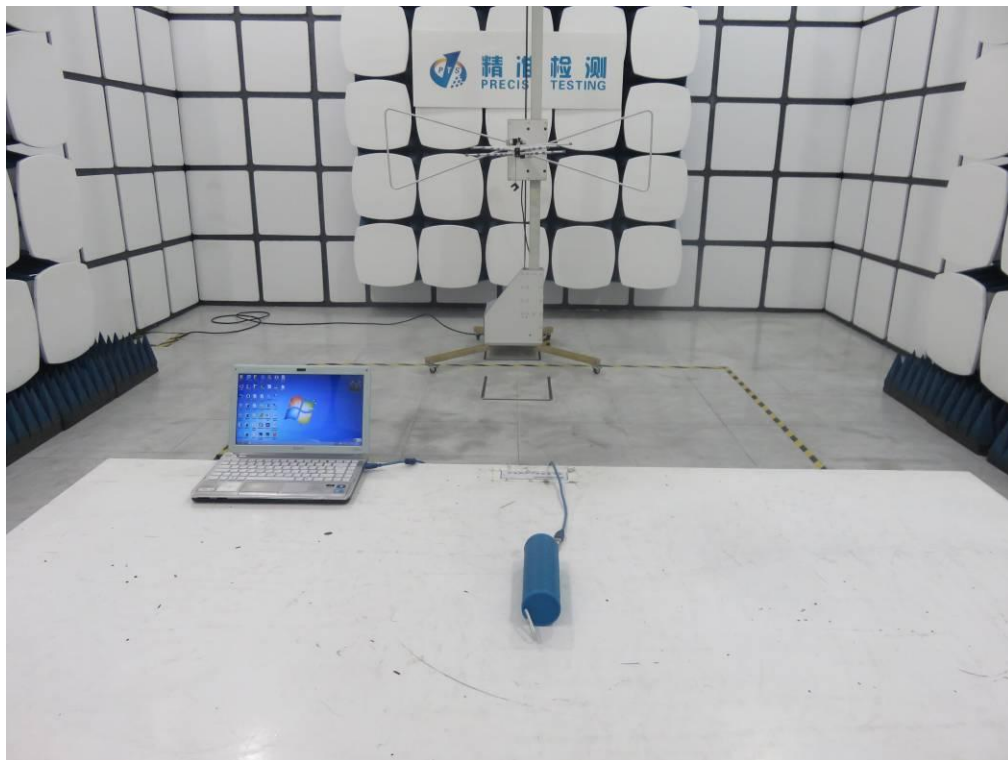

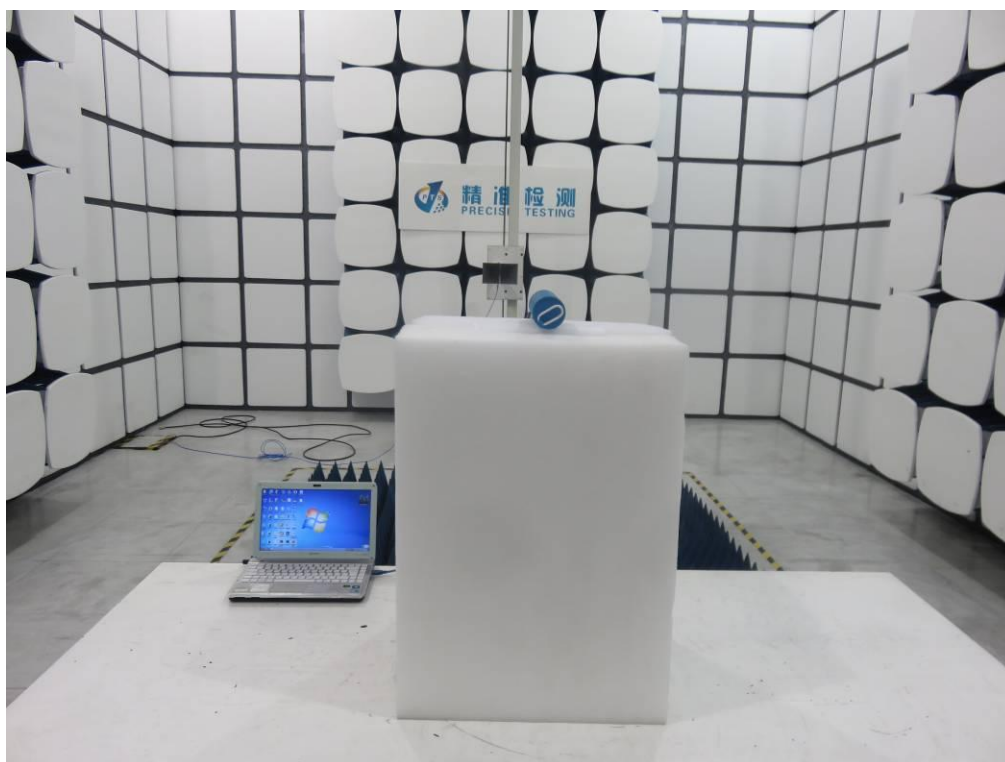

## APPENDIX B: PHOTOGRAPHS OF EUT

### WHOLE VIEW OF EUT

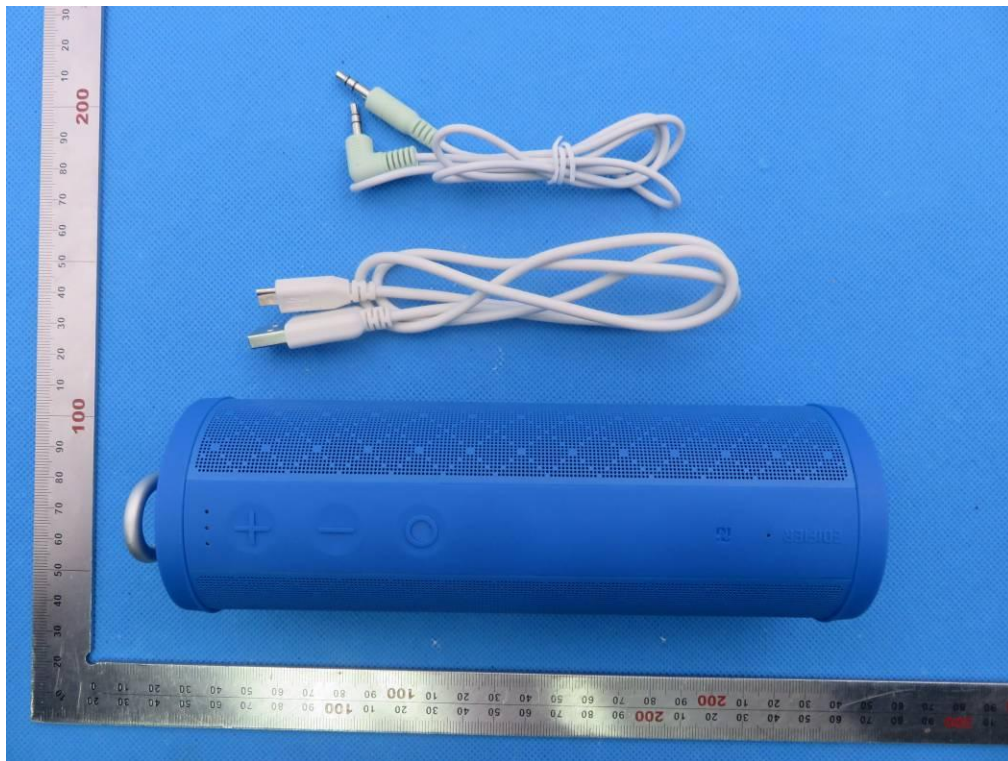


TOP VIEW OF EUT







BOTTOM VIEW OF EUT

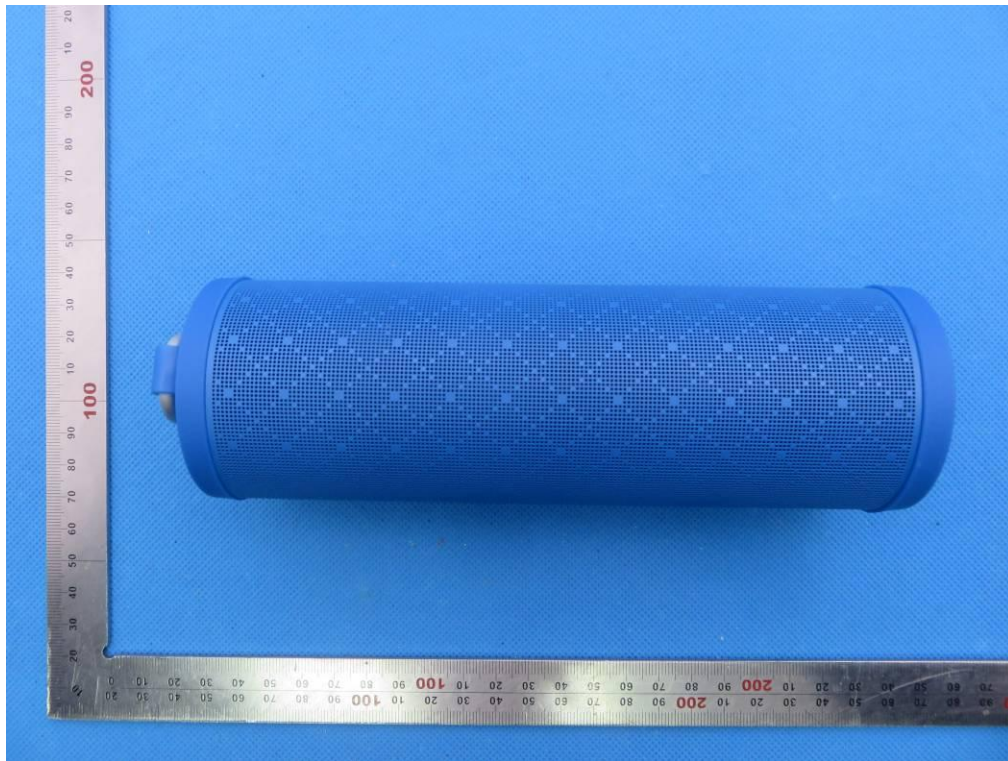

FRONT VIEW OF EUT

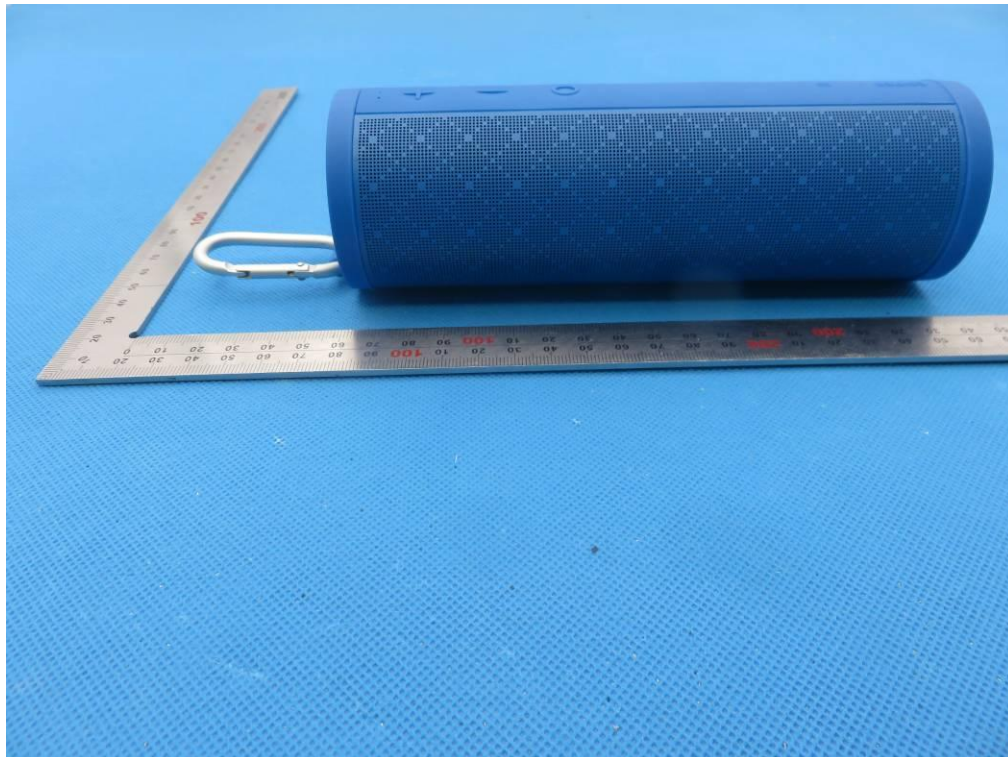

BACK VIEW OF EUT

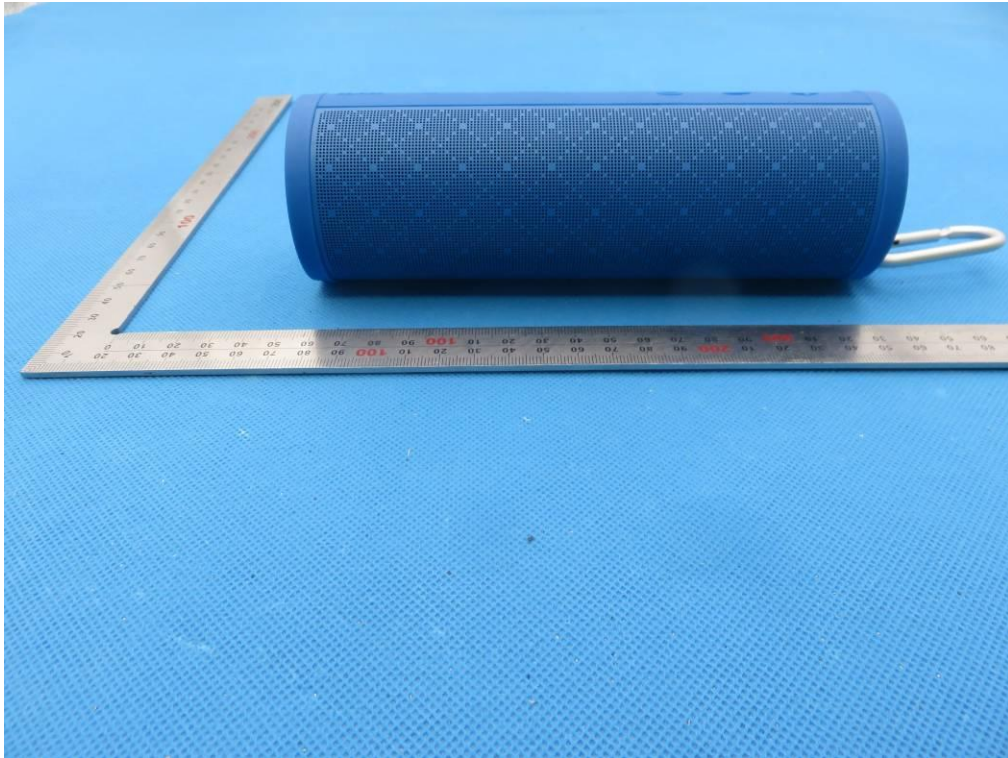


LEFT VIEW OF EUT






RIGHT VIEW OF EUT

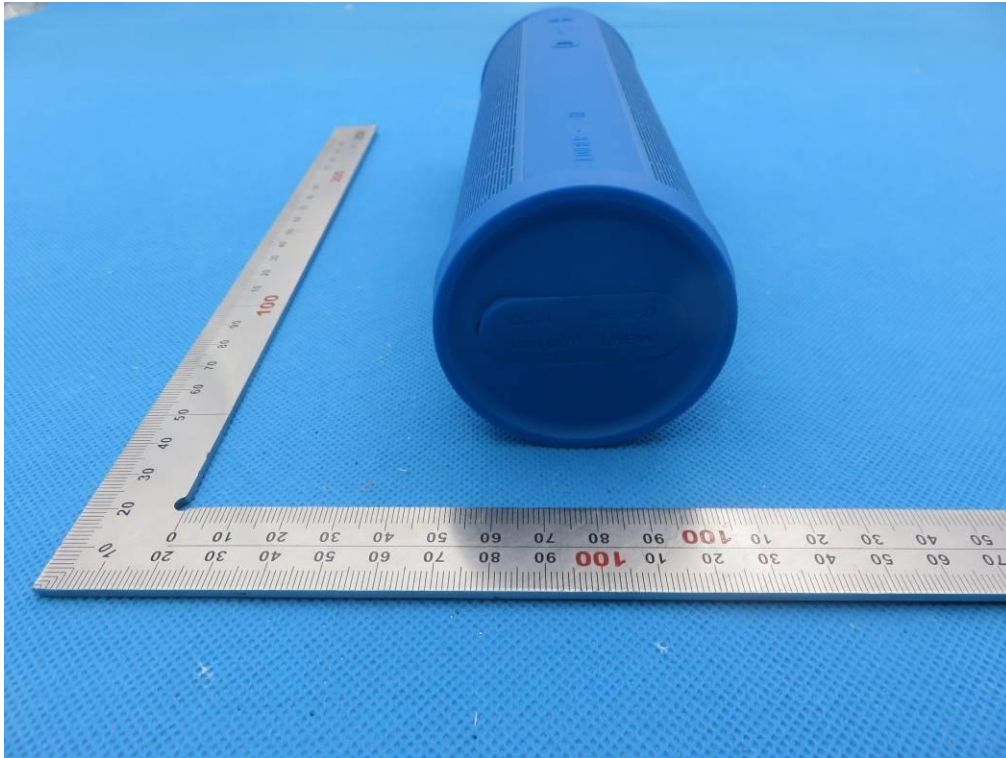


VIEW OF EUT (PORT)



VIEW OF EUT (OPEN)

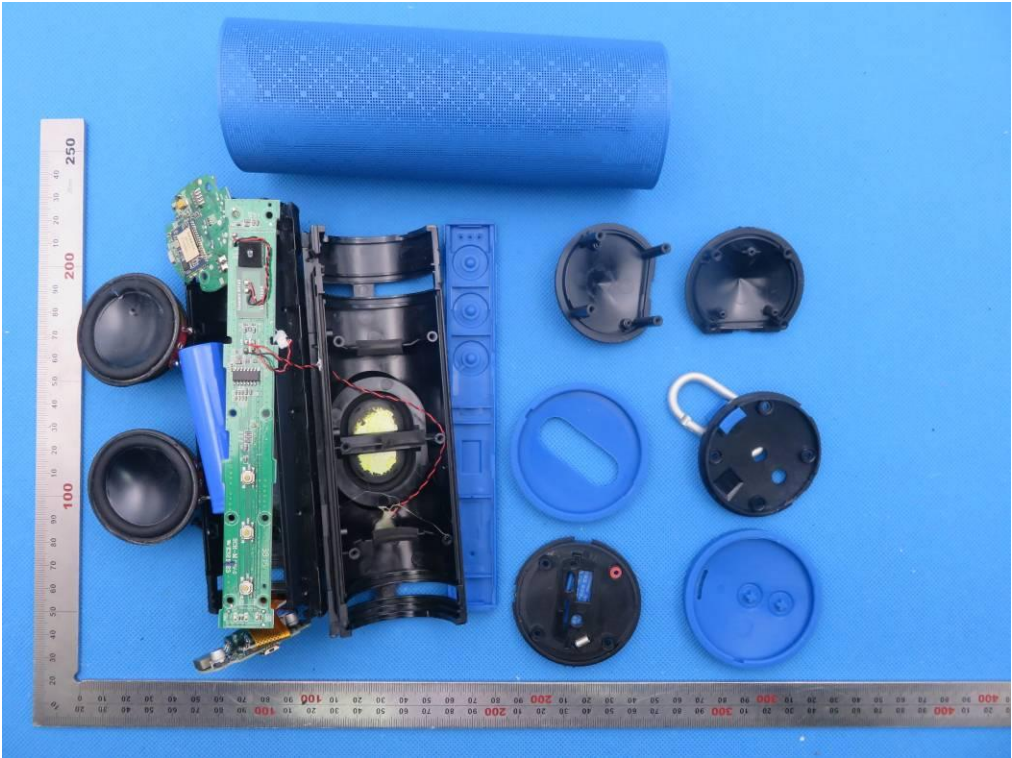


INTERNAL VIEW OF EUT-1

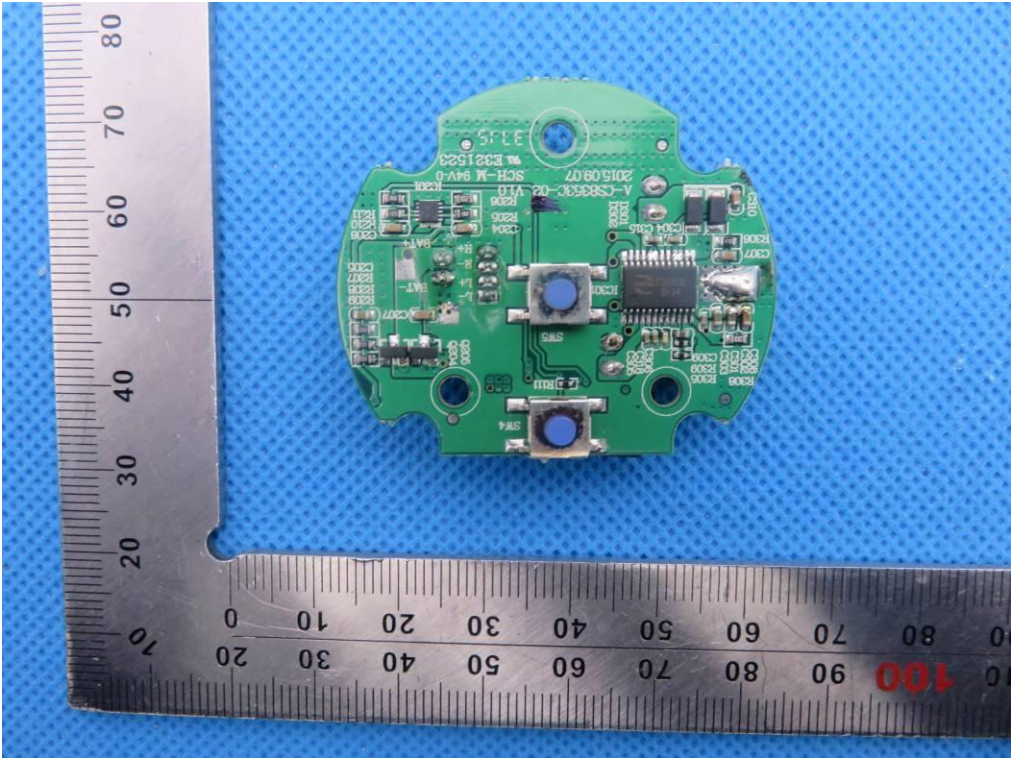




INTERNAL VIEW OF EUT-2

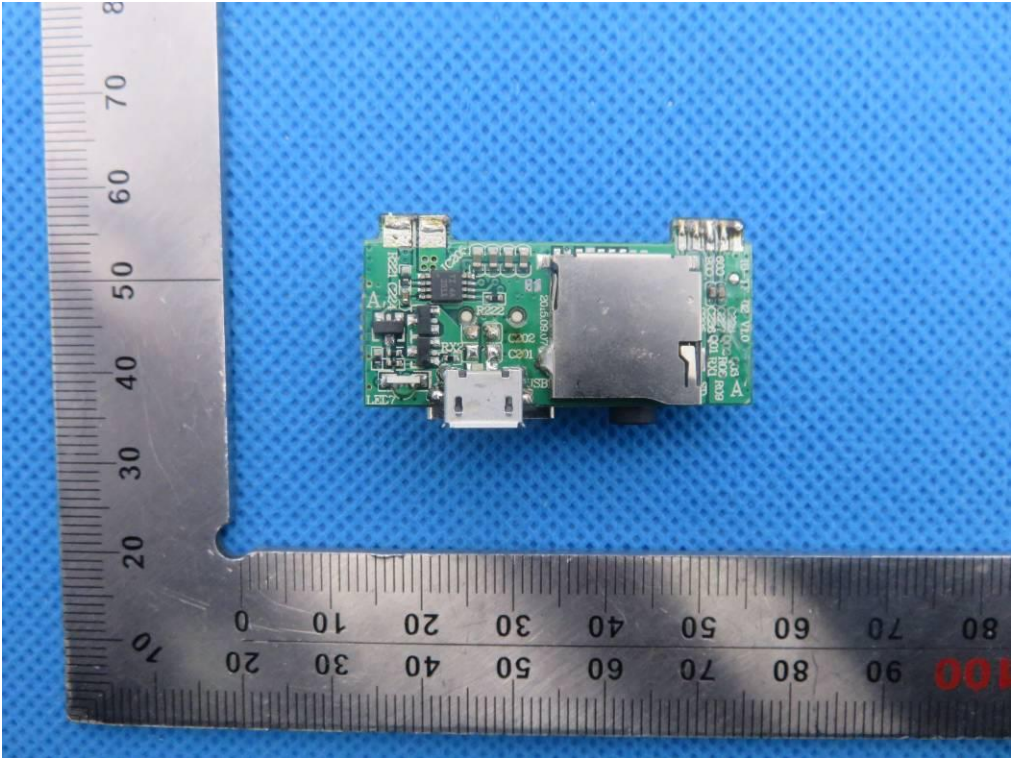


INTERNAL VIEW OF EUT-3

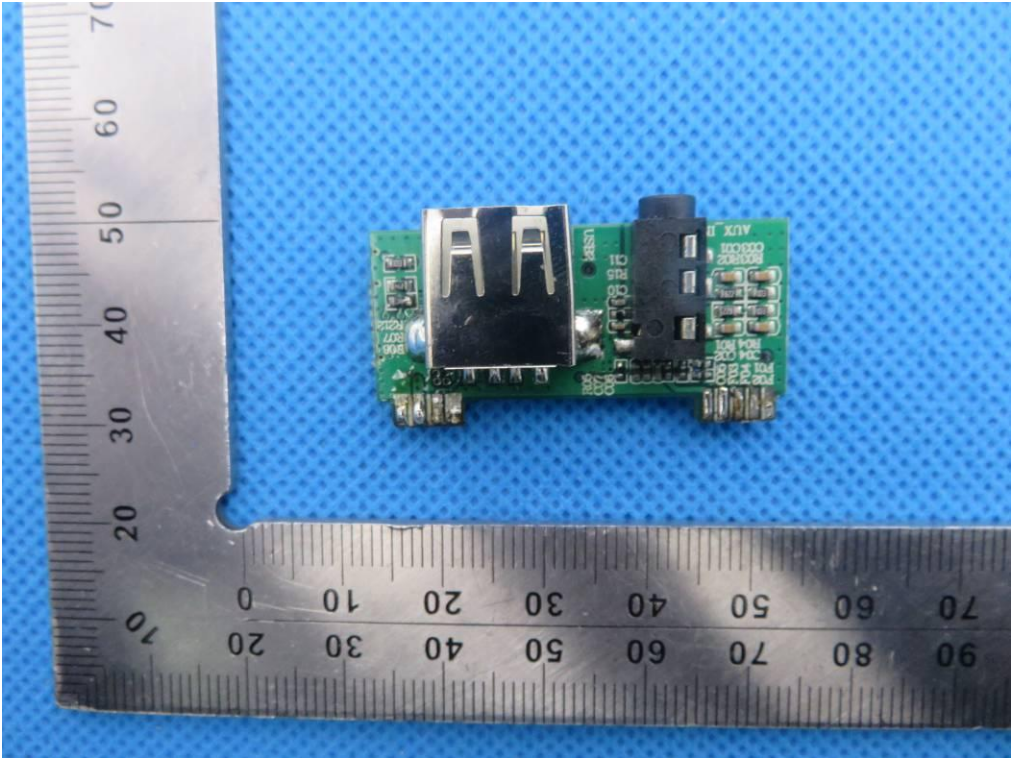





INTERNAL VIEW OF EUT-4

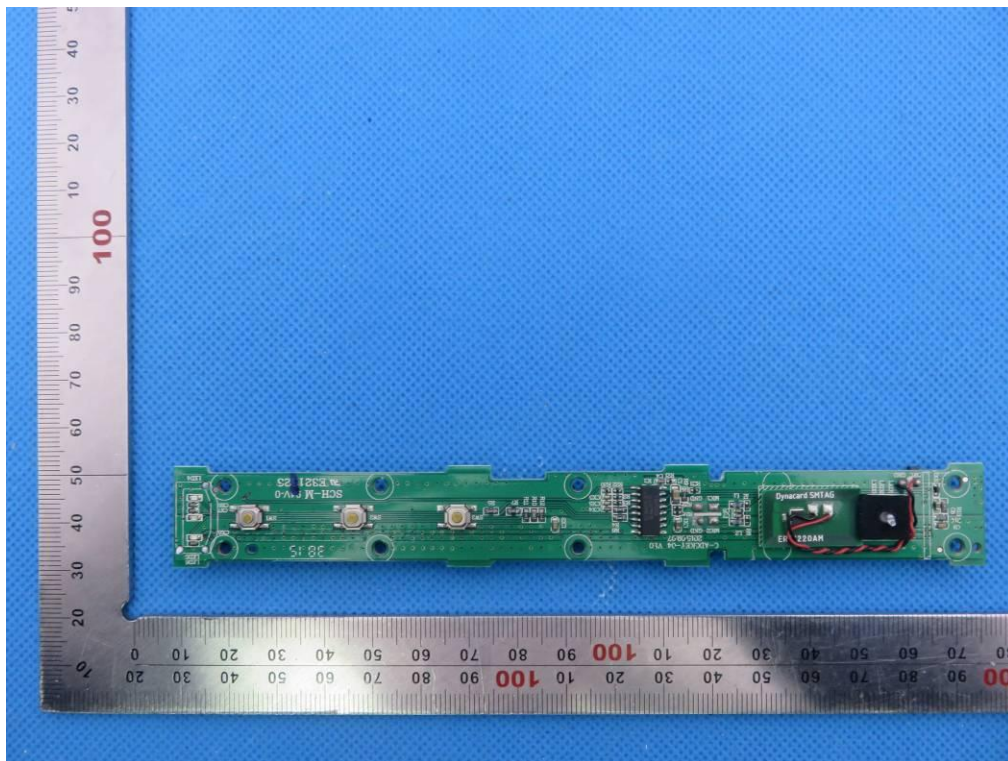


INTERNAL VIEW OF EUT-5

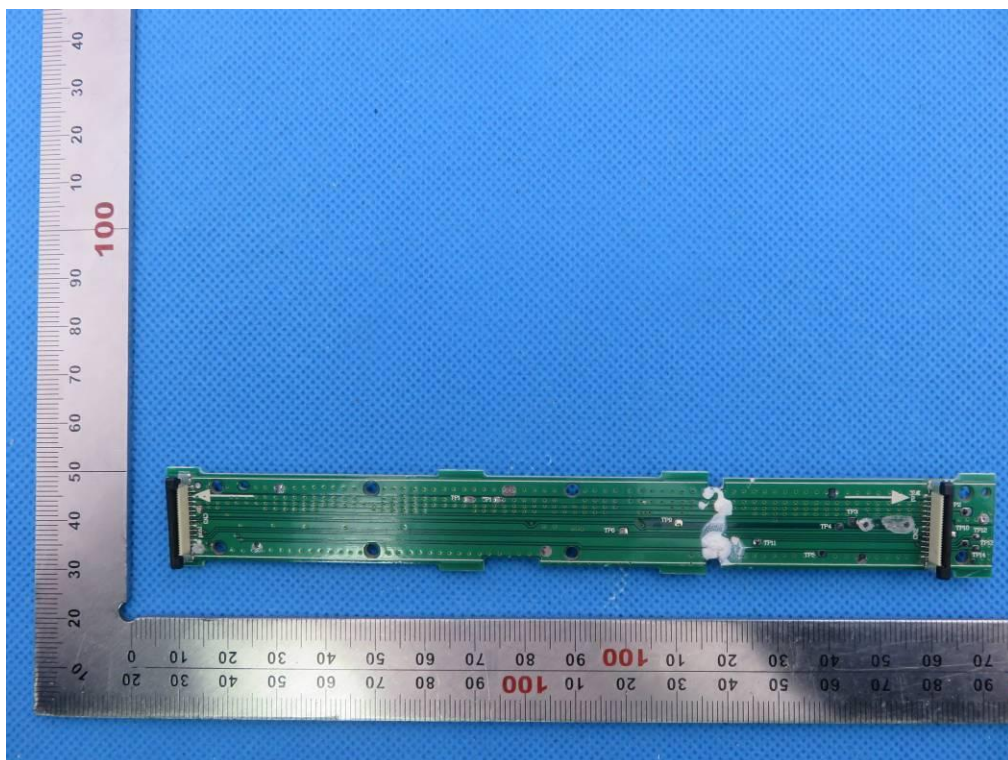

INTERNAL VIEW OF EUT-6

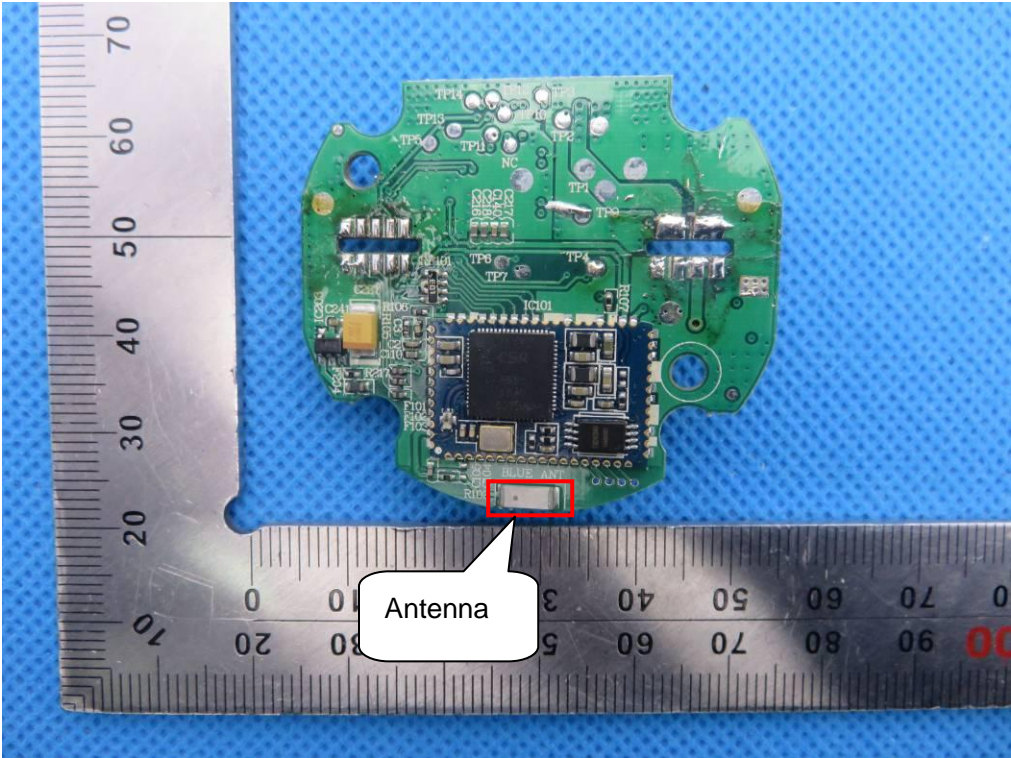


INTERNAL VIEW OF EUT-7

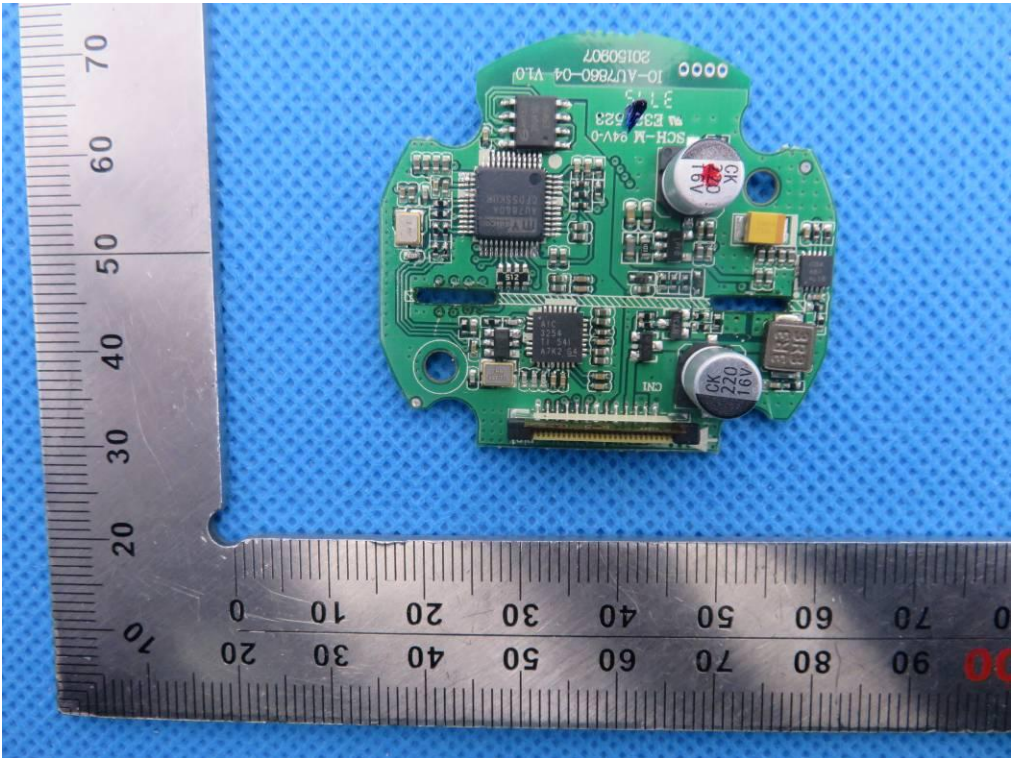



### INTERNAL VIEW OF EUT-8

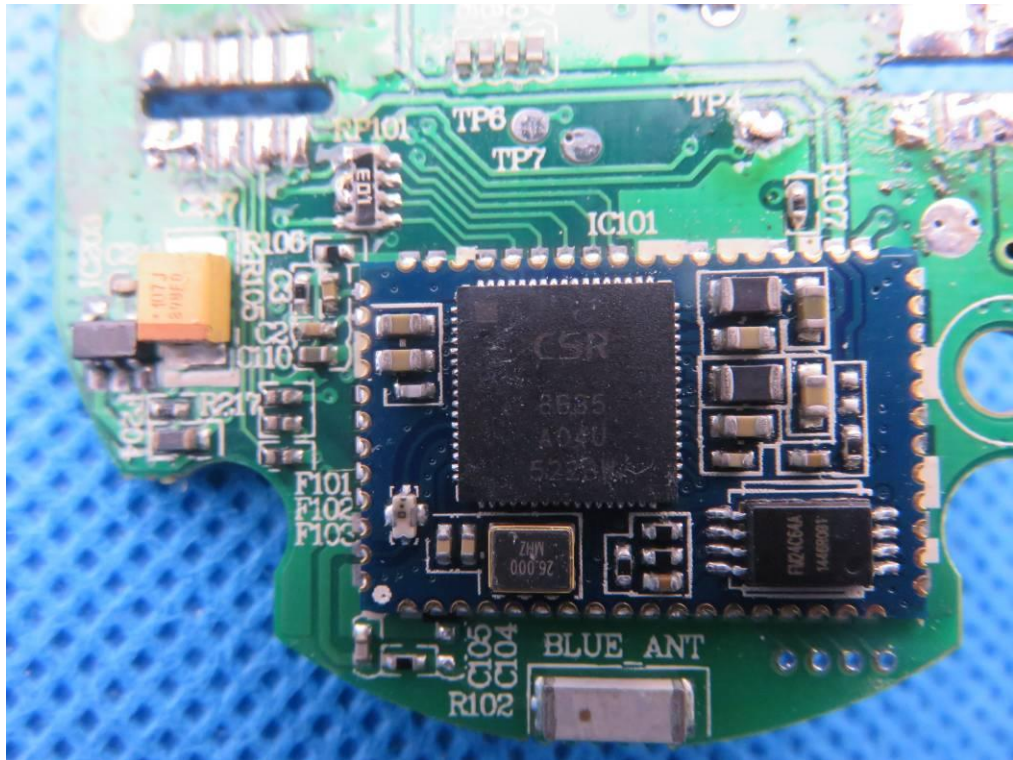

VIEW OF ADAPTER (AE)



THE ADAPTER SUPPLIED BY AGC

---END OF REPORT---