



Certification Test Report

**FCC ID: Z9O-92053026
IC: 10060A-92053026**

**FCC Rule Part: 15.249
ISED Canada Radio Standards Specification: RSS-210**

Report Number: BO72131442.400

Manufacturer: Ecolab Inc.
Model(s): 92053026

Test Begin Date: **October 10, 2017**
Test End Date: **November 3, 2017**

Report Issue Date: November 17, 2017



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

Prepared by:

A handwritten signature in blue ink.

**Thierry Jean-Charles
Team Lead
TÜV SÜD America, Inc.**

Reviewed by:

A handwritten signature in blue ink.

**Pete Walsh, NCE
Tampa Service Line Manager
TÜV SÜD America, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD America, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 15 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	Purpose	3
1.2	Manufacturer Information:	3
1.3	Product description	3
1.4	Test Methodology and Considerations	3
2	TEST FACILITIES	4
2.1	Location.....	4
2.2	Laboratory Accreditations/Recognitions/Certifications	4
2.3	Radiated & Conducted Emissions Test Site Description	5
2.3.1	Semi-Anechoic Chamber Test Site	5
2.3.2	Conducted Emissions Test Site Description	6
3	APPLICABLE STANDARD REFERENCES	6
4	LIST OF TEST EQUIPMENT	7
5	SUPPORT EQUIPMENT	8
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	8
7	SUMMARY OF TESTS	9
7.1	Antenna Requirement – FCC: Section 15.203.....	9
7.2	20dB / 99% Bandwidth – FCC: Section 15.215; ISED Canada RSS-Gen 6.6	9
7.2.1	Measurement Procedure.....	9
7.2.2	Measurement Results	9
7.3	Radiated Spurious Emissions – FCC: Section 15.249(a); ISED Canada: RSS-210 B.10..	11
7.3.1	Measurement Procedure.....	11
7.3.2	Duty Cycle Correction	11
7.3.3	Measurement Results	11
7.3.4	Sample Calculation	13
8	MEASUREMENT UNCERTAINTIES	14
9	CONCLUSION	14

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science and Economic Development Canada's Radio Standards Specification RSS-210.

1.2 Manufacturer Information:

Ecolab, Inc.
370 Wabasha St N
St. Paul, MN 55102

1.3 Product description

The Ecolab Inc. model 92053026 is a NXA HHCM touch free dispenser beacon. The device includes three radios operating at 125 kHz, 433.9 MHz and 2405 MHz, respectively. This test report documents the compliance of the 2405 MHz radio.

Technical Details

Frequency of Operation: 2405 MHz
Number of Channels: 1
Modulation: GFSK
Data Rate: 2 Mbps
Antenna / Gain: Inverted-F PCB antenna / 6.3 dBi
Input Voltage: 3 VDC (Size AA Battery)

Test Sample Serial Number(s): 15001FCA

Test Sample Condition: The device was provided in good operating condition without any noticeable physical defects.

1.4 Test Methodology and Considerations

The device is battery operated only without any provision for connection to the AC mains. The device is exempted from the power line conducted emissions requirements.

The EUT was evaluated for radiated emissions for the 2405 MHz transmitter inside the Nexa Classic and the Nexa Compact dispensers in the orientation of typical installation. The device was pre-configured to the maximum RF output power setting for the evaluation.

The 125-kHz transmitter does not transmit simultaneously with the 433 MHz and 2405 MHz co-located transmitters. The evaluation for intermodulation products was only performed for the 433 MHz and 2405 MHz radios transmitting simultaneously. All intermodulation products were found to comply with the requirements of FCC Section 15.209 and ISED Canada RSS-Gen. The evaluation of the 125 kHz and 433.9 MHz transceivers as well as the assessment to the unintentional emissions requirements are documented in separate test reports.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America, Inc.
3998 FAU Blvd, Suite 310
Boca Raton, Florida 33431
Phone: (561) 961-5585
Fax: (561) 961-5587
<http://www.tuv-sud-america.com>

2.2 Laboratory Accreditations/Recognitions/Certifications

TÜV SÜD America, Inc. is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

FCC Test Firm Registration #: 475089
ISED Canada Lab Code: 4175C

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which can support a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1060 Multi-device Controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

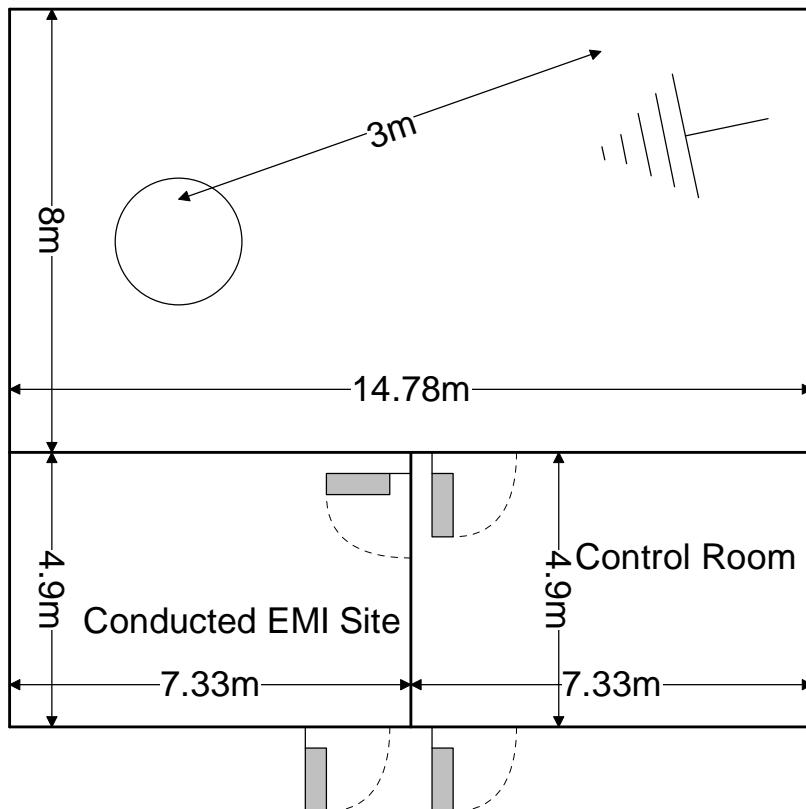


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are $7.3 \times 4.9 \times 3 \text{ m}^3$. The power line conducted emission site includes two LISNs: a Solar Model 8028-50 50 Ω /50 μH and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

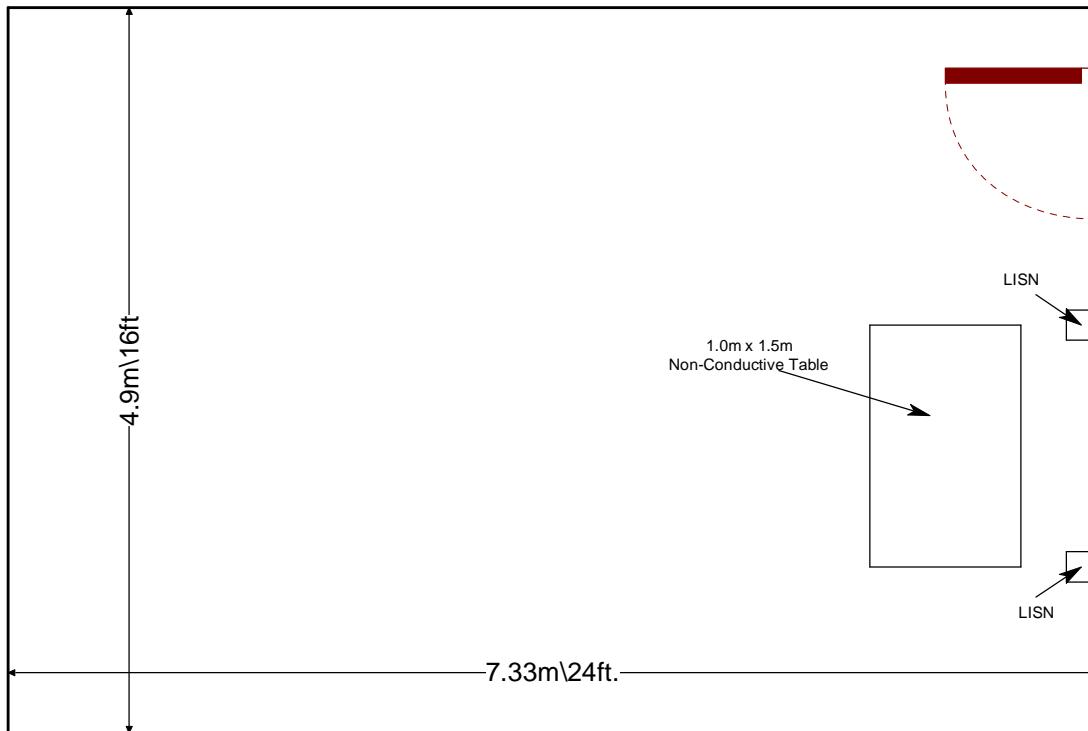


Figure 2.3.2-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2017.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2017
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-210 - Licence-Exempt Radio Apparatus: Category I Equipment, Issue 9 August 2016.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
282	Microwave Circuits	H2G020G4	Filters	74541	5/23/2017	5/23/2018
479	Electro-Metrics	ALP-70	Antennas	158	12/3/2015	12/3/2017
523	Agilent	E7405	Spectrum Analyzers	MY45103293	12/9/2016	12/9/2018
653	Suhner	SF-102A	Cables	0944/2A	9/5/2017	9/5/2018
2002	EMCO	3108	Antennas	2147	11/19/2015	11/19/2017
2004	EMCO	3146	Antennas	1385	11/19/2015	11/19/2017
2006	EMCO	3115	Antennas	2573	4/7/2017	4/7/2019
2008	COM-Power	AH-826	Antennas	81009	NCR	NCR
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	10/27/2017	10/27/2018
2082	Teledyne Storm Products	90-010-048	Cables	2082	4/7/2017	4/7/2018
2086	Merrimac	FAN-6-10K	Attenuators	23148-83-1	10/27/2017	10/27/2018
2089	Agilent Technologies, Inc.	83017A	Amplifiers	3123A00214	12/2/2016	12/2/2017
2095	ETS Lindgren	TILE4! - Version 4.2.A	Software	85242	NCR	NCR
2121	ACS Boca	Radiated Cable Set	Cable Set	2121	7/31/2017	7/31/2018
NBLE03366	Agilent	E4440A	Spectrum Analyzer	MY42510427	10/24/2017	10/24/2018

Notes:

- NCR=No Calibration Required
- The assets calibration cycle information is provided to cover the entire test period. Where applicable, the assets were only used during the active period of the cycle.

5 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Ecolab Inc.	92053026	15001FCA
2	Classic Dispenser	Ecolab Inc.	92021188	N/A
	Compact Dispenser	Ecolab Inc.	92021184	N/A

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
	The EUT is a plug-in device into a specific host equipment with no provision for additional connection to accessory equipment.			

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

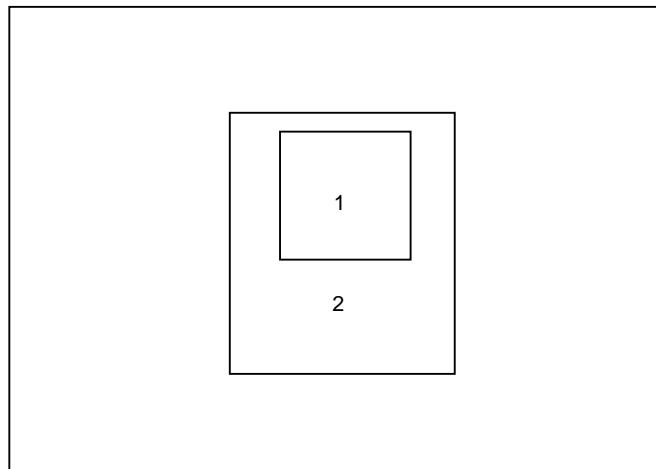


Figure 6-1: EUT Test Setup

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The device uses an internal 6.3 dBi PCB inverted-F antenna that is etched to the PCB. The antenna is not detachable thus meeting the requirements of FCC Section 15.203.

7.2 20dB / 99% Bandwidth – FCC: Section 15.215; ISED Canada RSS-Gen 6.6

7.2.1 Measurement Procedure

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected.

The spectrum analyzer span was set to 2 to 5 times the estimated bandwidth of the emission. The RBW was set from 1% to 5% of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The 20-dB function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission, including the emissions skirts. The RBW was set from 1% and 5% of the estimated 99% bandwidth. The occupied 99% bandwidth was measured by using the occupied bandwidth function of the spectrum analyzer set to 99% with a peak detector.

7.2.2 Measurement Results

Performed by: Thierry Jean-Charles

Table 7.2.2-1: 20dB / 99% Bandwidth

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
2405	2381.0	2831.6

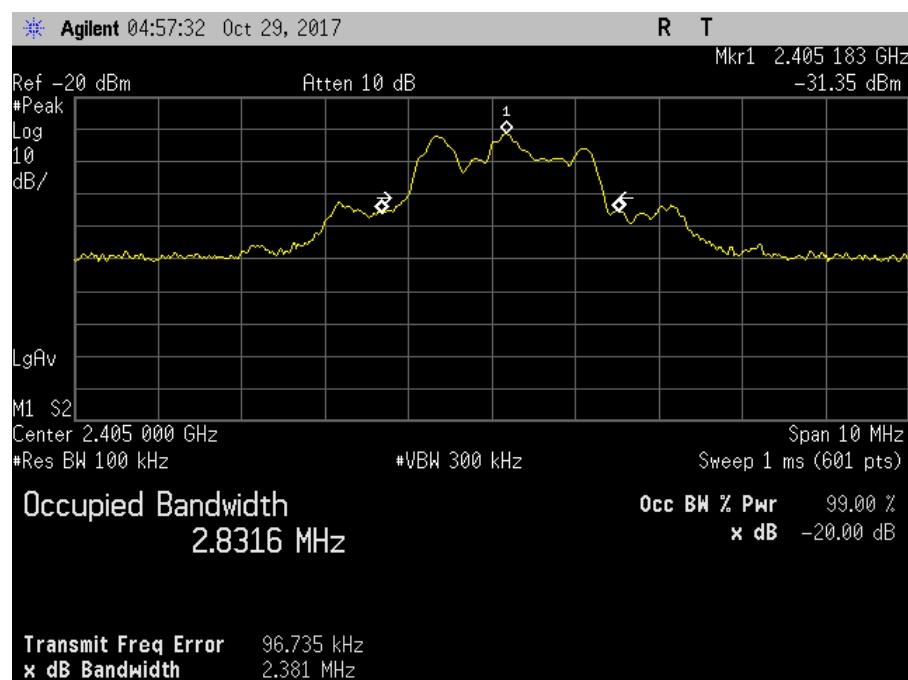


Figure 7.2.2-1: 20dB / 99% BW

7.3 Radiated Spurious Emissions – FCC: Section 15.249(a); ISED Canada: RSS-210 B.10

7.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 9 kHz to 26 GHz, 10 times the highest fundamental frequency.

For measurements below 30 MHz, the receive antenna height was set to 1 m and the EUT was rotated through 360°. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1 m to 4 m so that the maximum radiated emissions level would be detected. For frequencies below 1000 MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak and average measurements made with RBW and VBW of 1 MHz and 3 MHz respectively.

7.3.2 Duty Cycle Correction

The unit was continuously pulsing. A Duty Cycle Correction of 0.72% corresponding to $20 \log(0.72/100) = -42.85$ dB was applied to the peak measurements for the average results. The justification of the duty cycle is provided in the equipment's theory of operation document.

7.3.3 Measurement Results

Performed by: Thierry Jean-Charles, Jean Rene

Radiated spurious emissions found in the band of 9 kHz to 26 GHz are reported in the Table below.

Table 7.3.3-1: Radiated Spurious Emissions Tabulated Data – Nexa Classic Dispenser

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
Fundamental Frequency										
2405	84.60	84.60	H	-4.87	79.73	36.88	114.0	94.0	34.3	57.1
2405	88.70	88.70	V	-4.87	83.83	40.98	114.0	94.0	30.2	53.0
Spurious Emissions										
2388.305	59.88	59.88	V	-4.95	54.93	12.08	74.0	54.0	19.1	41.9
2389.98	59.57	59.57	V	-4.94	54.63	11.78	74.0	54.0	19.4	42.2
2420.3375	61.24	61.24	V	-4.80	56.44	13.59	74.0	54.0	17.6	40.4
2421.975	59.28	59.28	V	-4.79	54.49	11.63	74.0	54.0	19.5	42.4
4810	45.60	45.60	H	4.05	49.65	6.79	74.0	54.0	24.4	47.2
4810	45.57	45.57	V	4.05	49.62	6.76	74.0	54.0	24.4	47.2

Notes:

- The fundamental frequencies were measured using RBW = 3 MHz.
- A -42.85 dB correction factor was applied on the peak levels for the corrected average measurements.
- All emissions above 4810 MHz were attenuated below the limits and the noise floor of the measurement equipment.

Table 7.3.3-2: Radiated Spurious Emissions Tabulated Data – Nexa Compact Dispenser

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
Fundamental Frequency										
2405	84.56	84.56	H	-4.87	79.69	36.84	114.0	94.0	34.3	57.2
2405	88.97	88.97	V	-4.87	84.10	41.25	114.0	94.0	29.9	52.8
Spurious Emissions										
2390.05	61.10	61.10	V	-4.94	56.16	13.31	74.0	54.0	17.8	40.7
2388.25	59.79	59.79	V	-4.95	54.84	11.99	74.0	54.0	19.2	42.0
2420.3125	60.69	60.69	V	-4.80	55.89	13.04	74.0	54.0	18.1	41.0
2422.025	58.94	58.94	V	-4.79	54.15	11.29	74.0	54.0	19.9	42.7
4810	45.33	45.33	H	4.05	49.38	6.52	74.0	54.0	24.6	47.5
4810	45.79	45.79	V	4.05	49.84	6.98	74.0	54.0	24.2	47.0

Notes:

- The fundamental frequencies were measured using RBW = 3 MHz.
- A -42.85 dB correction factor was applied on the peak levels for the corrected average measurements.
- All emissions above 4810 MHz were attenuated below the limits and the noise floor of the measurement equipment.

7.3.4 Sample Calculation

$$R_C = R_U + CF_T$$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

R_U = Uncorrected Reading

R_C = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $59.88 + (-4.95) = 54.93 \text{ dB}\mu\text{V/m}$

Margin: $74 \text{ dB}\mu\text{V/m} - 54.93 \text{ dB}\mu\text{V/m} = 19.07 \text{ dB}$

Example Calculation: Average

Corrected Level: $59.88 + (-4.95) - 42.85 = 12.08 \text{ dB}\mu\text{V/m}$

Margin: $54 \text{ dB}\mu\text{V} - 12.08 \text{ dB}\mu\text{V/m} = 41.92 \text{ dB}$

8 MEASUREMENT UNCERTAINTIES

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Table 8-1: Measurement Uncertainties

Parameter	U_{lab}
Occupied Channel Bandwidth	$\pm 0.009 \%$
RF Conducted Output Power	$\pm 1.15 \text{ dB}$
Power Spectral Density	$\pm 1.15 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 1.15 \text{ dB}$
Radiated Emissions $\leq 1\text{GHz}$	$\pm 5.86 \text{ dB}$
Radiated Emissions $> 1\text{GHz}$	$\pm 4.65 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	$\pm 3.72 \text{ dB}$

9 CONCLUSION

In the opinion of TÜV SÜD America, Inc. the 92053026, manufactured by Ecolab Inc. meets the requirements of FCC Part 15 subpart C and Innovation, Science and Economic Development Canada's Radio Standards Specification RSS-210.

END REPORT