

## Certification Test Report

**FCC ID: Z90-FAS1541**  
**IC: 10060A-FAS1541**

**FCC Rule Part: 15.209**  
**ISED Canada Radio Standards Specification: RSS-210**

**ACS Report Number: 16-2029.W04.1B**

**Manufacturer: UltraClenz, LLC**  
**Model: FAS1541-00**

**Test Begin Date: May 26, 2016**  
**Test End Date: August 27, 2016**


**Report Issue Date: August 29, 2016**



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

**Prepared by:**



**Thierry Jean-Charles**  
**EMC Engineer**  
**Advanced Compliance Solutions, Inc.**

**Reviewed by:**



**Ryan McGann**  
**Wireless Program Manager**  
**Advanced Compliance Solutions, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 13 pages**

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL .....</b>	<b>3</b>
1.1	Purpose .....	3
1.2	Product Description.....	3
1.3	Test Methodology and Considerations .....	3
<b>2</b>	<b>TEST FACILITIES .....</b>	<b>4</b>
2.1	Location.....	4
2.2	Laboratory Accreditations/Recognitions/Certifications .....	4
2.3	Radiated & Conducted Emissions Test Site Description .....	5
<b>3</b>	<b>APPLICABLE STANDARD REFERENCES.....</b>	<b>6</b>
<b>4</b>	<b>LIST OF TEST EQUIPMENT.....</b>	<b>7</b>
<b>5</b>	<b>SUPPORT EQUIPMENT .....</b>	<b>8</b>
<b>6</b>	<b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM .....</b>	<b>8</b>
<b>7</b>	<b>SUMMARY OF TESTS.....</b>	<b>9</b>
7.1	Antenna Requirement – FCC: Section 15.203 .....	9
7.2	20dB / 99% Bandwidth: FCC: Section 15.215 / ISED Canada RSS-Gen 6.6 .....	9
7.3	Radiated Spurious Emissions – FCC: Section 15.209 / ISED Canada: RSS-210 2.5 .....	11
<b>8</b>	<b>CONCLUSION.....</b>	<b>13</b>

## 1 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science and Economic Development Canada's Radio Standards Specification RSS-210 for a Class 2 Permissive Change.

The purpose of the permissive change is to document the compliance of an additional antenna configuration for the 125 kHz transmitter. There is no power or hardware change on the equipment.

### 1.2 Product Description

The model FAS1541-00 is a hospital bed beacon. It includes three transceivers operating at 125 kHz, 433 MHz and 2405 MHz, respectively. The FAS1541-00 is mounted to a patient bed. Its function is to communicate with the Badge worn by the Healthcare Worker (HCW) when the HCW comes in close proximity with the patient bed (bed event), collect bed event data from that Badge and then transmit the collected data to a network where it will ultimately be sent to an offsite server for processing and archiving. This test report documents the compliance of the 125 kHz transmitter when configured with the mat antenna.

#### Technical Details

Frequency of Operation: 125.6 kHz

Number of Channels: 1

Modulation: OOK

Data Rate: 2.4 kbps

Antenna: Magnetic Loop Antenna

Input Voltage: 3 VDC (Size D Battery)

#### Manufacturer Information:

UltraClenz, LLC

1201 Jupiter Park Drive

Jupiter, FL 33458

Test Sample Serial Number(s): 1E000C9D

Test Sample Condition: Good

### 1.3 Test Methodology and Considerations

The FAS1541-00 is a battery operated device, with no provision for alternate power sources. The device is exempted from the power line conducted emissions requirements.

The FAS1541-00 was evaluated for radiated emissions for the 125 kHz transmitter. To meet the radiated emissions requirements, a FAIR-RITE part number 2643806402 ferrite was implemented on the loop antenna cable. Preliminary measurements were performed on the EUT using orientations typical to installation. The data reported corresponds to the worst case. The 125 kHz radio does not transmit simultaneously with the 433 MHz and the 2405 MHz co-located radios, per the manufacturer's theory of operation. Therefore, the 125 kHz radio was not evaluated for inter-modulation products with the co-located 433 MHz and 2405 MHz radios.

The unintentional emissions evaluation compliance with the new antenna is documented separately in a verification test report.

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.  
3998 FAU Blvd, Suite 310  
Boca Raton, Florida 33431  
Phone: (561) 961-5585  
Fax: (561) 961-5587  
[www.acstestlab.com](http://www.acstestlab.com)

FCC Test Firm Registration #: 475089

Innovation, Science and Economic Development Canada Lab Code: 4175C

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

**2.3 Radiated & Conducted Emissions Test Site Description**

**2.3.1 Semi-Anechoic Chamber Test Site**


The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1060 Multi-device Controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

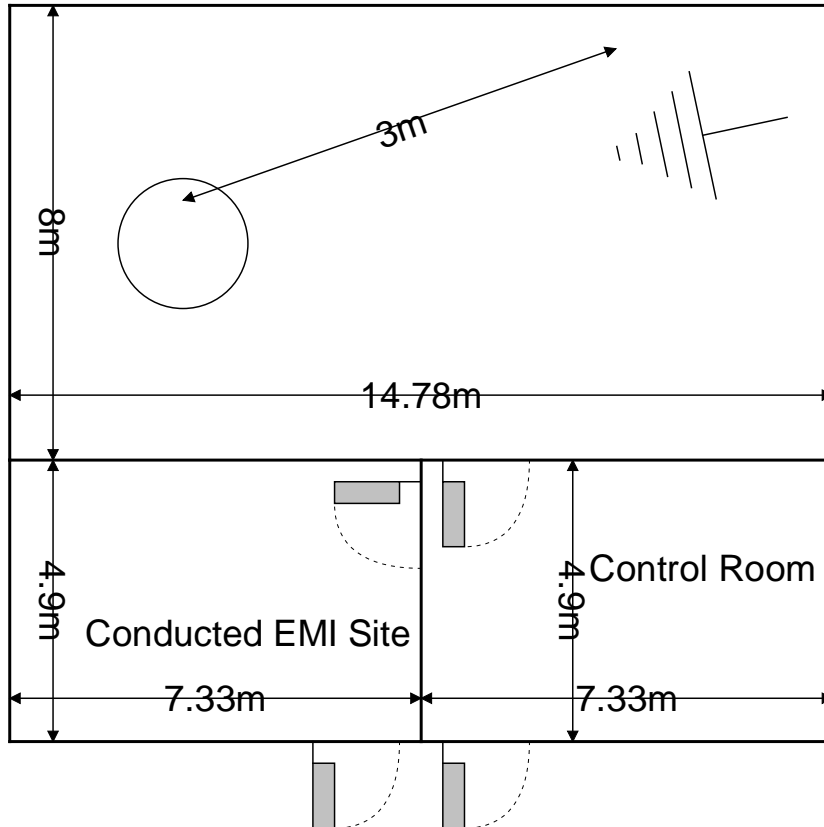

**Figure 2.3.1-1: Semi-Anechoic Chamber Test Site**

### 2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are 7.3 x 4.9 x 3 m<sup>3</sup>. The power line conducted emission site includes two LISNs: a Solar Model 8028-50 50 Ω/50 μH and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

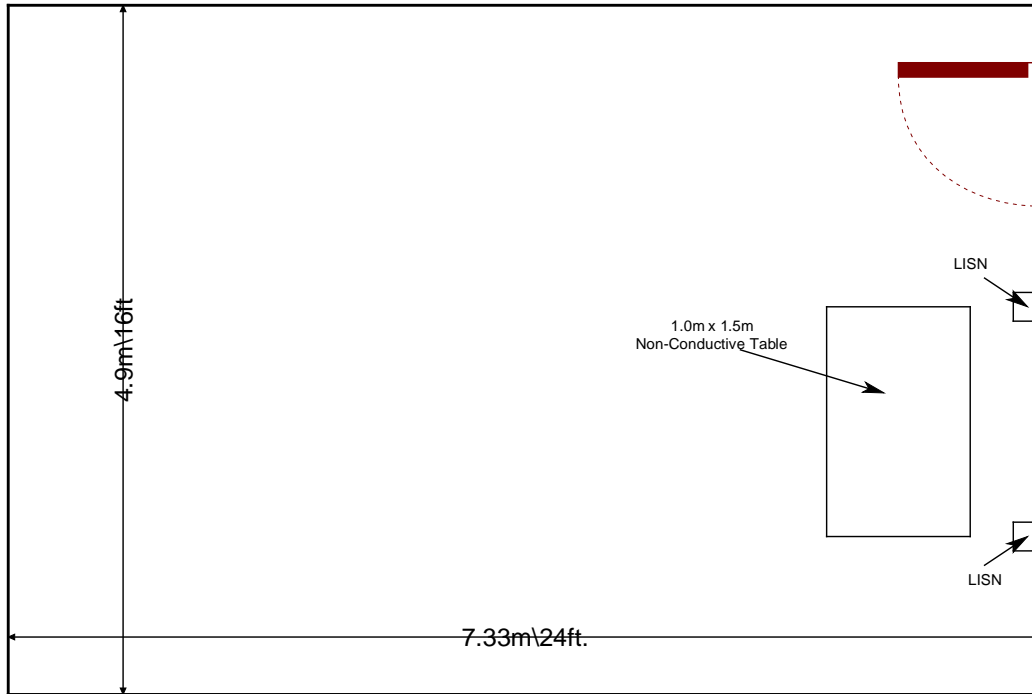


Figure 2.3.2-1: AC Mains Conducted EMI Site

## 3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2014: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40 GHz
- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2016
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2016
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8 December 2010.
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
78	EMCO	6502	Antennas	9104-2608	5/11/2016	5/11/2018
523	Agilent	E7405	Spectrum Analyzers	MY45103293	12/26/2014	12/26/2016
2002	EMCO	3108	Antennas	2147	11/19/2015	11/19/2017
2004	EMCO	3146	Antennas	1385	11/19/2015	11/19/2017
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	11/18/2015	11/18/2016
2095	ETS Lindgren	TILE4! - Version 4.2.A	Software	85242	NCR	NCR
2121	ACS Boca	Radiated Cable Set	Cable Set	2121	8/22/2015	8/22/2016
2121	ACS Boca	Radiated Cable Set	Cable Set	2121	8/1/2016	8/1/2017

**Notes:**

**NCR=No Calibration Required**

The assets calibration cycle information is provided to cover the entire test period.

5 SUPPORT EQUIPMENT


Table 5-1: EUT and Support Equipment

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	UltraClenz	FAS1541-00	1E000C9D
2	125kHz Antenna	UltraClenz	FAS1550-00	5
3	Ferrite (4 passes)	FAIR-RITE	2643806402	N/A

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	RJ25	2.75 m	No	EUT to Antenna

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

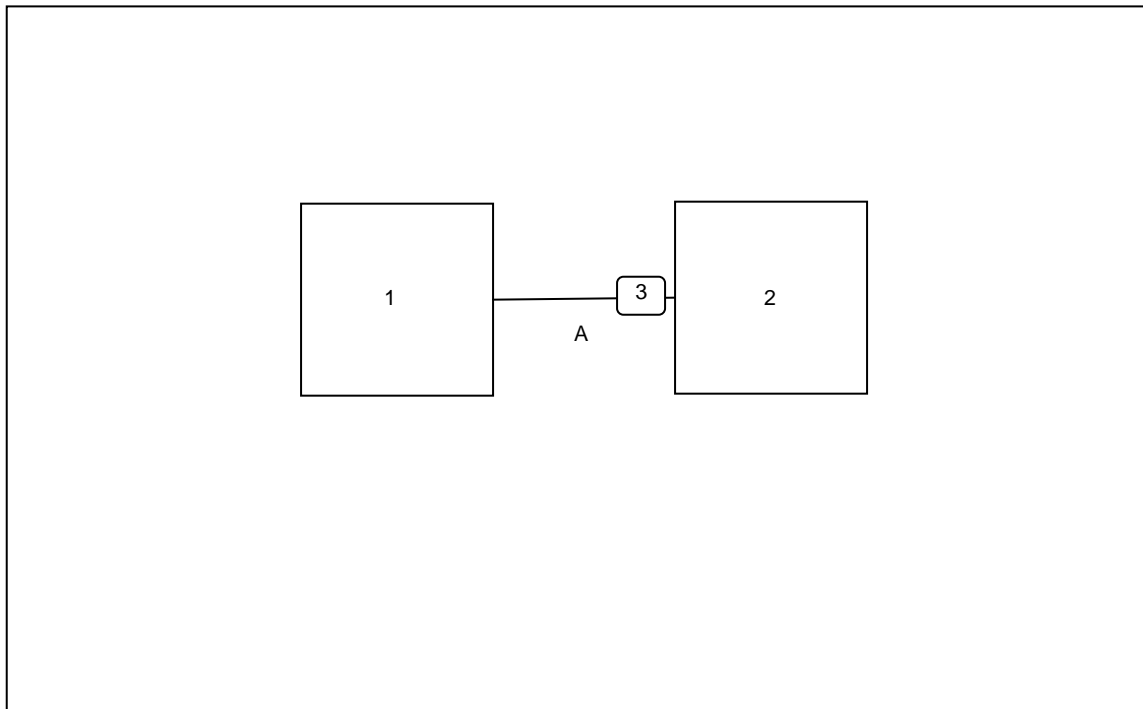



**7 SUMMARY OF TESTS**

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

**7.1 Antenna Requirement – FCC: Section 15.203**

The EUT provides a 6P6C connector for the external antenna. The antenna connector for the external antenna is unique. The EUT meets the requirements of FCC Section 15.203.

**7.2 20dB / 99% Bandwidth: FCC: Section 15.215 / ISED Canada RSS-Gen 6.6**

**7.2.1 Measurement Procedure**

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected.

The spectrum analyzer span was set to 2 to 5 times the estimated bandwidth of the emission. The RBW was to ≥ 1% to 5% of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission, including the emissions skirts. The RBW was set to 1% to 5% of the estimated 99% bandwidth. The occupied 99% bandwidth was measured by using a delta marker at the lower and upper frequencies leading to 0.5% of the total power.

**7.2.2 Measurement Results**

Results are shown below:

**Table 7.2.2-1: 20dB / 99% Bandwidth**

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
0.125	13.625	16.625

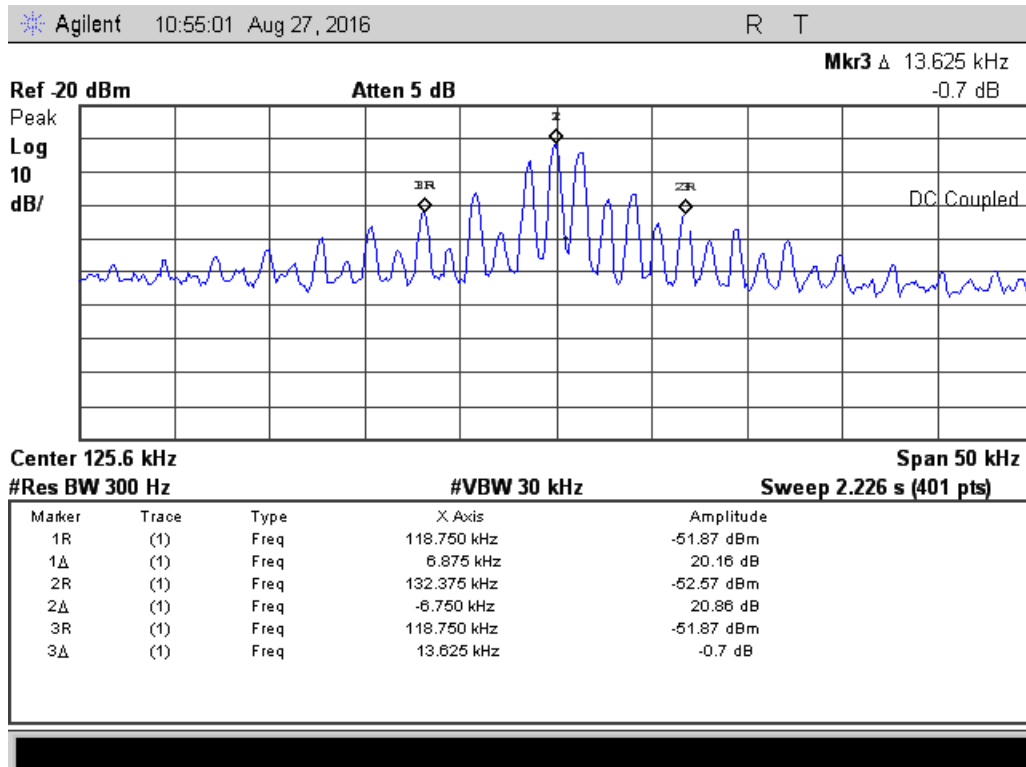


Figure 7.2.2-1: 20dB BW

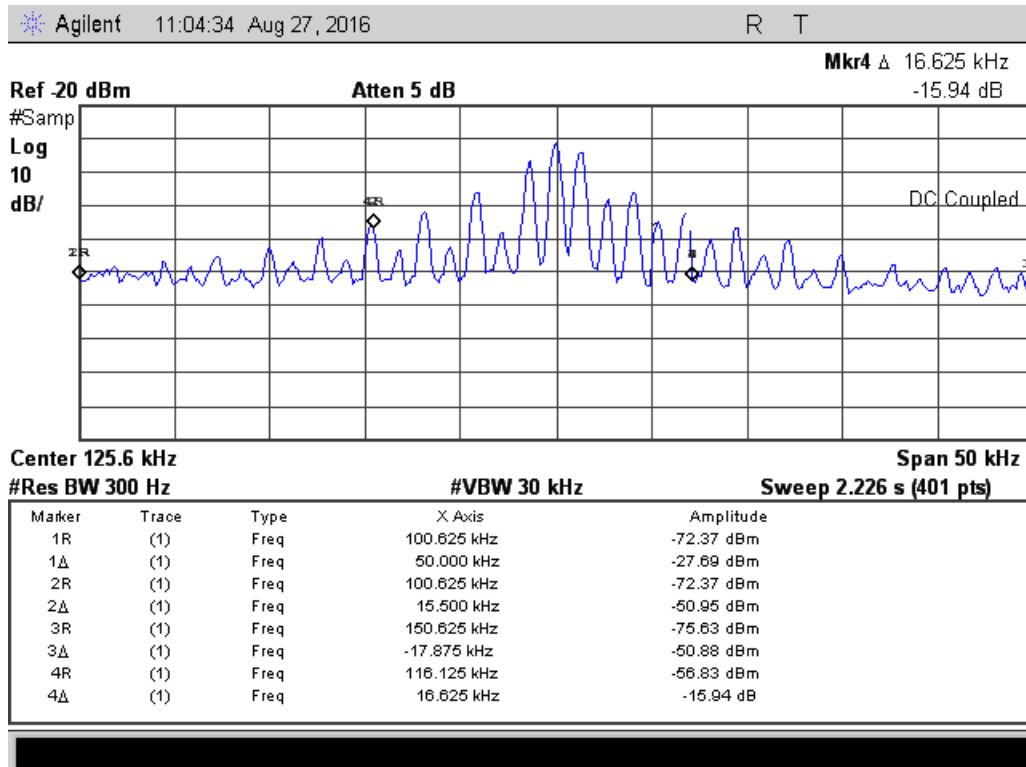


Figure 7.2.2-2: 99% OBW

### 7.3 Radiated Spurious Emissions – FCC: Section 15.209 / ISED Canada: RSS-210 2.5

#### 7.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 9 kHz to 1GHz. Section 15.33(a)(4) specifies, if the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to frequency specified in 15.33(b)(1) for unintentional radiators. The upper frequency range for the digital device is 1000MHz which greater than the 10<sup>th</sup> harmonic of the fundamental frequency. The upper frequency range measured was 1000MHz.

Measurements below 30MHz were performed in a semi-anechoic chamber with a 3 meter separation distance between the EUT and measurement antenna. The EUT was rotated 360 and the loop antenna rotated about the vertical axis to maximize each emission. The magnetic loop receiving antenna was positioned at 1 meter above the ground.

The spectrum analyzer's resolution and video bandwidths were set to 300 Hz and 1000 Hz respectively for frequencies below 150 kHz and 9 kHz and 30 kHz respectively for frequencies above 150 kHz and below 30 MHz. The fundamental levels were measured using a resolution bandwidth of 30 kHz which is greater than the measured emission bandwidth. For measurements in the frequency bands 9-90 kHz and 110-490 kHz, an average detector was used. When average measurements are specified, the peak emissions were also compared to a limit corresponding to 20 dB above the maximum permitted average limit according to Part 15.35. All other emissions were measured using a Quasi-peak detector. The final measurements were then corrected by antenna correction factors and cable loss for comparison to the limits.

Measurements above 30 MHz were performed in a semi-anechoic chamber with a 3 meter separation distance between the EUT and measurement antenna. The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000 MHz, quasi-peak measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz.

#### 7.3.2 Distance Correction for Measurements below 30 MHz – Part 15.31

Radiated measurements were performed at a distance closer than 300 meters and 30m as required, according to Part 15.209. Therefore a correction factor was applied to account for propagation loss at the specified distance. The propagation loss was determined by using the square of an inverse linear distance extrapolation factor (40dB/decade) according to 15.31. A sample calculation of the distance correction factor is shown below for limits expressed at a 300m measurement distance and a 30m measurement distance.

$$\begin{aligned}\text{Distance correction factor (300m Specified Test Distance)} &= 40 \cdot \text{Log} (\text{Test Distance}/300) \\ &= 40 \cdot \text{Log} (3/300) \\ &= - 80 \text{ dB}\end{aligned}$$

$$\begin{aligned}\text{Distance correction factor (30m Specified Test Distance)} &= 40 \cdot \text{Log} (\text{Test Distance}/30) \\ &= 40 \cdot \text{Log} (3/30) \\ &= - 40 \text{ dB}\end{aligned}$$

7.3.3 Measurement Results

Radiated spurious emissions found in the band of 9 kHz to 1 GHz are reported below.

Table 7.3.3-1: Radiated Spurious Emissions Tabulated Data

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
<b>Fundamental Frequency = 125 kHz</b>										
0.1258	90.06	83.47	H	10.31	100.37	93.78	125.6	105.6	25.2	11.8
0.1258	80.07	72.59	V	10.31	90.38	82.90	125.7	105.7	35.3	22.8
<b>Spurious Emissions below 30 MHz</b>										
0.2516	46.94	34.46	H	10.27	57.21	44.73	119.6	99.6	62.4	54.9
0.3774	49.56	41.61	H	10.25	59.81	51.86	116.1	96.1	56.3	44.2
0.5032	-----	35.09	H	10.26	-----	45.35	-----	73.6	-----	28.3
0.629	-----	38.01	H	10.27	-----	48.28	-----	71.6	-----	23.3
0.7548	-----	32.53	H	10.26	-----	42.79	-----	70.0	-----	27.2
<b>Spurious Emissions above 30 MHz</b>										
52.8463	-----	41.60	H	-16.98	-----	24.61	-----	40	-----	15.4
77.5181	-----	44.39	H	-19.39	-----	25.00	-----	40	-----	15.0
88.5922	-----	47.90	H	-19.46	-----	28.44	-----	43.5	-----	15.1
110.7	-----	55.83	H	-16.69	-----	39.14	-----	43.5	-----	4.4
132.855	-----	42.29	H	-14.76	-----	27.53	-----	43.5	-----	16.0
148.955	-----	38.66	H	-14.33	-----	24.34	-----	43.5	-----	19.2
155.018	-----	41.74	H	-14.15	-----	27.59	-----	43.5	-----	15.9
186.1	-----	36.56	H	-13.11	-----	23.45	-----	43.5	-----	20.0
199.385	-----	34.99	H	-12.78	-----	22.21	-----	43.5	-----	21.3
969.339	-----	22.13	H	-0.79	-----	21.34	-----	54	-----	32.7
88.6371	-----	45.58	V	-19.46	-----	26.12	-----	43.5	-----	17.4
110.7	-----	55.33	V	-16.69	-----	38.64	-----	43.5	-----	4.9
121.835	-----	40.32	V	-15.43	-----	24.89	-----	43.5	-----	18.6

Note: The emissions above 490 kHz were measured using a quasi-peak detector.

7.3.4 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

- CF<sub>T</sub> = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
- R<sub>U</sub> = Uncorrected Reading
- R<sub>C</sub> = Corrected Level
- AF = Antenna Factor
- CA = Cable Attenuation
- AG = Amplifier Gain
- DC = Duty Cycle Correction Factor

**Example Calculation: Peak**

Corrected Level: 80.07 + 10.31 = 90.38 dBμV/m  
 Margin: 125.7 dBμV/m – 90.38 dBμV/m = 35.3 dB

**Example Calculation: Average**

Corrected Level: 72.59 + 10.31 – 0 = 82.9 dBμV/m  
 Margin: 105.7 dBμV/m – 82.9 dBμV/m = 22.8 dB

**8 CONCLUSION**

In the opinion of ACS, Inc. the FAS1541-00 manufactured by UltraClenz, LLC meets the requirements of FCC Part 15 subpart C and Innovation, Science and Economic Development Canada's Radio Standards Specification RSS-210.

**END REPORT**