



Test Report No. 9112310553

Applicant: Synoia Technologies Ltd.

Equipment Under Test:

Cosmetic skin care device (RFID)

Name: WISH Hand-Piece model B

FCC ID: ZAI-SYNOIAWISHA01

***From The Standards Institution
Of Israel
Industry Division
Electronics & Telematics Laboratory
EMC Section***



**ACCLASS Accreditation Services
Certificate Number: AT-1359**

**Test Report No.:** 9112310553**Page 1 of 22 pages****Title:** Cosmetic skin care device (RFID);**Name:** WISH Hand-Piece model B

Applicant:	Synoia Technologies Ltd.
Address:	Jungfrugatan 48 SE-114 44, Stockholm, Sweden
Sample for test selected by:	The customer
The date of test:	1, 30 June 2010

Description of Equipment Under Test (EUT):	Cosmetic skin care device (RFID)
Model:	A V1.0 PN 7666
Serial number:	01004231
Software version of radio unit	132
Hardware version of radio unit	1.0

Reference Documents:

- ❖ CFR 47 FCC: Rules and Regulations; Part 15. "Radio frequency devices";
Subpart B: "Unintentional radiators" (2009)
Subpart C: "Intentional radiators" (2009),
Section 15.209. "Radiated emission limits, general requirements".
"Radiated Emission Limits, Additional Provisions";
Section 15.225. "Operation within the band 13.110 – 14.010 MHz".

This Test Report contains 22 pages and may be used only in full.	This Test Report applies only to the specimen tested and may not be applied to other specimens of the same product.
---	--

**Test Report No.:** 9112310553**Page 2 of 22 pages****Title:** Cosmetic skin care device (RFID);**Name:** WISH Hand-Piece model B

1. Test summary

Parameter	FCC Part 15 Reference paragraph	Verdict
Test of field strength emission from intentional radiators	Subpart C Section 15.225.	Comply
Radiated emission test.	Subpart B Section 15.109 Subpart C Section 15.209	Comply
Conducted emissions test	Subpart B Section 15.107, Subpart C Section 15.207	Comply
Frequency stability test	Subpart C Section 15.225	Comply

Telematics Laboratory

February 2011

Name: Eng. Yuri Rozenberg
Position: Head of EMC Branch

Name: Michael Feldman
Position: Test Technician

Measurement uncertainty.

Were relevant, the following measurement uncertainty level have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expended uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Test description	Expanded uncertainty
Radiated emissions in the open field test site at 3 m measuring distance: 30 MHz – 1.0 GHz 1.0 GHz – 18 GHz	2 U_c (E) = ± 4.32 dB 2 U_c (E) = ± 4.47 dB

**Test Report No.:** 9112310553**Page 3 of 22 pages****Title:** Cosmetic skin care device (RFID);**Name:** WISH Hand-Piece model B

Table of Contents

1. Test summary	2
2. EUT Description and operation	4
2.1. General description:	4
2.2. Potential emission sources:	8
2.3. EUT setup and operation:	8
3. Measurements, examinations and derived results	8
3.1. Location of the Test Site:	8
3.2. Test condition:	8
3.3. Initial visual check and functional test:	8
3.4. Radiated emission test:	9
3.5. Test of field strength emission from intentional radiator.	10
3.6. AC main conducted emissions test	13
3.7. Test of radiated emissions from unintentional radiator	16
3.8. Frequency stability test according to section 15.225	18
4. Appendix 1. Test equipment used	19
5. Appendix 2: Antenna Factor and Cable Loss	20

**Test Report No.: 9112310553****Page 4 of 22 pages****Title: Cosmetic skin care device (RFID);****Name: WISH Hand-Piece model B**

2. EUT Description and operation

2.1. General description:

* Note: the customer supplied all information in clause below.

The Wish is cordless multi-application aesthetic device. Wish features five switchable technology heads. Between the hand piece and the Treatment Capsules there is RFID communications. On the hand piece the RFID is implemented by TI chip TRF7960. The interface is through 3 push buttons and LCD display.

Transmitting frequency	13.56 MHz
Type of modulation:	OOK
Antenna type:	Integrated

The Wish unit has 3 possible configurations: models A, B, C. The difference between all the configurations are presented below. The models A and B are powered from Ni-MH battery 2.4VDC; the model C is powered from interchangeable 2x1.2V or 1.5V.

Module	A	B	C
Real Time Clock.		✓	-
Battery charger.	✓	✓	-
2xNi-MH cell.	✓	✓	-
RFID.	✓	✓	✓
CPU.	✓	✓	✓
LCD display	✓	✓	✓

Based this fact that the model B includes all possible modules, it was defined as the "worst case" and was tested for FCC compliance.

The EUT's block diagrams are shown in Figures 1-3.

The EUT external views are presented in Photos #1 and #2.

Test Report No.: 9112310553

Page 5 of 22 pages

Title: Cosmetic skin care device (RFID);

Name: WISH Hand-Piece model B

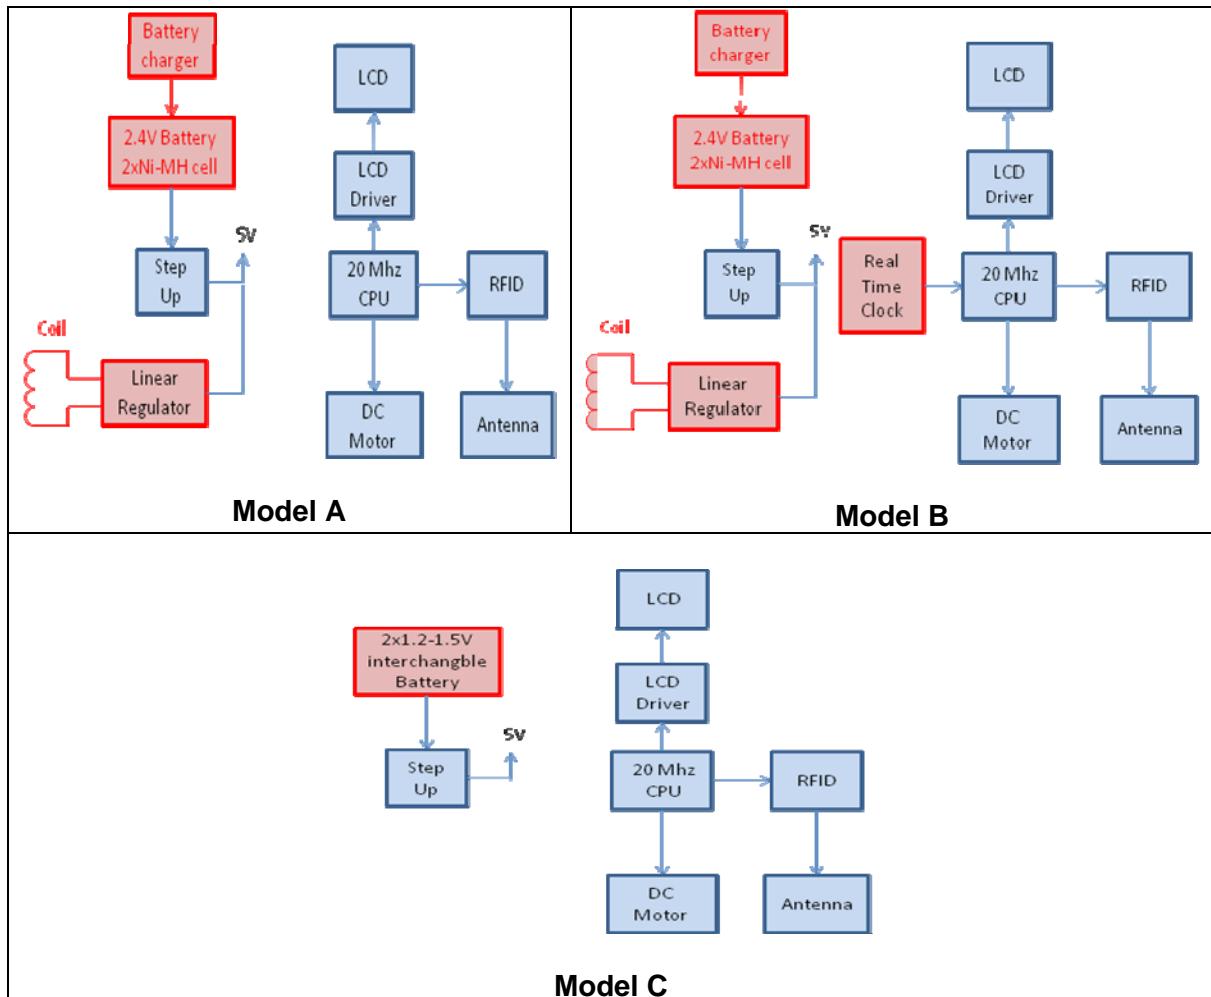


Figure 1. Hand piece block diagram (Models A, B, C).



Test Report No.: 9112310553

Page 6 of 22 pages

Title: Cosmetic skin care device (RFID);

Name: WISH Hand-Piece model B



Photo 1. EUT's external view.



Photo 2. EUT in charging mode.



Test Report No.: 9112310553

Page 7 of 22 pages

Title: Cosmetic skin care device (RFID);

Name: WISH Hand-Piece model B



Photo 3. RE test setup in Anechoic chamber.



Photo 4. RE test setup on OATS.

**Test Report No.: 9112310553****Page 8 of 22 pages****Title: Cosmetic skin care device (RFID);****Name: WISH Hand-Piece model B**

2.2. Potential emission sources:

The potential emission sources are detailed in Table 1.

Table 1. Potential emission sources

Frequency	Location
32.768 kHz	Real time clock
13.56 MHz crystal	LO and RFID clock

2.3. EUT setup and operation:

Measurements of transmitter were performed in continue transmission mode.

3. Measurements, examinations and derived results

3.1. Location of the Test Site:

Preliminary radiated test was conducted at the EMC laboratory of the Standards Institution of Israel in Tel-Aviv.

The final radiated emission test was conducted in an Open Area Test Site located at Kibbutz Native Halamed Hai in Emek HaEla, Israel.

3.2. Test condition:

Temperature: 24°C. Humidity: 63 %. Atmospheric pressure: 1012 mbar.

3.3. Initial visual check and functional test:

Initial visual check and brief built- in- test of the EUT was performed before testing.

- No external damages were found.
- The test on the EUT passed successfully.

**Test Report No.:** 9112310553**Page 9 of 22 pages****Title:** Cosmetic skin care device (RFID);**Name:** WISH Hand-Piece model B

3.4. Radiated emission test.

3.4.1. General:

Per FCC Part 15 subpart C Section 15.225, 15.209 and subpart B Section 15.109.

- * Initial scans were made using a peak detector but still using the appropriate ANSI IF bandwidth.
- * A tolerance limit was set 10 dB below the specification limit. Levels above the tolerance limit were retested using the Peak and Q. Peak detector.

3.4.2. Preliminary radiated emission tests:

Preliminary investigation measurements were performed up to tenth harmonic of fundamental in a semi-anechoic chamber at distance 3 meter. The EUT was setup in its typical configuration and operated in its various modes. For each mode of operation the frequency spectrum was monitored. EUT configuration, cable configuration and mode of operation, which produced the maximum level of emission, were documented. A list of frequencies to be tested was prepared.

3.4.3. Final measurements procedure:

The final radiated emission measurements were performed at the Open Area Test Site at the same (3 m) test distance. The EUT was operated as described above. The EUT was installed on a turn - table. Measurements were performed with active loop antenna at frequencies below 30 MHz and with Biconilog 30 MHz-2 GHz antenna above 30 MHz. The measurements were performed at each frequency that was founded previously at which the signal level was 10 dB below the limit or less. The levels were maximized by rotating turntable through 360° and changing antenna-to-EUT polarization from vertical to horizontal. The worse case result was noted in tables.

3.4.4. Radiated emission test results:

All received emissions from the EUT were found below FCC Part 15 Subpart B Section 15.109 and Subpart C sections 15.209 and 15.225.

Final result measurements in transmit mode are presented in tables #2, #3 in section 3.5.5.

**Test Report No.:** 9112310553**Page 10 of 22 pages****Title:** Cosmetic skin care device (RFID);**Name:** WISH Hand-Piece model B

3.5. *Test of field strength emission from intentional radiator.*

3.5.1. *General:*

Per FCC Part 15 Subpart C section 15.225.

3.5.2. *Requirements:*

The EUT's operation frequency is 13.56 MHz.

The field strength emissions from intentional radiators operated on this frequency shall comply with the limits of section 15.225 (a) (b) (c) (d).

Emission frequency MHz	Specified Field Strength limit of Fundamental $\mu\text{V/m}$ @ 30m	Calculated Field Strength limit $\text{dB}\mu\text{V/m}$ @ 3m
13.553 – 13.567	15.848	124.0
13.410 – 13.553 13.567 – 13.710	334.0	90.5
13.110 – 13.410 13.710 – 14.010	106.0	80.5

Note: The field strength limit was calculated with 40 dB/decade linear distance extrapolation factor.

The field strength of any emissions outside of the 13.110 – 14.010 MHz band shall not exceed the general radiated emission limit of § 15.209.

3.5.3. *Test procedure:*

The test was conducted according to clause 15.225.

3.5.4. *Test summary:*

The tested unit meets the standard requirement.

Test Report No.: 9112310553

Page 11 of 22 pages

Title: Cosmetic skin care device (RFID);Name: WISH Hand-Piece model B**3.5.5. Test results:****Table # 2. Fundamental frequency test result**

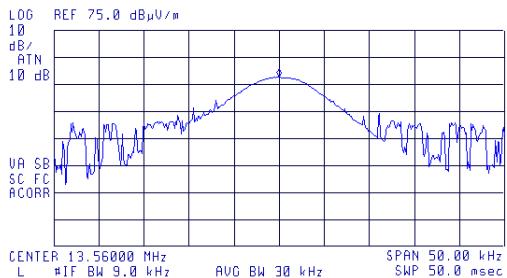
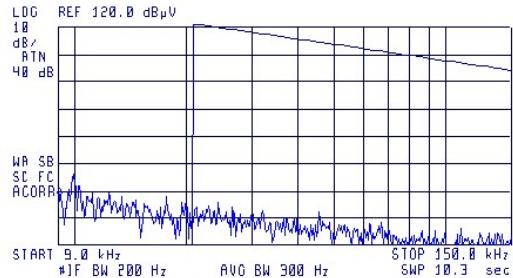
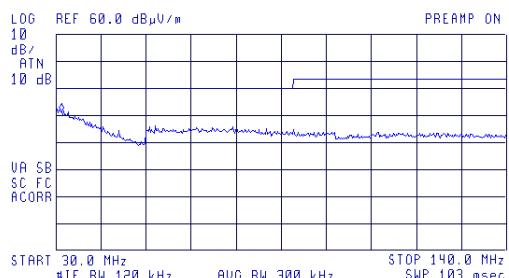
Carrier frequency MHz	Peak Amplitude dB μ V/m	Limit@ 3m dB μ V/m
13.560	57.6	124.0

For recorded fundamental frequency result see plot #1.

No emissions except carrier frequency were found.

Any received radiated emission result was found below the § 15.209 specified limit.

Investigation scans of spurious emissions present in plots ## 2-4.

**Test Report No.: 9112310553****Page 12 of 22 pages****Title: Cosmetic skin care device (RFID);****Name: WISH Hand-Piece model B**16:47:19 JUN 30, 2010
BDR EUT-WISHACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 13.56000 MHz
57.60 dB μ V/m16:53:13 JUN 30, 2010
BDR EUT-WISHACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 9.1 kHz
57.95 dB μ V/m**Plot # 1. Field strength of fundamental frequency 13.56 MHz.****Plot # 2. Frequencies scan 0.009 – 0.15 MHz. Test distance =3m.**16:51:05 JUN 30, 2010
BDR EUT-WISHACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 13.53 MHz
57.47 dB μ V/m17:24:09 JUN 30, 2010
BDR EUT-WISHACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 31.4 MHz
31.43 dB μ V/m**Plot # 3. Frequencies scan 0.15 – 30 MHz. Test distance =3m.****Plot # 4. Frequencies scan 30 – 140 MHz. Test distance 3m.**

**Test Report No.:** 9112310553**Page 13 of 22 pages****Title:** Cosmetic skin care device (RFID);**Name:** WISH Hand-Piece model B

3.6. AC main conducted emissions test

Per FCC Part 15 subpart B section 15.107 and subpart C section 15.207.

Test configuration:

The EUT was placed on a non-metallic table in a shielded room at a height of 80 cm from the floor and 40 cm from the vertical ground plane (wall) of the room.

3.6.1. Test procedure:

The EUT was operated in charging mode.

First, initial scans were performed. Final measurements were performed at the frequencies where emission exceeded the tolerance limit.

Test equipment (EMI receiver) setup was as follow:

Initial scan:

Detector type	Peak
Mode	Max hold
Bandwidth	9 kHz
Step size	Continuous sweep
Sweep time	>100 msec

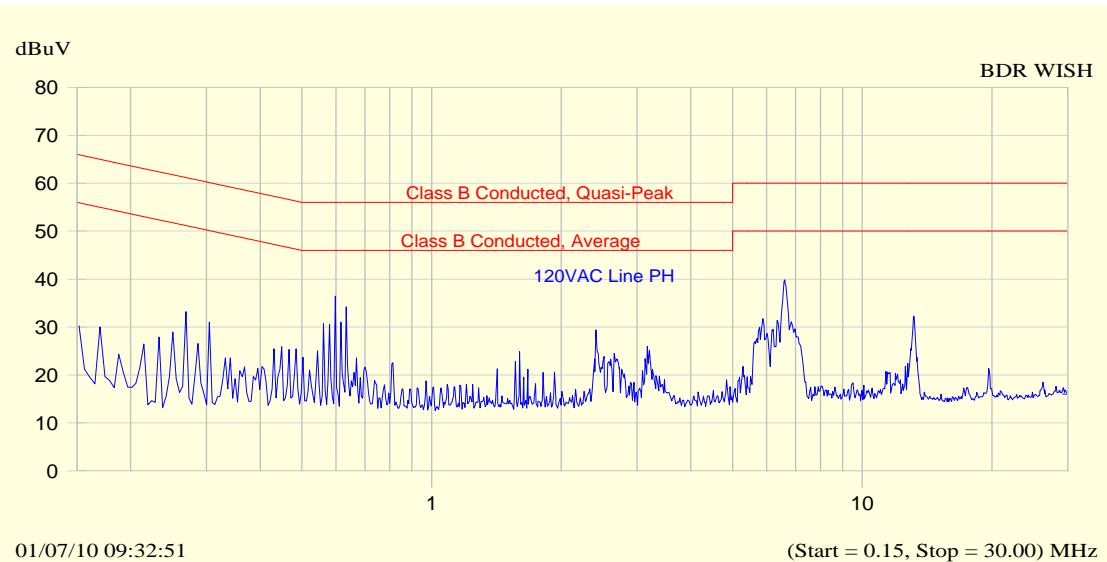
Measurements:

Detector type	Quasi-peak (CISPR), Average
Bandwidth	9 kHz
Observation	>15 seconds

3.6.2. Test results:

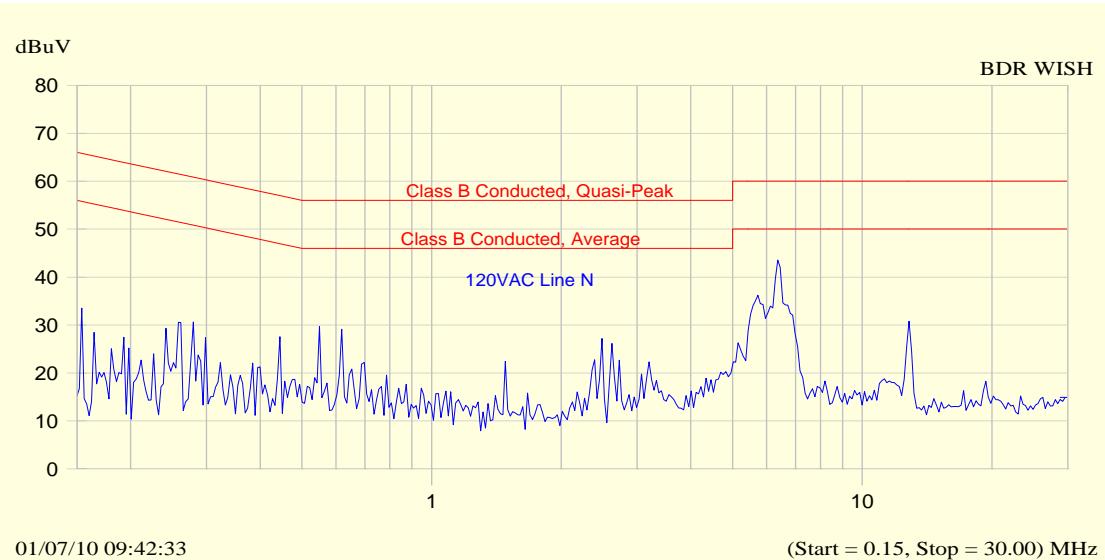
All received emissions from EUT were found below FCC Part 15.107, 15.207 limits (see plots ##5, 6 below).

The worst result was measured on line Neutral at 6.442 MHz with Average detector and found 7.6 dB below the AVG limit.

**Test Report No.: 9112310553****Page 14 of 22 pages****Title: Cosmetic skin care device (RFID);****Name: WISH Hand-Piece model B**

Frequency MHz	Peak dB μ V	QP dB μ V	QP Limit dB μ V	Margin dB	Avg dB μ V	Avg Limit dB μ V	Margin dB
0.607	37.6	29.1	56.0	-26.9	4.1	46.0	-41.9
6.608	37.6	37.0	60.0	-23.0	36.3	50.0	-13.7

Plot # 5. Tested line Phase.

**Test Report No.: 9112310553****Page 15 of 22 pages****Title: Cosmetic skin care device (RFID);****Name: WISH Hand-Piece model B**

Frequency MHz	Peak dB μ V	QP dB μ V	QP Limit dB μ V	Margin dB	Avg dB μ V	Avg Limit dB μ V	Margin dB
5.731	36.2	35.4	60.0	-24.6	35.1	50.0	-14.9
6.442	43.1	42.7	60.0	-17.3	42.4	50.0	-7.6

Plot # 6. Tested line Neutral

**Test Report No.:** 9112310553**Page 16 of 22 pages****Title:** Cosmetic skin care device (RFID);**Name:** WISH Hand-Piece model B

3.7. *Test of radiated emissions from unintentional radiator*

Per FCC Part 15 subpart B Section 15.109

3.7.1. *Test procedure:*

The EUT was on at normal performance.

First, initial scans were performed. Final measurements were performed according to clause 3.4.3.

Initial scan:

Detector type	Peak
Mode	Max hold
Bandwidth	120 kHz
Step size	Continuous sweep
Sweep time	>1 seconds/MHz

Measurements:

Detector type	Quasi-peak (CISPR)
Bandwidth	120 kHz
Measurement time	20 seconds/MHz
Observation	>15 seconds

3.7.2. *Radiated emission test results:*

All received emissions were found below FCC Part 15.109 class B limit and presented in table # 3 below.

Test Report No.: 9112310553

Page 17 of 22 pages

Title: Cosmetic skin care device (RFID);Name: WISH Hand-Piece model B

Table 3. Radiated emission test results
Subpart B class B 3m distance.

Frequency (MHz)	Antenna Polariz. V/H	Antenna Height (m)	Turn- table angle (°)	Emission Level Note 1 (dB μ V/m)	Limit @ 3 m (dB μ V/m)	Margin (dB)	Results
461.0	H	2.0	56	42.0	46.0	-4.0	Complies
474.6	H	2.0	109	39.6	46.0	-6.4	Complies
488.2	H	1.6	112	43.5	46.0	-2.5	Complies
501.7	H	1.1	87	40.9	46.0	-5.1	Complies
528.8	H	1.0	276	41.1	46.0	-4.9	Complies
542.4	H	1.0	53	42.0	46.0	-4.0	Complies

Note 1: Emission level = E Reading (dB μ V) + Cable loss (dB) + Antenna Factor (dB/m)
For Cable Loss and Antenna Factor refer to Appendix 2

**Test Report No.: 9112310553****Page 18 of 22 pages****Title: Cosmetic skin care device (RFID);****Name: WISH Hand-Piece model B**

3.8. *Frequency stability test according to section 15.225*

Table 4. Frequency stability test result

TEST CONDITIONS	Carrier frequency, MHz	Frequency deviation Hz
Test temperature		
+20°C	13.560100	0
-20°C	13.560080	-20
-10°C	13.560100	0
0°C	13.560120	+20
+10°C	13.560120	+20
+30°C	13.560080	-20
+40°C	13.560060	-40
+50°C	13.560080	-20
Maximum measured deviation		-40 Hz

3.8.1. Test procedure

The EUT was placed in a climatic chamber and allowed to stabilize at 20°C temperature and battery nominal voltage 2.4VDC for at least 15 min. The reference carrier frequency was taken. The temperature of climatic chamber was varied from -20°C to +50°C. Measured changes of frequencies were noted in table #4.

3.8.2. Requirements:

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency (1.356 kHz) over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

3.8.3. Test result:

The tested unit meets the standards requirements.

**Test Report No.:** 9112310553**Page 19 of 22 pages****Title:** Cosmetic skin care device (RFID);**Name:** WISH Hand-Piece model B

4. Appendix 1. Test equipment used

All measurements equipment is on SII calibration schedule with a recalibration interval not exceeding one year.

Instrument	MFR	Model	Serial No.	Due calibration date
EMI Receiver 9 kHz – 6.5 GHz	HP	8546A+85460 A	SII 4068	April 2011
Active Loop Antenna 10 kHz – 30 MHz	EMCO	6502	3283	Aug 2010
Antenna Biconilog 30 – 2000 MHz	Schaffner-Chase	CBL6112B	S/N 23181	Aug 2010
EMI Analyser 9 kHz - 26.5 GHz	HP	E7405A	SII 4944	Dec 2010
LISN 9 kHz – 30 MHz	FCC	LISN 250-32-4-16	SII5023	Oct 2010
Transient limiter 0.009-200 MHz	HP	11947A	3107105	May 2011
Oscilloscope	HP	54610B	US37340682	May 2011
RF cable, 4m	Sucoflex	104PE	21328/4PE	Oct 2010
Temperature/Humidity cabinet	Heraeus	HC 4033	SII 4062	Feb 2011
Antenna Mast	R&S	HCM	100002	N/A
Metallic turntable	R&S	HCT12	100001	N/A
Positioning controller	R&S	HCC	100002	N/A

**Test Report No.: 9112310553****Page 20 of 22 pages****Title: Cosmetic skin care device (RFID);****Name: WISH Hand-Piece model B**

5. Appendix 2: Antenna Factor and Cable Loss

Table 5. Cables #8 and #10 loss (10m cable + Mast).

Point	Frequency (MHz)	Cable Loss (dB)	Point	Frequency (MHz)	Cable Loss (dB)
1	30	0.53	21	1000	3.68
2	50	0.75	22	1100	3.82
3	100	1.08	23	1200	4.07
4	150	1.39	24	1300	4.24
5	200	1.61	25	1400	4.43
6	250	1.752	26	1500	4.6
7	300	2.00	27	1600	4.7
8	350	2.15	28	1700	4.85
9	400	2.26	29	1800	4.98
10	450	2.383	30	1900	5.19
11	500	2.52	31	2000	5.34
12	550	2.606	32	2100	5.51
13	600	2.75	33	2200	5.69
14	650	2.856	34	2300	5.89
15	700	3.06	35	2400	6.07
16	750	3.20	36	2500	6.22
17	800	3.27	37	2600	6.28
18	850	3.38	38	2700	6.41
19	900	3.46	39	2800	6.53
20	950	3.55	40	2900	6.84



Test Report No.: 9112310553

Page 21 of 22 pages

Title: Cosmetic skin care device (RFID);

Name: WISH Hand-Piece model B

Table 6. Antenna Factor

For Biconilog Antenna, Model Number: CBL 6112D, S/N: 23181

No.	f / MHz	AF / dB/m						
1	30	17.90	170	9.40	530	17.70	1040	22.20
2	32	16.70	175	9.00	540	18.25	1060	22.50
3	34	15.55	180	8.50	550	18.60	1080	22.50
4	36	14.35	185	8.45	560	14.45	1100	22.40
5	38	13.30	190	8.60	570	18.40	1120	22.60
6	40	12.20	195	8.85	580	18.50	1140	22.45
7	42	11.05	200	8.95	590	18.60	1160	22.50
8	44	9.95	205	8.80	600	18.60	1180	22.40
9	46	8.90	210	8.50	610	18.80	1200	22.80
10	48	8.05	215	8.20	620	18.99	1220	22.95
11	50	7.30	220	8.50	630	19.05	1240	23.10
12	52	6.80	225	9.00	640	19.23	1260	23.40
13	54	6.45	230	9.65	650	19.10	1280	23.35
14	56	6.00	235	10.30	660	19.13	1300	23.62
15	58	5.70	240	11.00	670	19.04	1320	23.64
16	60	5.45	245	11.60	680	19.00	1340	23.86
17	62	5.30	250	12.00	690	19.17	1360	23.95
18	64	5.20	255	12.45	700	19.28	1380	23.90
19	66	5.30	260	12.85	710	19.25	1400	24.45
20	68	5.30	265	12.50	720	19.45	1420	24.74
21	70	5.35	270	12.45	730	19.75	1440	24.93
22	72	5.50	275	12.40	740	19.95	1460	25.03
23	74	5.80	280	12.55	750	20.07	1480	25.45
24	76	6.00	285	12.65	760	19.85	1500	25.30
25	78	6.60	290	12.75	770	19.80	1520	25.25
26	80	6.70	295	12.95	780	19.85	1540	25.36
27	82	7.15	300	13.00	790	19.95	1560	25.58
28	84	7.60	310	13.35	800	20.05	1580	25.50
29	86	8.10	320	13.75	810	20.10	1600	25.65
30	88	8.50	330	13.85	820	20.35	1620	25.60
31	90	8.90	340	14.10	830	20.40	1640	25.70
32	92	9.20	350	14.50	840	20.35	1660	25.83
33	94	9.75	360	14.70	850	20.46	1680	25.97
34	96	9.95	370	14.90	860	20.39	1700	26.10
35	98	10.20	380	15.10	870	20.29	1720	26.25
36	100	10.50	390	15.45	880	20.24	1740	26.04
37	105	11.25	400	16.00	890	20.35	1760	26.14
38	110	11.70	410	16.40	900	20.55	1780	26.20
39	115	11.70	420	16.70	910	20.45	1800	26.40
40	120	11.80	430	16.35	920	20.60	1820	26.64
41	125	11.80	440	16.30	930	20.60	1840	26.86
42	130	11.70	450	16.30	940	20.66	1860	27.12
43	135	11.35	460	16.70	950	20.88	1880	27.00
44	140	10.95	470	17.05	960	21.11	1900	27.25
45	145	10.35	480	17.20	970	20.93	1920	27.36
46	150	10.05	490	17.30	980	21.03	1940	27.68
47	155	9.70	500	17.40	990	21.05	1960	27.10
48	160	9.70	510	17.50	1000	21.10	1980	27.06
49	165	9.45	520	17.60	1020	21.40	2000	27.25

**Test Report No.: 9112310553****Page 22 of 22 pages****Title: Cosmetic skin care device (RFID);****Name: WISH Hand-Piece model B**

Table 7. Antenna factor
Active Loop antenna mfr.EMCO mod. 6502 S/N 3424

Frequency (MHz)	Magnetic Antenna Factor (dBS/m)	Electric Antenna Factor (dB)
0.009	-31.46	20.07
0.010	-32.34	19.18
0.020	-36.15	15.38
0.050	-38.57	12.96
0.075	-38.78	12.75
0.100	-39.07	12.46
0.150	-39.07	12.45
0.250	-39.18	12.35
0.500	-39.29	12.24
0.750	-39.38	12.14
1.000	-39.57	11.95
2.000	-39.84	11.69
3.000	-40.09	11.44
4.000	-40.13	11.40
5.000	-40.24	11.28
10.000	-40.26	11.27
15.000	-40.70	10.83
20.000	-41.02	10.51
25.000	-41.94	9.59
30.000	-43.39	8.14

Table 8. Cable Loss
Type: Sucoflex 104PE; Ser.No.21328/4PE; 4 m length

Point	Frequency (GHz)	Cable Loss (dB)
1	0.0-1.0	1.7
2	1.0- 3.5	3.2
3	3.5- 5.5	4.0
4	5.5 - 7.5	4.7
5	7.5 - 9.5	5.3
6	9.5 - 10.5	5.6
7	10.5 - 12.5	6.2
8	12.5 - 14.5	6.8
9	14.5 - 16.5	7.5
10	16.5 - 18.0	8.1