

Annex 1: Measurement diagrams 21-1-0144001T01a-A1

Number of pages:	52	Date of Report:	2021-Nov-29
Testing company:	CETECOM GmbH Im Teelbruch 116 45219 Essen Germany Tel. + 49 (0) 20 54 / 95 19-0 Fax: + 49 (0) 20 54 / 95 19-150	Applicant:	Husqvarna AB
Product:	Robotic Mower BT		
Model:	Charging Station Board Type 34		
FCC ID:	ZASHQ-BLE-1E	IC:	23307-HQBLE1E
Testing has been carried out in accordance with:	Title 47 CFR, Chapter I FCC Regulations, Subchapter A Subpart C: §15.247 (DTS) , RSS-247, Issue 2 (DTS) RSS-Gen., Issue 5 Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		

Table of Contents

1	Measurement diagrams.....	3
1.1	Radiated measurements.....	3
1.2	Conducted measurements	26

1 Measurement diagrams

1.1 Radiated measurements

2.01a_BLE_low_standing


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	LKnopp/SSanthakum
Operating Mode:	1
Comment 1:	Channel low
Comment 2:	-
Environmental Conditions::	Humidity : 45%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

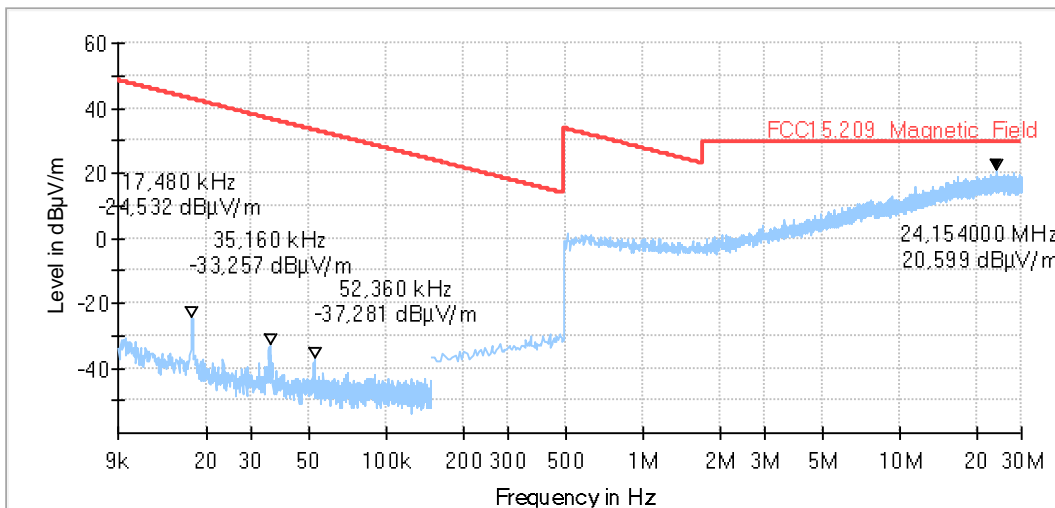

2.01b_BLE_low_laying


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	LKnopp/SSanthakum
Operating Mode:	1
Comment 1:	Channel low
Comment 2:	-
Environmental Conditions:	Humidity : 45%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

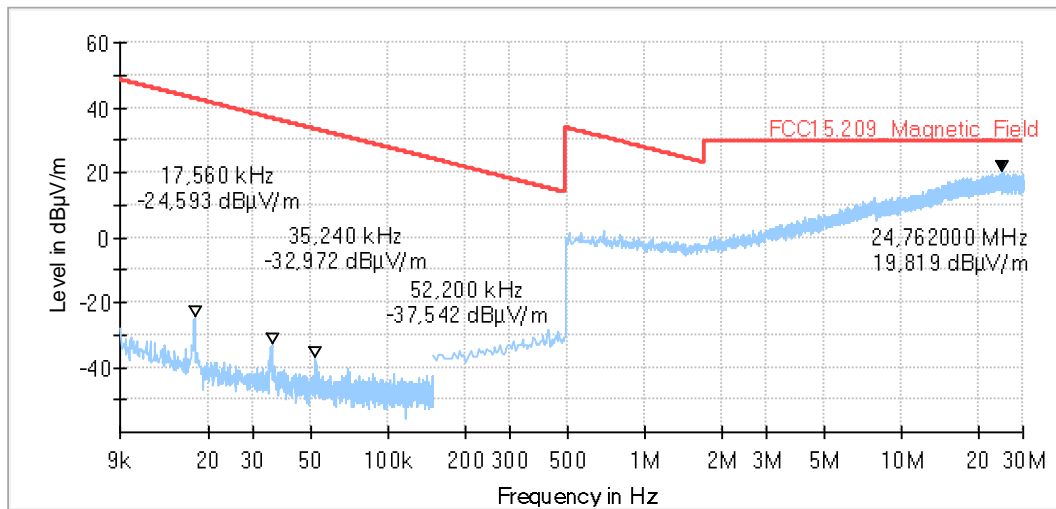

2.02a_BLE_mid_standing


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	LKnopp/SSanthakum
Operating Mode:	1
Comment 1:	Channel mid
Comment 2:	-
Environmental Conditions:	Humidity : 45%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

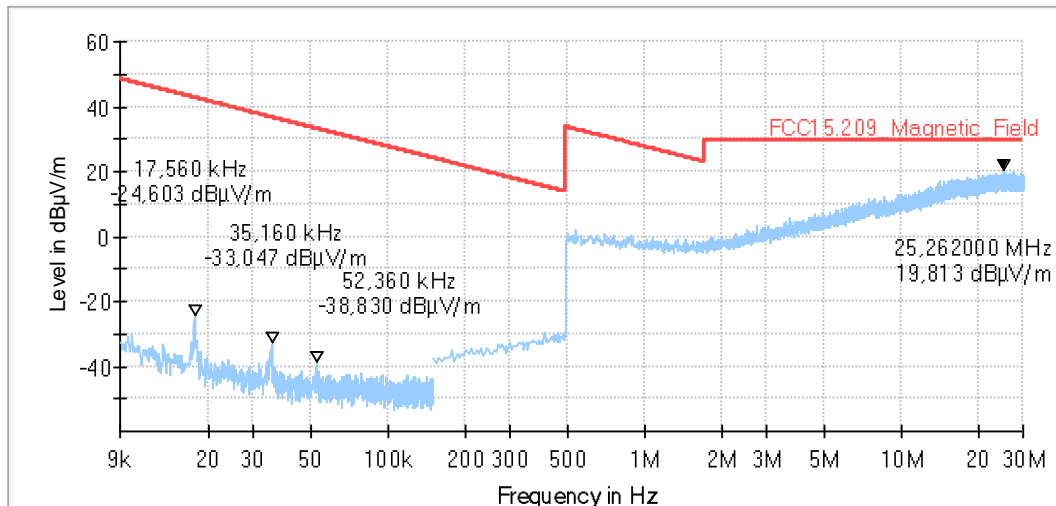

2.02b_BLE_mid_laying


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	LKnopp/SSanthakum
Operating Mode:	1
Comment 1:	Channel mid
Comment 2:	-
Environmental Conditions:	Humidity : 45%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

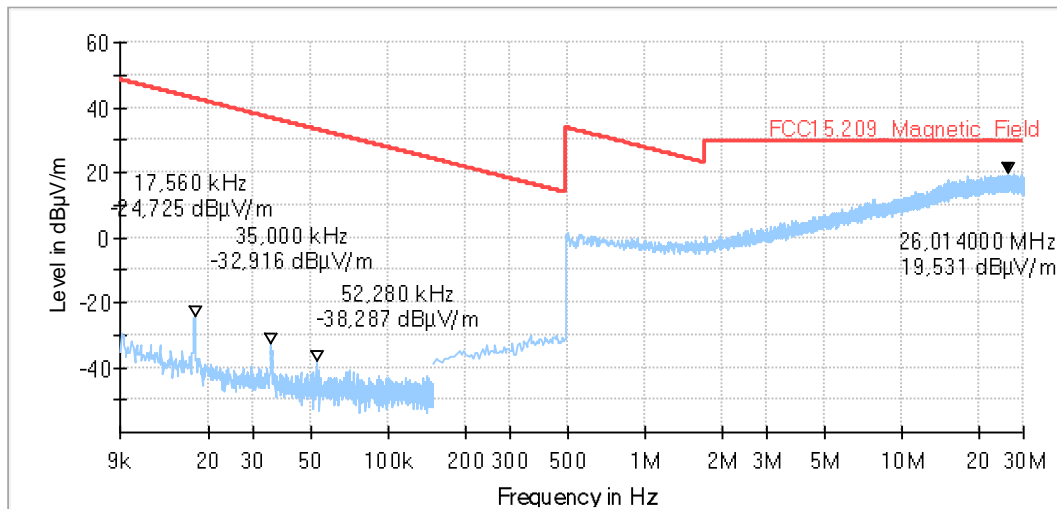

2.03a_BLE_high_standing


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	LKnopp/SSanthakum
Operating Mode:	1
Comment 1:	Channel high
Comment 2:	-
Environmental Conditions::	Humidity : 45%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

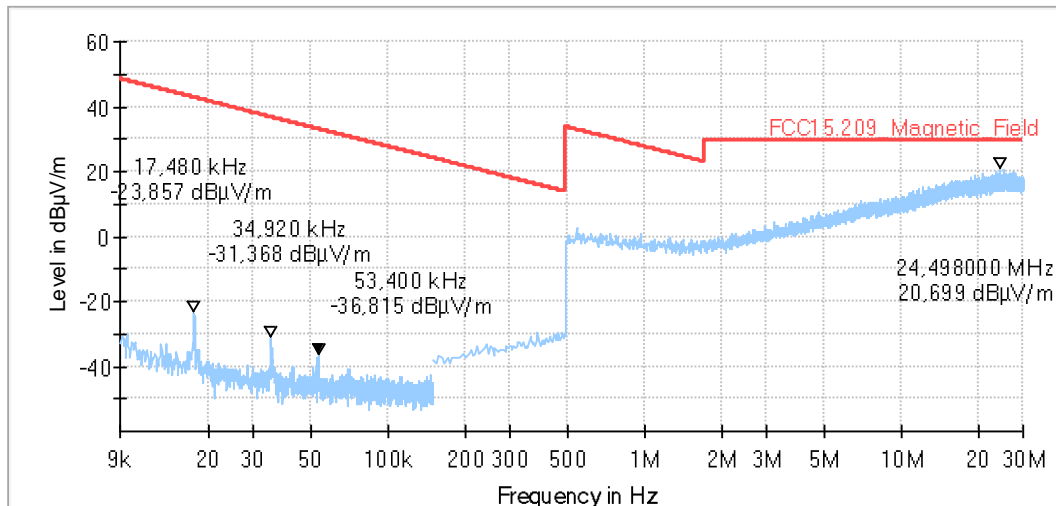

2.03b_BLE_high_laying


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	LKnopp/SSanthakum
Operating Mode:	1
Comment 1:	Channel high
Comment 2:	-
Environmental Conditions::	Humidity : 45%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

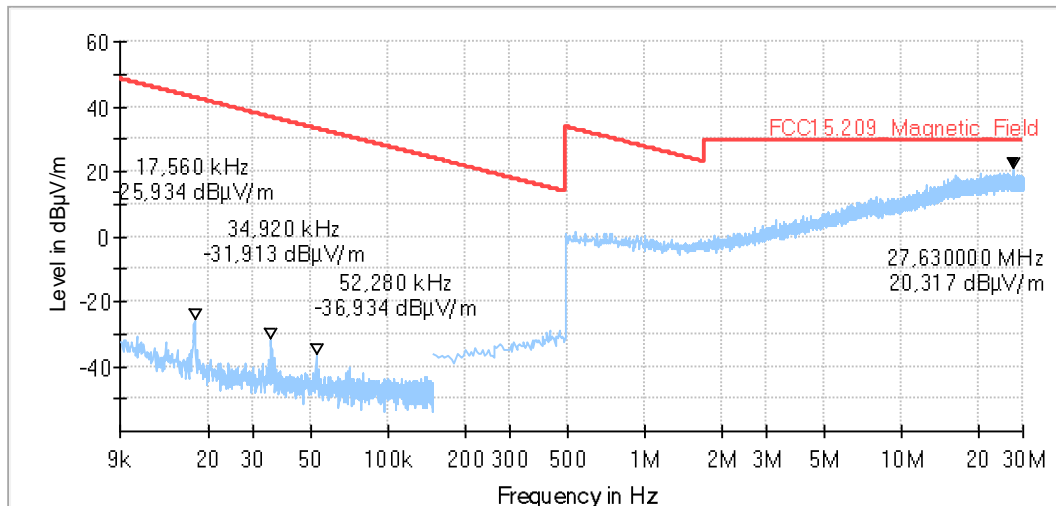

3.01a_BLE_low_standing


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 & RSS Gen. Issue 5
Antenna polarisation:	horizontal/vertical
Environmental Conditions:	Humidity : 45%rH; Temperature: 20°C
Operator Name:	LKnopp/SSanthakum
Operating Mode:	1
Power supply:	42 V DC
Comment:	Channel no. low
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

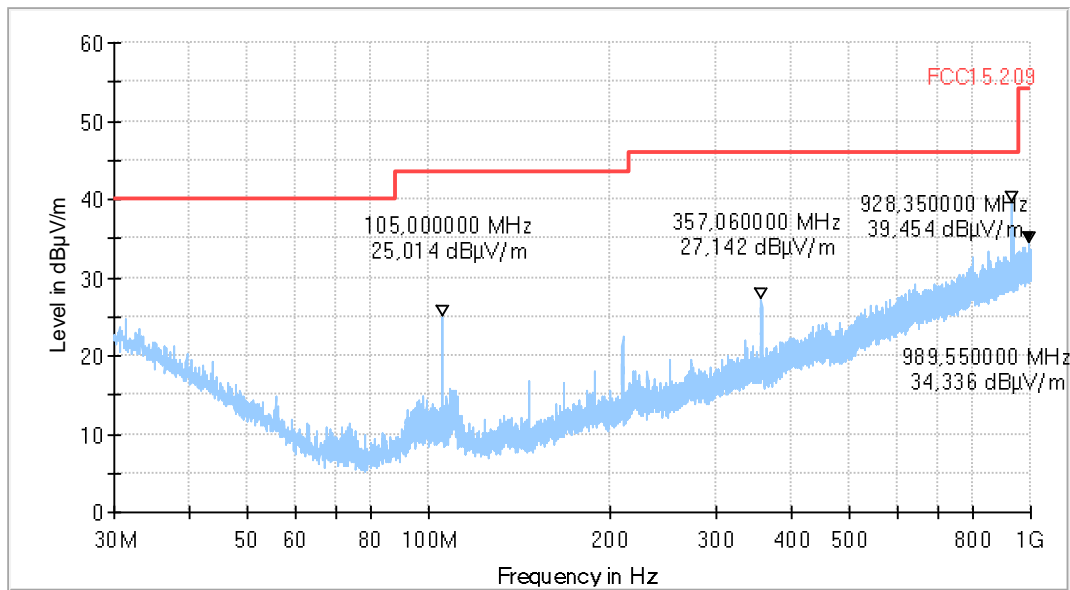

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

3.01b_BLE_low_laying


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 & RSS Gen. Issue 5
Antenna polarisation:	horizontal/vertical
Environmental Conditions:	Humidity : 45%rH; Temperature: 20°C
Operator Name:	LKnopp/SSanthakum
Operating Mode:	1
Power supply:	42 V DC
Comment:	Channel no. low
Verdict:	Passed

EUT Information

PMT number:	21-1-01440S05_C01
-------------	-------------------

Full Spectrum

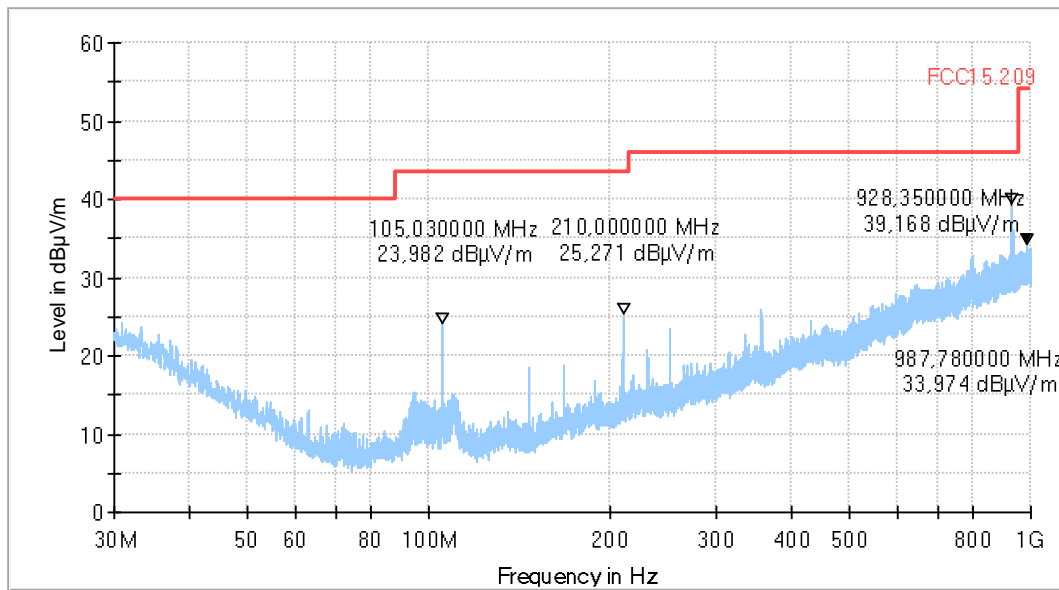

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

3.02a_BLE_mid_standing


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 & RSS Gen. Issue 5
Antenna polarisation:	horizontal/vertical
Environmental Conditions::	Humidity : 45%rH; Temperature: 20°C
Operator Name:	LKnopp/SSanthakum
Operating Mode:	1
Power supply:	42 V DC
Comment:	Channel no. mid
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

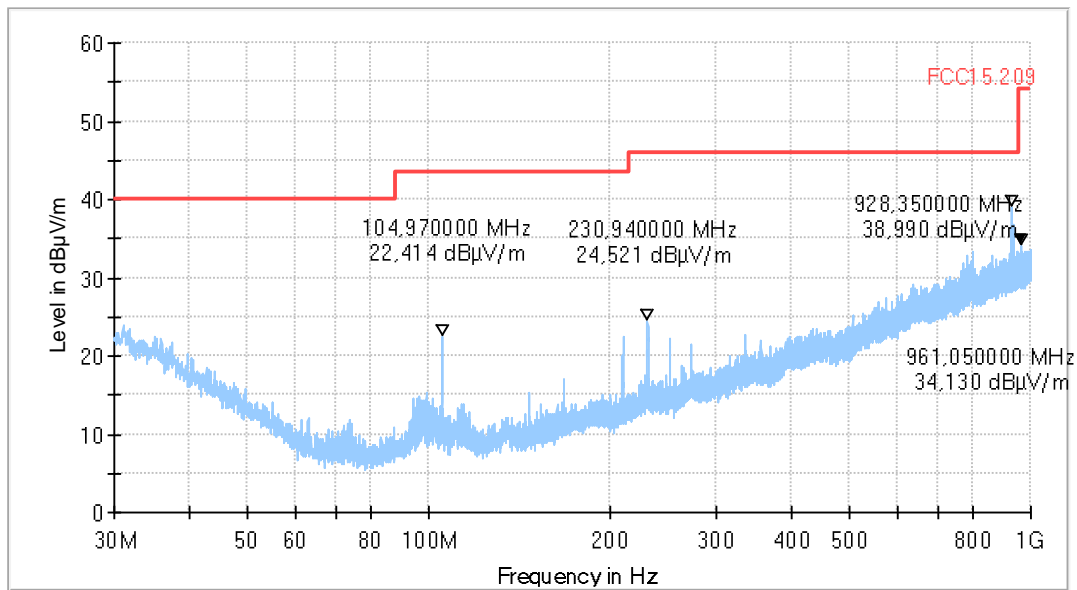

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

3.02b_BLE_mid_laying


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 & RSS Gen. Issue 5
Antenna polarisation:	horizontal/vertical
Environmental Conditions:	Humidity : 45%rH; Temperature: 20°C
Operator Name:	LKnopp/SSanthakum
Operating Mode:	1
Power supply:	42 V DC
Comment:	Channel no. mid
Verdict:	Passed

EUT Information

PMT number: 20-1-00636S10_C01

Full Spectrum

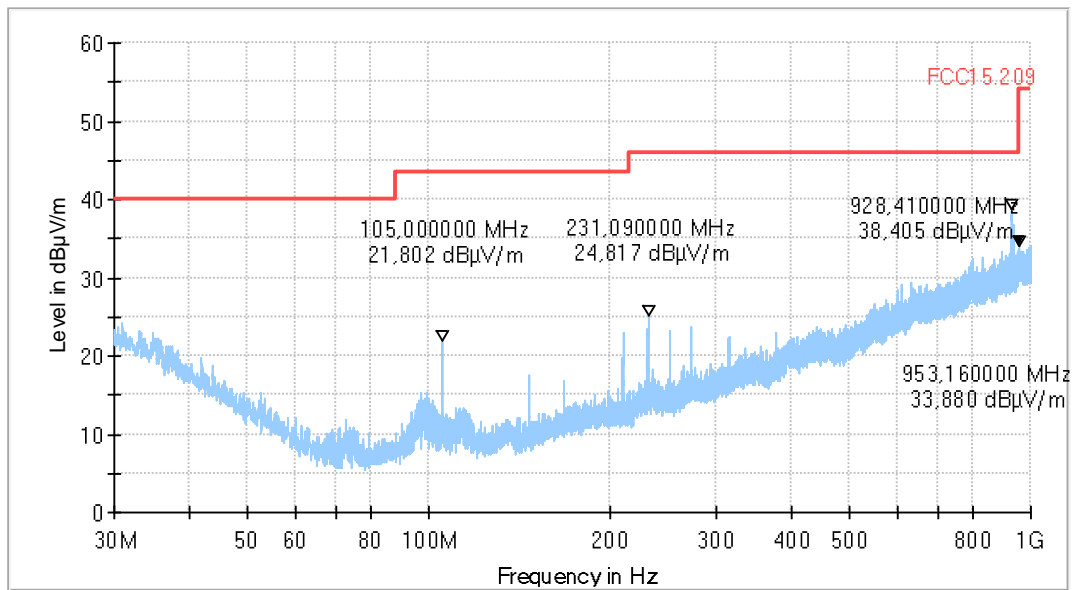

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

3.03a_BLE_high_standing


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 & RSS Gen. Issue 5
Antenna polarisation:	horizontal/vertical
Environmental Conditions:	Humidity : 45%rH; Temperature: 20°C
Operator Name:	LKnopp/SSanthakum
Operating Mode:	1
Power supply:	42 V DC
Comment:	Channel no. mid
Verdict:	Passed

EUT Information

PMT number: 20-1-00636S10_C01

Full Spectrum

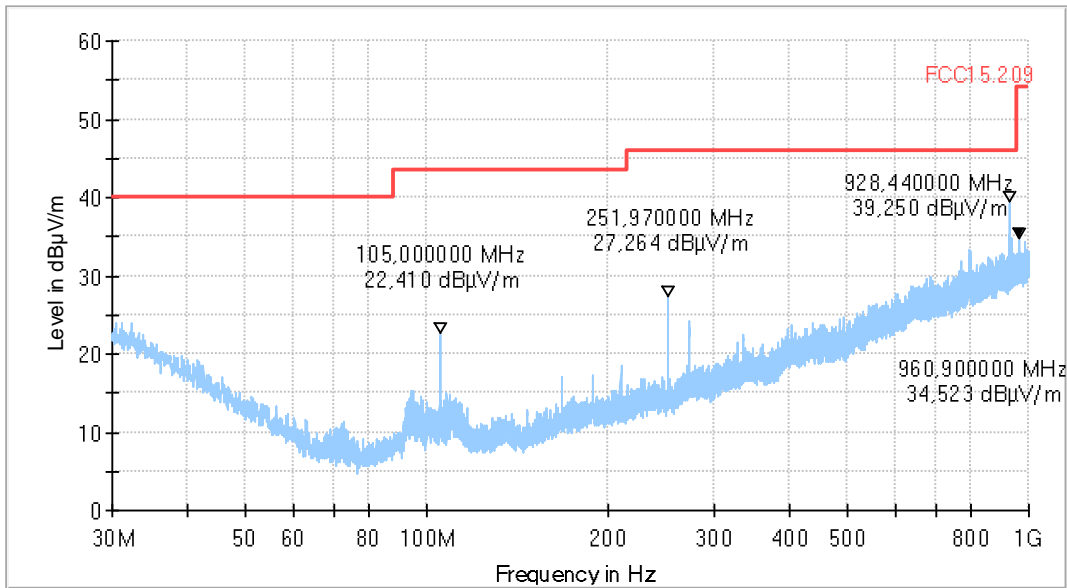

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

3.03b_BLE_high_laying


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 & RSS Gen. Issue 5
Antenna polarisation:	horizontal/vertical
Environmental Conditions:	Humidity : 45%rH; Temperature: 20°C
Operator Name:	LKnopp/SSanthakum
Operating Mode:	1
Power supply:	42 V DC
Comment:	Channel no. mid
Verdict:	Passed

EUT Information

PMT number: 20-1-00636S10_C01

Full Spectrum

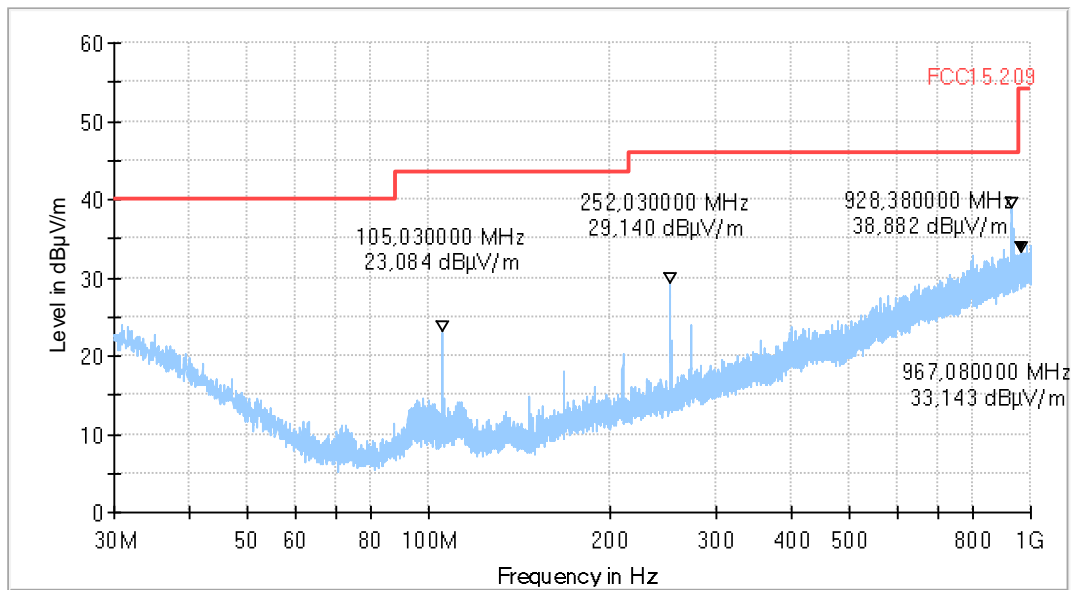

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

4.01a_BLE_low


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.60.20
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	1
Set-up no.	1
Operator:	HEI
Comment:	Channel low
Comment2:	-
Environmental Conditions:	Humidity : 63%rH; Temperature: 18°C
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

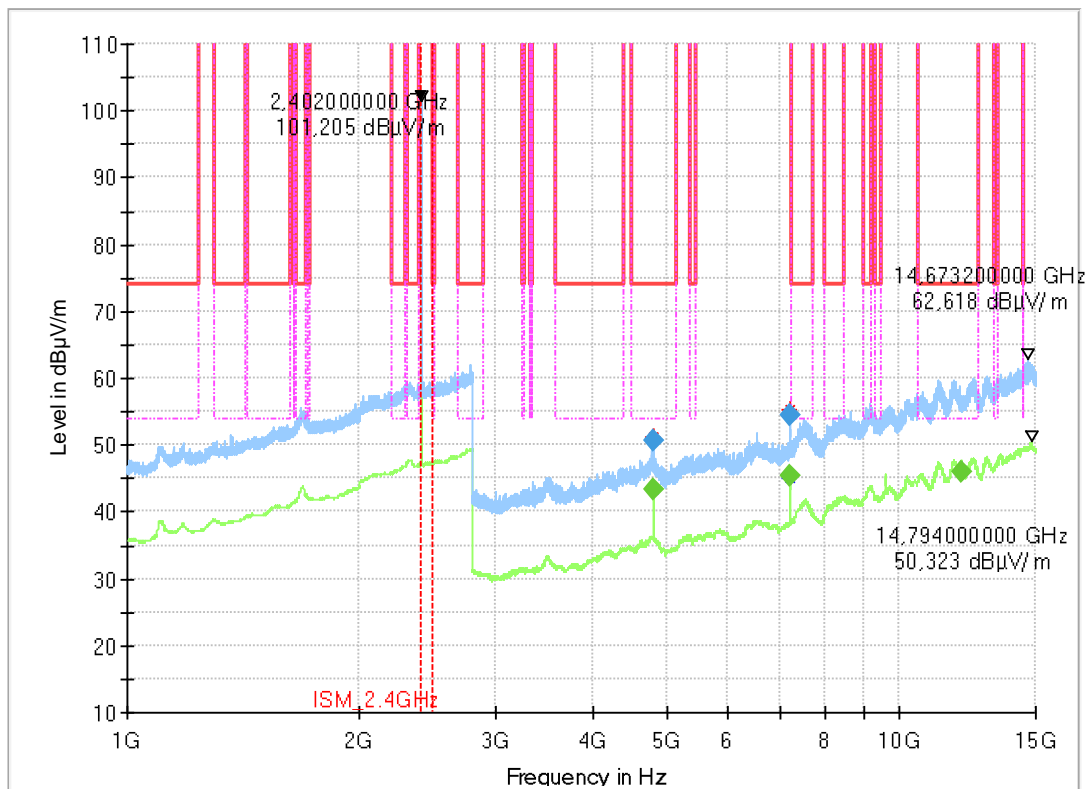

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
4803.600000	---	43.22	54.00	10.78	100.0	1000.000	155.0	V	95.0	0.0
4804.000000	50.75	---	74.00	23.25	100.0	1000.000	155.0	H	85.0	90.0
7205.200000	---	45.25	150.00	104.75	100.0	1000.000	155.0	V	10.0	90.0
7206.400000	54.49	---	150.00	95.51	100.0	1000.000	155.0	V	-14.0	90.0
12008.800000	---	46.10	54.00	7.90	100.0	1000.000	155.0	V	182.0	0.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Corr. (dB/m)
4803.600000	7
4804.000000	7
7205.200000	12
7206.400000	13
12008.800000	21

4.01b_BLE_low


Common Information

Test Description: Radiated field strength emission in 3m distance
Test Site: Fully Anechoic Chamber (FAC1) - EMC32 V10.60.20
Test Standard: FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation: horizontal/vertical

Operating Mode: 1
Set-up no. 1
Operator: HEI
Comment: Channel low
Comment2: -
Environmental Conditions: Humidity : 63%rH; Temperature: 18°C
Verdict: Passed

EUT Information

PMT number: 21-1-01440S05_C01

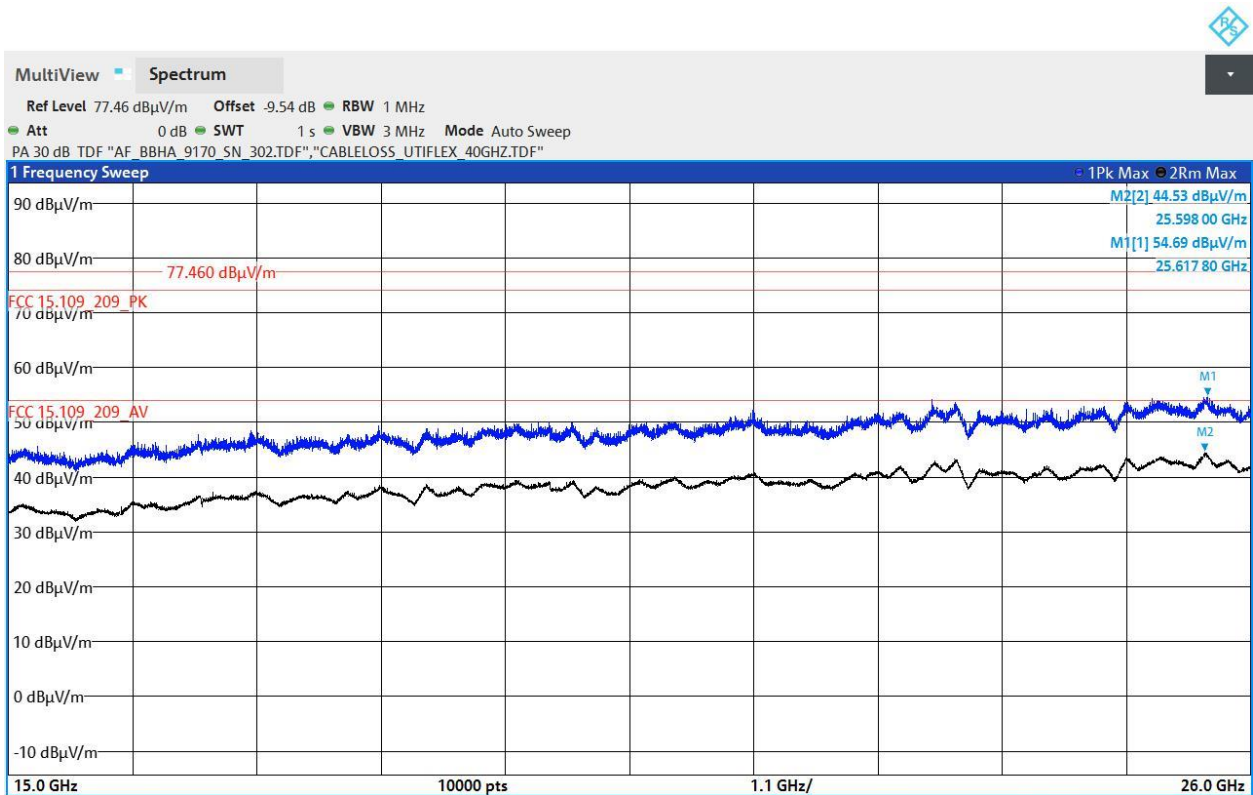

4.02a_BLE_mid


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.60.20
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	1
Set-up no.	1
Operator:	HEI
Comment:	Channel mid
Comment2:	-
Environmental Conditions:	Humidity : 63%rH; Temperature: 18°C
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

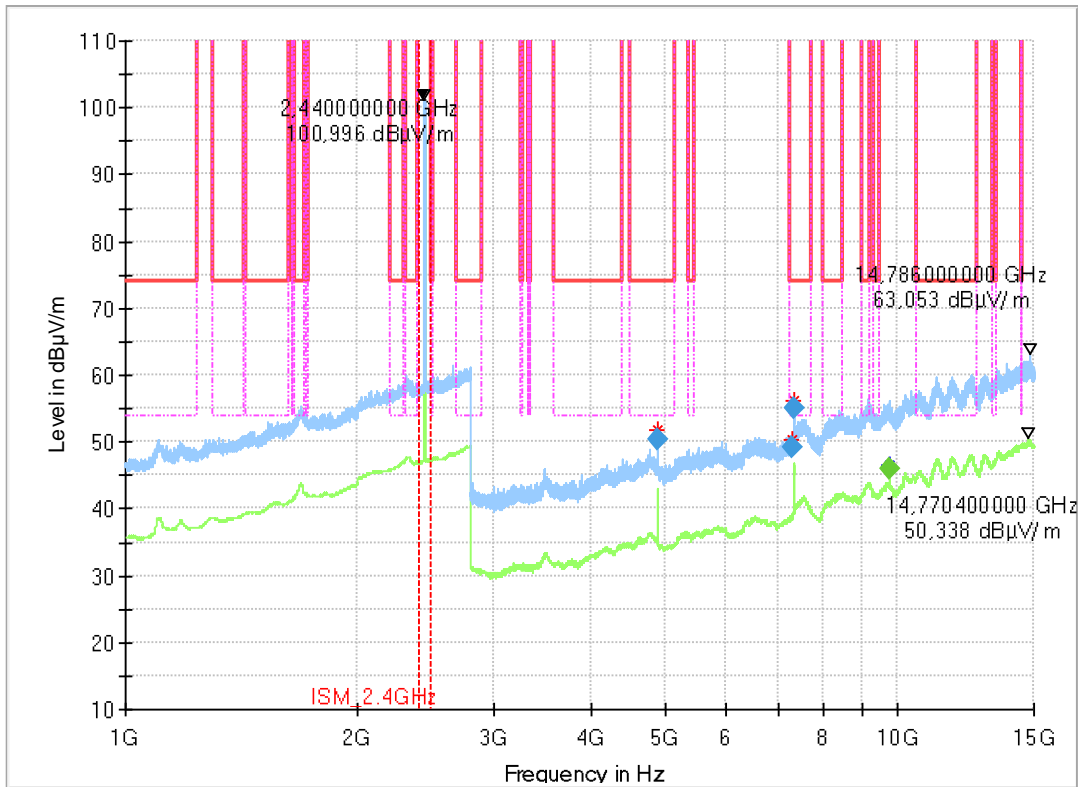

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
4880.400000	50.37	---	74.00	23.63	100.0	1000.000	155.0	V	96.0	0.0
7276.000000	49.11	---	74.00	24.89	100.0	1000.000	155.0	H	279.0	90.0
7319.200000	54.96	---	74.00	19.04	100.0	1000.000	155.0	V	8.0	90.0
9759.200000	---	45.87	150.00	104.13	100.0	1000.000	155.0	H	44.0	90.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Corr. (dB/m)
4880.400000	7
7276.000000	13
7319.200000	14
9759.200000	18


4.02b_BLE_mid

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.60.20
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	1
Set-up no.:	1
Operator:	HEI
Comment:	Channel mid
Comment2:	-
Environmental Conditions:	Humidity : 63%rH; Temperature: 18°C
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

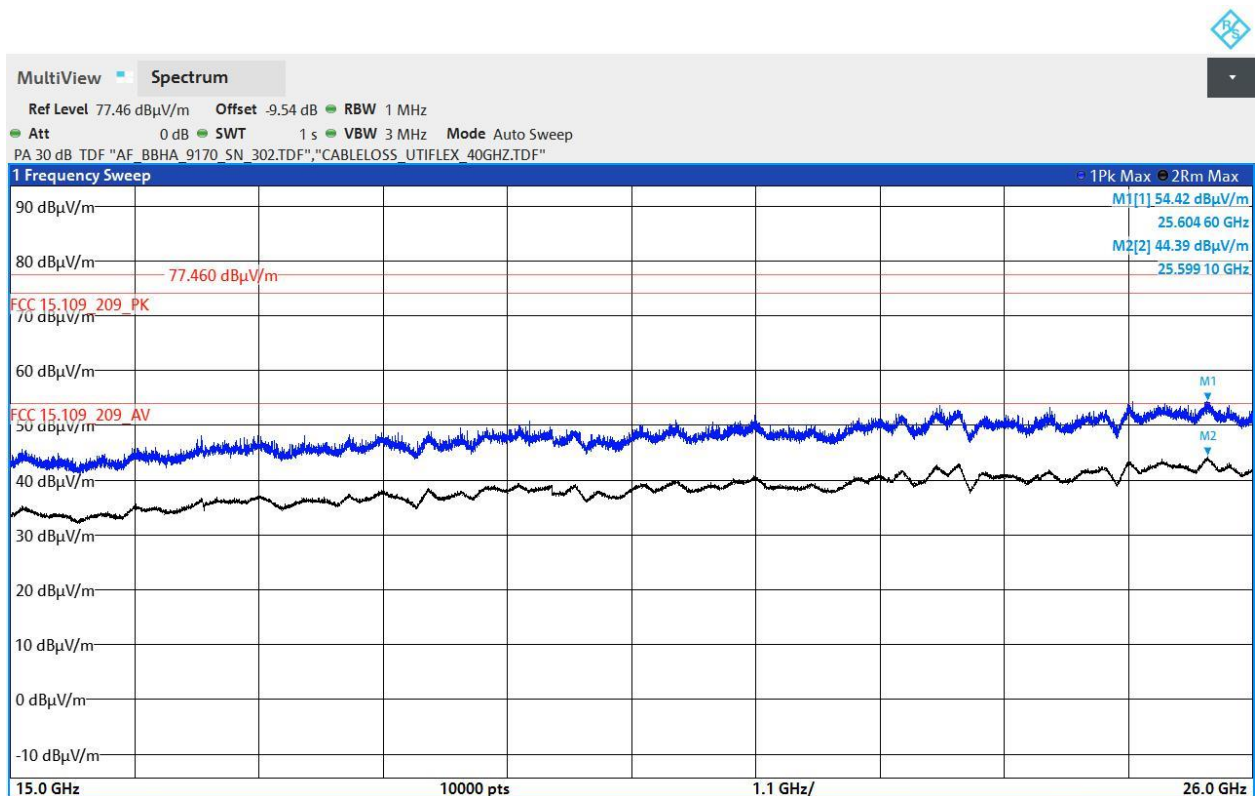

4.03a_BLE_high


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.60.20
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	1
Set-up no.	1
Operator:	HEI
Comment:	Channel high
Comment2:	-
Environmental Conditions:	Humidity : 63%rH; Temperature: 18°C
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

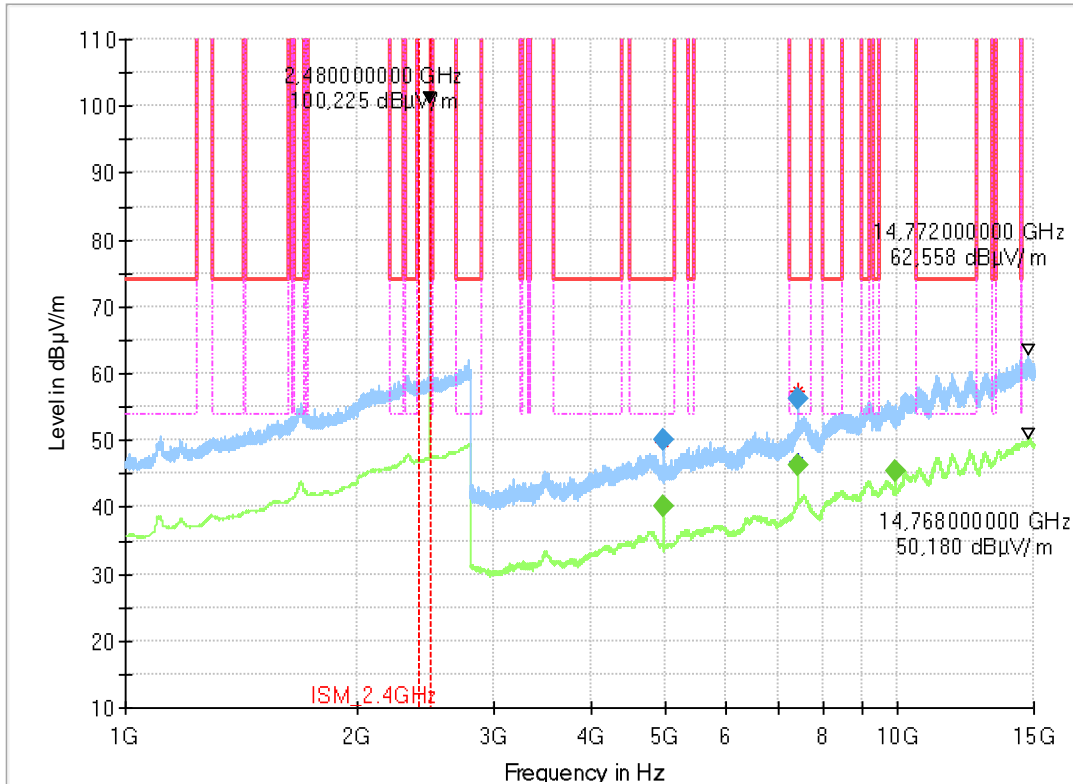

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
4959.600000	---	40.12	54.00	13.88	100.0	1000.000	155.0	V	91.0	0.0
4960.400000	49.99	---	74.00	24.01	100.0	1000.000	155.0	V	89.0	0.0
7439.200000	---	46.30	54.00	7.70	100.0	1000.000	155.0	V	6.0	90.0
7439.200000	56.10	---	74.00	17.90	100.0	1000.000	155.0	V	7.0	90.0
9920.800000	---	45.25	150.00	104.75	100.0	1000.000	155.0	H	-20.0	90.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Corr. (dB/m)
4959.600000	6
4960.400000	6
7439.200000	15
7439.200000	15
9920.800000	18


4.03b_BLE_high

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.60.20
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	1
Set-up no.:	1
Operator:	HEI
Comment:	Channel high
Comment2:	-
Environmental Conditions:	Humidity : 63%rH; Temperature: 18°C
Verdict:	Passed

EUT Information

PMT number: 21-1-01440S05_C01

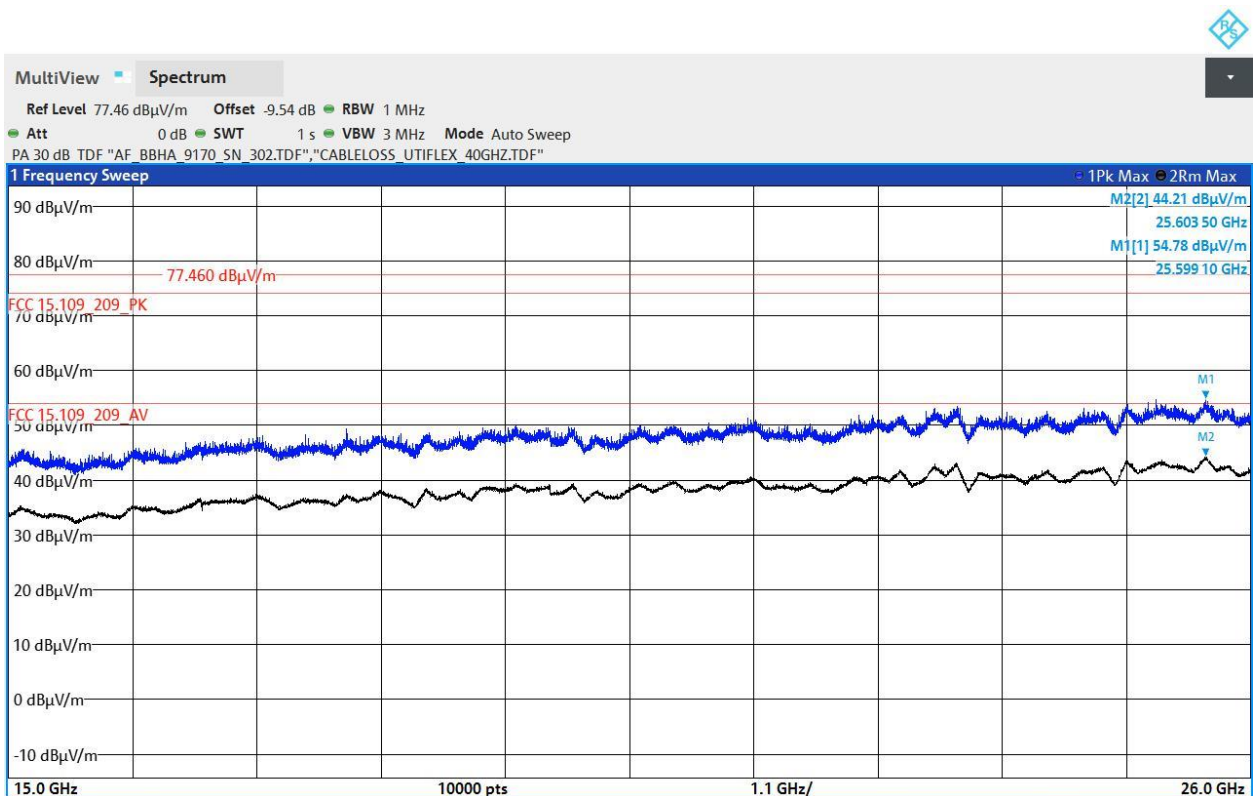

9.01_BE_BLE_low

Common Information


Test Description: Band-Edge: Radiated Field Strength Emissions Emissions in 3m distance
 Test Site: Fully Anechoic Chamber (FAC1) - EMC32 V10.60.20
 Test Standard: FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
 Antenna polarisation: horizontal/vertical

Operating Mode: 1
 Operator: PMA
 Comment: Channel low
 Comment2: -
 EUT Setup: 1
 Verdict: Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

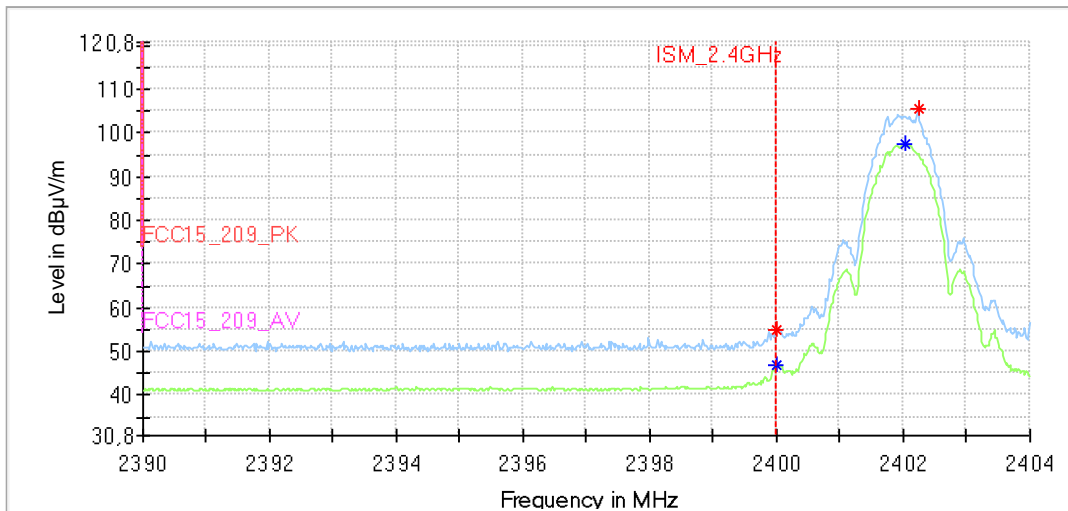

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	RMS (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2400.000000	54.80	---	150.00	95.20	---	---	155.0	H	285.0	0.0
2400.000000	---	47.13	150.00	102.87	---	---	155.0	H	285.0	0.0
2402.020000	---	97.43	150.00	52.57	---	---	155.0	H	280.0	0.0
2402.240000	105.68	---	150.00	44.32	---	---	155.0	H	280.0	0.0

9.02_BE_BLE_high

Common Information


Test Description: Band-Edge: Radiated Field Strength Emissions Emissions in 3m distance
 Test Site: Fully Anechoic Chamber (FAC1) - EMC32 V10.60.20
 Test Standard: FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
 Antenna polarisation: horizontal/vertical

Operating Mode: 1
 Operator: HEI
 Comment: Channel high
 Comment2: -
 EUT Setup: 1
 Verdict: Passed

EUT Information

PMT number: 21-1-01440S05_C01

Full Spectrum

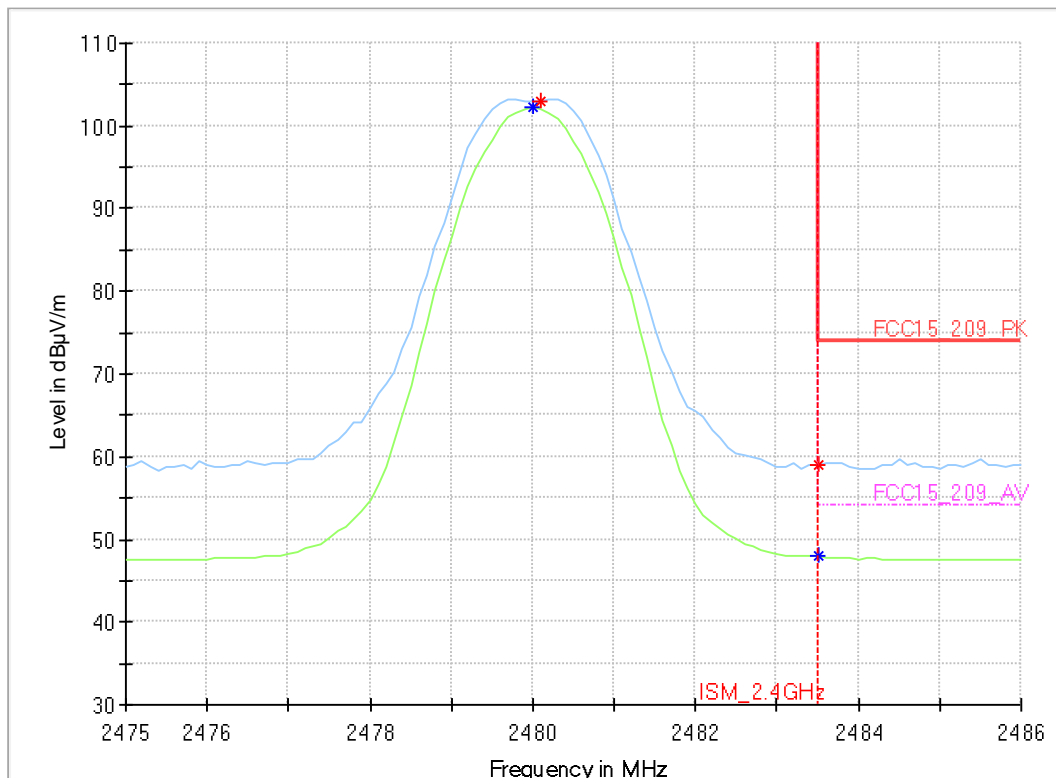

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	RMS (dBµV/m)	Limit (dBµV/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
2480.000000	---	102.18	150.00	47.82	---	---	155.0	H	344.0	0.0
2480.100000	103.04	---	150.00	46.96	---	---	155.0	H	344.0	0.0
2483.500000	---	47.95	54.00	6.05	---	---	155.0	H	344.0	0.0
2483.500000	59.05	---	74.00	14.95	---	---	155.0	V	313.0	90.0

1.2 Conducted measurements

RF output power

Mode	DUT Frequency	Gated RMS	Limit Max (dBm)	Gated EIRP	DutyCycle (%)	Result
BT-5 [1Mbps]; 2402MHz	2402.0000	5.5	30.0	5.5	100.000	PASS
BT-5 [1Mbps]; 2440MHz	2440.0000	5.3	30.0	5.3	100.000	PASS
BT-5 [1Mbps]; 2480MHz	2480.0000	5.0	30.0	5.0	100.000	PASS

Peak output power (Sweep)

Mode	DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
BT-5 [1Mbps]; 2402MHz	2402.000000	6.5	30.0	PASS
BT-5 [1Mbps]; 2440MHz	2440.000000	6.4	30.0	PASS
BT-5 [1Mbps]; 2480MHz	2480.000000	6.0	30.0	PASS

Minimum Emission Bandwidth 6 dB

Mode	DUT Frequency	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left	Band Edge Right
BT-5 [1Mbps]; 2402MHz	2402.0000	0.732674	0.500000	---	2401.6237	2402.3564
BT-5 [1Mbps]; 2440MHz	2440.0000	0.732674	0.500000	---	2439.6237	2440.3564
BT-5 [1Mbps]; 2480MHz	2480.0000	0.752476	0.500000	---	2479.6039	2480.3564

Peak Power Spectral Density

Mode	DUT Frequency	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
BT-5 [1Mbps]; 2402MHz	2402.000000	2401.732500	1.846	8.0	PASS
BT-5 [1Mbps]; 2440MHz	2440.000000	2439.732500	1.947	8.0	PASS
BT-5 [1Mbps]; 2480MHz	2480.000000	2479.727500	1.429	8.0	PASS

Occupied Channel Bandwidth 99%

Mode	DUT Frequency	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left	Band Edge Right
BT-5 [1Mbps]; 2402MHz	2402.0000	1.040000	---	---	2401.4575	2402.4975
BT-5 [1Mbps]; 2440MHz	2440.0000	1.050000	---	---	2439.4525	2440.5025
BT-5 [1Mbps]; 2480MHz	2480.0000	1.065000	---	---	2479.4425	2480.5075

Tx Spurious Emission

Mode	DUT Frequency (MHz)	Result
BT-5 [1Mbps]; 2402MHz	2402.000000	PASS
BT-5 [1Mbps]; 2440MHz	2440.000000	PASS
BT-5 [1Mbps]; 2480MHz	2480.000000	PASS


RF output power (2402 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2402.000000	5.5	30.0	5.5	100.000	PASS

Gated Trace

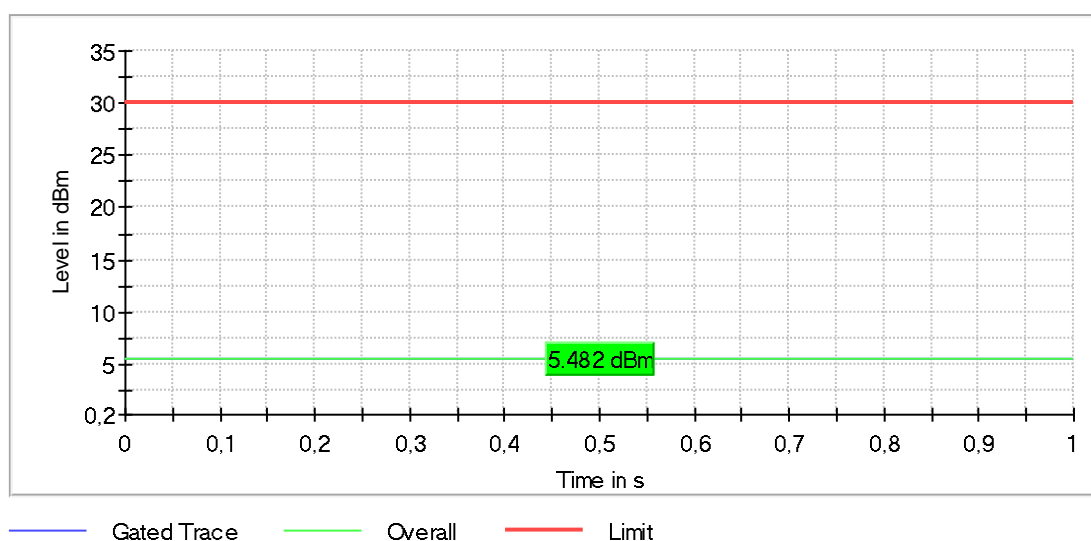

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (2440 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2440.000000	5.3	30.0	5.3	100.000	PASS

Gated Trace

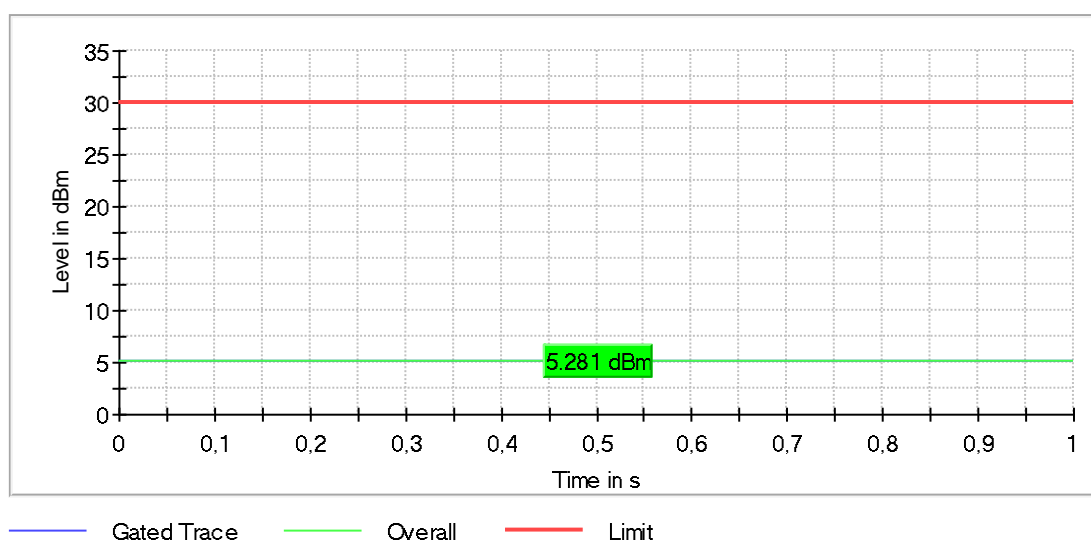

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μs	1.000 μs


RF output power (2480 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2480.000000	5.0	30.0	5.0	100.000	PASS

Gated Trace

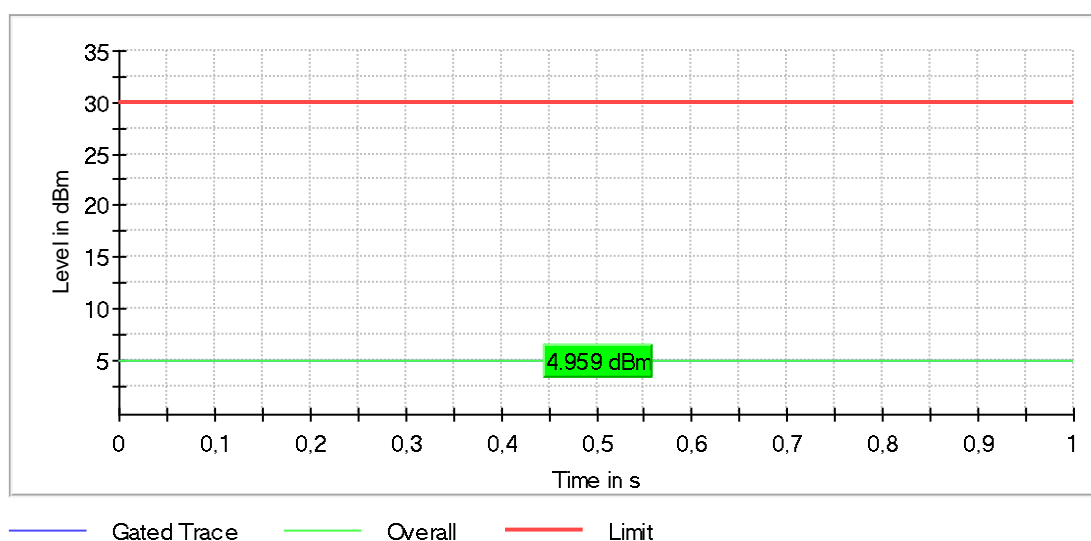

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

Peak output power (Sweep) (2402 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	6.5	30.0	PASS

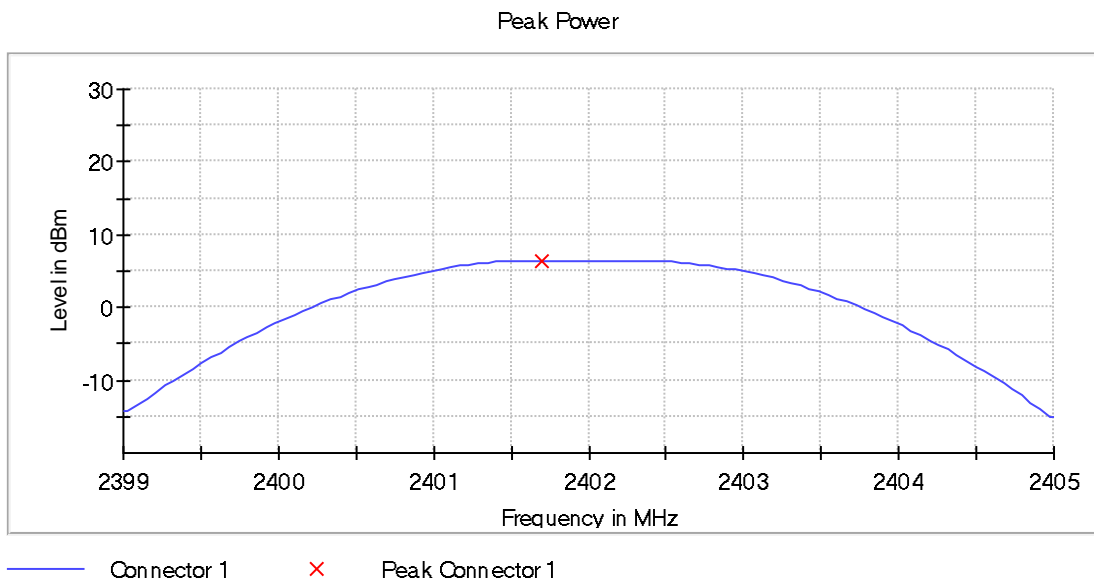

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39900 GHz	2.39900 GHz
Stop Frequency	2.40500 GHz	2.40500 GHz
Span	6.000 MHz	6.000 MHz
RBW	2.000 MHz	>= 1.000 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.01 dB	0.50 dB


Peak output power (Sweep) (2440 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2440.000000	6.4	30.0	PASS

Peak Power

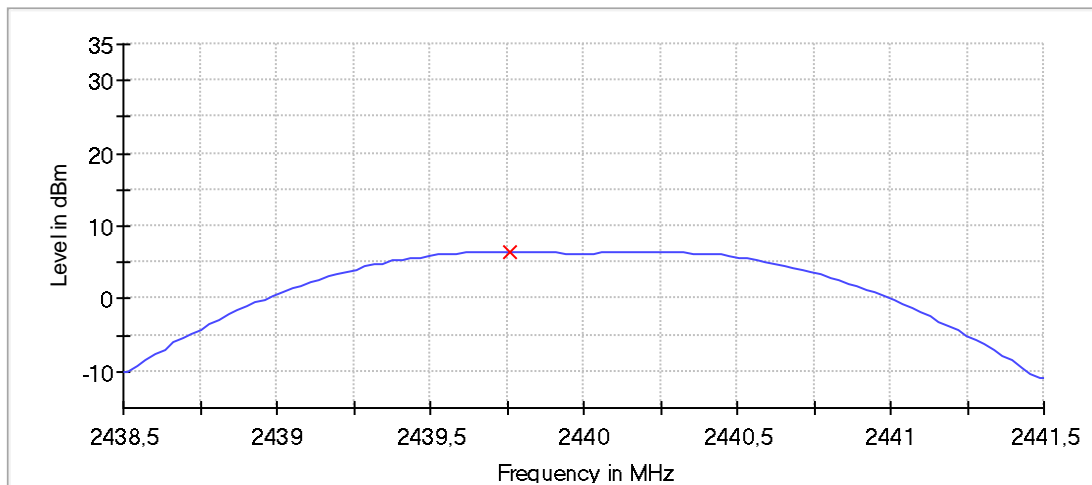

— Connector 1 × Peak Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43850 GHz	2.43850 GHz
Stop Frequency	2.44150 GHz	2.44150 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 732.675 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.50 dB


Peak output power (Sweep) (2480 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2480.000000	6.0	30.0	PASS

Peak Power

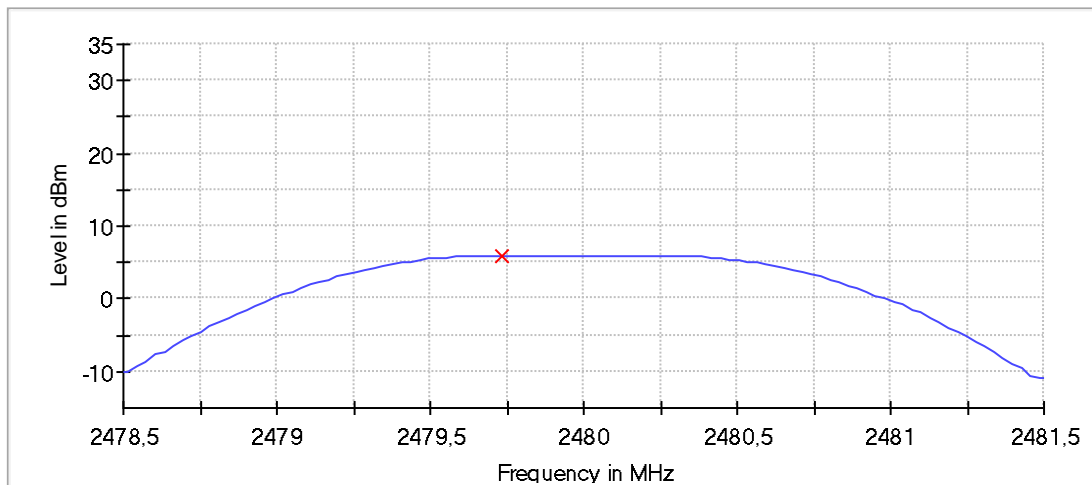

— Connector 1 × Peak Connector 1

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47850 GHz	2.47850 GHz
Stop Frequency	2.48150 GHz	2.48150 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 732.675 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2402 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.732674	0.500000	---	2401.623762	2402.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	6.3	PASS

6 dB Bandwidth

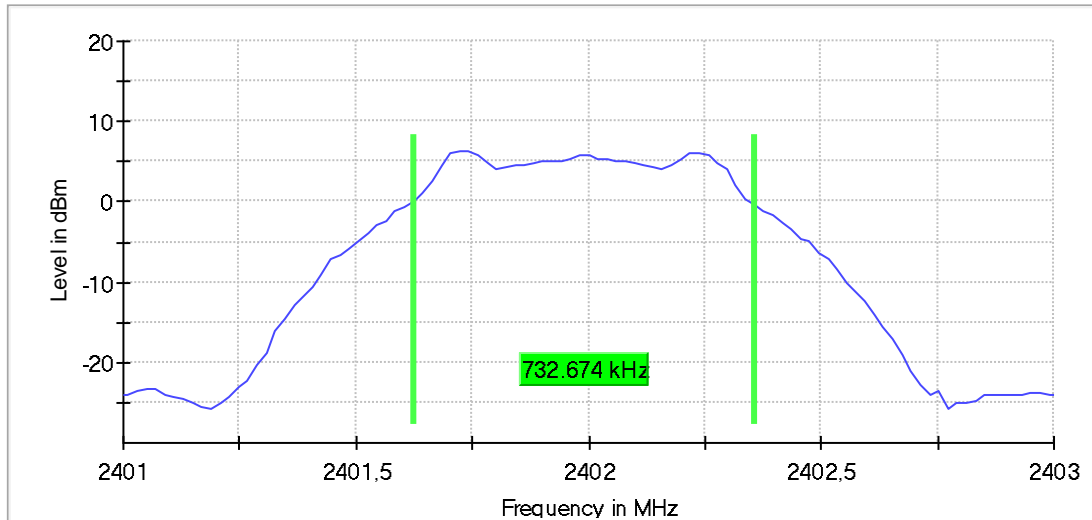

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.41 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2440 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.732674	0.500000	---	2439.623762	2440.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	6.2	PASS

6 dB Bandwidth

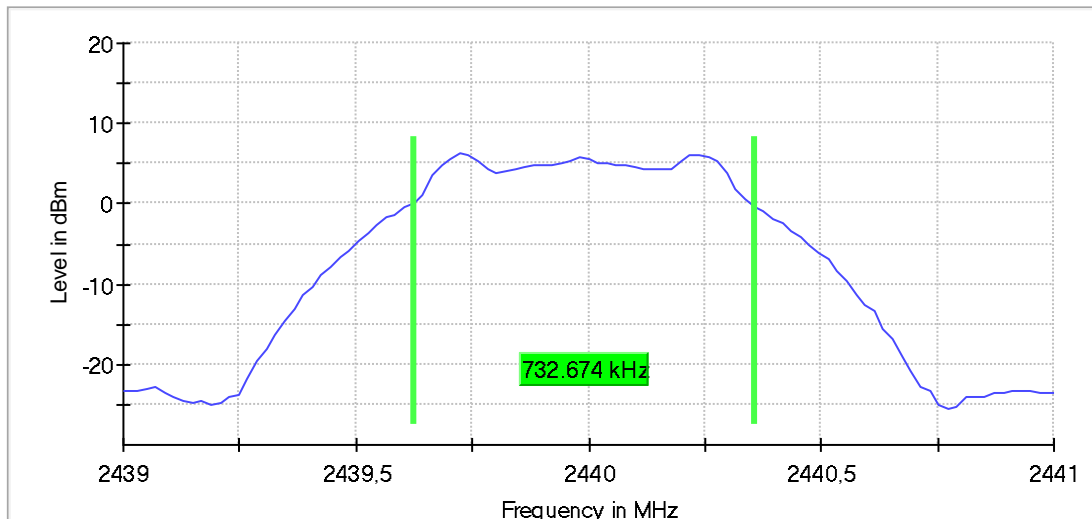

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.03 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2480 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.752476	0.500000	---	2479.603960	2480.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	5.7	PASS

6 dB Bandwidth

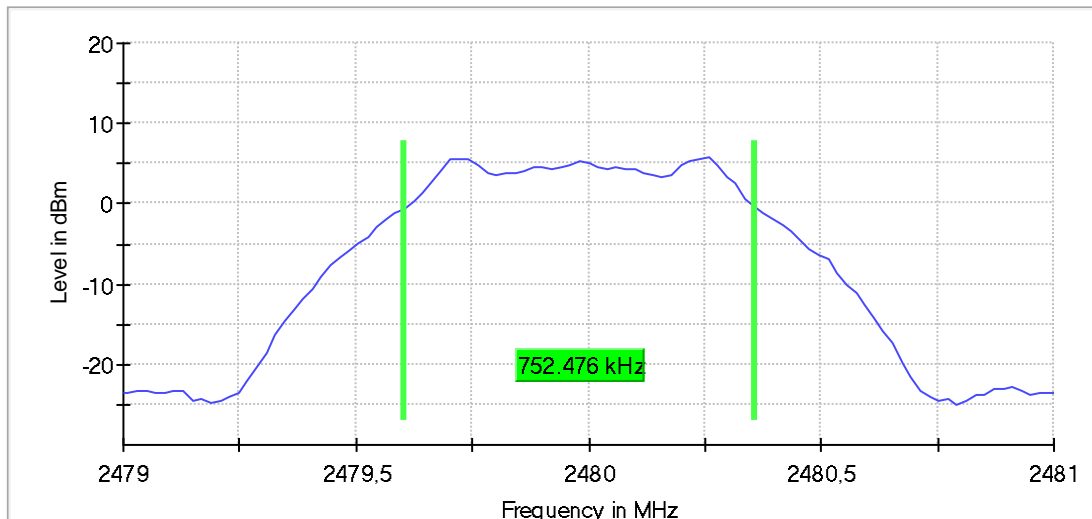

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.07 dB	0.50 dB


Peak Power Spectral Density (2402 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2402.000000	2401.732500	1.846	8.0	PASS

Peak Power Spectral Density

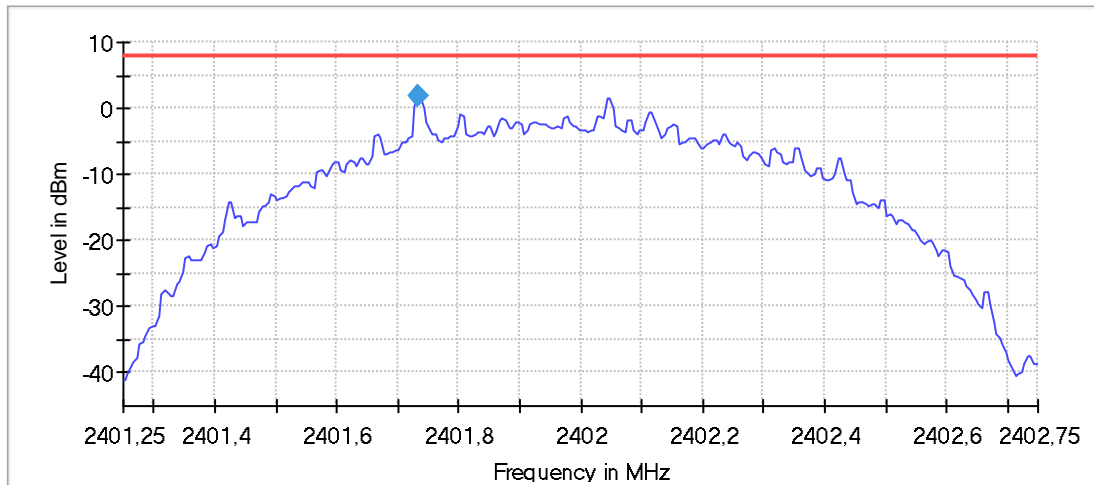

— Limit — Sum Level ◆ PSD

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40125 GHz	2.40125 GHz
Stop Frequency	2.40275 GHz	2.40275 GHz
Span	1.500 MHz	1.500 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	300	~ 300
SweepTime	1.500 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	20 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.31 dB	0.50 dB


Peak Power Spectral Density (2440 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2440.000000	2439.732500	1.947	8.0	PASS

Peak Power Spectral Density

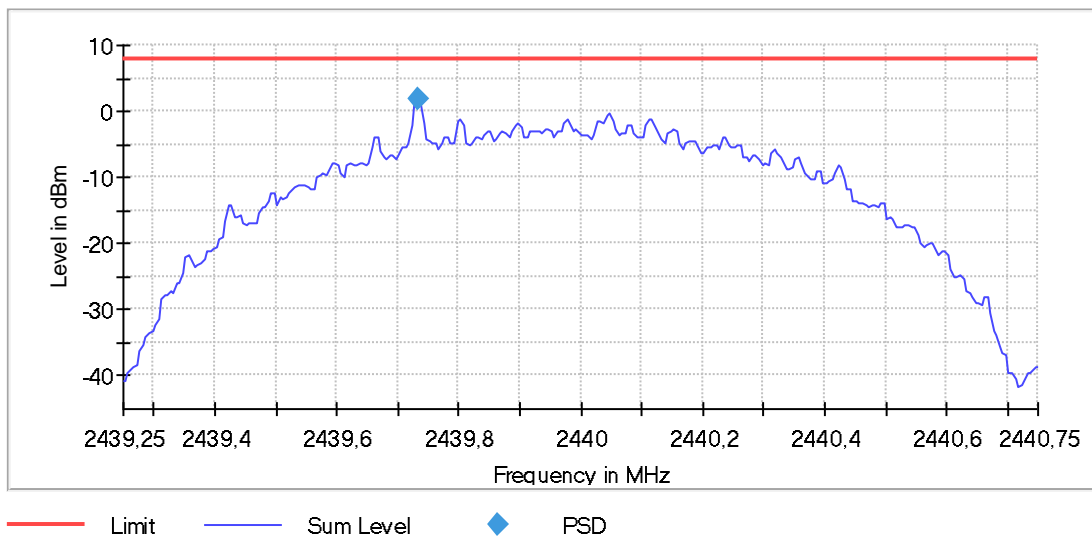

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43925 GHz	2.43925 GHz
Stop Frequency	2.44075 GHz	2.44075 GHz
Span	1.500 MHz	1.500 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	300	~ 300
SweepTime	1.500 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.43 dB	0.50 dB


Peak Power Spectral Density (2480 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2480.000000	2479.727500	1.429	8.0	PASS

Peak Power Spectral Density

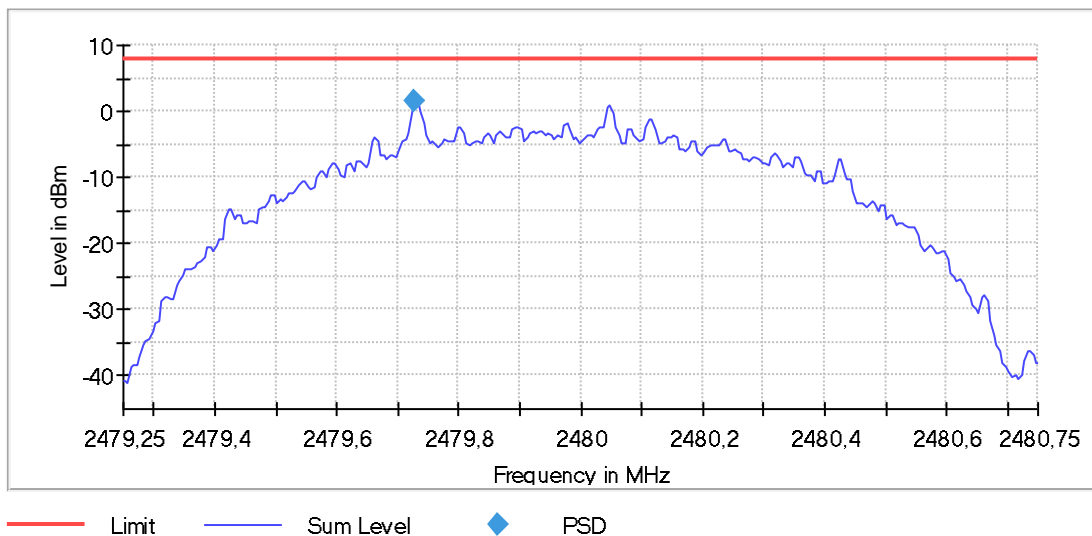

— Limit — Sum Level ◆ PSD

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47925 GHz	2.47925 GHz
Stop Frequency	2.48075 GHz	2.48075 GHz
Span	1.500 MHz	1.500 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	300	~ 300
SweepTime	1.500 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	21 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.33 dB	0.50 dB

Occupied Channel Bandwidth 99% (2402 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.040000	---	---	2401.457500	2402.497500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

99 % Bandwidth

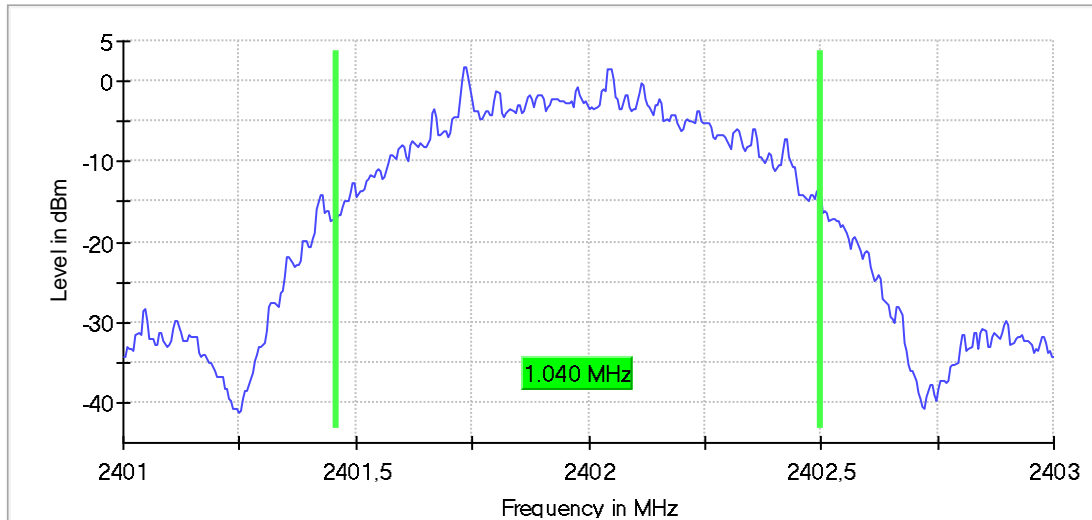

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	2.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	33 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.17 dB	0.30 dB

Occupied Channel Bandwidth 99% (2440 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.050000	---	---	2439.452500	2440.502500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

99 % Bandwidth

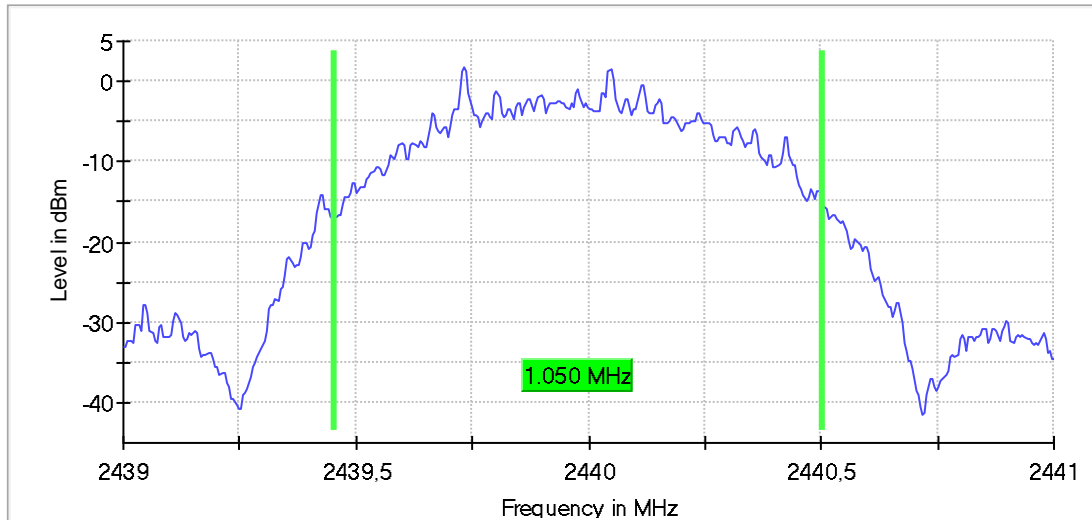

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	2.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	34 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.30 dB

Occupied Channel Bandwidth 99% (2480 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.065000	---	---	2479.442500	2480.507500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth

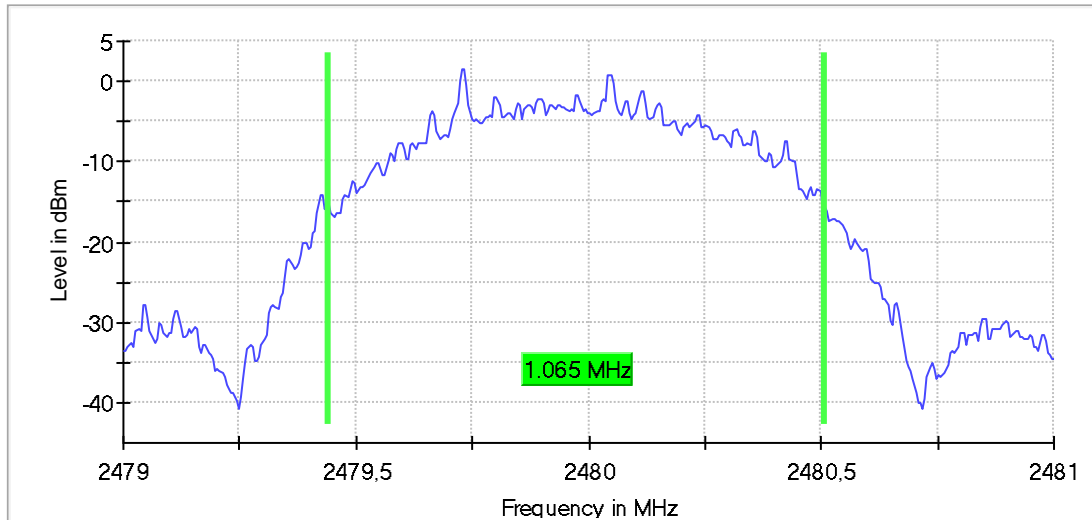

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	2.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	49 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.30 dB

Tx Spurious Emission (2402 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
2402.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
2399.958664	2.7	-52.7	-27.2	25.6	PASS


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2395.021008	4.7	-31.9	-27.2
4807.166065	-49.1	21.9	-27.2
9604.412133	-52.3	25.1	-27.2
12013.029431	-54.7	27.6	-27.2
293.886555	-57.8	30.6	-27.2
2385.063025	-61.3	34.2	-27.2
592.626050	-64.0	36.8	-27.2
2375.105042	-64.1	36.9	-27.2
443.256303	-64.2	37.1	-27.2
2096.281513	-65.9	38.7	-27.2
2365.147059	-66.4	39.2	-27.2
2345.231092	-67.4	40.2	-27.2
14411.652465	-67.8	40.6	-27.2
2146.071429	-67.9	40.7	-27.2
383.508403	-68.1	40.9	-27.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	2400.000000	1	1
2400.000000	2483.500000	1	1
2483.500000	26000.000000	1	1

Spurious

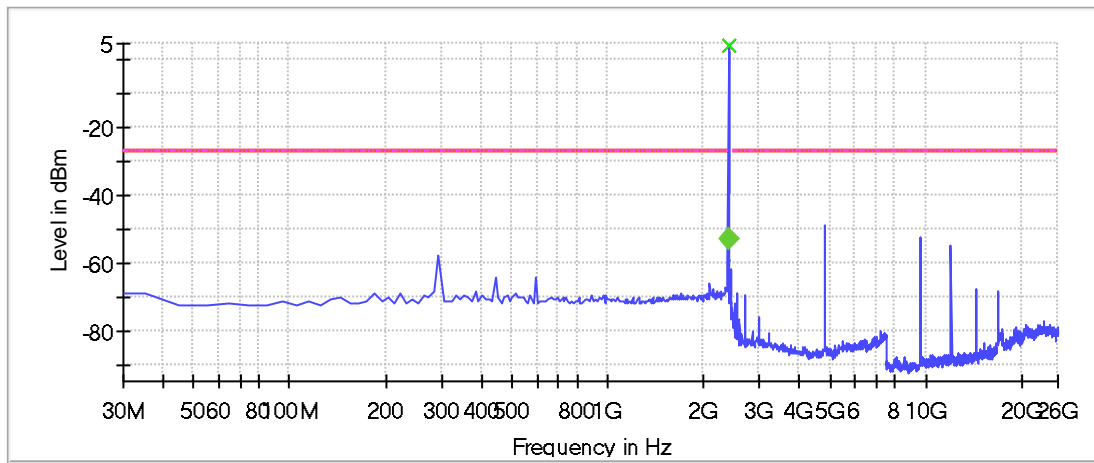


Gain

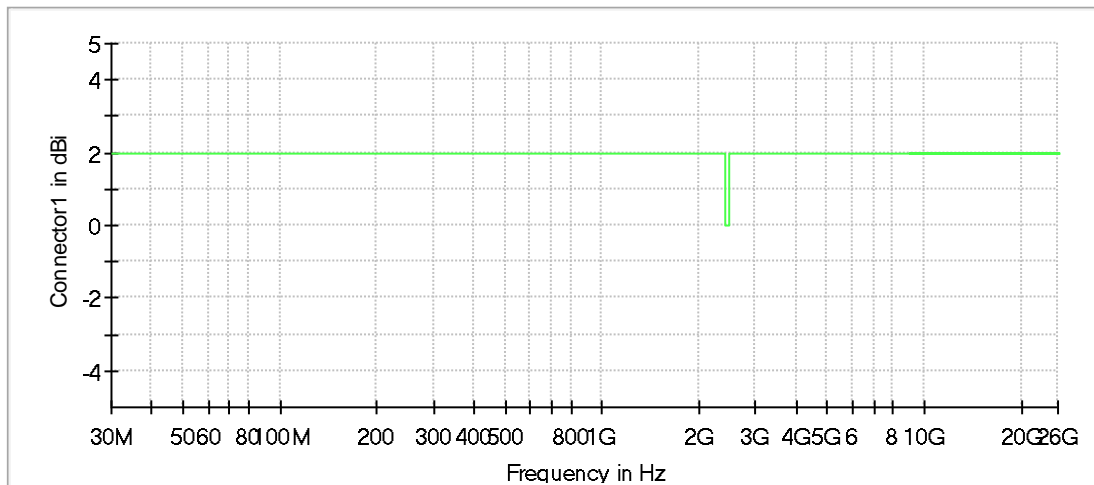


Connector1

Attenuation

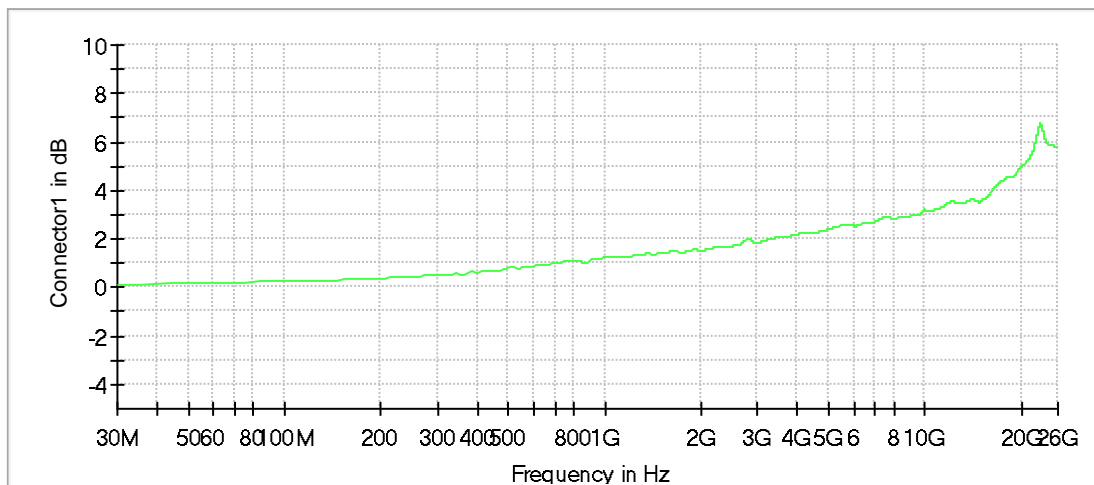

Connector1

FinalMeas_2395021008Hz

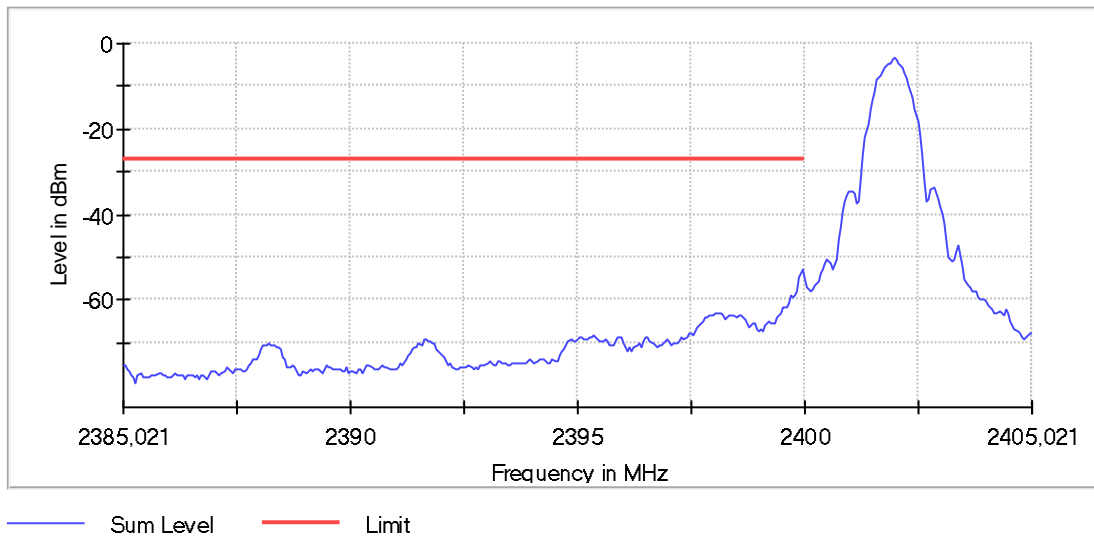

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-10.000 dBm	-30.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Final Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	401	~ 401
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	Sample	Sample
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Linear	Average Linear
SweepType	Sweep	AUTO
Preamp	off	off

Tx Spurious Emission (2440 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
2440.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4877.125903	-47.9	20.5	-27.5
9754.326073	-51.2	23.8	-27.5
9764.320336	-52.3	24.9	-27.5
12202.920421	-53.0	25.6	-27.5
303.844538	-56.3	28.8	-27.5
453.214286	-64.0	36.5	-27.5
602.584034	-65.4	38.0	-27.5
2126.155462	-67.8	40.4	-27.5
14641.520506	-67.9	40.4	-27.5
403.424370	-69.2	41.7	-27.5
2588.439758	-69.2	41.7	-27.5
911.281513	-69.6	42.2	-27.5
144.516807	-69.7	42.3	-27.5
283.928571	-70.0	42.5	-27.5
224.180672	-70.3	42.8	-27.5

Measurement Settings


Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	2400.000000	1	1
2400.000000	2483.500000	1	1
2483.500000	26000.000000	1	1

Spurious

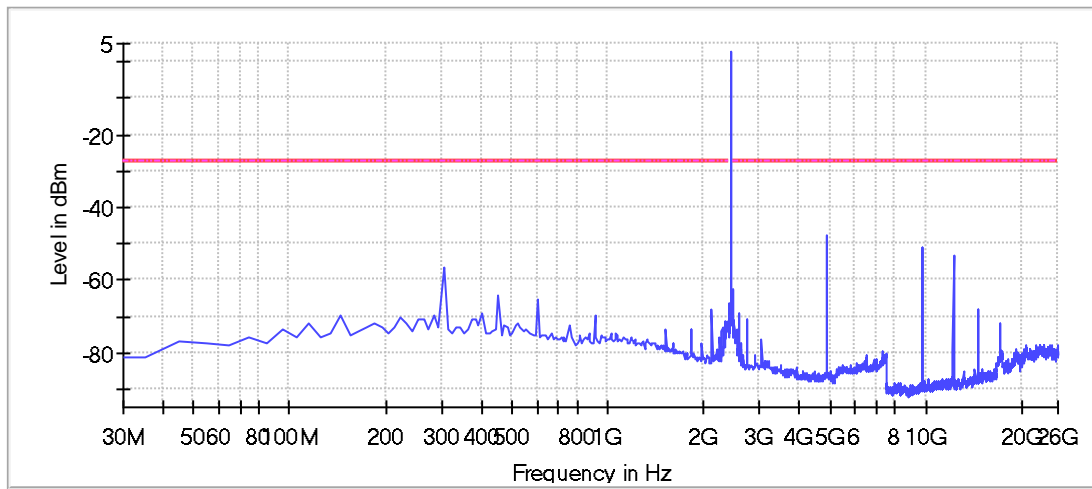


— Limit — Sum Level — Threshold × Critical × Final Critical

Gain

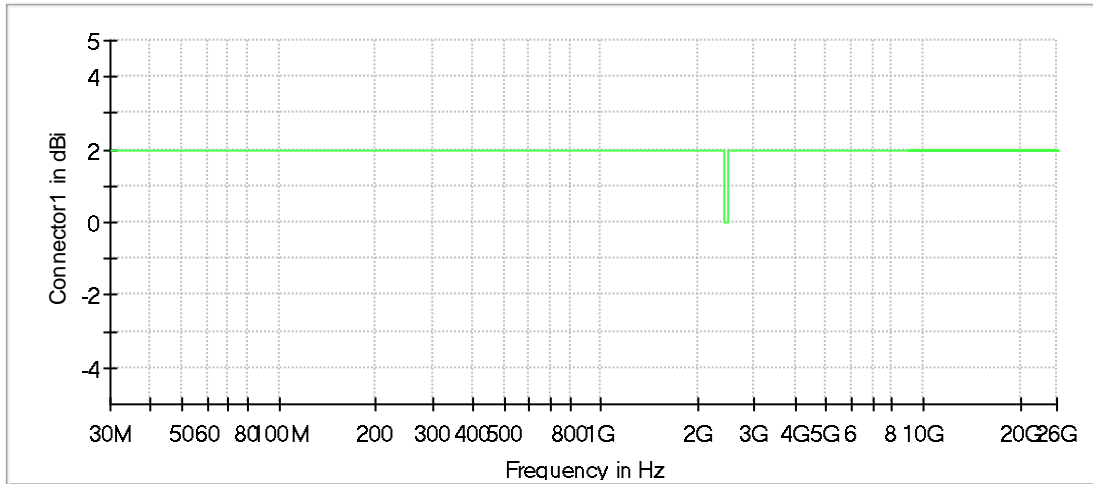

Connector1

Attenuation

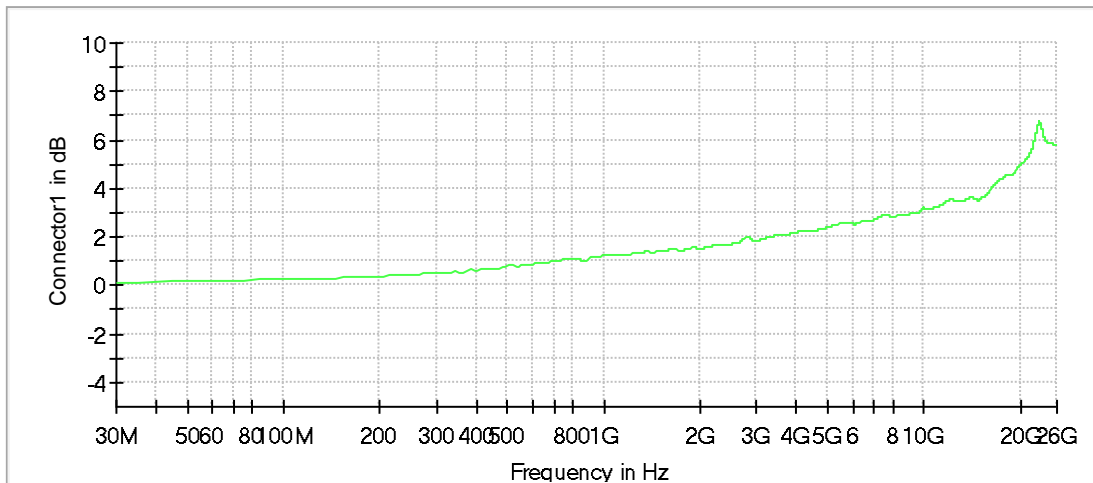

Connector1

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Tx Spurious Emission (2480 MHz; BT-5 [1Mbps] (0 dBm); 1 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
2480.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4957.080004	-50.6	22.4	-28.2
9924.228538	-52.1	23.9	-28.2
9914.234275	-52.2	23.9	-28.2
303.844538	-55.5	27.3	-28.2
24935.611028	-57.0	28.7	-28.2
23406.488844	-57.2	29.0	-28.2
22946.752762	-57.3	29.1	-28.2
20558.123991	-57.4	29.2	-28.2
20548.129728	-57.6	29.4	-28.2
23446.465895	-57.7	29.5	-28.2
23106.660965	-57.7	29.5	-28.2
20518.146940	-57.9	29.7	-28.2
23456.460157	-57.9	29.7	-28.2
20488.164152	-57.9	29.7	-28.2
24635.783149	-57.9	29.7	-28.2

Measurement Settings


Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	2400.000000	1	1
2400.000000	2483.500000	1	1
2483.500000	26000.000000	1	1

Spurious

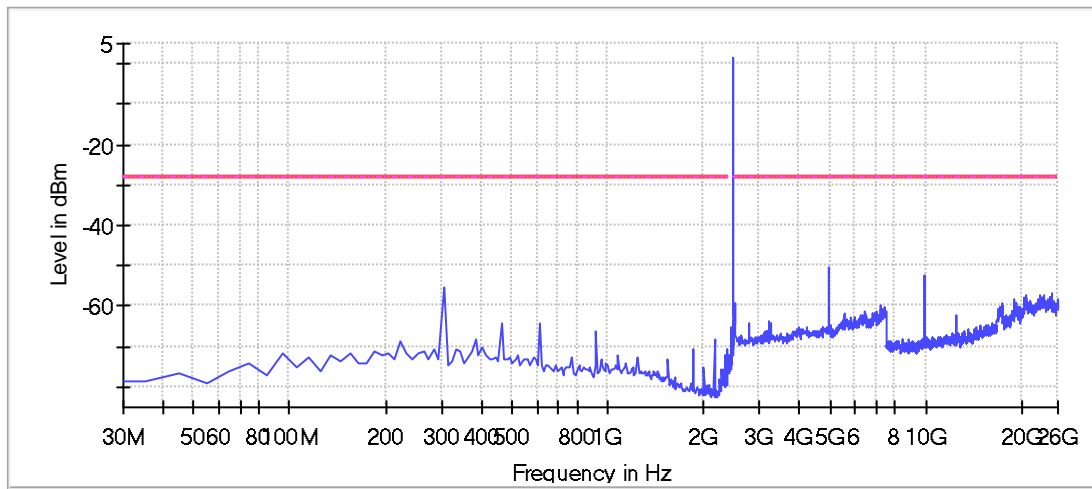


— Limit — Sum Level - - - Threshold × Critical × Final Critical

Gain

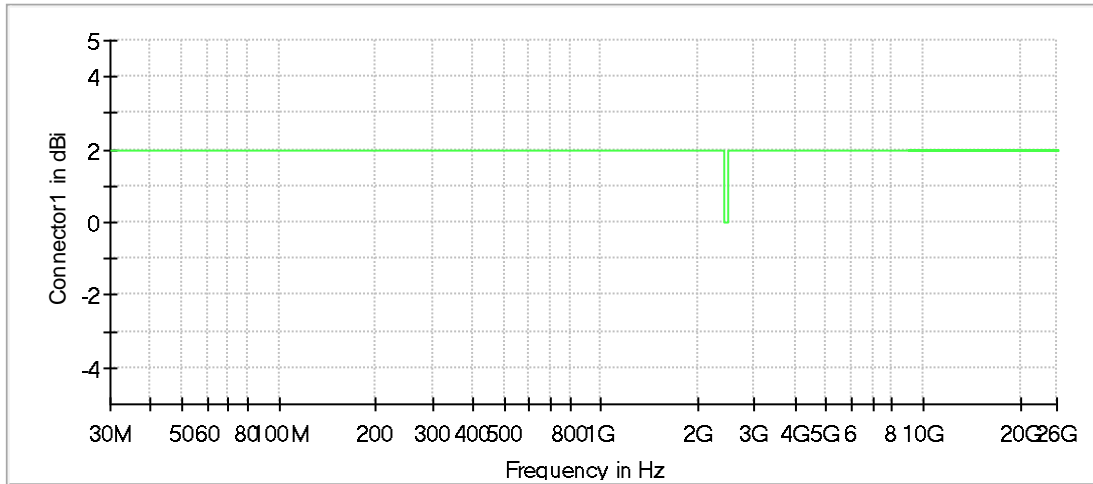

Connector1

Attenuation

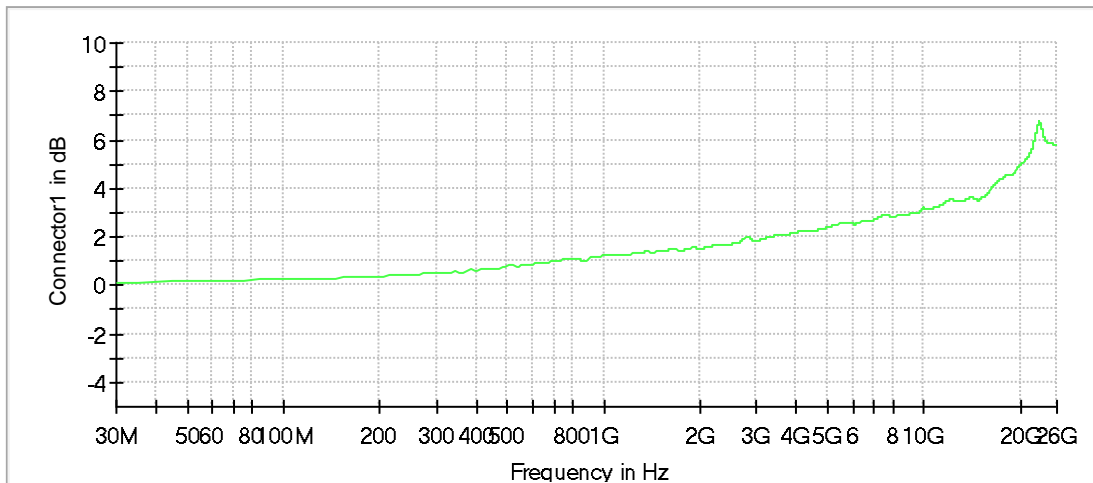

Connector1

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

End Of Annex 1