



FCC RADIO TEST REPORT

FCC ID : ZAT-2651R3SIPA
Equipment : CC2651R3SIPA SimpleLink™ Multiprotocol 2.4-GHz Wireless System-in-Package Module with Integrated Antenna & 352-KB Memory
Brand Name : Texas Instruments
Model Name : CC2651R3SIPAT0MOUR
Marketing Name : CC2651R3SIPA SimpleLink™ Multiprotocol 2.4-GHz Wireless System-in-Package Module with Integrated Antenna & 352-KB Memory
Applicant : Texas Instruments Incorporated
12500 TI BLVD., Dallas, Texas, 75243
Manufacturer : Texas Instruments Incorporated
12500 TI BLVD., Dallas, Texas, 75243
Standard : FCC Part 15 Subpart C §15.247

The product was received on Apr. 26, 2022 and testing was performed from May 02, 2022 to Jun. 13, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	17
3.3 Power Spectral Density Measurement	18
3.4 Conducted Band Edges and Spurious Emission Measurement	23
3.5 Radiated Band Edges and Spurious Emission Measurement	28
3.6 AC Conducted Emission Measurement.....	33
3.7 Antenna Requirements	35
4 List of Measuring Equipment	36
5 Uncertainty of Evaluation.....	38
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Conducted Spurious Emission	
Appendix D. Conducted Spurious Emission Plots	
Appendix E. Radiated Spurious Emission	
Appendix F. Radiated Spurious Emission Plots	
Appendix G. Duty Cycle Plots	
Appendix H. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	0.41 dB under the limit at 2483.480 MHz
3.6	15.207	AC Conducted Emission	Pass	7.09 dB under the limit at 0.152 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Danny Lee

Report Producer: Vivian Hsu



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth LE (125 kbps, 500 kbps, 1Mbps, 2Mbps) and Zigbee (OQPSK DSSS1:8, 250 kbps)

Antenna Information				
	Brand	Antenna Type	Model	2.4 GHz Gain
1	Texas Instruments	Inverted F - PCB	Custom Antenna	3.3 dBi
2		CC2651R3SIPA integrated antenna – PCB	Custom Antenna	1.5 dBi
3	Ethertronics	Dipole	1000423	-0.6dBi
4	LSR	Rubber Whip / Dipole	001-0012	2dBi
5			080-0013	2dBi
6			080-0014	2dBi
7		PIFA	001-0016	2.5dBi
8			001-0021	2.5dBi
9		Laird	PCB	CAF94504
10	CAF9405			2dBi
11	Pulse	Ceramic Chip	W3006	3.2dBi
12	ACX	Multilayer Chip	AT3216-BR2R7HAA	0.5dBi
13			AT312-T2R4PAA	1.5dBi
14	TDK	Multilayer Ceramic Chip Antenna	ANT016008LCD2442MA1	1.6dBi
15			ANT016008LCD2442MA2	2.5dBi
16	Mitsubishi	Chip Antenna	AM03DP-ST01	1.6dBi
17	Material	Antenna Unit	UB18CP-100ST01	-1.0dBi
18	Taiyo Yuden	Chip Antenna / Helical Monopole	AF216M245001	1.5dBi
19		Chip Antenna / Monopole Type	AH212M245001	1.3dBi
20			AH316M245001	1.9dBi
21	Antenna Technology	Dipole	AA2402SPU	2.0dBi
22			AA2402RSPU	2.0dBi
23			AA2402A-UFLLP	2.0dBi
24			AA2402AU-UFLLP	2.0dBi



Antenna Information				
	Brand	Antenna Type	Model	2.4 GHz Gain
25	Staf	Mono-pole	1019-016	2.14dBi
26			1019-017	2.14dBi
27			1019-018	2.14dBi
28			1019-019	2.14dBi
29	Map Electronics	Rubber Whip	MEIWX-2411SAXX-2400	2.0dBi
30			MEIWX-2411RSXX-2400	2.0dBi
31			MEIWX-282XSAXX-2400	2.0dBi
32			MEIWX-282XRSXX-2400	2.0dBi
33			MEIWF-HP01RS2X-2400	2.0dBi
34	Yageo	Chip	ANT3216A063R2400A	1.69dBi
35	Mag Layers	Chip	LTA-3216-2G4S3-A1	1dBi
36	Scientific		LTA-3216-2G4S3-A3	2dBi
37	Advantech	Rubber Whip / Dipole	AN2450-5706RS	2.38dBi
38			R-AN2400-5701RS	3.3dBi

Remark:

1. The EUT uses the PCB antenna from Texas Instruments (Antenna #2).
2. The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH02-HY, CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz) radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	250kbps / O-QPSK
	Mode 1: Zigbee Tx CH11_2405 MHz
	Mode 2: Zigbee Tx CH18_2440 MHz
	Mode 3: Zigbee Tx CH26_2480 MHz
Radiated Test Cases	Mode 1: Zigbee Tx CH11_2405 MHz
	Mode 2: Zigbee Tx CH18_2440 MHz
	Mode 3: Zigbee Tx CH26_2480 MHz
AC Conducted Emission	Mode 1: Bluetooth - LE TX + USB Cable (Charging from Notebook)
	Mode 2: Zigbee TX + USB Cable (Charging from Notebook)
Remark: The worst case of conducted emission is mode 1; only the test data of it was reported.	

2.3 Connection Diagram of Test System

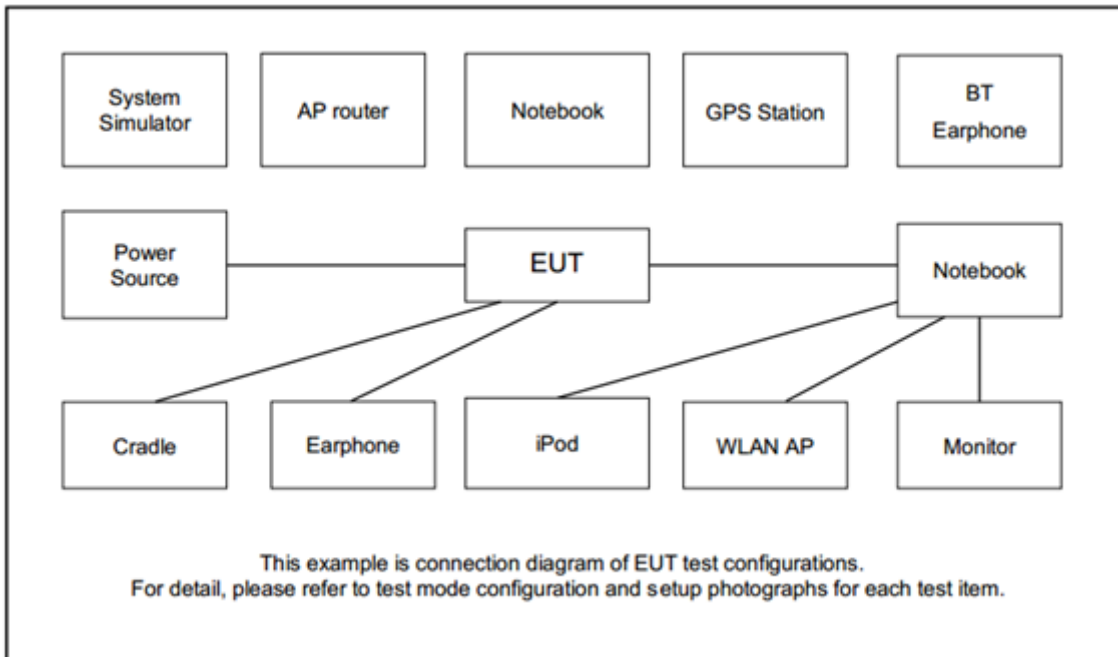

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	Unshielded, 1.0m	Unshielded, 1.8m
2.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0m	N/A
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Notebook	Dell	E3340	FCC DoC	Shielded, 0.3m	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

The RF test items, utility “SmartRF Studio 7 v2.25.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

<CH 11, CH 18 Setting 5, CH 26 Setting 1>

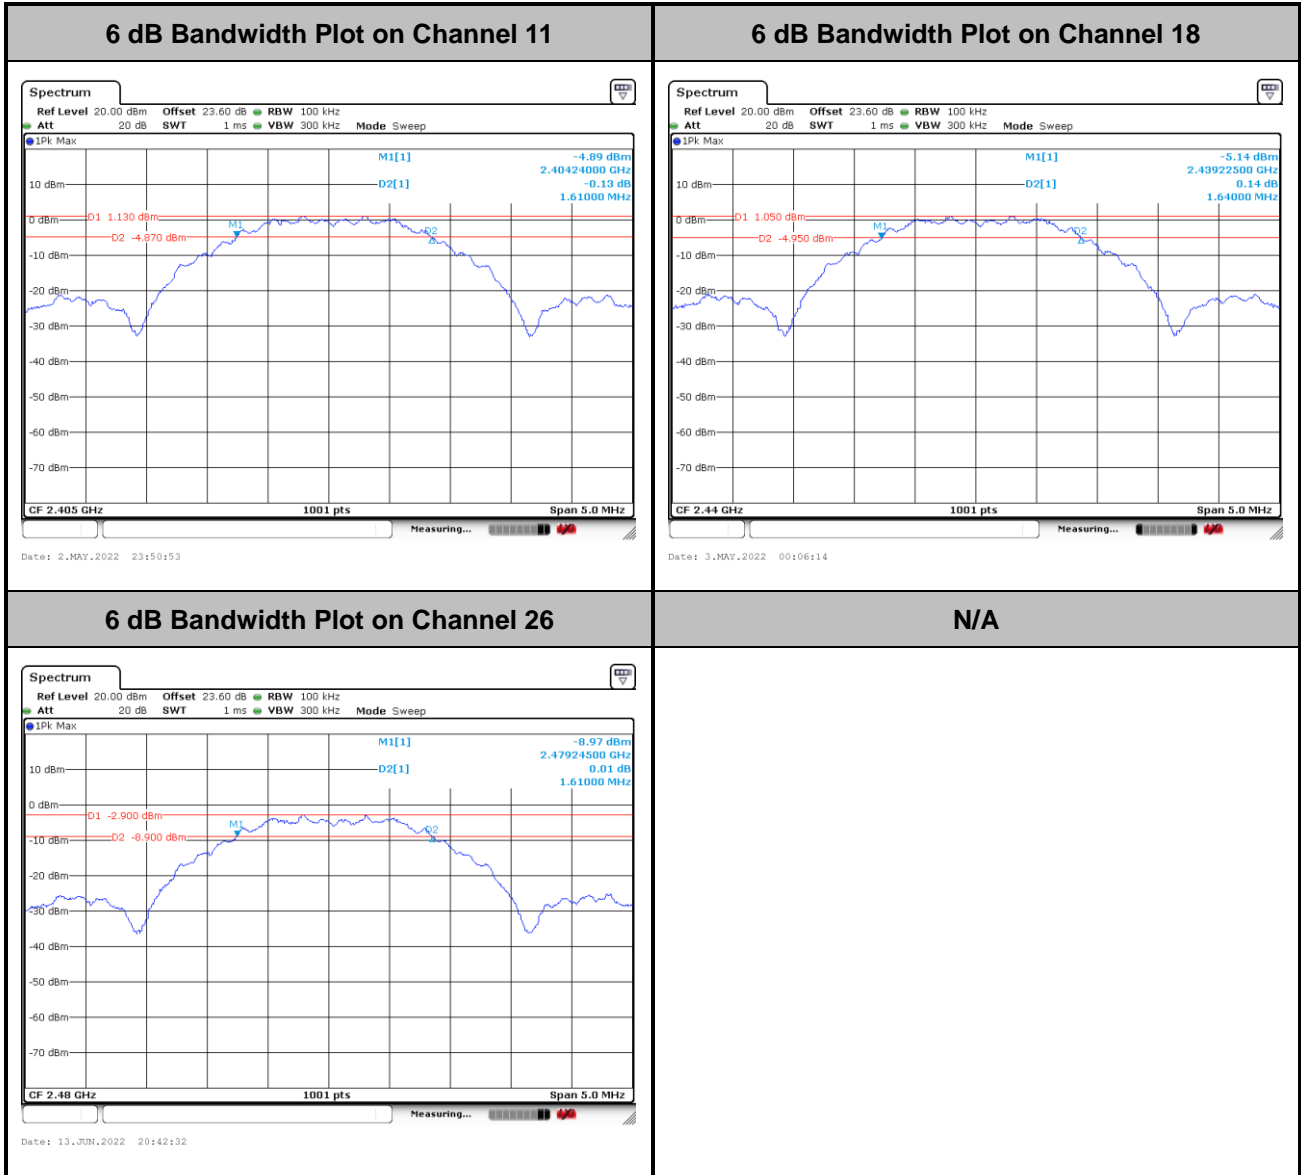



<CH 26 Setting 2>

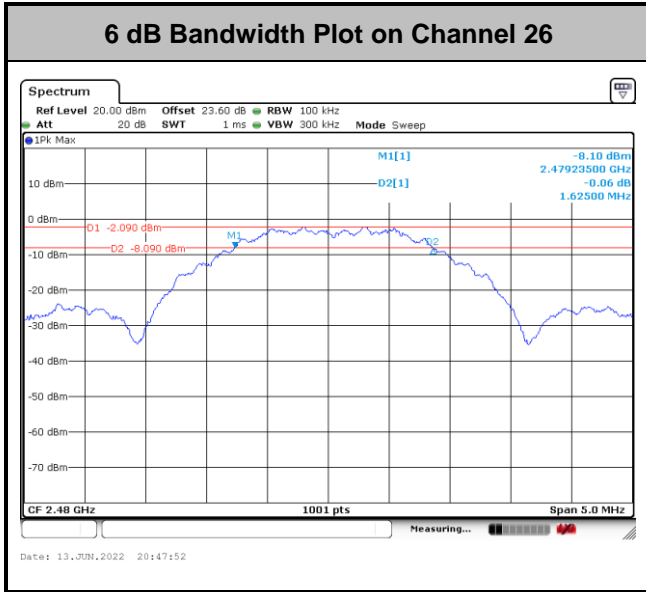




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<CH 11, CH 18 Setting 5, CH 26 Setting 1>

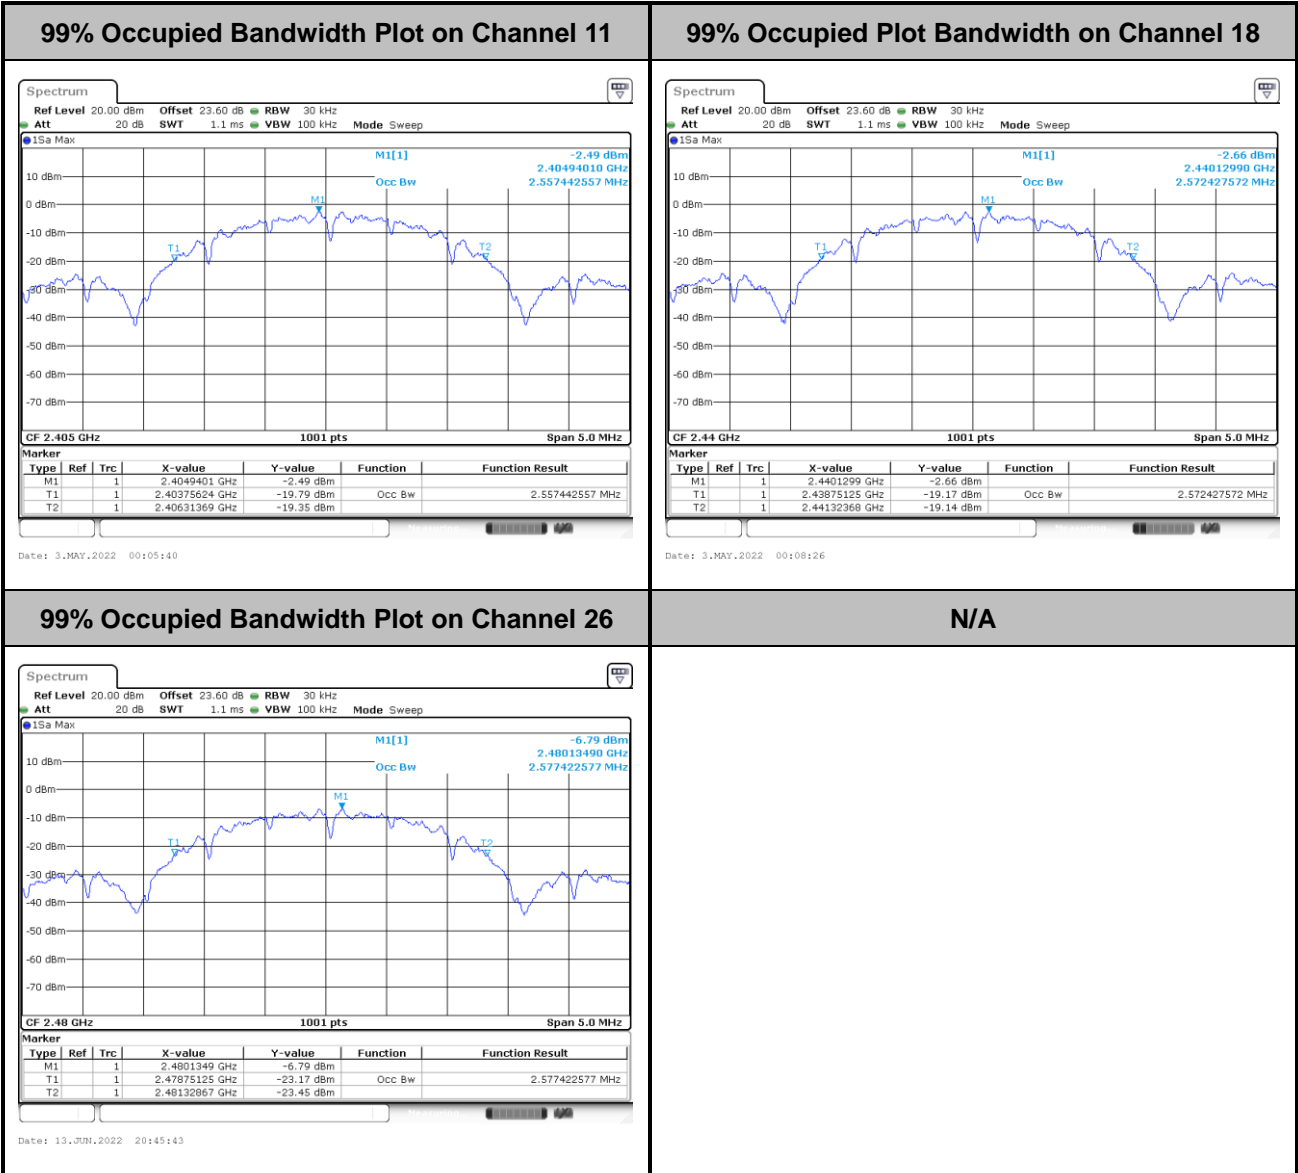

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<CH 26 Setting 2>

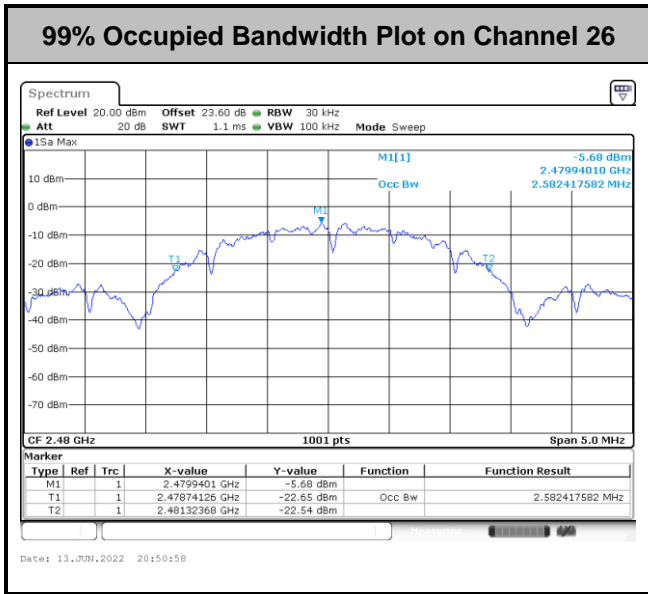

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

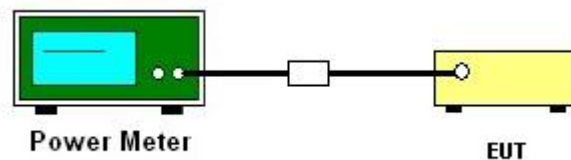

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

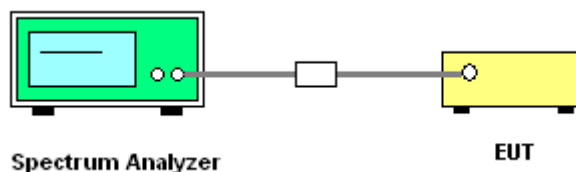


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<CH 11, CH 18 Setting 5, CH 26 Setting 1>

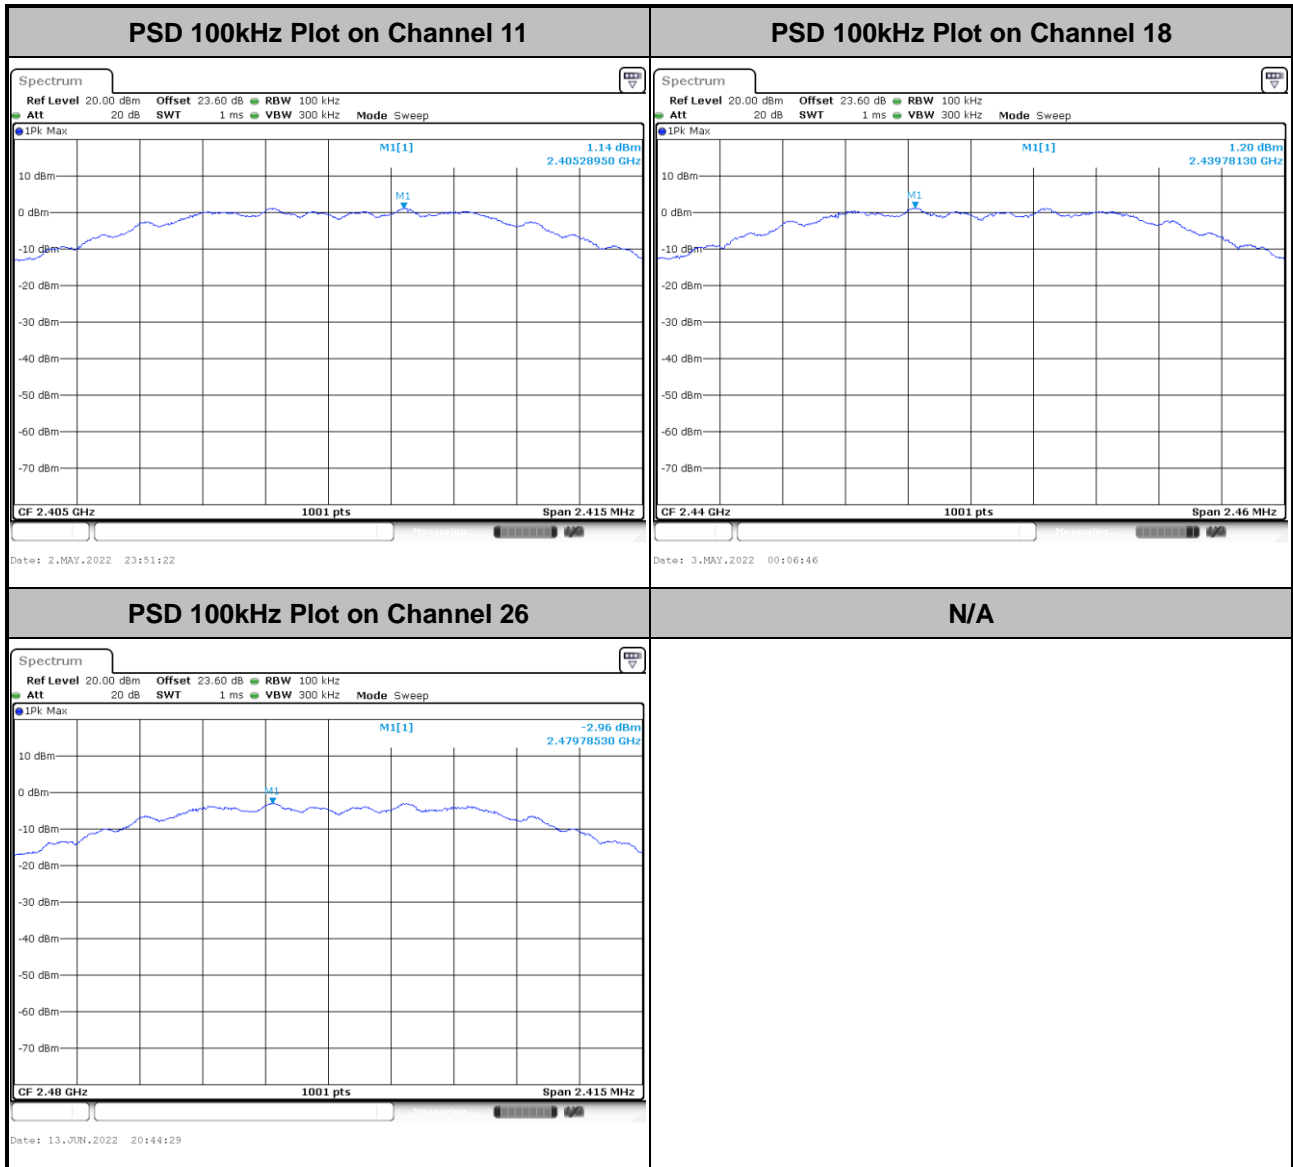




<CH 26 Setting 2>

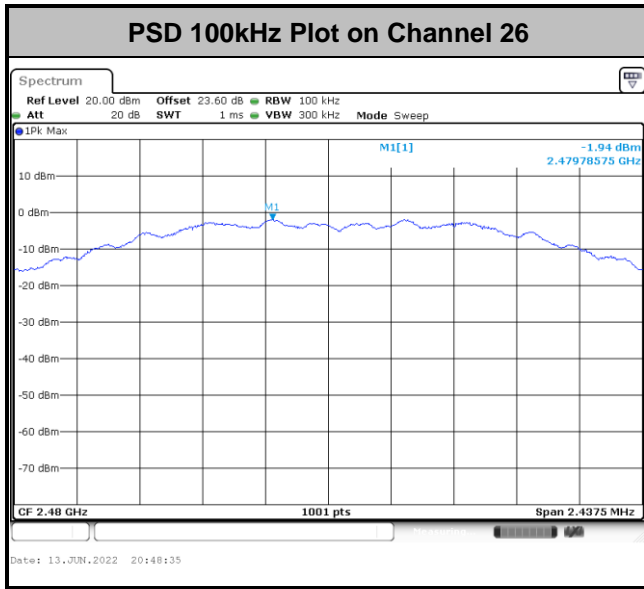




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<CH 11, CH 18 Setting 5, CH 26 Setting 1>

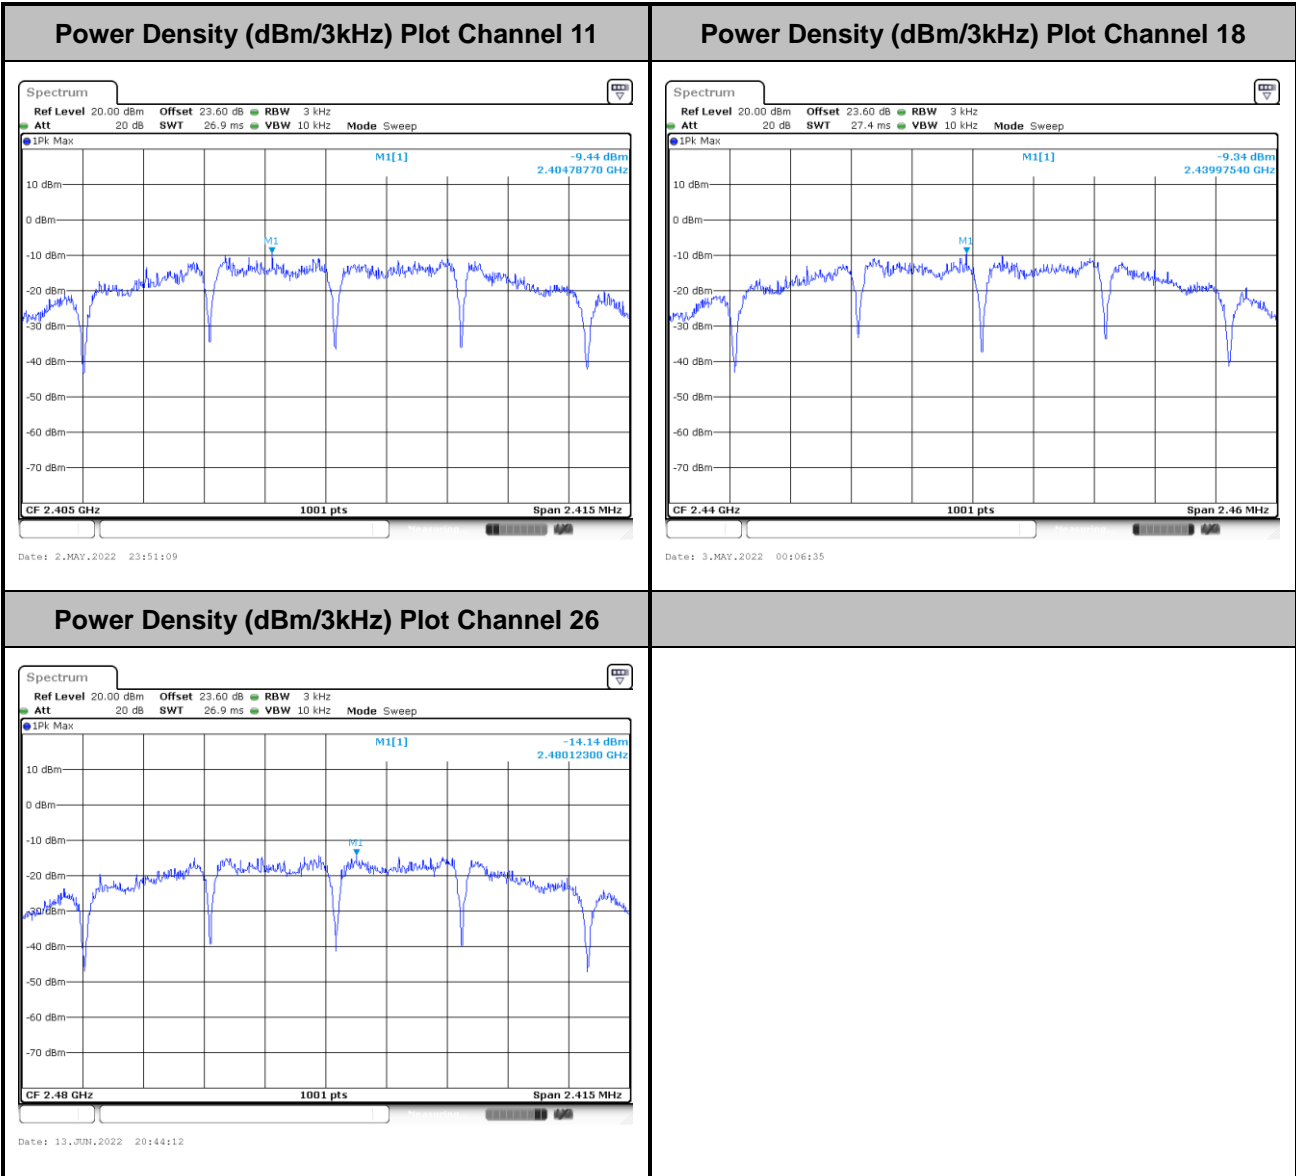



<CH26 Setting 2>

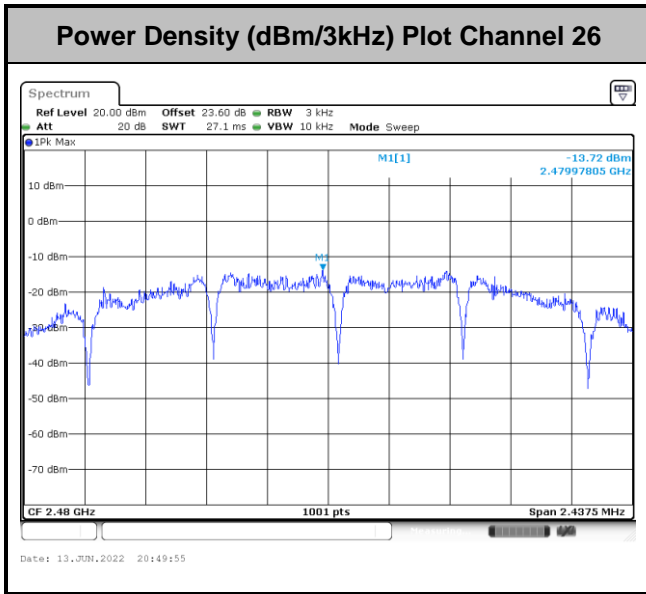

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

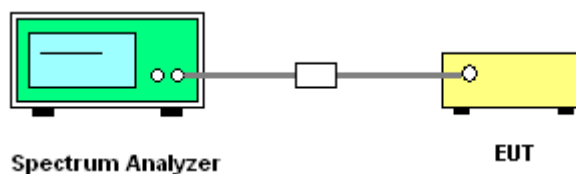




3.4.5 Test Result of Conducted Band Edges Plots

<CH 11, CH 18 Setting 5, CH 26 Setting 1>

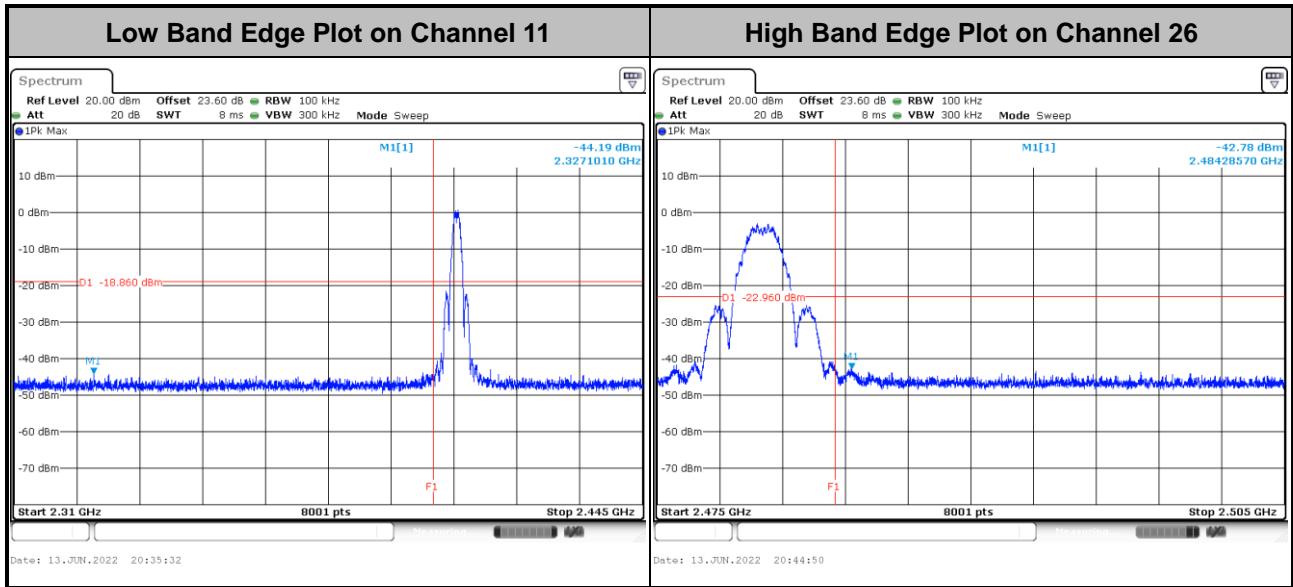


<CH 26 Setting 2>

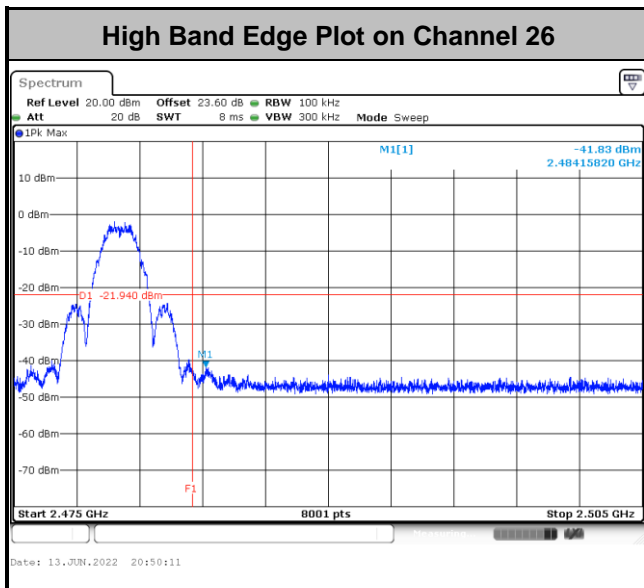




3.4.6 Test Result of Conducted Spurious Emission Plots


<CH 11, CH 18 Setting 5, CH 26 Setting 1>

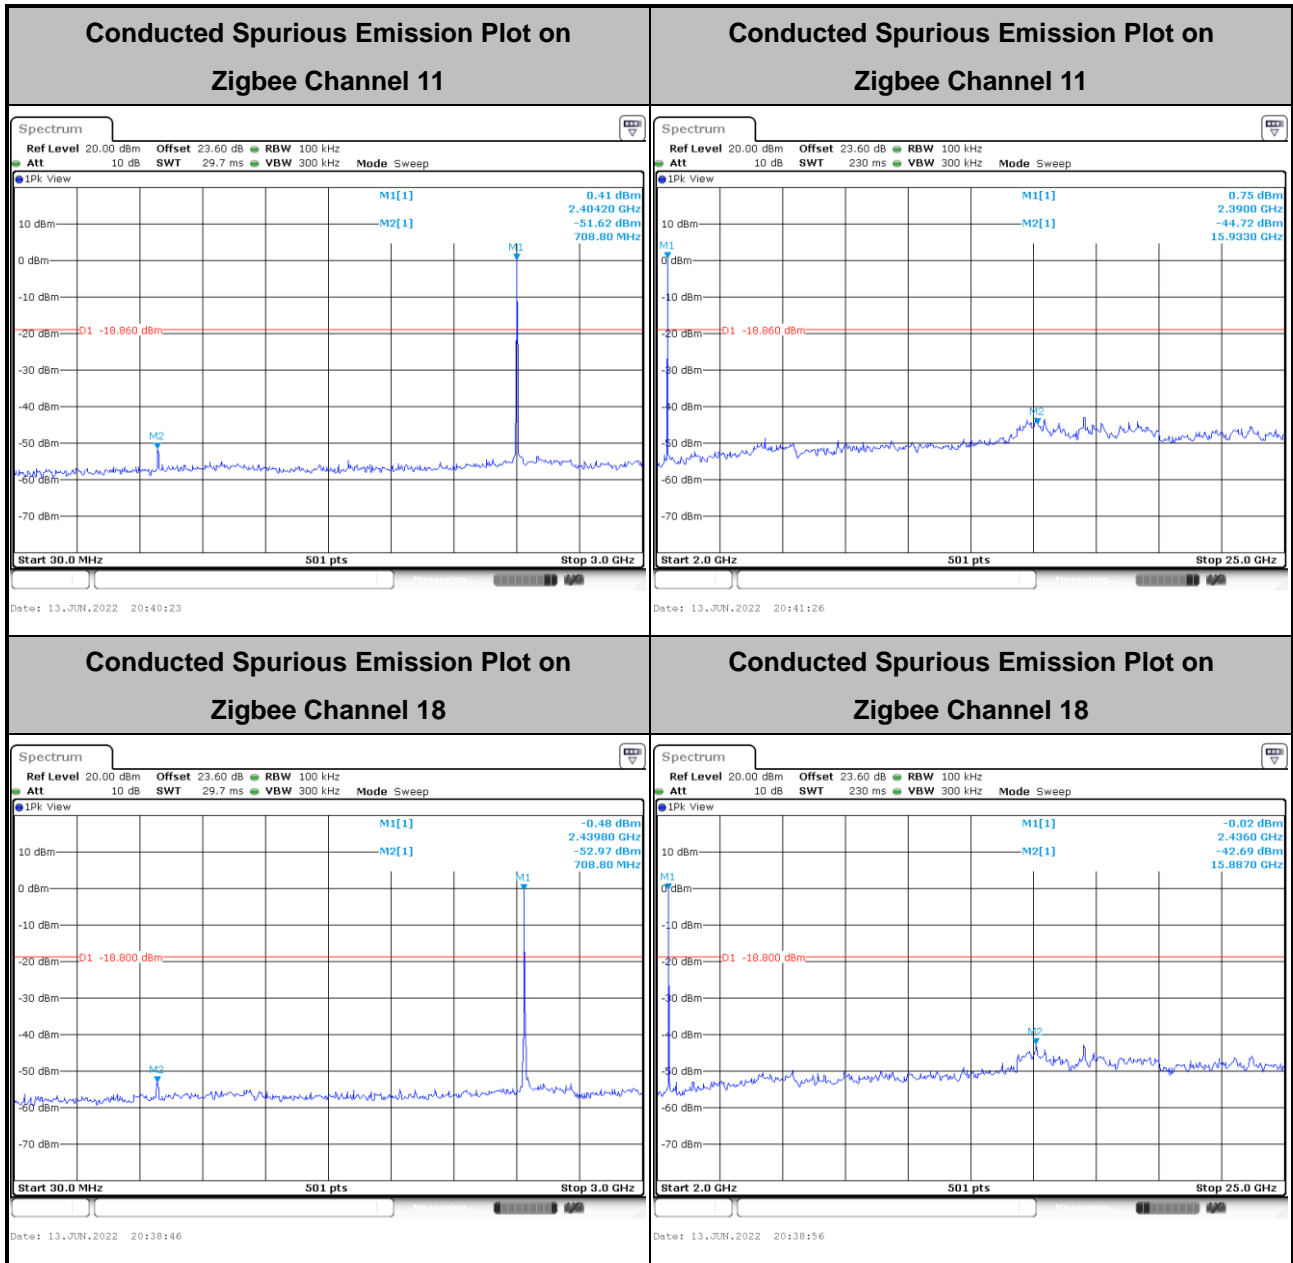

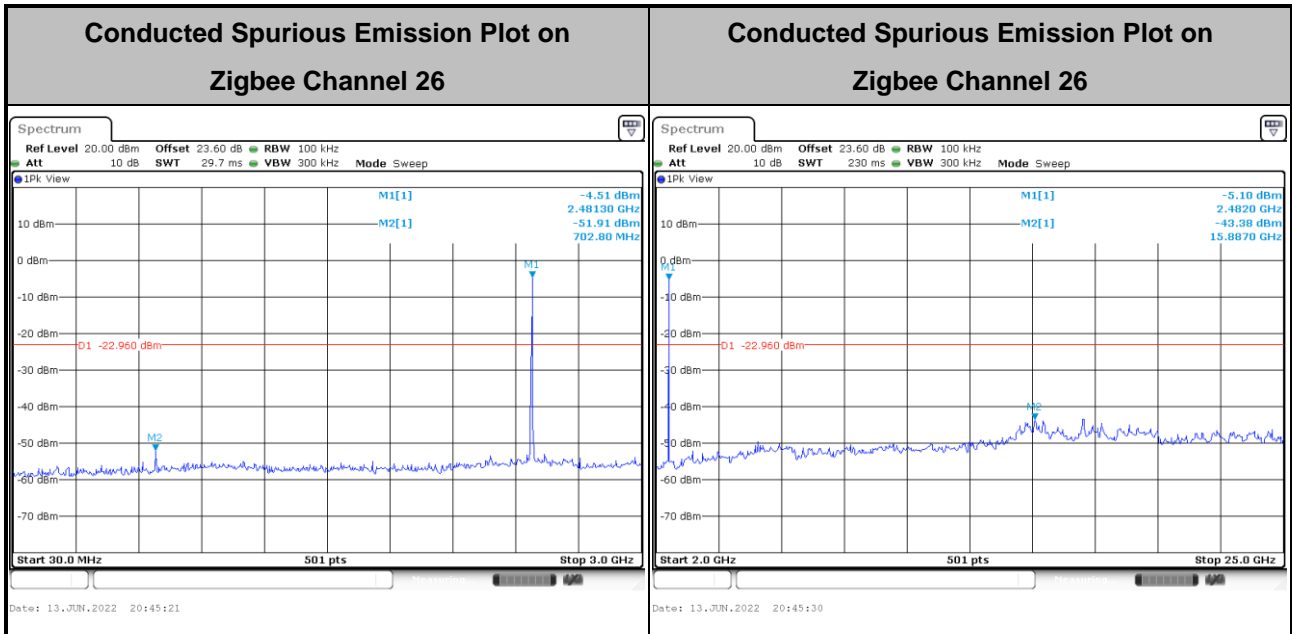



<CH 26 Setting >

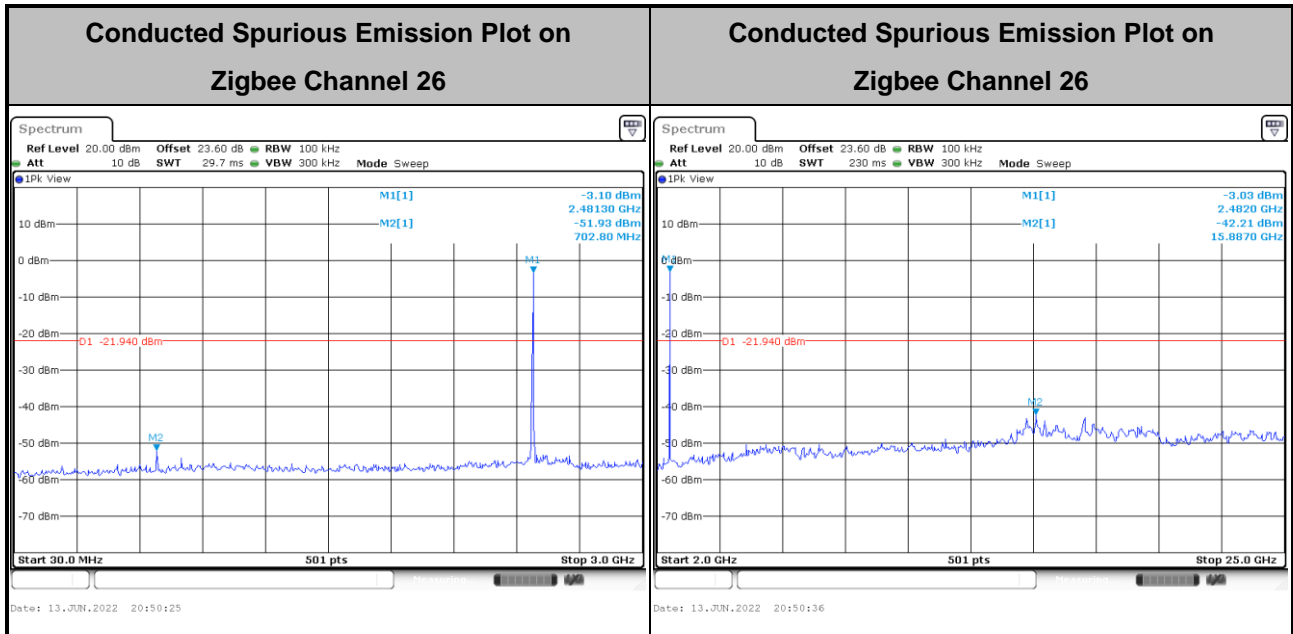



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.2 Antenna-port conducted measurements.
2. Measure the conducted output power (in dBm) using the peak detector.
3. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP.
4. Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies \leq 30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies $>$ 1000 MHz).
5. Convert the resultant EIRP to an equivalent electric field strength using the following relationship:
$$E = \text{EIRP} - 20 \log d + 104.8,$$
where
E is the electric field strength in dB μ V/m
EIRP is the equivalent isotropically radiated power in dBm
d is the specified measurement distance in 3m
6. Compare the resultant electric field strength level with the applicable regulatory limit.
7. Corrected Reading for conducted spurious emission: Antenna Factor + Cable Loss + Read Level = Level
8. Perform the cabinet radiated spurious emission test.
9. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
10. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
11. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
12. Corrected Reading for cabinet radiated spurious emission: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
13. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
14. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.


15. Use the following spectrum analyzer settings:
- (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
- For average measurement:
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For Conducted Measurement Setup:

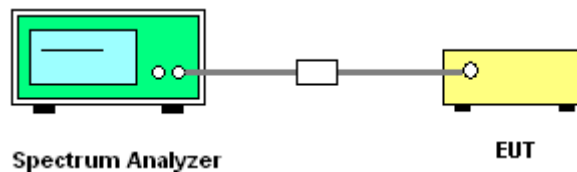


For radiated test below 30MHz

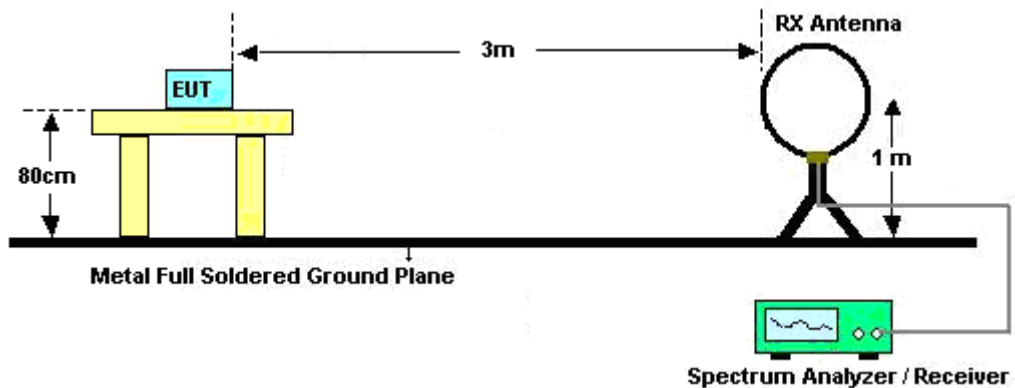


For radiated test from 30MHz to 1GHz

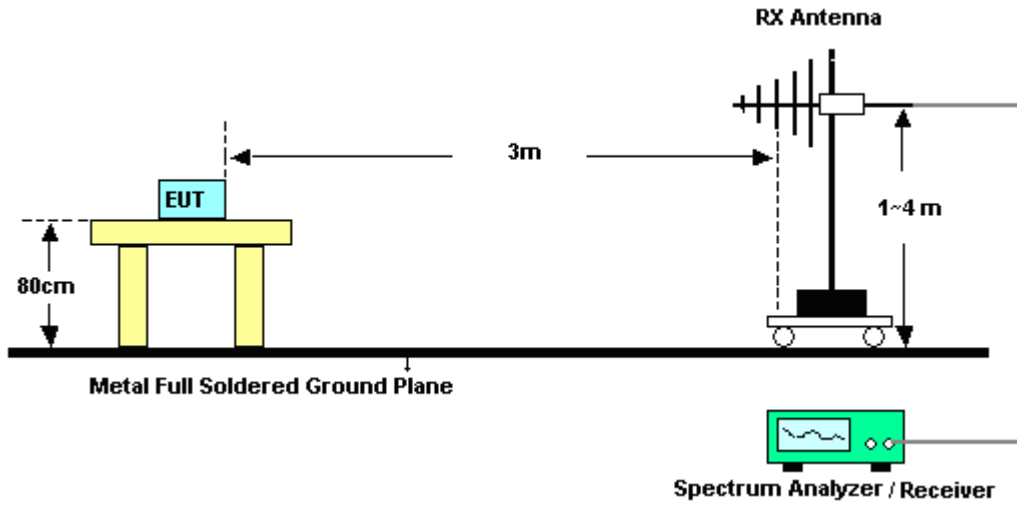

For radiated test from 1GHz to 18GHz

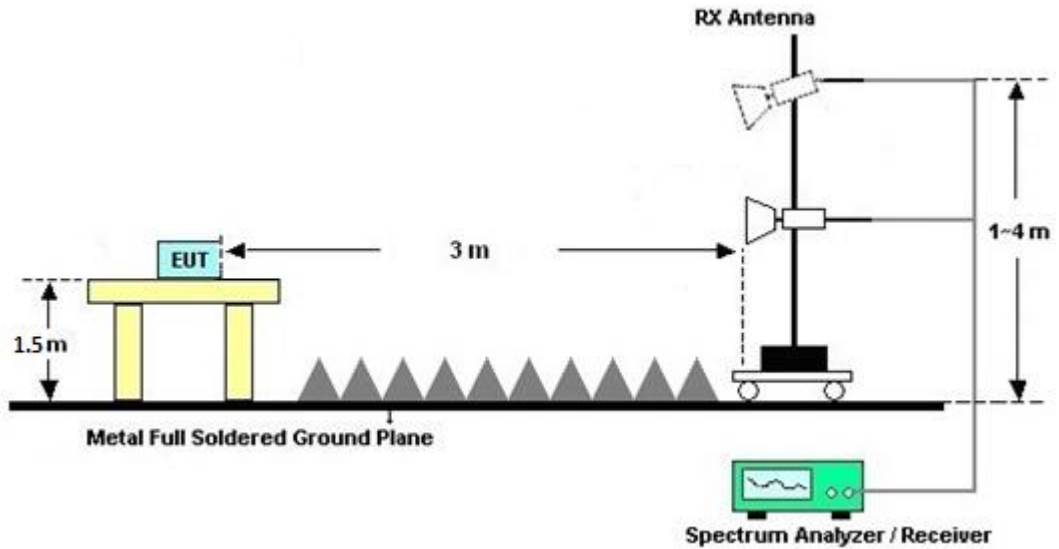

For radiated test above 18GHz

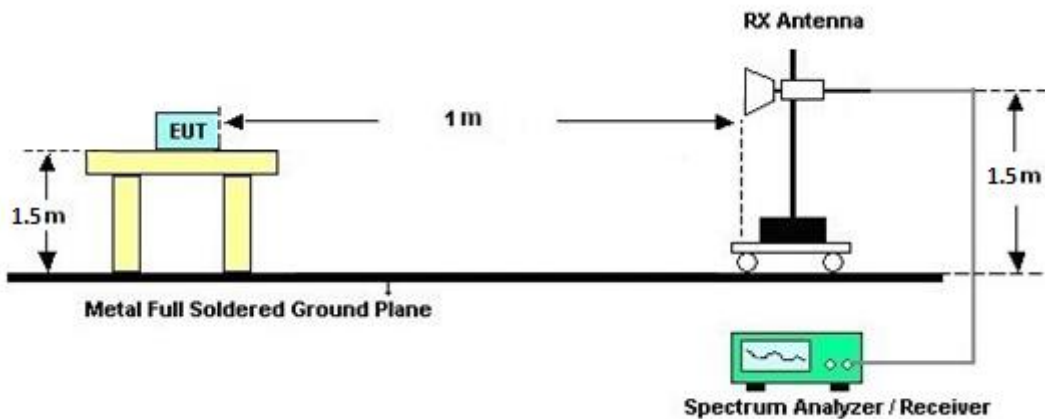



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Conduced Spurious at Band Edges in the Restricted Band

Please refer to Appendix C and D.

3.5.7 Test Result of Conduced Spurious Emission in the Restricted Band

Please refer to Appendix C and D.

3.5.8 Test Result of Cabinet Radiated Spurious at Band Edges

Please refer to Appendix E and F.

3.5.9 Test Result of Cabinet Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix E and F.

3.5.10 Duty Cycle

Please refer to Appendix G.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

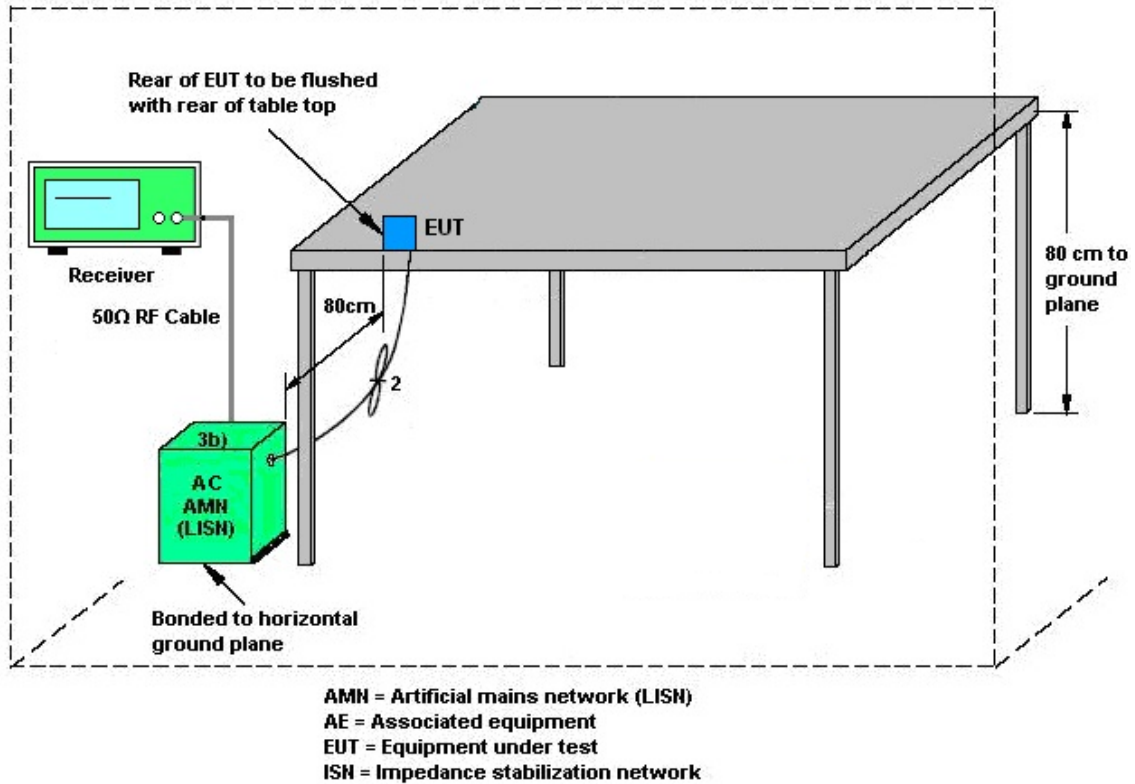

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 07, 2022	May 11, 2022~ May 12, 2022	Jan. 06, 2023	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	35419 & 03	30MHz~1GHz	Apr. 24, 2022	May 11, 2022~ May 12, 2022	Apr. 23, 2023	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 03, 2021	May 11, 2022~ May 12, 2022	Dec. 02, 2022	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917025 1	18GHz~40GHz	Nov. 30, 2021	May 11, 2022~ May 12, 2022	Nov. 29, 2022	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 21, 2022	May 11, 2022~ May 12, 2022	Apr. 20, 2023	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 04, 2021	May 11, 2022~ May 12, 2022	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Oct. 04, 2021	May 11, 2022~ May 12, 2022	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 23, 2021	May 11, 2022~ May 12, 2022	Jul. 22, 2022	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Jul. 22, 2021	May 11, 2022~ May 12, 2022	Jul. 21, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682/4	30MHz to 18GHz	Feb. 23, 2022	May 11, 2022~ May 12, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4	9kHz to 18GHz	Feb. 23, 2022	May 11, 2022~ May 12, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4	9kHz to 18GHz	Feb. 23, 2022	May 11, 2022~ May 12, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 17, 2021	May 11, 2022~ May 12, 2022	Sep. 16, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 23, 2022	May 11, 2022~ May 12, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 14, 2022	May 11, 2022~ May 12, 2022	Apr. 13, 2023	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	May 11, 2022~ May 12, 2022	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	May 11, 2022~ May 12, 2022	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	May 11, 2022~ May 12, 2022	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB1148	N/A	Oct. 25, 2021	May 11, 2022~ May 12, 2022	Oct. 24, 2022	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 07, 2022	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2021	Jun. 07, 2022	Nov. 30, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 03, 2021	Jun. 07, 2022	Dec. 02, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2021	Jun. 07, 2022	Nov. 15, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Jun. 07, 2022	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 28, 2021	Jun. 07, 2022	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 30, 2021	Jun. 07, 2022	Dec. 29, 2022	Conduction (CO05-HY)
Power Meter	Anritsu	ML2495A	932001	N/A	Sep. 30, 2021	May 02, 2022~ Jun. 13, 2022	Sep. 29, 2022	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	846202	300MHz~40GHz	Sep. 30, 2021	May 02, 2022~ Jun. 13, 2022	Sep. 29, 2022	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	May 02, 2022~ Jun. 13, 2022	Aug. 29, 2022	Conducted (TH02-HY)
Switch Control Mainframe	E-IUSTRUMENT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12, 2021	May 02, 2022~ Jun. 13, 2022	Aug. 11, 2022	Conducted (TH02-HY)
Spectrum Analyzer	ROHDE & SCHWARZ	FSV40	101565	10Hz~40GHz	Dec. 29, 2021	May 11, 2022~ Jun. 13, 2022	Dec. 28, 2022	CSE (TH02-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 10, 2022	May 11, 2022~ Jun. 13, 2022	Mar. 09, 2023	CSE (TH02-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 10, 2021	May 11, 2022~ Jun. 13, 2022	Dec. 09, 2022	CSE (TH02-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 21, 2022	May 11, 2022~ Jun. 13, 2022	Feb. 20, 2023	CSE (TH02-HY)
Filter	Wainwright	WLKS1200-12SS	SN2	1.2GHz Low Pass Filter	Mar. 15, 2022	May 11, 2022~ Jun. 13, 2022	Mar. 14, 2023	CSE (TH02-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN2	3GHz High Pass Filter	Jul. 12, 2021	May 11, 2022~ Jun. 13, 2022	Jul. 11, 2022	CSE (TH02-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.0 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Kai Liao	Temperature:	21~25	°C
Test Date:	2022/05/02 ~2022/06/13	Relative Humidity:	51~54	%

<CH11, CH18 Setting 5, CH26 Setting 1 + Ant. Gain 3.3 dBi>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250kbps	1	11	2405	2.557	1.610	0.50	Pass
Zigbee	250kbps	1	18	2440	2.572	1.640	0.50	Pass
Zigbee	250kbps	1	26	2480	2.577	1.610	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250kbps	1	11	2405	4.97	30.00	3.30	8.27	36.00	Pass
Zigbee	250kbps	1	18	2440	5.02	30.00	3.30	8.32	36.00	Pass
Zigbee	250kbps	1	26	2480	1.73	30.00	3.30	5.03	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250kbps	1	11	2405	4.65	30.00	3.30	7.95	36.00	Pass
Zigbee	250kbps	1	18	2440	4.73	30.00	3.30	8.03	36.00	Pass
Zigbee	250kbps	1	26	2480	0.95	30.00	3.30	4.25	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250kbps	1	11	2405	1.14	-9.44	3.30	8.00	Pass
Zigbee	250kbps	1	18	2440	1.20	-9.34	3.30	8.00	Pass
Zigbee	250kbps	1	26	2480	-2.96	-14.14	3.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

<CH26 Setting 2 + Ant. Gain 1.5 dBi>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250kbps	1	26	2480	2.582	1.625	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250kbps	1	26	2480	2.45	30.00	1.50	3.95	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250kbps	1	26	2480	1.83	30.00	1.50	3.33	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250kbps	1	26	2480	-1.94	-13.72	1.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 242614
 Test Mode : Mode 1
 Test Voltage : Power From System
 Phase : Line

Full Spectrum

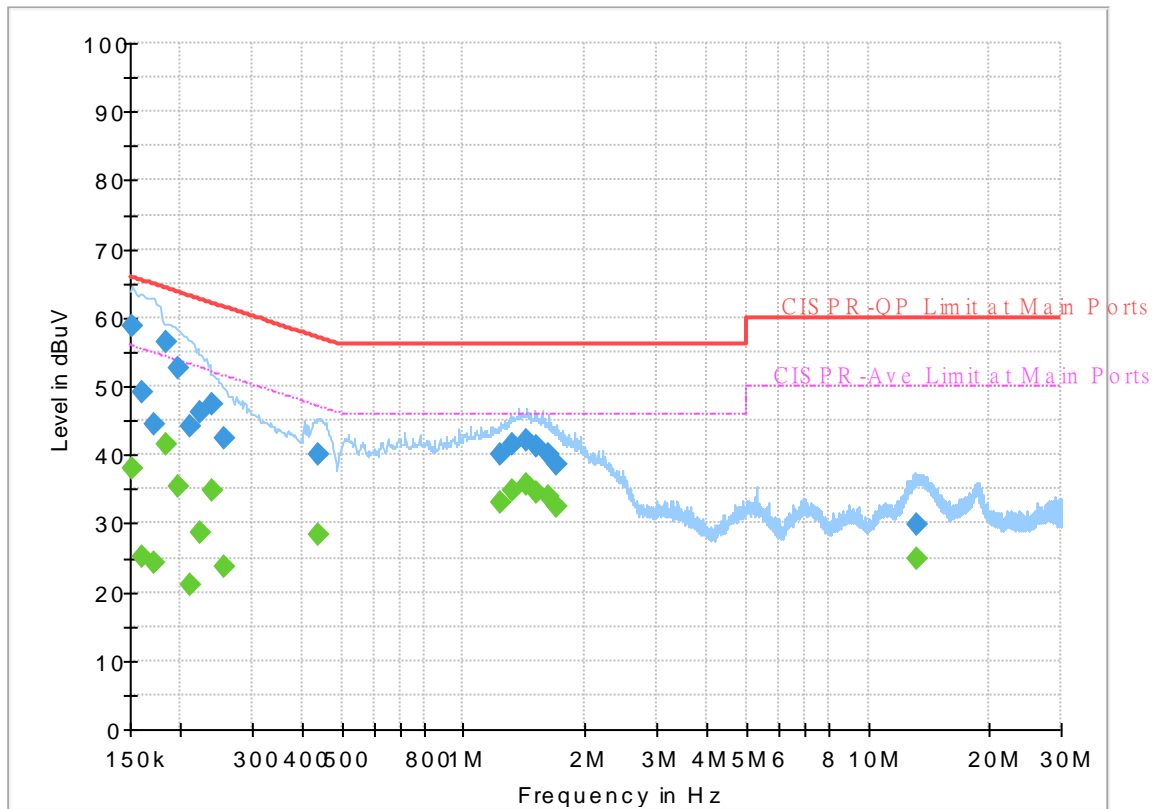

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	38.00	55.88	17.88	L1	OFF	19.6
0.152250	58.79	---	65.88	7.09	L1	OFF	19.6
0.161250	---	25.03	55.40	30.37	L1	OFF	19.6
0.161250	49.03	---	65.40	16.37	L1	OFF	19.6
0.172500	---	24.30	54.84	30.54	L1	OFF	19.6
0.172500	44.32	---	64.84	20.52	L1	OFF	19.6
0.183750	---	41.61	54.31	12.70	L1	OFF	19.6
0.183750	56.55	---	64.31	7.76	L1	OFF	19.6
0.197250	---	35.35	53.73	18.38	L1	OFF	19.6
0.197250	52.69	---	63.73	11.04	L1	OFF	19.6
0.210750	---	21.18	53.18	32.00	L1	OFF	19.6
0.210750	44.10	---	63.18	19.08	L1	OFF	19.6
0.224250	---	28.59	52.66	24.07	L1	OFF	19.6
0.224250	46.12	---	62.66	16.54	L1	OFF	19.6
0.240000	---	34.70	52.10	17.40	L1	OFF	19.6
0.240000	47.33	---	62.10	14.77	L1	OFF	19.6
0.255750	---	23.56	51.57	28.01	L1	OFF	19.6
0.255750	42.49	---	61.57	19.08	L1	OFF	19.6
0.438000	---	28.42	47.10	18.68	L1	OFF	19.6
0.438000	39.93	---	57.10	17.17	L1	OFF	19.6
1.236750	---	33.13	46.00	12.87	L1	OFF	19.6

1.236750	40.20	---	56.00	15.80	L1	OFF	19.6
1.329000	---	34.69	46.00	11.31	L1	OFF	19.6
1.329000	41.57	---	56.00	14.43	L1	OFF	19.6
1.430250	---	35.58	46.00	10.42	L1	OFF	19.6
1.430250	42.24	---	56.00	13.76	L1	OFF	19.6
1.518000	---	34.51	46.00	11.49	L1	OFF	19.6
1.518000	41.19	---	56.00	14.81	L1	OFF	19.6
1.626000	---	33.90	46.00	12.10	L1	OFF	19.6
1.626000	40.10	---	56.00	15.90	L1	OFF	19.6
1.707000	---	32.35	46.00	13.65	L1	OFF	19.6
1.707000	38.65	---	56.00	17.35	L1	OFF	19.6
13.276500	---	24.94	50.00	25.06	L1	OFF	19.8
13.276500	29.76	---	60.00	30.24	L1	OFF	19.8

EUT Information

Report NO : 242614
 Test Mode : Mode 1
 Test Voltage : Power From System
 Phase : Neutral

Full Spectrum

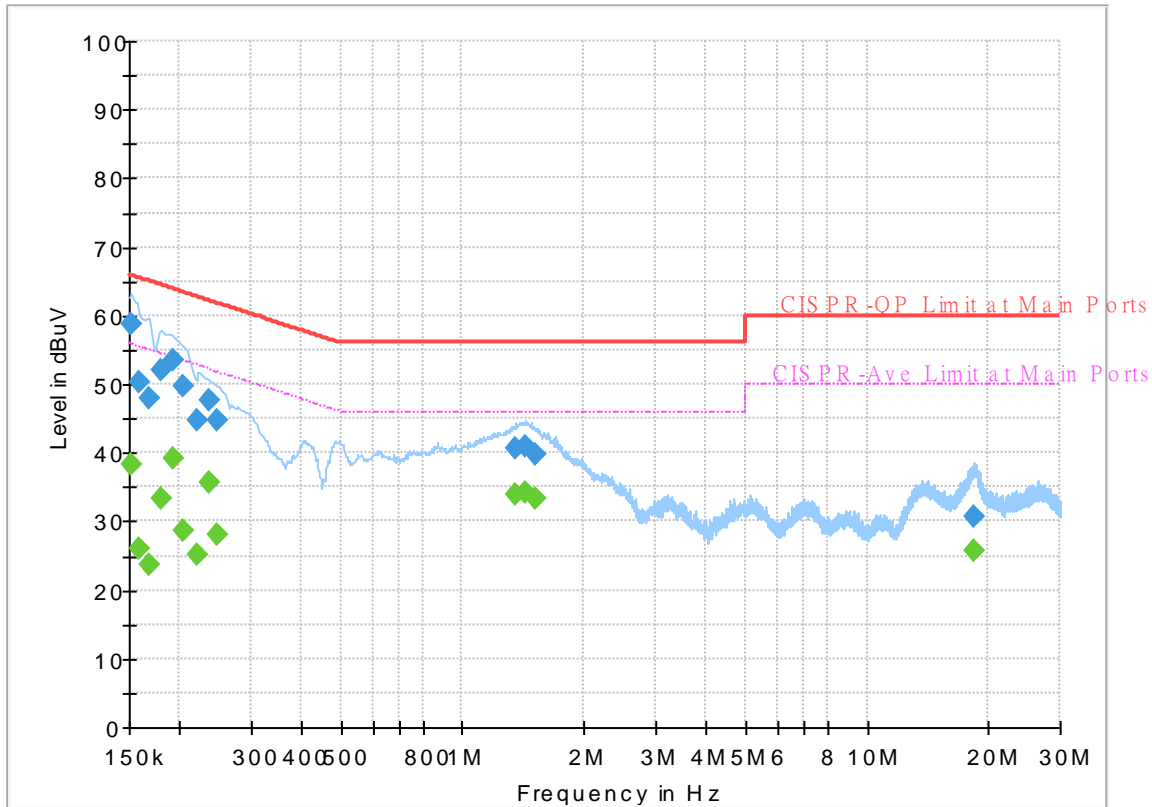

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	38.25	55.88	17.63	N	OFF	19.6
0.152250	58.67	---	65.88	7.21	N	OFF	19.6
0.159000	---	26.15	55.52	29.37	N	OFF	19.6
0.159000	50.21	---	65.52	15.31	N	OFF	19.6
0.168000	---	23.66	55.06	31.40	N	OFF	19.6
0.168000	48.05	---	65.06	17.01	N	OFF	19.6
0.179250	---	33.23	54.52	21.29	N	OFF	19.6
0.179250	52.09	---	64.52	12.43	N	OFF	19.6
0.192750	---	39.26	53.92	14.66	N	OFF	19.6
0.192750	53.58	---	63.92	10.34	N	OFF	19.6
0.204000	---	28.59	53.45	24.86	N	OFF	19.6
0.204000	49.57	---	63.45	13.88	N	OFF	19.6
0.222000	---	25.01	52.74	27.73	N	OFF	19.6
0.222000	44.64	---	62.74	18.10	N	OFF	19.6
0.237750	---	35.78	52.17	16.39	N	OFF	19.6
0.237750	47.56	---	62.17	14.61	N	OFF	19.6
0.249000	---	27.99	51.79	23.80	N	OFF	19.6
0.249000	44.83	---	61.79	16.96	N	OFF	19.6
1.358250	---	33.83	46.00	12.17	N	OFF	19.6
1.358250	40.52	---	56.00	15.48	N	OFF	19.6
1.425750	---	34.19	46.00	11.81	N	OFF	19.6

1.425750	40.97	---	56.00	15.03	N	OFF	19.6
1.520250	---	33.19	46.00	12.81	N	OFF	19.6
1.520250	39.87	---	56.00	16.13	N	OFF	19.6
18.478500	---	25.76	50.00	24.24	N	OFF	19.9
18.478500	30.78	---	60.00	29.22	N	OFF	19.9



Appendix C. Conducted Spurious Emission

Test Engineer :	Kai Liao	Temperature :	21.2 ~ 24.7°C
		Relative Humidity :	54.4 ~ 66.8%

<CH 11, CH 18 Setting 5, CH 26 Setting 1 + Ant. Gain 3.3 dBi>

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge)

Zigbee	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Gain (dBi)	Path Loss (dB)	MIMO Factor (dB)	Ground ing Factor (dB)	Peak Avg. (P/A)
Zigbee CH 11 2405MHz		2378.985	-41.69	-20.49	-21.2	-46.48	3.3	1.49	0	0	P
		2390.01	-54.68	-13.48	-41.2	-59.48	3.3	1.5	0	0	A
	*	2405	10.74	-	-	5.94	3.3	1.5	0	0	P
	*	2405	7	-	-	2.2	3.3	1.5	0	0	A
Zigbee CH 18 2440MHz		2387.7	-42.28	-21.08	-21.2	-47.08	3.3	1.5	0	0	P
		2388.12	-55.94	-14.74	-41.2	-60.74	3.3	1.5	0	0	A
	*	2440	10.64	-	-	5.76	3.3	1.58	0	0	P
	*	2440	6.75	-	-	1.87	3.3	1.58	0	0	A
		2495.38	-40.73	-19.53	-21.2	-45.64	3.3	1.61	0	0	P
		2492.58	-55.12	-13.92	-41.2	-60.03	3.3	1.61	0	0	A
Zigbee CH 26 2480MHz	*	2480	4.69	-	-	-0.08	3.3	1.47	0	0	P
	*	2480	0.91	-	-	-3.86	3.3	1.47	0	0	A
		2483.48	-32.43	-11.23	-21.2	-37.2	3.3	1.47	0	0	P
		2483.48	-41.61	-0.41	-41.2	-46.38	3.3	1.47	0	0	A
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



**2.4GHz 2400~2483.5MHz
Zigbee (Harmonic)**

Zigbee	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Gain (dBi)	Path Loss (dB)	MIMO Factor (dB)	Groun ding Factor (dB)	Peak Avg. (P/A)	
Zigbee CH 11 2405MHz		4810	-54.81	-33.61	-21.2	-60.96	3.3	2.85	0	0	P	
		7215	-56.16	-34.96	-21.2	-62.95	3.3	3.49	0	0	P	
		9620	-57.13	-35.93	-21.2	-64.36	3.3	3.93	0	0	P	
		12025	-55.79	-34.59	-21.2	-63.37	3.3	4.28	0	0	P	
		14430	-53.1	-31.9	-21.2	-62.73	3.3	6.33	0	0	P	
Zigbee CH 18 2440MHz		4880	-46.43	-25.23	-21.2	-52.45	3.3	2.72	0	0	P	
		7320	-59.15	-37.95	-21.2	-65.92	3.3	3.47	0	0	P	
		9760	-59.44	-38.24	-21.2	-66.72	3.3	3.98	0	0	P	
		12200	-52.46	-31.26	-21.2	-60.45	3.3	4.69	0	0	P	
		14640	-49.67	-28.47	-21.2	-58.54	3.3	5.57	0	0	P	
Zigbee CH 26 2480MHz		4960	-63.46	-42.26	-21.2	-69.41	3.3	2.65	0	0	P	
		9920	-61.34	-40.14	-21.2	-68.71	3.3	4.07	0	0	P	
		17626.8	-54.04	-32.84	-21.2	-64.07	3.3	6.73	0	0	P	
		23817	-52.74	-31.54	-21.2	-68.42	3.3	12.38	0	0	P	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
		(MHz)	(dBm)	(dB)	Limit	Level	Factor	Loss	Factor	Factor	Avg.
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
2.4GHz Zigbee LF		83.46	-82.68	-27.48	-55.2	-91.03	3.3	0.35	0	4.7	P
		187.68	-81.38	-29.68	-51.7	-89.95	3.3	0.57	0	4.7	P
		220.89	-80.58	-31.38	-49.2	-89.24	3.3	0.66	0	4.7	P
		738.2	-76.62	-27.42	-49.2	-85.74	3.3	1.12	0	4.7	P
		746.6	-76.53	-27.33	-49.2	-85.66	3.3	1.13	0	4.7	P
		840.4	-75.94	-26.74	-49.2	-85.28	3.3	1.34	0	4.7	P
Remark	1. No other spurious found. 2. All results are PASS against limit line.										



<CH 26 Setting 2 + Ant. Gain 1.5 dBi>

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge)

Zigbee	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Gain (dBi)	Path Loss (dB)	MIMO Factor (dB)	Ground ing Factor (dB)	Peak Avg. (P/A)
Zigbee CH 26 2480MHz	*	2480	4.5	-	-	1.03	2	1.47	0	0	P
	*	2480	0.76	-	-	-2.71	2	1.47	0	0	A
		2483.48	-32.61	-11.41	-21.2	-36.08	2	1.47	0	0	P
		2483.48	-41.73	-0.53	-41.2	-45.2	2	1.47	0	0	A
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



2.4GHz 2400~2483.5MHz

Zigbee (Harmonic)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak	
				Limit	Line	Level	Gain	Loss	Factor	Factor	Avg.	
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)	
Zigbee CH 26 2480MHz		4960	-61.65	-40.45	-21.2	-66.3	2	2.65	0	0	P	
		7440	-64.94	-43.74	-21.2	-70.43	2	3.49	0	0	P	
		9920	-60.47	-39.27	-21.2	-66.54	2	4.07	0	0	P	
		17681.4	-55.77	-34.57	-21.2	-65.55	2	7.78	0	0	P	
		24615	-54	-32.8	-21.2	-68.75	2	12.75	0	0	P	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
		(MHz)	(dBm)	(dB)	Limit	Level	Factor	Loss	Factor	Factor	Avg.
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
2.4GHz Zigbee LF		38.91	-83.85	-28.65	-55.2	-90.79	2	0.24	0	4.7	P
		175.53	-83.39	-31.69	-51.7	-90.64	2	0.55	0	4.7	P
		287.58	-82.93	-33.73	-49.2	-90.32	2	0.69	0	4.7	P
		722.1	-79.88	-30.68	-49.2	-87.78	2	1.2	0	4.7	P
		840.4	-76.06	-26.86	-49.2	-84.1	2	1.34	0	4.7	P
		887.3	-80.27	-31.07	-49.2	-88.34	2	1.37	0	4.7	P
Remark	1. No other spurious found. 2. All results are PASS against limit line.										



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for conducted spurious emission is shown as below:

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
Zigbee		2390	-45.8	-24.6	-21.2	-48.44	2	0.64	0	0	P
CH 11		2390	-59.91	-18.71	-41.2	-62.58	2	0.67	0	0	A
2405MHz											

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBm) =
Antenna Factor(dBi) + Path Loss(dB) + Read Level(dBm)
3. Over Limit(dB) = Level(dBm) – Limit Line(dBm)

For Peak Limit @ 2390MHz:

1. Level(dBm)
= Antenna Factor(dBi) + Path Loss(dB) + Read Level(dBm)
= 2(dBi) + 0.64(dB) - 48.44(dBm)
= -45.8 (dBm)
2. Over Limit(dB)
= Level(dBm) – Limit Line(dBm)
= -45.8(dBm) +21.2(dBm)
= -24.6(dB)

For Average Limit @ 2390MHz:

1. Level(dBm)
= Antenna Factor(dBi) + Path Loss(dB) + Read Level(dBm)
= 2(dBi) + 0.67(dB) - 62.58(dBm)
= -59.91 (dBm)
2. Over Limit(dB)
= Level(dBm) – Limit Line(dBm)
= -59.91(dBm) + 41.2(dBm)
= -18.71(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Conducted Spurious Emission Plots

Test Engineer :	Kai Liao	Temperature :	21.2 ~ 24.7°C
		Relative Humidity :	54.4 ~ 66.8%

Note symbol

-L	Low channel location
-R	High channel location







<CH 11, CH 18 Setting 5, CH 26 Setting 1 + Ant. Gain 3.3 dBi>

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge)

Zigbee	2.4GHz 2400~2483.5MHz Band Edge	
	Zigbee CH 11 2405MHz	
	CSE	Fundamental
Peak	<p>Site Condition : TH05-HY : FCC CLASS-B, CON ANT_GAIN+3.3 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz</p>	<p>Site Condition : TH05-HY : FCC CLASS-B, CON ANT_GAIN+3.3 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz</p>
Avg.	<p>Site Condition : TH05-HY : FCC CLASS-B(AVG), CON ANT_GAIN+3.3 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz</p>	<p>Site Condition : TH05-HY : FCC CLASS-B(AVG), CON ANT_GAIN+3.3 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz</p>

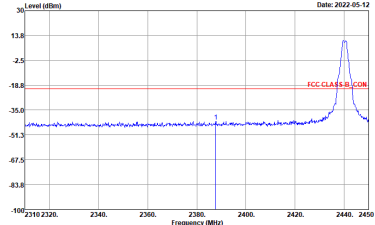
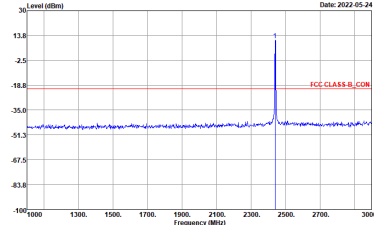
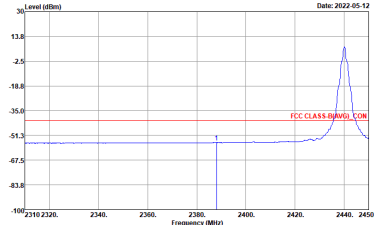
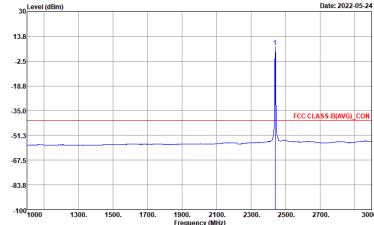


Zigbee	2.4GHz 2400~2483.5MHz Band Edge	
Zigbee CH 18 2440MHz - L		
CSE		Fundamental
Peak	 <p>Date: 2022-05-12</p> <p>Level (dBm) vs Frequency (MHz)</p> <p>Site: TH05-HY Condition: FCC CLASS-B, CON ANT_GAIN+3 3 HORIZONTAL, RBW:1000.000kHz, VBW:3000.000kHz</p>	 <p>Date: 2022-05-24</p> <p>Level (dBm) vs Frequency (MHz)</p> <p>Site: TH05-HY Condition: FCC CLASS-B, CON ANT_GAIN+3 3 HORIZONTAL, RBW:1000.000kHz, VBW:3000.000kHz</p>
Avg.	 <p>Date: 2022-05-12</p> <p>Level (dBm) vs Frequency (MHz)</p> <p>Site: TH05-HY Condition: FCC CLASS-B(AVG), CON ANT_GAIN+3 3 HORIZONTAL, RBW:1000.000kHz, VBW:3000.000kHz</p>	 <p>Date: 2022-05-24</p> <p>Level (dBm) vs Frequency (MHz)</p> <p>Site: TH05-HY Condition: FCC CLASS-B(AVG), CON ANT_GAIN+3 3 HORIZONTAL, RBW:1000.000kHz, VBW:3000.000kHz</p>



Zigbee	2.4GHz 2400~2483.5MHz Band Edge	
	Zigbee CH 18 2440MHz - R	
	CSE	Fundamental
<p>Peak</p>	<p>Site : TH05-HY Condition : FCC CLASS-B, CON ANT_GAIN+3.3 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz</p>	<p>Left blank</p>
<p>Avg.</p>	<p>Site : TH05-HY Condition : FCC CLASS-B(AVG), CON ANT_GAIN+3.3 HORIZONTAL : RBW:1000.0000Hz VBW:0.01500Hz</p>	<p>Left blank</p>

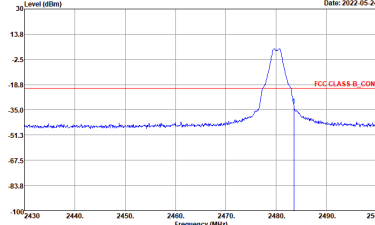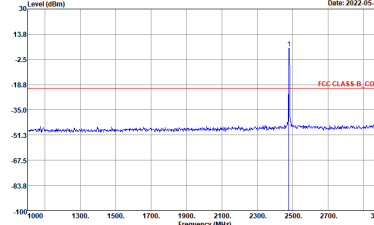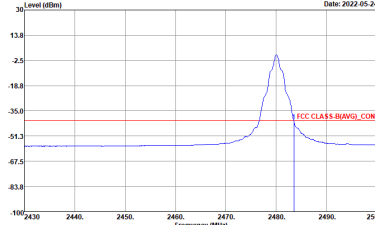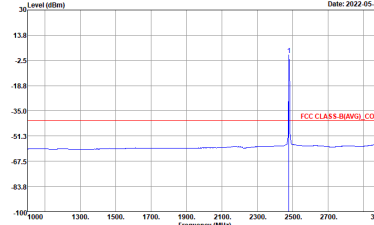

Zigbee	2.4GHz 2400~2483.5MHz Band Edge	
	Zigbee CH 26 2480MHz	
	CSE	Fundamental
Peak	 <p>Date: 2022-05-24</p> <p>Site : TH05-HY Condition : FCC CLASS-B_CON_ANT_GAIN+3.3 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz</p>	 <p>Date: 2022-05-24</p> <p>Site : TH05-HY Condition : FCC CLASS-B_CON_ANT_GAIN+3.3 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz</p>
Avg.	 <p>Date: 2022-05-24</p> <p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON_ANT_GAIN+3.3 HORIZONTAL : RBW:1000.0000Hz VBW:0.0100Hz</p>	 <p>Date: 2022-05-24</p> <p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON_ANT_GAIN+3.3 HORIZONTAL : RBW:1000.0000Hz VBW:0.1000Hz</p>




2.4GHz 2400~2483.5MHz

Zigbee (Harmonic)

Zigbee	2.4GHz 2400~2483.5MHz Harmonic	
	Zigbee	
	CH 11 2405MHz	CH 18 2440MHz
Peak Avg.	<p>Site : TH05-HY Condition : FCC CLASS-B, CON ANT, GAIN+3.3 HORIZONTAL RESW: 1000.0000Hz, VBW: 3000.0000Hz</p>	<p>Site : TH05-HY Condition : FCC CLASS-B, CON ANT, GAIN+3.3 HORIZONTAL RESW: 1000.0000Hz, VBW: 3000.0000Hz</p>

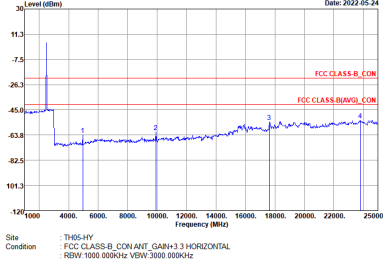


Zigbee	2.4GHz 2400~2483.5MHz Harmonic	
Zigbee		
CH 26 2480MHz		
Peak Avg.	 <p>The spectrum plot displays the signal level in dBm across a frequency range from 1000 to 25000 MHz. Two horizontal red lines indicate the FCC Class B limit at -75.0 dBm and the FCC Class B/AVG limit at -45.0 dBm. The measured signal level is consistently below the -45.0 dBm limit, with several peaks marked by vertical blue lines and numbered 1 through 4.</p> <p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT_GAIN=3.3 HORIZONTAL : RBW 1000.000kHz VIEW 3000.000kHz</p>	Left blank



Emission below 1GHz

2.4GHz Zigbee (LF)

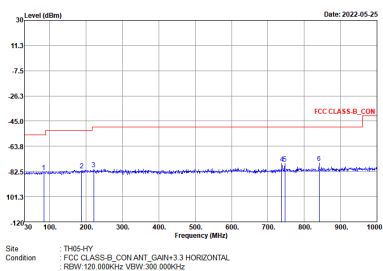Zigbee	2.4GHz 2400~2483.5MHz	
	Zigbee LF	
Peak	 <p>The spectrum plot displays the emission level in dBm on the y-axis (ranging from -120 to -30) against frequency in MHz on the x-axis (ranging from 50 to 1000). A red horizontal line represents the FCC CLASS B_CON limit, which is constant at -45.0 dBm. The measured signal is shown as a blue line with several distinct peaks labeled 1 through 5. Peak 1 is at approximately 100 MHz, peak 2 at 150 MHz, peak 3 at 200 MHz, peak 4 at 750 MHz, and peak 5 at 850 MHz. All peaks are well below the -45.0 dBm limit. The plot also includes the date 2022-05-25 and test conditions: Site: TH05-HY, Condition: FCC CLASS-B_CON ANT_GAIN+3.3 HORIZONTAL, ISM 120 000Hz YSW 300 000Hz.</p>	Left blank



<CH 26 Setting 2 + Ant. Gain 1.5 dBi>

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge)

Zigbee	2.4GHz 2400~2483.5MHz Band Edge	
	Zigbee CH 26 2480MHz	
	CSE	Fundamental
Peak	<p>Site Condition : TH05-HY FCC CLASS-B, CON ANT_GAIN+2 HORIZONTAL RSW: 1000.0000Hz VIEW: 3000.0000Hz</p>	<p>Site Condition : TH05-HY FCC CLASS-B, CON ANT_GAIN+2 HORIZONTAL RSW: 1000.0000Hz VIEW: 3000.0000Hz</p>
Avg.	<p>Site Condition : TH05-HY FCC CLASS B(AVG), CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : 242614 Mode : 13 Setting : 2</p>	<p>Site Condition : TH05-HY FCC CLASS B(AVG), CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : 242614 Mode : 13 Setting : 2</p>



2.4GHz 2400~2483.5MHz


Zigbee (Harmonic)

Zigbee	2.4GHz 2400~2483.5MHz Harmonic	
	Zigbee	
	CH 26 2480MHz	
Peak Avg.	<p>Level (dBm)</p> <p>Date: 2023-05-31</p> <p>FCC CLASS B_CON</p> <p>FCC CLASS B(AVG)_CON</p> <p>Site : TH05-HY</p> <p>Condition : FCC CLASS-B_CONSTANT_GARHz HORIZONTAL</p> <p>: RBW:1000.0000Hz VIEW:3000.0000Hz</p>	Left blank



Emission below 1GHz

2.4GHz Zigbee (LF)

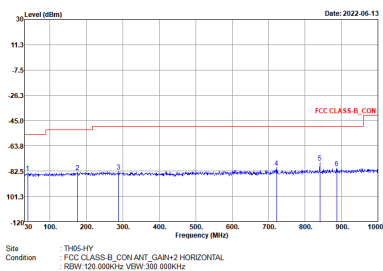Zigbee	2.4GHz 2400~2483.5MHz	
	Zigbee LF	
Peak	 <p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL RSW: 120.000GHz YSW: 300.000kHz</p>	Left blank



Appendix E. Cabinet Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	23~26.2°C
		Relative Humidity :	55.3~61%

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge @ 3m)

Zigbee	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
Zigbee CH 11 2405MHz		2346.12	53.98	-20.02	74	39.65	31.42	18.31	35.4	400	11	P	H	
		2382.975	42.95	-11.05	54	28.53	31.4	18.43	35.41	400	11	A	H	
	*	2405	86.05	-	-	71.54	31.44	18.49	35.42	400	11	P	H	
	*	2405	84.13	-	-	69.62	31.44	18.49	35.42	400	11	A	H	
													H	
														H
			2325.435	54.76	-19.24	74	40.4	31.5	18.25	35.39	355	139	P	V
			2389.275	42.94	-11.06	54	28.51	31.4	18.44	35.41	355	139	A	V
	*		2405	85.27	-	-	70.76	31.44	18.49	35.42	355	139	P	V
	*		2405	83.29	-	-	68.78	31.44	18.49	35.42	355	139	A	V
														V
													V	



Zigbee CH 18 2440MHz		2368.52	54.28	-19.72	74	39.9	31.4	18.39	35.41	378	6	P	H
		2315.18	42.94	-11.06	54	28.57	31.54	18.22	35.39	378	6	A	H
	*	2440	84.92	-	-	70.09	31.72	18.54	35.43	378	6	P	H
	*	2440	83.03	-	-	68.2	31.72	18.54	35.43	378	6	A	H
		2487.05	54.25	-19.75	74	39	32.1	18.6	35.45	378	6	P	H
		2499.3	43.86	-10.14	54	28.5	32.19	18.63	35.46	378	6	A	H
		2310.56	53.48	-20.52	74	39.09	31.56	18.21	35.38	388	138	P	V
		2386.86	42.96	-11.04	54	28.53	31.4	18.44	35.41	388	138	A	V
	*	2440	83.11	-	-	68.28	31.72	18.54	35.43	388	138	P	V
	*	2440	81.22	-	-	66.39	31.72	18.54	35.43	388	138	A	V
		2484.04	55.29	-18.71	74	40.07	32.07	18.6	35.45	388	138	P	V
		2499.3	43.87	-10.13	54	28.51	32.19	18.63	35.46	388	138	A	V
	Zigbee CH 26 2480MHz	*	2480	83.53	-	-	68.34	32.04	18.6	35.45	362	0	P
*		2480	80.98	-	-	65.79	32.04	18.6	35.45	362	0	A	H
		2489.96	54.35	-19.65	74	39.07	32.12	18.61	35.45	362	0	P	H
		2483.52	44.89	-9.11	54	29.67	32.07	18.6	35.45	362	0	A	H
													H
													H
*		2480	81.12	-	-	65.93	32.04	18.6	35.45	372	144	P	V
*		2480	79.04	-	-	63.85	32.04	18.6	35.45	372	144	A	V
		2491.28	54.6	-19.4	74	39.31	32.13	18.61	35.45	372	144	P	V
		2483.52	44.48	-9.52	54	29.26	32.07	18.6	35.45	372	144	A	V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
Zigbee (Harmonic @ 3m)

Zigbee	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
Zigbee CH 11 2405MHz		4810	41.13	-32.87	74	53.39	34.02	12.71	58.99	-	-	P	H	
		14499	47.5	-26.5	74	43.76	39.6	21.66	57.52	-	-	P	H	
		15705	48.66	-25.34	74	42.3	40.42	22.41	56.47	-	-	P	H	
		15705	38.39	-15.61	54	32.03	40.42	22.41	56.47	-	-	A	H	
		17745	51.59	-22.41	74	41.65	41.54	23.57	55.17	-	-	P	H	
		17745	41.15	-12.85	54	31.21	41.54	23.57	55.17	-	-	A	H	
														H
														H
														H
														H
														H
														H
														H
			4810	42.36	-31.64	74	54.62	34.02	12.71	58.99	-	-	P	V
			14499	47.69	-26.31	74	43.95	39.6	21.66	57.52	-	-	P	V
			16140	49.72	-24.28	74	41.92	41.2	22.68	56.08	-	-	P	V
			16140	39.62	-14.38	54	31.82	41.2	22.68	56.08	-	-	A	V
			17820	50.75	-23.25	74	40.71	41.56	23.61	55.13	-	-	P	V
		17820	40.93	-13.07	54	30.89	41.56	23.61	55.13	-	-	A	V	
													V	
													V	
													V	
													V	
													V	
													V	



Zigbee	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
Zigbee CH 18 2440MHz		4880	40.55	-33.45	74	52.62	34.04	12.75	58.86	-	-	P	H	
		7320	43.05	-30.95	74	49.84	35.68	15.03	57.5	-	-	P	H	
		14499	47.19	-26.81	74	43.45	39.6	21.66	57.52	-	-	P	H	
		16005	48.63	-25.37	74	41.01	41.01	22.6	55.99	-	-	P	H	
		16005	39.29	-14.71	54	31.67	41.01	22.6	55.99	-	-	A	H	
		17835	50.39	-23.61	74	40.37	41.53	23.62	55.13	-	-	P	H	
		17835	40.93	-13.07	54	30.91	41.53	23.62	55.13	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4880	42.99	-31.01	74	55.06	34.04	12.75	58.86	-	-	P	V
			7320	46.95	-27.05	74	53.74	35.68	15.03	57.5	-	-	P	V
			14499	47.14	-26.86	74	43.4	39.6	21.66	57.52	-	-	P	V
			15660	48.64	-25.36	74	42.48	40.32	22.39	56.55	-	-	P	V
			15660	38.13	-15.87	54	31.97	40.32	22.39	56.55	-	-	A	V
			17835	51.99	-22.01	74	41.97	41.53	23.62	55.13	-	-	P	V
			17835	41.24	-12.76	54	31.22	41.53	23.62	55.13	-	-	A	V
													V	
													V	
													V	
													V	
													V	



Zigbee	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
Zigbee CH 26 2480MHz		4960	40.39	-33.61	74	52.18	34.1	12.82	58.71	-	-	P	H	
		7440	40.86	-33.14	74	47.6	35.82	15.03	57.59	-	-	P	H	
		14499	46.83	-27.17	74	43.09	39.6	21.66	57.52	-	-	P	H	
		16155	48.25	-25.75	74	40.45	41.2	22.69	56.09	-	-	P	H	
		16155	39.16	-14.84	54	31.36	41.2	22.69	56.09	-	-	A	H	
		17820	50.38	-23.62	74	40.34	41.56	23.61	55.13	-	-	P	H	
		17820	40.88	-13.12	54	30.84	41.56	23.61	55.13	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4960	41.1	-32.9	74	52.89	34.1	12.82	58.71	-	-	P	V
			7440	40.74	-33.26	74	47.48	35.82	15.03	57.59	-	-	P	V
			14499	47.96	-26.04	74	44.22	39.6	21.66	57.52	-	-	P	V
			15990	48.44	-25.56	74	40.86	40.99	22.6	56.01	-	-	P	V
			15990	38.89	-15.11	54	31.31	40.99	22.6	56.01	-	-	A	V
			17715	50.72	-23.28	74	40.84	41.51	23.55	55.18	-	-	P	V
			17715	40.63	-13.37	54	30.75	41.51	23.55	55.18	-	-	A	V
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 													



Emission above 18GHz

2.4GHz Zigbee (SHF)

Zigbee	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz Zigbee SHF		23873	37.56	-36.44	74	48.27	38.75	8.74	58.2	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24839	37.43	-36.57	74	46.93	38.81	9.22	57.53	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz Zigbee LF		86.43	27.74	-12.26	40	41.93	14.19	1.66	30.04	-	-	P	H	
		95.88	30.54	-12.96	43.5	43.39	15.39	1.74	29.98	-	-	P	H	
		280.29	38.76	-7.24	46	46.88	18.78	2.86	29.76	-	-	P	H	
		419.7	28.6	-17.4	46	32.14	22.6	3.61	29.75	-	-	P	H	
		850.2	34.4	-11.6	46	29.68	28.65	5.13	29.06	-	-	P	H	
		960	37.08	-8.92	46	29.28	30.83	5.59	28.62	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30	31.82	-8.18	40	36.35	24.57	1.01	30.11	-	-	P	V
			64.29	29.98	-10.02	40	46.87	11.77	1.37	30.03	-	-	P	V
			234.12	34.63	-11.37	46	45.3	16.5	2.61	29.78	-	-	P	V
			792.8	31.67	-14.33	46	28.16	27.81	4.98	29.28	-	-	P	V
			846	33.01	-12.99	46	28.36	28.61	5.12	29.08	-	-	P	V
			960	35.93	-10.07	46	28.13	30.83	5.59	28.62	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
Zigbee		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 11		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2405MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix F. Cabinet Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	23~26.2°C
		Relative Humidity :	55.3~61%

Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz





Zigbee (Band Edge @ 3m)

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH 01 2405MHz	
	Horizontal	Fundamental
Peak	<p>Level (dBu/Vm) vs Frequency (MHz) plot for Peak Horizontal. The y-axis ranges from 10.0 to 140.0 dBu/Vm, and the x-axis ranges from 2310 to 2415 MHz. A prominent peak is visible at approximately 2405 MHz. The plot includes a red horizontal line at approximately 75 dBu/Vm and a blue trace showing the signal level. A vertical red line is drawn at the peak frequency. The date is 2022-05-12.</p> <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	<p>Level (dBu/Vm) vs Frequency (MHz) plot for Peak Fundamental. The y-axis ranges from 10.0 to 140.0 dBu/Vm, and the x-axis ranges from 1900 to 3000 MHz. A prominent peak is visible at approximately 2405 MHz. The plot includes a red horizontal line at approximately 75 dBu/Vm and a blue trace showing the signal level. A vertical red line is drawn at the peak frequency. The date is 2022-05-12.</p> <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	<p>Level (dBu/Vm) vs Frequency (MHz) plot for Avg Horizontal. The y-axis ranges from 10.0 to 140.0 dBu/Vm, and the x-axis ranges from 2310 to 2415 MHz. A prominent peak is visible at approximately 2405 MHz. The plot includes a red horizontal line at approximately 75 dBu/Vm and a blue trace showing the signal level. A vertical red line is drawn at the peak frequency. The date is 2022-05-12.</p> <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWF:Auto</p>	<p>Level (dBu/Vm) vs Frequency (MHz) plot for Avg Fundamental. The y-axis ranges from 10.0 to 140.0 dBu/Vm, and the x-axis ranges from 1900 to 3000 MHz. A prominent peak is visible at approximately 2405 MHz. The plot includes a red horizontal line at approximately 75 dBu/Vm and a blue trace showing the signal level. A vertical red line is drawn at the peak frequency. The date is 2022-05-12.</p> <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWF:Auto</p>

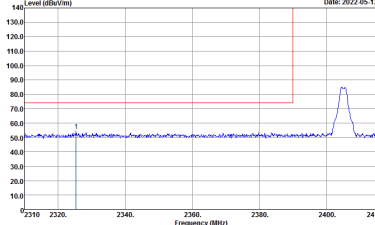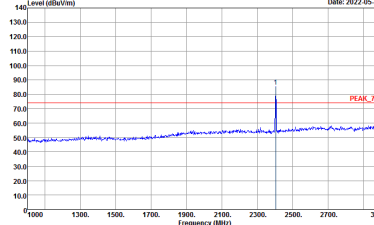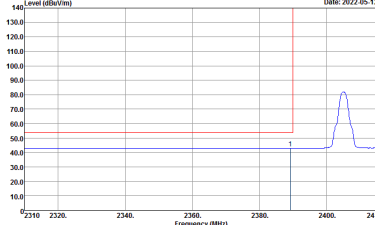
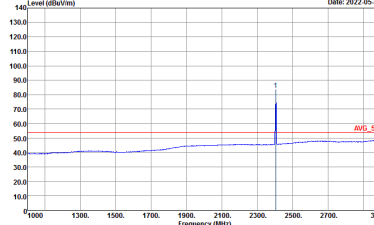


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH 01 2405MHz	
	Vertical	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2405 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2405 MHz.</p> <p>Site : 03CH07-HY Condition : :PEAK_BE_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2405 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1900 to 3000 MHz. A red vertical line marks the peak at 2405 MHz, labeled 'PEAK_X4'.</p> <p>Site : 03CH07-HY Condition : :PEAK_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average level. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2405 MHz.</p> <p>Site : 03CH07-HY Condition : :AVG_BE_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWF:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average level. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1900 to 3000 MHz. A red vertical line marks the peak at 2405 MHz, labeled 'AVG_X4'.</p> <p>Site : 03CH07-HY Condition : :AVG_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWF:Auto</p>

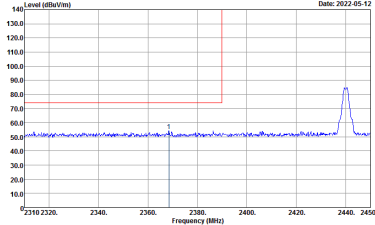
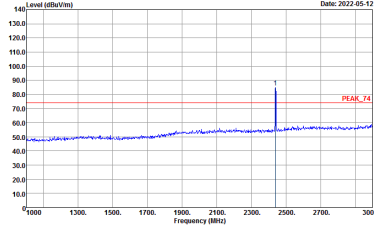
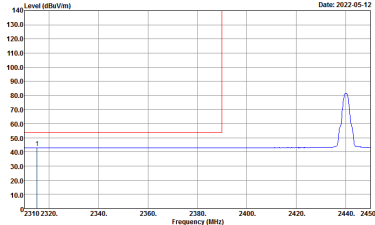
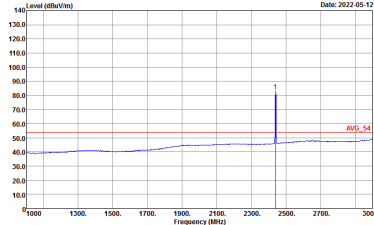


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH 08 2440MHz - L	
	Horizontal	Fundamental
Peak	 <p>Date: 2022-05-12</p> <p>Site : 03CH07-HY Condition : PEAK_BE_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2022-05-12</p> <p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2022-05-12</p> <p>Site : 03CH07-HY Condition : AVG_BE_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Date: 2022-05-12</p> <p>Site : 03CH07-HY Condition : AVG_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

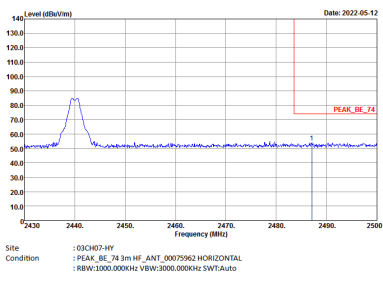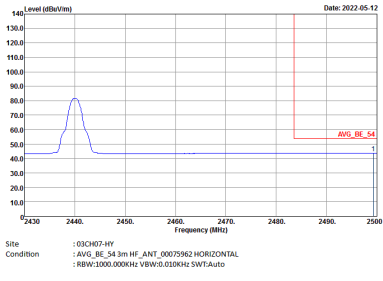

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH 08 2440MHz - R	
	Horizontal	Fundamental
Peak		Left blank
Avg.		Left blank

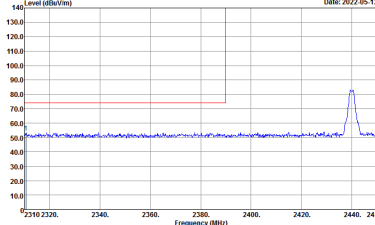
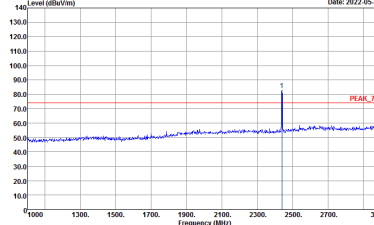
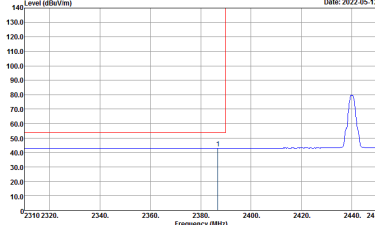
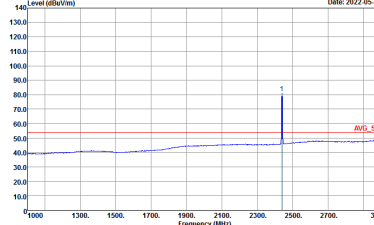


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH 08 2440MHz - L	
	Vertical	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2450 MHz. A red line indicates the peak level at approximately 80 dBuV/m.</p> <p>Site : 03CH07-HY Condition : PEAK_BE_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1900 to 3000 MHz. A red line indicates the peak level at approximately 80 dBuV/m, labeled 'PEAK_X4'.</p> <p>Site : 03CH07-HY Condition : PEAK_78.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average level. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2450 MHz. A red line indicates the average level at approximately 50 dBuV/m.</p> <p>Site : 03CH07-HY Condition : AVG_BE_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:9.010kHz SWF:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average level. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1900 to 3000 MHz. A red line indicates the average level at approximately 50 dBuV/m, labeled 'AVG_X4'.</p> <p>Site : 03CH07-HY Condition : AVG_54.3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:9.010kHz SWF:Auto</p>







Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH 08 2440MHz - R	
	Vertical	Fundamental
Peak	<p>Site : 03CH07-HV Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>	Left blank
Avg.	<p>Site : 03CH07-HV Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>	Left blank

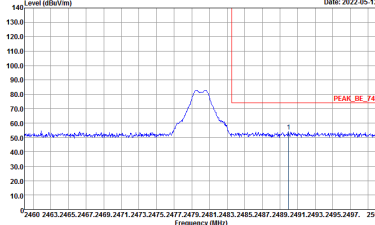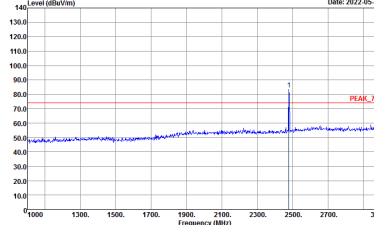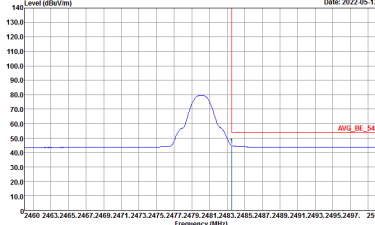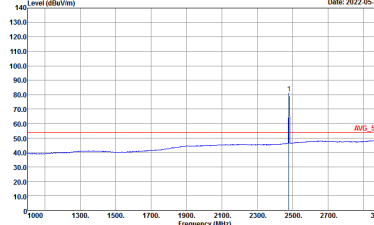

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH 26 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : :PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL :RBW:1000.000kHz VBW:3000.000kHz SWFA:Auto</p>	 <p>Site : 03CH07-HY Condition : :PEAK_74 3m HF_ANT_00075962 HORIZONTAL :RBW:1000.000kHz VBW:3000.000kHz SWFA:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : :AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL :RBW:1000.000kHz VBW:3000.000kHz SWFA:Auto</p>	 <p>Site : 03CH07-HY Condition : :AVG_54 3m HF_ANT_00075962 HORIZONTAL :RBW:1000.000kHz VBW:3000.000kHz SWFA:Auto</p>

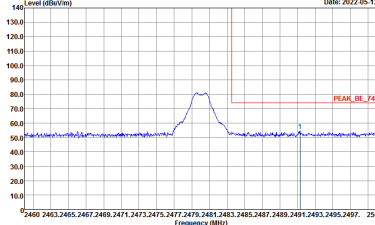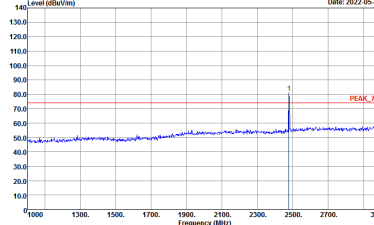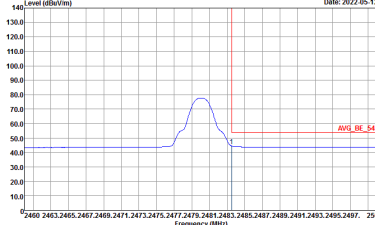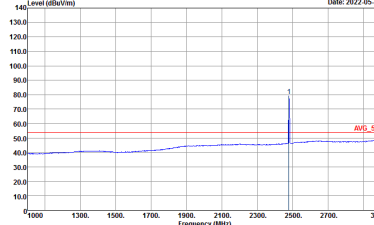

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH 26 2480MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	 <p>Site : 03CH07-HY Condition : : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWF:Auto</p>	 <p>Site : 03CH07-HY Condition : : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWF:Auto</p>



2.4GHz 2400~2483.5MHz

Zigbee (Harmonic @ 3m)

Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH 01 2405MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH 08 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH 26 2480MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 VERTICAL</p>



Emission above 18GHz
2.4GHz Zigbee (SHF @ 1m)



Table with 2 columns: Horizontal and Vertical. Each column contains a graph of Level (dBuV/m) vs Frequency (MHz) for Zigbee SHF. The graphs show a signal level around 40-50 dBuV/m with a peak at 74 dBuV/m. The table also includes site and condition information for both orientations.

Peak
Avg.



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	2.4GHz 2400~2483.5MHz	
	Zigbee LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH07-HY Condition : QP 3m LF-ANT:35419(6) HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition : QP 3m LF-ANT:35419(6) VERTICAL</p>



Appendix G. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Zigbee	100.00	-	-	10Hz

