



FCC RADIO TEST REPORT

FCC ID : ZAT-CC2652RSIP
Equipment : CC2652RSIPMOT
Brand Name : Texas Instruments Incorporated
Model Name : CC2652RSIPMOT
Marketing Name : CC2652RSIP SimpleLink™ Multiprotocol
2.4-GHz Wireless System-in-Package
Applicant : Texas Instruments
12500 TI BLVD., Dallas, Texas, 75243
Manufacturer : Texas Instruments
12500 TI BLVD., Dallas, Texas, 75243
Standard : FCC Part 15 Subpart C §15.247

The product was received on Nov. 09, 2021 and testing was started from Nov. 15, 2021 and completed on Feb. 17, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	17
3.3 Power Spectral Density Measurement	18
3.4 Conducted Band Edges and Spurious Emission Measurement	23
3.5 Radiated Band Edges and Spurious Emission Measurement	27
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements	34
4 List of Measuring Equipment	35
5 Uncertainty of Evaluation.....	37
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Conducted Spurious Emission	
Appendix D. Conducted Spurious Emission Plots	
Appendix E. Cabinet Radiated Spurious Emission	
Appendix F. Cabinet Radiated Spurious Emission Plots	
Appendix G. Duty Cycle Plots	
Appendix H. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR1N0955B	01	Initial issue of report	Mar. 03, 2022
FR1N0955B	02	Revise description in section 3.5.3 and appendix A	Mar. 21, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	0.66 dB under the limit at 2483.5 MHz
3.6	15.207	AC Conducted Emission	Pass	9.53 dB under the limit at 0.152 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Danny Lee

Report Producer: Ruby Zou



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth - LE, and Zigbee

	Brand	Antenna type	Model	2.4 GHz Gain
1	Texas Instruments	Inverted F - PCB	Custom Antenna	3.3dBi
2			Custom Antenna	5.3dBi
3	Ethertronics	Dipole	1000423	-0.6dBi
4	LSR	Rubber Whip / Dipole	001-0012	2dBi
5			080-0013	2dBi
6			080-0014	2dBi
7		PIFA	001-0016	2.5dBi
8	001-0021		2.5dBi	
9	Laird	PCB	CAF94504	2dBi
10			CAF9405	2dBi
11	Pulse	Ceramic Chip	W3006	3.2dBi
12	ACX	Multilayer Chip	AT3216-BR2R7HAA	0.5dBi
13			AT312-T2R4PAA	1.5dBi
14	TDK	Multilayer Ceramic Chip Antenna	ANT016008LCD2442MA1	1.6dBi
15			ANT016008LCD2442MA2	2.5dBi
16	Mitsubishi Material	Chip Antenna	AM03DP-ST01	1.6dBi
17		Antenna Unit	UB18CP-100ST01	-1.0dBi
18	Taiyo Yuden	Chip Antenna / Helical Monopole	AF216M245001	1.5dBi
19			AH212M245001	1.3dBi
20			AH316M245001	1.9dBi
21	Antenna Technology	Dipole	AA2402SPU	2.0dBi
22			AA2402RSPU	2.0dBi
23			AA2402A-UFLLP	2.0dBi
24			AA2402AU-UFLLP	2.0dBi
25	Staf	Mono-pole	1019-016	2.14dBi
26			1019-017	2.14dBi
27			1019-018	2.14dBi
28			1019-019	2.14dBi



	Brand	Antenna type	Model	2.4 GHz Gain
29	Map Electronics	Rubber Whip	MEIWX-2411SAXX-2400	2.0dBi
30			MEIWX-2411RSXX-2400	2.0dBi
31			MEIWX-1511RSXX-2400	5.0dBi
32			MEIWX-151XSAXX-2400	5.0dBi
33			MEIWX-1451RSXX-2400	4.0dBi
34			MEIWX-282XSAXX-2400	2.0dBi
35			MEIWX-282XRSXX-2400	2.0dBi
36			MEIWF-HP01RS2X-2400	2.0dBi
37	Yageo	Chip	ANT3216A063R2400A	1.69dBi
38	Mag Layers Scientific	Chip	LTA-3216-2G4S3-A1	1dBi
39			LTA-3216-2G4S3-A3	2dBi
40	Avantech	Rubber Whip / Dipole	AN2450-5706RS	2.38dBi
41			AN2450-5010BRS	5.03dBi
42			AN2450-92K01BRS	5.03dBi
43			R-AN2400-5701RS	3.3dBi

Remark:

1. The EUT uses the PCB antenna from Texas Instruments (Antenna #1)
2. The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY (TAF Code: 3786)
Remark	The Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	01	2405	09	2445
	02	2410	10	2450
	03	2415	11	2455
	04	2420	12	2460
	05	2425	13	2465
	06	2430	14	2470
	07	2435	15	2475
	08	2440	16	2480


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz) radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	250kbps / O-QPSK
	Mode 1: Zigbee Tx CH01_2405 MHz
	Mode 2: Zigbee Tx CH08_2440 MHz
	Mode 3: Zigbee Tx CH16_2480 MHz
Radiated Test Cases	Mode 1: Zigbee Tx CH01_2405 MHz
	Mode 2: Zigbee Tx CH08_2440 MHz
	Mode 3: Zigbee Tx CH16_2480 MHz
AC Conducted Emission	Mode 1: Bluetooth - LE TX + USB Cable (Charging from Notebook)
	Mode 2: Zigbee TX + USB Cable (Charging from Notebook)
Remark: The worst case of conducted emission is mode 2; only the test data of it was reported.	

2.3 Connection Diagram of Test System

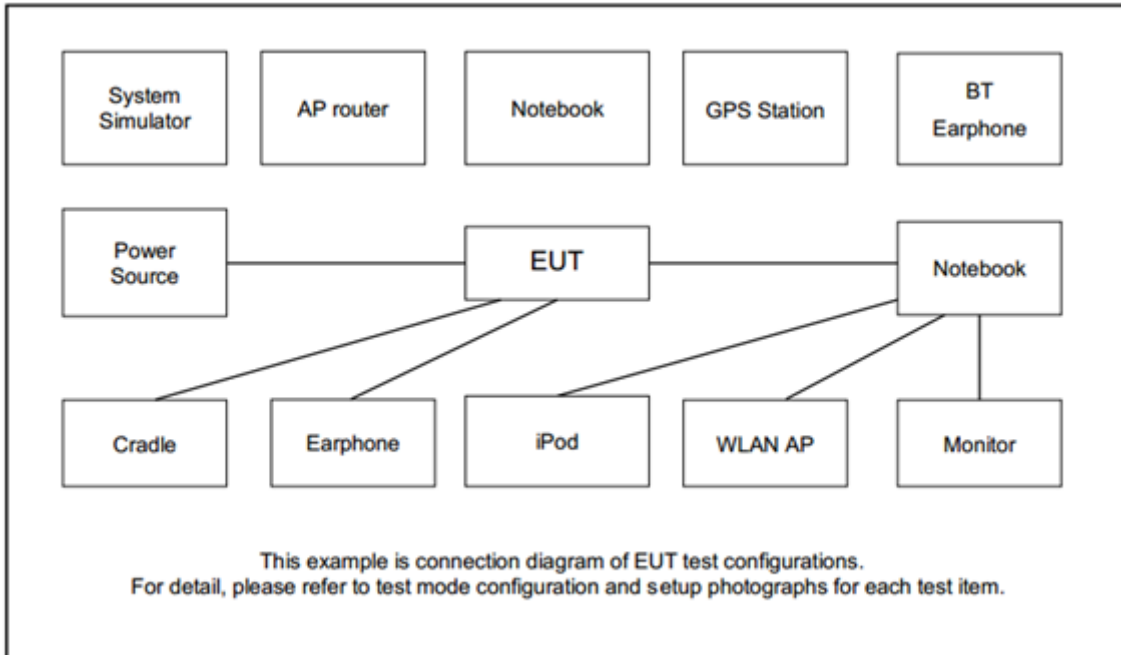

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	Unshielded, 1.0m	Unshielded, 1.8m
2.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0m	N/A
3.	Notebook	Dell	Latitude 3400	FCC DoC	Shielded, 0.2m	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Notebook	Dell	E3340	FCC DoC	Shielded, 0.3m	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m

2.5 EUT Operation Test Setup

The RF test items, utility “SmartRF Studio 7 v2.23.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

<CH01, CH08: Setting 5 & CH16: Setting 0 + Gain 5.3 dBi>

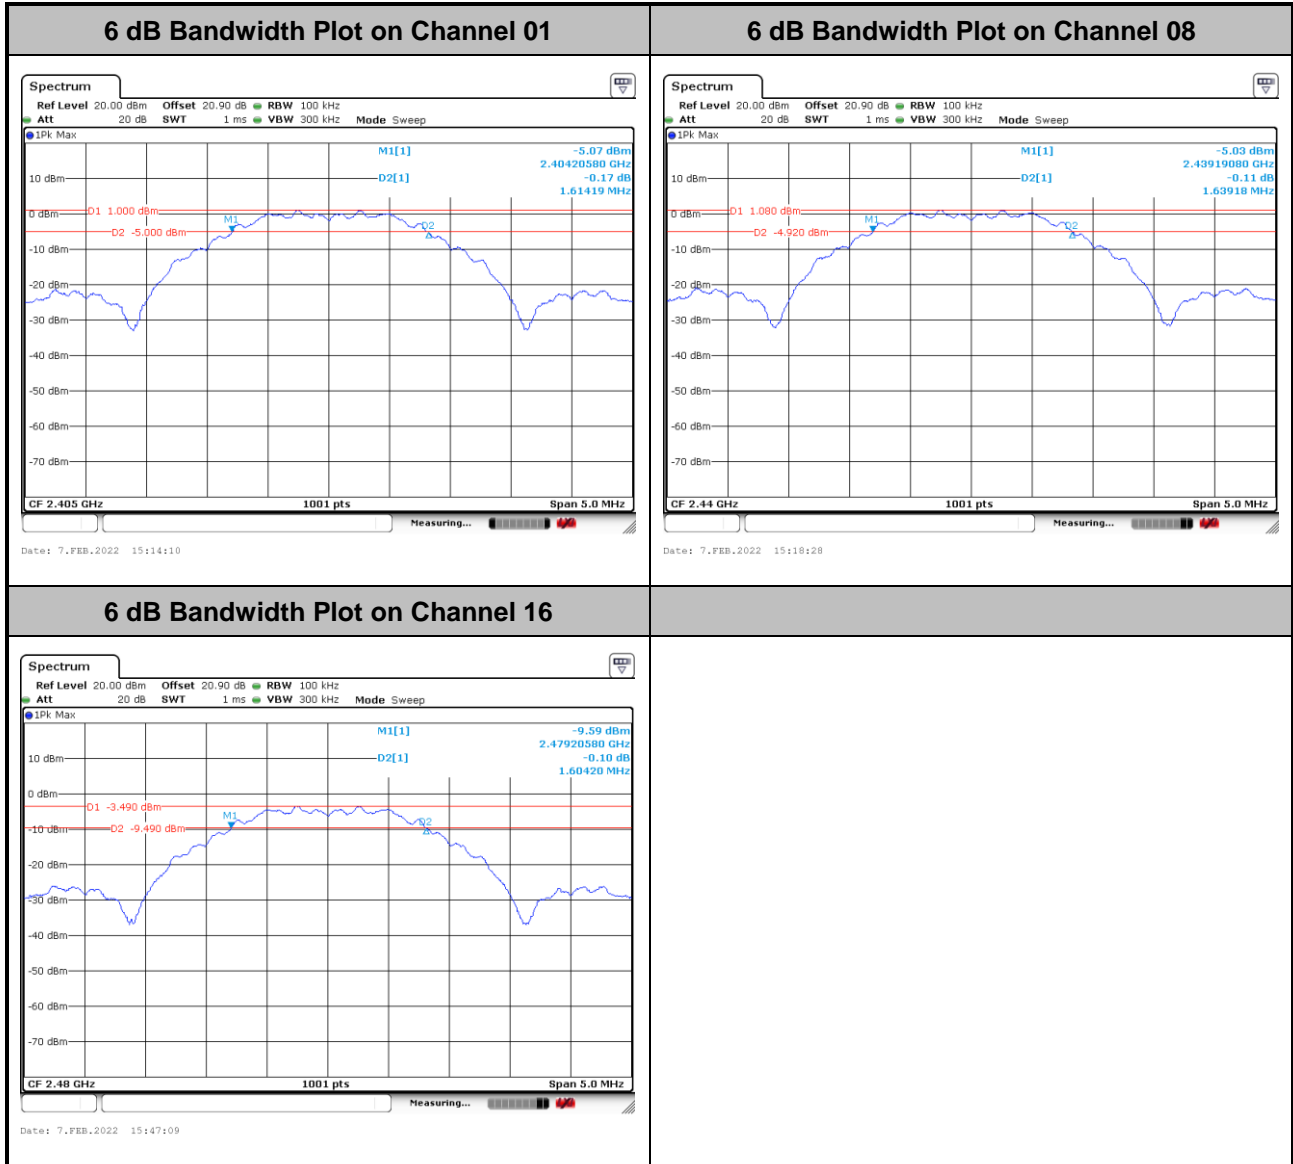



<CH16: Setting 2 + Gain 3.3 dBi>

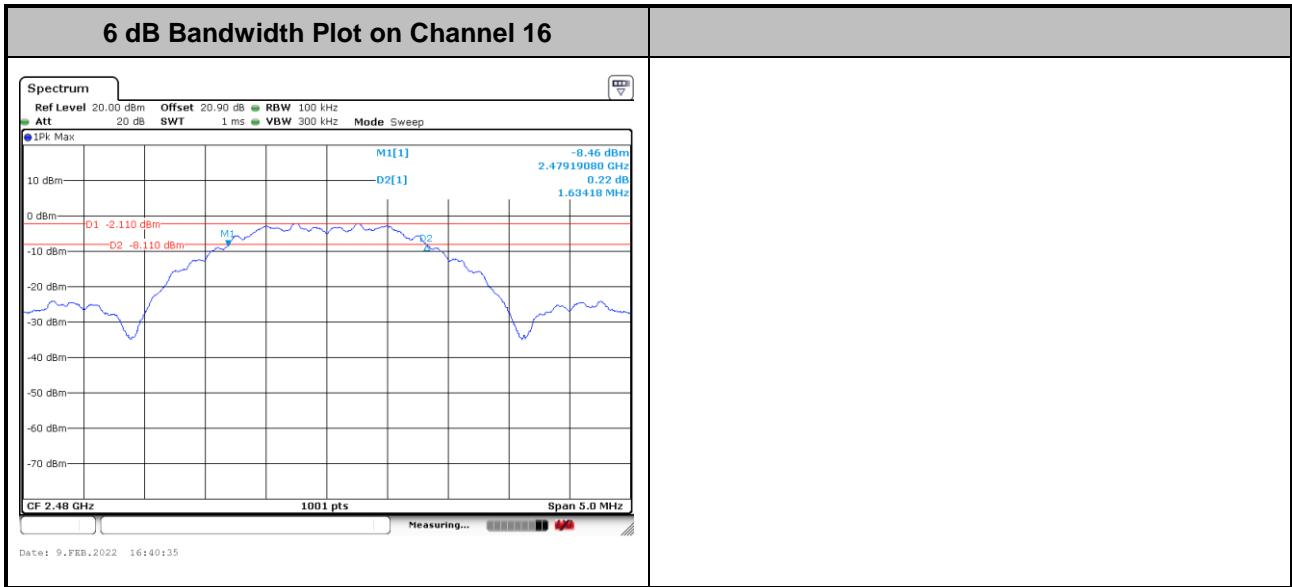




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<CH01, CH08: Setting 5 & CH16: Setting 0 + Gain 5.3 dBi>

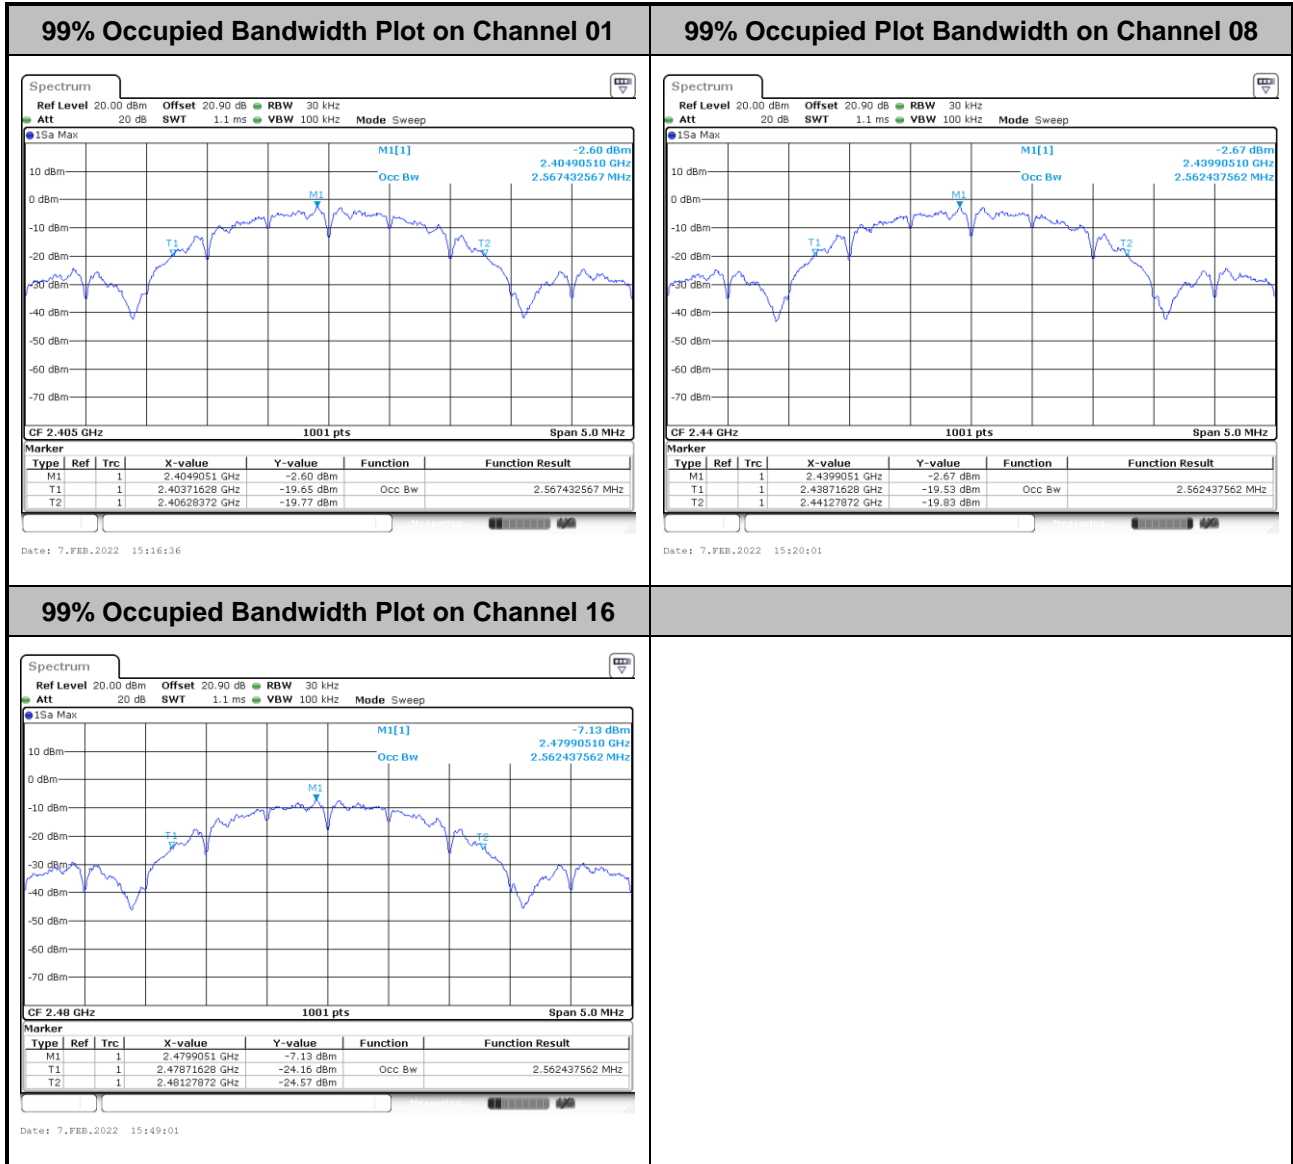

Note: The occupied channel bandwidth is maintained within the band of operation.



<CH16: Setting 2 + Gain 3.3 dBi>

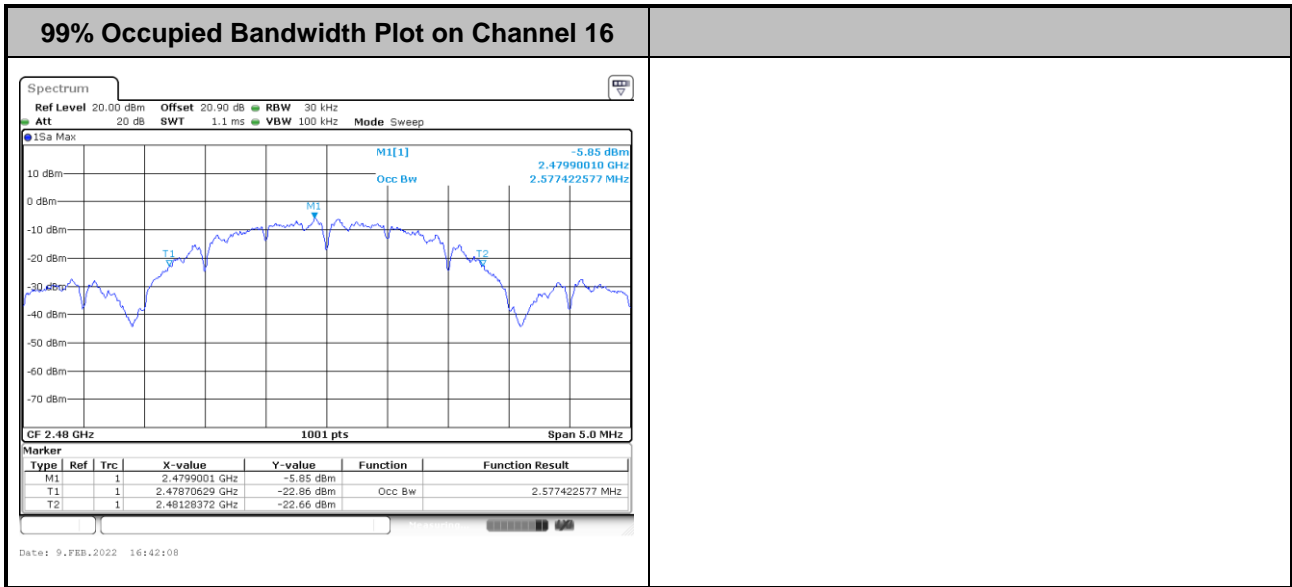

Note: The occupied channel bandwidth is maintained within the band of operation.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

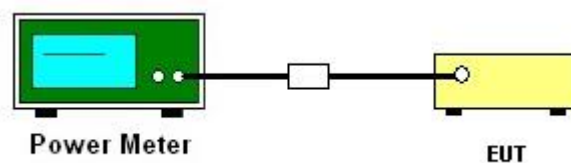

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

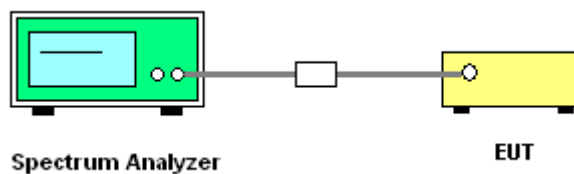


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<CH01, CH08: Setting 5 & CH16: Setting 0 + Gain 5.3 dBi>

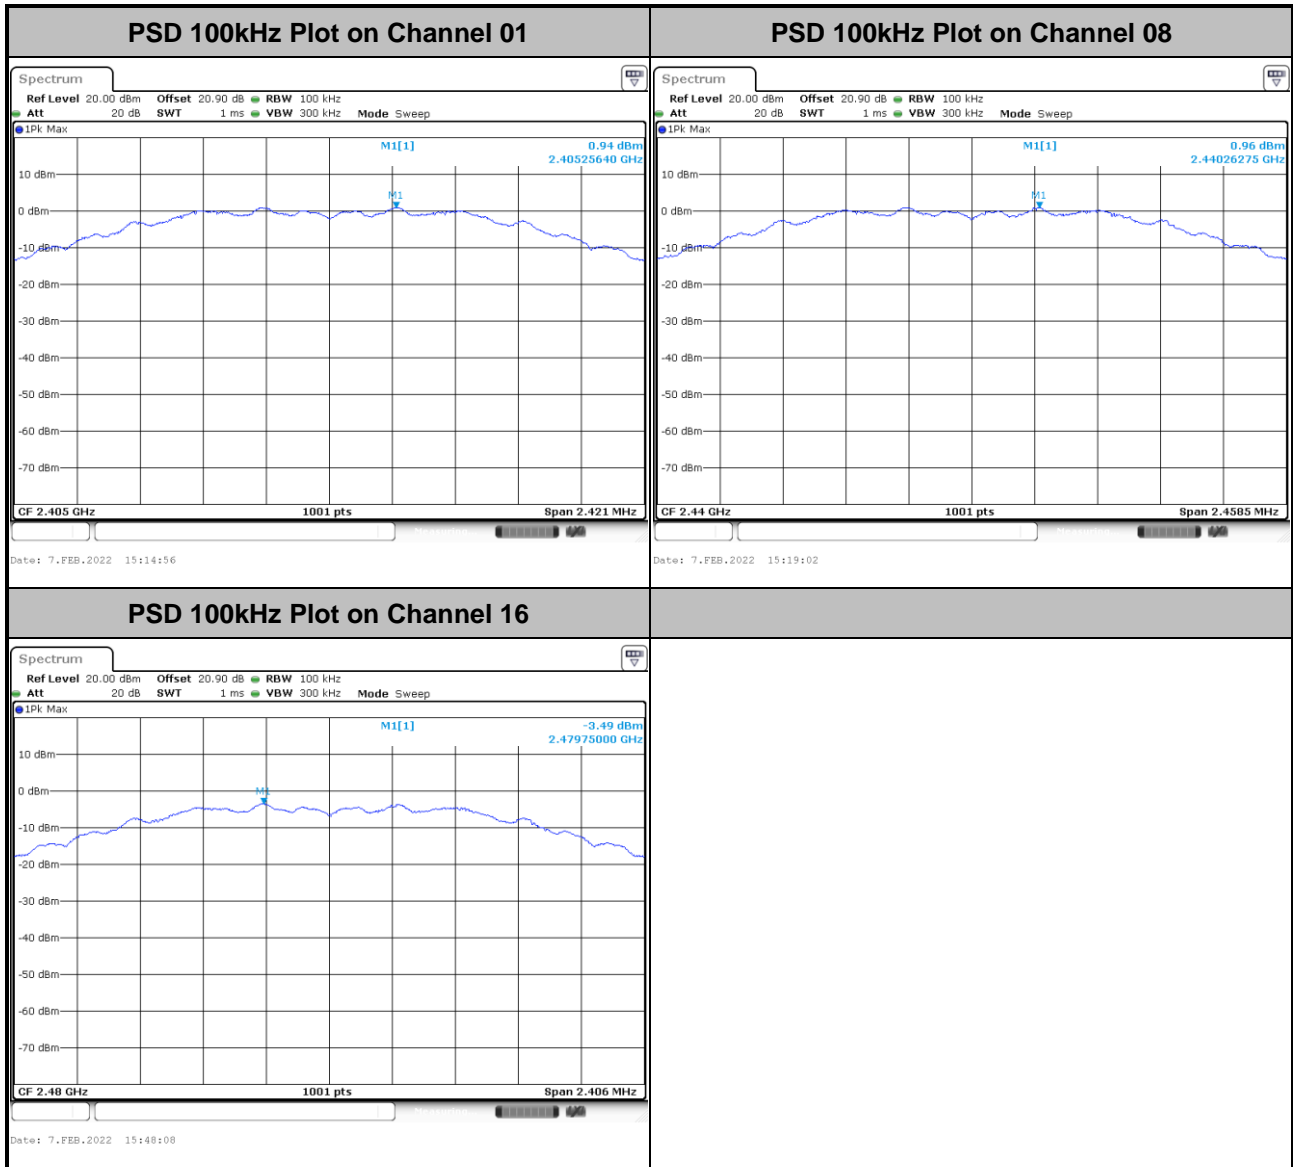




<CH16: Setting 2 + Gain 3.3 dBi>

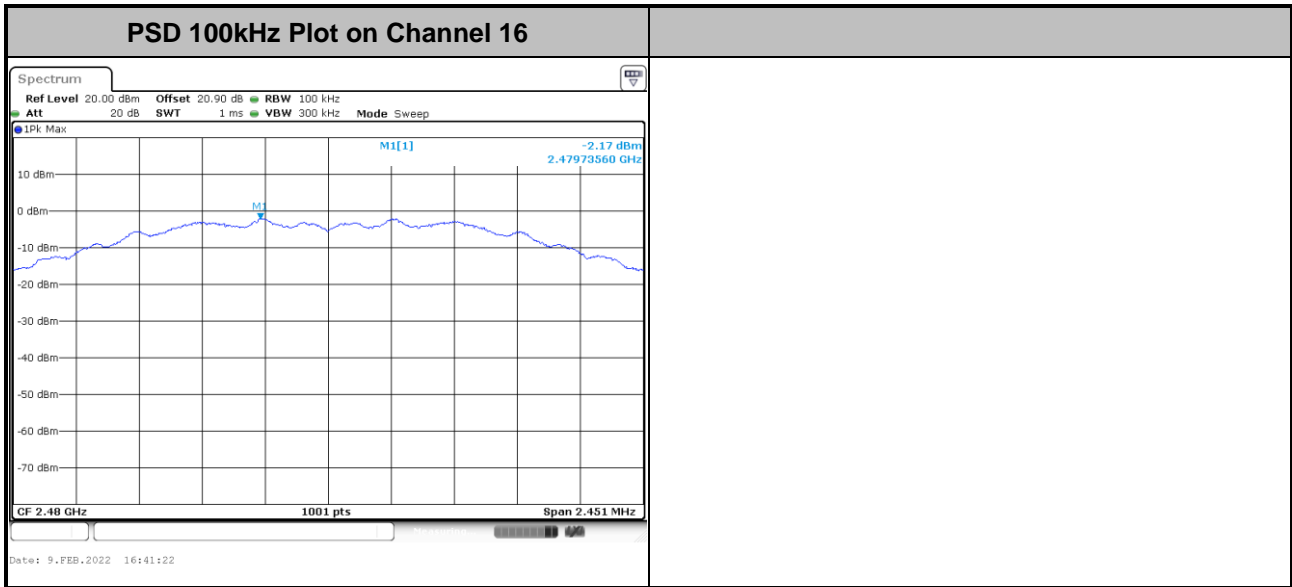




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<CH01, CH08: Setting 5 & CH16: Setting 0 + Gain 5.3 dBi>

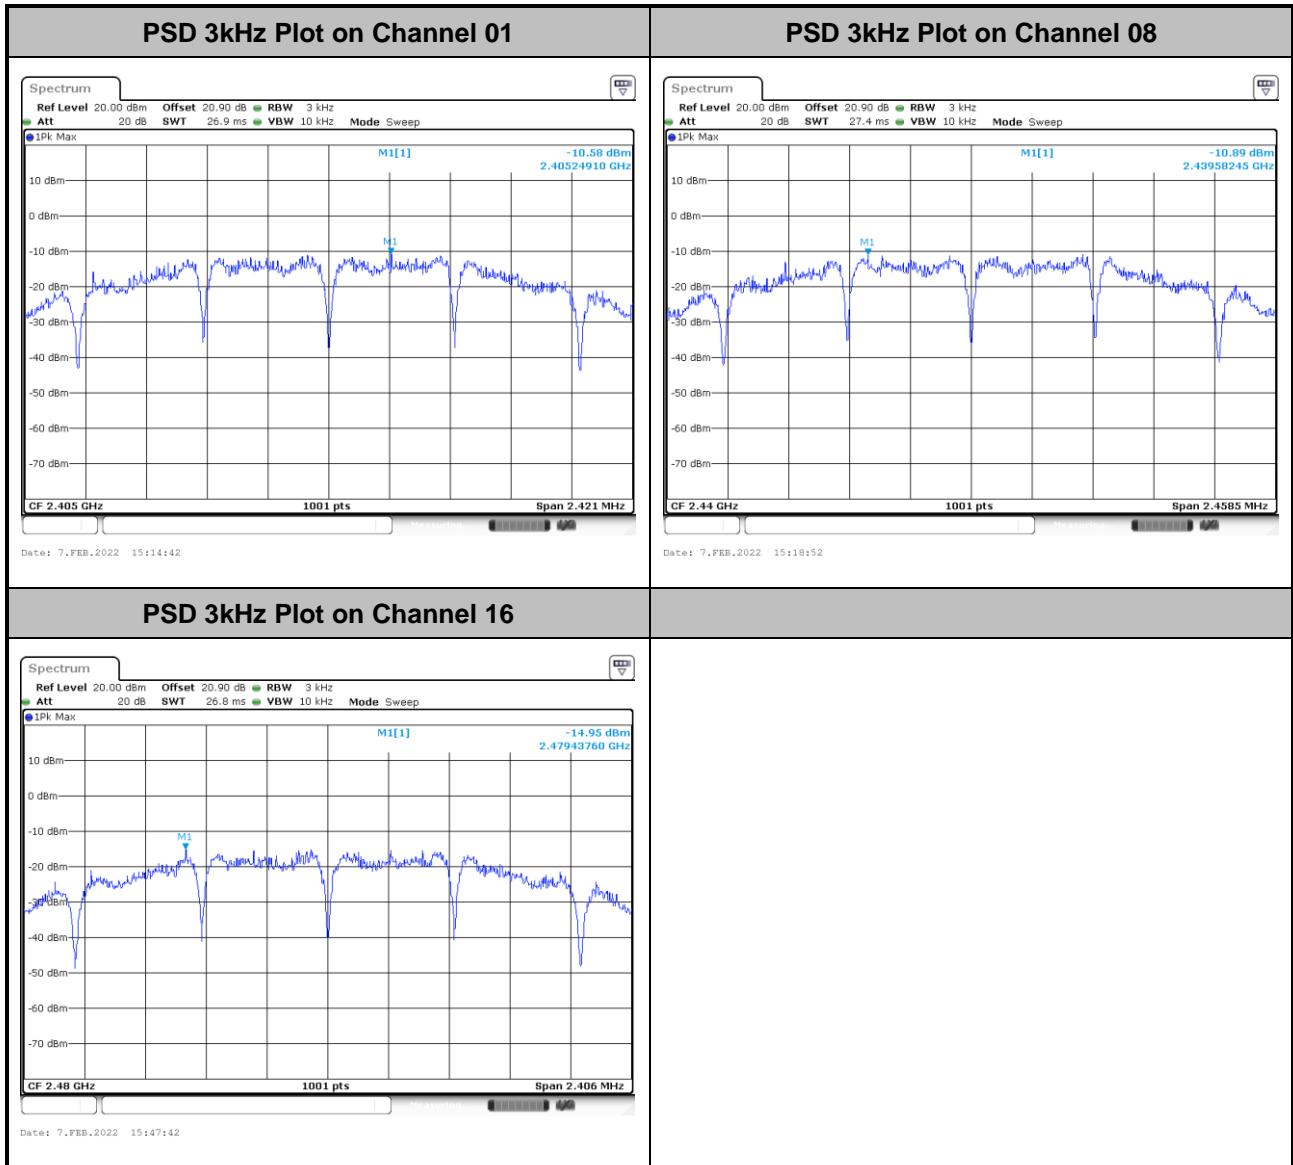



<CH16: Setting 2 + Gain 3.3 dBi>

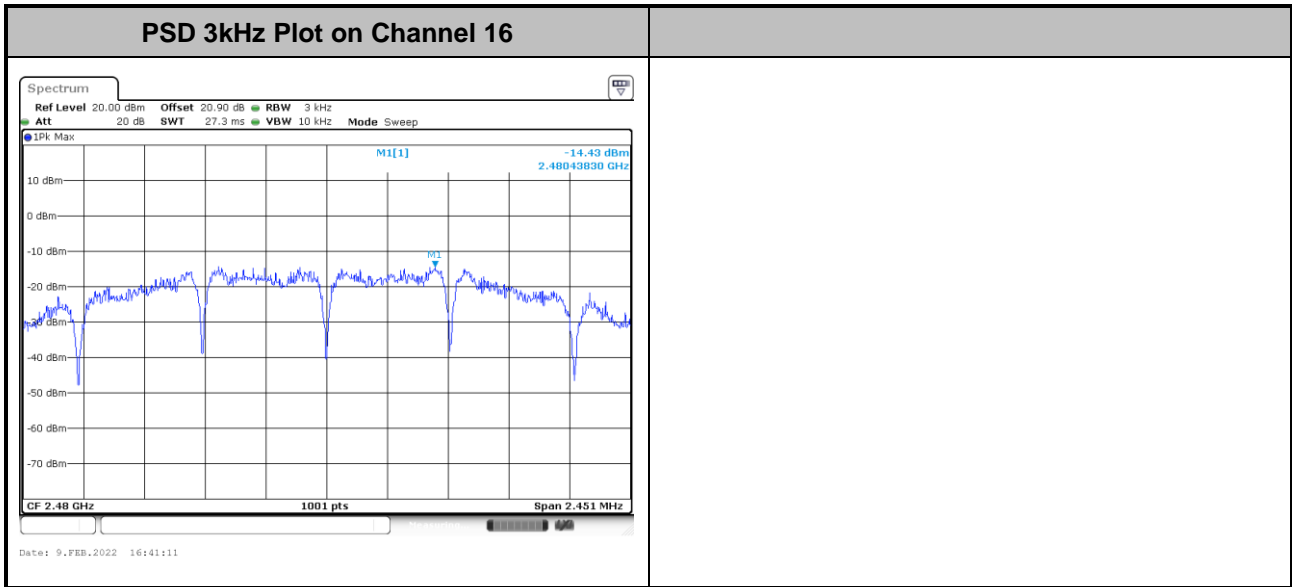

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.1 General and 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

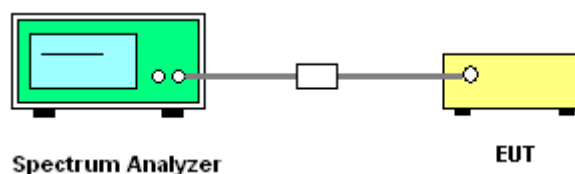




3.4.5 Test Result of Conducted Band Edges Plots

<CH01: Setting 5 & CH16: Setting 0 + Gain 5.3 dBi>

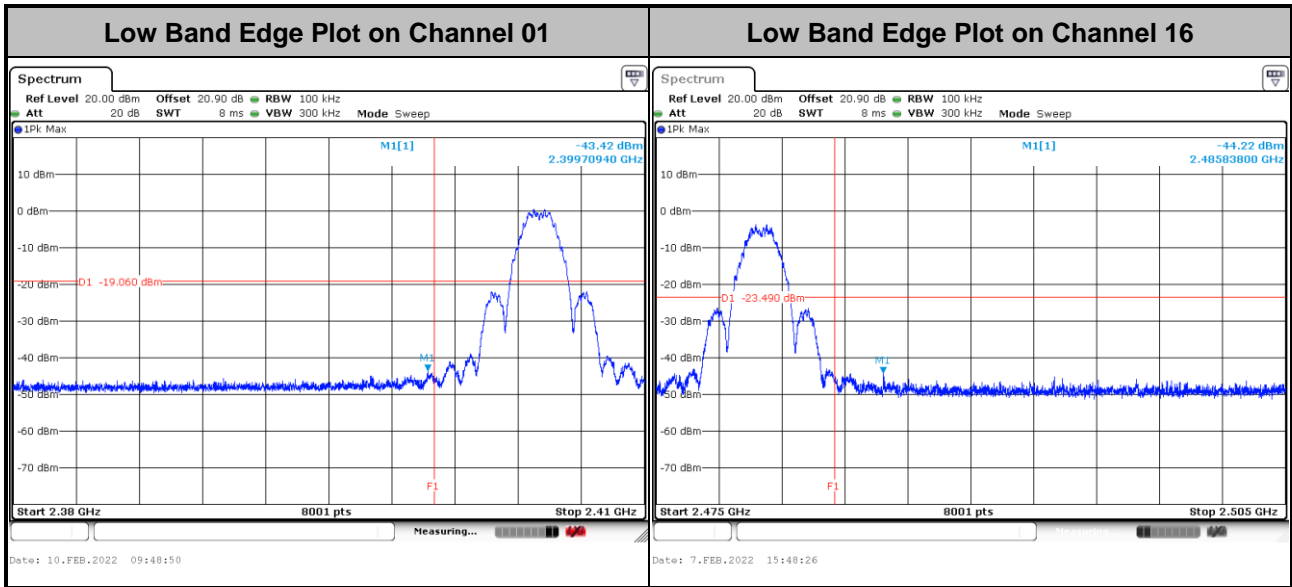


<CH16: Setting 2 + Gain 3.3 dBi >

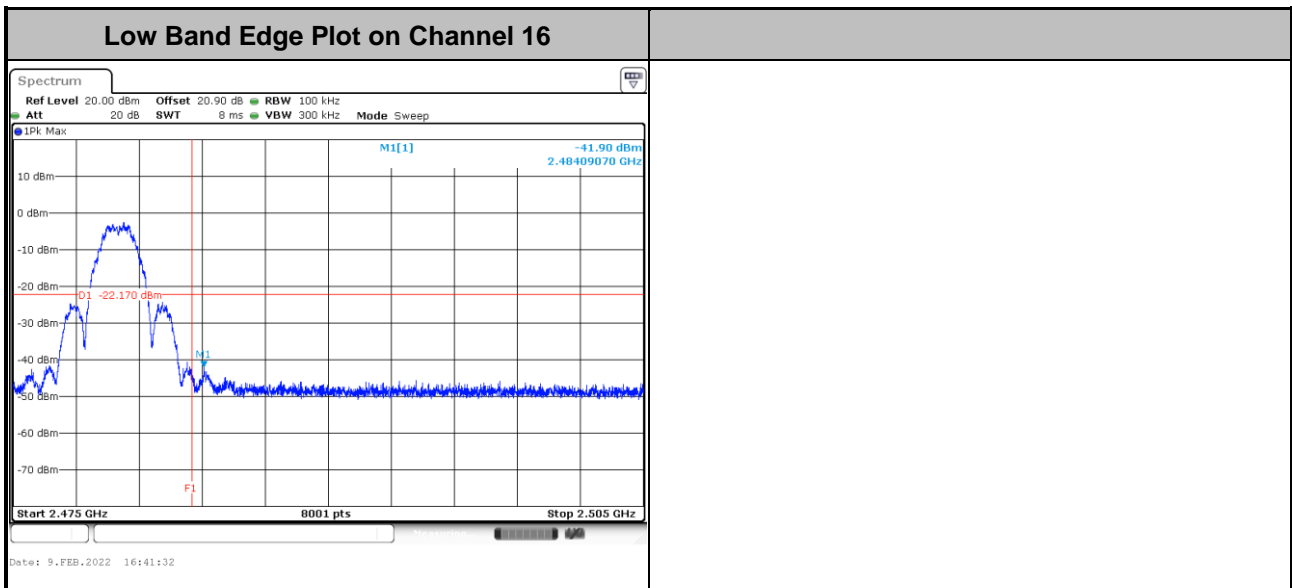





3.4.6 Test Result of Conducted Spurious Emission Plots

<CH01, CH08: Setting 5 & CH16: Setting 0 + Gain 5.3 dBi>

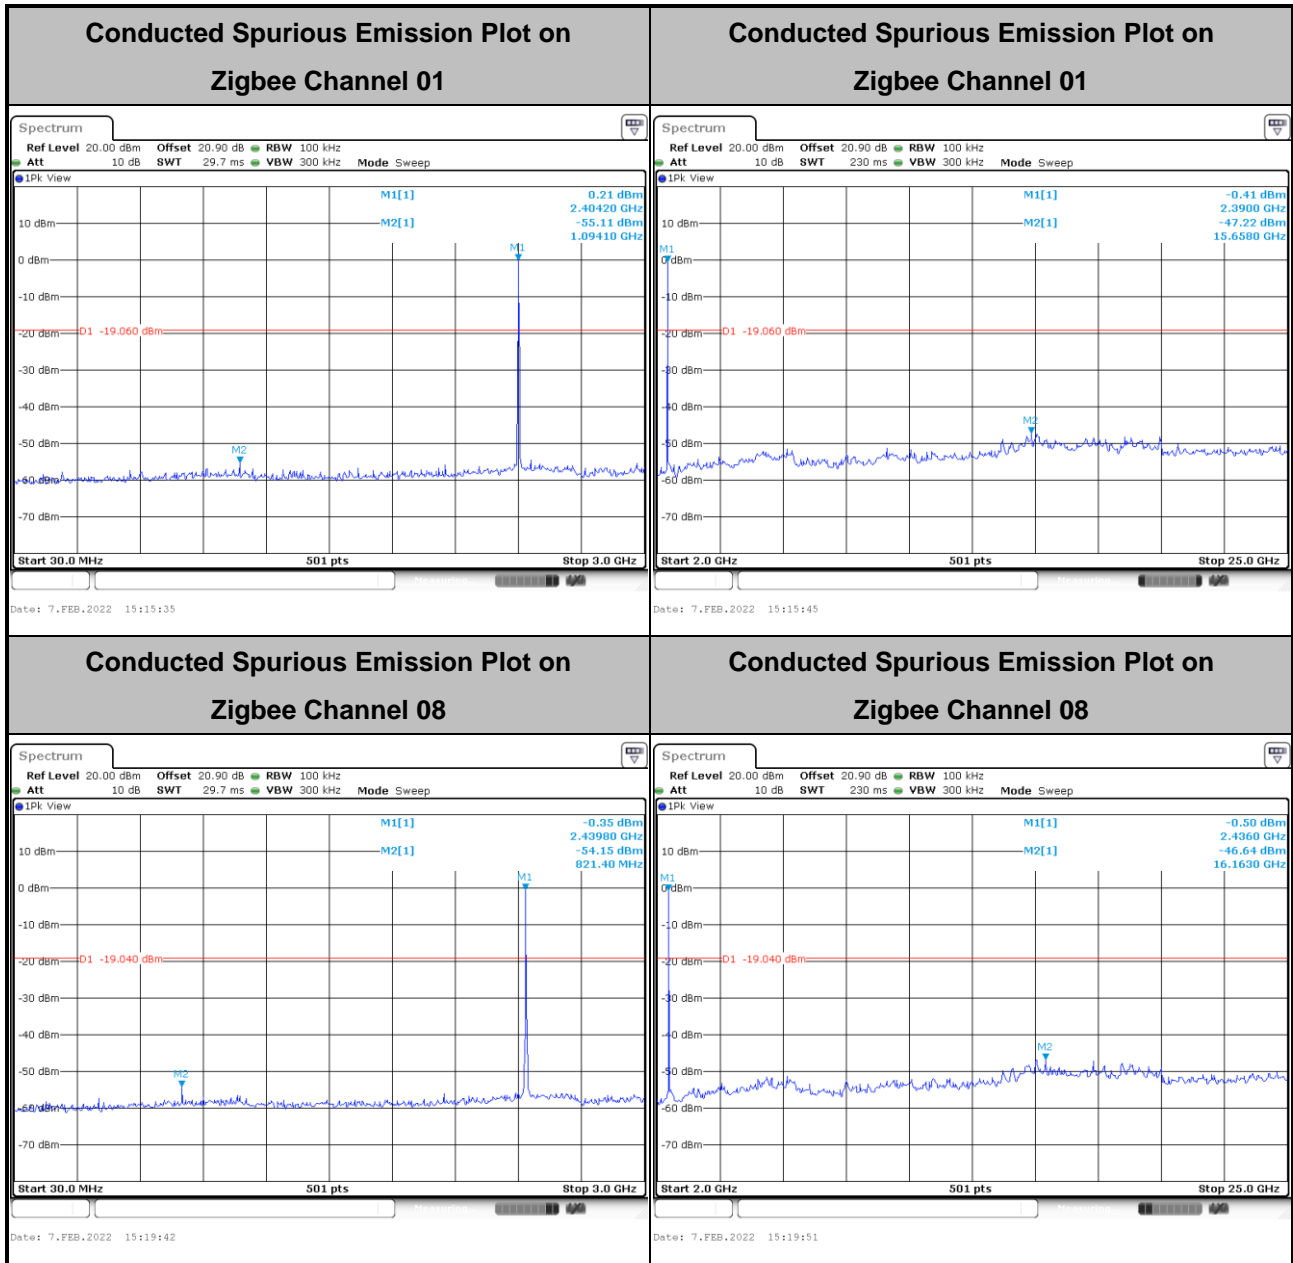

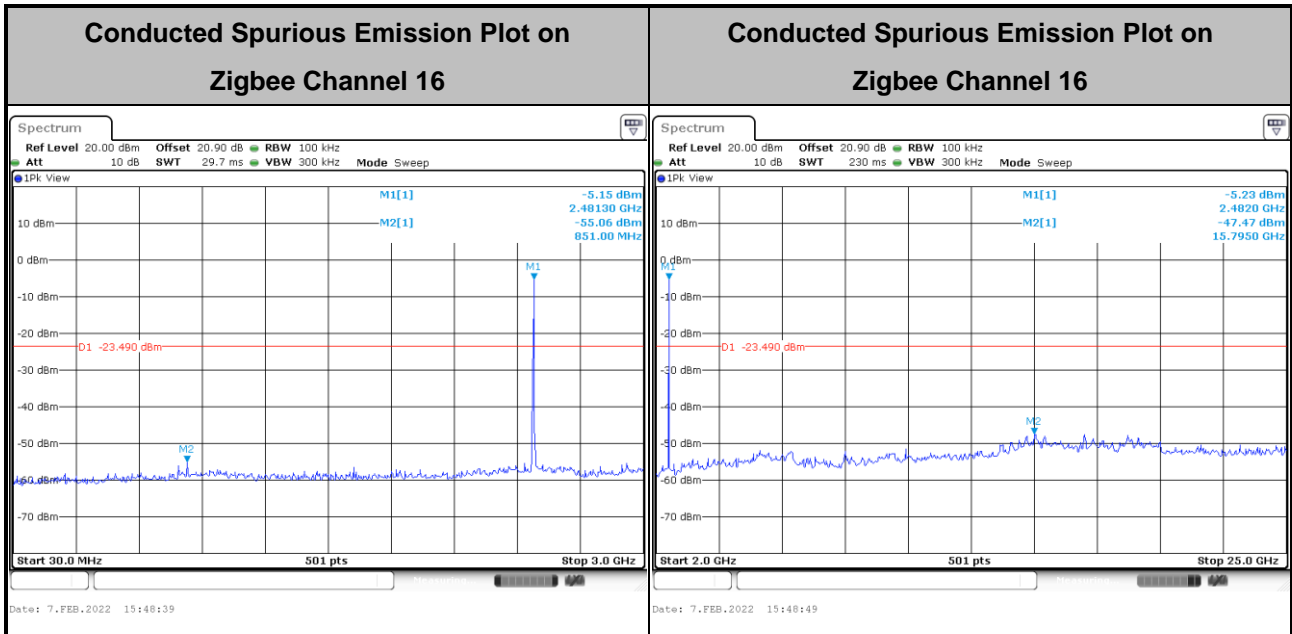

<CH16: Setting 2 + Gain 3.3 dBi>

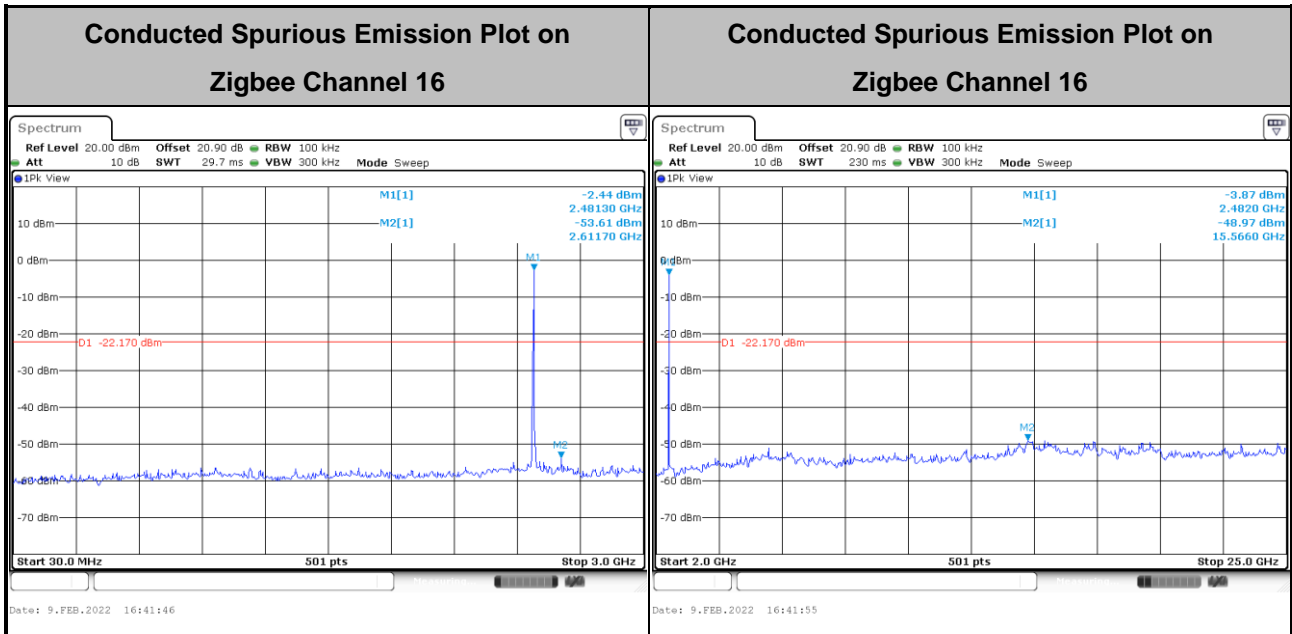



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands shall comply with the general field strength limits as following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

**3.5.3 Test Procedures**

1. The testing follows the ANSI C63.10 Section 11.12.2 Antenna-port conducted measurements.
2. Measure the conducted output power (in dBm) using the peak detector.
3. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP.
4. Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies \leq 30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies $>$ 1000 MHz).
5. Convert the resultant EIRP to an equivalent electric field strength using the following relationship:
$$E = \text{EIRP} - 20 \log d + 104.8,$$
where
E is the electric field strength in dB μ V/m
EIRP is the equivalent isotropically radiated power in dBm
d is the specified measurement distance in 3m
6. Compare the resultant electric field strength level with the applicable regulatory limit.
7. Perform the cabinet radiated spurious emission test.
8. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
9. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
10. The EUT was placed at distance 3 meter from measurement antenna which was mounted on the top of a variable height antenna tower.
11. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
12. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
13. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
14. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold;


(3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For Conducted Measurement Setup:

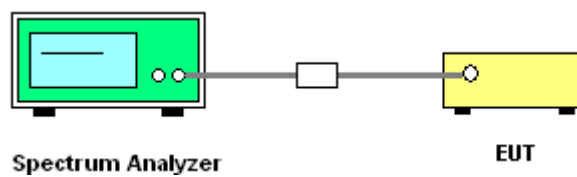


For radiated test below 30MHz

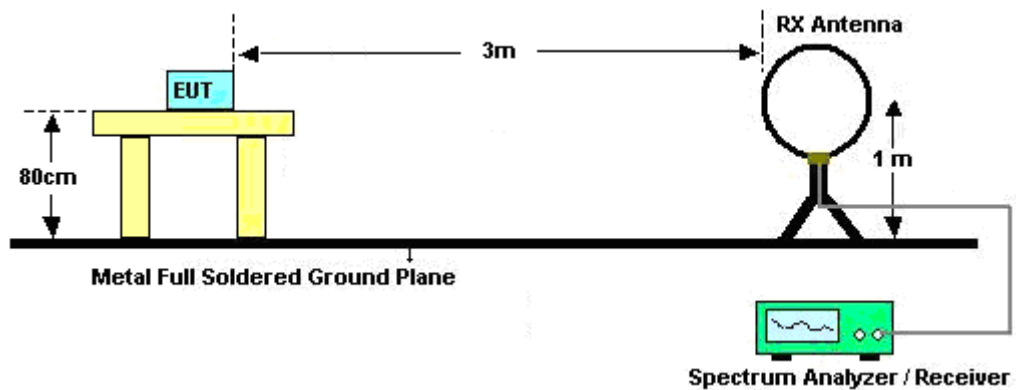


For radiated test from 30MHz to 1GHz

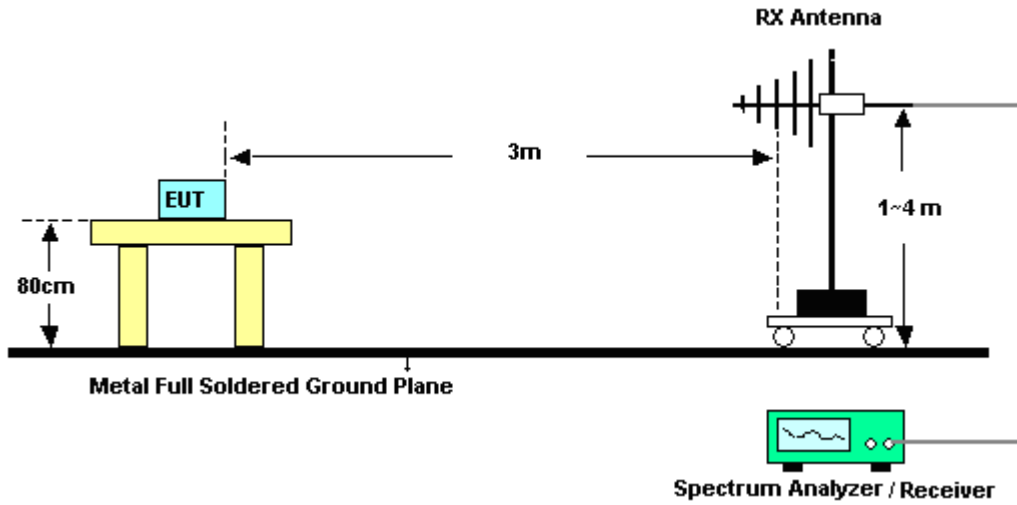

For radiated test from 1GHz to 18GHz

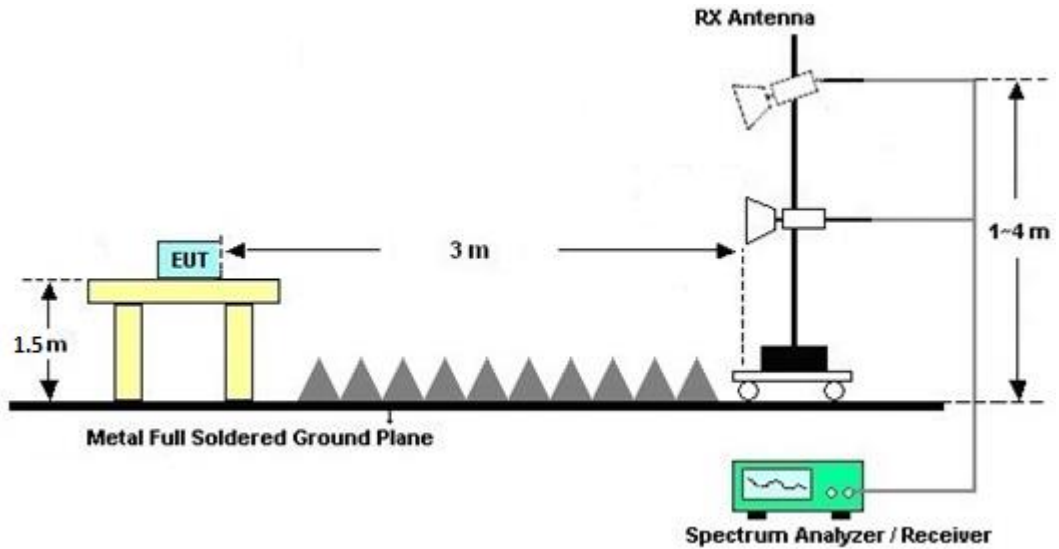

For radiated test above 18GHz

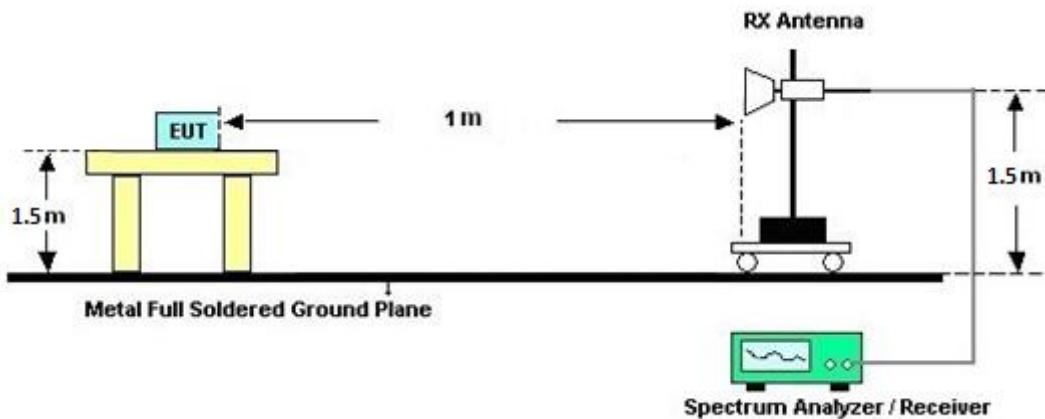



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Conduced Spurious at Band Edges in the Restricted Band

Please refer to Appendix C and D.

3.5.7 Test Result of Conduced Spurious Emission in the Restricted Band

Please refer to Appendix C and D.

3.5.8 Test Result of Cabinet Radiated Spurious at Band Edges

Please refer to Appendix E and F.

3.5.9 Test Result of Cabinet Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix E and F.

3.5.10 Duty Cycle

Please refer to Appendix G.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

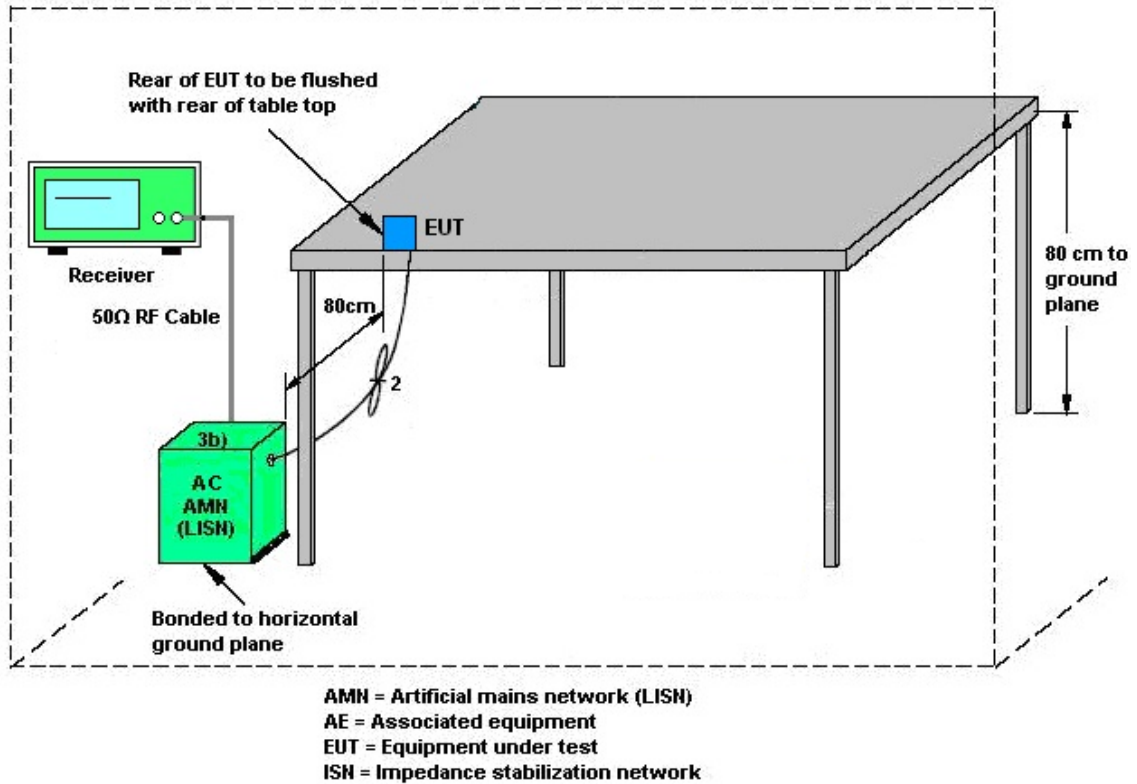

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power and power spectral density limit shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 07, 2022	Jan. 19, 2022~ Jan. 21, 2022	Jan. 06, 2023	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N- 06	35419 & 03	30MHz~1GHz	Apr. 28, 2021	Jan. 19, 2022~ Jan. 21, 2022	Apr. 27, 2022	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 03, 2021	Jan. 19, 2022~ Jan. 21, 2022	Dec. 02, 2022	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91702 51	18GHz~40GHz	Nov. 30, 2021	Jan. 19, 2022~ Jan. 21, 2022	Nov. 29, 2022	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	1590075	1GHz~18GHz	Apr. 22, 2021	Jan. 19, 2022~ Jan. 21, 2022	Apr. 21, 2022	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 04, 2021	Jan. 19, 2022~ Jan. 21, 2022	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Oct. 04, 2021	Jan. 19, 2022~ Jan. 21, 2022	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 23, 2021	Jan. 19, 2022~ Jan. 21, 2022	Jul. 22, 2022	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY5235027 6	3Hz~44GHz	Jul. 22, 2021	Jan. 19, 2022~ Jan. 21, 2022	Jul. 21, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682-4	30MHz to 18GHz	Feb. 24, 2021	Jan. 19, 2022~ Jan. 21, 2022	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971-4	9kHz to 18GHz	Feb. 24, 2021	Jan. 19, 2022~ Jan. 21, 2022	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655-4	9kHz to 18GHz	Feb. 24, 2021	Jan. 19, 2022~ Jan. 21, 2022	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2,8 01606/2	18GHz~40GHz	Feb. 24, 2021	Jan. 19, 2022~ Jan. 21, 2022	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126 E	30MHz~18GHz	Sep. 17, 2021	Jan. 19, 2022~ Jan. 21, 2022	Sep. 16, 2022	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Jan. 19, 2022~ Jan. 21, 2022	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jan. 19, 2022~ Jan. 21, 2022	N/A	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Jan. 19, 2022~ Jan. 21, 2022	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB249 5	N/A	Mar. 09, 2021	Jan. 19, 2022~ Jan. 21, 2022	Mar. 08, 2022	Radiation (03CH07-HY)
Power Meter	Anritsu	ML2495A	932001	N/A	Sep. 30, 2021	Nov. 15, 2021~ Feb. 10, 2022	Sep. 29, 2022	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	846202	300MHz~40GH z	Sep. 30, 2021	Nov. 15, 2021~ Feb. 10, 2022	Sep. 29, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Nov. 15, 2021~ Feb. 10, 2022	Aug. 29, 2022	Conducted (TH05-HY)
Switch Control Mainframe	E-IUSTRUME NT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12, 2021	Nov. 15, 2021~ Feb. 10, 2022	Aug. 11, 2022	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 15, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 30, 2020	Nov. 15, 2021	Nov. 29, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 01, 2020	Nov. 15, 2021	Nov. 30, 2021	Conduction (CO05-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Feb. 01, 2021	Nov. 15, 2021	Jan. 30, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 15, 2021	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2021	Nov. 15, 2021	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	Nov. 15, 2021	Dec. 30, 2021	Conduction (CO05-HY)
Spectrum Analyzer	ROHDE & SCHWARZ	FSV40	101565	10Hz~40GHz	Dec. 29, 2021	Jan. 13, 2022~ Feb. 17, 2022	Dec. 28, 2022	CSE (TH05-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 11, 2021	Jan. 13, 2022~ Feb. 17, 2022	Mar. 10, 2022	CSE (TH05-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 10, 2021	Jan. 13, 2022~ Feb. 17, 2022	Dec. 09, 2022	CSE (TH05-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 22, 2021	Jan. 13, 2022~ Feb. 17, 2022	Feb. 21, 2022	CSE (TH05-HY)
Filter	Wainwright	WLKS1200-12SS	SN2	1.2GHz Low Pass Filter	Mar. 17, 2021	Jan. 13, 2022~ Feb. 17, 2022	Mar. 16, 2022	CSE (TH05-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN2	3GHz High Pass Filter	Jul. 12, 2021	Jan. 13, 2022~ Feb. 17, 2022	Jul. 11, 2022	CSE (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.0 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Richard Qiu	Temperature:	17-25.9	°C
Test Date:	2021/11/15-2022/2/10	Relative Humidity:	37.5-72.2	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250kbps	1	1	2405	2.567	1.614	0.50	Pass
Zigbee	250kbps	1	8	2440	2.562	1.639	0.50	Pass
Zigbee	250kbps	1	16	2480	2.562	1.604	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Setting
Zigbee	250kbps	1	1	2405	4.11	30.00	5.30	9.41	36.00	Pass	5
Zigbee	250kbps	1	8	2440	4.24	30.00	5.30	9.54	36.00	Pass	5
Zigbee	250kbps	1	16	2480	-0.19	30.00	5.30	5.11	36.00	Pass	0

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250kbps	1	1	2405	3.95	30.00	5.30	9.25	36.00	Pass
Zigbee	250kbps	1	8	2440	3.98	30.00	5.30	9.28	36.00	Pass
Zigbee	250kbps	1	16	2480	-0.57	30.00	5.30	4.73	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250kbps	1	1	2405	0.94	-10.58	5.30	8.00	Pass
Zigbee	250kbps	1	8	2440	0.96	-10.89	5.30	8.00	Pass
Zigbee	250kbps	1	16	2480	-3.49	-14.95	5.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth								
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250kbps	1	16	2480	2.577	1.634	0.50	Pass

TEST RESULTS DATA Peak Power Table											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Setting
Zigbee	250kbps	1	16	2480	1.92	30.00	3.30	5.22	36.00	Pass	2

TEST RESULTS DATA Average Power Table (Reporting Only)										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250kbps	1	16	2480	1.55	30.00	3.30	4.85	36.00	Pass

TEST RESULTS DATA Peak Power Density									
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250kbps	1	16	2480	-2.17	-14.43	3.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Setting
Zigbee	250kbps	1	1	2405	0.58	30.00	5.30	5.88	36.00	Pass	0
Zigbee	250kbps	1	8	2440	0.20	30.00	5.30	5.50	36.00	Pass	0
Zigbee	250kbps	1	16	2480	-0.19	30.00	5.30	5.11	36.00	Pass	0

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250kbps	1	1	2405	0.25	30.00	5.30	5.55	36.00	Pass
Zigbee	250kbps	1	8	2440	-0.10	30.00	5.30	5.20	36.00	Pass
Zigbee	250kbps	1	16	2480	-0.57	30.00	5.30	4.73	36.00	Pass




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 1N0955
 Test Mode : Mode 2
 Test Voltage : Power From System
 Phase : Line

Full Spectrum

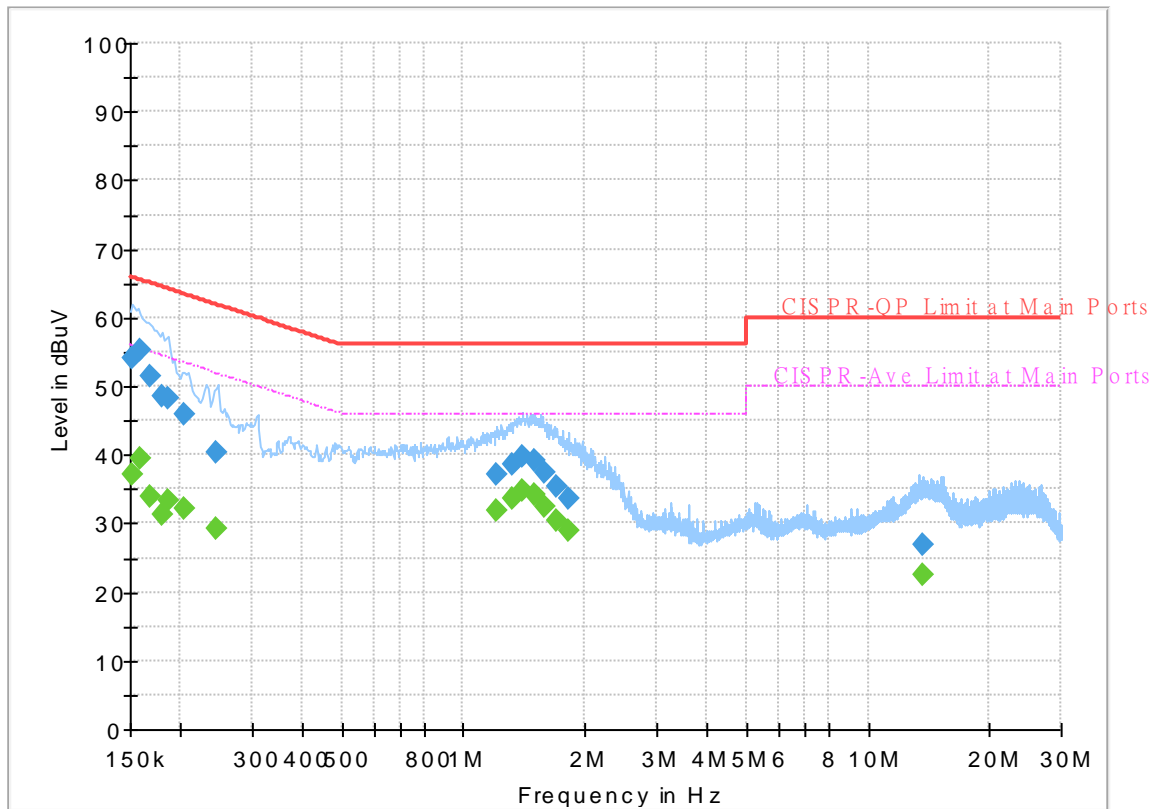

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	37.25	55.88	18.63	L1	OFF	19.6
0.152250	54.14	---	65.88	11.74	L1	OFF	19.6
0.159000	---	39.37	55.52	16.15	L1	OFF	19.6
0.159000	55.41	---	65.52	10.11	L1	OFF	19.6
0.168000	---	34.04	55.06	21.02	L1	OFF	19.6
0.168000	51.46	---	65.06	13.60	L1	OFF	19.6
0.179250	---	31.30	54.52	23.22	L1	OFF	19.6
0.179250	48.67	---	64.52	15.85	L1	OFF	19.6
0.186000	---	33.25	54.21	20.96	L1	OFF	19.6
0.186000	48.25	---	64.21	15.96	L1	OFF	19.6
0.204000	---	32.15	53.45	21.30	L1	OFF	19.6
0.204000	45.96	---	63.45	17.49	L1	OFF	19.6
0.244500	---	29.34	51.94	22.60	L1	OFF	19.6
0.244500	40.25	---	61.94	21.69	L1	OFF	19.6
1.209750	---	31.92	46.00	14.08	L1	OFF	20.1
1.209750	37.08	---	56.00	18.92	L1	OFF	20.1
1.322250	---	33.63	46.00	12.37	L1	OFF	20.1
1.322250	38.50	---	56.00	17.50	L1	OFF	20.1
1.401000	---	34.86	46.00	11.14	L1	OFF	20.1
1.401000	39.79	---	56.00	16.21	L1	OFF	20.1
1.493250	---	34.33	46.00	11.67	L1	OFF	20.1

1.493250	39.18	---	56.00	16.82	L1	OFF	20.1
1.594500	---	32.54	46.00	13.46	L1	OFF	20.1
1.594500	37.29	---	56.00	18.71	L1	OFF	20.1
1.700250	---	30.53	46.00	15.47	L1	OFF	20.1
1.700250	35.30	---	56.00	20.70	L1	OFF	20.1
1.815000	---	28.90	46.00	17.10	L1	OFF	20.1
1.815000	33.58	---	56.00	22.42	L1	OFF	20.1
13.596000	---	22.48	50.00	27.52	L1	OFF	19.9
13.596000	26.90	---	60.00	33.10	L1	OFF	19.9

EUT Information

Report NO : 1N0955
 Test Mode : Mode 2
 Test Voltage : Power From System
 Phase : Neutral

Full Spectrum

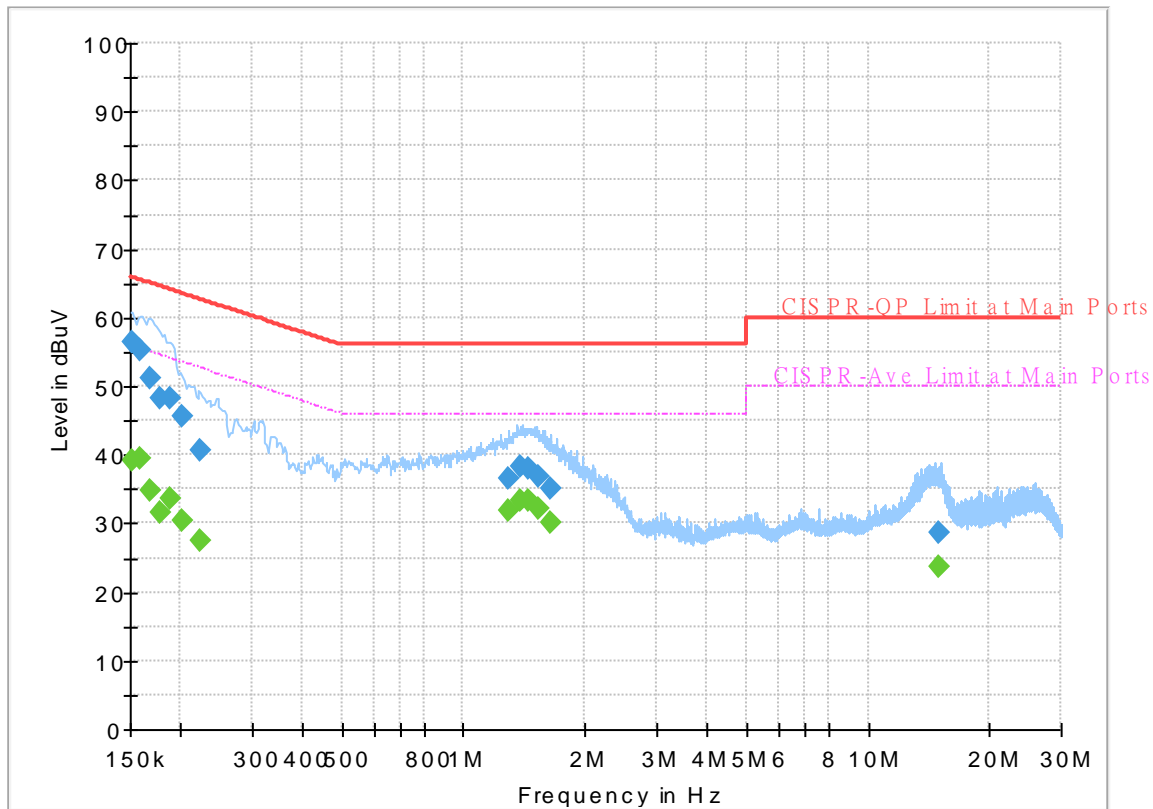

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	39.19	55.88	16.69	N	OFF	19.6
0.152250	56.35	---	65.88	9.53	N	OFF	19.6
0.159000	---	39.38	55.52	16.14	N	OFF	19.6
0.159000	55.19	---	65.52	10.33	N	OFF	19.6
0.168000	---	34.86	55.06	20.20	N	OFF	19.6
0.168000	51.05	---	65.06	14.01	N	OFF	19.6
0.177000	---	31.51	54.63	23.12	N	OFF	19.6
0.177000	48.34	---	64.63	16.29	N	OFF	19.6
0.188250	---	33.72	54.11	20.39	N	OFF	19.6
0.188250	48.27	---	64.11	15.84	N	OFF	19.6
0.201750	---	30.51	53.54	23.03	N	OFF	19.6
0.201750	45.66	---	63.54	17.88	N	OFF	19.6
0.224250	---	27.48	52.66	25.18	N	OFF	19.6
0.224250	40.78	---	62.66	21.88	N	OFF	19.6
1.295250	---	31.77	46.00	14.23	N	OFF	20.1
1.295250	36.56	---	56.00	19.44	N	OFF	20.1
1.387500	---	33.29	46.00	12.71	N	OFF	20.1
1.387500	38.23	---	56.00	17.77	N	OFF	20.1
1.455000	---	33.24	46.00	12.76	N	OFF	20.1
1.455000	37.99	---	56.00	18.01	N	OFF	20.1
1.538250	---	32.08	46.00	13.92	N	OFF	20.1

1.538250	36.91	---	56.00	19.09	N	OFF	20.1
1.637250	---	30.24	46.00	15.76	N	OFF	20.1
1.637250	34.95	---	56.00	21.05	N	OFF	20.1
14.894250	---	23.83	50.00	26.17	N	OFF	20.0
14.894250	28.56	---	60.00	31.44	N	OFF	20.0



Appendix C. Conducted Spurious Emission

Test Engineer :	Richard Qiu	Temperature :	17.5~24.3°C
		Relative Humidity :	48.7~66.8%

<CH01, CH08: Setting 5 & CH16: Setting 0 + Gain 5.3 dBi>

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge)

Zigbee	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Gain (dBi)	Path Loss (dB)	MIMO Factor (dB)	Ground ing Factor (dB)	Peak Avg. (P/A)
Zigbee CH 01 2405MHz		2329.32	-41.03	-19.83	-21.2	-47.53	5.3	1.2	0	0	P
		2388.645	-54.88	-13.68	-41.2	-61.42	5.3	1.24	0	0	A
	*	2405	9.59	-	-	3.05	5.3	1.24	0	0	P
	*	2405	5.74	-	-	-0.8	5.3	1.24	0	0	A
Zigbee CH 08 2440MHz		2375.24	-41.7	-20.5	-21.2	-48.23	5.3	1.23	0	0	P
		2388.68	-55.55	-14.35	-41.2	-62.09	5.3	1.24	0	0	A
	*	2440	9.78	-	-	3.24	5.3	1.24	0	0	P
	*	2440	5.98	-	-	-0.56	5.3	1.24	0	0	A
		2486.77	-40.11	-18.91	-21.2	-46.66	5.3	1.25	0	0	P
		2488.38	-54.81	-13.61	-41.2	-61.36	5.3	1.25	0	0	A
Zigbee CH 16 2480MHz	*	2480	5.23	-	-	-1.31	5.3	1.24	0	0	P
	*	2480	1.51	-	-	-5.03	5.3	1.24	0	0	A
		2483.5	-33.84	-12.64	-21.2	-40.39	5.3	1.25	0	0	P
		2483.5	-41.71	-0.51	-41.2	-48.26	5.3	1.25	0	0	A
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



2.4GHz 2400~2483.5MHz
Zigbee (Harmonic)

Zigbee	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Gain (dBi)	Path Loss (dB)	MIMO Factor (dB)	Groun ding Factor (dB)	Peak Avg. (P/A)
Zigbee CH 01 2405MHz		4810	-52.99	-31.79	-21.2	-60.86	5.3	2.57	0	0	P
		7215	-60.53	-39.33	-21.2	-68.57	5.3	2.74	0	0	P
		12025	-50.56	-29.36	-21.2	-59.88	5.3	4.02	0	0	P
		14430	-44.43	-23.23	-21.2	-54.53	5.3	4.8	0	0	P
Zigbee CH 08 2440MHz		4880	-42.38	-21.18	-21.2	-50.19	5.3	2.51	0	0	P
		7320	-60.36	-39.16	-21.2	-68.49	5.3	2.83	0	0	P
		12200	-55.15	-33.95	-21.2	-64.6	5.3	4.15	0	0	P
		14640	-41.72	-20.52	-21.2	-51.95	5.3	4.93	0	0	P
Zigbee CH 16 2480MHz		4960	-65.03	-43.83	-21.2	-72.7	5.3	2.37	0	0	P
		24956	-52.89	-31.69	-21.2	-71.02	5.3	12.73	0	0	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
		(MHz)	(dBm)	(dB)	Limit	Level	Factor	Loss	Factor	Factor	Avg.
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
2.4GHz Zigbee LF		52.95	-78.62	-23.42	-55.2	-89.03	5.3	0.41	0	4.7	P
		201.72	-77.39	-25.69	-51.7	-88.11	5.3	0.72	0	4.7	P
		226.29	-77.7	-28.5	-49.2	-88.41	5.3	0.71	0	4.7	P
		411.3	-77.49	-28.29	-49.2	-88.36	5.3	0.87	0	4.7	P
		943.3	-75.97	-26.77	-49.2	-87.39	5.3	1.42	0	4.7	P
		971.3	-76.71	-35.51	-41.2	-88.15	5.3	1.44	0	4.7	P
Remark	1. No other spurious found. 2. All results are PASS against limit line.										



<CH16: Setting 2 + Gain 3.3 dBi>

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge)

Zigbee	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Gain (dBi)	Path Loss (dB)	MIMO Factor (dB)	Ground ing Factor (dB)	Peak Avg. (P/A)
Zigbee CH 16 2480MHz	*	2480	5.04	-	-	0.5	3.3	1.24	0	0	P
	*	2480	1.33	-	-	-3.21	3.3	1.24	0	0	A
		2483.5	-33.85	-12.65	-21.2	-38.4	3.3	1.25	0	0	P
		2483.5	-41.86	-0.66	-41.2	-46.41	3.3	1.25	0	0	A
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



2.4GHz 2400~2483.5MHz

Zigbee (Harmonic)

Zigbee	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Gain (dBi)	Path Loss (dB)	MIMO Factor (dB)	Groun ding Factor (dB)	Peak Avg. (P/A)
Zigbee CH 16 2480MHz		4960	-62.6	-41.4	-21.2	-68.27	3.3	2.37	0	0	P
		24934	-54.93	-33.73	-21.2	-70.96	3.3	12.73	0	0	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
		(MHz)	(dBm)	(dB)	Limit	Level	Factor	Loss	Factor	Factor	Avg.
					(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
2.4GHz Zigbee LF		40.26	-81.28	-26.08	-55.2	-89.67	3.3	0.39	0	4.7	P
		213.06	-79.2	-27.5	-51.7	-87.93	3.3	0.73	0	4.7	P
		219.54	-79.88	-30.68	-49.2	-88.61	3.3	0.73	0	4.7	P
		479.9	-79.03	-29.83	-49.2	-87.93	3.3	0.9	0	4.7	P
		777.4	-78.58	-29.38	-49.2	-87.77	3.3	1.19	0	4.7	P
		972.7	-79.08	-37.88	-41.2	-88.53	3.3	1.45	0	4.7	P
Remark	1. No other spurious found. 2. All results are PASS against limit line.										



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
				Limit	Line	Level	Factor	Loss	Factor	Factor	Avg.
		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dBi)	(dB)	(dB)	(dB)	(P/A)
Zigbee CH 01		2390	-45.8	-24.6	-21.2	-48.44	2	0.64	0	0	P
2405MHz		2390	-59.91	-18.71	-41.2	-62.58	2	0.67	0	0	A

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBm)
3. Over Limit(dB) = Level(dBm) – Limit Line(dBm)

For Peak Limit @ 2390MHz:

1. Level(dBm)
= Antenna Factor(dBi) + Path Loss(dB) + Read Level(dBm)
= 2(dBi) + 0.64(dB) - 48.44(dBm)
= -45.8 (dBm)
2. Over Limit(dB)
= Level(dBm) – Limit Line(dBm)
= -45.8(dBm) +21.2(dBm)
= -24.6(dB)

For Average Limit @ 2390MHz:

1. Level(dBm)
= Antenna Factor(dBi) + Path Loss(dB) + Read Level(dBm)
= 2(dBi) + 0.67(dB) - 62.58(dBm)
= -59.91 (dBm)
2. Over Limit(dB)
= Level(dB m) – Limit Line(dBm)
= -59.91(dBμV/m) + 41.2(dBm)
= -18.71(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Conducted Spurious Emission Plots

Test Engineer :	Richard Qiu	Temperature :	17.5~24.3°C
		Relative Humidity :	48.7~66.8%

Note symbol

-L	Low channel location
-R	High channel location







<CH01, CH08: Setting 5 & CH16: Setting 0 + Gain 5.3 dBi>

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge)

Zigbee	2.4GHz 2400~2483.5MHz Band Edge	
	Zigbee CH01 2405MHz	
	CSE	Fundamental
Peak	<p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Detector : Peak Project : IN0955 Mode : 9 Setting : 5</p>	<p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Detector : Peak Project : IN0955 Mode : 9 Setting : 5</p>
Avg.	<p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Detector : Peak Project : IN0955 Mode : 9 Setting : 5</p>	<p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Detector : Peak Project : IN0955 Mode : 9 Setting : 5</p>

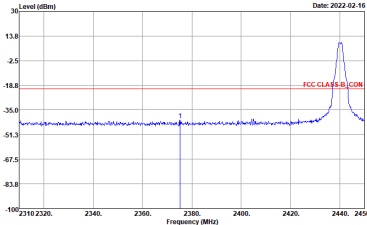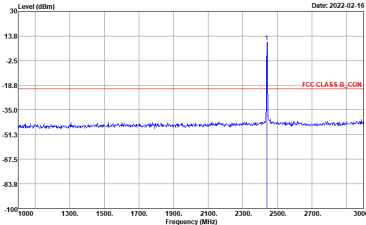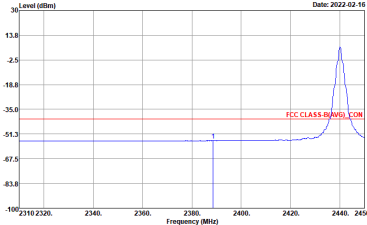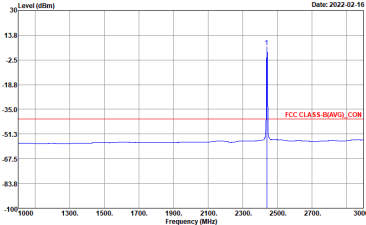

Zigbee	2.4GHz 2400~2483.5MHz Band Edge	
Zigbee CH08 2440MHz - L		
	CSE	Fundamental
Peak	 <p>Site: TH05-HY Condition: FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL RBW: 1000.000kHz VSW: 3000.000kHz Detector: Peak Project: 1N0955 Mode: 10 Setting: .5</p>	 <p>Site: TH05-HY Condition: FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL RBW: 1000.000kHz VSW: 3000.000kHz Detector: Peak Project: 1N0955 Mode: 10 Setting: .5</p>
Avg.	 <p>Site: TH05-HY Condition: FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL RBW: 1000.000kHz VSW: 0.010kHz Detector: Peak Project: 1N0955 Mode: 10 Setting: .5</p>	 <p>Site: TH05-HY Condition: FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL RBW: 1000.000kHz VSW: 0.010kHz Detector: Peak Project: 1N0955 Mode: 10 Setting: .5</p>



Zigbee	2.4GHz 2400~2483.5MHz Band Edge	
	Zigbee CH08 2440MHz - R	
	CSE	Fundamental
Peak	<p> Site : TH05-HY Condition : FCC CLASS B_CON ANT GAIN+5.3 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 10 Setting : 5 </p>	Left blank
Avg.	<p> Site : TH05-HY Condition : FCC CLASS B(AVG)_CON ANT GAIN+5.3 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 10 Setting : 5 </p>	Left blank



Zigbee	2.4GHz 2400~2483.5MHz Band Edge	
	Zigbee CH16 2480MHz	
	CSE	Fundamental
Peak	<p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 11 Setting : 0</p>	<p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 11 Setting : 0</p>
Avg.	<p>Site : TH05-HY Condition : FCC CLASS-B(AVG) CON ANT GAIN+5.3 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 11 Setting : 0</p>	<p>Site : TH05-HY Condition : FCC CLASS-B(AVG) CON ANT GAIN+5.3 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 11 Setting : 0</p>



2.4GHz 2400~2483.5MHz

Zigbee (Harmonic)


Zigbee	2.4GHz 2400~2483.5MHz Harmonic	
	Zigbee	
	CH11 2405MHz	CH18 2440MHz
<p>Peak</p> <p>Avg.</p>	<p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT_GAIN+3.3 HORIZONTAL Detector : Peak Project : FR0955 Mode : 9 Setting : 5</p>	<p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT_GAIN+5.3 HORIZONTAL Detector : Peak Project : FR0955 Mode : 10 Setting : 5</p>



Zigbee	2.4GHz 2400~2483.5MHz Harmonic	
	Zigbee	
	CH26 2480MHz	
Peak Avg.	<p>Site : TH05-HY Condition : FCC CLASS-B_DOWN ANT GAIN+3 HORIZONTAL Detector : Peak Project : FR1N0955 Mode : 11 Setting : 0</p>	Left blank



Emission below 1GHz
2.4GHz Zigbee (LF)




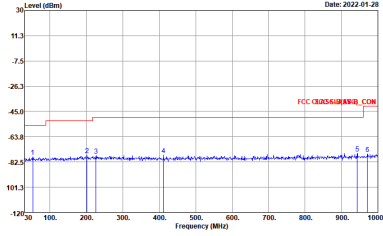
Zigbee	2.4GHz 2400~2483.5MHz	
	Zigbee LF	
Peak	 <p>Date: 2022-01-28</p> <p>FCC CLASS B limit</p> <p>Level (dBm)</p> <p>Frequency (MHz)</p> <p>Site : TH05-HY Condition : FCC CLASS B, CCN ANT GAIN+5.3 HORIZONTAL Detector : Peak Project : N0955 Mode : 13 Setting : 0</p>	Left blank



<CH16: Setting 2 + Gain 3.3dBi>

2.4GHz 2400~2483.5MHz


Zigbee (Band Edge)

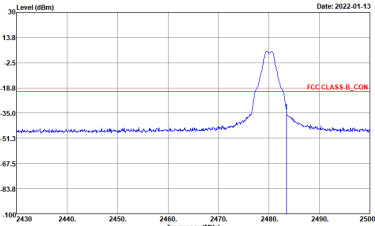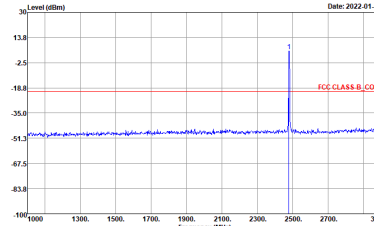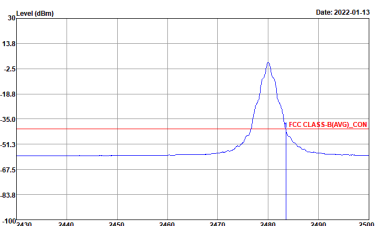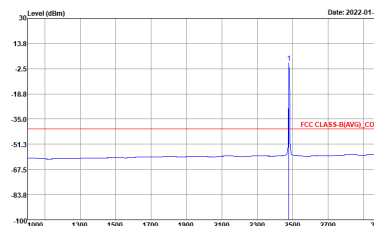Zigbee		2.4GHz 2400~2483.5MHz Band Edge	
		Zigbee CH16 2480MHz	
		CSE	Fundamental
Peak	 <p>Level (dBm) vs Frequency (MHz) for CSE Peak. The plot shows a peak at 2480 MHz. A red horizontal line indicates the FCC CLASS-B CON limit at -18.0 dBm. The peak level is approximately -1.0 dBm.</p> <p>Date: 2022-01-13</p> <p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT_GAIN+3.3 HORIZONTAL RBW: 1000.000kHz VBW: 3000.000kHz Detector : Peak Project : TH0955 Mode : 11 Setting : 2</p>	 <p>Level (dBm) vs Frequency (MHz) for Fundamental Peak. The plot shows a sharp peak at 2480 MHz. A red horizontal line indicates the FCC CLASS-B CON limit at -18.0 dBm. The peak level is approximately -1.0 dBm.</p> <p>Date: 2022-01-13</p> <p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT_GAIN+3.3 HORIZONTAL RBW: 1000.000kHz VBW: 3000.000kHz Detector : Peak Project : TH0955 Mode : 11 Setting : 2</p>	
	Avg.	 <p>Level (dBm) vs Frequency (MHz) for CSE Avg. The plot shows a peak at 2480 MHz. A red horizontal line indicates the FCC CLASS-B(AVG) CON limit at -51.3 dBm. The peak level is approximately -1.0 dBm.</p> <p>Date: 2022-01-13</p> <p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+3.3 HORIZONTAL RBW: 1000.000kHz VBW: 0.010kHz Detector : Peak Project : TH0955 Mode : 11 Setting : 2</p>	 <p>Level (dBm) vs Frequency (MHz) for Fundamental Avg. The plot shows a sharp peak at 2480 MHz. A red horizontal line indicates the FCC CLASS-B(AVG) CON limit at -51.3 dBm. The peak level is approximately -1.0 dBm.</p> <p>Date: 2022-01-13</p> <p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+3.3 HORIZONTAL RBW: 1000.000kHz VBW: 0.010kHz Detector : Peak Project : TH0955 Mode : 11 Setting : 2</p>




2.4GHz 2400~2483.5MHz

Zigbee (Harmonic)

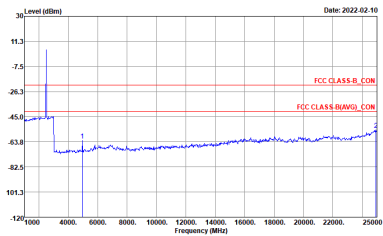Zigbee	2.4GHz 2400~2483.5MHz Harmonic	
	Zigbee	
	CH26 2480MHz	
Peak Avg.	 <p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT_GAIN+3.3 HORIZONTAL Detector : Peak Project : 160955 Mode : 11 Setting : 2</p>	Left blank



Emission below 1GHz
2.4GHz Zigbee (LF)

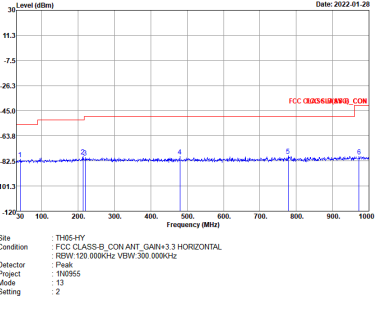Zigbee	2.4GHz 2400~2483.5MHz	
	Zigbee LF	
Peak	 <p>Date: 2022.01.28</p> <p>Site : TH05-HY Condition : FCC CLASS-B_CON_ANT_GAIN+3.3 HORIZONTAL Detector : Peak Project : FR0955 Mode : 33 Setting : 2</p>	Left blank



Appendix E. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	19.5~21.4°C
		Relative Humidity :	60.5~65.5%

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge @ 3m)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
Zigbee CH 01 2405MHz		2381.925	53.31	-20.69	74	39.21	31.4	18.11	35.41	177	27	P	H	
		2387.28	42.03	-11.97	54	27.91	31.4	18.13	35.41	177	27	A	H	
	*	2405	75.9	-	-	61.68	31.44	18.2	35.42	177	27	P	H	
	*	2405	73.73	-	-	59.51	31.44	18.2	35.42	177	27	A	H	
													H	
														H
			2328.06	53	-21	74	39.04	31.49	17.86	35.39	381	350	P	V
			2389.38	42	-12	54	27.87	31.4	18.14	35.41	381	350	A	V
	*		2405	73.37	-	-	59.15	31.44	18.2	35.42	381	350	P	V
	*		2405	71.21	-	-	56.99	31.44	18.2	35.42	381	350	A	V
														V
														V
Zigbee CH 08 2440MHz		2364.32	52.72	-21.28	74	38.7	31.4	18.03	35.41	100	20	P	H	
		2385.04	41.99	-12.01	54	27.88	31.4	18.12	35.41	100	20	A	H	
	*	2440	76.19	-	-	61.68	31.72	18.22	35.43	100	20	P	H	
	*	2440	74.04	-	-	59.53	31.72	18.22	35.43	100	20	A	H	
			2493	53.04	-20.96	74	38.11	32.14	18.25	35.46	100	20	P	H
			2499.58	42.94	-11.06	54	27.94	32.2	18.26	35.46	100	20	A	H
			2358.58	52.44	-21.56	74	38.44	31.4	18	35.4	362	312	P	V
			2386.86	42	-12	54	27.88	31.4	18.13	35.41	362	312	A	V
	*		2440	71.8	-	-	57.29	31.72	18.22	35.43	362	312	P	V
	*		2440	69.33	-	-	54.82	31.72	18.22	35.43	362	312	A	V
			2484.95	53.48	-20.52	74	38.6	32.08	18.25	35.45	362	312	P	V
			2499.37	42.92	-11.08	54	27.93	32.19	18.26	35.46	362	312	A	V



Zigbee CH 16 2480MHz	*	2480	76.39	-	-	61.56	32.04	18.24	35.45	121	22	P	H
	*	2480	74.36	-	-	59.53	32.04	18.24	35.45	121	22	A	H
		2495.72	53.69	-20.31	74	38.73	32.17	18.25	35.46	121	22	P	H
		2483.52	42.98	-11.02	54	28.11	32.07	18.25	35.45	121	22	A	H
													H
													H
	*	2480	72.89	-	-	58.06	32.04	18.24	35.45	400	350	P	V
	*	2480	70.78	-	-	55.95	32.04	18.24	35.45	400	350	A	V
		2489.64	53.44	-20.56	74	38.52	32.12	18.25	35.45	400	350	P	V
		2494.6	42.9	-11.1	54	27.95	32.16	18.25	35.46	400	350	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

Zigbee	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
Zigbee CH 01 2405MHz		4810	41.35	-32.65	74	52.4	34.02	12.91	57.98	-	-	P	H	
		14490	46.3	-27.7	74	42.82	39.58	21.99	58.09	-	-	P	H	
		15675	48.83	-25.17	74	42.4	40.35	23.19	57.11	-	-	P	H	
		15675	37.52	-16.48	54	31.09	40.35	23.19	57.11	-	-	A	H	
		17895	50.44	-23.56	74	40.3	41.41	24.77	56.04	-	-	P	H	
		17895	39.9	-14.1	54	29.76	41.41	24.77	56.04	-	-	A	H	
														H
														H
														H
														H
														H
														H
														H
														H
														H
			4810	41.6	-32.4	74	52.65	34.02	12.91	57.98	-	-	P	V
			14490	46.67	-27.33	74	43.19	39.58	21.99	58.09	-	-	P	V
			15885	48.01	-25.99	74	40.68	40.87	23.39	56.93	-	-	P	V
		15885	38.18	-15.82	54	30.85	40.87	23.39	56.93	-	-	A	V	
		17955	50.06	-23.94	74	39.8	41.46	24.81	56.01	-	-	P	V	
		17955	39.82	-14.18	54	29.56	41.46	24.81	56.01	-	-	A	V	
													V	
													V	
													V	
													V	
													V	
													V	



Zigbee	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
Zigbee CH 08 2440MHz		4880	42.19	-31.81	74	53.19	34.04	12.86	57.9	-	-	P	H	
		7320	39.82	-34.18	74	47.15	35.68	14.91	57.92	-	-	P	H	
		14475	46.61	-27.39	74	43.17	39.55	21.98	58.09	-	-	P	H	
		15840	48.37	-25.63	74	41.21	40.78	23.35	56.97	-	-	P	H	
		15840	38.1	-15.9	54	30.94	40.78	23.35	56.97	-	-	A	H	
		17760	50.95	-23.05	74	40.83	41.56	24.68	56.12	-	-	P	H	
		17760	40.22	-13.78	54	30.1	41.56	24.68	56.12	-	-	A	H	
														H
														H
														H
														H
														H
														H
														H
			4880	41.65	-32.35	74	52.65	34.04	12.86	57.9	-	-	P	V
			7320	41.72	-32.28	74	49.05	35.68	14.91	57.92	-	-	P	V
			14490	47.55	-26.45	74	44.07	39.58	21.99	58.09	-	-	P	V
			15825	48.75	-25.25	74	41.64	40.75	23.34	56.98	-	-	P	V
			15825	37.64	-16.36	54	30.53	40.75	23.34	56.98	-	-	A	V
			17865	50.58	-23.42	74	40.42	41.47	24.75	56.06	-	-	P	V
		17865	39.83	-14.17	54	29.67	41.47	24.75	56.06	-	-	A	V	
													V	
													V	
													V	
													V	
													V	



Zigbee	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
Zigbee CH 16 2480MHz		4960	41.07	-32.93	74	51.96	34.1	12.82	57.81	-	-	P	H	
		7440	39.4	-34.6	74	46.65	35.82	14.97	58.04	-	-	P	H	
		14490	47.26	-26.74	74	43.78	39.58	21.99	58.09	-	-	P	H	
		16155	49.1	-24.9	74	41.05	41.2	23.62	56.77	-	-	P	H	
		16155	38.61	-15.39	54	30.56	41.2	23.62	56.77	-	-	A	H	
		17730	50.03	-23.97	74	39.98	41.53	24.66	56.14	-	-	P	H	
		17730	40.24	-13.76	54	30.19	41.53	24.66	56.14	-	-	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
			4960	41.82	-32.18	74	52.71	34.1	12.82	57.81	-	-	P	V
			7440	39.51	-34.49	74	46.76	35.82	14.97	58.04	-	-	P	V
			14499	46.56	-27.44	74	43.05	39.6	22	58.09	-	-	P	V
			16140	47.92	-26.08	74	39.9	41.2	23.6	56.78	-	-	P	V
			17985	50.37	-23.63	74	40.04	41.49	24.83	55.99	-	-	P	V
			17985	40.58	-13.42	54	30.25	41.49	24.83	55.99	-	-	A	V
													V	
												V		
												V		
												V		
												V		
												V		
												V		
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 													



Emission above 18GHz

2.4GHz Zigbee (SHF)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz Zigbee SHF		21262	36.38	-37.62	74	52.76	37.8	5.72	59.9	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			23733	35.84	-38.16	74	48.81	38.9	6.44	58.31	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz Zigbee LF		99.93	31.41	-12.09	43.5	43.65	16.04	1.71	29.99	-	-	P	H	
		196.59	30.59	-12.91	43.5	43.3	14.92	2.34	29.97	-	-	P	H	
		241.14	39.15	-6.85	46	49.4	17.17	2.55	29.97	100	0	Q	H	
		346.2	34.68	-11.32	46	41.53	20.16	2.97	29.98	-	-	P	H	
		834.8	33.62	-12.38	46	30.36	28.06	4.55	29.35	-	-	P	H	
		959.4	33.57	-12.43	46	26.53	30.8	4.91	28.67	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			30	33.02	-6.98	40	37.58	24.57	0.9	30.03	-	-	P	V
			64.56	27.71	-12.29	40	44.53	11.77	1.41	30	-	-	P	V
			243.84	35.45	-10.55	46	45.37	17.49	2.56	29.97	-	-	P	V
			727.7	28.69	-17.31	46	27.38	26.82	4.21	29.72	-	-	P	V
			861.4	32.32	-13.68	46	28.01	28.86	4.62	29.17	-	-	P	V
			948.2	33.75	-12.25	46	27.44	30.17	4.86	28.72	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	TaZigbee	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
Zigbee		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2405MHz													

1. Path Loss(dB) = CaZigbee loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix F. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	19.5~21.4°C
		Relative Humidity :	60.5~65.5%

Note symbol





-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz
Zigbee (Band Edge @ 3m)

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH01 2405MHz	
	Horizontal	Fundamental
Peak	<p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 9</p>	<p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 9</p>
Avg.	<p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : AVG_BE_34 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 9</p>	<p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : AVG_34 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 9</p>

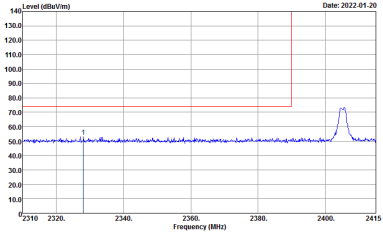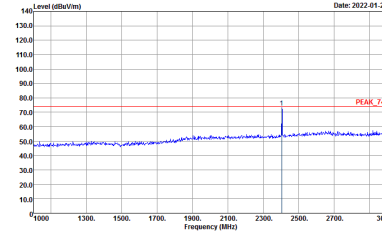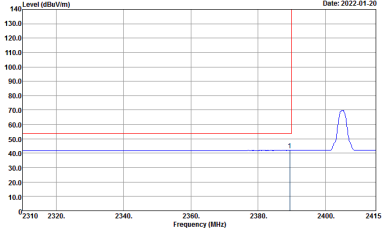
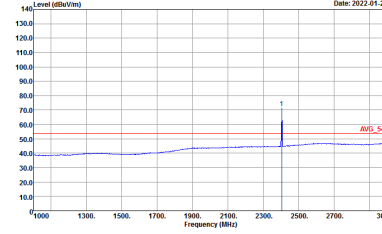


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH01 2405MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 9</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 9</p>
Avg	 <p>Site : 03CH07-HY Condition : AVG_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 9</p>	 <p>Site : 03CH07-HY Condition : AVG_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 9</p>

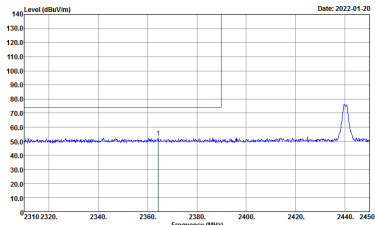
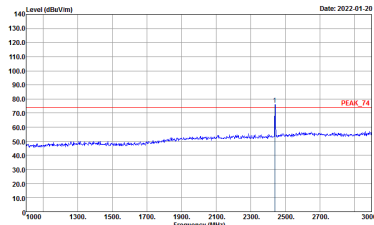
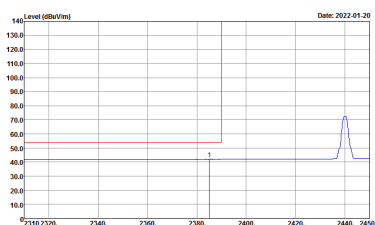
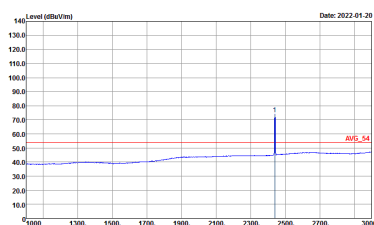


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH08 2440MHz - L	
	Horizontal	Fundamental
Peak	 <p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : PEAK_BE_24 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : Peak Mode : 10</p>	 <p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : Peak Mode : 10</p>
Avg.	 <p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : AVG_BE_24 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Project : Peak Mode : 10</p>	 <p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Project : Peak Mode : 10</p>

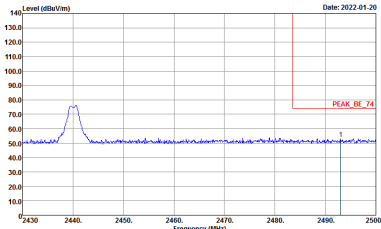
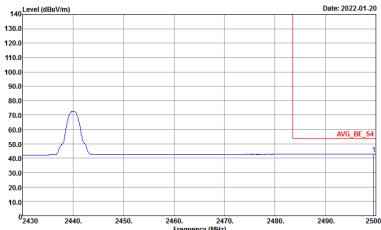


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH08 2440MHz - R	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 10</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 10</p>	Left blank

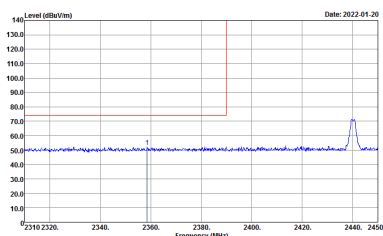
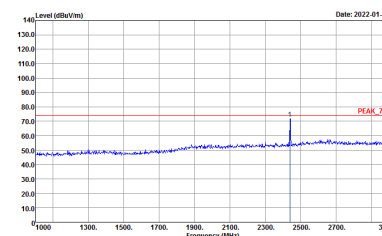
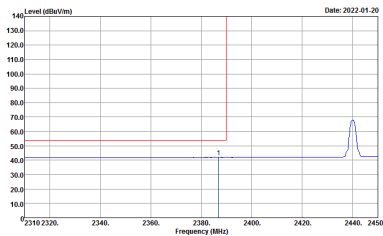
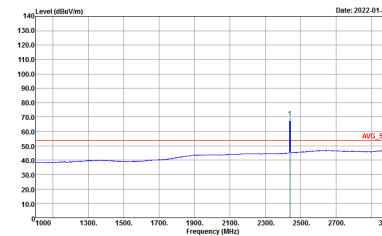


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH08 2440MHz - L	
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 10</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 10</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 10</p>	 <p>Site : 03CH07-HY Condition : AVG_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 10</p>

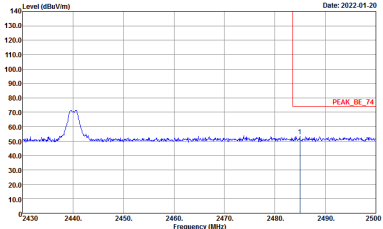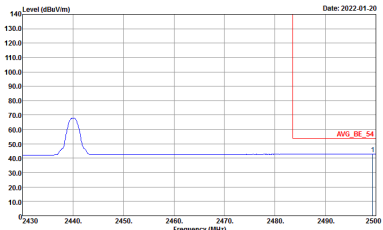

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH08 2440MHz - R	
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 10</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 10</p>	Left blank

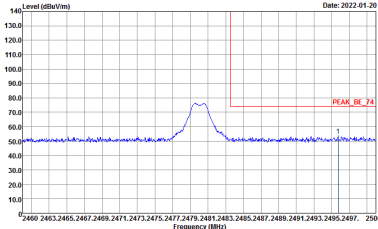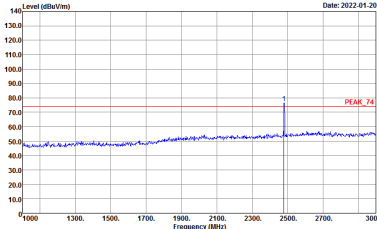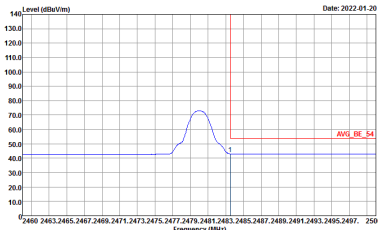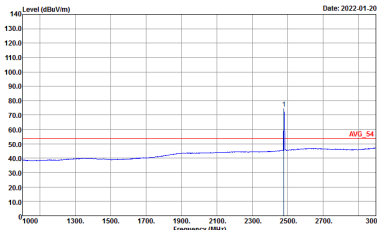

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
Zigbee CH16 2480MHz		
Horizontal		Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 11</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 11</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 11</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 1N0955 Mode : 11</p>





Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH16 2480MHz	
	Vertical	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 11</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 11</p>
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 11</p>	<p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 1N0955 Mode : 11</p>



2.4GHz 2400~2483.5MHz

Zigbee (Harmonic @ 3m)

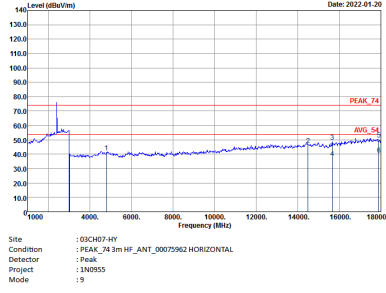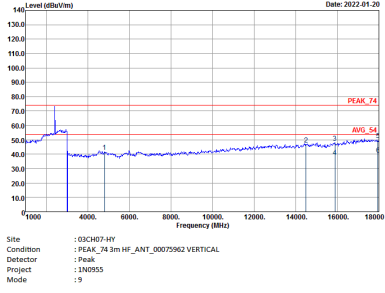Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH01 2405MHz	
	Horizontal	Vertical
Peak Avg.		



Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH08 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 13N055 Mode : 10</p>	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 13N055 Mode : 10</p>



Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH16 2480MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 13N055 Mode : 11</p>	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 13N055 Mode : 11</p>



Emission above 18GHz
2.4GHz Zigbee (SHF @ 1m)

Zigbee	2.4GHz 2400~2483.5MHz	
Zigbee SHF		
Horizontal		Vertical
<p>Peak</p> <p>Avg.</p>	<p>Site : 03CM07-HY Condition : PEAK_74 1m SHF-EHF_9170221 HORIZONTAL Detector : Peak Project : 12A0955 Mode : 12</p>	<p>Site : 03CM07-HY Condition : PEAK_74 1m SHF-EHF_9170221 VERTICAL Detector : Peak Project : 12A0955 Mode : 12</p>



Emission below 1GHz
2.4GHz Zigbee (LF)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot of Level (dBuV/m) vs Frequency (MHz) for Zigbee LF. Includes metadata like Site, Condition, Detector, Project, and Mode.

QP / Peak



Appendix G. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Zigbee	100.00	-	-	10Hz

