


L1 is a Bead to be mounted if regulator U2 is not mounted,
 CC1175 ref des will default not use regulator: do not mount U2, C12, C41, C53
 TG5021CG is optional: do not mount L1 if regulator U2 is mounted

CC1175 using XTAL: do not mount: X2, C321, C322, R321, R322
 CC1175 using TCXO: do not mount: R12, R321, C311, X1, C301: mount 0 Ohm resistor

R12 is a 0ohms shunt resistor that ground
 the EXT_XOSC pin when TCXO is not mounted.

FIDUCIAL_MARK FM1 FIDUCIAL_MARK FM2 FIDUCIAL_MARK FM3

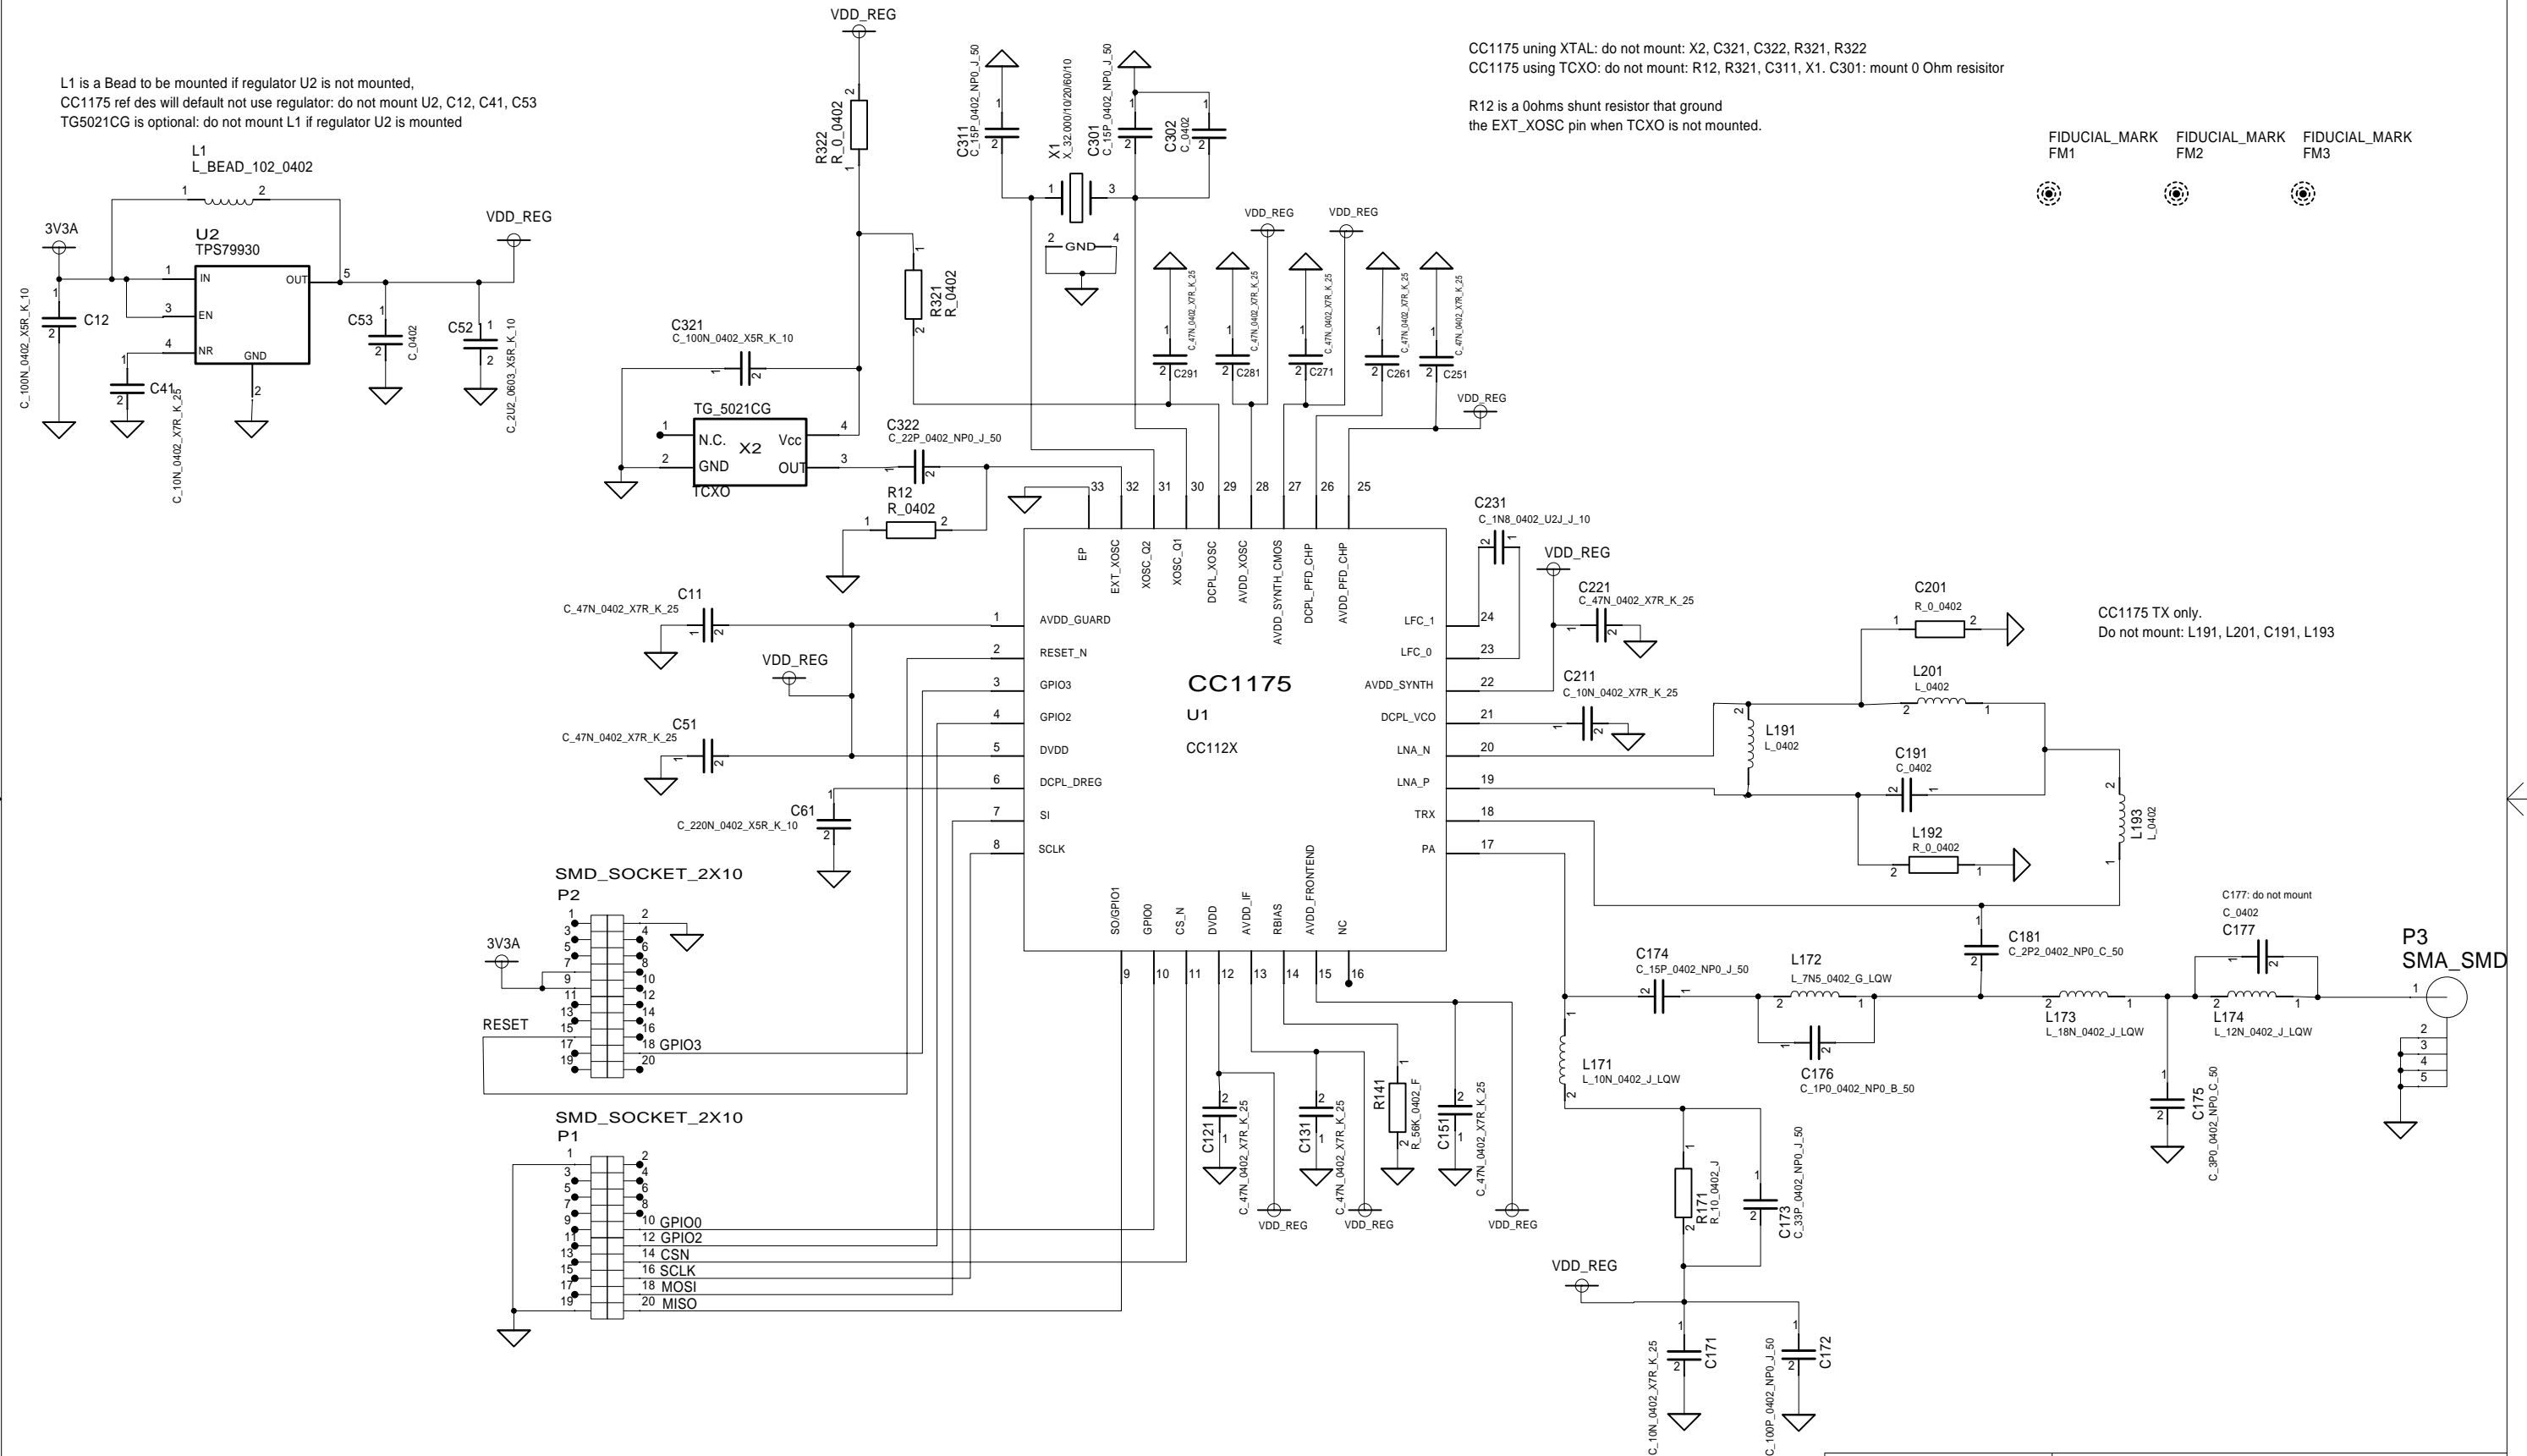

CC1175 TX only.
 Do not mount: L191, L201, C191, L193

CC1175

868/915 MHz frequency band

CONTRACT NO.		COMPANY NAME			
03236		Texas Instruments			
APPROVALS	DATE	DWG			
DRAWN	FRS	SIZE	FSCM NO.	DWG NO.	REV.
CHECKED		A3			1.1.0
ISSUED		SCALE		SHEET 1 of 1	