



Test report no. : 215161-4

Item tested : CC1180DB

**Type of equipment : Low power transceiver module
903.5 – 926.5 MHz**

FCC ID : ZAT1180DB868

Client : Texas Instruments Norway AS

FCC Part 15.249

Low Power Transmitter
902 - 928 MHz Band

RSS-210, Issue 8

Low-Power Licence-exempt Radiocommunications devices
902 – 928 MHz Band

23 January 2013

Authorized by : 

Frode Sveinsen
Technical Verificator



CONTENTS

1	GENERAL INFORMATION	3
1.1	Testhouse info	3
1.2	Client information	3
1.3	Manufacturer	3
2	TEST INFORMATION.....	4
2.1	Test item	4
2.2	Test environment	5
2.3	Test period	5
3	TEST REPORT SUMMARY	6
3.1	General	6
3.2	Test summary	7
3.3	Description of modification for modification filing	7
3.4	Comments	7
3.5	Family list rationale	7
4	TEST RESULTS	8
4.1	Occupied bandwidth	8
4.2	Peak power output	10
4.3	Spurious emissions (radiated)	20
5	LIST OF TEST EQUIPMENT.....	33
6	BLOCK DIAGRAM	34
6.1	System set up for radiated measurements	34
6.2	Test site radiated emission	35

1 GENERAL INFORMATION

1.1 Testhouse info

Name : Nemko AS
Address : Nemko Kjeller
Instituttveien 6, Box 96
NO-2027 Kjeller, NORWAY
Telephone : +47 64 84 57 00
Fax : +47 64 84 57 05
Email: comlab@nemko.no
FCC test firm : 994405
IC OATS : 2040D-1
Total Number of Pages: 35

1.2 Client information

Name : Texas Instruments Norway AS
Address : Gaustadalléen 21,
NO-0349 Oslo, Norway
Telephone : +47 22 95 85 44
Fax : +47 22 95 85 46

Contact:

Name : Dag Grini
Telephone : +47 22 95 83 01
E-mail : d.grini@ti.com

1.3 Manufacturer

Same as client

2 TEST INFORMATION

2.1 Test item

Name :	Texas Instruments
Model/version :	CC1180DB
FCC ID :	ZAT1180DB868
IC :	451H-1180DB868
Serial number :	0x0012 4B00 000E 0C2E (MAC ID)
Hardware identity and/or version:	1.1.0
Software identity and/or version :	-
Frequency Range :	903.5 – 926.5 MHz
Number of Channels :	3
Operating Modes :	TX and RX
Type of Modulation :	2-GFSK
Data rate:	200kbit/s
User Frequency Adjustment :	None, Software controlled
Conducted Output Power :	0.16 mW
Type of Power Supply :	Battery (tested with 2 AAA batteries)
Antenna Connector :	None
Antenna type:	PCB antenna
Antenna Diversity Supported :	None

Description of test item

The CC1180DB is an RF-transceiver module.

2.2 Test environment

2.2.1 Normal test condition

Temperature:	20 – 23 °C
Relative humidity:	30 – 44 %
Normal test voltage:	3.3 V DC

The values are the limit registered during the test period.

2.3 Test period

Item received date:	2012-11-22
Test period :	from 2012-11-22 -2012-12-20

3 TEST REPORT SUMMARY

3.1 General

Manufacturer: Texas Instruments
Model No.: CC1180DB

All measurements are traceable to national standards.

The tests were conducted for the purpose of demonstrating compliance with FCC CFR 47 Part 15.249 and Industry Canada RSS-210, Issue 8 and RSS-GEN, Issue 3.

Radiated tests were conducted in accordance with ANSI C63.4-2003 and ANSI C63.10-2009. The radiated tests were made in a semi-anechoic chamber at measuring distances of 3 and 10 meters.

- | | |
|---|---|
| <input checked="" type="checkbox"/> New Submission | <input checked="" type="checkbox"/> Production Unit |
| <input type="checkbox"/> Class II Permissive Change | <input type="checkbox"/> Pre-production Unit |
| DXT Equipment Code | <input type="checkbox"/> Family Listing |

THIS TEST REPORT RELATES ONLY TO THE ITEM (S) TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".



TEST REPORT #: 215161-4



TESTED BY: _____
Thomas Dangle, Test engineer

DATE: 2012-12-20

Nemko AS authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko AS.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko AS accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

This test report applies only to the items and configurations tested.

3.2 Test summary

Name of test	FCC Part 15 reference	RSS-210 Issue 8 & RSS-GEN Issue 3	Result
Supply Voltage Variations	15.31(e)	N/A	Complies ¹
Antenna Requirement	15.203	7.1.4 (RSS-GEN)	N/A ²
Power-line Conducted Emission	15.207(c)	7.2.2 (RSS-GEN)	N/A ¹
Occupied Bandwidth	N/A	4.6.1 (RSS-GEN)	-
Peak Power Output	15.249(a)(c)	A2.9	Complies
Band edge Emissions	15.249(d)	A.2.9	Complies
Spurious Emissions (Radiated)	15.249 (e) 15.209	A2.9 4.9 (RSS-GEN)	Complies

¹ EUT is battery powered.

² No antenna included in this test report

RSS Gen issue 3 covers section 7 & 6

RSS 210 issue 8 covers section A2.9

3.3 Description of modification for modification filing

Not applicable.

3.4 Comments

The channels are selected by pressing a button on the EUT. The measurements are performed at channels near top , near middle and near bottom . And the output level is set to maximum in the software. The EUT complies at these channels.

The radiated measurements are tested on three axis.

Two fully charged AAA batteries are used.

3.5 Family list rationale

Not Applicable.

4 TEST RESULTS

4.1 Occupied bandwidth

Para. No.: RSS-Gen 4.6.1

Test Performed By: Thomas Dangle	Date of Test: 13-Dec-2012
----------------------------------	---------------------------

Test Results: Complies

Measurement Data:


Data Rate	OBW (MHz)		
	903.500MHz	915.000MHz	926.500MHz
200 kbps	-	3.08	-

Measured Conducted

Requirements:

For information only

903.5 MHz – OBW – 3.10 MHz – Conducted measurement

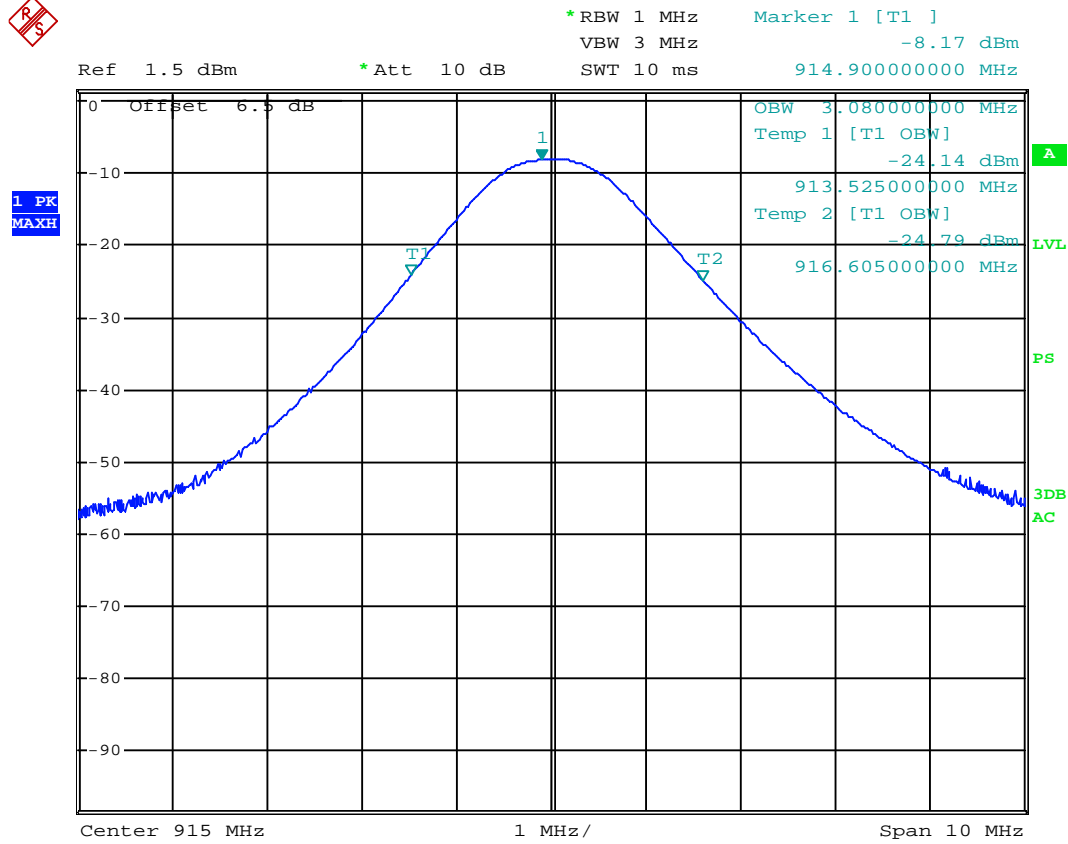

Date: 13.DEC.2012 14:26:02

915 MHz – OBW – 3.08 MHz – Conducted measurement

4.2 Peak power output

Para. No.: 15.249 (a) / A2.9

Test Performed By: Thomas Dangle	Date of Test: 13 and 14-Dec-2012
----------------------------------	----------------------------------

Test Results: Complies

Measurement data:

Maximum conducted peak output power

RF channel	903.5MHz	915MHz	926.5MHz
@ 200 kbps, Measured value (dBm)	-8.40	-8.17	-7.89

Maximum field strength

RF channel	903.5MHz	915MHz	926.5MHz
VP: Measured value (dB μ V/m)	90.79	90.45	91.20
HP: Measured value (dB μ V/m)	76.88	76.96	76.49

Radiated measurements are performed at 3 m distance.

Detachable antenna?

Yes No

If detachable, is the antenna connector non-standard?


Yes No

SMA connector

New batteries are used.

Requirements:

The maximum peak output power shall be ≤ 94 dB μ V/m

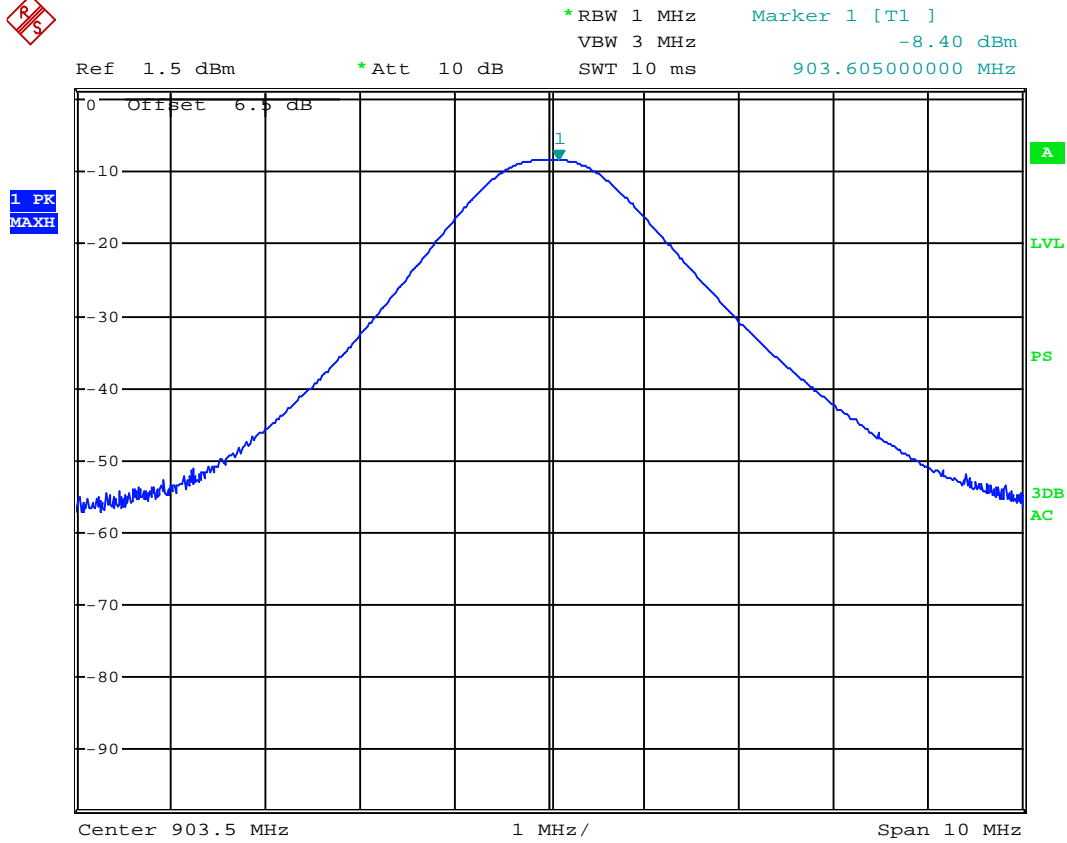


Date: 13.DEC.2012 14:27:57

Conducted power – 903.5MHz



Ref 1.5 dBm *Att 10 dB *RBW 1 MHz Marker 1 [T1]
Offset 6.5 dB VBW 3 MHz -8.17 dBm
SWT 10 ms 914.995000000 MHz

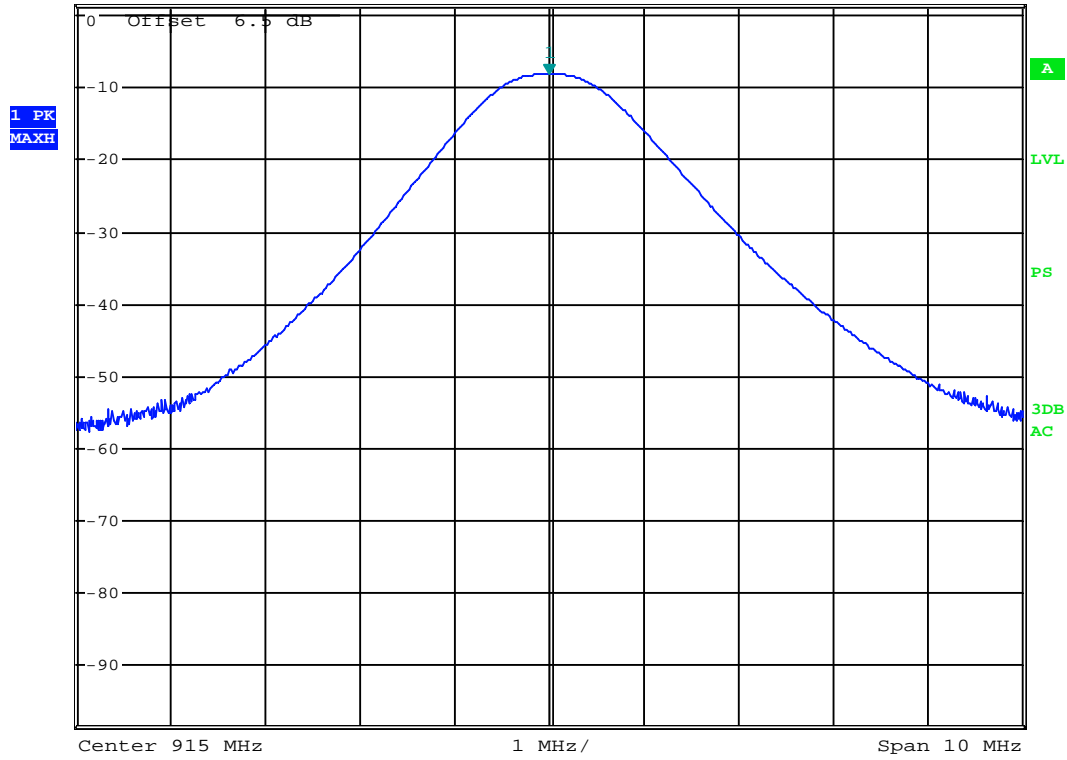


Date: 13.DEC.2012 14:21:53

Conducted power – 915MHz



Ref 1.5 dBm *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz -7.89 dBm
 SWT 10 ms 926.62000000 MHz

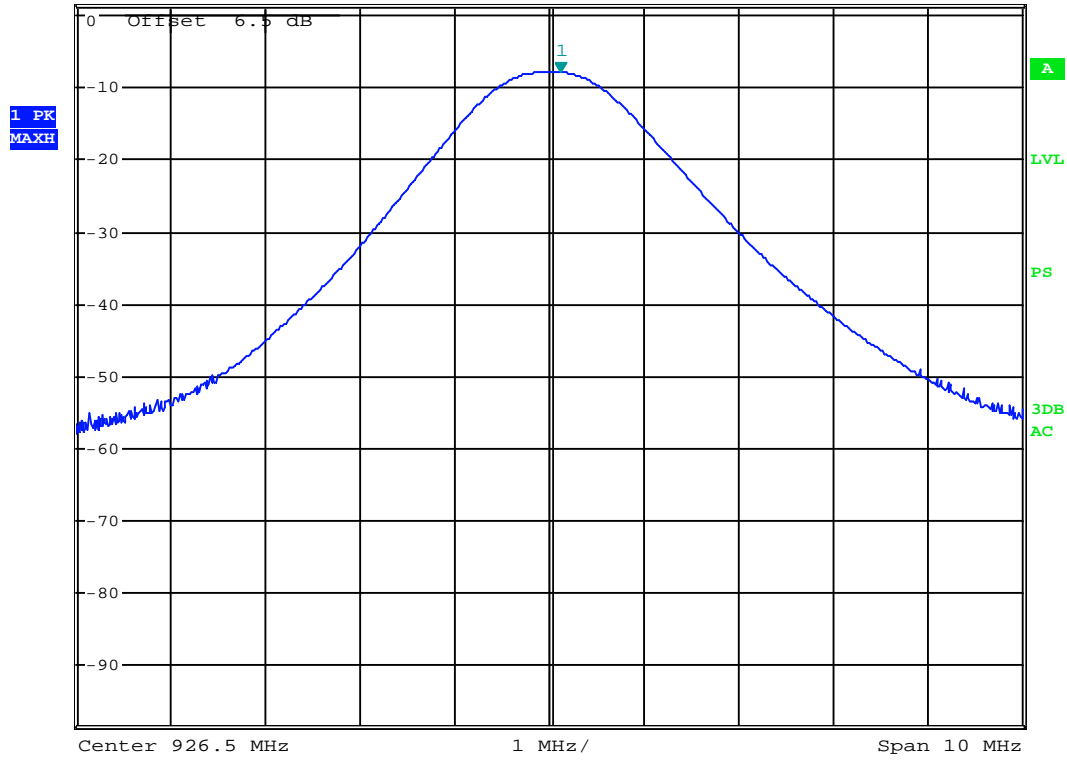

Date: 13.DEC.2012 14:20:26

Conducted power – 926.5MHz




*RBW 1 MHz Marker 1 [T1]
VBW 3 MHz 90.79 dBμV/m
SWT 2.5 ms 903.419871795 MHz

Ref 97 dBμV/m

*Att 10 dB

1 PK
MAXH

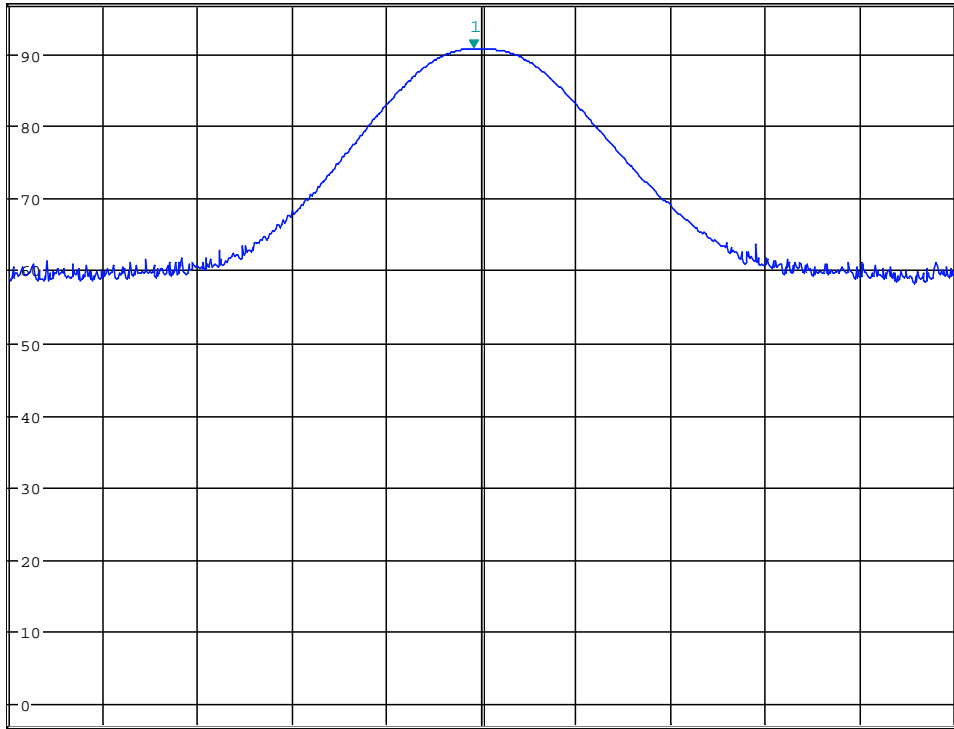

Center 903.5 MHz

1 MHz/


Span 10 MHz

Date: 14.DEC.2012 08:11:55

VP: 903.5MHz – Field strength



Ref 97 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 76.88 dB μ V/m
 SWT 2.5 ms 903.564102564 MHz

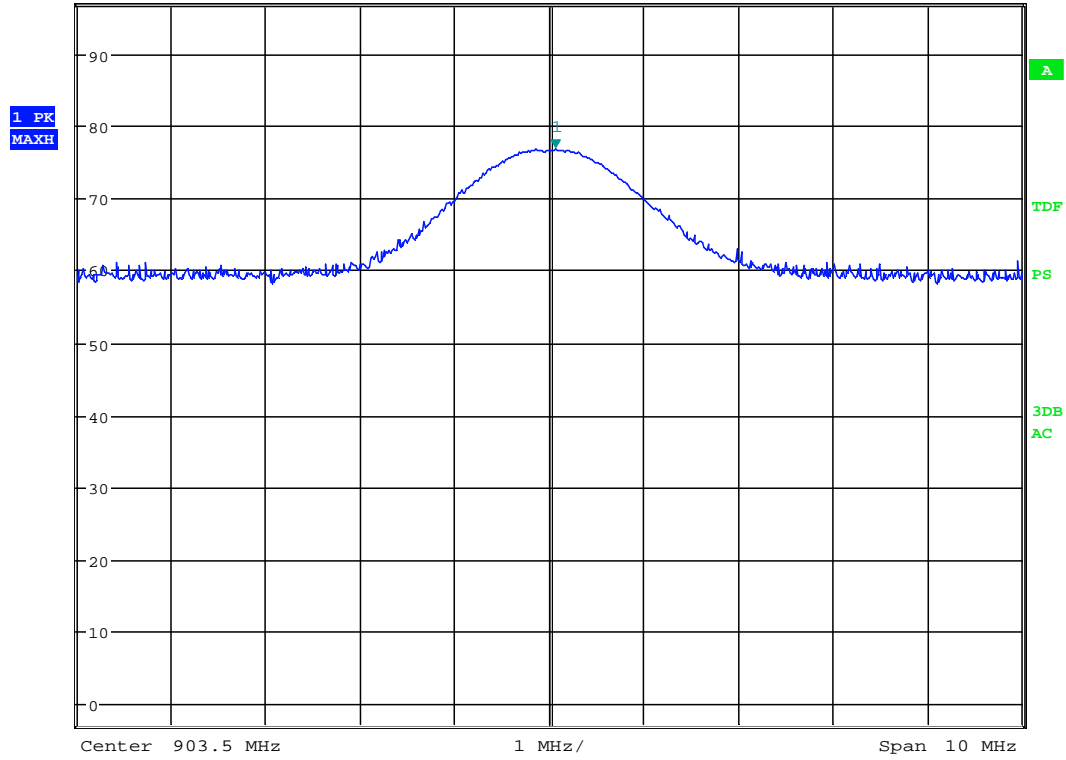


Date: 14.DEC.2012 08:11:06

HP: 903.5MHz – Field strength



Ref 97 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 76.96 dB μ V/m
 SWT 2.5 ms 914.903846154 MHz

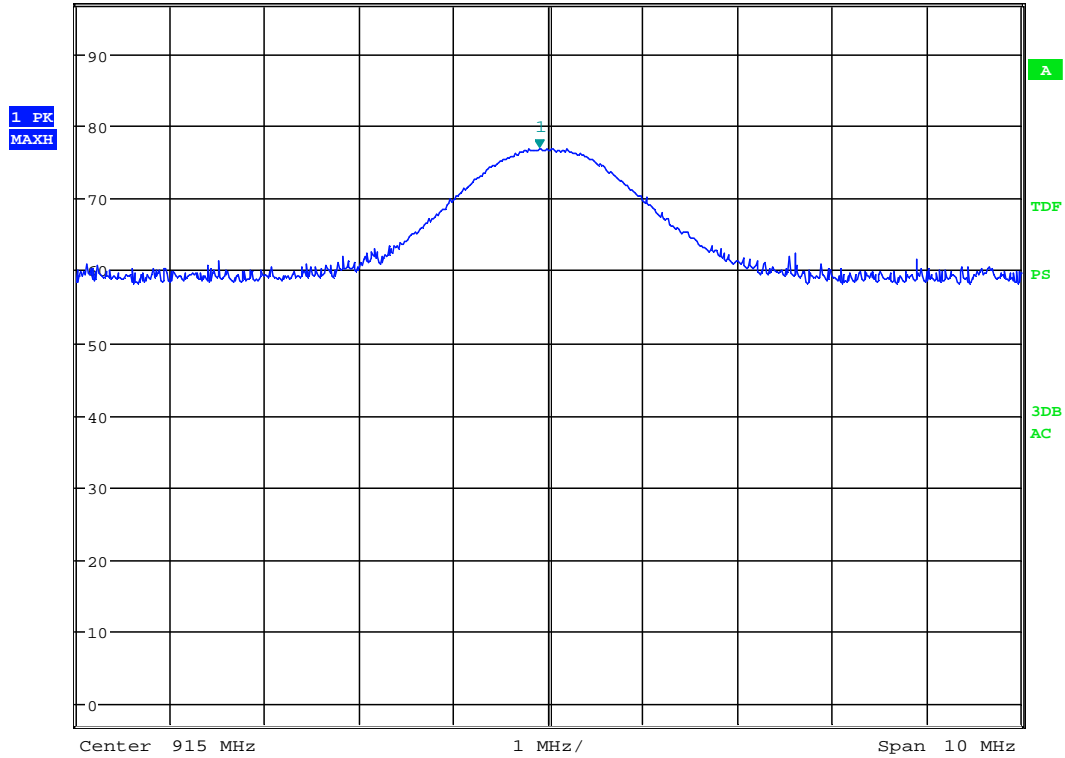


Date: 14.DEC.2012 08:04:19

HP: 915MHz – Field strength



Ref 97 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 76.49 dB μ V/m
 SWT 2.5 ms 926.387820513 MHz

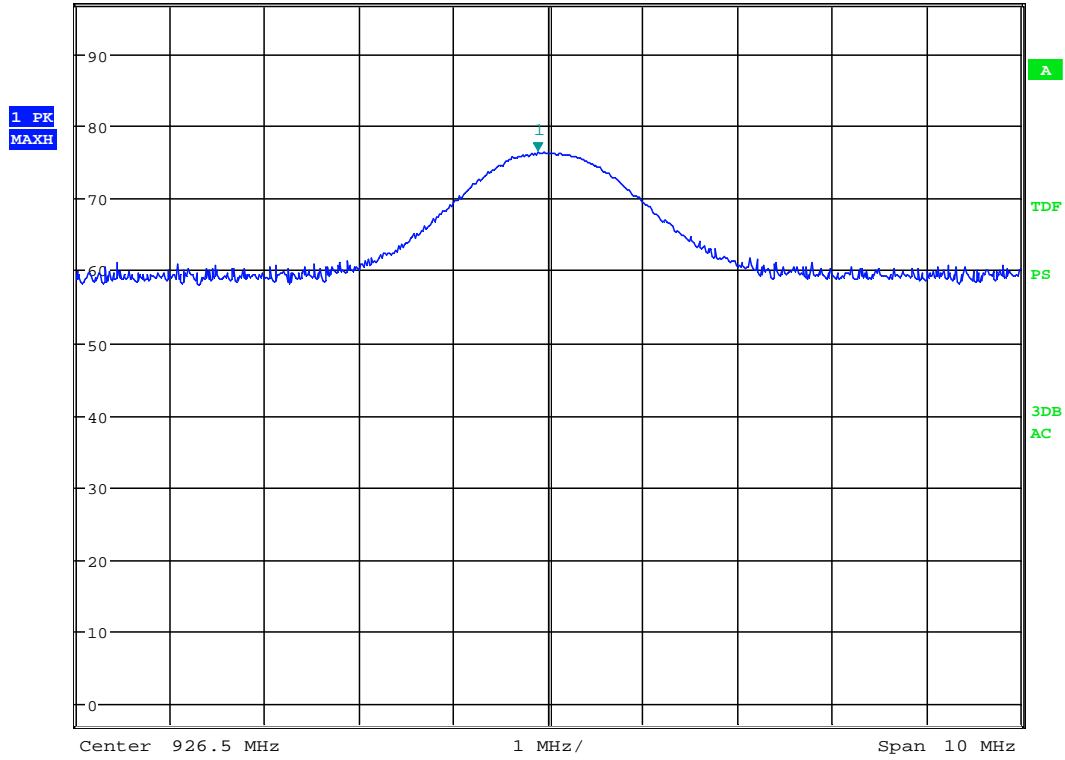

Date: 14.DEC.2012 07:54:18

HP: 926.5MHz – Field strength

4.3 Spurious emissions (radiated)

Para. No.: 15.209 / 15.249 (e) / A2.9 / 4.9

Test Performed By: Thomas Dangle	Date of Test: 30-Nov, 3, 6 and 14-Dec -2012
----------------------------------	---

Test Results: Complies

Measurement Data:

Radiated Emissions with antenna, 1-10 GHz

1-10 GHz measured at a distance of 3m.

Measured with Peak Detector:

Frequency	Dist. corr. factor	Field strength, Peak	Duty cycle corr. factor	Limit	Margin
GHz	dB	dB μ V/m	dB	dB μ V/m	dB
1 - 3	0	<44	-	74	>30
3 - 8.5	0	<52	-	74	>22
8.5 - 10	0	<53	-	74	>21

Average Detector:

Frequency	Dist. corr. factor	Field strength, AV	Duty cycle corr. factor	Limit	Margin
GHz	dB	dB μ V/m	dB	dB μ V/m	dB
1 - 3	0	<44	-	54	>10
3 - 8.5	0	<52	-	54	>2
8.5 - 10	0	<53	-	54	>1

The maximum is observed in Vertical polarization

The test sample was transmitting with 100% duty cycle for all tests.


Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor".

Requirement:

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.




Ref 87 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 42.41 dB μ V/m
 SWT 15 ms 1.830128205 GHz

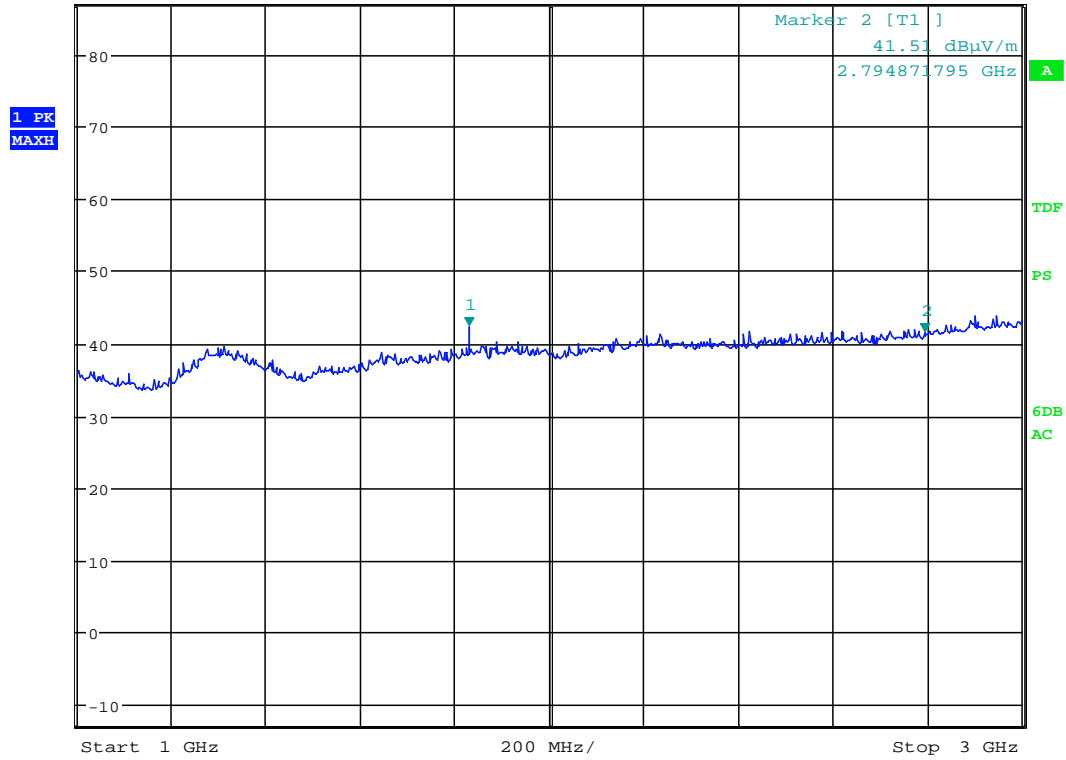


Date: 14.DEC.2012 08:46:12

VP ch 915 MHz: pre-view scan 1 - 3 GHz -Pk with HP-filter

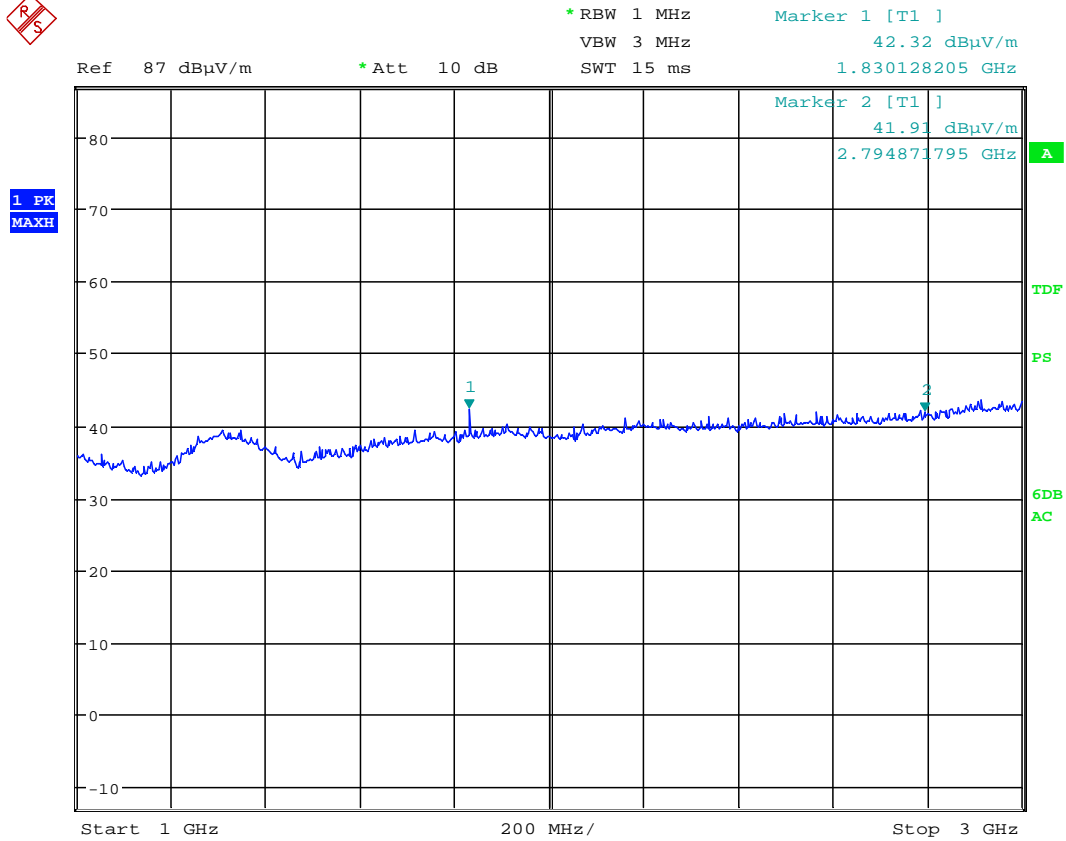


Date: 14.DEC.2012 08:47:58

HP ch 915 MHz : pre-view scan 1 - 3 GHz -Pk with HP-filter

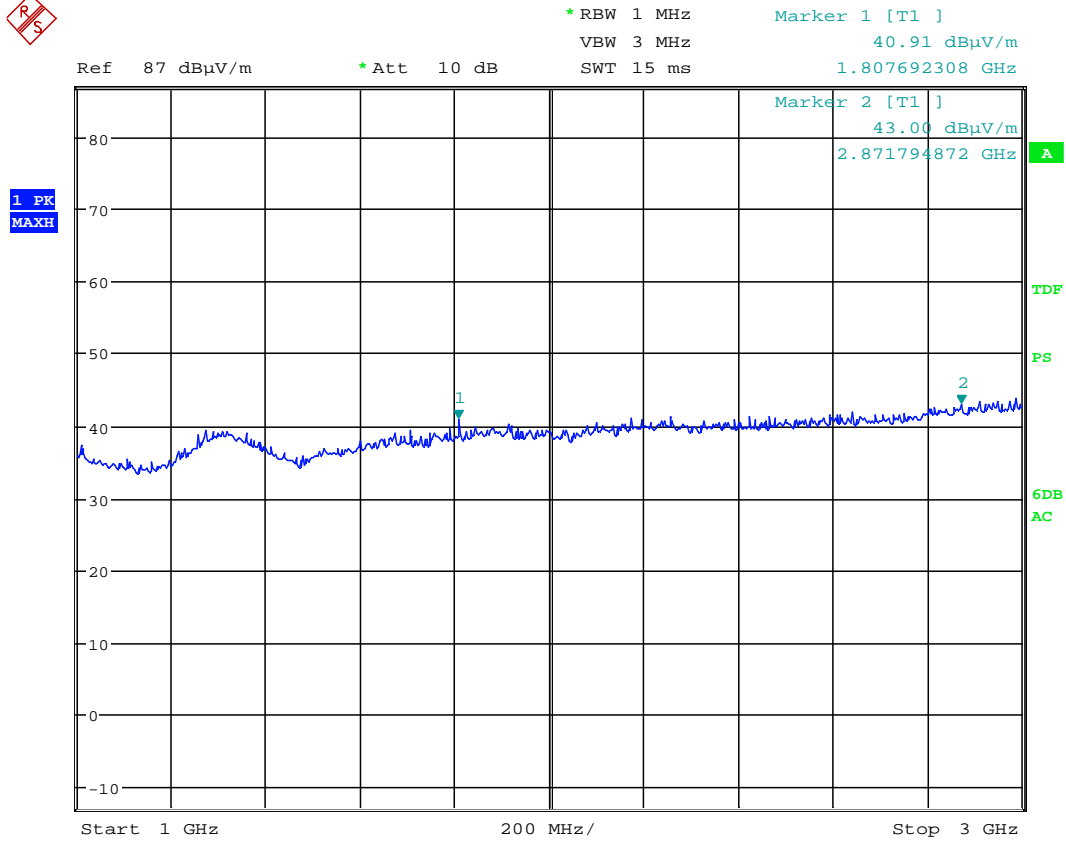

Date: 14.DEC.2012 08:50:30

VP ch 903.5 MHz: pre-view scan 1 - 3 GHz -Pk with HP-filter

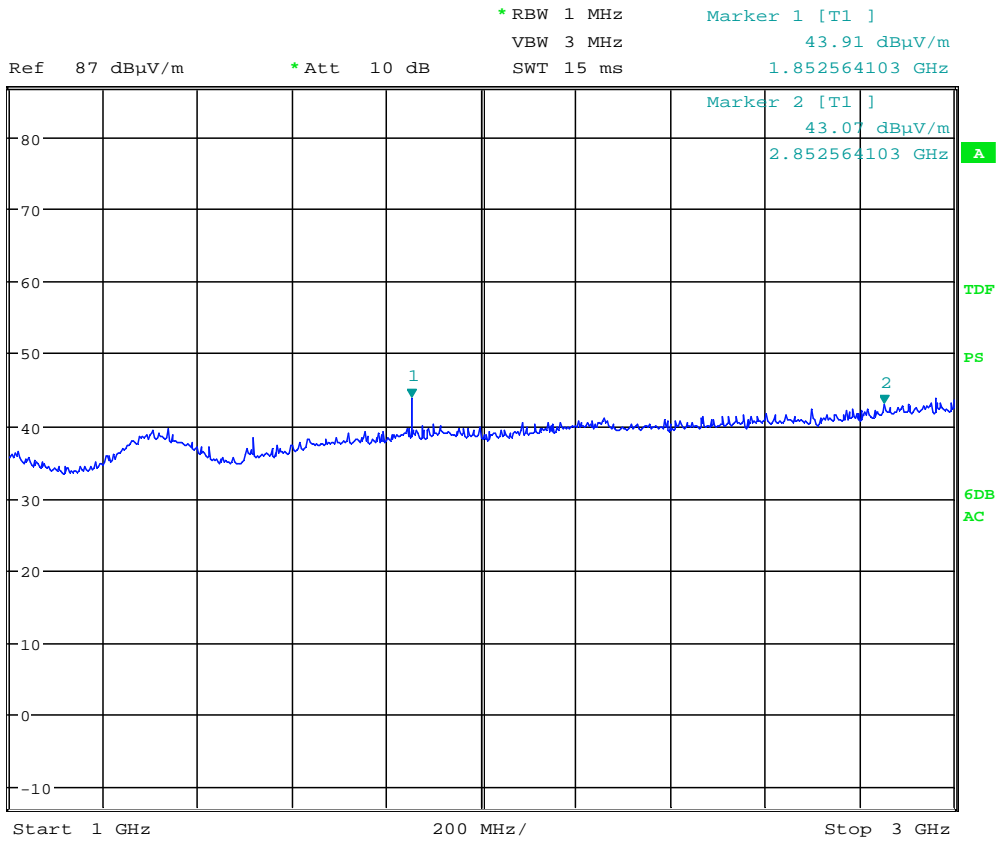


Date: 14.DEC.2012 08:53:01

VP ch 926.5 MHz: pre-view scan 1 - 3 GHz -Pk with HP-filter



Ref 87 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 50.77 dB μ V/m
 SWT 45 ms 8.267350000 GHz

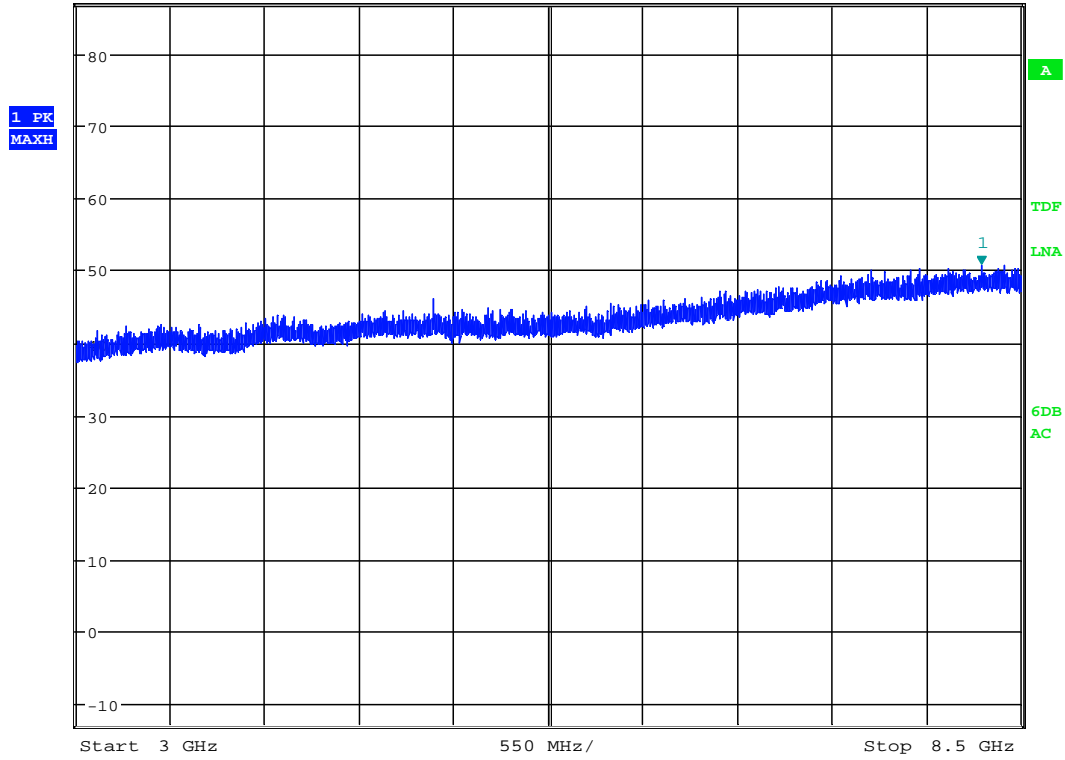


Date: 3.DEC.2012 15:54:10

VP ch 903.5 MHz : pre-view scan 3 - 8.5 GHz -Pk with HP-filter



*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 51.05 dBµV/m
 SWT 45 ms 8.390550000 GHz
 Ref 87 dBµV/m *Att 10 dB

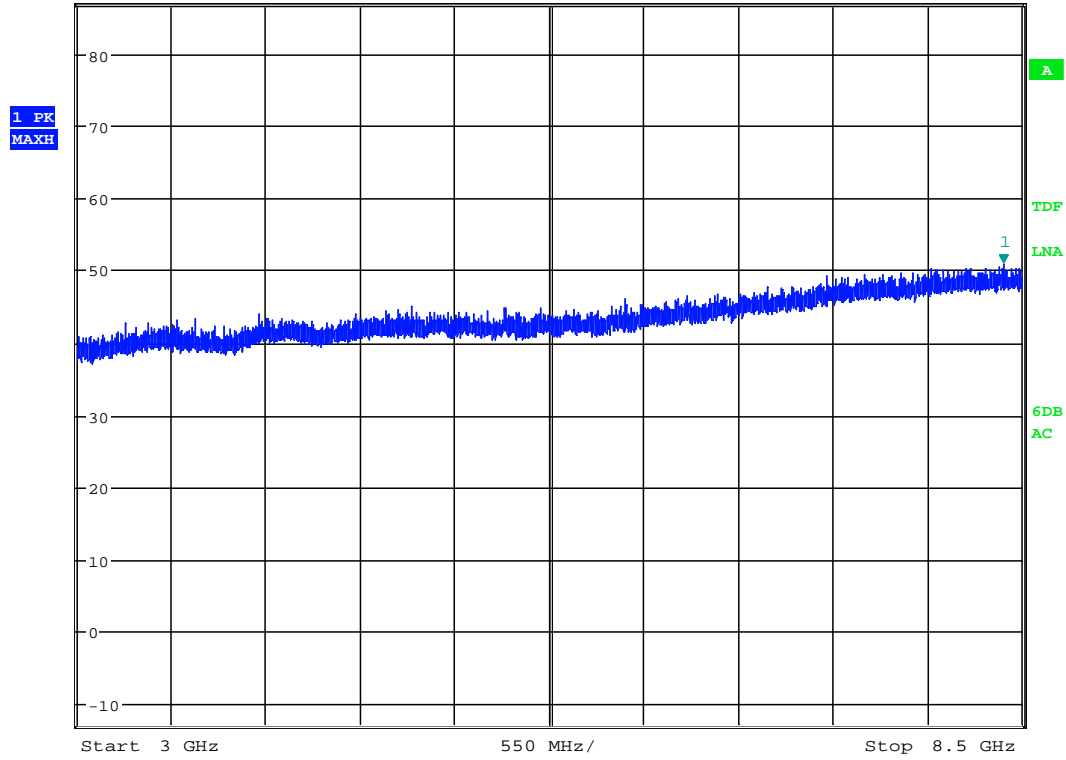


Date: 3.DEC.2012 15:41:16

VP ch 915 MHz : pre-view scan 3 - 8.5 GHz -Pk with HP-filter



*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 51.03 dBμV/m
 Ref 87 dBμV/m *Att 10 dB SWT 45 ms 8.089700000 GHz

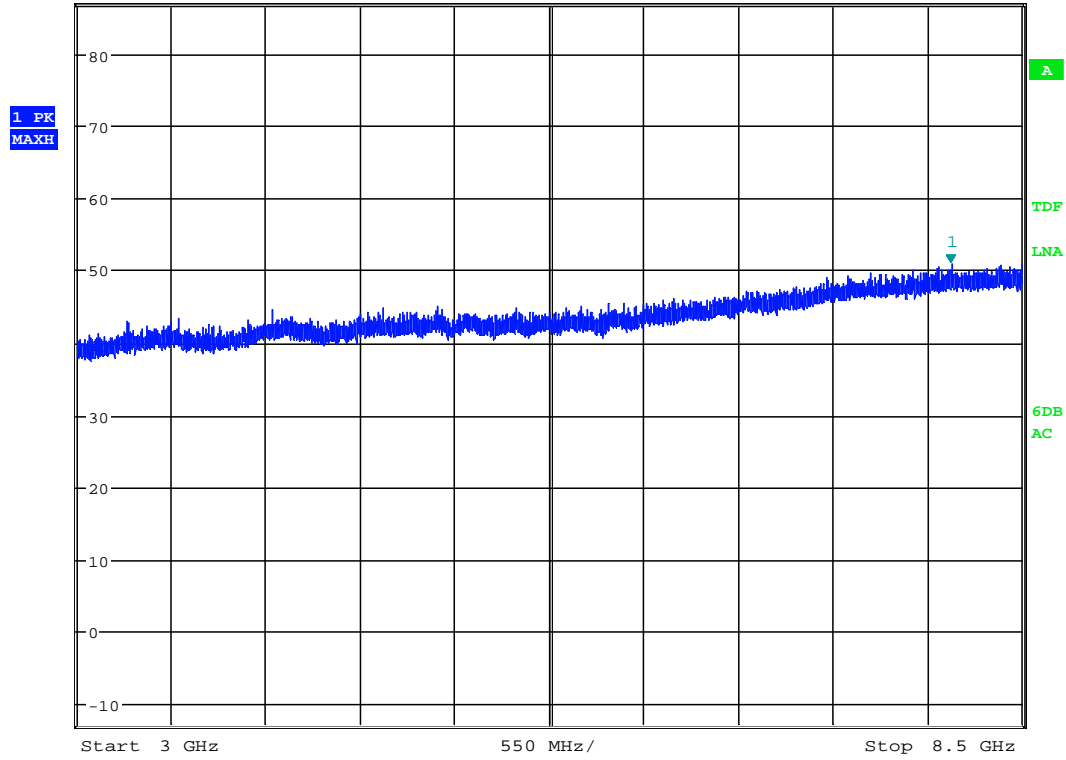


Date: 3.DEC.2012 15:37:37

VP ch 926.5 MHz : pre-view scan 3 - 8.5 GHz -Pk with HP-filter



Ref 87 dB μ V/m * Att 10 dB * RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 50.77 dB μ V/m
 SWT 45 ms 8.267350000 GHz

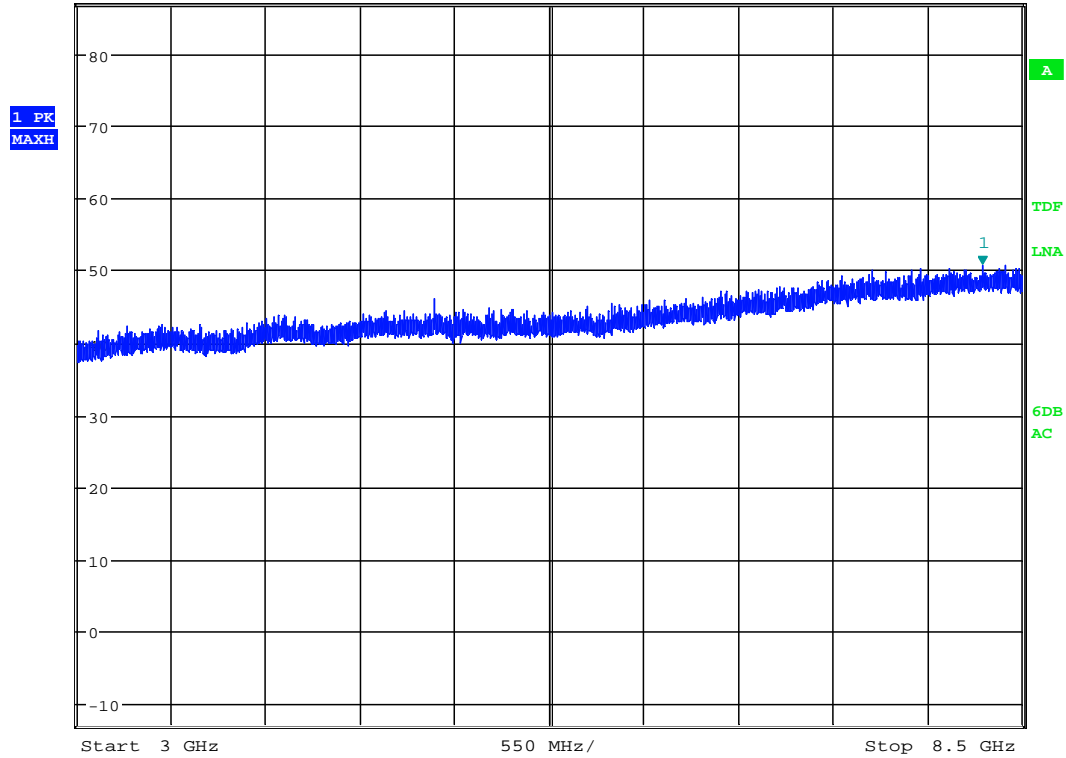


Date: 3.DEC.2012 15:54:10

VP ch 903.5 MHz : pre-view scan 8.5 - 10 GHz -Pk with HP-filter



*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 52.25 dBμV
 Ref 87 dBμV *Att 10 dB SWT 45 ms 9.769600000 GHz

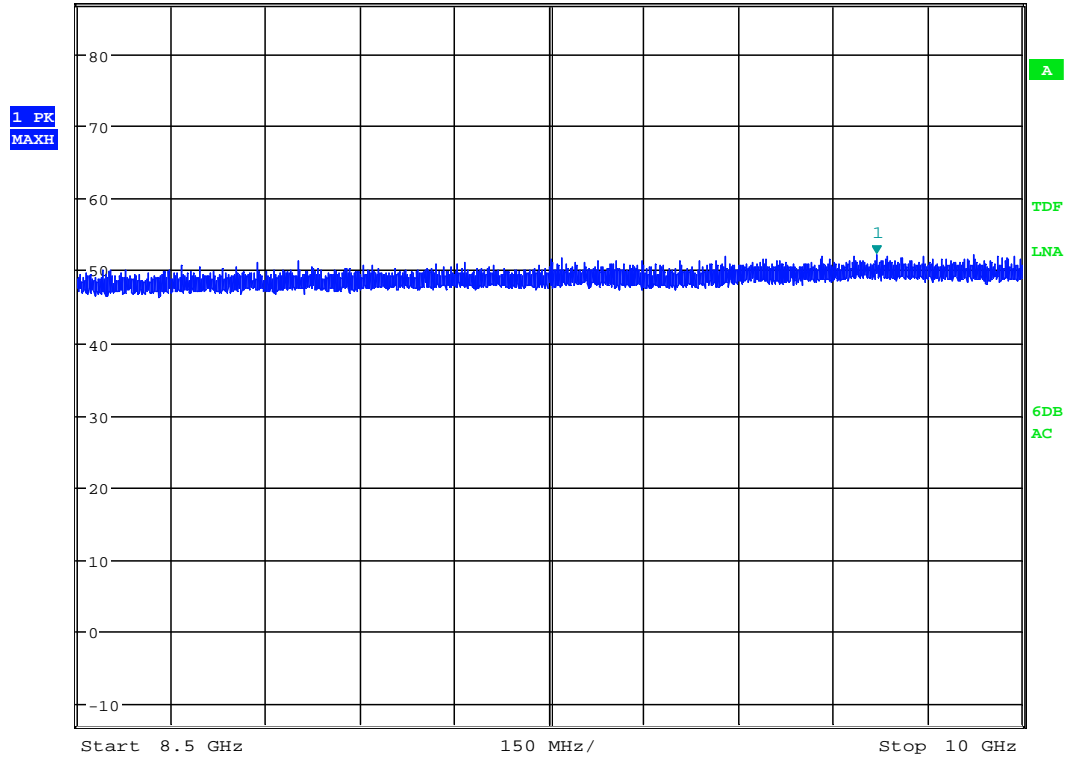


Date: 3.DEC.2012 16:14:02

VP ch 915 MHz : pre-view scan 8.5 - 10 GHz -Pk with HP-filter



*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 52.16 dBµV
 Ref 87 dBµV *Att 10 dB SWT 45 ms 9.822850000 GHz

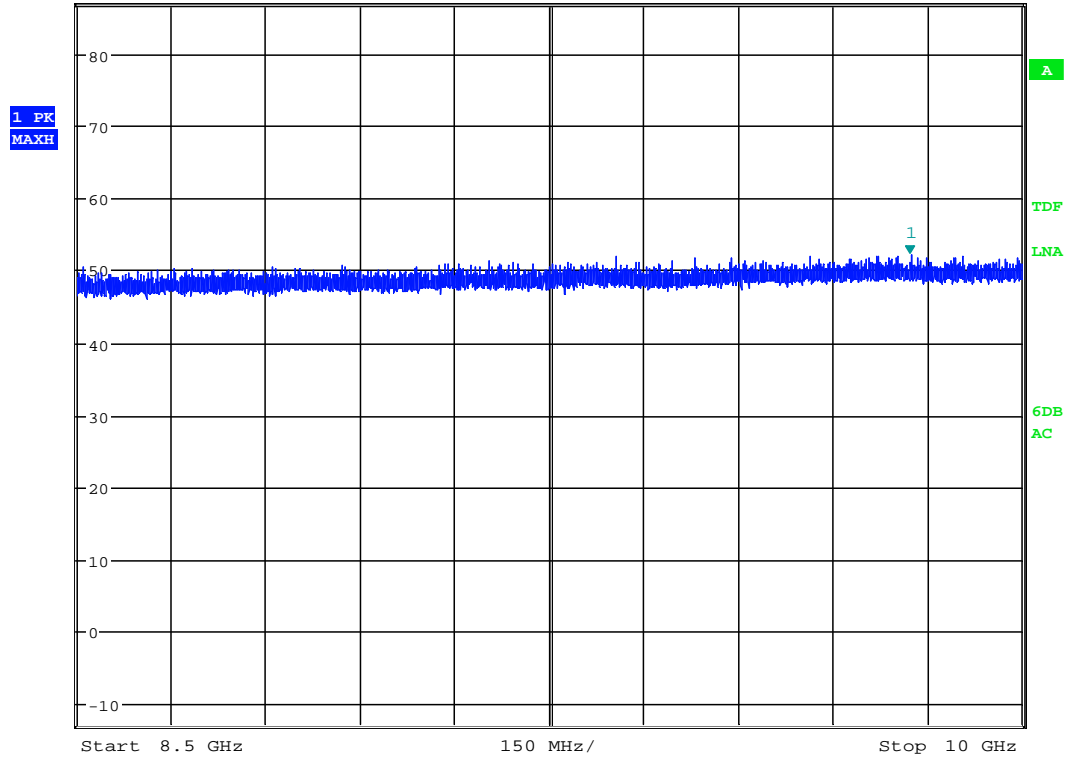


Date: 3.DEC.2012 16:10:19

VP ch 926.5 MHz : pre-view scan 8.5 - 10 GHz -Pk with HP-filter

Radiated emissions 9kHz – 30 MHz.

Detector: Peak

Measuring distance 10 m.

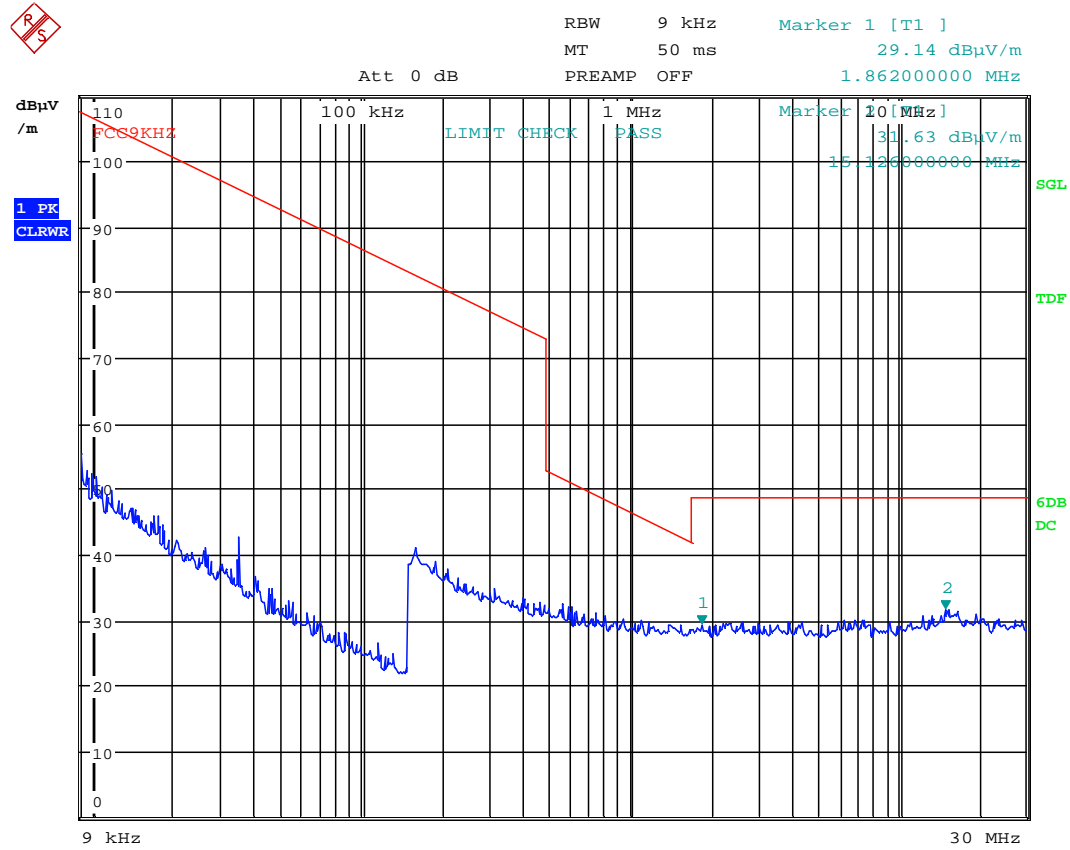

Date: 6.DEC.2012 15:57:41

Radiated emissions 30 – 1000 MHz.


Detector: Peak

Measuring distance 3 m.

The graph shows peak scan and highest values. Since there is no spurious found no QP values are measured.

FCC Pt15 Class B 30-1000 MHz 3m

FCC Pt15 Class B 30-1000M 3m

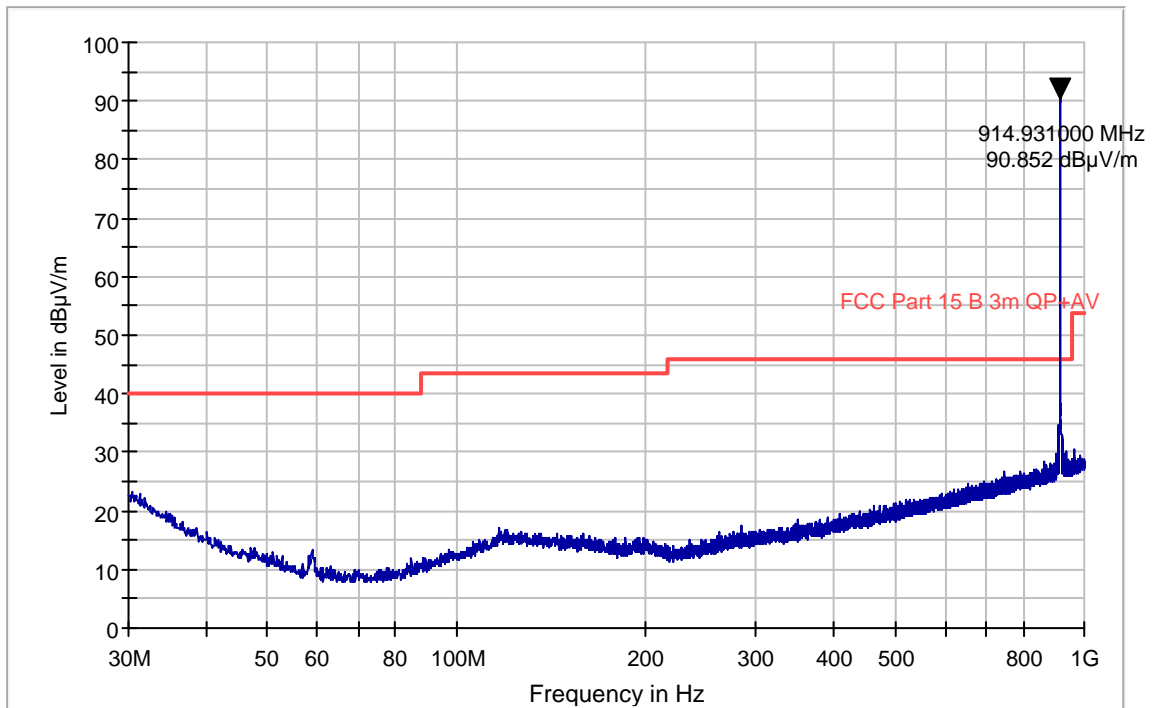

The marker shows the transmitter carrier at channel 915 MHz


5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.

No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1.	ESU40	EMI Receiver	Rohde & Schwarz	LR1639	2010.06	2013.06
2.	3115	Antenna horn	EMCO	LR 1330	2010.08.05	2013.08.05
3.	6810.17A	Attenuator	Suhner	LR 1185	2011.10.18	2013.10.18
4.	87V	Multimeter, Digital	Fluke	LR1599	2010.12.15	2012.12.15
5.	8449B	Amplifier	Hewlett Packard	LR 1322	2012.09.20	2013.09.20
6.	HFH2-Z2	Antenna loop	Rohde and Schwarz	LR 285	2010.10.08	2013.10.08
7.	10855A	Amplifier	Hewlett Packard	LR 1445	2012.09.20	2013.09.20
8.	HL223	Antenna log.per	Rohde & Schwarz	LR 1261	2010.05.09	2013.05.09
9.	HK116	Antenna biconic	Rohde & Schwarz	LR 1260	2010.05.09	2013.05.09
10.	LNA6900	Amplifier, low noise	Teseq	LR1593	2011.11.24	2013.11.24
11.	JB3	Antenna Bilog	Sunol Sciences Inc.	N4525	2012.10.11	2013.10.11
12.	6HC 1500-18000	HP filter	Trithlic	LR1612	Cal b4 use	
13.	FA210A1010003030	Microwave cable	Rosenberger	LR1566	Cal b4 use	
14.	ESCI	EMI Receiver	Rohde & Schwarz	N4259	2012.01.03	2013.01.03

6 BLOCK DIAGRAM

6.1 System set up for radiated measurements



Test equipment: 1- 14

6.2 Test site radiated emission

