



Test report no. : 182244-3

Item tested : CC85xx-CC2590EM

Type of equipment : 2.4GHz wireless audio transceiver

FCC ID : ZAT85XXCC2590EM

IC ID: 451H-85XX2590EM

Client : Texas Instruments Norway AS

FCC Part 15.247

Digital Transmission System

RSS-210, Issue 8

Low Power Licence-Exempt
Radiocommunication Devices

2012-10-16

Authorized by : 

Frode Sveinsen
Technical Vericator

CONTENTS

1 GENERAL INFORMATION 3

1.1 Testhouse Info 3

1.2 Client Information..... 3

1.3 Responsible Manufacturer (If other than client) 3

2 Test Information..... 4

2.1 Test Item 4

2.2 Test Environment..... 5

2.2.1 Normal test condition 5

2.3 Test Period..... 5

3 TEST REPORT SUMMARY 6

3.1 General 6

3.2 Test Summary..... 7

3.3 Description of modification for Modification Filing..... 7

3.4 Comments 7

3.5 Family List Rational 7

3.6 Test Engineer(s) 7

4 TEST RESULTS 8

4.1 Minimum 6 dB Bandwidth 8

4.2 20 dB Bandwidth..... 10

4.3 Peak Power Output..... 11

4.4 Spurious Emissions (Radiated) 18

4.5 Receiver Spurious Emissions 30

4.6 Power Spectral Density (PSD)..... 35

5 LIST OF TEST EQUIPMENT..... 37

6 BLOCK DIAGRAM 38

6.1 Power Line Conducted Emission 38

6.2 Test Site Radiated Emission..... 38

1 GENERAL INFORMATION

1.1 Testhouse Info

Name : Nemko AS
Address : Nemko Kjeller
Instituttveien 6, Box 96
NO-2027 Kjeller, NORWAY
Telephone : +47 64 84 57 00
Fax : +47 64 84 57 05
E-mail: comlab@nemko.com
FCC test firm : 994405
IC OATS : 2040D-1
Total Number of Pages: 38

1.2 Client Information

Name : Texas Instruments Norway AS
Address : Gaustadalléen 21,
NO-0349 Oslo, Norway
Telephone : +47 22 95 85 44
Fax : +47 22 95 85 46

Contact:

Name : Fredrik Kervel
Telephone : +47 22 95 83 62
E-mail : f.kervel@ti.com

1.3 Responsible Manufacturer (If other than client)

Name : /
Address : /

2 Test Information

2.1 Test Item

Name :	Texas Instruments
Model/version :	CC85XX-CC2590EM
Serial number :	-
Hardware identity and/or version:	-
Software identity and/or version :	-
Frequency Range :	2406 – 2474 MHz
Number of Channels :	4 (out of 18)
Channel BW:	>2MHz
Channel spacing:	4MHz
Operating Modes :	Transceiver
Type of Modulation :	Shaped 8GFSK, (DSSS)
Data rate:	5000kbit/s
User Frequency Adjustment :	None, Software controlled
Conducted Output Power :	0.0067 Watts (Peak)
Type of Power Supply :	Battery 9.0Vdc
Antenna Connector :	SMA
Antenna type:	Whip antenna - Pulse W1010
Antenna Diversity Supported :	None

Theory of Operation

The CC85XX-CC2590EM with Purepath Wireless Audio Evaluation Board is powered from a 9V battery (preferred choice) or USB. The CC85XX-CC2590EM uses 4 out of 18 2MHz channels. The 4 channels used are based on what channels achieve the best RSSI performance in an initial scan of the band at start-up. A channel will be kept until influenced by interference at which time it will be exchanged with the 5th best channel from a receiver perspective to continue keeping optimum communication performance. This system is considered an adaptive frequency hopping system, i.e. a kind of frequency agile system.

Exposure Evaluation

The EUT is exempted from RF Exposure Evaluation.

2.2 Test Environment

2.2.1 Normal test condition

Temperature:	20 – 25 °C
Relative humidity:	30 – 45 %
Normal test voltage:	9.0 V DC

The radiated emissions tests were performed with the EUT powered from a test-jig with 9V primary batteries.

The values are the limit registered during the test period.

2.3 Test Period

Item received date: 2011-10-04

Test period : from 2011-10-24 -2011-11-02 and 2012-02-07

3 TEST REPORT SUMMARY

3.1 General

Manufacturer: Texas Instruments
Model No.: CC85XX-CC2590EM
Serial No.: /

All measurements are traceable to national standards.

The tests were conducted for the purpose of demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and Industry Canada RSS-210 Issue 8.


Radiated tests were conducted in accordance with ANSI C63.4-2003. The radiated tests were made in a semi-anechoic chamber at measuring distances of 3m and 10m.

- | | |
|---|---|
| <input checked="" type="checkbox"/> New Submission | <input checked="" type="checkbox"/> Production Unit |
| <input type="checkbox"/> Class II Permissive Change | <input type="checkbox"/> Pre-production Unit |
| DTS Equipment Code | <input type="checkbox"/> Family Listing |

THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.
Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".



TEST REPORT #: 182244-3

TESTED BY: 
G.Suhanthakumar, Test engineer

DATE: 2012-02-22

Nemko Group authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

3.2 Test Summary

Name of test	FCC Part 15 reference	RSS-210 Issue 8 reference	Result
Antenna Requirement	15.203	7.1.4 (RSS-GEN)	Pass
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2.2 (RSS-GEN)	N/A*
Minimum 6 dB Bandwidth	15.247(a)(2)	A8.2	Pass
Peak Power Output	15.247(b)	A8.4	Pass
Power Spectral Density	15.247(d)	A8.2	Pass
Spurious Emissions (Antenna Conducted)	15.247(c)	A8.5	Pass
Spurious Emissions (Radiated)	15.247(c) 15.109(a) 15.209(a)	A8.5	Pass
Receiver Emissions (Radiated)	N/A	2.3	Pass

*EUT is battery operated only.

3.3 Description of modification for Modification Filing

Not applicable.

3.4 Comments

All ports were populated during spurious emission measurements.

3.5 Family List Rational

Not Applicable.

3.6 Test Engineer(s)

G.Suhanthakumar / Thomas Dangle

4 TEST RESULTS

4.1 Minimum 6 dB Bandwidth

Para. No.: 15.247 (a)(2)

Test Performed By: G.Suwanthakumar	Date of Test: 24 Oct 2011
------------------------------------	---------------------------


Test Results: Complies

Measurement Data:

Measured 6 dB Bandwidth (MHz)		
2406 MHz	2442 MHz	2474 MHz
2.13	2.22	2.22

Requirements:

For Digital Transmission Systems in the 2400-2483.5 MHz band the minimum 6 dB bandwidth shall be at least 500 KHz.

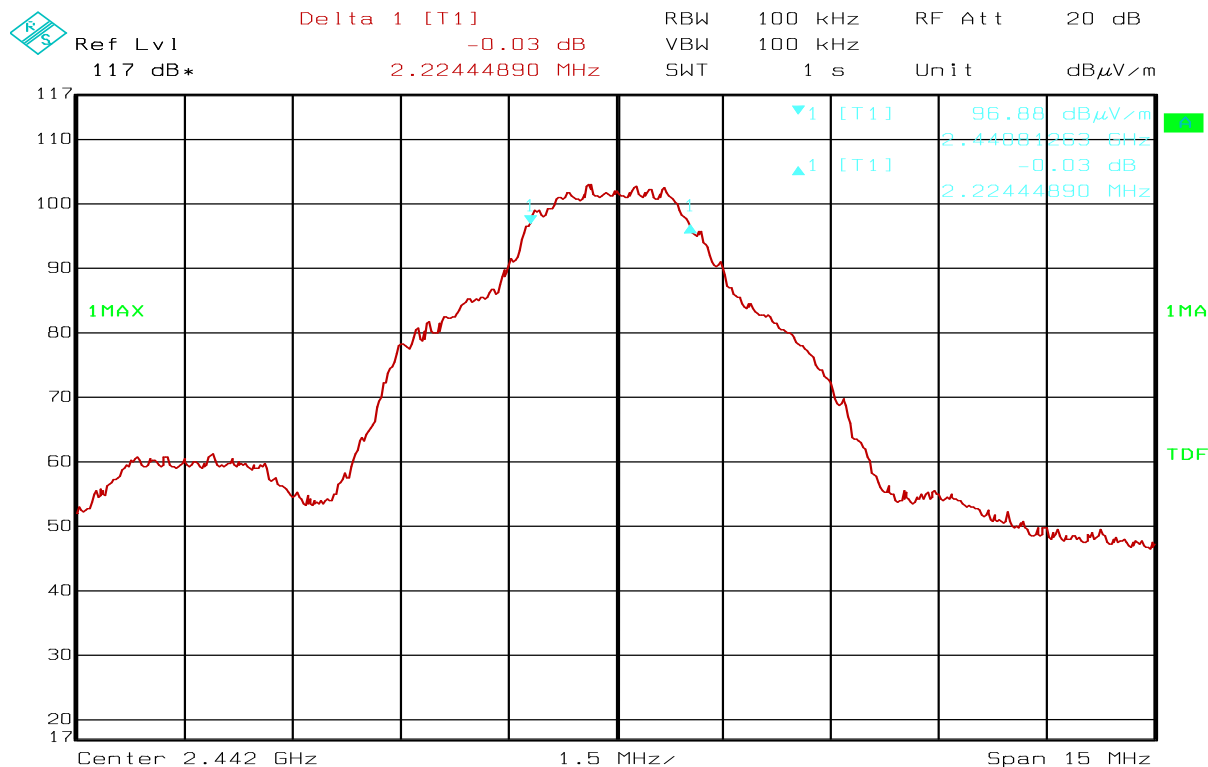

Date: 24.OCT.2011 12:47:37

6 dB Bandwidth at 2442 MHz

4.2 20 dB Bandwidth


Test Performed By: G.Suwanthakumar	Date of Test: 24 Oct 2011
------------------------------------	---------------------------

Measurement Data:

Measured 20 dB Bandwidth (MHz)
2442 MHz
4.27

Requirements:

No requirements. Reported for information only.

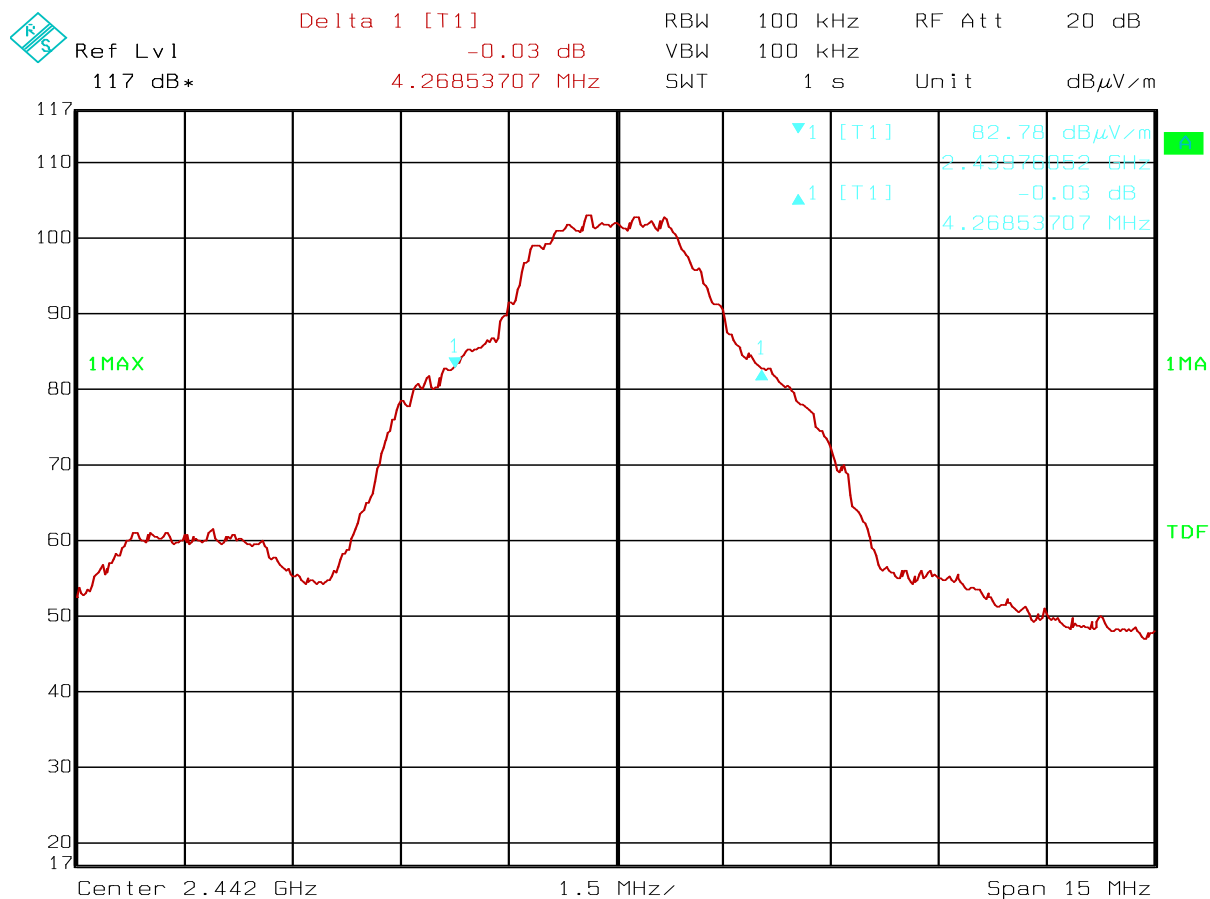

Date: 24.OCT.2011 12:55:19

20 dB Bandwidth at 2442 MHz

4.3 Peak Power Output

Para. No.: 15.247 (b)

Test Performed By: G.Suwanthakumar	Date of Test: 24 Oct 2011
------------------------------------	---------------------------

Test Results: Complies

Measurement Data:

RF channel	2406 MHz	2442 MHz	2474 MHz
Conducted Power (dBm)	8.3	8.3	7.7
Conducted Power (mWatt)	6.7	6.7	5.9
Measured field strength (dBµV/m)	106.4	106.4	105.3
Radiated Power EIRP (dBm)	9.5	10.7	10.4
Antenna Gain (dB)	1.3	2.5	2.6

Radiated Power is calculated from measured field strength by the formula in DA00-705.

See attached graph.

Detachable antenna?

Yes No

If detachable, is the antenna connector non-standard?

Yes No

Type of antenna connector: SMA.

Requirements:

The maximum peak output power shall not exceed the following limits:

For Digital Transmission Systems in the 2400 - 2483.5 MHz band: 1 Watt


If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



MARKER 1
 2.40714 GHz
 Ref 11.5 dBm * Att 10 dB

* RBW 3 MHz Marker 1 [T1]
 VBW 10 MHz 8.75 dBm
 SWT 2.5 ms 2.407140000 GHz

1 PK
 MAXH

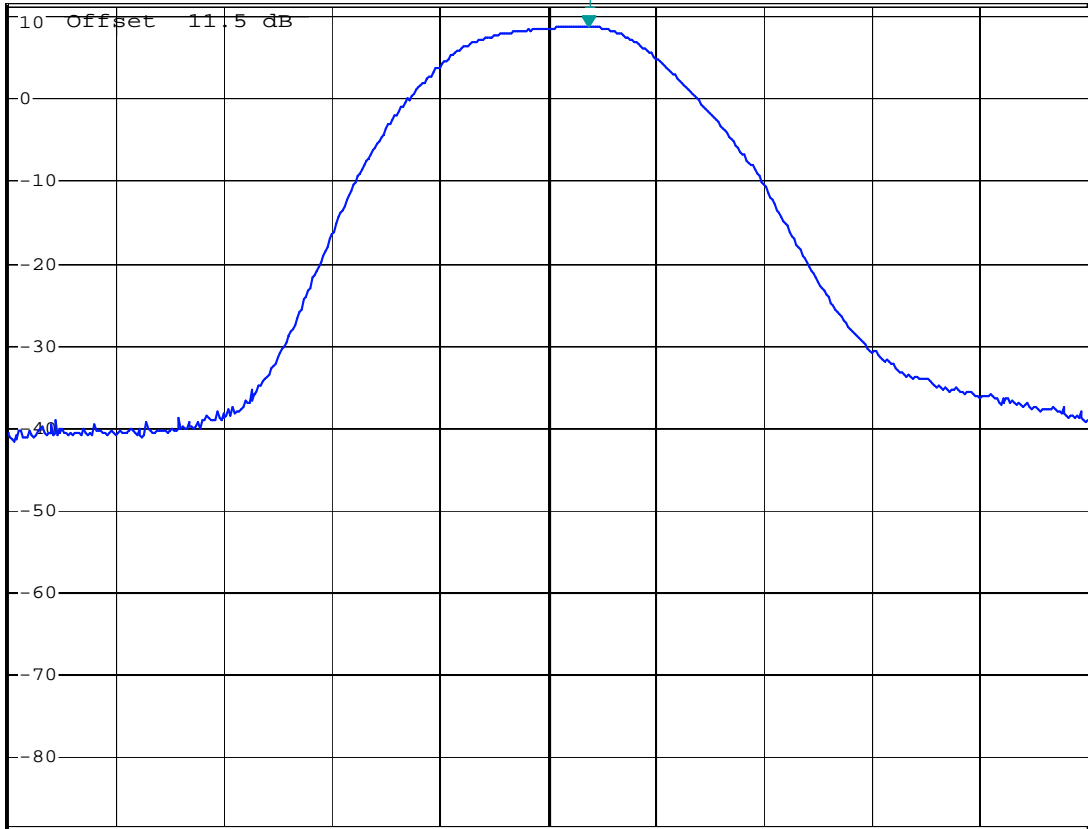


Center 2.406 GHz 3 MHz/ Span 30 MHz

Date: 1.NOV.2011 15:15:09

Conducted Power, 2406 MHz



Ref Lvl	Marker 1 [T1]	RBW	3 MHz	RF Att	20 dB
117 dB*	106.41 dB μ V/m	VBW	3 MHz		
	2.40681162 GHz	SWT	5 ms	Unit	dB μ V/m

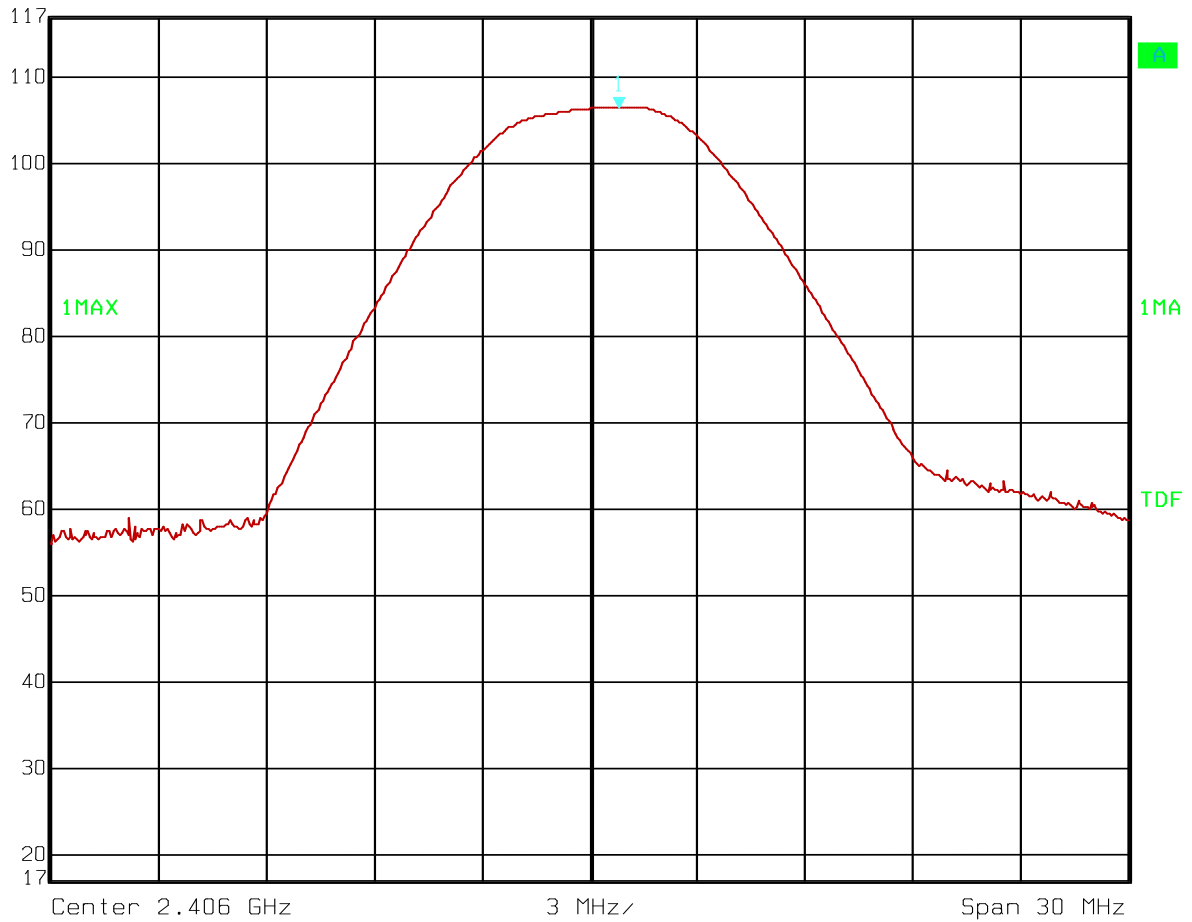

Date: 24.OCT.2011 12:03:03


Radiated Field strength, 2406 MHz



MARKER 1
 2.44086 GHz
 Ref 11.5 dBm * Att 10 dB

* RBW 3 MHz Marker 1 [T1]
 VBW 10 MHz 8.26 dBm
 SWT 2.5 ms 2.440860000 GHz

1 PK
 MAXH

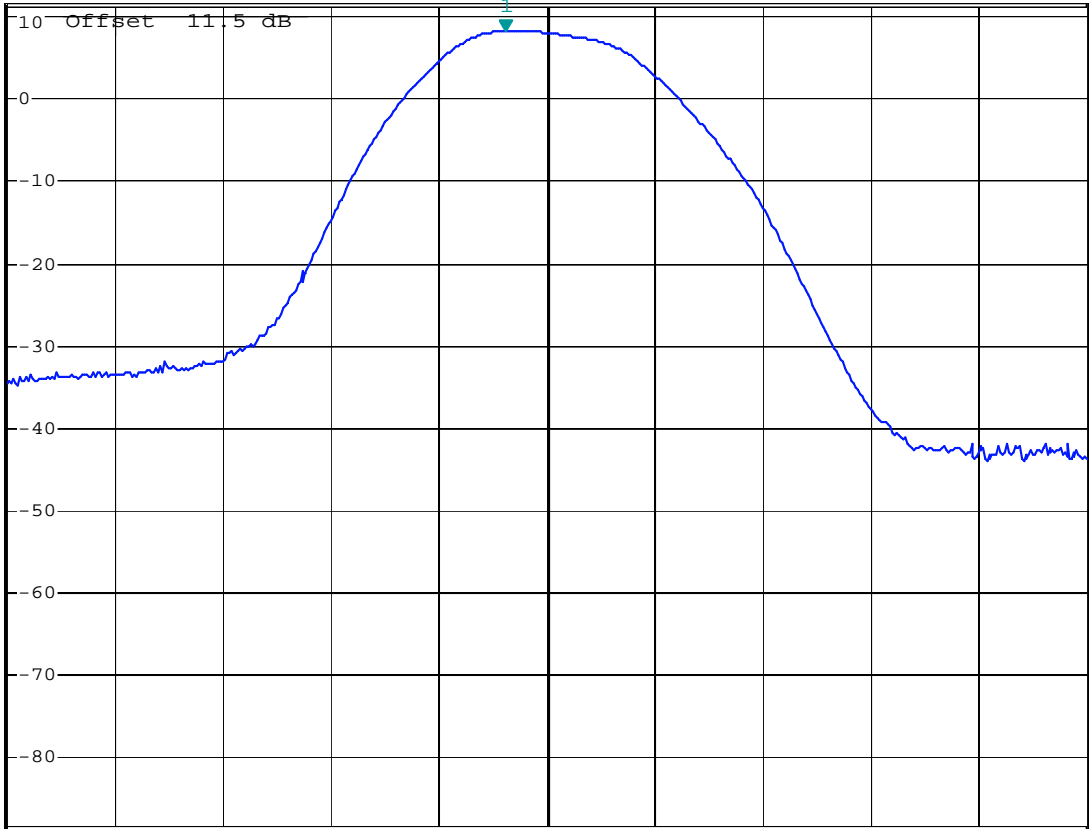

A


LVL

Date: 1.NOV.2011 15:18:29

Conducted Power, 2442 MHz



Ref Lvl	Marker 1 [T1]	RBW	3 MHz	RF Att	20 dB
117 dB*	106.40 dB μ V/m	VBW	3 MHz		
	2.44100802 GHz	SWT	1 s	Unit	dB μ V/m

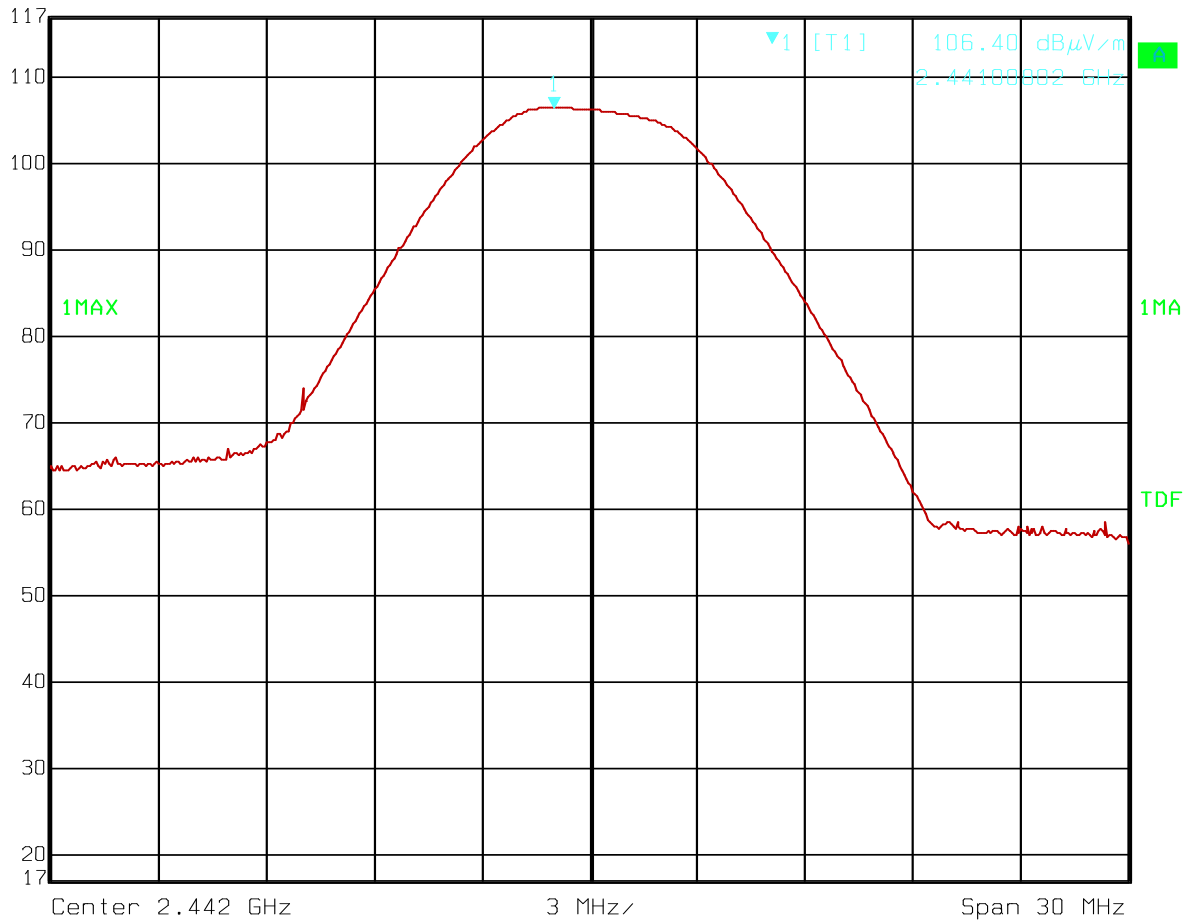

Date: 24.OCT.2011 12:46:07


Radiated Field strength, 2442 MHz



MARKER 1
2.47274 GHz
Ref 11.5 dBm *Att 10 dB

*RBW 3 MHz Marker 1 [T1]
VBW 10 MHz 7.72 dBm
SWT 2.5 ms 2.472740000 GHz

1 PK
MAXH

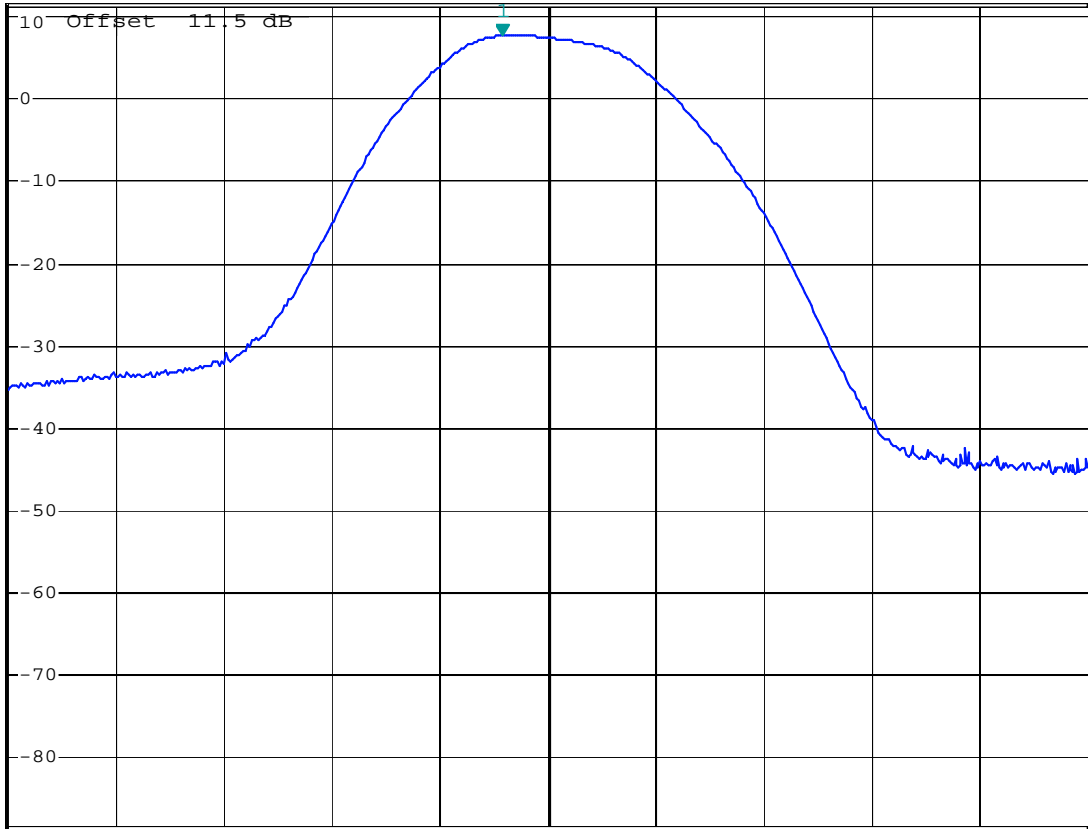


Center 2.474 GHz 3 MHz/ Span 30 MHz

Date: 1.NOV.2011 15:20:19

Conducted Power, 2474 MHz



Ref Lvl	Marker 1 [T1]	RBW	3 MHz	RF Att	20 dB
117 dB*	105.28 dB μ V/m	VBW	3 MHz		
	2.47288778 GHz	SWT	1 s	Unit	dB μ V/m

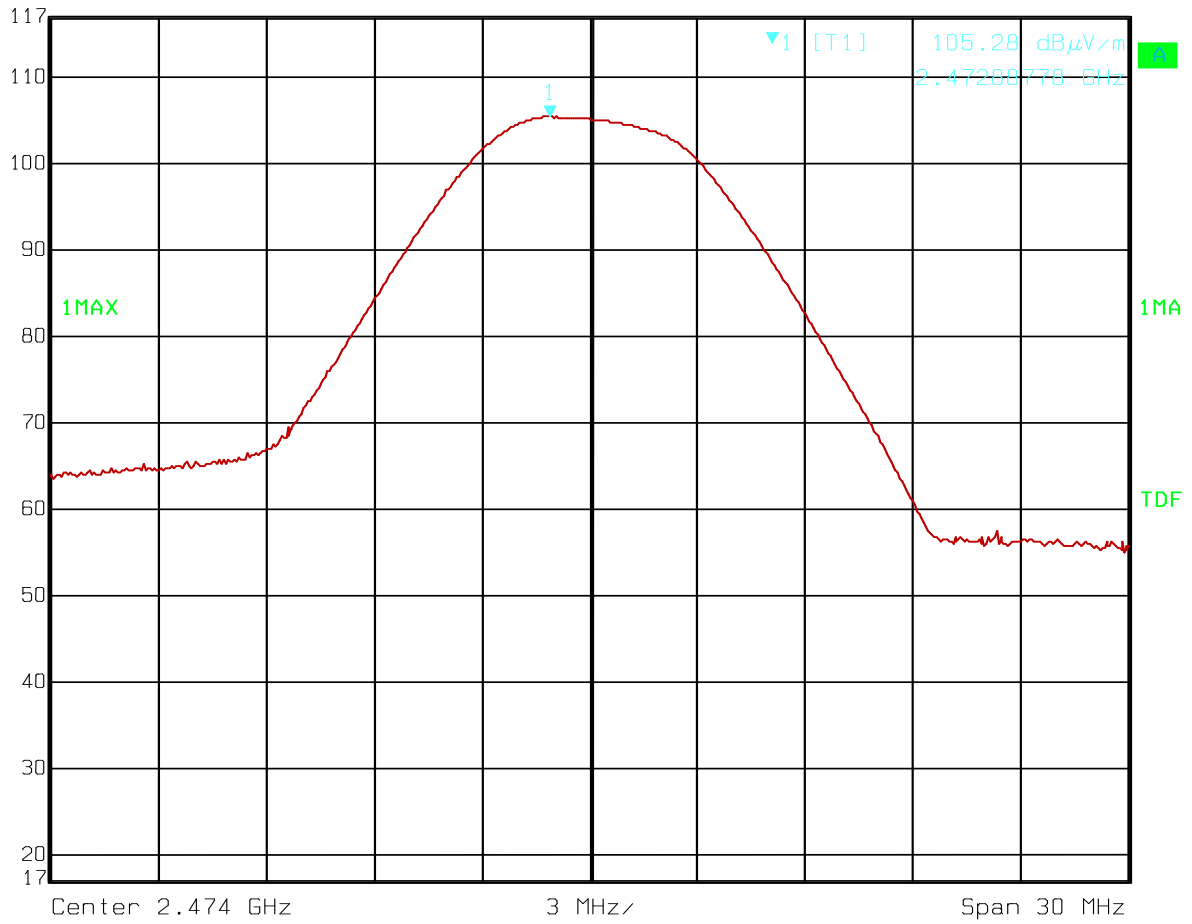

Date: 24.OCT.2011 13:02:32

Radiated Field strength, 2474 MHz

4.4 Spurious Emissions (Radiated)

Para. No.: 15.247 (c)

Test Performed By: G.Suhandhakumar	Date of Test: 24 Oct 2011
------------------------------------	---------------------------

Test Results: Complies

Measurement Data:

Band-edge, @3m

Frequency	Measured Field Strength @3m, dBµV/m	Detector	Limit dBµV/m	Margin dB
2.39 GHz	40.4	AV	54	13.6
	40.4	PK	74	33.6
2.4835 GHz	42.4	AV	54	11.6
	42.4*	PK	74	34.9

*Calculated with Marker-Delta method.

See attached plots.

Marker Delta Calculation:

Max: 105.1 dBµV/m

Delta: 62.7 dB

Band Edge Field Strength, Peak: $105.1 - 62.7 \text{ dB}\mu\text{V/m} = 42.4 \text{ dB}\mu\text{V/m}$

RF conducted power


Scan performed radiated with 100 kHz Bandwidth from 10kHz to 25 GHz.

All emissions are more than 20dB below carrier.

See plots.



Delta 1 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl 107 dB* 61.95 dB VBW 100 kHz
 16.48797595 MHz SWT 12.5 ms Unit dB μ V/m

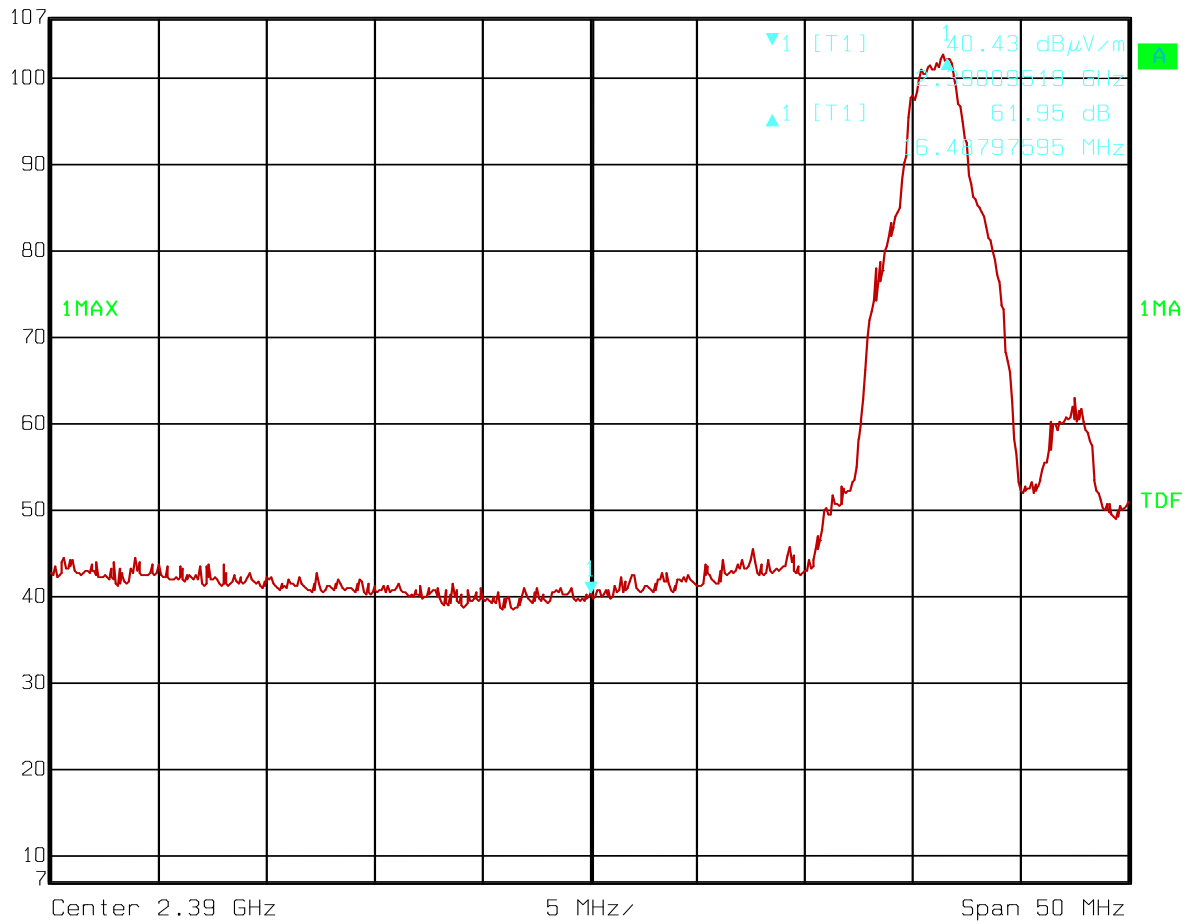


Date: 24.OCT.2011 12:16:23

Band Edge, 2390 MHz, Peak Detector



Ref Lvl	117 dB*	Marker 1 [T1]	105.08 dB μ V/m	RBW	1 MHz	RF Att	20 dB
			2.47297796 GHz	VBW	1 MHz		
				SWT	1 s	Unit	dB μ V/m

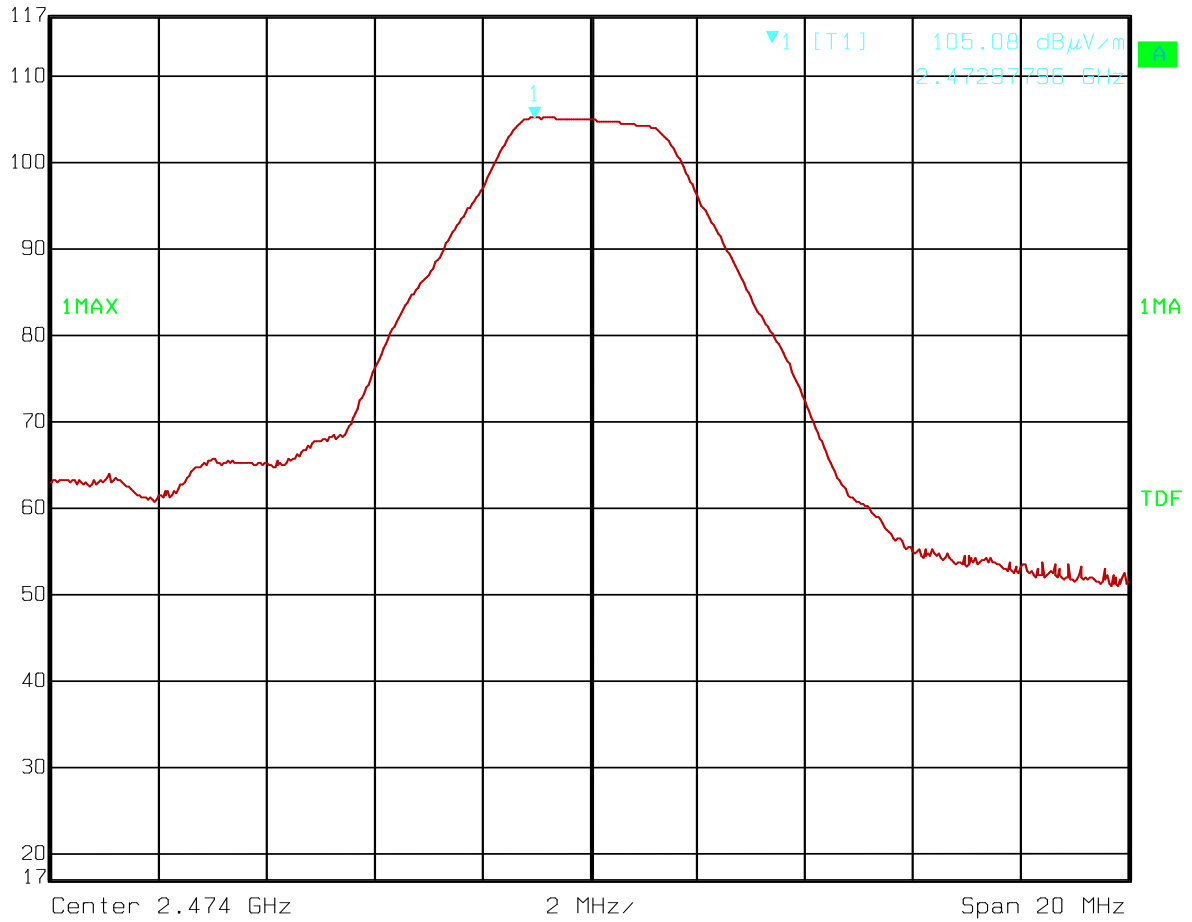


Date: 24.OCT.2011 13:03:14

Band Edge, 2483.5 MHz, Marker Delta, Max



Delta 1 [T1]
 Ref Lvl 107 dB*
62.65 dB
-9.89979960 MHz
 RBW 100 kHz RF Att 10 dB
 VBW 100 kHz
 SWT 1 s Unit dB μ V/m

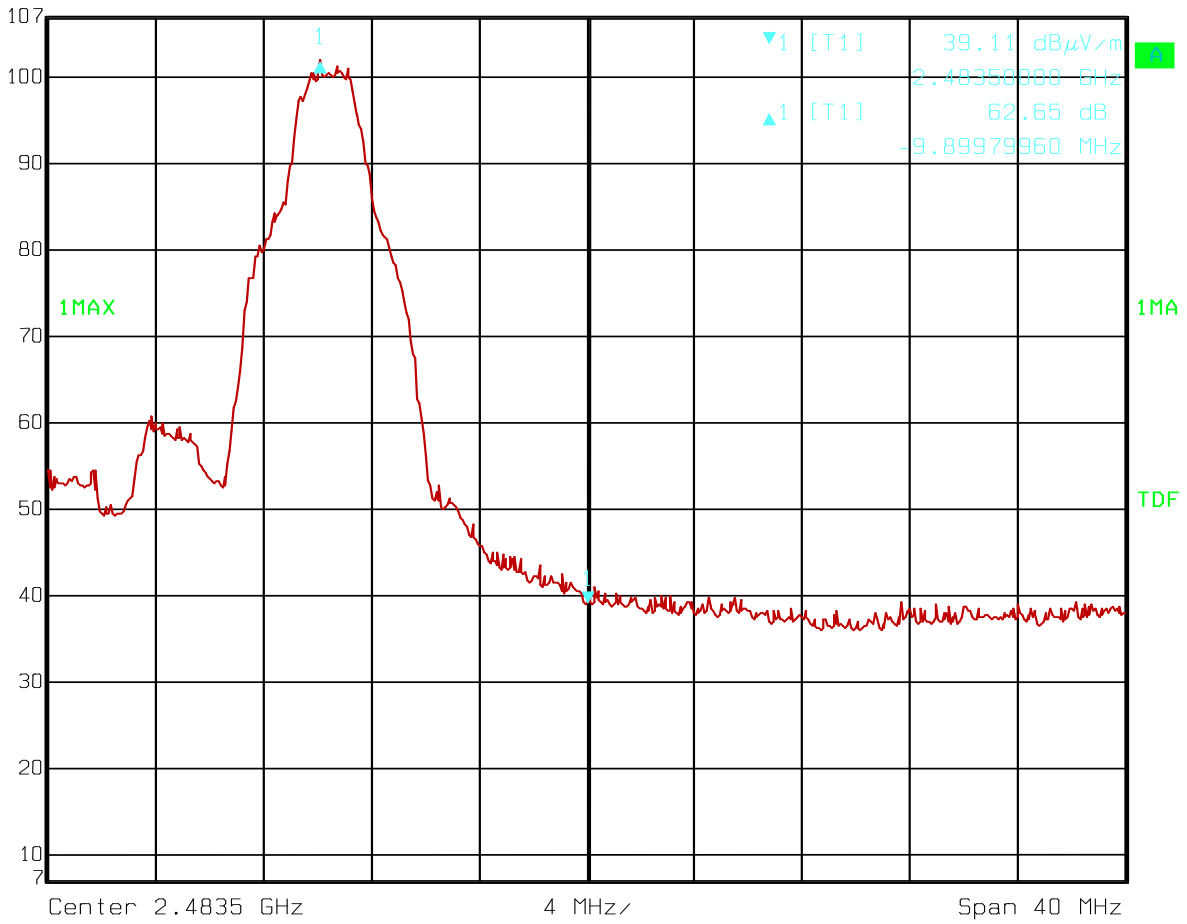


Date: 24.OCT.2011 13:04:19

Band Edge, 2483.5 MHz, Marker Delta, Delta



*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz 3.92 dBm
SWT 800 ms 2.432006264 GHz

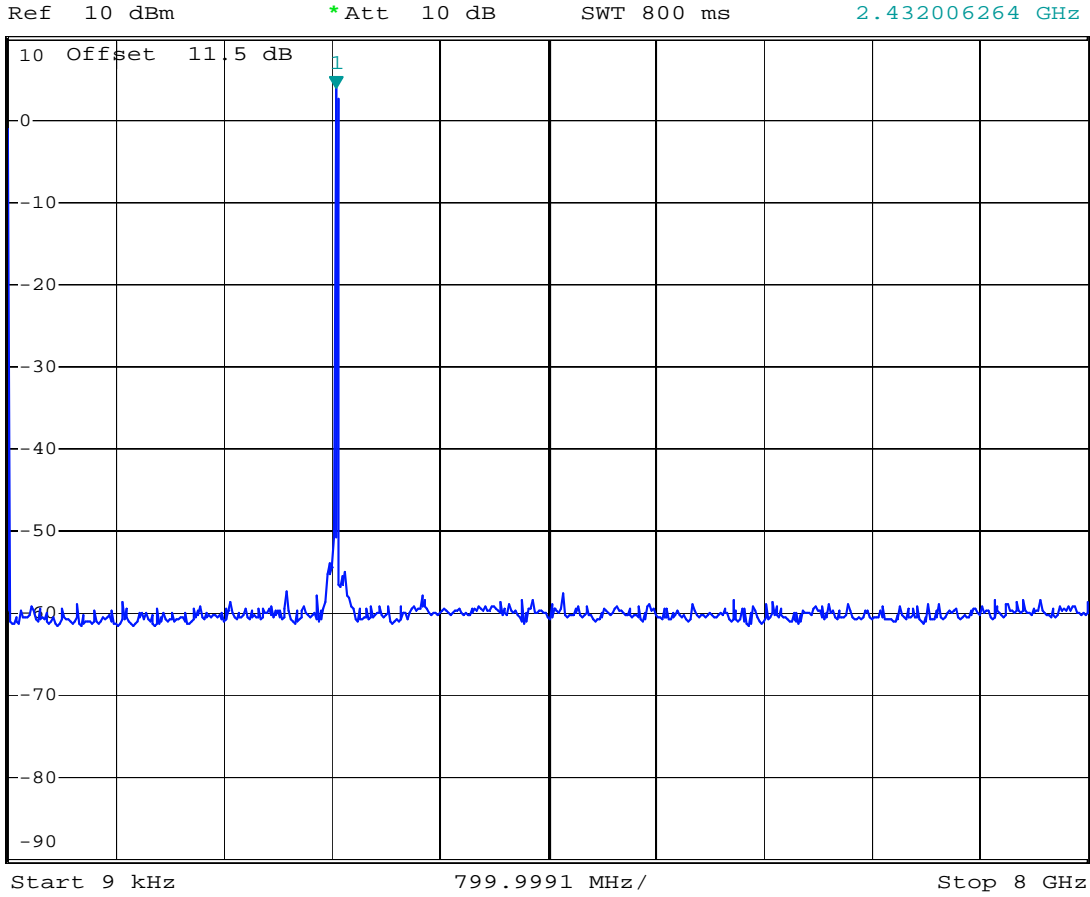

Date: 2.NOV.2011 07:34:03

Conducted Emissions, 10kHz – 8GHz

Test Performed By: Thomas Dangle

Date of Test: 07 Feb 2012

Radiated emission 30 – 1000 MHz.


Detector: Peak

Measuring distance 3m.

All values are below the limit even when measured with Peak Detector.

See attached plot.

FCC Pt15 Class B 30-1000M 3m

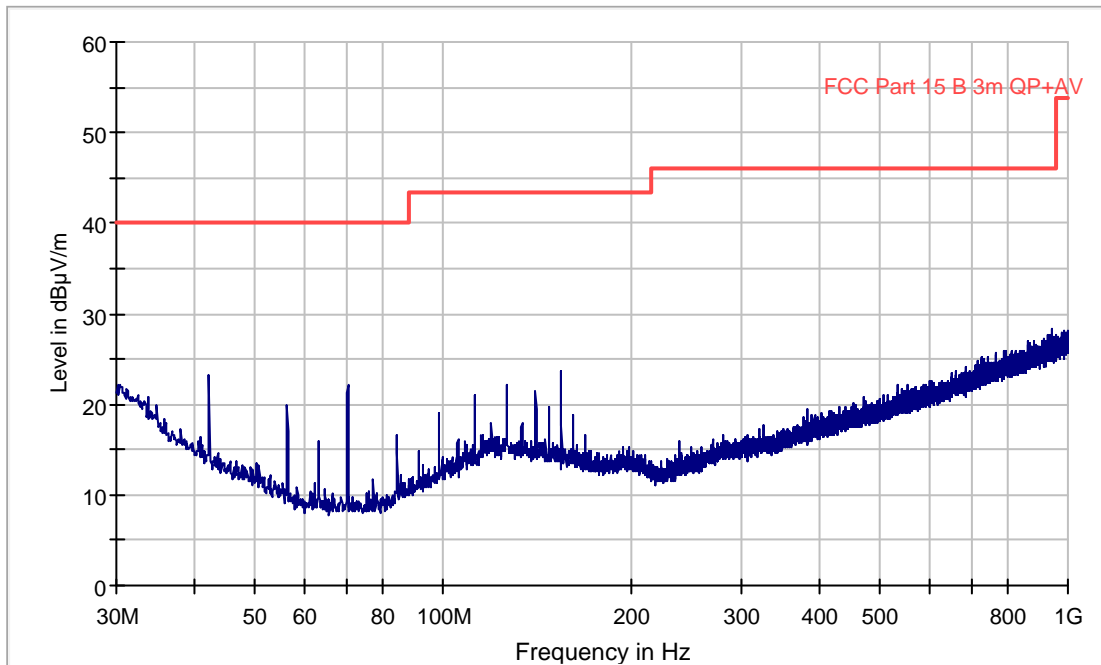

Radiated Emissions, 30 – 1000 MHz, VP and HP, @3m

Radiated Emissions, 1-25 GHz

1-12 GHz measured at a distance of 3m

12 - 18 GHz measured at 1m

Prescan performed from 18 to 25 GHz.

Frequency MHz	Field strength @3m dB μ V/m	Detector	Limit dB μ V/m	Margin dB
4812	None detected	Pk	74	-
4884	None detected	Pk	74	-
4948	None detected	Pk	74	-


All emissions are below the Average Limit, even when measured with Peak Detector.

Antenna factor, amplifier gain and cable loss are included in Spectrum Analyzer "Transducer factor".

Distance Correction factor of 9.5 dB for measurements at 1m is included in above values

See attached graphs.

Radiated Emissions, 1 – 13 GHz, VP, @3m – pre-scan only

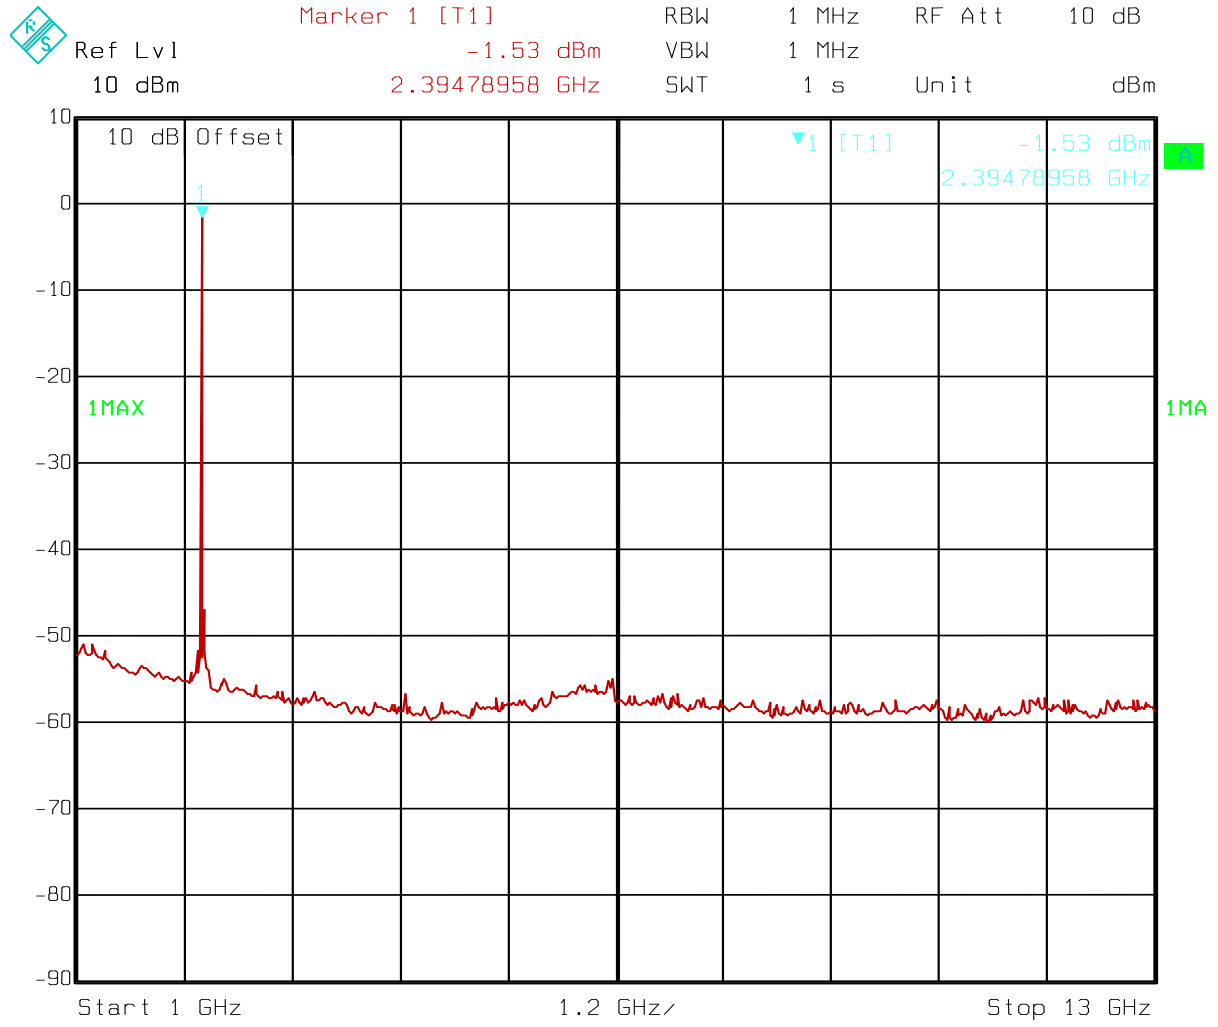


Date: 24.OCT.2011 12:29:53

Radiated Emissions, 1 – 13 GHz, HP, @3m pre-scan only



Ref Lvl 10 dB Marker 1 [T1] RBW 1 MHz RF Att 10 dB
 -13.72 dBm VBW 1 MHz
 2.39478958 GHz SWT 1 s Unit dBm

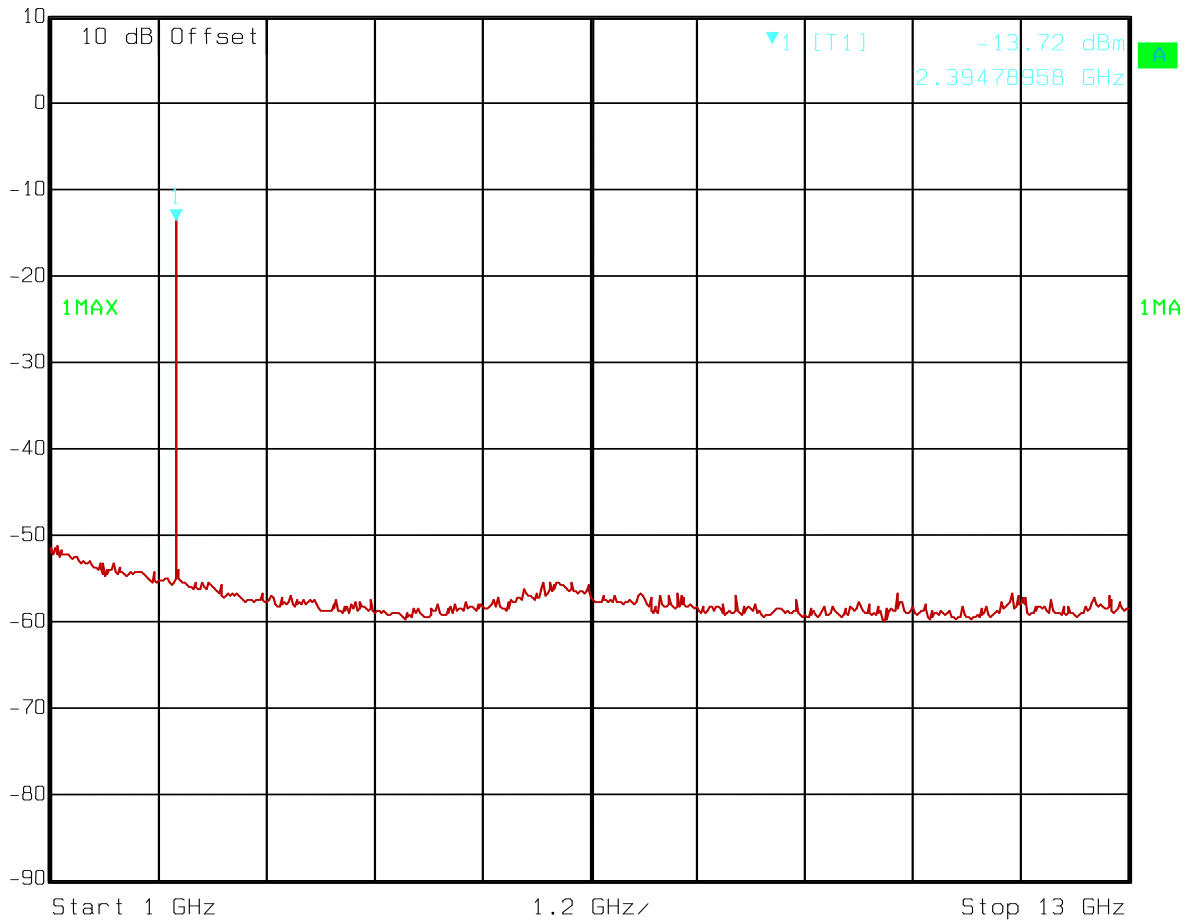

Date: 24.OCT.2011 13:16:12

Radiated Emissions, 1 – 13 GHz, VP, @3m pre-scan only

4.5 Receiver Spurious Emissions

Test Performed By: G.Suhanthakumar/Thomas Dangle

Date of Test: 24 Oct 2011 and
 07 Feb 2012

Measurement Procedure:

Industry Canada RSS-210 paragraph 2.3 and RSS-GEN paragraphs 4.10 and 6.

Test results:

Frequency MHz	Carrier Freq. MHz	Measured Value Radiated dBuV/m @3m	Limit dBuV/m @3m	Margin dB
30 – 1000	all	under the limit	40 - 47	/
2406	4810	48.67	54	10.3
2442	4882	48.85	54	9.4
2474	4946	47.73	54	8.8
> 1000 (all others)	all	None found	54	/

The measurement was performed radiated with the EUT in receive-only mode.


Requirements, RSS-GEN Issue 3, clause 6

The measurement can be performed either radiated or conducted.

When measured Conducted: no spurious signals appearing at the antenna terminals shall exceed 2 nW per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nW above 1 GHz.

When measured Radiated: See Table 2 in RSS-GEN Issue 3, clause 6.


EN 55022 Class B 0-1G 3m

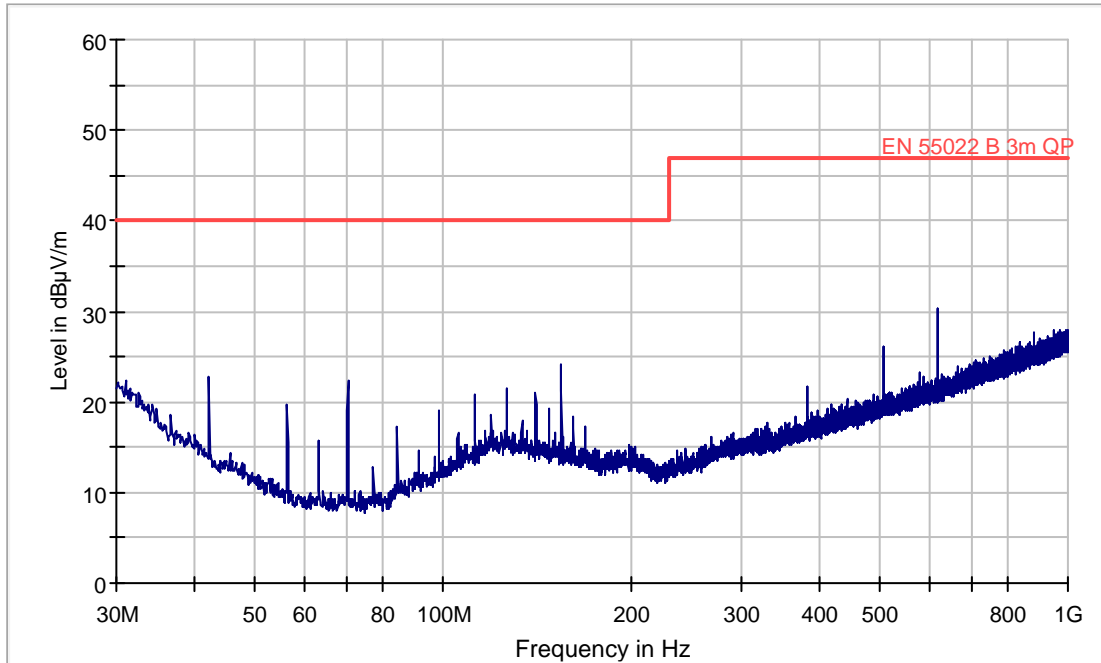

Radiated Emissions, 30 – 1000 MHz, VP and HP, @3m



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
87 dB*	48.61 dB μ V/m	VBW	1 MHz		
	4.81003006 GHz	SWT	5 ms	Unit	dB μ V/m

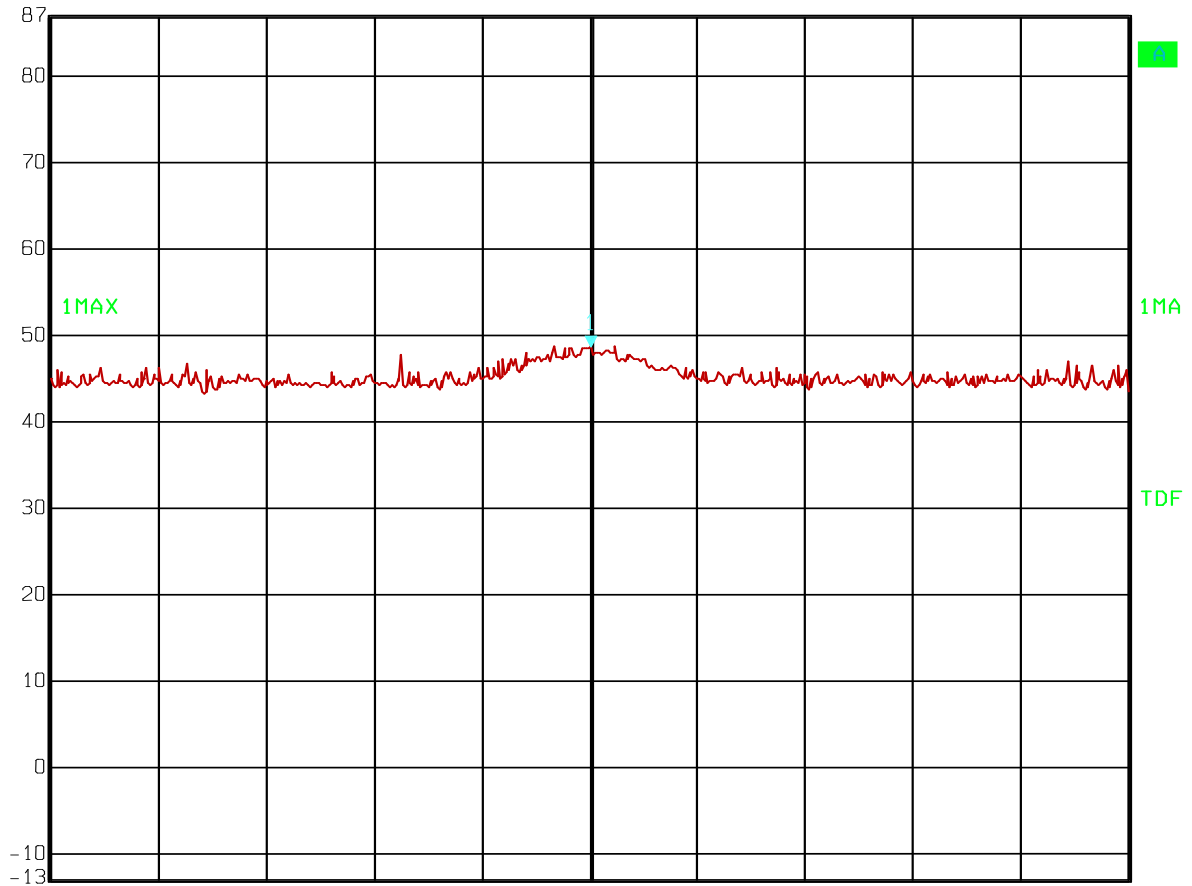


Center 4.81002004 GHz 1 MHz/ Span 10 MHz

Date: 24.OCT.2011 11:49:53

Receiver Radiated Emissions, 4810 MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
87 dB*	49.93 dB μ V/m	VBW	1 MHz		
	4.88213990 GHz	SWT	5 ms	Unit	dB μ V/m

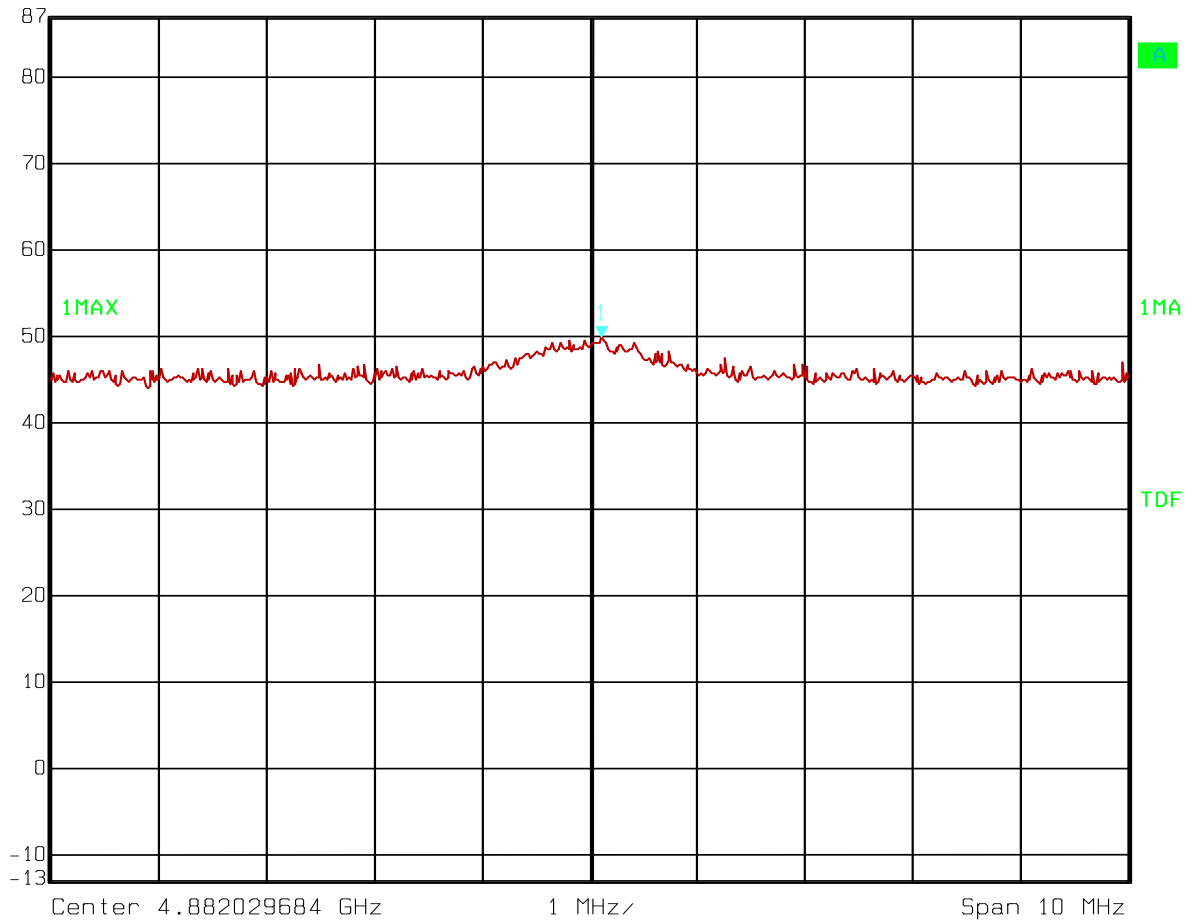


Date: 24.OCT.2011 10:56:12

Receiver Radiated Emissions, 4882 MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
87 dB*	49.33 dB μ V/m	VBW	1 MHz		
	4.94609807 GHz	SWT	5 ms	Unit	dB μ V/m

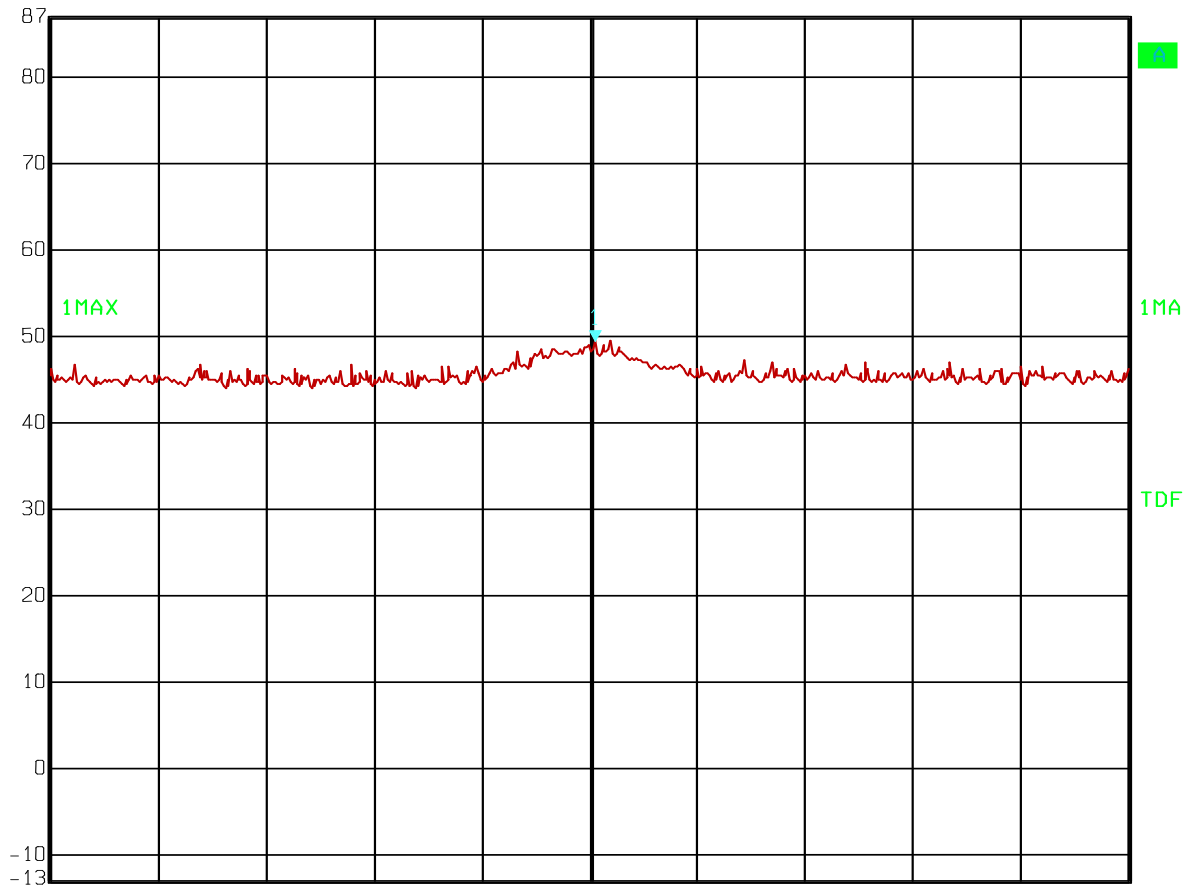

Center 4.946047968 GHz 1 MHz Span 10 MHz

Date: 24.OCT.2011 11:53:33

Receiver Radiated Emissions, 4946 MHz

4.6 Power Spectral Density (PSD)

Para. No.: 15.247 (d)

Test Performed By: G.Suwanthakumar

Date of Test: 2 Nov 2011

Test Results: Passed

Measured and Calculated Data:

The alternative test procedures in point 2) A , B and formula 1 described in guidance on measurements for Digital Transmission Systems is used.

	Measured PSD
Power Spectral Density @2442 MHz	-11.05 dBm

Requirements:

The Power Spectral Density of a Digital Transmission System shall be no greater than +8 dBm in any 3 kHz band.




CENTER FREQUENCY
 2.44092 GHz

*RBW 3 kHz Marker 1 [T1]
 VBW 10 kHz -11.05 dBm
 *SWT 100 s 2.441408000 GHz

Ref 11.5 dBm *Att 10 dB

1 PK
 VIEW

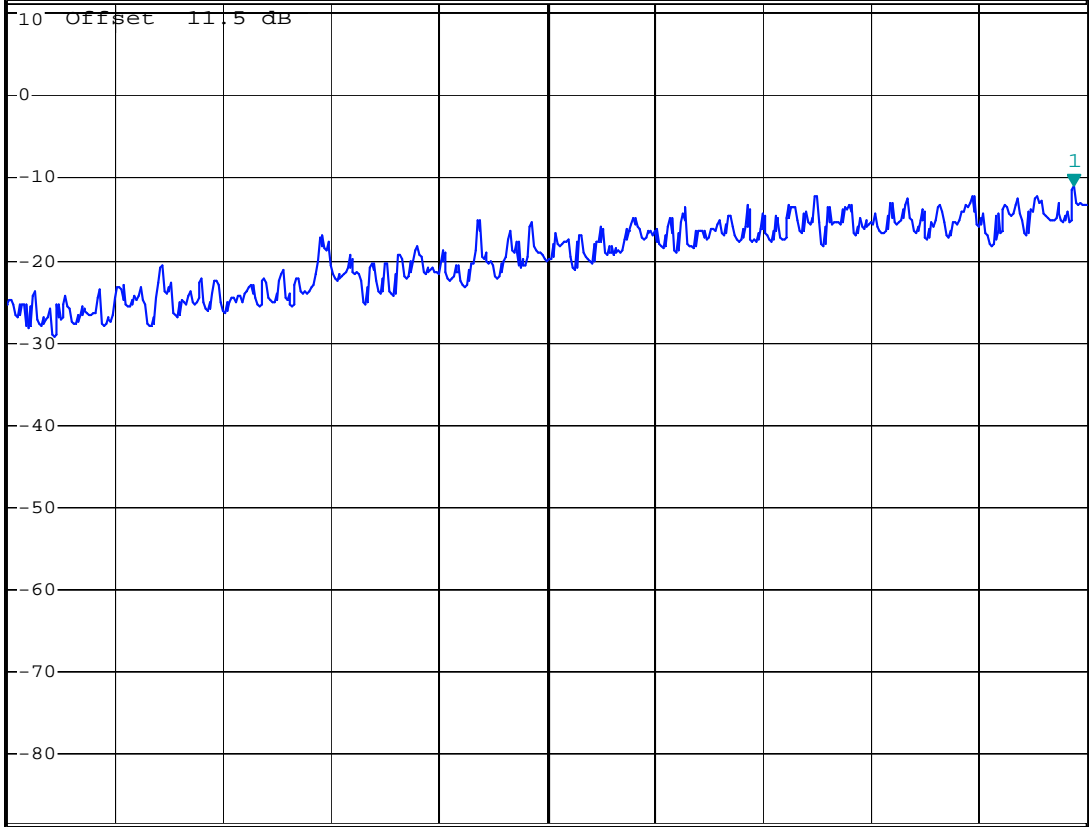

Center 2.44092 GHz 100 kHz/ Span 1 MHz

Date: 2.NOV.2011 07:32:18

PSD Measurement

5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the test laboratory.

Date: 2011-10-24


No.	Instrument/ ancillary	Type of instrument/ ancillary	Manufacturer	Ref. no.	Cal. Date	Cal. Due
1	FSEK	Spectrum Analyzer	Rohde & Schwarz	LR 1337	2010.12.15	2012.12.15
2	ESHS10	Spectrum Analyzer	Rohde & Schwarz	LR 1090	2011.06.21	2012.06.21
3	3115	Antenna horn	EMCO	LR 1330	2010.08.05	2013.08.05
4	643	Antenna horn	Narda	LR 093	2009.01.26	2012.01.26
5	642	Antenna horn	Narda	LR 220	2009.01.26	2012.01.26
6	PM7320X	Antenna horn	Siverts lab	LR 103	2009.01.26	2012.01.26
7	DBF-520-20	Antenna horn	Systron Donner	LR 101	2009.01.26	2012.01.26
8	638	Antenna horn	Narda	LR 098	2010.06.17	2015.06.17
9	JB3	Antenna BiLog	Sunol Sciences	N-4525	2010-09	2012-09
10	8449B	Pre-amplifier	Hewlett Packard	LR 1322	2011-09-27	2012-09-27
11	LNA6900	Pre-amplifier	Teseq	LR 1593	2010-11	2011-11
12	ESCI	Test Receiver	Rohde & Schwarz	N-4529	2010.11.08	2011.11.02
13	ESH3-Z3	LISN	Rohde & Schwarz	LR 1076	2009-10-22	2011-10-22
14	80S	Signal Generator	Powertron	LT 502	Cal b4 use	
15	Model 87 V	Multimeter	Fluke	LR 1598	2010-12-14	2011-12-14
16	FSU26	Spectrum Analyzer	Rohde & Schwarz	LR 1504	2010.09.28	2012.09.28

Date: 2012-02-07

No.	Instrument/ ancillary	Type of instrument/ ancillary	Manufacturer	Ref. no.	Cal. Date	Cal. Due
1	JB3	Antenna BiLog	Sunol Sciences	N-4525	2010-09	2012-09
2	LNA6900	Pre-amplifier	Teseq	LR 1593	2011-11-24	2013-11-24
3	ESCI	Test Receiver	Rohde & Schwarz	N-4259	2011.12.21	2012.11.03
4	Model 87 V	Multimeter	Fluke	LR 1598	2011-03-11	2012-11-03

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

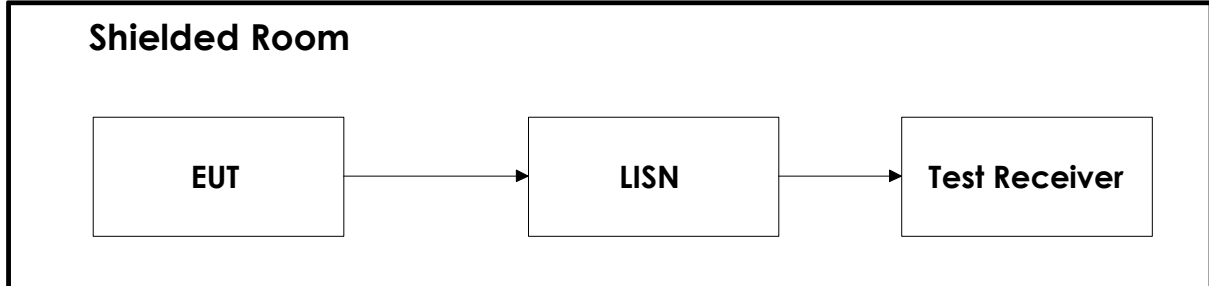

6.2 Test Site Radiated Emission

