



Test report no. : 224123-3

Item tested : Zlight2

Type of equipment : 2.4 GHz Transceiver

FCC ID : ZATZLIGHT2

Client : Texas Instruments Norway AS

FCC Part 15.247

Digital Transmission System

RSS-210, Issue 8

Low Power Licence-Exempt
Radiocommunication Devices

25 February 2013

Authorized by :

Frode Sveinsen
Technical Verificator



CONTENTS

- 1 GENERAL INFORMATION 3**
- 1.1 Testhouse Info 3
- 1.2 Client Information 3
- 1.3 Responsible Manufacturer (If other than client) 3
- 2 TEST INFORMATION 4**
- 2.1 Test Item 4
- 2.2 Test Environment 5
- 2.3 Test Period 5
- 3 TEST REPORT SUMMARY 6**
- 3.1 General 6
- 3.2 Test Summary 7
- 3.3 Description of modification for Modification Filing 7
- 3.4 Comments 7
- 3.5 Family List Rational 7
- 4 TEST RESULTS 8**
- 4.1 Power Line Conducted Emissions 8
- 4.2 Minimum 6 dB Bandwidth 9
- 4.3 20 dB Bandwidth 13
- 4.4 Peak Power Output 15
- 4.5 Spurious Emissions (Radiated) 19
- 4.6 Power Spectral Density (PSD) 61
- 5 LIST OF TEST EQUIPMENT 65**
- 6 BLOCK DIAGRAM 66**
- 6.1 Power Line Conducted Emission 66
- 6.2 Test Site Radiated Emission 66

1 GENERAL INFORMATION

1.1 Testhouse Info

Name : Nemko AS
Address : Nemko Kjeller
Instituttveien 6, Box 96
NO-2027 Kjeller, NORWAY
Telephone : +47 64 84 57 00
Fax : +47 64 84 57 05
E-mail: comlab@nemko.com
FCC test firm : 994405
IC OATS : 2040D-1
Total Number of Pages: 66

1.2 Client Information

Name : Texas Instruments Norway AS
Address : Gaustadalléen 21,
NO-0349 Oslo, Norway
Telephone : +47 22 95 85 44
Fax : +47 22 95 85 46

Contact:

Name : Dag Grini
Telephone : +47 22 95 83 01
E-mail : d.grini@ti.com

1.3 Responsible Manufacturer (If other than client)

Same as the client.

2 TEST INFORMATION

2.1 Test Item

| | |
|------------------------------------|--|
| Name : | Texas Instruments |
| FCC ID : | ZATZLIGHT2 |
| IC : | 451H-ZLIGHT2 |
| Model/version : | Zlight2 |
| Serial number : | - |
| Hardware identity and/or version: | - |
| Software identity and/or version : | - |
| Frequency Range : | 2405 – 2480 MHz |
| Number of Channels : | 16 |
| Type of Modulation : | 250 kbps, OQPSK (Digital) |
| Conducted Output power: | 2.7 mW (Peak) |
| User Frequency Adjustment : | None |
| Type of Power Supply : | 6.0V _{DC} (Four AA LR6 1.5 V _{DC} batteries) |
| Antenna Connector : | PCB antenna |
| Antenna Diversity Supported : | No |
| Desktop Charger : | None |

Description of Test Item

The Zlight2 supports Zigbee/IEEE 802.15.4 standard, which is considered Digital Modulation per FCC part 15.247.

Exposure Evaluation

The EUT is exempted from RF Exposure Evaluation.

2.2 Test Environment

2.2.1 Normal test condition

| | |
|----------------------|---|
| Temperature: | 19.6 – 21.5 °C |
| Relative humidity: | 20.2 – 43.3 % |
| Normal test voltage: | Nominal 6.0 V DC (4 x AA battery type/ LR6) |

New batteries were used for all tests.

The values are the limit registered during the test period.

2.3 Test Period

Item received date: 2013-01-07

Test period : from 2013-01-22 and 2013-01-31

3 TEST REPORT SUMMARY

3.1 General

Manufacturer: Texas Instruments

Model No.: Zlight2

All measurements are tracable to national standards.

The tests were conducted for the purpose of demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and Industry Canada RSS-210 Issue 8.

Radiated tests were conducted in accordance with ANSI C63.4-2003. The radiated tests were made in a semi-anechoic chamber at measuring distances of 3m and 10m.

New Submission

Production Unit

Class II Permissive Change

Pre-production Unit

DTS Equipment Code


Family Listing

**THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.
Deviations from, additions to, or exclusions from the test specifications are described in
"Summary of Test Data".**



TEST REPORT #: 224123-3

TESTED BY:


G.Suhanthakumar, Test engineer

DATE: 2013-01-31

Nemko Group authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

3.2 Test Summary

| Name of test | FCC Part 15 reference | RSS-210 Issue 8 reference | Result |
|--|-------------------------------------|---------------------------|--------|
| Antenna Requirement | 15.203 | 7.1.4 (RSS-GEN) | Pass |
| Power Line Conducted Emission | 15.107(a) 15.207(a) | 7.2.2 (RSS-GEN) | N/A* |
| Minimum 6 dB Bandwidth | 15.247(a)(2) | A8.2 | Pass |
| Peak Power Output | 15.247(b) | A8.4 | Pass |
| Power Spectral Density | 15.247(d) | A8.2 | Pass |
| Spurious Emissions (Antenna Conducted) | 15.247(c) | A8.5 | Pass |
| Spurious Emissions (Radiated) | 15.247(c) 15.109(a) 15.209(a) | A8.5 | Pass |
| Receiver Emissions (Radiated) | N/A | 2.3 | N/A |

*EUT is battery operated only.

3.3 Description of modification for Modification Filing

Not applicable.

3.4 Comments

All ports were populated during spurious emission measurements.

3.5 Family List Rational

Not Applicable.

4 TEST RESULTS

4.1 Power Line Conducted Emissions

Para. No.: 15.207 (a)

The test is not applicable since the device is powered by battery.

| | |
|----------------------|-----------------|
| Test Performed By: - | Date of Test: - |
|----------------------|-----------------|

Measurement procedure: ANSI C63.4-2003 using 50 μ H/50 ohms LISN.

Test Results: -

Measurement Data: -

4.2 Minimum 6 dB Bandwidth

Para. No.: 15.247 (a)(2)

| | |
|------------------------------------|---------------------------|
| Test Performed By: G.Suwanthakumar | Date of Test: 29 Jan 2013 |
|------------------------------------|---------------------------|

Test Results: Complies


Measurement Data:

| Measured 6 dB Bandwidth (MHz) | | |
|-------------------------------|----------|---------|
| 2405MHz | 2440 MHz | 2480MHz |
| 1.6 | 1.6 | 1.6 |

Tested according to KDB 558074 D01 DTS Meas Guidance v02, Section 7.1.


Requirements:

For Digital Transmission Systems in the 2400-2483.5 MHz band the minimum 6 dB bandwidth shall be at least 500 KHz.

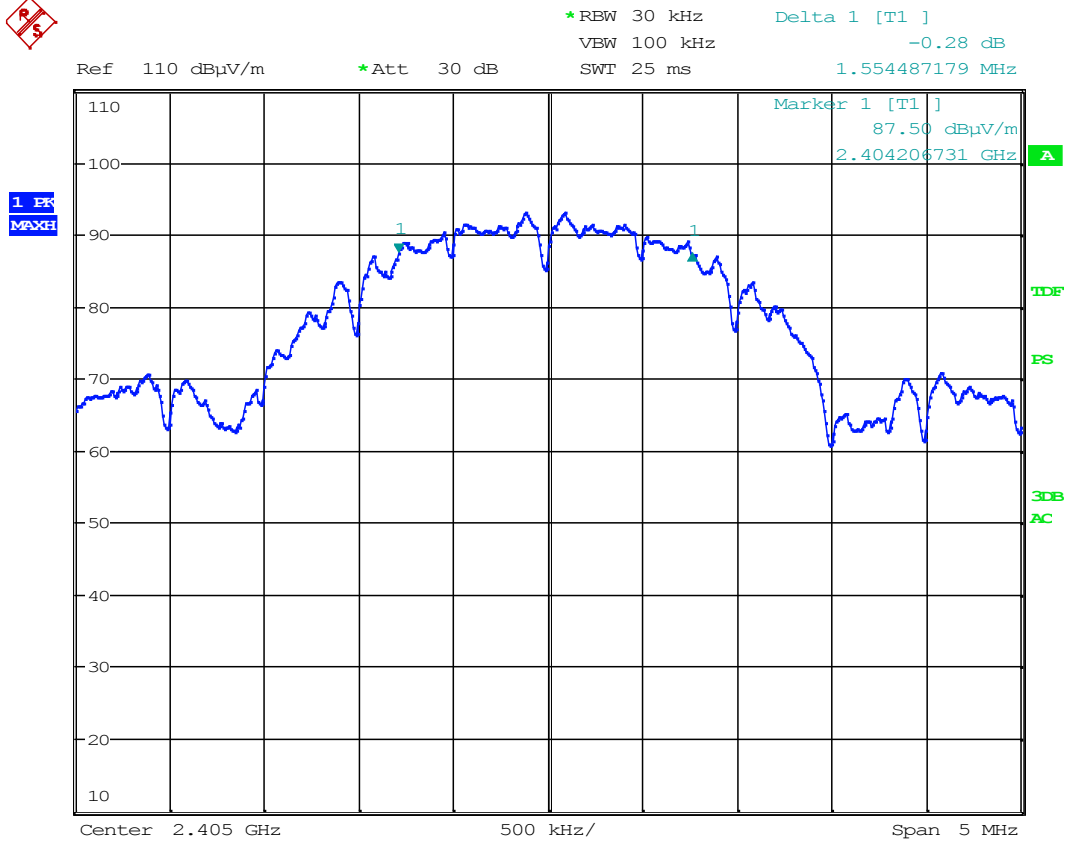


Date: 29.JAN.2013 10:07:35

6 dB Bandwidth at 2405 MHz

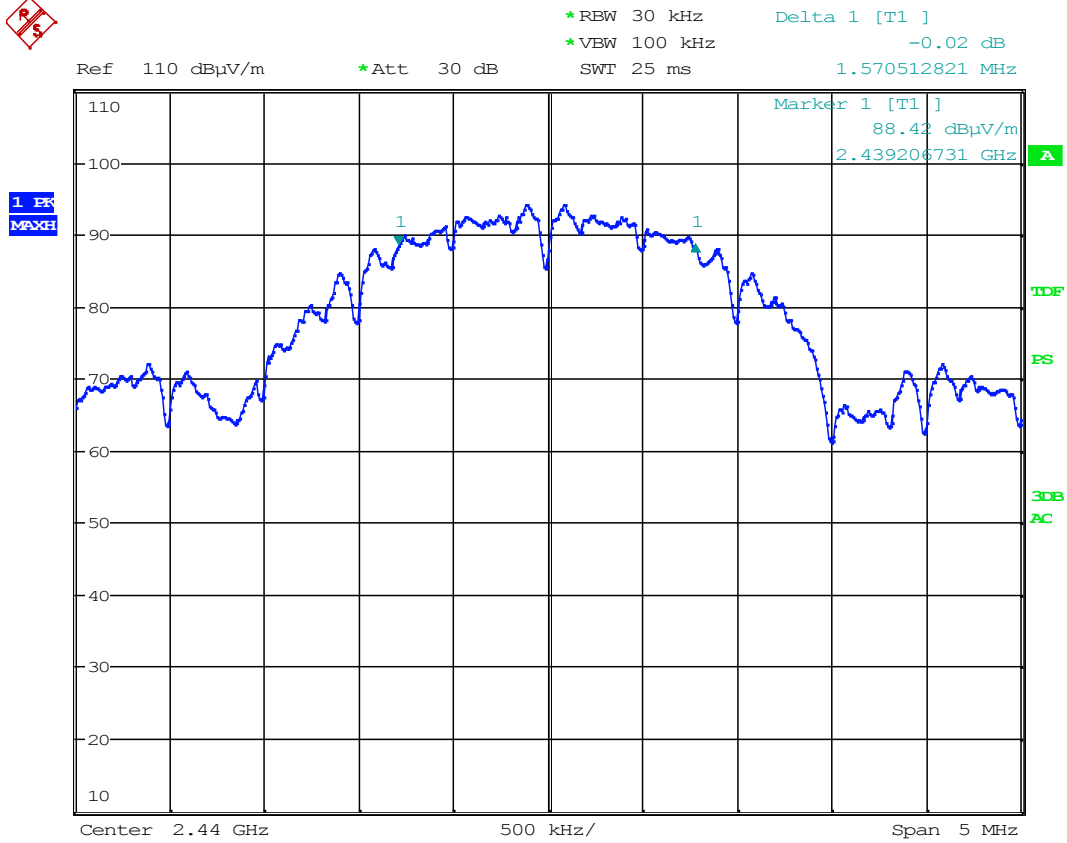

Date: 29.JAN.2013 10:24:45

6 dB Bandwidth at 2440 MHz

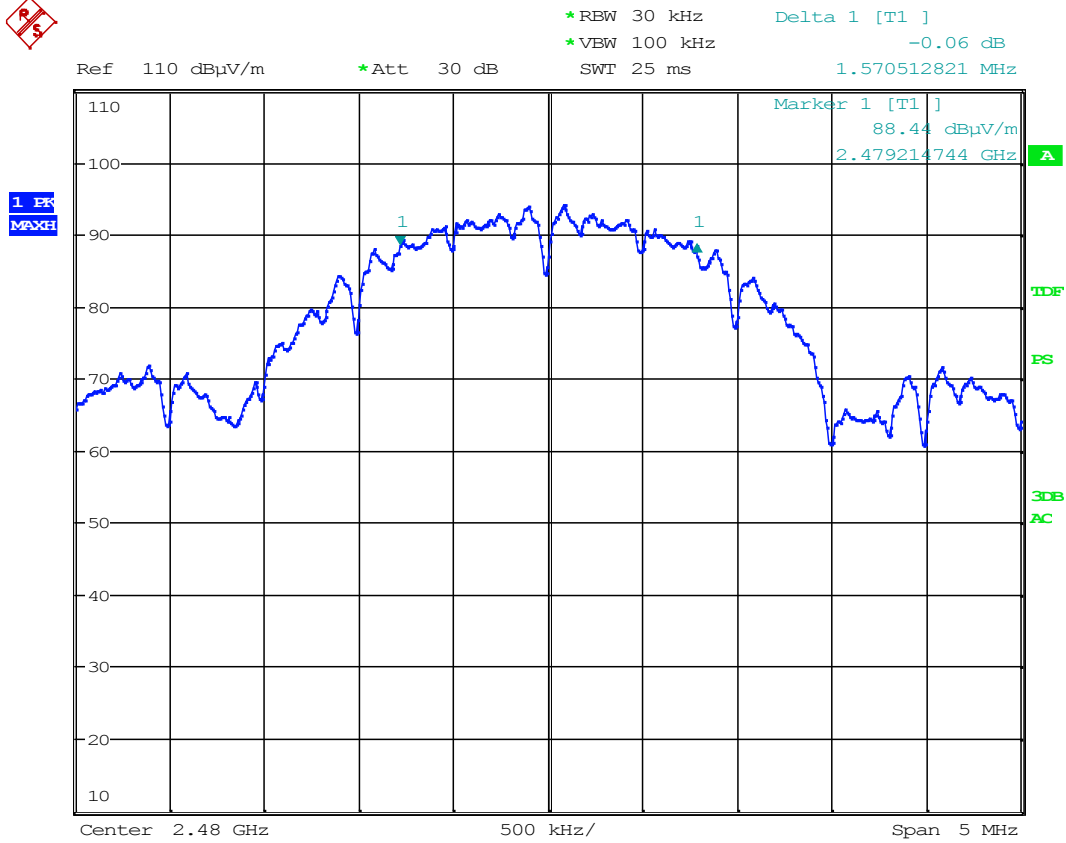

Date: 29.JAN.2013 10:27:07

6 dB Bandwidth at 2480 MHz

4.3 20 dB Bandwidth


| | |
|------------------------------------|----------------------------|
| Test Performed By: G.Suwanthakumar | Date of Test: 22 jan. 2013 |
|------------------------------------|----------------------------|

Measurement Data:

| |
|--------------------------------|
| Measured 20 dB Bandwidth (MHz) |
| 2440 MHz |
| 2.7 |

Requirements:

No requirements. Reported for information only.

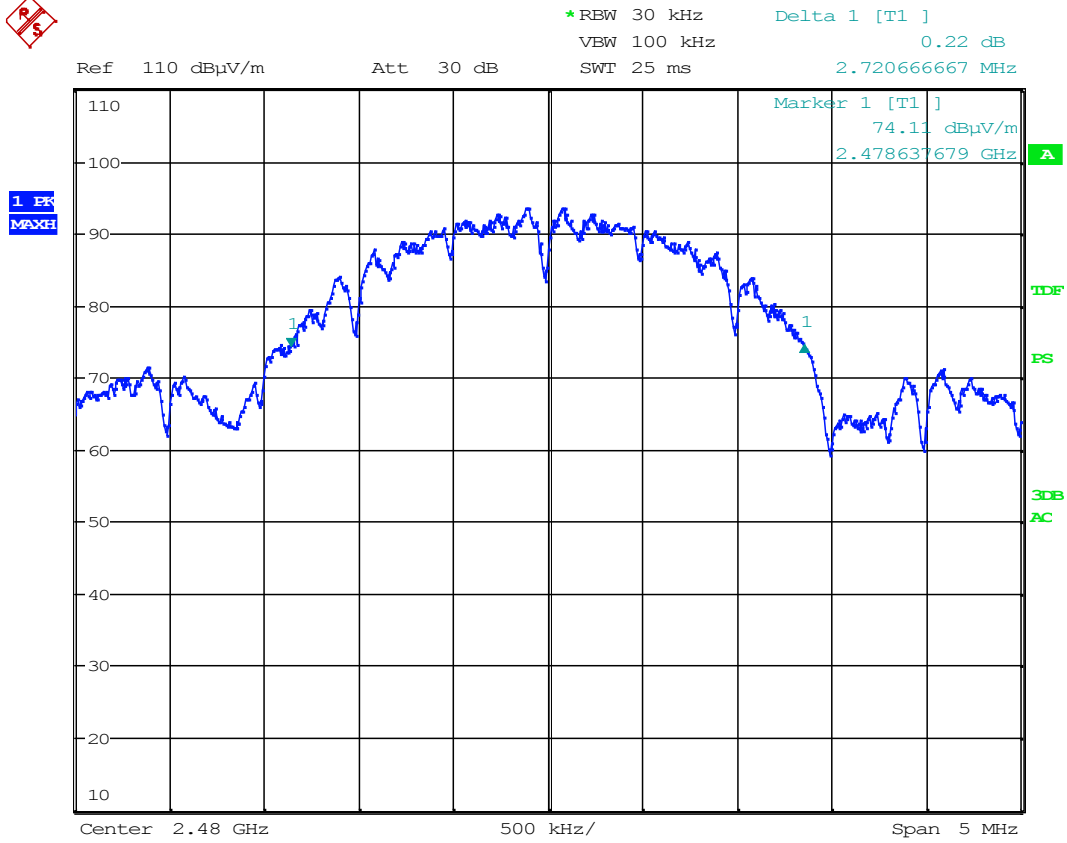

Date: 22.JAN.2013 16:07:29

20 dB Bandwidth at 2440 MHz

4.4 Peak Power Output

Para. No.: 15.247 (b)

| | |
|------------------------------------|---------------------------|
| Test Performed By: G.Suwanthakumar | Date of Test: 22 Jan 2013 |
|------------------------------------|---------------------------|

Test Results: Complies

Measurement Data:

| RF channel | 2405 MHz | 2440 MHz | 2480 MHz |
|--|----------|----------|----------|
| Measured Maximum Field strength (dBµV/m) –HP | 100.6 | 101.7 | 101.1 |
| Calc. Radiated Power (dBm) | 5.3 | 6.4 | 5.8 |
| Calc. Radiated Power (mW) | 3.4 | 4.4 | 3.8 |
| Declared Antenna Gain (dBi) | 2.15 | 2.15 | 2.15 |
| *Calculated conducted power (dBm) | 3.15 | 4.25 | 3.65 |
| *Calculated conducted power (mW) | 2.1 | 2.7 | 2.3 |

*Calculated from manufacturer declared antenna gain.

Tested according to KDB 558074 D01 DTS Meas Guidance v02, Section 8.1.1.

EIRP is calculated according to KDB 558074 D01 DTS Meas Guidance v02, Section 10.2.2.1

The maximum field strength is obtained in XY plane and horizontal polarization.

See attached graph.

- Detachable antenna? Yes No
- If detachable, is the antenna connector non-standard? Yes No

Requirements:


The maximum peak output power shall not exceed the following limits:

For Digital Transmission Systems in the 2400 - 2483.5 MHz band: 1 Watt

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.




Ref 110 dB μ V/m Att 30 dB *RBW 3 MHz Marker 1 [T1]
 VBW 10 MHz 100.62 dB μ V/m
 SWT 2.5 ms 2.404479167 GHz

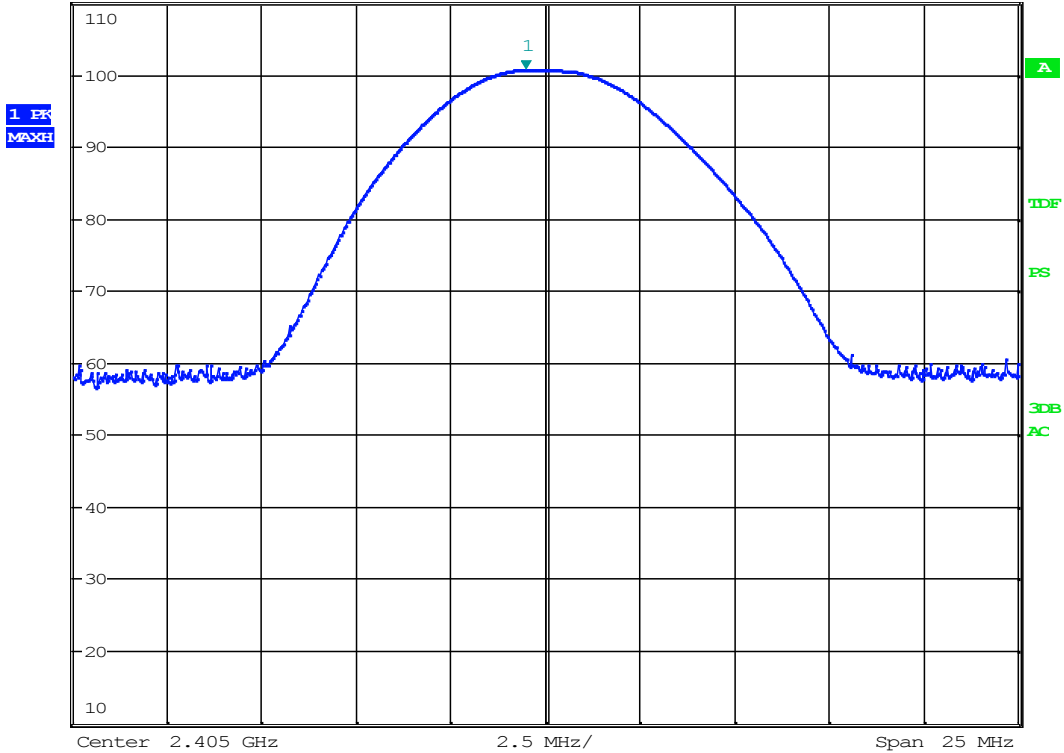


Date: 22.JAN.2013 15:21:33

Radiated Field strength, HP , 2405 MHz

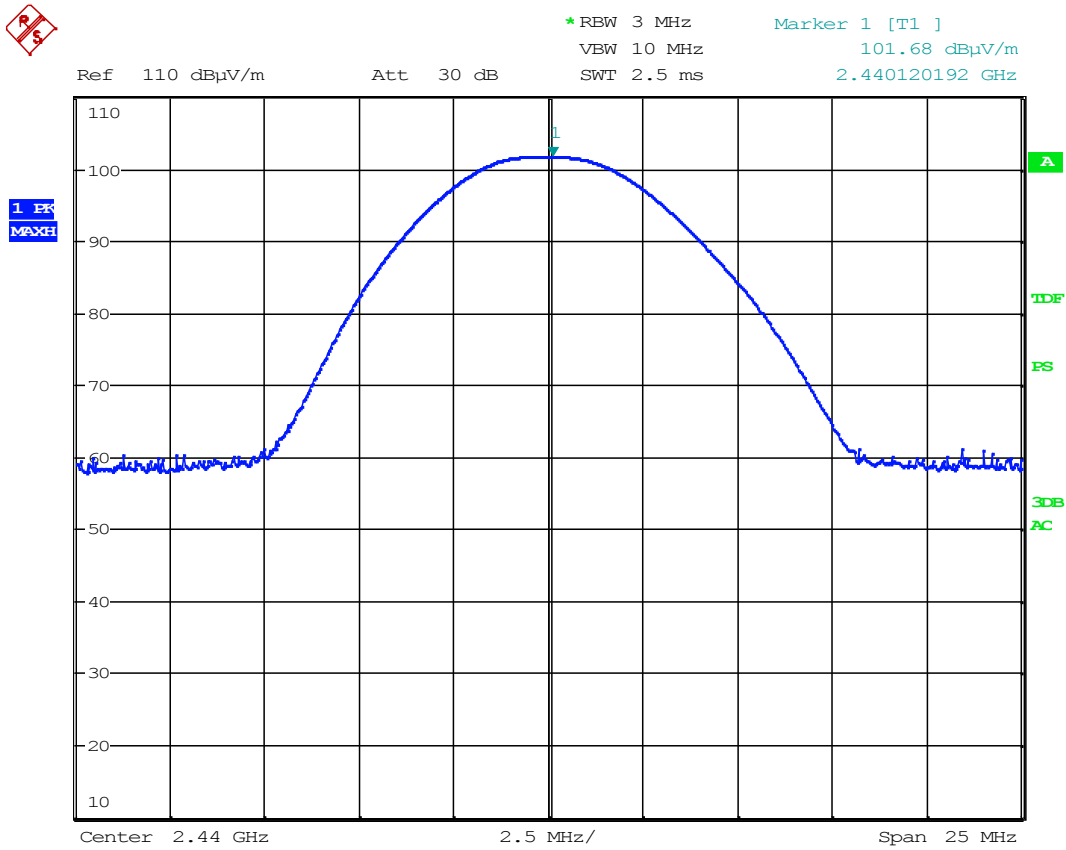

Date: 22.JAN.2013 15:31:44

Radiated field strength, HP, 2440 MHz

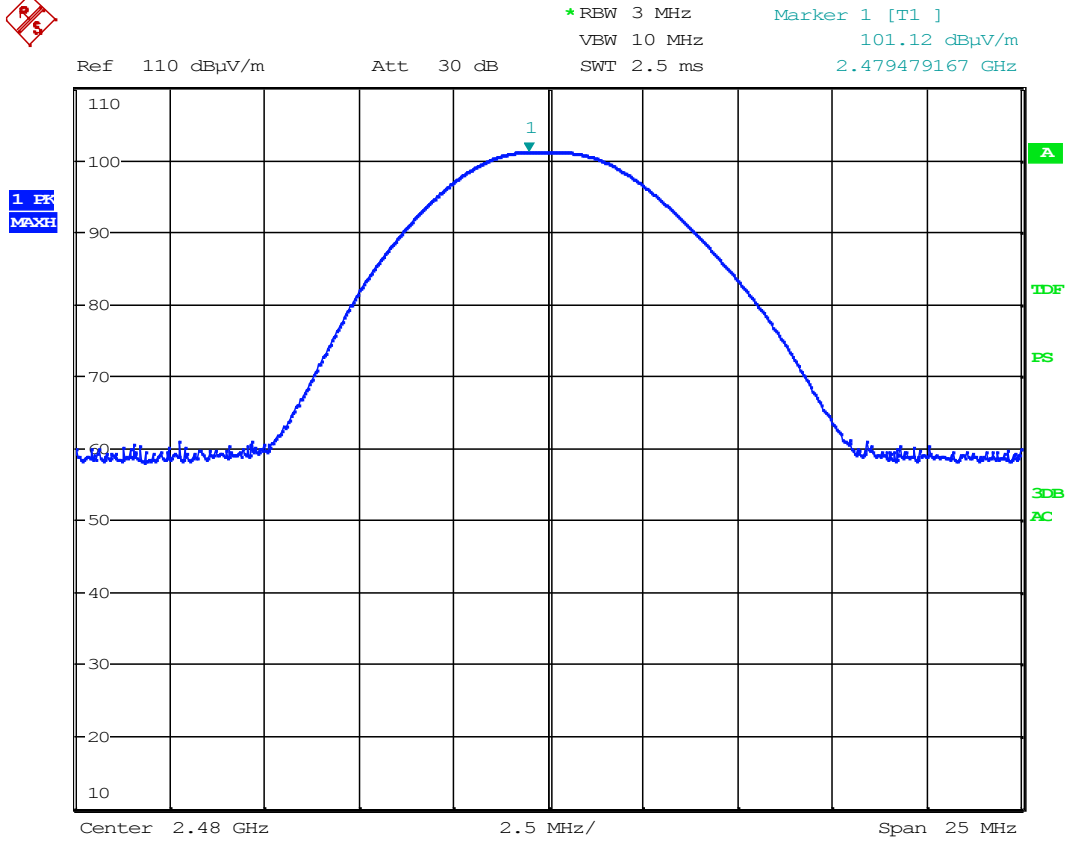

Date: 22.JAN.2013 15:44:01

Radiated field strength, HP, 2480 MHz

4.5 Spurious Emissions (Radiated)

Para. No.: 15.247 (c)

| | |
|------------------------------------|---|
| Test Performed By: G.Suhanthakumar | Date of Test: 29 & 30 Jan 2013& 13 Feb 2013 |
|------------------------------------|---|

Test Results: Complies

Measurement Data:

Band-edge, @3m

| Frequency | Measured Field Strength @3m, dB μ V/m | Detector | Limit dB μ V/m | Margin dB |
|------------|---|----------|--------------------|-----------|
| 2.39 GHz | 44.4 | PK | 74 | 29.6 |
| | 37.9 | AV | 54 | 16.1 |
| 2.4835 GHz | 70.9 | PK | 74 | 3.1 |
| | 53.8 | AV | 54 | 0.2 |

Tested according to KDB 913591.

Band-edge field strength 2.4835 GHz:

Marker Delta 100kHz RBW: 45.44 dB


Average Field Strength: $99.22 - 45.44 = 53.78$ dB μ V/m

100% duty cycle

See attached plots.


RF conducted power

Because of small size of the PCB, it was not possible to mount a 50 ohm connector on the pcb.

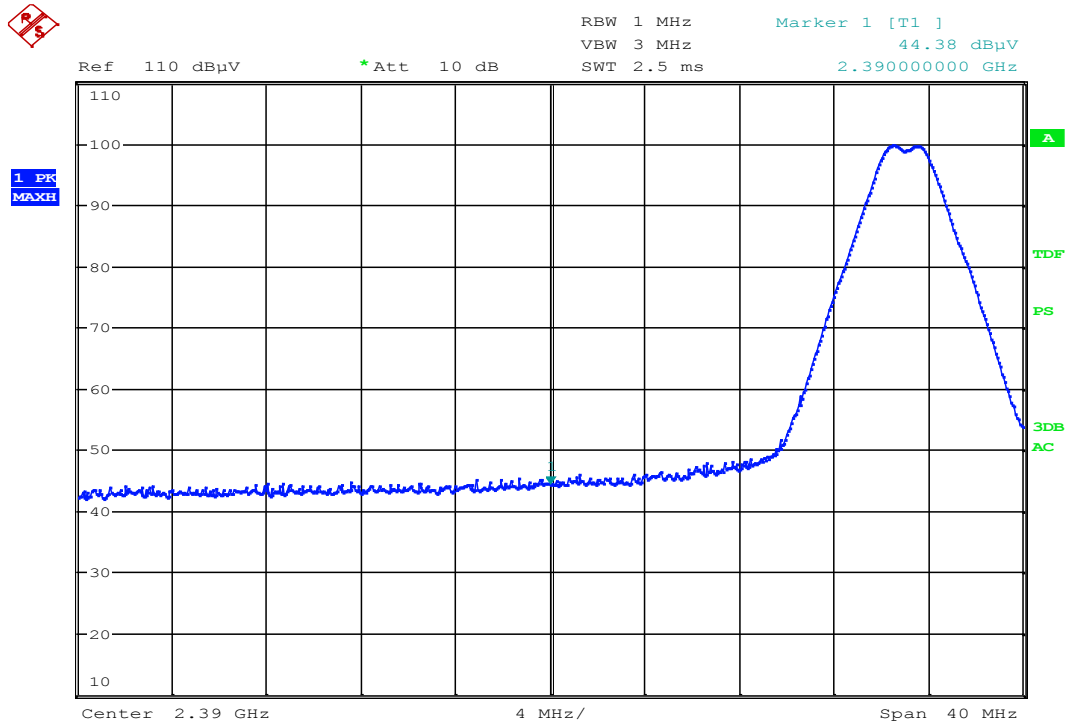


Date: 13.FEB.2013 11:05:33

Band Edge, 2390 MHz, Peak Detector

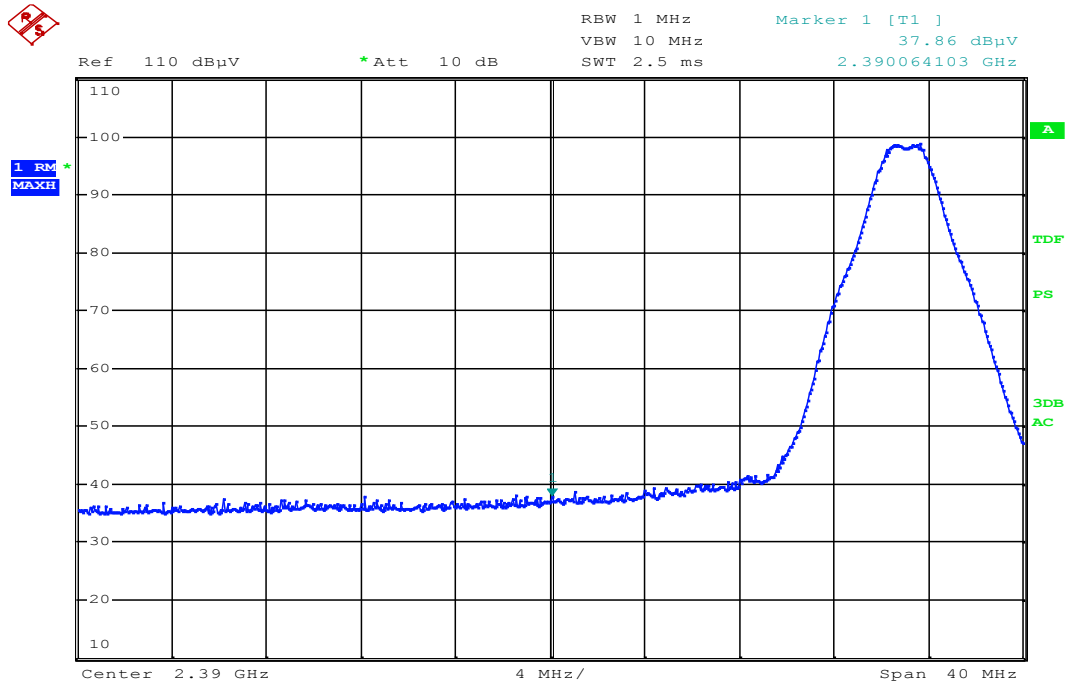


Date: 13.FEB.2013 11:06:16

Band Edge, 2390 MHz, Average Detector

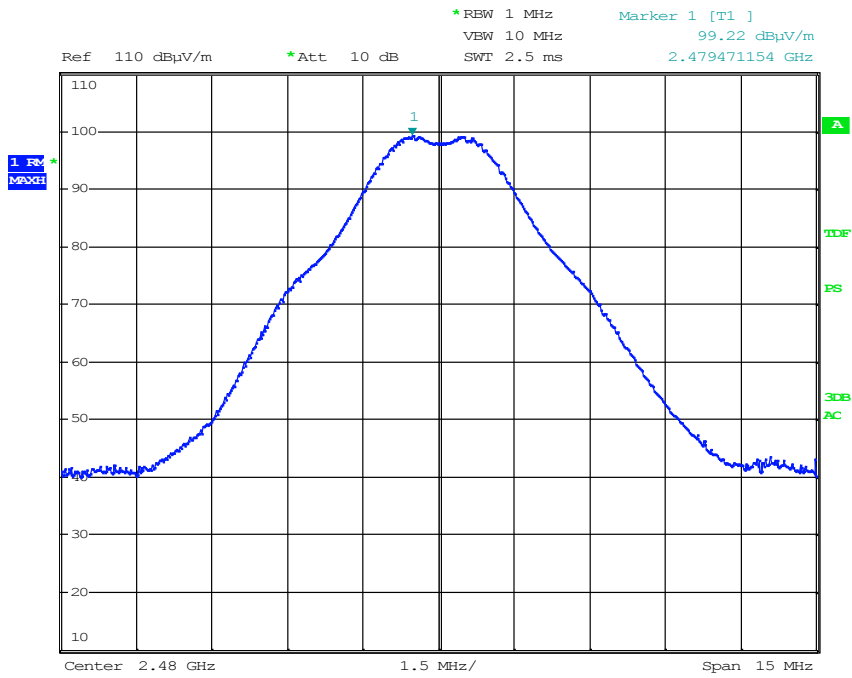


Date: 31.JAN.2013 18:00:56

Field strength at 2480MHz for delta marker

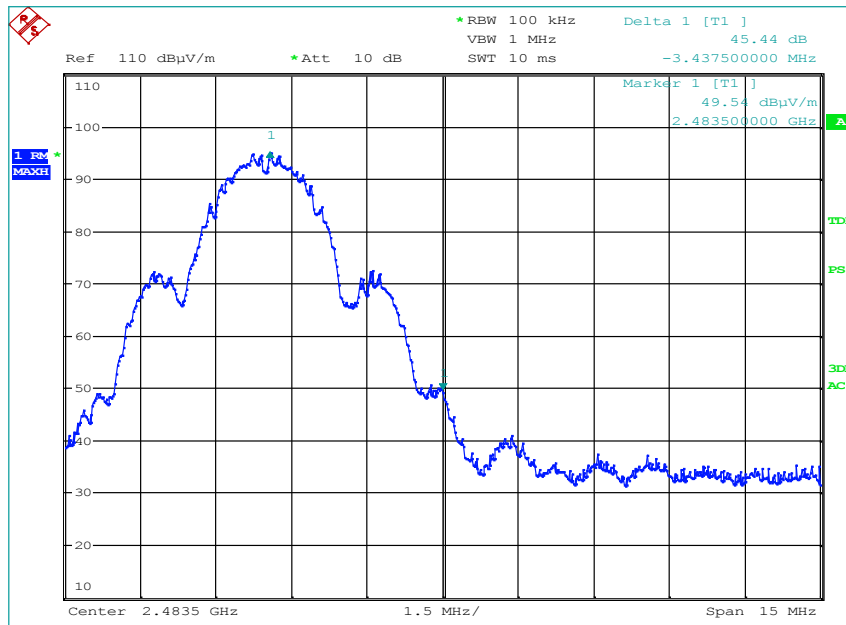

Date: 30.JAN.2013 15:05:26

Delta marker, 2483.5MHz, AV detector

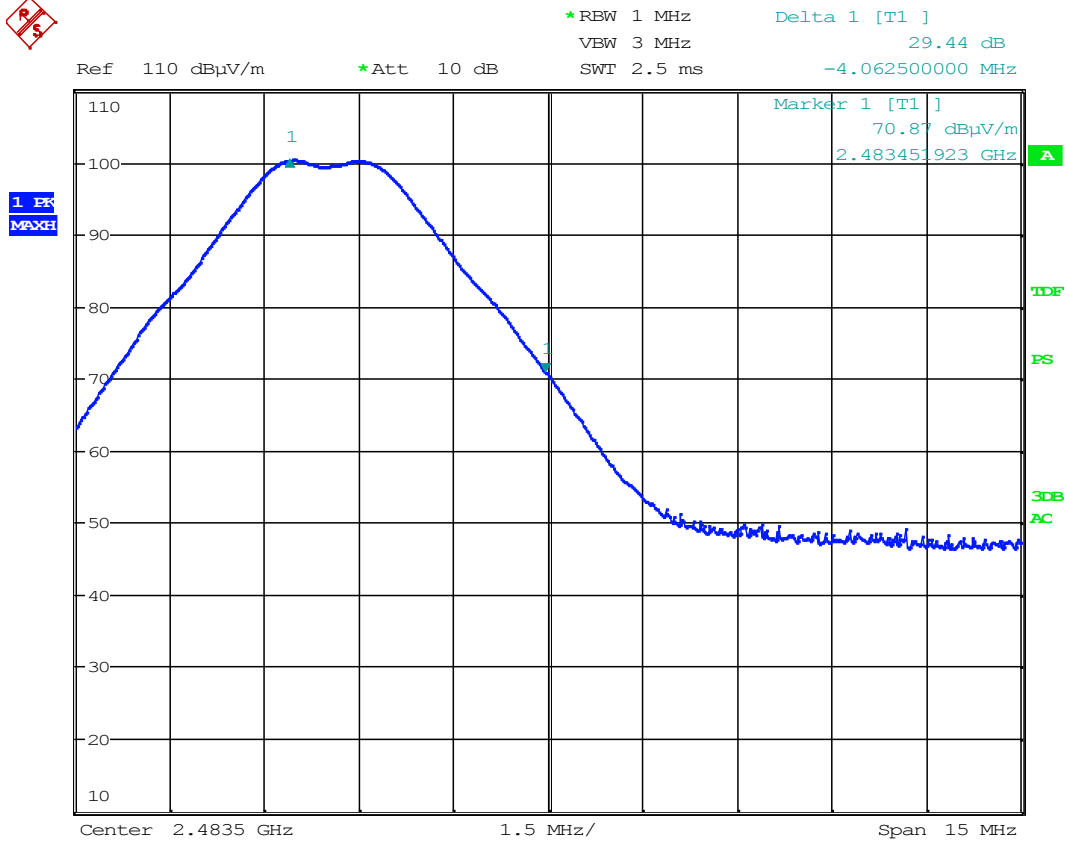


Date: 30.JAN.2013 15:29:23

Band Edge, 2483.5 MHz, Peak Detector

Radiated emissions 9kHz - 30 MHz.

Detector: Quasi-Peak

Measuring distance 10 m.

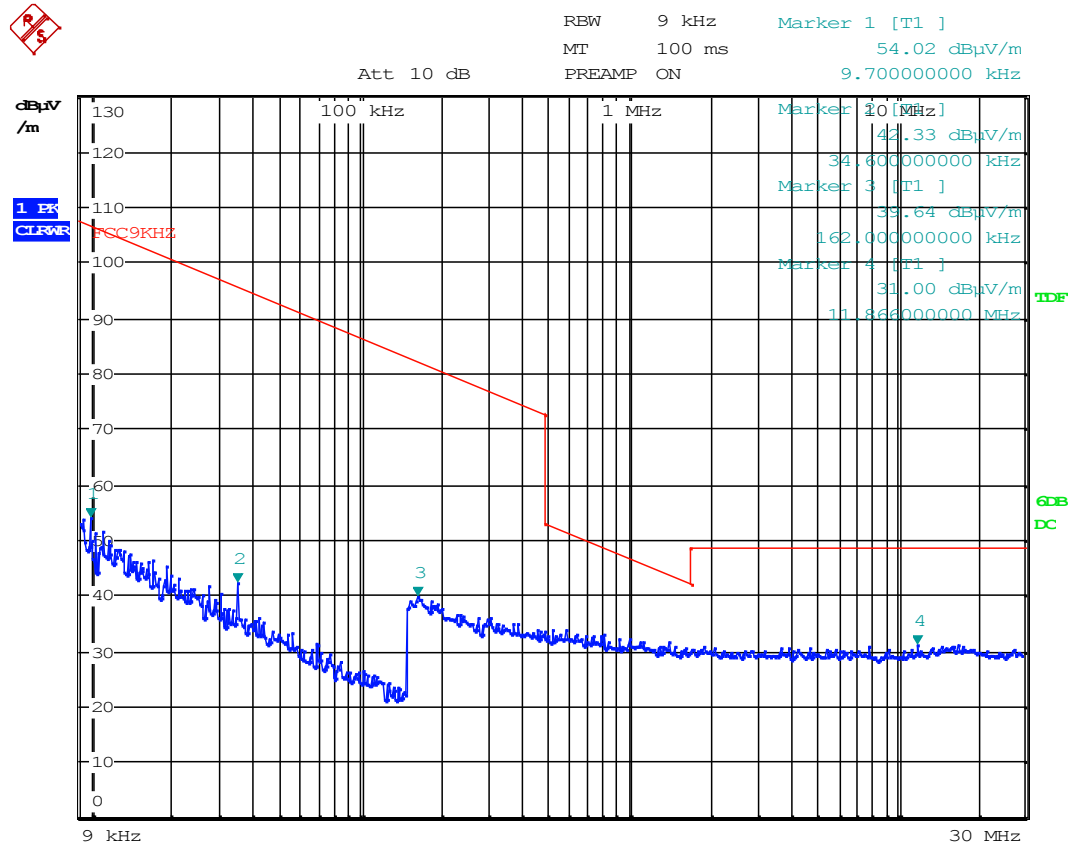

Date: 30.JAN.2013 16:06:01

Radiated Emissions, 9 kHz – 30 MHz @10m


Radiated emission 30 – 1000 MHz.

Detector: Peak

Measuring distance at 3m.

All values are below the limit even when measured with Peak Detector.

See attached plot.

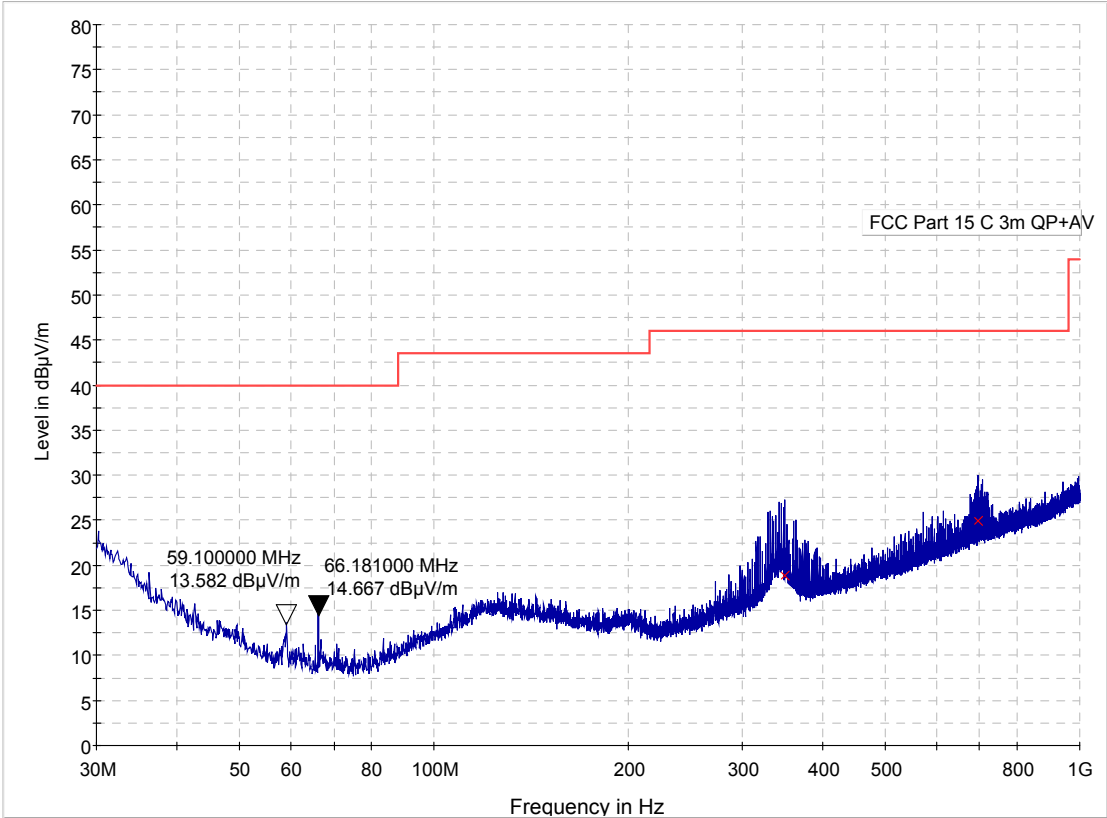

Radiated Emissions, 30 – 1000 MHz, VP and HP, @3m

Radiated Emissions, 1-25 GHz

1-8 GHz measured at a distance of 3 m

8 - 25 GHz measured at 1m

Peak detector

| Frequency MHz | Field Strength @3m dB μ V/m | Detector | Limit dB μ V/m | Margin dB |
|------------------|------------------------------------|----------|-----------------------|--------------|
| 4810 | 52.8 | Pk | 74 | 21.2 |
| 4880 | 52.5 | Pk | 74 | 21.5 |
| 4960 | 50.8 | Pk | 74 | 23.2 |
| 7215 | 55.4 | Pk | 74 | 18.6 |
| 7320 | 57.3 | Pk | 74 | 16.7 |
| 7440 | 54.7 | Pk | 74 | 19.3 |
| 12025 | 49.8 | Pk | 74 | 24.2 |
| 12200 | 48.9 | Pk | 74 | 25.1 |
| 12400 | 46.1 | Pk | 74 | 27.9 |

Average detector


| Frequency MHz | Field Strength @3m dB μ V/m | Detector | Limit dB μ V/m | Margin dB |
|------------------|------------------------------------|----------|-----------------------|--------------|
| 4810 | 46.3 | Av | 54 | 7.7 |
| 4880 | 46.9 | Av | 54 | 7.1 |
| 4960 | 44.1 | Av | 54 | 9.9 |
| 7215 | 51.8 | Av | 54 | 2.2 |
| 7320 | 53.5 | Av | 54 | 0.5 |
| 7440 | 51.0 | Av | 54 | 3 |
| 12025 | 43.5 | Av | 54 | 10.5 |
| 1220.0 | 42.0 | Av | 54 | 12 |
| 1240.0 | 36.4 | Av | 54 | 17.6 |

Maximum field strength for 2nd & 3rd harmonic is obtained in vertical polarization and for 5th harmonic horizontal polarization.

Above detected emissions are within the restricted bands §15.205: (4.5 – 5.15GHz),(7.25 – 7.75GHz),(10.6 - 12.7GHz)


Antenna factor, amplifier gain and cable loss are included in Spectrum Analyzer "Transducer factor".

See attached graphs.

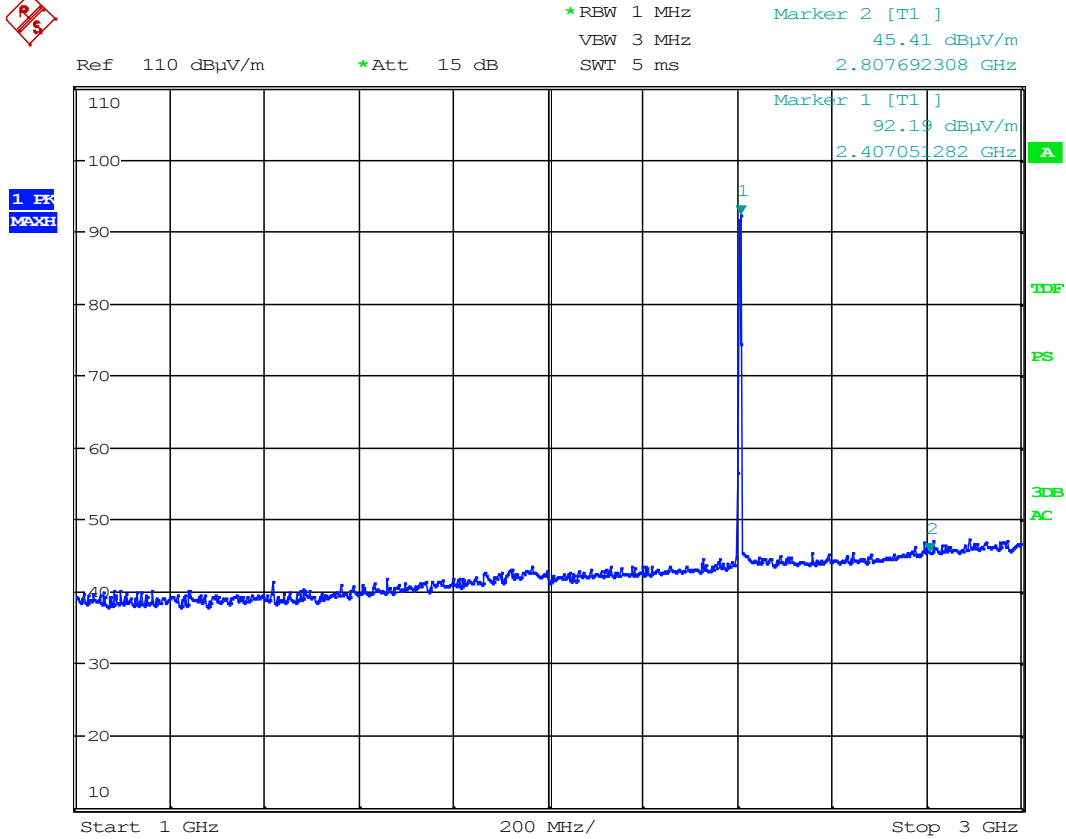


Date: 29.JAN.2013 11:06:54

Radiated Emissions ch. 2405 MHz, 1 – 3 GHz, VP, @3m – Pre-scan with Peak detector

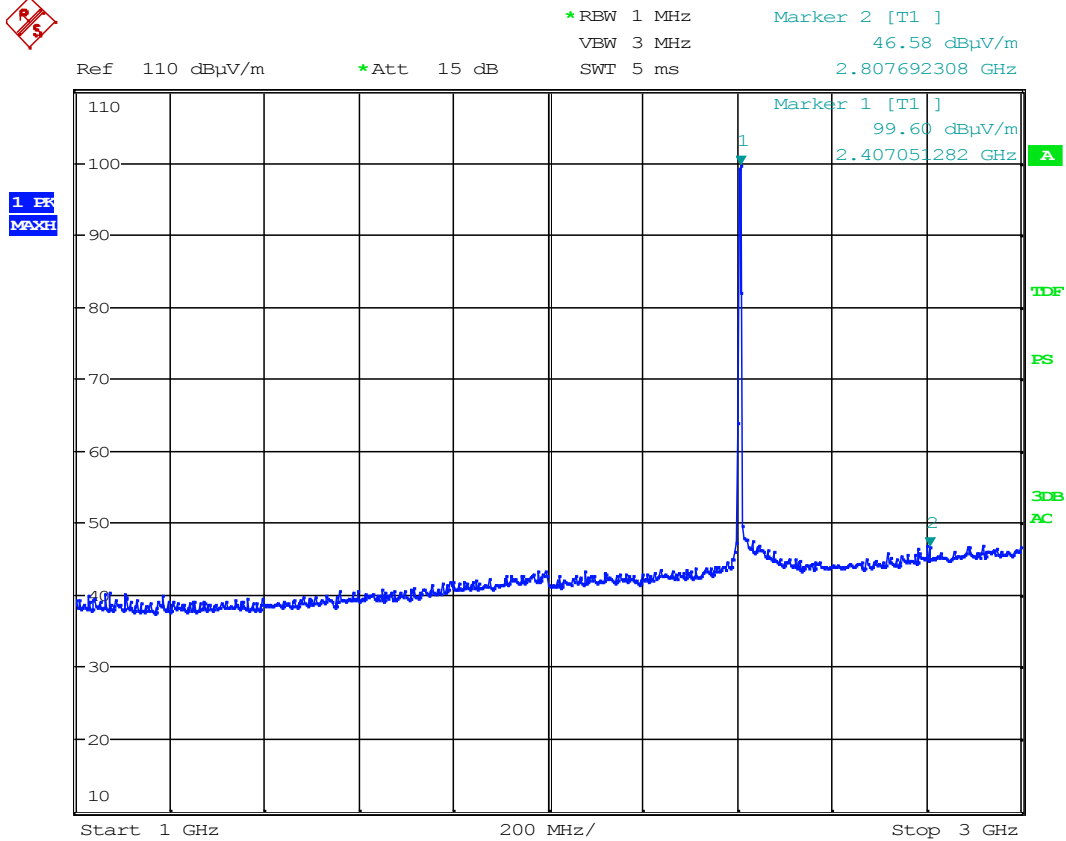


Date: 29.JAN.2013 11:04:37

Radiated Emissions ch. 2405 MHz, 1 – 3 GHz, HP, @3m – Pre-scan with Peak detector

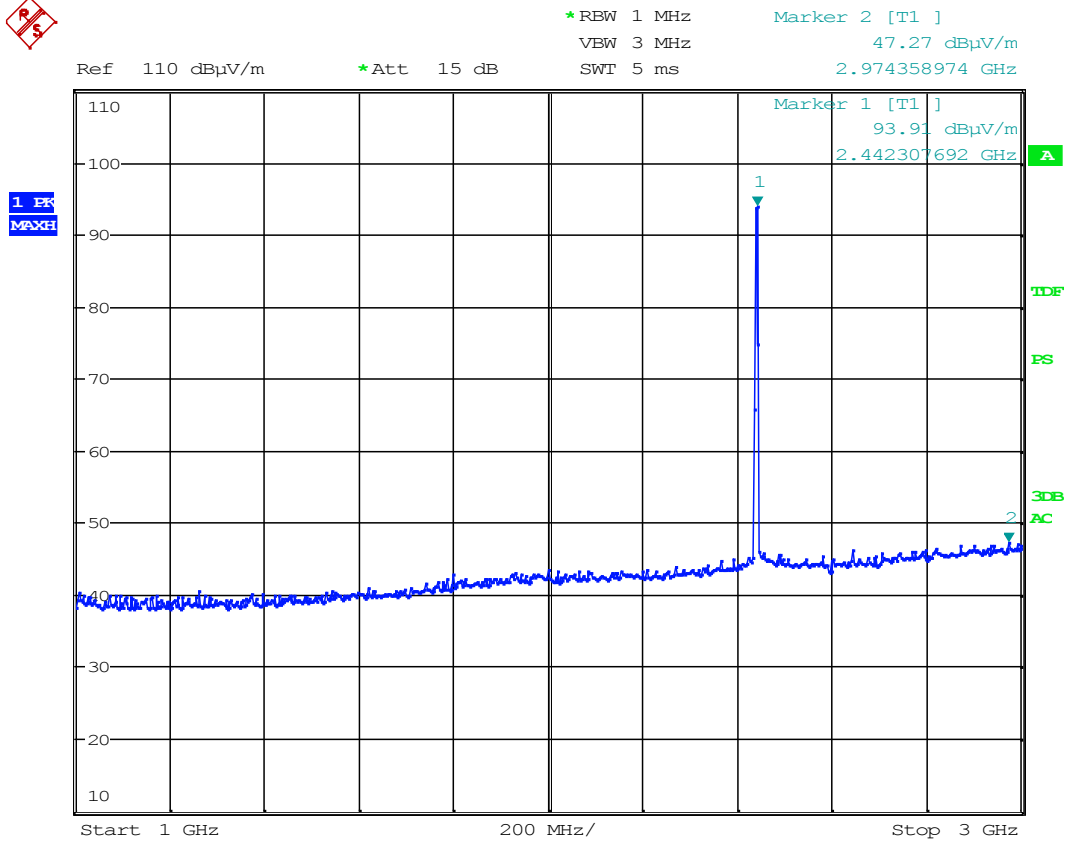


Date: 29.JAN.2013 11:11:23

Radiated Emissions ch. 2440 MHz, 1 – 3 GHz, VP, @3m – Pre-scan with Peak detector

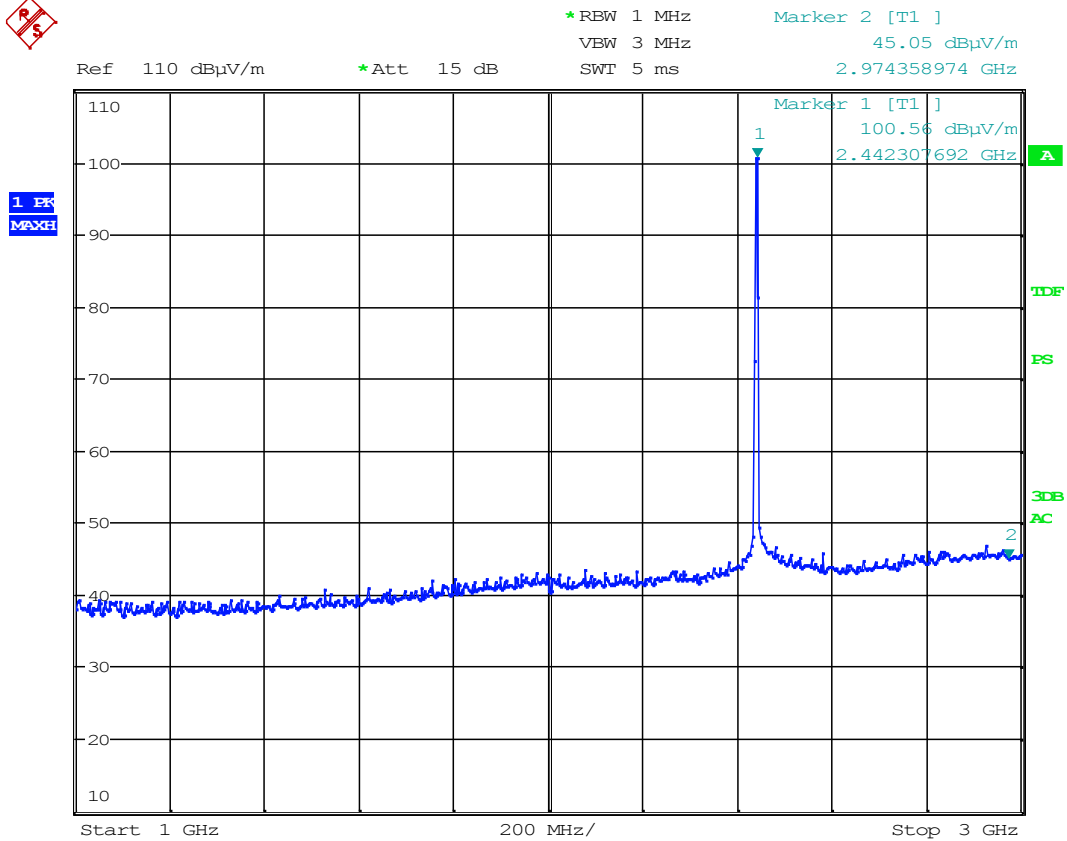

Date: 29.JAN.2013 11:12:18

Radiated Emissions ch. 2440 MHz, 1 – 3 GHz, HP, @3m – Pre-scan with Peak detector

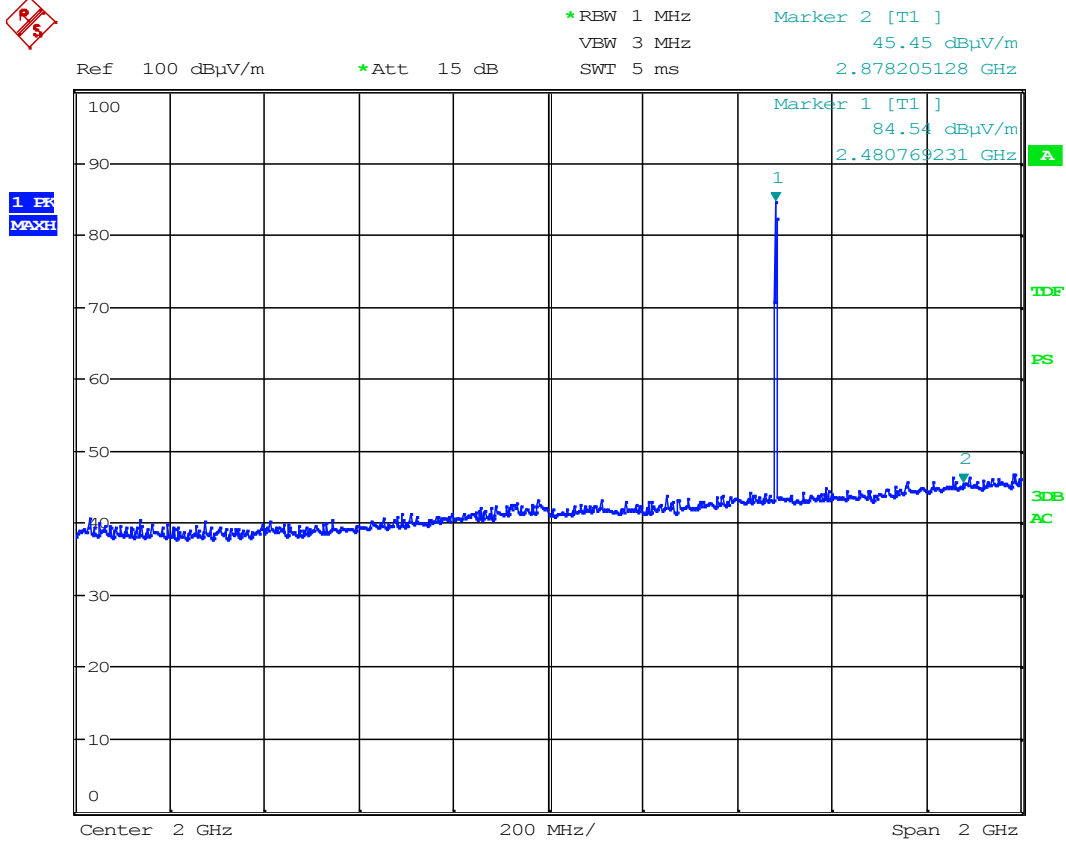


Date: 31.JAN.2013 07:37:45

Radiated Emissions ch. 2480 MHz, 1 – 3 GHz, VP, @3m – Pre-scan with Peak detector




Ref 107 dB μ V/m *Att 30 dB *RBW 1 MHz Marker 2 [T1]
 VBW 3 MHz 49.35 dB μ V/m
 SWT 5 ms 2.993589744 GHz

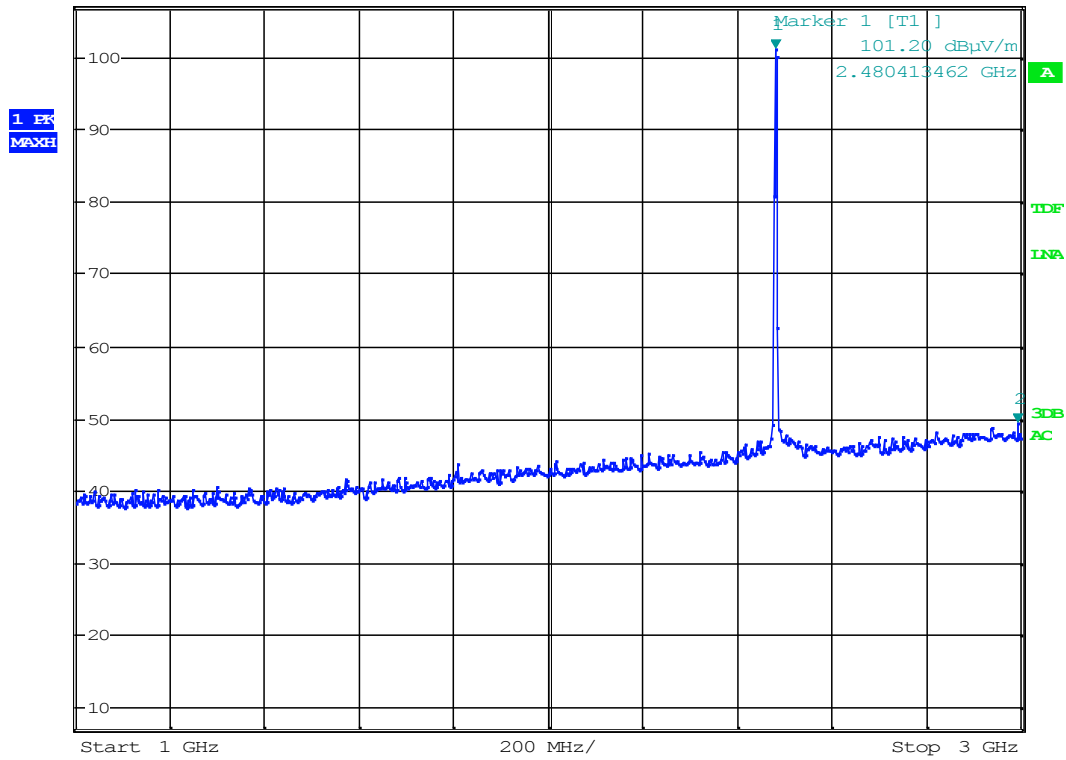


Date: 29.JAN.2013 10:37:44

Radiated Emissions ch. 2480 MHz, 1 – 3 GHz, HP, @3m – Pre-scan with Peak detector

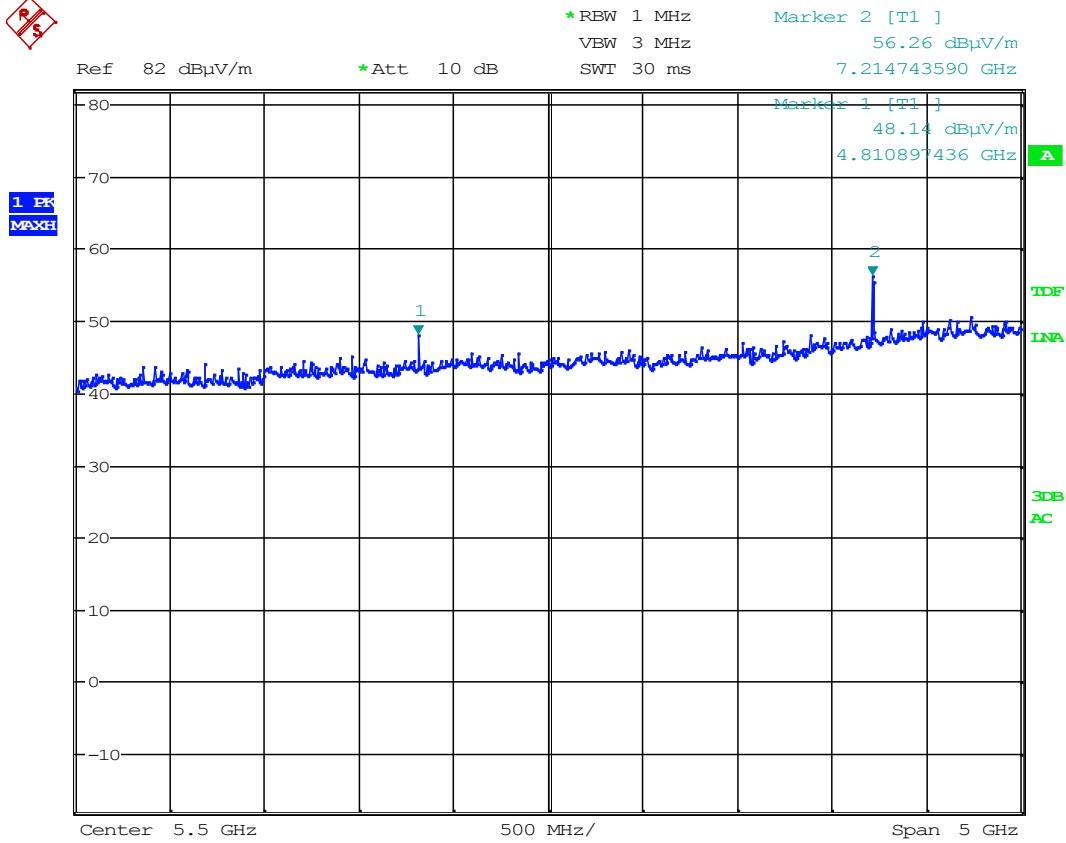

Date: 29.JAN.2013 12:24:29

Radiated Emissions ch. 2405 MHz, 3 – 8.5 GHz, VP, @3m – Pre-scan with Peak detector

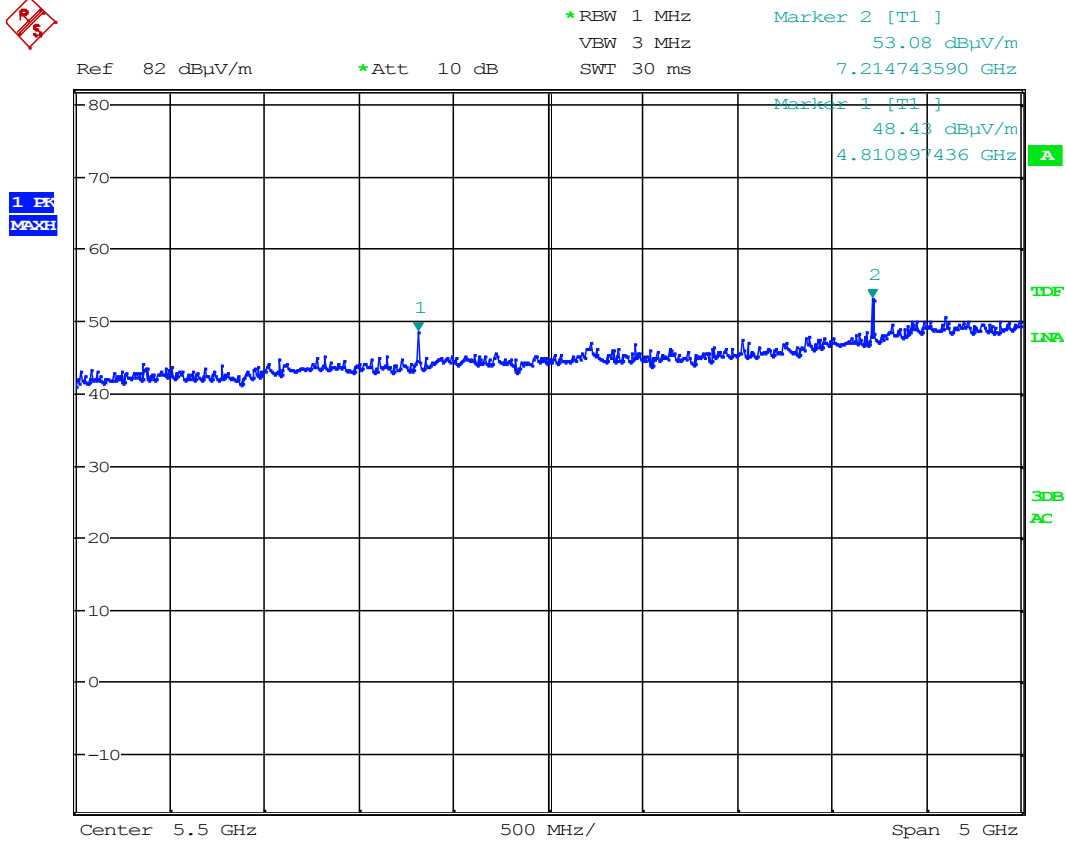


Date: 29.JAN.2013 12:23:11

Radiated Emissions ch. 2405 MHz, 3 – 8.5 GHz, HP, @3m – Pre-scan with Peak detector



*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 52.75 dBμV/m
 SWT 20 ms 4.808918269 GHz

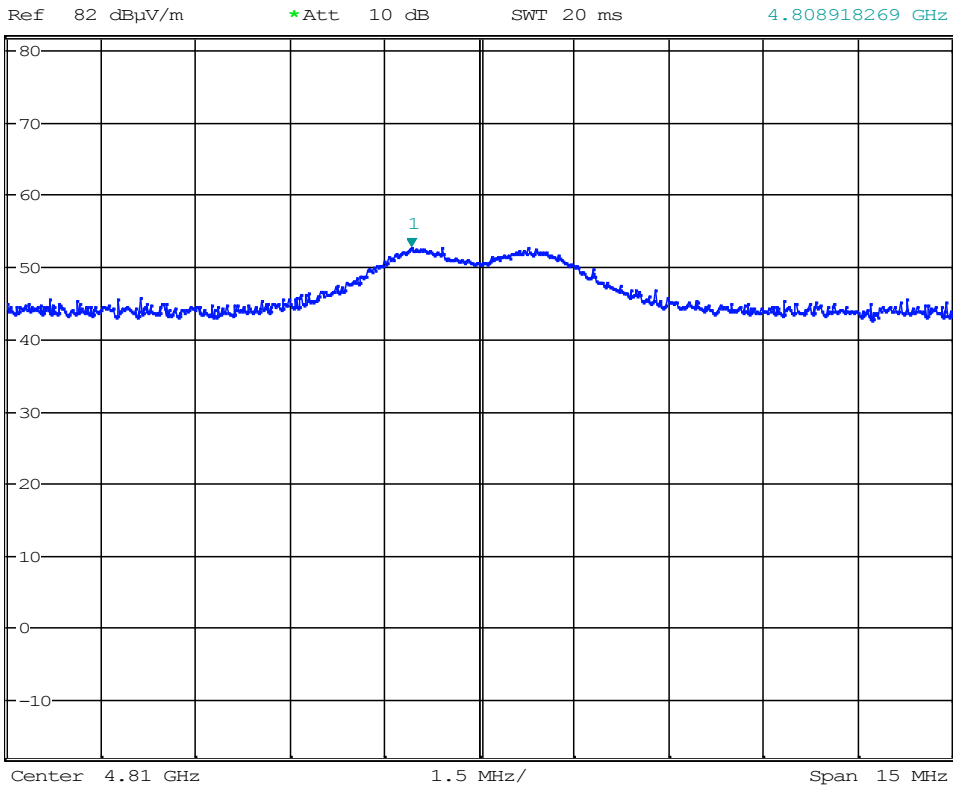


Date: 29.JAN.2013 12:33:32

2nd harmonic-ch2405MHz – VP @3m- peak detector



Ref 82 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 46.25 dB μ V/m
 SWT 20 ms 4.809134615 GHz

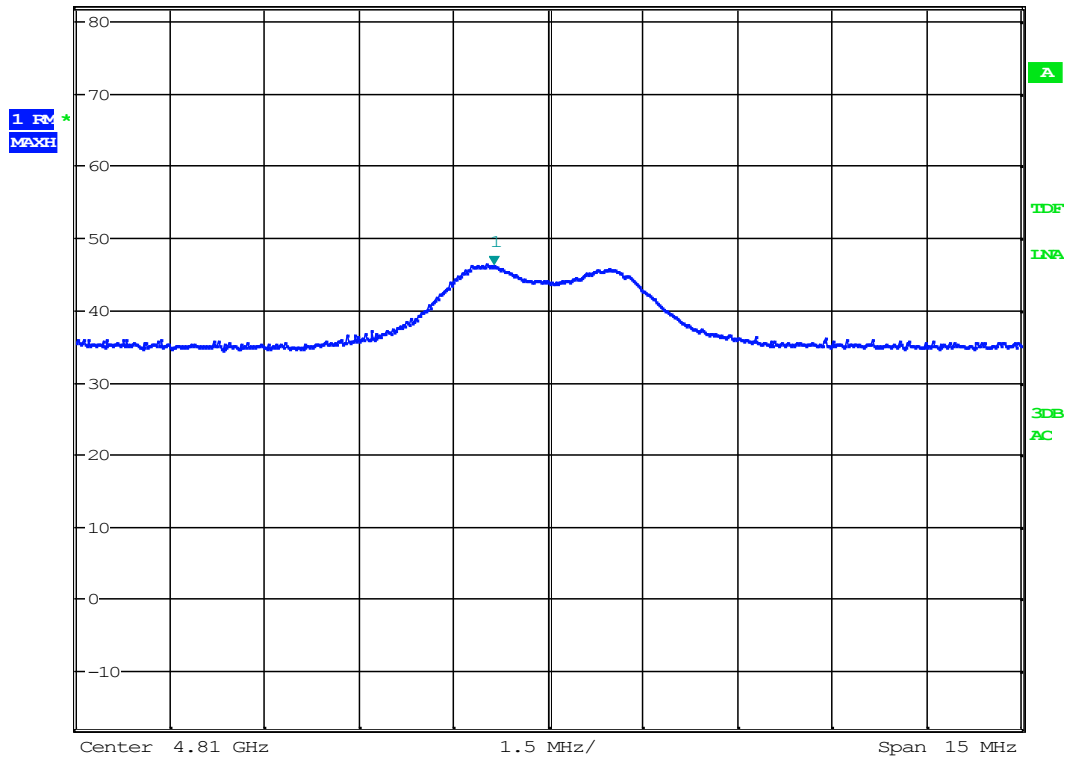


Date: 29.JAN.2013 12:40:35

2nd harmonic-ch2405MHz – VP @3m- AV detector




Ref 72.5 dBµV/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 55.37 dBµV/m
 SWT 20 ms 7.213461538 GHz

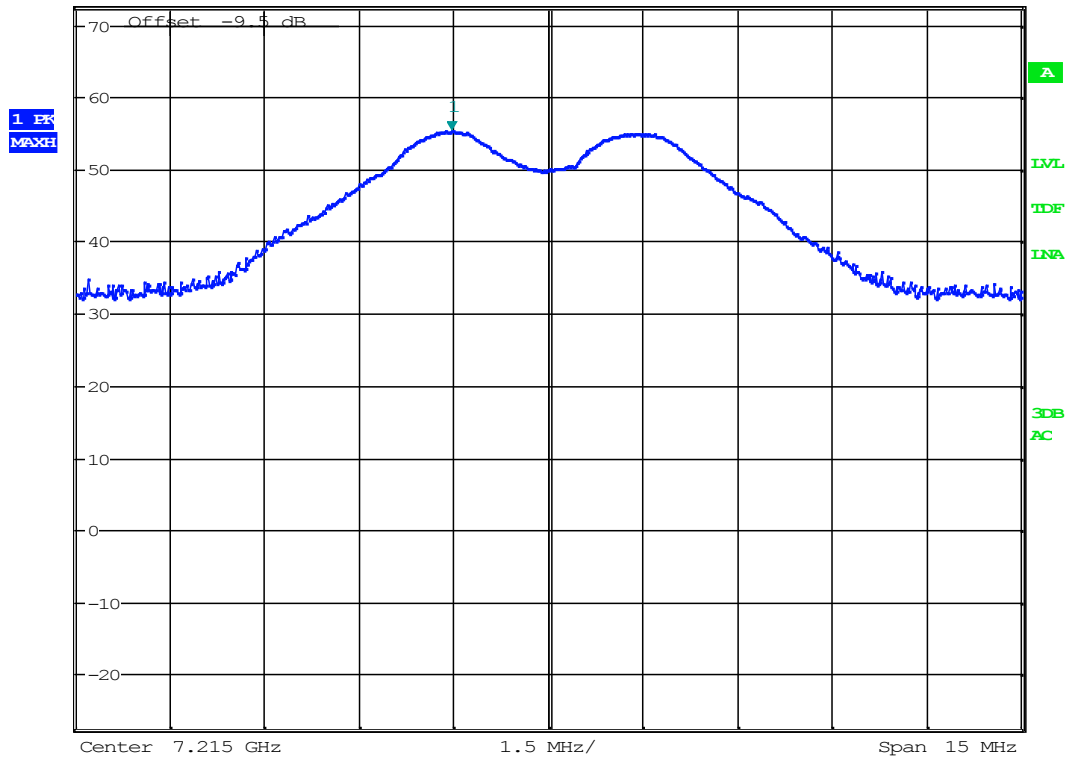


Date: 29.JAN.2013 13:39:37

3rd harmonic-ch2405MHz – VP @1m- peak detector-distance correction is included in the graph

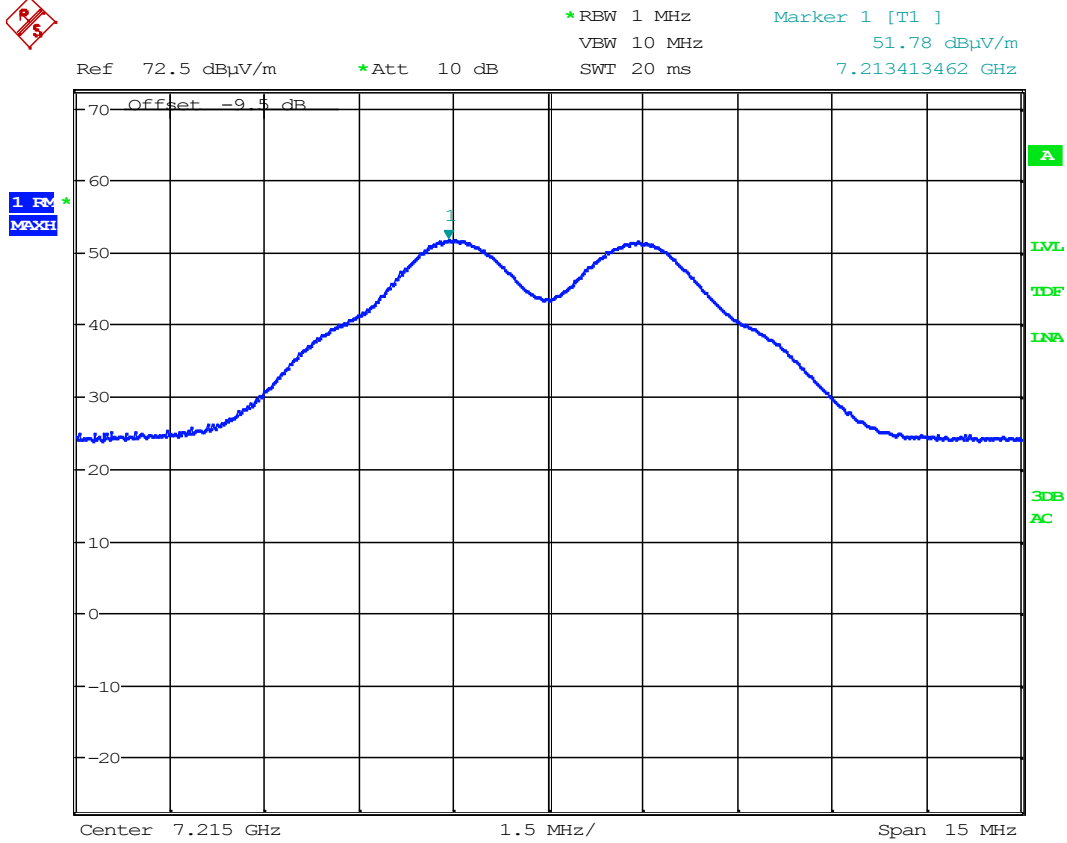


Date: 29.JAN.2013 13:42:19

3rd harmonic-ch2405MHz – VP @1m- AV detector- distance correction is included in the graph

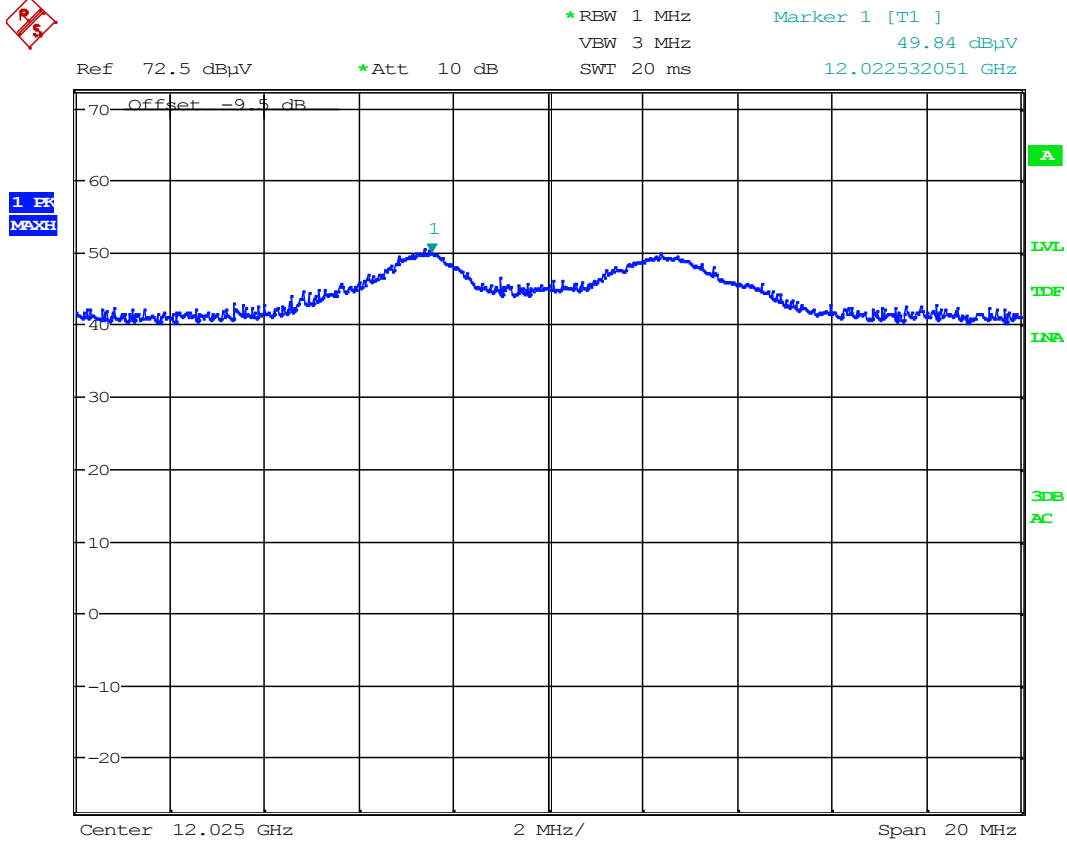

Date: 29.JAN.2013 14:20:42

5th harmonic-ch2405MHz – HP @1m- PK detector- distance correction is included in the graph

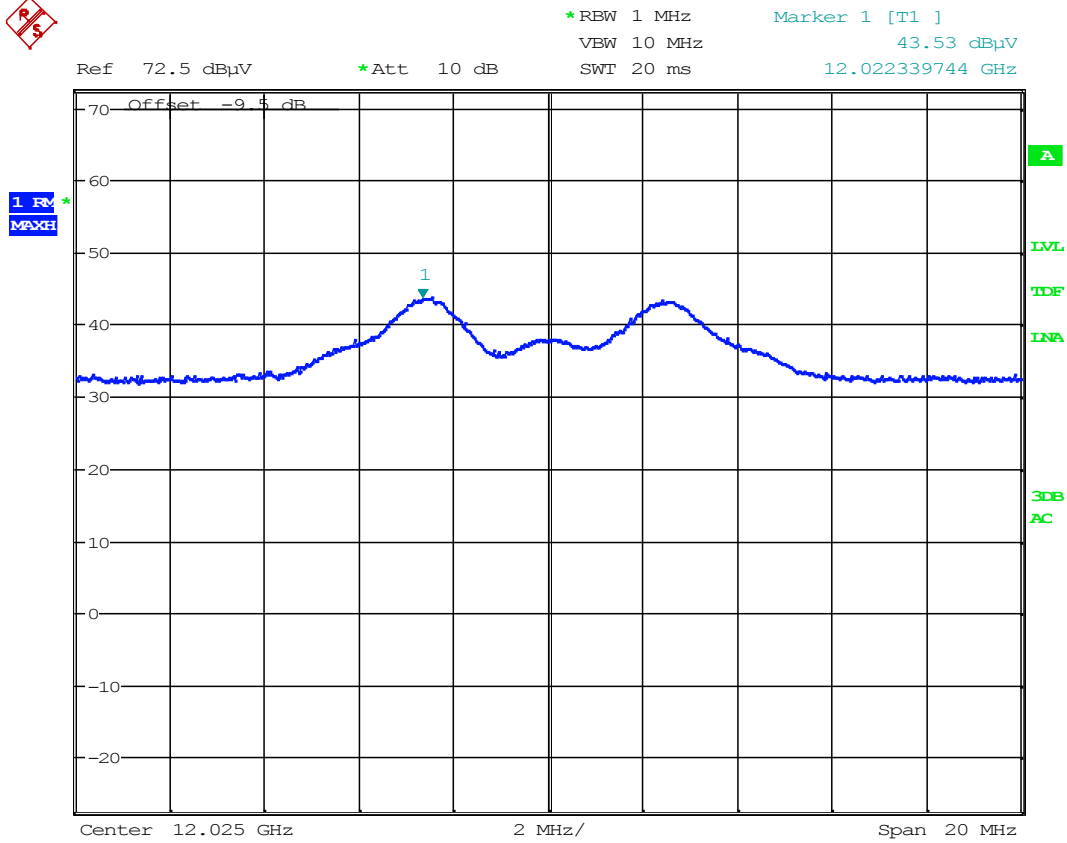


Date: 29.JAN.2013 14:20:23

5th harmonic-ch2405MHz – HP @1m- AV detector- distance correction is included in the graph



Ref 82 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
VBW 3 MHz 52.48 dB μ V/m
SWT 20 ms 4.878774038 GHz

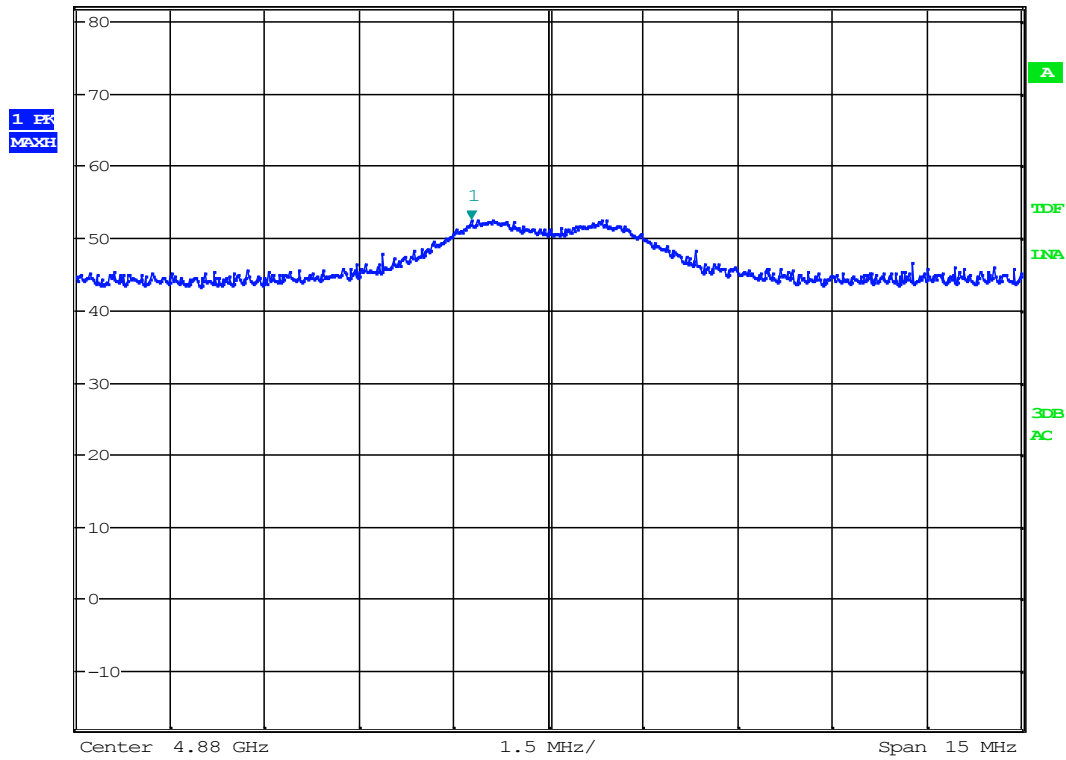


Date: 29.JAN.2013 12:50:51

2nd harmonic-ch2440MHz – VP @3m- Peak detector




Ref 82 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 46.88 dB μ V/m
 SWT 20 ms 4.879014423 GHz

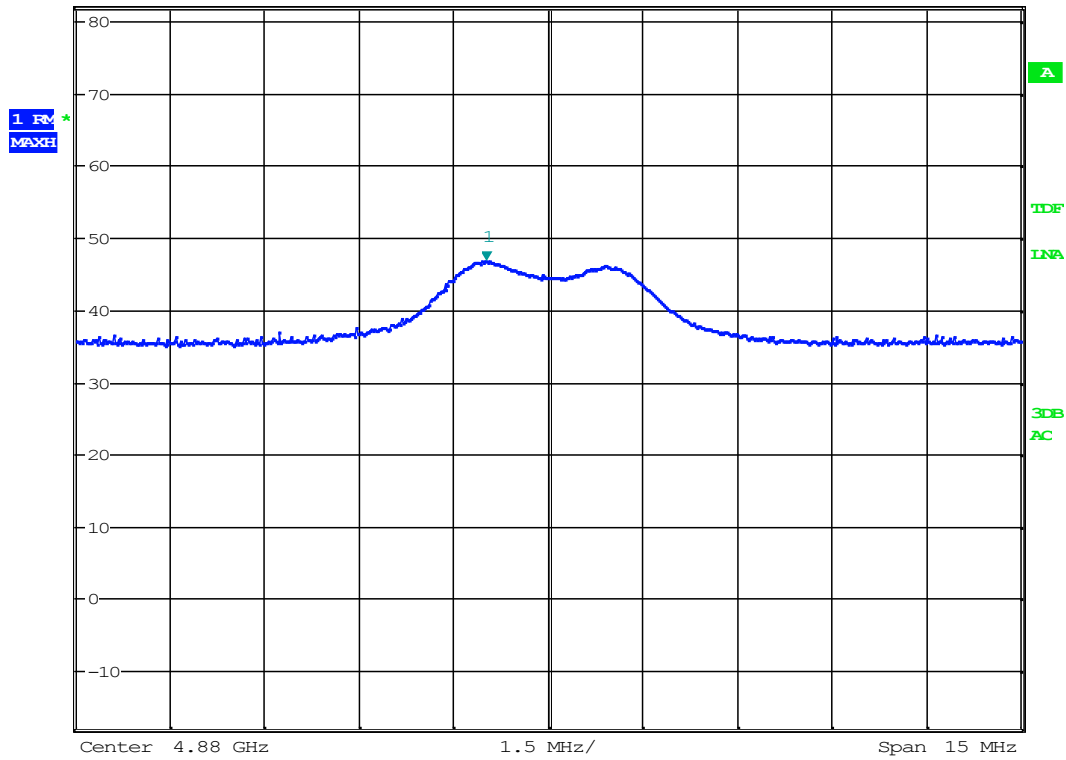


Date: 29.JAN.2013 12:54:39

2nd harmonic-ch2440MHz – VP @3m- AV detector

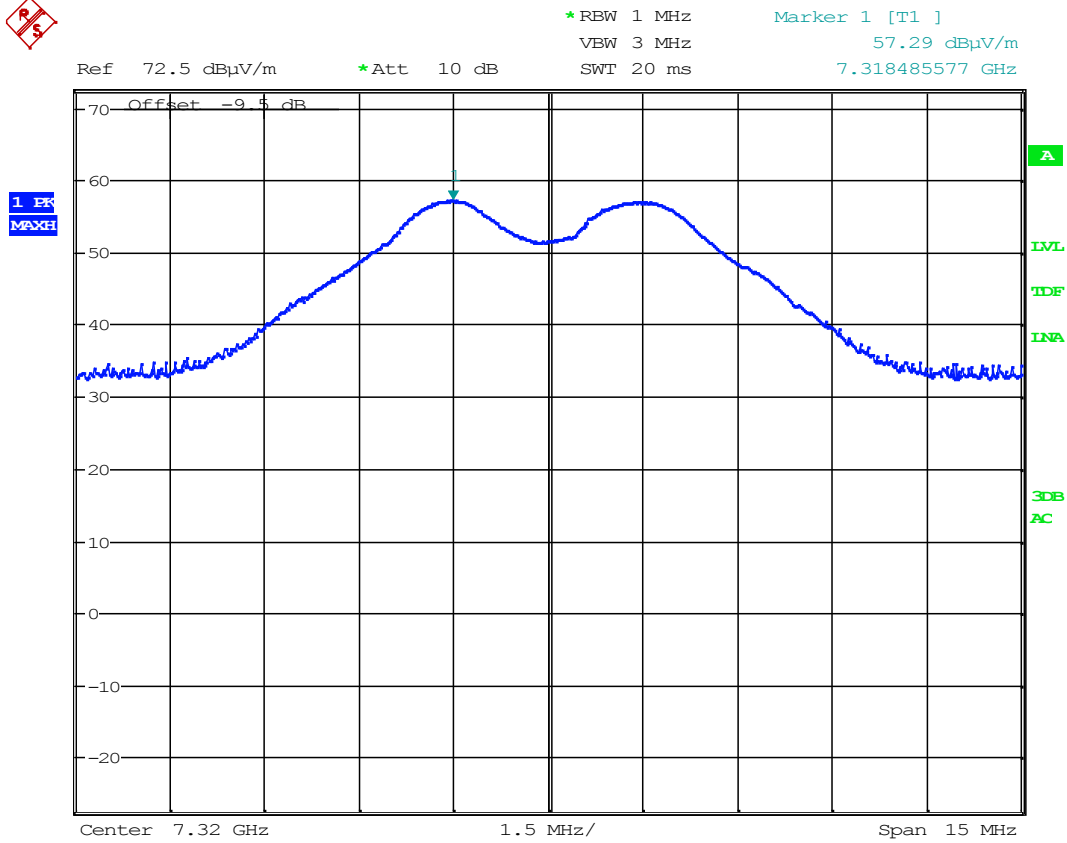

Date: 29.JAN.2013 13:49:04

3rd harmonic-ch2440MHz – VP @1m- peak detector- distance correction is included in the graph

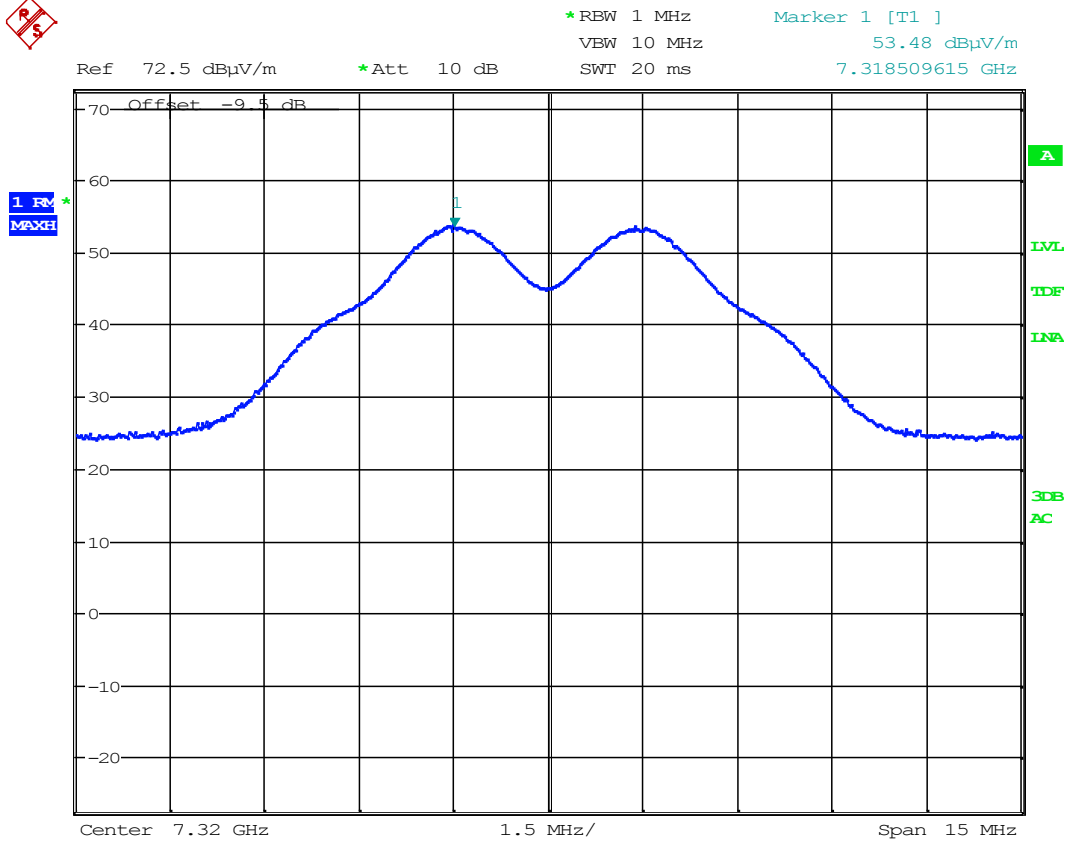


Date: 29.JAN.2013 13:52:20

3rd harmonic-ch2440MHz – VP @1m- AV detector- distance correction is included in the graph




Ref 72.5 dBμV *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 Offset -9.5 dB VBW 3 MHz 48.89 dBμV
 SWT 20 ms 12.197532051 GHz

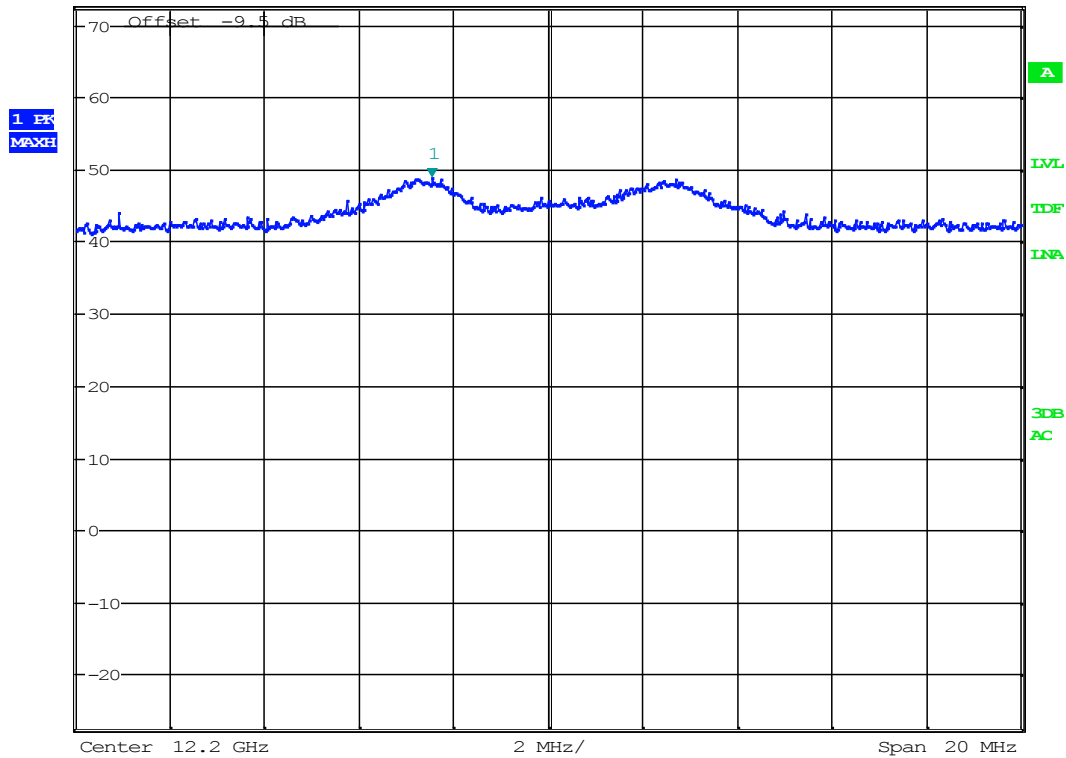

Date: 29.JAN.2013 14:03:50

5th harmonic-ch2440MHz – HP @1m- PK detector- distance correction is included in the graph

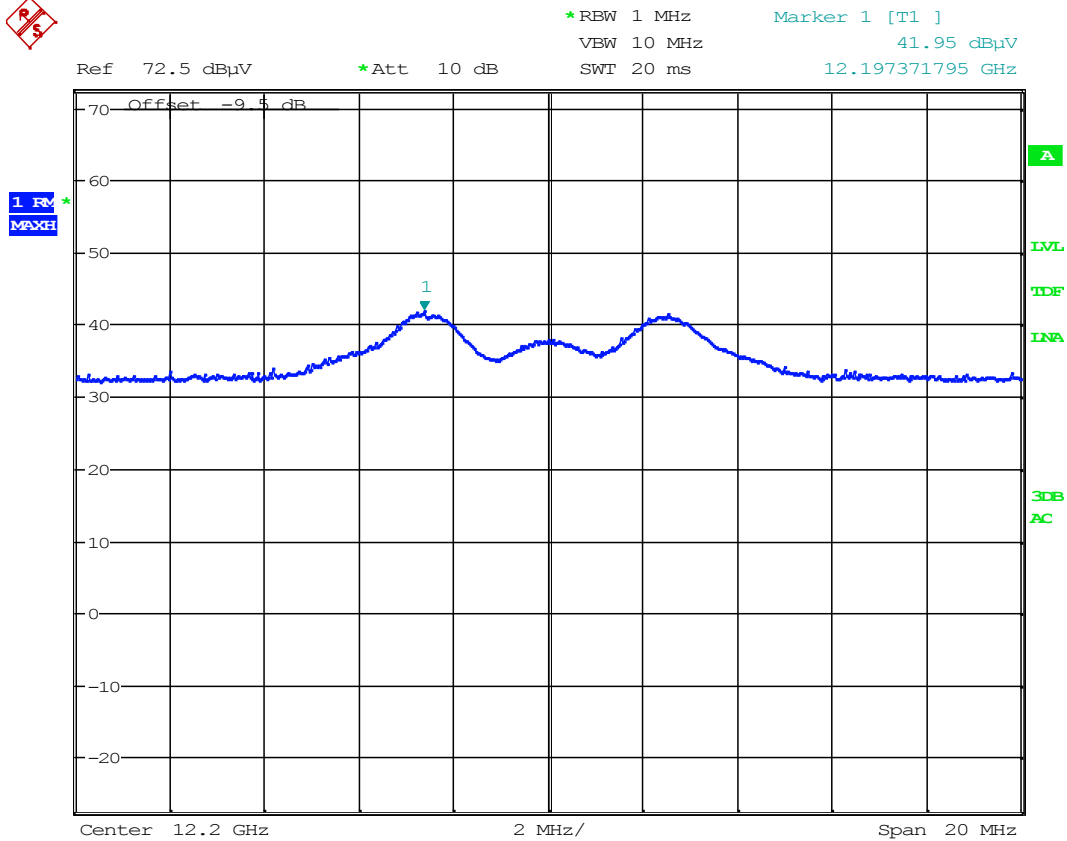


Date: 29.JAN.2013 14:05:12

5th harmonic-ch2440MHz – HP @1m- AV detector- distance correction is included in the graph



Ref 82 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 50.75 dB μ V/m
 SWT 20 ms 4.959591346 GHz

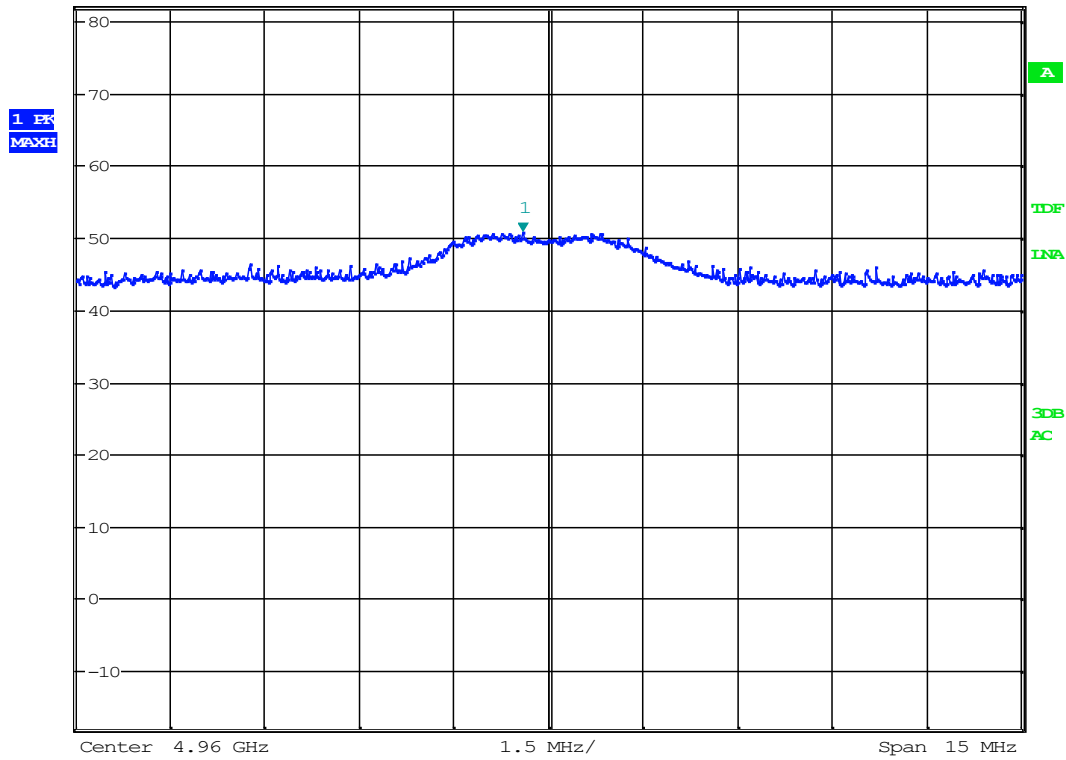


Date: 29.JAN.2013 13:07:54

2nd harmonic-ch2480MHz – VP @3m- Peak detector



Ref 82 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 10 MHz 44.14 dB μ V/m
 SWT 20 ms 4.958990385 GHz

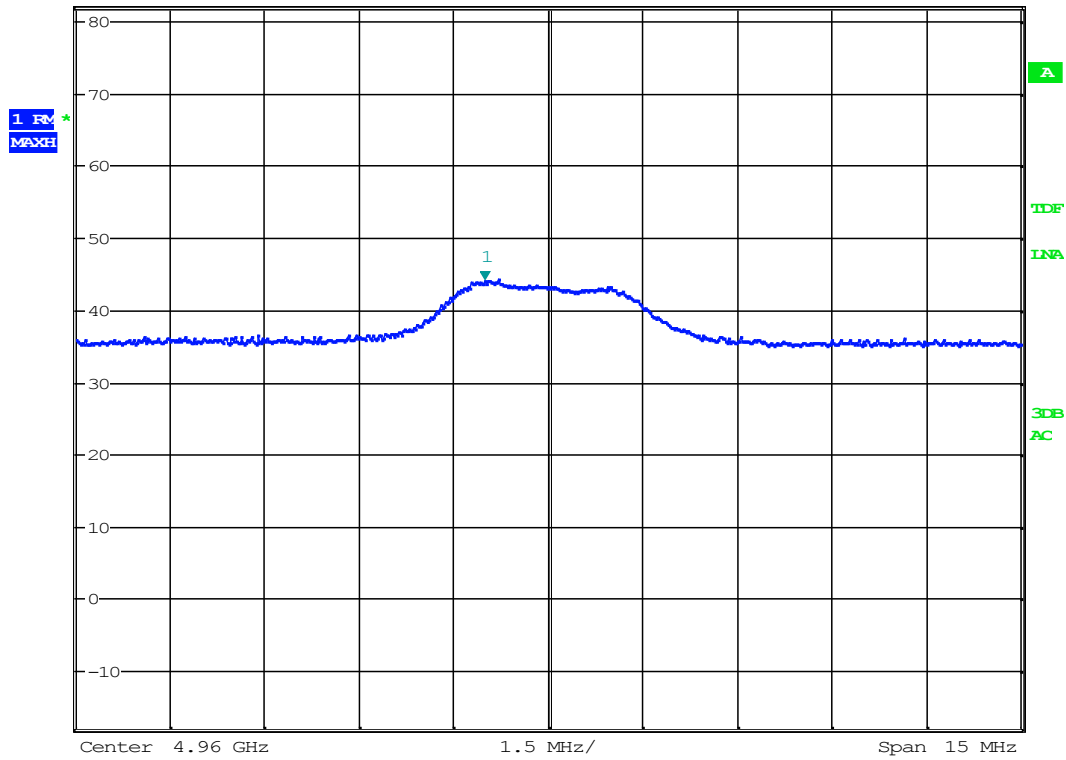


Date: 29.JAN.2013 13:13:02

2nd harmonic-ch2480MHz – VP @3m- AV detector



Ref 72.5 dBµV/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 54.67 dBµV/m
 SWT 20 ms 7.438365385 GHz

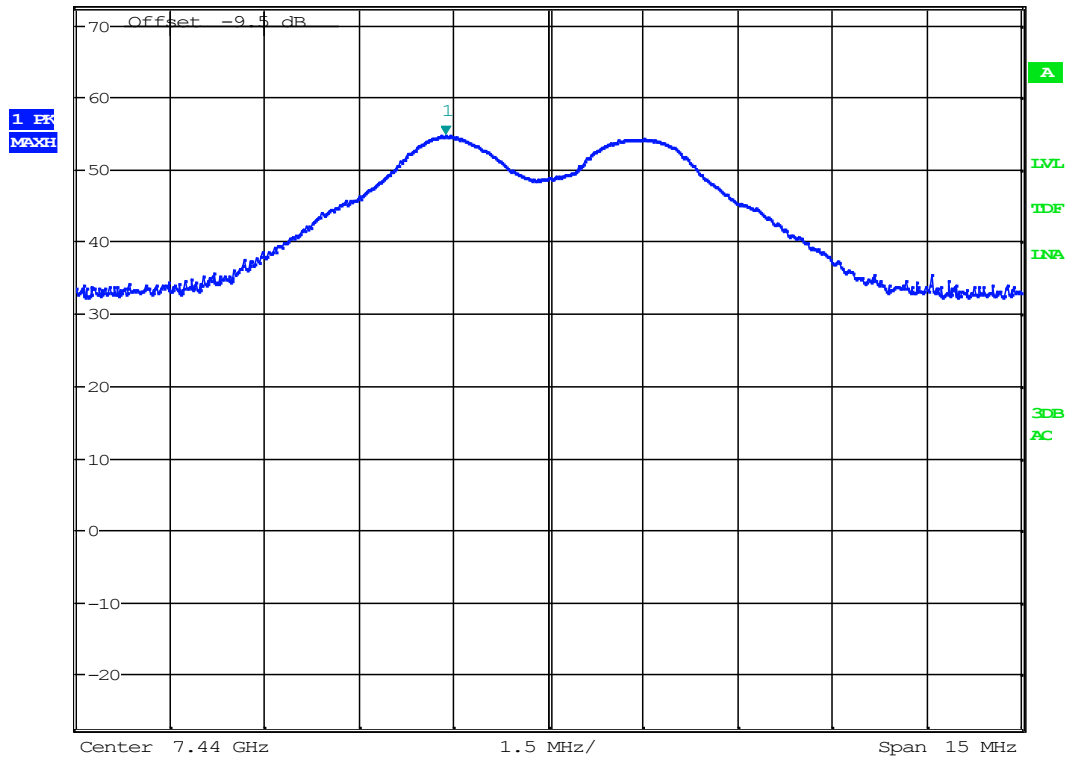


Date: 29.JAN.2013 13:30:00

3rd harmonic-ch2480MHz – VP @1m- Peak detector- distance correction is included in the graph




Ref 72.5 dBµV/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 Offset -9.5 dB VBW 10 MHz 51.00 dBµV/m
 SWT 20 ms 7.438389423 GHz

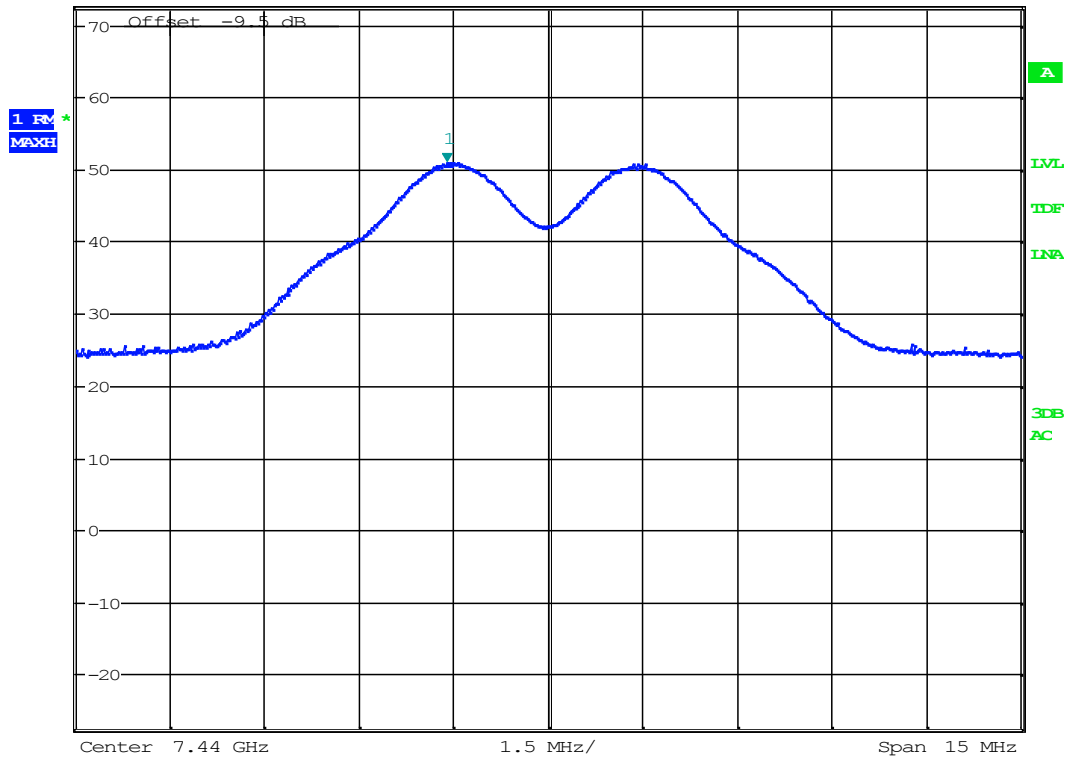


Date: 29.JAN.2013 13:33:17

3rd harmonic-ch2480MHz – VP @1m- AV detector- distance correction is included in the graph

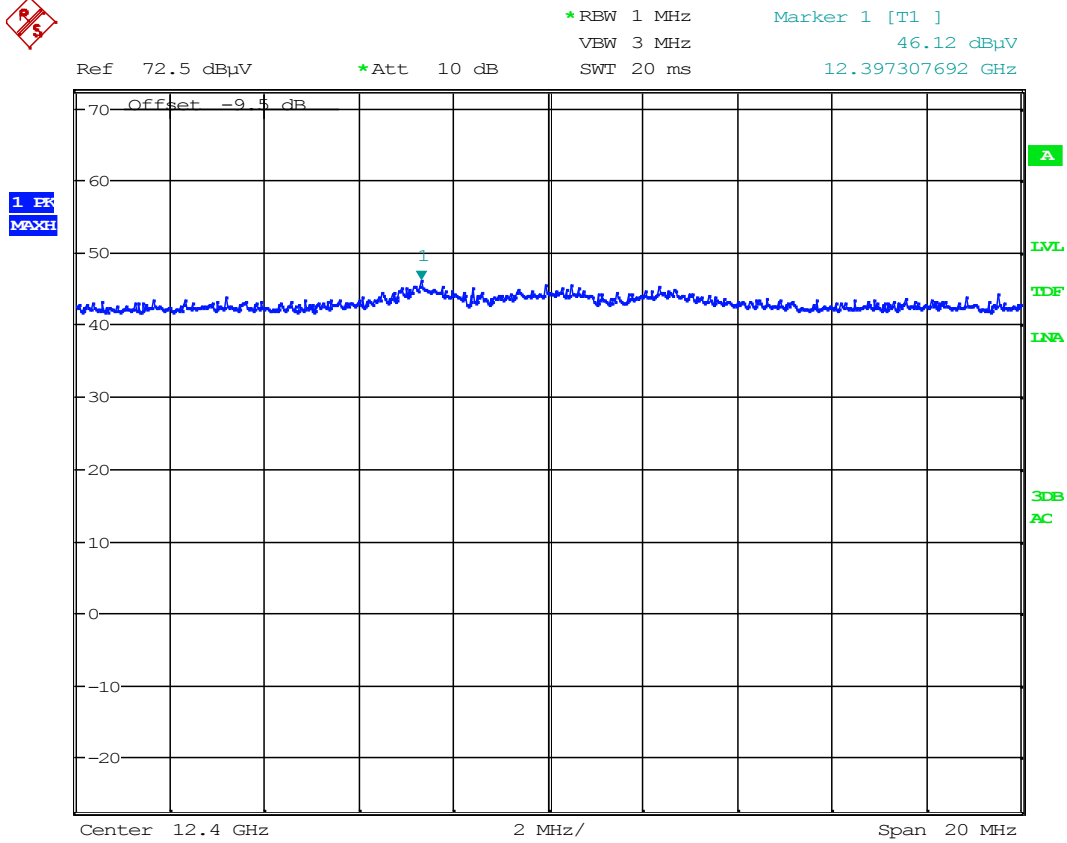


Date: 29.JAN.2013 14:12:24

5th harmonic-ch2480MHz – HP @1m- PK detector- distance correction is included in the graph

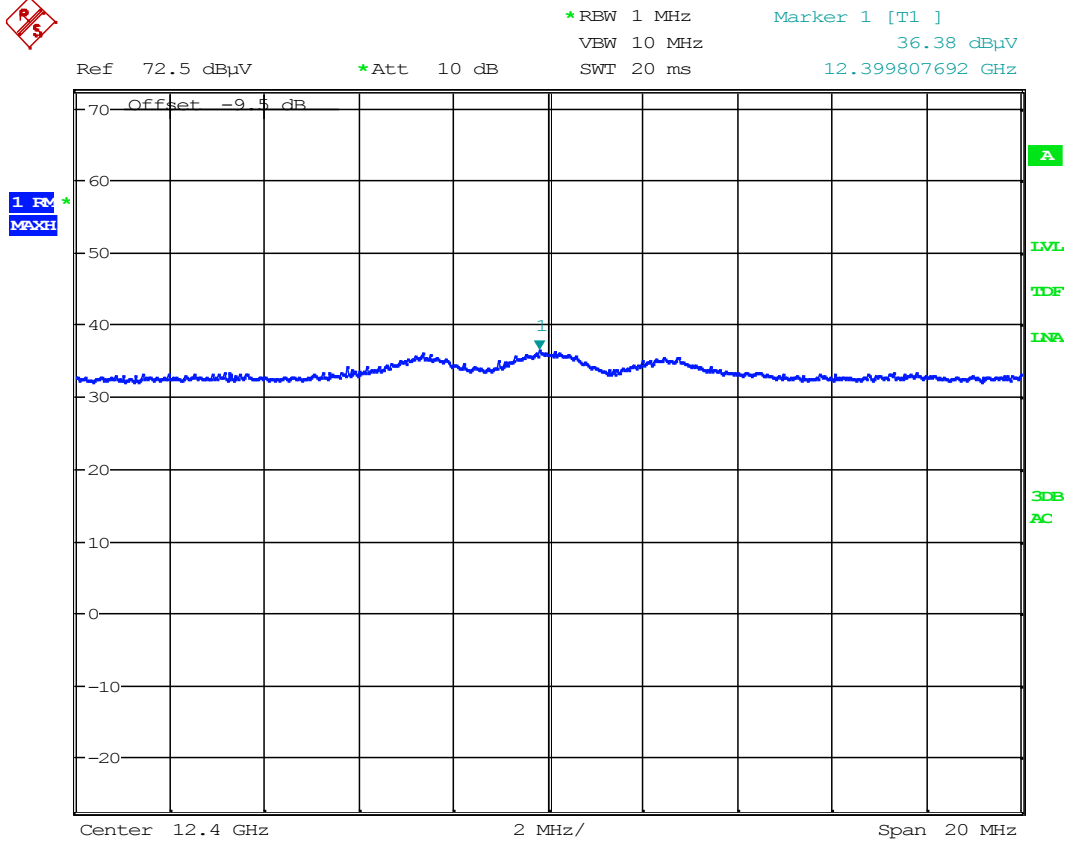


Date: 29.JAN.2013 14:12:44

5th harmonic-ch2480MHz – HP @1m- AV detector- distance correction is included in the graph

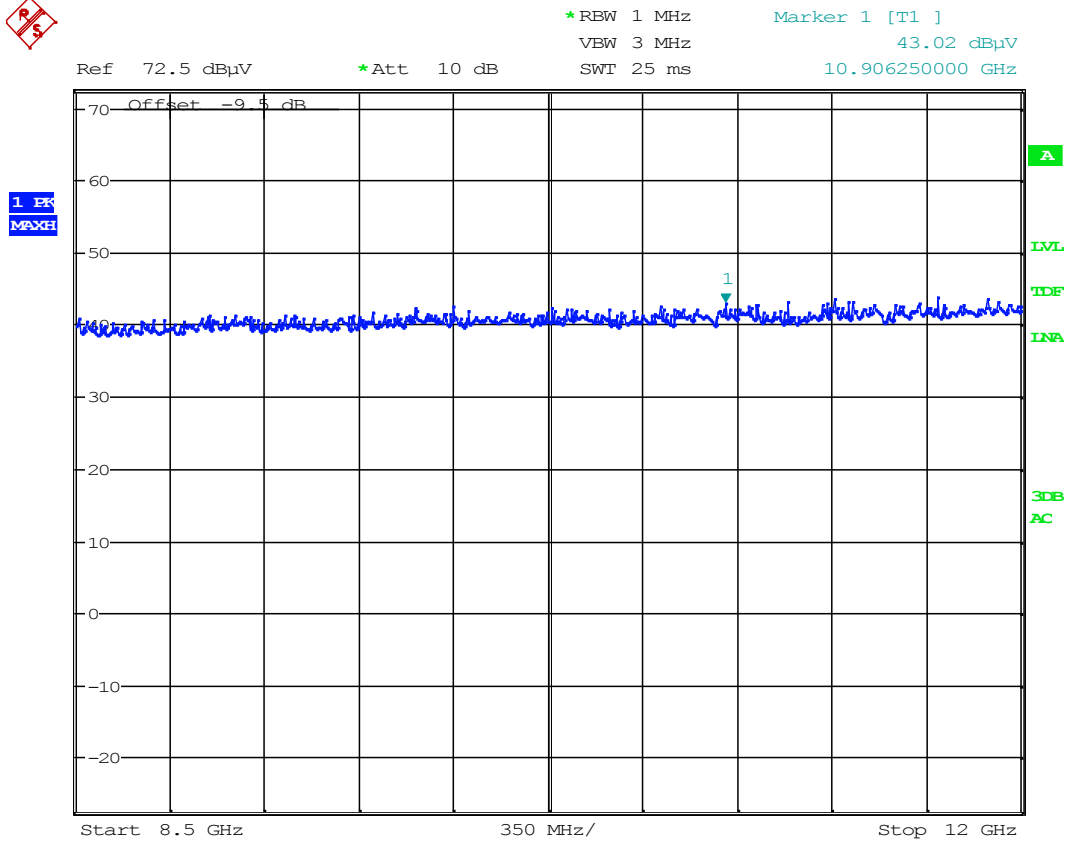


Date: 29.JAN.2013 13:57:13

Radiated Emissions ch. 2405 MHz, 8.5 – 12 GHz, VP, @1m – Pre-scan with Peak detector , Distance Correction factor of -9.5 dB is included in the graph

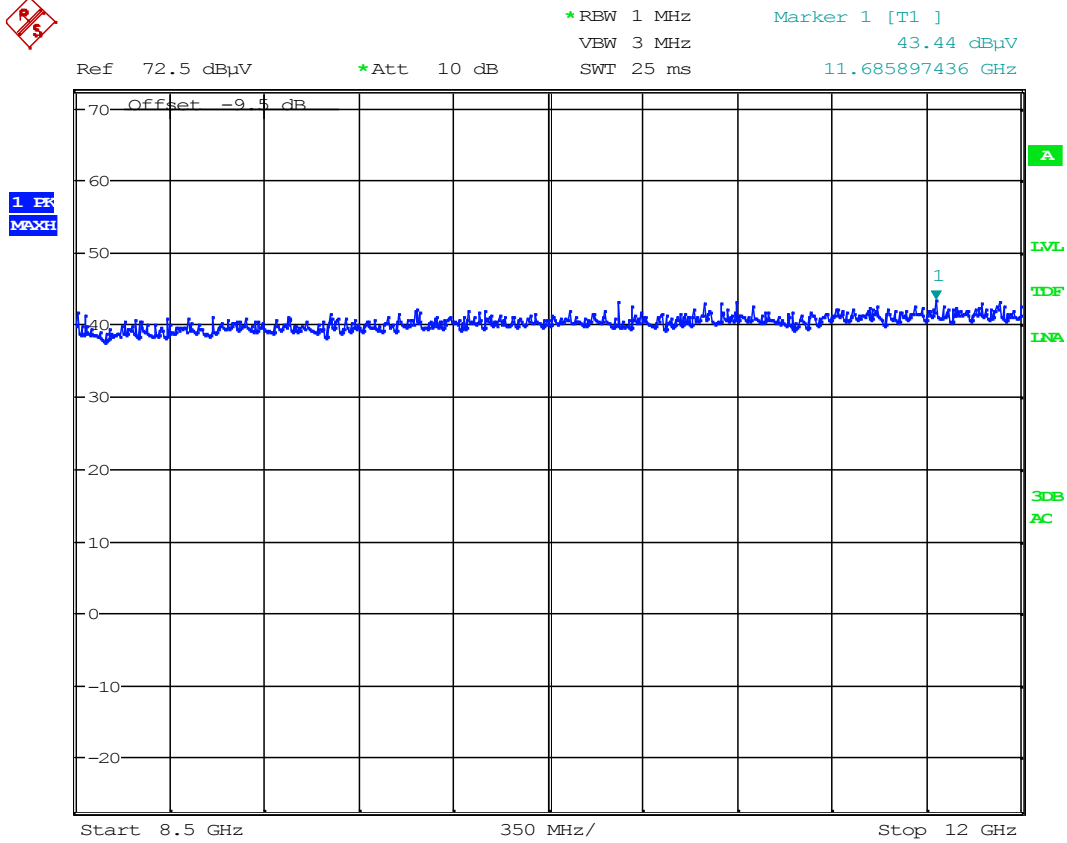

Date: 29.JAN.2013 13:57:53

Radiated Emissions ch. 2405 MHz, 8.5 – 12 GHz, HP, @1m – Pre-scan with Peak detector , Distance Correction factor of -9.5 dB is included in the graph.

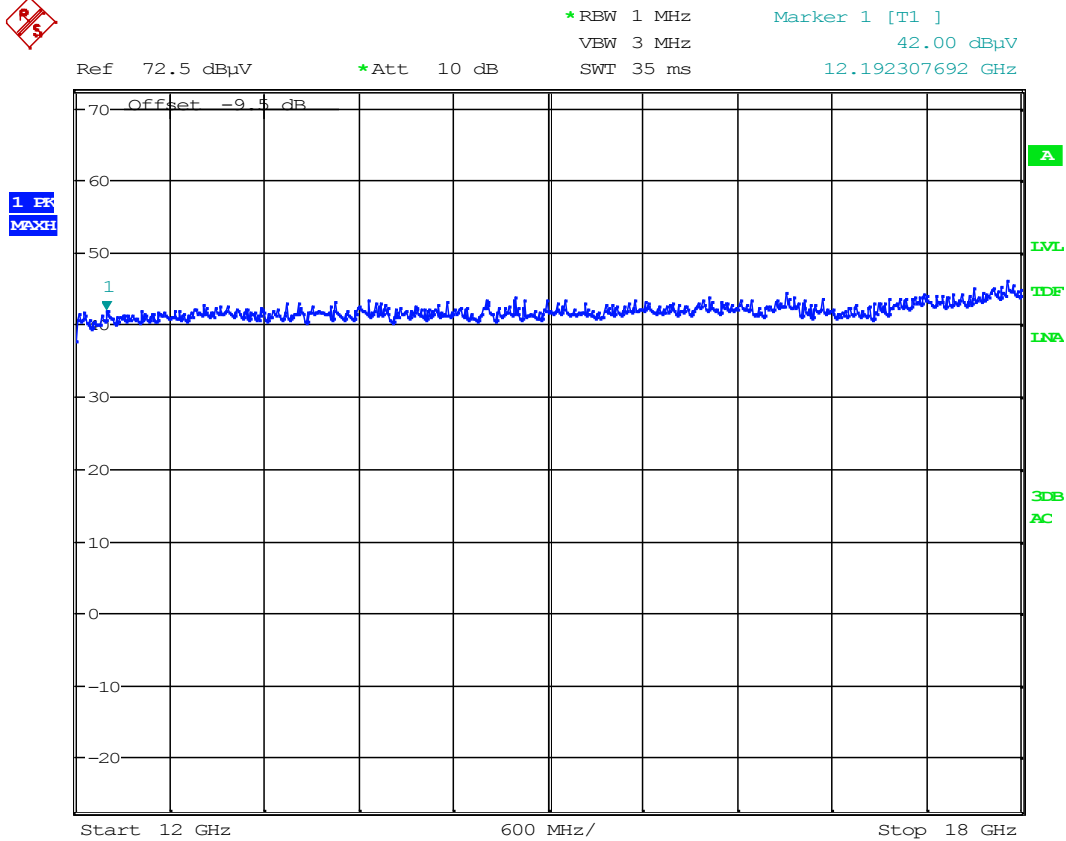


Date: 29.JAN.2013 14:02:16

Radiated Emissions ch. 2405 MHz, 12 – 18 GHz, VP, @1m – Pre-scan with Peak detector, Distance Correction factor of -9.5 dB is included in the graph.



Ref 72.5 dBμV *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 Offset -9.5 dB VBW 3 MHz 47.70 dBμV
 SWT 35 ms 12.192307692 GHz

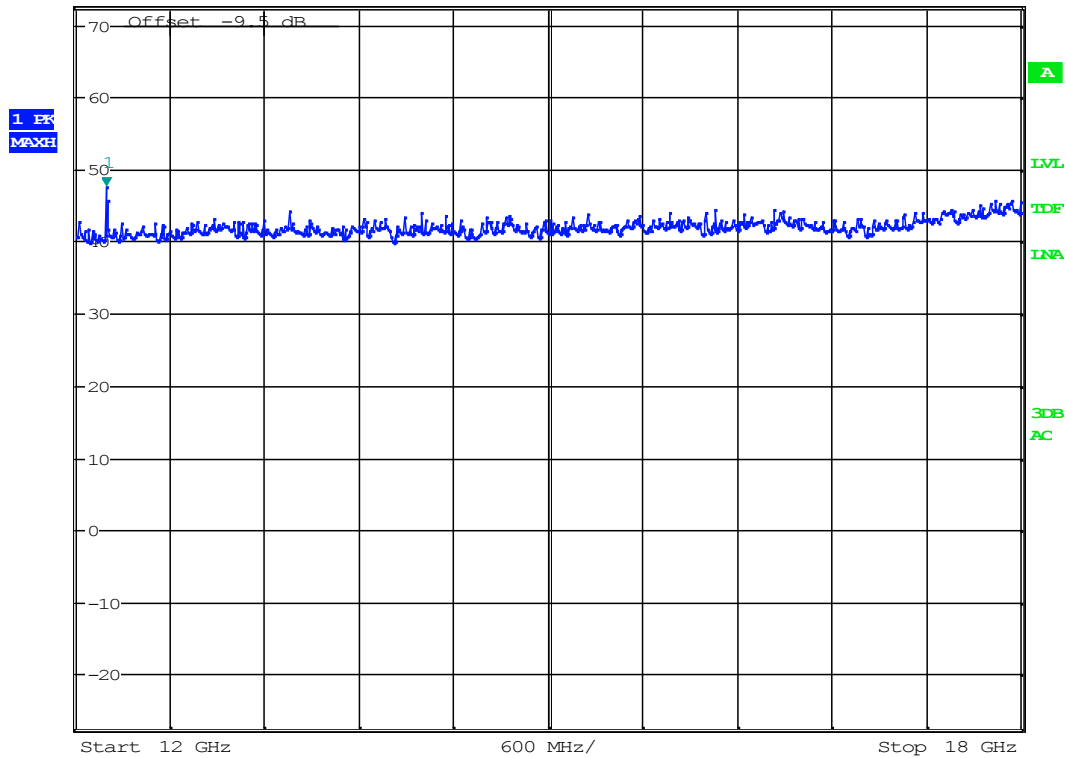


Date: 29.JAN.2013 14:01:56

Radiated Emissions ch. 2405 MHz, 12 – 18 GHz, HP, @1m – Pre-scan with Peak detector, Distance Correction factor of -9.5dB is included in the graph.



Ref 72.5 dBµV/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 Offset -9.5 dB VBW 3 MHz 45.12 dBµV/m
 SWT 45 ms 24.506410256 GHz

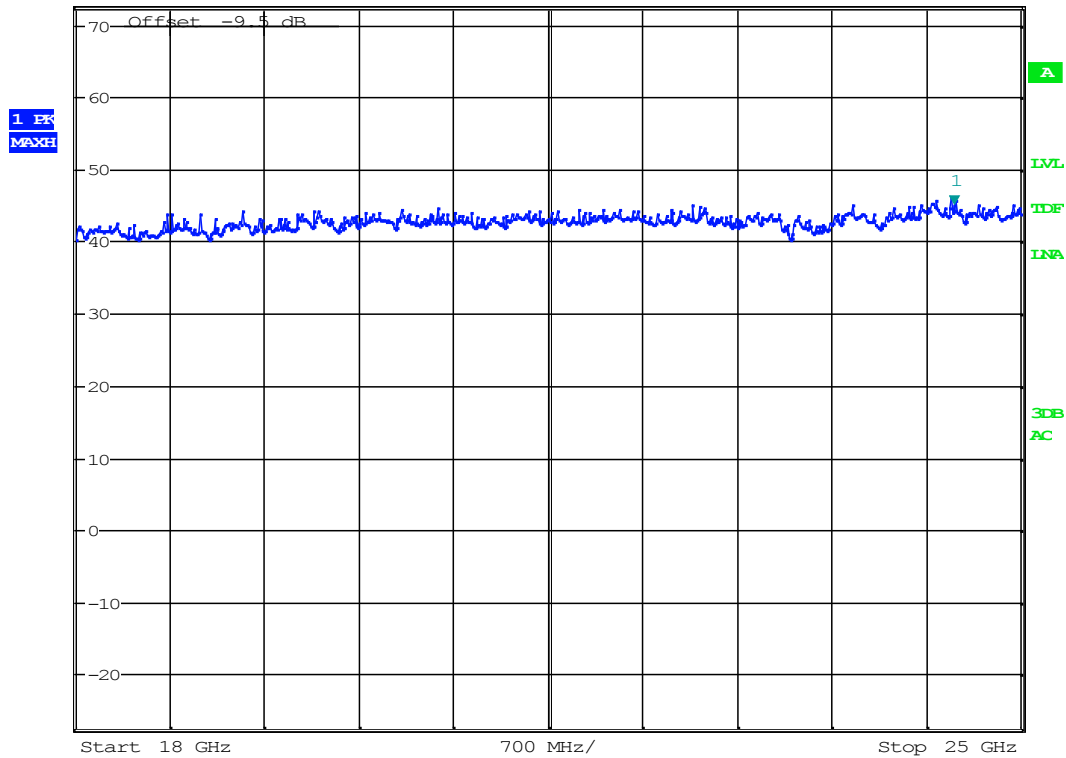

Date: 29.JAN.2013 15:00:56

Radiated Emissions ch. 2405 MHz, 18 – 25 GHz, VP/HP, Pre-scan with Peak detector, Distance Correction factor -9.5dB is included in the graph.

In receive mode detected LO leakage emissions:

Peak detector

| Frequency MHz | Channel MHz | Field Strength @3m dB μ V/m | Detector | Limit dB μ V/m | Margin dB |
|------------------|----------------|------------------------------------|----------|-----------------------|--------------|
| 4809 | 2405 | 50.1 | Pk | 74 | 23.9 |
| 4879 | 2440 | 49.8 | Pk | 74 | 24.2 |
| 4959 | 2480 | 50.5 | Pk | 74 | 23.5 |


Average detector

| Frequency MHz | Channel MHz | Field Strength @3m dB μ V/m | Detector | Limit dB μ V/m | Margin dB |
|------------------|----------------|------------------------------------|----------|-----------------------|--------------|
| 4809 | 2405 | 44.0 | Av | 54 | 10 |
| 4879 | 2440 | 43.4 | Av | 54 | 10.6 |
| 4959 | 2480 | 43.3 | Av | 54 | 10.7 |

The detected spurious emissions are within the restricted band (4.5 - 5.15 GHz).


The maximum is detected in vertical polarization.

See attached graphs.

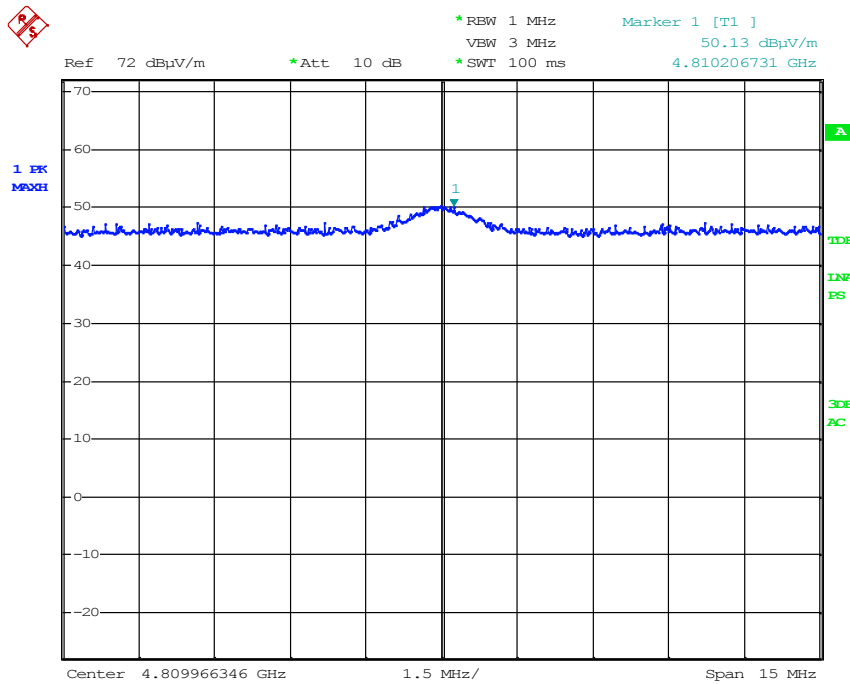


Date: 22.JAN.2013 14:21:03

LO leakage at ch 2405MHz – VP : PK detector

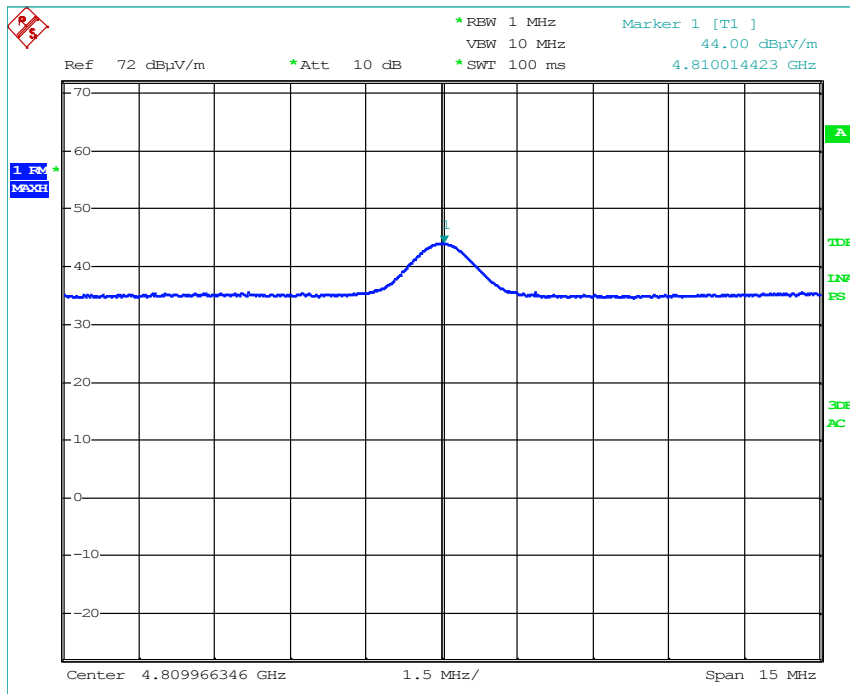


Date: 22.JAN.2013 14:21:35

LO leakage at ch 2405MHz – VP : AV detector

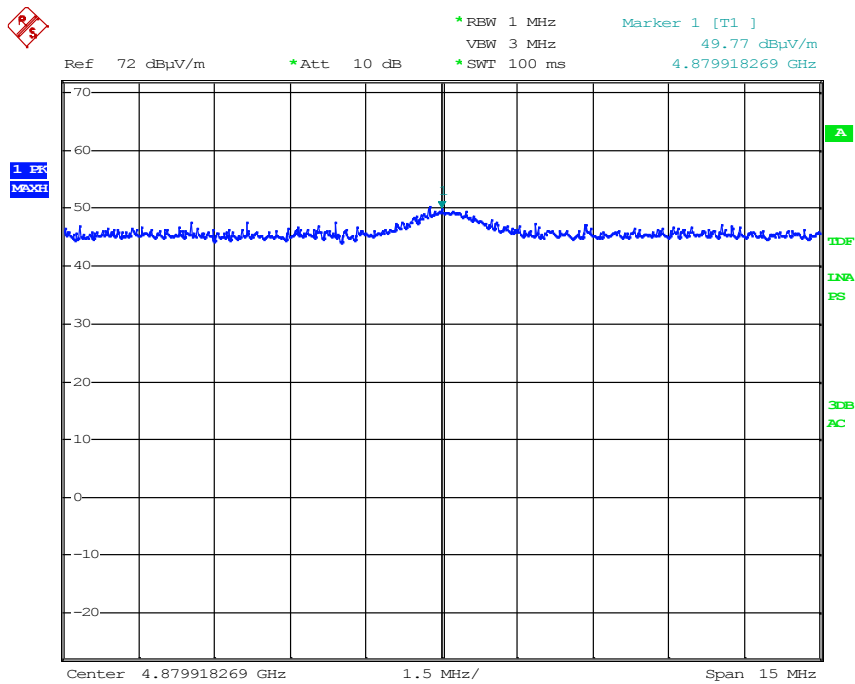


Date: 22.JAN.2013 14:55:42

LO leakage at ch 2440MHz – VP : PK detector

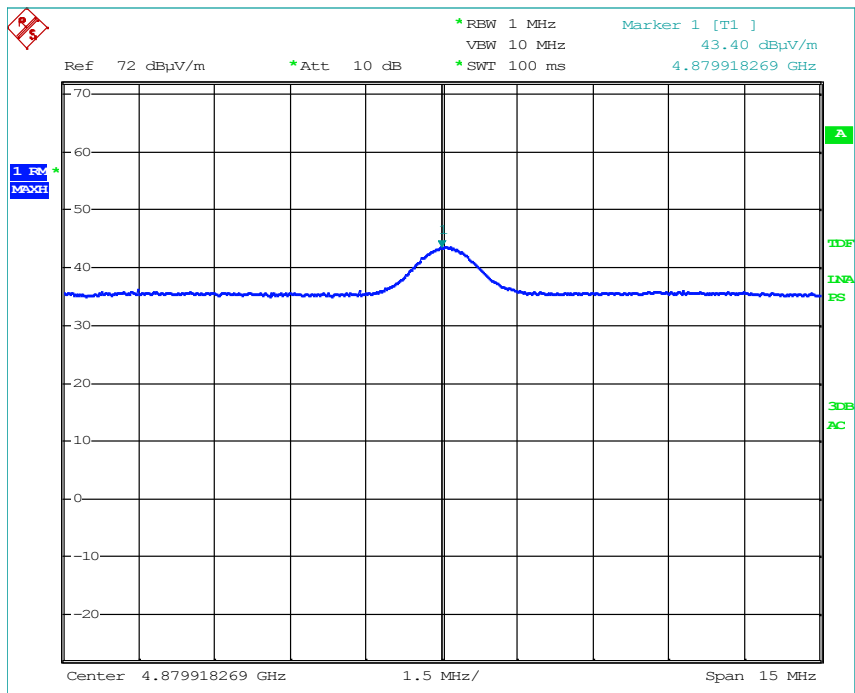


Date: 22.JAN.2013 14:55:20

LO leakage at ch 2440MHz – VP : AV detector

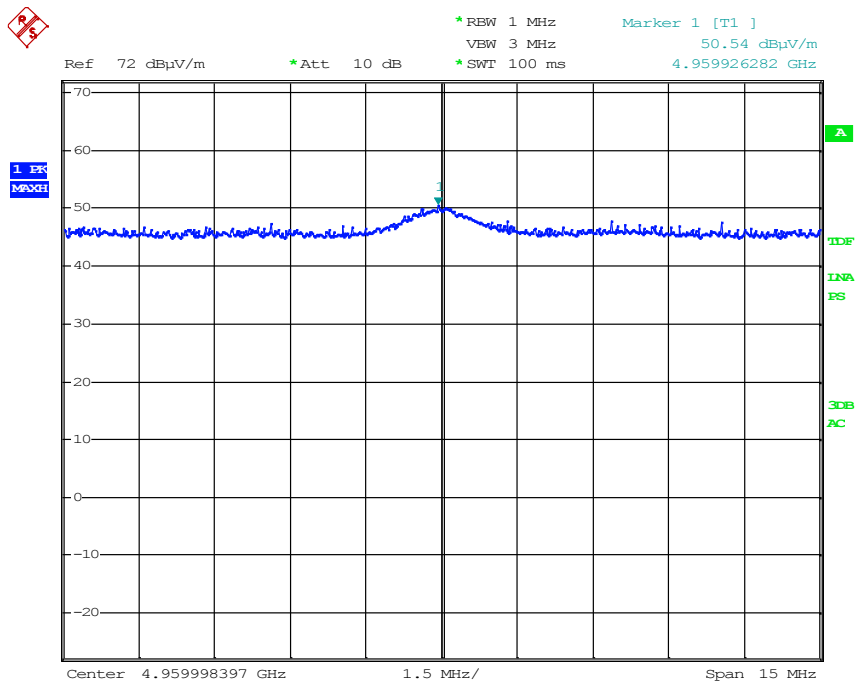

Date: 22.JAN.2013 14:58:45

LO leakage at ch 2480MHz – VP : PK detector

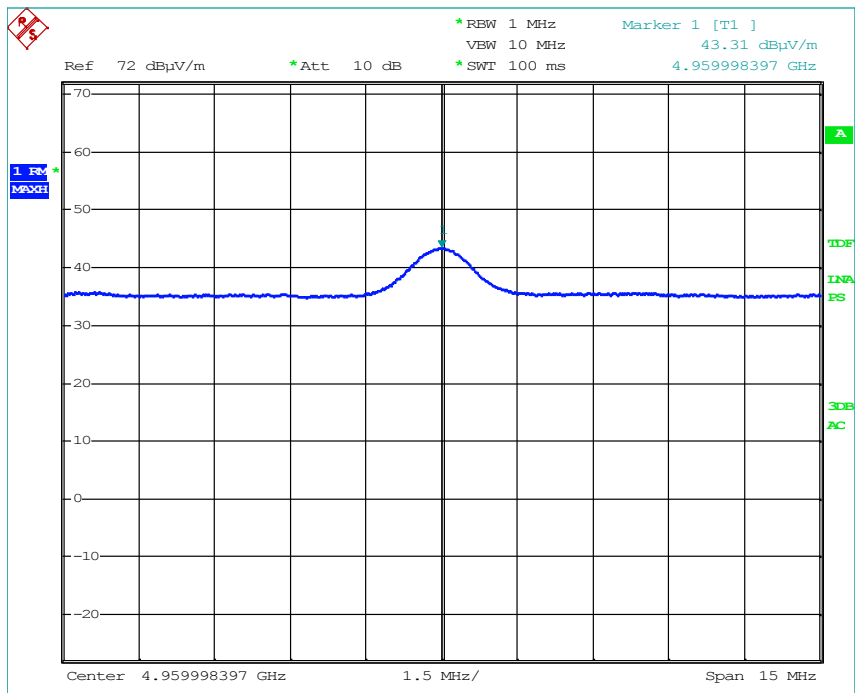

Date: 22.JAN.2013 14:57:54

LO leakage at ch 2480MHz – VP : AV detector

4.6 Power Spectral Density (PSD)

Para. No.: 15.247 (e)

| | |
|------------------------------------|----------------------------|
| Test Performed By: G.Suwanthakumar | Date of Test: 29 Jan. 2013 |
|------------------------------------|----------------------------|

Test Results: Complies

Measured and Calculated Data:

| | calculated peak PSD dBm |
|----------------------------------|----------------------------|
| Power Spectral Density @2405 MHz | -10.5 |
| Power Spectral Density @2440 MHz | -9.2 |
| Power Spectral Density @2480 MHz | -9.5 |

Tested according to KDB 558074 D01 DTS Meas Guidance v02, Section 9.1.

EIRP is calculated according to KDB 558074 D01 DTS Meas Guidance v02, Section 10.2.2.1


Requirements:

The Power Spectral Density of a Digital Transmission System shall be no greater than +8 dBm in any 3 kHz band.



Ref 110 dB μ V/m *Att 20 dB *RBW 3 kHz Marker 1 [T1] 84.73 dB μ V/m
 *VBW 10 kHz 2.405423077 GHz
 SWT 170 ms

1 PK
 MAXH

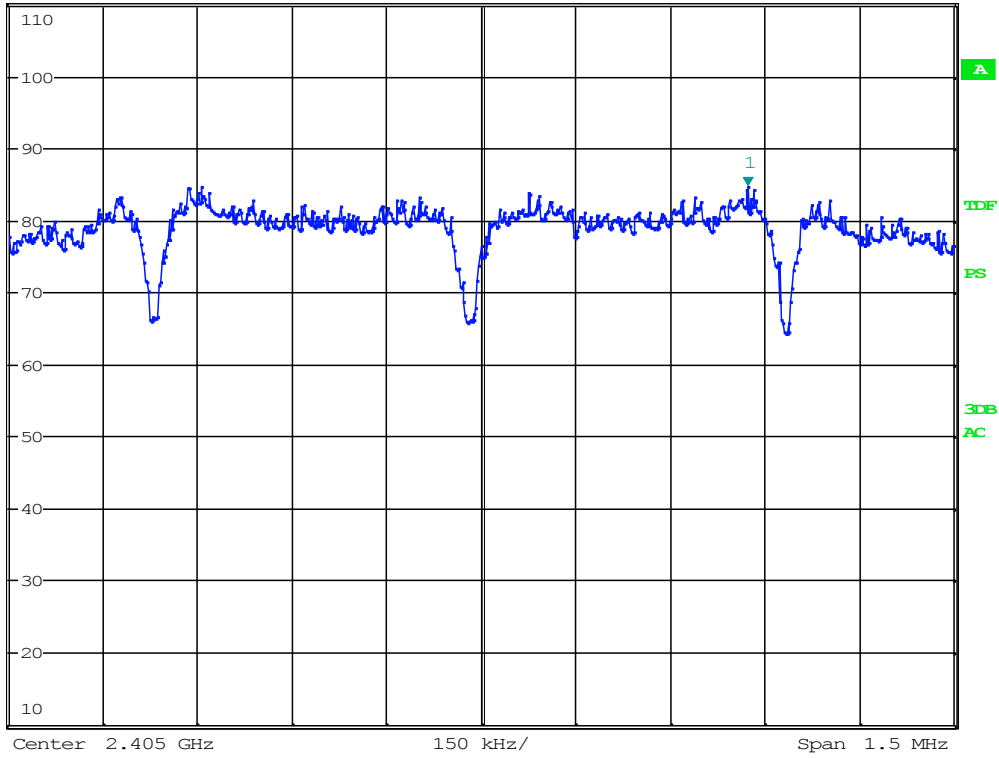


Date: 29.JAN.2013 10:20:58

PSD Measurement - 2405MHz




Ref 110 dB μ V/m *Att 20 dB *RBW 3 kHz Marker 1 [T1]
 *VBW 10 kHz 86.06 dB μ V/m
 SWT 170 ms 2.439545673 GHz

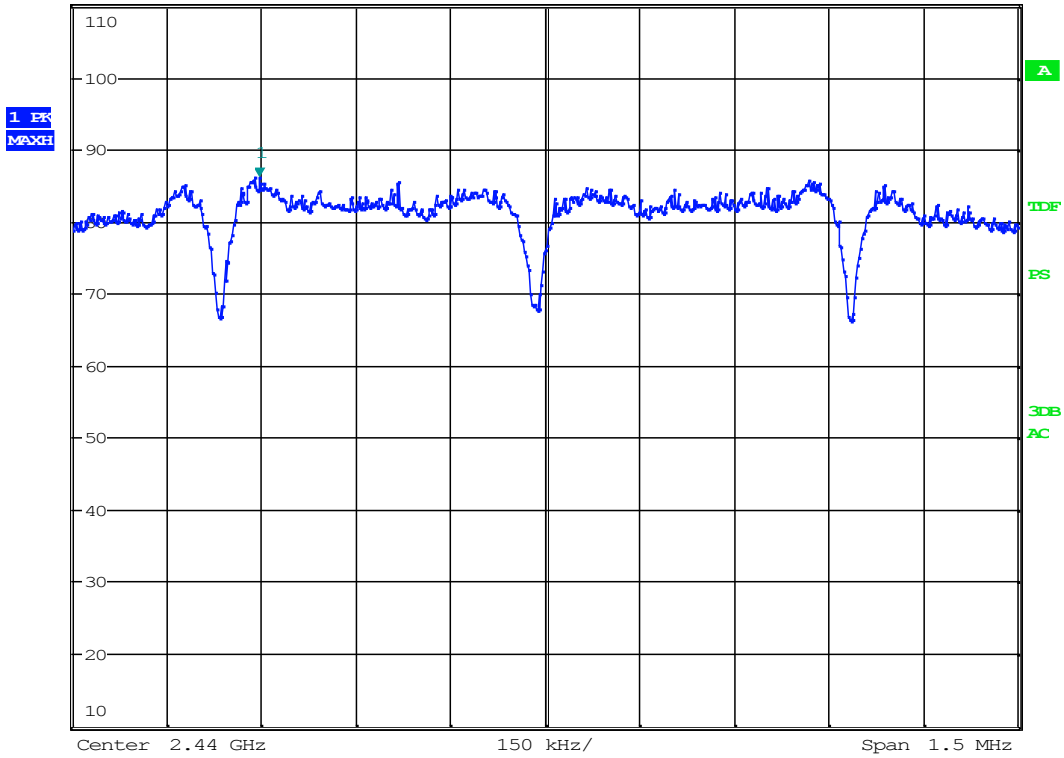

Date: 29.JAN.2013 10:23:07

PSD Measurement – 2440MHz

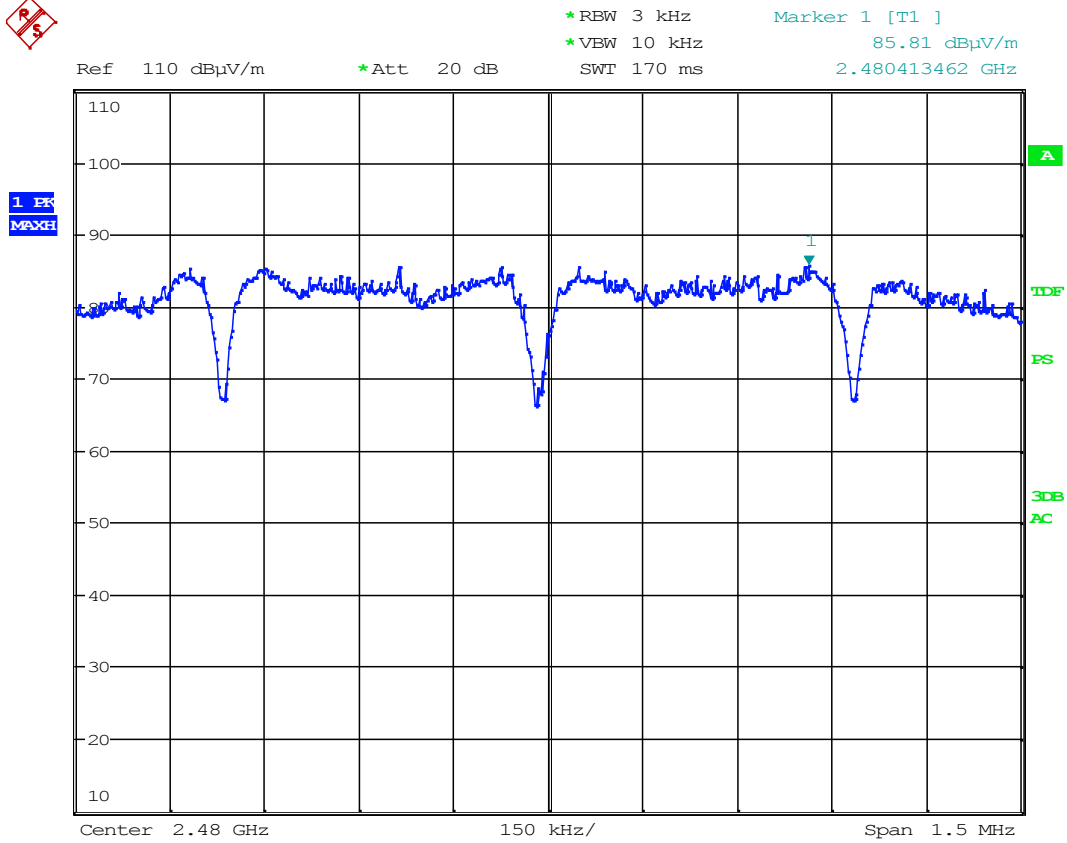

Date: 29.JAN.2013 10:28:55

PSD Measurement - 2480MHz


5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the test laboratory.

| No. | Instrument/ ancillary | Type of instrument/ ancillary | Manufacturer | Ref. no. | Cal. Date | Cal. Due |
|-----|--------------------------|----------------------------------|-----------------|----------|--------------|-------------|
| 1 | FSP30 | Spectrum Analyzer | Rohde & Schwarz | LR 1551 | 2012.04.05 | 2013.04.05 |
| 2 | ESU40 | EMI Receiver | Rohde & Schwarz | LR1639 | 2010.06 | 2013.06 |
| 3 | 3115 | Antenna horn | EMCO | LR 1330 | 2010.08.05 | 2013.08.05 |
| 4 | 643 | Antenna horn | Narda | LR 093 | 2009.01.26 | 2014.01.26 |
| 5 | 642 | Antenna horn | Narda | LR 220 | 2009.01.26 | 2014.01.26 |
| 6 | PM7320X | Antenna horn | Siverts lab | LR 103 | 2009.01.26 | 2014.01.26 |
| 7 | DBF-520-20 | Antenna horn | Systron Donner | LR 101 | 2009.01.26 | 2014.01.26 |
| 8 | 638 | Antenna horn | Narda | LR 098 | 2010.06.17 | 2015.06.17 |
| 9 | VULB 9163 | Antenna TriLog | Schwarzbeck | LR1616 | 2012-08 | 2013-08 |
| 10 | 8449B | Pre-amplifier | Hewlett Packard | LR 1322 | 2012-09-27 | 2013-09-27 |
| 11 | LNA6900 | Pre-amplifier | Teseq | LR 1593 | 2012-11 | 2013-11 |
| 14 | 80S | Signal Generator | Powertron | LT 502 | Cal b4 use | |
| 15 | Model 87 V | Multimeter | Fluke | LR 1598 | 2012-12-14 | 2014-12-14 |
| 17 | 6810.17A | 10 attenuator | Suhner | LR 1143 | 2012.09.15 | 2014.09.15 |
| 18 | FA210A1010003030 | Microwave cable | Rosenberger | LR1566 | Cal b4 use | |
| 19 | 6HC 3000-18000 | HP Filter | Trithlic | LR1614 | Cal b4 use | |
| 20 | 6HC 2500-18000 | HP Filter | Trithlic | LR1615 | Cal b4 use | |
| 21 | FSW | Spectrum Analyzer | Rohde & Schwarz | LR1640 | 2012.06 | 2014.06 |

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

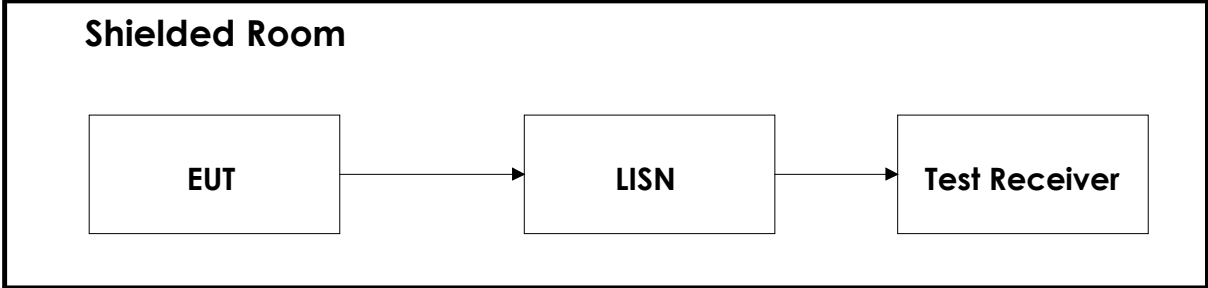

6.2 Test Site Radiated Emission

