

# SHENZHEN DNS INDUSTRIES CO., LTD.

## TEST REPORT

### SCOPE OF WORK

FCC TESTING—WX-M01A, 16WMS129, 16WMS129-BLU,  
16WMS129-BLK, 16WMS129-GRY,  
16WMS129-XXX (X=A-Z)

### REPORT NUMBER

181220015SZN-001

### ISSUE DATE

JANUARY 09, 2019

### [REVISED DATE]

[-----]

### PAGES

42

### DOCUMENT CONTROL NUMBER

FCC ID 249\_C

© 2017 INTERTEK



**SHENZHEN DNS INDUSTRIES CO., LTD.**

Application  
For  
Certification

**FCC ID: ZBC-16WMS129****Waterproof Bluetooth Speaker****Model: WX-M01A, 16WMS129, 16WMS129-BLU, 16WMS129-BLK,  
16WMS129-GRY, 16WMS129-XXX (X=A-Z)****Brand Name: DNS****2.4GHz Transceiver****Report No.: 181220015SZN-001**

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-17]

Prepared and Checked by:

Approved by:

Sign on file  
*Joanna Jiao*  
Engineer

---

*Kidd Yang*  
Technical Supervisor  
Date: January 09, 2019

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Services Shenzhen Ltd. Longhua Branch**

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Test Equipment List

## MEASUREMENT/TECHNICAL REPORT

SHENZHEN DNS INDUSTRIES CO., LTD.

Model: WX-M01A

FCC ID: ZBC-16WMS129

This report concerns (check one) Original Grant X Class II Change \_\_\_\_\_

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes \_\_\_\_\_ No X

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes \_\_\_\_\_ No X

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-17 Edition] provision.

Report prepared by:

Joanna Jiao  
Intertek Testing Services Shenzhen Ltd. Longhua Branch  
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing  
Community, GuanHu Subdistrict, LongHua District, Shenzhen,  
P.R. China.  
Tel / Fax: 86-755-8601 6288/86-755-8601 6751

## Table of Contents

<b>1.0 General Description .....</b>	<b>7</b>
1.1 Product Description .....	7
1.2 Related Submittal(s) Grants .....	7
1.3 Test Methodology.....	7
1.4 Test Facility .....	7
<b>2.0 System Test Configuration .....</b>	<b>9</b>
2.1 Justification .....	9
2.2 EUT Exercising Software.....	9
2.3 Special Accessories .....	9
2.4 Equipment Modification .....	9
2.5 Measurement Uncertainty .....	10
2.6 Support Equipment List and Description .....	10
<b>3.0 Emission Results .....</b>	<b>12</b>
3.1 Radiated Test Results .....	13
3.1.1 Field Strength Calculation.....	13
3.1.2 Radiated Emission Configuration Photograph.....	14
3.1.3 Radiated Emissions.....	14
3.1.4 Transmitter Spurious Emissions .....	17
3.2 Conducted Emission at Mains Termina.....	21
3.2.1 Conducted Emissions Configuration Photograph .....	21
3.2.2 Conducted Emissions .....	21
<b>4.0 Equipment Photographs.....</b>	<b>25</b>
<b>5.0 Product Labelling.....</b>	<b>27</b>
<b>6.0 Technical Specifications.....</b>	<b>29</b>
<b>7.0 Instruction Manual .....</b>	<b>31</b>
<b>8.0 Miscellaneous Information .....</b>	<b>33</b>
8.1 Bandedge Plot .....	34
8.2 Discussion of Pulse Desensitization .....	36
8.3 Emissions Test Procedures.....	37
<b>9.0 Confidentiality Request .....</b>	<b>40</b>
<b>10.0 Test Equipment List .....</b>	<b>42</b>

### List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Report	Bandedge Plot	bandedge.pdf
Test Report	20dB BW Plot	bw.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

## **EXHIBIT 1**

### **GENERAL DESCRIPTION**

## 1.0 General Description

### 1.1 Product Description

The equipment under test (EUT) is a Waterproof Bluetooth Speaker with Bluetooth technology operating in 2402-2480MHz. The EUT is powered by DC 3.7V rechargeable battery which can be charged by DC 5V from USB port. The USB port only used for charging purpose. For more detail information pls. refer to the user manual.

Antenna Type: PCB antenna

Modulation Type: GFSK,  $\pi/4$ -DQPSK, 8-DPSK

Antenna Gain: -0.58dBi

Bluetooth Version: V5.0+EDR

The Model: 16WMS129, 16WMS129-BLU, 16WMS129-BLK, 16WMS129-GRY, 16WMS129-XXX (X=A-Z) are the same as the Model: WX-M01A in hardware aspect. The difference in model number and appearance serves as marketing strategy.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 1.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the Waterproof Bluetooth Speaker which has Bluetooth function, and related report for FCC SDOC is subjected to report number: 181220015SZN-002.

### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application.

### 1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).



## **EXHIBIT 2**

### **SYSTEM TEST CONFIGURATION**

## 2.0 System Test Configuration

### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT is powered by a fully rechargeable battery (DC 3.7V, 1200mAh) which was charged by adapter with 120V/60Hz input during the test, only the worst data was reported in this report.

All packets DH1, DH3 & DH5 mode in modulation type GFSK,  $\pi/4$ -DQPSK and 8-DPSK were tested and only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.

The rear of unit was flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a floor stand, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

### 2.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

### 2.3 Special Accessories

No special accessories used.

### 2.4 Equipment Modification

Any modifications installed previous to testing by SHENZHEN DNS INDUSTRIES CO., LTD. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Longhua Branch.

## 2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

## 2.6 Support Equipment List and Description

Description	Manufacturer	Model No.
iPod (provided by Intertek)	Apple	A1367
USB Cable (provided by Intertek)	N/A	Unshielded, 0.5cm
Adaptor (provided by Intertek)	N/A	AK933YH Input: AC100-240V, 50/60Hz, 0.4A Output: DC5V,2A

## **EXHIBIT 3**

### **EMISSION RESULTS**

### 3.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

### 3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

### 3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

### 3.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission  
at  
255.00 MHz

Judgement: Passed by 12.2 dB

#### **TEST PERSONNEL:**

*Sign on file*

Joanna Jiao, Engineer  
*Typed/Printed Name*

25 December 2018  
*Date*

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: 25 December 2018


Model: WX-M01A

Worst Case Operating Mode:

Transmitting(2402MHz)


ANT Polarity: Horizontal

FCC Part 15

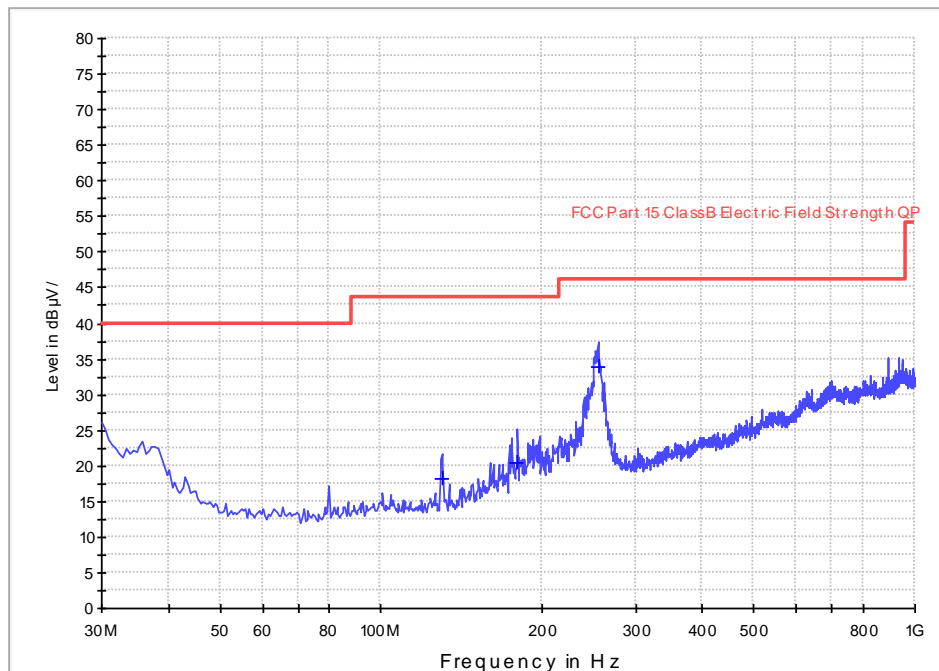

ANT Polarity: Vertical

FCC Part 15

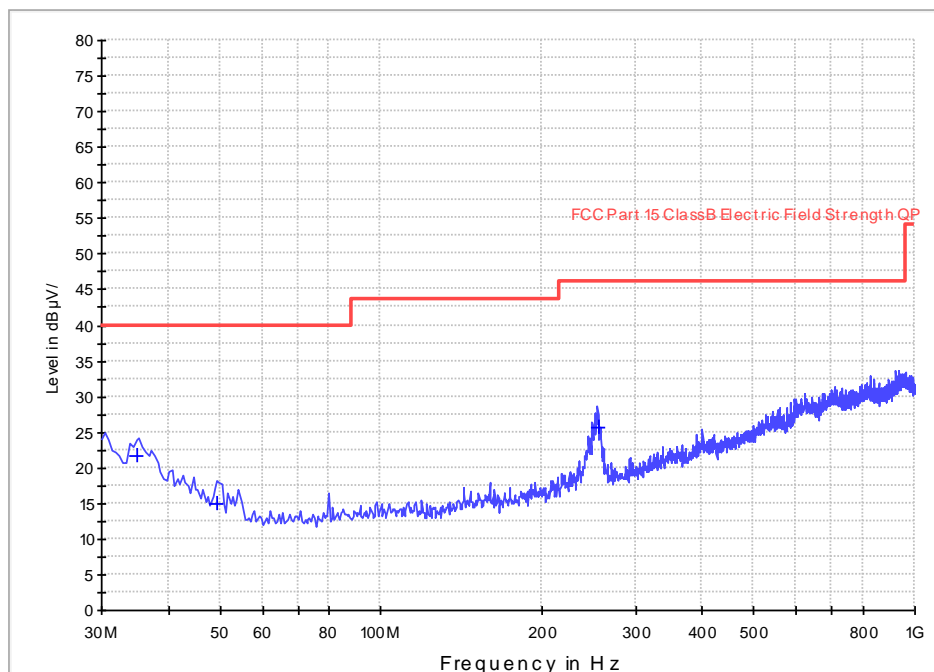



Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: 25 December 2018

Model: WX-M01A

Worst Case Operating Mode:

Transmitting(2402MHz)

Table 1

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	130.3950	28.2	20.0	10.1	18.3	43.5	-25.2
Horizontal	180.3500	29.2	20.0	11.3	20.5	43.5	-23.0
Horizontal	255.0000	32.1	20.0	21.7	33.8	46.0	-12.2
Vertical	34.8500	31.5	20.0	10.1	21.6	43.5	-21.9
Vertical	49.4000	32.0	20.0	3.1	15.1	43.5	-28.4
Vertical	255.0000	24.0	20.0	21.7	25.7	46.0	-20.3

NOTES: 1. Quasi-Peak detector is used except for others stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. All emissions are below the QP limit.

### 3.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission  
at  
2397.800 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 1.3 dB

#### **TEST PERSONNEL:**

*Sign on file*

Joanna Jiao, Engineer  
*Typed/Printed Name*

09 January,2019  
*Date*

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: 09 January,2019

Model: WX-M01A

Worst Case Operating Mode:

Transmitting(2402MHz)

Table 2

### Radiated Emissions

(2402MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2402.000	105.7	36.7	28.1	97.1	114.0	-16.9
Horizontal	4804.875	50.3	36.7	35.5	49.1	74.0	-24.9
Horizontal	7206.000	53.3	36.1	36.5	53.7	74.0	-20.3
Horizontal	2397.800	63.9	36.1	36.5	64.3	74.0	-9.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2402.000	94.5	36.7	28.1	85.9	94.0	-8.1
Horizontal	4804.875	40.7	36.7	35.5	39.5	54.0	-14.5
Horizontal	7206.000	44.5	36.1	36.5	44.9	54.0	-9.1
Horizontal	2397.800	52.3	36.1	36.5	52.7	54.0	-1.3

NOTES: 1. RBW=1MHz/VBW=3MHz was used for peak measurements and average measurements were made with measurement instrumentation employing an average detector function using a minimum resolution bandwidth of 1 MHz.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Joanna Jiao

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: 09 January,2019

Model: WX-M01A

Worst Case Operating Mode:

Transmitting(2441MHz)

Table 3

### Radiated Emissions

(2441MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2441.045	100.5	36.7	28.1	91.9	114.0	-22.1
Horizontal	4882.375	48.5	36.7	35.5	47.3	74.0	-26.7
Horizontal	7323.205	51.7	36.1	37.2	52.8	74.0	-21.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2441.045	87.3	36.7	28.1	78.7	94.0	-15.3
Horizontal	4882.375	40.4	36.7	35.5	39.2	54.0	-14.8
Horizontal	7323.205	41.8	36.1	37.2	42.9	54.0	-11.1

NOTES: 1. RBW=1MHz/VBW=3MHz was used for peak measurements and average measurements were made with measurement instrumentation employing an average detector function using a minimum resolution bandwidth of 1 MHz.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Joanna Jiao

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: 09 January,2019

Model: WX-M01A

Worst Case Operating Mode:

Transmitting(2480MHz)

Table 4

### Radiated Emissions

(2480MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2480.000	97.8	36.7	28.1	89.2	114.0	-24.8
Horizontal	4960.075	48.0	36.7	35.5	46.8	74.0	-27.2
Horizontal	7440.375	53.4	36.1	37.2	54.5	74.0	-19.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2480.000	85.5	36.7	28.1	76.9	94.0	-17.1
Horizontal	4960.075	38.8	36.7	35.5	37.6	54.0	-16.4
Horizontal	7440.375	43.5	36.1	37.2	44.6	54.0	-9.4

NOTES: 1. RBW=1MHz/VBW=3MHz was used for peak measurements and average measurements were made with measurement instrumentation employing an average detector function using a minimum resolution bandwidth of 1 MHz.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Joanna Jiao

### 3.2 Conducted Emission at Mains Terminal

#### 3.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

#### 3.2.2 Conducted Emissions

Worst Case Conducted Configuration  
At

1.866 MHz

Judgement: Passed by 2.8 dB margin

#### **TEST PERSONNEL:**

*Sign on file*

Joanna Jiao, Engineer  
*Typed/Printed Name*

25 December, 2018  
*Date*


Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Model: WX-M01A

Operating Mode: Charging+BT Link

Phase: Live

## Conducted Emission Test - FCC

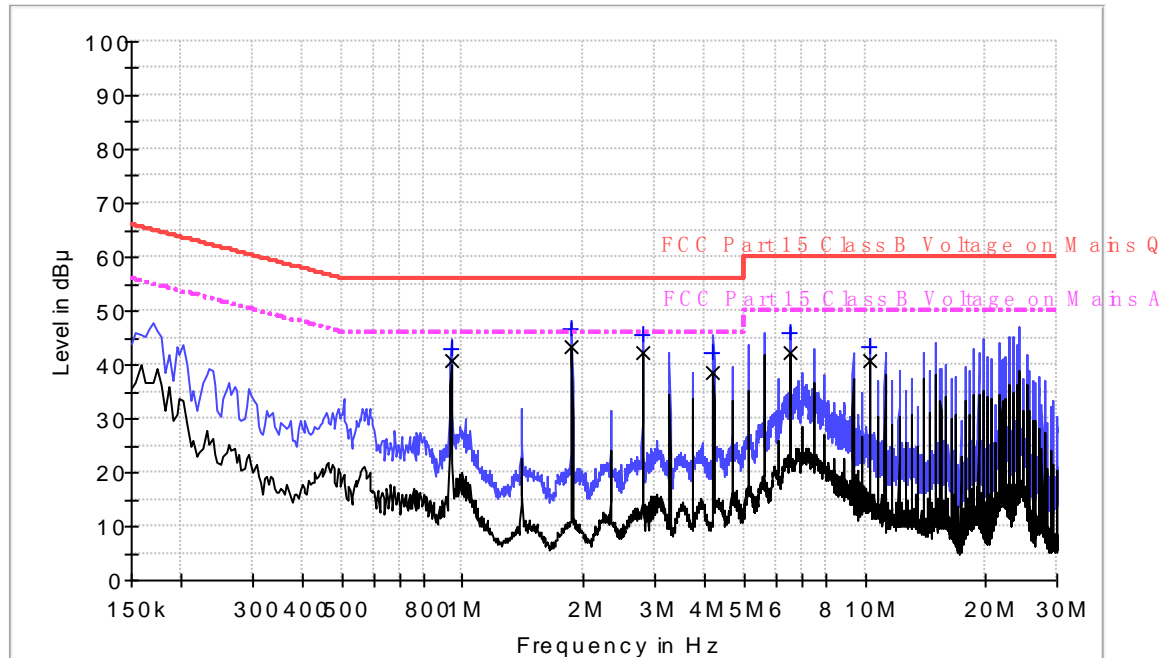

## Result Table QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.934000	43.1	9.000	L1	9.7	12.9	56.0
1.866000	46.6	9.000	L1	9.7	9.4	56.0
2.800000	45.5	9.000	L1	9.7	10.5	56.0
4.200000	42.4	9.000	L1	9.7	13.6	56.0
6.534000	45.8	9.000	L1	9.8	14.2	60.0
10.266000	43.3	9.000	L1	9.9	16.7	60.0

## Result Table AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.934000	40.6	9.000	L1	9.7	5.4	46.0
1.866000	43.2	9.000	L1	9.7	2.8	46.0
2.800000	42.2	9.000	L1	9.7	3.8	46.0
4.200000	38.5	9.000	L1	9.7	7.5	46.0
6.534000	42.3	9.000	L1	9.8	7.7	50.0
10.266000	40.7	9.000	L1	9.9	9.3	50.0


Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Model: WX-M01A

Operating Mode: Charging+BT Link

Phase: Neutral

## Conducted Emission Test - FCC

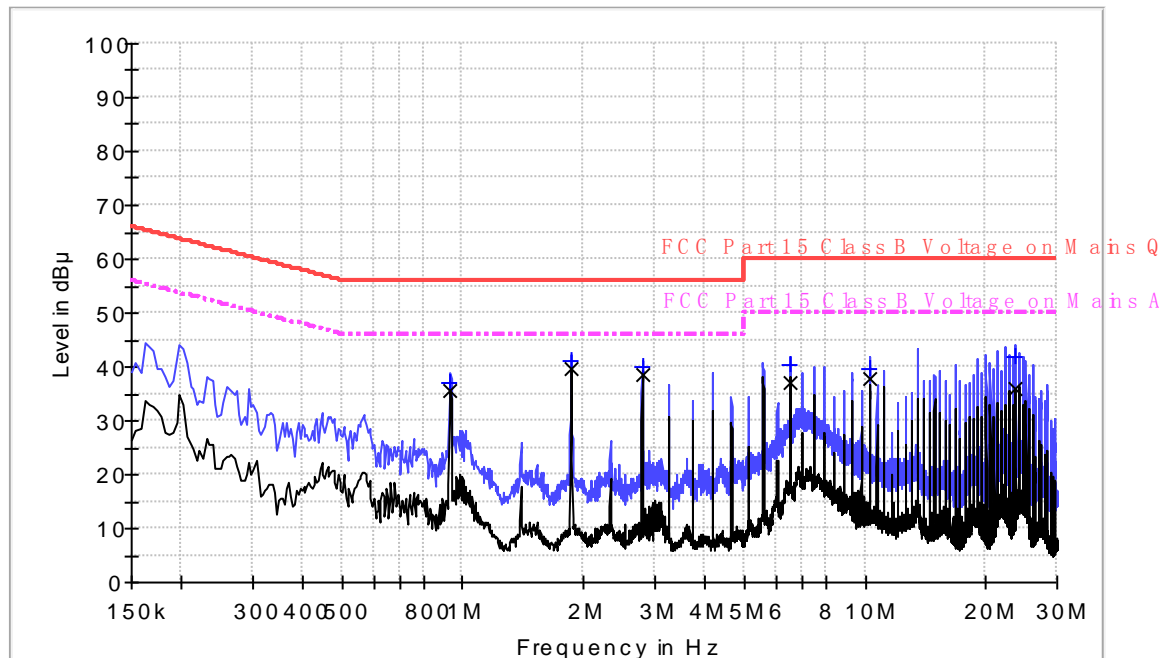

## Result Table QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.930000	37.2	9.000	N	9.7	18.8	56.0
1.862000	41.0	9.000	N	9.7	15.0	56.0
2.794000	39.9	9.000	N	9.7	16.1	56.0
6.518000	40.2	9.000	N	9.8	19.8	60.0
10.246000	39.7	9.000	N	9.9	20.3	60.0
23.738000	41.9	9.000	N	10.5	18.1	60.0

## Result Table AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.930000	35.5	9.000	N	9.7	10.5	46.0
1.862000	39.6	9.000	N	9.7	6.4	46.0
2.794000	38.4	9.000	N	9.7	7.6	46.0
6.518000	37.2	9.000	N	9.8	12.8	50.0
10.246000	37.8	9.000	N	9.9	12.2	50.0
23.738000	35.9	9.000	N	10.5	14.1	50.0



## **EXHIBIT 4**

### **EQUIPMENT PHOTOGRAPHS**

#### 4.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

## **EXHIBIT 5**

### **PRODUCT LABELLING**

## 5.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

## **EXHIBIT 6**

### **TECHNICAL SPECIFICATIONS**

## 6.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

# **EXHIBIT 7**

## **INSTRUCTION MANUAL**

## 7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.



## **EXHIBIT 8**

### **MISCELLANEOUS INFORMATION**

## 8.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

## 8.1 Bandedge Plot

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bandedge.pdf. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

### Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

#### **(i) Lower channel 2402MHz:**

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 97.1 \text{ dB}\mu\text{v/m} - 35.6 \text{ dB} \\ &= 61.5 \text{ dB}\mu\text{v/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 85.9 \text{ dB}\mu\text{v/m} - 35.6 \text{ dB} \\ &= 50.3 \text{ dB}\mu\text{v/m} \end{aligned}$$

#### **(ii) Upper channel 2480MHz:**

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 89.2 \text{ dB}\mu\text{v/m} - 46.6 \text{ dB} \\ &= 42.6 \text{ dB}\mu\text{v/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 76.9 \text{ dB}\mu\text{v/m} - 46.6 \text{ dB} \\ &= 30.3 \text{ dB}\mu\text{v/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB $\mu$ v/m (Peak Limit) and 54dB $\mu$ v/m (Average Limit).

**8.1 Bandedge Plot (cont'd)**

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.1 Bandwidth

## 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period ( $T_{\text{eff}}$ ) is approximately 625 $\mu$ s for Bluetooth. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

### 8.3 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter, 12mm in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average measurements were made with measurement instrumentation employing an average detector function using a minimum resolution bandwidth of 1 MHz.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

### 8.3 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

## **EXHIBIT 9**

### **CONFIDENTIALITY REQUEST**



## 9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

## **EXHIBIT 10 TEST EQUIPMENT LIST**

## 10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	14-Sep-2018	14-Sep-2019
SZ185-01	EMI Receiver	R&S	ESCI	100547	24-Jan-2018	24-Jan-2019
SZ061-08	Horn Antenna	ETS	3115	00092346	14-Sep-2018	14-Sep-2019
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	11-May-2018	11-May-2019
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	5-Jun-2018	5-Jun-2019
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	24-Jan-2018	24-Jan-2019
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIAL	RG 213U	--	12-Jul-2018	12-Jan-2019
SZ062-05	RF Cable	RADIAL	0.04-26.5GHz	--	31-Aug-2018	28-Feb-2019
SZ062-12	RF Cable	RADIAL	0.04-26.5GHz	--	31-Aug-2018	28-Feb-2019
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	5-Jun-2018	5-Jun-2019
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	26-Oct-2018	26-Oct-2019
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	26-Oct-2018	26-Oct-2019
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2019
SZ062-16	RF Cable	HUBER+SUHNER	CBL2-BN-1m	110127-2231000	29-Oct-2018	29-Oct-2019

\*\*\*\*\* End of Report \*\*\*\*\*