


# Human Exposure Report

**Application No.:** SZEM1908017315CR  
**Applicant:** SHENZHEN DNS INDUSTRIES CO., LTD.  
**Address of Applicant:** 23/F Building A, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian, shenzhen, 518026 China  
**Manufacturer:** SHENZHEN DNS INDUSTRIES CO., LTD.  
**Address of Manufacturer:** 23/F Building A, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian, Shenzhen, China  
**Factory:** HUIZHOU D&S CABLE CO., LTD.  
**Address of Factory:** LONGJIN DONGJIANG INDUSTRY ZONE, SHUIKOU, HUICHENG, HUIZHOU, GUANGDONG, CHINA  
**Equipment Under Test (EUT):**  
**EUT Name:** WIRELESS CHARGER  
**Model No.:** WD-241B, CRC#2046770 ♣  
 ♣ Please refer to section 3.2 of this report which indicates which model was actually tested and which were electrically identical.  
**Trade mark:** DNS, omars, mbest, power zone, NOVVO  
**FCC ID:** ZBCWD-241B  
**Standards:** 47 CFR PART 1, Subpart I, Section 1.1310  
 47 CFR PART 2, Subpart J, Section 2.1091  
**Date of Receipt:** 2019-08-09  
**Date of Test:** 2019-08-14 to 2019-09-27  
**Date of Issue:** 2019-10-08

<b>Test Result :</b>	<b>Pass*</b>
----------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above

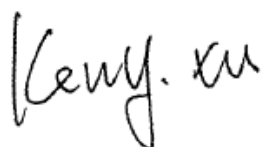

Keny Xu  
EMC Laboratory Manager





<i>Revision Record</i>				
<b>Version</b>	<b>Chapter</b>	<b>Date</b>	<b>Modifier</b>	<b>Remark</b>
01		2019-10-08		Original

<b>Authorized for issue by:</b>			
			
		<hr/>	
		<b>Peter Geng /Project Engineer</b>	
			
		<hr/>	
		<b>Eric Fu /Reviewer</b>	



## 2 Contents

1	COVER PAGE .....	1
2	CONTENTS .....	3
3	GENERAL INFORMATION .....	4
3.1	DETAILS OF E.U.T. ....	4
3.2	DESCRIPTION OF SUPPORT UNITS .....	4
3.3	TEST LOCATION .....	5
3.4	TEST FACILITY.....	5
3.5	DEVIATION FROM STANDARDS.....	5
3.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	5
4	EQUIPMENTS USED DURING TEST.....	6
5	TEST RESULTS.....	7
5.1	RF EXPOSURE TEST .....	7
5.1.1	E.U.T. Operation.....	7
6	PHOTOGRAPHS- RF EXPOSURE SETUP .....	9



### 3 General Information

#### 3.1 Details of E.U.T.

Power supply:	Input: DC 5V/2A, DC 9V/1.67A Output: DC 5V/1A, DC 9V/1.1A
Operation frequency	111.54kHz-162.02kHz
Modulation type:	Load modulation
Antenna type:	Inductive loop coil antenna
Remark:	1) Tests were conducted in both load modes and the worst case(10W) is reported only. 2) The device contains two inductive coils built-in, vertical and horizontal, tests were conducted in both condition and the worst case(vertical) is reported only.

#### 3.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	Apple	A1357 W010A051	REF. No.SEA0500
Adapter	SAMSUNG	EP-TA200	R37J8YA7W71DK3
Adapter(for radiated emission)	LeTV	EQ-24BCN	65201C44220
Micro USB Cable	PHILIPS	SWR2101	REF. No.SEA0700
SAMSUNG Galaxy S8	SAMSUNG	SM-G9500	R28J9140LPB

#### Declaration of EUT Family Grouping:

Model No.: WD-241B, CRC#2046770

Only the model WD-241B was tested, since the electrical circuit design, layout, components used, internal wiring and functions were identical for the above models, with only difference on the model.



### 3.3 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 3.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

### 3.5 Deviation from Standards

None.

### 3.6 Abnormalities from Standard Conditions

None.



## 4 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Due date
1	Shielding Room	SAEMC	MSR733	SEM001-09	2020-05-09
2	Electric and Magnetic Field Analyzer	Narda	EHP-50F	EMC092	2020-05-06



## 5 Test Results

### 5.1 RF Exposure test

Test Requirement: 47 CFR PART 1, Subpart I, Section 1.1310

Measurement Distance: 15cm

Limit:

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz  
 \*=Plane-wave equivalent power density  
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

#### 5.1.1 E.U.T. Operation

##### Operating Environment:

Temperature: 24.0 °C      Humidity: 52 % RH      Atmospheric Pressure: 1015 mbar

##### EUT Operation:

This device has been tested with mobile phone at zero charge, intermediate charge, and full charge.



**5.1.2 Measurement Data**

**Output Voltage=DC 9V; The max output power =10W**

**Magnetic Field Emissions**

Operation frequency	Test Distance (cm)	Test Position	Probe Measure Result (A/m)	50% Limit (A/m)
141 kHz	15	Side 1	0.1138	0.815
		Side 2	0.1882	0.815
		Side 3	0.1264	0.815
		Side 4	0.0659	0.815
		Top	0.0983	0.815

**Mobile phone has been charge at zero charge, intermediate charge, and full charge.**


**Magnetic Field Emissions**

Operation frequency	Test Distance (cm)	Test Position	Probe Measure Result(A/m)			50%Limit (A/m)
			zero charge	intermediate charge	full charge	
141 kHz	15	Side 1	0.1254	0.1133	0.0998	0.815
		Side 2	0.1982	0.1836	0.1693	0.815
		Side 3	0.1359	0.1415	0.1083	0.815
		Side 4	0.0793	0.0637	0.0512	0.815
		Top	0.1102	0.0986	0.0841	0.815





## 6 Photographs- RF exposure setup

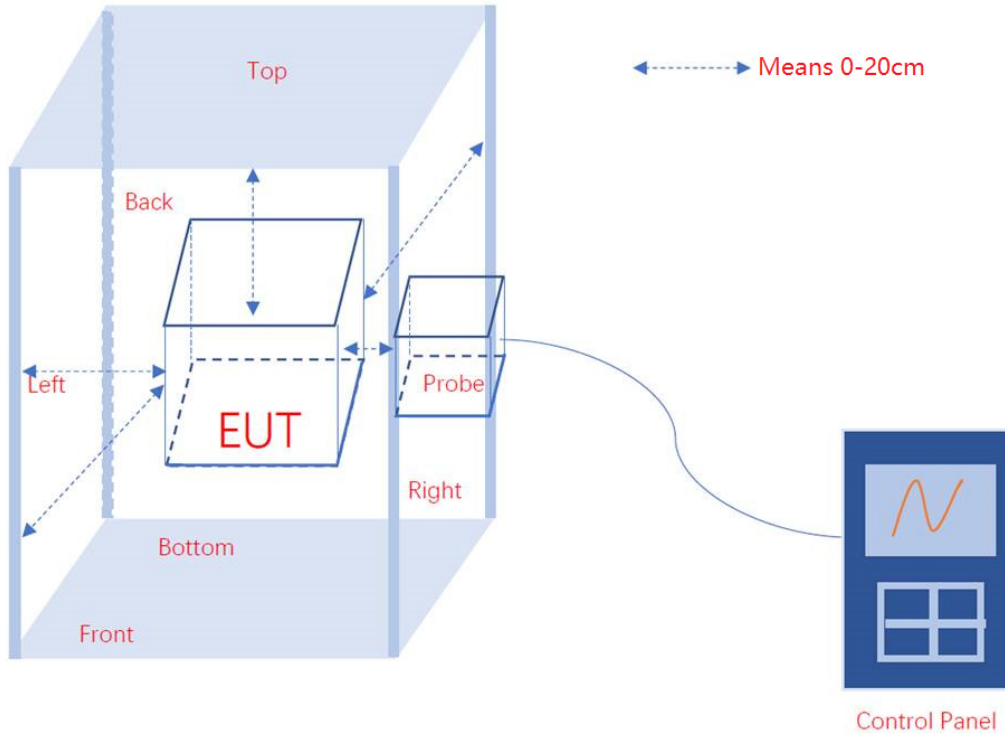

- End of the Report -

