



Test Report No.: RF200522S002



# TEST REPORT

Applicant	SHENZHEN DNS INDUSTRIES CO., LTD.
Address	23/F Building A, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian, Shenzhen, China

Manufacturer or Supplier	SHENZHEN DNS INDUSTRIES CO., LTD.
Address	23/F Building A, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian, Shenzhen, China
Product	Wireless Headset
Brand Name	DNS
Model	WX-316A
Additional Model & Model Difference	N/A
Date of tests	May 29, 2020~ Jun. 16, 2020

the tests have been carried out according to the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Evans He Project Engineer / EMC Department	Approved by David Huang Assistant Manager / EMC Department
	Date: Jun. 17, 2020

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



# TABLE OF CONTENTS

- RELEASE CONTROL RECORD ..... 5**
- 1 SUMMARY OF TEST RESULTS..... 6**
- 2 MEASUREMENT UNCERTAINTY ..... 6**
- 3 GENERAL INFORMATION ..... 7**
  - 3.1 GENERAL DESCRIPTION OF EUT..... 7
  - 3.2 DESCRIPTION OF TEST MODES..... 8
    - 3.2.1. CONFIGURATION OF SYSTEM UNDER TEST ..... 9
    - 3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 9
  - 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....11
  - 3.4 DESCRIPTION OF SUPPORT UNITS.....11
- 4 TEST TYPES AND RESULTS.....11**
  - 4.1. CONDUCTED EMISSION MEASUREMENT ..... 12
    - 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT ..... 12
    - 4.1.2 TEST INSTRUMENTS ..... 12
    - 4.1.3 TEST PROCEDURES ..... 13
    - 4.1.4 DEVIATION FROM TEST STANDARD ..... 13
    - 4.1.5 TEST SETUP ..... 14
    - 4.1.6 EUT OPERATING CONDITIONS ..... 14
    - 4.1.7 TEST RESULTS..... 15
  - 4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT ..... 17
    - 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT ..... 17
    - 4.2.2 TEST INSTRUMENTS ..... 18
    - 4.2.3 TEST PROCEDURES ..... 19
    - 4.2.4 DEVIATION FROM TEST STANDARD ..... 20
    - 4.2.5 TEST SETUP ..... 20
    - 4.2.6 EUT OPERATING CONDITIONS ..... 21
    - 4.2.7 TEST RESULTS..... 22
  - 4.3 NUMBER OF HOPPING FREQUENCY USED..... 30
    - 4.3.1 LIMIT OF HOPPING FREQUENCY USED ..... 30
    - 4.3.2 TEST SETUP ..... 30
    - 4.3.3 TEST INSTRUMENTS ..... 30
    - 4.3.4 TEST PROCEDURES ..... 31
    - 4.3.5 DEVIATION FROM TEST STANDARD ..... 31



4.3.6 TEST RESULTS..... 31

4.4 DWELL TIME ON EACH CHANNEL ..... 33

4.4.1 LIMIT OF DWELL TIME USED ..... 33

4.4.2 TEST SETUP ..... 33

4.4.3 TEST INSTRUMENTS ..... 33

4.4.4 TEST PROCEDURES ..... 33

4.4.5 DEVIATION FROM TEST STANDARD ..... 34

4.4.6 TEST RESULTS..... 34

4.5 CHANNEL BANDWIDTH..... 35

4.5.1 LIMITS OF CHANNEL BANDWIDTH ..... 37

4.5.2 TEST SETUP ..... 37

4.5.3 TEST INSTRUMENTS ..... 37

4.5.4 TEST PROCEDURE ..... 37

4.5.5 DEVIATION FROM TEST STANDARD ..... 37

4.5.6 EUT OPERATING CONDITION..... 37

4.5.7 TEST RESULTS..... 38

4.6 HOPPING CHANNEL SEPARATION ..... 42

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION ..... 42

4.6.2 TEST SETUP ..... 42

4.6.3 TEST INSTRUMENTS ..... 42

4.6.4 TEST PROCEDURES ..... 42

4.6.5 DEVIATION FROM TEST STANDARD ..... 42

4.6.6 TEST RESULTS..... 43

4.7 CONDUCTED OUTPUT POWER ..... 47

4.7.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT..... 47

4.7.2 TEST SETUP ..... 47

4.7.3 TEST INSTRUMENTS ..... 47

4.7.4 TEST PROCEDURES ..... 47

4.7.5 DEVIATION FROM TEST STANDARD ..... 47

4.7.6 EUT OPERATING CONDITION..... 47

4.7.7 TEST RESULTS..... 48

4.8 OUT OF BAND EMISSION MEASUREMENT ..... 49

4.8.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT ..... 49

4.8.2 TEST INSTRUMENTS ..... 49

4.8.3 TEST PROCEDURE ..... 49

4.8.4 DEVIATION FROM TEST STANDARD ..... 49

4.8.5 EUT OPERATING CONDITION..... 49



**BUREAU  
VERITAS**

**Test Report No.: RF200522S002**

4.8.6	TEST RESULTS.....	49
<b>5</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>56</b>
<b>6</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....</b>	<b>57</b>



Test Report No.: RF200522S002

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF200522S002	Original release	Jun. 17, 2020



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(d)& 15.209	Transmitter Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

# 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.70dB
	30MHz ~ 1GMHz	3.74dB
	1GHz ~ 18GHz	4.66dB
	18GHz ~ 40GHz	4.67dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Wireless Headset
<b>MODEL NO.</b>	WX-316A
<b>ADDITIONAL MODEL</b>	N/A
<b>FCC ID</b>	ZBCWX316A
<b>POWER SUPPLY</b>	DC 3.7V from Battery or DC 5V from USB port
<b>MODULATION TECHNOLOGY</b>	FHSS
<b>MODULATION TYPE</b>	GFSK, $\pi/4$ DQPSK
<b>OPERATING FREQUENCY</b>	2402MHz~2480MHz
<b>NUMBER OF CHANNEL</b>	79
<b>PEAK OUTPUT POWER</b>	4.532mW (Max. Measured)
<b>ANTENNA TYPE</b>	PCB Antenna, -0.58dBi Gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 200522S002) for detailed product photo.



### 3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		





3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X axis for radiated emission.

Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	Powered By Fully Battery

Where RE<1G: Radiated Emission below 1GHz  
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz  
APCM: Antenna Port Conducted Measurement

**RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	39	FHSS	GFSK	DH5

For the test results, only the worst case was shown in test report.

**RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
	0 to 78	0, 39, 78	FHSS	π/4 DQPSK	2DH5



**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	Hopping	FHSS	GFSK	DH5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
	0 to 78	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	25deg. C, 55%RH	DC 3.7V from Fully Battery	Aaron Liang
RE≥1G	25deg. C, 55%RH	DC 3.7V from Fully Battery	Aaron Liang
PLC	25deg. C, 55%RH	DC 3.7V from Fully Battery	Aaron Liang
APCM	25deg. C, 60%RH	DC 3.7V from Fully Battery	Aaron Liang



**BUREAU  
VERITAS**

Test Report No.: RF200522S002

### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. Section 15.247**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

### **3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit without any other necessary accessory or support units.



## 4 TEST TYPES AND RESULTS

### 4.1. CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 12,21	Mar. 11,21
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 12,21	Mar. 11,21
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 12,21	Mar. 11,21
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Sep. 24,20	Sep. 23,21
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

#### 4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

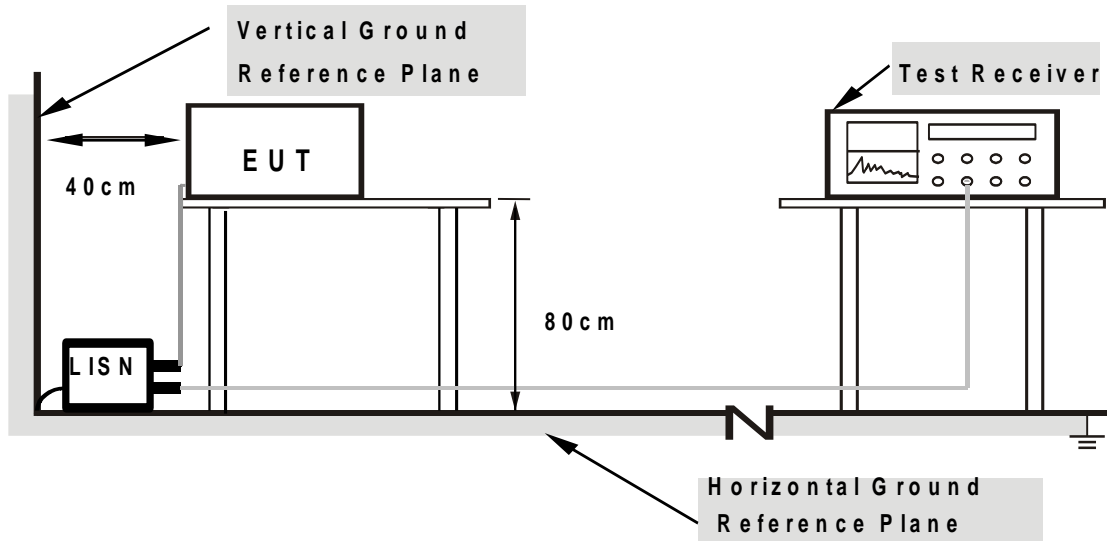

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




### 4.1.7 TEST RESULTS

**CONDUCTED WORST-CASE DATA:**

<b>PHASE</b>	Line	<b>6dB BANDWIDTH</b>	9kHz
--------------	------	----------------------	------

NO.	P/L	FREQUENCY (MHZ)	READING (DBUV)	DETECTOR	CORRECTED (DB)	RESULT (DBUV)	LIMIT (DBUV)	MARGIN (DB)
1	L1	0.5049	25.42	QP	10.10	35.52	56.00	-20.48
<b>2</b>	<b>L1</b>	<b>0.5049</b>	<b>16.93</b>	<b>AVG</b>	<b>10.10</b>	<b>27.03</b>	<b>46.00</b>	<b>-18.97</b>
3	L1	1.3434	15.60	QP	10.14	25.74	56.00	-30.26
4	L1	1.3434	7.57	AVG	10.14	17.71	46.00	-28.29
5	L1	2.0610	13.25	QP	10.15	23.40	56.00	-32.60
6	L1	2.0610	5.37	AVG	10.15	15.52	46.00	-30.48
7	L1	2.9541	11.65	QP	10.16	21.81	56.00	-34.19
8	L1	2.9541	3.68	AVG	10.16	13.84	46.00	-32.16
9	L1	4.6302	8.09	QP	10.19	18.28	56.00	-37.72
10	L1	4.6302	0.92	AVG	10.19	11.11	46.00	-34.89
11	L1	20.4837	10.72	QP	10.41	21.13	60.00	-38.87
12	L1	20.4837	2.71	AVG	10.41	13.12	50.00	-36.88

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

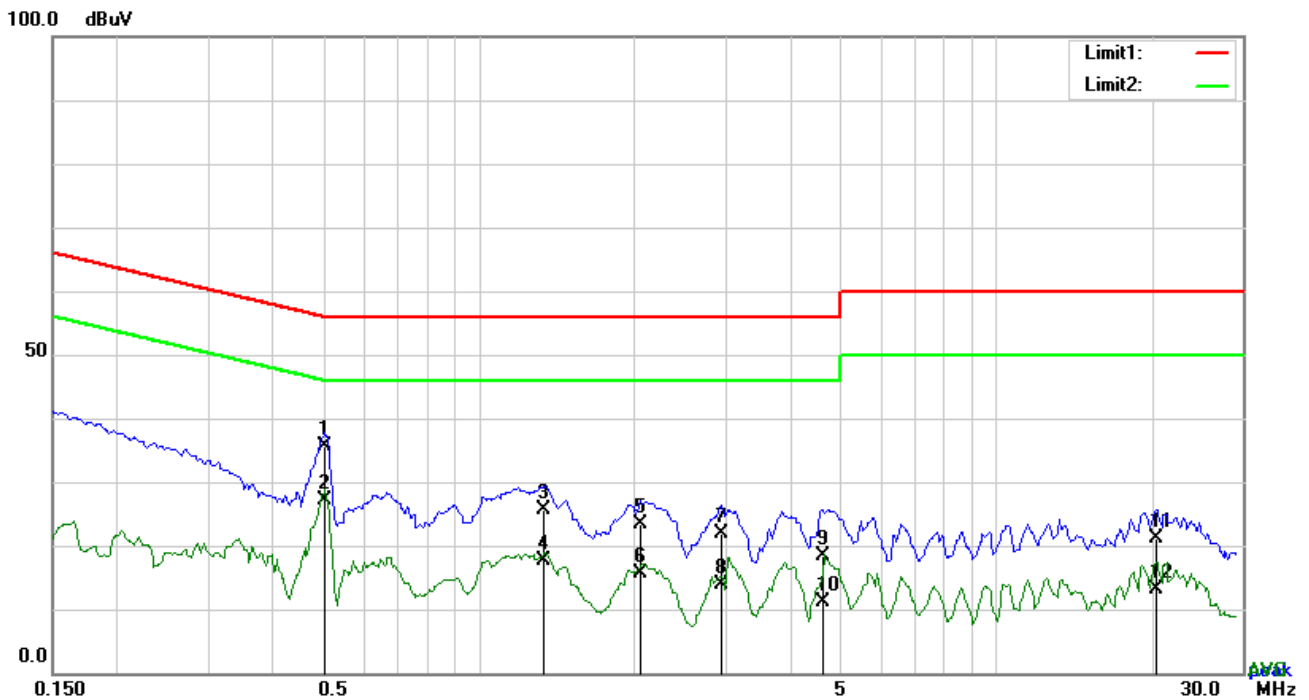




PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

NO.	P/L	FREQUENCY (MHZ)	READING (DBUV)	DETECTOR	CORRECTED (DB)	RESULT (DBUV)	LIMIT (DBUV)	MARGIN (DB)
1	N	0.5010	19.78	QP	10.12	29.90	56.00	-26.10
2	N	0.5010	10.26	AVG	10.12	20.38	46.00	-25.62
3	N	0.7662	6.73	QP	10.13	16.86	56.00	-39.14
4	N	0.7662	-2.06	AVG	10.13	8.07	46.00	-37.93
5	N	1.3590	10.96	QP	10.16	21.12	56.00	-34.88
6	N	1.3590	1.50	AVG	10.16	11.66	46.00	-34.34
7	N	3.0273	6.47	QP	10.18	16.65	56.00	-39.35
8	N	3.0273	-1.75	AVG	10.18	8.43	46.00	-37.57
9	N	11.8764	4.53	QP	10.28	14.81	60.00	-45.19
10	N	11.8764	-2.38	AVG	10.28	7.90	50.00	-42.10
11	N	20.4486	9.99	QP	10.38	20.37	60.00	-39.63
12	N	20.4486	-2.61	AVG	10.38	7.77	50.00	-42.23

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

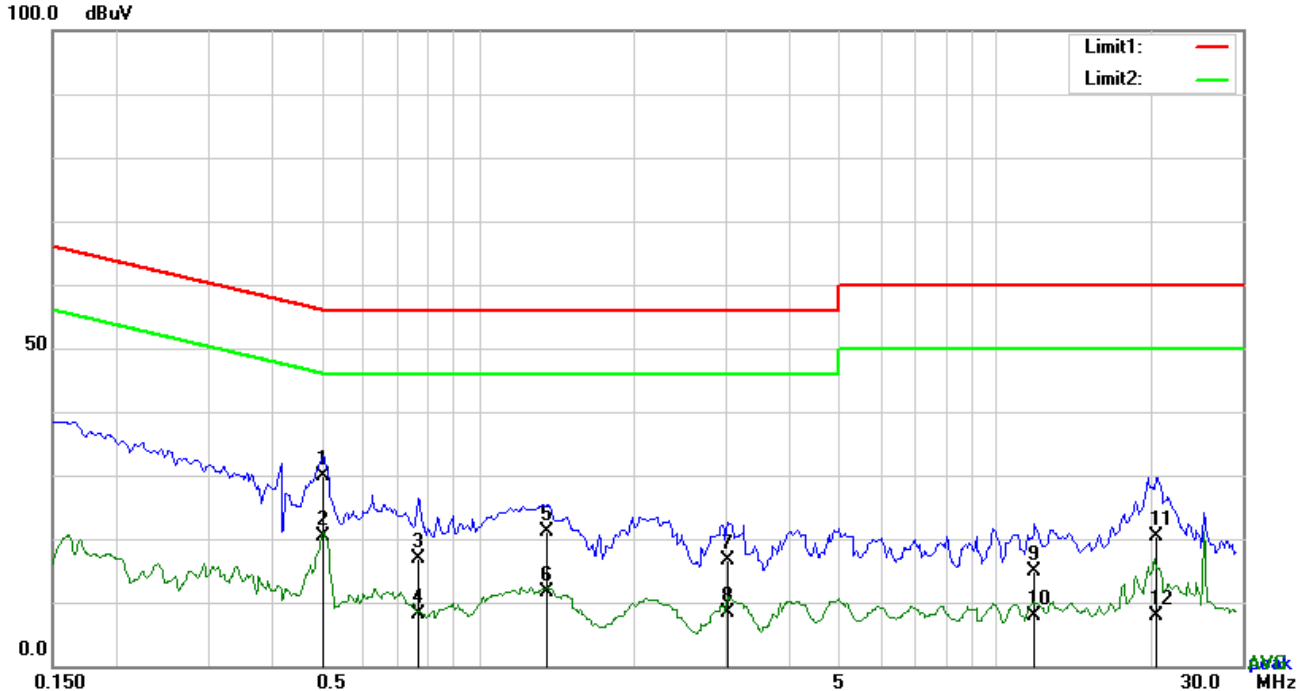



## 4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESL6	1300.5001K06 -100262-eQ	Mar. 24,20	Mar. 24,21
Bilog Antenna	Sunol Sciences	JB6	A110712	Apr. 08, 20	Apr. 07, 21
Active Antenna	CMO-POWER	AL-130	121031	Mar. 27, 20	Mar. 26, 21
Signal Amplifier	HP	8447E	443008	Mar. 24,20	Mar. 24,21
Spectrum	Agilent	E4446A	MY46180622	May. 08, 20	May. 07, 21
MXA signal analyzer	Agilent	N9020A	MY49100060	Mar. 24, 20	Mar. 24, 21
Horn Antenna	COM-POWER	HAH-118	71259	Apr. 17, 20	Apr. 17, 21
Horn Antenna	COM-POWER	HAH-118	71283	Mar. 20, 20	Mar. 19, 21
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170147	Jun. 30, 19	Jun. 29, 20
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170242	Jun. 30, 19	Jun. 29, 20
AMPLIFIER	EM Electornic Corporation	EM01G26G	60613	Mar. 24, 20	Mar. 24, 21
AMPLIFIER	Emc Instruments Corporation	Emc012645	980077	Jan. 04, 20	Jan. 03,21
3m Semi-anechoic Chamber	SAEMC	9m*6m*6m	N/A	Oct. 18,18	Oct. 17,21
Test Software	EZ-EMC	ICP-03A1	N/A	N/A	N/A

**NOTE:**

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 535293.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.




#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.2.5 TEST SETUP

##### Below 30MHz test setup

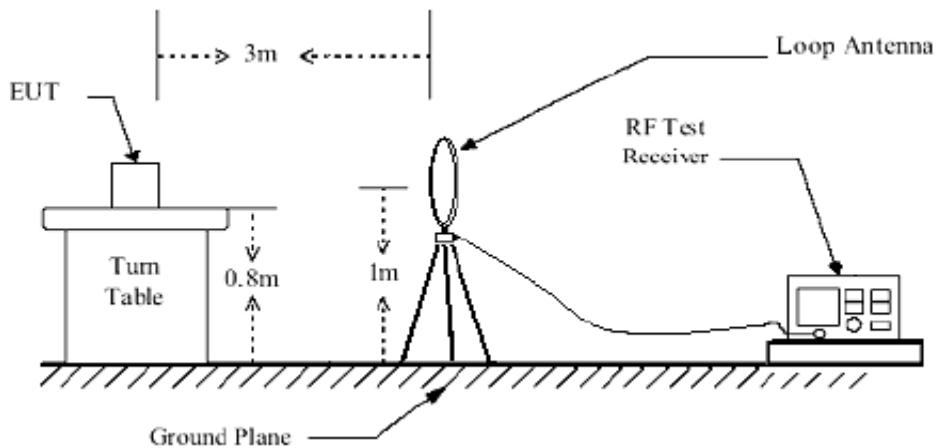


##### Below 1GHz test setup

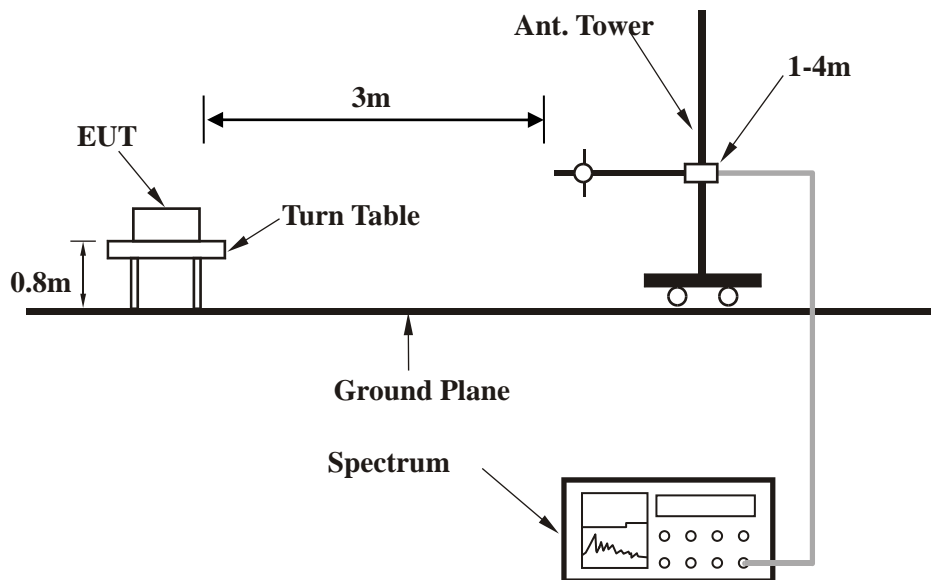

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

## Above 1GHz test setup

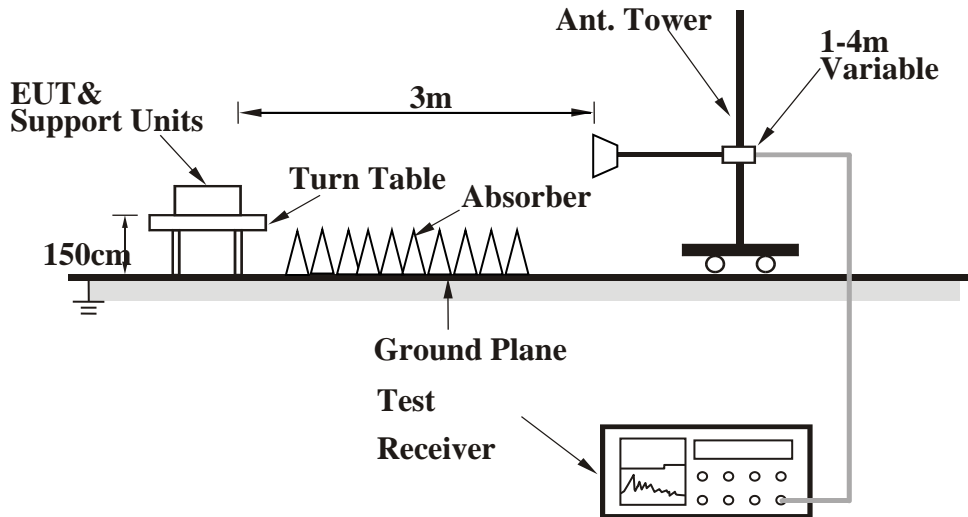

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



### 4.2.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:


#### GFSK

<b>CHANNEL</b>	Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m										
No.	Frequency (MHz)	Reading (dBuV/m)	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	35.4993	25.24	16.94	22.25	0.16	20.09	40.00	-19.91	100	318
2	100.5806	27.15	9.73	22.32	0.82	15.38	43.50	-28.12	100	88
3	239.9873	26.37	11.82	22.31	1.60	17.48	46.00	-28.52	100	326
4	312.1794	28.37	13.59	22.26	1.75	21.45	46.00	-24.55	100	230
5	383.9318	29.04	15.22	22.05	1.90	24.11	46.00	-21.89	100	299
6	721.7259	26.17	20.30	21.31	2.44	27.60	46.00	-18.40	100	195

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

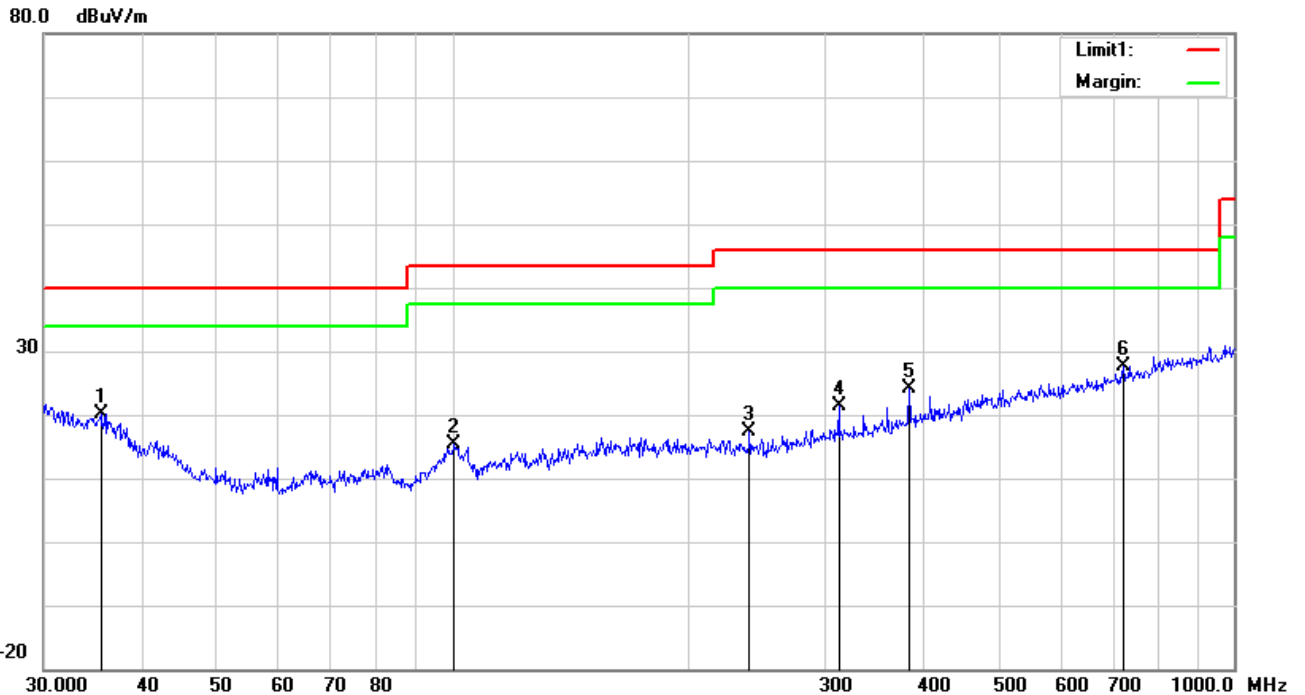




<b>CHANNEL</b>	Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m										
No.	Frequency (MHz)	Reading (dBuV/m)	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	31.2893	27.38	19.59	22.27	0.14	24.84	40.00	-15.16	100	30
2	99.5281	27.64	9.61	22.32	0.82	15.75	43.50	-27.75	100	99
3	160.3457	27.99	12.30	22.27	1.32	19.34	43.50	-24.16	100	106
4	374.6226	27.43	14.94	22.08	1.89	22.18	46.00	-23.82	100	335
5	656.5300	29.21	19.48	21.46	2.37	29.60	46.00	-16.40	100	251
6	790.6188	29.77	21.51	21.17	2.54	32.65	46.00	-13.35	100	355

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

80.0 dBuV/m

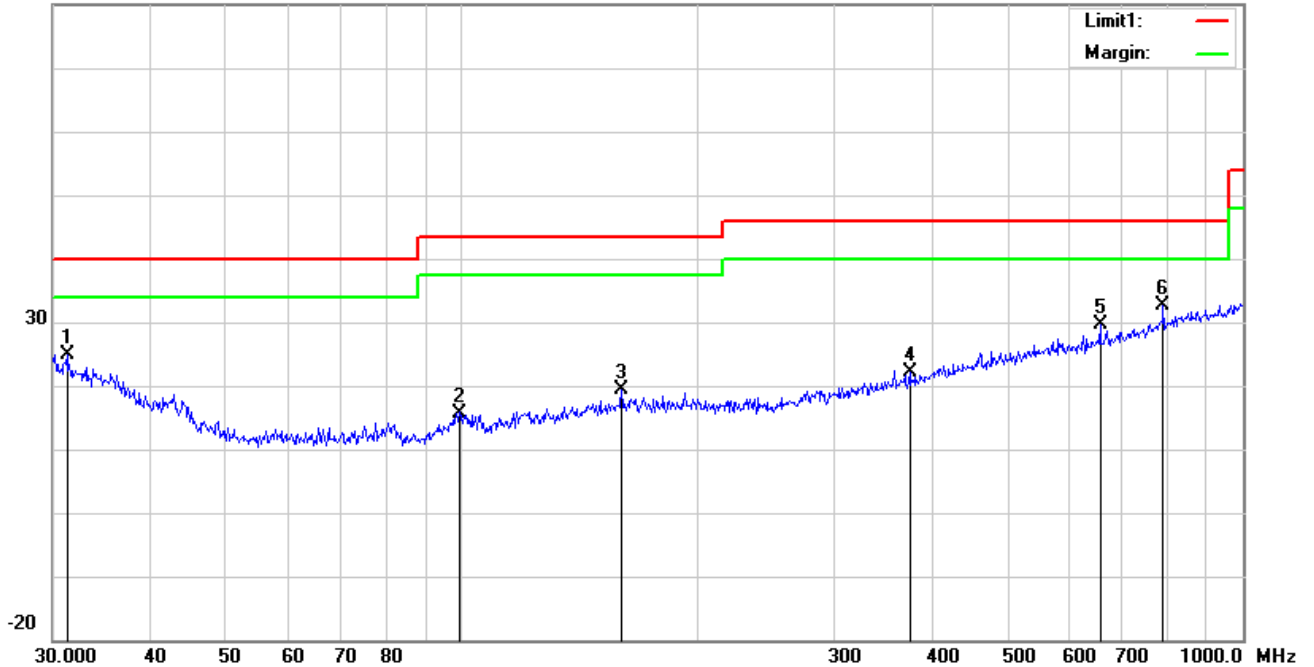



ABOVE 1GHZ DATA

BT\_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390	50.45 PK	74	-23.55	200	150	64.15	-13.7
2	2390	27.95 AV	54	-26.05	200	150	41.65	-13.7
3	*2402	99.75 PK			269	96	113.45	-13.7
4	*2402	77.25 AV			398	96	90.95	-13.7
5	4804	53.32 PK	74	-20.68	113	160	59.7	-6.38
6	4804	30.82 AV	54	-23.18	126	160	37.2	-6.38
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390	49.23 PK	74	-24.77	318	77	62.93	-13.7
2	2390	26.73 AV	54	-27.27	318	77	40.43	-13.7
3	*2402	94.13 PK			171	354	107.83	-13.7
4	*2402	71.63 AV			328	354	85.33	-13.7
5	4804	53.45 PK	74	-20.55	238	53	59.83	-6.38
6	4804	30.95 AV	54	-23.05	266	53	37.33	-6.38

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.





CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441	100.28 PK			289	340	113.98	-13.7
2	*2441	77.78 AV			289	340	91.48	-13.7
3	4882	53.87 PK	74	-20.13	157	112	59.81	-5.94
4	4882	31.37 AV	54	-22.63	157	112	37.31	-5.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441	95.26 PK				336	158	108.96
2	*2441	72.76 AV				336	158	86.46
3	4882	53.62 PK	74	74	-20.38	299	256	59.56
4	4882	31.12 AV	54	54	-22.88	299	256	37.06

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.5	59.55 PK	74	-14.45	335	152	73.25	-13.7
2	2483.5	37.05 AV	54	-16.95	335	152	50.75	-13.7
3	*2480	101.73 PK			151	95	115.43	-13.7
4	*2480	79.23 AV			151	95	92.93	-13.7
5	4960	53.58 PK	74	-20.42	348	134	59.02	-5.44
6	4960	31.08 AV	54	-22.92	348	134	36.52	-5.44
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.5	55.21 PK	74	-18.79	131	275	68.91	-13.7
2	2483.5	32.71 AV	54	-21.29	131	275	46.41	-13.7
3	*2480	96.75 PK			272	230	110.45	-13.7
4	*2480	74.25 AV			272	230	87.95	-13.7
5	4960	53.76 PK	74	-20.24	265	12	59.2	-5.44
6	4960	31.26 AV	54	-22.74	265	12	36.7	-5.44

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



BT\_ π/4 DQPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390	58.61 PK	74	-15.39	128	233	72.31	-13.7
2	2390	36.11 AV	54	-17.89	128	233	49.81	-13.7
3	*2402	100.11 PK			293	351	113.81	-13.7
4	*2402	77.61 AV			215	351	91.31	-13.7
5	4804	53.33 PK	74	-20.67	303	152	59.71	-6.38
6	4804	30.83 AV	54	-23.17	298	152	37.21	-6.38
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390	50.74 PK	74	-23.26	156	281	64.44	-13.7
2	2390	28.24 AV	54	-25.76	156	281	41.94	-13.7
3	*2402	93.33 PK			105	186	107.03	-13.7
4	*2402	70.83 AV			325	186	84.53	-13.7
5	4804	53.23 PK	74	-20.77	397	5	59.61	-6.38
6	4804	30.73 AV	54	-23.27	177	5	37.11	-6.38

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441	100.78 PK			120	42	114.48	-13.7
2	*2441	78.28 AV			120	42	91.98	-13.7
3	4882	53.67 PK	74	-20.33	382	333	59.61	-5.94
4	4882	31.17 AV	54	-22.83	382	333	37.11	-5.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441	95.54 PK			232	208	109.24	-13.7
2	*2441	73.04 AV			232	208	86.74	-13.7
3	4882	53.77 PK	74	-20.23	390	125	59.71	-5.94
4	4882	31.27 AV	54	-22.73	390	125	37.21	-5.94

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.5	56.52 PK	74	-17.48	178	333	70.22	-13.7
2	2483.5	34.02 AV	54	-19.98	178	333	47.72	-13.7
3	*2480	103.33 PK			269	164	117.03	-13.7
4	*2480	80.83 AV			269	164	94.53	-13.7
5	4960	53.35 PK	74	-20.65	291	4	58.79	-5.44
6	4960	30.85 AV	54	-23.15	291	4	36.29	-5.44
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.5	54.61 PK	74	-19.39	387	215	68.31	-13.7
2	2483.5	32.11 AV	54	-21.89	387	215	45.81	-13.7
3	*2480	96.44 PK			246	208	110.14	-13.7
4	*2480	73.94 AV			246	208	87.64	-13.7
5	4960	53.76 PK	74	-20.24	102	292	59.2	-5.44
6	4960	31.26 AV	54	-22.74	102	292	36.7	-5.44

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.




### 4.3 NUMBER OF HOPPING FREQUENCY USED

#### 4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

#### 4.3.2 TEST SETUP

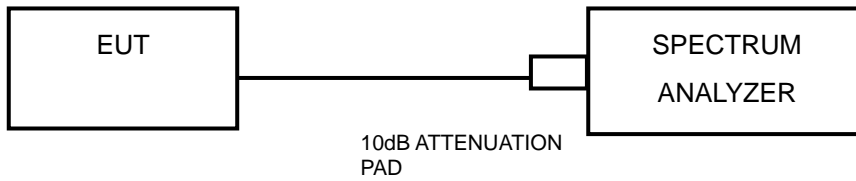

#### 4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 18, 19	Dec. 17, 20
MXA VEXTOR SIGNAL	Agilent	n5182a	MY50140530	Mar. 24,20	Mar. 24,21
MXA signal analyzer	Agilent	n9020a	MY49100060	Mar. 24,20	Mar. 24,21
RF Control Unit	Tonscend	JS0806-2	188060112	Mar. 24,20	Mar. 24,21
Signal Generation	Agilent	E4421B	US40051152	Dec. 18, 19	Dec. 17, 20
DC Power Supply	Agilent	E3640A	MY40004013	Mar. 30,20	Mar. 30,21
Programmable Temperature & Humidity Chamber	Hongjin	HYC-TH-225 DH	DG-180746	Mar. 24,20	Mar. 24,21
Test System	Tonscend	JS 1120-3	N/A	N/A	N/A
Power Splitter	Weinschel	1580-1	TL177	Mar. 27,20	Mar. 27,21

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

#### 4.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

#### 4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.6 TEST RESULTS


There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.




BUREAU VERITAS

Test Report No.: RF200522S002

GFSK

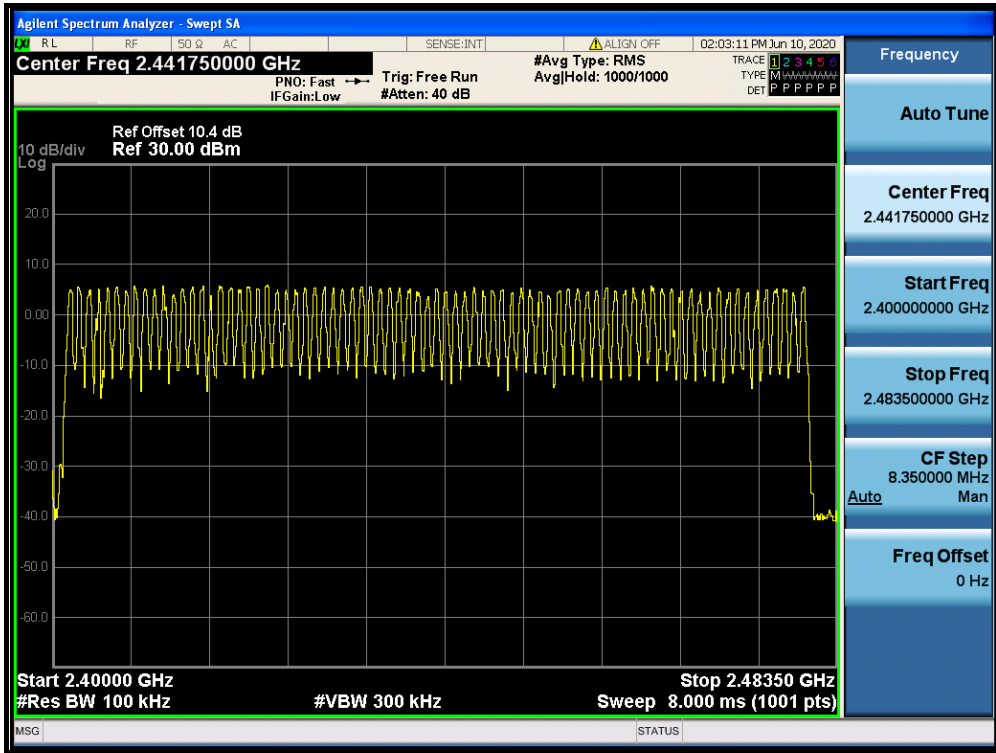

$\pi/4$  DQPSK

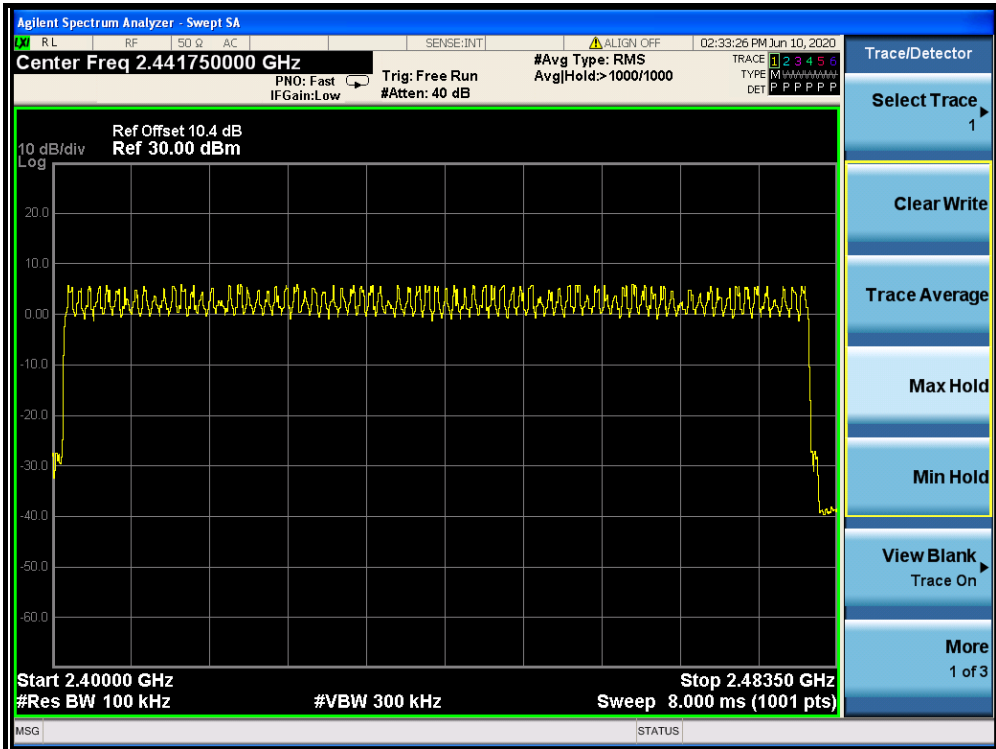

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.sz@bureauveritas.com](mailto:customerservice.sz@bureauveritas.com)




## 4.4 DWELL TIME ON EACH CHANNEL

### 4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.4.2 TEST SETUP

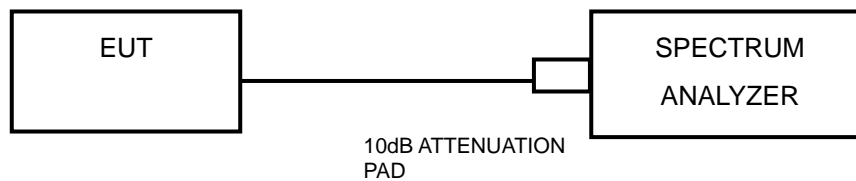

### 4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

### 4.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.6 TEST RESULTS

#### GFSK


Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
DH1	79	31.6	3.16	30	300	0.374	112.20	400	PASS
DH3	79	31.6	3.16	15	150	1.631	244.65	400	PASS
DH5	79	31.6	3.16	12	120	2.879	345.48	400	PASS

#### $\pi/4$ DQPSK


Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
3DH1	79	31.6	3.16	32	320	0.385	123.20	400	PASS
3DH3	79	31.6	3.16	9	90	1.637	147.33	400	PASS
3DH5	79	31.6	3.16	7	70	2.885	201.95	400	PASS

**NOTE:** Test plots of the transmitting time slot are shown on next page.

GFSK

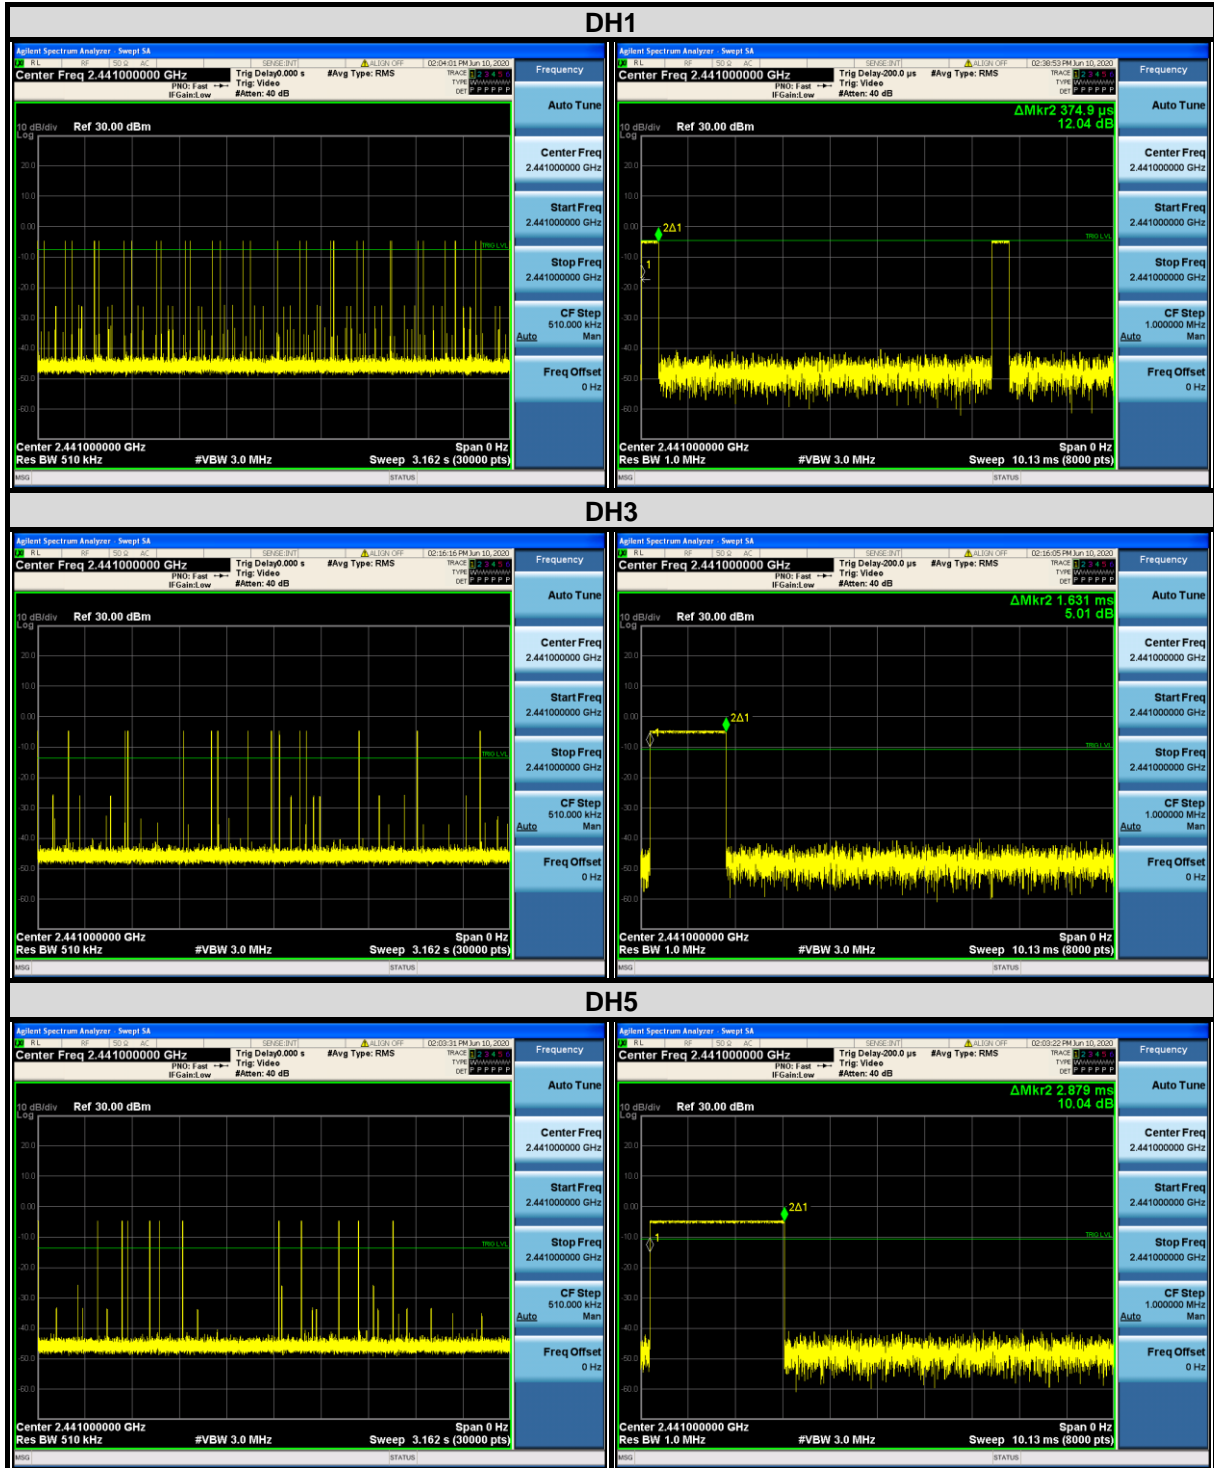

**π/4 DQPSK**

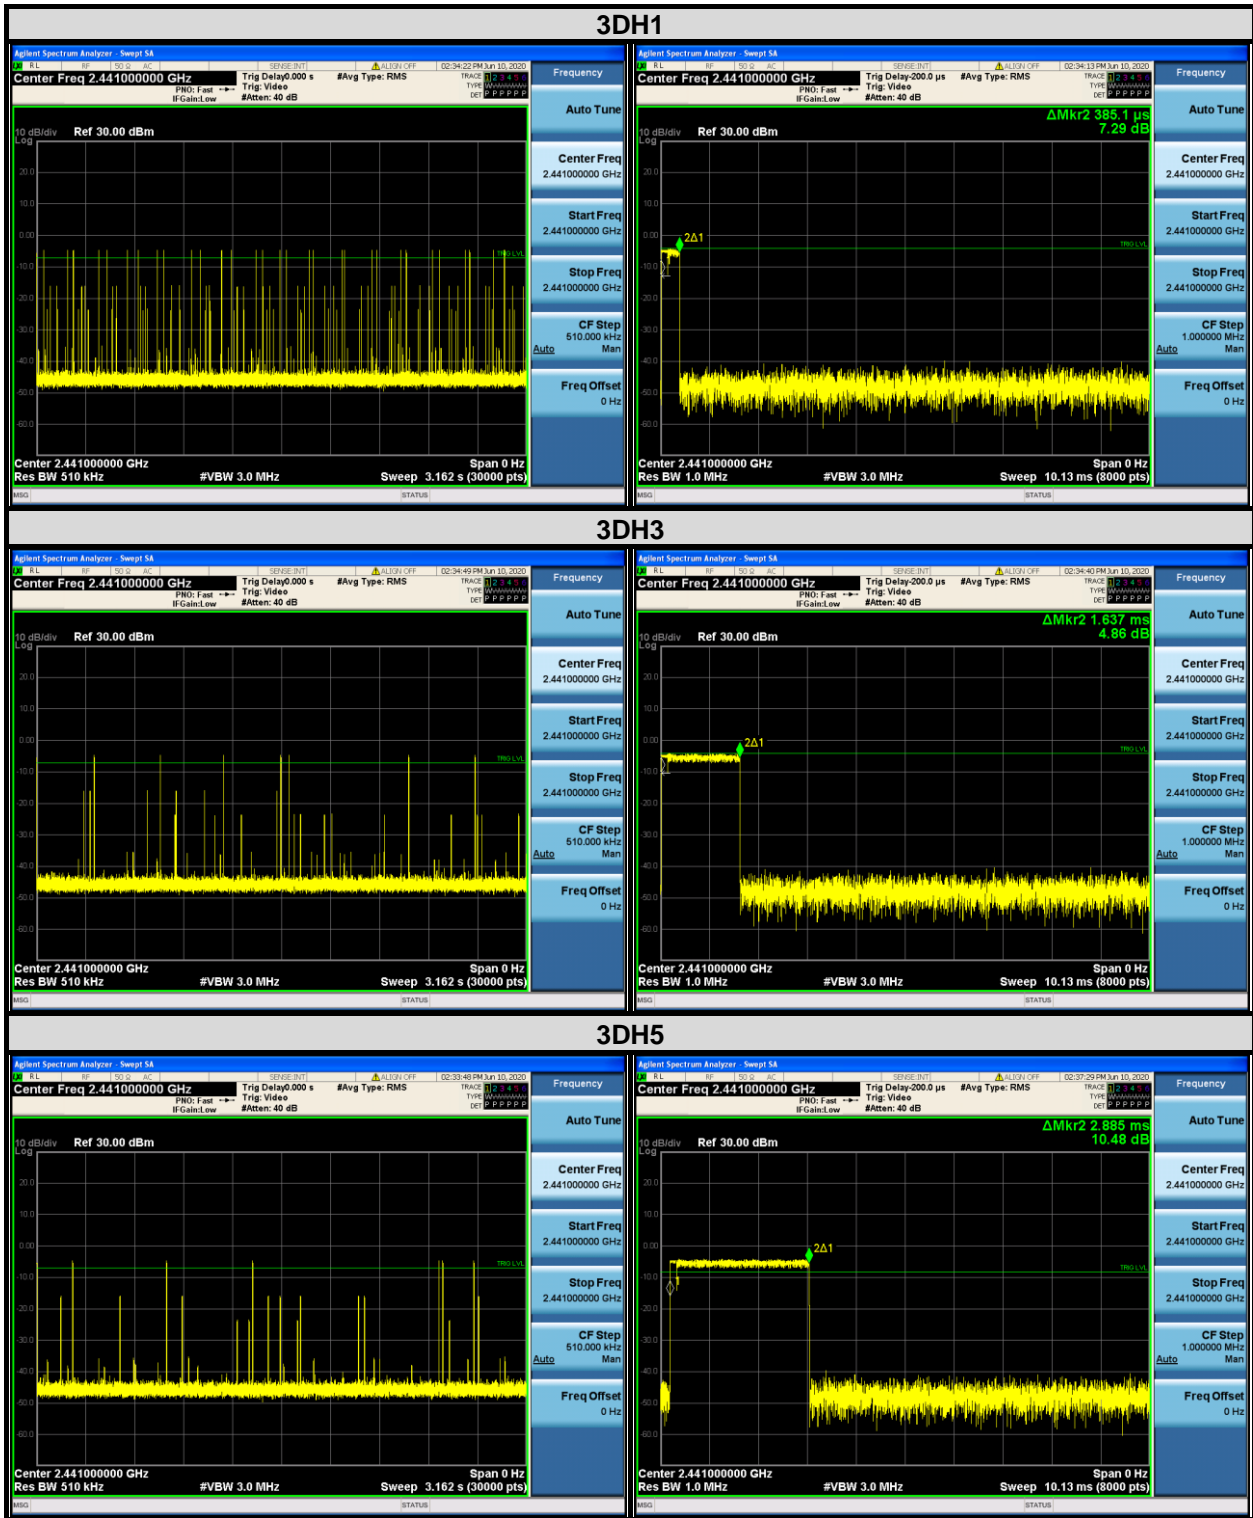




## 4.5 CHANNEL BANDWIDTH

### 4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.5.2 TEST SETUP

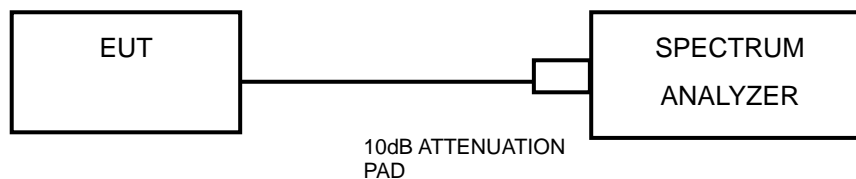

### 4.5.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**BUREAU  
VERITAS**

Test Report No.: RF200522S002

### 4.5.7 TEST RESULTS

#### GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.852
39	2441	0.939
78	2480	0.918

#### CH 0



Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.sz@bureauveritas.com](mailto:customerservice.sz@bureauveritas.com)

CH 39



CH 78





**BUREAU  
VERITAS**

Test Report No.: RF200522S002

**π /4 DQPSK**

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.329
39	2441	1.335
78	2480	1.284

**CH 0**







BUREAU VERITAS

Test Report No.: RF200522S002

CH 39



CH 78



Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.sz@bureauveritas.com](mailto:customerservice.sz@bureauveritas.com)




## 4.6 HOPPING CHANNEL SEPARATION

### 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 4.6.2 TEST SETUP

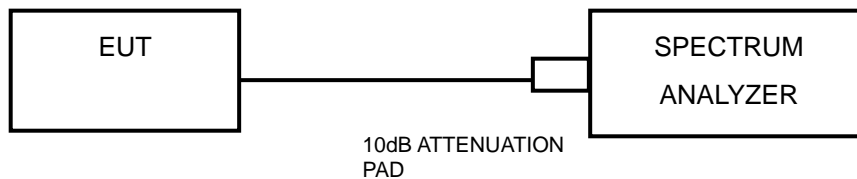

### 4.6.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

### 4.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.



### 4.6.6 TEST RESULTS

#### GFSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.002	0.852	0.852	PASS
39	2441	1.002	0.939	0.939	PASS
78	2480	1.002	0.918	0.918	PASS

#### CH 0





BUREAU VERITAS

Test Report No.: RF200522S002

CH 39



CH 78



Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.sz@bureauveritas.com](mailto:customerservice.sz@bureauveritas.com)



**$\pi/4$  DQPSK**

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.002	1.329	0.89	PASS
39	2441	1.002	1.335	0.89	PASS
78	2480	1.002	1.284	0.86	PASS

**NOTE:** The minimum limit is two-third 20dB bandwidth.

**CH 0**



CH 39



CH 78






## 4.7 CONDUCTED OUTPUT POWER

### 4.7.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

### 4.7.2 TEST SETUP

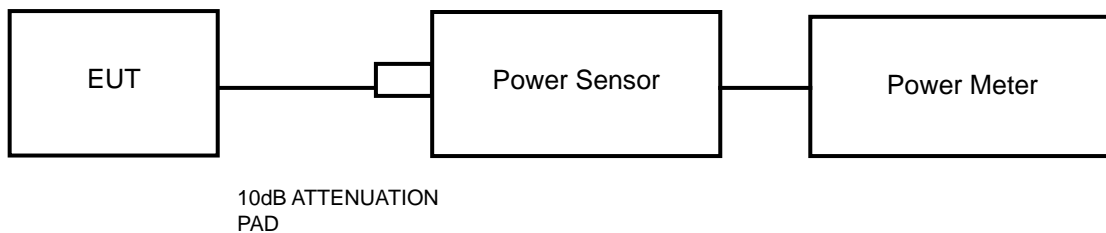

### 4.7.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

### 4.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

### 4.7.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 4.7.7 TEST RESULTS

#### MAXIMUM PEAK OUTPUT POWER

##### GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	5.956	3.941	1000	PASS
39	2441	6.001	3.982	1000	PASS
78	2480	5.894	3.885	1000	PASS

##### $\pi/4$ DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	6.533	4.501	125	PASS
39	2441	6.563	<b>4.532</b>	125	PASS
78	2480	6.495	4.462	125	PASS

#### AVERAGE OUTPUT POWER(FOR REFERENCE)

##### GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	<b>5.21</b>	3.319
39	2441	5.22	3.327
78	2480	5.20	3.311

##### $\pi/4$ DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	3.36	2.168
39	2441	<b>3.47</b>	2.223
78	2480	3.45	2.213



## 4.8 OUT OF BAND EMISSION MEASUREMENT

### 4.8.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

### 4.8.2 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

### 4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

### 4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 4.8.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.



BUREAU VERITAS

Test Report No.: RF200522S002

GFSK

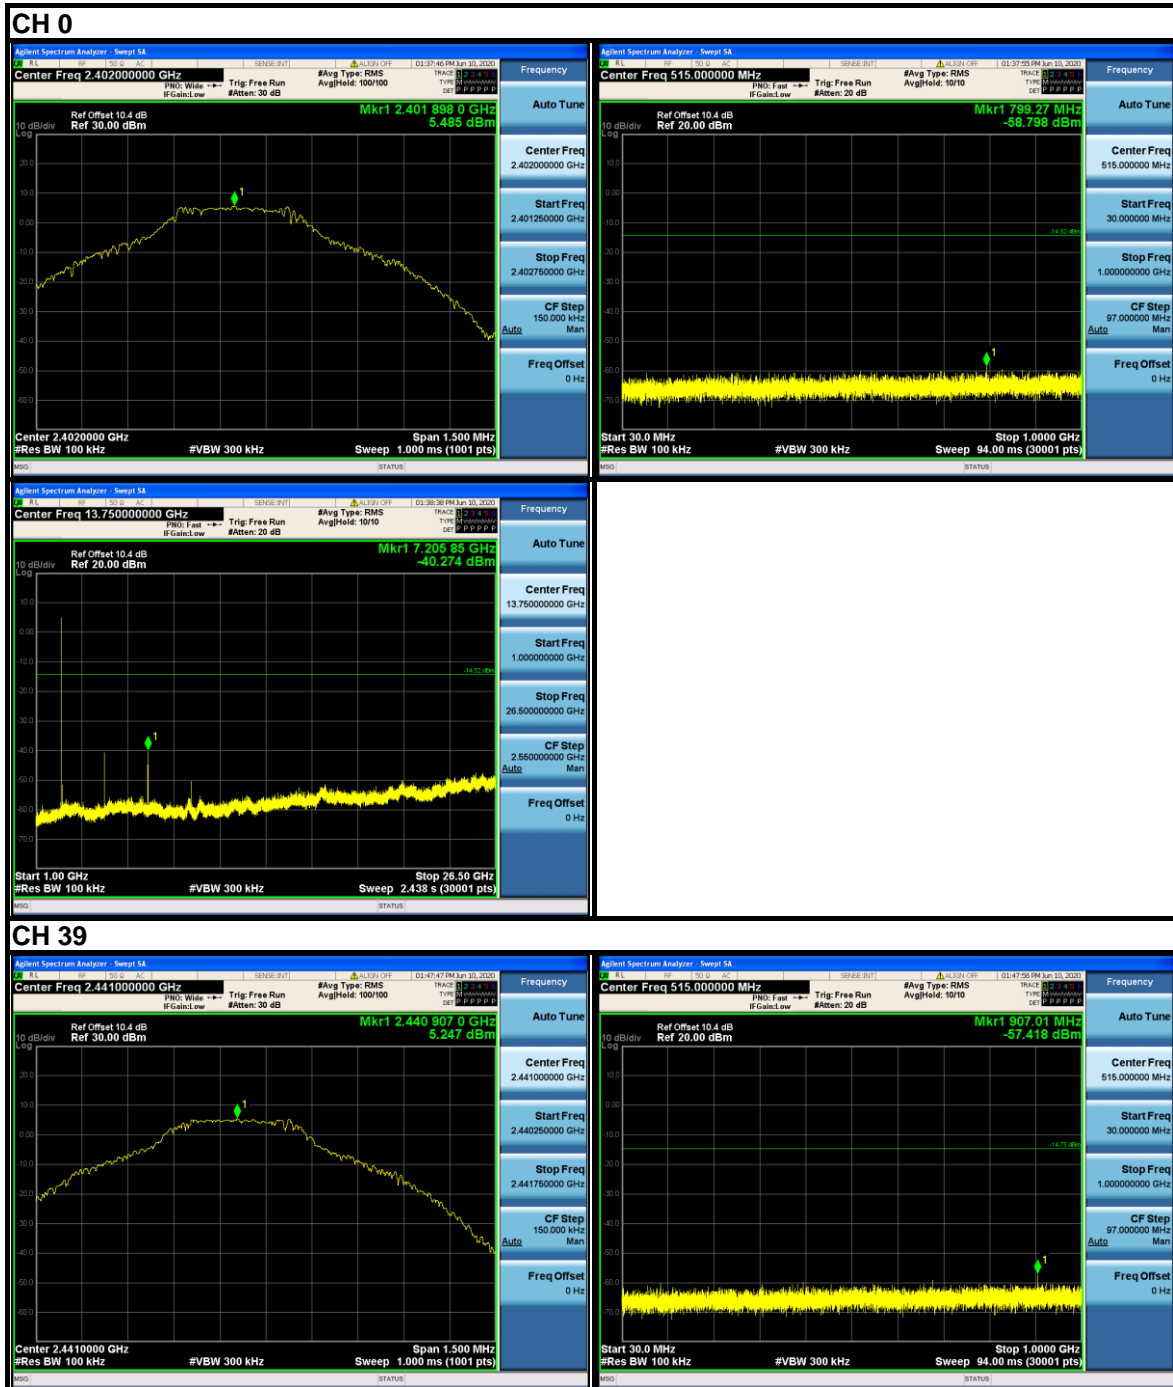

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.


Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.sz@bureauveritas.com](mailto:customerservice.sz@bureauveritas.com)






BUREAU VERITAS

Test Report No.: RF200522S002

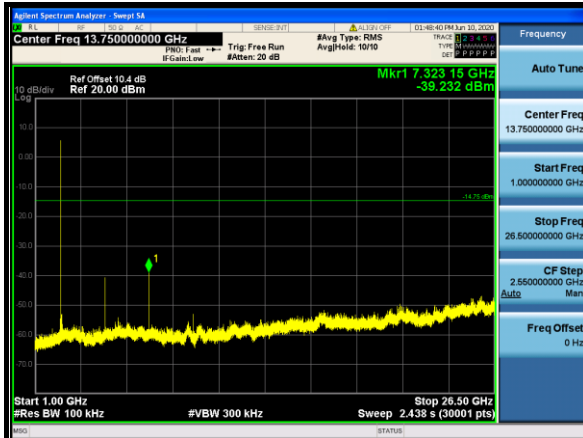

CH 78

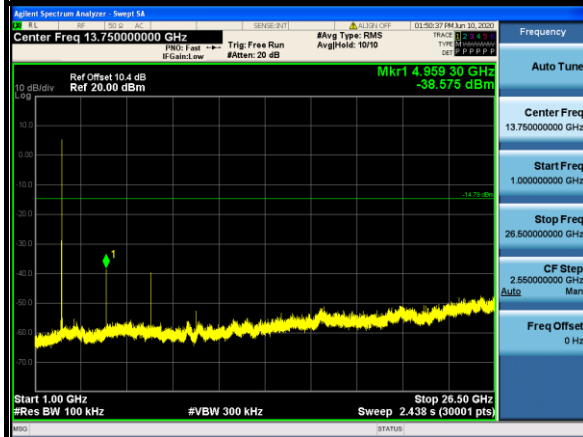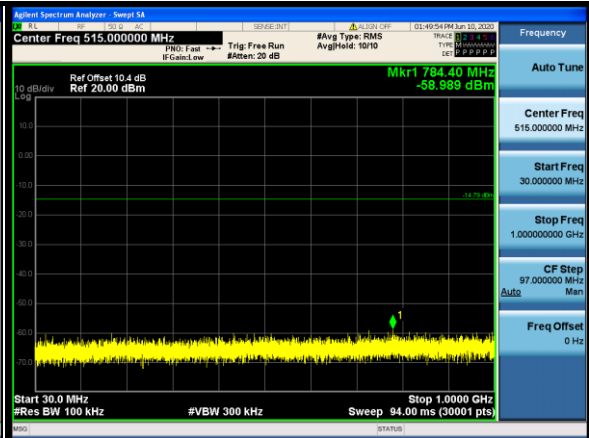

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.


Tel: +86-755-26014629 Ext.800  
Email: [customerservice.sz@bureauveritas.com](mailto:customerservice.sz@bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF200522S002

$\pi/4$  DQPSK

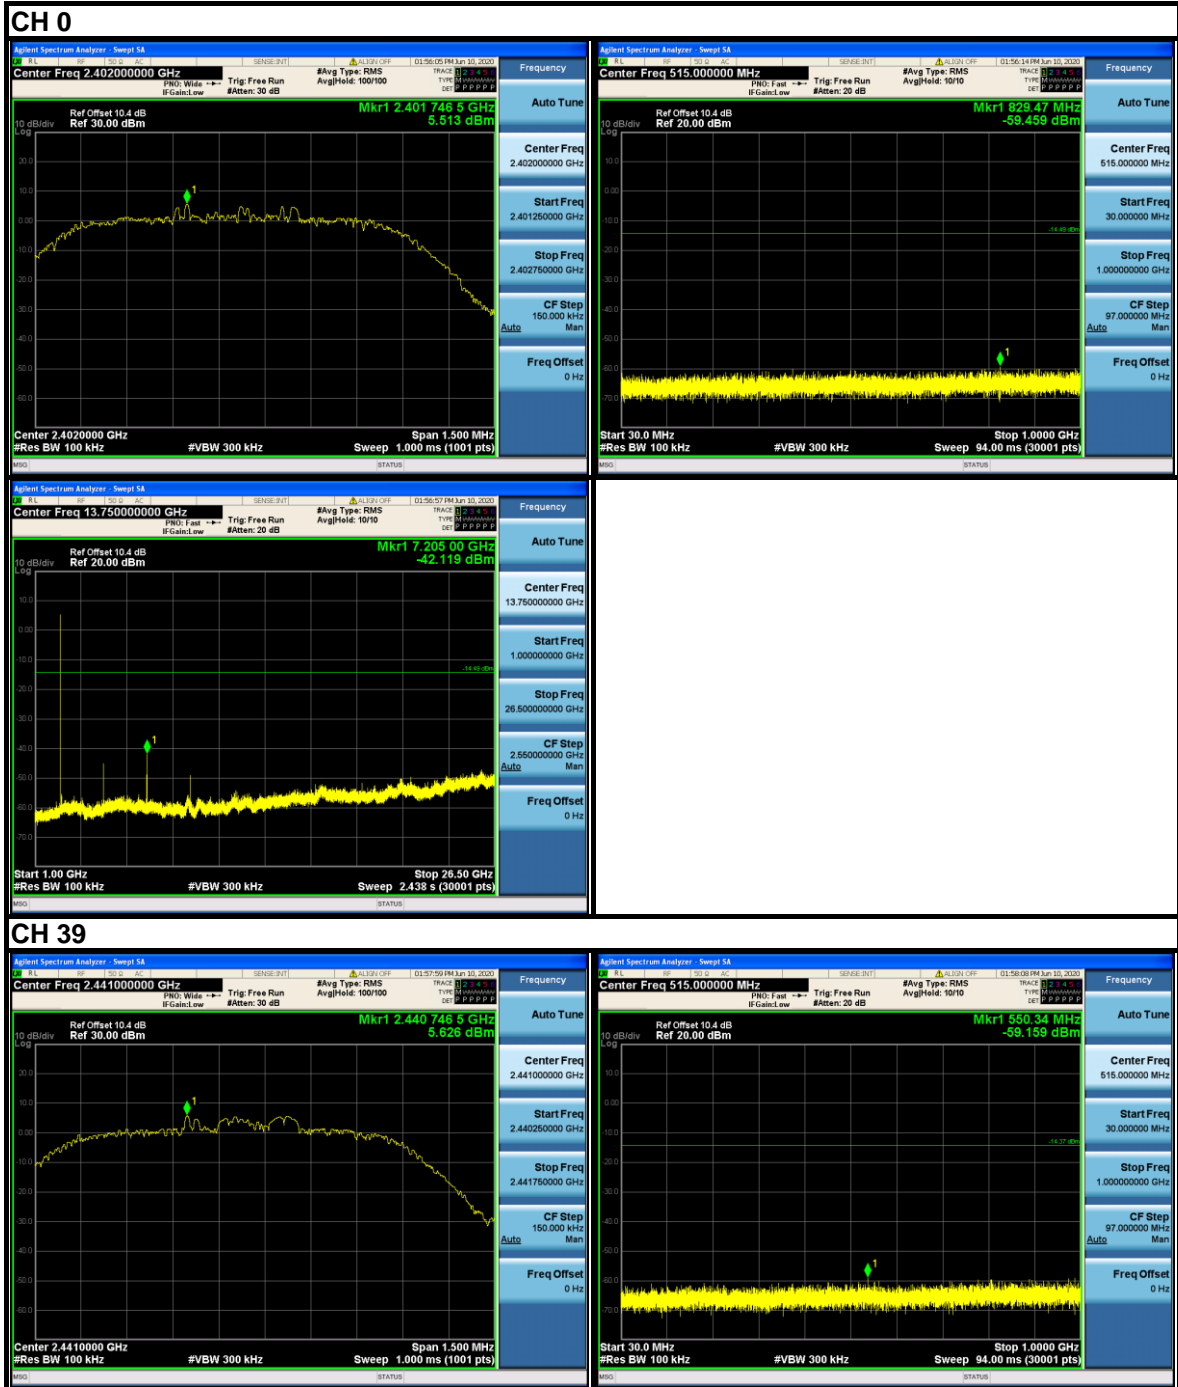

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.


Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.sz@bureauveritas.com](mailto:customerservice.sz@bureauveritas.com)






BUREAU VERITAS

Test Report No.: RF200522S002

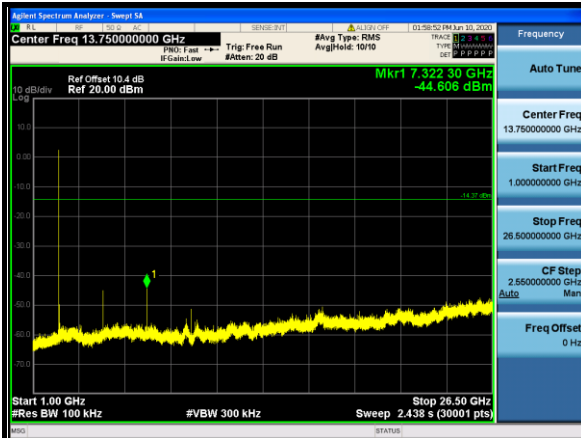

CH 78

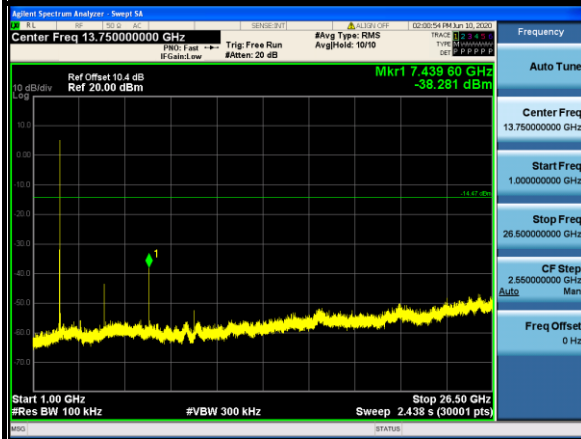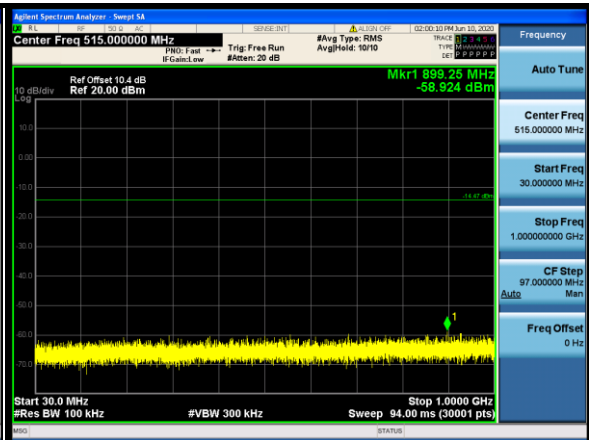

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.


Tel: +86-755-26014629 Ext.800  
Email: [customerservice.sz@bureauveritas.com](mailto:customerservice.sz@bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF200522S002

GFSK

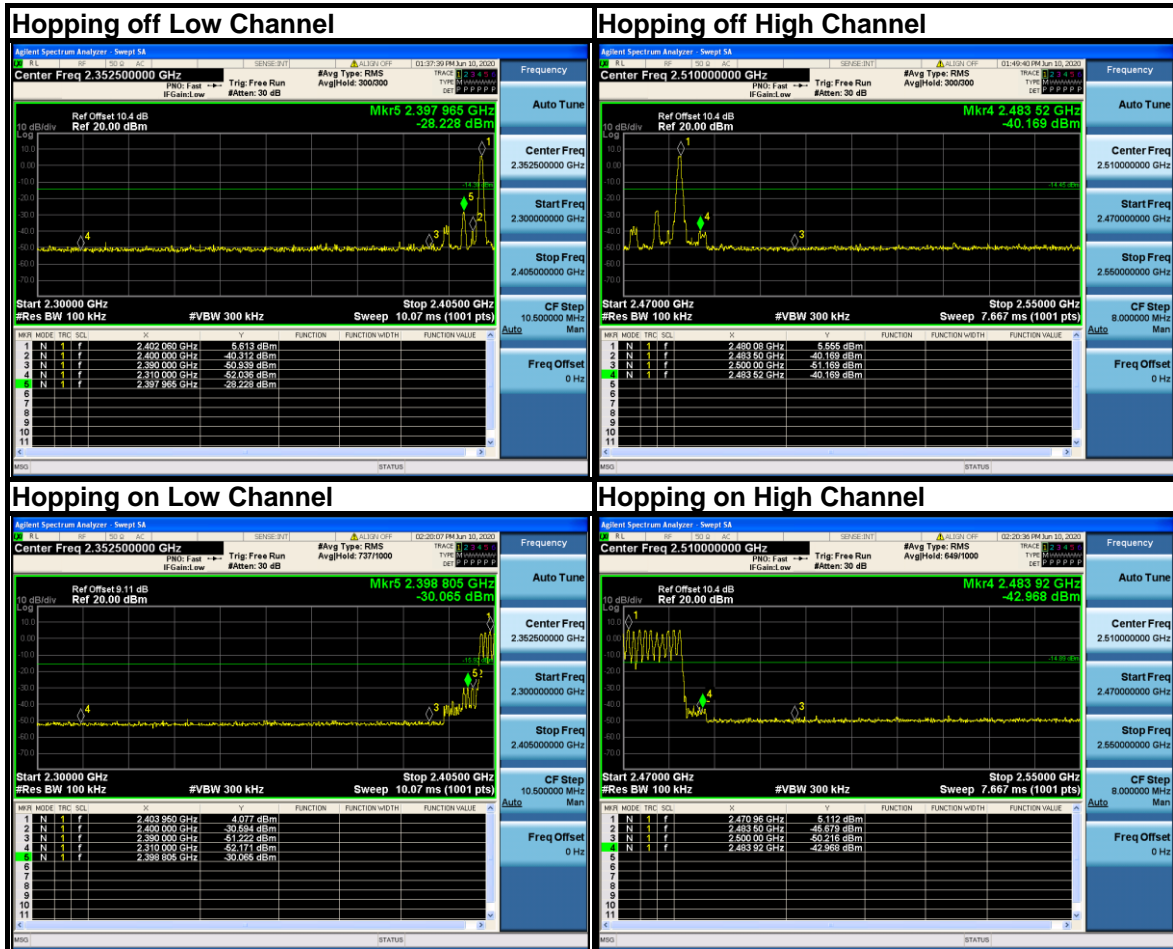

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen Guangdong, 518108, China.


Tel: +86-755-26014629 Ext.800  
Email: [customerservice.sz@bureauveritas.com](mailto:customerservice.sz@bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF200522S002

T/4 DQPSK

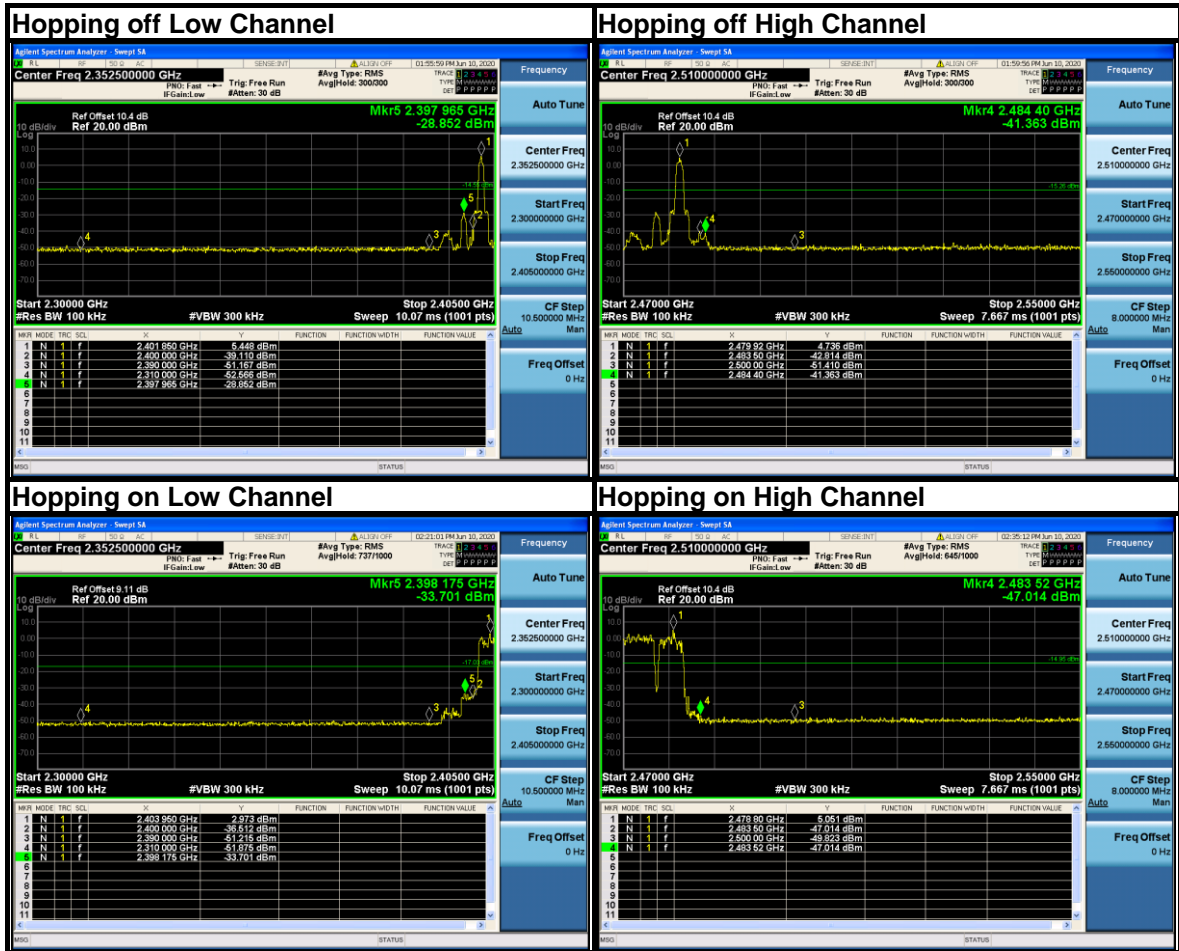

Bureau Veritas (Shenzhen)  
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology  
Park, South Side of Zhoushi Road, Bao'an District,  
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800  
Email: [customerservice.sz@bureauveritas.com](mailto:customerservice.sz@bureauveritas.com)



**BUREAU  
VERITAS**

**Test Report No.: RF200522S002**

## **5 PHOTOGRAPHS OF THE TEST CONFIGURATION**

Please refer to the attached file (Test Setup Photo).





**BUREAU  
VERITAS**

Test Report No.: RF200522S002

## **6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**