

SHENZHEN DNS INDUSTRIES CO., LTD.

TEST REPORT



SCOPE OF WORK

FCC TESTING–Omars-Dogo

REPORT NUMBER

170918022SZN-003

ISSUE DATE

20 July 2018

[REVISED DATE]

[-----]

PAGES

77

DOCUMENT CONTROL NUMBER

FCC ID 247_b

© 2017 INTERTEK

SHENZHEN DNS INDUSTRIES CO., LTD.

Application
For
Certification

FCC ID: ZBCWX56001**ALEXA SPEAKER****Model: Omars-Dogo****2.4GHz Wi-Fi Transceiver**

Report No.: 170918022SZN-003

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-17]

Prepared and Checked by:**Approved by:****Damon Wang
Engineer**

**Kidd Yang
Technical Supervisor
Date: 20 July 2018**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Service Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	Summary of Tests
<i>EXHIBIT 2:</i>	General Description
<i>EXHIBIT 3:</i>	System Test Configuration
<i>EXHIBIT 4:</i>	Measurement Results
<i>EXHIBIT 5:</i>	Equipment Photographs
<i>EXHIBIT 6:</i>	Product Labeling
<i>EXHIBIT 7:</i>	Technical Specifications
<i>EXHIBIT 8:</i>	Instruction Manual
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Miscellaneous Information
<i>EXHIBIT 11:</i>	Test Equipment List

MEASUREMENT/TECHNICAL REPORT

ALEXA SPEAKER

Model: Omars-Dogo

FCC ID: ZBCWX56001

This report concerns (check one) Original Grant Class II Change

Equipment Type: DTS - Part 15 Digital Transmission Systems (Wi-Fi transmitter portion)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until : _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-17] Edition] provision.

Report prepared by:

Damon Wang
Intertek Testing Services Shenzhen Ltd.
Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue,
Zhangkengjing Community, GuanHu Subdistrict,
LongHua District, Shenzhen.
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6661

Table of Contents

1.0	Summary of Test results	7
2.0	General Description	9
2.1	Product Description	9
2.2	Related Submittal(s) Grants	9
2.3	Test Methodology.....	9
2.4	Test Facility	9
3.0	System Test Configuration	11
3.1	Justification	11
3.2	EUT Exercising Software	11
3.3	Special Accessories	12
3.4	Measurement Uncertainty	12
3.5	Equipment Modification.....	12
3.6	Support Equipment List and Description.....	12
4.0	Measurement Results	14
4.1	Maximum Conducted Output Power at Antenna Terminals.....	14
4.2	Minimum 6 dB RF Bandwidth.....	15
4.3	Maximum Power Density Reading	22
4.4	Out of Band Conducted Emissions.....	29
4.5	Out of Band Radiated Emissions.....	45
4.6	Transmitter Radiated Emissions in Restricted Bands	46
4.7	Field Strength Calculation	47
4.8	Radiated Spurious Emission	48
4.9	Radiated Emissions from Digital Section of Transceiver.....	59
4.10	Conducted Emission	60
4.11	Transmitter Duty Cycle Calculation and Measurements	63
5.0	Equipment Photographs	65
6.0	Product Labelling	67
7.0	Technical Specifications	69
8.0	Instruction Manual	71
9.0	Confidentiality Request	73
10.0	Discussion of Pulse Desensitization	75
11.0	Test Equipment List	77

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

EXHIBIT 1

SUMMARY OF TEST RESULTS

1.0 Summary of Test results**ALEXA SPEAKER****Model: Omars-Dogo****FCC ID: ZBCWX56001**

TEST ITEM	REFERENCE	RESULTS
Max. Output power	15.247(b)(3)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d)	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

EXHIBIT 2

GENERAL DESCRIPTION

2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is an ALEXA SPEAKER with Wi-Fi function operating at 2412-2462MHz for 802.11b/g/n-HT20, 11 channels with 5MHz channel spacing. The EUT is powered by a DC 3.7V, 1400mAh rechargeable battery which can be charged by USB port (DC 5V). The USB port is only use for charging purpose. For more detailed features description, please refer to the user's manual.

Type of Modulation: BPSK, QPSK, 16QAM, 64QAM, CCK, DQPSK, DBPSK

Antenna Type: Integral Antenna

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of:

DTS- Part 15 Digital Transmission Systems (WiFi transmitter portion) and for the Bluetooth mode was tested and demonstrated in report 170918022SZN-002. Other digital functions were reported in the verification report: 17918022ZN-001.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10: 2013 and KDB 558074 D01 v05. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

EXHIBIT 3

SYSTEM TEST CONFIGURATION

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. The EUT was powered by a fully-charged DC 3.7V new rechargeable battery which was charged by an AC/DC adaptor or PC with input of AC 120V, 60Hz during the test.

On 802.11b/g/n-HT20 mode, only one antenna is used, and all data rate were tested and only the worst case data is shown in the report.

For maximizing emissions, the EUT was rotated through 360°, the EUT was placed on the styrene turntable with 0.8m up to 1GHz and 1.5 m above 1GHz. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

The rear of unit was flushed with the rear of the table.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

3.3 Special Accessories

N/A.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.5 Equipment Modification

Any modifications installed previous to testing by SHENZHEN DNS INDUSTRIES CO., LTD. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Model No.
iPod	Apple	A1367
Aux In Cable	N/A	Unshielded, Length 100cm
USB cable	DNS	Unshielded, Length 120cm
PC	Lenovo	T420
AC Adapter	G-TIDE	HJ-050100

EXHIBIT 4
MEASUREMENT RESULTS

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: September 27, 2017

Model: Omars-Dogo

4.0 Measurement Results

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna power of the EUT was connected to the input of a broadband peak RF power meter. The power meter have a video bandwidth that is greater than DTS bandwidth and utilize a fast-responding diode detector. Power was read directly at the EUT antenna terminals with cable loss added.

For antennas with gains of 6 dBi or less, maximum allowed Transmitter output is 1 watt (+30 dBm).

IEEE 802.11b (Antenna Gain = 5.37dBi) (CCK, 1Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2412	17.15	51.88
Middle Channel: 2437	16.60	45.71
High Channel: 2462	16.32	42.85

IEEE 802.11g (Antenna Gain = 5.37dBi) (16QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2412	22.21	166.34
Middle Channel: 2437	22.08	161.44
High Channel: 2462	22.24	167.49

IEEE 802.11n-HT20 (Antenna Gain = 5.37dBi) (64QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2412	22.19	165.58
Middle Channel: 2437	22.13	163.31
High Channel: 2462	22.28	169.04

Cable loss: 0.5 dB External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function

EUT max. output level = 22.28dBm

EUT max. radiated output level = 22.28dBm + 5.37dBi = 27.65dBm = 0.582mW

For RF Exposure, the information is saved with filename: SAR report.pdf.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: September 27, 2017

Model: Omars-Dogo

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a) (2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 KHz according to FCC KDB 558074 D01 v05. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Limit: The 6 dB Bandwidth is at least 500 kHz.



IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	10.072
2437	10.072
2462	9.595


IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	15.065
2437	15.065
2462	15.022

IEEE 802.11n-HT20 (64QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	15.065
2437	15.109
2462	15.065



The test plots are attached as below.

802.11b

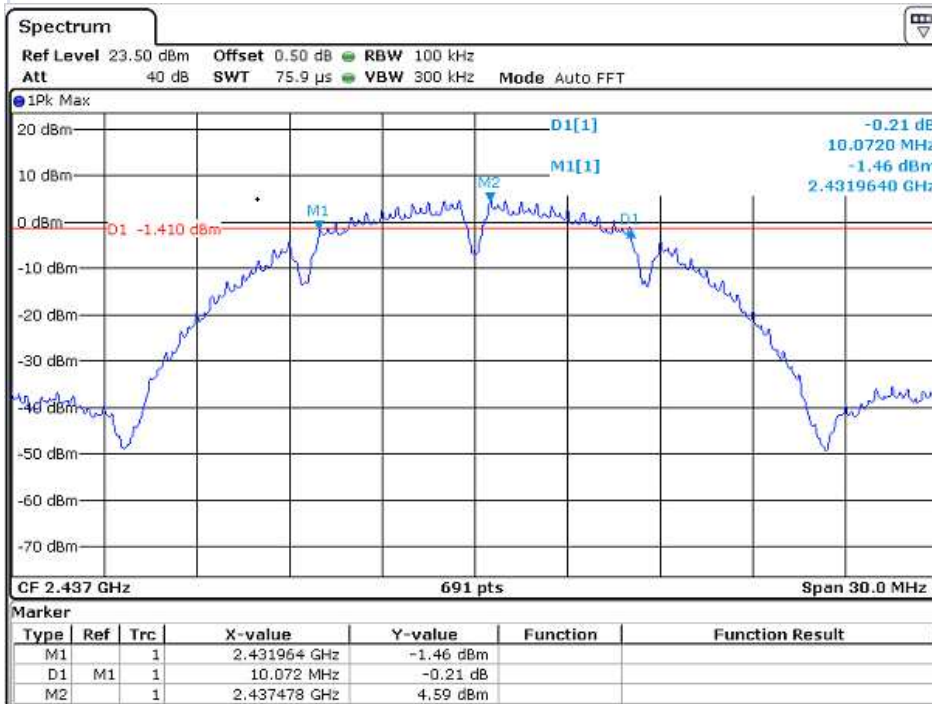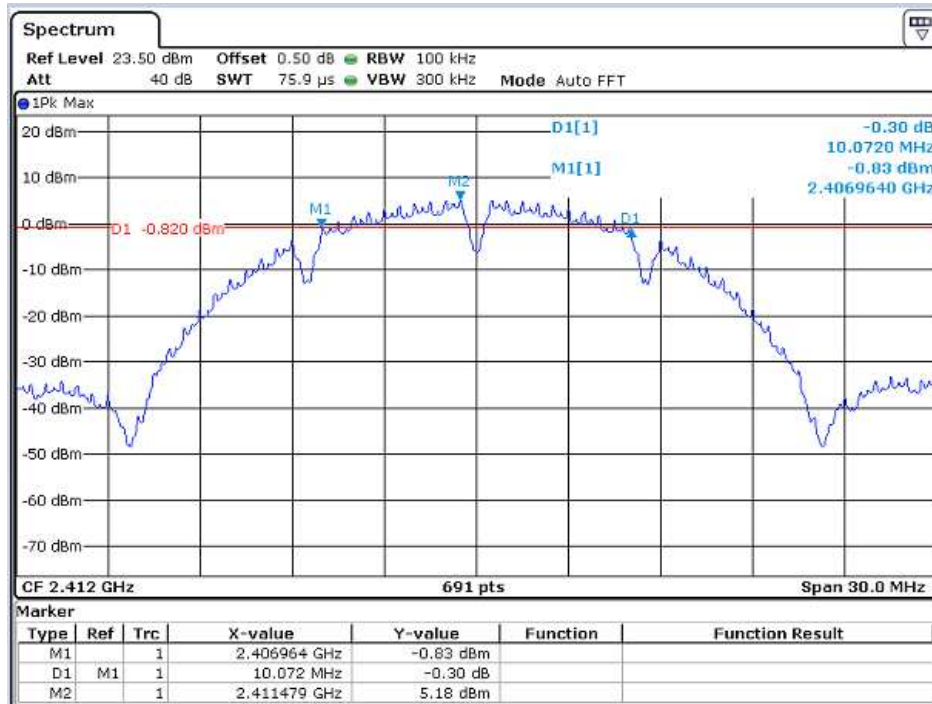


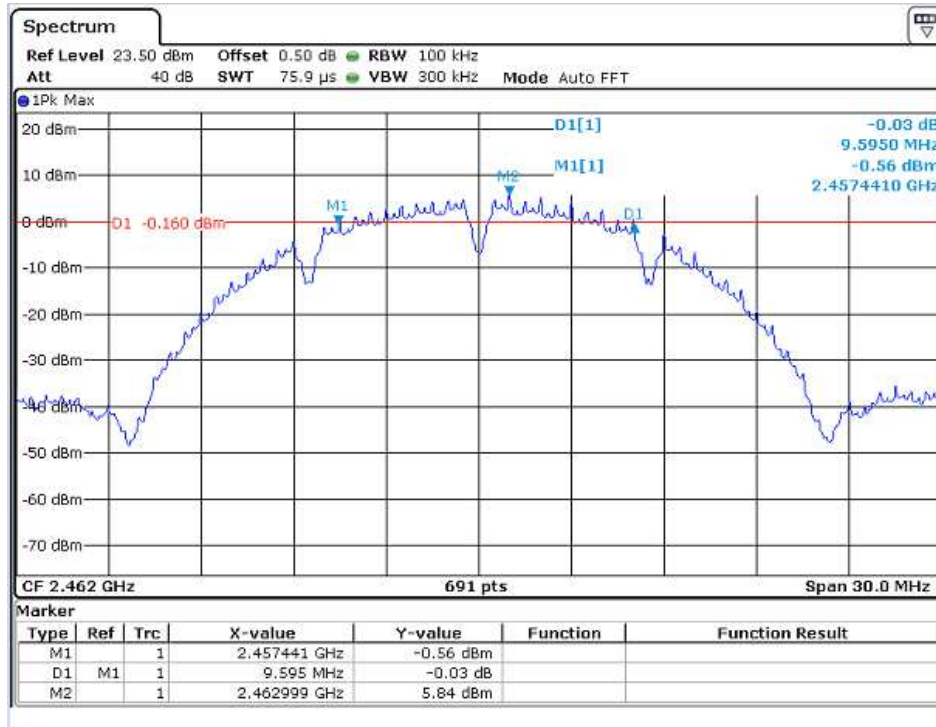



802.11g

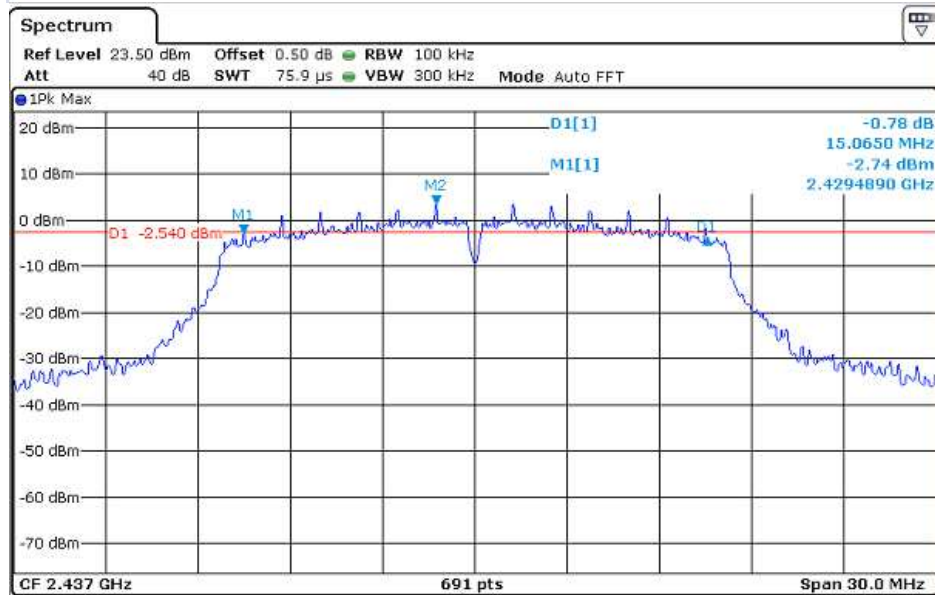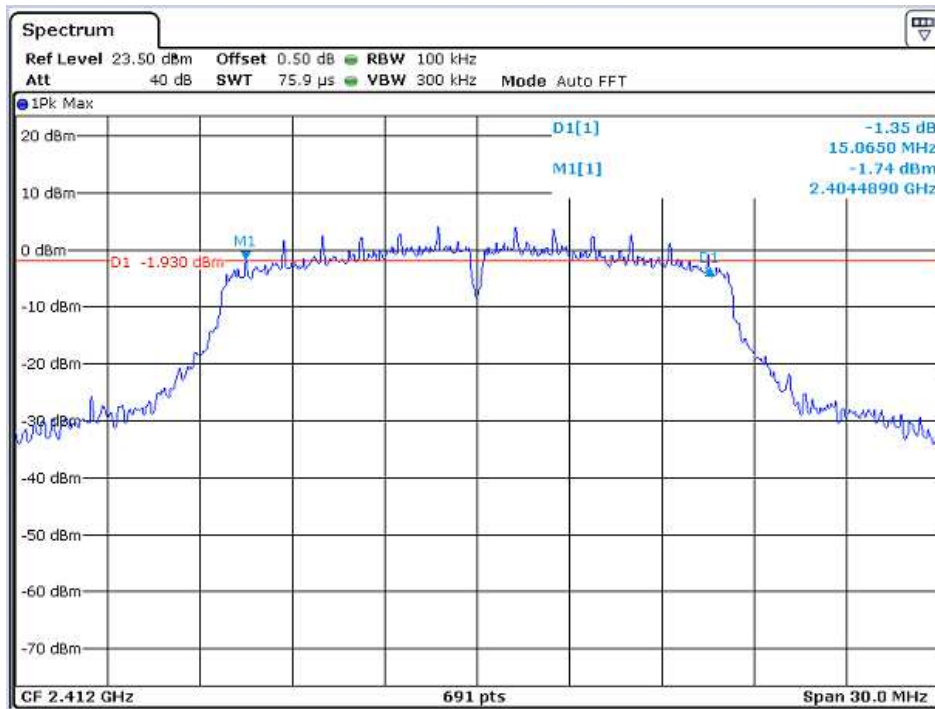


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.429489 GHz	-2.74 dBm		
D1	M1	1	15.065 MHz	-0.78 dB		
M2		1	2.435741 GHz	3.46 dBm		

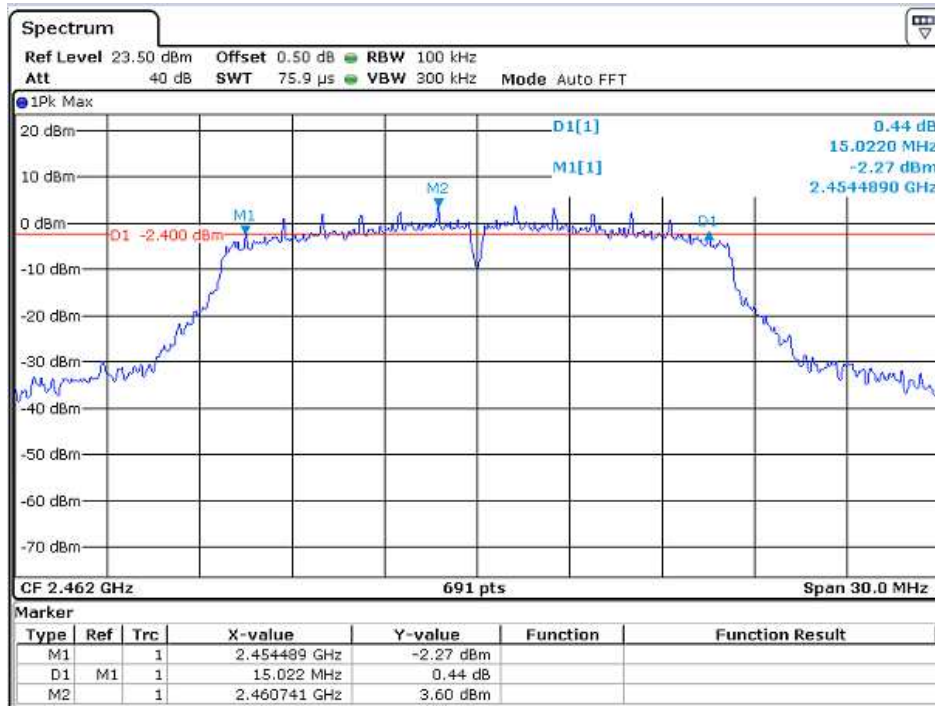

802.11n-HT20

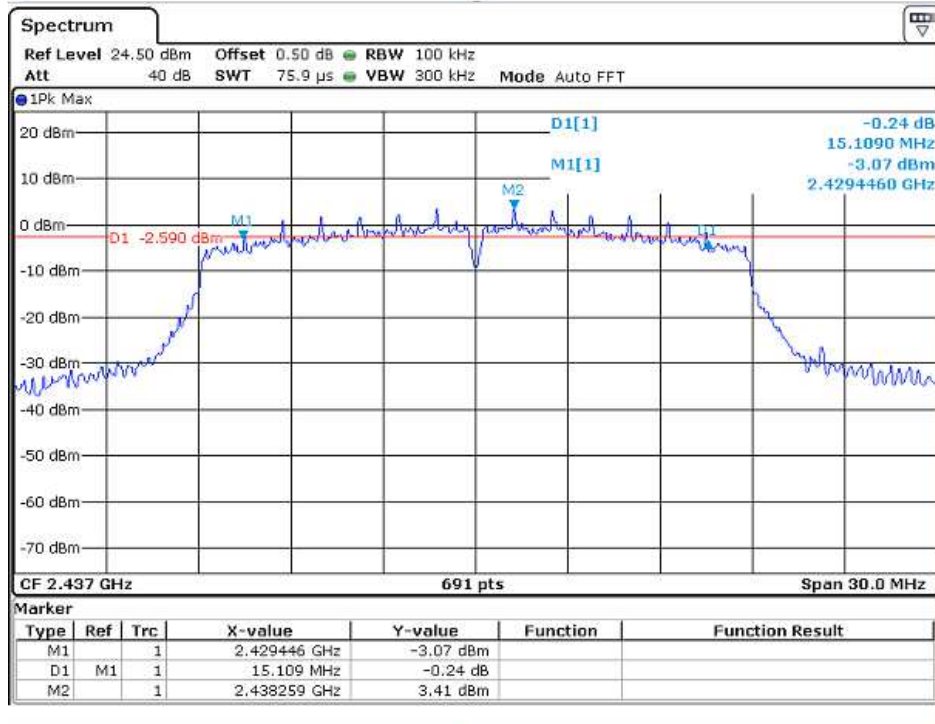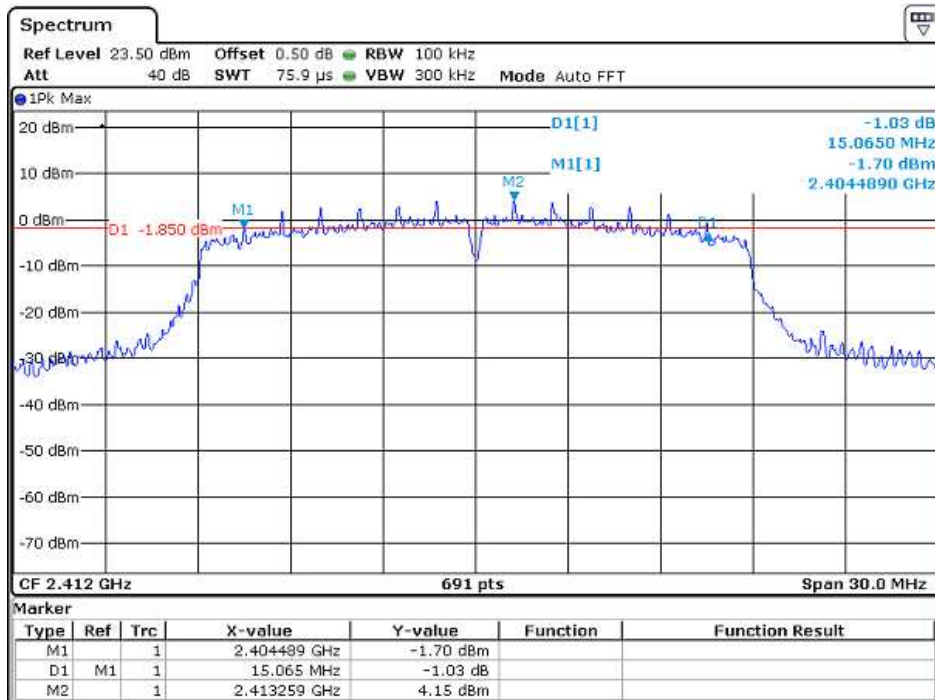

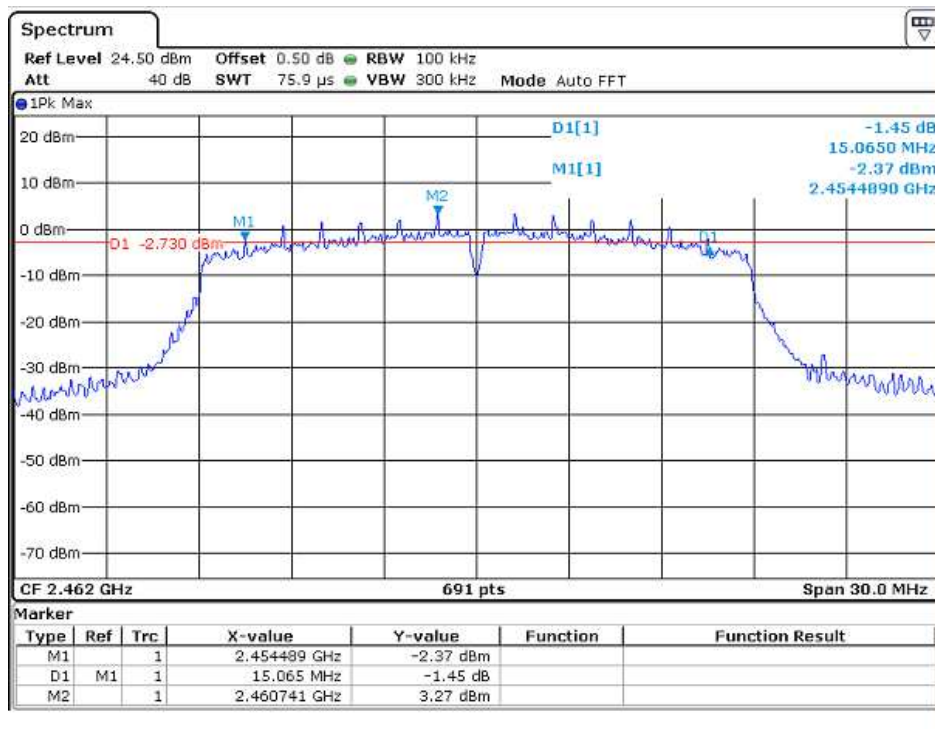

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: September 27, 2017

Model: Omars-Dogo

4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The Measurement Procedure PKPSD was set according to the FCC KDB 558074 D01 v05.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/3 kHz.



IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	5.32
2437	4.71
2462	4.62


IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	4.03
2437	3.44
2462	3.56

IEEE 802.11n-HT20 (64QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	4.11
2437	3.27
2462	3.43



The test plots are attached as below.


802.11b

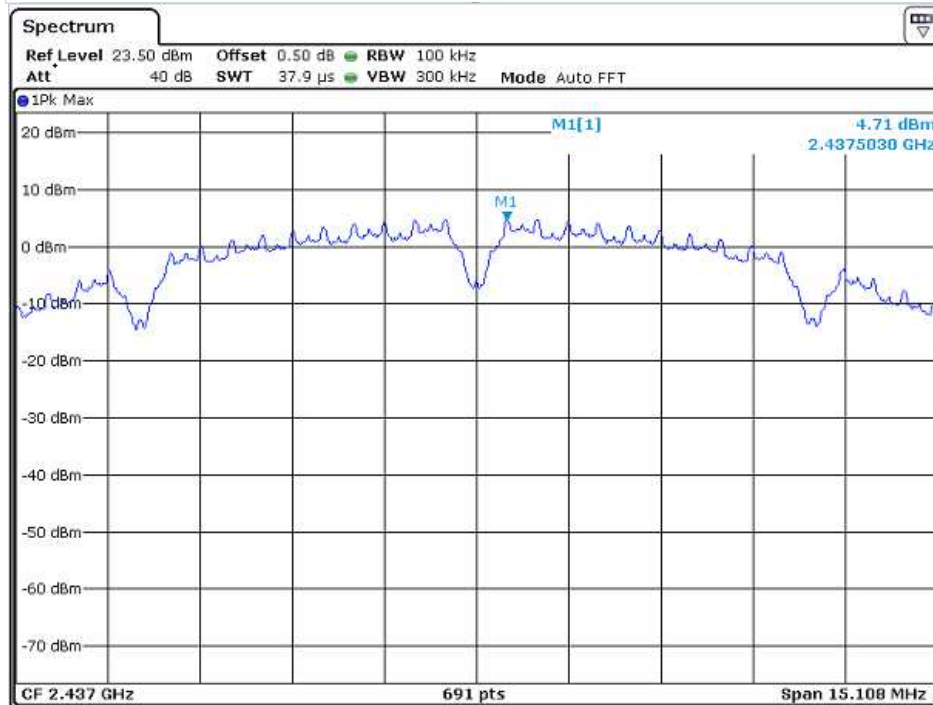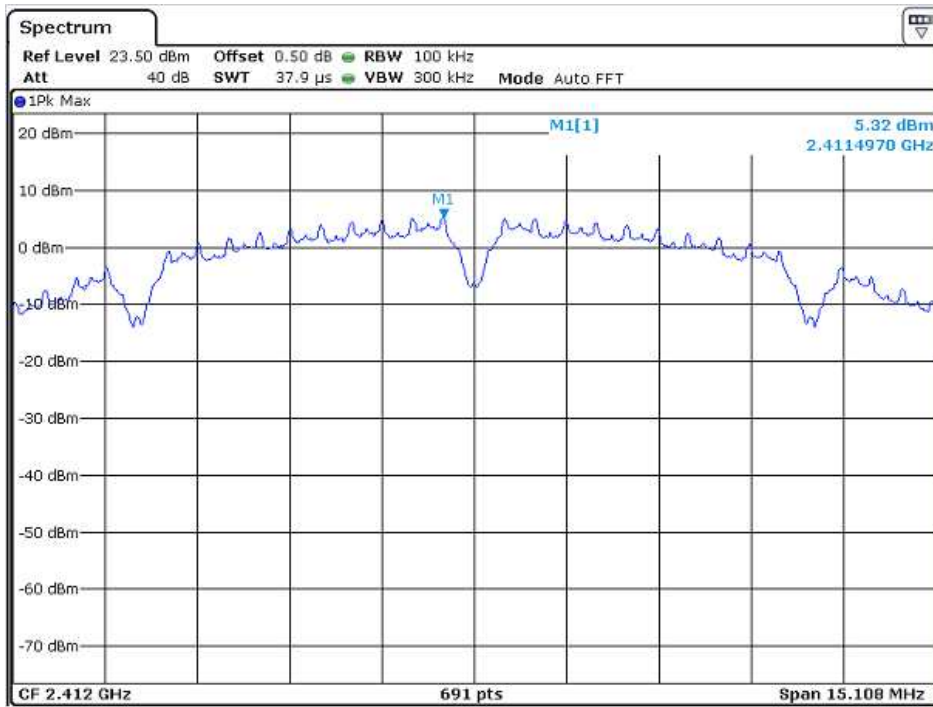

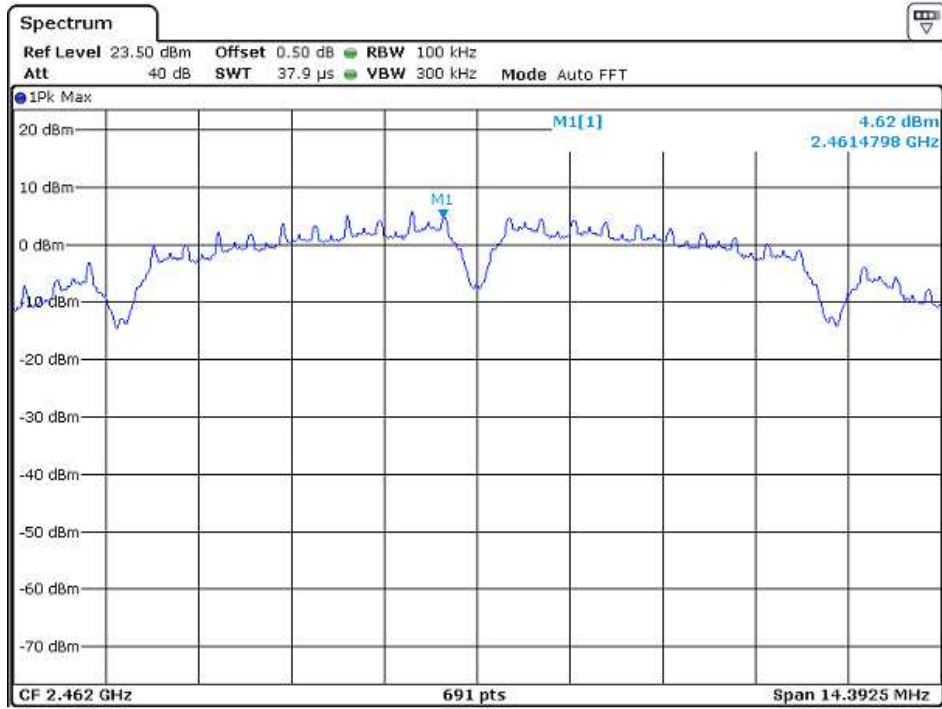



802.11g

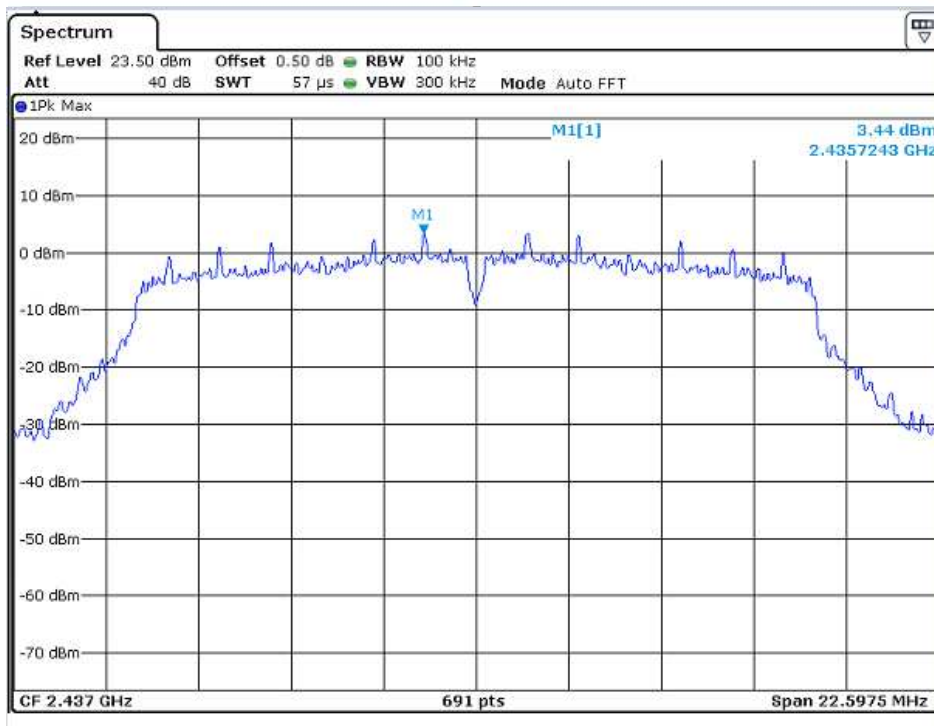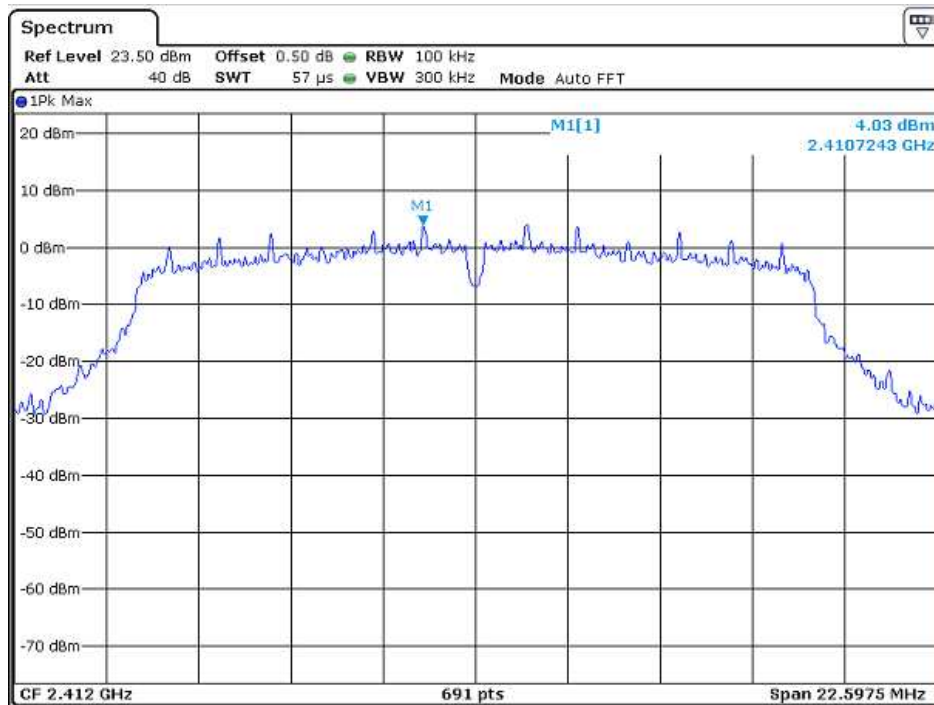

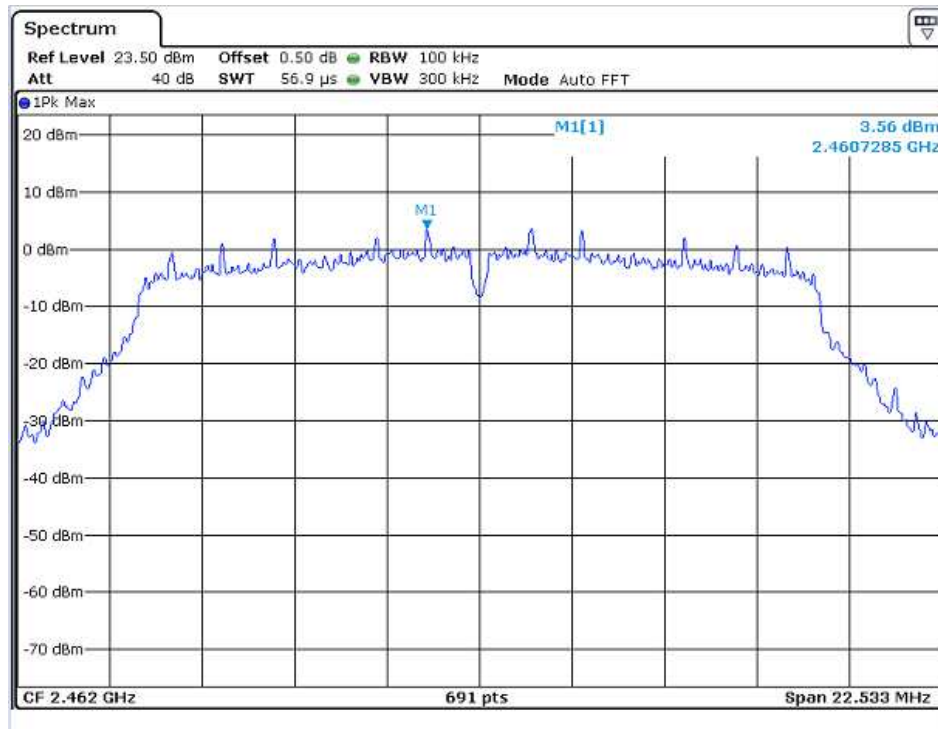

802.11n-HT20

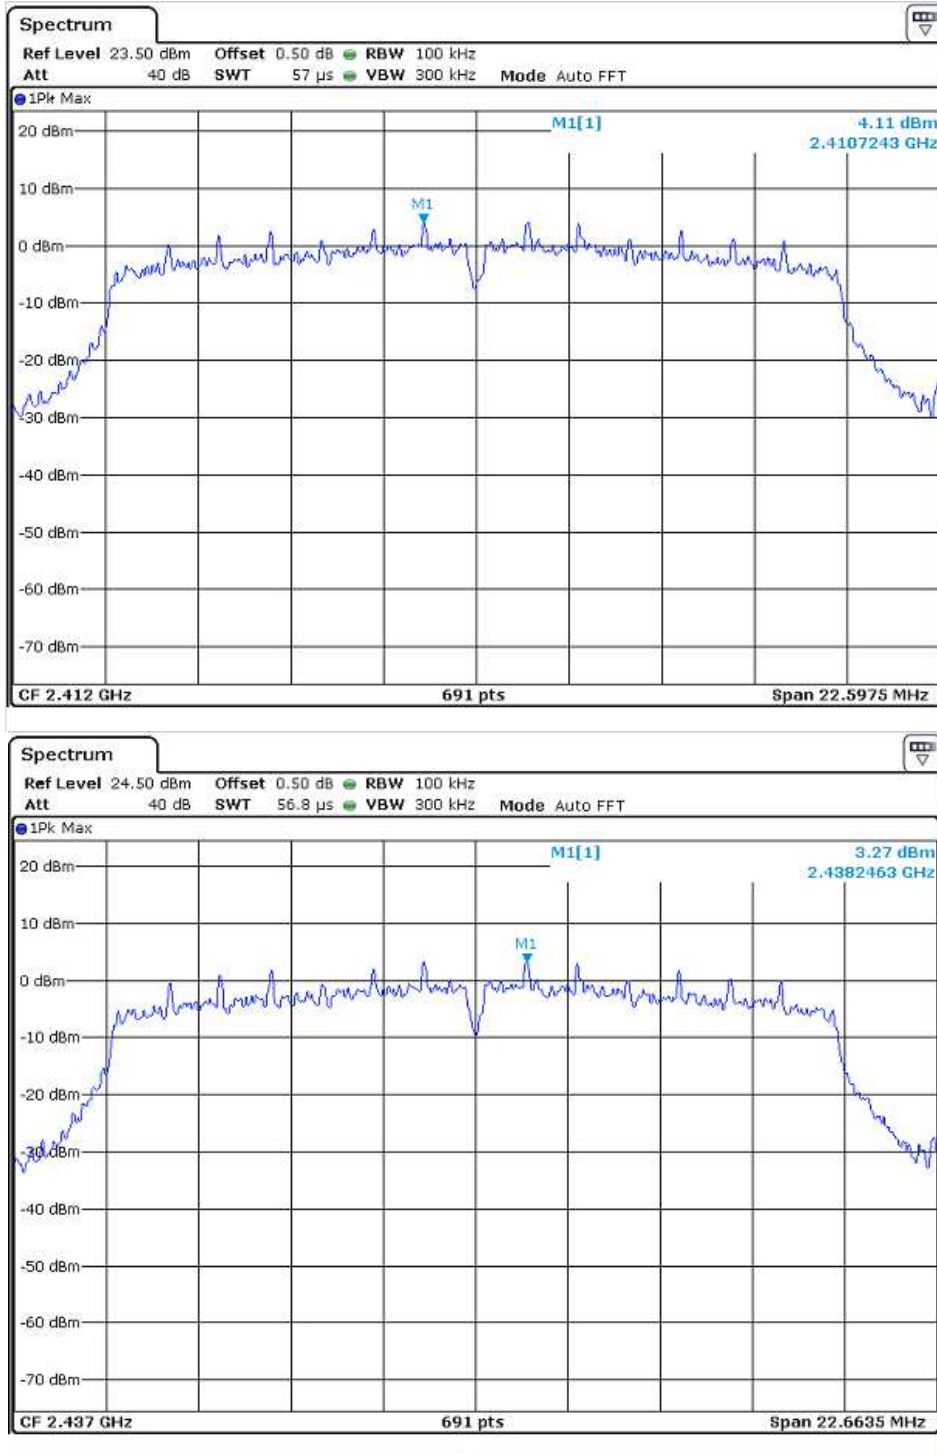

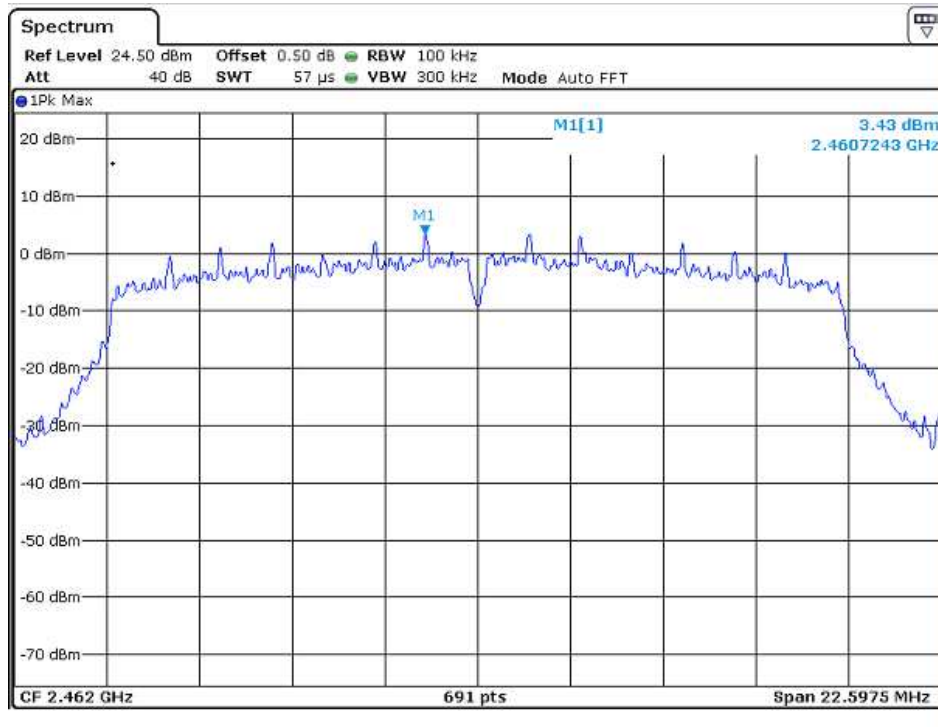

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: September 27, 2017

Model: Omars-Dogo

4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. The Measurement Procedure was set according to the FCC KDB 558074 D01 v05.



All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.


Refer to the attached test plots for out of band conducted emissions data with rate of 1Mbps for 802.11b and 6Mbps for 802.11g and 6Mbps for 802.11n-HT20.

The test plots showed all spurious emission up to the tenth harmonic were measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.



The test plots are attached as below.

802.11b
Channel 01 (2412MHz) Reference Level: 5.32dBm

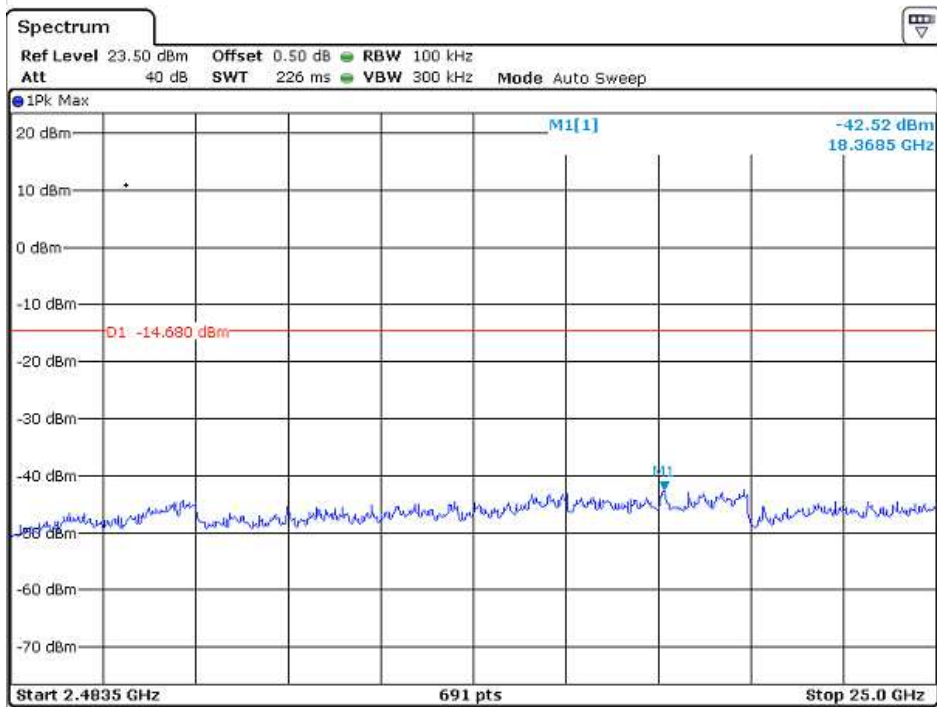
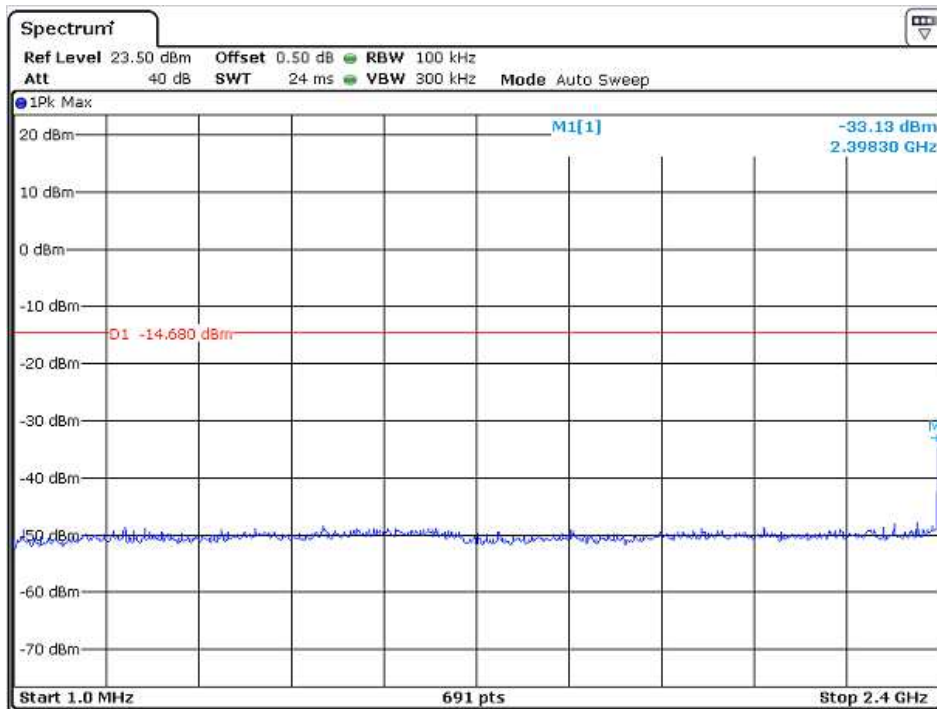


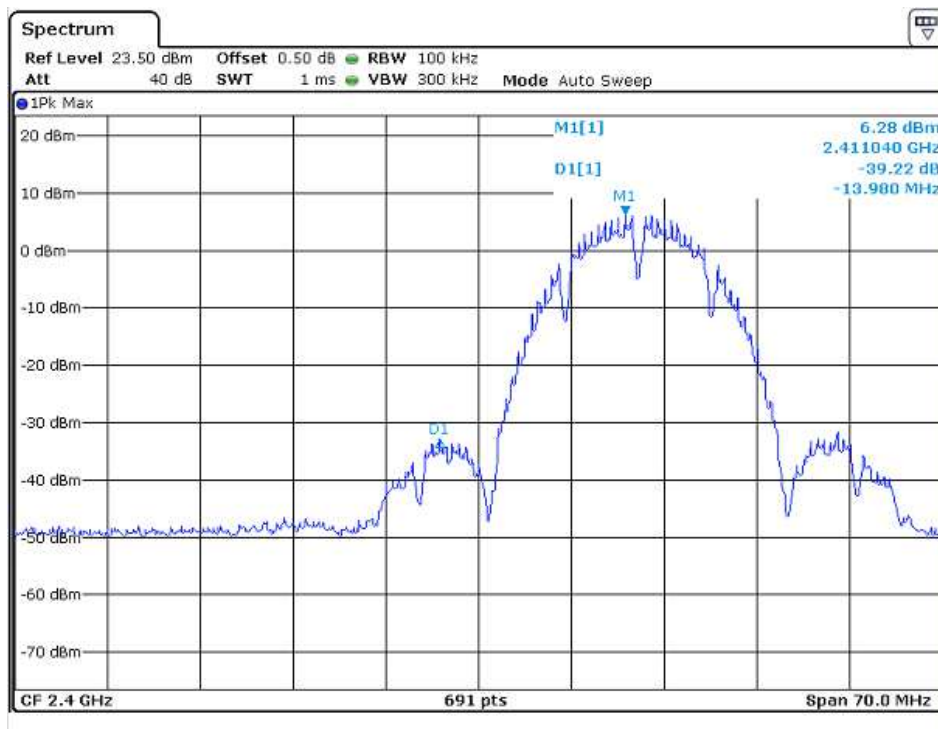


Channel 06 (2437MHz) Reference Level: 4.71dBm

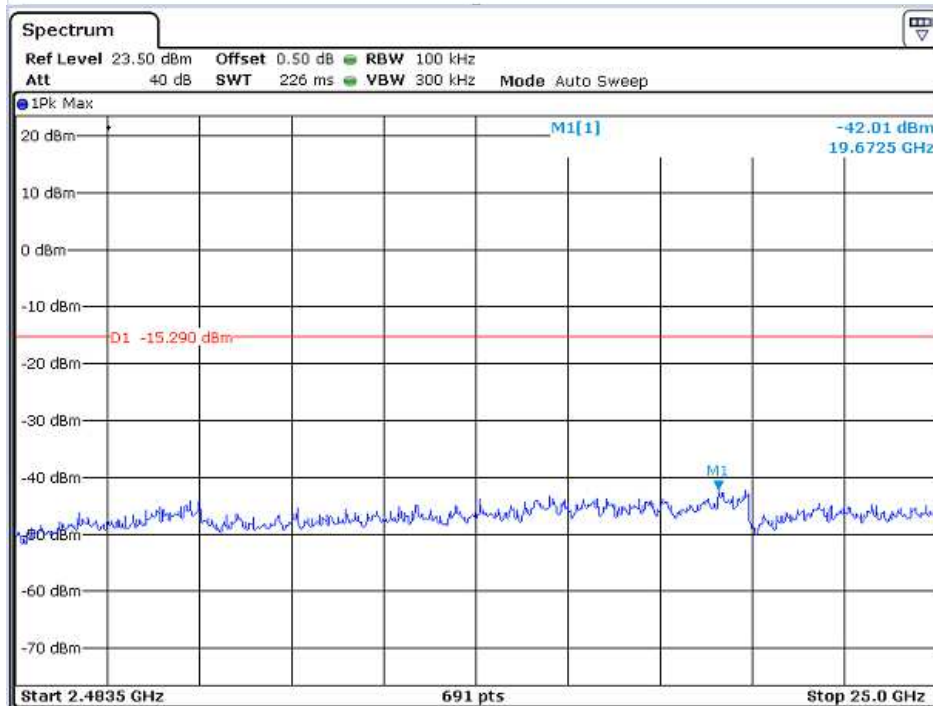
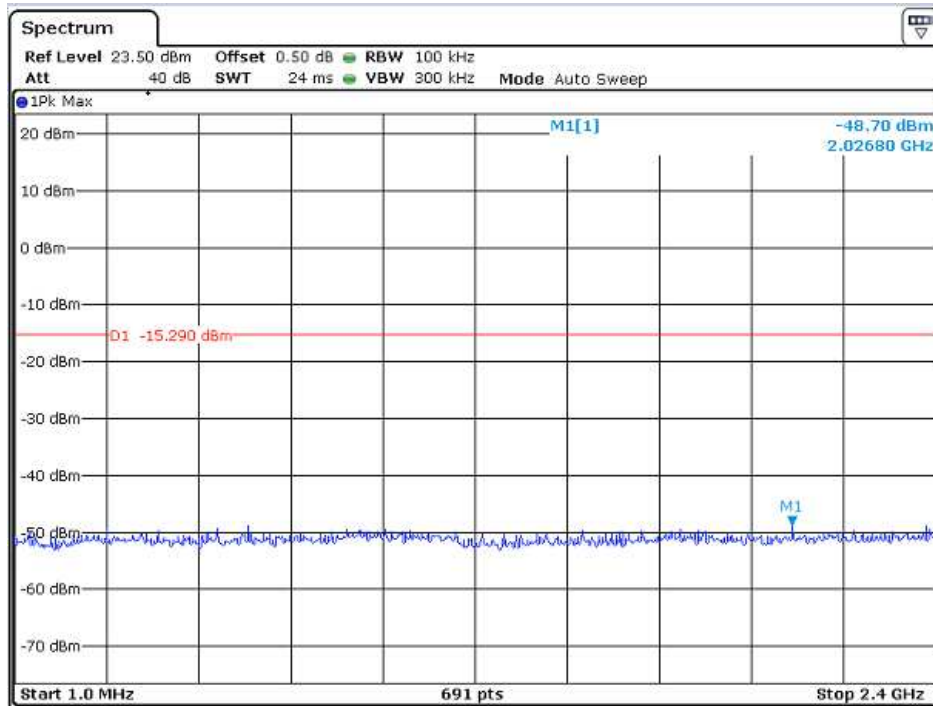



Channel 11 (2462MHz) Reference Level: 4.62dBm

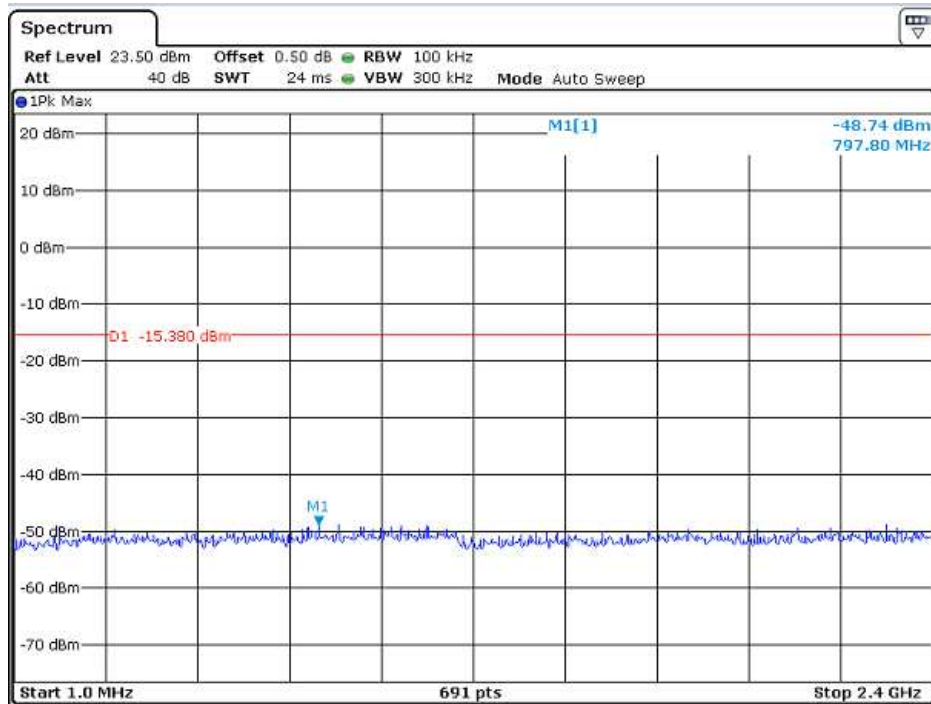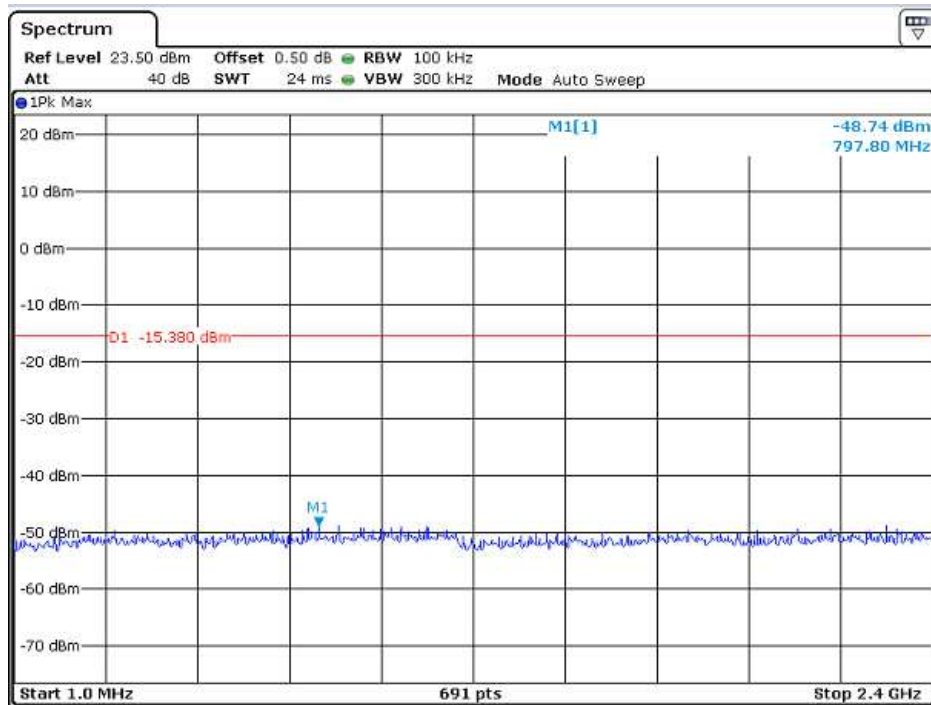


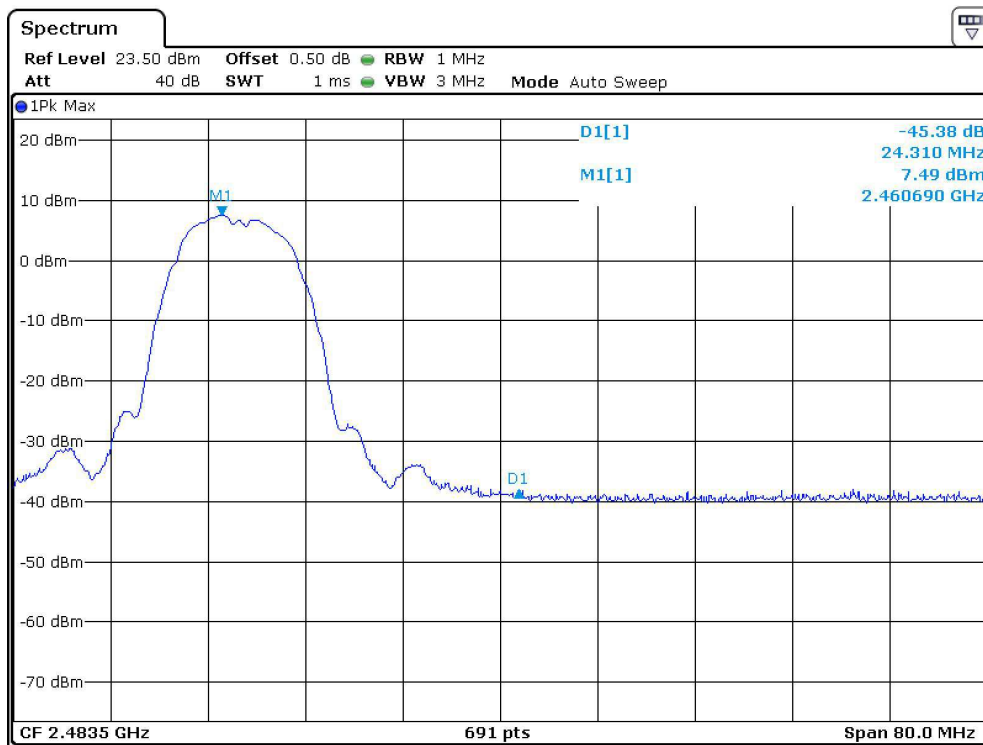


802.11g
Channel 01 (2412MHz) Reference Level: 4.03dBm

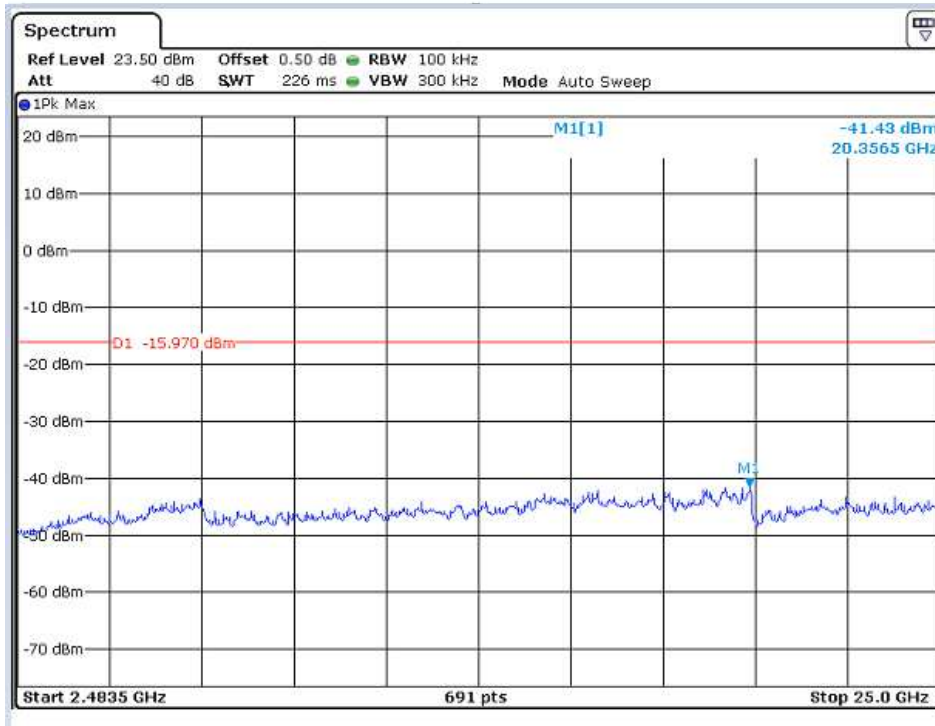
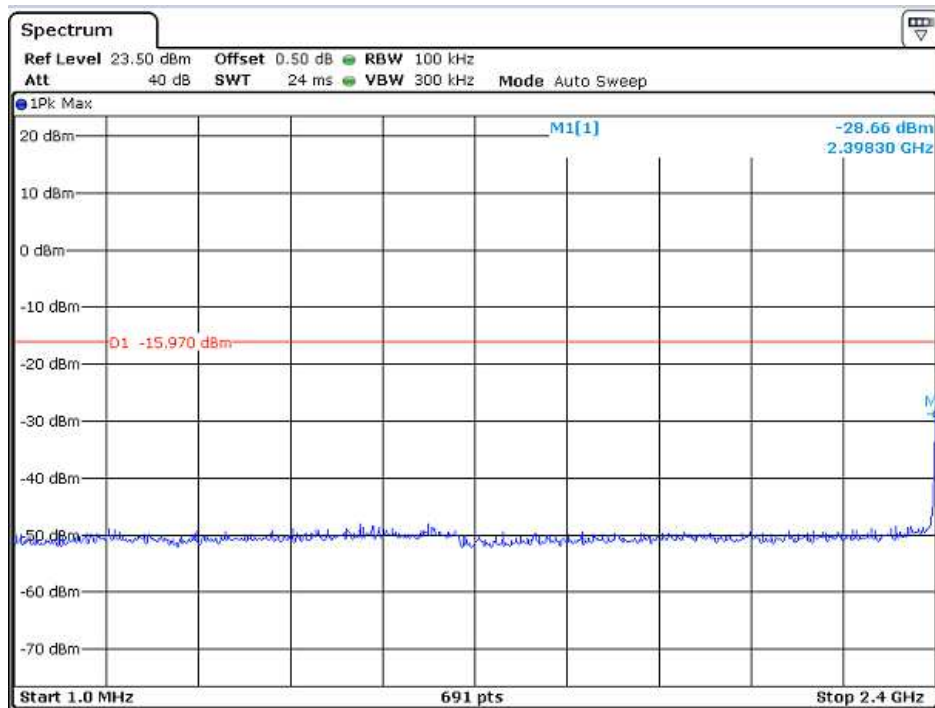


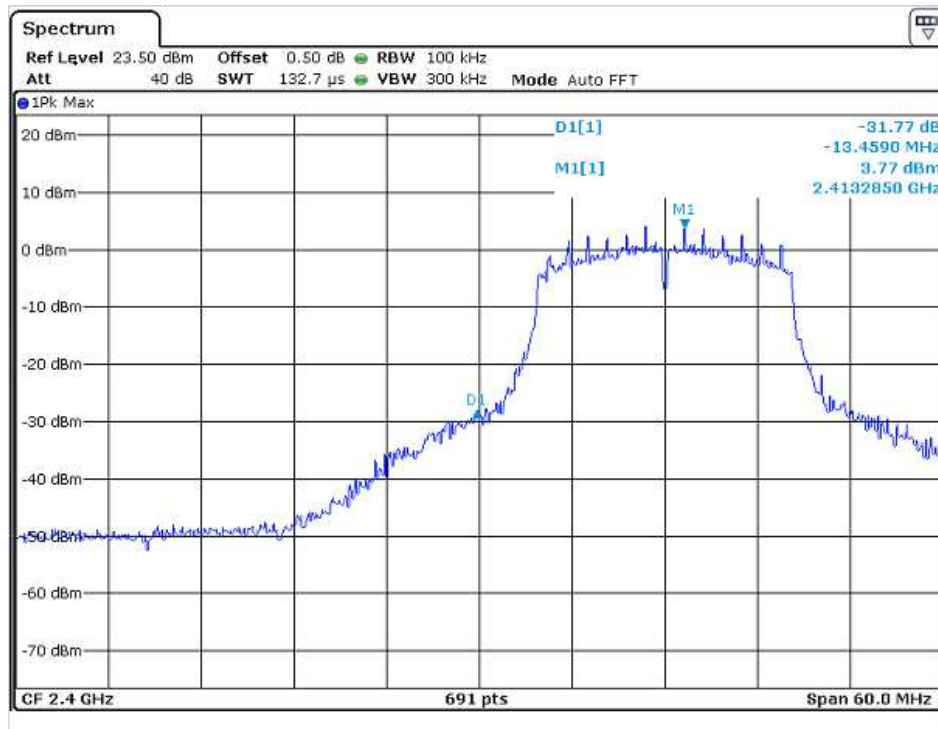


Channel 06 (2437MHz) Reference Level: 3.44dBm

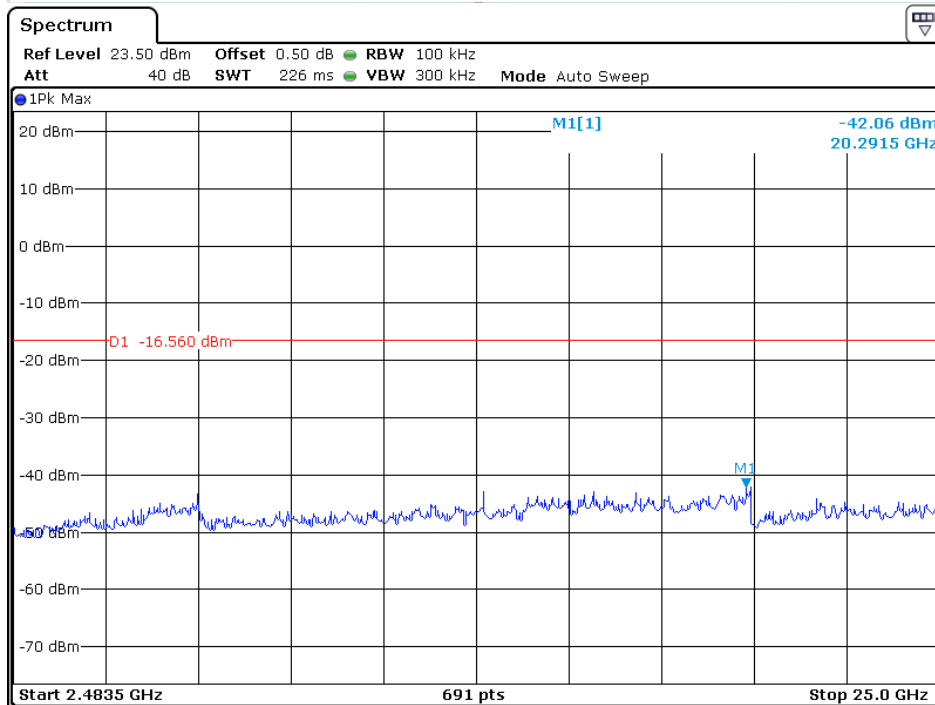
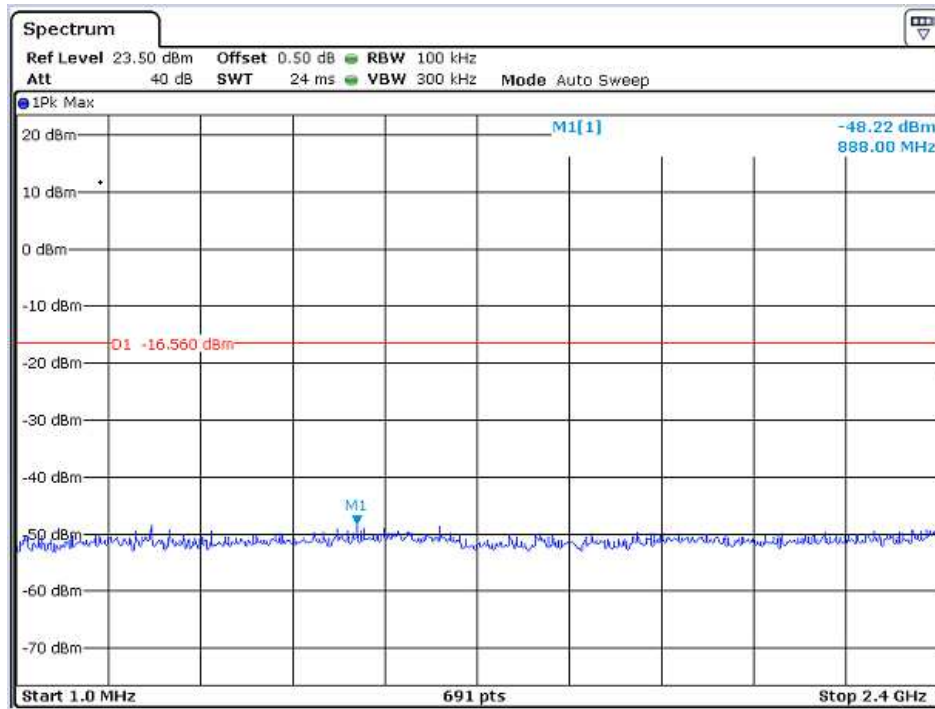



Channel 11 (2462MHz) Reference Level: 3.56dBm

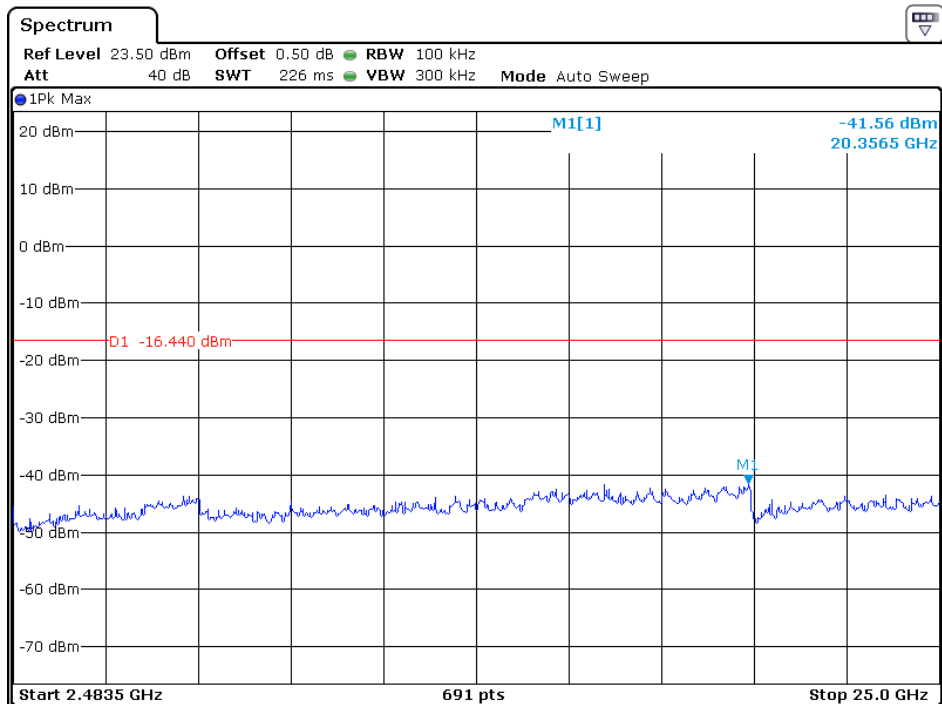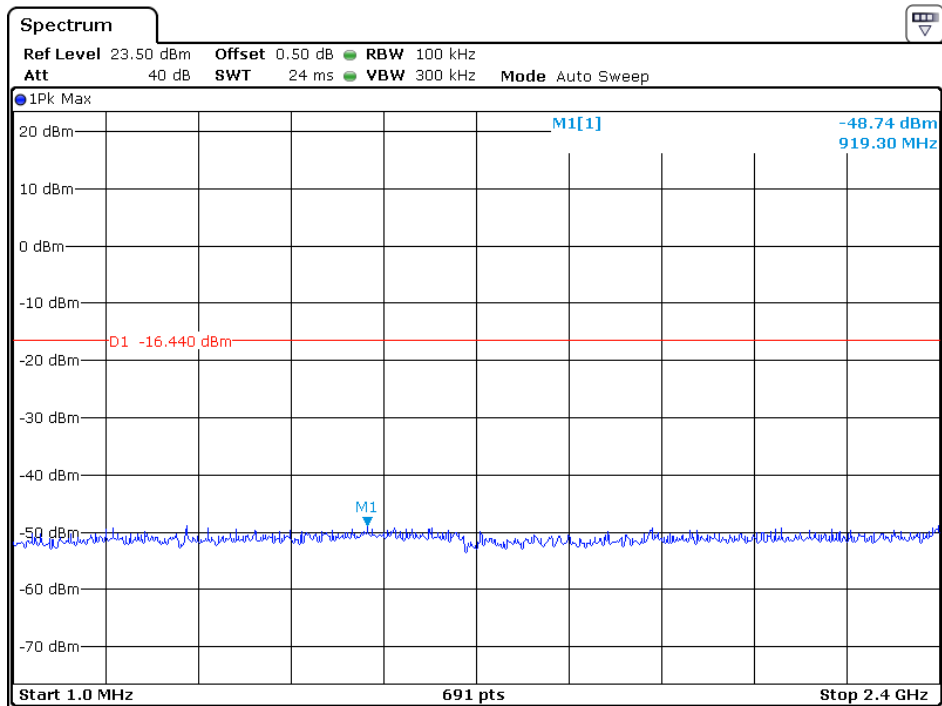


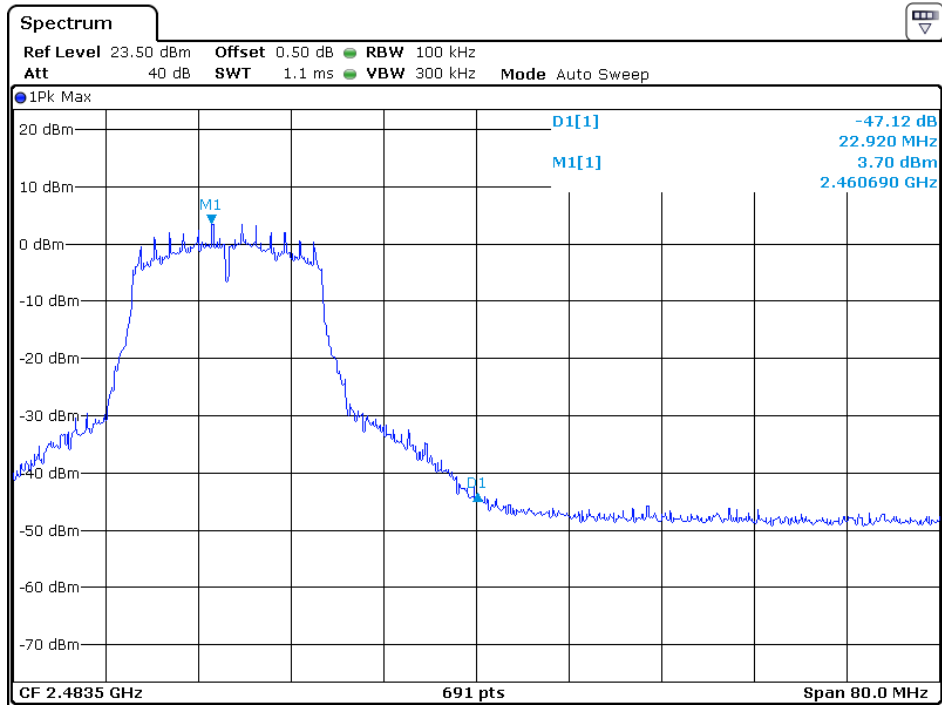


802.11n-HT20
Channel 01 (2412MHz) Reference Level: 4.11dBm

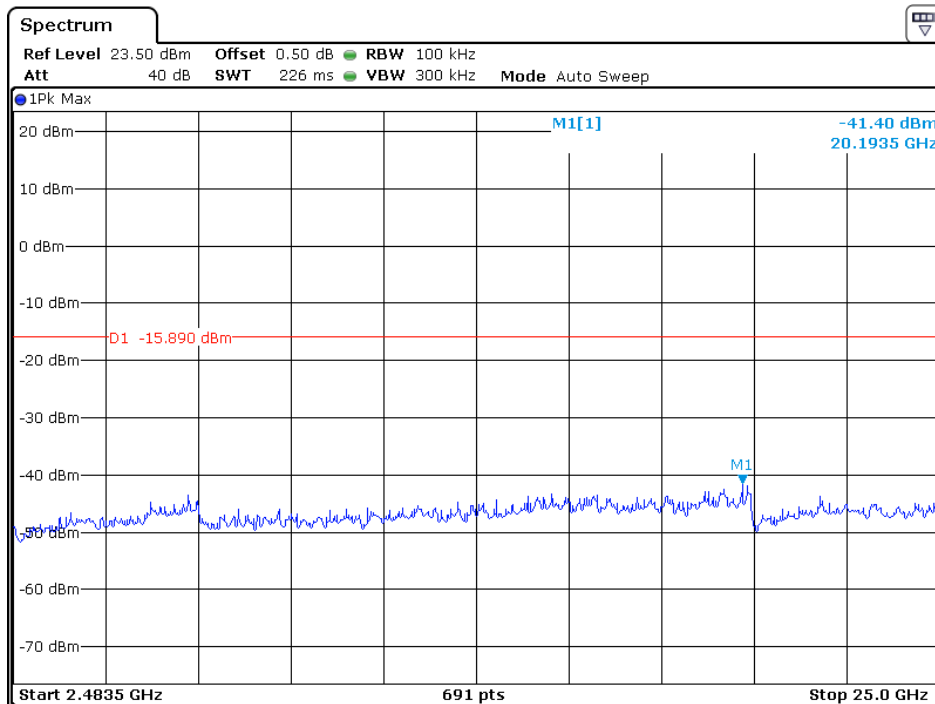
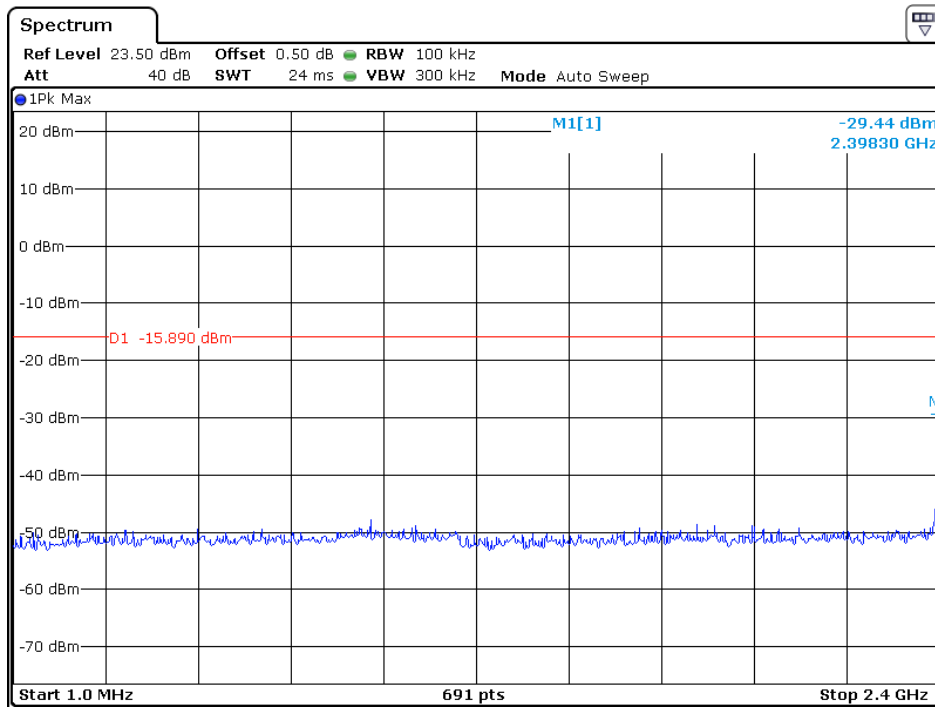


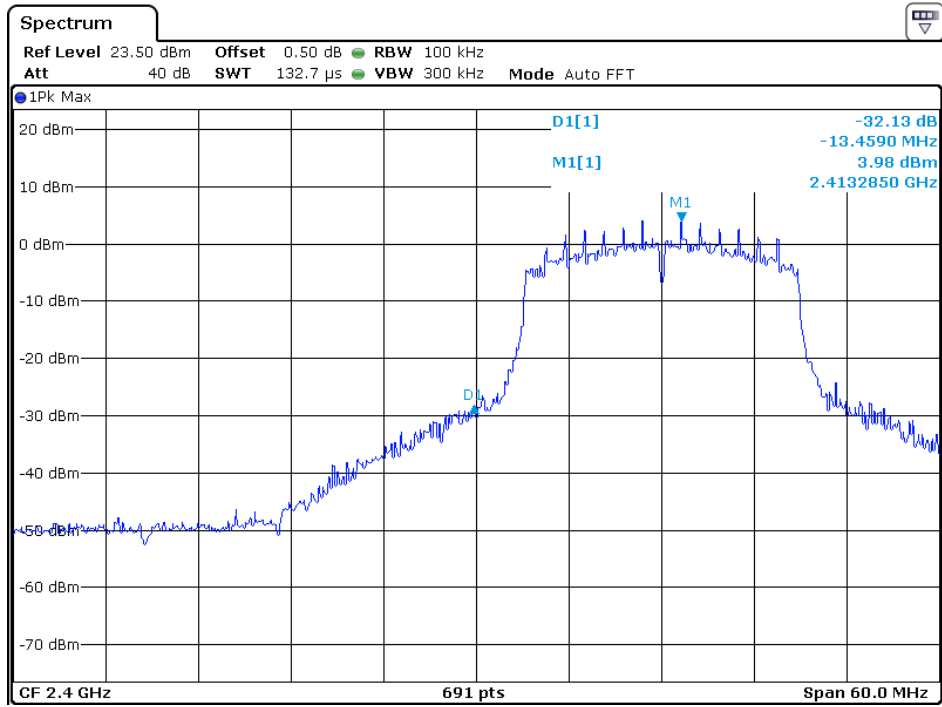


Channel 06 (2437MHz) Reference Level: 3.27dBm

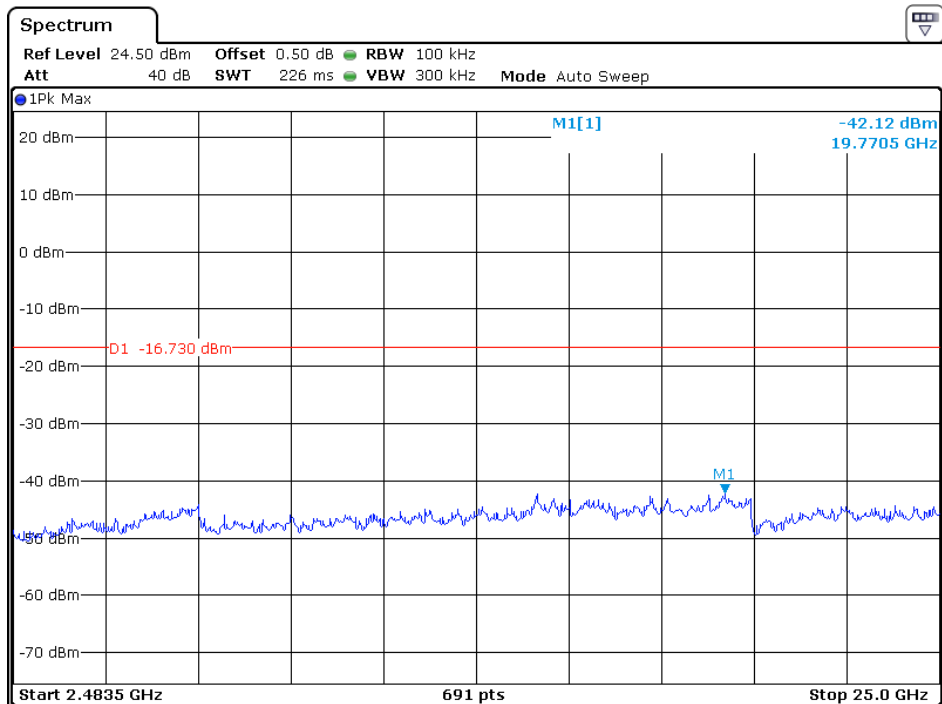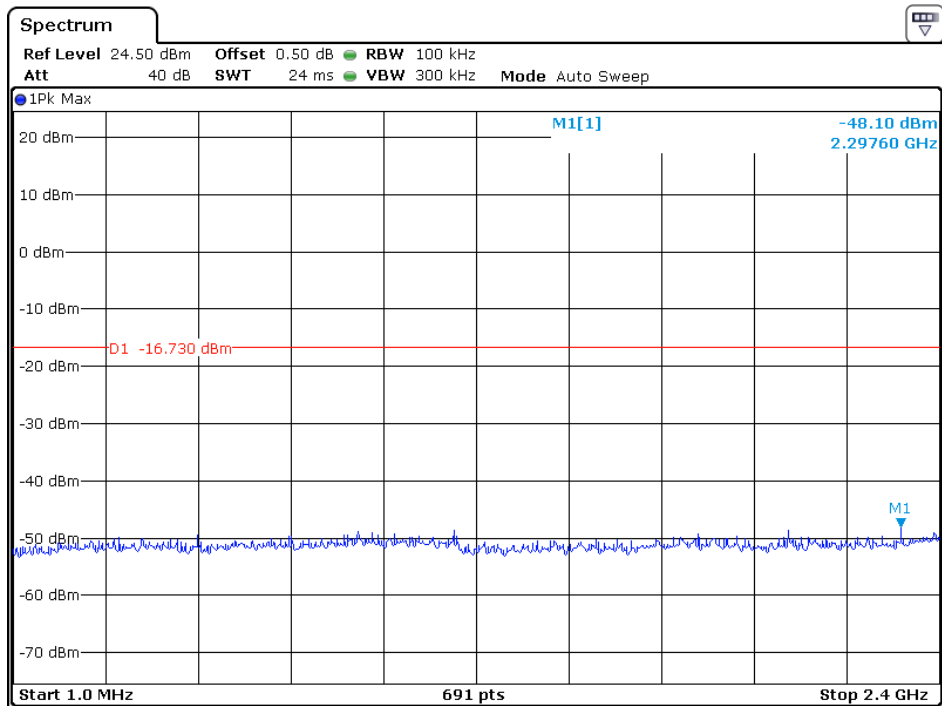

Channel 11 (2462MHz) Reference Level: 3.43dBm

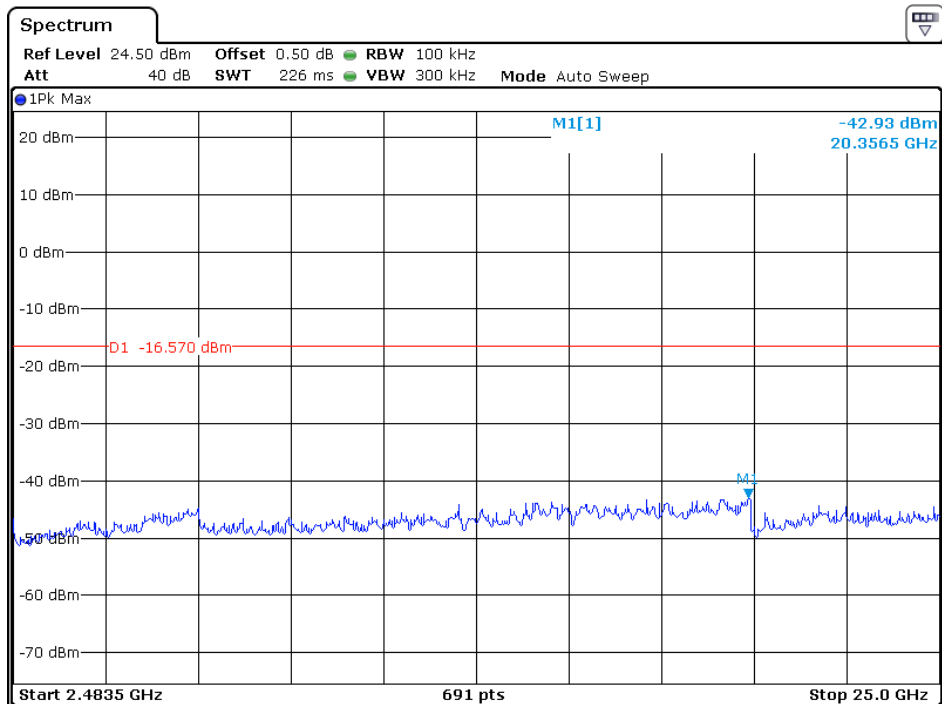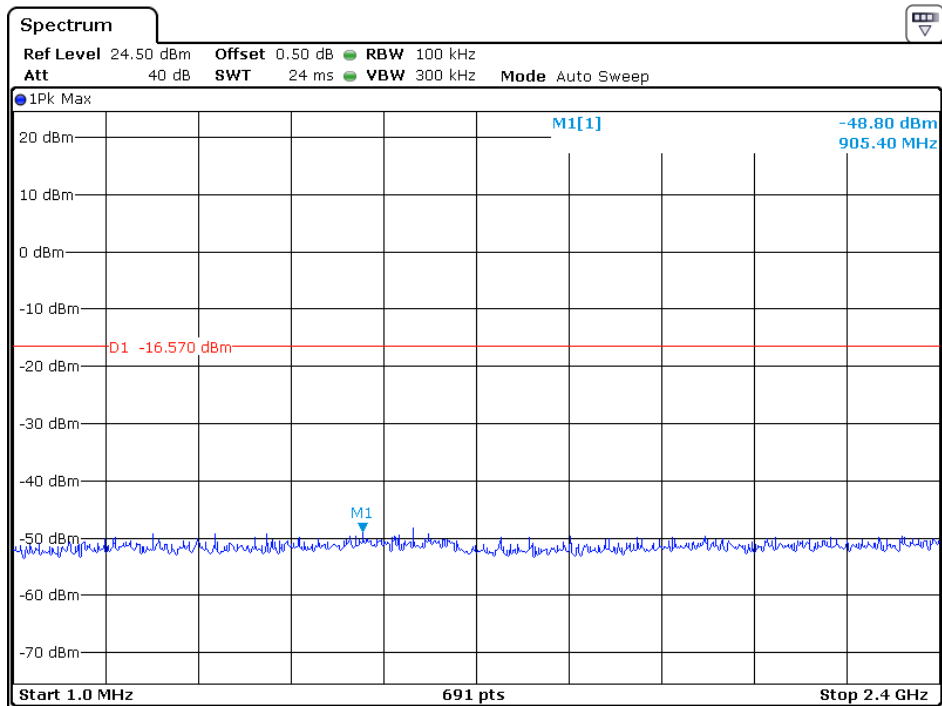

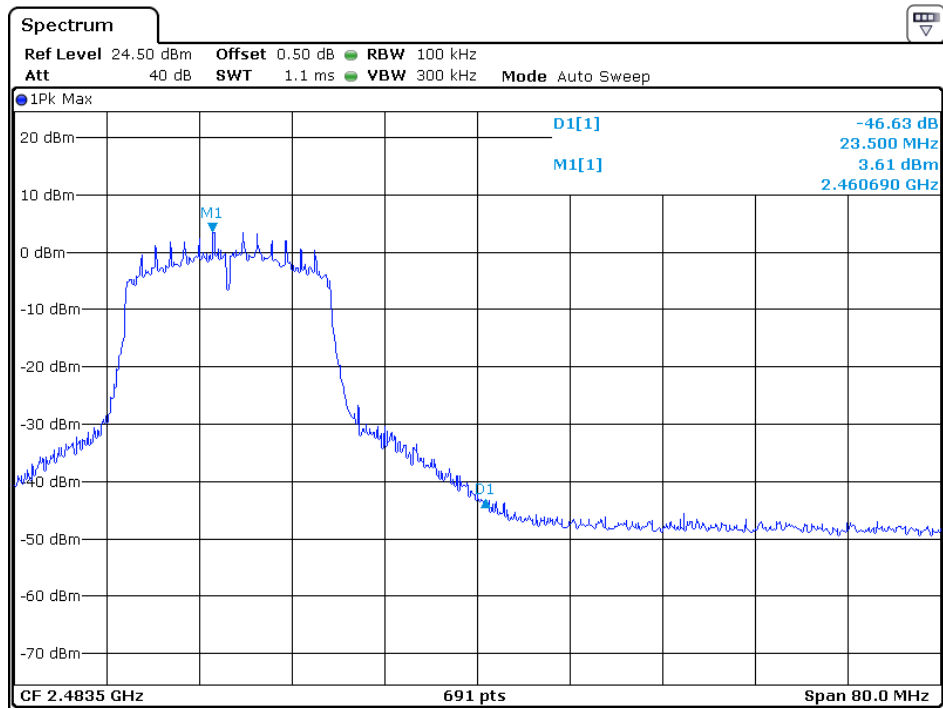

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: September 27, 2017

Model: Omars-Dogo

4.5 Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Not required, since all emissions are more than 20dB below fundamental

See attached data sheet

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b) (c):

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 42 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm} [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

4.8 Radiated Spurious Emission

Worst Case Radiated Spurious Emission (802.11b-Channel 01)
at 4824MHz
is passed by 0.7dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

Worst Case Operating Mode:

Transmitting (802.11b-Channel 01)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	52.423	38.5	20.0	13.3	31.8	40.0	-8.2
Horizontal	287.535	37.2	20.0	15.7	32.9	46.0	-13.1
Horizontal	409.755	38.6	20.0	19.3	37.9	46.0	-8.1
Vertical	52.478	41.5	20.0	13.5	35.0	40.0	-5.0
Vertical	66.594	35.5	20.0	15.8	31.3	40.0	-8.7
Vertical	409.755	38.3	20.0	20.3	38.6	46.0	-7.4

- NOTES:
1. Quasi-Peak detector is used for frequency below 1GHz.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

Worst Case Operating Mode:

Transmitting (802.11b-Channel 01)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	57.7	36.8	33.5	54.4	74.0	-19.6
Horizontal	*2390.000	55.8	36.4	29.1	48.5	74.0	-25.5

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	56.6	36.8	33.5	53.3	54.0	-0.7
Horizontal	*2390.000	54.2	36.4	29.1	46.9	54.0	-7.1

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

Worst Case Operating Mode:

Transmitting (802.11b-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	57.6	36.7	33.4	54.3	74.0	-19.7
Horizontal	*7311.000	58.0	36.6	35.8	57.2	74.0	-16.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	53.4	36.7	33.4	50.1	54.0	-3.9
Horizontal	*7311.000	47.6	36.6	35.8	46.8	54.0	-7.2

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

Worst Case Operating Mode:

Transmitting (802.11b-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	57.7	36.8	33.3	54.2	74.0	-19.8
Horizontal	*2484.500	64.1	36.5	29.3	56.9	74.0	-17.1

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	51.7	36.8	33.3	48.2	54.0	-5.8
Horizontal	*2484.500	53.6	36.5	29.3	46.4	54.0	-7.6

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

Worst Case Operating Mode:

Transmitting (802.11g-Channel 01)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	57.4	36.8	33.5	54.1	74.0	-19.9
Horizontal	*2390.000	51.9	36.4	29.1	44.6	74.0	-29.4

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	40.5	36.8	33.5	37.2	54.0	-16.8
Horizontal	*2390.000	37.4	36.4	29.1	30.1	54.0	-23.9

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

Worst Case Operating Mode:

Transmitting (802.11g-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	57.5	36.7	33.4	54.2	74.0	-19.8
Horizontal	*7311.000	58.6	36.6	35.8	57.8	74.0	-16.2

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	43.1	36.7	33.4	39.8	54.0	-14.2
Horizontal	*7311.000	44.2	36.6	35.8	43.4	54.0	-10.6

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

Worst Case Operating Mode:

Transmitting (802.11g-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	57.8	36.8	33.3	54.3	74.0	-19.7
Horizontal	*2484.50	64.9	36.5	29.3	57.7	74.0	-16.3

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	43.6	36.8	33.3	40.1	54.0	-13.9
Horizontal	*2484.500	50.7	36.5	29.3	43.5	54.0	-10.5

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

Worst Case Operating Mode:

Transmitting (802.11n20-Channel 01)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	58.8	36.8	33.5	55.5	74.0	-18.5
Horizontal	*2390.000	54.5	36.4	29.1	47.2	74.0	-26.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4824.000	41.7	36.8	33.5	38.4	54.0	-15.6
Horizontal	*2390.000	38.0	36.4	29.1	30.7	54.0	-23.3

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

Worst Case Operating Mode:

Transmitting (802.11n20-Channel 06)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	59.5	36.7	33.4	56.2	74.0	-17.8
Horizontal	*7311.000	60.9	36.6	35.8	60.1	74.0	-13.9

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4874.000	41.7	36.7	33.4	38.4	54.0	-15.6
Horizontal	*7311.000	43.1	36.6	35.8	42.3	54.0	-11.7

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

Worst Case Operating Mode:

Transmitting (802.11n20-Channel 11)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	59.3	36.8	33.3	55.8	74.0	-18.2
Horizontal	*2484.500	67.2	36.5	29.3	60.0	74.0	-14.0

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	*4924.000	41.7	36.8	33.3	38.2	54.0	-15.8
Horizontal	*2484.500	49.6	36.5	29.3	42.4	54.0	-11.6

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: October 24, 2017

Model: Omars-Dogo

4.9 Radiated Emissions from Digital Section of Transceiver, FCC Ref: 15.109

Not required - No digital part

Test results are attached

Included in the separated report.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: September 20, 2017

Model: Omars-Dogo

4.10 Conducted Emission

Worst Case Conducted emission at 0.438MHz is Passed by 12.5dB margin

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.


Date of Test: September 20, 2017

Model: Omars-Dogo

Worst Case Operating Mode: 802.11n-HT20 (TX-Channel 01)

Line: Live

Conducted Emission Test - FCC

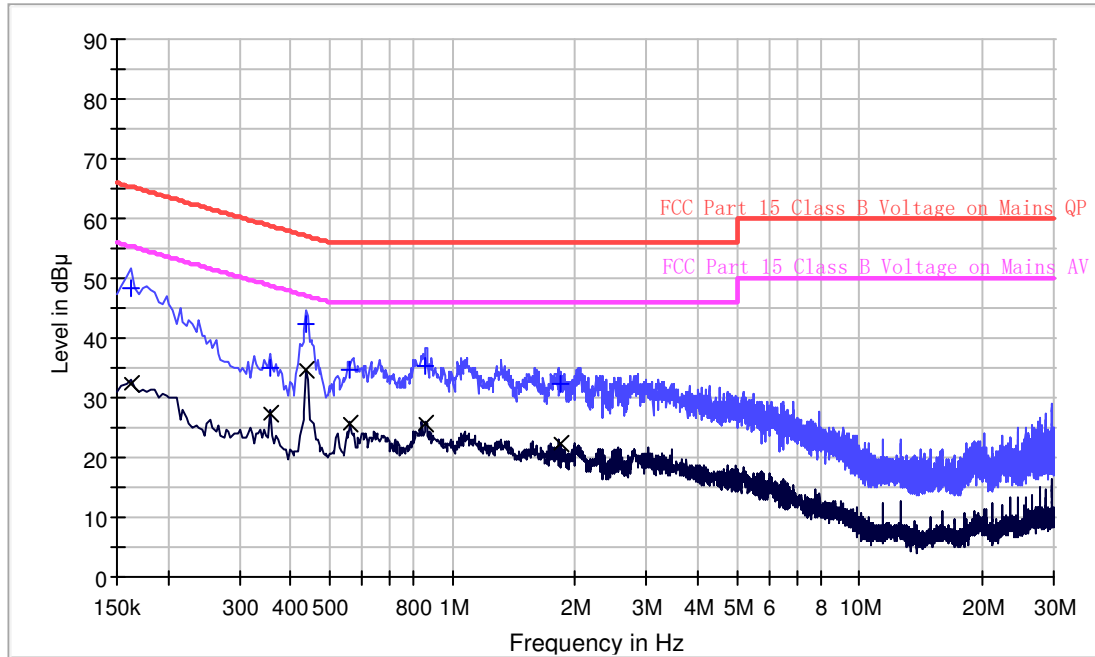

Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.162000	48.2	L1	9.6	17.2	65.4
0.358000	34.9	L1	9.7	23.9	58.8
0.438000	42.4	L1	9.7	14.7	57.1
0.562000	34.7	L1	9.7	21.3	56.0
0.862000	35.5	L1	9.7	20.5	56.0
1.838000	32.2	L1	9.7	23.8	56.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.162000	32.3	L1	9.6	23.1	55.4
0.358000	27.5	L1	9.7	21.3	48.8
0.438000	34.6	L1	9.7	12.5	47.1
0.562000	25.8	L1	9.7	20.2	46.0
0.862000	25.7	L1	9.7	20.3	46.0
1.838000	22.3	L1	9.7	23.7	46.0

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.


Date of Test: September 20, 2017

Model: Omars-Dogo

Worst Case Operating Mode: 802.11n-HT20 (TX-Channel 01)

Line: Neutral

Conducted Emission Test - FCC

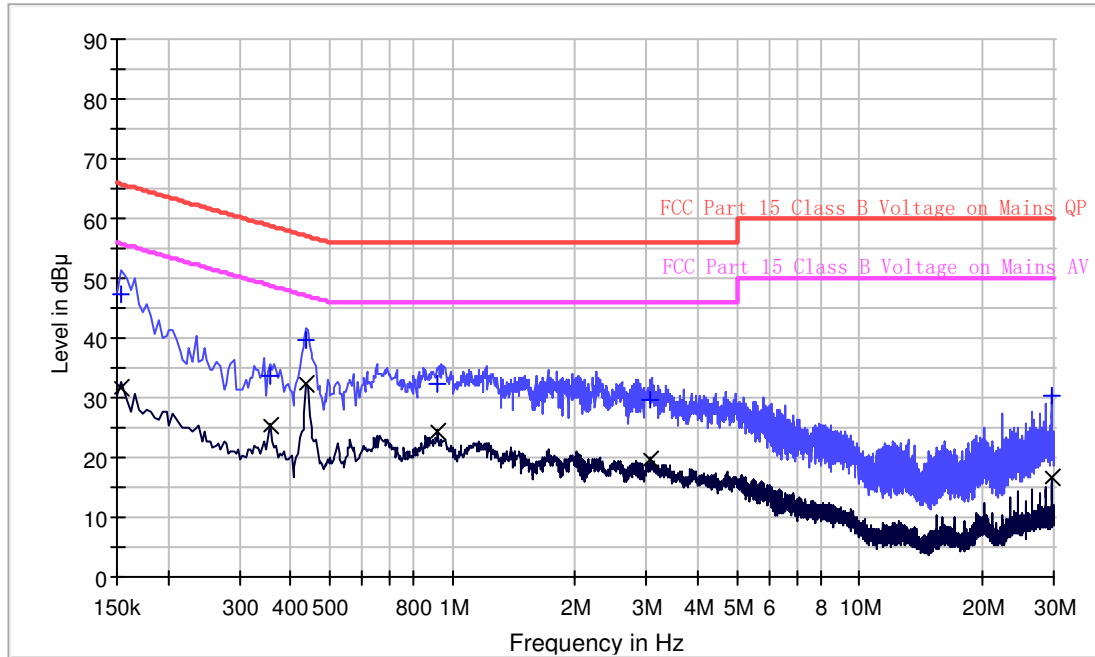

Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154000	47.4	N	9.6	18.4	65.8
0.358000	33.6	N	9.7	25.2	58.8
0.438000	39.6	N	9.7	17.5	57.1
0.922000	32.5	N	9.7	23.5	56.0
3.062000	29.7	N	9.8	26.3	56.0
29.766000	30.2	N	10.9	29.8	60.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154000	31.8	N	9.6	24.0	55.8
0.358000	25.5	N	9.7	23.3	48.8
0.438000	32.3	N	9.7	14.8	47.1
0.922000	24.4	N	9.7	21.6	46.0
3.062000	19.7	N	9.8	26.3	46.0
29.766000	16.8	N	10.9	33.2	50.0

Applicant: SHENZHEN DNS INDUSTRIES CO., LTD.

Date of Test: September 27, 2017

Model: Omars-Dogo

4.11 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

EXHIBIT 5
EQUIPMENT PHOTOGRAPHS

5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

EXHIBIT 6

PRODUCT LABELLING

6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

EXHIBIT 7

TECHNICAL SPECIFICATIONS

7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

EXHIBIT 8

INSTRUCTION MANUAL

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

EXHIBIT 9

CONFIDENTIALITY REQUEST

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

EXHIBIT 10
MISCELLANEOUS INFORMATION

10.0 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, *Spectrum Analysis ... Pulsed RF*.

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

EXHIBIT 11

TEST EQUIPMENT LIST

11.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ182-02	RF Power Meter	Anritsu	ML2496A	1302005	1-Jun-2017	1-Jun-2018
SZ182-02-01	Power Sensor	Anritsu	MA2411B	1207429	1-Jun-2017	1-Jun-2018
SZ185-01	EMI Receiver	R&S	ESCI	100547	9-Feb-2017	9-Feb-2018
SZ061-08	Horn Antenna	ETS	3115	00092346	20-Sep-2017	20-Sep-2018
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	26-May-2017	26-May-2018
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	1-Jun-2017	1-Jun-2018
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	7-Jul-2017	7-Jul-2018
SZ181-04	Preamplifier	Agilent	8449B	3008A024 74	9-Feb-2017	9-Feb-2018
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIALL	RG 213U	--	30-Jun-2017	30-Dec-2017
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	11-Sep-2017	11-Mar-2018
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	11-Sep-2017	11-Mar-2018
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	14-Jun-2017	14-Jun-2018
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	1-Nov-2016	1-Nov-2017
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	1-Nov-2016	1-Nov-2017
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2019
SZ061-03	BiConiLog Antenna	ETS	3142C	00078828	20-Sep-2017	20-Sep-2018