


INTERTEK TESTING SERVICES


Report No.: HK11041104-1
Sample No.: 1/1

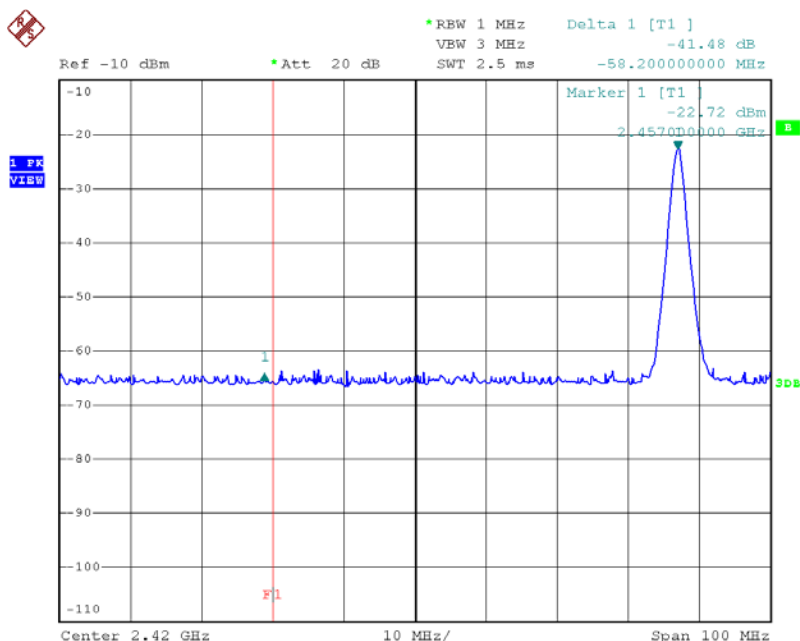

OATS = 96.00 dBuV/m
 Field Strength (Peak)
 =96.00 – 41.48 dBuV/m
 =54.52 dBuV/m

Field Strength (Average)
 =54.52 – AF dBuV/m
 =54.52 – 54.20 dBuV/m
 =0.32 dBuV/m

Date: 12.MAY.2011 05:18:30

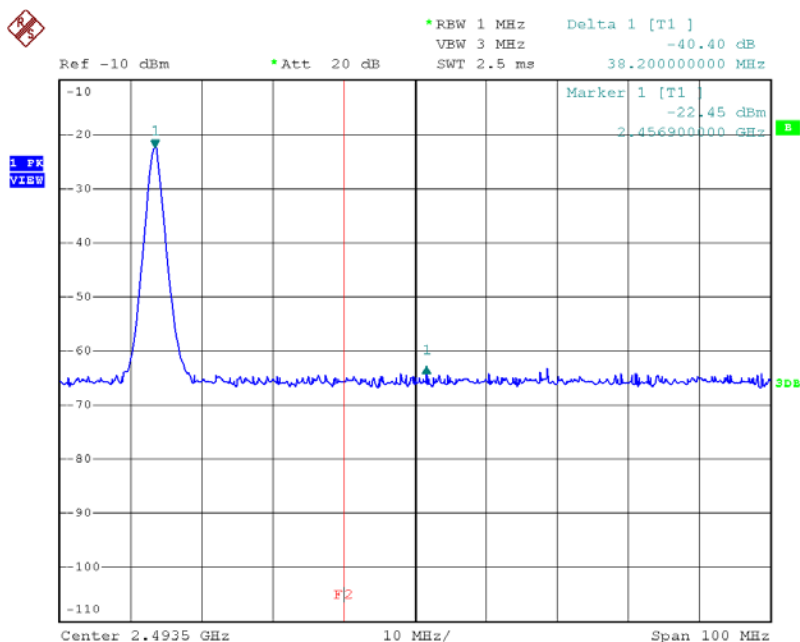

OATS = 96.00 dBuV/m
 Field Strength (Peak)
 =96.00 – 40.40 dBuV/m
 =55.60 dBuV/m

Field Strength (Average)
 =55.60 – AF dBuV/m
 =55.60 – 54.20 dBuV/m
 =1.40 dBuV/m

Date: 12.MAY.2011 05:20:26

Bandedge Plot - Pursuant to FCC Part 15 Section 15.249 Requirement (Pass/Fail)