



Testing Tomorrow's Technology

Application for
Title 47 USC, Part 2, Subpart J, Section 2.942 Equipment Authorization of
Modular Certification
Per
FCC Part 25
for the
Sypes Canyon Communications
Model ZeMo SCC-001
FCC ID: ZBR001
IC: 9540A-001

Issue Date: February 21, 2011
UST Project No: 11-0013

Number of pages contained in his report: 52


3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com



Testing Tomorrow's Technology

I certify that I am authorized to sign for the test facility and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: 

Name: Alan Ghasiani

Title: Consulting Engineer - President

Date: February 21, 2011

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

TABLE OF CONTENTS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	GENERAL INFORMATION	6
1.1	Product Description.....	6
1.2	Related Approvals.....	6
2	Test and Measurements	7
2.1	Configuration of Tested System.....	7
2.2	Test Facility.....	7
2.3	Test Equipment.....	7
2.4	Modifications to Equipment under Test (EUT)	7
2.5	Antenna Description.....	11
2.6	RF Power Output (FCC Section 2.1046, 25.204).....	12
2.7	Modulation Characteristics (FCC Section 2.1047)	18
2.8	Occupied Bandwidth and Emission Limitations (FCC Sec. 2.1049, 25.202(f))	19
2.9	Spurious Emissions at Antenna Terminals (FCC Section 2.1051)	24
2.10	Field Strength of Spurious Radiation (FCC Section 2.1053, 25.202(f)).....	31
2.11	Frequency Stability (FCC Section 2.1055 and 25.202(d)).....	33
2.12	Emissions from Mobile Earth Stations for Protection of Aeronautical Radio navigation-Satellite Service. (FCC 25.216).....	36
2.13	Unintentional Radiator, Radiated Emissions (CFR 15.109)	42
2.14	Unintentional Radiator Power Lines Conducted Emissions (CFR 15.107).....	47
3	Measurement Uncertainty	48
3.1	Conducted Emissions Measurement Uncertainty:	48
3.2	Radiated Emissions Measurement Uncertainty:	48
4	PHOTOGRAPHS	49
5	RF EXPOSURE INFORMATION	52

LIST OF FIGURES

<u>Figure</u>	<u>Title</u>	<u>Page</u>
Figure 1	- Test Configuration.....	8
Figure 2	- Photograph of Spurious Emissions Measurement Setup - Rear View	9
Figure 3	- Photograph of Spurious Emissions Measurement Setup - Front View.....	10
Figure 4	- RF Power Output Channel A.....	14
Figure 5	- RF Power Output Channel B.....	15
Figure 6	- RF Power Output Channel C	16
Figure 7	- RF Power Channel D	17
Figure 8	- Occupied Bandwidth – Low Channel A.....	20
Figure 9	- Emission Limitation, 50% to 100% from mid frequency, Low Channel A.....	21
Figure 10	- Occupied Bandwidth, High Channel D.....	22
Figure 11	- Emission Limitation, 50% to 100% from mid frequency,	23
Figure 12	- Spurious Emissions at Antenna Terminals - Channel A.....	25
Figure 13	- Spurious Emissions at Antenna Terminals - Channel A.....	26
Figure 14	- Spurious Emissions at Antenna Terminals - Channel A.....	27
Figure 15	- Spurious Emissions at Antenna Terminals - Channel D.....	28
Figure 16	- Spurious Emissions at Antenna Terminals - Channel D.....	29
Figure 17	- Spurious Emissions at Antenna Terminals - Channel D.....	30
Figure 18	- Emissions from Mobile Earth Stations for Protection of Aeronautical Radio- navigation-Satellite Service (25.216(c) (1))	37
Figure 19	- Emissions from Mobile Earth Stations for Protection of Aeronautical Radio- navigation-Satellite Service (FCC 25.216(c) (2))	38
Figure 20	- Emissions from Mobile Earth Stations for Protection of Aeronautical Radio- navigation-Satellite Service (FCC 25.216(g)(1)).....	39
Figure 21	- Emissions from Mobile Earth Stations for Protection of Aeronautical Radio- navigation-Satellite Service (FCC 25.216(g)(2)).....	40
Figure 22	- Emissions from Mobile Earth Stations for Protection of Aeronautical Radio- navigation-Satellite Service (FCC 25.216(i))	41
Figure 23	- Radiated Emissions Test Data - 30 MHz to 1000 MHz-Horizontal.....	44
Figure 24	- Radiated Emissions Test Data - 30 MHz to 1000 MHz-Vertical	45
Figure 25	- Top View of EUT	49
Figure 26	- Bottom View of EUT.....	50
Figure 27	- Transmitter Module with Shield in Place	51

LIST OF TABLES

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1 - EUT and Peripherals		8
Table 2 - Test Instruments		11
Table 3 - RF POWER OUTPUT		13
Table 4 - Field Strength of Spurious Radiation.....		32
Table 5 - Frequency Stability versus Temperature at Start-up		33
Table 6 - Frequency Stability versus Temperature 2 mins after start-up.....		34
Table 7 - Frequency Stability versus Temperature 5 mins after start-up.....		34
Table 8 - Frequency Stability versus Temperature 10 mins after start-up		35
Table 9 - Unintentional Radiator, Radiated Emissions (CFR 15.109).....		43
Table 10 - Unintentional Radiator, Radiated Emissions (CFR 15.109)-Above 1 GHz ...		46

1 GENERAL INFORMATION

1.1 Product Description

The Equipment Under Test (EUT) is a surface-mount satellite transmitter compatible for use over Globalstar Simplex Data Service. It is a transmit-only device requiring integration into an application-level assembly. The ZeMo transmitter operates over 3.3 to 5.0 VDC input and receives configuration information and data via a dedicated 12C serial interface. The unit is compact and battery powered.

The EUT was configured to operate at 1611.25 and 1618.75 MHz. For the purpose of this test the EUT was placed into a maximum transmission mode, transmitting a signal every 5 seconds.

1.2 Related Approvals

The EUT is subject to the following authorizations:

- a) Certification as a Non-Broadcast Station Transmitter as specified by FCC Part 25.
- b) Verification as a Digital Device as specified by FCC 15.101.

2 Test and Measurements

2.1 Configuration of Tested System

A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious emissions measurements are shown in Figure 2 and 3.

2.2 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and registered with the FCC under designation number US5117. Additionally, this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 2982A-1.

2.3 Test Equipment

Table 2 describes test equipment used to evaluate this product.

2.4 Modifications to Equipment under Test (EUT)

No modifications were made by US Tech to bring the EUT into compliance with FCC requirements.




Figure 1 - Test Configuration

Table 1 - EUT and Peripherals

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID: IC:	CABLES P/D
Transmitter (EUT)	SCC-001	None	ZBR001 9540A-001	1m U USB For programming only

s = shielded

u = unshielded



Figure 2 – Photograph of Spurious Emissions Measurement Setup - Rear View



Figure 3 - Photograph of Spurious Emissions Measurement Setup - Front View

Table 2 - Test Instruments

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	DATE OF LAST CALIBRATION
SPECTRUM ANALYZER	8593E	HEWLETT-PACKARD	3205A00124	10/18/2010
SPECTRUM ANALYZER	8566B	HEWLETT-PACKARD	2410A00109	10/29/10
RF PREAMP 100 kHz to 1.3	8447D	HEWLETT-PACKARD	2944A06291	9/7/10
BICONICAL ANTENNA	BIA25	Electro-Metrics	2451	12/29/09 2 Year
LOG PERIODIC 100 MHz to 1000	3146	EMCO	3110-3236	1/22/10 2 Year
HORN ANTENNA 1 GHz to 18 GHz	SAS-571	A. H. Systems	605	2/9/2010 2 Year
PREAMP 1 GHz to 26.5 GHz	8449B	HEWLETT-PACKARD	3008A00480	9/21/10
CALCULATION PROGRAM	N/A	N/A	Ver. 6.0	N/A

Note: The calibration interval of the above test instruments is 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

2.5 Antenna Description

The EUT incorporates a Satellite transmit antenna: ceramic patch, +5 dBi gain, passive, Spectrum Advanced Specialties part number PA45-1615-1575SA.

2.6 RF Power Output (FCC Section 2.1046, 25.204)

In bands shared coequally with terrestrial radio communications services, the equivalent isotropic radiated power (EIRP) transmitted in any direction towards the horizon by an earth station operating in frequency bands between 1 and 15 GHz, shall not exceed the limits below.

For angles of elevation of the horizon greater than 5 degrees there shall be no restriction as to the equivalent isotropic radiated power transmitted by an earth station towards the horizon.

Limit = $EIRP < +40 \text{ dBW (+70 dBm)}$ in any 4 kHz band for $\theta = 0$ degrees

The manufacturer has stated that the EUT has a maximum output power of +22 dBm.

Test data is found in Table 3 and Figures 4 and 5 below.

US Tech Test Report
Report Number:
Issue Date:
Customer:
FCC ID/IC:
Model:


FCC Part 25 Certification
11-0013
February 15, 2011
Sypes Canyon
ZBR001/9540A-001
ZeMo Satellite Transmitter SCC-001

Table 3 - RF POWER OUTPUT

Frequency of Fundamental (MHz)	Measurement (dBm)	Cable Loss (dB)	Adjusted Measurement (dBm)	Limit (dBm)
1611.330	21.3	0.2	21.5	+70
1613.750	20.7	0.2	20.9	+70
1616.250	20.7	0.2	20.9	+70
1618.750	19.96	0.2	20.16	+70

Note: Given the output power and antenna gain of +5 dBi, even the direct lobe of radiation meets the FCC's EIRP Requirement for $\theta = 0$ (+40 dBW, +70 dBm)

Test Date: February 3, 2011

Tester Signature: 

Name: Keyvan Muvahhid

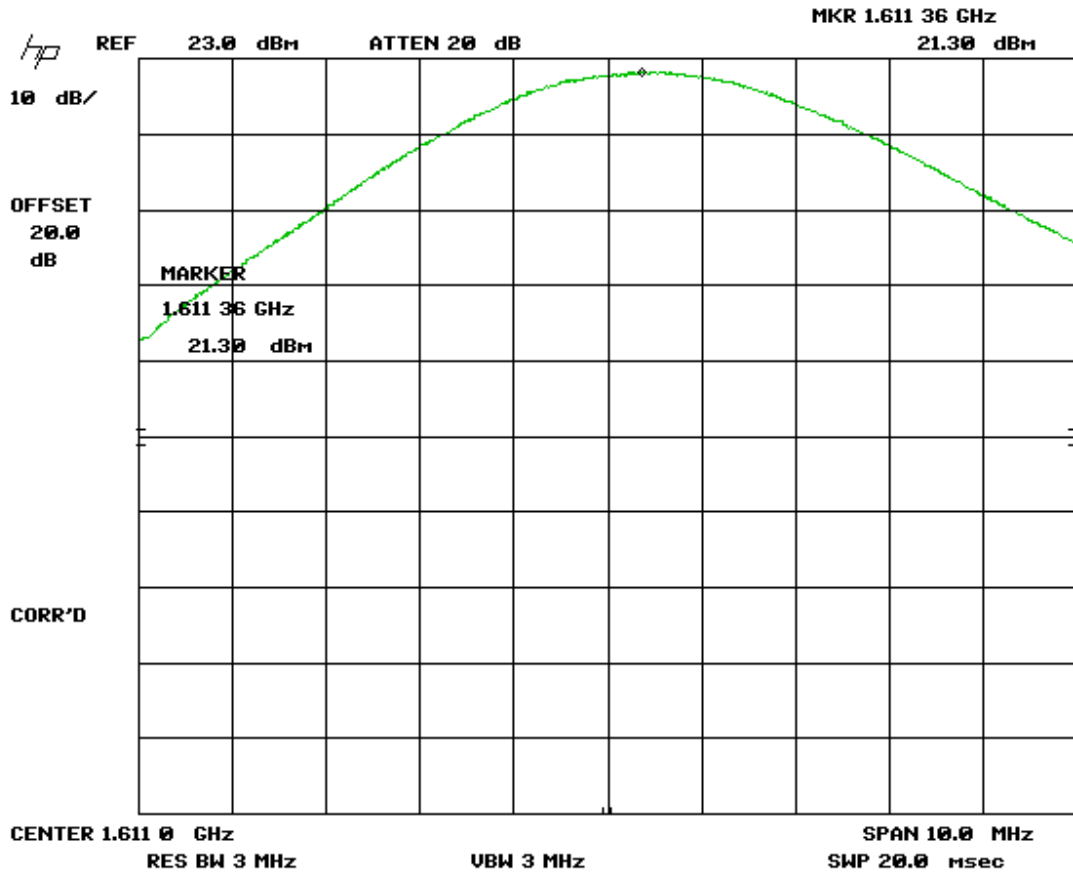


Figure 4 - RF Power Output Channel A

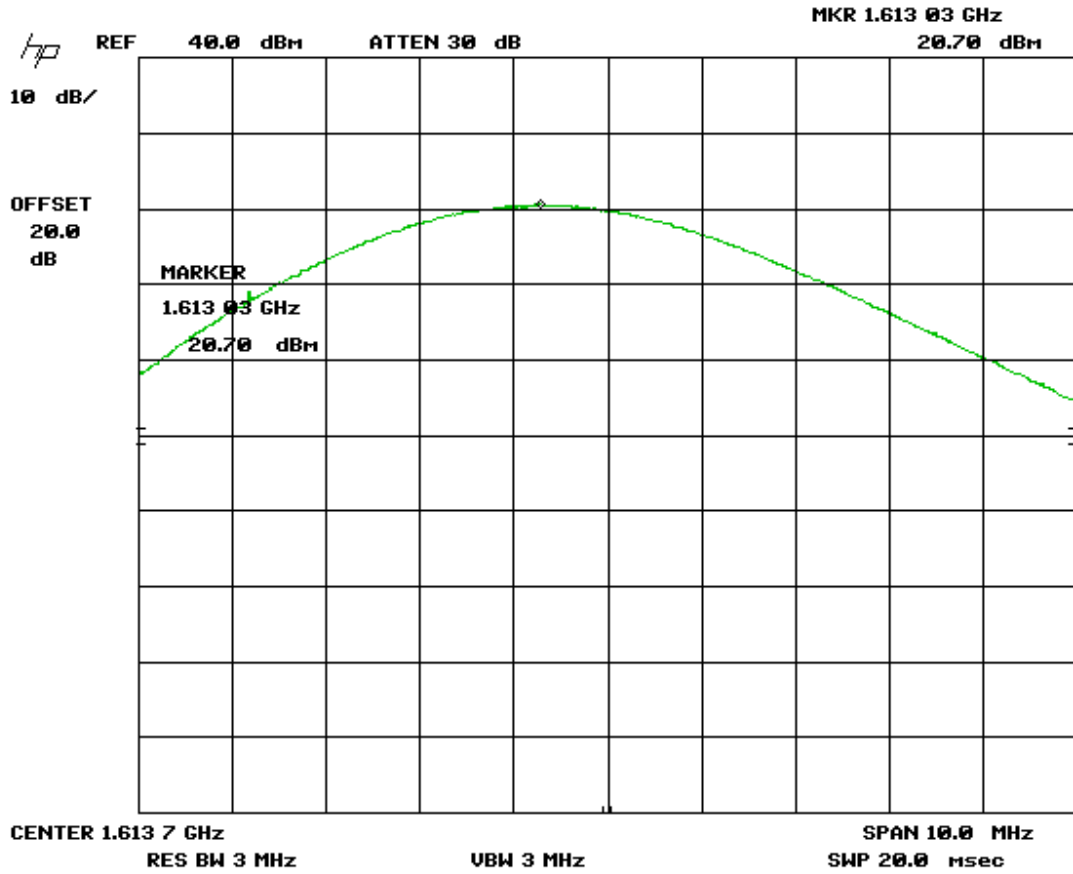


Figure 5 - RF Power Output Channel B

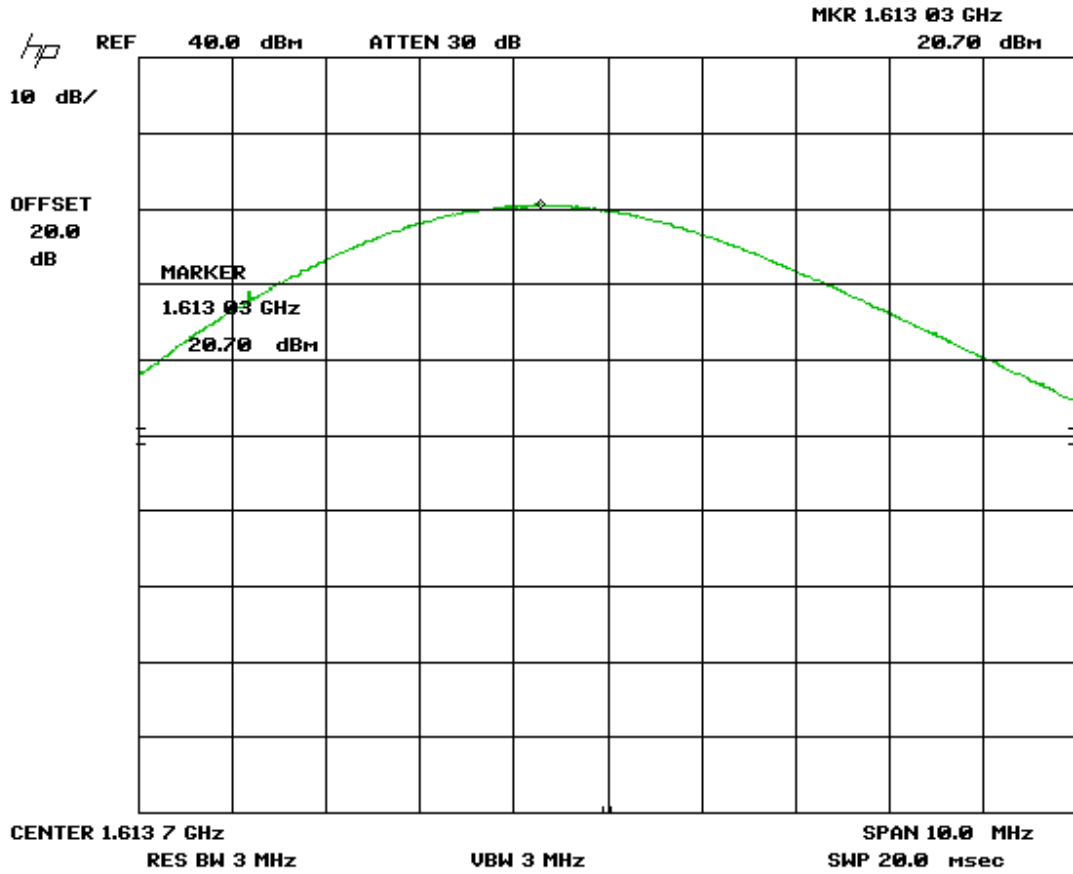


Figure 6 - RF Power Output Channel C

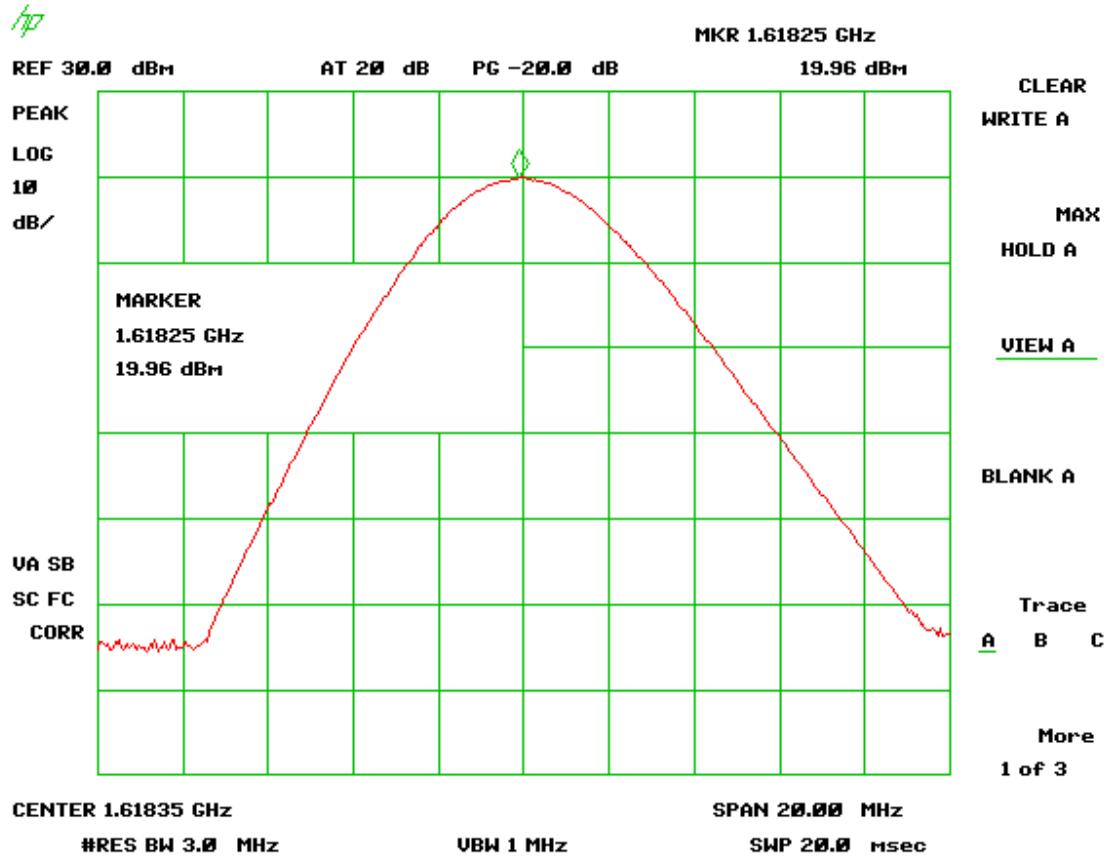


Figure 7 - RF Power Channel D

US Tech Test Report
Report Number:
Issue Date:
Customer:
FCC ID/IC:
Model:

FCC Part 25 Certification
11-0013
February 15, 2011
Sypes Canyon
ZBR001/9540A-001
ZeMo Satellite Transmitter SCC-001

2.7 Modulation Characteristics (FCC Section 2.1047)

The EUT uses digital modulation techniques only, which were employed during the tests for occupied bandwidth.

2.8 Occupied Bandwidth and Emission Limitations (FCC Sec. 2.1049, 25.202(f))

2.8.1 The EUT was modulated by its own internal sources. Both Low and High Channels were tested. The bandwidth of the fundamental was measured using a spectrum analyzer. The results are shown in Figures 6 and 8 below. Long sweep times were applied at frequencies near the fundamental to ensure that a good signal was obtained.

2.8.2 Out-of-band emissions at frequencies removed from the midpoint of the assigned frequency by more than 50% up to and including 100% of the authorized bandwidth (2.5 MHz), should be attenuated by at least 25 dB. See figures 7 and 9 below:

2.8.3 Out-of-band emissions at frequencies removed from the midpoint of the assigned frequency by more than 100% (2.5 MHz to 6.25 MHz) up to and including 250% of the authorized bandwidth (2.5 MHz), should be attenuated by at least 35 dB. See figures 7 and 9 below.

2.8.4 Out-of-band emissions at frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (2.5 MHz), should be attenuated by at least $43 + 10 \log (P_{\text{Watts}})$ dB below the mean power of the transmitter.

For Lowest Channel = $43 + 10 \log (0.141) = 34.5$ dB, Limit = $21.5 - 34.5 = -13$ dBm.
For Highest Channel = $43 + 10 \log (0.104) = 33.2$ dB, Limit = $20.2 - 33.2 = -13$ dBm.
The results are shown in figure 10 through Figure 15.

Note: A 10 kHz RBW was used instead. This was deemed to meet the 4 kHz RBW requirement.

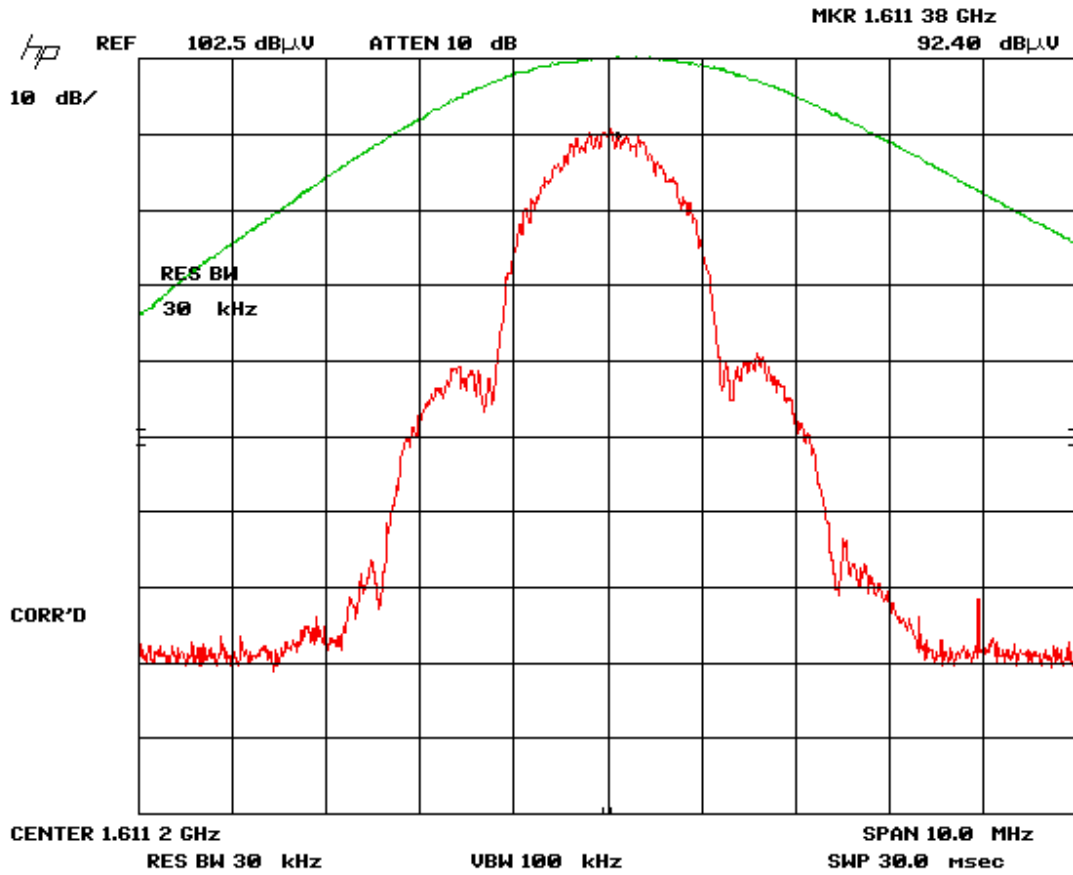


Figure 8 - Occupied Bandwidth – Low Channel A

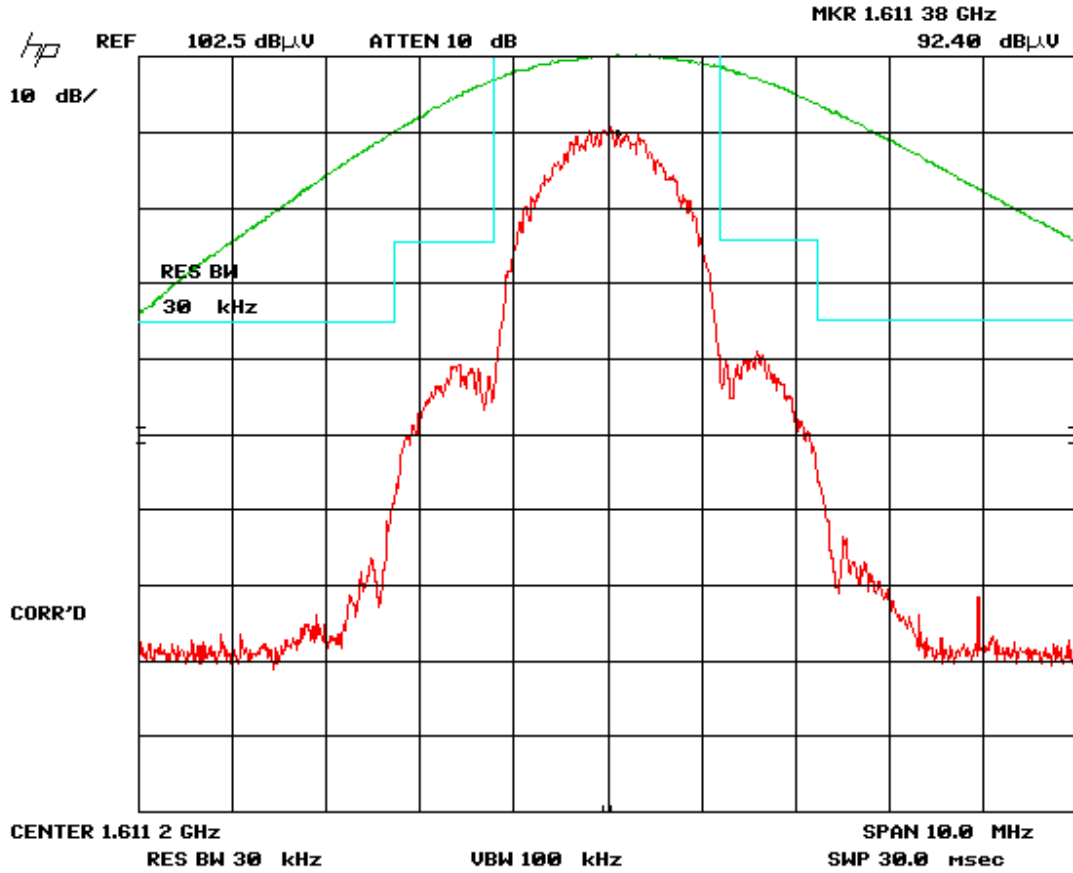


Figure 9 - Emission Limitation, 50% to 100% from mid frequency, Low Channel A

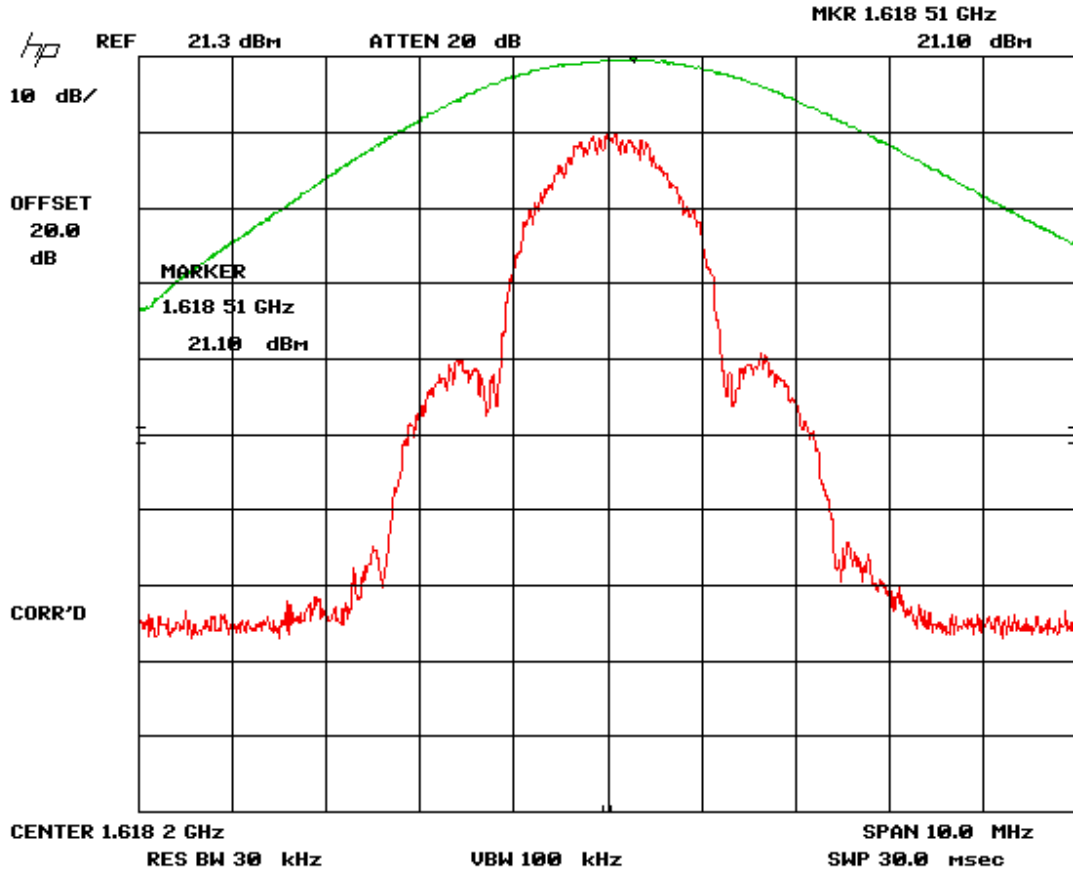


Figure 10 - Occupied Bandwidth, High Channel D

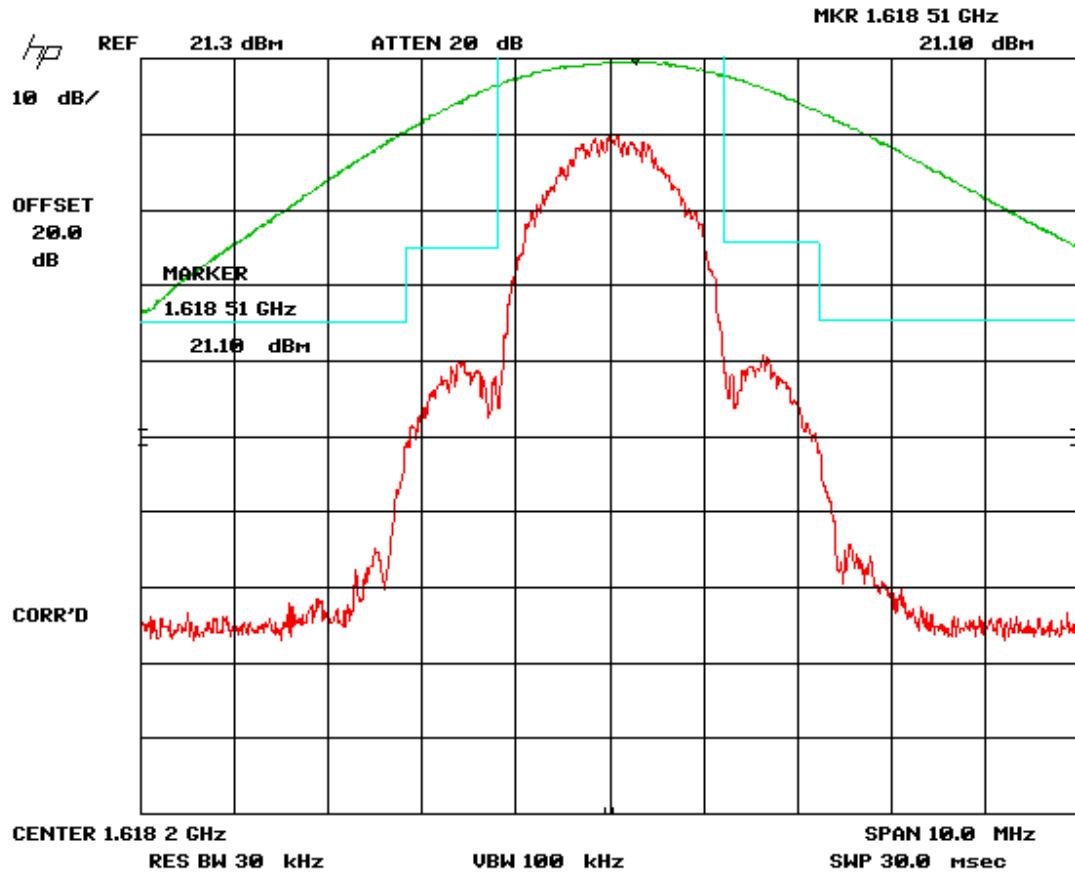


Figure 11 - Emission Limitation, 50% to 100% from mid frequency, High Channel D.

2.9 Spurious Emissions at Antenna Terminals (FCC Section 2.1051)

Out-of-band emissions at frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (2.5 MHz) shall be attenuated by at least:


$43 + 10 \log (P_{\text{Watts}})$ dB below the mean power of the transmitter.

For Lowest Channel = $43 + 10 \log (0.126) = 34$ dB down, limit = - 13 dBm

For Highest Channel = $43 + 10 \log (0.104) = 33.1$ dB down, limit = - 13 dBm

Note: A 10 kHz RBW was used instead of 4 kHz. This was deemed to be a worst case for the required 4 kHz RBW.
--

Spurious emissions appearing at the antenna terminals were measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable to the antenna output terminals or across the antenna leads on the PCB as specified by the manufacturer. Results are shown in Figures 10-15 below.

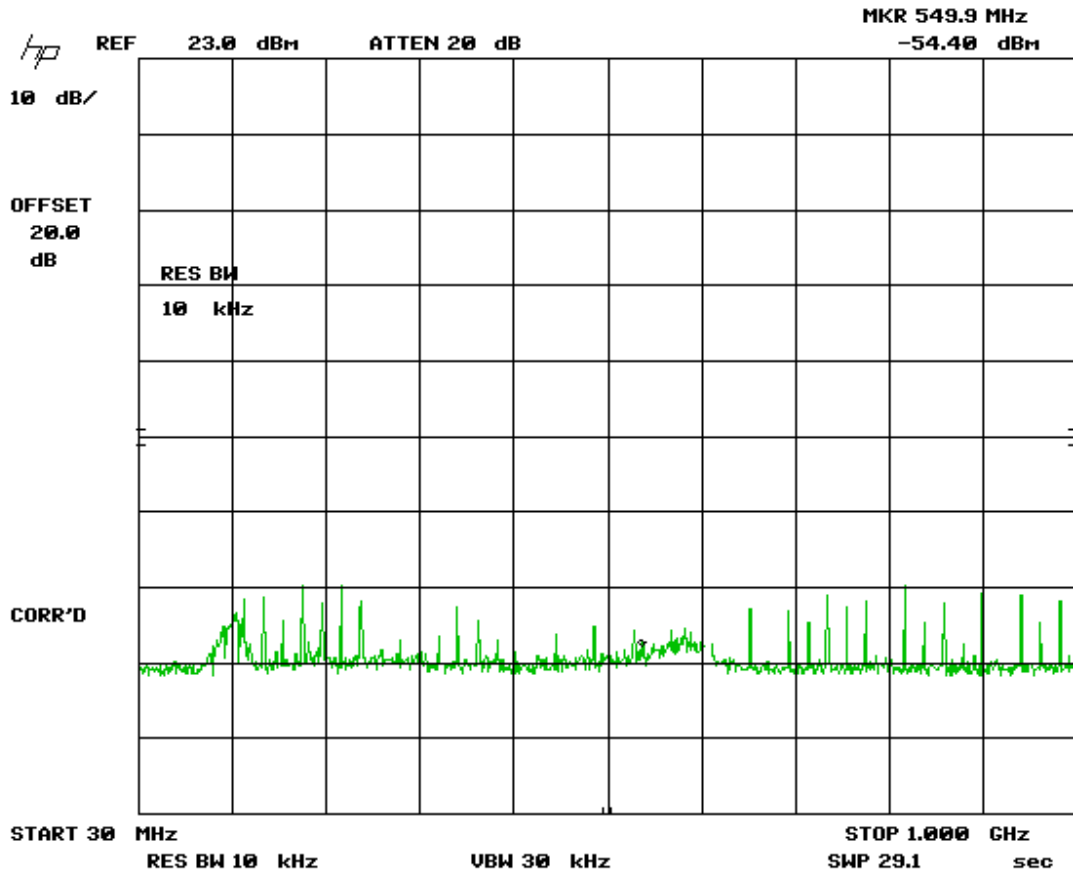

Limit = - 13 dBm

Figure 12 - Spurious Emissions at Antenna Terminals - Channel A

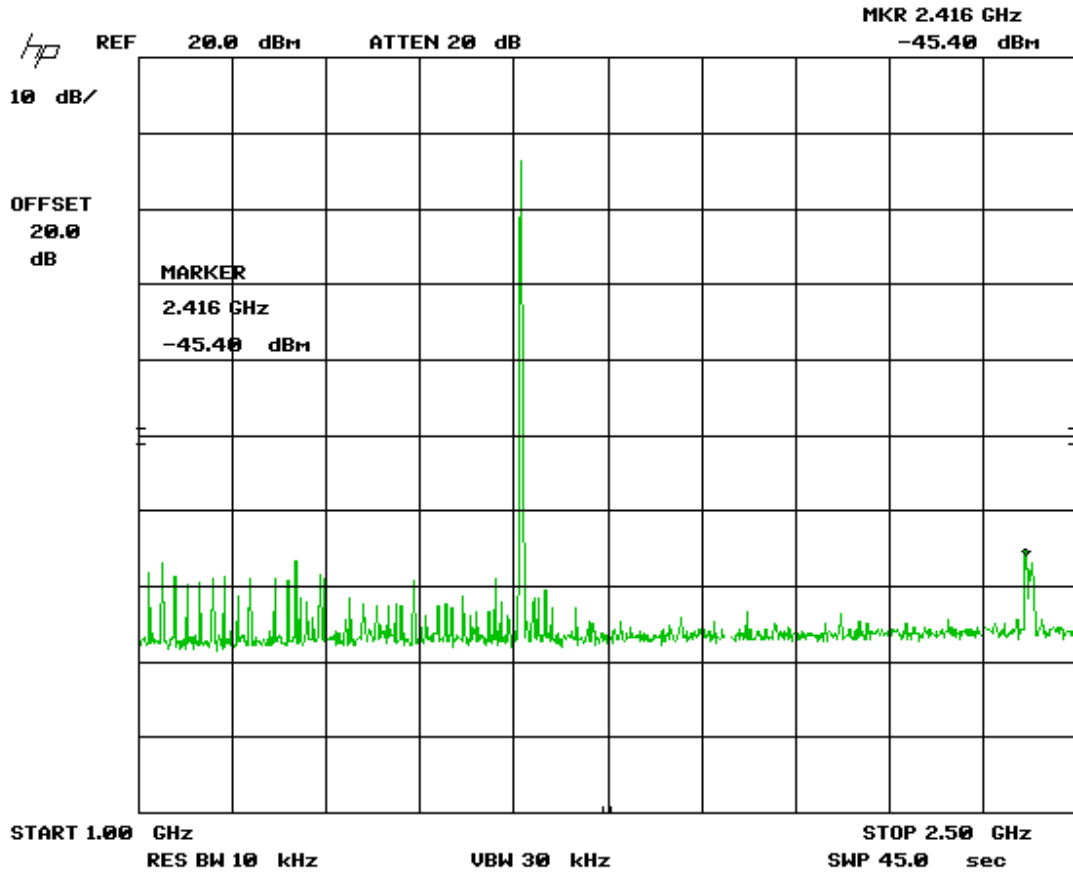


Figure 13 - Spurious Emissions at Antenna Terminals - Channel A

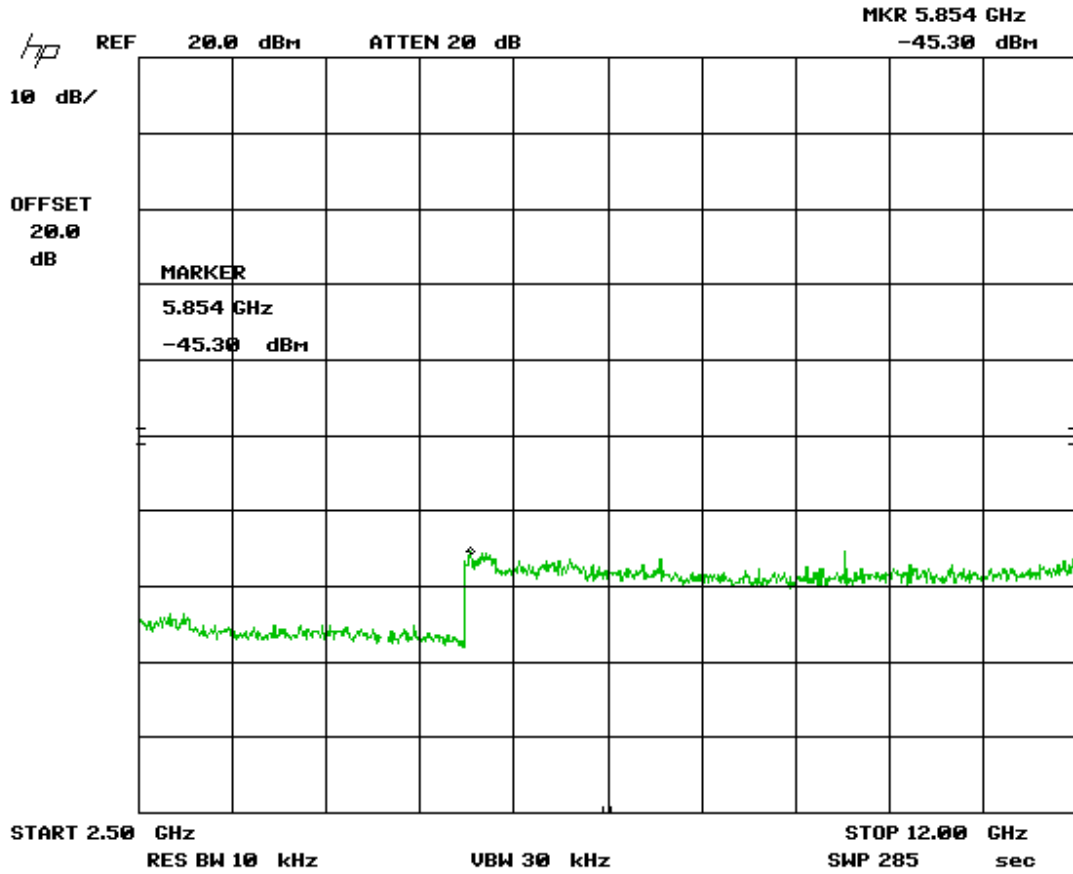


Figure 14 - Spurious Emissions at Antenna Terminals - Channel A

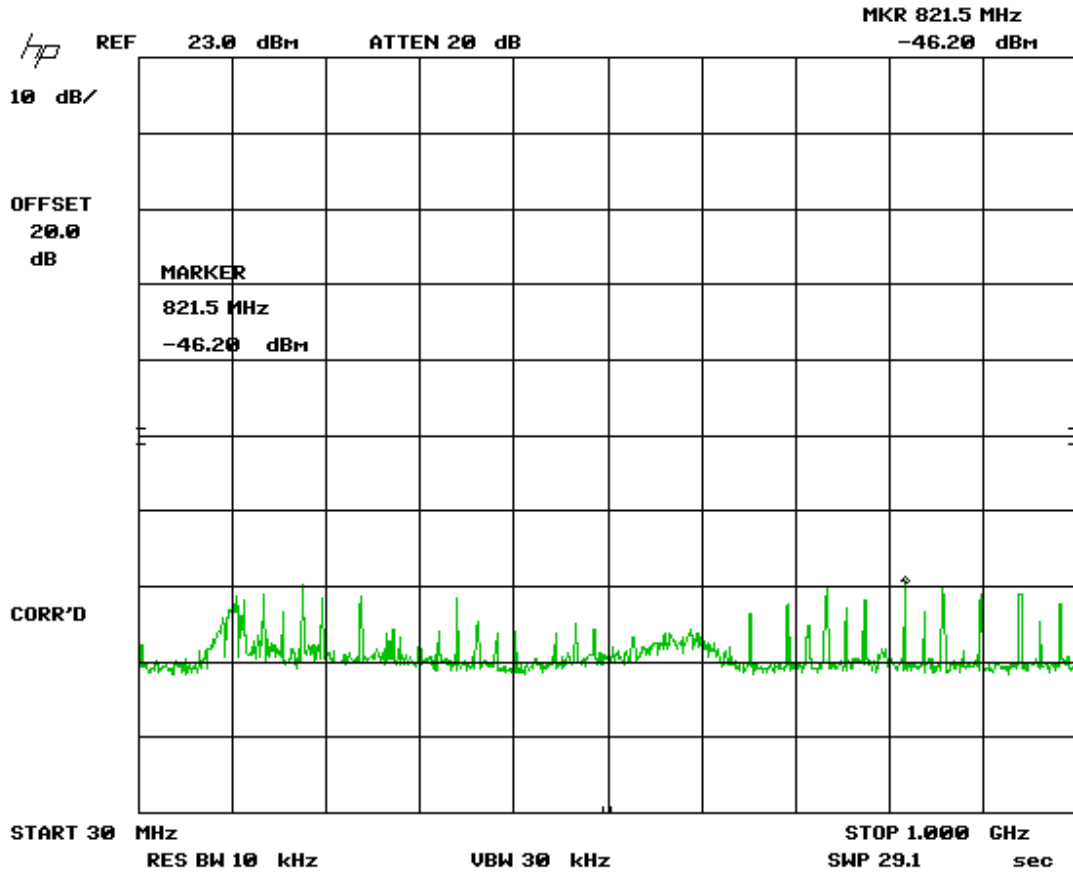


Figure 15 - Spurious Emissions at Antenna Terminals - Channel D

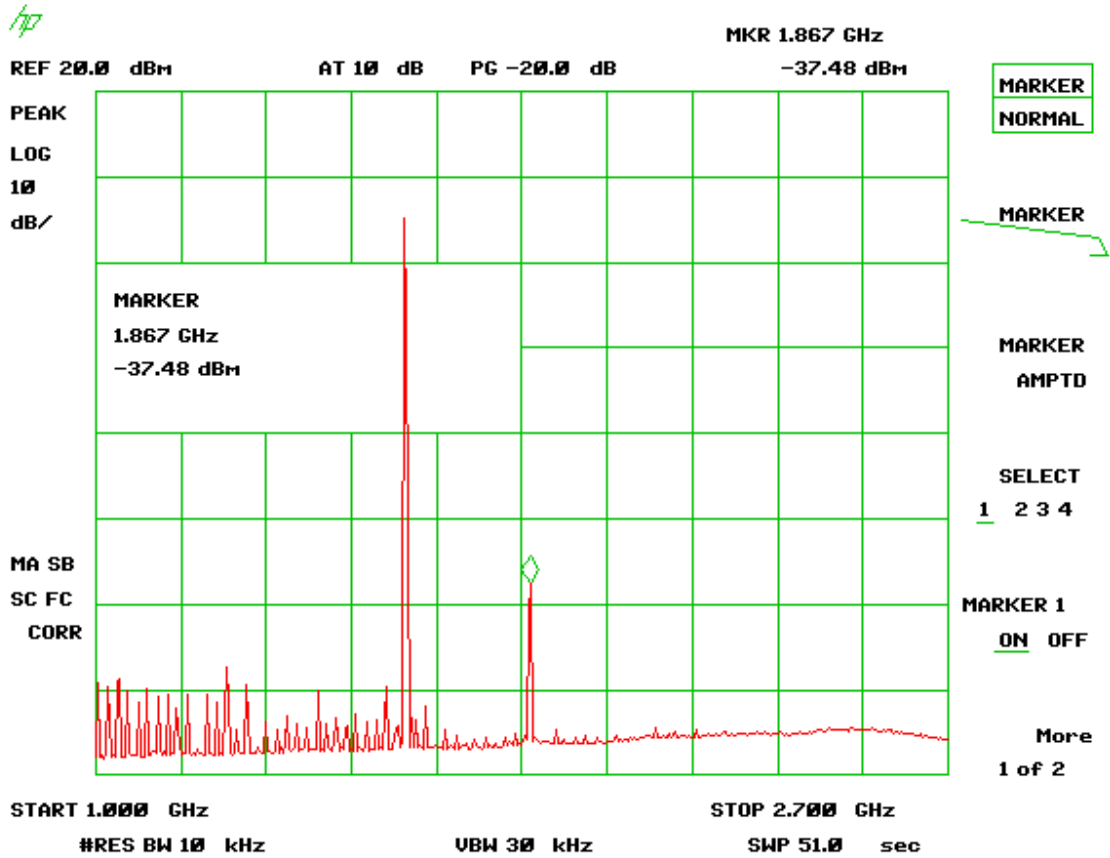


Figure 16 - Spurious Emissions at Antenna Terminals - Channel D

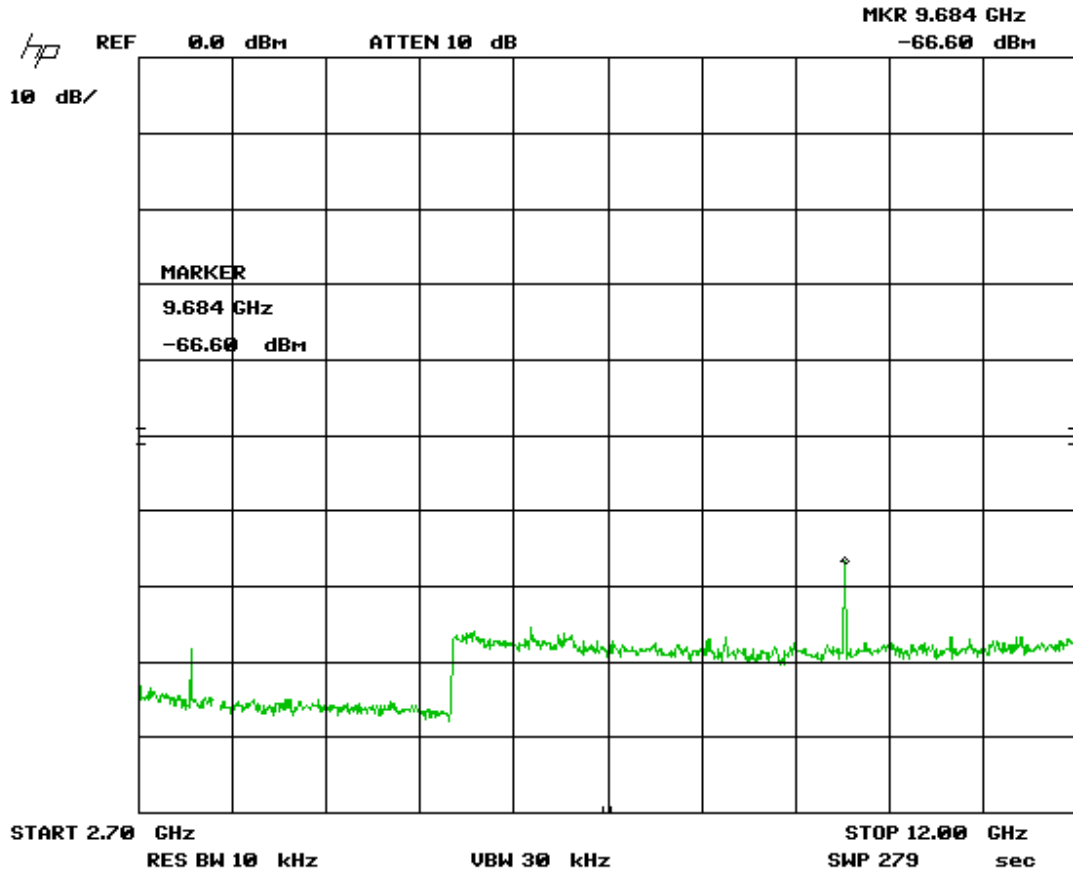


Figure 17 - Spurious Emissions at Antenna Terminals - Channel D

2.10 Field Strength of Spurious Radiation (FCC Section 2.1053, 25.202(f))

2.10.1 Spurious emissions were evaluated from 30 MHz to 16.2 GHz at an EUT to antenna distance of either 1 or 3 meters. The EUT was tested with an external power source and modulated by its own internal sources. Both low and high channels were tested.

2.10.2 The EUT was placed on an open area test site and the spurious emissions tested with the Substitution Method as stipulated by ANSI/TIA-603-C-2004. Measurements for the 30 MHz to 1000 MHz frequency range were made with the analyzer's bandwidth set to 120 kHz. Measurements above 1 GHz were made with the analyzer's bandwidth set to 1 MHz. The worse case results are shown in Table 4.

2.10.3 For out-of-band emissions at frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (2.5 MHz), signals must be attenuated by at least at least

$$43 + 10 \log (P_{\text{Watts}}) \text{ below the mean power of the transmitter}$$

Low channel radiated power = 17.24 dBm = 0.053 watts

High channel radiated power = 15.78 dBm = 0.0378 watts

Limits:

For Lowest Channel = $43 + 10 \log (P_{\text{Watts}}) = 43 + 10 \log (0.053) = 30.24 \text{ dB attenuation}$

For Highest Channel = $43 + 10 \log (P_{\text{Watts}}) = 43 + 10 \log (0.0378) = - 28.77 \text{ dB attenuation}$

Limits:

$17.24 \text{ dBm} - 30.24 \text{ dB} = -13 \text{ dBm}$

$15.78 \text{ dBm} - 28.77 \text{ dB} = -13 \text{ dBm}$

Table 4 - Field Strength of Spurious Radiation


Frequency	Maximum RX Reading (Units A)	Recreated Reading During Substitution (Using Same Units A) - Ideally 0	Difference Column A - B	TX Gain (dBi)	TX Gain Relative to Dipole (dB)	RF Power into TX antenna (Corrected for any CL and Pads to antenna Feed Point) (dBm) (SG Value-CL)	RF Power into substitution TX antenna corrected by TX Gain Relative to Dipole (dBm)	Limits (dBm)	Margin Below Limit (dB)
The following applies information from test as performed									
1611.18	84.18	83.78	0.4	7.8	5.66	11.18	17.24	70	52.76
6445.17	61.28	60.22	1.06	11.3	9.16	-41.32	-31.1	-13	18.11
9667.42	49.33	50.1	-0.77	11.8	9.66	-35.35	-26.46	-13	13.47
1618.15	83.65	78.39	5.26	7.8	5.66	4.86	15.78	70	54.22
6472.1	53.2	53.5	-0.3	11.3	9.16	-41.4	-32.54	-13	19.54

Sample Calculation:

EIRP = Power into TX antenna – Cable loss + substitution antenna gain + Difference Column A –B
 EIRP = 11.18 + 5.66 + 0.4 = 17.24 dBm

Test Date: February 3, 2011

Tester

Signature:  **Name:** Keyvan Muvahhid

2.11 Frequency Stability (FCC Section 2.1055 and 25.202(d))

The frequency tolerance of the carrier signal was measured while the ambient temperature was varied from -30 to + 50 degrees centigrade. The frequency tolerance was verified at 10 degree increments. Additionally, the supply voltage was varied from 85% to 115% of the nominal value (except for hand carried, battery powered equipment that was measured at battery endpoint). The carrier frequency of Earth Stations shall be maintained within 0.001 percent = 10 parts per million. Test data are found in tables 5 through 8 below. Because of the modulation, the measurements were done for frequencies below the center of the high channel where response was 20 dB down.

Table 5 - Frequency Stability versus Temperature at Start-up

Frequency Stability vs. Temperature (At Startup)		
Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1617.0380	0.0
-20	1617.0500	7.4
-10	1617.0380	0.0
0	1617.0380	0.0
10	1617.0380	0.0
20	1617.0380	0.0
30	1617.0250	-8.0
40	1617.0250	-8.0
50	1617.0380	0.0

Test Date: February 5, 2011

Tested by

Signature: 


Name: Keyvan Muvahhid

Table 6 - Frequency Stability versus Temperature 2 mins after start-up

Frequency Stability vs. Temperature (At Startup)		
Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1617.0380	0.0
-20	1617.0500	7.4
-10	1617.0350	-1.9
0	1617.0380	0.0
10	1617.0380	0.0
20	1617.0380	0.0
30	1617.0250	-8.0
40	1617.0250	-8.0
50	1617.0250	-8.0

Test Date: February 5, 2011

Tested by

Signature: 

Name: Keyvan Muvahhid

Table 7 - Frequency Stability versus Temperature 5 mins after start-up

Frequency Stability vs. Temperature (At Startup)		
Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1617.0500	7.4
-20	1617.0500	7.4
-10	1617.0350	-1.9
0	1617.0380	0.0
10	1617.0250	-8.0
20	1617.0380	0.0
30	1617.0250	-8.0
40	1617.0250	-8.0
50	1617.0250	-8.0

Test Date: February 5, 2011

US Tech Test Report
Report Number:
Issue Date:
Customer:
FCC ID/IC:
Model:

FCC Part 25 Certification
11-0013
February 15, 2011
Sypes Canyon
ZBR001/9540A-001
ZeMo Satellite Transmitter SCC-001



Tested by
Signature:  Name: Keyvan Muvahhid

Table 8 - Frequency Stability versus Temperature 10 mins after start-up

Frequency Stability vs. Temperature (At Startup)		
Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1617.0500	7.4
-20	1617.0380	0.0
-10	1617.0380	0.0
0	1617.0380	0.0
10	1617.0250	-8.0
20	1617.0380	0.0
30	1617.0250	-8.0
40	1617.0250	-8.0
50	1617.0250	-8.0

Test Date: February 5, 2011

Tested by
Signature:  Name: Keyvan Muvahhid

2.12 Emissions from Mobile Earth Stations for Protection of Aeronautical Radio navigation-Satellite Service. (FCC 25.216)

25.216c(1) Emissions from the EUT were evaluated from 1559 MHz – 1605 MHz and did not exceed the limit at -70dBW/MHz, averaged over 2 milliseconds, shown in figure 16.

25.216c(2) Emissions of less than 1KHz Bandwidth from the EUT were evaluated from 1559 MHz – 1605 MHz and did not exceed the limit at -80dBW, averaged over 2 milliseconds, shown in figure 17.

25.216 f & g(1) Emissions from the EUT were evaluated from 1605 MHz – 1610 MHz and did not exceed the limits ranging from –70 dBW/MHz at 1605 MHz to –10dBW/MHz at 1610 MHz, averaged over 2 milliseconds, Shown in Figure 18.

25.216 g(2) Emissions from the EUT were evaluated from 1605 MHz – 1610 MHz and did not exceed the limits ranging from -80 dBW/MHz at 1605 MHz to –20dBW/MHz at 1610 MHz, averaged over 2 milliseconds, shown in Figure 19.

25.216(i) Emissions from the EUT were evaluated from 1559 MHz – 1605 MHz and did not exceed –80 dBW/MHz over any 2 millisecond active transmission interval. (Carrier off) Emissions were measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable (Cable Loss = 0.25 dB) to the antenna output terminal with the Resolution Bandwidth set to 1 MHz. Results are shown on Figure 20.

Limit = - 70 dBW/MHz - 5 dBi = - 45 dBm

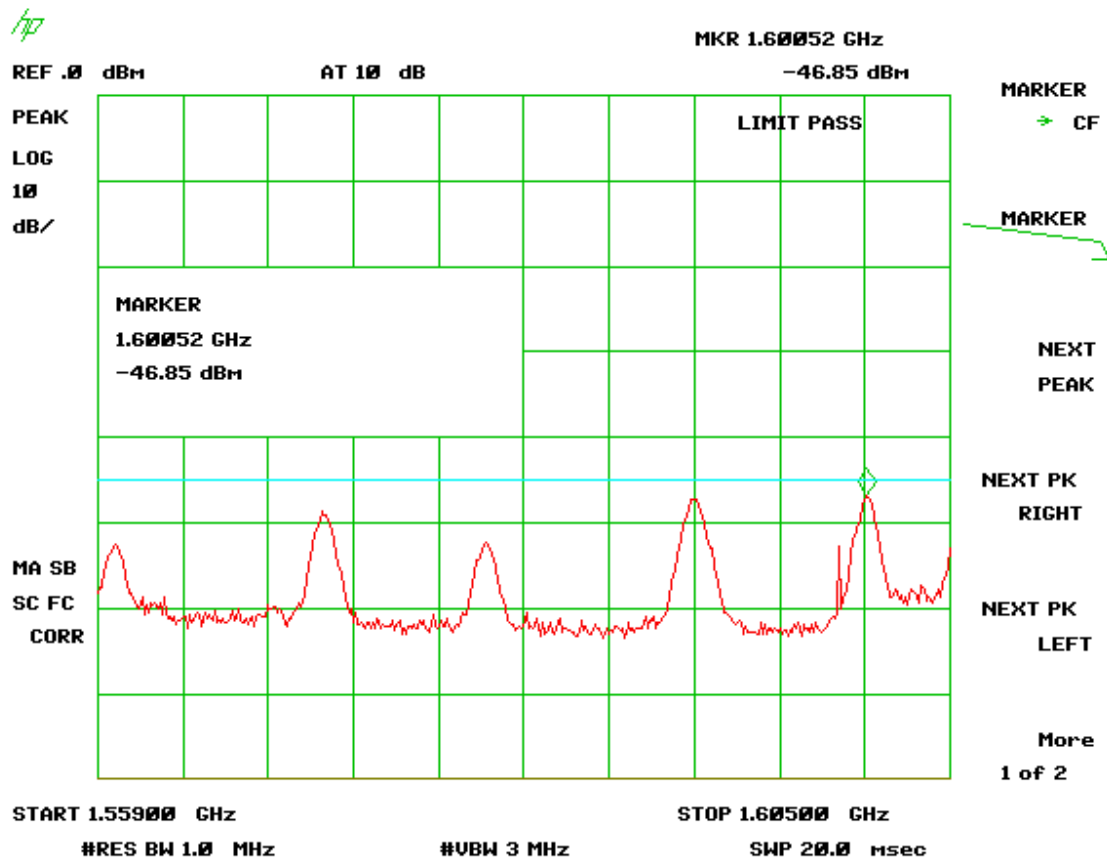


Figure 18 - Emissions from Mobile Earth Stations for Protection of Aeronautical Radio-navigation-Satellite Service (25.216(c) (1))

Limit = -80 dBW - 5 dB_i = -55dBm

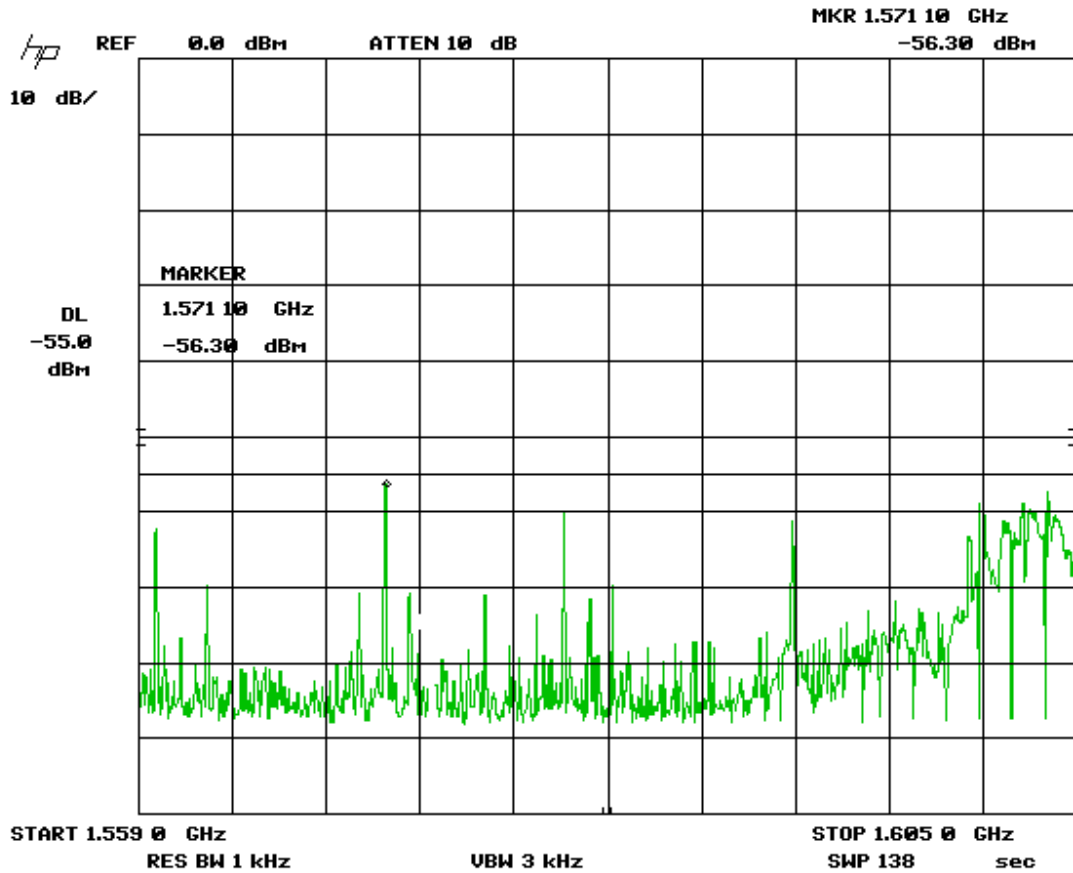


Figure 19 - Emissions from Mobile Earth Stations for Protection of Aeronautical Radio-navigation-Satellite Service (FCC 25.216(c) (2))

Limit = -70 dBW/MHz at 1605 MHz to -10 dBW/MHz at 1610 (-45 dBm to 15 dBm)

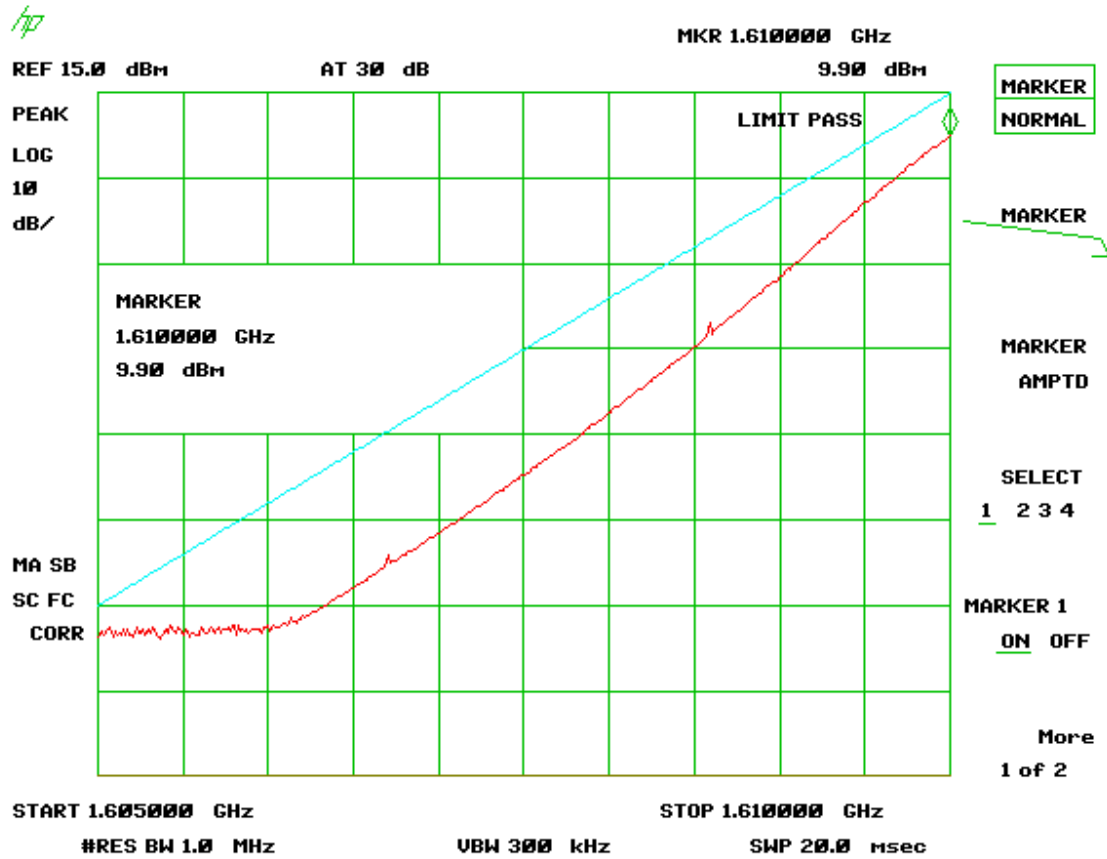


Figure 20 - Emissions from Mobile Earth Stations for Protection of Aeronautical Radio-navigation-Satellite Service (FCC 25.216(g)(1))

Limit = -80 dBW/MHz at 1605 MHz to -20 dBW/MHz at 1610 (-55 dBm to 5 dBm)

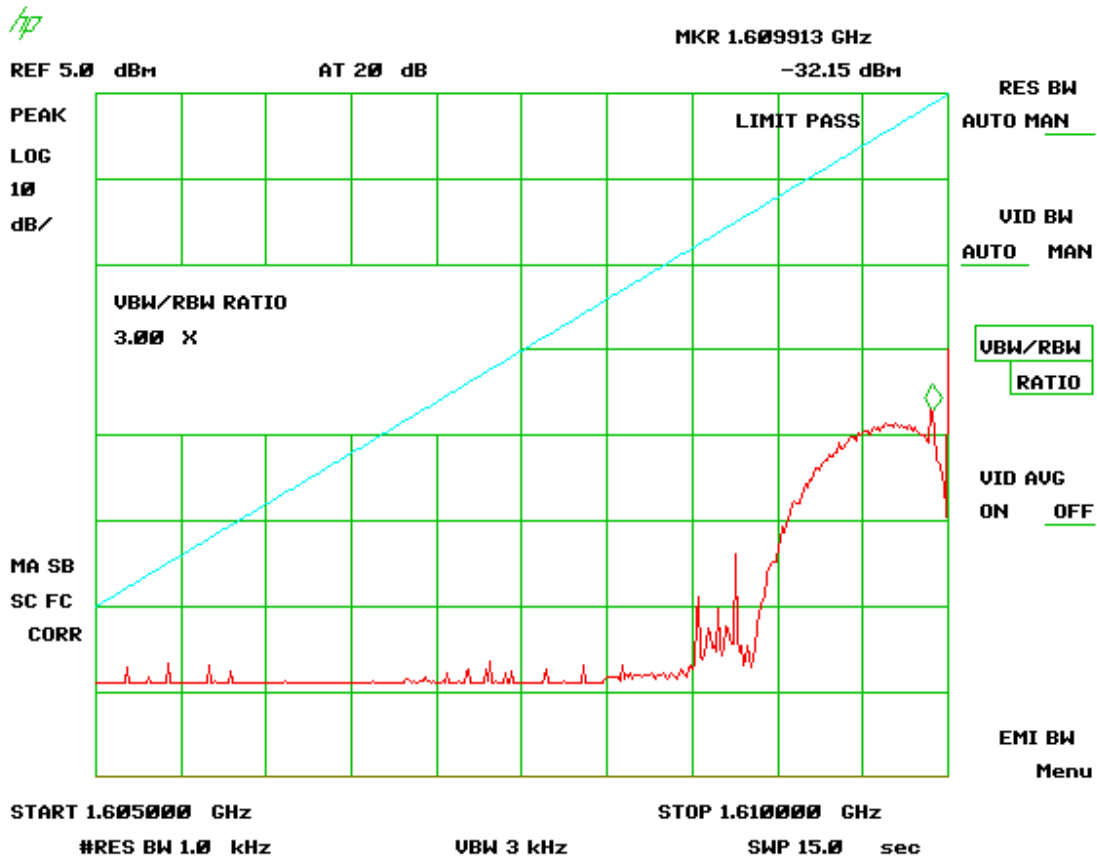


Figure 21 - Emissions from Mobile Earth Stations for Protection of Aeronautical Radio-navigation-Satellite Service (FCC 25.216(g)(2))

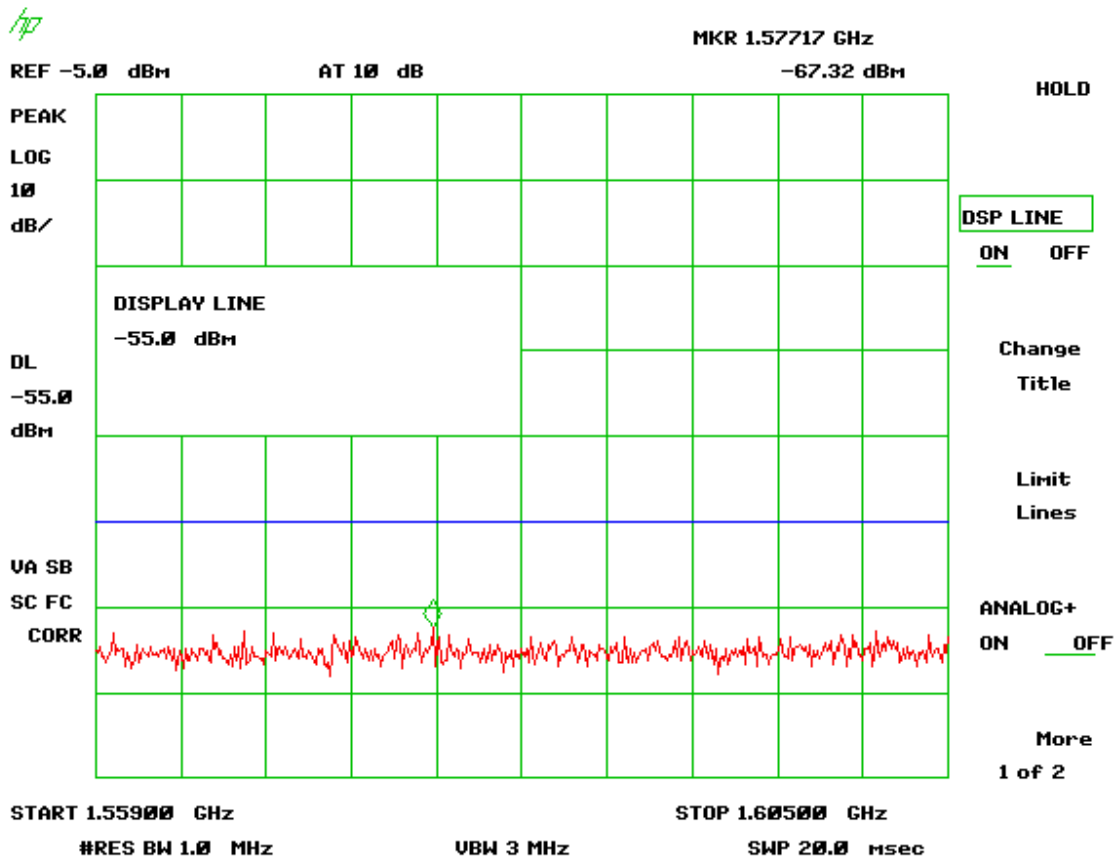


Figure 22 - Emissions from Mobile Earth Stations for Protection of Aeronautical Radio-navigation-Satellite Service (FCC 25.216(i))

2.13 Unintentional Radiator, Radiated Emissions (CFR 15.109)

The transceiver has a receiver and is controlled by digital processes; therefore, for Verification of the Digital Device the radiated emissions per CFR15.109 were measured. Power line conducted emissions are not a consideration because the EUT is battery powered.

The radiated measurements were performed over the frequency range of 30 MHz to 16.5 GHz according to the procedures of ANSI C63.4. The EUT was set up on the OATS site for 3 meter testing. It was placed on a non-conductive table at a height of 80 cm above the ground plane on a 3 meter, diameter turn-table. The EUT was positioned along the Z-axis facing the measurement antenna. The measurement antenna was connected to the receiving device, a Spectrum Analyzer with quasi-peak adaptor, through an RF preamplifier by 50 Ohm, double-shielded, coaxial cable.

The Spectrum Analyzer Resolution and video bandwidths and frequency span controls were adjusted according to the detector used and the frequency range being examined. Below 1 GHz, a resolution bandwidth of 120 kHz was used. Above 1 GHz, the resolution bandwidth was set to 1 MHz. The video bandwidth was coupled to the resolution bandwidth. The Quasi-peak adaptor box was placed in bypass mode for the scanning activities.

During the search for radiated digital device emissions, when a candidate emission was found, the antenna was raised and lowered from 1 meter to 4 meters in height in an attempt to maximize the emission. Also, the turntable was rotated through 360 degrees in an attempt to maximize the emission. If there was a question of the emission being a real digital device emission, the EUT was turned OFF and then back ON while watching the Spectrum Analyzer display for the signal to disappear and then re-appear. After manipulation of the antenna and turntable to maximize the signal, the EUT was re-oriented in the three mutually exclusive orthogonal planes in an attempt to further maximize the signal.

The final readings of digital emissions were made with a peak or quasi-peak detector. Because the limits are Quasi-peak, the peak readings were first used for comparison to the limit. If the peak signals passed the QP limit then QP measurements were not performed. Otherwise QP measurements were performed for comparison to the QP limit. The same process was repeated for the other antenna polarization (Vertical or Horizontal). At least six (6) readings were gathered for reporting purposes. Test results are included in Table 6 below.


US Tech Test Report
 Report Number:
 Issue Date:
 Customer:
 FCC ID/IC:
 Model:

FCC Part 25 Certification
 11-0013
 February 15, 2011
 Sypes Canyon
 ZBR001/9540A-001
 ZeMo Satellite Transmitter SCC-001

Table 9 - Unintentional Radiator, Radiated Emissions (CFR 15.109)

Tested by:	Test: FCC 15.109			Date:02/5/11		Client: Sypes Canyon			
KM	Project: 11-0013			Class B		Model: SCC-001			
Frequency	Analyzer Reading	AF+CL+ DC-PA	Corrected Results	Quasi-peak Limit	Margin	Detector used	Antenna Distance/ Polarization	Turntable Position	Antenna height
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			Degrees	meters
Tested over the 30 MHz to 1 GHz range									
No emissions were seen 20 dB Below the FCC Part 15.109 limits									

Test Date: February 8, 2011

Tested by
Signature: 

Name: Keyvan Muvahhid

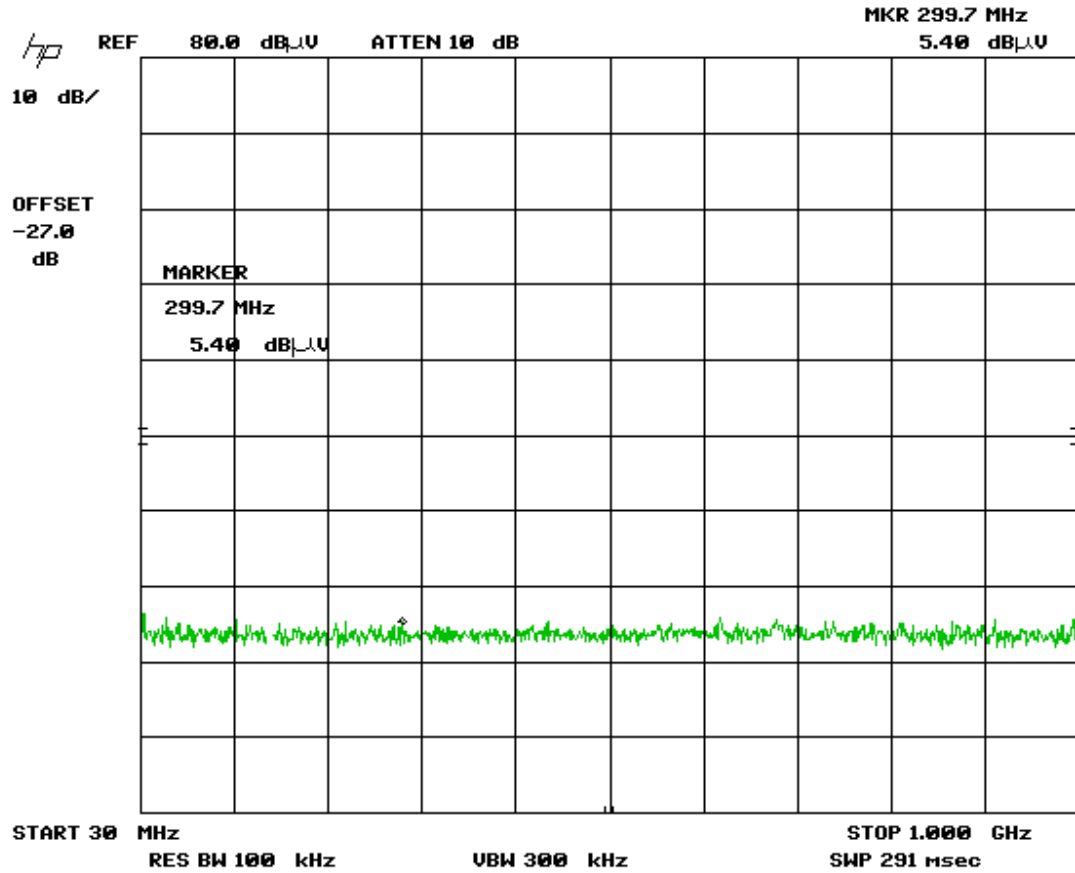


Figure 23 - Radiated Emissions Test Data - 30 MHz to 1000 MHz-Horizontal

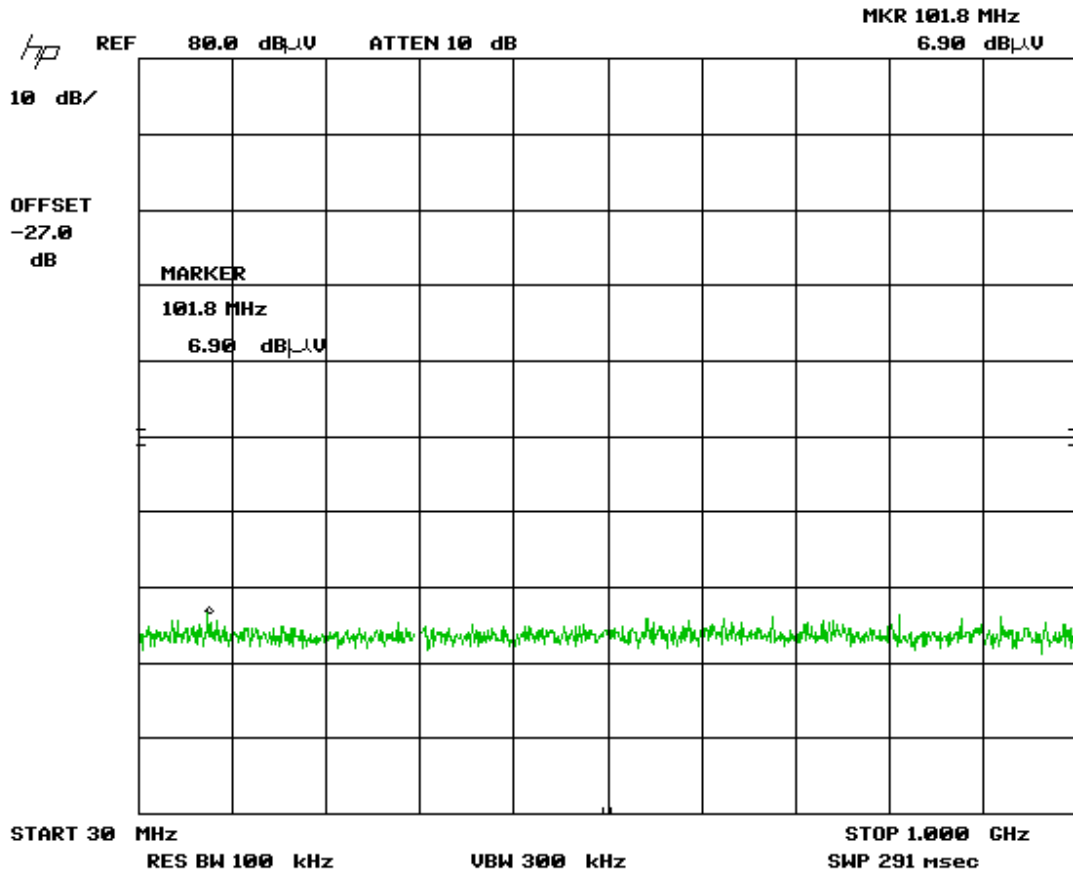


Figure 24 - Radiated Emissions Test Data - 30 MHz to 1000 MHz-Vertical

US Tech Test Report
 Report Number:
 Issue Date:
 Customer:
 FCC ID/IC:
 Model:


FCC Part 25 Certification
 11-0013
 February 15, 2011
 Sypes Canyon
 ZBR001/9540A-001
 ZeMo Satellite Transmitter SCC-001

Table 10 - Unintentional Radiator, Radiated Emissions (CFR 15.109)-Above 1 GHz

Unintentional Radiator, Radiated Emissions							
Test By: K.M.	Test: FCC Part 15.109, 15.209			Client: Sypes Canyon			
	Project: 11-0013 Class: B			Model: SCC-001			
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP
Tested over the 1 GHz to 16.5 GHz range							
1591.2500	50.68	-8.48	42.20	54.0	3.0m./VERT	11.8	AVG
2332.2500	54.34	-3.86	50.48	54.0	3.0m./VERT	3.5	AVG
2488.4800	53.99	-3.67	50.32	54.0	3.0m./VERT	3.7	AVG
2549.8300	50.00	-3.30	46.70	54.0	3.0m./VERT	7.3	AVG
2332.5000	55.63	-4.08	51.55	54.0	3.0m./HORZ	2.5	PK

No other emissions detected within 20 dB of the FCC Part 15.109 limits
 AF is antenna factor. CL is cable loss. PA is preamplifier gain
 SAMPLE CALCULATION:
 RESULTS: At 1591.25 MHz: = ((50.68+ (-8.48)) = 42.20 dBuV/m @ 3m
 Margin = (55 - 42.20) = 11.8 dB

Test Date: February 8, 2011

Tested by
 Signature: 

Name: Keyvan Muvahhid

US Tech Test Report
Report Number:
Issue Date:
Customer:
FCC ID/IC:
Model:

FCC Part 25 Certification
11-0013
February 15, 2011
Sypes Canyon
ZBR001/9540A-001
ZeMo Satellite Transmitter SCC-001

2.14 Unintentional Radiator Power Lines Conducted Emissions (CFR 15.107)

The test data provided herein is to support the Verification requirement for the digital apparatus. The power line conducted voltage measurements for Receiver and Digital Devices have been carried out in accordance with CFR 15.107 and ANSI C63.4, Paragraph 7, with a spectrum analyzer connected to an LISN and the EUT placed into an idle condition or a continuous mode of receive (non-transmitting). Since the EUT is battery powered only, this test is not applied per 15.107 paragraph d.

3 Measurement Uncertainty

3.1 Conducted Emissions Measurement Uncertainty:

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.8 dB.

The data listed in this test report has sufficient margin to negate the effects of uncertainty. This measurement unconditionally passes.

3.2 Radiated Emissions Measurement Uncertainty:

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.3 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.1 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.1 dB.

The data listed in this test report does not have sufficient margin to negate the effects of uncertainty, (more than the measurement uncertainty value at 2332.25, 2488.48 2332.50 MHz). Therefore, this test is conditionally acceptable.

4 PHOTOGRAPHS

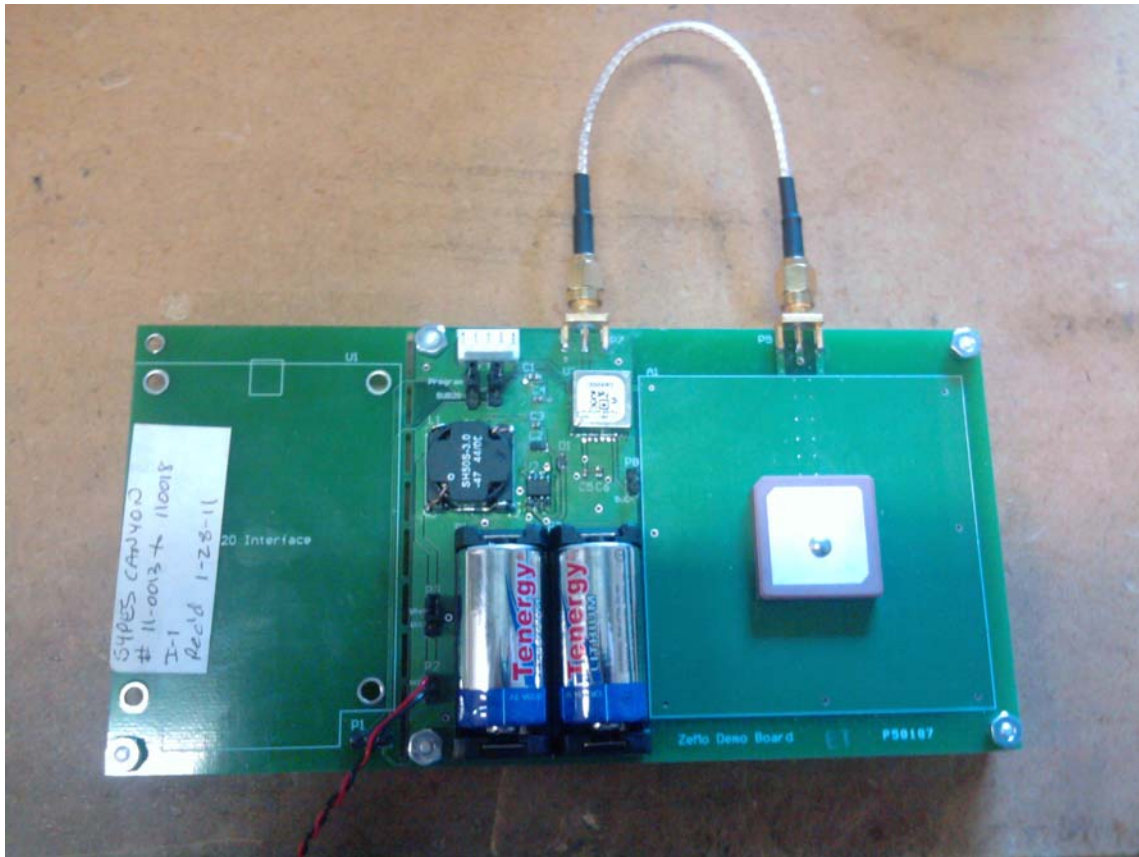


Figure 25 - Top View of EUT

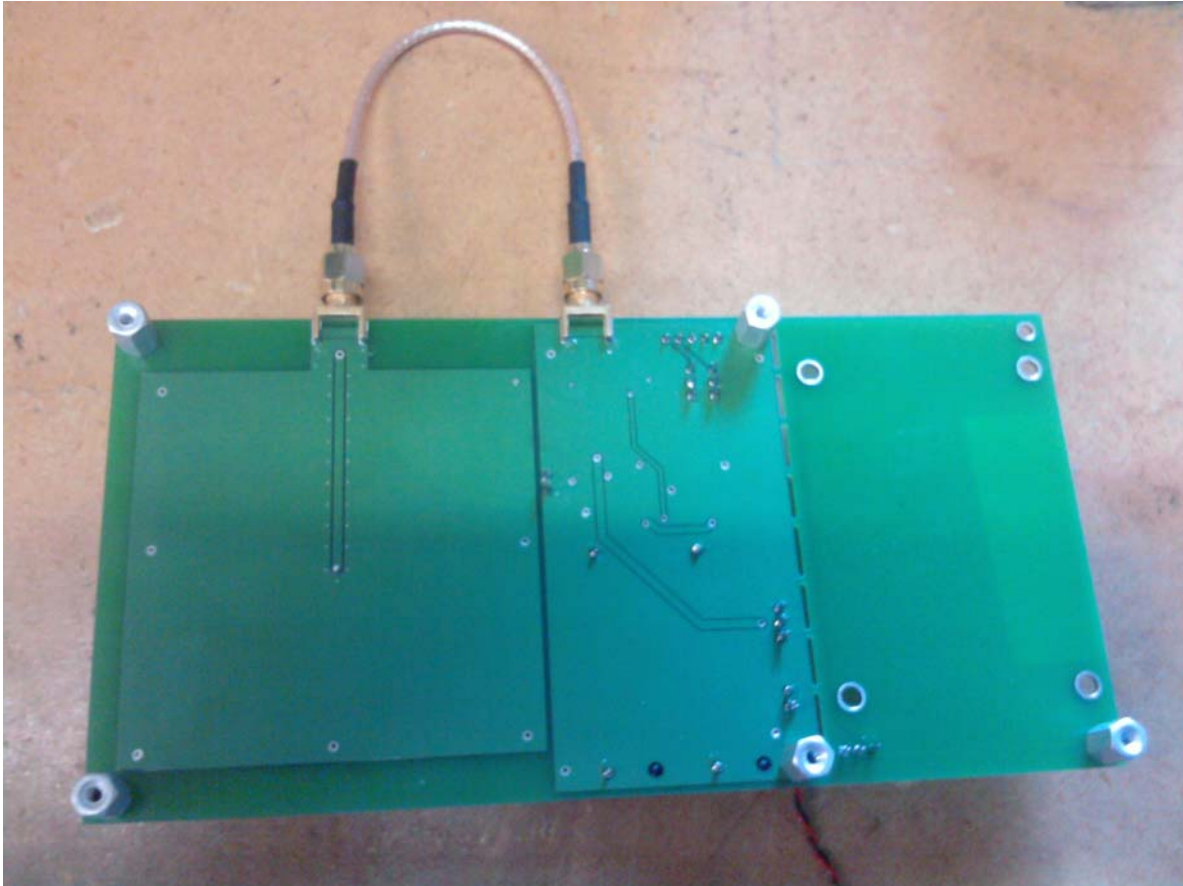


Figure 26 - Bottom View of EUT



Figure 27 - Transmitter Module with Shield in Place

5 RF EXPOSURE INFORMATION

The maximum exposure level to the public from the RF power of the EUT shall not exceed a power density, S , of 1 mW/cm² at a distance, d , of 20 cm from the EUT.

Therefore, for:

Peak Power (Watts) = 21.5 dBm (0.141 Watts) (from Table 3, herein)
Gain of Transmit Antenna = 5.0 dB_i = 3.16, numeric (from Paragraph 2.5, herein)
 d = Distance = 20 cm = 0.2 m

$$\begin{aligned} S &= (PG/4\pi d^2) = \text{EIRP}/4A = 0.141(3.16)/4*\pi*0.2*0.2 \\ &= 0.446/0.502 = 0.888 \text{ W/m}^2 \\ &= 0.089 \text{ mW/cm}^2 \end{aligned}$$

Which is much less than 1mW/cm²