



LCIE



Accréditation
N°1-0312
Scope available on
www.cofrac.fr

RFID 13,56MHz Template: Release April 14th, 2021

TEST REPORT

N°: 14400459-776688-A

Version : 02

Subject	Radio spectrum matters tests according to standards: 47 CFR Part 15.225 & RSS 210 Issue 10 & &RSS-Gen Issue 5
Issued to	IDEMIA Identity & Security France 2, place Samuel De Champlain 92400 COURBEVOIE FRANCE
Apparatus under test	
↪ Product	Access Control Terminal with biometric
↪ Trade mark	IDEMIA
↪ Manufacturer	IDEMIA Identity & Security France
↪ Model under test	MPH-AC007A
↪ Serial number	2208SSP0000028
↪ FCC ID	ZBW-MPHAC007A
↪ IC	11472A-MPHAC007A
Conclusion	See Test Program chapter
Test date	March 17, 2022 to March 31, 2022
Test location	Fontenay Aux Roses & Ecuelles
Test Site	6230B-1
Registration Number	197516
Designation Number	FR0008
Sample receipt date	March 15, 2022
Composition of document	53 pages
Document issued on	May 18, 2022

Written by :
Julien PALARD
Tests operator

Approved by :
Patrick TEIXEIRA
Technical manager



This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified or rule defined by the test method, the decision of conformity doesn't take into account the uncertainty of measures. This document doesn't anticipate any certification decision. This document doesn't anticipate any certification decision. The COFRAC accreditation attests the technical capability of the testing laboratory for the only tests covered by the accreditation. If some tests mentioned in this report are carried out outside the framework of COFRAC accreditation, they are indicated by an asterisk (*).

LCIE
Laboratoire Central des Industries Electriques
Une société de Bureau Veritas

33, Av du Général Leclerc
92266 Fontenay Aux Roses
FRANCE

Tél : +33 1 40 95 60 60
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	April 12, 2022	J. PALARD	Creation of the document
02	May 18, 2022	J. PALARD	Modification name product

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



SUMMARY

1. TEST PROGRAM 4

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER) 5

3. OCCUPIED BANDWIDTH..... 11

4. FREQUENCY TOLERANCE 15

5. AC POWER LINE CONDUCTED EMISSIONS..... 20

6. FIELD STRENGTH OUTSIDE OF THE BANDS 13.110-14.010 MHZ 38

7. FIELD STRENGTH WITHIN THE BAND 13.110-14.010MHZ..... 48

8. UNCERTAINTIES CHART 53



1. TEST PROGRAM

References

- 47 CFR Part 15.225 (2020)
- RSS 210 Issue 10
- RSS Gen Issue 5
- ANSI C63.10 (2013)

Radio requirement:

Clause (47CFR Part 15.225 & RSS-210 Issue 9 & RSS-Gen Issue 5) Test Description	Test result - Comments			
Occupied Bandwidth	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
20dB Bandwidth	<input type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input checked="" type="checkbox"/> NA	<input type="checkbox"/> NP(1)
AC Power Line Conducted Emission	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA(2)	<input type="checkbox"/> NP(1)
Frequency Tolerance	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Field strength within the band 13.110-14.010MHz	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Field strength outside of the bands 13.110-14.010 MHz	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
Receiver Radiated Emissions	<input checked="" type="checkbox"/> PASS (3)	<input type="checkbox"/> FAIL	<input type="checkbox"/> NA	<input type="checkbox"/> NP(1)
This table is a summary of test report, see conclusion of each clause of this test report for detail.				

(1): Limited program

(2): EUT not directly or indirectly connected to the AC Power Public Network

(3) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable


NP: Test Not Performed

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):
IDEMIA MPH-AC007A


Serial Number: 2208SSP0000028

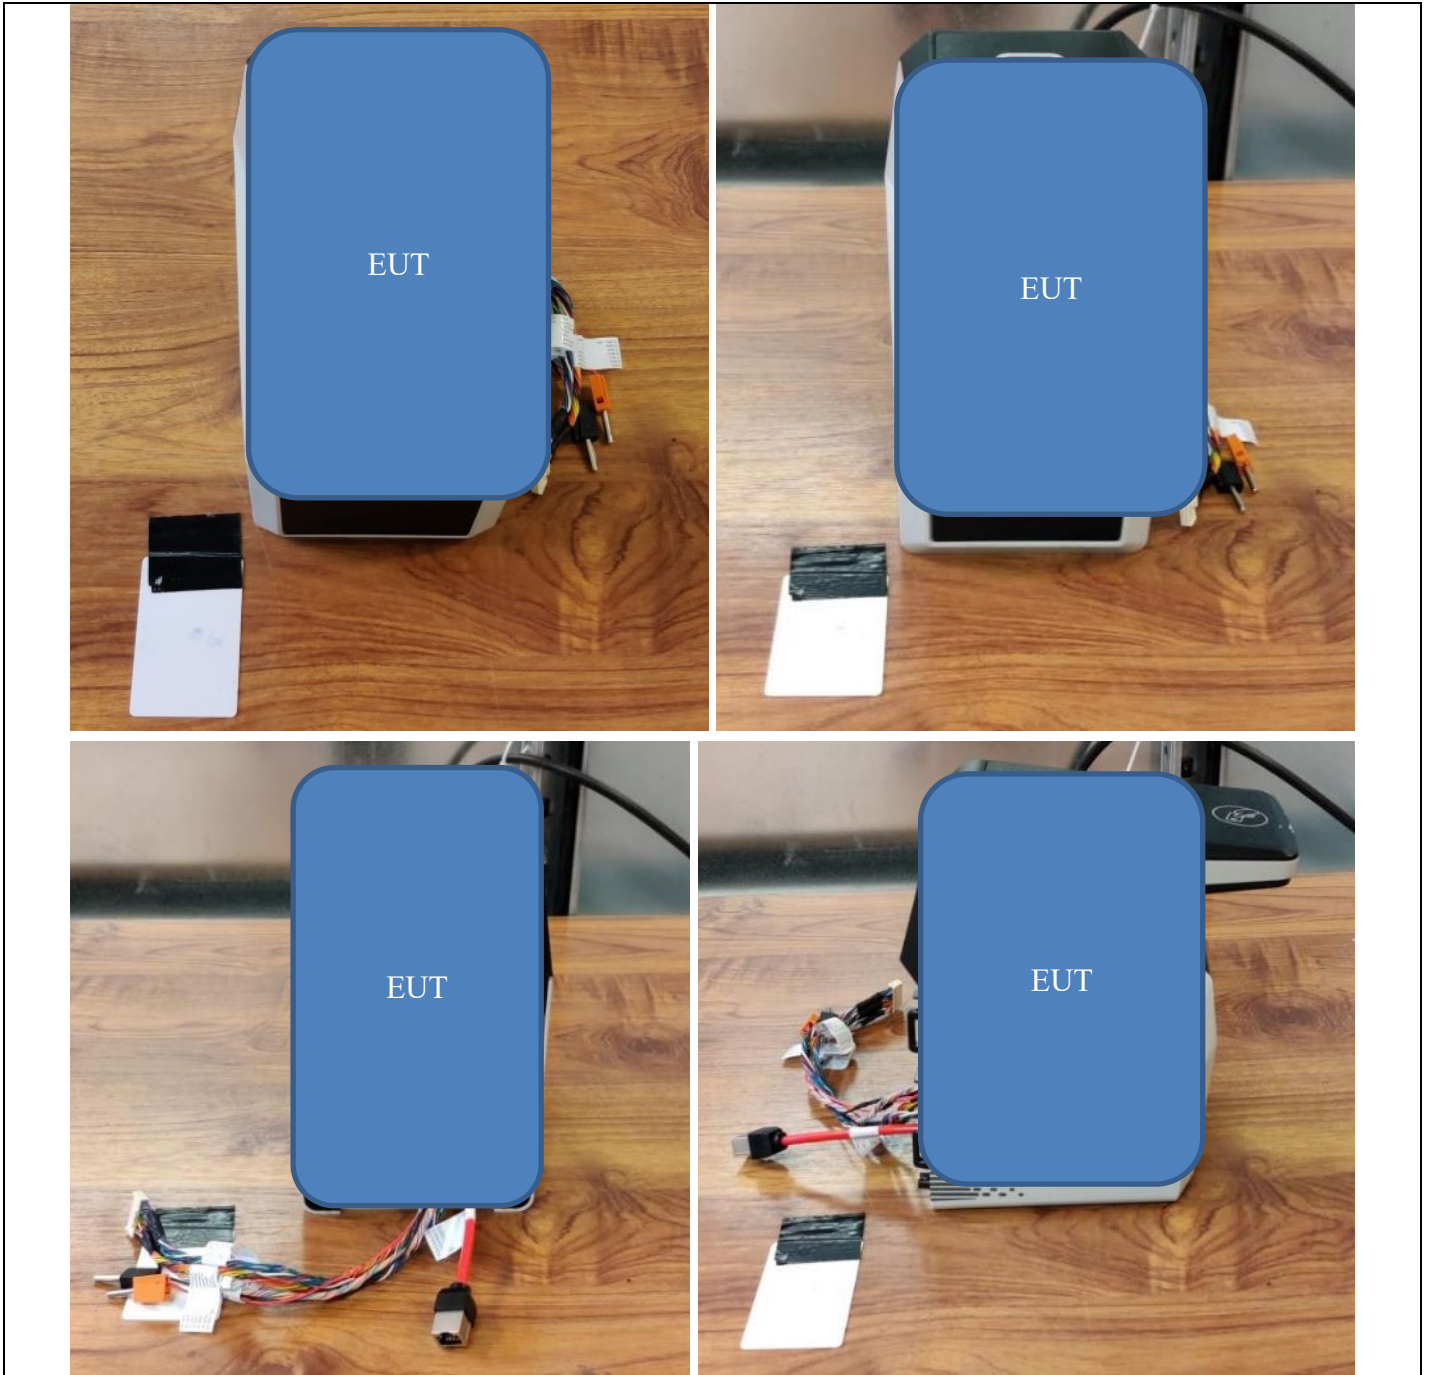

Equipment Under Test



L C I E

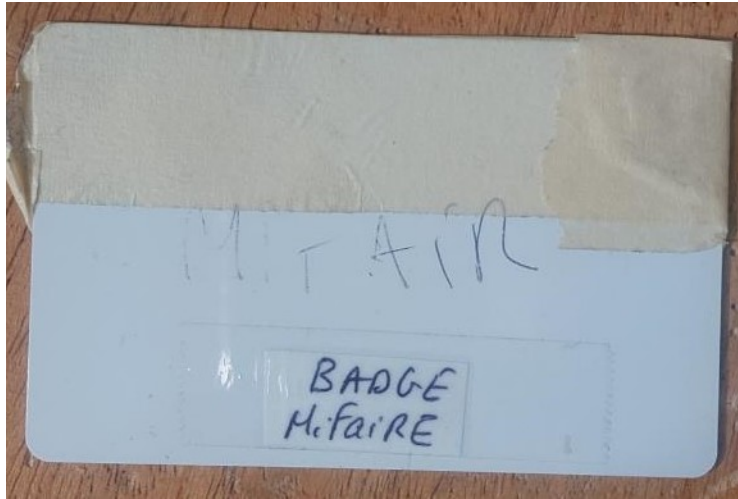

Rfid tag

Auxiliary equipment

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
POE	PHIHONG reference POE29U-1AT(PL)	2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	100-240V~ 50/60Hz
AC/DC Power supply	FRIWO model : FW7362/12	1.8	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Input:100-240V~50-60Hz Output: 12Vdc 2.5A
DC Power supply	12Vdc	1.8	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-
Ethernet	RJ45	10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Between POE and EUT when powered through POE or Between EUT and Laptop when powered through DC power supply.

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
LapTop	LENOVO R500	-	Not under test / just to send ping command
Power Supply - FRIWO	FW7362/12	-	Not sold with the product
POE Injector - PHIHONG	POE29U-1AT(PL)	-	Not sold with the product



Equipment information (declaration of provider):

Type:	<input checked="" type="checkbox"/> RFID		
Chipset Ref :			
Frequency band:	[13.553 to 13.567] MHz		
Number of Channel:	1		
Antenna Type:	<input checked="" type="checkbox"/> Integral	<input type="checkbox"/> External	<input type="checkbox"/> Dedicated
Antenna Requirements §15.203	Select Antenna Requirements		
Transmit chains:	1		
Receiver chains	1		
Type of equipment:	<input checked="" type="checkbox"/> Stand-alone	<input type="checkbox"/> Plug-in	<input type="checkbox"/> Combined
Equipment arrangement:	<input type="checkbox"/> Tabletop	<input type="checkbox"/> Floor-standing	<input type="checkbox"/> Multiple orientations
Equipment type:	<input checked="" type="checkbox"/> Production model		<input type="checkbox"/> Pre-production model
Operating temperature range:	Tmin:	<input checked="" type="checkbox"/> -30°C IC <input checked="" type="checkbox"/> -20°C FCC	<input type="checkbox"/>
	Tnom:	20°C	
	Tmax:	<input type="checkbox"/> 50°C	<input checked="" type="checkbox"/> +55°C
DC Mode			
Operating voltage:	Vmin:	<input type="checkbox"/> 102V/60Hz	<input checked="" type="checkbox"/> 9.0 VDC
	Vnom:	<input type="checkbox"/> 120V/60Hz	<input checked="" type="checkbox"/> 12.0 VDC
	Vmax:	<input type="checkbox"/> 138V/60Hz	<input checked="" type="checkbox"/> 27.6 VDC
POE Mode			
Operating voltage:	Vmin:	<input type="checkbox"/> 102V/60Hz	<input checked="" type="checkbox"/> 42.5 VDC
	Vnom:	<input type="checkbox"/> 120V/60Hz	<input checked="" type="checkbox"/> 48 VDC
	Vmax:	<input type="checkbox"/> 138V/60Hz	<input checked="" type="checkbox"/> 57 VDC

Antenna Characteristic			
Antenna assembly	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
1			50

Modulation Type

Hardware information		
Software (if applicable):	V. :	1.0.0



2.2. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
Test mode 2	Permanent reception

Test	Running mode
Occupied Bandwidth	<input checked="" type="checkbox"/> Test mode 1 (1) <input type="checkbox"/> Alternative test mode()
Frequency Tolerance	<input checked="" type="checkbox"/> Test mode 1 (1) <input type="checkbox"/> Alternative test mode()
AC Power Line Conducted Emission	<input checked="" type="checkbox"/> Test mode 1 (1) <input type="checkbox"/> Alternative test mode()
Field strength within the band 13.110-14.010MHz	<input checked="" type="checkbox"/> Test mode 1 (1) <input type="checkbox"/> Alternative test mode()
Field strength outside of the bands 13.110-14.010 MHz	<input checked="" type="checkbox"/> Test mode 1 (1) <input type="checkbox"/> Alternative test mode()
Receiver Radiated Emissions	<input checked="" type="checkbox"/> Test mode 2 (2) <input type="checkbox"/> Alternative test mode()

(1) Following commands with the specific test software "X" are used to set the product:

a. – See document "X"(provided by customer) for the command used during test.

(2) Note: The test can't be performed because the transmitter and receiver are operating at the same frequency and the transmitter cannot be switched off as the carrier is used as receiver injection signal

2.3. EQUIPMENT LABELLING





2.4. EQUIPMENT MODIFICATION

None Modification:

2.5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength
 RA = Receiver Amplitude
 AF = Antenna Factor
 CF = Cable Factor
 AG = Amplifier Gain

Assume a receiver reading of 52.5dB μ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB μ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m.}$$

2.6. CALIBRATION DATE

The calibration intervals are extended at 12+2 months. This extended interval is based on the fact that there is sufficient calibration data to statistically establish a trend or based on experience of use of the test equipment to assure good measurement results for a longer period

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Test performed by : Julien PALARD
Date of test : March 30, 2022
Ambient temperature : 25°C
Relative humidity : 42%

3.2. TEST SETUP

- The Equipment Under Test is installed:

- On a table
- In a climatic chamber
- In an anechoic chamber


- Measurement is performed with a spectrum analyzer in:

- Conducted Method
- Radiated Method


The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

- Test Procedure:

- RSS-Gen Issue 5 § 6.7
 - RBW used in the range of 1% to 5% of the anticipated emission bandwidth
 - Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - Detector = Peak.
 - Trace mode = Max Hold.
 - Sweep = Auto couple.
 - Allow the trace to stabilize.
 - OBW 99% function of spectrum analyzer used

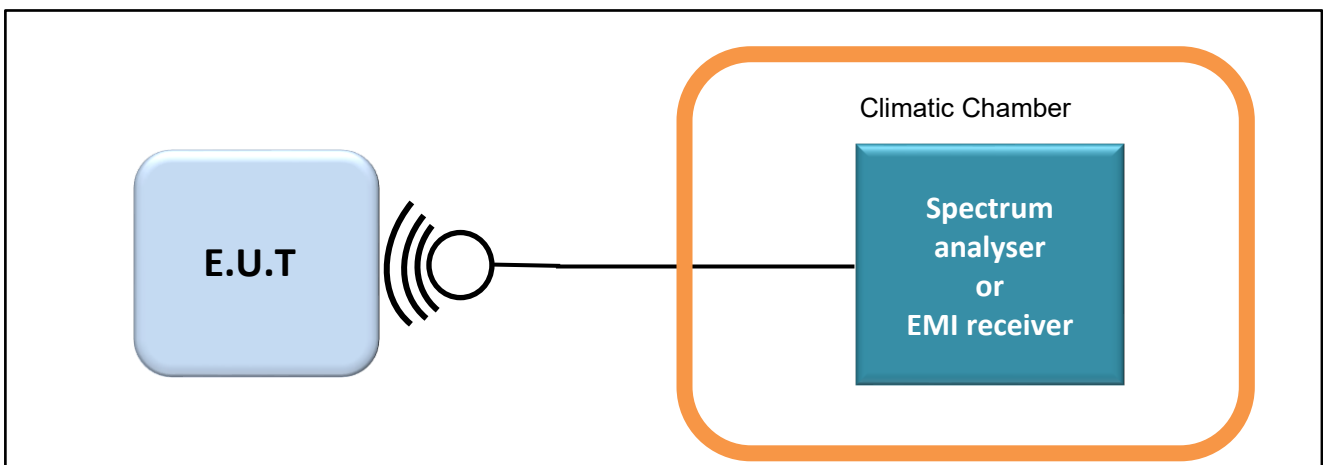

Test set up of Occupied Bandwidth

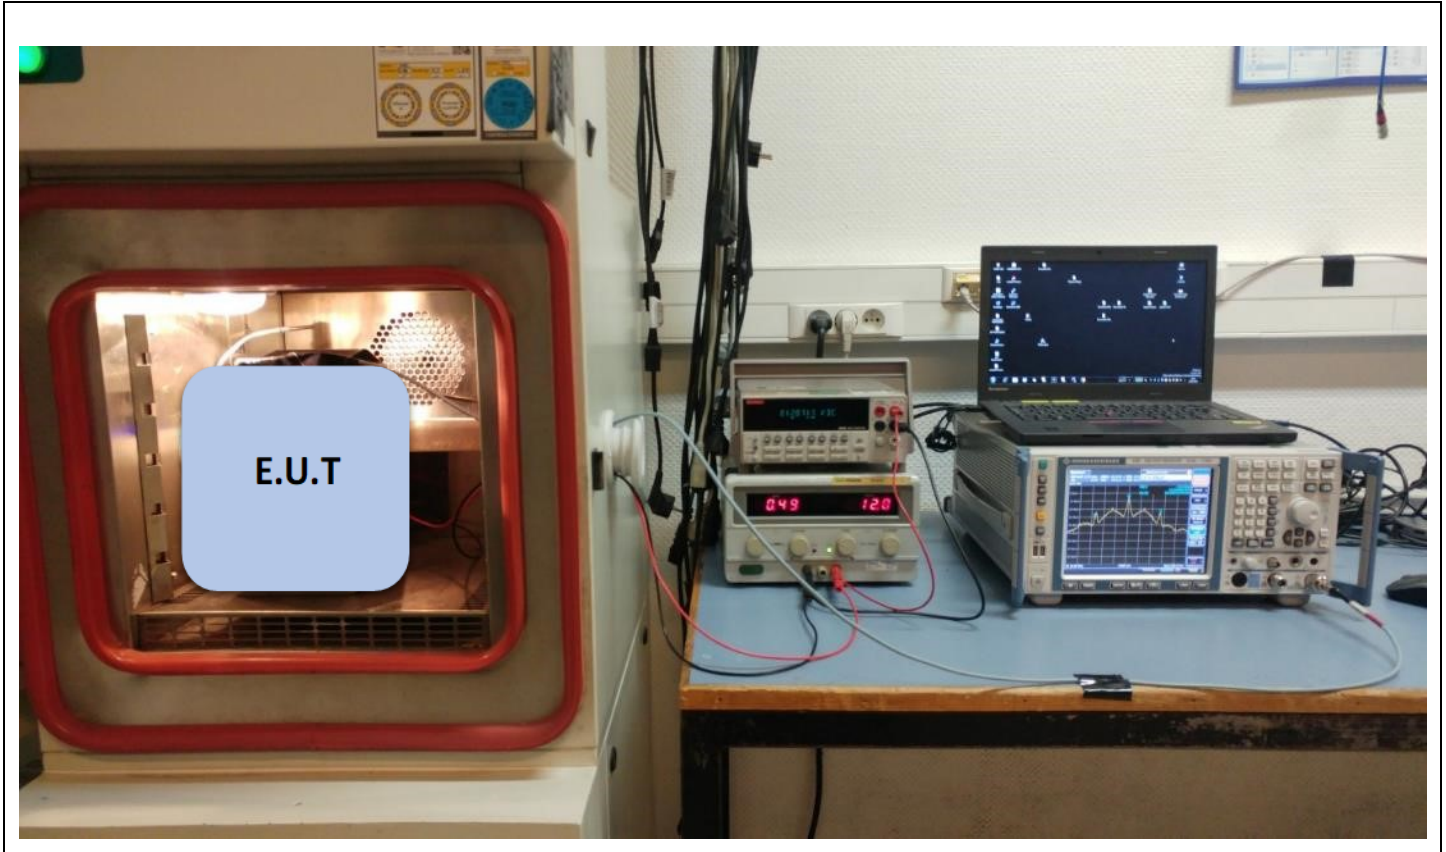

Photograph for Occupied bandwidth in normal test condition

3.3. LIMIT

None

3.4. TEST EQUIPMENT LIST


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Climatic chamber	SECASI	SLT34	D1024029	See Hygrometer	See Hygrometer
Hygrometer	AOIP	TM360	B4041042	2021/04	2023/04
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2021/04	2023/04
Multimeter	KEITHLEY	2000	A1242090	2021/03	2023/03
Power supply	ISO-TECH	IPS1603D	A7042247	See Multimeter	See Multimeter
13,56MHz Test fixture Antenna	-	-	A5329422	-	-

Note: In our quality system, the test equipment calibration due is more & less 2 months




L C I E

3.5. RESULTS

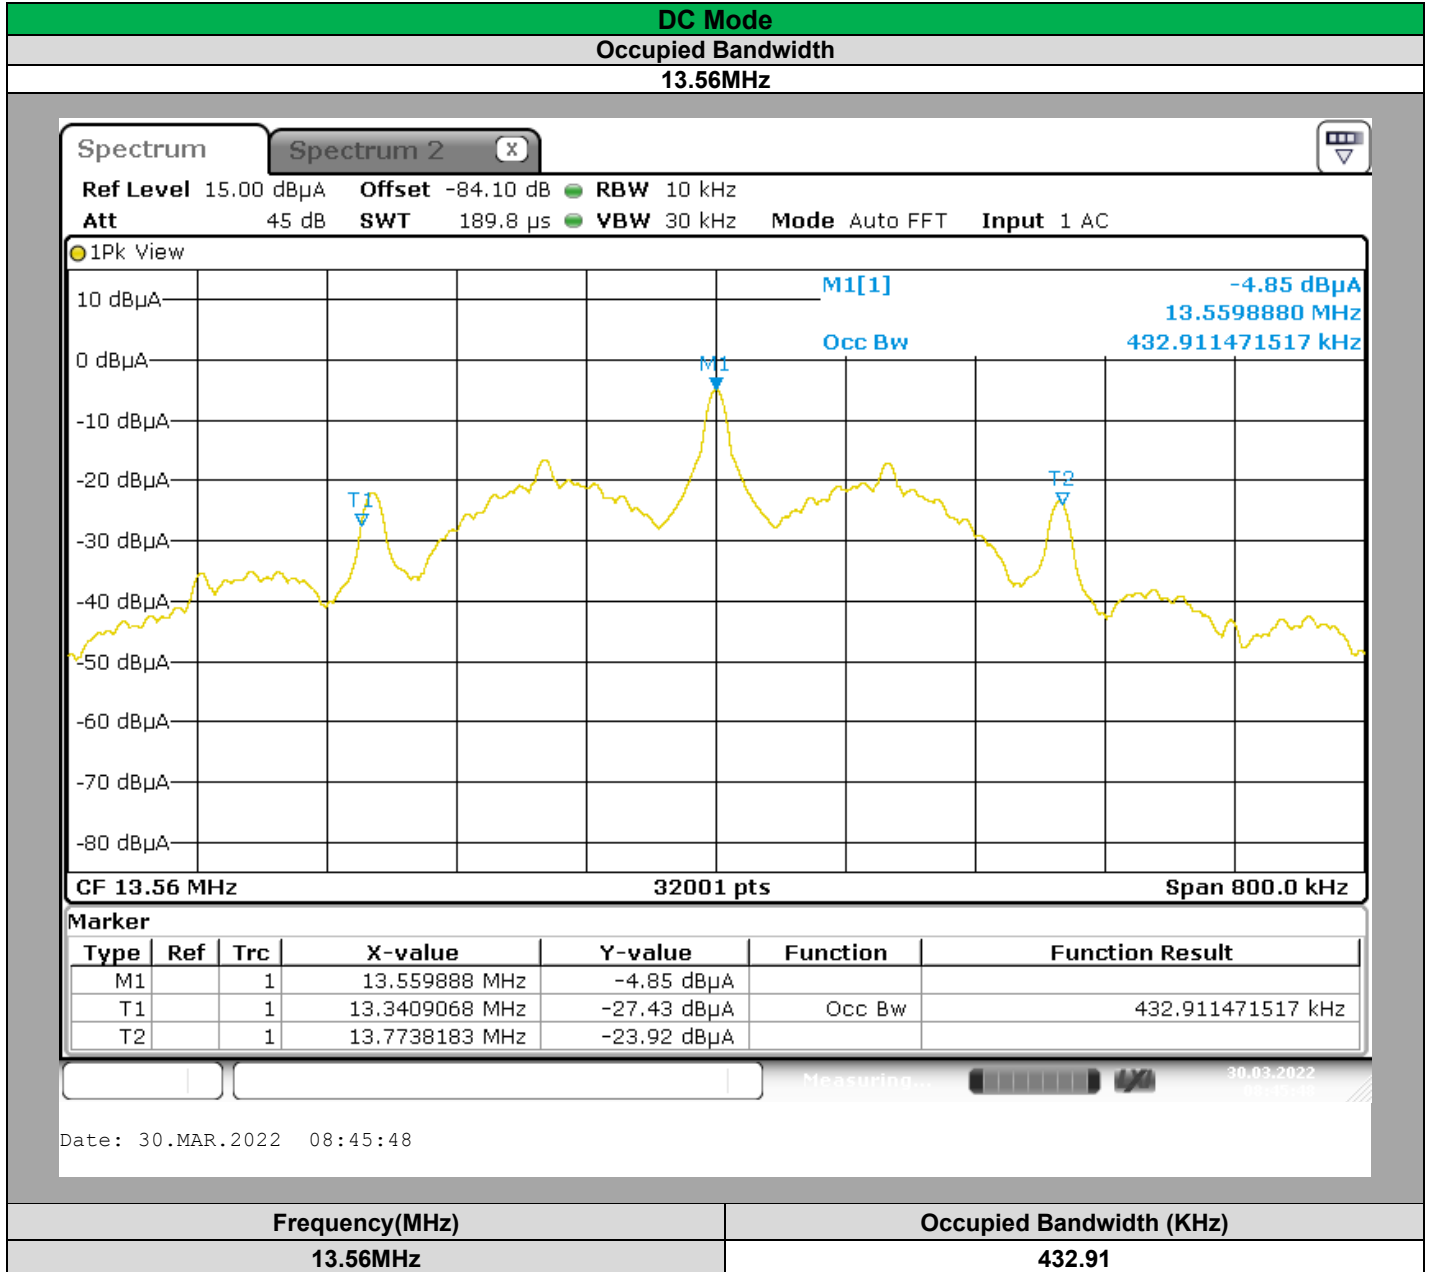



L C I E

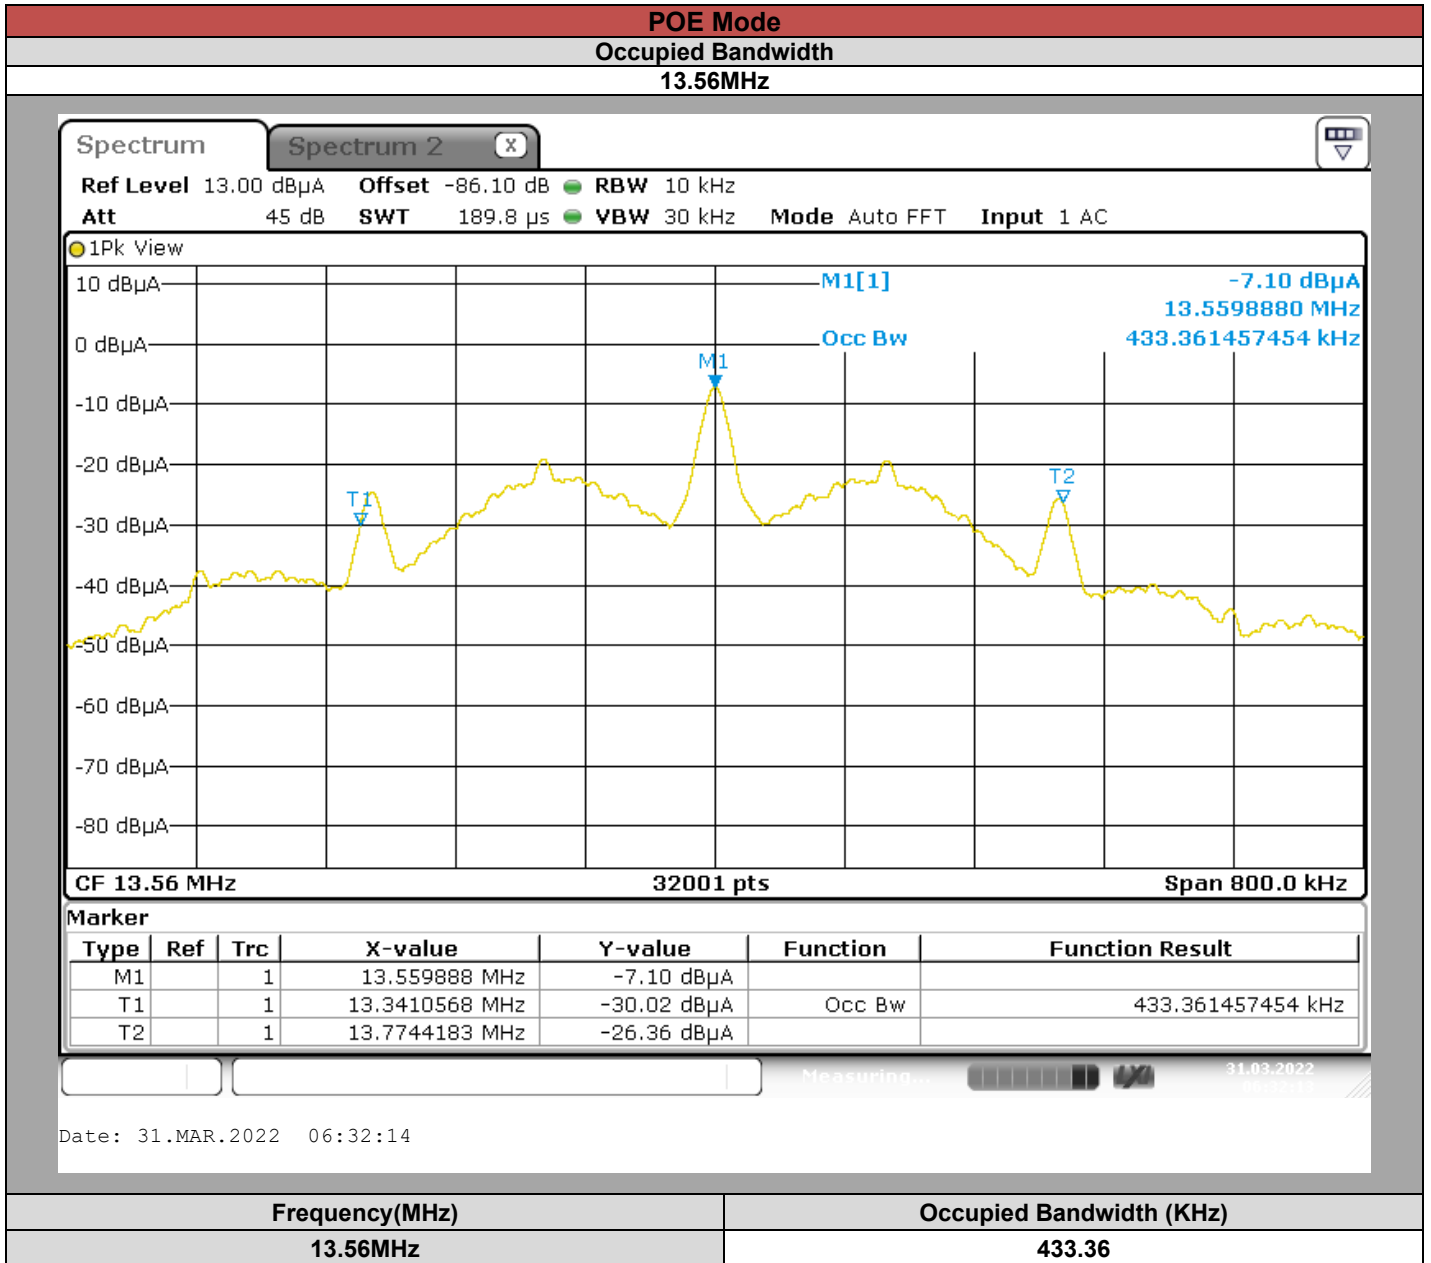

3.6. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **IDEMIA** MPH-AC007A, SN: **2208SSP0000028**, in configuration and description presented in this test report, show levels **compliant** to the **RSS-GEN** limits.

4. FREQUENCY TOLERANCE

4.1. TEST CONDITIONS

Test performed by : Julien PALARD
Date of test : March 30, 2022
Ambient temperature : 25°C
Relative humidity : 42%

4.2. TEST SETUP

- The Equipment Under Test is installed:


- On a table
- In a climatic chamber
- In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- Conducted Method
- Radiated Method

- Test Procedure:


- ANSI C63.10 § 6.8

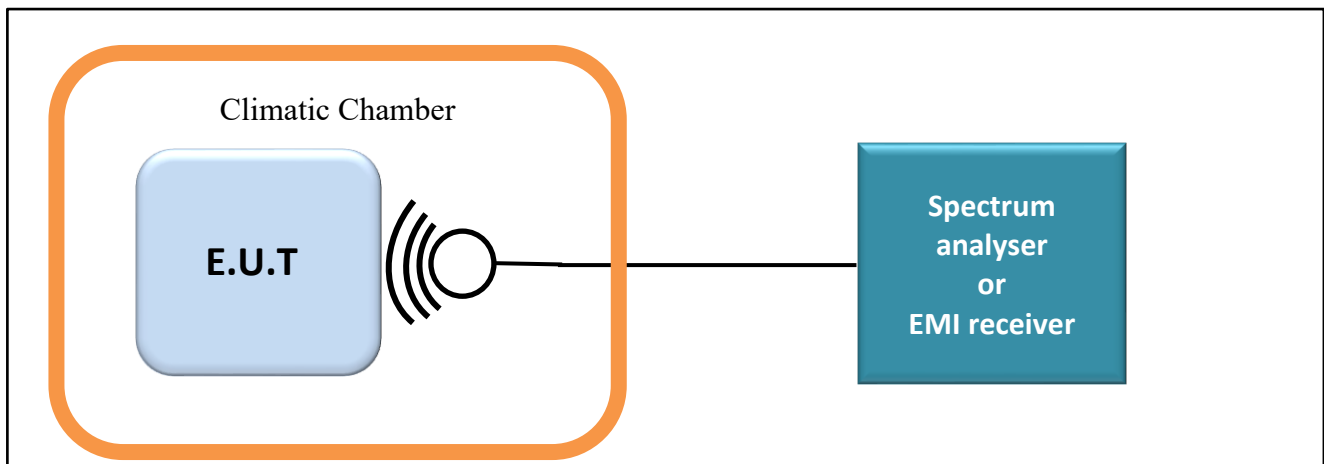

Test set up of Occupied Bandwidth

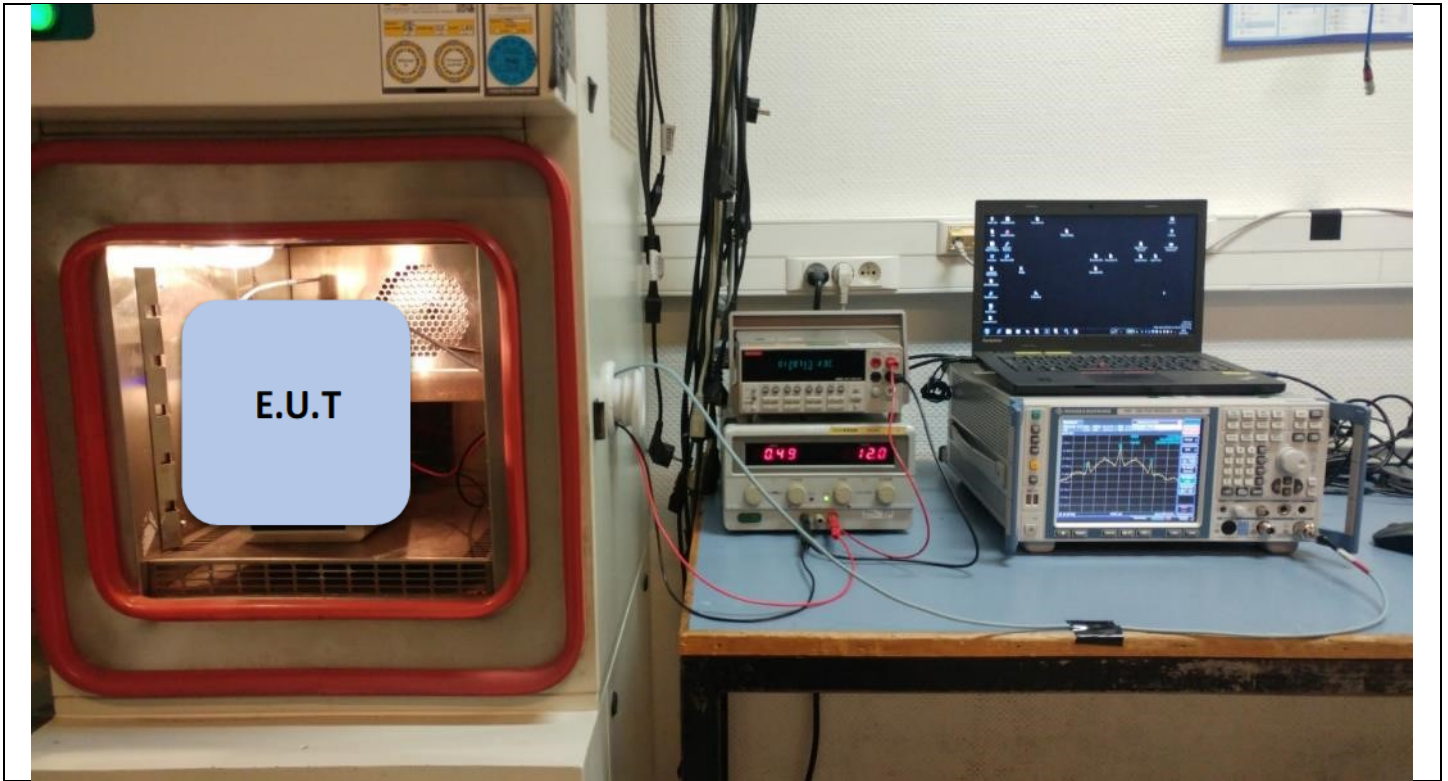

Photograph for Frequency Tolerance in normal test condition

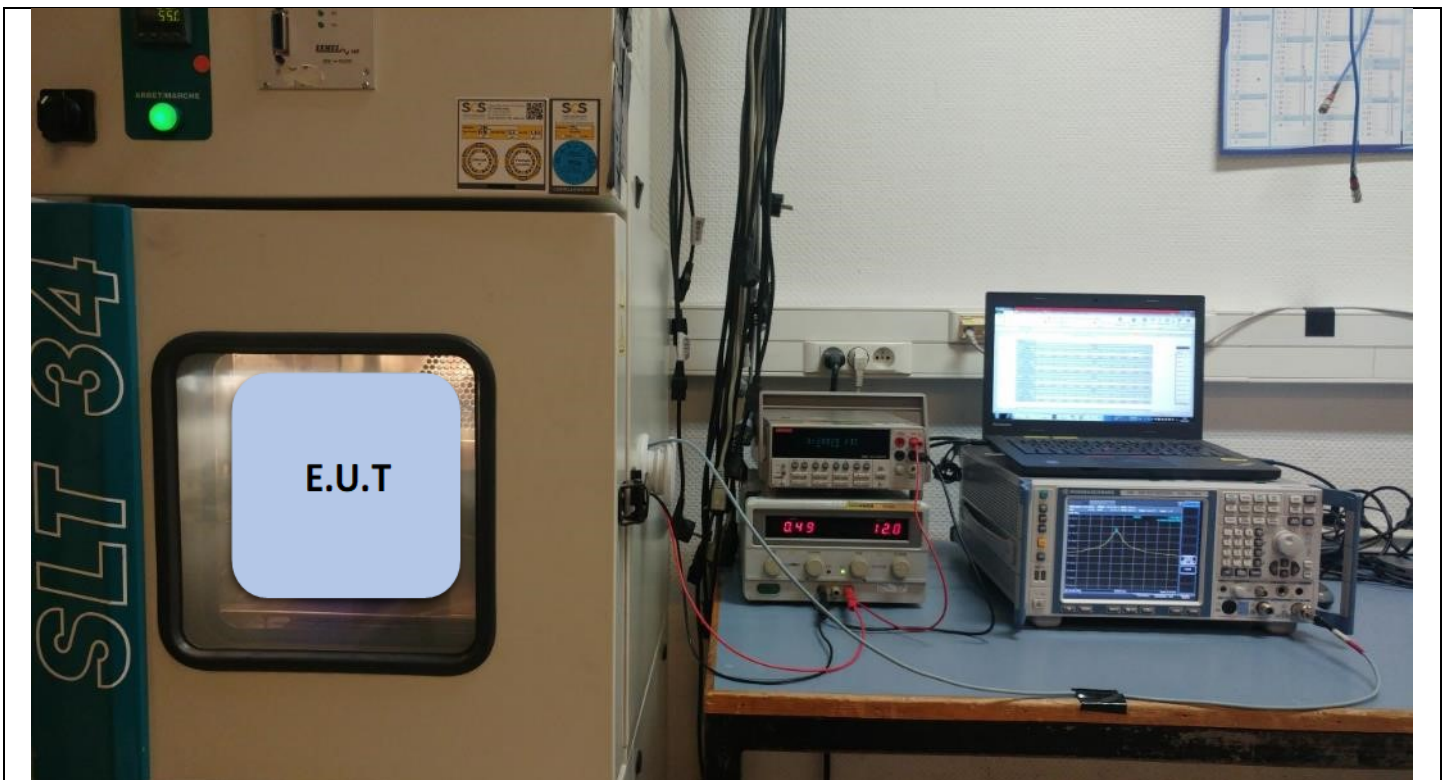



Photograph for Frequency Tolerance in extreme test condition

4.3. LIMIT

$\pm 0.01\%$ ($\pm 100\text{ppm}$)

4.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Climatic chamber	SECASI	SLT34	D1024029	See Hygrometer	See Hygrometer
Hygrometer	AOIP	TM360	B4041042	2021/04	2023/04
EMI receiver	ROHDE & SCHWARZ	ESR 7	A2642023	2021/04	2023/04
Multimeter	KEITHLEY	2000	A1242090	2021/03	2023/03
Power supply	KIKUSUI	PCR500M	A7049006	See Multimeter	See Multimeter
13,56MHz Test fixture Antenna	-	-	A5329422	-	-

Note: In our quality system, the test equipment calibration due is more & less 2 months



L C I E

4.5. RESULTS

Frequency (MHz)	DC Mode									
EUT ACTIVATION	Start up									
Voltage	Vnom									
Temperature	-30	-20	-10	0	10	20	30	40	50	55
Frequency (MHz)	13,55992969	13,55995938	13,559961	13,559941	13,55991175	13,55988725	13,55986132	13,55986682	13,55987169	13,55987288
Frequency Drift (%)	-0,0005	-0,0003	-0,0003	-0,0004	-0,0007	-0,0008	-0,0010	-0,0010	-0,0009	-0,0009
EUT ACTIVATION	2min									
Voltage	Vnom									
Temperature	-30	-20	-10	0	10	20	30	40	50	55
Frequency (MHz)	13,55992838	13,55995944	13,55996119	13,55994138	13,55991194	13,55988769	13,5598615	13,55986669	13,55987163	13,55987307
Frequency Drift (%)	-0,0005	-0,0003	-0,0003	-0,0004	-0,0006	-0,0008	-0,0010	-0,0010	-0,0009	-0,0009
EUT ACTIVATION	5min									
Voltage	Vnom									
Temperature	-30	-20	-10	0	10	20	30	40	50	55
Frequency (MHz)	13,55992807	13,55995938	13,55996138	13,55994144	13,55991219	13,55988769	13,55986163	13,55986625	13,5598715	13,55987344
Frequency Drift (%)	-0,0005	-0,0003	-0,0003	-0,0004	-0,0006	-0,0008	-0,0010	-0,0010	-0,0009	-0,0009
EUT ACTIVATION	10min									
Voltage	Vnom									
Temperature	-30	-20	-10	0	10	20	30	40	50	55
Frequency (MHz)	13,55992788	13,55995938	13,55996144	13,55994181	13,5599125	13,55988782	13,55986169	13,55986613	13,55987157	13,55987357
Frequency Drift (%)	-0,0005	-0,0003	-0,0003	-0,0004	-0,0006	-0,0008	-0,0010	-0,0010	-0,0009	-0,0009
Temperature	Tnom									
Voltage	Vmin			Vnom				Vmax		
Frequency (MHz)	13,55988469			13,55988475				13,55988482		
Frequency Drift (%)	-0,0009			-0,0008				-0,0008		



Frequency (MHz)	13,56	POE Mode								
EUT ACTIVATION	Start up									
Voltage	Vnom									
Temperature	-30	-20	-10	0	10	20	30	40	50	55
Frequency (MHz)	13,5599545	13,55996781	13,55995088	13,55993863	13,55992713	13,55989632	13,55987238	13,5598595	13,55987563	13,55987457
Frequency Drift (%)	-0,0003	-0,0002	-0,0004	-0,0005	-0,0005	-0,0008	-0,0009	-0,0010	-0,0009	-0,0009
EUT ACTIVATION	2min									
Voltage	Vnom									
Temperature	-30	-20	-10	0	10	20	30	40	50	55
Frequency (MHz)	13,559954	13,55996769	13,55995144	13,55993913	13,55992719	13,5598965	13,5598725	13,5598595	13,55987582	13,55987475
Frequency Drift (%)	-0,0003	-0,0002	-0,0004	-0,0004	-0,0005	-0,0008	-0,0009	-0,0010	-0,0009	-0,0009
EUT ACTIVATION	5min									
Voltage	Vnom									
Temperature	-30	-20	-10	0	10	20	30	40	50	55
Frequency (MHz)	13,55995375	13,55996775	13,55995175	13,55993938	13,55992725	13,55989644	13,5598725	13,55985957	13,55987594	13,55987507
Frequency Drift (%)	-0,0003	-0,0002	-0,0004	-0,0004	-0,0005	-0,0008	-0,0009	-0,0010	-0,0009	-0,0009
EUT ACTIVATION	10min									
Voltage	Vnom									
Temperature	-30		-10	0	10	20	30	40	50	55
Frequency (MHz)	13,55995344	13,55996769	13,55995188	13,55993969	13,55992725	13,55989657	13,55987257	13,55985963	13,559876	13,55987519
Frequency Drift (%)	-0,0003	-0,0002	-0,0004	-0,0004	-0,0005	-0,0008	-0,0009	-0,0010	-0,0009	-0,0009
Temperature	Tnom									
Voltage	Vmin			Vnom				Vmax		
Frequency (MHz)	13,55990313			13,55990457				13,55990382		
Frequency Drift (%)	-0,0007			-0,0007				-0,0007		

4.6. CONCLUSION

Frequency tolerance measurement performed on the sample of the product **IDEMIA** MPH-AC007A, SN: **2208SSP000028**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.225 & RSS 210 limits.

5. AC POWER LINE CONDUCTED EMISSIONS

5.1. TEST CONDITIONS


Test performed by : Laurent DENEUX
 Date of test : March 17, 2022 to March 18, 2022
 Ambient temperature : 20 °C
 Relative humidity : 43 %


5.2. TEST SETUP

The product has been tested according to ANSI C63.10 method. The EUT is placed on the ground reference plane, at 80cm from the LISN. The distance between the EUT and the vertical ground plane is 40cm. Auxiliaries are powered by another LISN. The cable has been shorted to 1meter length. The EUT is powered through the LISN. Measurement is made with a receiver in peak mode. This was followed by a Quasi-Peak, i.e. CISPR measurement for any strong signal. If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary. The LISN (measure) is 50Ω / 50μH. Interconnecting cables and equipment's were moved to position that maximized emission.


Voltage table used (for Power Line Conducted Emissions):

Type	Measurement performed:	
<input checked="" type="checkbox"/> AC / <input checked="" type="checkbox"/> DC (Auxiliary used)	<input checked="" type="checkbox"/> 120VAC/60Hz	<input checked="" type="checkbox"/> 240VAC/50Hz
<input type="checkbox"/> USB (Laptop auxiliary)	<input type="checkbox"/> 120VAC/60Hz (Laptop auxiliary)	<input type="checkbox"/> 240VAC/50Hz(Laptop auxiliary)

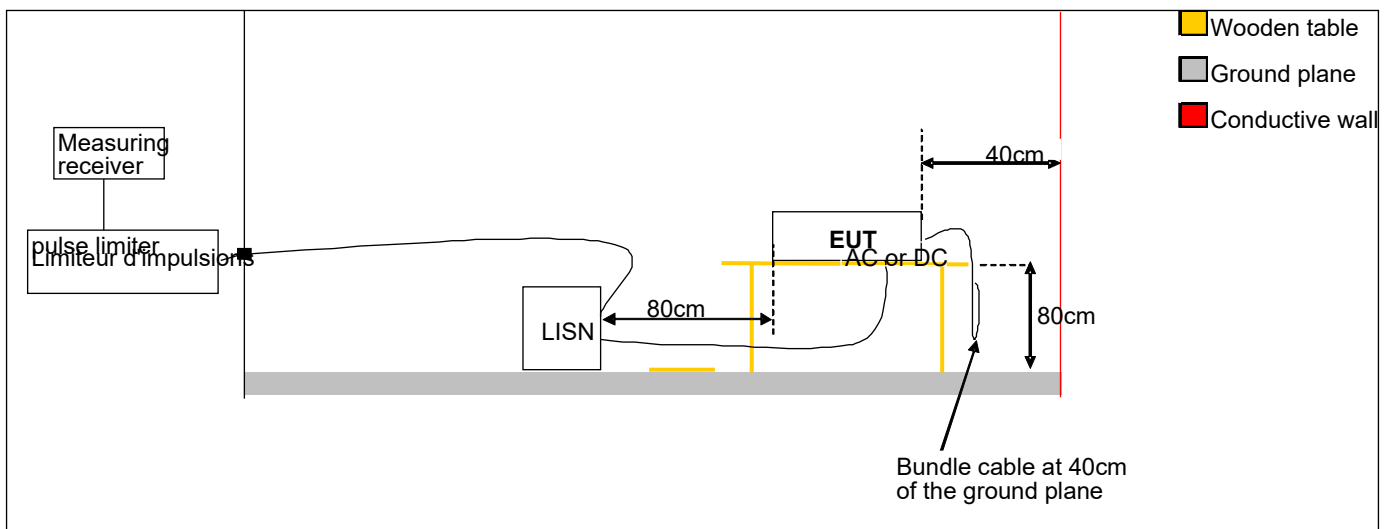

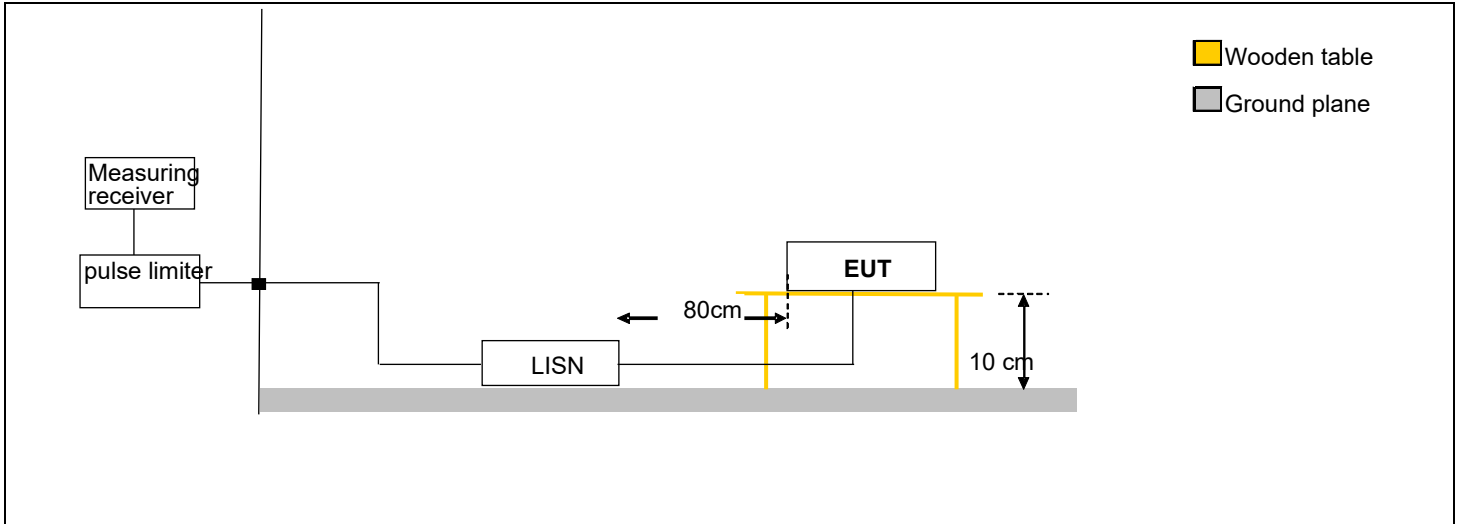


Test set up of AC Power Line Conducted Emissions

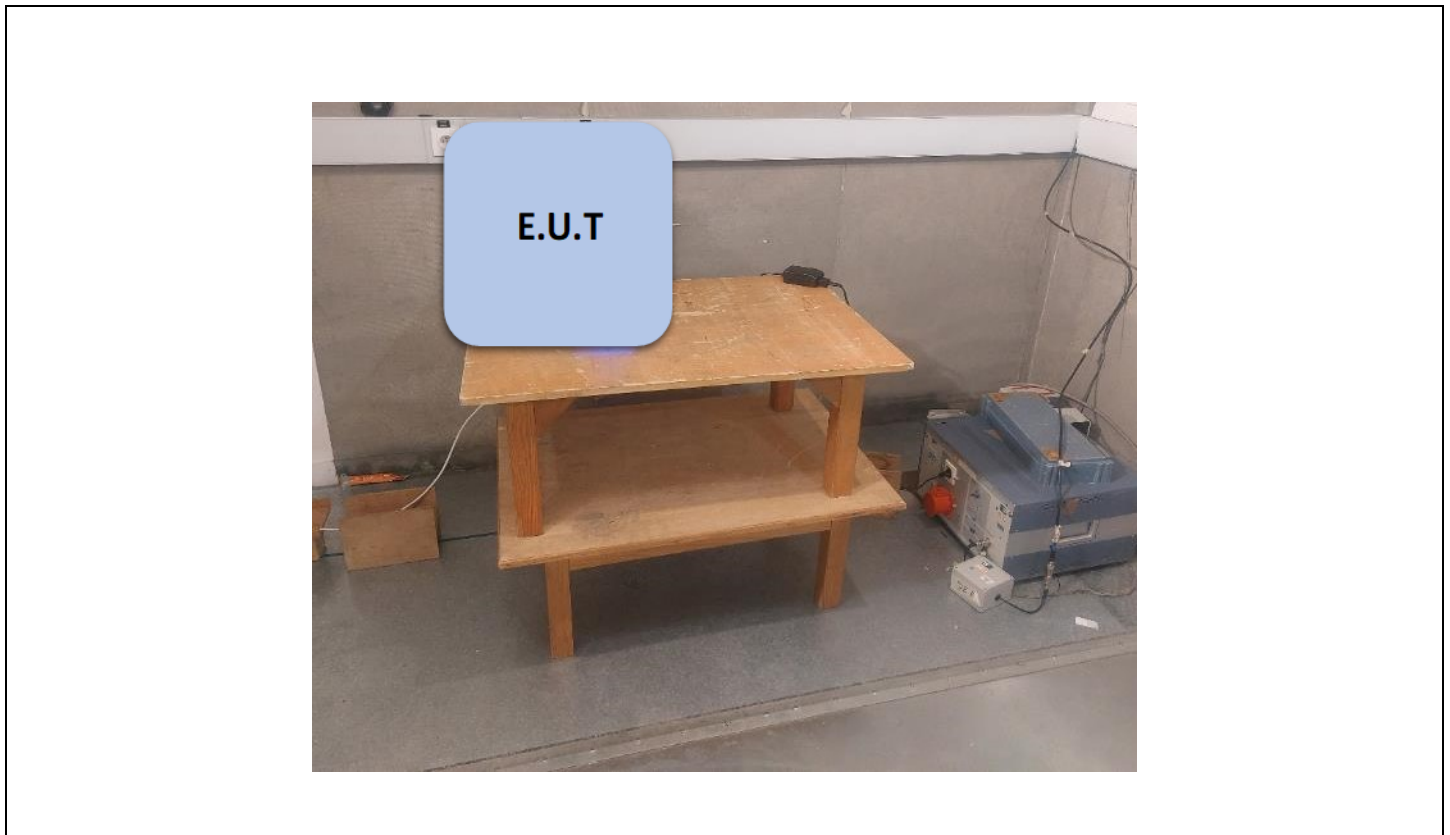

Photograph for AC Power Line Conducted Emissions (Mode DC)



Photograph for AC Power Line Conducted Emissions (mode DC)

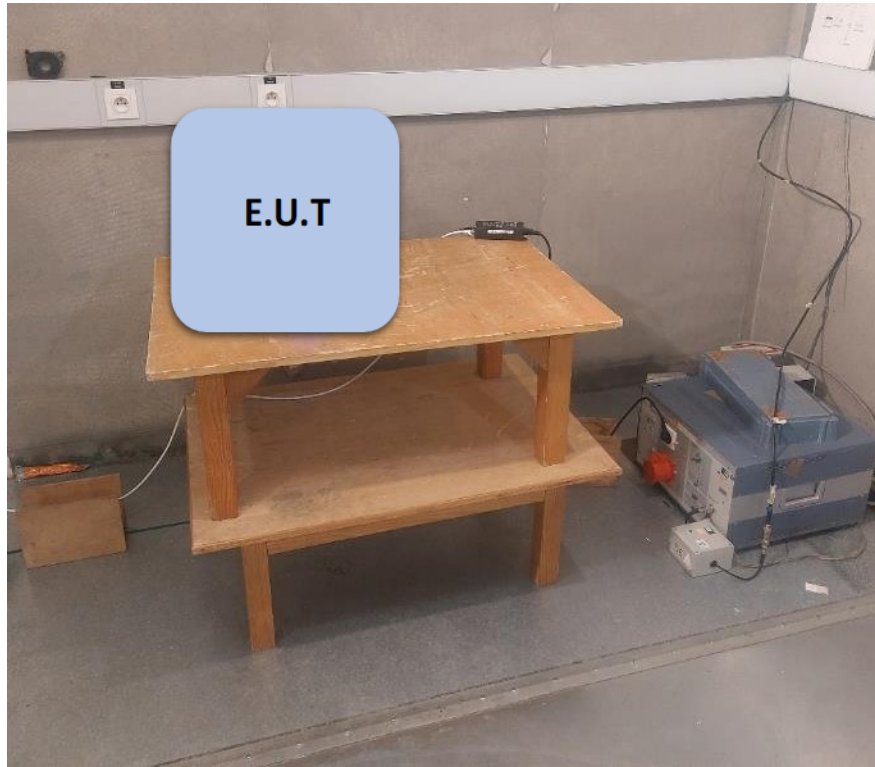

Photograph for AC Power Line Conducted Emissions (mode POE)



Photograph for AC Power Line Conducted Emissions (mode POE)



5.3. LIMIT

Frequency range	Level	Detector
0,15kHz to 0,5MHz	66dB μ V to 56 μ V*	QPeak
	56dB μ V to 46 μ V*	Average
0,5MHz to 5MHz	56dB μ V	QPeak
	46dB μ V	Average
5MHz to 30MHz	60B μ V	QPeak
	50dB μ V	Average

*Decreases with the logarithm of the frequency

5.4. TEST EQUIPMENT LIST


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Receiver	RHODE & SCHWARZ	ESU	A2642018	2020/10	2022/10
V ISLN	ROHDE & SCHWARZ	ESH2-Z5	C2322001	2021/10	2022/10
Pulse limiter	ROHDE & SCHWARZ	ESH3-Z2	A2649008	2021/06	2022/06
Cable	-	-	A5329417	2021/11	2022/11
Cable	-	-	A5329589	2021/11	2022/11
Reference ground plan 2 x 3m	L.C.I.E.	-	-	-	-

Note: In our quality system, the test equipment calibration due is more & less 2 months

5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None Divergence:

5.6. RESULTS

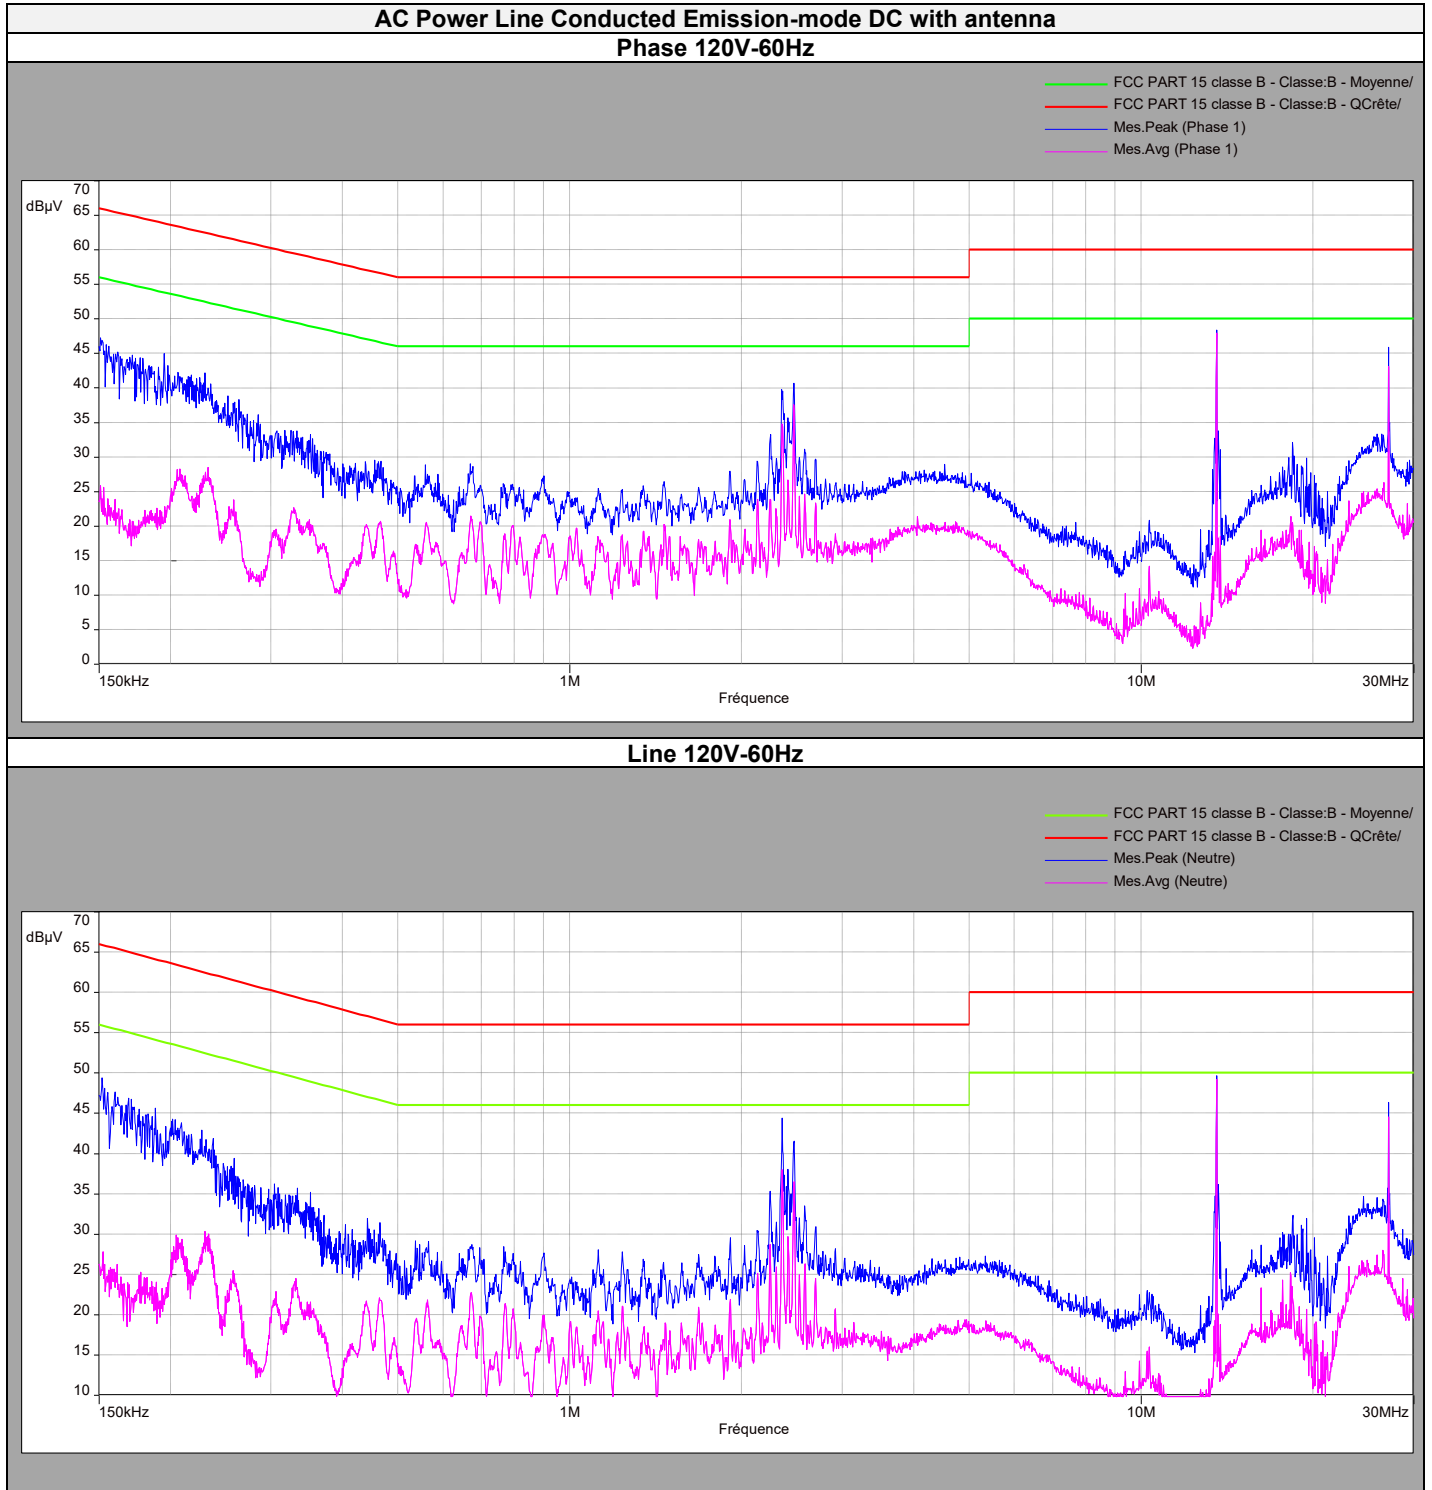



L C I E


Phase Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0,151	47,2	-	66	18,8	29	56	27
2,46	40,6	-	57,8	17,2	37,4	47,8	10,4
13,56	38,3	-	60	21,7	32	50	18
18,42	32	-	60	28	20,2	50	29,8
27,12	45,8	-	60	14,2	43	50	7

Neutral Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0,15	49,7	-	66	16,3	27,8	56	28,2
2,35	44,4	-	56	11,6	37,3	46	8,7
13,56	49,6	-	60	10,4	49,2	50	0,8
18,44	31,7	-	60	28,3	22	50	28
27,12	46,7	-	60	13,3	45,4	50	4,6




L C I E

AC Power Line Conducted Emission –mode DC with antenna Phase 240V-50Hz

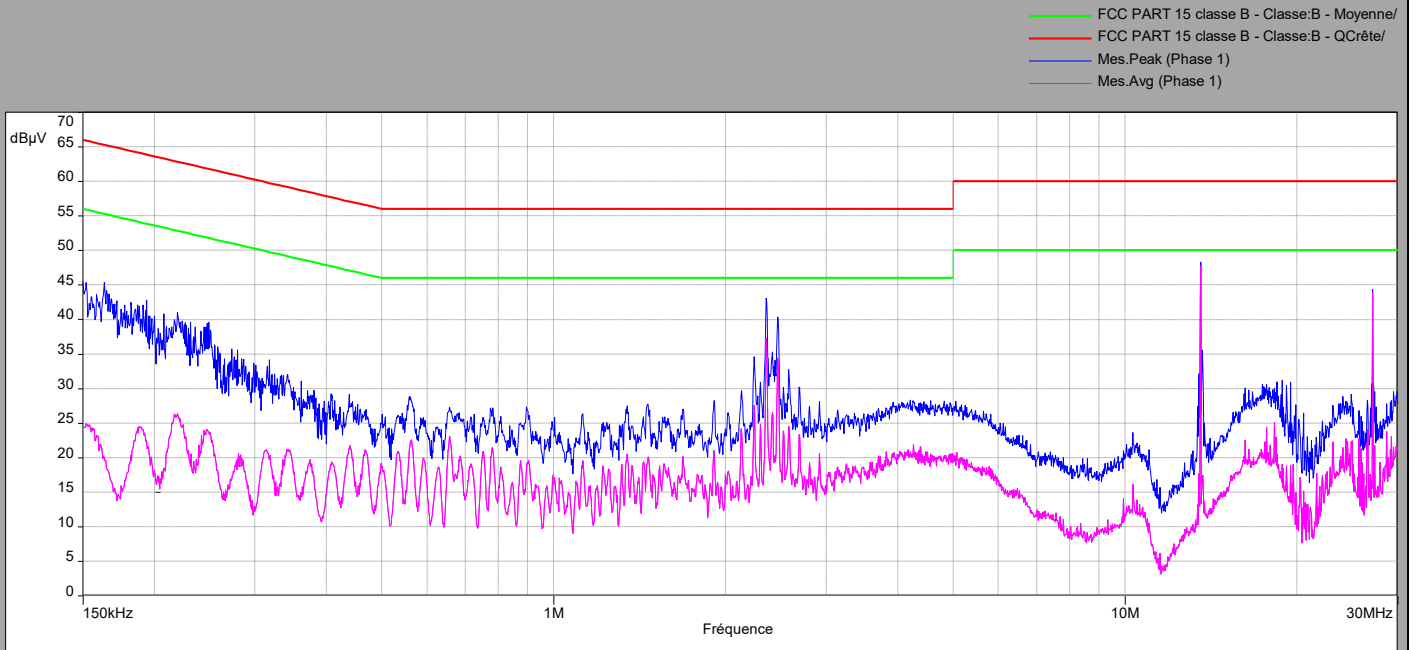

Line 240V-50Hz

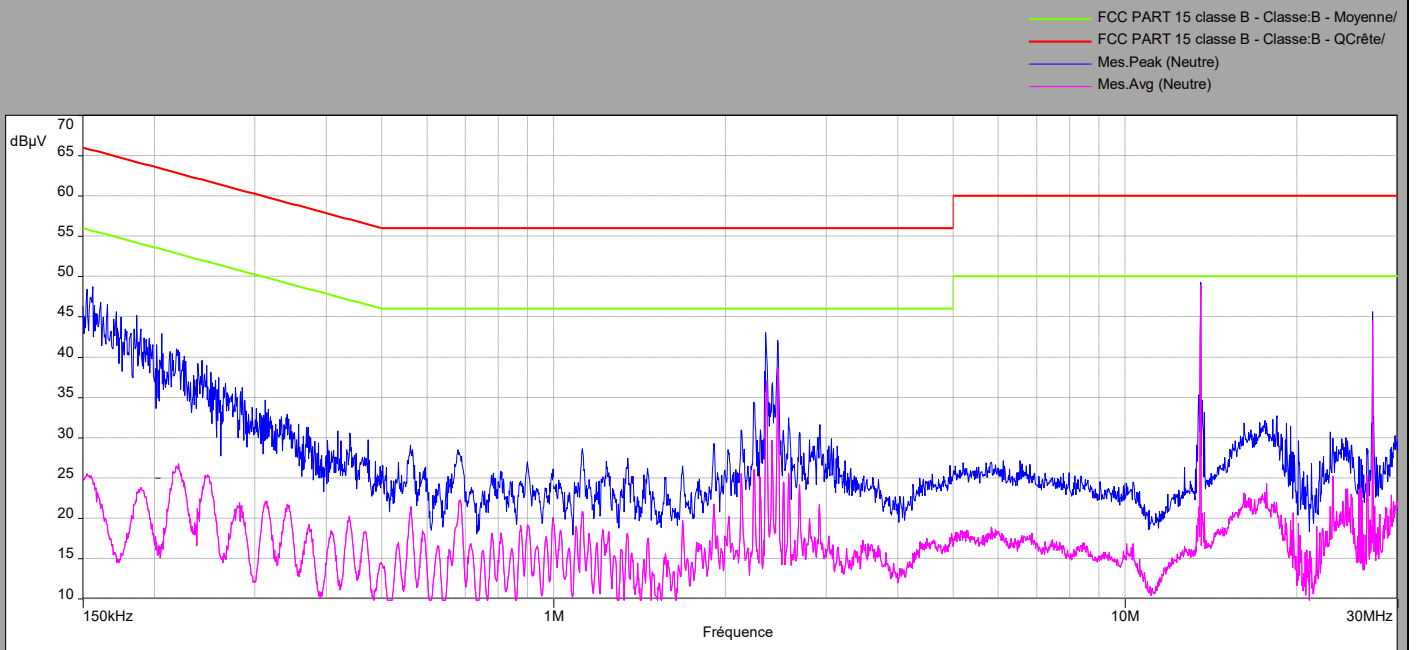



L C I E


Phase Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0,15	45,5	-	66	20,5	24,4	56	31,6
2,35	43	-	56	13	37,3	46	8,7
13,56	48,2	-	60	11,8	47,7	50	2,3
19,49	30,8	-	60	29,2	18,8	50	31,2
27,12	44,3	-	60	15,7	44	50	6

Neutral Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0,15	48,4	-	64	15,6	25,4	39	13,6
2,46	42	-	46	4	38,6	46	7,4
13,56	49,3	-	60	10,7	48,8	50	1,2
23,13	29,7	-	60	30,3	25,2	50	24,8
27,12	45	-	60	15	42,7	50	7,3




L C I E

AC Power Line Conducted Emission – mode POE with antenna Phase 120V-60Hz

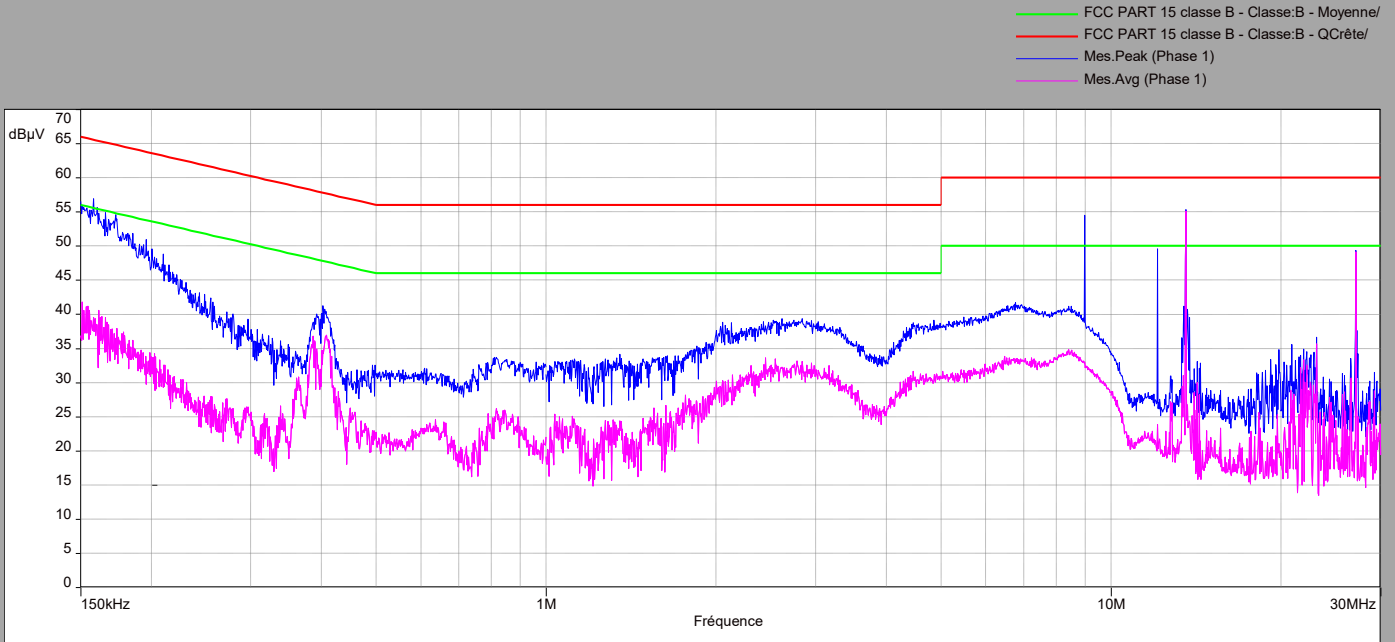

Line 120V-60Hz

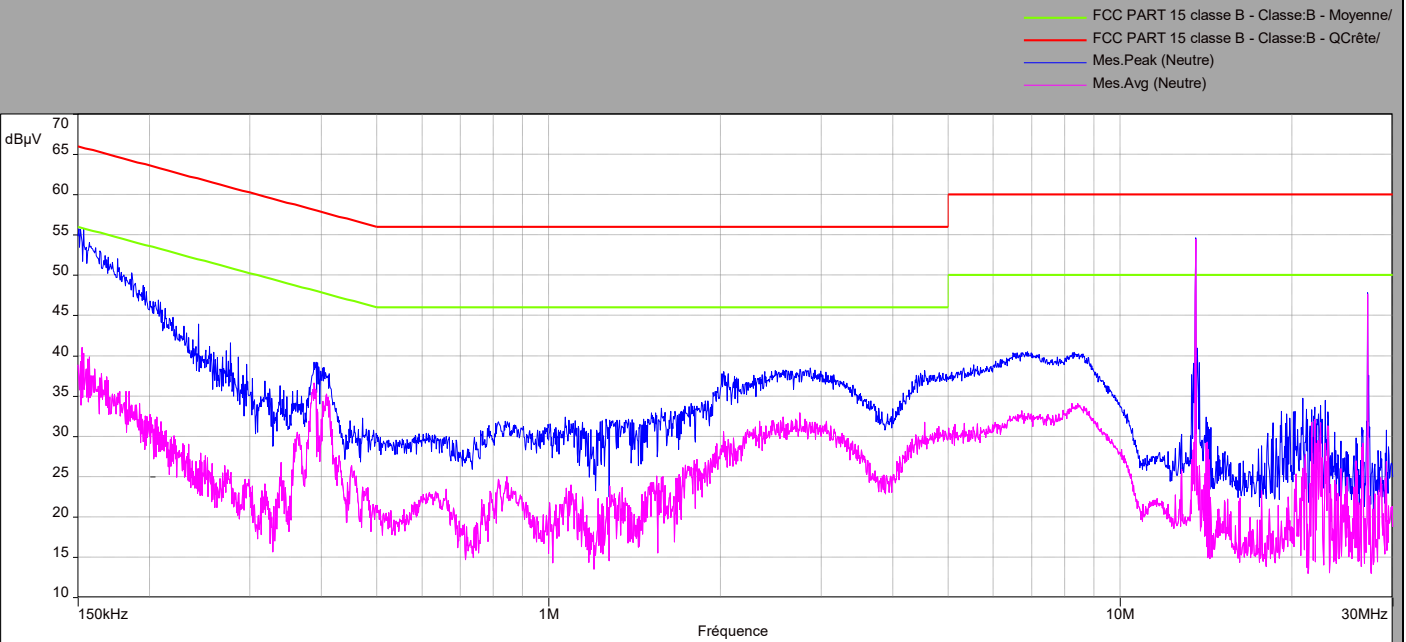



L C I E


Phase Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0,151	56	-	66	10	46,8	56	9,2
0,408	39,8	-	57,8	18	37	47,8	10,8
2,75	38,3	-	56	17,7	32	46	14
13,56	55,3	-	60	4,7	55	50	-5
27,12	49,3	-	60	10,7	49	50	1

Neutral Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0,15	55,6	-	64	8,4	40,3	39	-1,3
0,383	39,2	-	58	18,8	36,6	48	11,4
6,73	39,3	-	60	20,7	39,1	50	10,9
13,56	54,6	-	60	5,4	54,4	50	-4,4
27,12	47,8	-	60	12,2	46,6	50	3,4




L C I E

AC Power Line Conducted Emission - mode POE with antenna Phase 240V-50Hz

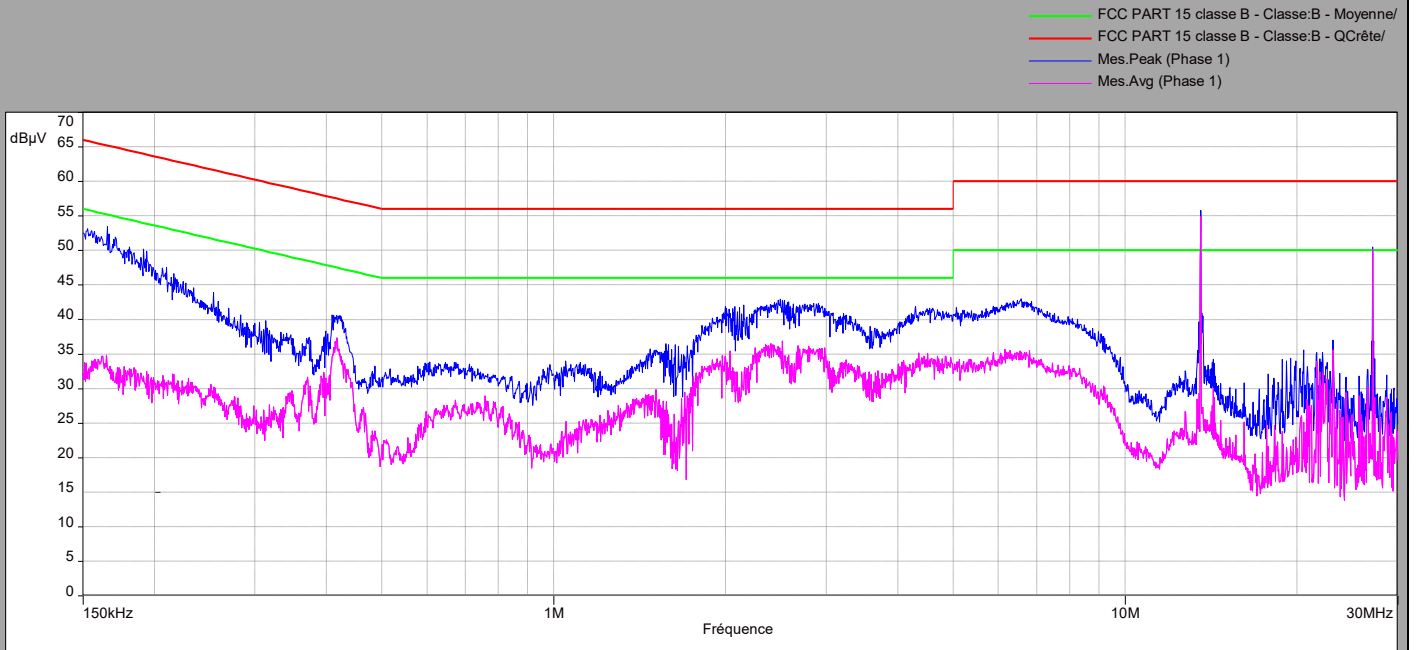

Line 240V-50Hz

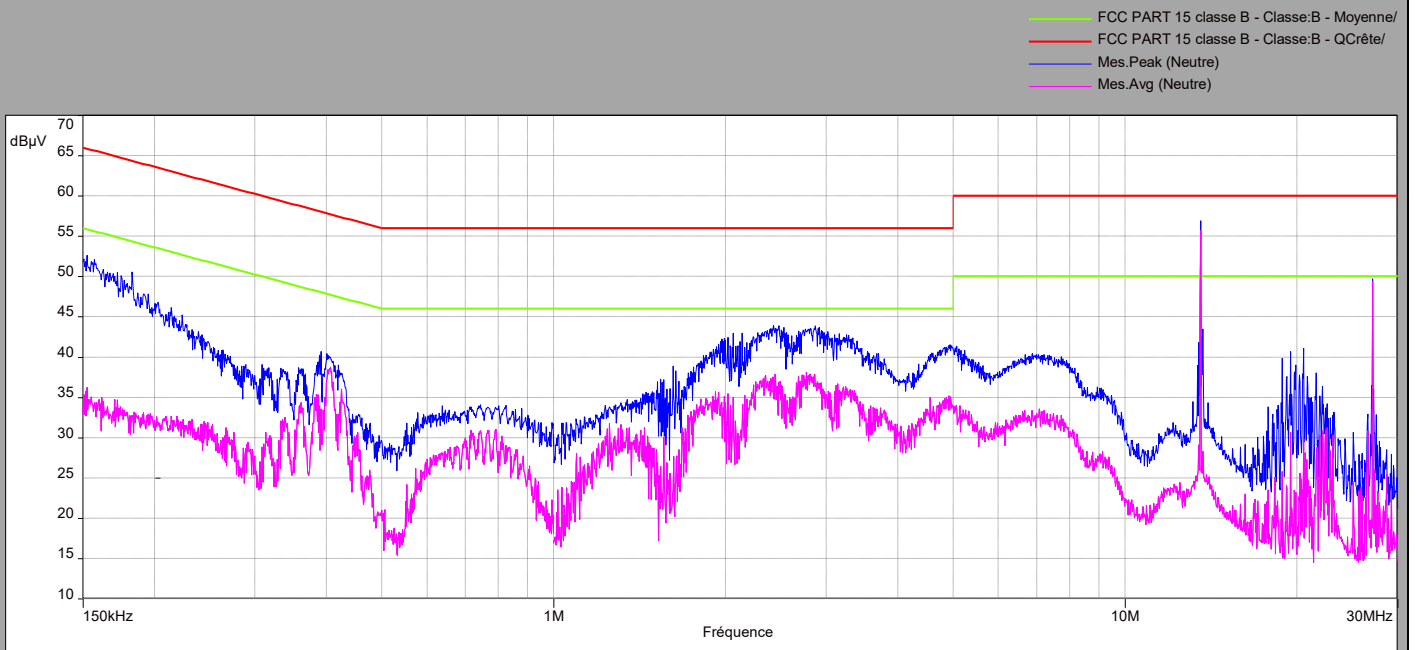



L C I E


Phase Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0,15	52.5	-	66	13.5	32	56	24
0,42	40.2	-	58	17.8	37.2	48	10.8
2,37	42.7	-	56	13.3	36.8	46	9.2
13,56	55.7	-	60	4.3	54.8	50	-4.8
27,12	50.5	-	60	9.5	50	50	0

Neutral Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0,15	51	-	64	13	33	39	6
0,416	39,9	-	58	18,1	38,3	48	9,7
2,44	43	-	56	13	37,8	46	8,2
13,56	57	-	60	3	56,7	50	-6,7
27,12	49,7	-	60	10,3	49,3	50	0,7




L C I E

AC Power Line Conducted Emission –mode POE without antenna Phase 120V-60Hz

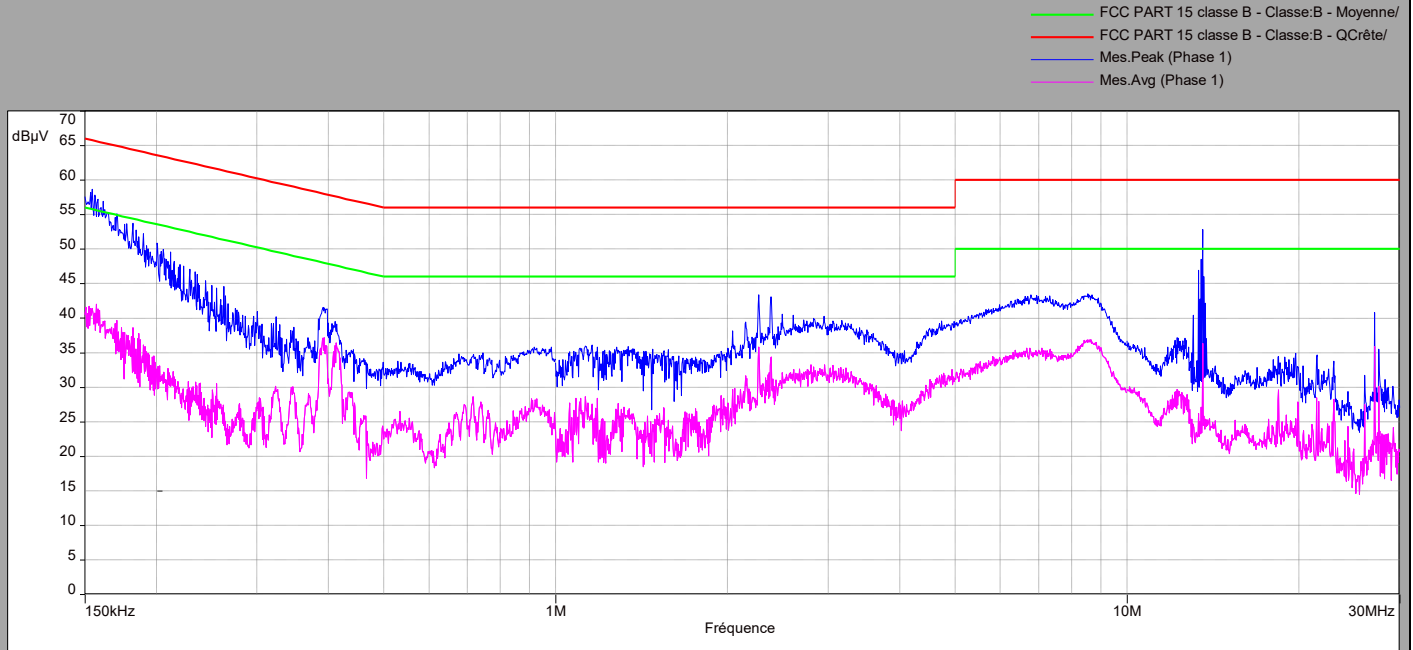

Line 120V-60Hz

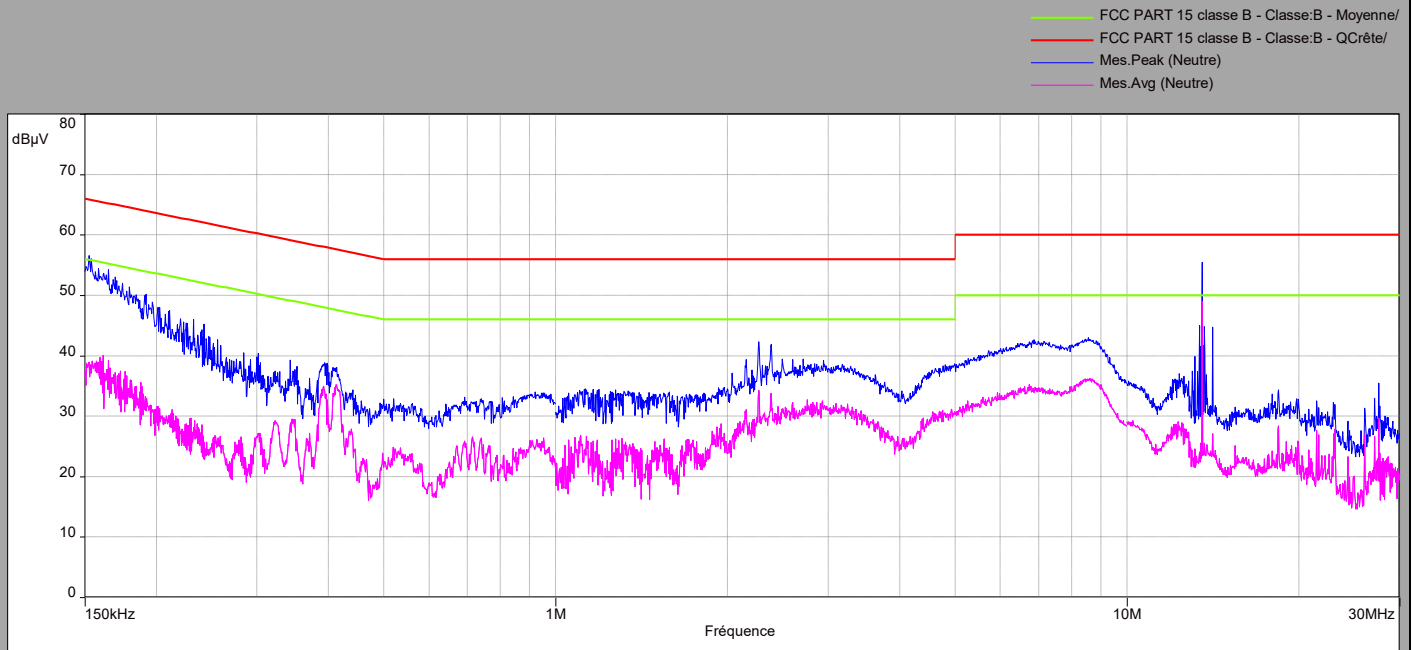



L C I E


Phase Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0.15	58.6	-	66	7.4	41.4	56	14.6
0.42	41.4	-	57.4	16	37.6	47.4	9.8
2.26	42.7	-	56	13.3	37.5	46	8.5
13.56	52.8	-	60	7.2	36.3	50	13.7
27.6	40.8	-	60	19.2	35.8	50	14.2

Neutral Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0.15	56.6	-	66	9.4	39	56	17
0.42	38.3	-	57.4	19.1	35	47.4	12.4
2.27	42.3	-	56	13.7	34.3	46	11.7
13.56	45.4	-	60	14.6	49	50	1
27.6	33.6	-	60	26.4	27.8	50	22.2




L C I E

AC Power Line Conducted Emission - mode POE without antenna Phase 240V-50Hz

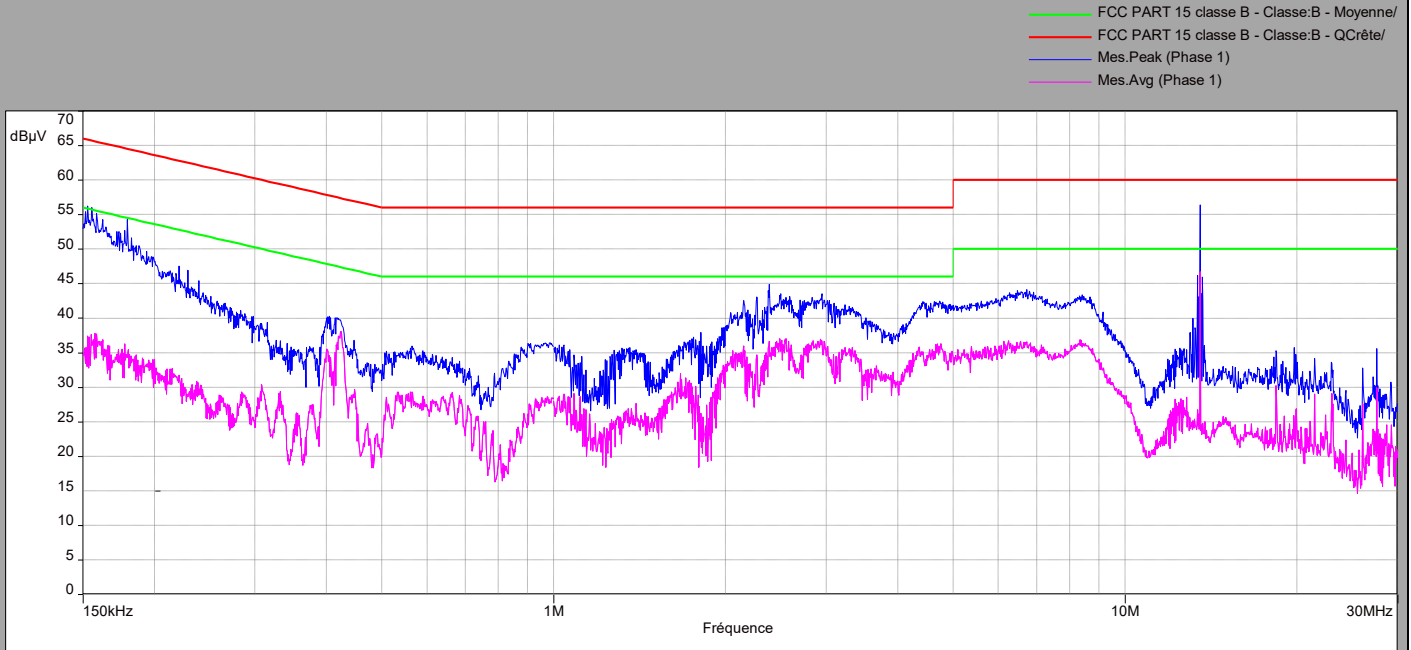

Line 240V-50Hz

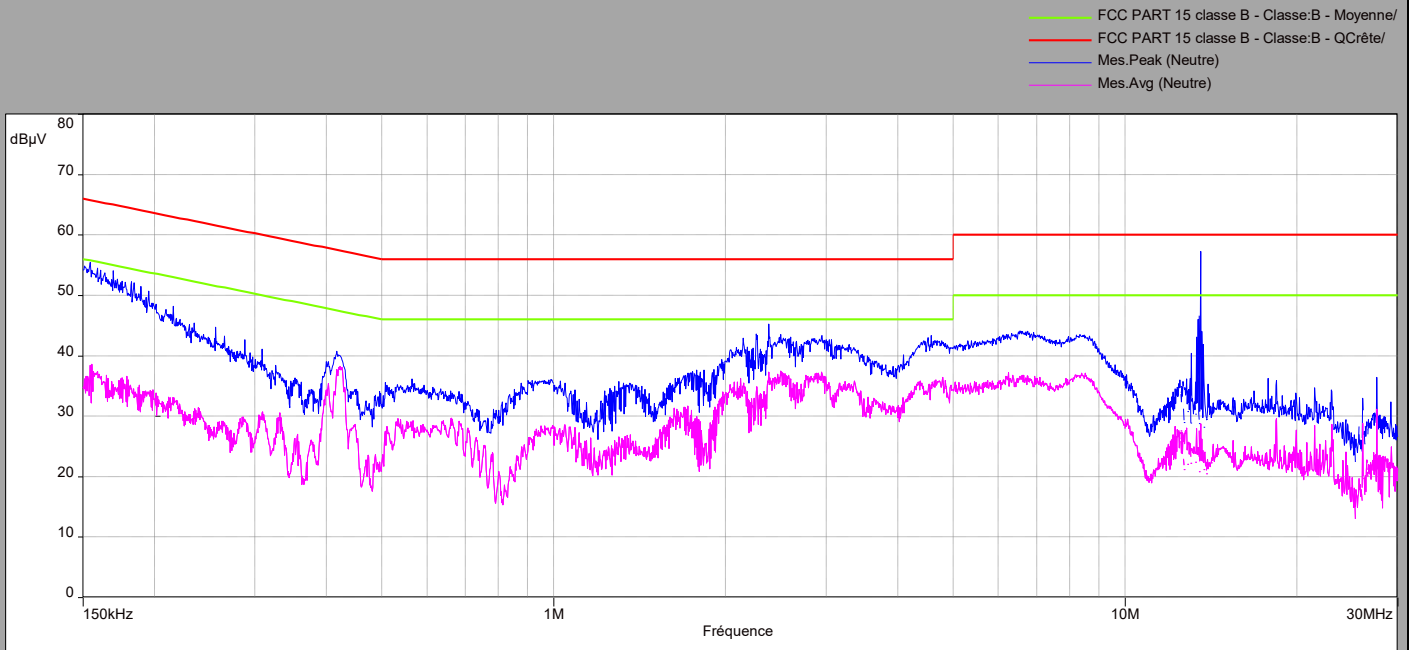



Phase Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0.15	56	-	66	10	37.4	56	18.6
0.42	40	-	57.4	17.4	37.8	47.4	9.6
2.38	44.8	-	56	11.2	36.6	46	9.4
13.56	56	-	60	4	46.6	50	3.4
27.6	35.5	-	60	24.5	29.9	50	20.1

Neutral Line							
Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Margin Quasi-Peak (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)	Margin Average (dB μ V)
0.150	55.5	-	66	10.5	38.4	56	17.6
0.423	40.1	-	57.4	17.3	38.2	47.4	9.2
2.38	45.2	-	56	10.8	37.2	46	8.8
13.56	57.2	-	60	2.8	28.7	50	21.3
27.6	36.4	-	60	23.6	31	50	19

5.7. CONCLUSION

Ac Power Line Conducted Emission measurement performed on the sample of the product **IDEMIA MPH-AC007A**, SN: **2208SSP0000028**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.225 & RSS Gen limits.

6. FIELD STRENGTH OUTSIDE OF THE BANDS 13.110-14.010 MHz


6.1. TEST CONDITIONS

Test performed by : Laurent DENEUX
 Date of test : March 17, 2022 to March 18, 2022
 Ambient temperature : 18 to 20 °C
 Relative humidity : 46 to 51 %

6.2. TEST SETUP

The product has been tested according to ANSI C63.10 and FCC part 15 subpart C:


Frequency range :	Below 30MHz	From 30MHz to 1GHz	Above 1GHz
Antenna Polarization :	Parallel, Perpendicular And Ground parallel	Horizontal And Vertical	Horizontal And Vertical
Antenna Height :	1m	Varied from 1m to 4m	Varied from 1m to 4m
Antenna Type :	Loop	Bi-Log	Horn
RBW Filter :	200Hz below 150kHz 9kHz above 150kHz	120kHz	1MHz
Maximization :	Turntable rotation of 360 degrees range		
EUT height :	0.8m		1.5m
Test site :	Open Aera Test Site	Open Aera Test Site	Open Aera Test Site
Distance EUT-Antenna :	3m	10m	10m

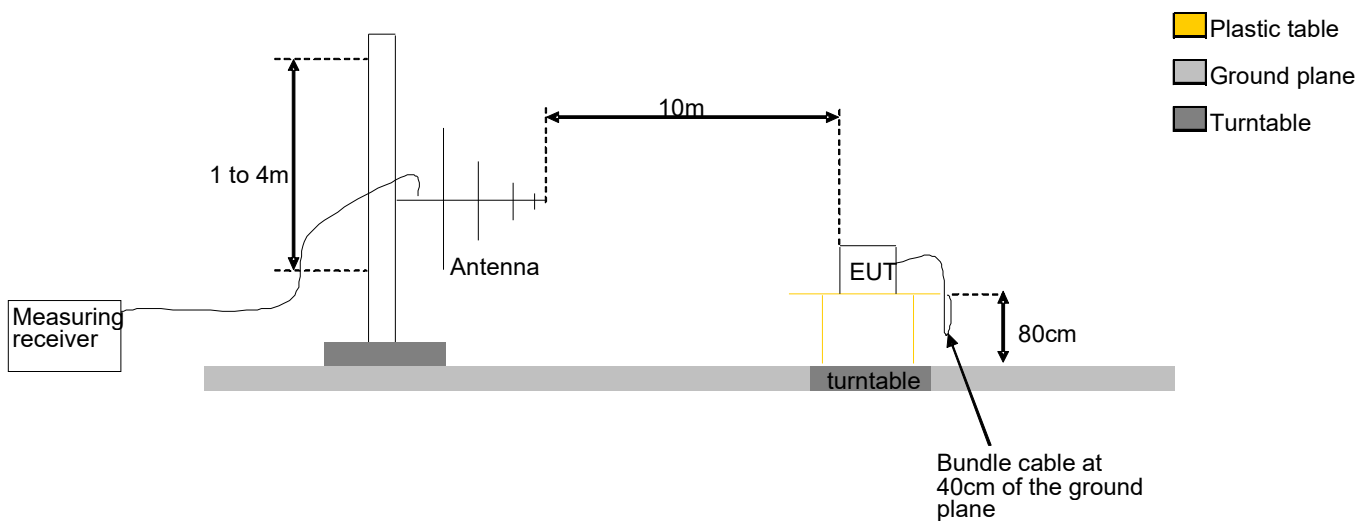

Test Set up for radiated measurement in open area test site



Photograph for Field strength outside of the bands 13.110-14.010 MHz

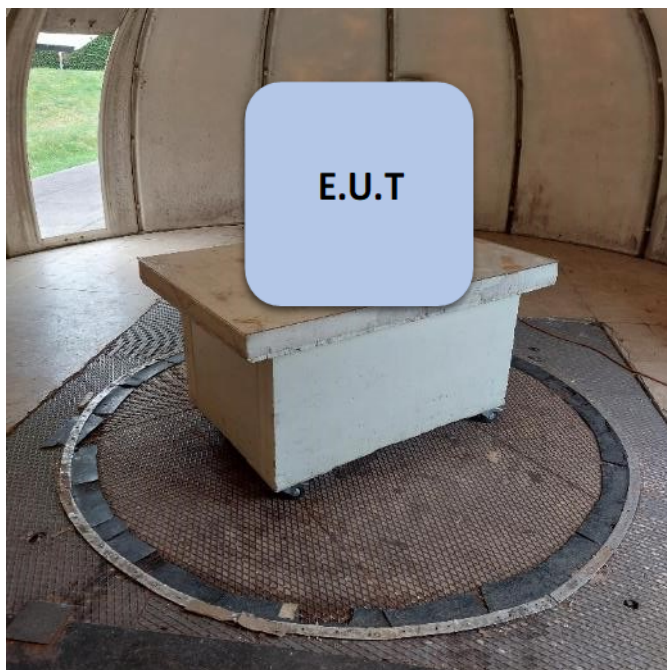

Photograph for Field strength outside of the bands 13.110-14.010 MHz



L C I E

6.3. LIMIT

Measure at 300m		
Frequency range	Level	Detector
9kHz-490kHz	67.6dB μ V/m /F(kHz)	QPeak
Measure at 30m		
Frequency range	Level	Detector
490kHz-1.705MHz	87.6dB μ V/m /F(kHz)	QPeak
1.705MHz-30MHz	29.5dB μ V/m	QPeak
Measure at 10m		
Frequency range	Level	Detector
30MHz to 88MHz	29.5dB μ V/m	QPeak
88MHz to 216MHz	33dB μ V/m	QPeak
216MHz to 960MHz	35.5B μ V/m	QPeak
960MHz to 1000MHz	43.5dB μ V/m	QPeak
Above 1000MHz	63.5dB μ V/m	Peak
	43.5dB μ V/m	Average
Measure at 3m		
Frequency range	Level	Detector
30MHz to 88MHz	40dB μ V/m	QPeak
88MHz to 216MHz	43.5dB μ V/m	QPeak
216MHz to 960MHz	46B μ V/m	QPeak
960MHz to 1000MHz	54dB μ V/m	QPeak
Above 1000MHz	74dB μ V/m	Peak
	54dB μ V/m	Average



6.4. TEST EQUIPMENT LIST


Description	Manufacturer	Model	Identifier	Last Calibration date	Calibration due date
Open test site	LCIE	-	F2000400	2022-02	2023-02
EMI Test Receiver	ROHDE & SCHWARZ	ESU	A2642018	2020-10	2022-10
Cable	-	-	A5329416	2022-02	2023-02
Cable	-	-	A5329442	2021-12	2022-12
Loop antenna	R&S	HFH2-Z2	C2040269	2020-09	2022-09
Dipole large bande	R&S	HUF-Z1	C2040011	2020-05	2022-05
Logperiodic antenna	R&S	HL 023 A2	C2040001	2020-05	2022-05
Signal Generator	R&S	SMR20	A5444002	2020-07	2022-07
Antenne bilog	CHASE	CBL 6112A	C2040040	2021-04	2022-04
Cable	-	-	A5329876	2021-12	2022-12
Cable	-	-	A5329449	2021-12	2022-12

Note: In our quality system, the test equipment calibration due is more & less 2 months

6.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None Divergence:

6.6. RESULTS

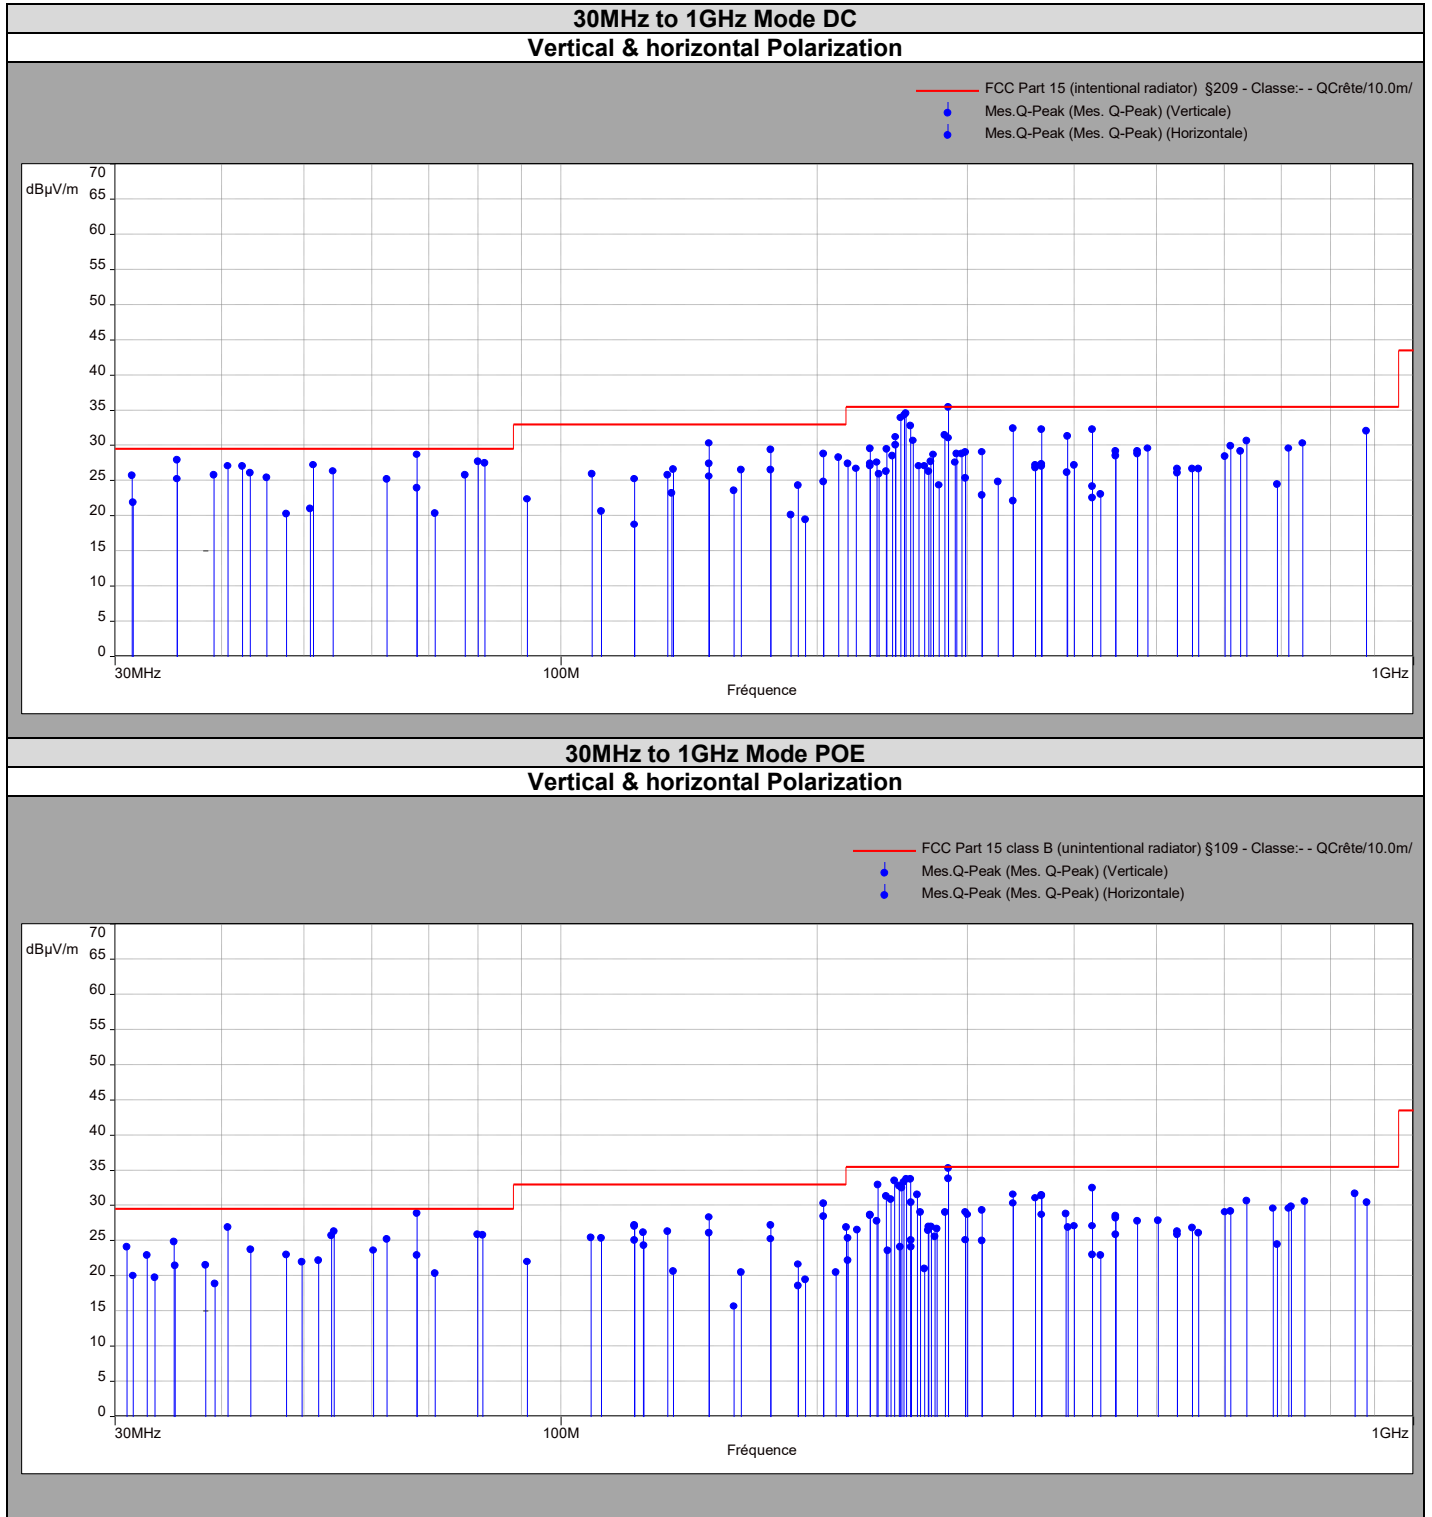



L C I E

Final measurement mode DC

9kHz to 30MHz

9kHz to 30MHz					
Polarization	Frequency (MHz)	Peak Level (dB μ V/m)	QPeak Level (dB μ V/m)	Limit (dB μ V/m)	Margin QPeak (dB μ V/m)
Parallel	0.39602244	-	41.58	95.6	54,02
Parallel	0.44891026	-	39.74	94.6	54,86
Parallel	0.5105	-	35.13	96.7	61,57
Parallel	0.54901923	-	42.2	95.1	52,9
Parallel	0.62099359	-	39.4	95.7	56,3
Parallel	0.72	-	32.9	97.2	64,3
Parallel	0.842	-	33.3	97.2	63,9
Parallel	27.1198397	-	31.9	69.5	37,6
Perpendicular	0.36702885	-	43.47	96.3	52,83
Perpendicular	0.424	-	41.12	95.1	53,98
Perpendicular	0.4755	-	38.04	94.1	56,06
Perpendicular	0.5315	-	33.81	73.09	39,28
Perpendicular	0.60299679	-	30.98	71.99	41,01
Perpendicular	0.6625	-	29.85	71.18	41,33
Perpendicular	0.7525	-	32.06	70.07	38,01
Perpendicular	0.849	-	33.33	69.02	35,69
Perpendicular	0.9235	-	33.2	68.29	35,09
Perpendicular	1.038	-	32.28	67.28	35
Perpendicular	16.228	-	25.15	69.5	44,35
Perpendicular	27.12	-	39.98	69.5	29,52
Ground parallel	2.837044872	-	38.14	69.5	31,36
Ground parallel	2.950557692	-	41.34	69.5	28,16
Ground parallel	3.064076923	-	36.34	69.5	33,16
Ground parallel	3.67	-	24.11	69.5	45,39

Final measurement mode DC:

30MHz to 1000MHz

	Frequency (MHz)	level (dB μ V/m)	limit FCC class B	Marge/ Fcc Part class B
Vertical	35.5	27.9	29.5	1.6
Vertical	40.7	27.1	29.5	2.4
Vertical	42.3	27.03	29.5	2.47
Vertical	67.8	28.68	29.5	0.82
Vertical	80	27.66	29.5	1.84
Vertical	81.36025641	27.43	29.5	2.07
Vertical	250.3	33.95	35.5	1.55
Vertical	252.6682692	34.3	35.5	1.2
Vertical	257.61	34.5	35.5	1
Vertical	258.8	30.68	35.5	4.82
Vertical	284.7583333	35.4	35.5	0.1
Horizontal	230.5	29.51	35.5	5.99
Horizontal	311.9	29.08	35.5	6.42
Horizontal	339	32.39	35.5	3.11

No significant spurious has been observed above 1GHz.



L C I E

Final measurement mode POE

9kHz to 30MHz

9kHz to 30MHz					
Polarization	Frequency (MHz)	Peak Level (dB μ V/m)	QPeak Level (dB μ V/m)	Limit (dB μ V/m)	Margin QPeak (dB μ V/m)
Parallel	0.3885	-	44,45	95,8	51,35
Parallel	0.4135	-	44,49	95,3	50,81
Parallel	0.483		43,68	93,9	50,22
Parallel	0.5695		38,53	72,49	33,96
Parallel	0.6625		31,92	71,18	39,26
Parallel	0.753		30,56	70,06	39,5
Parallel	0.8115	-	33,14	69,414	36,274
Parallel	0.9215	-	30,89	68,31	37,42
Parallel	1.292	-	30,08	65,37	35,29
Parallel	1.48	-	38	64,19	26,19
Parallel	1.784	-	33,51	69,5	35,99
Parallel	27.1198397		34,5	69,5	35
Perpendicular	0.3475	-	43,41	96,8	53,39
Perpendicular	0.387	-	44,29	95,9	51,61
Perpendicular	0.4205	-	44,25	95,1	50,85
Perpendicular	0.48	-	43,64	94	50,36
Perpendicular	0.5345	-	42,57	73,04	30,47
Perpendicular	0.616	-	36,75	71,81	35,06
Perpendicular	0.6855	-	33,3	70,88	37,58
Perpendicular	0.745	-	32,14	70,164	38,024
Perpendicular	0.81	-	34,85	69,43	34,58
Perpendicular	0.8935	-	33,62	68,587	34,967
Perpendicular	0.955	-	34,13	68	33,87
Perpendicular	1.066	-	31,92	67,04	35,12
Perpendicular	1.272	-	30,11	65,51	35,4
Perpendicular	1.388	-	31,36	64,75	33,39
Perpendicular	1.77	-	33,68	69,5	35,82
Perpendicular	27.12	-	43,3	69,5	26,2
Ground parallel	2.837044872	-	38,14	69,5	31,36
Ground parallel	2.950557692	-	41,34	69,5	28,16
Ground parallel	3.064076923	-	36,34	69,5	33,16
Ground parallel	3.67	-	24,11	69,5	45,39



Final measurement mode POE:

30MHz to 1000MHz

	Frequency (MHz)	level (dBµV/m)	limit FCC class B	Margin Fcc Part class B
Vertical	40.679	26.89	29.5	2.61
Vertical	62.5	25.21	29.5	4.29
Vertical	67.8	28.86	29.5	0.64
Vertical	203.4	30.23	33	2.77
Vertical	235.6	32.89	35.5	2.61
Vertical	246.40	33.51	35.5	1.99
Vertical	252.6	33.3	35.5	2.2
Vertical	254.2	33.71	35.5	1.79
Vertical	284.758	35.27	35.5	0.23
Vertical	366.1	31.45	35.5	4.05
Vertical	420.35	32.48	35.5	3.02
Vertical	745.8	30.58	35.5	4.92
Horizontal	203.4	28.4	33	4.6
Horizontal	339	31.57	35.5	3.93
Horizontal	360	31.04	35.5	4.46
Horizontal	745.8	30.58	35.5	4.92

No significant spurious has been observed above 1GHz.

6.7. CONCLUSION

Field strength outside of the bands 13.110-14.010 MHz measurement performed on the sample of the product **IDEMIA MPH-AC007A**, SN: **2208SSP0000028**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.225 & RSS-Gen limits.

7. FIELD STRENGTH WITHIN THE BAND 13.110-14.010MHZ

7.1. TEST CONDITIONS

Test performed by : Laurent DENEUX
 Date of test : March 18, 2022
 Ambient temperature : 18 to 20 °C
 Relative humidity : 46 to 51 %

7.2. TEST SETUP

Measurement procedure:


- Open Area Test Site
- Open Area Test Site + Test fixture in climatic chamber

The product has been tested according to ANSI C63.10.

The EUT is placed **on an open area test site**. Distance between measuring antenna and the EUT is **Distance**.

Test is performed in parallel, perpendicular and ground parallel axis with a loop antenna below 30MHz.

Measurement bandwidth was 9kHz between 150kHz & 30MHz. The level has been maximised by the turntable rotation of 360 degrees range on all axis of EUT used in normal configuration. Antenna height search was performed from 1 to 4m. The EUT is placed at 0.8m.

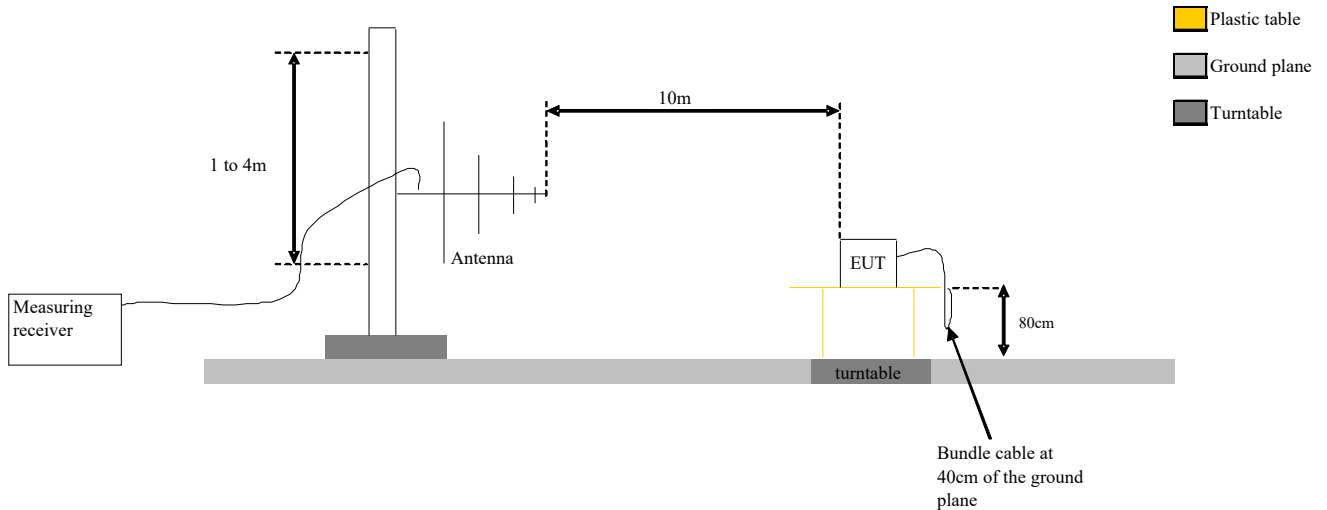


Test Set up for radiated measurement in open area test site

For measurement with test fixture is used, the power level calibration of the spectrum analyzer shall then be related to the power level or field strength measured with temperature during OATS measure taking in consideration in climatic chamber. The calculation will be used to calculate the absolute level of the sideband power.

Frequency band 13.110-14.010MHz

Following plots show radiated emission level in the frequency band 13.110-14.010MHz with a RBW of 9kHz and a quasi-peak detector. The graphs are obtained with a measuring receiver.

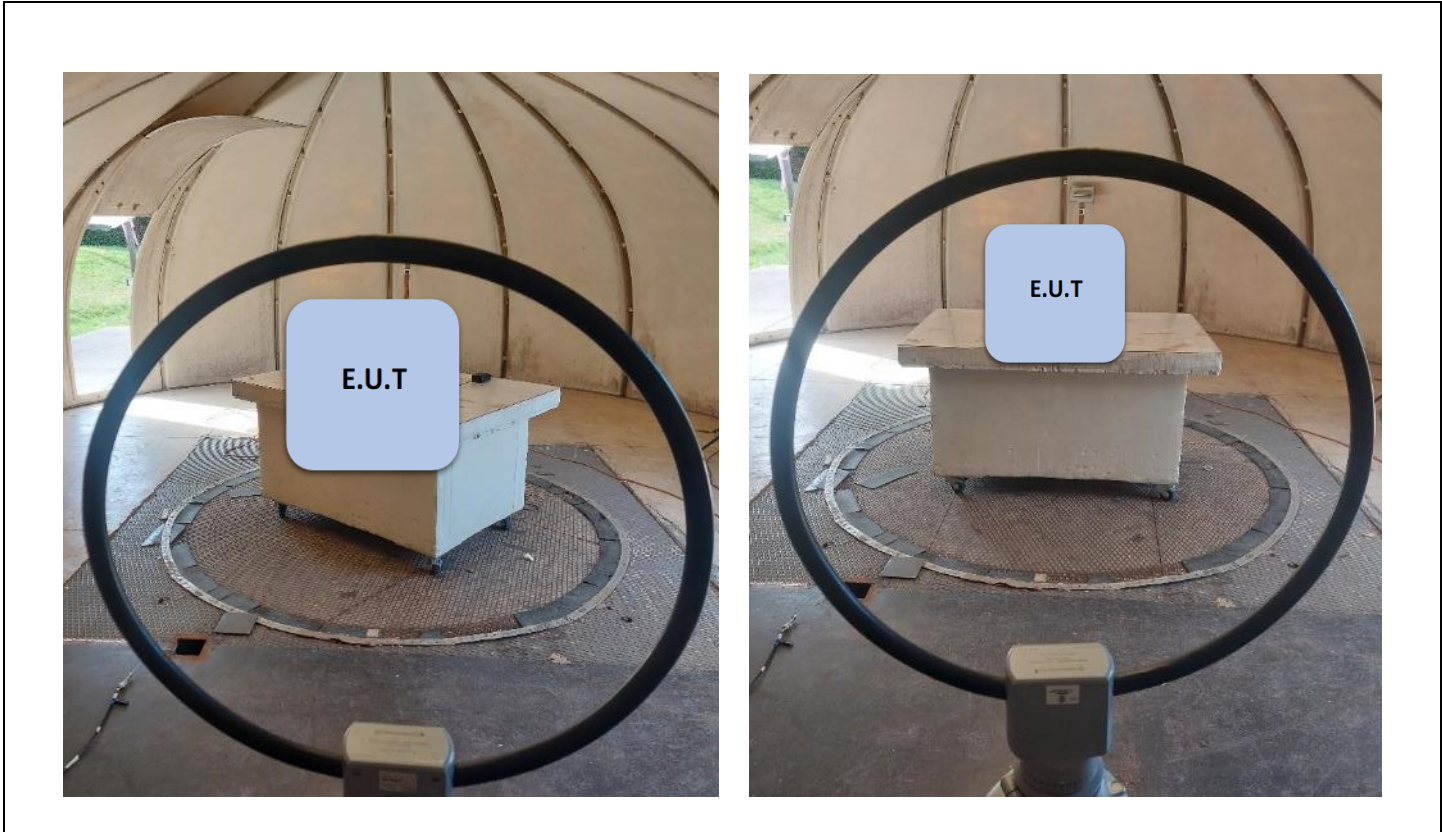

Photograph for Field strength within the band 13.110-14.010MHz



7.3. LIMIT

Frequency (MHz)	Field strength ($\mu\text{V/m}$) @30m	Field strength ($\text{dB}\mu\text{V/m}$) @30m	Field strength ($\text{dB}\mu\text{V/m}$) @3m
13.553-13.567	15 848	84.0	124.0
13.410-13.553 13.567-13.710	334.0	50.5	90.5
13.110-13.410 13.710-14.010	106.0	40.5	80.5
Below 13.110MHz Above 14.010MHz	30.0	29.5	69.5

7.4. TEST EQUIPMENT LIST

Description	Manufacturer	Model	Identifier	Last Calibration date	Calibration due date
Open test site	LCIE	-	F2000400	2022-02	2023-02
EMI Test Receiver	ROHDE & SCHWARZ	ESU	A2642018	2020-10	2022-10
Cable	-	-	A5329416	2022-02	2023-02
Cable	-	-	A5329442	2021-12	2022-12
Loop antenna	R&S	HFH2-Z2	C2040269	2020-09	2022-09
Cable	-	-	A5329449	2021-12	2022-12

Note: In our quality system, the test equipment calibration due is more & less 2 months

7.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None Divergence:



L C I E

7.6. RESULTS

Mode DC

Parallel Axis			
Frequency (MHz)	Peak Level (dB μ V/m) (3m)	QPeak Level (dB μ V/m) (3m)	Limit (dB μ V/m) (3m)
Below 13.110	-	28.7	69.5
13.110 to 13.410	-	32.2	80.5
13.410 to 13.553	--	34.3	90.5
13.553 to 13.567	-	57.5	124.0
13.567 to 13.710	-	35.6	90.5
13.710 to 14.010	-	32.3	80.5
Above 14.010	-	29.7	69.5

Ground Parallel Axis			
Frequency (MHz)	Peak Level (dB μ V/m) (3m)	QPeak Level (dB μ V/m) (3m)	Limit (dB μ V/m) (3m)
Below 13.110	-	27.9	69.5
13.110 to 13.410	-	31.1	80.5
13.410 to 13.553	-	33.9	90.5
13.553 to 13.567	-	53.2	124.0
13.567 to 13.710	-	33.2	90.5
13.710 to 14.010	-	31.7	80.5
Above 14.010	-	29.4	69.5

Perpendicular Axis			
Frequency (MHz)	Peak Level (dB μ V/m) (3m)	QPeak Level (dB μ V/m) (3m)	Limit (dB μ V/m) (3m)
Below 13.110	-	28.8	69.5
13.110 to 13.410	-	31.4	80.5
13.410 to 13.553	-	36.4	90.5
13.553 to 13.567	-	67.9	124
13.567 to 13.710	-	37.4	90.5
13.710 to 14.010	-	32.4	80.5
Above 14.010	-	28.4	69.5



Mode POE

Parallel Axis			
Frequency (MHz)	Peak Level (dB μ V/m) (3m)	QPeak Level (dB μ V/m) (3m)	Limit (dB μ V/m) (3m)
Below 13.110	-	31.2	69.5
13.110 to 13.410	-	34.5	80.5
13.410 to 13.553	-	40.1	90.5
13.553 to 13.567	-	55.9	124.0
13.567 to 13.710	-	39.5	90.5
13.710 to 14.010	-	37.1	80.5
Above 14.010	-	33.2	69.5

Ground Parallel Axis			
Frequency (MHz)	Peak Level (dB μ V/m) (3m)	QPeak Level (dB μ V/m) (3m)	Limit (dB μ V/m) (3m)
Below 13.110	-	29.8	69.5
13.110 to 13.410	-	32.4	80.5
13.410 to 13.553	-	34.9	90.5
13.553 to 13.567	-	51.4	124.0
13.567 to 13.710	-	34.6	90.5
13.710 to 14.010	-	32.7	80.5
Above 14.010	-	30.4	69.5

Perpendicular Axis			
Frequency (MHz)	Peak Level (dB μ V/m) (3m)	QPeak Level (dB μ V/m) (3m)	Limit (dB μ V/m) (3m)
Below 13.110	-	32.6	69.5
13.110 to 13.410	-	35.9	80.5
13.410 to 13.553	-	38.9	90.5
13.553 to 13.567	-	63	124
13.567 to 13.710	-	38.8	90.5
13.710 to 14.010	-	34.4	80.5
Above 14.010	-	30.5	69.5

7.7. CONCLUSION

Field strength within the band 13.110-14.010MHz measurement performed on the sample of the product **IDEMIA MPH-AC007A**, SN: **2208SSP0000028**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.225 & RSS 210 limits.

8. UNCERTAINTIES CHART

47 CFR Part 15.209 & 15.207 Kind of test	Wide uncertainty laboratory (k=2) ±x(dB) / (Hz)/ ms	Uncertainty limit
Measurement of conducted disturbances in voltage on the AC power port (9 kHz – 150 kHz)	2,67	3.8
Measurement of conducted disturbances in voltage on the AC power port (150 kHz – 30 MHz)	2,67	3.4
Measurement of conducted disturbances in voltage on the telecommunication port. (AAN)	3,67	5.0
Measurement of conducted disturbances in current (current clamp)	2,73	2.9
Measurement of disturbance power	2,67	4.5
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC V01	4,48	/
Measurement of radiated magnetic field from 10kHz to 30MHz in SAC C01	4,48	/
Measurement of radiated electric field from 30 to 1000MHz in horizontal position on the OATS (Ecuellas)	4,88	6.3
Measurement of radiated electric field from 1 to 18GHz on the Ecuellas site	5.16	/
Measurement of radiated electric field from 30 to 1000MHz in vertical position on the OATS (Ecuellas)	4,99	6.3
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in SAC C01	5,08	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in SAC C01	5,16	6.3
Measurement of radiated electric field from 30 to 1000MHz in horizontal position in SAC V01	5,08	6.3
Measurement of radiated electric field from 30 to 1000MHz in vertical position in SAC V01	5,15	6.3
Measurement of radiated electric field from 1 to 6 GHz C01	5,1	5.2
Measurement of radiated electric field from 1 to 6 GHz V01	4,85	5.2
Measurement of radiated magnetic field from 10kHz to 30MHz on the OATS (Ecuellas)	4,48	/

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the CISPR. The conformity of the sample is directly established by the applicable limits values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report