



BUREAU  
VERITAS

Test Report No.: RF190325W006-2



# FCC TEST REPORT (Part 15, Subpart C)



Applicant:	Corporativo Lanix S.A. de C.V.
Address:	Carretera Internacional Hermosillo-Nogales Km 8.5, Hermosillo Sonora, Mexico

Manufacturer or Supplier:	Corporativo Lanix S.A. de C.V.
Address:	Carretera Internacional Hermosillo-Nogales Km 8.5, Hermosillo Sonora, Mexico
Product:	smartphone
Brand Name:	LANIX
Model Name:	lIium Alpha 1s
FCC ID:	ZC4ALPHA1S
Date of tests:	Mar. 26, 2019 ~ Apr. 15, 2019

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247**
- ANSI C63.10-2013**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Roger Li Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Apr. 16, 2019	 Date: Apr. 16, 2019
<small>This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <a href="http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions">http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions</a> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.</small>	



# TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>4</b>
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
1.1 MEASUREMENT UNCERTAINTY .....	5
<b>2 GENERAL INFORMATION .....</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF EUT .....	6
2.2 DESCRIPTION OF TEST MODES .....	8
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST .....	9
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
2.3 DUTY CYCLE OF TEST SIGNAL .....	12
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	13
2.5 DESCRIPTION OF SUPPORT UNITS .....	13
<b>3 TEST TYPES AND RESULTS.....</b>	<b>14</b>
3.1 CONDUCTED EMISSION MEASUREMENT .....	14
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	14
3.1.2 TEST INSTRUMENTS.....	14
3.1.3 TEST PROCEDURES .....	15
3.1.4 DEVIATION FROM TEST STANDARD .....	15
3.1.5 TEST SETUP .....	16
3.1.6 EUT OPERATING CONDITIONS .....	16
3.1.7 TEST RESULTS .....	17
3.2 RADIATED EMISSION MEASUREMENT .....	21
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	21
3.2.2 TEST INSTRUMENTS.....	22
3.2.3 TEST PROCEDURES .....	23
3.2.4 DEVIATION FROM TEST STANDARD .....	23
3.2.5 TEST SETUP .....	24
3.2.6 EUT OPERATING CONDITIONS .....	25
3.2.7 TEST RESULTS .....	26
3.3 6 DB BANDWIDTH MEASUREMENT .....	42
3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT .....	42
3.3.2 TEST INSTRUMENTS.....	42
3.3.3 TEST PROCEDURE.....	42
3.3.4 DEVIATION FROM TEST STANDARD .....	42
3.3.5 TEST SETUP .....	43



3.3.6	EUT OPERATING CONDITIONS .....	43
3.3.7	TEST RESULTS .....	44
3.4	CONDUCTED OUTPUT POWER.....	48
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	48
3.4.2	TEST SETUP .....	48
3.4.3	TEST INSTRUMENTS.....	48
3.4.4	TEST PROCEDURES .....	48
3.4.5	DEVIATION FROM TEST STANDARD .....	48
3.4.6	EUT OPERATING CONDITIONS .....	48
3.4.7	TEST RESULTS .....	49
3.4.7.1	MAXIMUM PEAK OUTPUT POWER .....	49
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	50
3.5	POWER SPECTRAL DENSITY MEASUREMENT .....	51
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	51
3.5.2	TEST SETUP .....	51
3.5.3	TEST INSTRUMENTS.....	51
3.5.4	TEST PROCEDURE.....	51
3.5.5	DEVIATION FROM TEST STANDARD .....	51
3.5.6	EUT OPERATING CONDITION .....	51
3.5.7	TEST RESULTS .....	52
3.6	OUT OF BAND EMISSION MEASUREMENT .....	56
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	56
3.6.2	TEST SETUP .....	56
3.6.3	TEST INSTRUMENTS.....	56
3.6.4	TEST PROCEDURE.....	56
3.6.5	DEVIATION FROM TEST STANDARD .....	57
3.6.6	EUT OPERATING CONDITION .....	57
3.6.7	TEST RESULTS .....	57
<b>4</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>66</b>
<b>5</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>67</b>



**BUREAU**  
**VERITAS**

Test Report No.: RF190325W006-2

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190325W006-2	Original release	Apr. 16, 2019



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.60dB at 18.744000MHz.
15.205 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.45 dB at 2483.5MHz.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	± 2.70dB
All Radiated emissions	±4.48dB
Conducted emissions	±2 dB
Occupied Channel Bandwidth	±21.7KHz
Conducted Output power	±1.03 dB
Power Spectral Density	±0.95 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	smartphone
<b>BRAND NAME</b>	LANIX
<b>MODEL NAME</b>	Ilium Alpha 1s
<b>NOMINAL VOLTAGE</b>	5.0Vdc (adapter or host equipment) 3.85Vdc (Li-ion, battery)
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM, DTS
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM BT-LE(GFSK) for DTS
<b>TRANSMISSION RATE</b>	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n: up to 65 Mbps BT_LE: 1 Mbps
<b>OPERATING FREQUENCY</b>	2412-2462MHz for 11b/g/n(HT20) 2402-2480MHz for BT-LE(GFSK)
<b>MAX. OUTPUT POWER</b>	WLAN: 118.577mW (Maximum) BT-LE: 5.248mW (Maximum)
<b>ANTENNA TYPE</b>	PIFA Antenna with -4.6dBi gain for WLAN PIFA Antenna with -5.1dBi gain for BT_LE
<b>HW VERSION</b>	V1.0
<b>SW VERSION</b>	Ilium Alpha 1s_SW_01_V01
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	USB cable: non-shielded, detachable, 1.0m Earphone cable: non-shielded, detachable, 1.2m

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	1TX /1RX
BT_LE	1TX /1RX



3. The EUT was powered by the following adapter:

ADAPTER	
BRAND:	Ianix
MODEL:	Alpha 1s-C
INPUT:	AC 100-240V, 250mA
OUTPUT:	DC 5V, 1550mA

4. The EUT matched the following USB cable and Earphone:

USB CABLE	
BRAND:	Ianix
MODEL:	Alpha 1s
SIGNAL LINE:	1.0 meter

EARPHONE	
BRAND:	Ianix
MODEL:	Alpha 1s
SIGNAL LINE:	1.2 meter

5. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



## 2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480





### 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

### 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE**: No need to concern of Conducted Emission due to the EUT is powered by battery.

### RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	0	DSS	GFSK	1
802.11n HT20	1 to 11	11	OFDM	BPSK	6.5



**RADIATED EMISSION TEST (ABOVE 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
BT-LE	0 to 39	0,19, 39	DTS	GFSK	1

**POWER LINE CONDUCTED EMISSION TEST:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n HT20	1 to 11	11	OFDM	BPSK	6.5

**BANDEDGE MEASUREMENT:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
BT-LE	0 to 39	0, 39	DTS	GFSK	1



**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
BT-LE	0 to 39	0, 19, 39	DTS	GFSK	1

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	22deg. C, 54%RH	DC 5V from adaptor	Star Le
RE≥1G	22deg. C, 54%RH	DC 5V from adaptor	Star Le
PLC	24deg. C, 55%RH	DC 5V from adaptor	John Wen
APCM	25deg. C, 60%RH	3.85Vdc from battery	Rain Wang




### 2.3 Duty Cycle of Test Signal

#### WIFI 2.4GHz

**802.11b:** Duty cycle = 1 > 98%, Duty factor is not required.

**802.11g:** Duty cycle = 1.358/1.421 = 0.965 < 98%, Duty factor = 10 \* log( 1/0.965) = 0.197

**802.11n (HT20):** Duty cycle = 1.270/1.306 = 0.972 < 98%, Duty factor = 10 \* log( 1/0.972) = 0.121

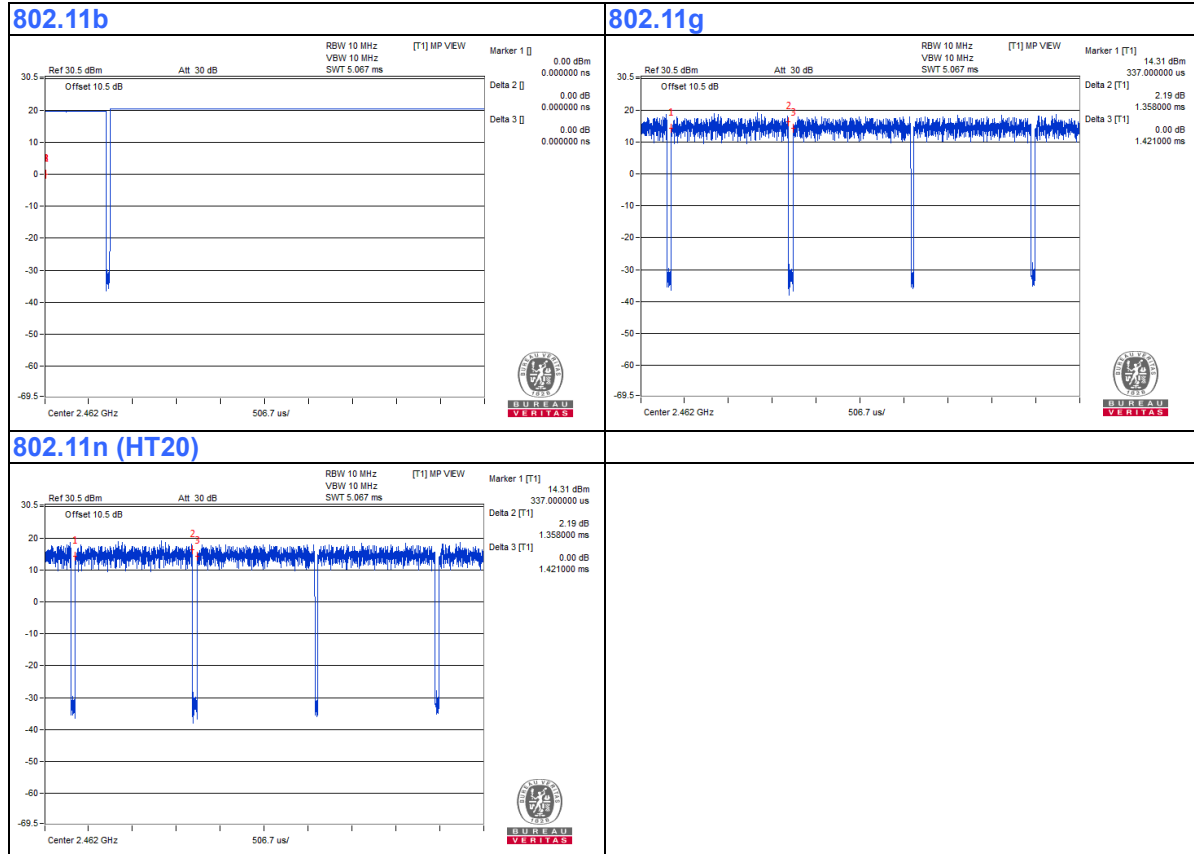



## 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**558074 D01 15.247 Meas Guidance v05r02**

**ANSI C63.10-2013**

Note:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m



### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

##### 3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 26,19	Feb. 25,20
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Feb. 26,19	Feb. 25,20

**NOTE:**

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



### 3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



### 3.1.5 TEST SETUP

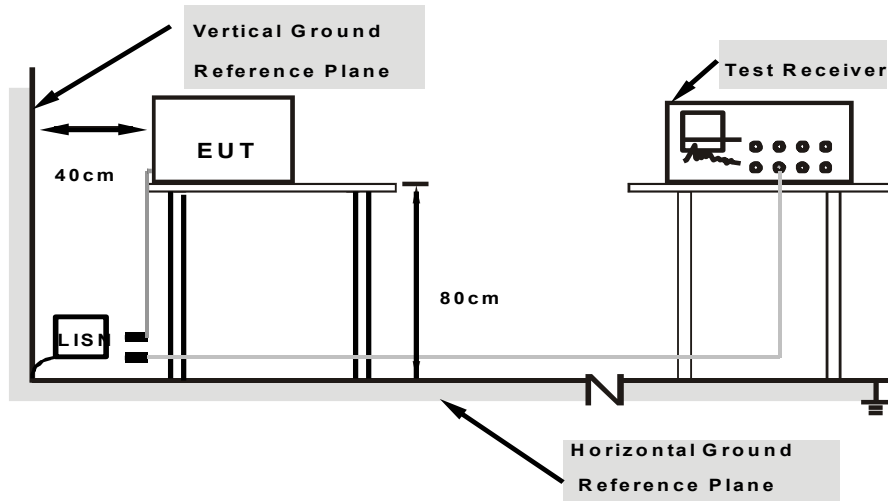

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80  
from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.





### 3.1.7 TEST RESULTS


#### CONDUCTED WORST-CASE DATA:

<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	John Wen	<b>TEST DATE</b>	2019/04/04
<b>Test Voltage</b>	DC 5V From Adapter		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
1.444000	---	25.35	46.00	-20.65	L	ON	10.1
1.444000	36.92	---	56.00	-19.08	L	ON	10.1
3.220000	---	24.95	46.00	-21.05	L	ON	10.2
3.220000	37.22	---	56.00	-18.78	L	ON	10.2
4.680000	---	27.25	46.00	-18.75	L	ON	10.2
4.680000	37.20	---	56.00	-18.80	L	ON	10.2
10.124000	---	36.70	50.00	-13.30	L	ON	10.5
10.124000	47.78	---	60.00	-12.22	L	ON	10.5
16.880000	---	39.80	50.00	-10.20	L	ON	10.5
16.880000	50.43	---	60.00	-9.57	L	ON	10.5
18.142000	---	36.77	50.00	-13.23	L	ON	10.5
18.142000	48.63	---	60.00	-11.37	L	ON	10.5

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

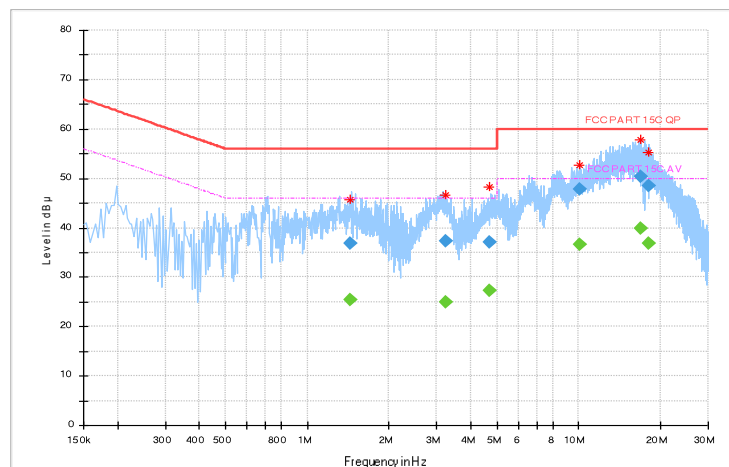




<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	John Wen	<b>TEST DATE</b>	2019/04/04
<b>Test Voltage</b>	DC 5V From Adapter		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.708000	---	32.39	46.00	-13.61	N	ON	9.9
0.708000	43.48	---	56.00	-12.52	N	ON	9.9
3.188000	---	31.81	46.00	-14.19	N	ON	10.1
3.188000	41.21	---	56.00	-14.79	N	ON	10.1
4.928000	---	30.94	46.00	-15.06	N	ON	10.1
4.928000	40.05	---	56.00	-15.95	N	ON	10.1
10.092000	---	36.39	50.00	-13.61	N	ON	10.3
10.092000	46.54	---	60.00	-13.46	N	ON	10.3
17.432000	---	38.50	50.00	-11.50	N	ON	10.4
17.432000	49.78	---	60.00	-10.22	N	ON	10.4
18.744000	---	38.54	50.00	-11.46	N	ON	10.5
<b>18.744000</b>	<b>51.40</b>	---	<b>60.00</b>	<b>-8.60</b>	<b>N</b>	<b>ON</b>	<b>10.5</b>

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

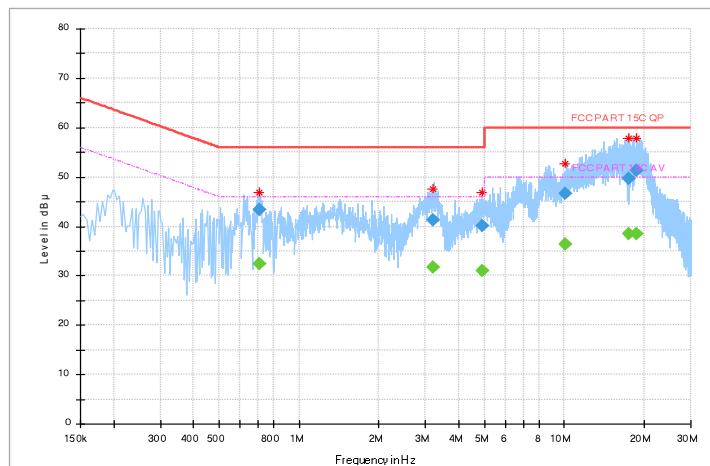




<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	John Wen	<b>TEST DATE</b>	2019/04/04
<b>Test Voltage</b>	Data Transmission		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154000	---	37.11	55.78	-18.67	L	ON	9.9
0.154000	53.82	---	65.78	-11.96	L	ON	9.9
0.368000	---	19.06	48.55	-29.49	L	ON	10.0
0.368000	33.80	---	58.55	-24.75	L	ON	10.0
0.516000	---	24.56	46.00	-21.44	L	ON	10.0
0.516000	34.31	---	56.00	-21.69	L	ON	10.0
1.912000	---	19.15	46.00	-26.85	L	ON	10.1
1.912000	25.35	---	56.00	-30.65	L	ON	10.1
3.580000	---	21.43	46.00	-24.57	L	ON	10.2
3.580000	28.73	---	56.00	-27.27	L	ON	10.2
4.324000	---	24.43	46.00	-21.57	L	ON	10.2
4.324000	35.68	---	56.00	-20.32	L	ON	10.2

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

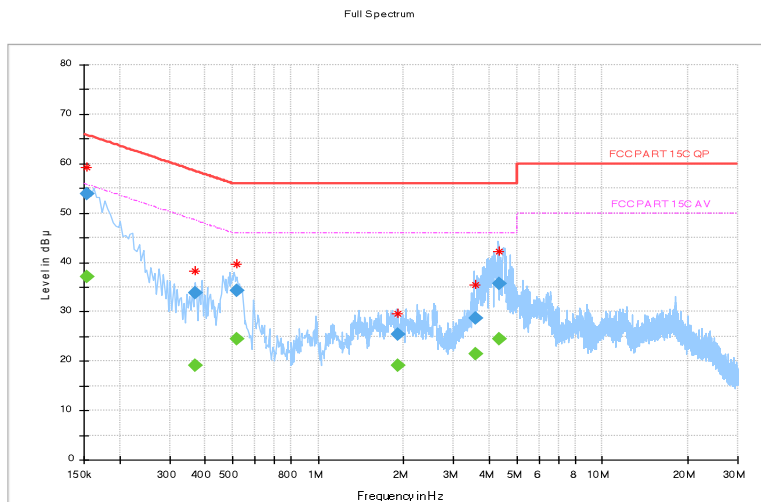




<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	John Wen	<b>TEST DATE</b>	2019/04/04
<b>Test Voltage</b>	Data Transmission		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	36.82	56.00	-19.18	N	ON	9.9
0.150000	52.59	---	66.00	-13.41	N	ON	9.9
0.184000	---	31.97	54.30	-22.34	N	ON	9.9
0.184000	47.03	---	64.30	-17.28	N	ON	9.9
0.504000	---	29.15	46.00	-16.85	N	ON	9.9
0.504000	37.94	---	56.00	-18.06	N	ON	9.9
1.484000	---	22.41	46.00	-23.59	N	ON	10.0
1.484000	29.23	---	56.00	-26.77	N	ON	10.0
2.624000	---	15.61	46.00	-30.39	N	ON	10.1
2.624000	22.01	---	56.00	-33.99	N	ON	10.1
4.936000	---	25.93	46.00	-20.07	N	ON	10.1
4.936000	34.58	---	56.00	-21.42	N	ON	10.1

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

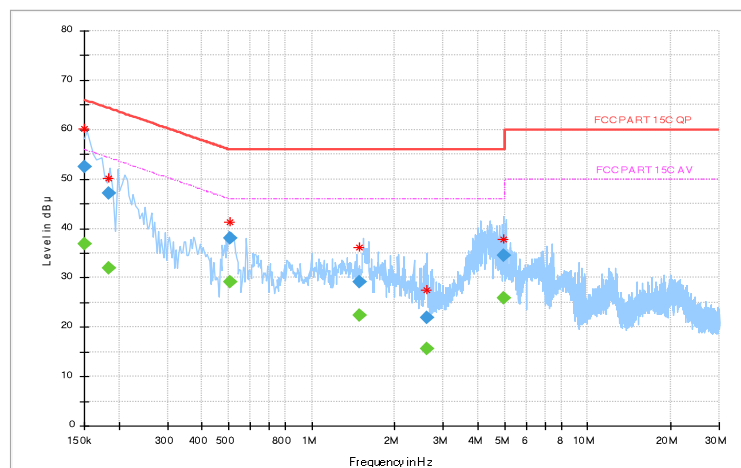



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Feb. 26,19	Feb. 25,20
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 26,19	Feb. 25,20
Horn Antenna	ETS-LINDGREN	3117	00168728	Feb. 26,19	Feb. 25,20
Loop antenna	Daze	ZN30900A	0708	Oct. 23,18	Oct. 22, 19
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Nov. 21, 18	Nov. 20, 19
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 09,18	Jul. 08,19
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 26,19	Feb. 25,20
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 09,18	Jul. 08,19

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Chamber.
  3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



### 3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation




### 3.2.5 TEST SETUP

#### < Frequency Range below 30MHz >

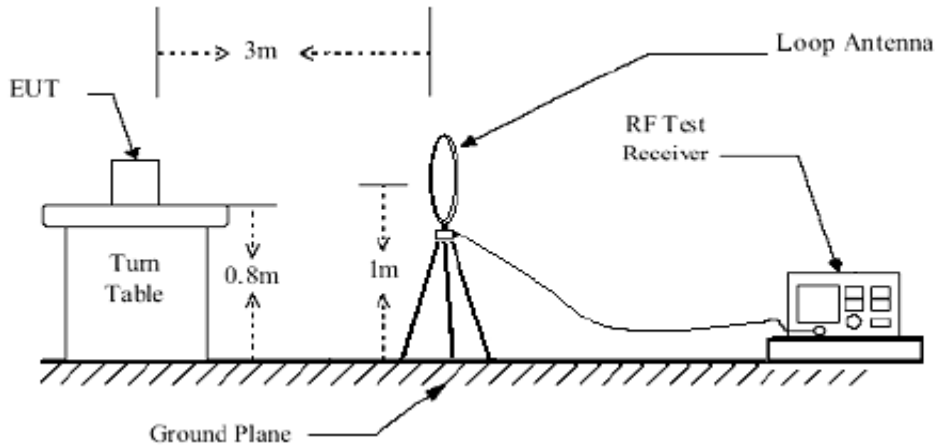


#### < Frequency Range 30MHz~1GHz >

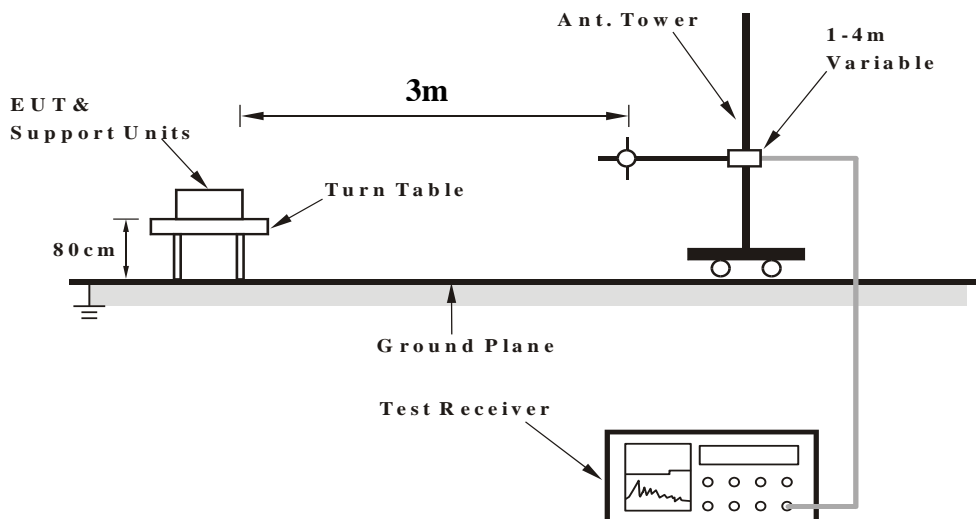





<Frequency Range above 1GHz>

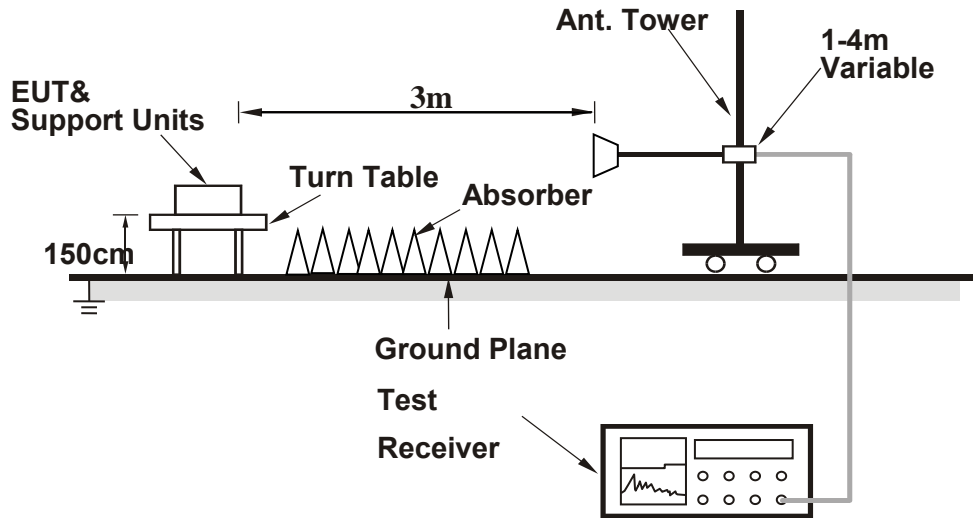

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



### 3.2.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:

**9 KHz – 30 MHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.


**30 MHz – 1GHz data:**  
**802.11n (20MHz)**

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
39.42	29.58	55.56	40	-10.42	10.6	0.9	37.48	100	210	QP
112.23	24.37	52.36	43.5	-19.13	7.57	1.4	36.96	100	210	QP
185.62	28.72	53.68	43.5	-14.78	9.96	1.73	36.65	100	210	QP
203.65	31.96	56.42	43.5	-11.54	10.27	1.81	36.54	100	210	QP
325.61	31.07	51.23	46	-14.93	14.08	2.32	36.56	100	210	QP
425.68	32.01	48.56	46	-13.99	17.51	2.72	36.78	100	210	QP

#### REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
 Margin value = Emission level – Limit value.

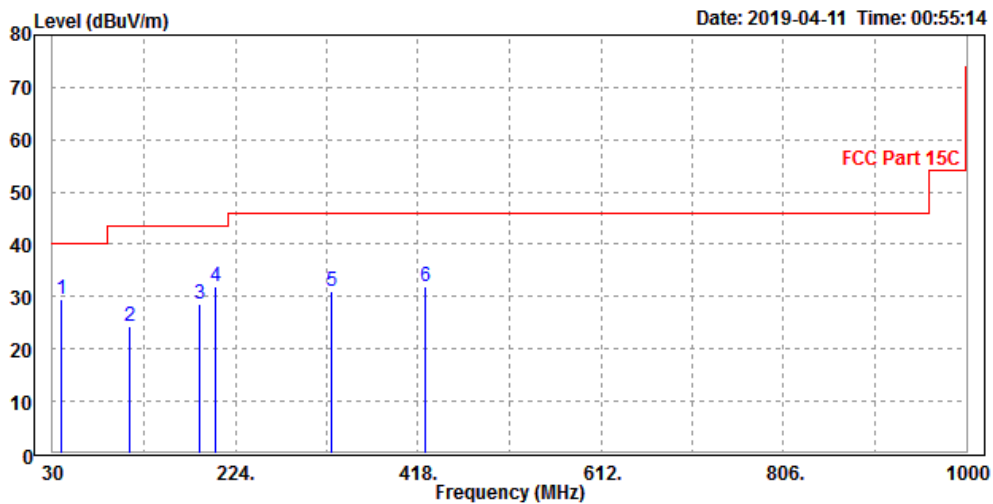




<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
36.21	24.74	48.56	40	-15.26	12.82	0.87	37.51	200	0	QP
100.21	30.95	58.64	43.5	-12.55	7.99	1.31	36.99	200	0	QP
189.45	31.44	56.33	43.5	-12.06	9.99	1.74	36.62	200	0	QP
265.52	30.48	52.31	46	-15.52	12.59	2.09	36.51	200	0	QP
320.12	34.04	54.44	46	-11.96	13.85	2.29	36.54	200	0	QP
412.36	35.57	52.3	46	-10.43	17.35	2.67	36.75	200	0	QP

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.

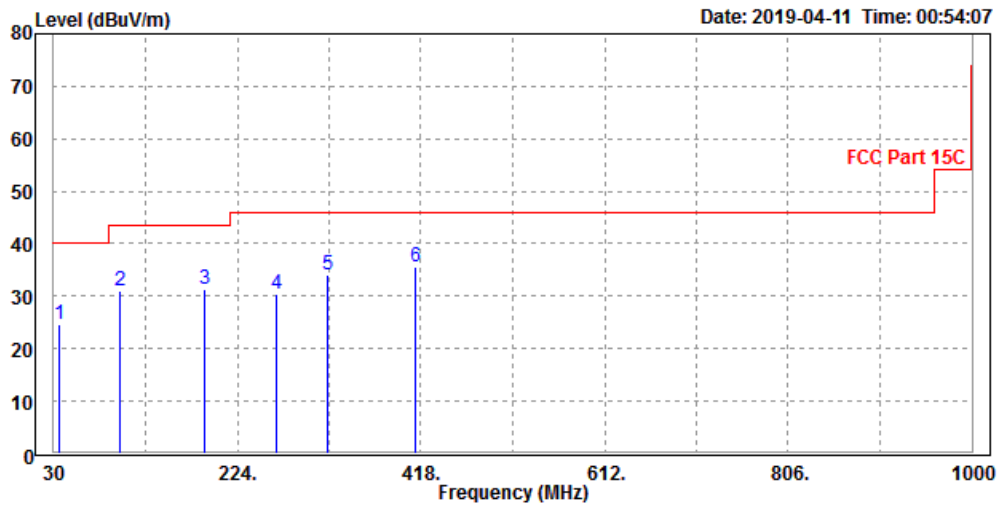



**ABOVE 1GHZ WORST-CASE DATA:**

**Note:** For higher frequency, the emission is too low to be detected.

**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.94	52.11	54	-10.06	32.87	4.88	45.92	110	255	Average
2390	56.96	65.13	74	-17.04	32.87	4.88	45.92	110	255	Peak
2412	97.34	105.46			32.89	4.9	45.91	110	255	Average
2412	104.33	112.45			32.89	4.9	45.91	110	255	Peak
2483.5	43.3	51.23	54	-10.7	32.98	4.98	45.89	110	255	Average
2483.5	52.85	60.78	74	-21.15	32.98	4.98	45.89	110	255	Peak
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	45.94	54.11	54	-8.06	32.87	4.88	45.92	100	231	Average
2390	57.11	65.28	74	-16.89	32.87	4.88	45.92	100	231	Peak
2412	97.36	105.48			32.89	4.9	45.91	100	231	Average
2412	105.42	113.54			32.89	4.9	45.91	100	231	Peak
2483.5	43.33	51.26	54	-10.67	32.98	4.98	45.89	100	231	Average
2483.5	54.22	62.15	74	-19.78	32.98	4.98	45.89	100	231	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.81	51.98	54	-10.19	32.87	4.88	45.92	145	266	Average
2390	54.18	62.35	74	-19.82	32.87	4.88	45.92	145	266	Peak
2437	95.36	103.42			32.92	4.93	45.91	145	266	Average
2437	104.4	112.46			32.92	4.93	45.91	145	266	Peak
2483.5	44.5	52.43	54	-9.5	32.98	4.98	45.89	145	266	Average
2483.5	53.66	61.59	74	-20.34	32.98	4.98	45.89	145	266	Peak

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.05	51.22	54	-10.95	32.87	4.88	45.92	155	287	Average
2390	53.4	61.57	74	-20.6	32.87	4.88	45.92	155	287	Peak
2437	93.27	101.33			32.92	4.93	45.91	155	287	Average
2437	103.16	111.22			32.92	4.93	45.91	155	287	Peak
2483.5	43.71	51.64	54	-10.29	32.98	4.98	45.89	155	287	Average
2483.5	54.25	62.18	74	-19.75	32.98	4.98	45.89	155	287	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.51	51.68	54	-10.49	32.87	4.88	45.92	157	315	Average
2390	55.75	63.92	74	-18.25	32.87	4.88	45.92	157	315	Peak
2462	95.53	103.52			32.95	4.96	45.9	157	315	Average
2462	104.63	112.62			32.95	4.96	45.9	157	315	Peak
2483.5	45.31	53.24	54	-8.69	32.98	4.98	45.89	157	315	Average
2483.5	57.61	65.54	74	-16.39	32.98	4.98	45.89	157	315	Peak
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.19	51.36	54	-10.81	32.87	4.88	45.92	161	312	Average
2390	54.38	62.55	74	-19.62	32.87	4.88	45.92	161	312	Peak
2462	94.35	102.34			32.95	4.96	45.9	161	312	Average
2462	104.22	112.21			32.95	4.96	45.9	161	312	Peak
2483.5	45.53	53.46	54	-8.47	32.98	4.98	45.89	161	312	Average
2483.5	57.81	65.74	74	-16.19	32.98	4.98	45.89	161	312	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	47.37	56.12	54	-6.63	32.29	4.88	45.92	177	301	Average
2390	60.82	69.57	74	-13.18	32.29	4.88	45.92	177	301	Peak
2412	93.51	102.21			32.31	4.9	45.91	77	301	Average
2412	103.88	112.58			32.31	4.9	45.91	177	301	Peak
2483.5	43.78	52.31	54	-10.22	32.38	4.98	45.89	177	301	Average
2483.5	54.01	62.54	74	-19.99	32.38	4.98	45.89	177	301	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.04	56.21	54	-5.96	32.87	4.88	45.92	152	325	Average
2390	63.39	71.56	74	-10.61	32.87	4.88	45.92	152	325	Peak
2412	93.16	101.28			32.89	4.9	45.91	152	325	Average
2412	105.3	113.42			32.89	4.9	45.91	152	325	Peak
2483.5	43.36	51.29	54	-10.64	32.98	4.98	45.89	152	325	Average
2483.5	53.75	61.68	74	-20.25	32.98	4.98	45.89	152	325	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.61	51.78	54	-10.39	32.87	4.88	45.92	148	298	Average
2390	54.37	62.54	74	-19.63	32.87	4.88	45.92	148	298	Peak
2437	94.36	102.42			32.92	4.93	45.91	148	298	Average
2437	103.53	111.59			32.92	4.93	45.91	148	298	Peak
2483.5	42.72	50.65	54	-11.28	32.98	4.98	45.89	148	298	Average
2483.5	53.61	61.54	74	-20.39	32.98	4.98	45.89	148	298	Peak
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	44.17	52.34	54	-9.83	32.87	4.88	45.92	169	311	Average
2390	52.94	61.11	74	-21.06	32.87	4.88	45.92	169	311	Peak
2437	94.31	102.37			32.92	4.93	45.91	169	311	Average
2437	103.6	111.66			32.92	4.93	45.91	169	311	Peak
2483.5	44.71	52.64	54	-9.29	32.98	4.98	45.89	169	311	Average
2483.5	635.28	643.21	74	561.28	32.98	4.98	45.89	169	311	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.





<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.72	51.89	54	-10.28	32.87	4.88	45.92	167	308	Average
2390	54.34	62.51	74	-19.66	32.87	4.88	45.92	167	308	Peak
2462	93.76	101.75			32.95	4.96	45.9	167	308	Average
2462	105.56	113.55			32.95	4.96	45.9	167	308	Peak
2483.5	47.73	55.66	54	-6.27	32.98	4.98	45.89	167	308	Average
2483.5	61.65	69.58	74	-12.35	32.98	4.98	45.89	167	308	Peak

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	44.29	52.46	54	-9.71	32.87	4.88	45.92	158	310	Average
2390	54.4	62.57	74	-19.6	32.87	4.88	45.92	158	310	Peak
2462	95.66	103.65			32.95	4.96	45.9	158	310	Average
2462	105.43	113.42			32.95	4.96	45.9	158	310	Peak
2483.5	48.38	56.31	54	-5.62	32.98	4.98	45.89	158	310	Average
2483.5	65.31	73.24	74	-8.69	32.98	4.98	45.89	158	310	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



**802.11n (20MHz)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	48.14	56.31	54	-5.86	32.87	4.88	45.92	142	278	Average
2390	61.35	69.52	74	-12.65	32.87	4.88	45.92	142	278	Peak
2412	93.1	101.22			32.89	4.9	45.91	142	278	Average
2412	104.29	112.41			32.89	4.9	45.91	142	278	Peak
2483.5	43.53	51.46	54	-10.47	32.98	4.98	45.89	142	278	Average
2483.5	54.65	62.58	74	-19.35	32.98	4.98	45.89	142	278	Peak
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	48.51	56.68	54	-5.49	32.87	4.88	45.92	172	299	Average
2390	63.4	71.57	74	-10.6	32.87	4.88	45.92	172	299	Peak
2412	93.12	101.24			32.89	4.9	45.91	172	299	Average
2412	115.47	123.59			32.89	4.9	45.91	172	299	Peak
2483.5	43.76	51.69	54	-10.24	32.98	4.98	45.89	172	299	Average
2483.5	54.45	62.38	74	-19.55	32.98	4.98	45.89	172	299	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.27	51.44	54	-10.73	32.87	4.88	45.92	100	322	Average
2390	54.38	62.55	74	-19.62	32.87	4.88	45.92	100	322	Peak
2437	93.06	101.12			32.92	4.93	45.91	100	322	Average
2437	104.62	112.68			32.92	4.93	45.91	100	322	Peak
2483.5	43.76	51.69	54	-10.24	32.98	4.98	45.89	100	322	Average
2483.5	54.58	62.51	74	-19.42	32.98	4.98	45.89	100	322	Peak

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.96	52.13	54	-10.04	32.87	4.88	45.92	155	263	Average
2390	53.07	61.24	74	-20.93	32.87	4.88	45.92	155	263	Peak
2437	94.07	102.13			32.92	4.93	45.91	155	263	Average
2437	105.4	113.46			32.92	4.93	45.91	155	263	Peak
2483.5	42.71	50.64	54	-11.29	32.98	4.98	45.89	155	263	Average
2483.5	54.61	62.54	74	-19.39	32.98	4.98	45.89	155	263	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	45.29	53.46	54	-8.71	32.87	4.88	45.92	165	287	Average
2390	55.37	63.54	74	-18.63	32.87	4.88	45.92	165	287	Peak
2462	93.29	101.28			32.95	4.96	45.9	165	287	Average
2462	104.32	112.31			32.95	4.96	45.9	165	287	Peak
2483.5	47.48	55.41	54	-6.52	32.98	4.98	45.89	165	287	Average
2483.5	60.58	68.51	74	-13.42	32.98	4.98	45.89	165	287	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	44.5	52.67	54	-9.5	32.87	4.88	45.92	156	316	Average
2390	55.6	63.77	74	-18.4	32.87	4.88	45.92	156	316	Peak
2462	95.9	103.89			32.95	4.96	45.9	156	316	Average
2462	106.63	114.62			32.95	4.96	45.9	156	316	Peak
<b>2483.5</b>	<b>48.55</b>	<b>56.48</b>	<b>54</b>	<b>-5.45</b>	<b>32.98</b>	<b>4.98</b>	<b>45.89</b>	<b>156</b>	<b>316</b>	<b>Average</b>
2483.5	62.65	70.58	74	-11.35	32.98	4.98	45.89	156	316	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



**BELOW 1GHz WORST-CASE DATA:**

**9 KHz – 30 MHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

**30 MHz – 1GHz data:**


**BT-LE (GFSK)**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
50.58	23.46	52.98	40	-16.54	6.8	1	37.32	100	360	QP
125.54	23.3	50.36	43.5	-20.2	8.51	1.47	37.04	100	360	QP
185.69	28.94	53.58	43.5	-14.56	10.24	1.73	36.61	100	360	QP
325.64	35.67	55.47	46	-10.33	14.65	2.32	36.77	100	360	QP
425.12	28.79	45.62	46	-17.21	17.33	2.71	36.87	100	360	QP
488.66	35.1	51.23	46	-10.9	17.9	2.95	36.98	100	360	QP

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

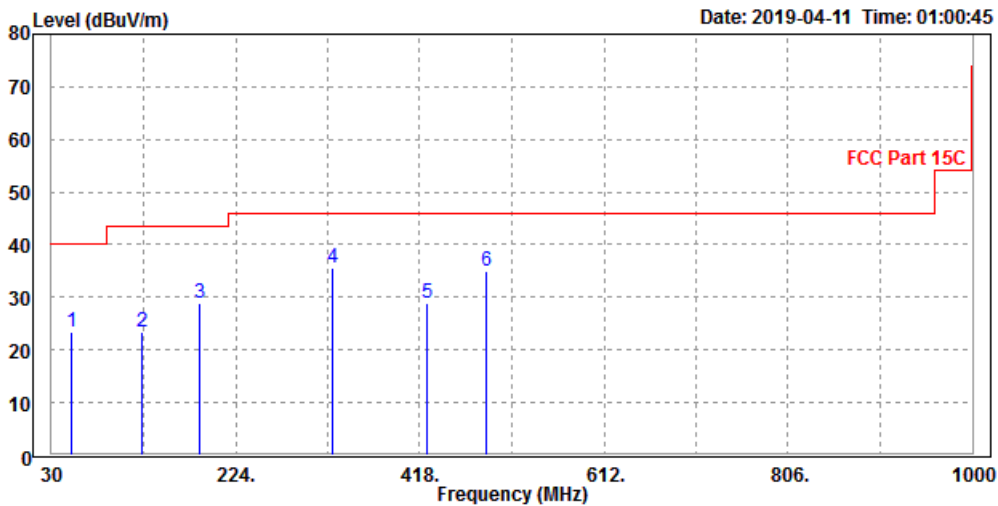



**BUREAU  
VERITAS**


Test Report No.: RF190325W006-2

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
45.26	21.98	52.31	40	-18.02	6.04	1.04	37.41	200	0	QP
78.59	23.95	52.15	40	-16.05	7.94	1.2	37.34	200	0	QP
168.95	25.68	50.31	43.5	-17.82	10.38	1.68	36.69	200	0	QP
321.45	30.89	50.85	46	-15.11	14.51	2.3	36.77	200	0	QP
368.52	33.89	52.14	46	-12.11	16.06	2.49	36.8	200	0	QP
489.62	34.09	50.21	46	-11.91	17.91	2.95	36.98	200	0	QP

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

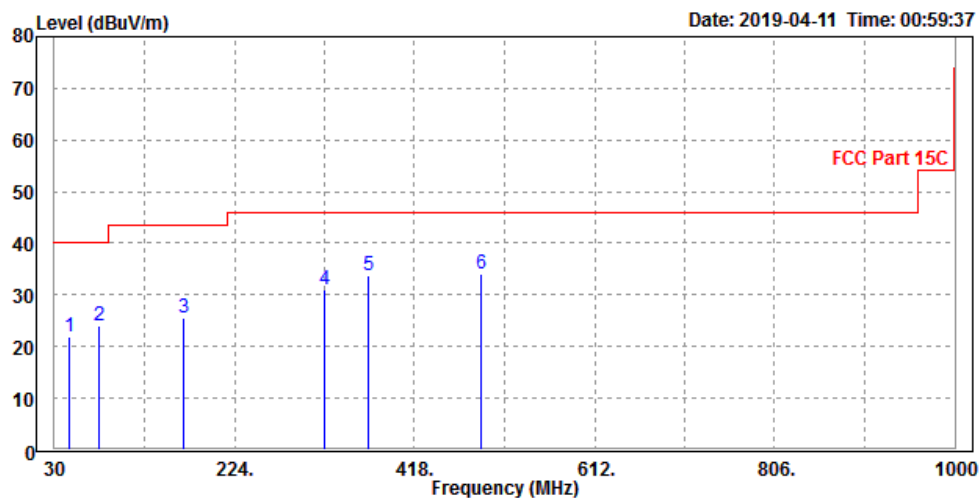



**ABOVE 1GHz TEST DATA:**

**Note:** For higher frequency, the emission is too low to be detected.

**BT-LE (GFSK)**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.04	51.66	54	-10.96	32.87	4.88	46.37	121	189	Average
2390	53.33	61.95	74	-20.67	32.87	4.88	46.37	121	189	Peak
2402	86.22	94.82			32.88	4.89	46.37	121	189	Average
2402	98.92	107.52			32.88	4.89	46.37	121	189	Peak
2483.5	43.43	51.84	54	-10.57	32.98	4.98	46.37	121	189	Average
2483.5	52.84	61.25	74	-21.16	32.98	4.98	46.37	121	189	Peak
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
<b>2390</b>	<b>44.01</b>	<b>52.63</b>	<b>54</b>	<b>-9.99</b>	<b>32.87</b>	<b>4.88</b>	<b>46.37</b>	<b>100</b>	<b>215</b>	<b>Average</b>
2390	54.59	63.21	74	-19.41	32.87	4.88	46.37	100	215	Peak
2402	53.76	62.36			32.88	4.89	46.37	100	215	Average
2402	97.73	106.33			32.88	4.89	46.37	100	215	Peak
2483.5	44	52.41	54	-10	32.98	4.98	46.37	100	215	Average
2483.5	54.13	62.54	74	-19.87	32.98	4.98	46.37	100	215	Peak

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 19	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.62	52.24	54	-10.38	32.87	4.88	46.37	120	211	Average
2390	52.96	61.58	74	-21.04	32.87	4.88	46.37	120	211	Peak
2440	86	94.5			32.93	4.94	46.37	120	211	Average
2440	98.06	106.56			32.93	4.94	46.37	120	211	Peak
2483.5	42.27	50.68	54	-11.73	32.98	4.98	46.37	120	211	Average
2483.5	53.78	62.19	74	-20.22	32.98	4.98	46.37	120	211	Peak

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	41.86	50.48	54	-12.14	32.87	4.88	46.37	116	255	Average
2390	53.63	62.25	74	-20.37	32.87	4.88	46.37	116	255	Peak
2440	83.8	92.3			32.93	4.94	46.37	116	255	Average
2440	96.61	105.11			32.93	4.94	46.37	116	255	Peak
2483.5	43.03	51.44	54	-10.97	32.98	4.98	46.37	116	255	Average
2483.5	53.94	62.35	74	-20.06	32.98	4.98	46.37	116	255	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2440MHz: Fundamental frequency.





<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.49	51.11	54	-11.51	32.87	4.88	46.37	122	175	Average
2390	53.16	61.78	74	-20.84	32.87	4.88	46.37	122	175	Peak
2480	83.71	92.12			32.98	4.98	46.37	122	175	Average
2480	97.04	105.45			32.98	4.98	46.37	122	175	Peak
2483.5	44.01	52.42	54	-9.99	32.98	4.98	46.37	122	175	Average
2483.5	53.18	61.59	74	-20.82	32.98	4.98	46.37	122	175	Peak

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.74	52.36	54	-10.26	32.87	4.88	46.37	100	218	Average
2390	54.13	62.75	74	-19.87	32.87	4.88	46.37	100	218	Peak
2480	83.8	92.21			32.98	4.98	46.37	100	218	Average
2480	97.03	105.44			32.98	4.98	46.37	100	218	Peak
2483.5	43.9	52.31	54	-10.1	32.98	4.98	46.37	100	218	Average
2483.5	53.01	61.42	74	-20.99	32.98	4.98	46.37	100	218	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.



### 3.3 6 dB BANDWIDTH MEASUREMENT

#### 3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 26,19	Feb. 25,20
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 26,19	Feb. 25,20
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Feb. 26,19	Feb. 25,20
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 26,19	Feb. 25,20

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

#### 3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 3.3.4 DEVIATION FROM TEST STANDARD

No deviation.



### 3.3.5 TEST SETUP

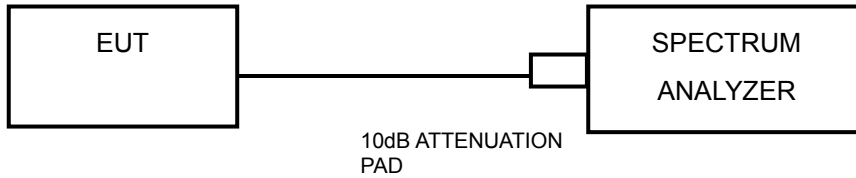

### 3.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 3.3.7 TEST RESULTS

#### 802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	9.05	0.5	PASS
6	2437	8.59	0.5	PASS
11	2462	9.10	0.5	PASS

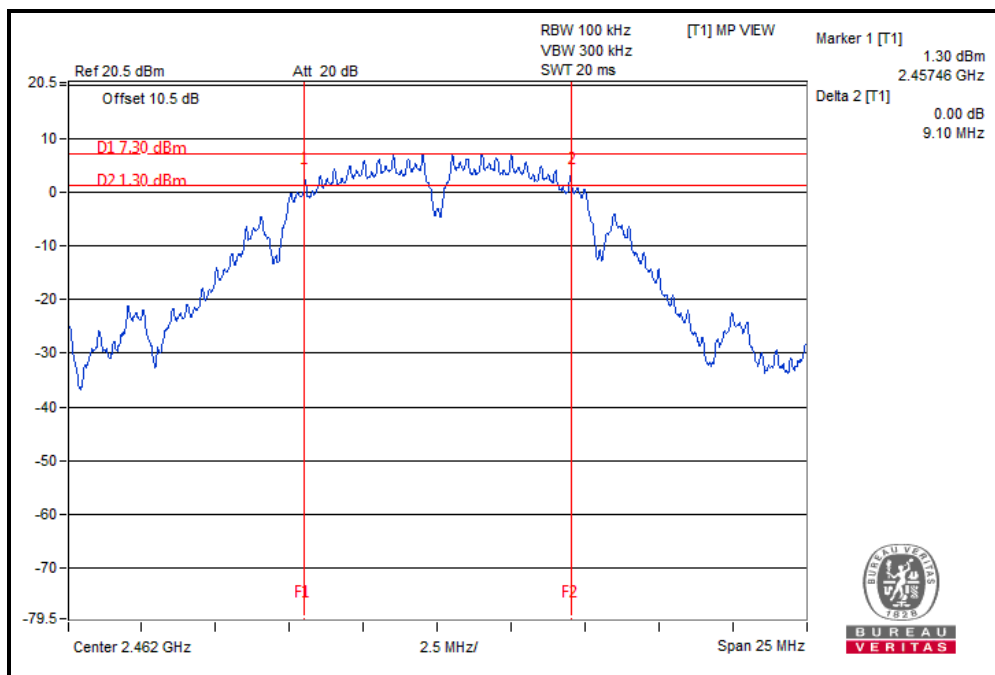




BUREAU VERITAS

Test Report No.: RF190325W006-2

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.04	0.5	PASS
6	2437	16.10	0.5	PASS
11	2462	16.37	0.5	PASS

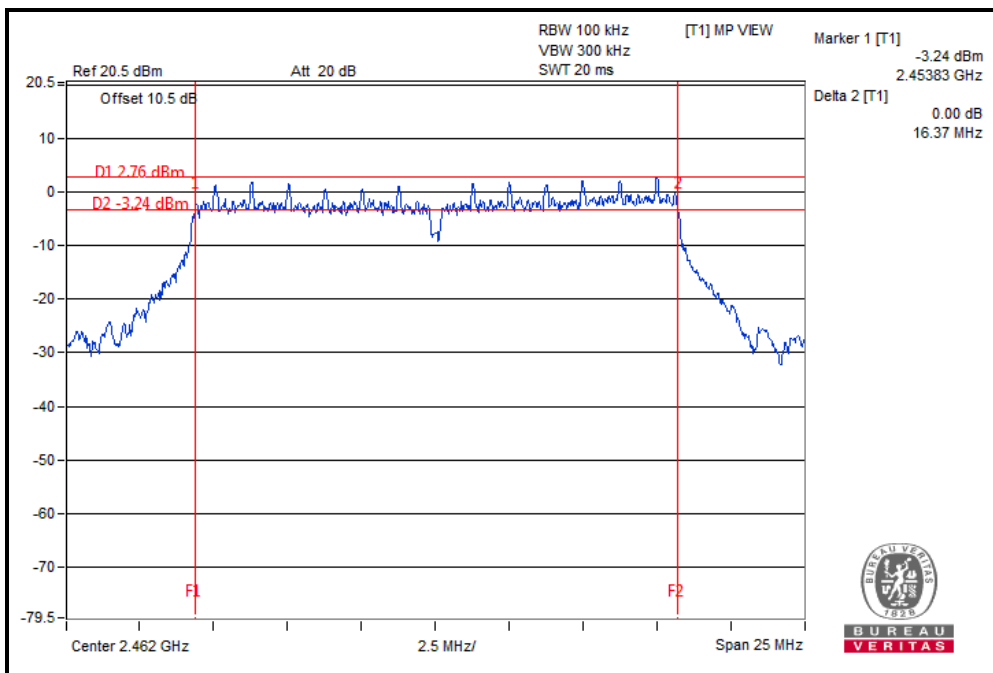




**BUREAU  
VERITAS**

Test Report No.: RF190325W006-2

802.11n (20MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.36	0.5	PASS
6	2437	16.71	0.5	PASS
11	2462	17.62	0.5	PASS

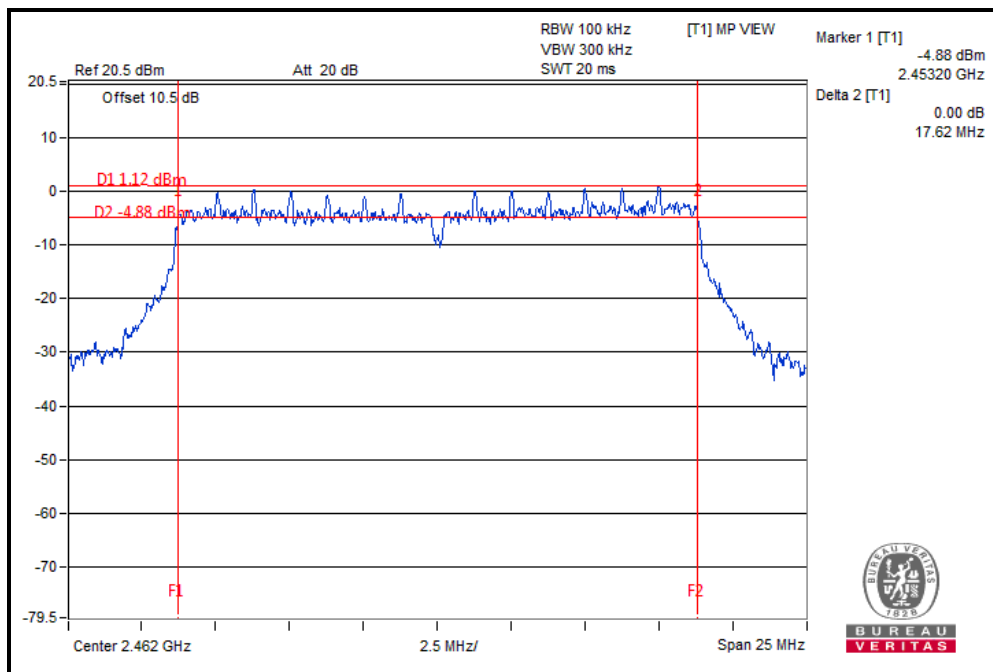



**BT-LE (GFSK)**

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.51	0.5	PASS
19	2440	0.51	0.5	PASS
39	2480	0.50	0.5	PASS

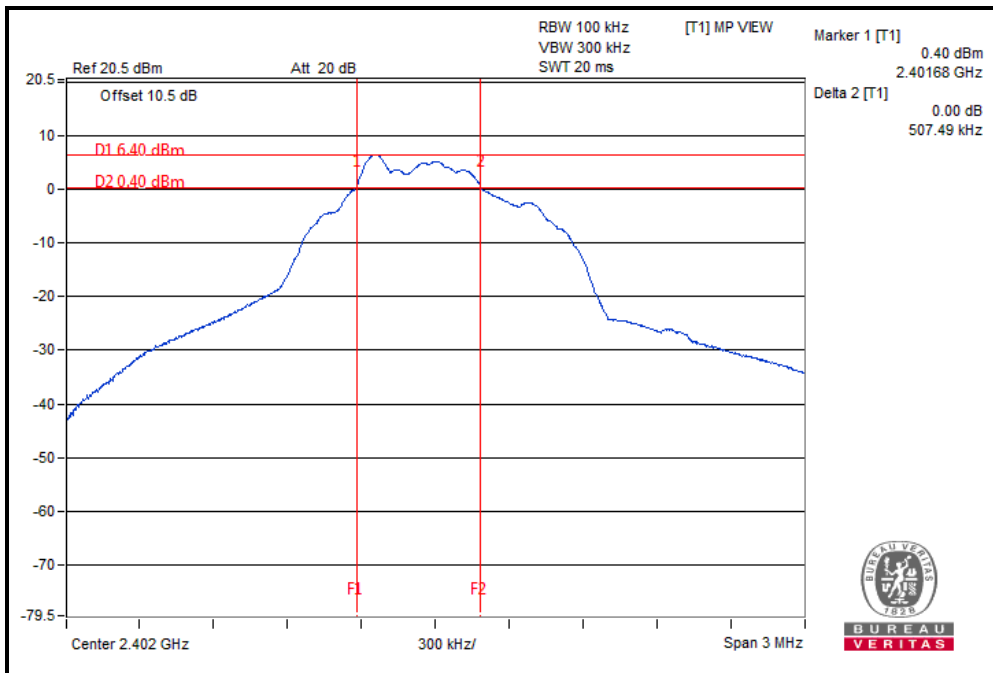




### 3.4 CONDUCTED OUTPUT POWER

#### 3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

#### 3.4.2 TEST SETUP

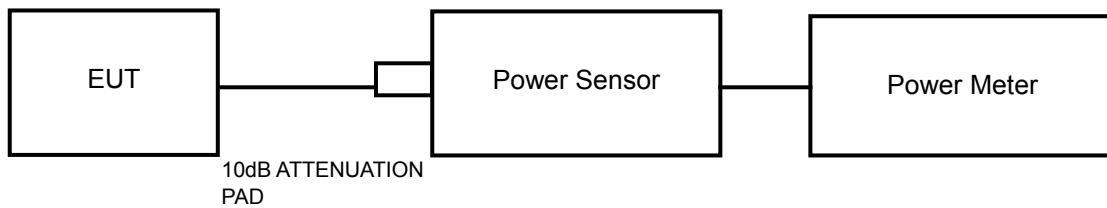

#### 3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

#### 3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

#### 3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.





### 3.4.7 TEST RESULTS

#### 3.4.7.1 MAXIMUM PEAK OUTPUT POWER

##### 802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	19.37	86.497	1	PASS
6	2437	19.43	87.700	1	PASS
11	2462	17.92	61.944	1	PASS

##### 802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	20.55	113.501	1	PASS
6	2437	20.74	<b>118.577</b>	1	PASS
11	2462	19.55	90.157	1	PASS

##### 802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	20.25	105.925	1	PASS
6	2437	20.33	107.895	1	PASS
11	2462	19.29	84.918	1	PASS

##### BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	5.27	3.365	1	PASS
19	2440	7.18	5.224	1	PASS
39	2480	7.20	<b>5.248</b>	1	PASS



### 3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

#### 802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	16.88	N/A
6	2437	16.70	N/A
11	2462	15.14	N/A

#### 802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	12.82	N/A
6	2437	12.93	N/A
11	2462	11.36	N/A

#### 802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	12.05	N/A
6	2437	12.22	N/A
11	2462	10.72	N/A

#### BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	2.43	N/A
19	2440	1.95	N/A
39	2480	4.39	N/A



### 3.5 POWER SPECTRAL DENSITY MEASUREMENT

#### 3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

#### 3.5.2 TEST SETUP



#### 3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

#### 3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW  $\geq 3 \times$  RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

#### 3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 3.5.7 TEST RESULTS

#### 802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-5.87	8	PASS
6	2437	-6.45	8	PASS
11	2462	-8.33	8	PASS

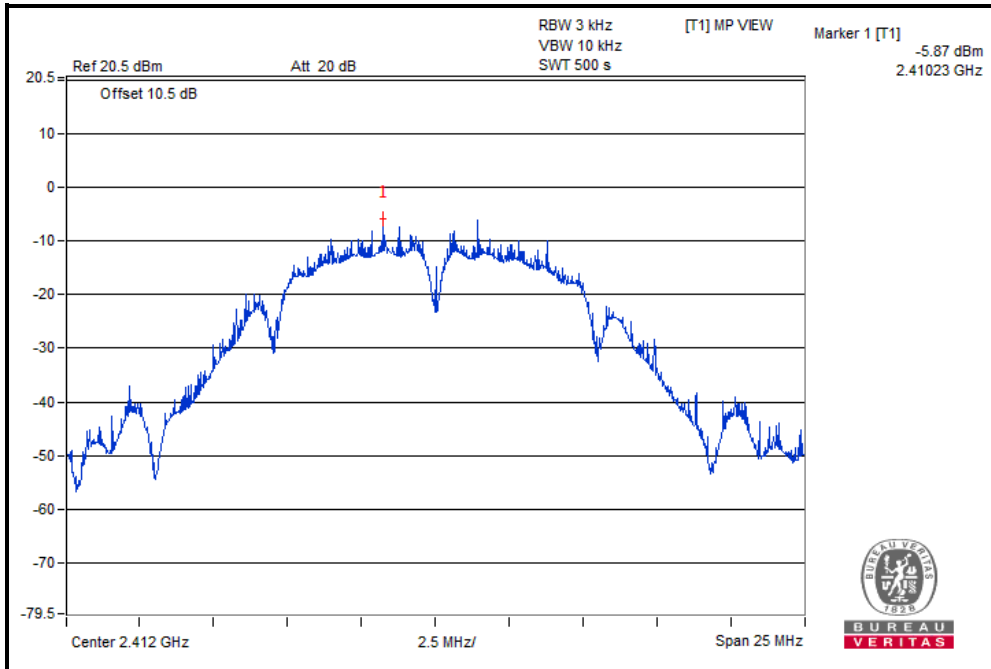




**BUREAU  
VERITAS**

**Test Report No.: RF190325W006-2**

**802.11g**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-11.86	8	PASS
6	2437	-11.95	8	PASS
11	2462	-14.09	8	PASS

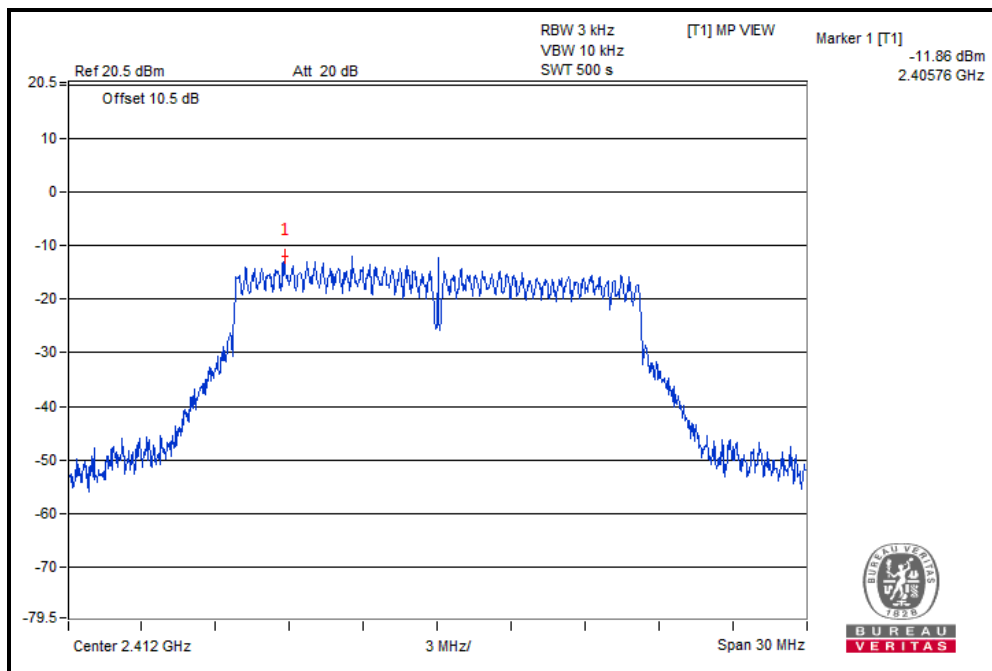




**BUREAU  
VERITAS**

Test Report No.: RF190325W006-2

802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-13.01	8	PASS
6	2437	-12.59	8	PASS
11	2462	-14.66	8	PASS

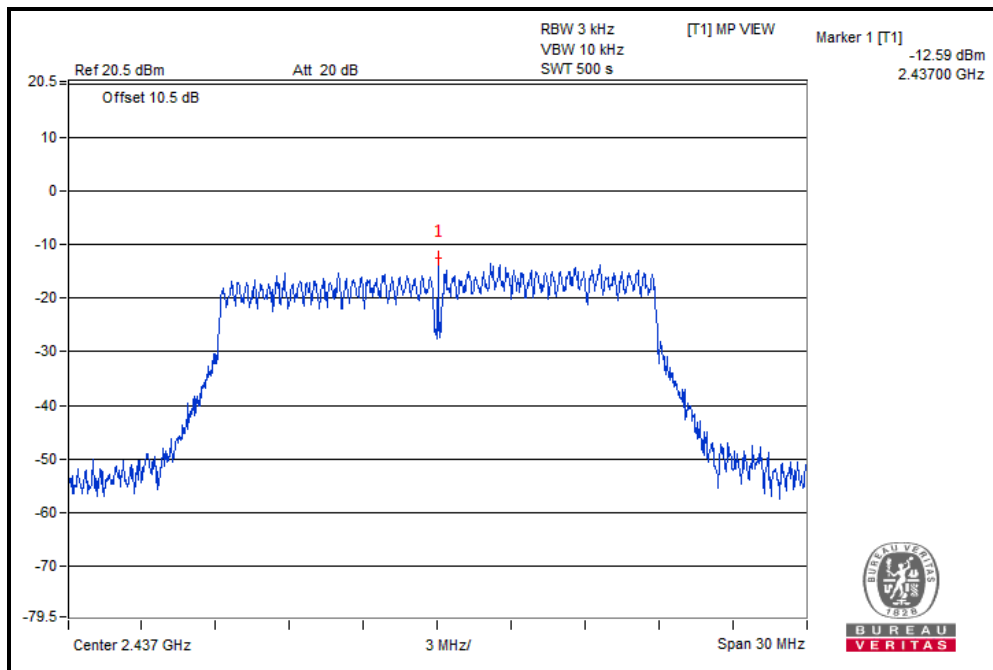




**BUREAU  
VERITAS**

**Test Report No.: RF190325W006-2**

**BT-LE (GFSK)**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-9.65	8	PASS
19	2440	-8.18	8	PASS
39	2480	-9.95	8	PASS

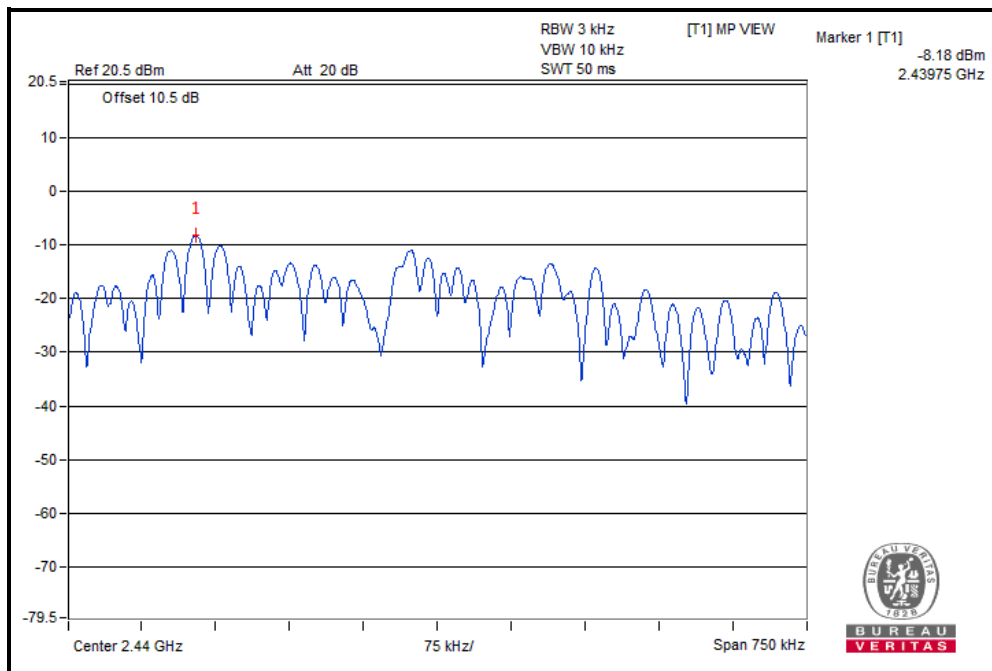




### 3.6 OUT OF BAND EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 3.6.2 TEST SETUP

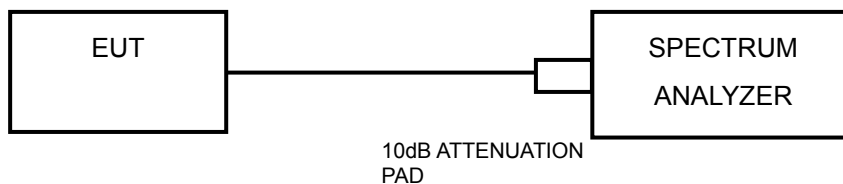

#### 3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

#### 3.6.4 TEST PROCEDURE

##### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.





## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.





**BUREAU  
VERITAS**



Test Report No.: RF190325W006-2

### 802.11b



#### CH 1

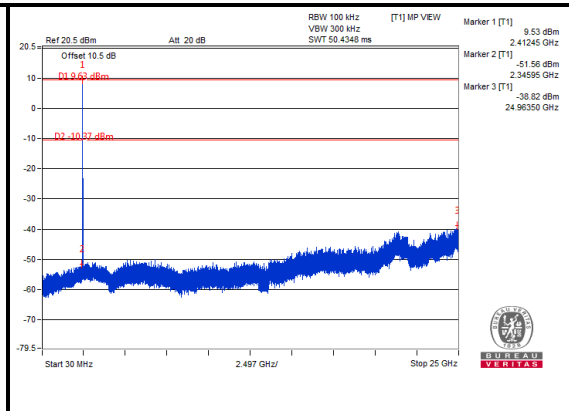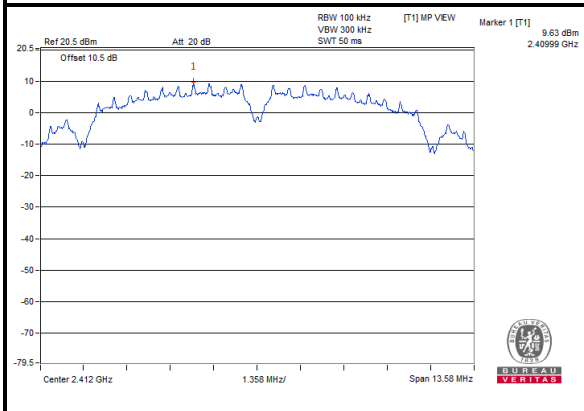

#### CH 6

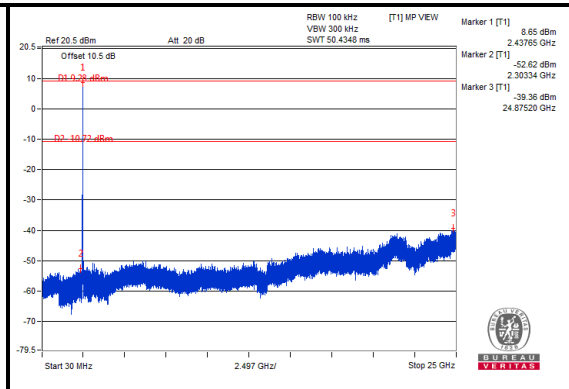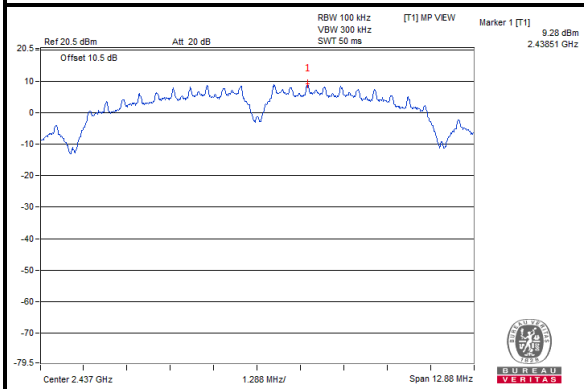

#### CH 11

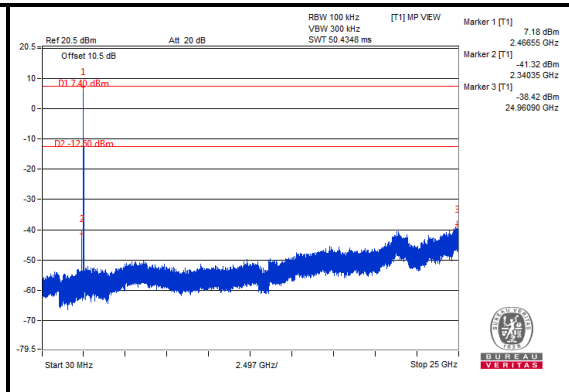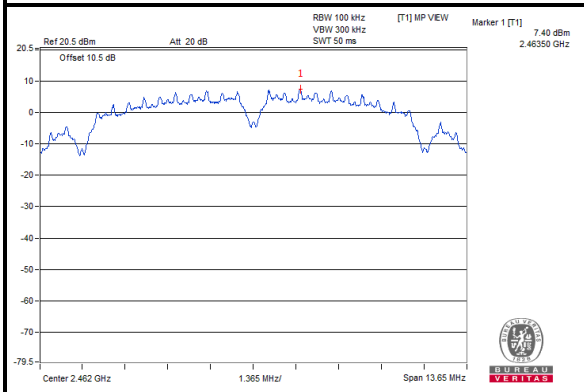





**BUREAU  
VERITAS**

Test Report No.: RF190325W006-2

### CH 1 Band Edge

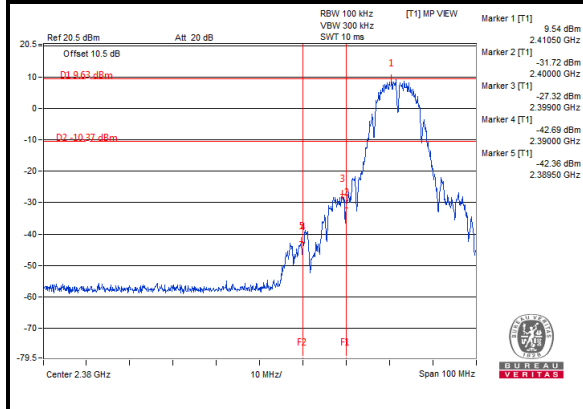

### CH 11 Band Edge

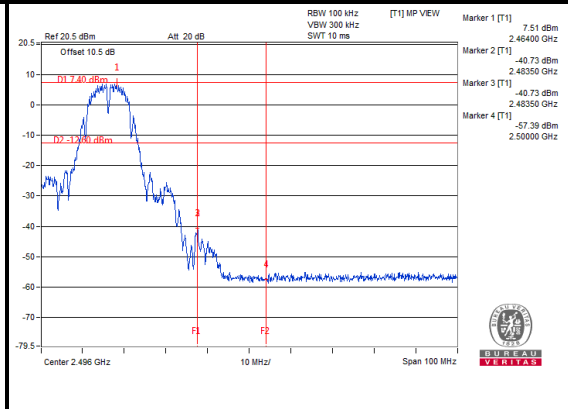




BUREAU VERITAS


Test Report No.: RF190325W006-2

### 802.11g


#### CH 1

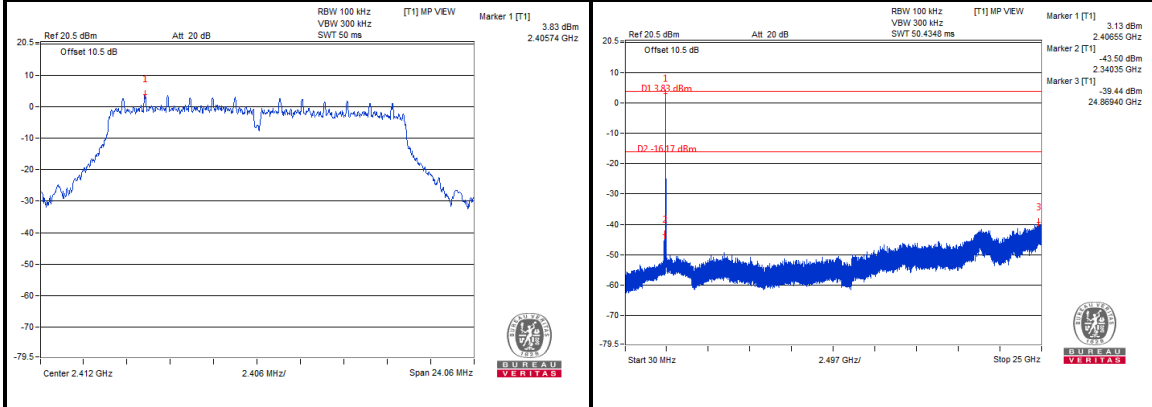

#### CH 6

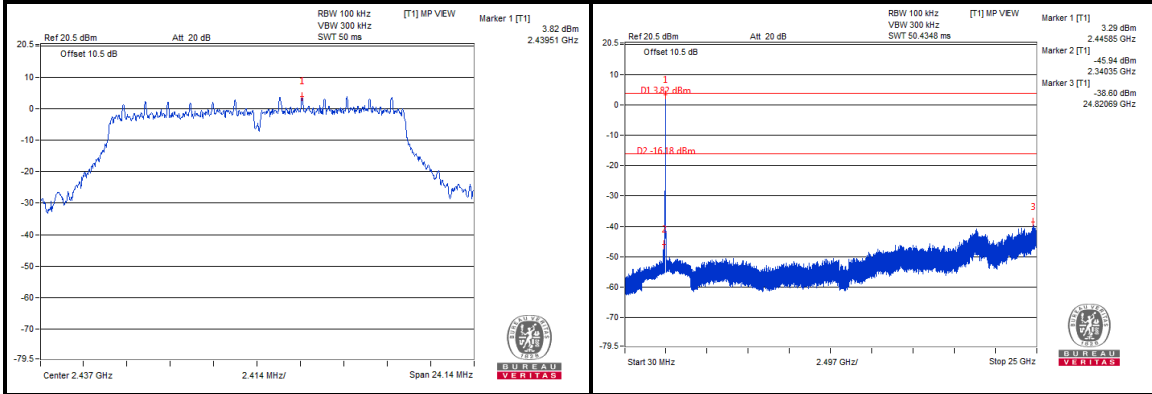

#### CH 11

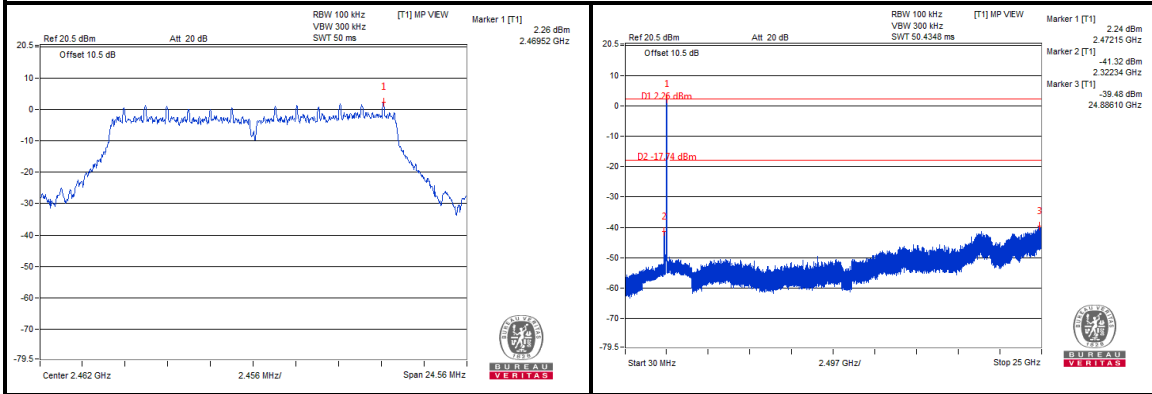





**BUREAU  
VERITAS**

Test Report No.: RF190325W006-2

### CH 1 Band Edge

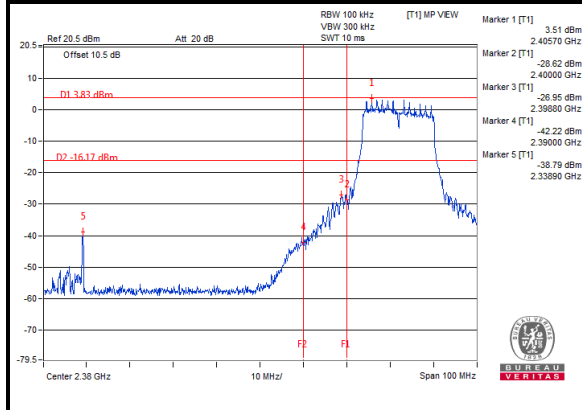

### CH 11 Band Edge

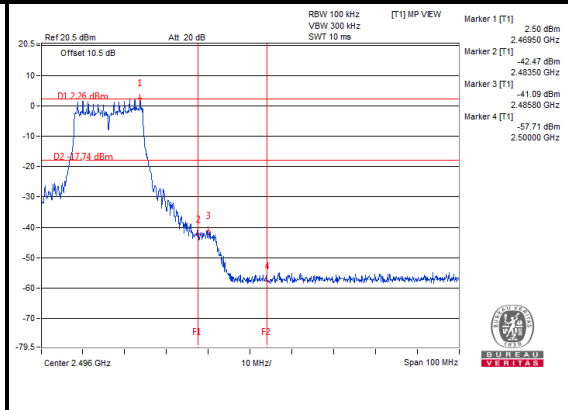





BUREAU VERITAS



Test Report No.: RF190325W006-2

### 802.11n (20MHz)



#### CH 1

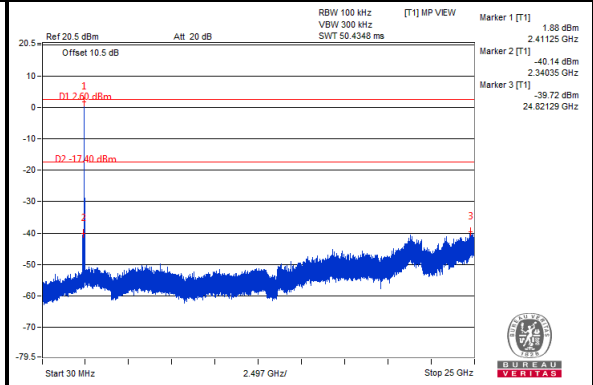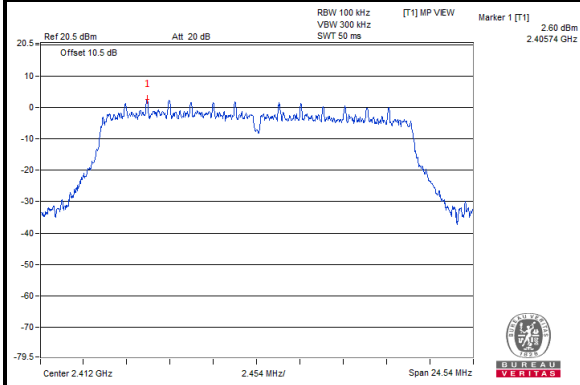

#### CH 6

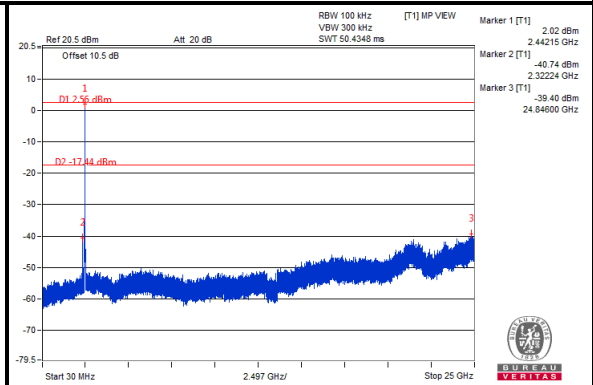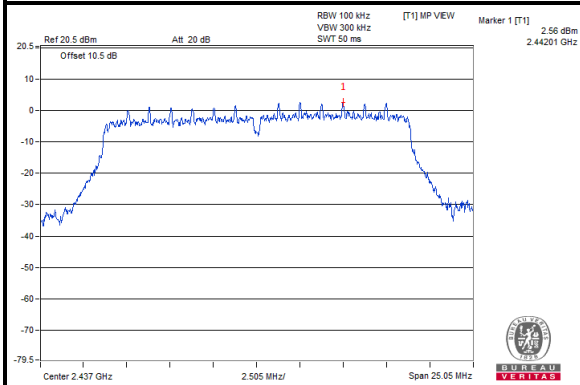

#### CH 11

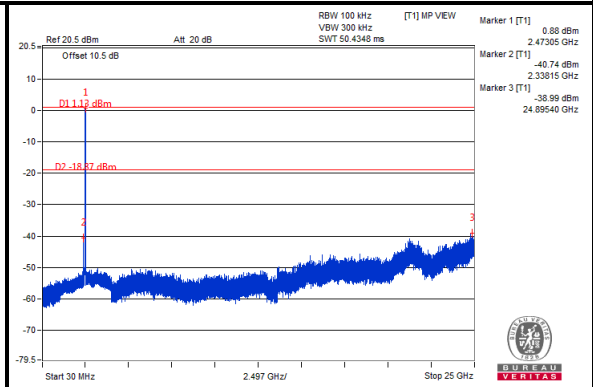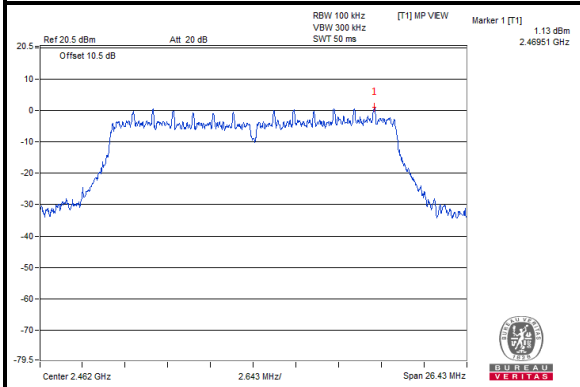





**BUREAU  
VERITAS**

Test Report No.: RF190325W006-2

### CH 1 Band Edge

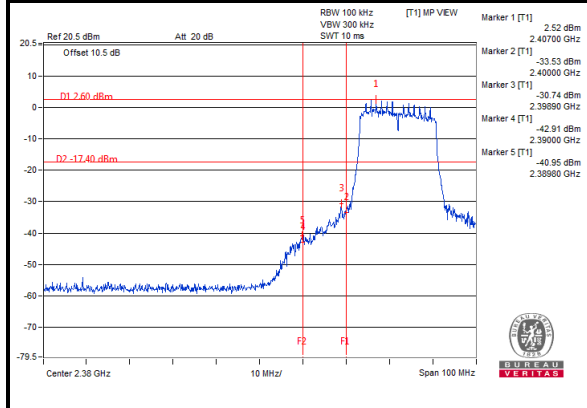

### CH 11 Band Edge

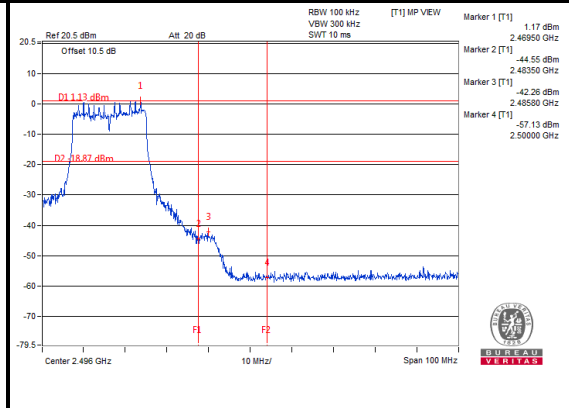





BUREAU VERITAS



Test Report No.: RF190325W006-2

### BT-LE (GFSK)



#### CH 0

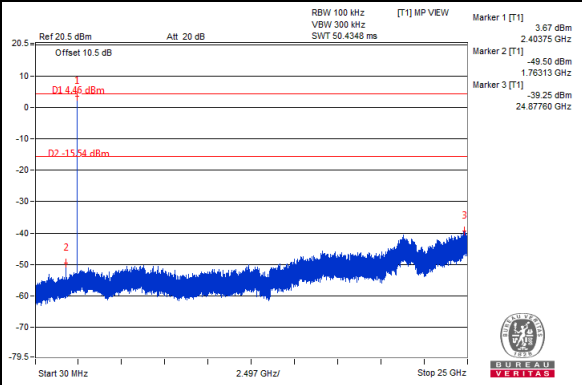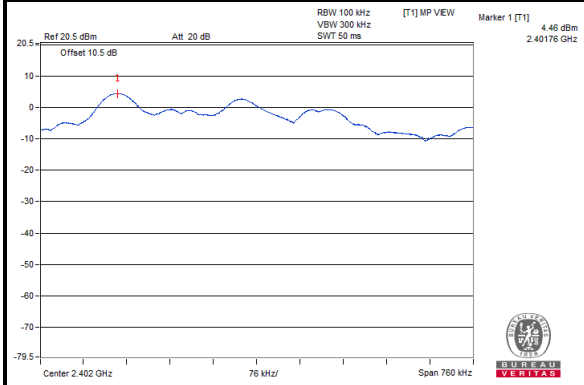

#### CH 19

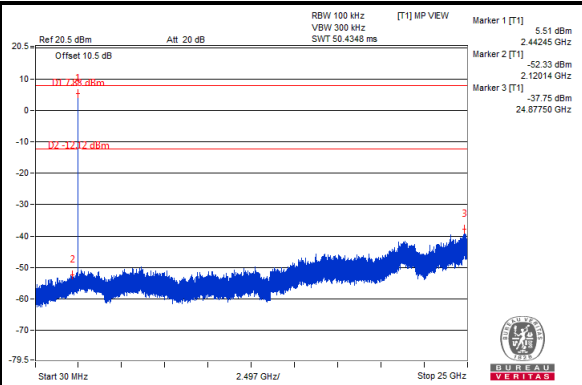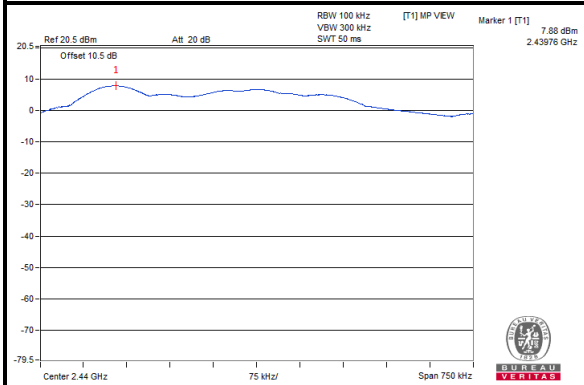

#### CH 39

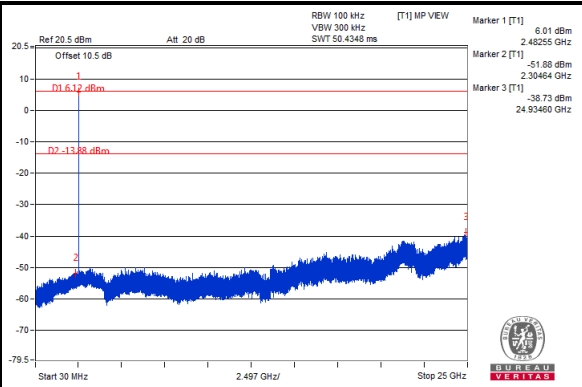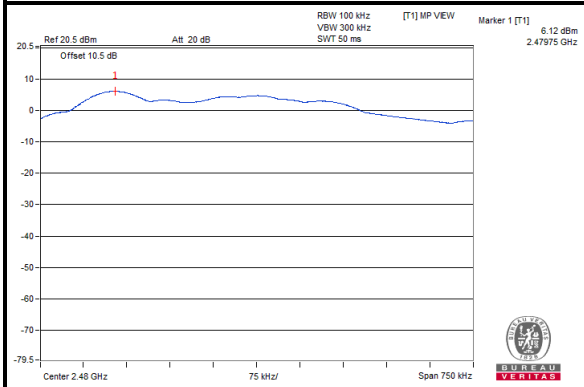






**BUREAU  
VERITAS**

Test Report No.: RF190325W006-2

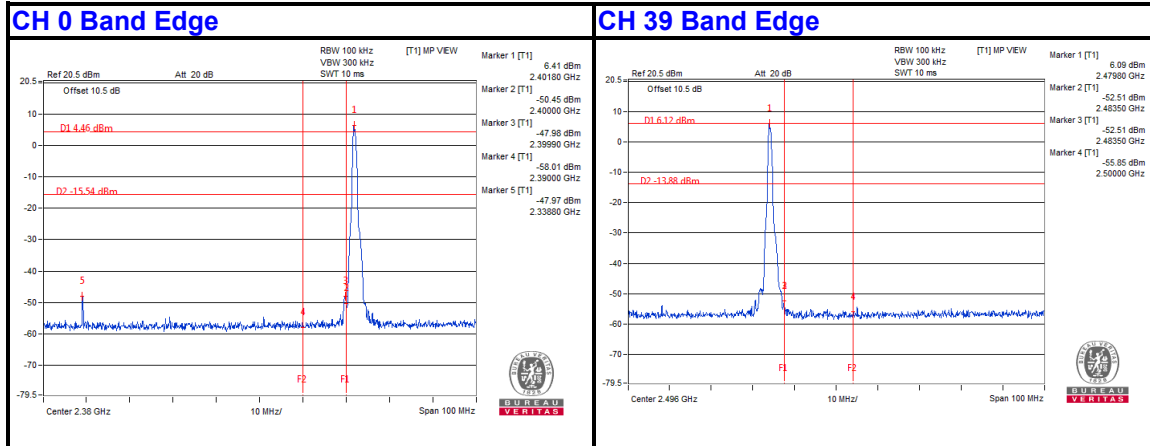



**BUREAU**  
**VERITAS**

Test Report No.: RF190325W006-2

## 4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 5 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

**---END---**