


3.5 BAND EDGE MEASUREMENT

3.5.1 LIMITS OF BAND EDGE MEASUREMENT

The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

3.5.2 TEST SETUP

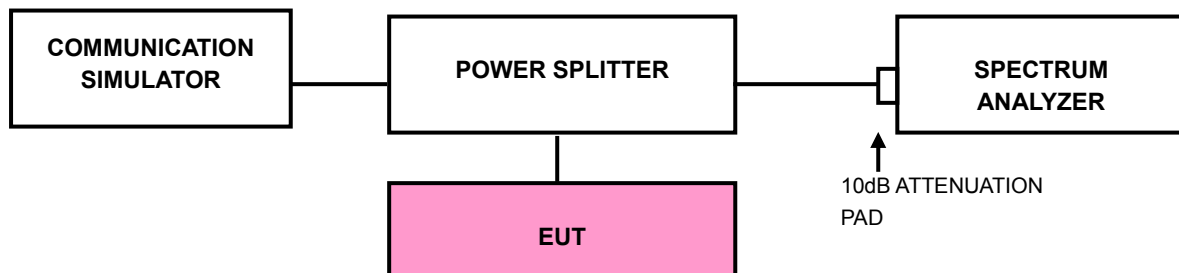




3.5.3 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- i. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- j. Record the max trace plot into the test report.



3.5.4 TEST RESULTS



LTE BAND 4

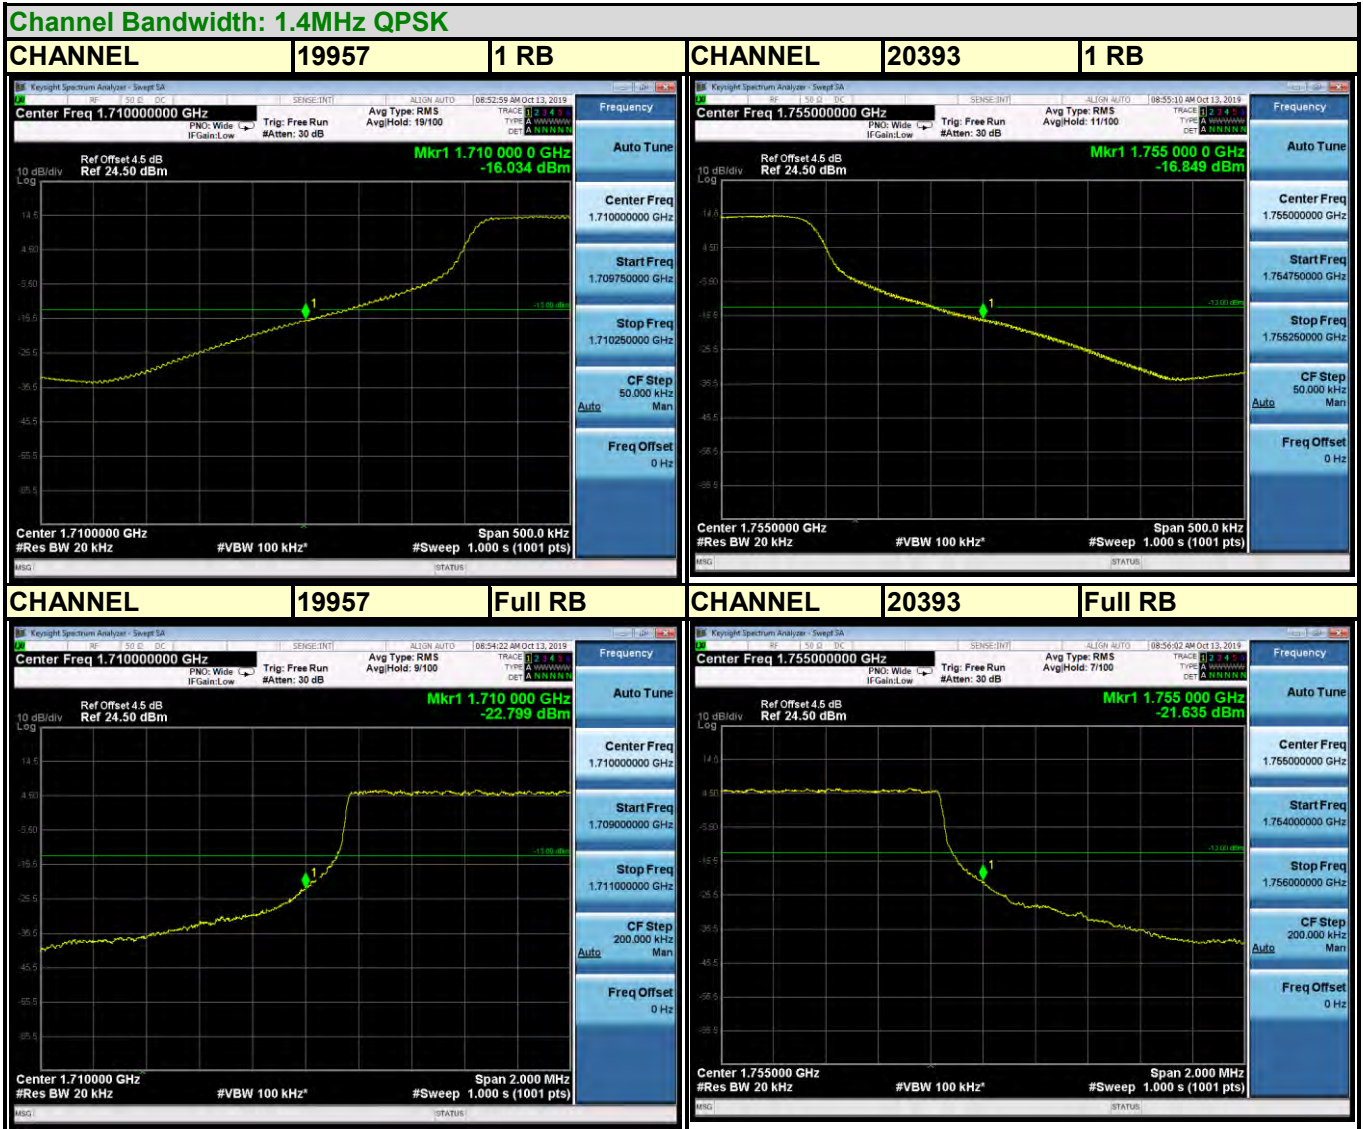



Test Report No.: RF190712W002-5

Channel Bandwidth: 1.4MHz 16QAM

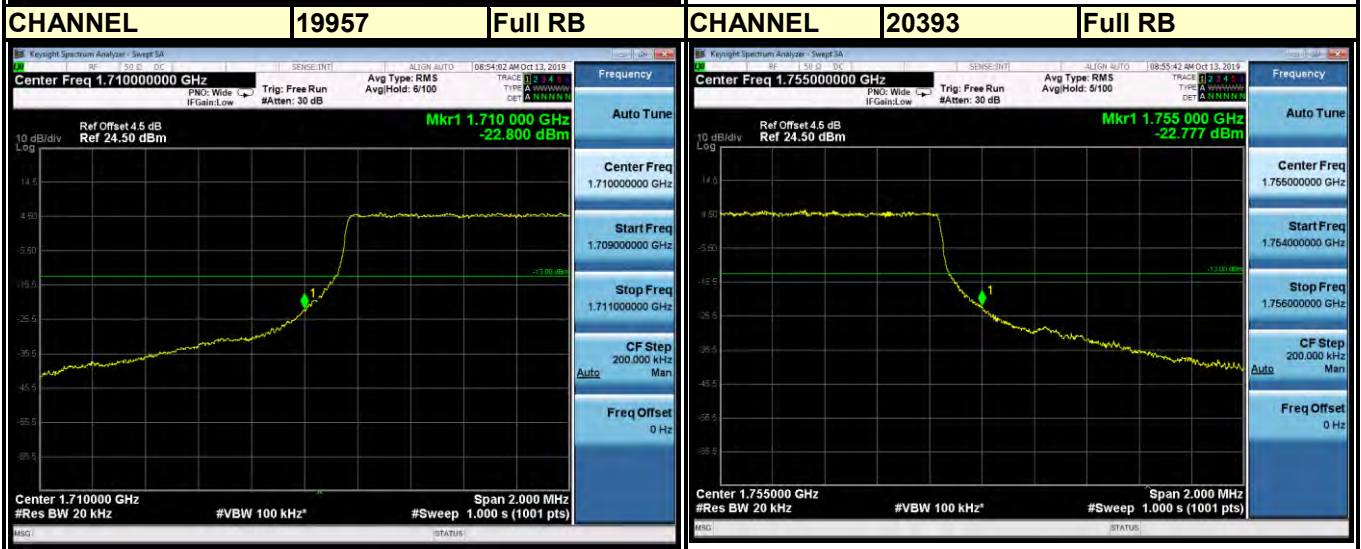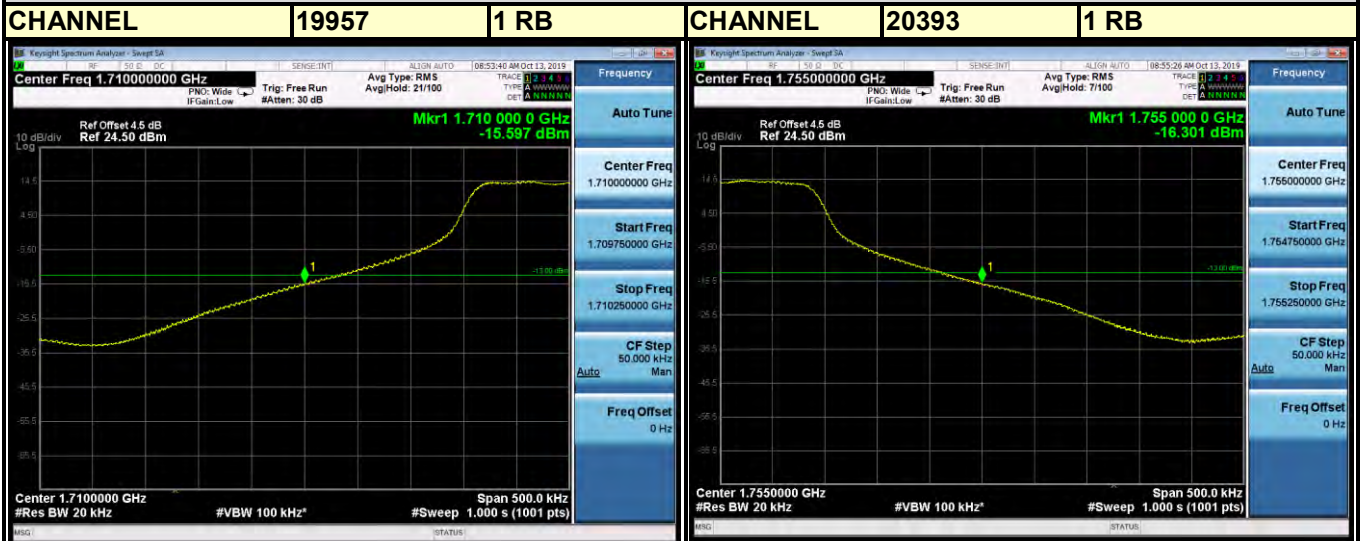



Test Report No.: RF190712W002-5

LTE BAND 4





BUREAU VERITAS

Test Report No.: RF190712W002-5






LTE BAND 4





Test Report No.: RF190712W002-5

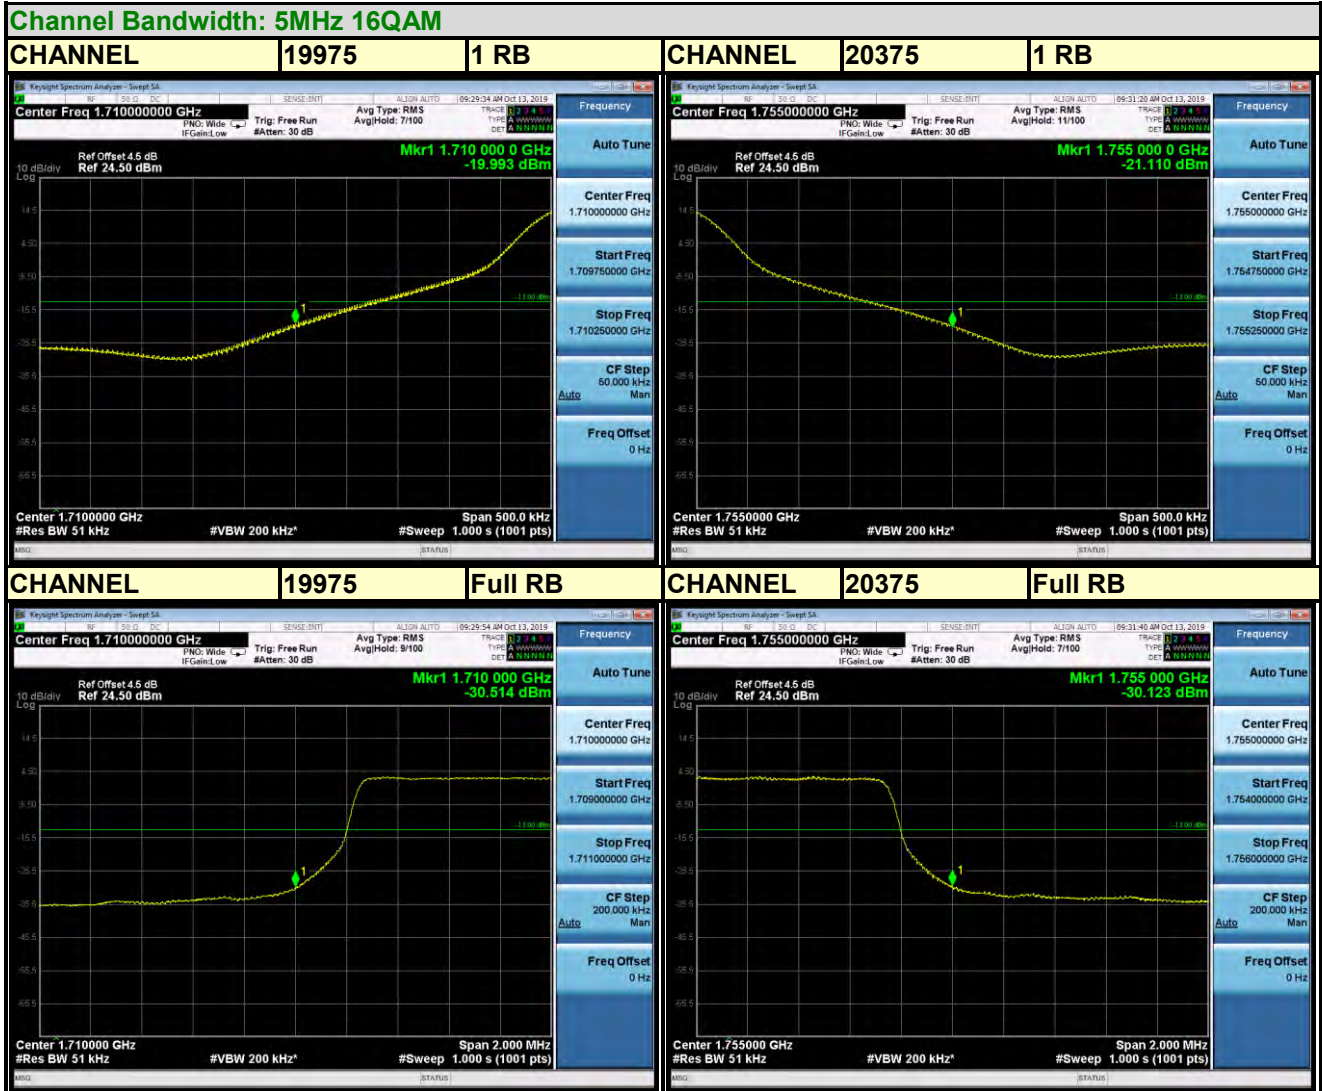



LTE BAND 4







BUREAU VERITAS

Test Report No.: RF190712W002-5

Channel Bandwidth: 10MHz 16QAM

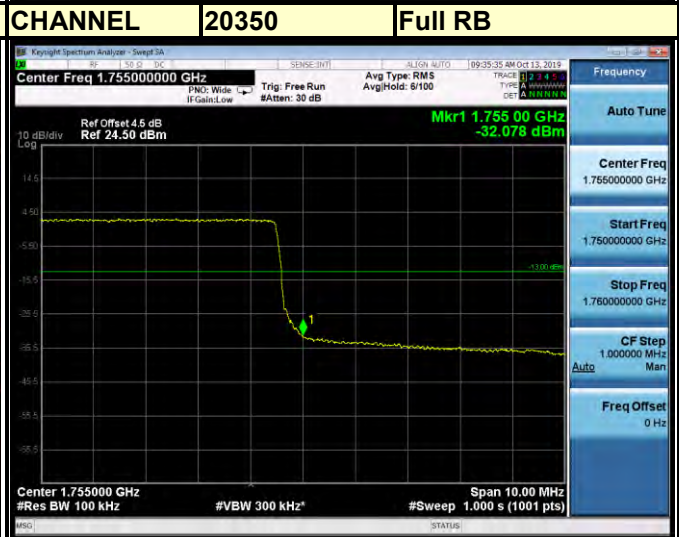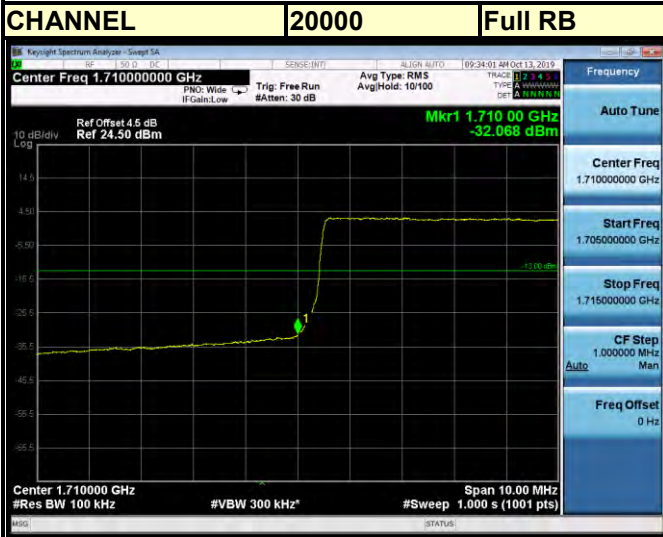



LTE BAND 4







BUREAU VERITAS

Test Report No.: RF190712W002-5

Channel Bandwidth: 15MHz 16QAM

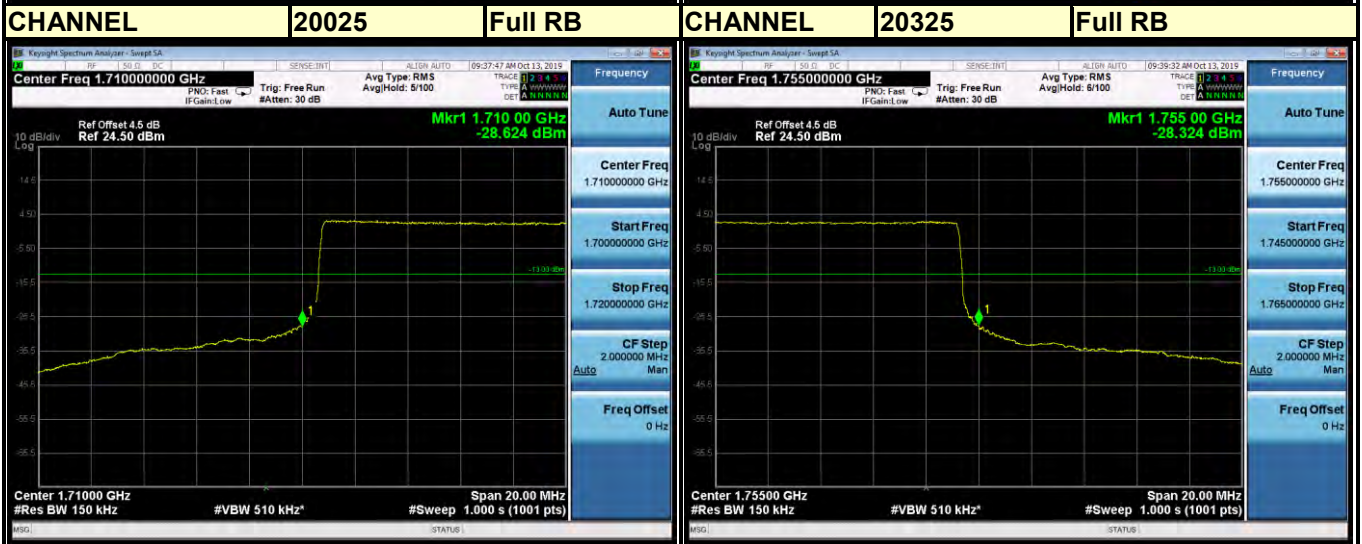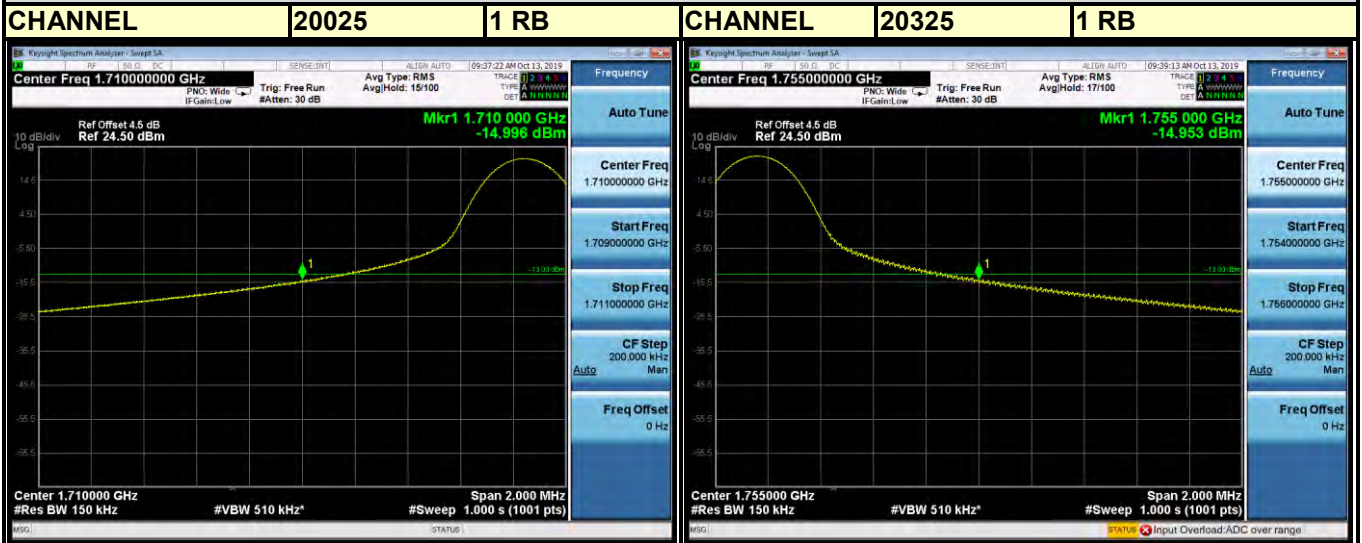



LTE BAND 4







BUREAU VERITAS

Test Report No.: RF190712W002-5

Channel Bandwidth: 20MHz 16QAM

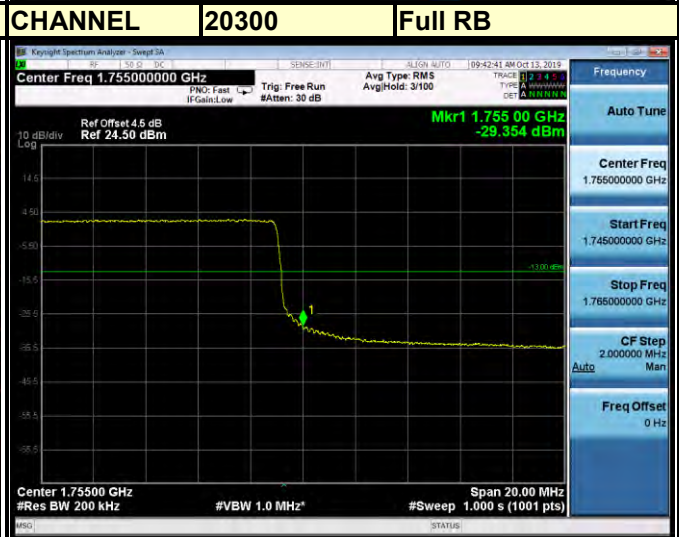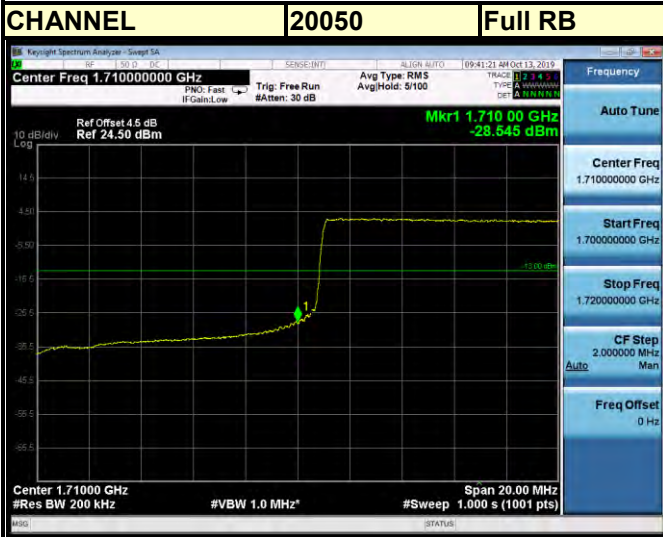




Test Report No.: RF190712W002-5

LTE BAND 66

Channel Bandwidth: 1.4MHz QPSK

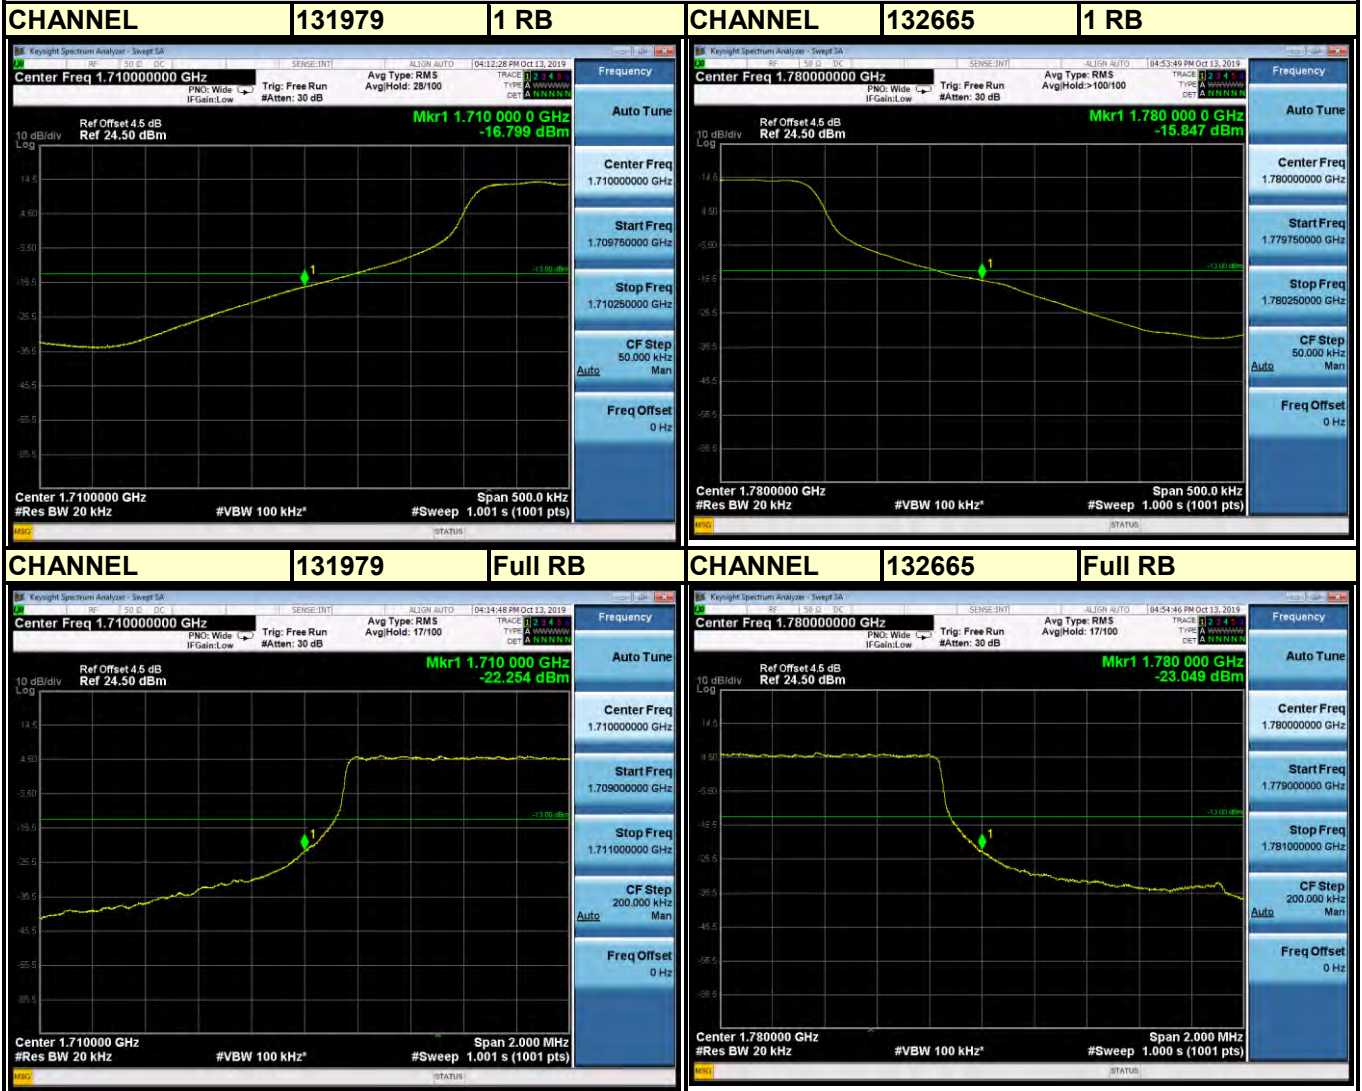



Test Report No.: RF190712W002-5

Channel Bandwidth: 1.4MHz 16QAM





LTE BAND 66





BUREAU VERITAS

Test Report No.: RF190712W002-5





BUREAU VERITAS

Test Report No.: RF190712W002-5


LTE BAND 66





BUREAU VERITAS

Test Report No.: RF190712W002-5

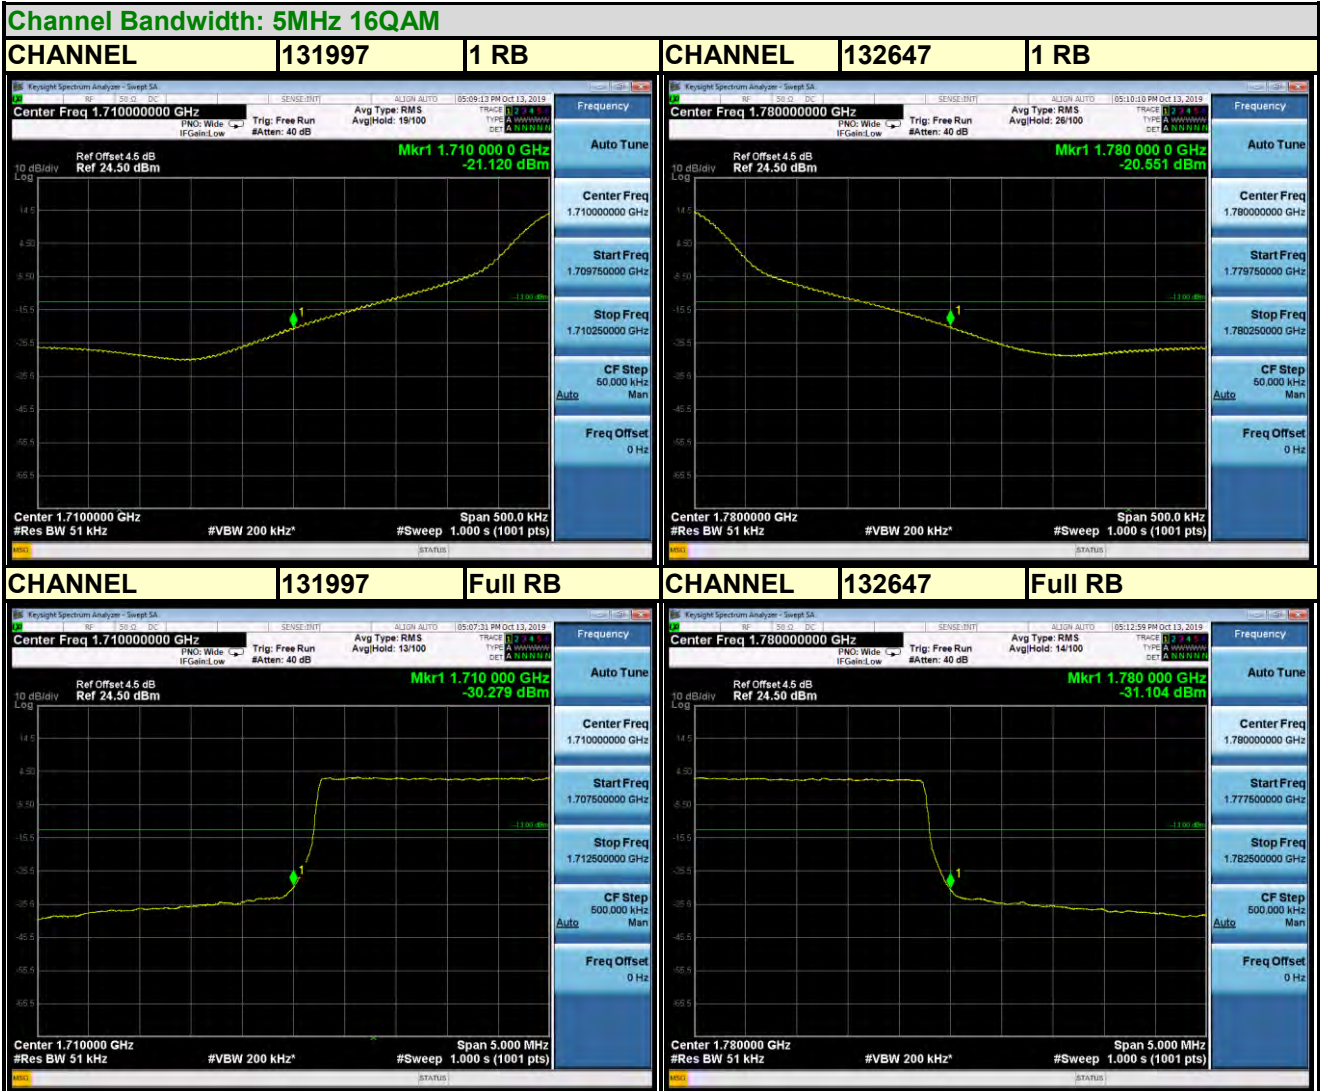



BUREAU VERITAS

Test Report No.: RF190712W002-5

LTE BAND 66









BUREAU VERITAS

Test Report No.: RF190712W002-5

Channel Bandwidth: 10MHz 16QAM

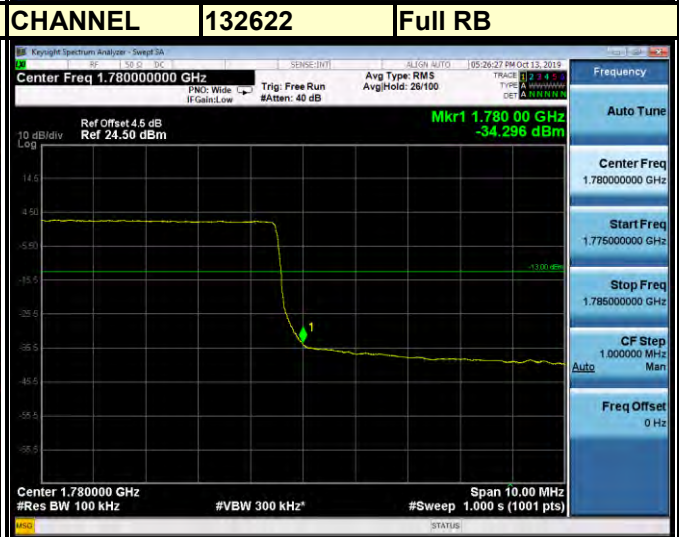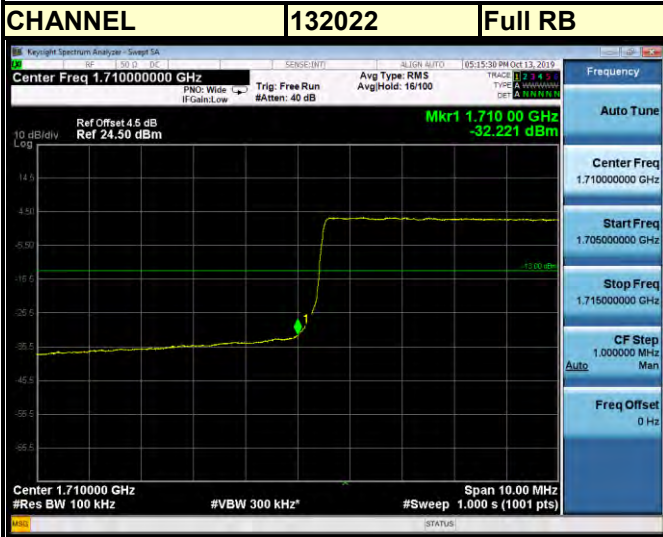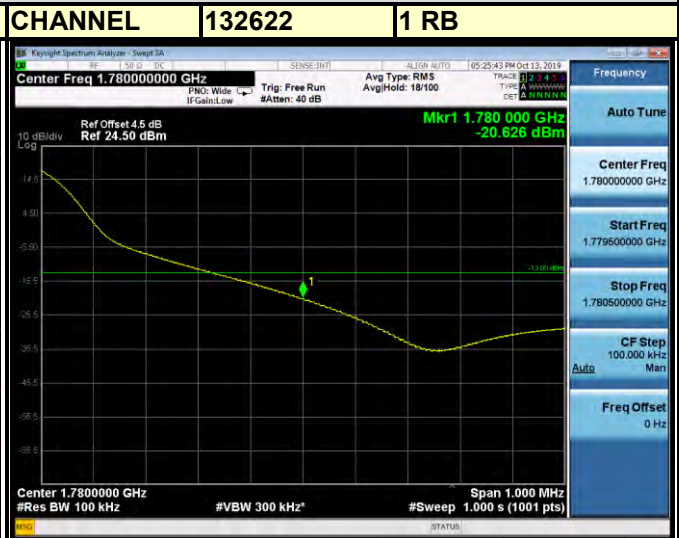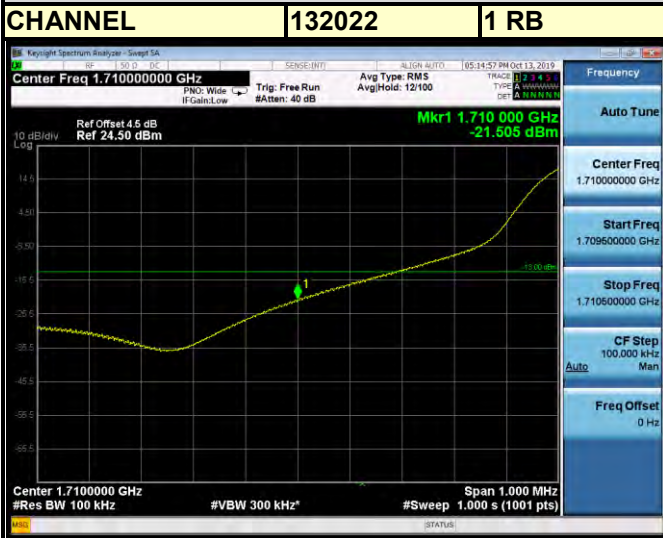



LTE BAND 66







BUREAU VERITAS

Test Report No.: RF190712W002-5

Channel Bandwidth: 15MHz 16QAM

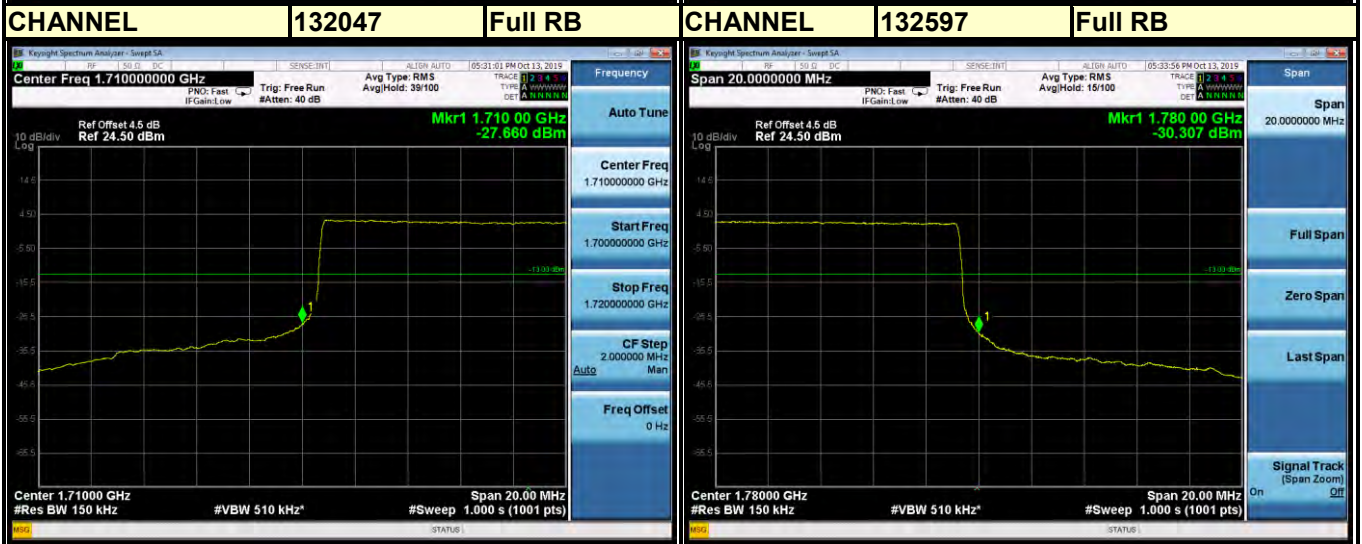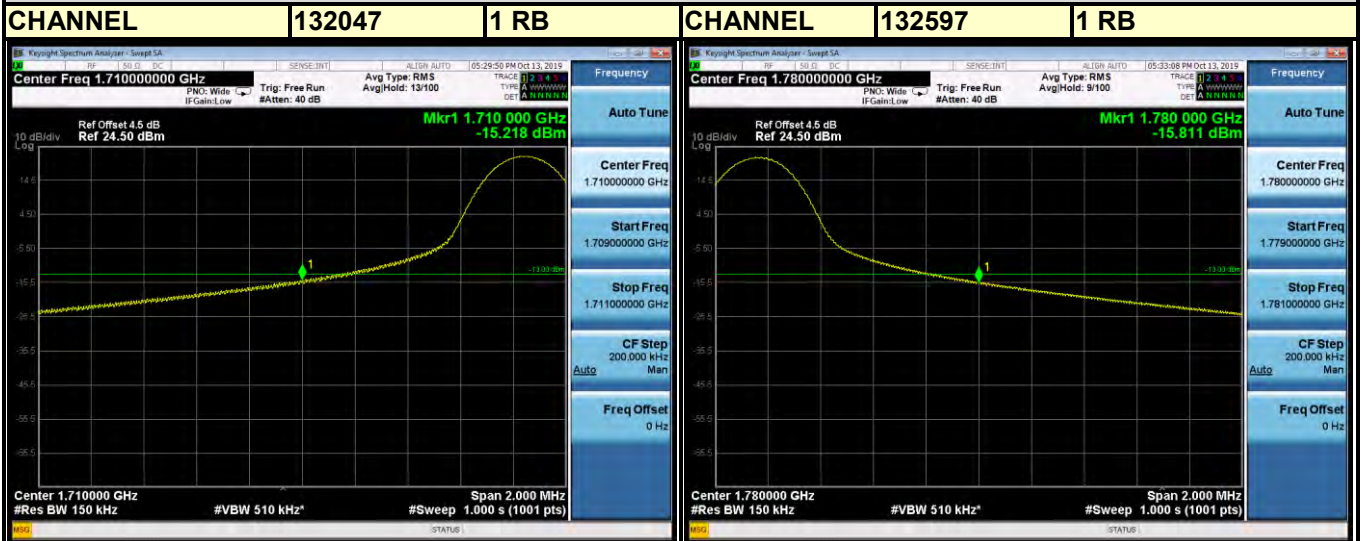



BUREAU VERITAS

Test Report No.: RF190712W002-5

LTE BAND 66








BUREAU VERITAS

Test Report No.: RF190712W002-5

Channel Bandwidth: 20MHz 16QAM

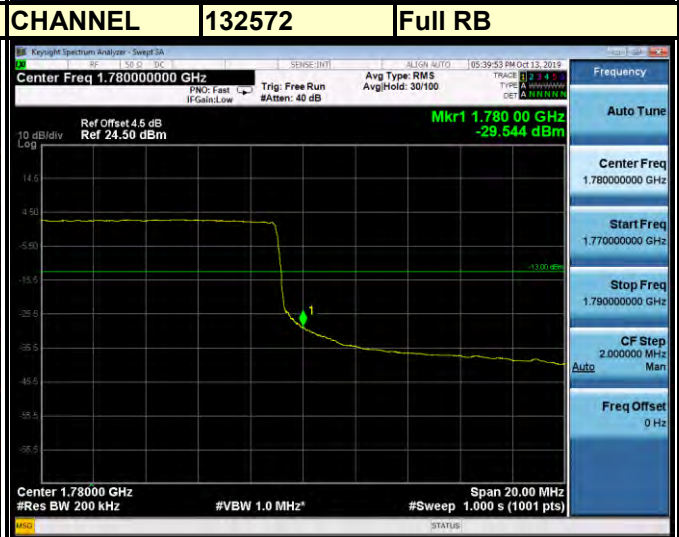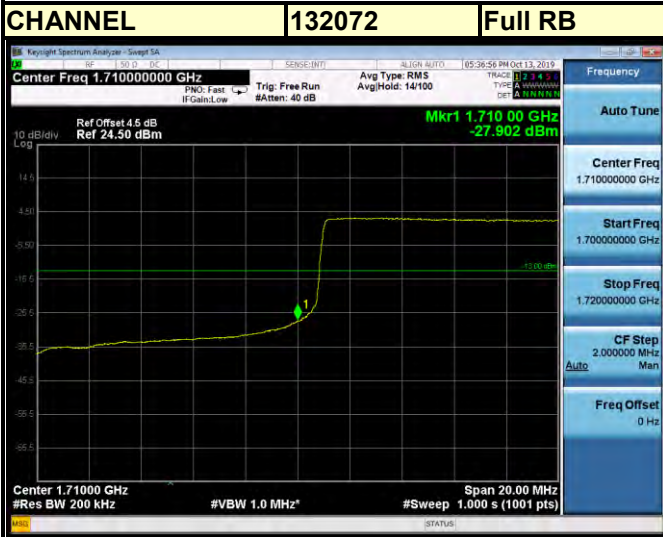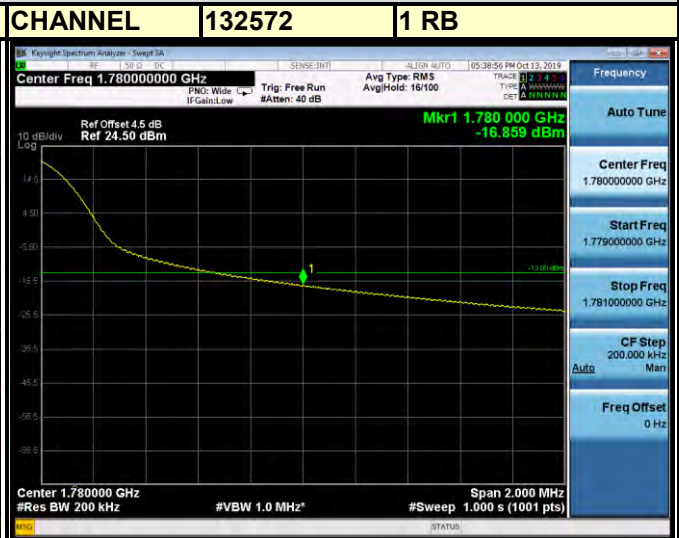

3.6 CONDUCTED SPURIOUS EMISSIONS


3.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

3.6.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at middle operational frequency range.
- b. Measuring frequency range is from 30 MHz to 19.1GHz for WCDMA Band 4 & LTE Band 4. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz are used for conducted emission measurement.

3.6.3 TEST SETUP

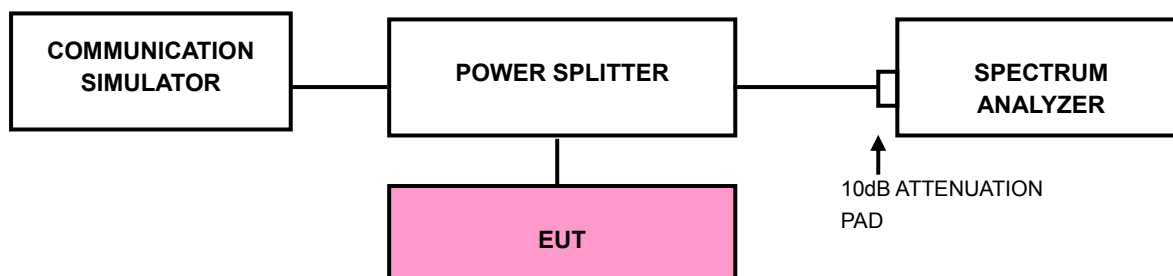




BUREAU VERITAS

Test Report No.: RF190712W002-5

3.6.4 TEST RESULTS LTE BAND 4

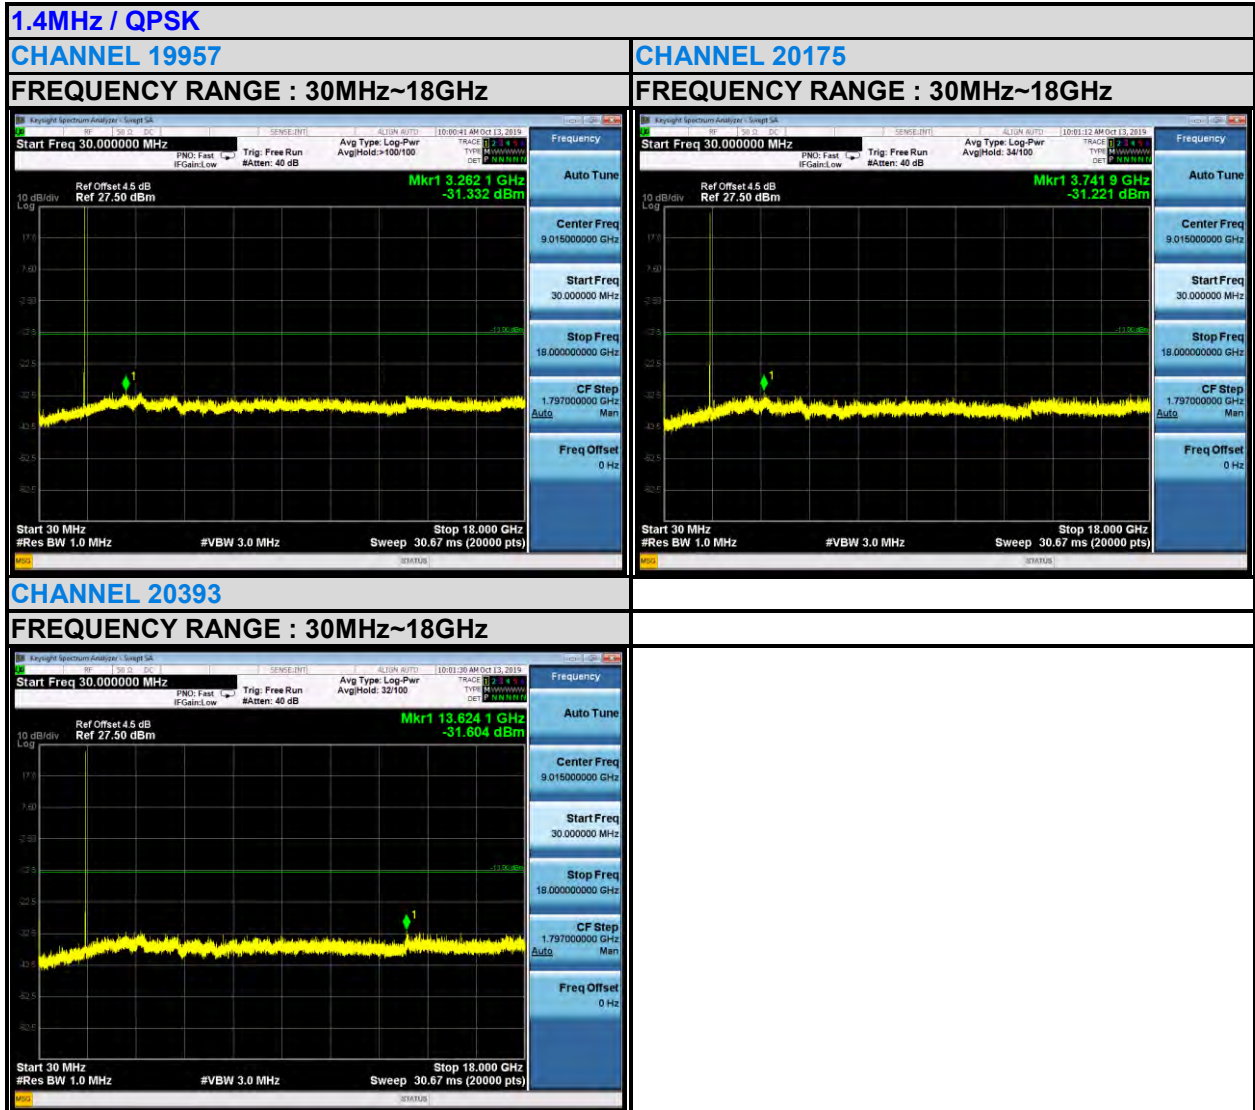




BUREAU VERITAS

Test Report No.: RF190712W002-5

3MHz / QPSK


CHANNEL 19965

FREQUENCY RANGE : 30MHz~18GHz

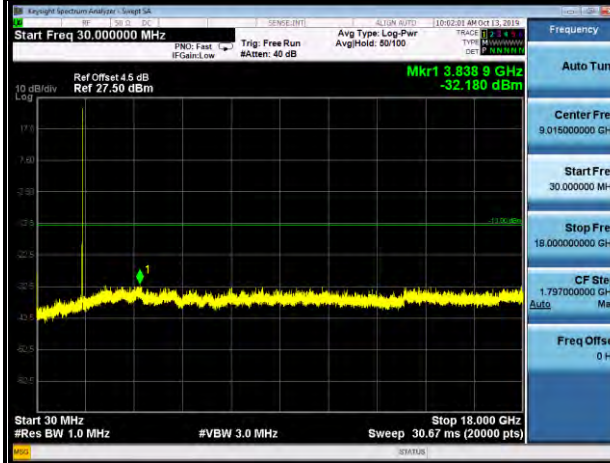


CHANNEL 20175

FREQUENCY RANGE : 30MHz~18GHz

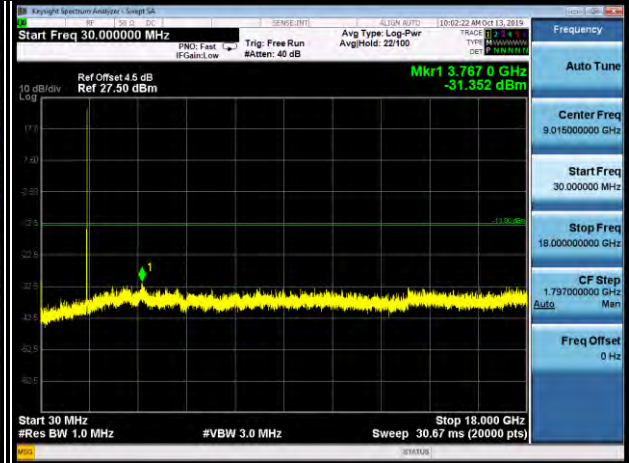

CHANNEL 20385

FREQUENCY RANGE : 30MHz~18GHz

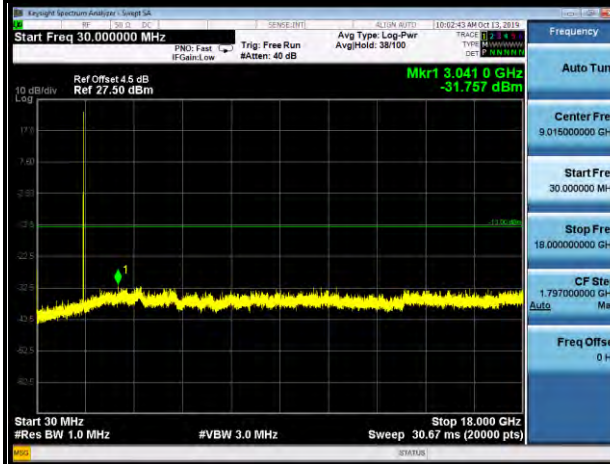




5MHz / QPSK


CHANNEL 19975

FREQUENCY RANGE : 30MHz~18GHz

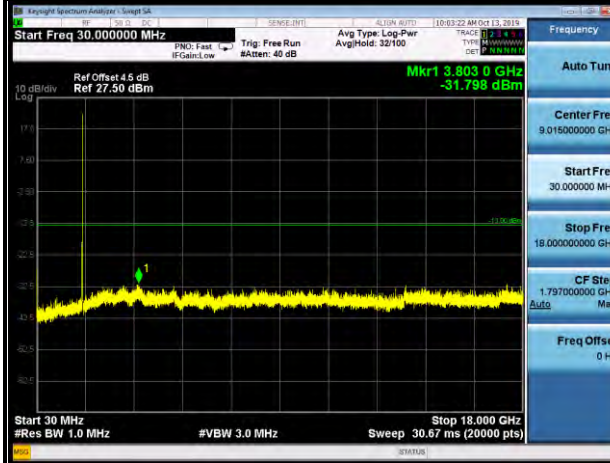


CHANNEL 20175

FREQUENCY RANGE : 30MHz~18GHz

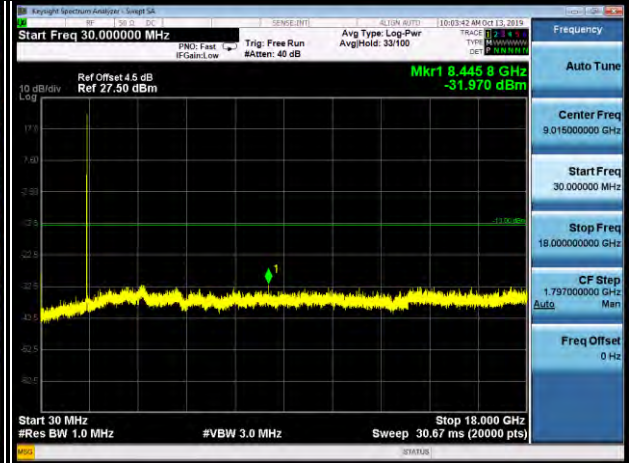

CHANNEL 20375

FREQUENCY RANGE : 30MHz~18GHz

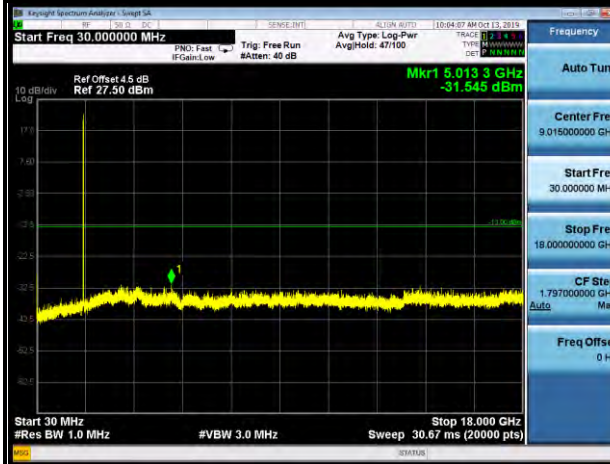




BUREAU VERITAS

Test Report No.: RF190712W002-5

10MHz / QPSK


CHANNEL 20000

FREQUENCY RANGE : 30MHz~18GHz

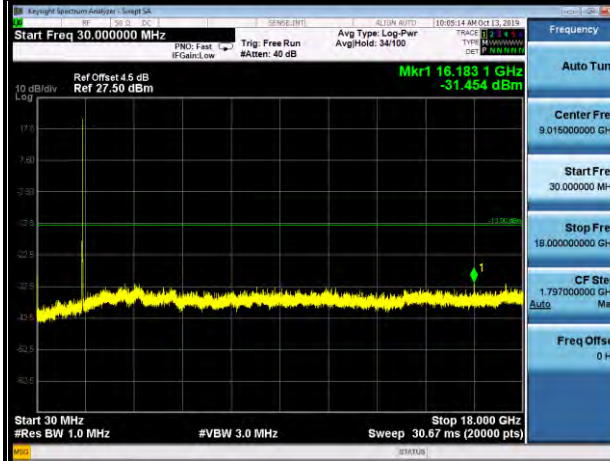


CHANNEL 20175

FREQUENCY RANGE : 30MHz~18GHz

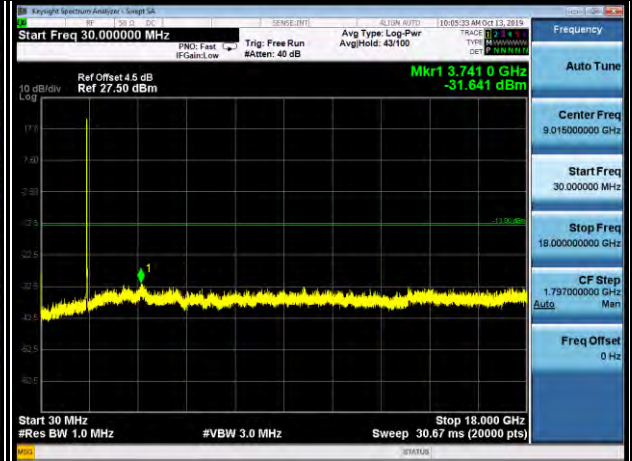

CHANNEL 20350


FREQUENCY RANGE : 30MHz~18GHz

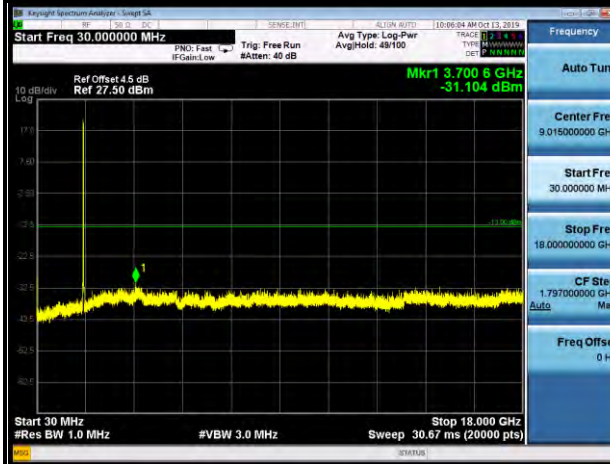



BUREAU VERITAS

Test Report No.: RF190712W002-5

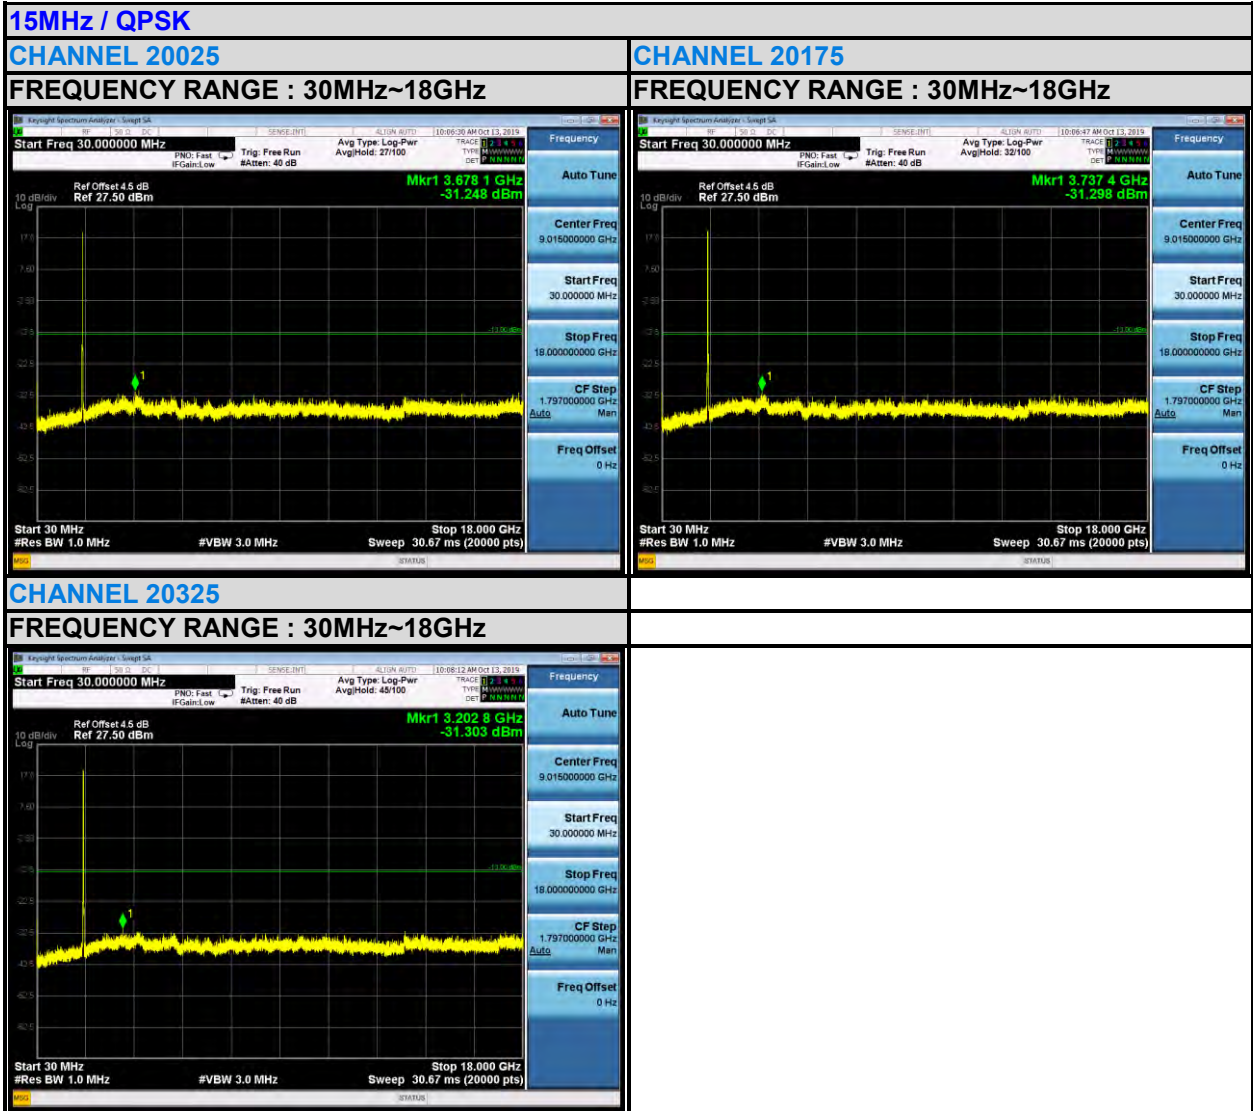




BUREAU VERITAS

Test Report No.: RF190712W002-5

20MHz / QPSK


CHANNEL 20050

FREQUENCY RANGE : 30MHz~18GHz

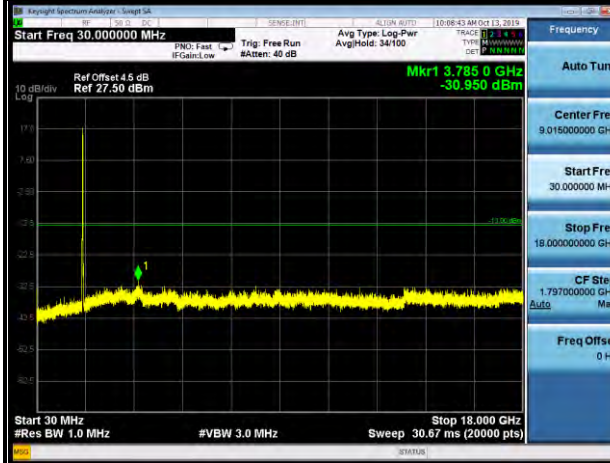


CHANNEL 20175

FREQUENCY RANGE : 30MHz~18GHz

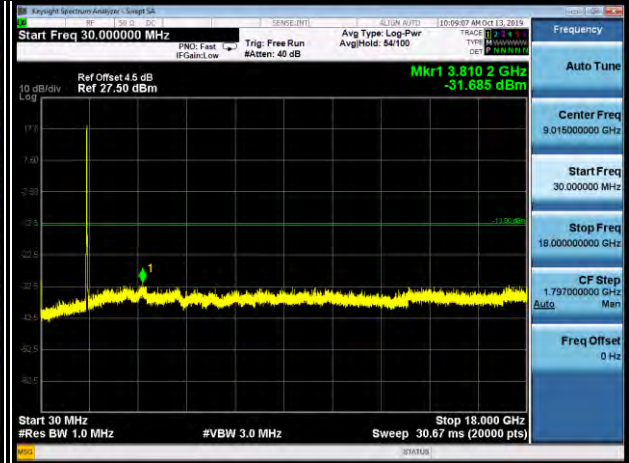

CHANNEL 20300

FREQUENCY RANGE : 30MHz~18GHz

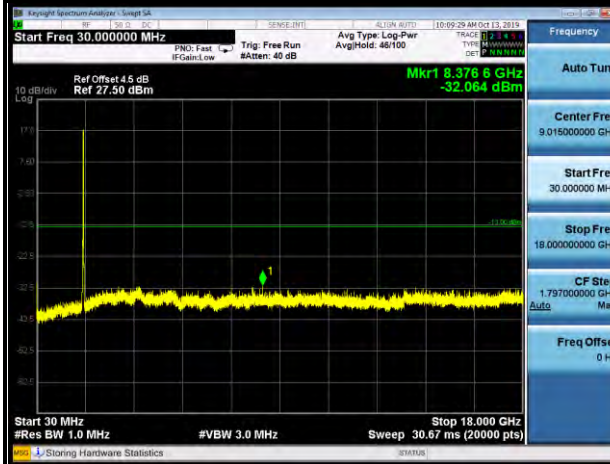



BUREAU VERITAS


Test Report No.: RF190712W002-5

LTE BAND 66

1.4MHz / QPSK


CHANNEL 131979

FREQUENCY RANGE : 30MHz~18GHz

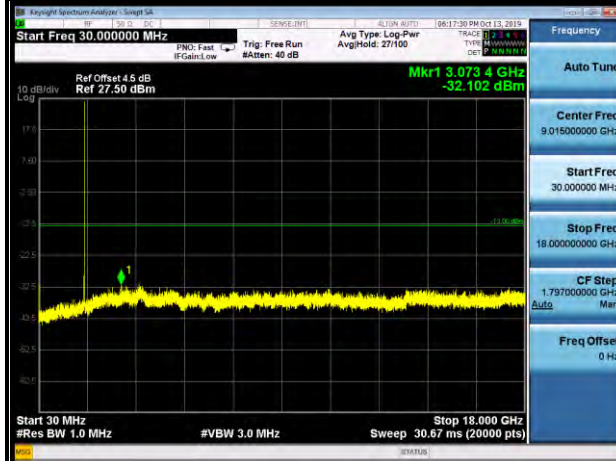



CHANNEL 132322


FREQUENCY RANGE : 30MHz~18GHz

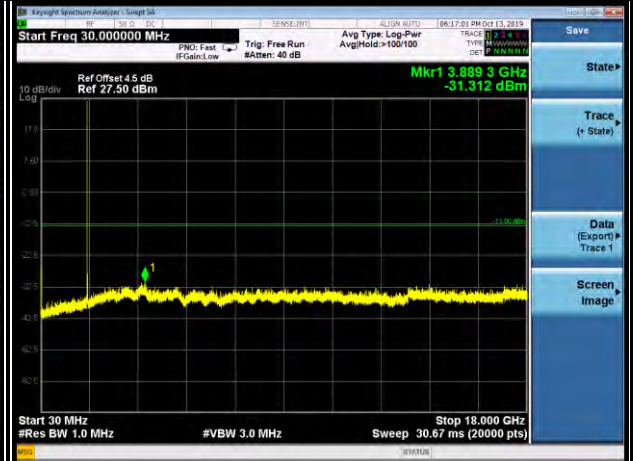

CHANNEL 132665

FREQUENCY RANGE : 30MHz~18GHz

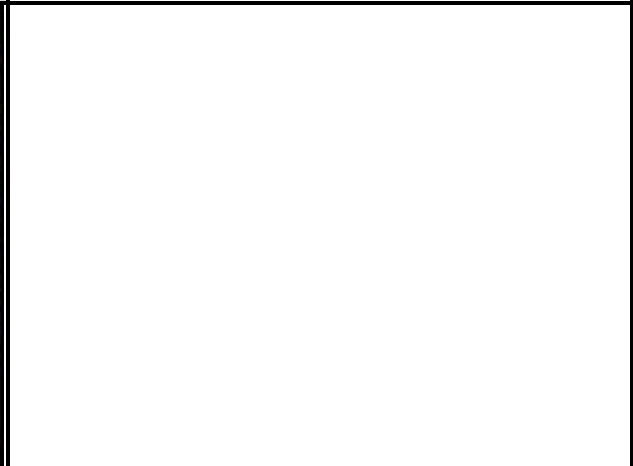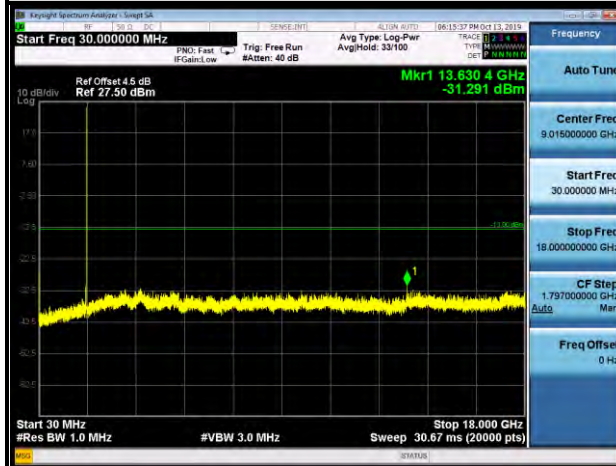


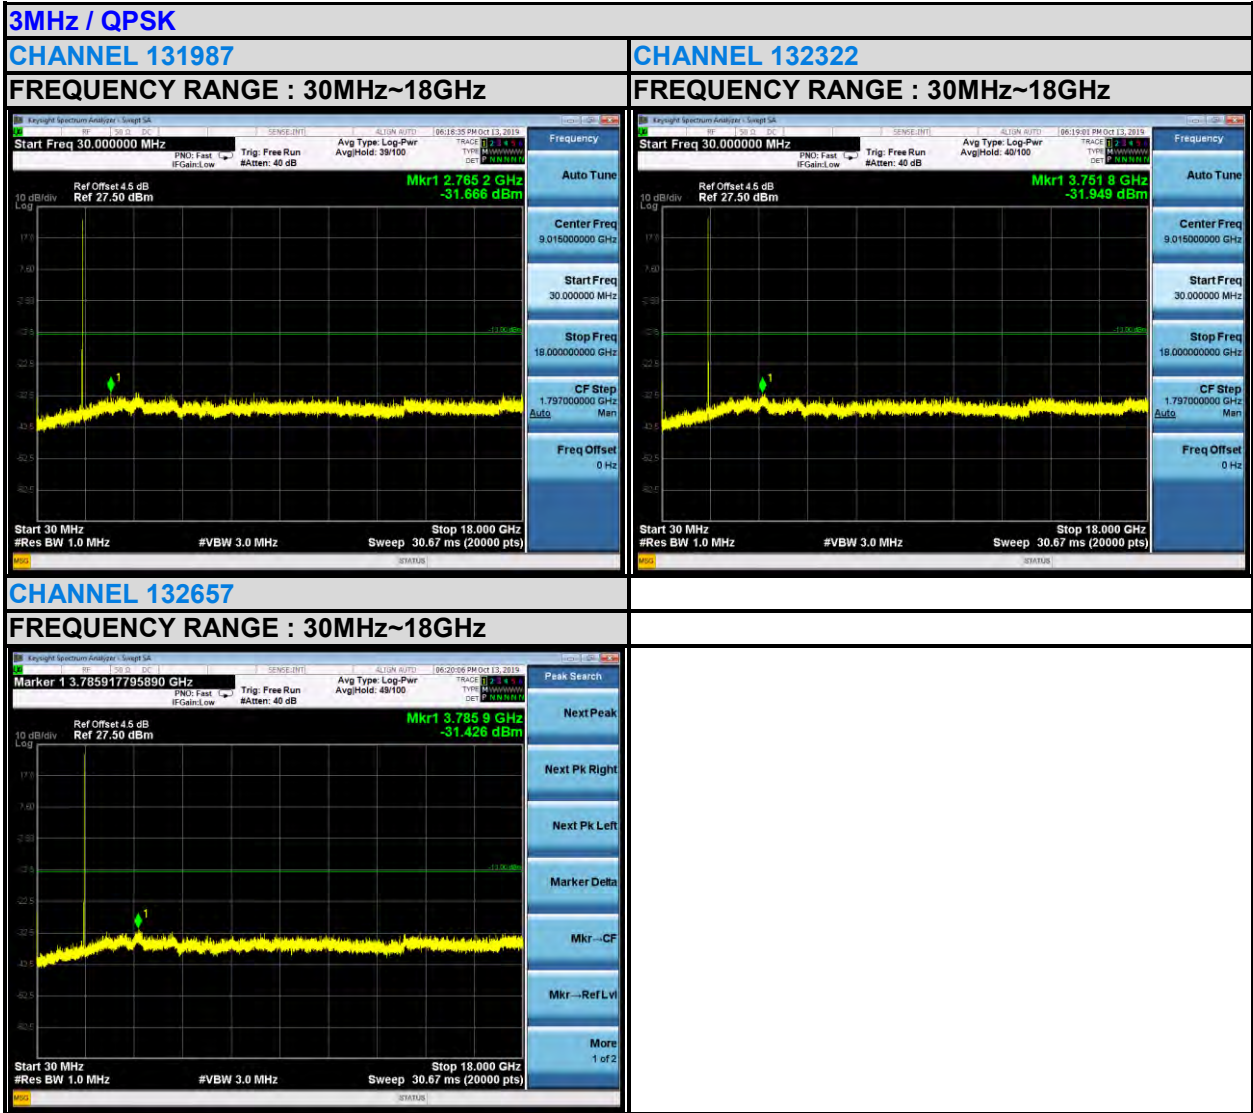



BUREAU VERITAS

Test Report No.: RF190712W002-5

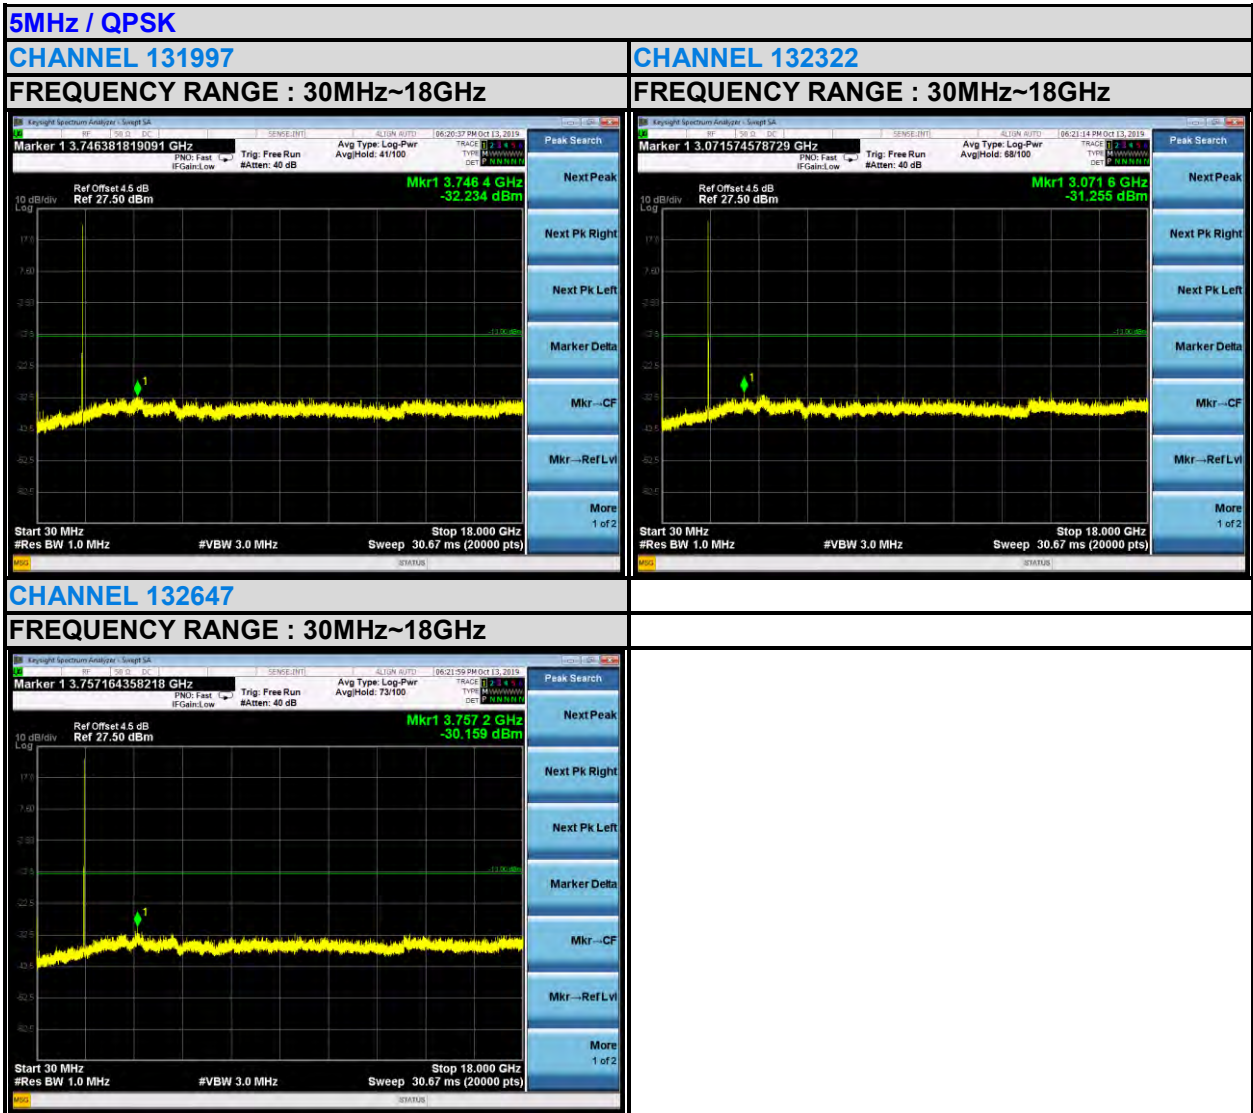




BUREAU VERITAS

Test Report No.: RF190712W002-5

10MHz / QPSK

CHANNEL 132022

FREQUENCY RANGE : 30MHz~18GHz

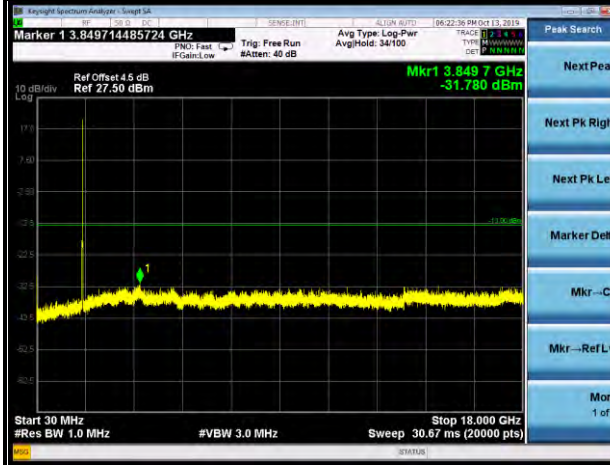


CHANNEL 132322

FREQUENCY RANGE : 30MHz~18GHz



CHANNEL 132622

FREQUENCY RANGE : 30MHz~18GHz

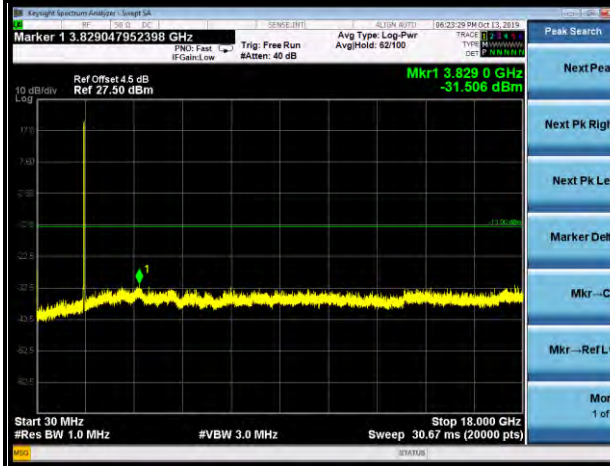




BUREAU VERITAS

Test Report No.: RF190712W002-5

15MHz / QPSK


CHANNEL 132047

FREQUENCY RANGE : 30MHz~18GHz

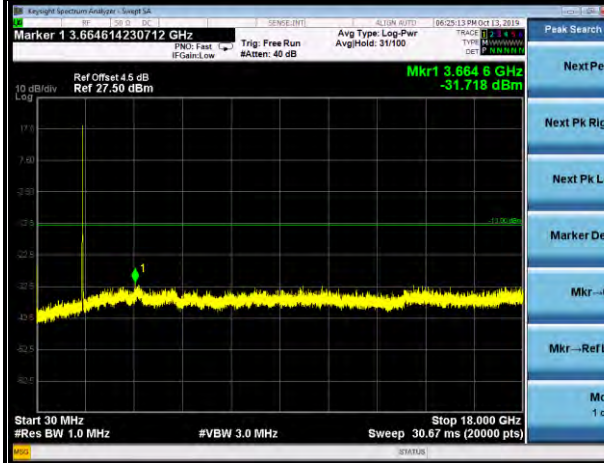


CHANNEL 132322

FREQUENCY RANGE : 30MHz~18GHz

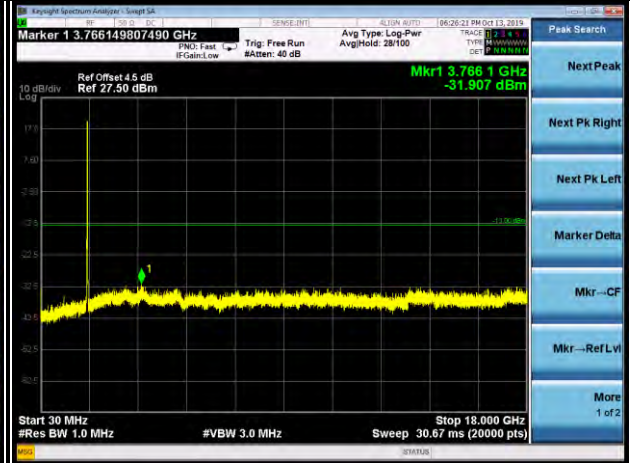

CHANNEL 132597

FREQUENCY RANGE : 30MHz~18GHz

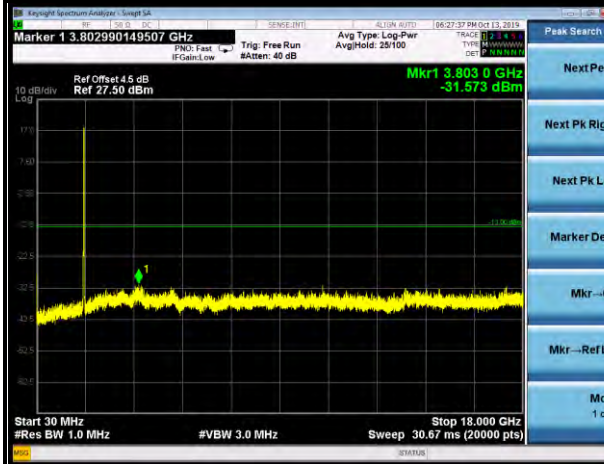




BUREAU VERITAS

Test Report No.: RF190712W002-5

20MHz / QPSK


CHANNEL 132072

FREQUENCY RANGE : 30MHz~18GHz

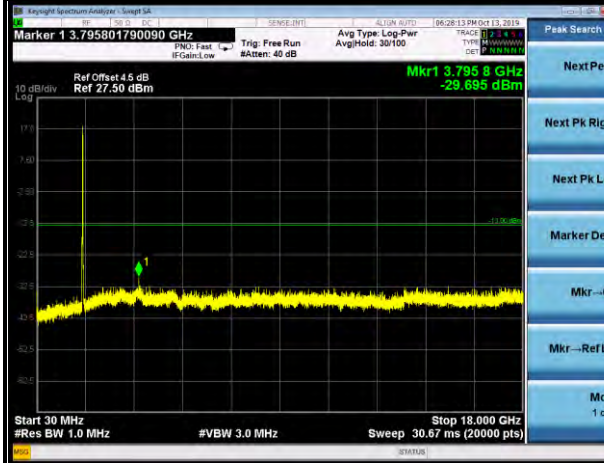


CHANNEL 132322

FREQUENCY RANGE : 30MHz~18GHz

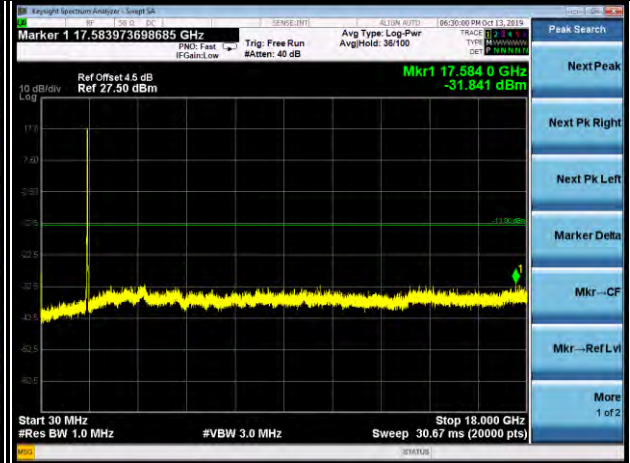

CHANNEL 132572

FREQUENCY RANGE : 30MHz~18GHz

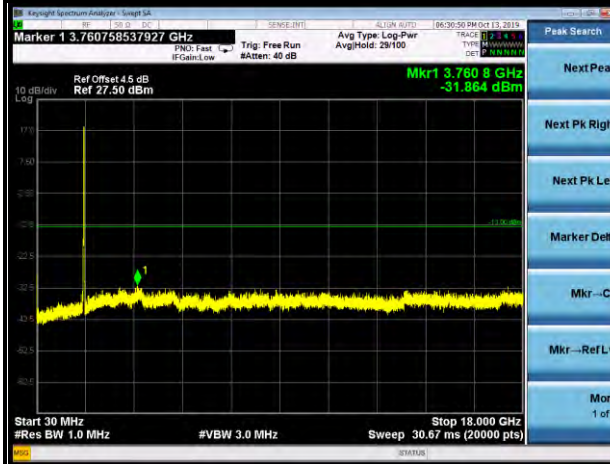



3.7 RADIATED EMISSION MEASUREMENT

3.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

3.7.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.7.3 DEVIATION FROM TEST STANDARD


No deviation

3.7.4 TEST SETUP

< Frequency Range 30MHz~1GHz >

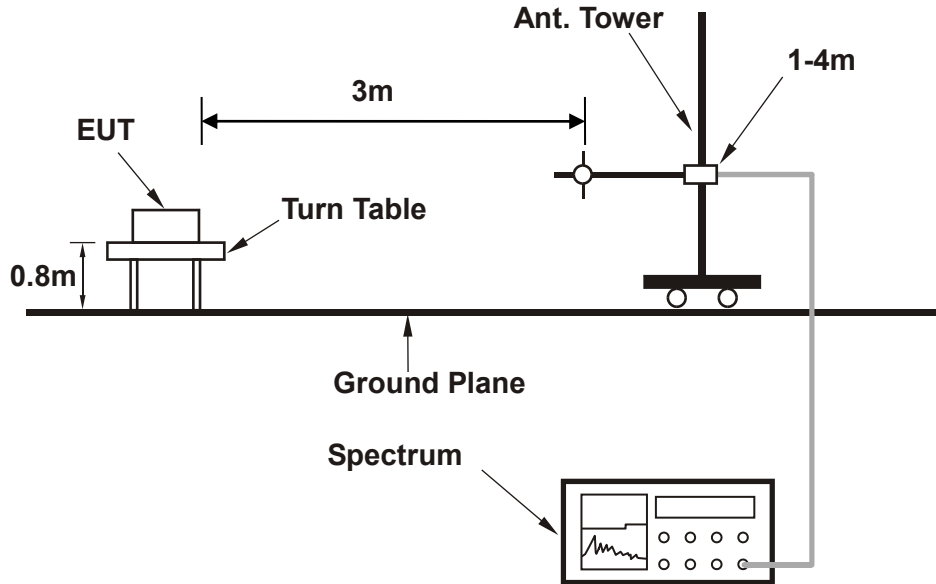

<Frequency Range above 1GHz>

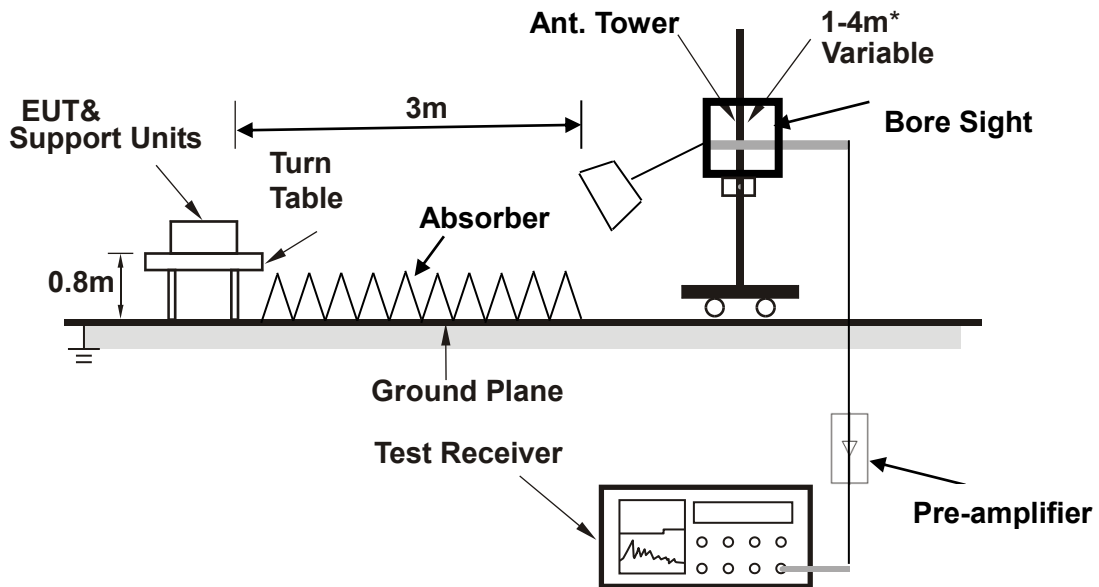

Note: Above 1G is a directional antenna

depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.7.5 TEST RESULTS


BELOW 1GHz WORST-CASE DATA

30 MHz – 1GHz data:

LTE BAND 4

MODE	TX channel 20175	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase	
	MHz	dBm/m	dBm	dBm/m	dB	dB/m			
1	PP	38.460	-37.94	-50.12	-13.00	-24.94	12.18	Peak	Horizontal
2		101.580	-51.83	-40.35	-13.00	-38.83	-11.48	Peak	Horizontal
3		189.210	-42.98	-25.46	-13.00	-29.98	-17.52	Peak	Horizontal
4		241.360	-49.02	-32.58	-13.00	-36.02	-16.44	Peak	Horizontal
5		301.260	-58.95	-45.18	-13.00	-45.95	-13.77	Peak	Horizontal
6		389.520	-46.45	-35.64	-13.00	-33.45	-10.81	Peak	Horizontal

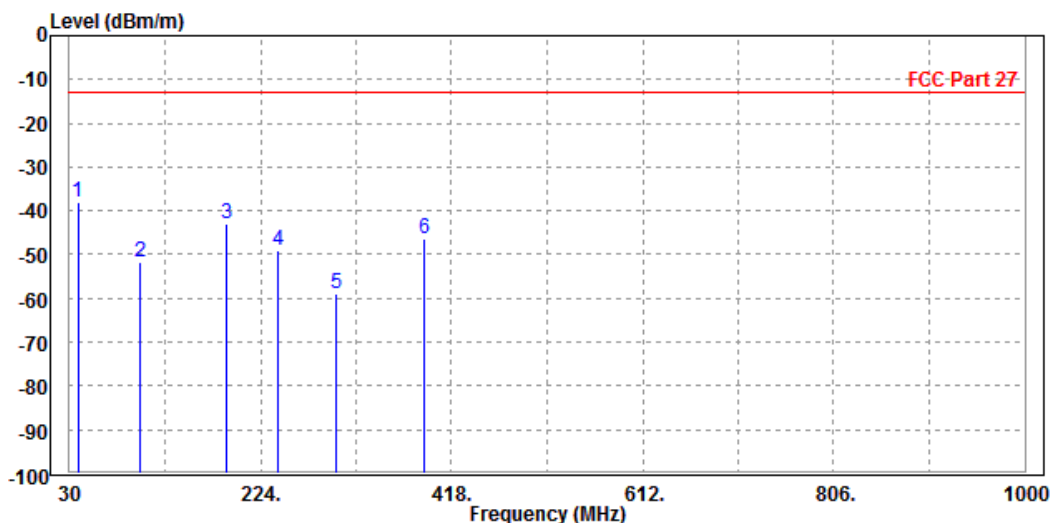




Test Report No.: RF190712W002-5

MODE	TX channel 20175	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase	
	MHz	dBm/m	dBm	dBm/m	dB	dB/m			
1	PP	35.120	-37.60	-36.28	-13.00	-24.60	-1.32	Peak	Vertical
2		123.310	-42.26	-29.67	-13.00	-29.26	-12.59	Peak	Vertical
3		174.560	-62.26	-48.52	-13.00	-49.26	-13.74	Peak	Vertical
4		256.310	-47.17	-35.68	-13.00	-34.17	-11.49	Peak	Vertical
5		385.240	-53.11	-42.12	-13.00	-40.11	-10.99	Peak	Vertical
6		423.650	-50.81	-40.75	-13.00	-37.81	-10.06	Peak	Vertical

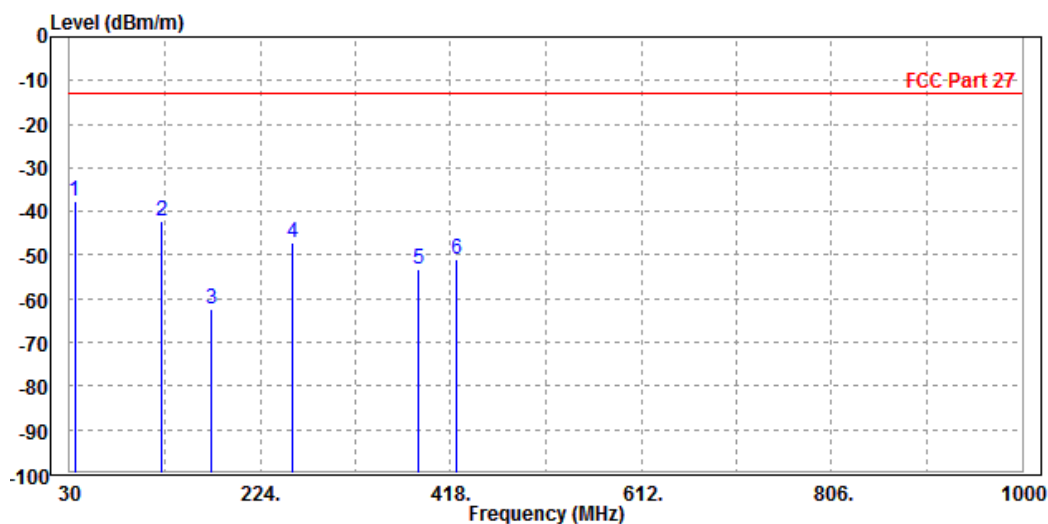



Test Report No.: RF190712W002-5

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-46.70	-55.28	-13.00	-33.70	8.58	Peak	Horizontal
2 PP	5197.500	-43.24	-52.36	-13.00	-30.24	9.12	Peak	Horizontal

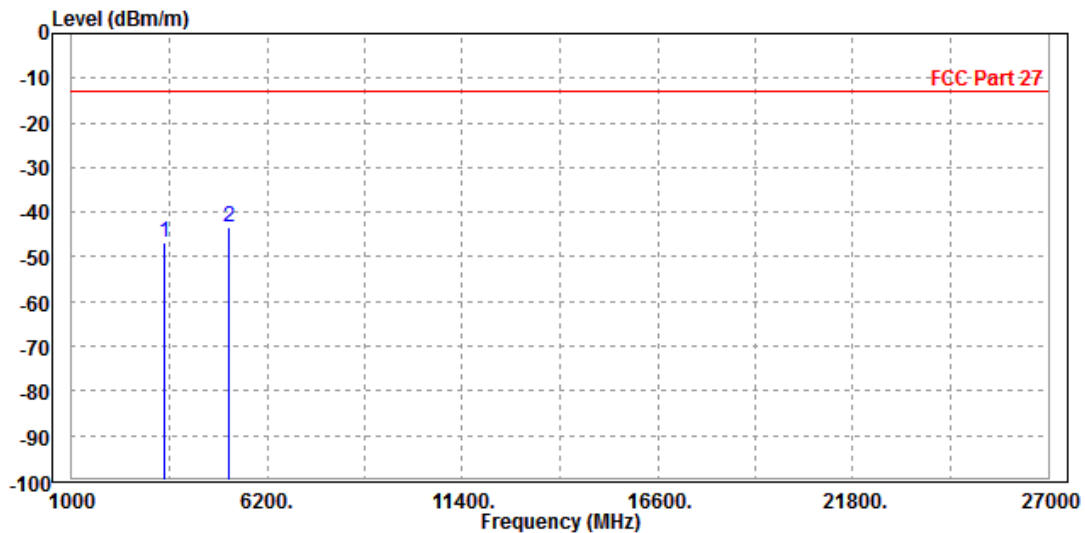




Test Report No.: RF190712W002-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-47.29	-56.45	-13.00	-34.29	9.16	Peak	Vertical
2	PP 5197.500	-43.39	-53.21	-13.00	-30.39	9.82	Peak	Vertical

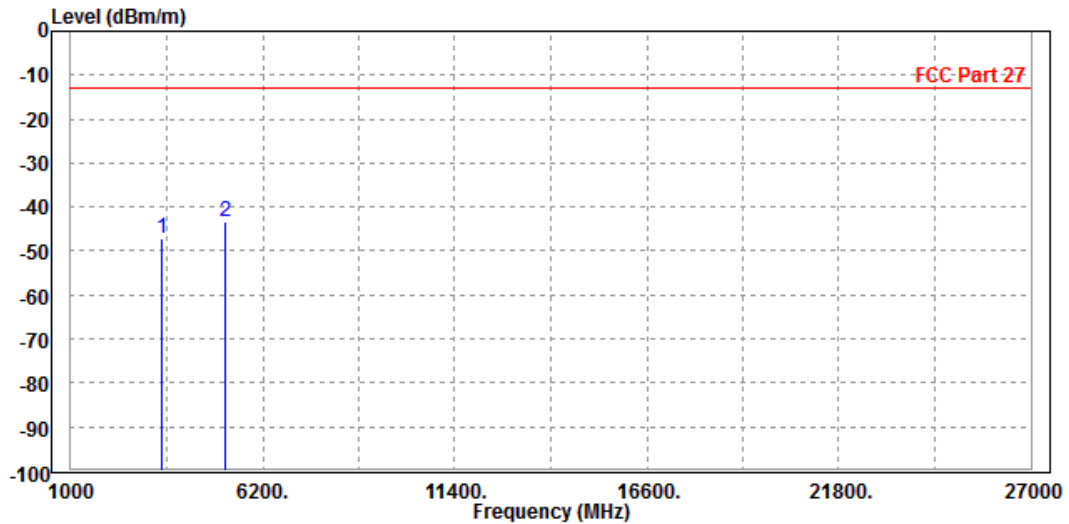




Test Report No.: RF190712W002-5

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-48.84	-57.42	-13.00	-35.84	8.58	Peak	Horizontal
2 PP	5197.500	-44.04	-53.16	-13.00	-31.04	9.12	Peak	Horizontal

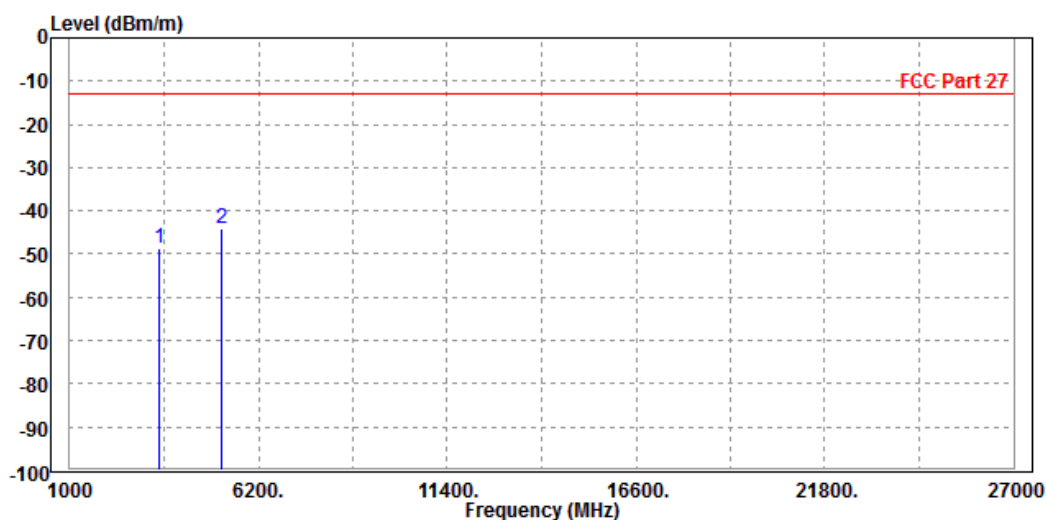




Test Report No.: RF190712W002-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-47.18	-56.34	-13.00	-34.18	9.16	Peak	Vertical
2	PP 5197.500	-42.66	-52.48	-13.00	-29.66	9.82	Peak	Vertical

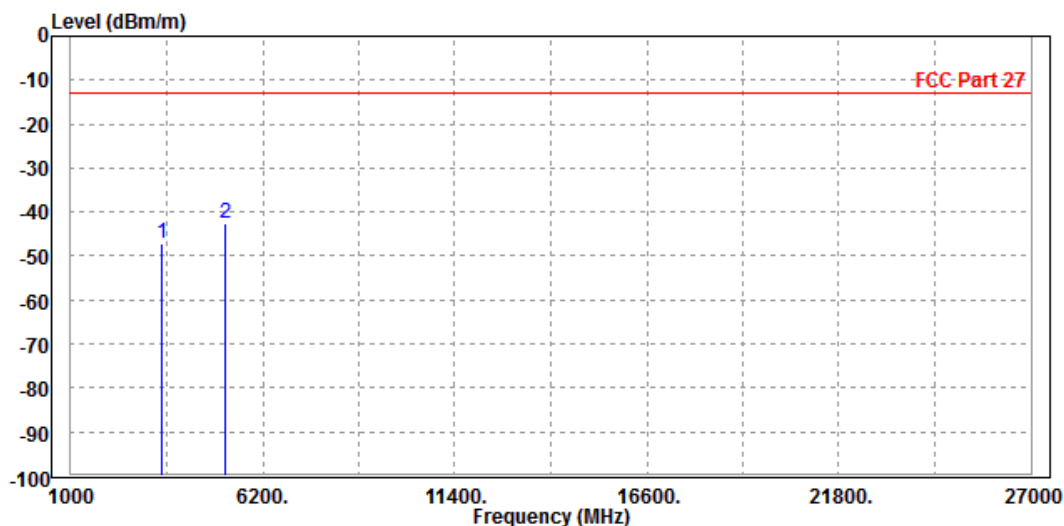




Test Report No.: RF190712W002-5

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-46.65	-55.23	-13.00	-33.65	8.58	Peak	Horizontal
2 PP	5197.500	-43.34	-52.46	-13.00	-30.34	9.12	Peak	Horizontal

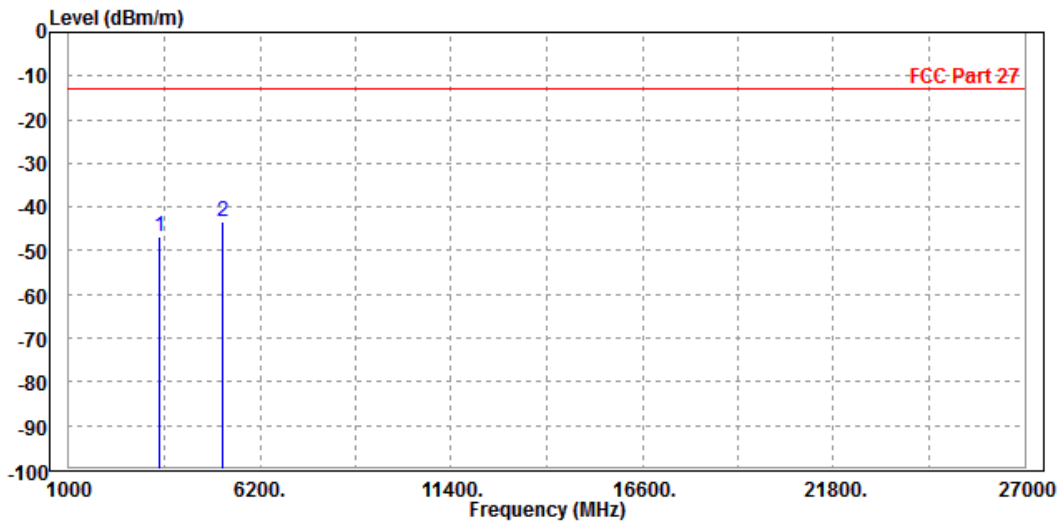




Test Report No.: RF190712W002-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-46.97	-56.13	-13.00	-33.97	9.16	Peak	Vertical
2 PP	5197.500	-42.59	-52.41	-13.00	-29.59	9.82	Peak	Vertical

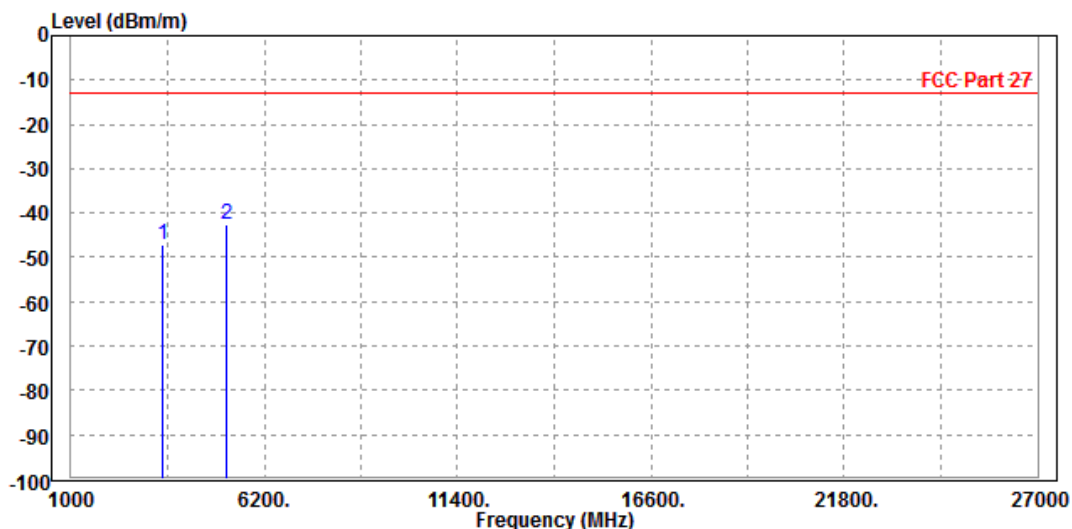



**BUREAU
VERITAS**


Test Report No.: RF190712W002-5

CHANNEL BANDWIDTH: 10MHz / QPSK

CH 20000

MODE	TX channel 20000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3418.000	-46.58	-55.17	-13.00	-33.58	8.59	Peak	Horizontal
2	PP 5145.000	-43.90	-52.86	-13.00	-30.90	8.96	Peak	Horizontal

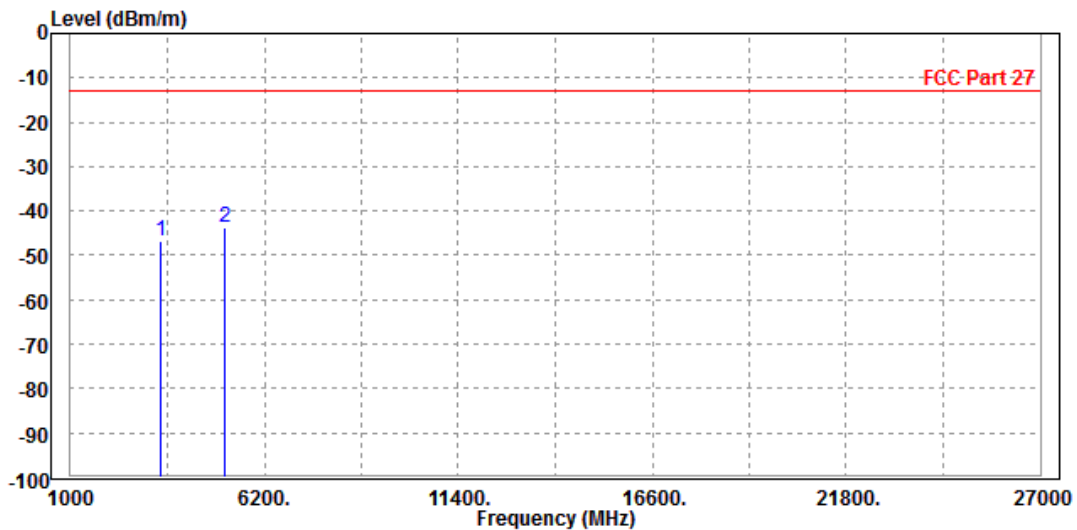




Test Report No.: RF190712W002-5

MODE	TX channel 20000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3418.000	-45.56	-54.67	-13.00	-32.56	9.11	Peak	Vertical
2	PP 5145.000	-41.37	-51.21	-13.00	-28.37	9.84	Peak	Vertical

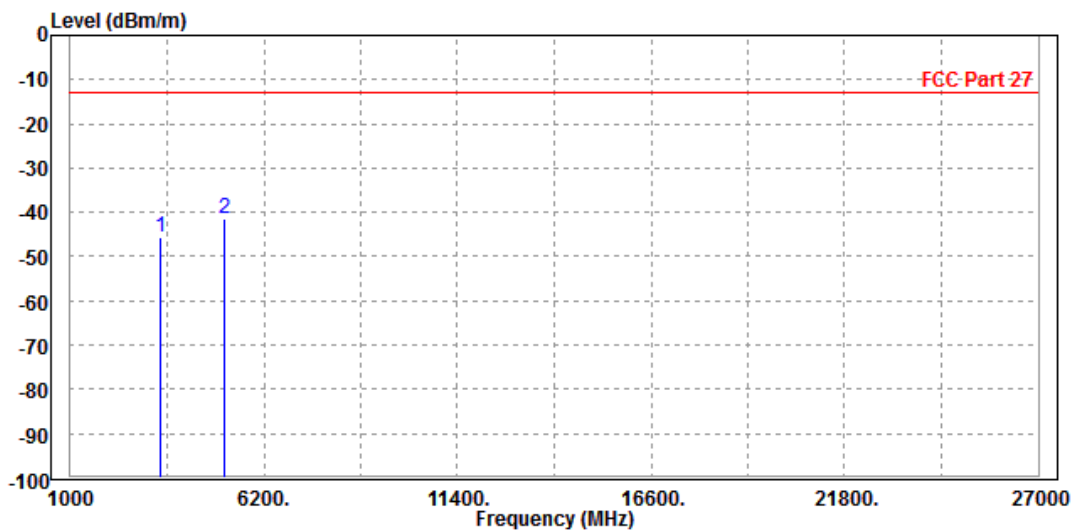




**BUREAU
VERITAS**

Test Report No.: RF190712W002-5

CH 20175

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-46.78	-55.36	-13.00	-33.78	8.58	Peak	Horizontal
2 PP	5197.500	-43.00	-52.12	-13.00	-30.00	9.12	Peak	Horizontal

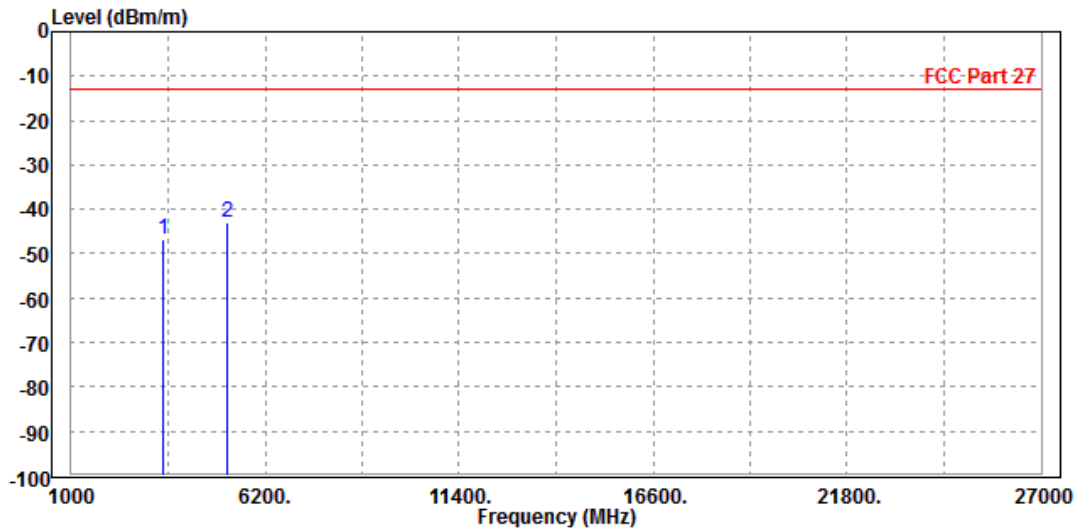




Test Report No.: RF190712W002-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-47.29	-56.45	-13.00	-34.29	9.16	Peak	Vertical
2 PP	5197.500	-40.52	-50.34	-13.00	-27.52	9.82	Peak	Vertical

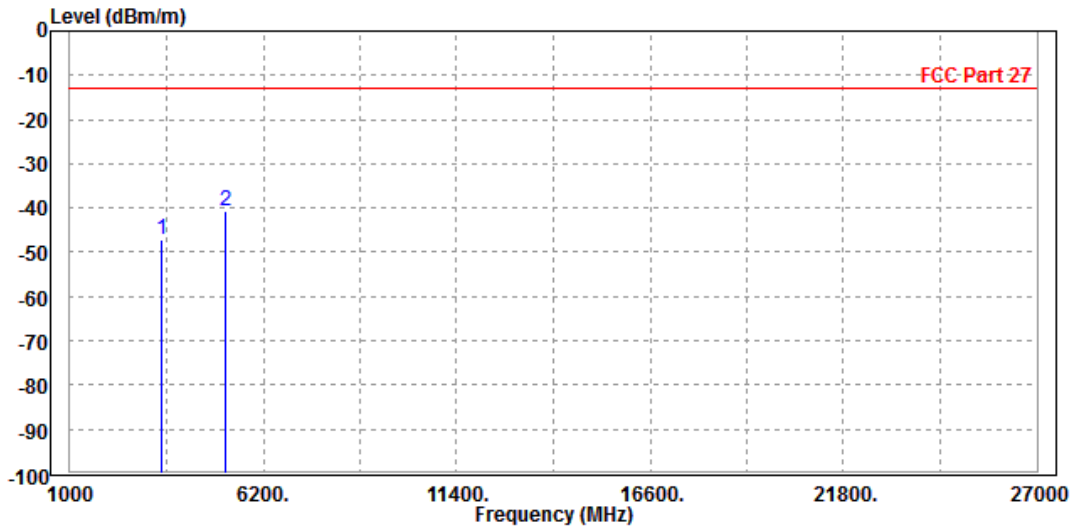




**BUREAU
VERITAS**

Test Report No.: RF190712W002-5

CH 20350

MODE	TX channel 20350	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-46.12	-54.69	-13.00	-33.12	8.57	Peak	Horizontal
2	PP 5250.000	-43.09	-52.36	-13.00	-30.09	9.27	Peak	Horizontal

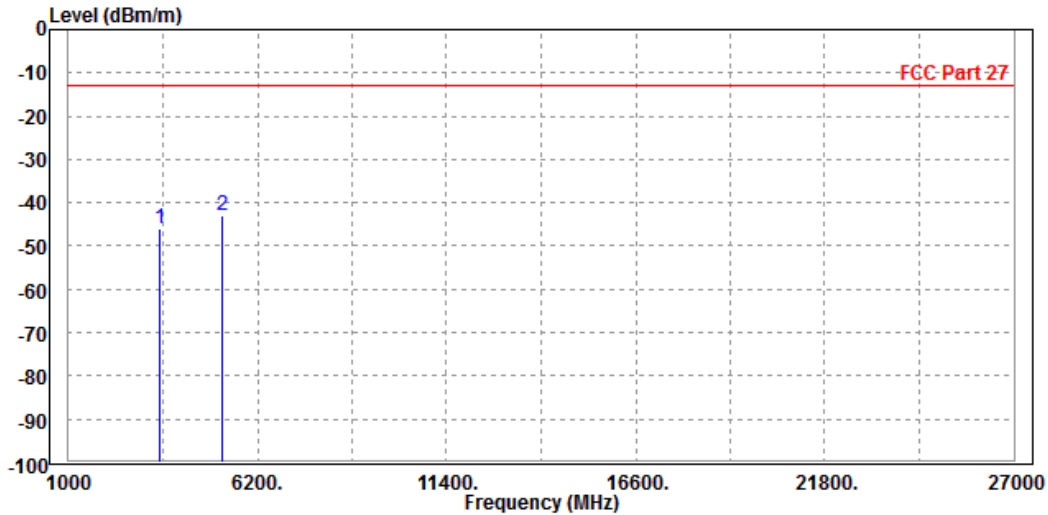




Test Report No.: RF190712W002-5

MODE	TX channel 20350	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-46.13	-55.32	-13.00	-33.13	9.19	Peak	Vertical
2 PP	5250.000	-42.09	-51.89	-13.00	-29.09	9.80	Peak	Vertical

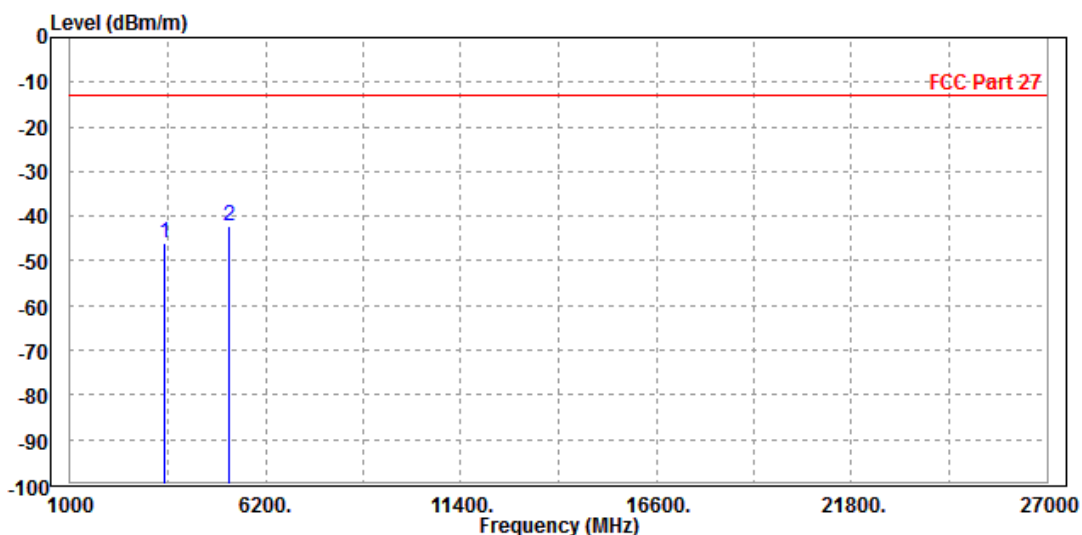




BUREAU VERITAS

Test Report No.: RF190712W002-5

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-47.79	-56.37	-13.00	-34.79	8.58	Peak	Horizontal
2 PP	5197.500	-43.33	-52.45	-13.00	-30.33	9.12	Peak	Horizontal

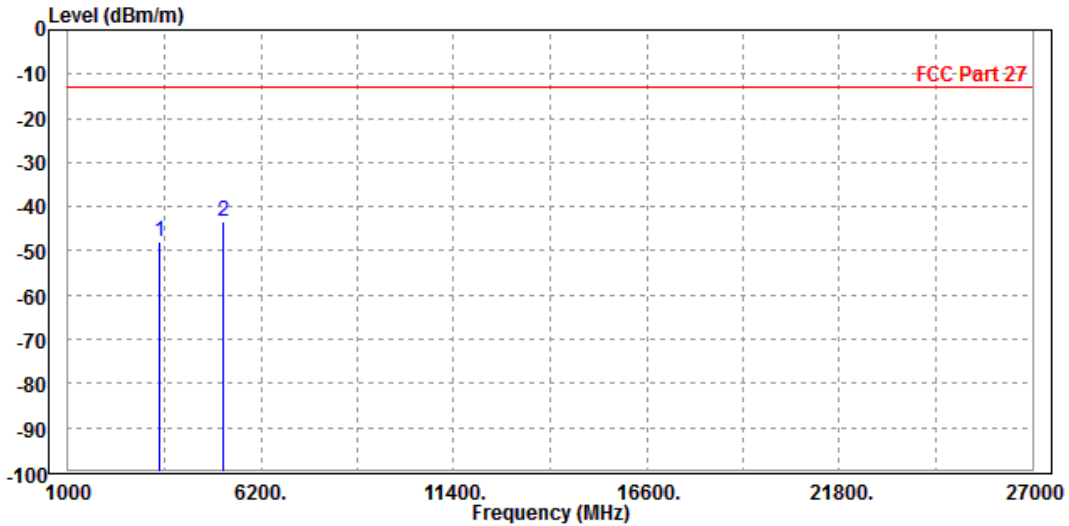




Test Report No.: RF190712W002-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-46.62	-55.78	-13.00	-33.62	9.16	Peak	Vertical
2 PP	5197.500	-43.30	-53.12	-13.00	-30.30	9.82	Peak	Vertical

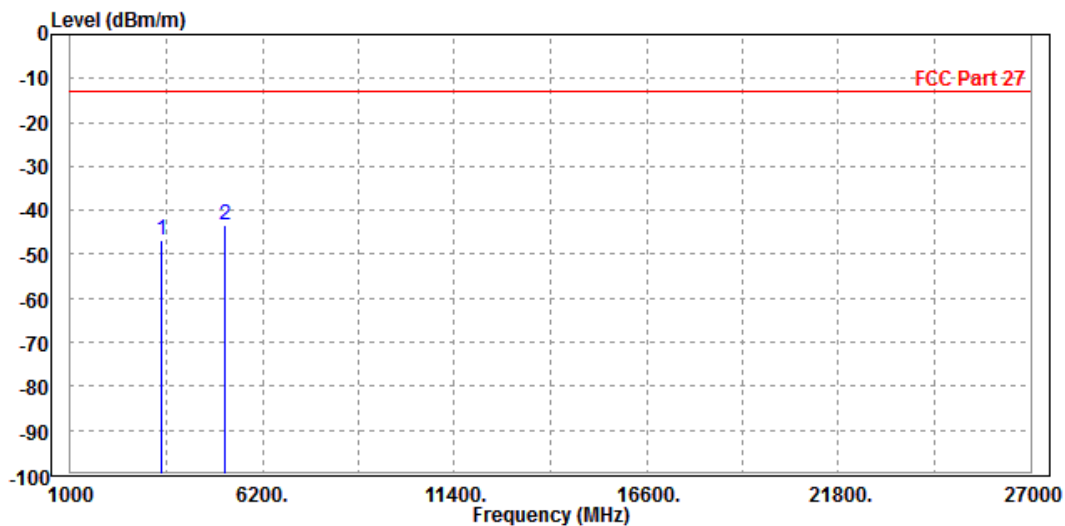




Test Report No.: RF190712W002-5

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-46.84	-55.42	-13.00	-33.84	8.58	Peak	Horizontal
2 PP	5197.500	-43.73	-52.85	-13.00	-30.73	9.12	Peak	Horizontal

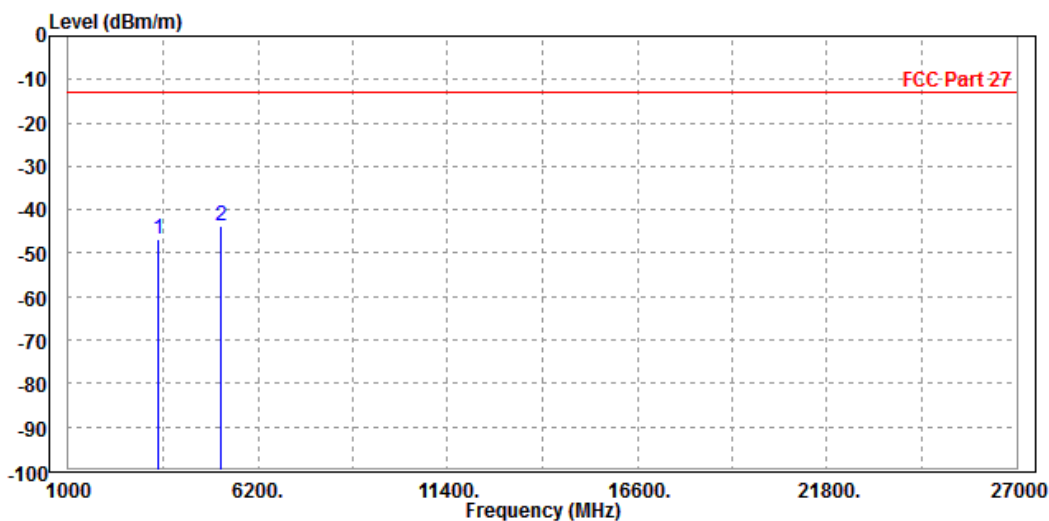




Test Report No.: RF190712W002-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-47.18	-56.34	-13.00	-34.18	9.16	Peak	Vertical
2	PP 5197.500	-43.47	-53.29	-13.00	-30.47	9.82	Peak	Vertical

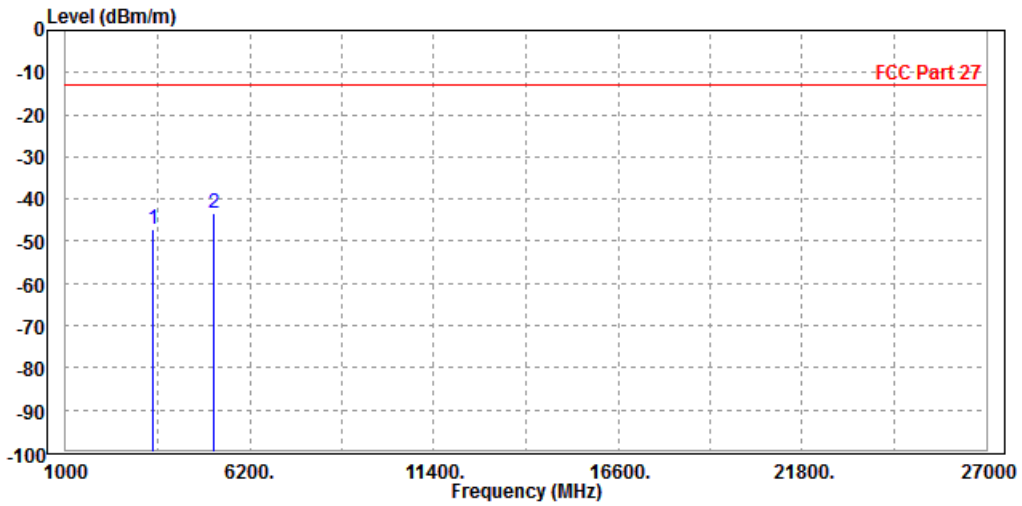



Test Report No.: RF190712W002-5


LTE BAND 66

CHANNEL BANDWIDTH: 1.4MHz / QPSK

CH 131979

MODE	TX channel 131979	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3421.400	-51.77	-53.63	-13.00	-38.77	1.86	Peak	Horizontal
2 PP	5132.100	-46.82	-55.35	-13.00	-33.82	8.53	Peak	Horizontal

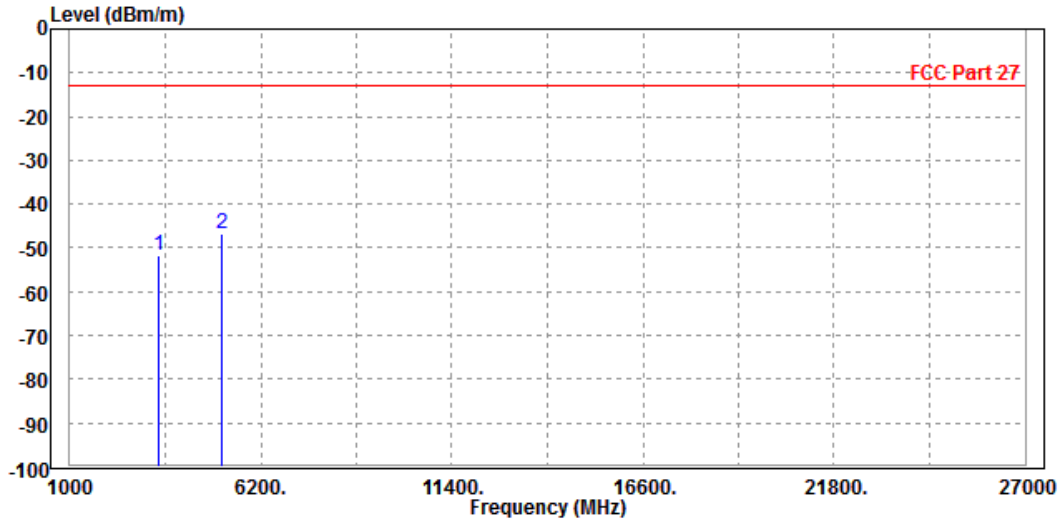




Test Report No.: RF190712W002-5

MODE	TX channel 131979	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3421.400	-51.74	-54.21	-13.00	-38.74	2.47	Peak	Vertical
2 PP	5132.100	-49.37	-57.36	-13.00	-36.37	7.99	Peak	Vertical

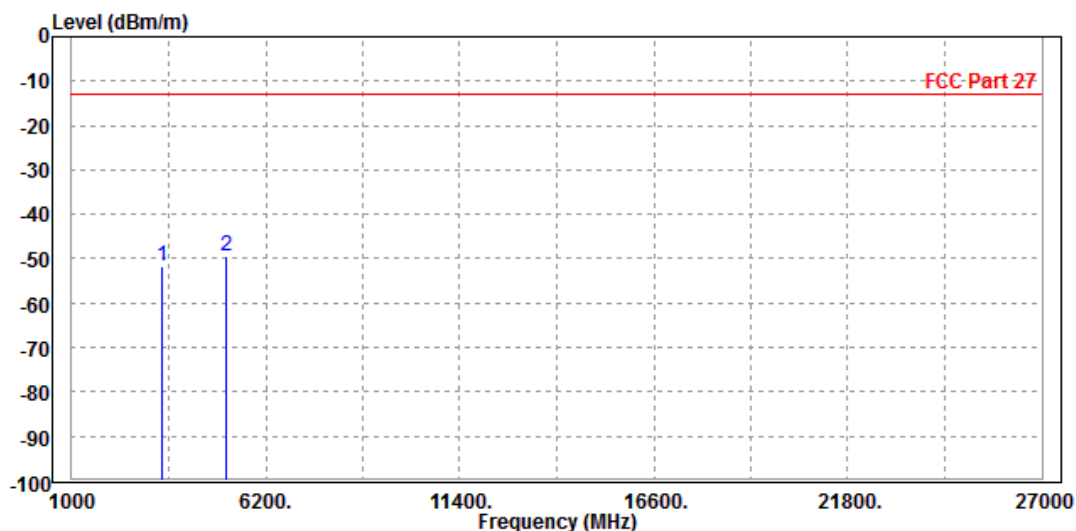




**BUREAU
VERITAS**

Test Report No.: RF190712W002-5

CH 132322

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-49.91	-52.18	-13.00	-36.91	2.27	Peak	Horizontal
2 PP	5265.000	-46.86	-55.55	-13.00	-33.86	8.69	Peak	Horizontal

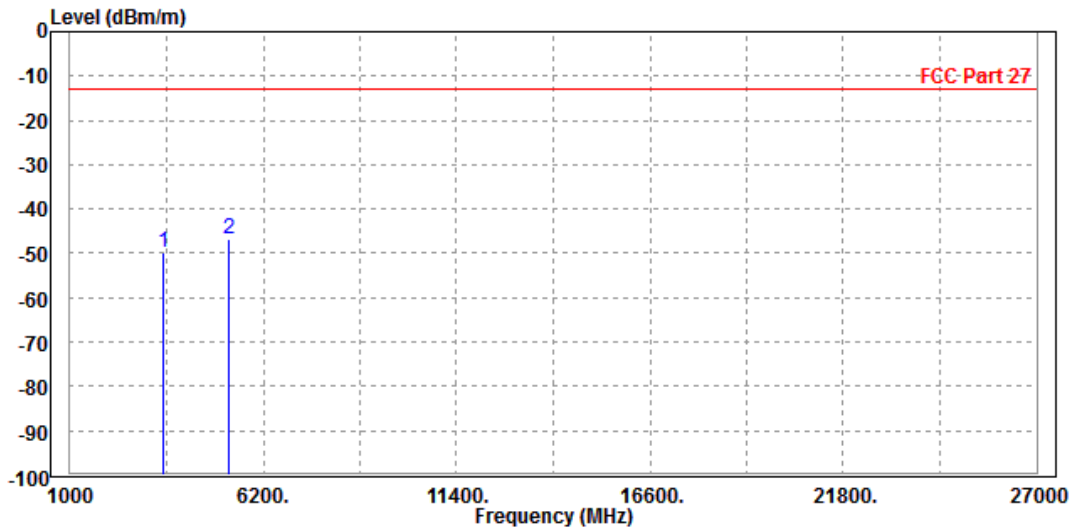




Test Report No.: RF190712W002-5

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-50.61	-53.29	-13.00	-37.61	2.68	Peak	Vertical
2	PP 5265.000	-47.33	-55.31	-13.00	-34.33	7.98	Peak	Vertical

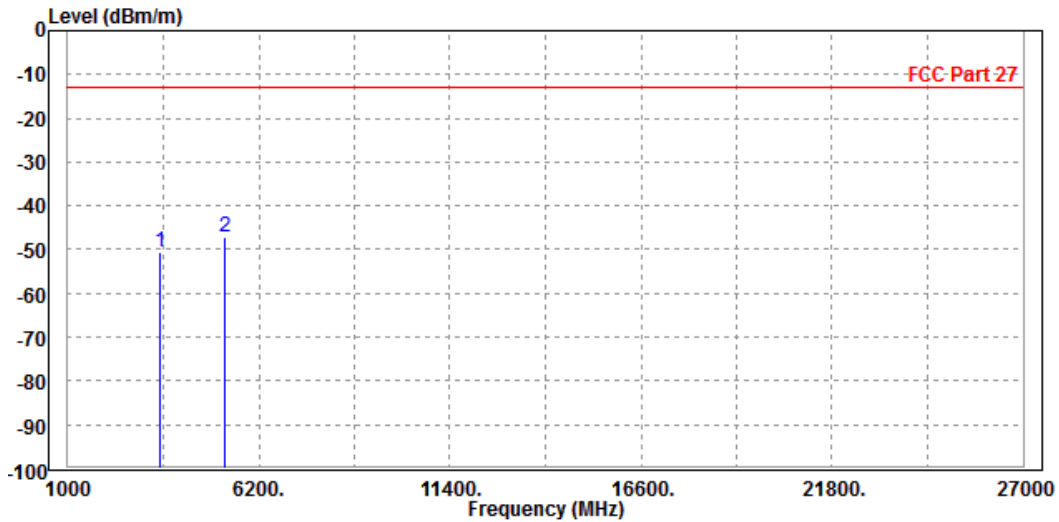




**BUREAU
VERITAS**

Test Report No.: RF190712W002-5

CH 132665

MODE	TX channel 132665	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3558.600	-51.25	-53.69	-13.00	-38.25	2.44	Peak	Horizontal
2	PP 5337.900	-47.65	-56.42	-13.00	-34.65	8.77	Peak	Horizontal

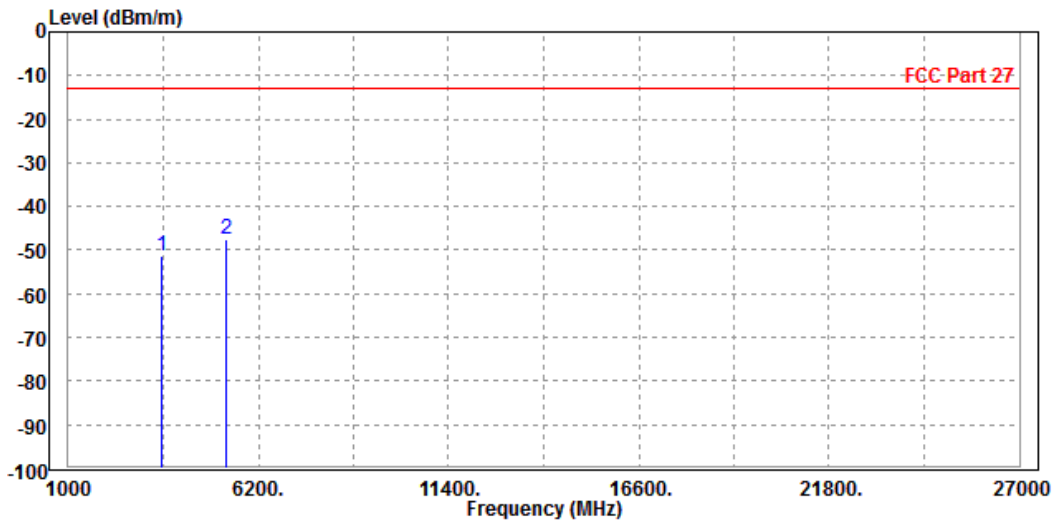




Test Report No.: RF190712W002-5

MODE	TX channel 132665	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3558.600	-49.48	-52.34	-13.00	-36.48	2.86	Peak	Vertical
2	PP 5337.900	-48.30	-56.28	-13.00	-35.30	7.98	Peak	Vertical

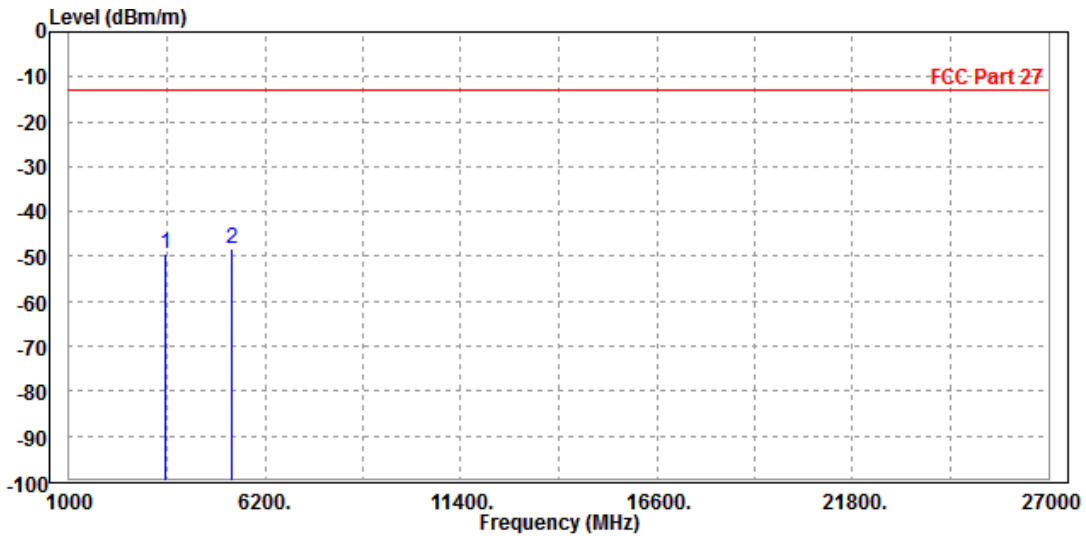




Test Report No.: RF190712W002-5

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-53.40	-55.67	-13.00	-40.40	2.27	Peak	Horizontal
2 PP	5265.000	-49.22	-57.91	-13.00	-36.22	8.69	Peak	Horizontal

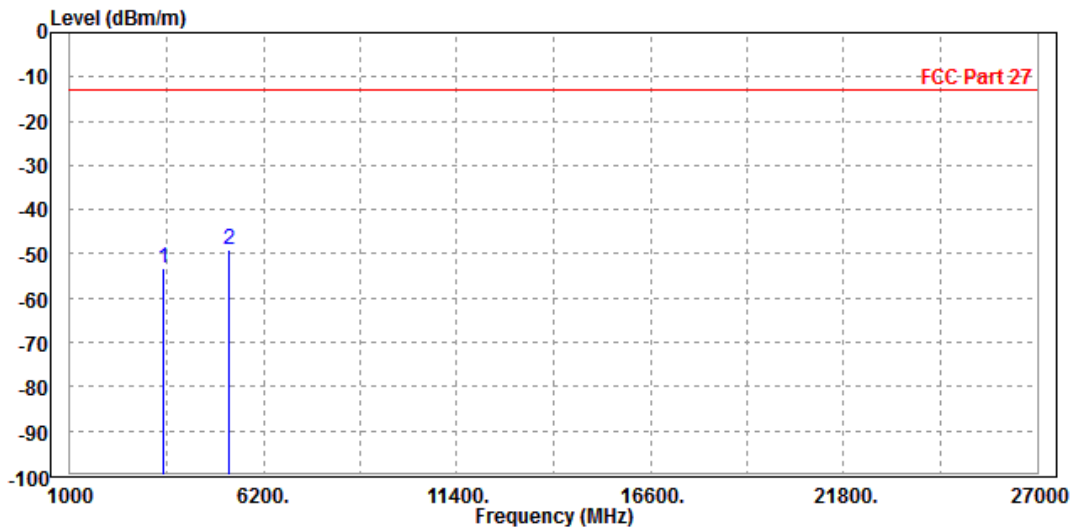




Test Report No.: RF190712W002-5

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-53.85	-56.53	-13.00	-40.85	2.68	Peak	Vertical
2	PP 5265.000	-50.74	-58.72	-13.00	-37.74	7.98	Peak	Vertical

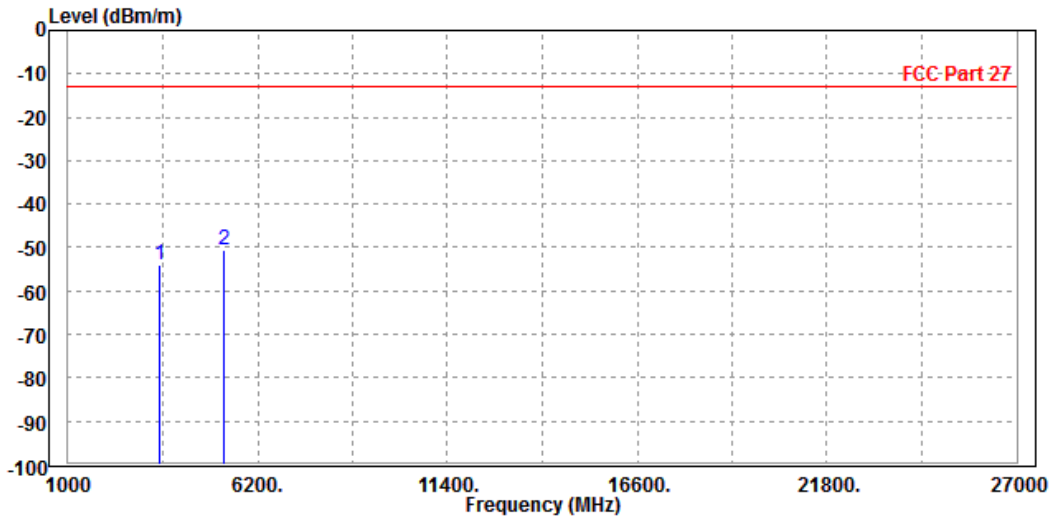




BUREAU VERITAS

Test Report No.: RF190712W002-5

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-53.11	-55.38	-13.00	-40.11	2.27	Peak	Horizontal
2 PP	5265.000	-48.56	-57.25	-13.00	-35.56	8.69	Peak	Horizontal

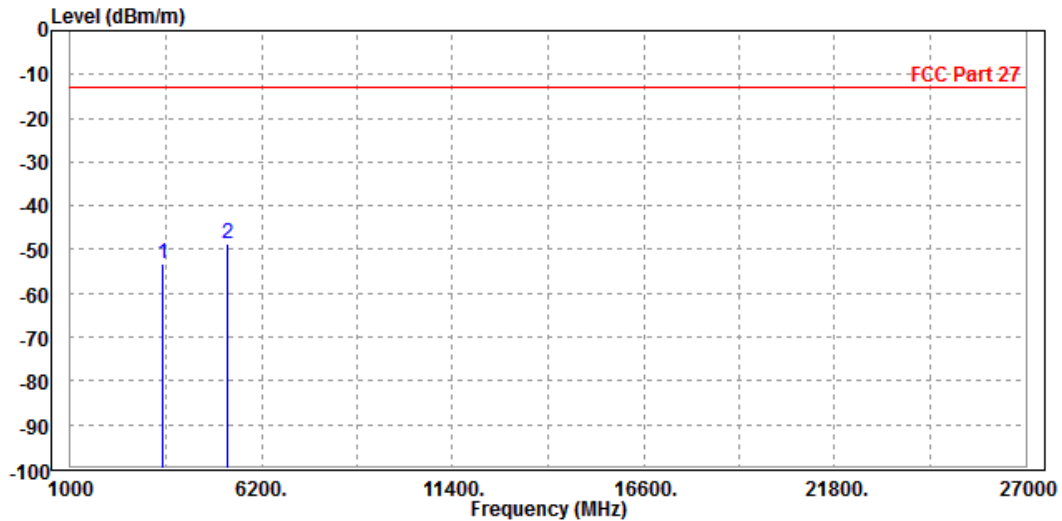




Test Report No.: RF190712W002-5

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-52.55	-55.23	-13.00	-39.55	2.68	Peak	Vertical
2 PP	5265.000	-49.70	-57.68	-13.00	-36.70	7.98	Peak	Vertical

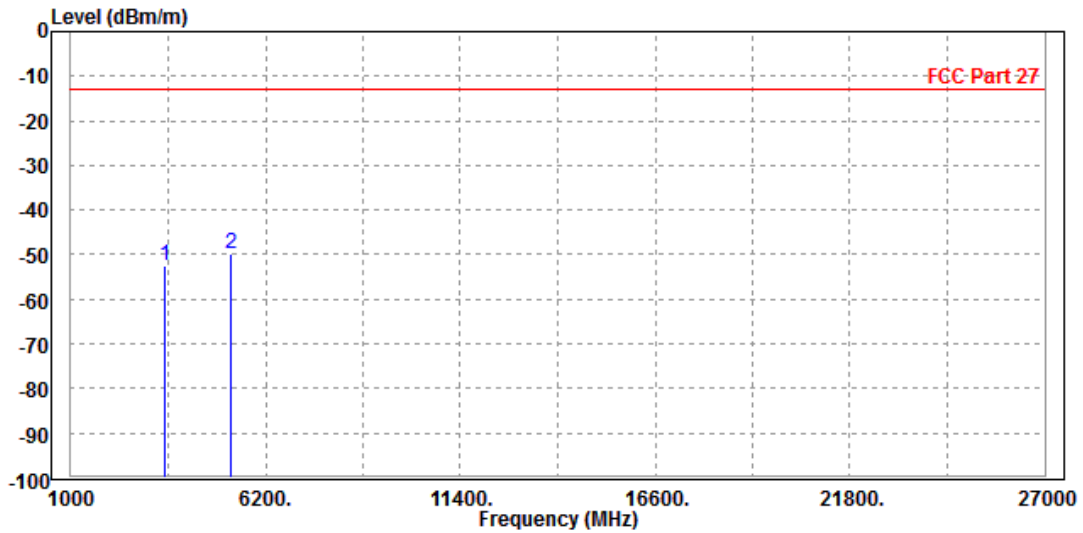




BUREAU VERITAS

Test Report No.: RF190712W002-5

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-52.01	-54.28	-13.00	-39.01	2.27	Peak	Horizontal
2 PP	5265.000	-48.72	-57.41	-13.00	-35.72	8.69	Peak	Horizontal

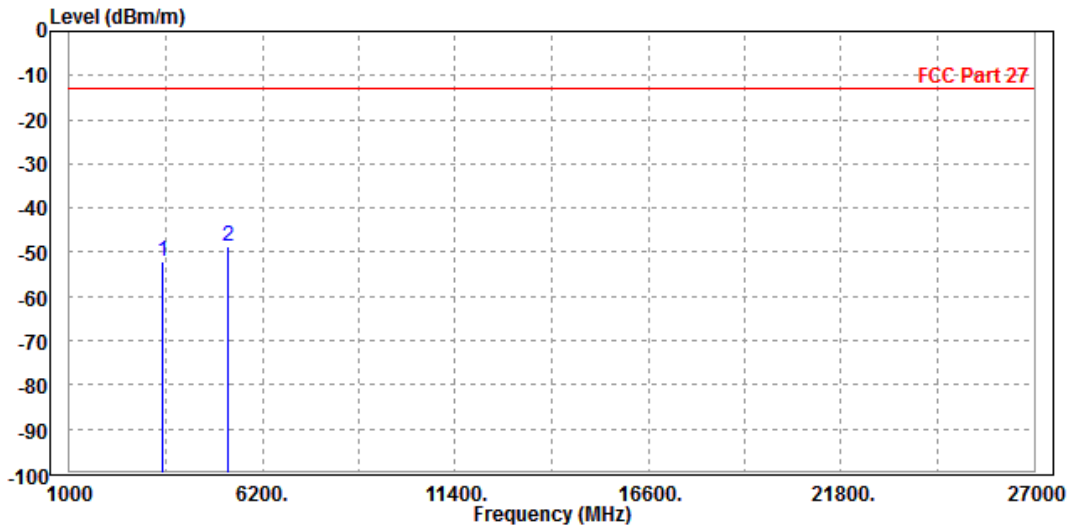




Test Report No.: RF190712W002-5

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-51.68	-54.36	-13.00	-38.68	2.68	Peak	Vertical
2	PP 5265.000	-48.23	-56.21	-13.00	-35.23	7.98	Peak	Vertical

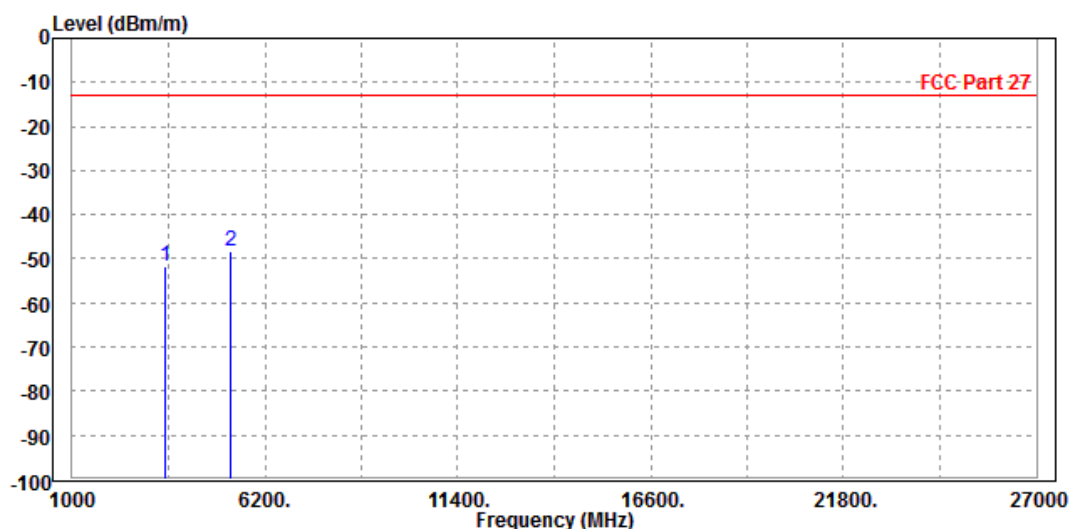




Test Report No.: RF190712W002-5

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-53.00	-55.27	-13.00	-40.00	2.27	Peak	Horizontal
2 PP	5265.000	-49.20	-57.89	-13.00	-36.20	8.69	Peak	Horizontal

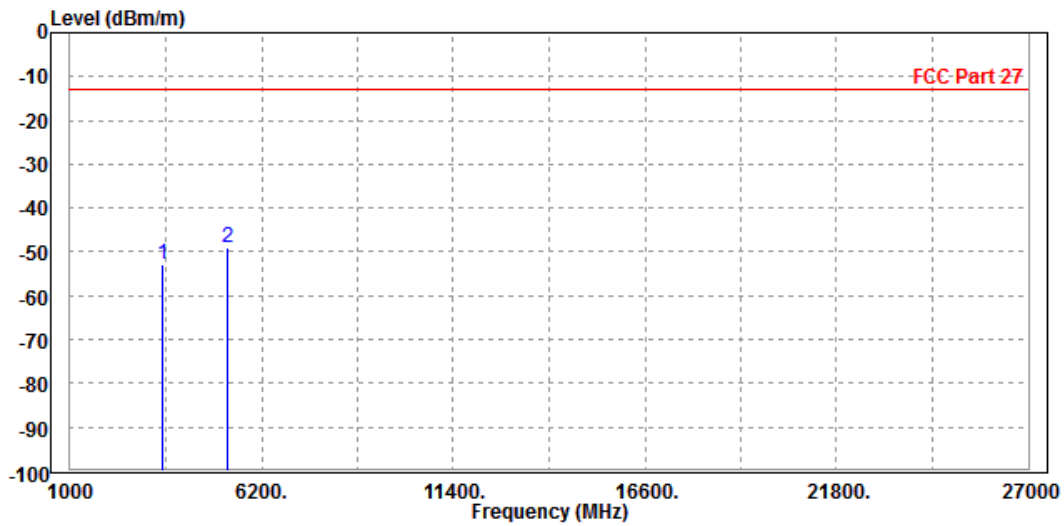




Test Report No.: RF190712W002-5

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-53.94	-56.62	-13.00	-40.94	2.68	Peak	Vertical
2	PP 5265.000	-50.73	-58.71	-13.00	-37.73	7.98	Peak	Vertical

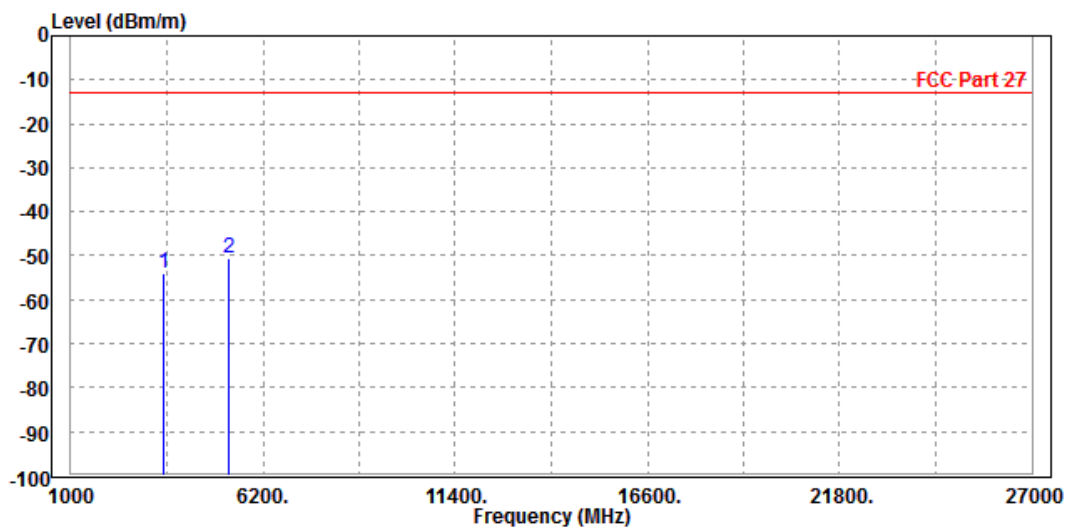




Test Report No.: RF190712W002-5

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-53.99	-56.26	-13.00	-40.99	2.27	Peak	Horizontal
2 PP	5265.000	-48.79	-57.48	-13.00	-35.79	8.69	Peak	Horizontal

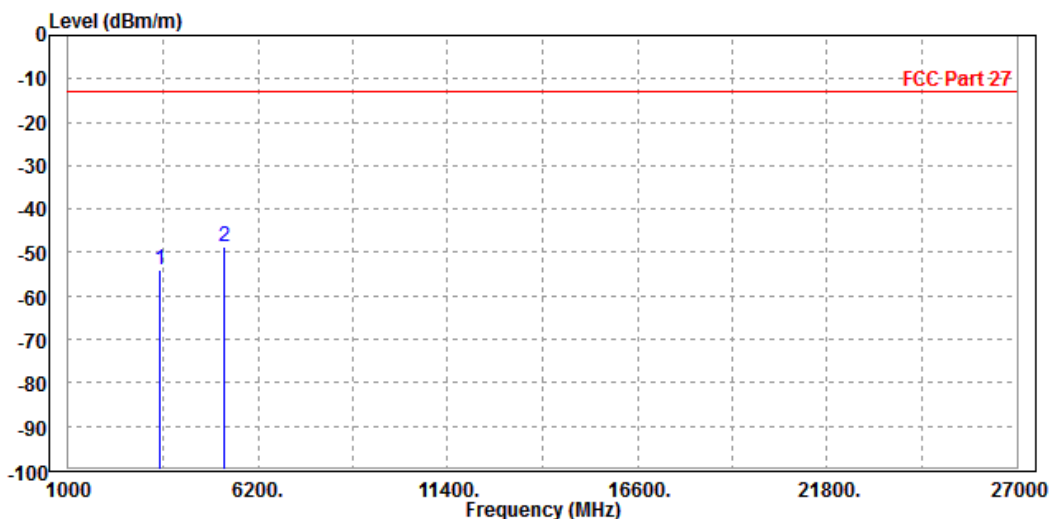




Test Report No.: RF190712W002-5

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 12V from adapter
TESTED BY	Star Le		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3522.000	-53.14	-55.82	-13.00	-40.14	2.68	Peak	Vertical
2 PP	5265.000	-49.47	-57.45	-13.00	-36.47	7.98	Peak	Vertical

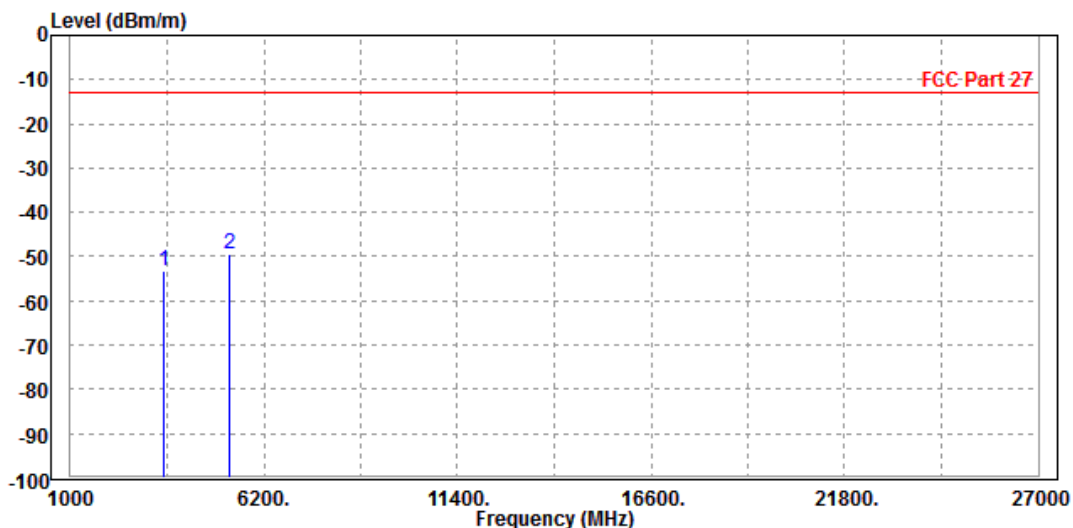



Test Report No.: RF190712W002-5

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: RF190712W002-5

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---