

FCC Test Report (PART 24)

Report No.: RF160517W001-4

FCC ID: ZC4L610

Test Model: Ilium L610

Received Date: May 17, 2016

Test Date: May 18, 2016 ~ Jun. 11, 2016

Issued Date: Jun. 12, 2016

Applicant: Corporativo Lanix S.A. de C.V.

Address: Carretera Internacional Hermosillo-Nogales Km 8.5, Hermosillo
Sonora, Mexico

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd.,
Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Cau Vil., Lin Kou Dist., New Taipei
City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang,
Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

TABLE OF CONTENTS

| | |
|---|-----------|
| RELEASE CONTROL RECORD | 3 |
| 1 Certificate of Conformity..... | 4 |
| 2 Summary of Test Results | 5 |
| 2.1 Measurement Uncertainty | 5 |
| 2.2 Test Site And Instruments | 5 |
| 3 General Information..... | 7 |
| 3.1 General Description of EUT | 7 |
| 3.2 Configuration Of System Under Test..... | 10 |
| 3.2.1 Description Of Support Units..... | 11 |
| 3.3 Test Mode Applicability and Tested Channel Detail | 11 |
| 3.4 EUT Operating Conditions | 14 |
| 3.5 General Description of Applied Standards | 14 |
| 4 Test Types and Results | 15 |
| 4.1 Output Power Measurement | 15 |
| 4.1.1 Limits of Output Power Measurement..... | 15 |
| 4.1.2 Test Procedures..... | 15 |
| 4.1.3 Test Setup..... | 16 |
| 4.1.4 Test Results | 17 |
| 4.2 Frequency Stability Measurement..... | 26 |
| 4.2.1 Limits of Frequency Stability Measurement..... | 26 |
| 4.2.2 Test Procedure | 26 |
| 4.2.3 Test Setup..... | 26 |
| 4.2.4 Test Results | 27 |
| 4.3 Occupied Bandwidth Measurement | 29 |
| 4.3.1 Test Procedure | 29 |
| 4.3.2 Test Setup..... | 29 |
| 4.3.3 Test Result..... | 30 |
| 4.4 Band Edge Measurement | 38 |
| 4.4.1 Limits of Band Edge Measurement | 38 |
| 4.4.2 Test Setup..... | 38 |
| 4.4.3 Test Procedures..... | 38 |
| 4.4.4 Test Results | 39 |
| 4.5 Peak To Average Ratio..... | 46 |
| 4.5.1 Limits of Peak To Average Ratio Measurement | 46 |
| 4.5.2 Test Setup..... | 46 |
| 4.5.3 Test Procedures..... | 46 |
| 4.5.4 Test Results | 47 |
| 4.6 Conducted Spurious Emissions | 51 |
| 4.6.1 Limits of Conducted Spurious Emissions Measurement..... | 51 |
| 4.6.2 Test Setup..... | 51 |
| 4.6.3 Test Procedure | 51 |
| 4.6.4 Test Results | 52 |
| 4.7 Radiated Emission Measurement | 56 |
| 4.7.1 Limits of Radiated Emission Measurement..... | 56 |
| 4.7.2 Test Procedure | 56 |
| 4.7.3 Deviation from Test Standard | 56 |
| 4.7.4 Test Setup..... | 57 |
| 4.7.5 Test Results | 58 |
| 5 Pictures of Test Arrangements..... | 58 |
| Appendix – Information on the Testing Laboratories | 79 |



A D T

RELEASE CONTROL RECORD

| Issue No. | Description | Date Issued |
|----------------|------------------|---------------|
| RF160517W001-4 | Original release | Jun. 12, 2016 |

1 Certificate of Conformity

Product: Smartphone

Brand: LANIX

Test Model: Ilium L610


Sample Status: Production unit

Applicant: Corporativo Lanix S.A. de C.V.

Test Date: May 18, 2016 ~ Jun. 11, 2016

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : , **Date:** Jun. 12, 2016
Amyee Qian / Engineer

Approved by : , **Date:** Jun. 12, 2016
William Chung / Manager

2 Summary of Test Results

| Applied Standard: FCC Part 24 & Part 2 | | | |
|--|------------------------------|--------|--|
| FCC Clause | Test Item | Result | Remarks |
| 2.1046 24.232 | Effective Radiated Power | PASS | Meet the requirement of limit. |
| 2.1046 24.232(d) | Peak To Average Ratio | PASS | Meet the requirement of limit. |
| 2.1055 24.235 | Frequency Stability | PASS | Meet the requirement of limit. |
| 2.1049 24.238(b) | Occupied Bandwidth | PASS | Meet the requirement of limit. |
| 24.238(b) | Band Edge Measurements | PASS | Meet the requirement of limit. |
| 2.1051 24.238 | Conducted Spurious Emissions | PASS | Meet the requirement of limit. |
| 2.1053 24.238 | Radiated Spurious Emissions | PASS | Meet the requirement of limit. Minimum passing margin is -16.39dB at 5640.00MHz. |

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Frequency | Expanded Uncertainty (k=2) (\pm) |
|------------------------------------|------------------|--------------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 2.44 dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 200MHz | 2.93 dB |
| | 200MHz ~ 1000MHz | 2.95 dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 18GHz | 2.26 dB |
| | 18GHz ~ 40GHz | 1.94 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.2 Test Site And Instruments

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|----------------------------------|-----------------|--------------------------|-------------|-------------|-------------|
| EMI Test Receiver | Rohde&Schwarz | ESR7 | 101494 | Apr. 05,16 | Apr. 04,17 |
| Signal and Spectrum Analyzer | Rohde&Schwarz | FSV40 | 101094 | Apr. 05,16 | Apr. 04,17 |
| Bilog Antenna 1 | Teseq | CBL 6111D | 30643 | Jun. 25,15 | Jun. 24,16 |
| Bilog Antenna 2 | Teseq | CBL 6111D | 27089 | Jun. 25,15 | Jun. 24,16 |
| Horn Antenna | ETS-Lindgren | 3117 | 00062558 | May 30,14 | May 29,17 |
| Horn Antenna (15GHz-40GHz) | SCHWARZBECK | BBHA 9170 | BBHA9170147 | Jan. 21,14 | Jan. 20,17 |
| Amplifier | Burgeon | BPA-530 | 100220 | Apr. 05,16 | Apr. 04,17 |
| Pre-Amplifier | HP | 8449B | 3008A00409 | Apr. 24,16 | Apr. 23,17 |
| Pre-Amplifier (18GHz-40GHz) | EMCI | EMC 184045 | 980102 | Nov. 11,15 | Nov. 10,16 |
| GPS Generator+ Antenna | TOJOIN | GNSS-5000A | E1-010119 | Aug. 08, 14 | Aug. 07, 16 |
| 3m Semi-anechoic Chamber | ETS-LINDGREN | 9m*6m*6m | NSEMC003 | Mar. 12,16 | Mar. 11,18 |
| Test Software | ADT | ADT_Radiated_V7.6.15.9.2 | N/A | N/A | N/A |
| Power Meter | Anritsu | ML2495A | 1139001 | Feb.19,16 | Feb. 18,17 |
| Power Sensor | Anritsu | MA2411B | 1126068 | Feb.19,16 | Feb. 18,17 |
| Power Sensor | Keysight | U2021XA | MY55060016 | May 27,15 | May 26,17 |
| Power Sensor | Keysight | U2021XA | MY55060018 | May 27,15 | May 26,17 |
| Digital Multimeter | FLUKE | 15B | A1220010DG | Oct. 12, 15 | Oct. 11, 16 |
| Humid & Temp Programmable Tester | Haida | HD-2257 | 110807201 | Sep.07,15 | Sep. 06,16 |
| Oscilloscope | Agilent | DSO9254A | MY51260160 | Nov. 09,15 | Nov. 08,16 |
| Signal Analyzer | Rohde & Schwarz | FSV7 | 102331 | Nov. 09,15 | Nov. 08,16 |
| Signal Generator | Agilent | N5183A | MY50140980 | Apr. 21, 16 | Apr. 20, 17 |
| ESG Vector Signal Generator | Agilent | E4438C | MY49072505 | Sep. 01,15 | Aug. 31,16 |
| BLUETOOTH TESTER | Rohde&Schwarz | CBT32 | 100811 | Oct. 12, 15 | Oct. 11, 16 |

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. The test was performed in HwaYa Chamber 4.

4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

5. The FCC Site Registration No. is 460141.

6. The IC Site Registration No. is IC7450F-4.

3 General Information

3.1 General Description of EUT

| | | |
|--|--|-----------------------|
| PRODUCT | Smartphone | |
| BRAND | LANIX | |
| MODEL NAME | Ilium L610 | |
| POWER SUPPLY | 5.0Vdc (adapter or host equipment) 3.8Vdc (battery) | |
| MODULATION TYPE | GSM, GPRS: GMSK EDGE: GMSK, 8PSK WCDMA : BPSK LTE Band 2: QPSK, 16QAM | |
| FREQUENCY RANGE | GSM, GPRS, EDGE: 1850.2MHz ~ 1909.8MHz | |
| | WCDMA: 1852.4MHz ~ 1907.6MHz | |
| | LTE Band 2 Channel Bandwidth: 1.4MHz | 1850.7MHz ~ 1909.3MHz |
| | LTE Band 2 Channel Bandwidth: 3MHz | 1851.5MHz ~ 1908.5MHz |
| | LTE Band 2 Channel Bandwidth: 5MHz | 1852.5MHz ~ 1907.5MHz |
| | LTE Band 2 Channel Bandwidth: 10MHz | 1855.0MHz ~ 1905.0MHz |
| | LTE Band 2 Channel Bandwidth: 15MHz | 1857.5MHz ~ 1902.5MHz |
| | LTE Band 2 Channel Bandwidth: 20MHz | 1860.0MHz ~ 1900.0MHz |
| MAX. EIRP POWER | GSM: 857mW | |
| | EDGE: 441mW | |
| | WCDMA: 234mW | |
| | LTE Band 2 Channel Bandwidth: 1.4MHz | 269mW |
| | LTE Band 2 Channel Bandwidth: 3MHz | 265mW |
| | LTE Band 2 Channel Bandwidth: 5MHz | 268mW |
| | LTE Band 2 Channel Bandwidth: 10MHz | 272mW |
| | LTE Band 2 Channel Bandwidth: 15MHz | 267mW |
| LTE Band 2 Channel Bandwidth: 20MHz | 241mW | |

| | | |
|----------------------------|---|---------------------------------------|
| EMISSION DESIGNATOR | GSM | 246KGXW |
| | EDGE | 250KG7W |
| | WCDMA | 4M18F9W |
| | LTE Band 2 Channel Bandwidth: 1.4MHz | QPSK: 1M09G7D 16QAM: 1M09W7D |
| | LTE Band 2 Channel Bandwidth: 3MHz | QPSK: 2M70G7D 16QAM: 2M68W7D |
| | LTE Band 2 Channel Bandwidth: 5MHz | QPSK: 4M49G7D 16QAM: 4M49W7D |
| | LTE Band 2 Channel Bandwidth: 10MHz | QPSK: 8M96G7D 16QAM: 8M94W7D |
| | LTE Band 2 Channel Bandwidth: 15MHz | QPSK: 13M5G7D 16QAM: 13M5W7D |
| | LTE Band 2 Channel Bandwidth: 20MHz | QPSK: 17M9G7D 16QAM: 17M9W7D |
| | ANTENNA TYPE | Fixed Internal antenna with 0dBi gain |
| HW VERSION | V0.10 | |
| SW VERSION | Ilium L610_TELCEL_SW_01_01 | |
| ACCESSORY DEVICE | Refer to note as below | |
| DATA CABLE | USB cable: shielded, detachable, 0.8 m Earphone cable: Unshielded, detachable, 1.5 m | |

Note:

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
- The EUT was powered by the following adapters:

| ADAPTER 1 | |
|------------------|--------------------|
| BRAND: | LANIX |
| MODEL: | Ilium L610-C |
| INPUT: | AC 100-240V, 150mA |
| OUTPUT: | DC 5V, 1000mA |

| ADAPTER 2 | |
|------------------|--------------------|
| BRAND: | LANIX |
| MODEL: | Ilium L610-C |
| INPUT: | AC 100-240V, 150mA |
| OUTPUT: | DC 5V, 1000mA |

- The EUT matched the following USB Cable and Earphone.


| USB CABLE | |
|---------------------|------------|
| BRAND: | LANIX |
| MODEL: | Ilium L610 |
| SIGNAL LINE: | 0.8 METER |

| | |
|---------------------|------------|
| EARPHONE | |
| BRAND: | LANIX |
| MODEL: | Ilium L610 |
| SIGNAL LINE: | 1.5 METER |


5. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

3.2 Configuration Of System Under Test

FOR RADIATION EMISSION TEST

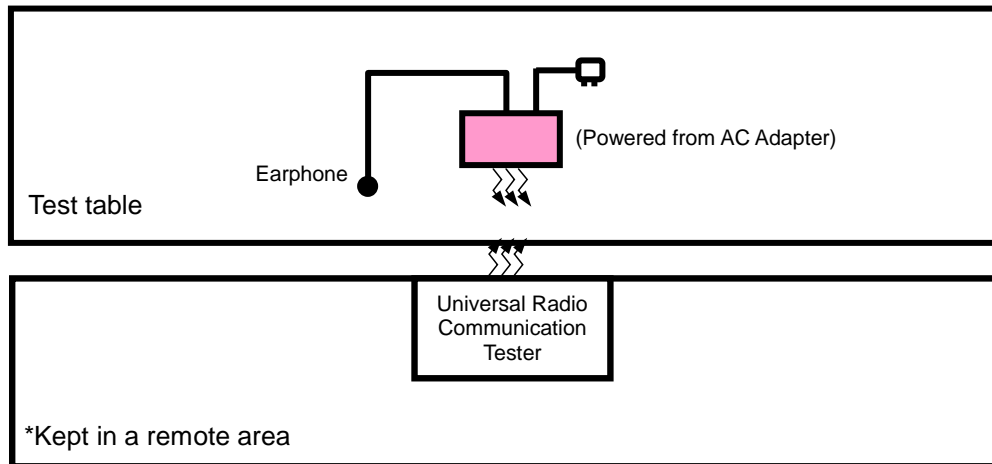

FOR E.R.P. TEST

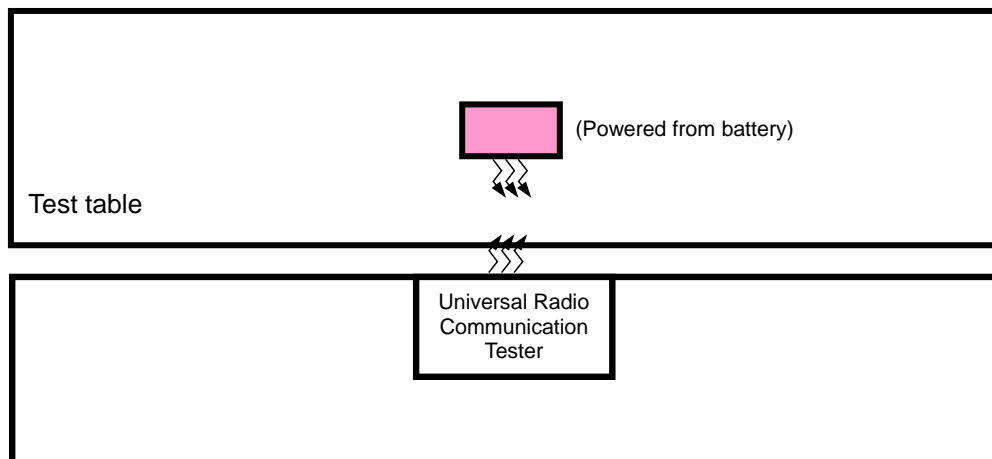

3.2.1 Description Of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|-----------|----------|-----------|------------|--------|
| 1 | DC source | LONG WEI | PS-6403D | 010934269 | N/A |
| 2 | PC | HP | A6608CN | 3CR83825X3 | N/A |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | DC Line: Unshielded, Detachable 1.0m |
| 2 | AC Line: Unshielded, Detachable 1.5m |

NOTE:

1. All power cords of the above support units are non shielded (1.8m).

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports
The worst case was found when positioned on Z-plane. Following channel(s) was (were) selected for the final test as listed below:

Test results are presented in the report as below.

| Test Mode | Test Condition |
|-----------|--------------------|
| A | Power from adapter |
| B | Power from battery |

GSM MODE

| EUT Configure Mode | Test Item | Available Channel | Tested Channel | Mode |
|--------------------|------------------------------|-------------------|----------------|-----------|
| A | EIRP | 512 to 810 | 512, 661, 810 | GSM |
| B | Frequency Stability | 512 to 810 | 661 | GSM |
| A | Occupied Bandwidth | 512 to 810 | 512, 661, 810 | GSM, EDGE |
| A | Band Edge | 512 to 810 | 512, 810 | GSM, EDGE |
| A | Peak To Average Ratio | 512 to 810 | 512, 661, 810 | GSM, EDGE |
| A | Condcudeted Emission | 512 to 810 | 512, 661, 810 | GSM, EDGE |
| A | Radiated Emission Below 1GHz | 512 to 810 | 512 | GSM |
| A | Radiated Emission Above 1GHz | 512 to 810 | 512, 661, 810 | GSM |

WCDMA MODE

| EUT Configure Mode | Test Item | Available Channel | Tested Channel | Mode |
|--------------------|------------------------------|-------------------|------------------|-------|
| A | EIRP | 9262 to 9538 | 9262, 9400, 9538 | WCDMA |
| B | Frequency Stability | 9262 to 9538 | 9400 | WCDMA |
| A | Occupied Bandwidth | 9262 to 9538 | 9262, 9400, 9538 | WCDMA |
| A | Band Edge | 9262 to 9538 | 9262, 9538 | WCDMA |
| A | Peak To Average Ratio | 9262 to 9538 | 9262, 9400, 9538 | WCDMA |
| A | Conducuted Emission | 9262 to 9538 | 9262, 9400, 9538 | WCDMA |
| A | Radiated Emission Below 1GHz | 9262 to 9538 | 9262 | WCDMA |
| A | Radiated Emission Above 1GHz | 9262 to 9538 | 9262, 9400, 9538 | WCDMA |

LTE BAND 2

| EUT CONFIGURE MODE | TEST ITEM | AVAILABLE CHANNEL | TESTED CHANNEL | CHANNEL BANDWIDTH | MODULATION | MODE |
|--------------------|-----------------------|-------------------|---------------------|-------------------|-------------|----------------------|
| B | EIRP | 18607 to 19193 | 18607, 18900, 19193 | 1.4MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| | | 18615 to 19185 | 18615, 18900, 19185 | 3MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| | | 18625 to 19175 | 18625, 18900, 19175 | 5MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| | | 18650 to 19150 | 18650, 18900, 19150 | 10MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| | | 18675 to 19125 | 18675, 18900, 19125 | 15MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| | | 18700 to 19100 | 18700, 18900, 19100 | 20MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| B | FREQUENCY STABILITY | 18607 to 19193 | 18900 | 1.4MHz | QPSK | 1 RB / 0 RB Offset |
| | | 18615 to 19185 | 18900 | 3MHz | QPSK | 1 RB / 0 RB Offset |
| | | 18625 to 19175 | 18900 | 5MHz | QPSK | 1 RB / 0 RB Offset |
| | | 18650 to 19150 | 18900 | 10MHz | QPSK | 1 RB / 0 RB Offset |
| | | 18675 to 19125 | 18900 | 15MHz | QPSK | 1 RB / 0 RB Offset |
| | | 18700 to 19100 | 18900 | 20MHz | QPSK | 1 RB / 0 RB Offset |
| B | OCCUPIED BANDWIDTH | 18607 to 19193 | 18607, 18900, 19193 | 1.4MHz | QPSK, 16QAM | 6 RB / 0 RB Offset |
| | | 18615 to 19185 | 18615, 18900, 19185 | 3MHz | QPSK, 16QAM | 15 RB / 0 RB Offset |
| | | 18625 to 19175 | 18625, 18900, 19175 | 5MHz | QPSK, 16QAM | 25 RB / 0 RB Offset |
| | | 18650 to 19150 | 18650, 18900, 19150 | 10MHz | QPSK, 16QAM | 50 RB / 0 RB Offset |
| | | 18675 to 19125 | 18675, 18900, 19125 | 15MHz | QPSK, 16QAM | 75 RB / 0 RB Offset |
| | | 18700 to 19100 | 18700, 18900, 19100 | 20MHz | QPSK, 16QAM | 100 RB / 0 RB Offset |
| B | PEAK TO AVERAGE RATIO | 18607 to 19193 | 18607, 18900, 19193 | 1.4MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| | | 18615 to 19185 | 18615, 18900, 19185 | 3MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| | | 18625 to 19175 | 18625, 18900, 19175 | 5MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| | | 18650 to 19150 | 18650, 18900, 19150 | 10MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| | | 18675 to 19125 | 18675, 18900, 19125 | 15MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |
| | | 18700 to 19100 | 18700, 18900, 19100 | 20MHz | QPSK, 16QAM | 1 RB / 0 RB Offset |

| | | | | | | | | |
|----------------|-------------------|----------------|--------------------|----------------|-------|---------------------|------|--------------------|
| B | BAND EDGE | 18607 to 19193 | 18607 | 1.4MHz | QPSK | 1 RB / 0 RB Offset | | |
| | | | 19193 | 1.4MHz | QPSK | 6 RB / 0 RB Offset | | |
| | | 18615 to 19185 | 18615 | 3MHz | QPSK | 1 RB / 5 RB Offset | | |
| | | | 19185 | 3MHz | QPSK | 6 RB / 0 RB Offset | | |
| | | 18625 to 19175 | 18625 | 5MHz | QPSK | 1 RB / 0 RB Offset | | |
| | | | 19175 | 5MHz | QPSK | 15 RB / 0 RB Offset | | |
| | | 18650 to 19150 | 18650 | 10MHz | QPSK | 1 RB / 14 RB Offset | | |
| | | | 19150 | 10MHz | QPSK | 15 RB / 0 RB Offset | | |
| | | 18675 to 19125 | 18675 | 15MHz | QPSK | 1 RB / 0 RB Offset | | |
| | | | 19125 | 15MHz | QPSK | 25 RB / 0 RB Offset | | |
| | | 18700 to 19100 | 18700 | 20MHz | QPSK | 1 RB / 24 RB Offset | | |
| | | | 19100 | 20MHz | QPSK | 25 RB / 0 RB Offset | | |
| | | B | CONDCUDED EMISSION | 18607 to 19193 | 18900 | 1.4MHz | QPSK | 1 RB / 0 RB Offset |
| | | | | 18615 to 19185 | 18900 | 3MHz | QPSK | 1 RB / 0 RB Offset |
| | | | | 18625 to 19175 | 18900 | 5MHz | QPSK | 1 RB / 0 RB Offset |
| | | | | 18650 to 19150 | 18900 | 10MHz | QPSK | 1 RB / 0 RB Offset |
| 18675 to 19125 | 18900 | | | 15MHz | QPSK | 1 RB / 0 RB Offset | | |
| 18700 to 19100 | 18900 | | | 20MHz | QPSK | 1 RB / 0 RB Offset | | |
| A | RADIATED EMISSION | 18607 to 19193 | 18900 | 1.4MHz | QPSK | 1 RB / 0 RB Offset | | |
| | | 18615 to 19185 | 18900 | 3MHz | QPSK | 1 RB / 0 RB Offset | | |
| | | 18625 to 19175 | 18900 | 5MHz | QPSK | 1 RB / 0 RB Offset | | |
| | | 18650 to 19150 | 18900 | 10MHz | QPSK | 1 RB / 0 RB Offset | | |
| | | 18675 to 19125 | 18900 | 15MHz | QPSK | 1 RB / 0 RB Offset | | |
| | | 18700 to 19100 | 18900 | 20MHz | QPSK | 1 RB / 0 RB Offset | | |

Test Condition:

| Test Item | Environmental Conditions | Input Power | Tested By |
|-----------------------|------------------------------------|----------------------|-------------|
| EIRP | 21deg. C, 71%RH 22deg. C, 71%RH | DC 3.8V from battery | Yuqiang Yin |
| Frequency Stability | 24deg. C, 64%RH | DC 3.8V from battery | Yuqiang Yin |
| Occupied Bandwidth | 24deg. C, 64%RH | DC 3.8V from battery | Yuqiang Yin |
| Band Edge | 24deg. C, 64%RH | DC 3.8V from battery | Yuqiang Yin |
| Peak To Average Ratio | 24deg. C, 64%RH | DC 3.8V from battery | Yuqiang Yin |
| Condcudeted Emission | 24deg. C, 64%RH | 5Vdc from adapter | Alex Chen |
| Radiated Emission | 21deg. C, 71%RH | DC 3.8V from battery | Yuqiang Yin |

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/EIA-603-D

NOTE: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS and 5MHz for WCDMA mode, and 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$

Conducted Power Measurement:

The EUT was set up for the maximum power with GSM, GPRS & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 Test Setup

EIRP / ERP MEASUREMENT:

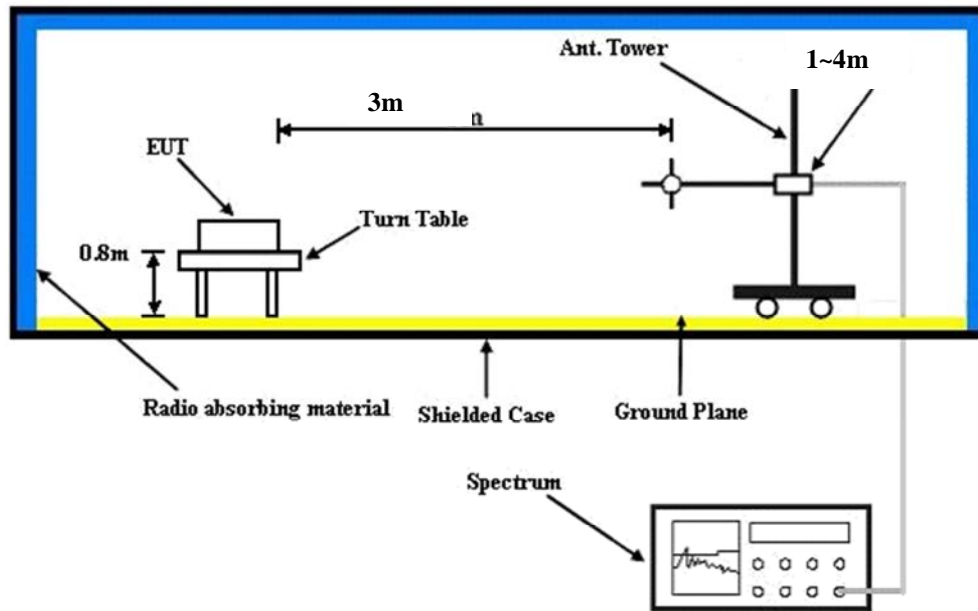

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

CONDUCTED OUTPUT POWER (dBm)

| Band | GSM1900 | | |
|-----------------------|--------------|--------|--------|
| Channel | 512 | 661 | 810 |
| Frequency (MHz) | 1850.2 | 1880.0 | 1909.8 |
| GSM | 31.22 | 30.98 | 31.11 |
| GPRS 8 | 31.21 | 30.95 | 31.04 |
| GPRS 10 | 29.30 | 29.29 | 29.14 |
| GPRS 11 | 27.21 | 27.30 | 27.43 |
| GPRS 12 | 25.20 | 25.20 | 25.37 |
| EDGE 8 (MCS1) | 24.89 | 24.89 | 25.08 |
| EDGE 10 (MCS1) | 23.47 | 23.51 | 23.69 |
| EDGE 11 (MCS9) | 22.17 | 22.19 | 22.35 |
| EDGE 12 (MCS9) | 20.75 | 20.78 | 20.92 |

| Band | WCDMA II | | |
|------------------------|----------|--------|--------------|
| Channel | 9262 | 9400 | 9538 |
| Frequency (MHz) | 1852.4 | 1880.0 | 1907.6 |
| RMC 12.2K | 22.49 | 22.33 | 22.66 |
| HSPA | | | |
| HSDPA Subtest-1 | 21.34 | 21.32 | 21.57 |
| HSDPA Subtest-2 | 21.01 | 21.11 | 21.36 |
| HSDPA Subtest-3 | 20.71 | 20.81 | 21.08 |
| HSDPA Subtest-4 | 20.00 | 20.12 | 20.06 |
| HSUPA Subtest-1 | 21.04 | 20.91 | 21.23 |
| HSUPA Subtest-2 | 19.57 | 19.49 | 19.70 |
| HSUPA Subtest-3 | 20.06 | 20.14 | 20.26 |
| HSUPA Subtest-4 | 19.39 | 19.52 | 19.60 |
| HSUPA Subtest-5 | 21.54 | 21.50 | 21.62 |

| LTE Band 2 | | | | | | | |
|------------|------------|---------|-----------|-------------------------|-----------------------|-------------------------|---------------------|
| BW | Modulation | RB Size | RB Offset | Low CH 18607 | Mid CH 18900 | High CH 19193 | 3GPP MPR (dB) |
| | | | | Frequency 1850.7 MHz | Frequency 1880 MHz | Frequency 1909.3 MHz | |
| 1.4MHz | QPSK | 1 | 0 | 23.25 | 23.27 | 23.30 | 0 |
| | | 1 | 2 | 23.04 | 23.18 | 23.27 | 0 |
| | | 1 | 5 | 23.07 | 23.13 | 23.22 | 0 |
| | | 3 | 0 | 23.24 | 23.26 | 23.29 | 0 |
| | | 3 | 1 | 23.03 | 23.17 | 23.26 | 0 |
| | | 3 | 3 | 23.06 | 23.12 | 23.21 | 0 |
| | | 6 | 0 | 22.16 | 22.11 | 22.23 | 1 |
| | 16QAM | 1 | 0 | 22.22 | 22.28 | 22.31 | 1 |
| | | 1 | 2 | 22.16 | 22.29 | 22.29 | 1 |
| | | 1 | 5 | 21.99 | 22.22 | 22.21 | 1 |
| | | 3 | 0 | 22.20 | 22.26 | 22.29 | 1 |
| | | 3 | 1 | 22.14 | 22.27 | 22.27 | 1 |
| | | 3 | 3 | 21.97 | 22.20 | 22.19 | 1 |
| | | 6 | 0 | 21.22 | 21.16 | 21.22 | 2 |
| LTE Band 2 | | | | | | | |
| BW | Modulation | RB Size | RB Offset | Low CH 18615 | Mid CH 18900 | High CH 19185 | 3GPP MPR (dB) |
| | | | | Frequency 1851.5 MHz | Frequency 1880 MHz | Frequency 1908.5 MHz | |
| 3 MHz | QPSK | 1 | 0 | 23.28 | 23.30 | 23.33 | 0 |
| | | 1 | 7 | 23.07 | 23.21 | 23.30 | 0 |
| | | 1 | 14 | 23.10 | 23.16 | 23.25 | 0 |
| | | 8 | 0 | 22.08 | 22.24 | 22.32 | 1 |
| | | 8 | 3 | 22.03 | 22.21 | 22.17 | 1 |
| | | 8 | 7 | 22.02 | 22.16 | 22.30 | 1 |
| | | 15 | 0 | 22.19 | 22.14 | 22.26 | 1 |
| | 16QAM | 1 | 0 | 22.25 | 22.31 | 22.34 | 1 |
| | | 1 | 7 | 22.19 | 22.32 | 22.32 | 1 |
| | | 1 | 14 | 22.02 | 22.25 | 22.24 | 1 |
| | | 8 | 0 | 21.09 | 21.37 | 21.37 | 2 |
| | | 8 | 3 | 21.23 | 21.38 | 21.48 | 2 |
| | | 8 | 7 | 21.09 | 21.36 | 21.37 | 2 |
| | | 15 | 0 | 21.25 | 21.19 | 21.25 | 2 |

| BW | Modulation | RB Size | RB Offset | Low CH 18625 | Mid CH 18900 | High CH 19175 | 3GPP MPR (dB) |
|-------------------|------------|---------|-----------|-------------------------|-----------------------|-------------------------|---------------------|
| | | | | Frequency 1852.5 MHz | Frequency 1880 MHz | Frequency 1907.5 MHz | |
| 5 MHz | QPSK | 1 | 0 | 23.31 | 23.33 | 23.36 | 0 |
| | | 1 | 12 | 23.10 | 23.24 | 23.33 | 0 |
| | | 1 | 24 | 23.13 | 23.19 | 23.28 | 0 |
| | | 12 | 0 | 22.11 | 22.27 | 22.35 | 1 |
| | | 12 | 6 | 22.06 | 22.24 | 22.20 | 1 |
| | | 12 | 13 | 22.05 | 22.19 | 22.33 | 1 |
| | | 25 | 0 | 22.22 | 22.17 | 22.29 | 1 |
| | 16QAM | 1 | 0 | 22.28 | 22.34 | 22.37 | 1 |
| | | 1 | 12 | 22.22 | 22.35 | 22.35 | 1 |
| | | 1 | 24 | 22.05 | 22.28 | 22.27 | 1 |
| | | 12 | 0 | 21.12 | 21.40 | 21.40 | 2 |
| | | 12 | 6 | 21.26 | 21.41 | 21.51 | 2 |
| | | 12 | 13 | 21.12 | 21.39 | 21.40 | 2 |
| | | 25 | 0 | 21.28 | 21.22 | 21.28 | 2 |
| LTE Band 2 | | | | | | | |
| BW | Modulation | RB Size | RB Offset | Low CH 18650 | Mid CH 18900 | High CH 19150 | 3GPP MPR (dB) |
| | | | | Frequency 1855 MHz | Frequency 1880 MHz | Frequency 1905 MHz | |
| 10 MHz | QPSK | 1 | 0 | 23.33 | 23.35 | 23.38 | 0 |
| | | 1 | 24 | 23.12 | 23.26 | 23.35 | 0 |
| | | 1 | 49 | 23.15 | 23.21 | 23.30 | 0 |
| | | 25 | 0 | 22.13 | 22.29 | 22.37 | 1 |
| | | 25 | 12 | 22.08 | 22.26 | 22.22 | 1 |
| | | 25 | 25 | 22.07 | 22.21 | 22.35 | 1 |
| | | 50 | 0 | 22.24 | 22.19 | 22.31 | 1 |
| | 16QAM | 1 | 0 | 22.30 | 22.36 | 22.39 | 1 |
| | | 1 | 24 | 22.24 | 22.37 | 22.37 | 1 |
| | | 1 | 49 | 22.07 | 22.30 | 22.29 | 1 |
| | | 25 | 0 | 21.14 | 21.42 | 21.42 | 2 |
| | | 25 | 12 | 21.28 | 21.43 | 21.53 | 2 |
| | | 25 | 25 | 21.14 | 21.41 | 21.42 | 2 |
| | | 50 | 0 | 21.30 | 21.24 | 21.30 | 2 |
| BW | Modulation | RB Size | RB Offset | Low CH 18675 | Mid CH 18900 | High CH 19125 | 3GPP MPR (dB) |
| | | | | Frequency 1857.5 MHz | Frequency 1880 MHz | Frequency 1902.5 MHz | |
| 15 MHz | QPSK | 1 | 0 | 23.49 | 23.29 | 23.56 | 0 |

| | | | | | | | |
|--|--------------|----|----|-------|-------|-------|---|
| | | 1 | 37 | 23.36 | 23.38 | 23.41 | 0 |
| | | 1 | 74 | 23.15 | 23.29 | 23.38 | 0 |
| | | 36 | 0 | 23.18 | 23.24 | 23.33 | 1 |
| | | 36 | 19 | 22.16 | 22.32 | 22.40 | 1 |
| | | 36 | 39 | 22.11 | 22.29 | 22.25 | 1 |
| | | 75 | 0 | 22.10 | 22.24 | 22.38 | 1 |
| | 16QAM | 1 | 0 | 22.27 | 22.22 | 22.34 | 1 |
| | | 1 | 37 | 22.33 | 22.39 | 22.42 | 1 |
| | | 1 | 74 | 22.27 | 22.40 | 22.40 | 1 |
| | | 36 | 0 | 22.10 | 22.33 | 22.32 | 2 |
| | | 36 | 19 | 21.17 | 21.45 | 21.45 | 2 |
| | | 36 | 39 | 21.31 | 21.46 | 21.56 | 2 |
| | | 75 | 0 | 21.17 | 21.44 | 21.45 | 2 |

LTE Band 2

| BW | Modulation | RB Size | RB Offset | Low CH 18700 | Mid CH 18900 | High CH 19100 | 3GPP MPR (dB) |
|--------------|-------------------|----------------|------------------|---------------------------|---------------------------|---------------------------|----------------------|
| | | | | Frequency 1860 MHz | Frequency 1880 MHz | Frequency 1900 MHz | |
| 20MHz | QPSK | 1 | 0 | 23.41 | 23.43 | 23.46 | 0 |
| | | 1 | 50 | 23.20 | 23.34 | 23.43 | 0 |
| | | 1 | 99 | 23.23 | 23.29 | 23.38 | 0 |
| | | 50 | 0 | 22.21 | 22.37 | 22.45 | 1 |
| | | 50 | 25 | 22.16 | 22.34 | 22.30 | 1 |
| | | 50 | 50 | 22.15 | 22.29 | 22.43 | 1 |
| | | 100 | 0 | 22.32 | 22.27 | 22.39 | 1 |
| | 16QAM | 1 | 0 | 22.38 | 22.44 | 22.47 | 1 |
| | | 1 | 50 | 22.32 | 22.45 | 22.45 | 1 |
| | | 1 | 99 | 22.15 | 22.38 | 22.37 | 1 |
| | | 50 | 0 | 21.22 | 21.50 | 21.50 | 2 |
| | | 50 | 25 | 21.36 | 21.51 | 21.61 | 2 |
| | | 50 | 50 | 21.22 | 21.49 | 21.50 | 2 |
| | | 100 | 0 | 21.38 | 21.32 | 21.38 | 2 |

EIRP POWER (dBm)
GSM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|
| 512 | 1850.2 | -20.62 | 43.83 | 23.21 | 209.41 | H |
| 661 | 1880.0 | -20.79 | 43.57 | 22.78 | 189.67 | H |
| 810 | 1909.8 | -20.86 | 44.57 | 23.71 | 234.96 | H |
| 512 | 1850.2 | -17.44 | 46.39 | 28.95 | 785.24 | V |
| 661 | 1880.0 | -17.77 | 47.10 | 29.33 | 856.64 | V |
| 810 | 1909.8 | -17.28 | 45.98 | 28.70 | 740.63 | V |

EDGE

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|
| 512 | 1850.2 | -23.78 | 43.83 | 20.05 | 101.16 | H |
| 661 | 1880.0 | -23.58 | 43.57 | 19.99 | 99.77 | H |
| 810 | 1909.8 | -23.27 | 44.57 | 21.30 | 134.90 | H |
| 512 | 1850.2 | -20.49 | 46.39 | 25.90 | 389.05 | V |
| 661 | 1880.0 | -20.65 | 47.10 | 26.45 | 441.37 | V |
| 810 | 1909.8 | -20.17 | 45.98 | 25.81 | 380.72 | V |

WCDMA

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|
| 9262 | 1852.4 | -25.15 | 43.83 | 18.68 | 73.79 | H |
| 9400 | 1880.0 | -25.21 | 43.57 | 18.36 | 68.55 | H |
| 9538 | 1907.6 | -25.05 | 44.57 | 19.52 | 89.54 | H |
| 9262 | 1852.4 | -23.19 | 46.39 | 23.20 | 208.93 | V |
| 9400 | 1880.0 | -23.41 | 47.10 | 23.69 | 233.78 | V |
| 9538 | 1907.6 | -23.38 | 45.98 | 22.60 | 181.80 | V |

REMARKS: 1. EIRP Output Power (dBm) = LVL (dBm) + Correction Factor (dB).
 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

LTE BAND 2
CHANNEL BANDWIDTH: 1.4MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 18607 | 1850.7 | -26.99 | 43.83 | 16.84 | 48.35 | H | 2 |
| 18900 | 1880.0 | -26.04 | 43.57 | 17.53 | 56.62 | H | 2 |
| 19193 | 1909.3 | -26.73 | 44.32 | 17.59 | 57.40 | H | 2 |
| 18607 | 1850.7 | -23.17 | 46.41 | 23.24 | 210.91 | V | 2 |
| 18900 | 1880.0 | -22.78 | 47.07 | 24.29 | 268.53 | V | 2 |
| 19193 | 1909.3 | -23.35 | 45.88 | 22.53 | 179.23 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 1.4MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 18607 | 1850.7 | -27.86 | 43.83 | 15.97 | 39.57 | H | 2 |
| 18900 | 1880.0 | -26.97 | 43.57 | 16.60 | 45.71 | H | 2 |
| 19193 | 1909.3 | -27.69 | 44.32 | 16.63 | 46.02 | H | 2 |
| 18607 | 1850.7 | -24.04 | 46.41 | 22.37 | 172.62 | V | 2 |
| 18900 | 1880.0 | -23.71 | 47.07 | 23.36 | 216.77 | V | 2 |
| 19193 | 1909.3 | -24.31 | 45.88 | 21.57 | 143.68 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 3MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 18615 | 1851.5 | -26.97 | 43.82 | 16.85 | 48.44 | H | 2 |
| 18900 | 1880.0 | -26.10 | 43.57 | 17.47 | 55.85 | H | 2 |
| 19185 | 1908.5 | -26.68 | 44.38 | 17.70 | 58.83 | H | 2 |
| 18615 | 1851.5 | -23.15 | 46.45 | 23.30 | 213.85 | V | 2 |
| 18900 | 1880.0 | -22.84 | 47.07 | 24.23 | 264.85 | V | 2 |
| 19185 | 1908.5 | -23.30 | 45.88 | 22.58 | 181.13 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 3MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 18615 | 1851.5 | -28.04 | 43.82 | 15.78 | 37.86 | H | 2 |
| 18900 | 1880.0 | -26.99 | 43.57 | 16.58 | 45.50 | H | 2 |
| 19185 | 1908.5 | -27.67 | 44.38 | 16.71 | 46.84 | H | 2 |
| 18615 | 1851.5 | -24.22 | 46.45 | 22.23 | 167.15 | V | 2 |
| 18900 | 1880.0 | -23.73 | 47.07 | 23.34 | 215.77 | V | 2 |
| 19185 | 1908.5 | -24.29 | 45.88 | 21.59 | 144.21 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 5MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 18625 | 1852.5 | -27.03 | 43.83 | 16.80 | 47.84 | H | 2 |
| 18900 | 1880.0 | -26.05 | 43.57 | 17.52 | 56.49 | H | 2 |
| 19175 | 1907.5 | -26.63 | 44.19 | 17.56 | 56.99 | H | 2 |
| 18625 | 1852.5 | -23.21 | 46.46 | 23.25 | 211.49 | V | 2 |
| 18900 | 1880.0 | -22.79 | 47.07 | 24.28 | 267.92 | V | 2 |
| 19175 | 1907.5 | -23.25 | 45.89 | 22.64 | 183.70 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 5MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 18625 | 1852.5 | -27.86 | 43.83 | 15.97 | 39.52 | H | 2 |
| 18900 | 1880.0 | -27.07 | 43.57 | 16.50 | 44.67 | H | 2 |
| 19175 | 1907.5 | -27.73 | 44.19 | 16.46 | 44.24 | H | 2 |
| 18625 | 1852.5 | -24.04 | 46.46 | 22.42 | 174.70 | V | 2 |
| 18900 | 1880.0 | -23.81 | 47.07 | 23.26 | 211.84 | V | 2 |
| 19175 | 1907.5 | -24.35 | 45.89 | 21.54 | 142.59 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 10MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 18650 | 1855.0 | -26.84 | 43.86 | 17.02 | 50.36 | H | 2 |
| 18900 | 1880.0 | -13.20 | 43.57 | 30.37 | 1088.93 | H | 2 |
| 19150 | 1905.0 | -26.50 | 43.99 | 17.49 | 56.16 | H | 2 |
| 18650 | 1855.0 | -23.02 | 46.28 | 23.26 | 211.74 | V | 2 |
| 18900 | 1880.0 | -22.73 | 47.07 | 24.34 | 271.64 | V | 2 |
| 19150 | 1905.0 | -23.12 | 45.92 | 22.80 | 190.63 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 10MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 18650 | 1855.0 | -27.99 | 43.86 | 15.87 | 38.65 | H | 2 |
| 18900 | 1880.0 | -27.09 | 43.57 | 16.48 | 44.46 | H | 2 |
| 19150 | 1905.0 | -27.66 | 43.99 | 16.33 | 42.99 | H | 2 |
| 18650 | 1855.0 | -24.17 | 46.28 | 22.11 | 162.48 | V | 2 |
| 18900 | 1880.0 | -23.83 | 47.07 | 23.24 | 210.86 | V | 2 |
| 19150 | 1905.0 | -24.28 | 45.92 | 21.64 | 145.95 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 15MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 18675 | 1857.5 | -26.85 | 43.99 | 17.14 | 51.78 | H | 2 |
| 18900 | 1880.0 | -26.06 | 43.57 | 17.51 | 56.36 | H | 2 |
| 19125 | 1902.5 | -26.57 | 43.66 | 17.09 | 51.11 | H | 2 |
| 18675 | 1857.5 | -23.03 | 45.93 | 22.90 | 194.85 | V | 2 |
| 18900 | 1880.0 | -22.80 | 47.07 | 24.27 | 267.30 | V | 2 |
| 19125 | 1902.5 | -23.19 | 46.20 | 23.01 | 200.08 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 15MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 18675 | 1857.5 | -27.71 | 43.99 | 16.28 | 42.48 | H | 2 |
| 18900 | 1880.0 | -26.93 | 43.57 | 16.64 | 46.13 | H | 2 |
| 19125 | 1902.5 | -27.42 | 43.66 | 16.24 | 42.02 | H | 2 |
| 18675 | 1857.5 | -23.89 | 45.93 | 22.04 | 159.85 | V | 2 |
| 18900 | 1880.0 | -23.67 | 47.07 | 23.40 | 218.78 | V | 2 |
| 19125 | 1902.5 | -24.04 | 46.20 | 22.16 | 164.51 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 20MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|---------------|--------------------|-----------|
| 18700 | 1860.0 | -27.43 | 43.50 | 16.07 | 40.45 | H | 2 |
| 18900 | 1880.0 | -26.51 | 43.57 | 17.06 | 50.82 | H | 2 |
| 19100 | 1900.0 | -27.15 | 43.62 | 16.47 | 44.32 | H | 2 |
| 18700 | 1860.0 | -23.61 | 45.57 | 21.96 | 157.04 | V | 2 |
| 18900 | 1880.0 | -23.25 | 47.07 | 23.82 | 240.99 | V | 2 |
| 19100 | 1900.0 | -23.77 | 46.26 | 22.49 | 177.46 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

CHANNEL BANDWIDTH: 20MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | EIRP(dBm) | EIRP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|-----------|----------|--------------------|-----------|
| 18700 | 1860.0 | -28.36 | 43.50 | 15.14 | 32.65 | H | 2 |
| 18900 | 1880.0 | -27.58 | 43.57 | 15.99 | 39.72 | H | 2 |
| 19100 | 1900.0 | -27.98 | 43.62 | 15.64 | 36.61 | H | 2 |
| 18700 | 1860.0 | -24.54 | 45.57 | 21.03 | 126.77 | V | 2 |
| 18900 | 1880.0 | -24.32 | 47.07 | 22.75 | 188.36 | V | 2 |
| 19100 | 1900.0 | -24.60 | 46.26 | 21.66 | 146.59 | V | 2 |

NOTE: EIRP (dBm) = LVL (dBm) + Correction Factor (dB)

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.2.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

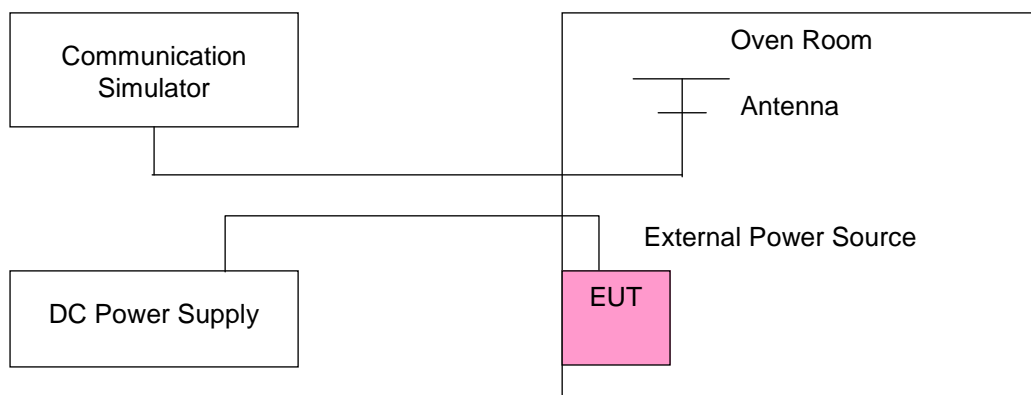

4.2.4 Test Results

FREQUENCY ERROR VS. VOLTAGE

| VOLTAGE (Volts) | FREQUENCY ERROR (ppm) | | | LIMIT (ppm) |
|-----------------|-----------------------|---------|---------|-------------|
| | GSM | EDGE | WCDMA | |
| 3.8 | 0.0013 | 0.0014 | 0.0014 | 2.5 |
| 3.6 | -0.0016 | -0.0017 | -0.0018 | 2.5 |
| 4.2 | -0.0013 | -0.0015 | -0.0014 | 2.5 |

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.2Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

| TEMP. (°C) | FREQUENCY ERROR (ppm) | | | LIMIT (ppm) |
|------------|-----------------------|---------|---------|-------------|
| | GSM | EDGE | WCDMA | |
| -30 | -0.0059 | -0.0054 | -0.0057 | 2.5 |
| -20 | -0.0053 | -0.0048 | -0.0051 | 2.5 |
| -10 | -0.0046 | -0.0040 | -0.0044 | 2.5 |
| 0 | -0.0039 | -0.0036 | -0.0037 | 2.5 |
| 10 | -0.0032 | -0.0028 | -0.0031 | 2.5 |
| 20 | -0.0024 | -0.0022 | -0.0023 | 2.5 |
| 30 | -0.0017 | -0.0013 | -0.0016 | 2.5 |
| 40 | -0.0011 | -0.0007 | -0.0011 | 2.5 |
| 50 | -0.0003 | -0.0001 | -0.0003 | 2.5 |
| 60 | 0.0002 | 0.0004 | 0.0003 | 2.5 |

LTE BAND 2

| AFC FREQUENCY ERROR vs. VOLTAGE | | | | | | | |
|---------------------------------|-----------------------|---------|---------|---------|---------|---------|-------------|
| VOLTAGE (Volts) | FREQUENCY ERROR (ppm) | | | | | | LIMIT (ppm) |
| | 1.4MHz | 3MHz | 5MHz | 10MHz | 15MHz | 20MHz | |
| 3.8 | 0.0029 | 0.0025 | 0.0038 | 0.0031 | 0.0035 | 0.0027 | 2.5 |
| 3.6 | -0.0035 | -0.0038 | -0.0047 | -0.0038 | -0.0042 | -0.0035 | 2.5 |
| 4.2 | -0.0031 | -0.0034 | -0.0041 | -0.0035 | -0.0037 | -0.0030 | 2.5 |

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.2Vdc.


| AFC FREQUENCY ERROR vs. TEMPERATURE | | | | | | | |
|-------------------------------------|-----------------------|---------|---------|---------|---------|---------|-------------|
| TEMP. (°C) | FREQUENCY ERROR (ppm) | | | | | | LIMIT (ppm) |
| | 1.4MHz | 3MHz | 5MHz | 10MHz | 15MHz | 20MHz | |
| -30 | -0.0059 | -0.0057 | -0.0059 | -0.0058 | -0.0060 | -0.0057 | 2.5 |
| -20 | -0.0053 | -0.0049 | -0.0054 | -0.0051 | -0.0055 | -0.0049 | 2.5 |
| -10 | -0.0045 | -0.0043 | -0.0046 | -0.0046 | -0.0048 | -0.0043 | 2.5 |
| 0 | -0.0038 | -0.0036 | -0.0039 | -0.0038 | -0.0040 | -0.0036 | 2.5 |
| 10 | -0.0030 | -0.0029 | -0.0032 | -0.0031 | -0.0033 | -0.0029 | 2.5 |
| 20 | -0.0023 | -0.0022 | -0.0026 | -0.0023 | -0.0025 | -0.0022 | 2.5 |
| 30 | -0.0017 | -0.0015 | -0.0018 | -0.0017 | -0.0019 | -0.0014 | 2.5 |
| 40 | -0.0010 | -0.0008 | -0.0013 | -0.0010 | -0.0011 | -0.0008 | 2.5 |
| 50 | -0.0003 | -0.0002 | -0.0005 | -0.0003 | -0.0002 | -0.0001 | 2.5 |
| 60 | 0.0004 | 0.0004 | 0.0002 | 0.0004 | 0.0004 | 0.0004 | 2.5 |

4.3 Occupied Bandwidth Measurement

4.3.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 Test Setup

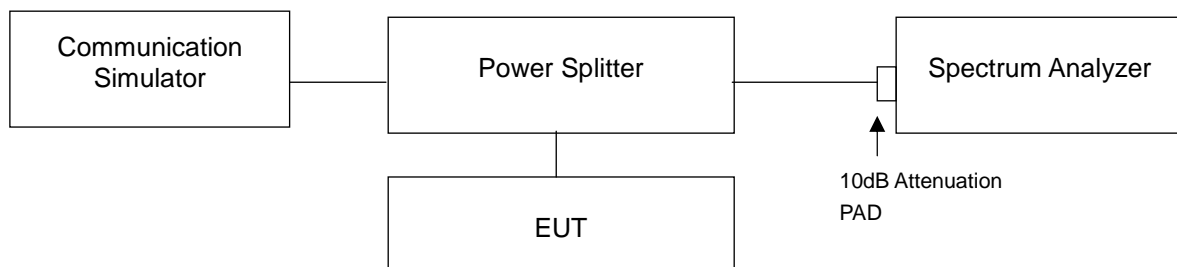


4.3.3 Test Result



| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (kHz) | | CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |
|---------|-----------------|------------------------------|--------|---------|-----------------|------------------------------|
| | | GSM | EDGE | | | WCDMA |
| 512 | 1850.2 | 242.00 | 247.00 | 9262 | 1852.4 | 4.16 |
| 661 | 1880.0 | 243.00 | 250.00 | 9400 | 1880.0 | 4.18 |
| 810 | 1909.8 | 246.00 | 243.00 | 9538 | 1907.6 | 4.15 |

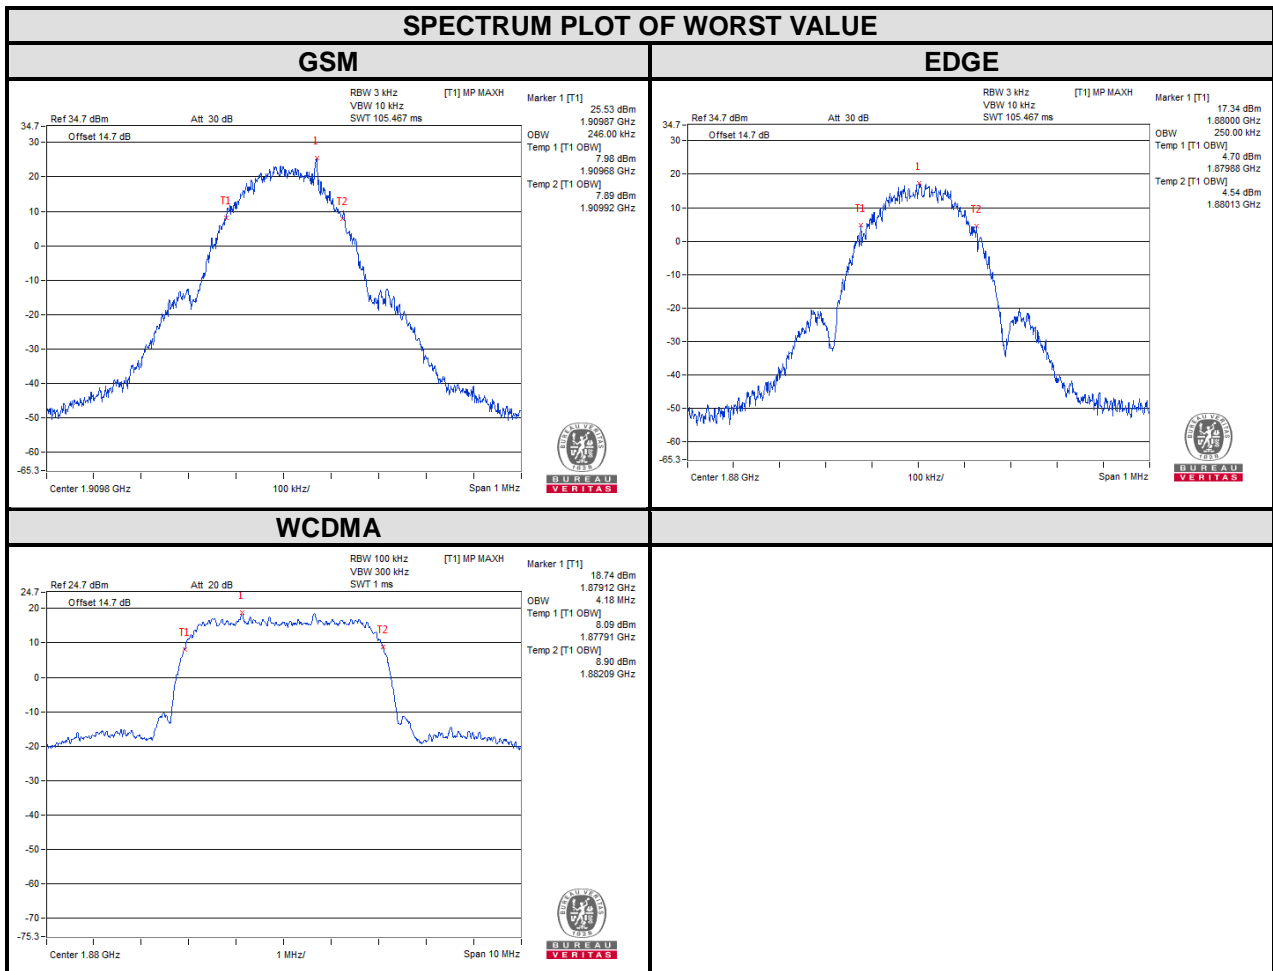

| CHANNEL | FREQUENCY (MHz) | 26dB BANDWIDTH (kHz) | | CHANNEL | FREQUENCY (MHz) | 26dB BANDWIDTH (MHz) |
|---------|-----------------|----------------------|--------|---------|-----------------|----------------------|
| | | GSM | EDGE | | | |
| 512 | 1850.2 | 319.67 | 316.25 | 9262 | 1852.4 | 4.71 |
| 661 | 1880.0 | 315.03 | 303.78 | 9400 | 1880.0 | 4.72 |
| 810 | 1909.8 | 320.02 | 314.59 | 9538 | 1907.6 | 4.74 |

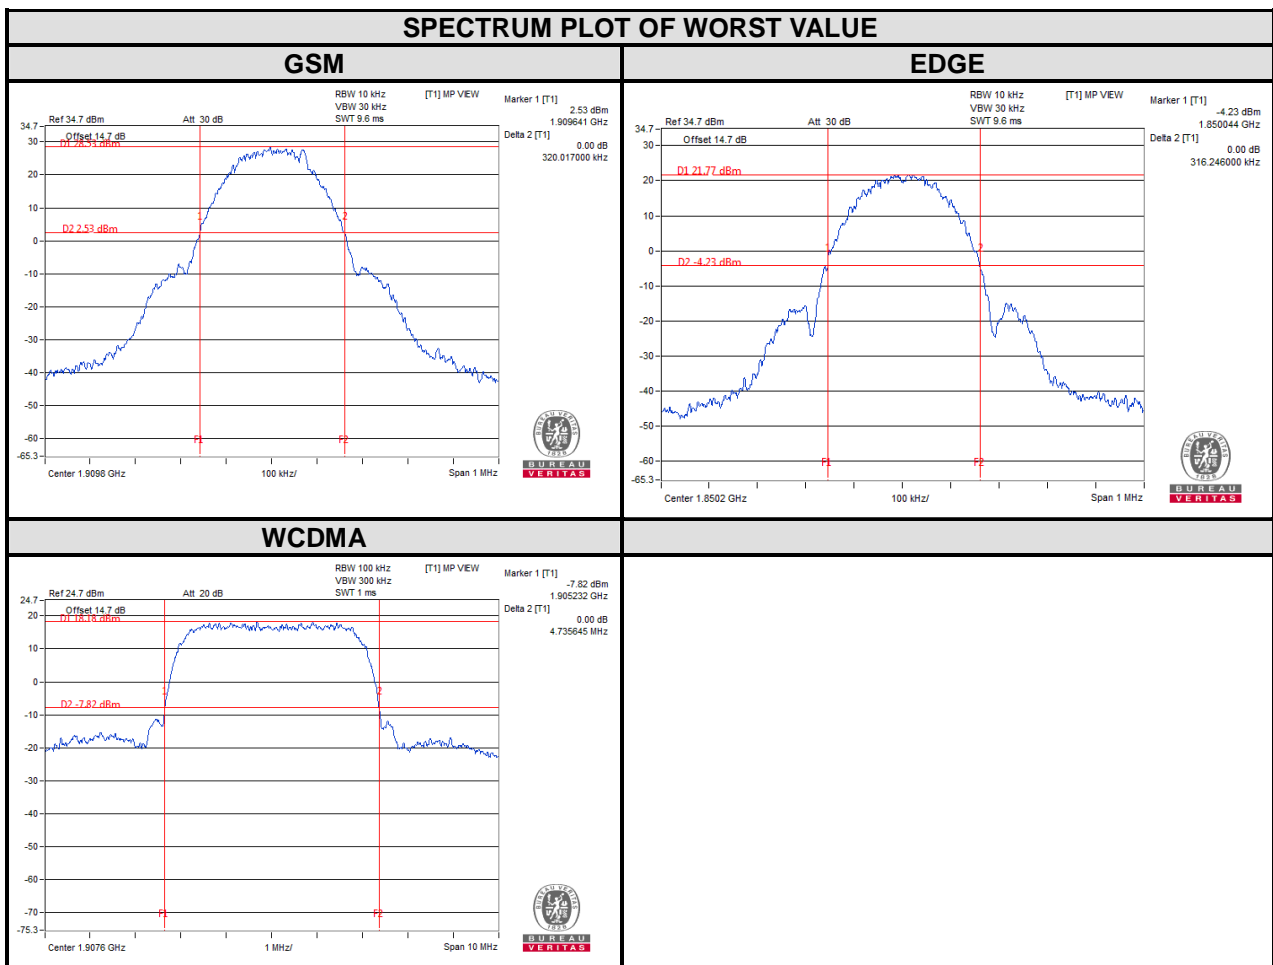

| LTE band 2 | | | | | | | |
|----------------------------|-----------------|------------------------------|-------|---------|-----------------|-----------------------|-------|
| Channel Bandwidth : 1.4MHz | | | | | | | |
| Channel | Frequency (MHz) | 99% Occupied bandwidth (MHz) | | Channel | Frequency (MHz) | 26 dB bandwidth (MHz) | |
| | | QPSK | 16QAM | | | QPSK | 16QAM |
| 18607 | 1850.7 | 1.09 | 1.09 | 18607 | 1850.7 | 1.26 | 1.26 |
| 18900 | 1880 | 1.09 | 1.09 | 18900 | 1880 | 1.26 | 1.28 |
| 19193 | 1909.3 | 1.09 | 1.09 | 19193 | 1909.3 | 1.28 | 1.30 |

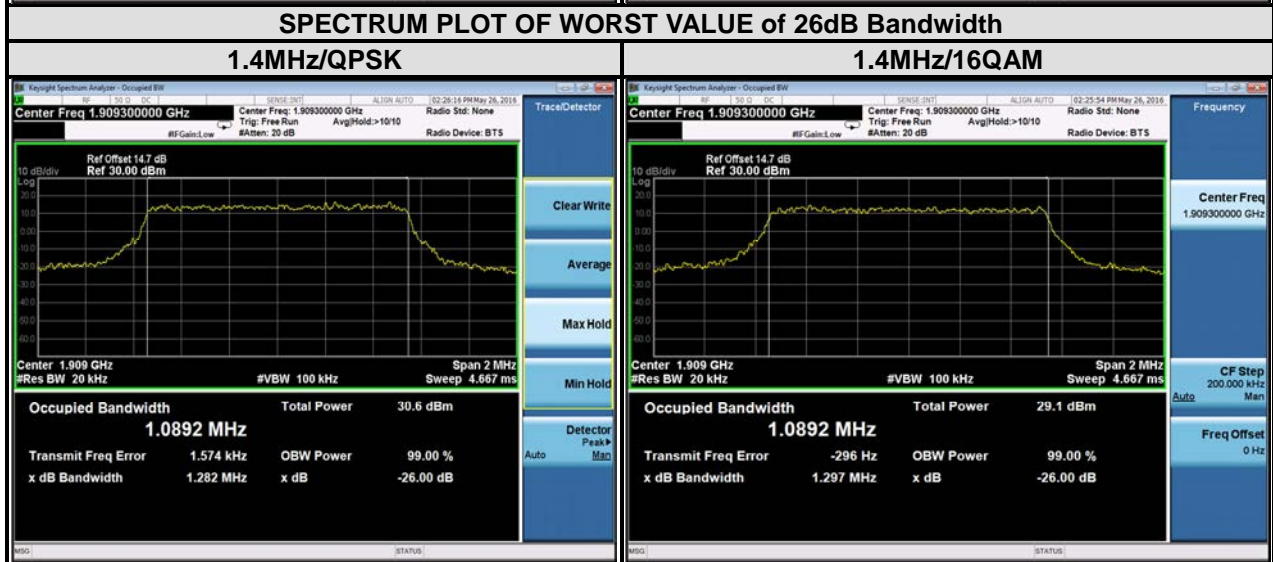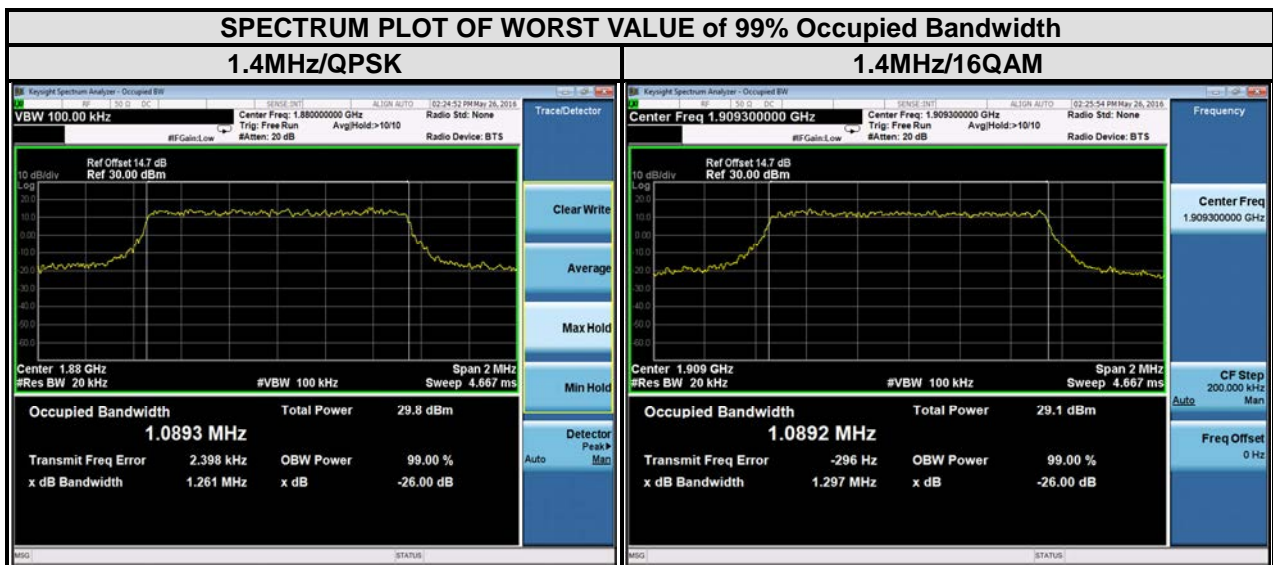

LTE band 2

Channel Bandwidth : 3MHz

| Channel | Frequency (MHz) | 99% Occupied bandwidth (MHz) | | Channel | Frequency (MHz) | 26 dB bandwidth (MHz) | |
|---------|-----------------|------------------------------|-------|---------|-----------------|-----------------------|-------|
| | | QPSK | 16QAM | | | QPSK | 16QAM |
| 18615 | 1851.5 | 2.69 | 2.68 | 18615 | 1851.5 | 2.93 | 2.90 |
| 18900 | 1880 | 2.70 | 2.68 | 18900 | 1880 | 2.96 | 2.93 |
| 19185 | 1908.5 | 2.69 | 2.68 | 19185 | 1908.5 | 2.94 | 2.92 |

SPECTRUM PLOT OF WORST VALUE of 99% Occupied Bandwidth



SPECTRUM PLOT OF WORST VALUE of 26dB Occupied Bandwidth




LTE band 2


Channel Bandwidth : 5 MHz

| Channel | Frequency (MHz) | 99% Occupied bandwidth (MHz) | | Channel | Frequency (MHz) | 26 dB bandwidth (MHz) | |
|---------|-----------------|------------------------------|-------|---------|-----------------|-----------------------|-------|
| | | QPSK | 16QAM | | | QPSK | 16QAM |
| 18625 | 1852.5 | 4.49 | 4.49 | 18625 | 1852.5 | 4.92 | 4.90 |
| 18900 | 1880 | 4.49 | 4.48 | 18900 | 1880 | 4.92 | 4.91 |
| 19175 | 1907.5 | 4.48 | 4.48 | 19175 | 1907.5 | 4.92 | 4.88 |


SPECTRUM PLOT OF WORST VALUE of 99% Occupied Bandwidth

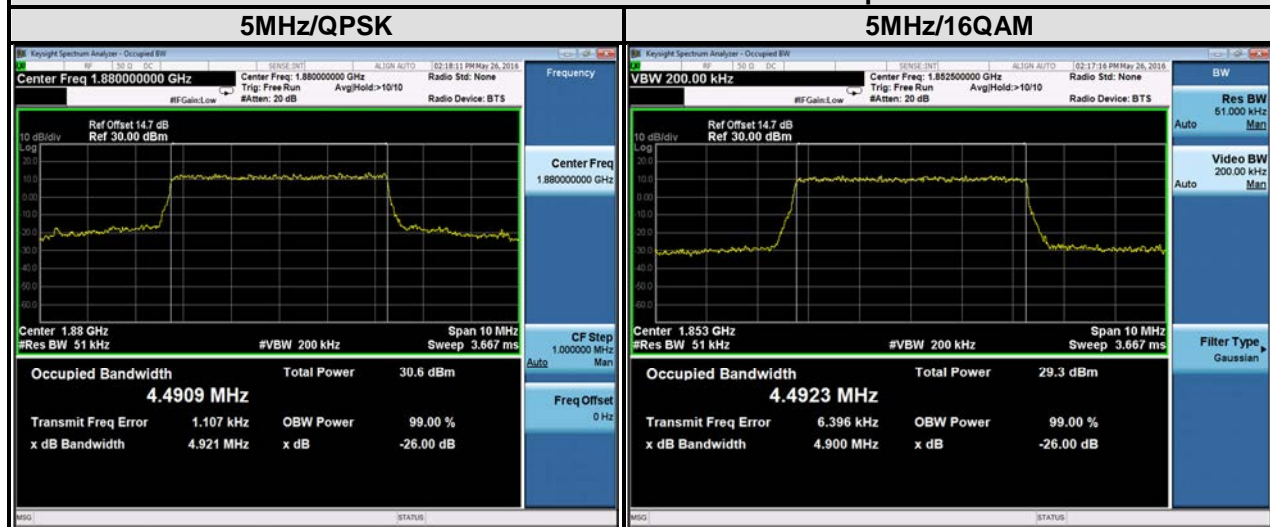



SPECTRUM PLOT OF WORST VALUE of 26dB Occupied Bandwidth

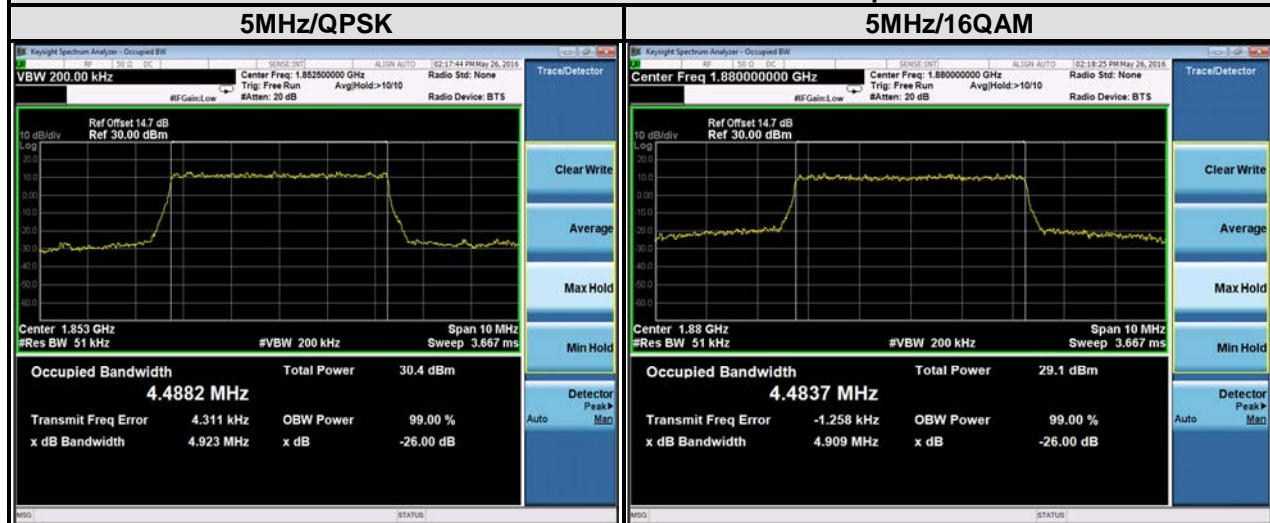

| LTE band 2 | | | | | | | |
|----------------------------|-----------------|------------------------------|-------|---------|-----------------|-----------------------|-------|
| Channel Bandwidth : 10 MHz | | | | | | | |
| Channel | Frequency (MHz) | 99% Occupied bandwidth (MHz) | | Channel | Frequency (MHz) | 26 dB bandwidth (MHz) | |
| | | QPSK | 16QAM | | | QPSK | 16QAM |
| 18650 | 1855 | 8.94 | 8.93 | 18650 | 1855 | 9.68 | 9.65 |
| 18900 | 1880 | 8.96 | 8.94 | 18900 | 1880 | 9.75 | 9.68 |
| 19150 | 1905 | 8.95 | 8.94 | 19150 | 1905 | 9.71 | 9.69 |

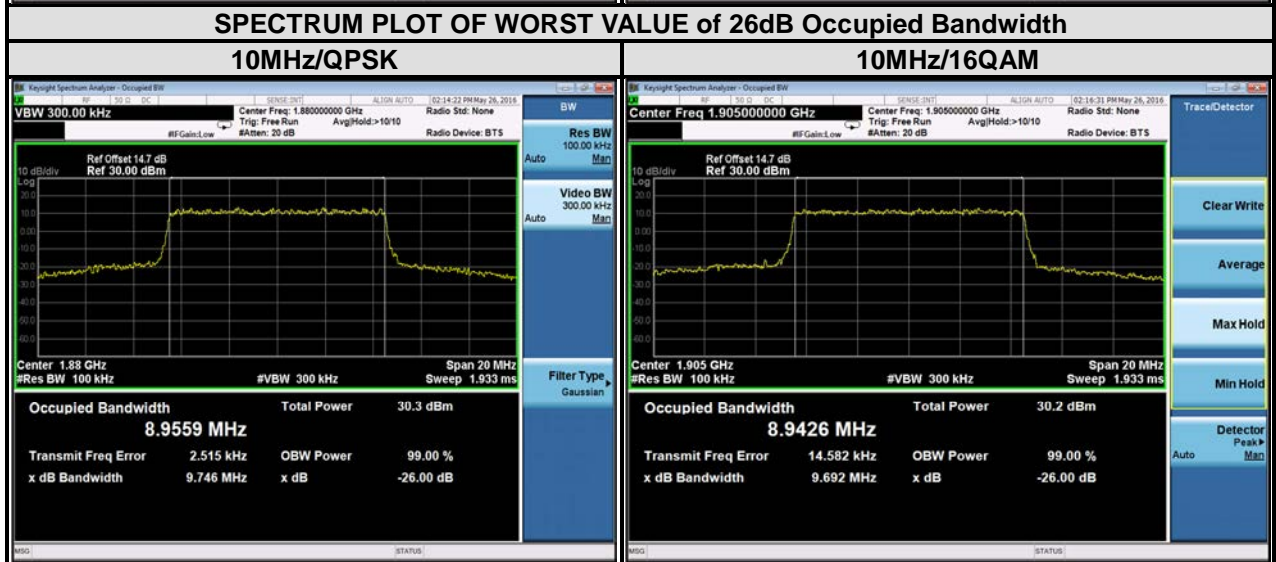

| LTE band 2 | | | | | | | |
|----------------------------|-----------------|------------------------------|-------|---------|-----------------|-----------------------|-------|
| Channel Bandwidth : 15 MHz | | | | | | | |
| Channel | Frequency (MHz) | 99% Occupied bandwidth (MHz) | | Channel | Frequency (MHz) | 26 dB bandwidth (MHz) | |
| | | QPSK | 16QAM | | | QPSK | 16QAM |
| 18675 | 1857.5 | 13.42 | 13.43 | 18675 | 1857.5 | 14.58 | 14.52 |
| 18900 | 1880 | 13.43 | 13.42 | 18900 | 1880 | 14.53 | 14.53 |
| 19125 | 1902.5 | 13.45 | 13.45 | 19125 | 1902.5 | 14.45 | 14.56 |

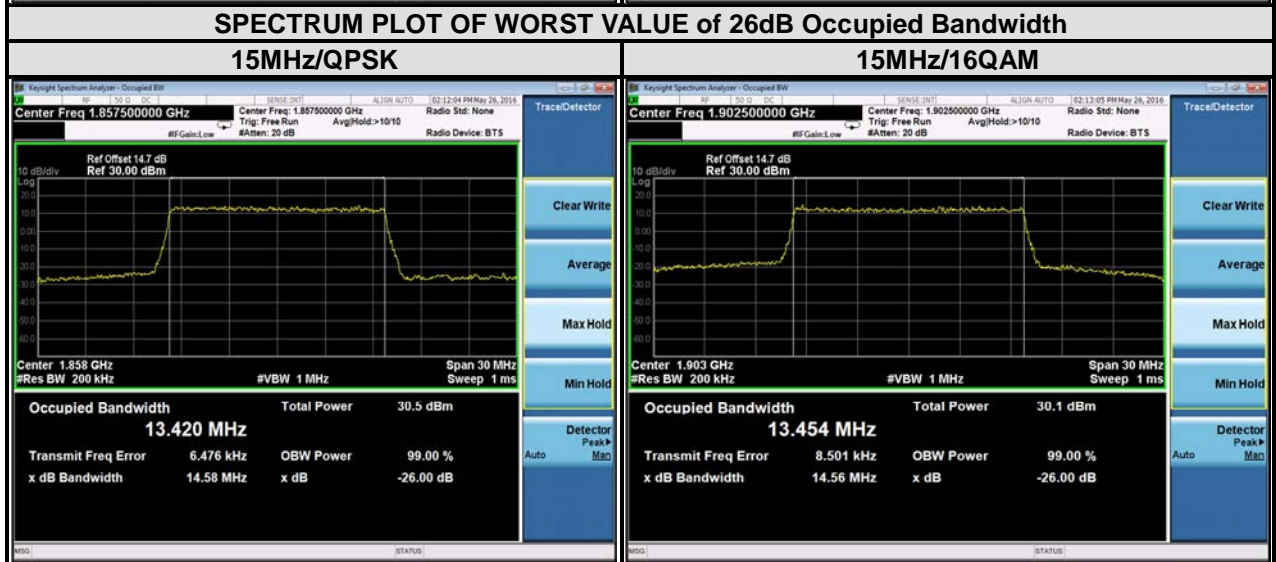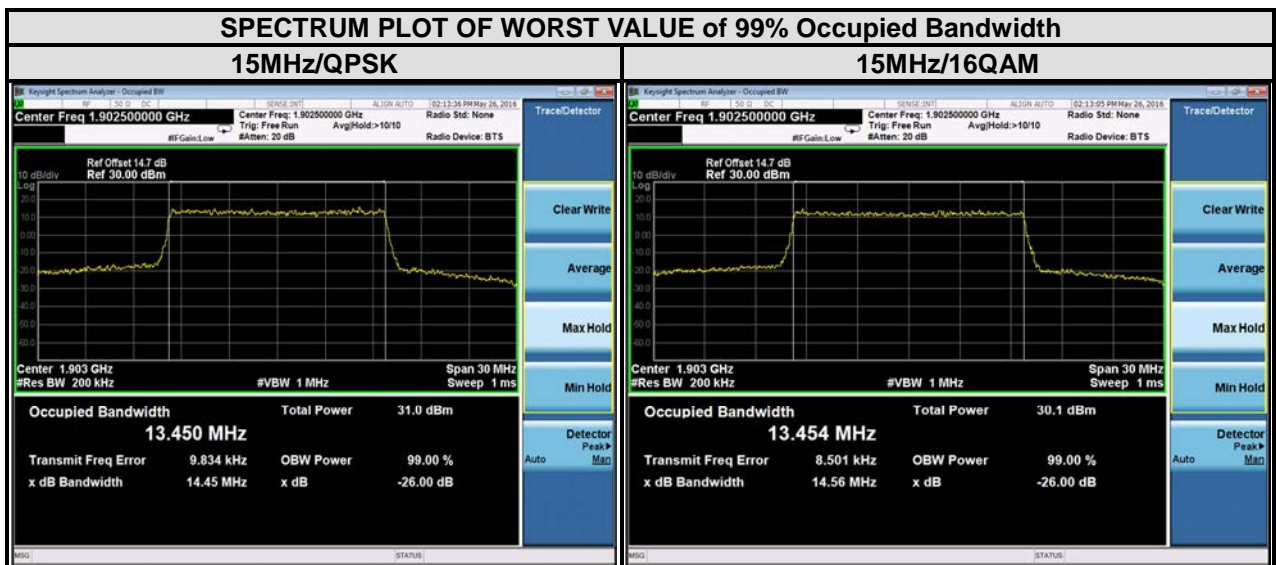


LTE band 2

Channel Bandwidth : 20 MHz


| Channel | Frequency (MHz) | 99% Occupied bandwidth (MHz) | | Channel | Frequency (MHz) | 26 dB bandwidth (MHz) | |
|---------|-----------------|------------------------------|-------|---------|-----------------|-----------------------|-------|
| | | QPSK | 16QAM | | | QPSK | 16QAM |
| 18700 | 1860 | 17.93 | 17.86 | 18700 | 1860 | 19.35 | 19.00 |
| 18900 | 1880 | 17.92 | 17.87 | 18900 | 1880 | 19.08 | 19.08 |
| 19100 | 1900 | 17.93 | 17.88 | 19100 | 1900 | 19.22 | 19.08 |

SPECTRUM PLOT OF WORST VALUE of 99% Occupied Bandwidth

20MHz/QPSK

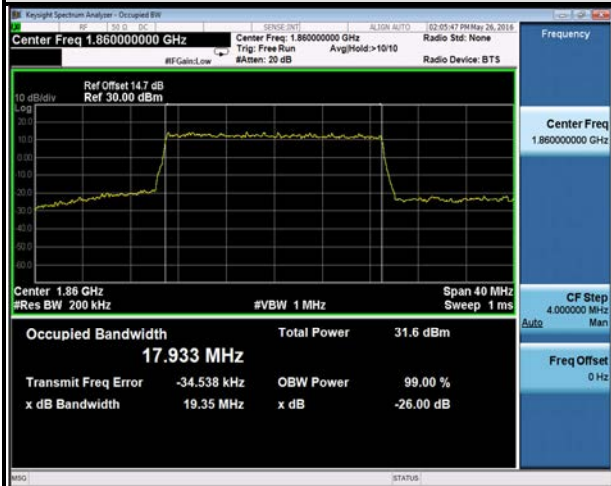


20MHz/16QAM

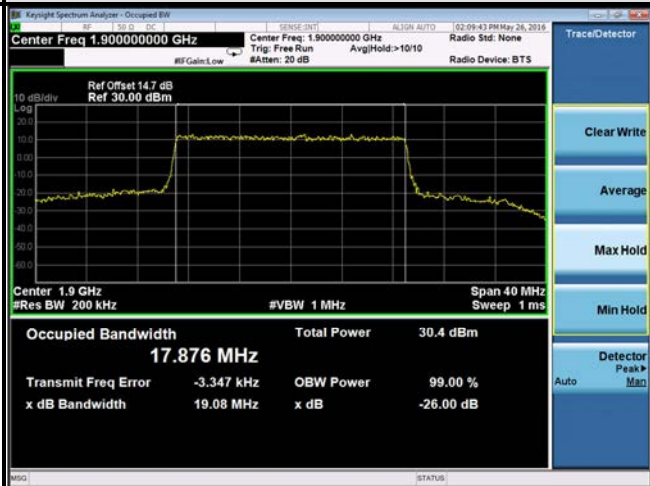


SPECTRUM PLOT OF WORST VALUE of 26dB Occupied Bandwidth

20MHz/QPSK

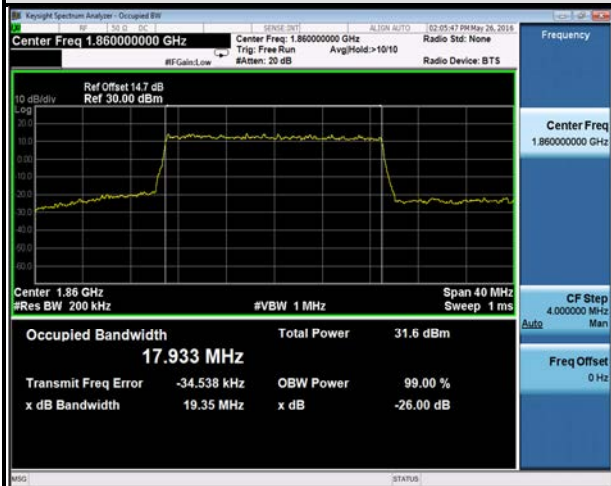

20MHz/16QAM

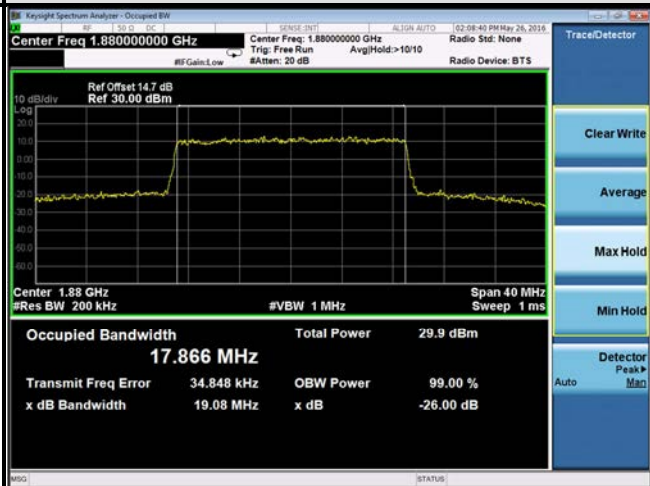


4.4 Band Edge Measurement

4.4.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.4.2 Test Setup

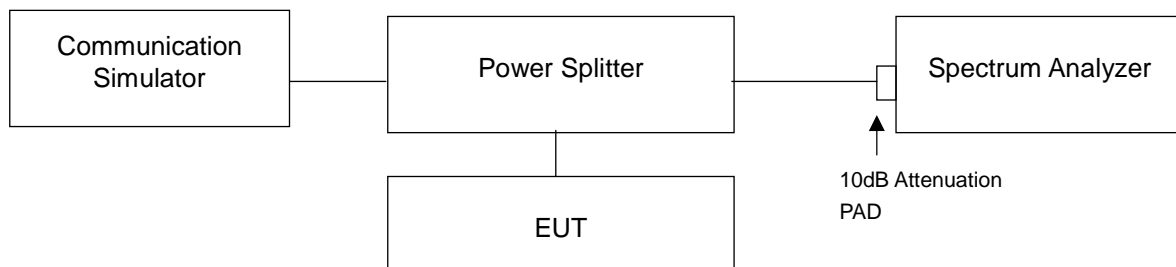

4.4.3 Test Procedures


- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/ GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 20kHz and VB of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 50kHz and VB of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 200kHz and VB of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- i. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 200kHz and VB of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- j. Record the max trace plot into the test report.

4.4.4 Test Results

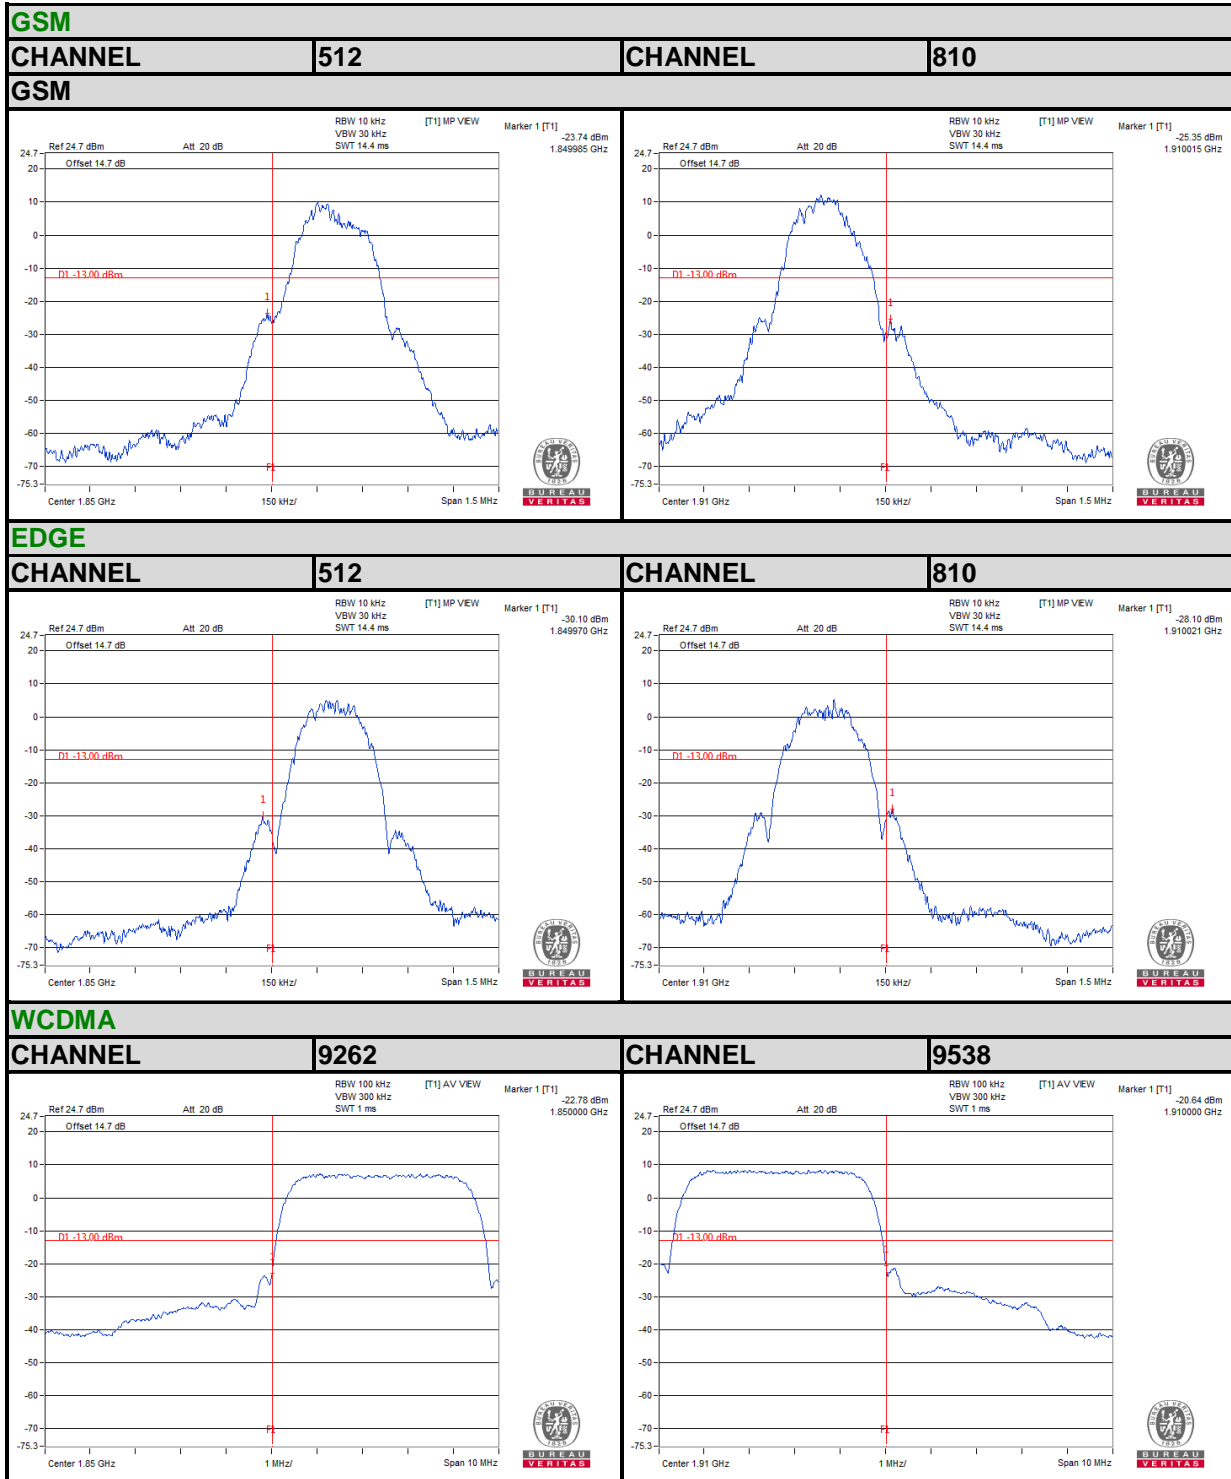

LTE BAND 2

Channel Bandwidth: 1.4MHz

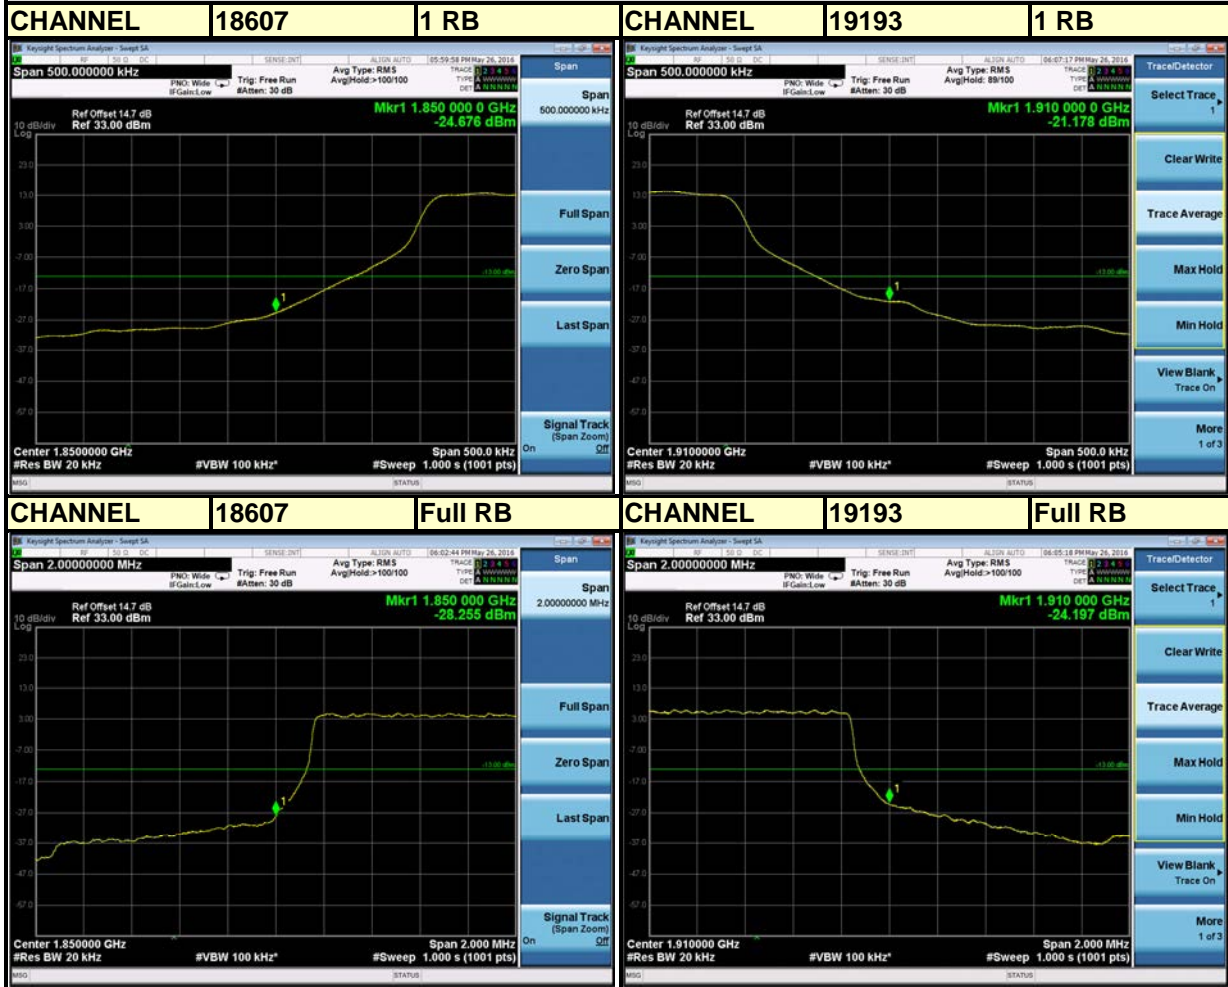




LTE BAND 2

Channel Bandwidth: 3MHz




LTE BAND 2

Channel Bandwidth: 5MHz

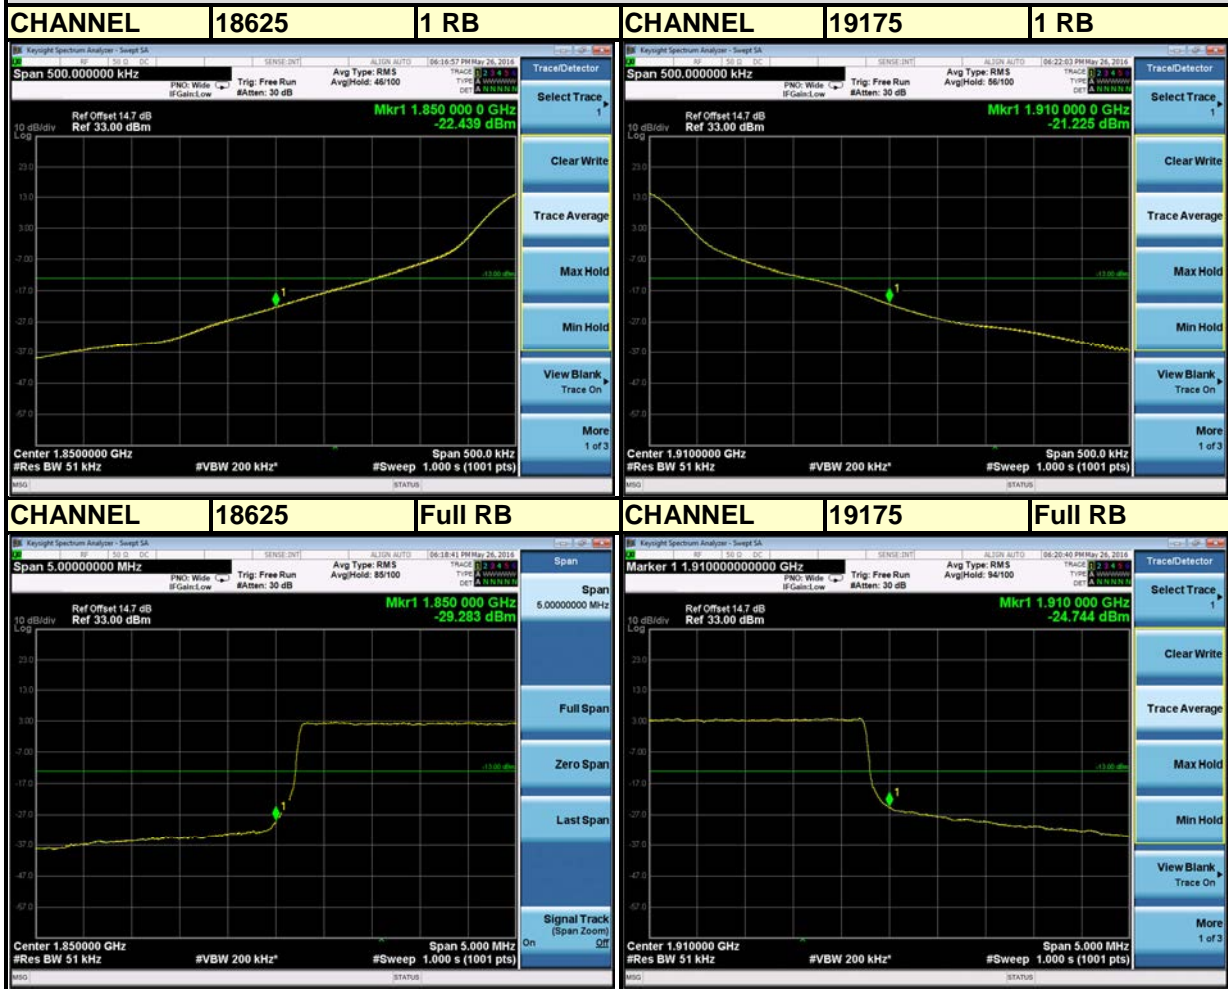


LTE BAND 2

Channel Bandwidth: 10MHz

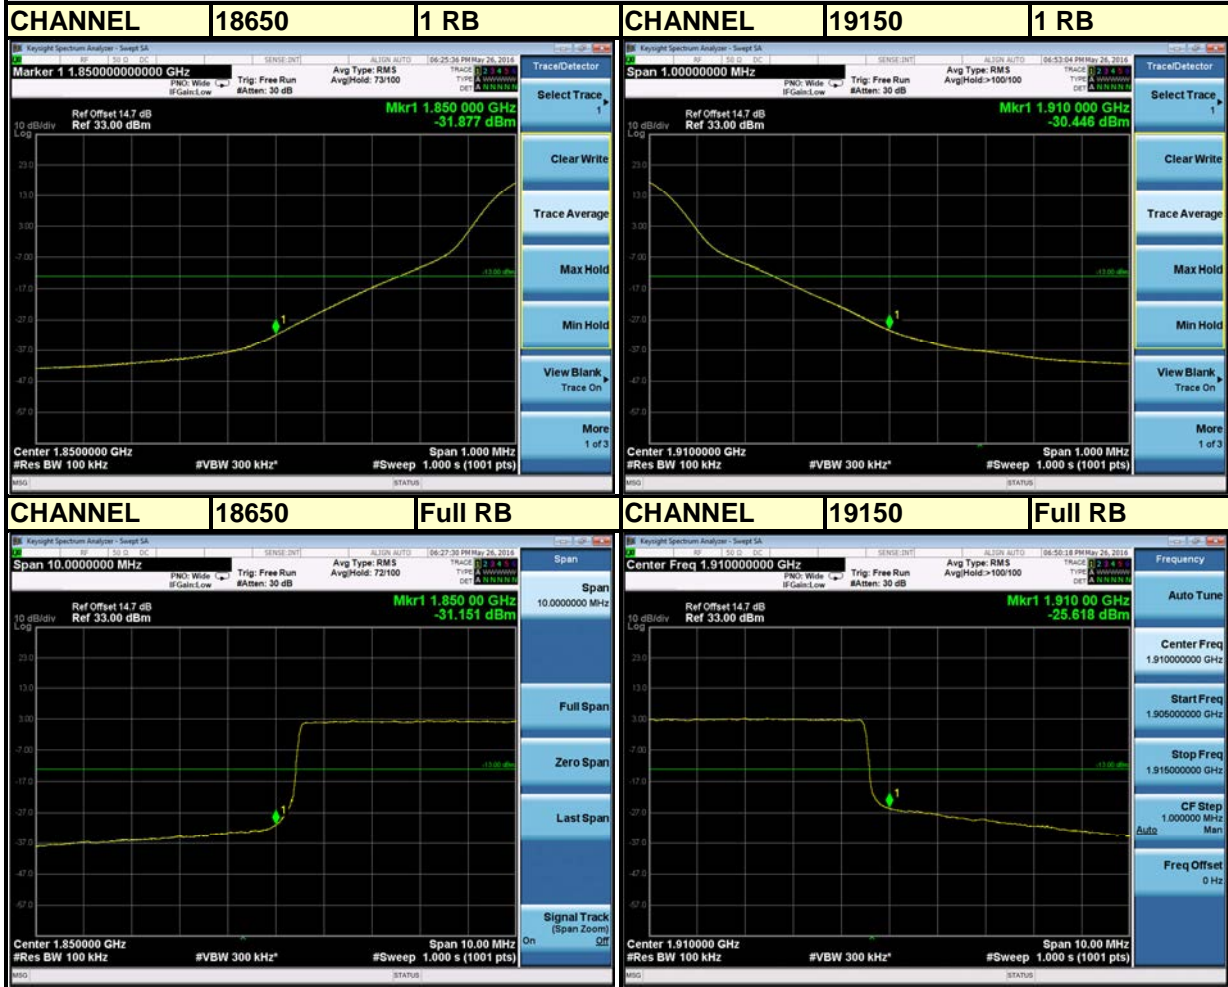


LTE BAND 2

Channel Bandwidth: 15MHz

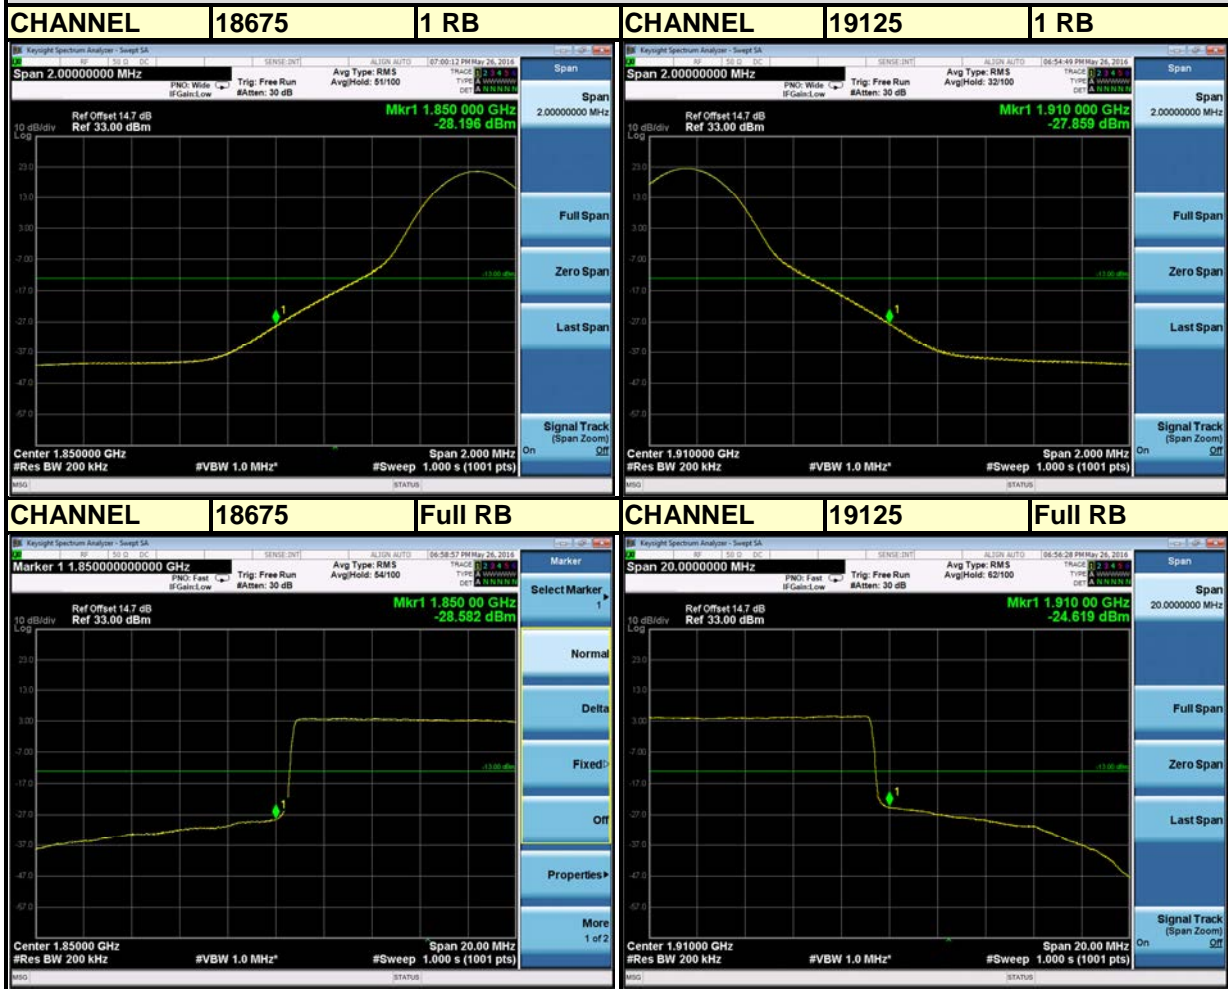

LTE BAND 2

Channel Bandwidth: 20MHz

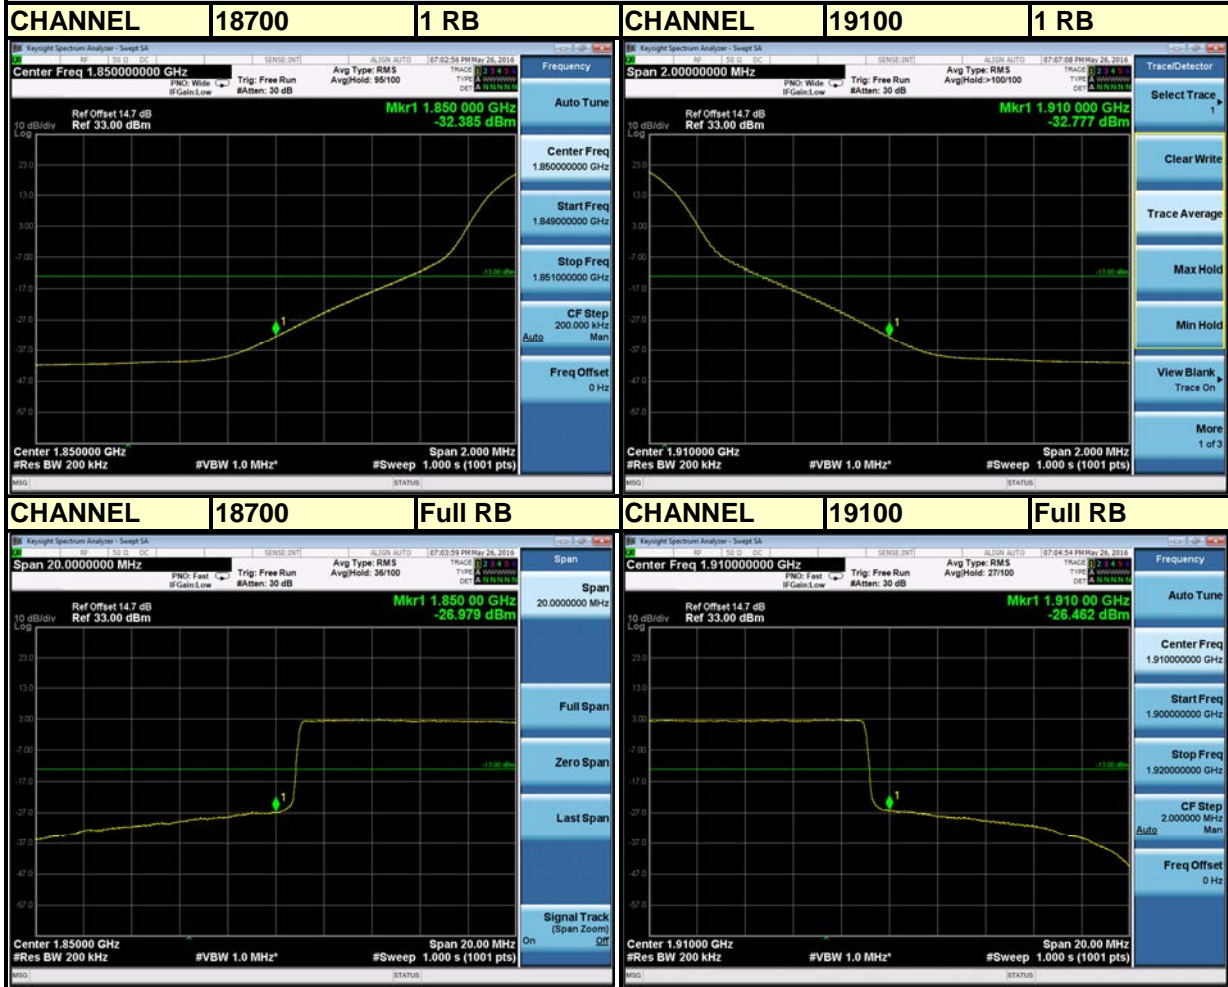


4.5 Peak To Average Ratio

4.5.1 Limits of Peak To Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.5.2 Test Setup

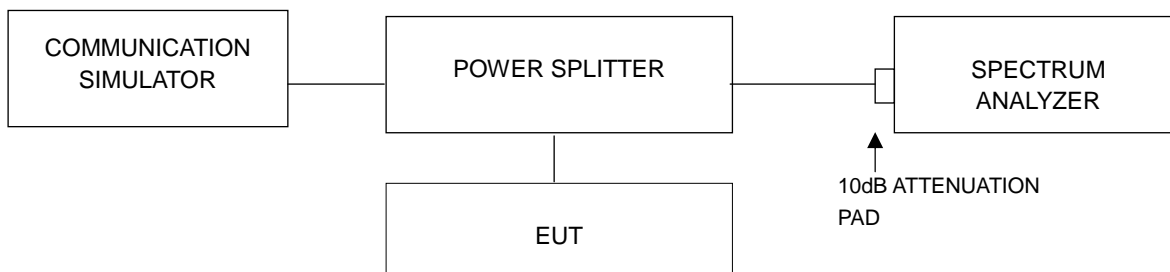


4.5.3 Test Procedures

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results

| Channel | Frequency (MHz) | Peak To Average Ratio (dB) | | Channel | Frequency (MHz) | Peak To Average Ratio (dB) |
|---------|-----------------|----------------------------|------|---------|-----------------|----------------------------|
| | | GSM | EDGE | | | |
| 661 | 1880.0 | 10.59 | 9.42 | 9400 | 1880.0 | 3.58 |

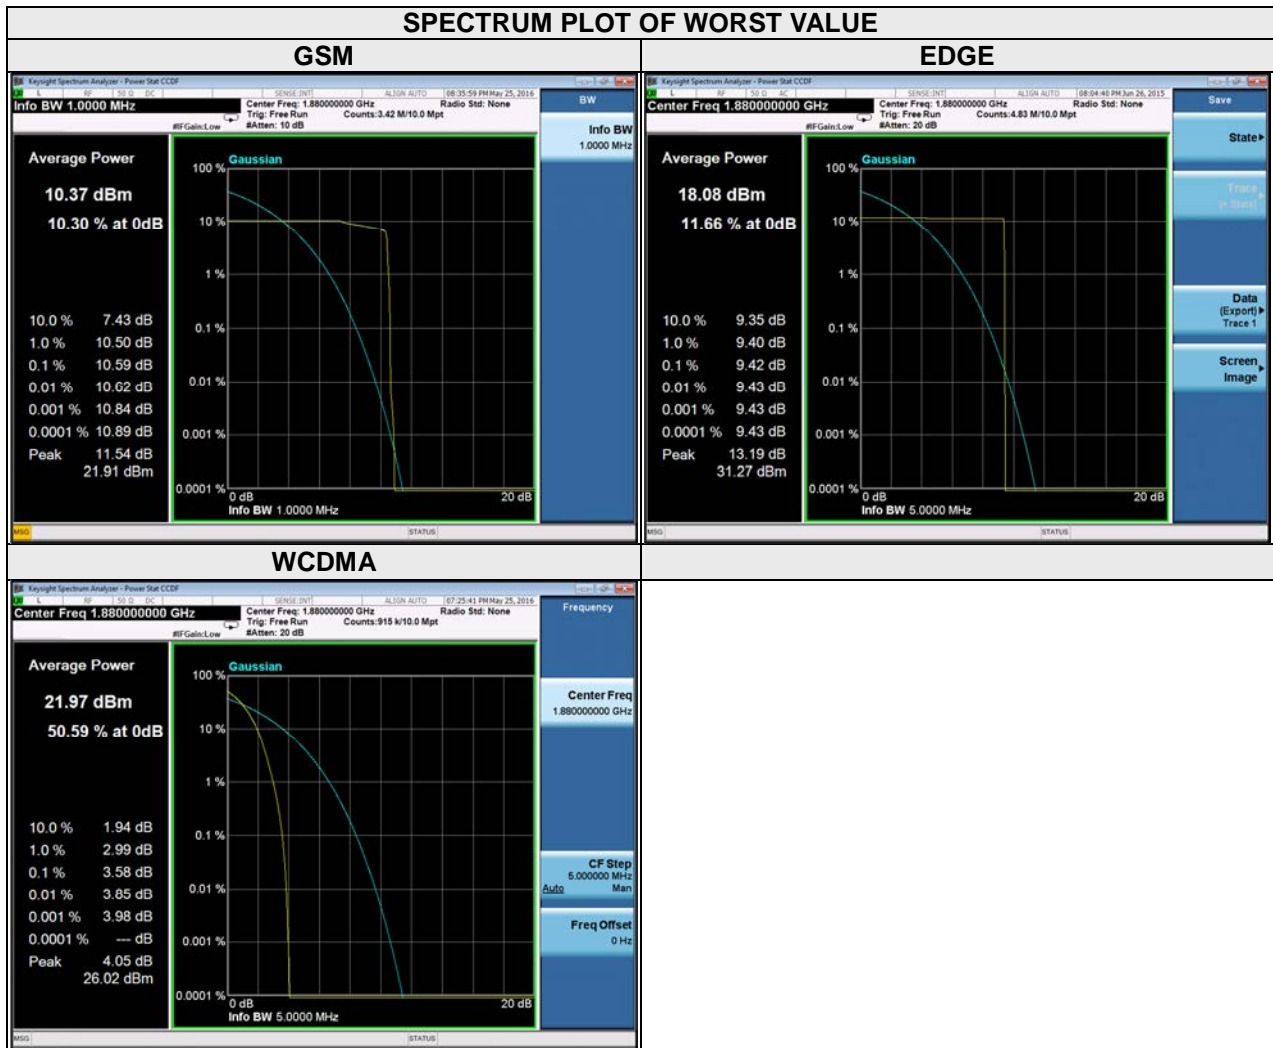


LTE BAND 2


| CHANNEL BANDWIDTH: 1.4MHz | | | | CHANNEL BANDWIDTH: 3MHz | | | |
|---------------------------|-----------------|----------------------------|-------|-------------------------|-----------------|----------------------------|-------|
| CHANNEL | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) | | CHANNEL | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) | |
| | | QPSK | 16QAM | | | QPSK | 16QAM |
| 18607 | 1850.7 | 5.58 | 6.25 | 18615 | 1851.5 | 5.63 | 6.40 |
| 18900 | 1880 | 6.09 | 6.98 | 18900 | 1880 | 6.28 | 7.09 |
| 19193 | 1909.3 | 5.50 | 6.33 | 19185 | 1908.5 | 5.72 | 6.54 |

SPECTRUM PLOT OF WORST VALUE


1.4MHz / QPSK

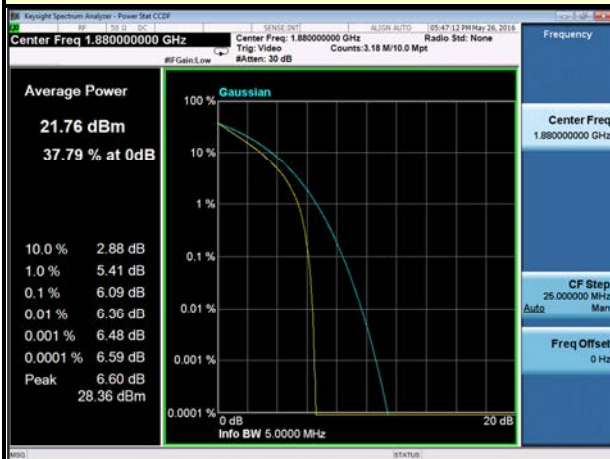


1.4MHz / 16QAM

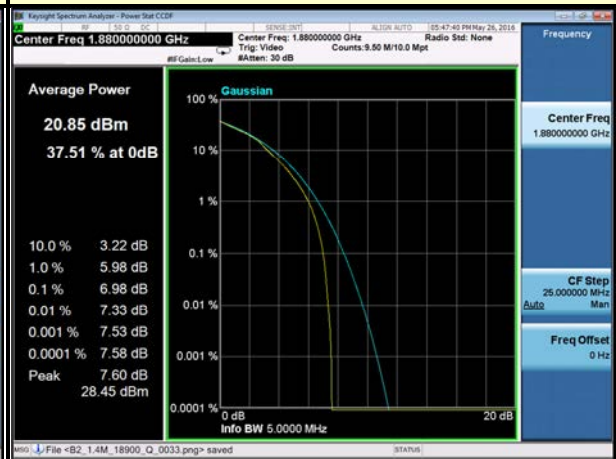


3MHz / QPSK

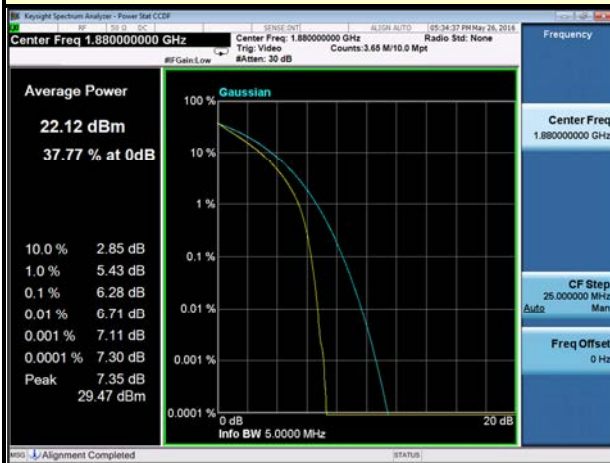

3MHz / 16QAM

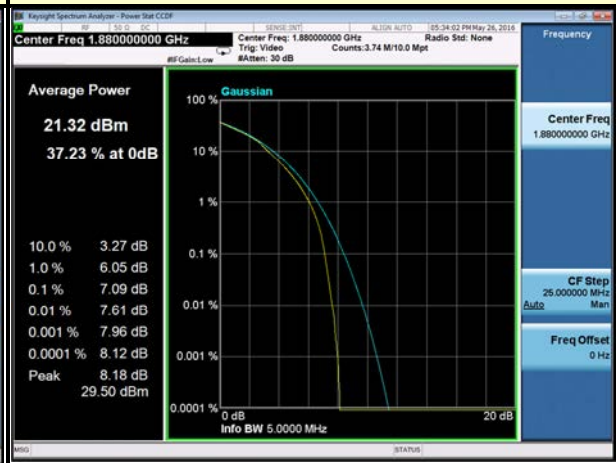

| CHANNEL BANDWIDTH: 5MHz | | | | CHANNEL BANDWIDTH: 10MHz | | | |
|-------------------------|-----------------|----------------------------|-------|--------------------------|-----------------|----------------------------|-------|
| CHANNEL | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) | | CHANNEL | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) | |
| | | QPSK | 16QAM | | | QPSK | 16QAM |
| 18625 | 1852.5 | 5.46 | 6.31 | 18650 | 1855 | 5.20 | 6.03 |
| 18900 | 1880 | 5.99 | 6.88 | 18900 | 1880 | 5.33 | 6.27 |
| 19175 | 1907.5 | 5.64 | 6.57 | 19150 | 1905 | 5.58 | 6.86 |

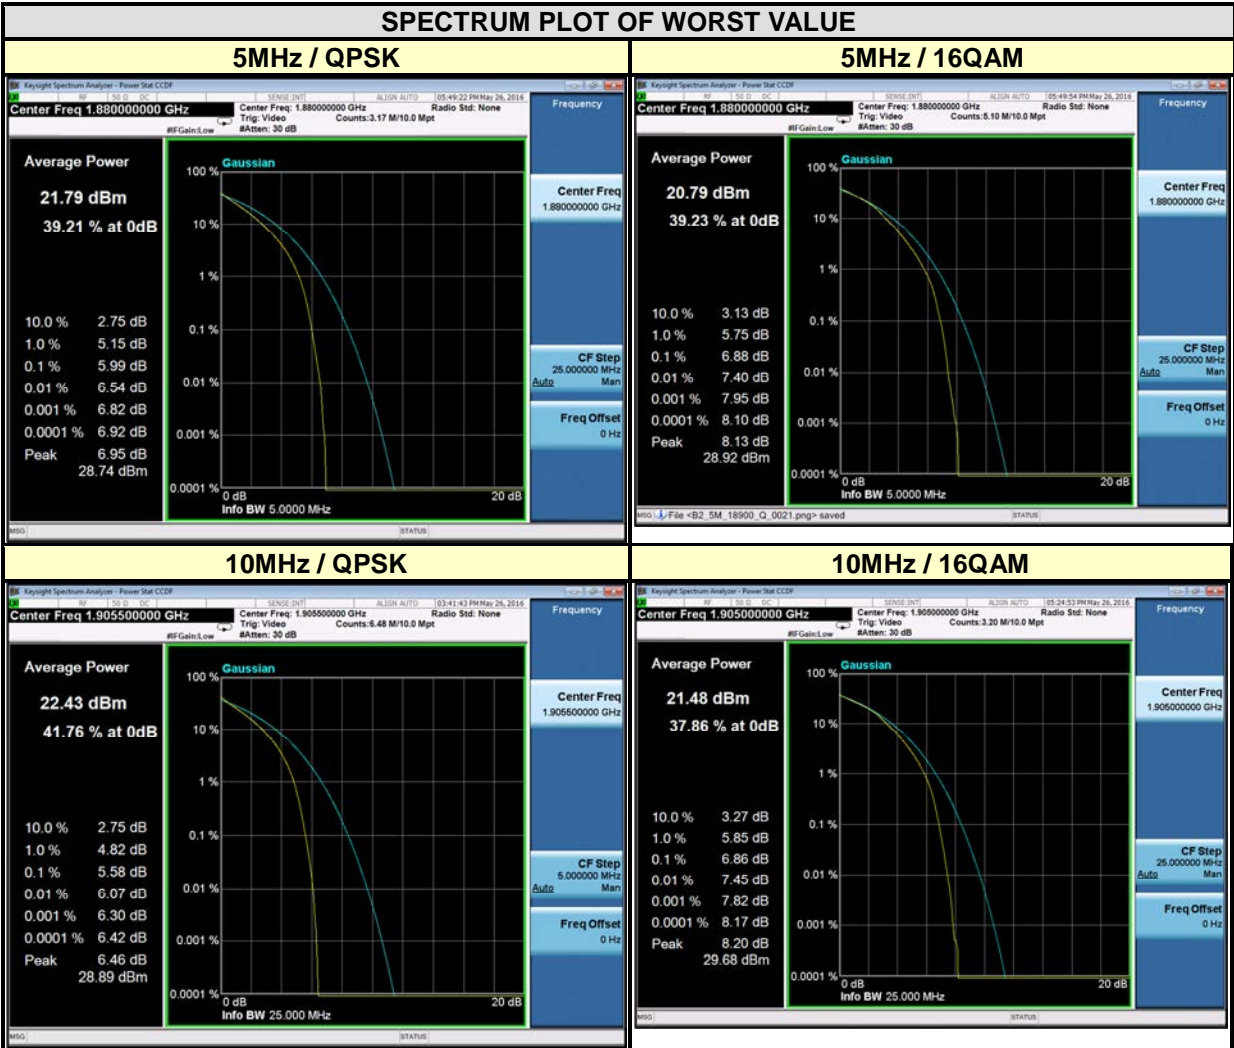


| CHANNEL BANDWIDTH: 15MHz | | | | CHANNEL BANDWIDTH: 20MHz | | | |
|--------------------------|-----------------|----------------------------|-------|--------------------------|-----------------|----------------------------|-------|
| CHANNEL | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) | | CHANNEL | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) | |
| | | QPSK | 16QAM | | | QPSK | 16QAM |
| 18675 | 1857.5 | 5.41 | 6.14 | 18700 | 1860 | 5.50 | 6.28 |
| 18900 | 1880 | 5.88 | 6.76 | 18900 | 1880 | 5.67 | 6.55 |
| 19125 | 1902.5 | 5.61 | 6.48 | 19100 | 1900 | 5.55 | 6.35 |

SPECTRUM PLOT OF WORST VALUE


15MHz / QPSK




15MHz / 16QAM

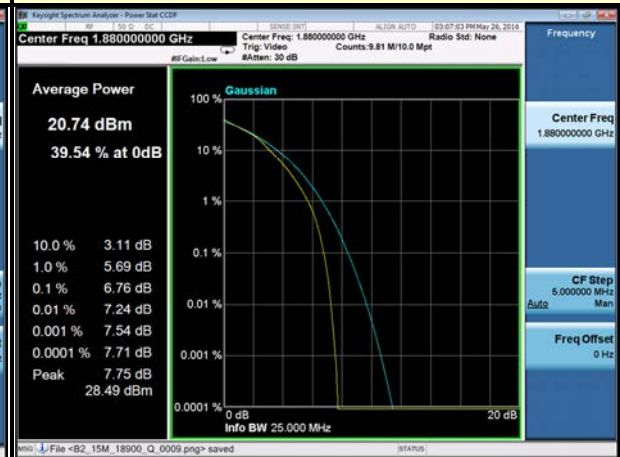

20MHz / QPSK

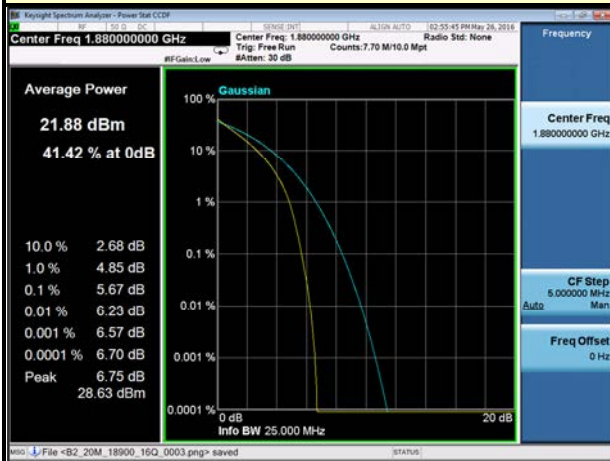

20MHz / 16QAM

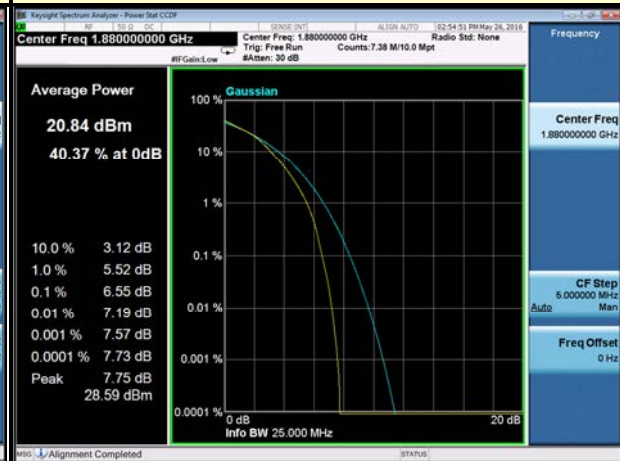


4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .


4.6.2 Test Setup

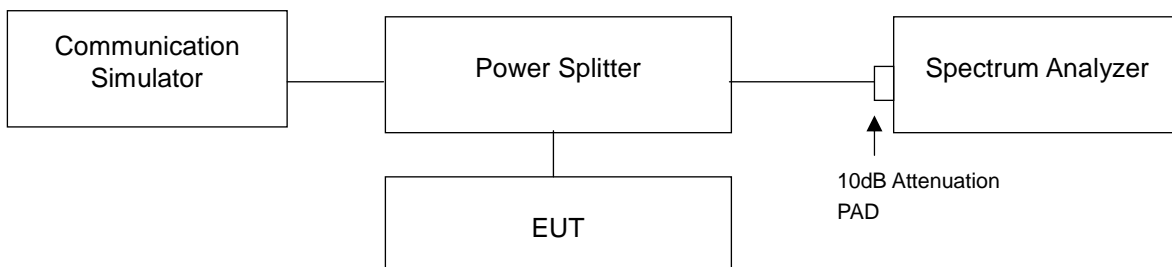

4.6.3 Test Procedure


- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 19.1GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.6.4 Test Results

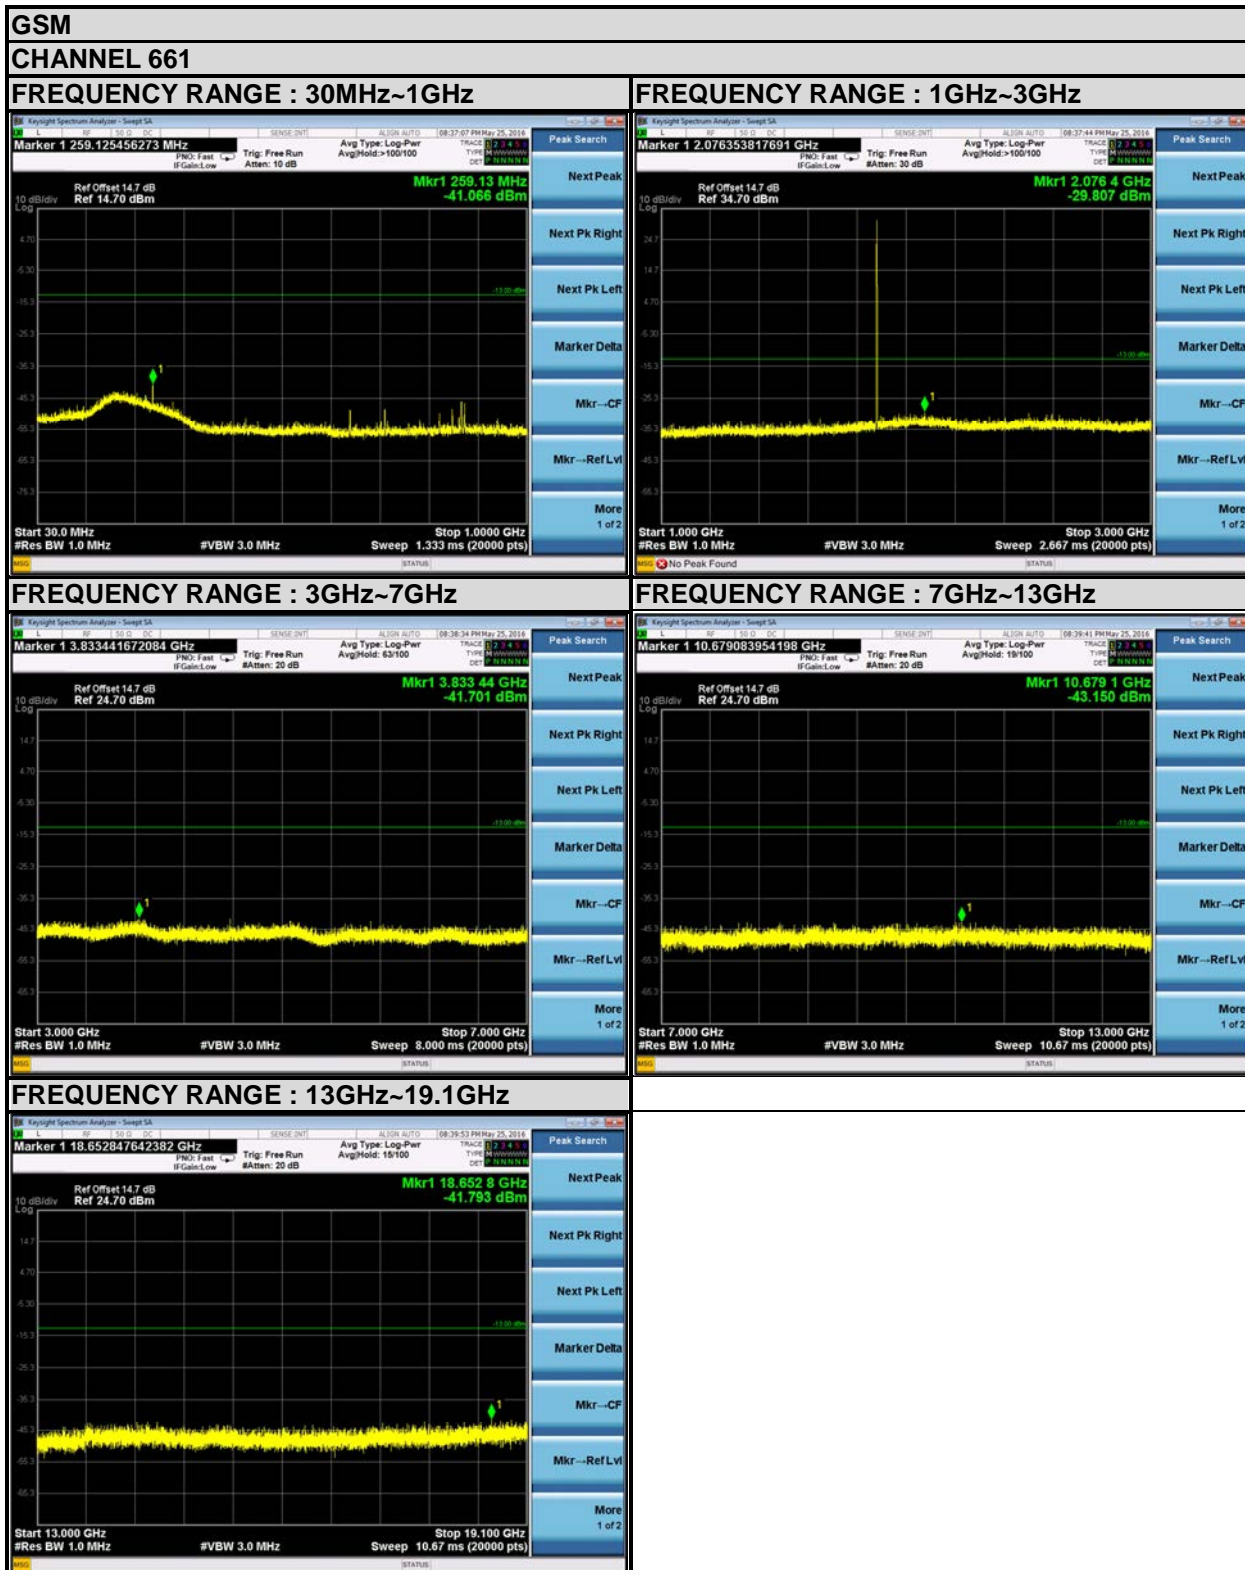


EDGE
CHANNEL 512


FREQUENCY RANGE : 30MHz~1GHz

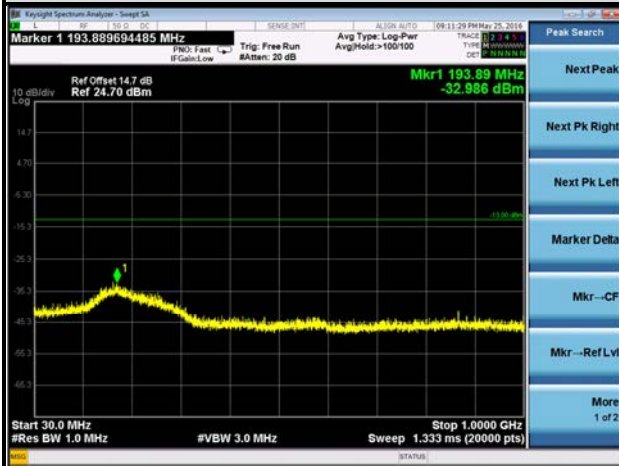


FREQUENCY RANGE : 1GHz~3GHz

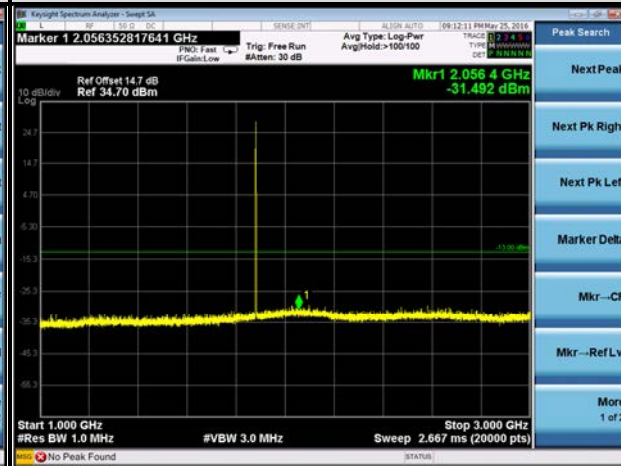


FREQUENCY RANGE : 3GHz~7GHz

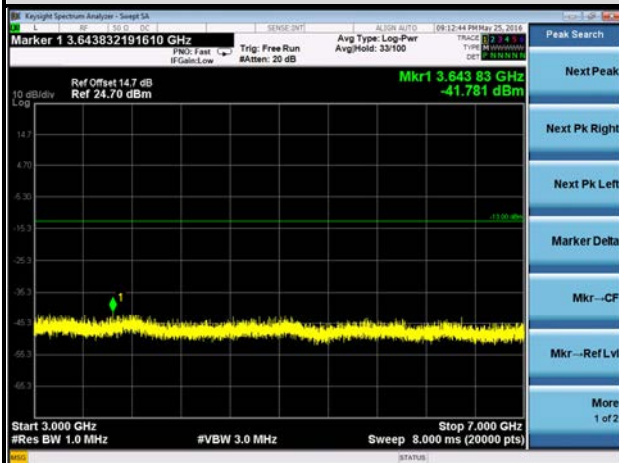

FREQUENCY RANGE : 7GHz~13GHz

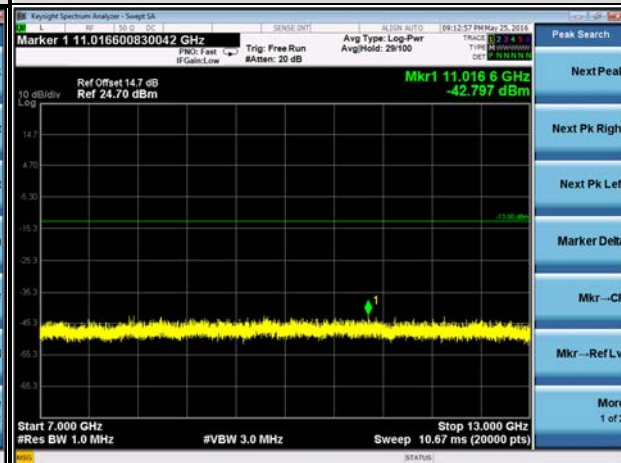


FREQUENCY RANGE : 13GHz~19.1GHz

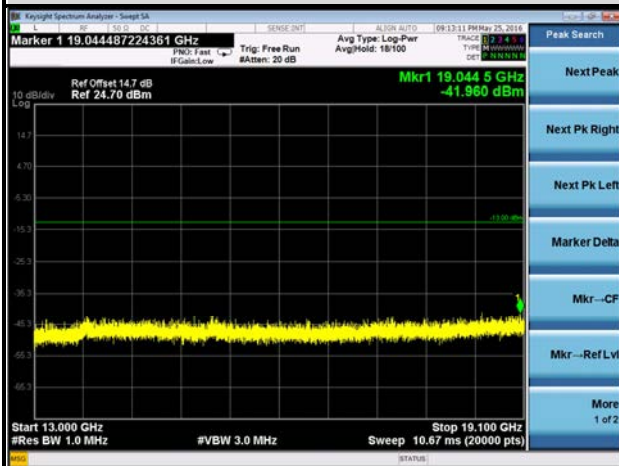


WCDMA
CHANNEL 9400


FREQUENCY RANGE : 30MHz~1GHz

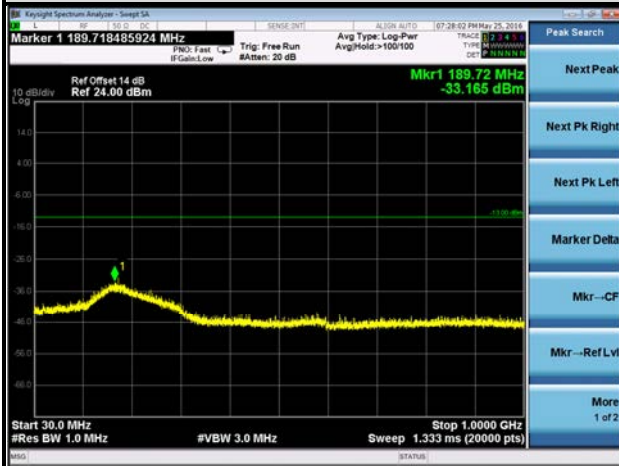


FREQUENCY RANGE : 1GHz~3GHz

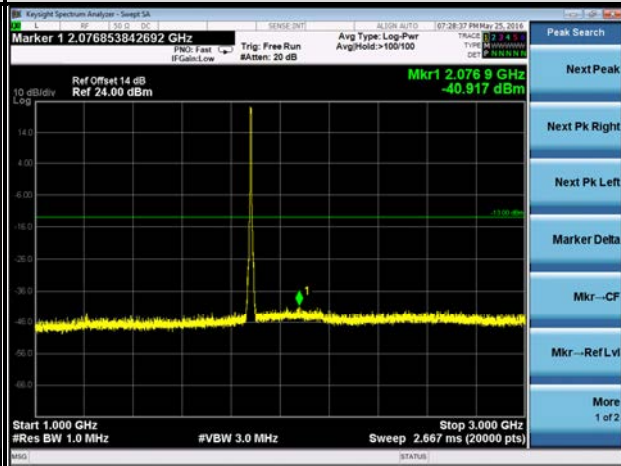


FREQUENCY RANGE : 3GHz~7GHz

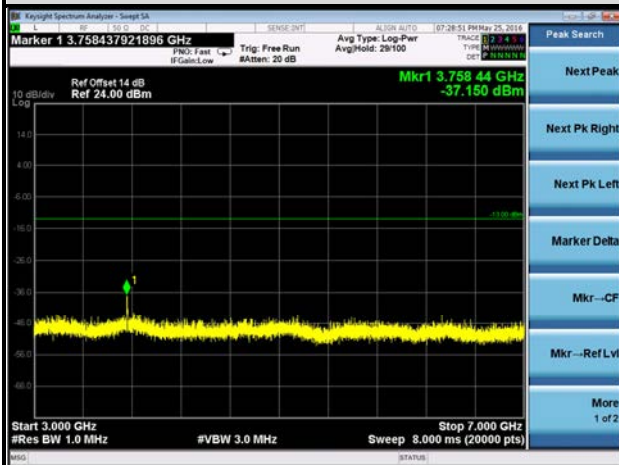

FREQUENCY RANGE : 7GHz~13GHz

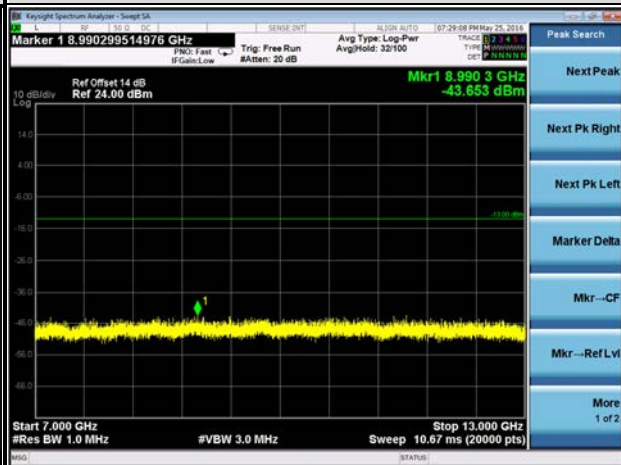

FREQUENCY RANGE : 13GHz~19.1GHz

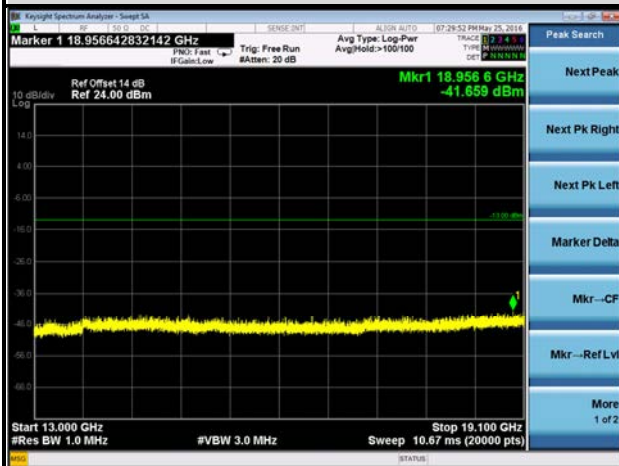


LTE BAND 2

CHANNEL 18900

1.4MHz / QPSK


FREQUENCY RANGE : 30MHz~19.1GHz

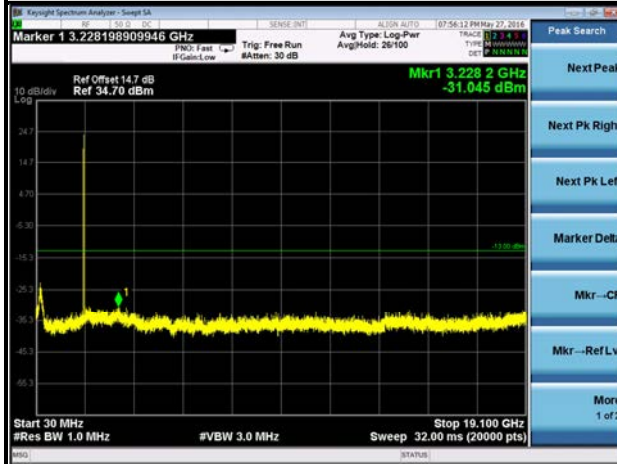

CHANNEL 18900

3MHz / QPSK


FREQUENCY RANGE : 30MHz~19.1GHz

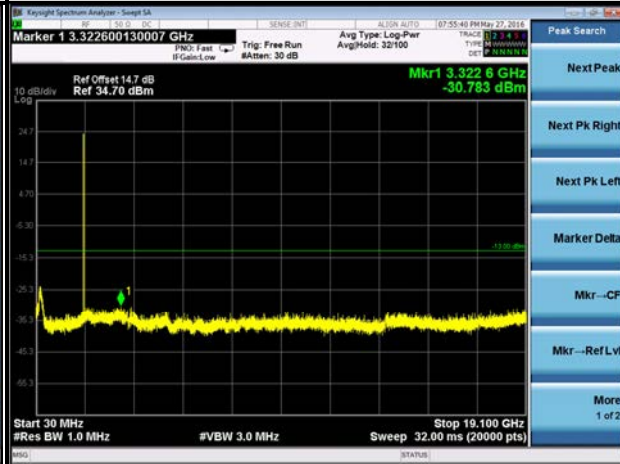

CHANNEL 18900

5MHz / QPSK


FREQUENCY RANGE : 30MHz~19.1GHz

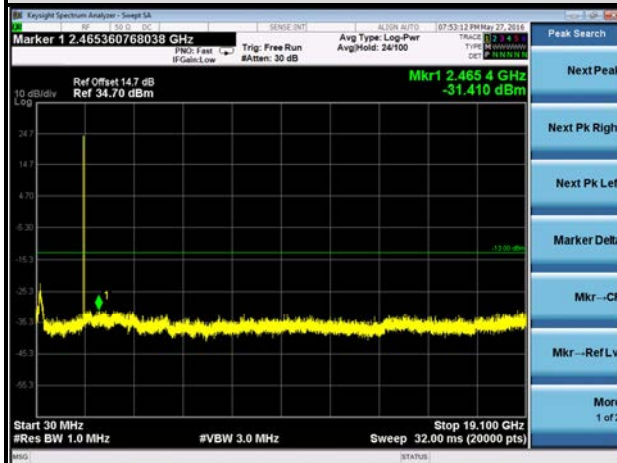

CHANNEL 18900

10MHz / QPSK


FREQUENCY RANGE : 30MHz~19.1GHz

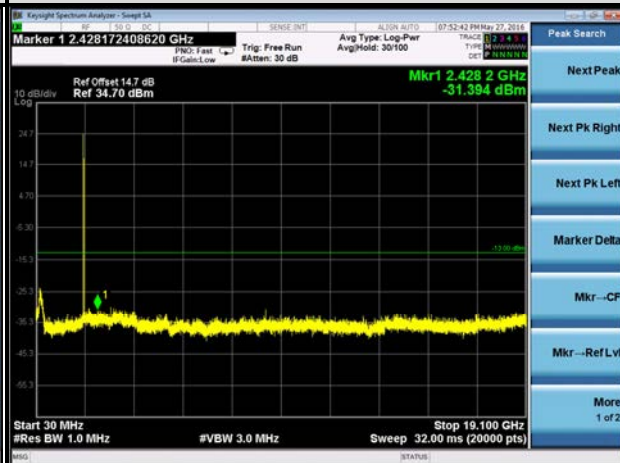

CHANNEL 18900

15MHz / QPSK


FREQUENCY RANGE : 30MHz~19.1GHz

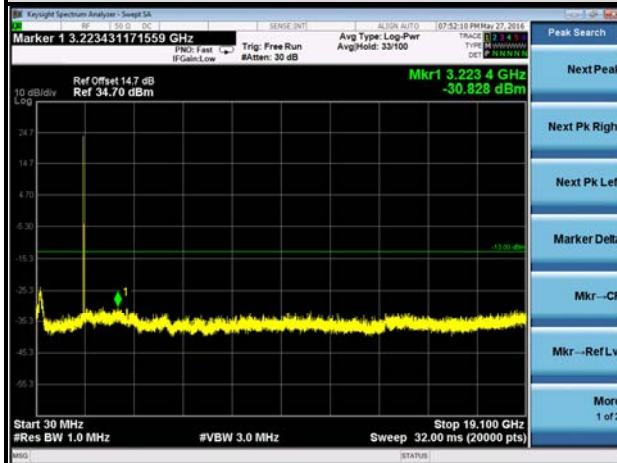

CHANNEL 18900

20MHz / QPSK

FREQUENCY RANGE : 30MHz~19.1GHz

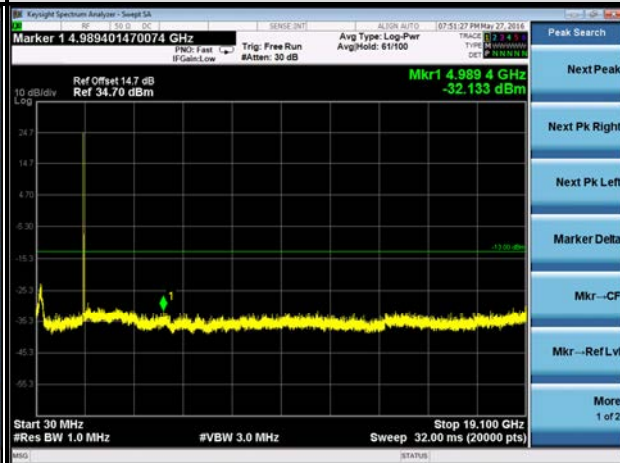

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.7.2 Test Procedure


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.3 Deviation from Test Standard

No deviation.

4.7.4 Test Setup

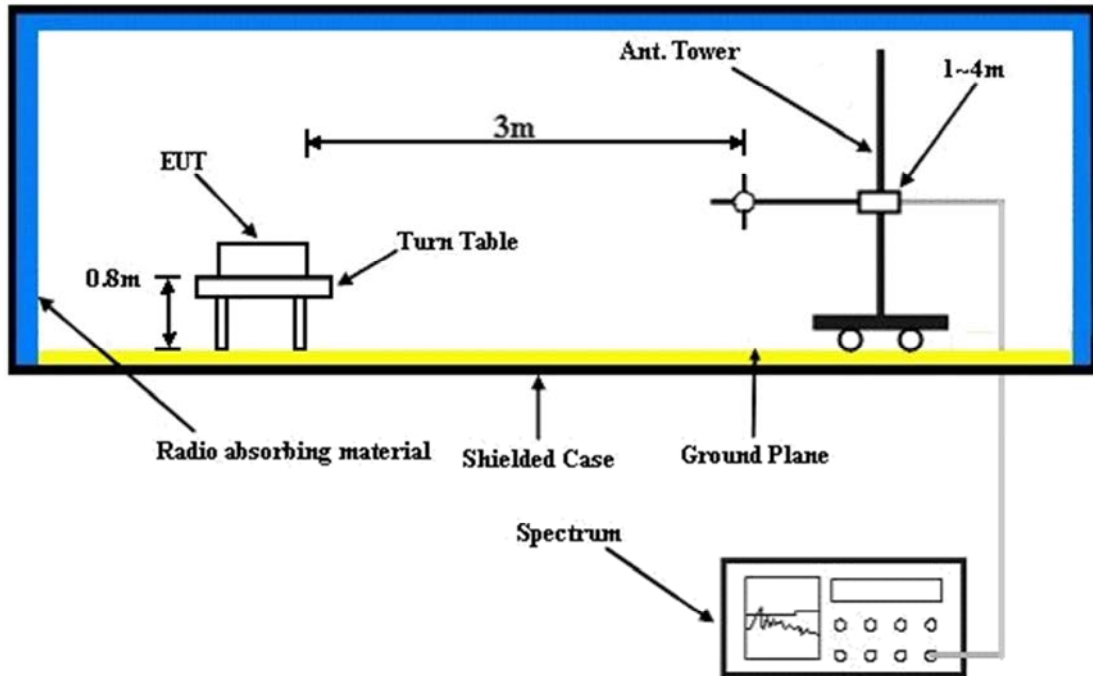


For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results


BELOW 1GHz WORST-CASE DATA

GSM 1900:

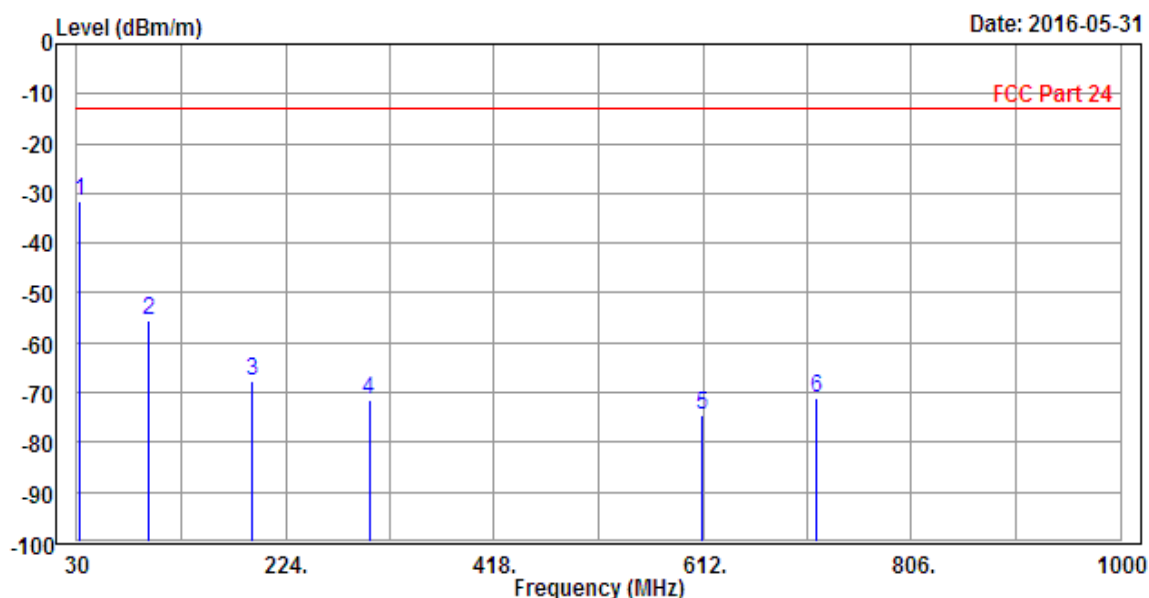

Condition: FCC Part 24 3m EIRP_26M-1GHz-20160505-EMC9135+3143B-FCC
 EUT : Baifone P4905
 Mode : PCS 1900
 Test By : Alex Chen
 Remark : IMEI 357288070008602

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|---------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 PP | 31.940 | -31.56 | -48.23 | -13.00 | -18.56 | 16.67 | Peak | Horizontal |
| 2 | 96.930 | -55.66 | -45.15 | -13.00 | -42.66 | -10.51 | Peak | Horizontal |
| 3 | 192.960 | -67.72 | -50.30 | -13.00 | -54.72 | -17.42 | Peak | Horizontal |
| 4 | 301.600 | -71.64 | -57.89 | -13.00 | -58.64 | -13.75 | Peak | Horizontal |
| 5 | 611.030 | -74.52 | -66.19 | -13.00 | -61.52 | -8.33 | Peak | Horizontal |
| 6 | 716.760 | -71.12 | -65.98 | -13.00 | -58.12 | -5.14 | Peak | Horizontal |

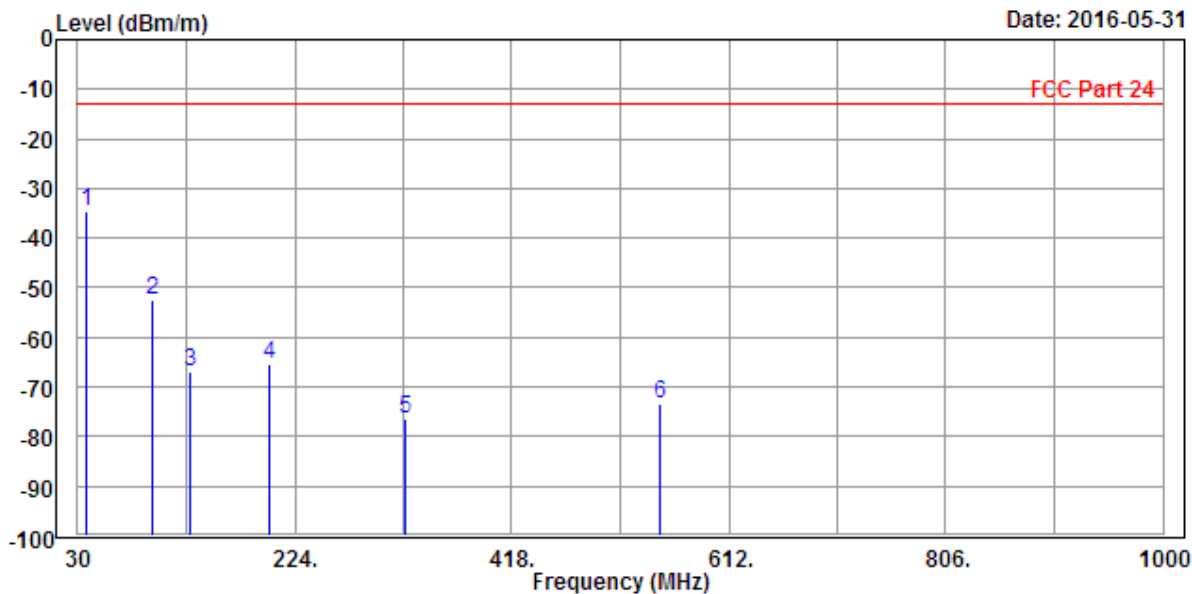


Condition: FCC Part 24 3m EIRP_26M-1GHz-20160505-EMC9135+3143B-FCC
 EUT : Baifone P4905
 Mode : PCS 1900
 Test By : Alex Chen
 Remark : IMEI 357288070008602

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|---------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 PP | 37.760 | -34.66 | -33.36 | -13.00 | -21.66 | -1.30 | Peak | Vertical |
| 2 | 96.930 | -52.34 | -41.71 | -13.00 | -39.34 | -10.63 | Peak | Vertical |
| 3 | 129.910 | -67.09 | -55.94 | -13.00 | -54.09 | -11.15 | Peak | Vertical |
| 4 | 200.720 | -65.40 | -54.75 | -13.00 | -52.40 | -10.65 | Peak | Vertical |
| 5 | 322.940 | -76.61 | -65.40 | -13.00 | -63.61 | -11.21 | Peak | Vertical |
| 6 | 550.890 | -73.25 | -65.96 | -13.00 | -60.25 | -7.29 | Peak | Vertical |


ABOVE 1GHz DATA

GSM 1900:

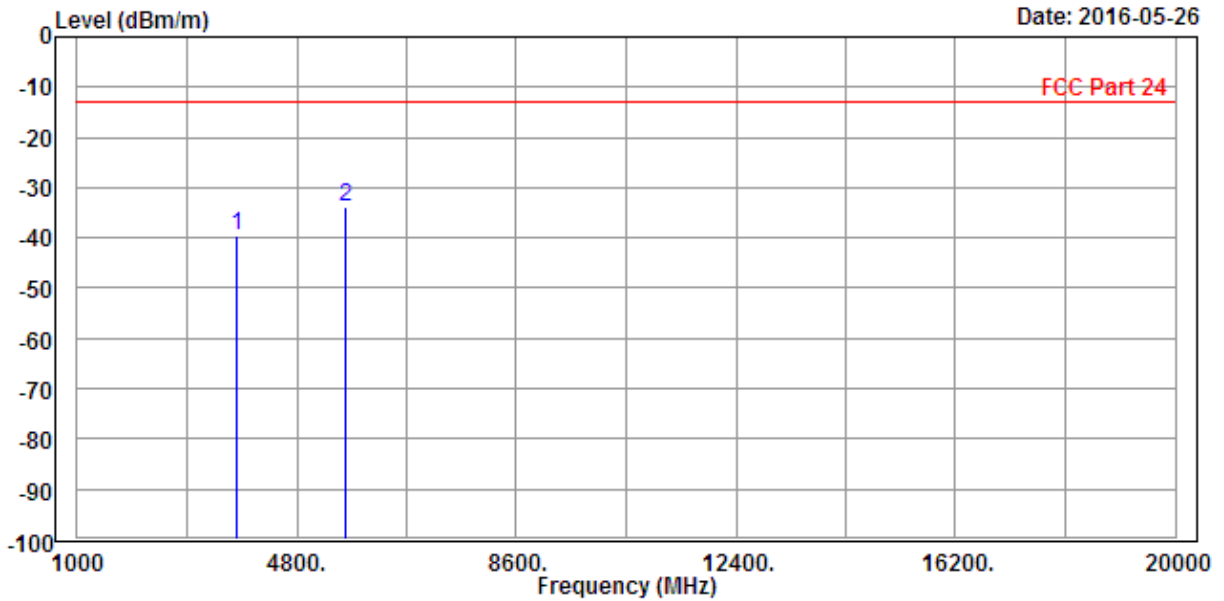

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : PCS 1900
 Plan : X-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -39.50 | -42.89 | -13.00 | -26.50 | 3.39 | Peak | Horizontal |
| 2 | 5640.000 | -33.83 | -42.95 | -13.00 | -20.83 | 9.12 | Peak | Horizontal |

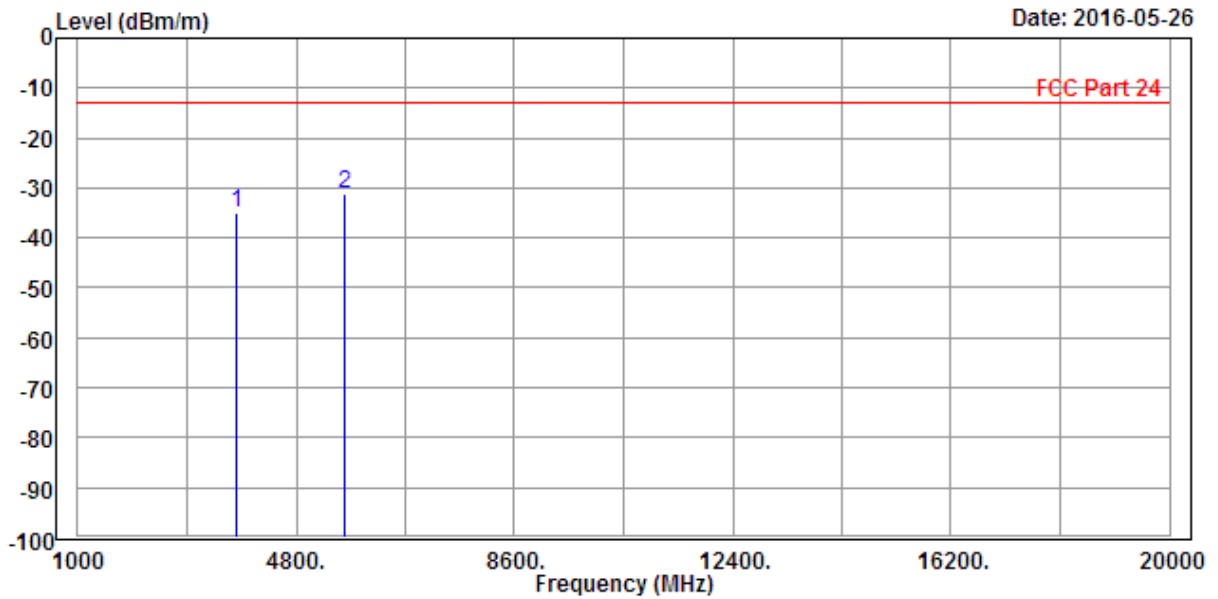

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : PCS 1900
 Plan : X-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -35.00 | -38.85 | -13.00 | -22.00 | 3.85 | Peak | Vertical |
| 2 PP | 5640.000 | -31.02 | -39.28 | -13.00 | -18.02 | 8.26 | Peak | Vertical |

EDGE 1900:

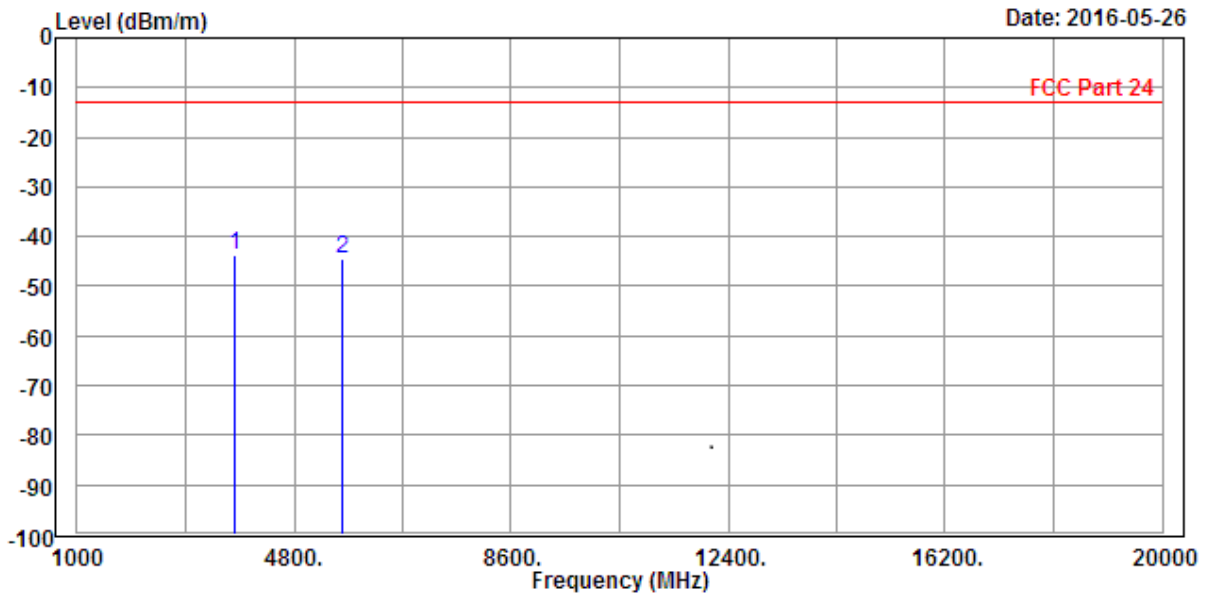

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : Edge 1900
 Plan : X-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 PP | 3755.000 | -43.64 | -47.03 | -13.00 | -30.64 | 3.39 | Peak | Horizontal |
| 2 | 5640.000 | -44.36 | -53.48 | -13.00 | -31.36 | 9.12 | Peak | Horizontal |

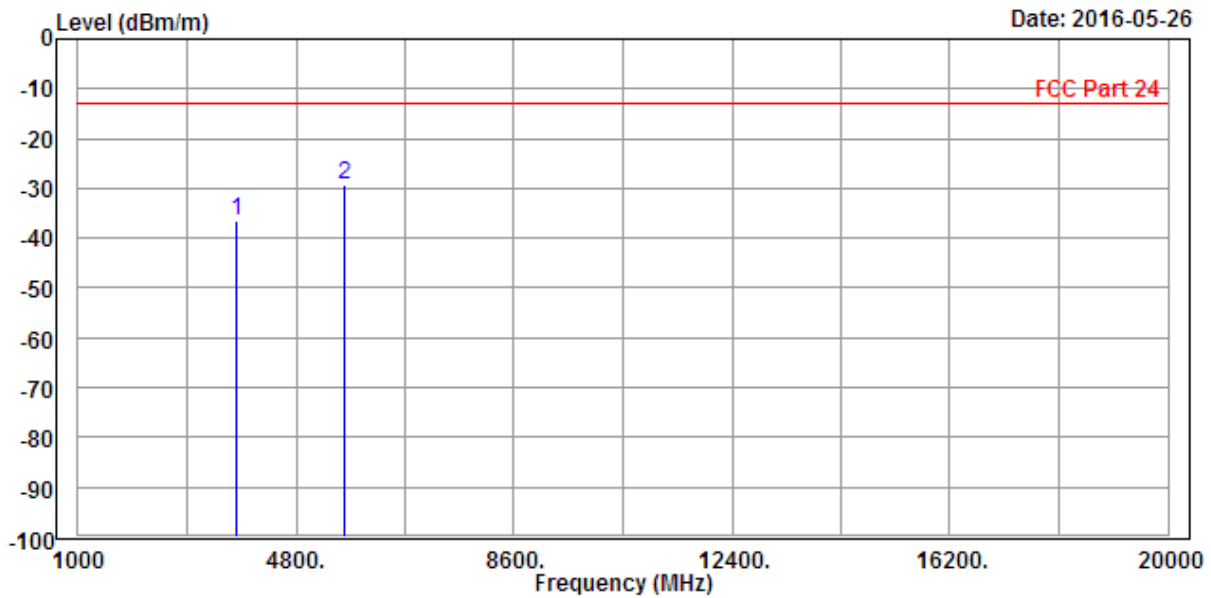

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
EUT : Baifone P4905
Mode : Edge 1900
Plan : X-Plan
Test By : Alex Chen
Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -36.67 | -40.52 | -13.00 | -23.67 | 3.85 | Peak | Vertical |
| 2 PP | 5640.000 | -29.39 | -37.65 | -13.00 | -16.39 | 8.26 | Peak | Vertical |

WCDMA Band II:

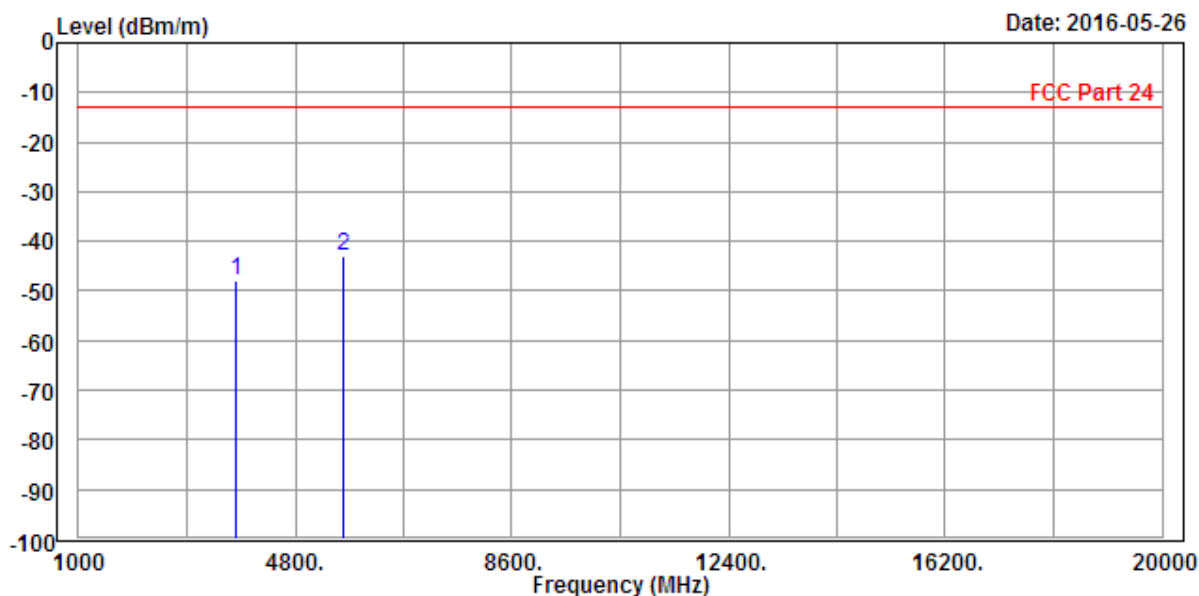

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : WCDMA Band2
 Plan : X-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -47.76 | -51.15 | -13.00 | -34.76 | 3.39 | Peak | Horizontal |
| 2 PP | 5640.000 | -43.09 | -52.21 | -13.00 | -30.09 | 9.12 | Peak | Horizontal |

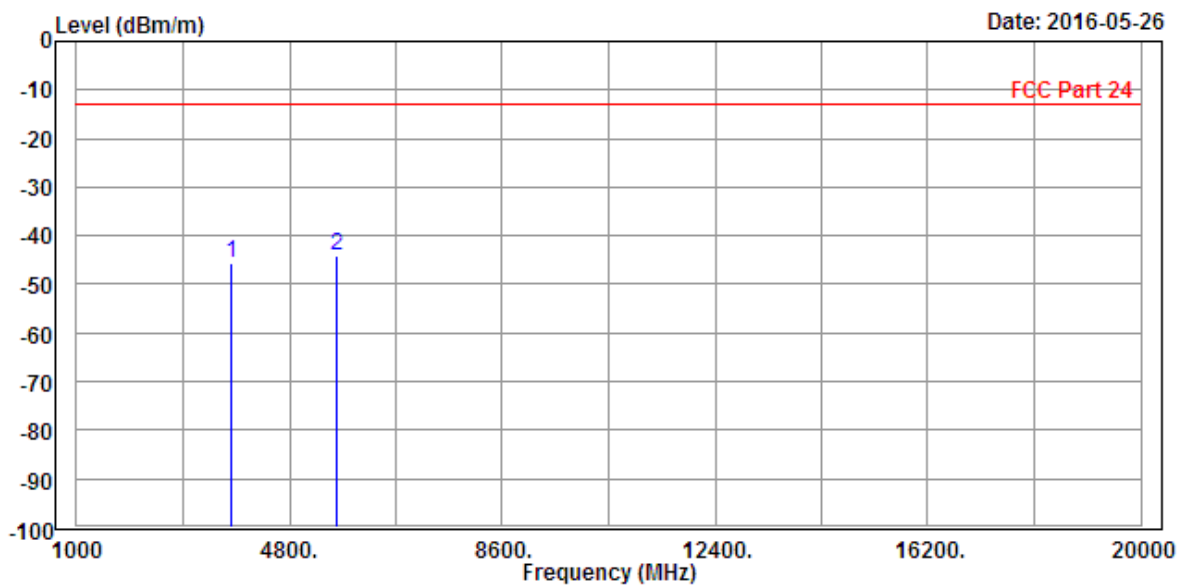


Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
EUT : Baifone P4905
Mode : WCDMA Band2
Plan : X-Plan
Test By : Alex Chen
Remark : IMEI 357288070008602

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -45.62 | -49.47 | -13.00 | -32.62 | 3.85 | Peak | Vertical |
| 2 PP | 5640.000 | -43.96 | -52.22 | -13.00 | -30.96 | 8.26 | Peak | Vertical |


LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

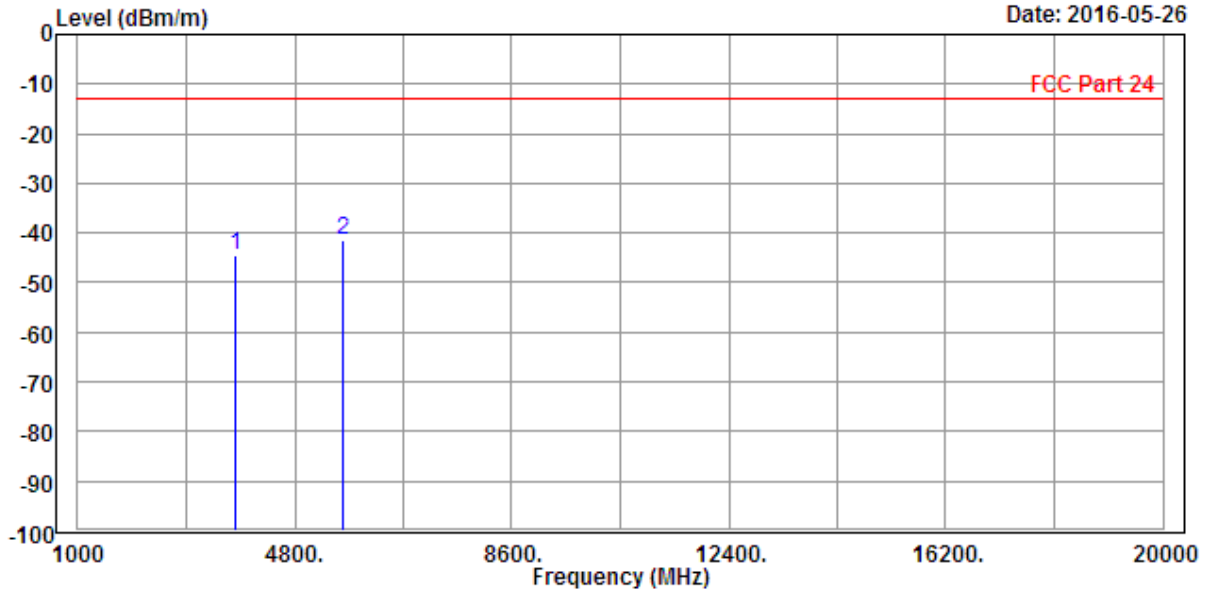

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(1.4M)
 Plan : Y-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3760.000 | -44.41 | -47.82 | -13.00 | -31.41 | 3.41 | Peak | Horizontal |
| 2 PP | 5640.000 | -41.47 | -50.59 | -13.00 | -28.47 | 9.12 | Peak | Horizontal |

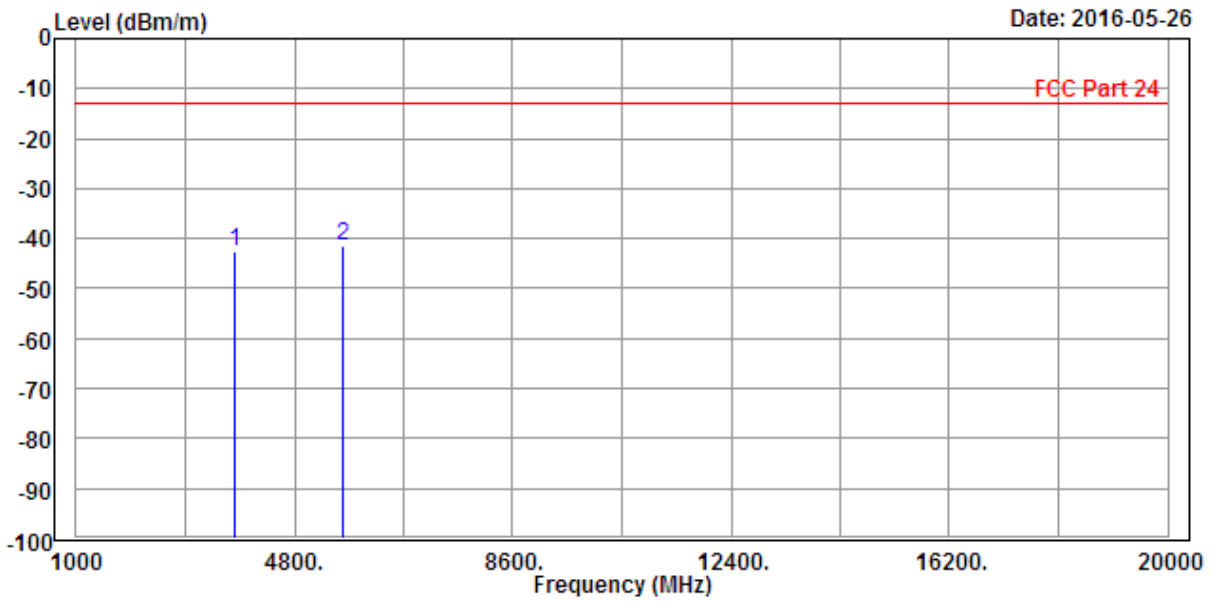

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(1.4M)
 Plan : Y-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -42.51 | -46.36 | -13.00 | -29.51 | 3.85 | Peak | Vertical |
| 2 | PP 5640.000 | -41.61 | -49.87 | -13.00 | -28.61 | 8.26 | Peak | Vertical |

CHANNEL BANDWIDTH: 3MHz / QPSK

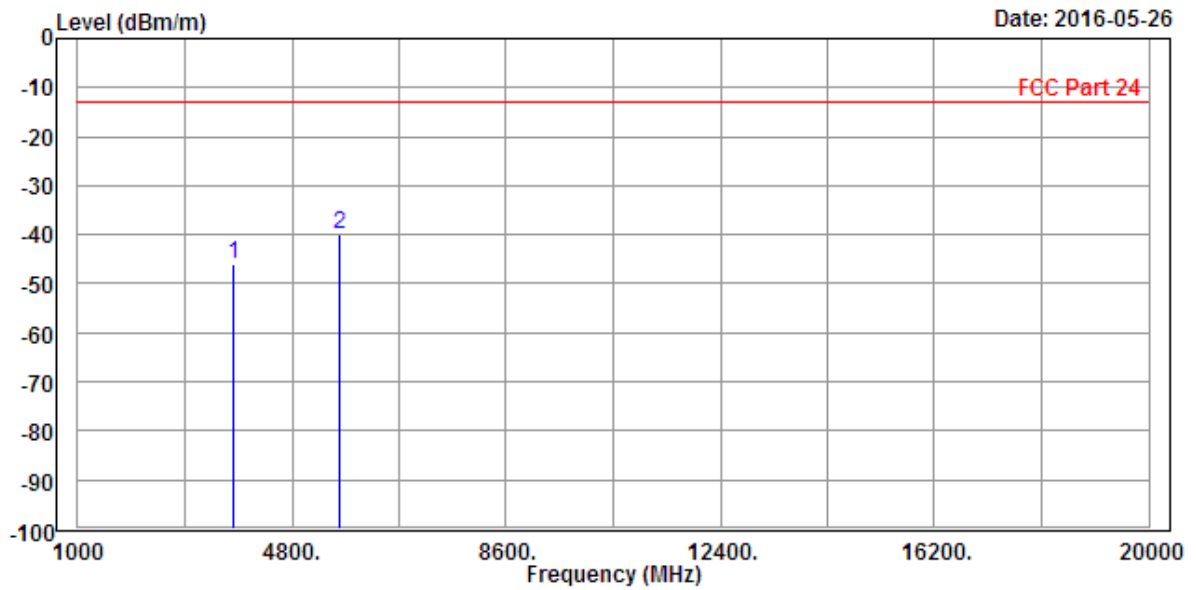

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(3M)
 Plan : Y-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -46.03 | -49.42 | -13.00 | -33.03 | 3.39 | Peak | Horizontal |
| 2 PP | 5640.000 | -39.89 | -49.01 | -13.00 | -26.89 | 9.12 | Peak | Horizontal |

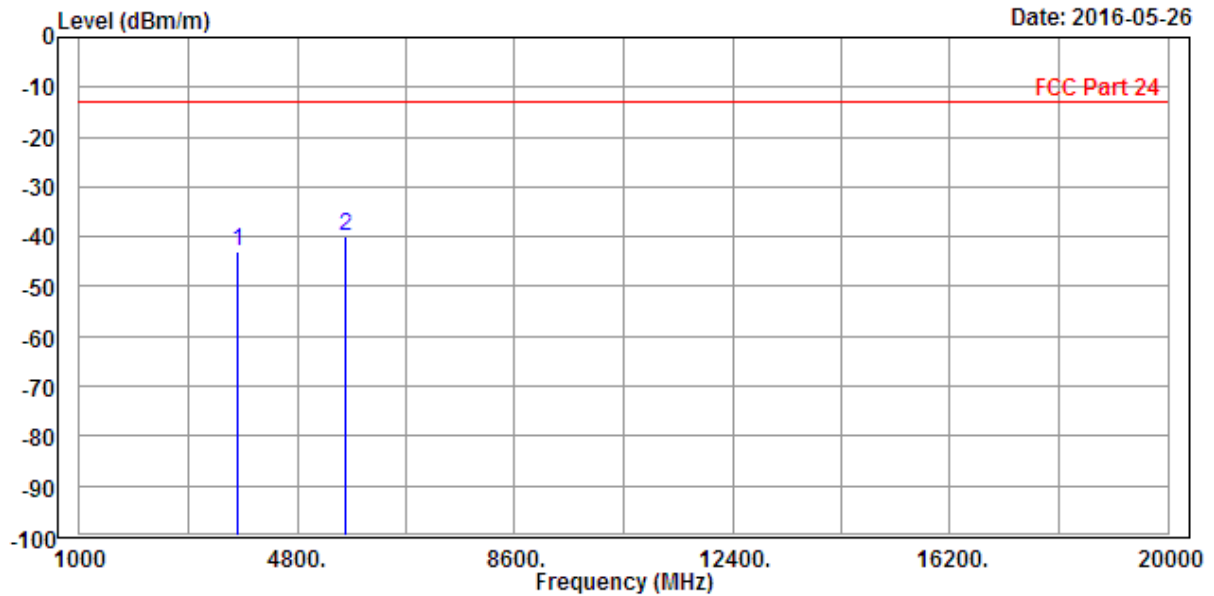

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(3M)
 Plan : Y-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -42.99 | -46.84 | -13.00 | -29.99 | 3.85 | Peak | Vertical |
| 2 PP | 5640.000 | -40.11 | -48.37 | -13.00 | -27.11 | 8.26 | Peak | Vertical |

CHANNEL BANDWIDTH: 5MHz / QPSK

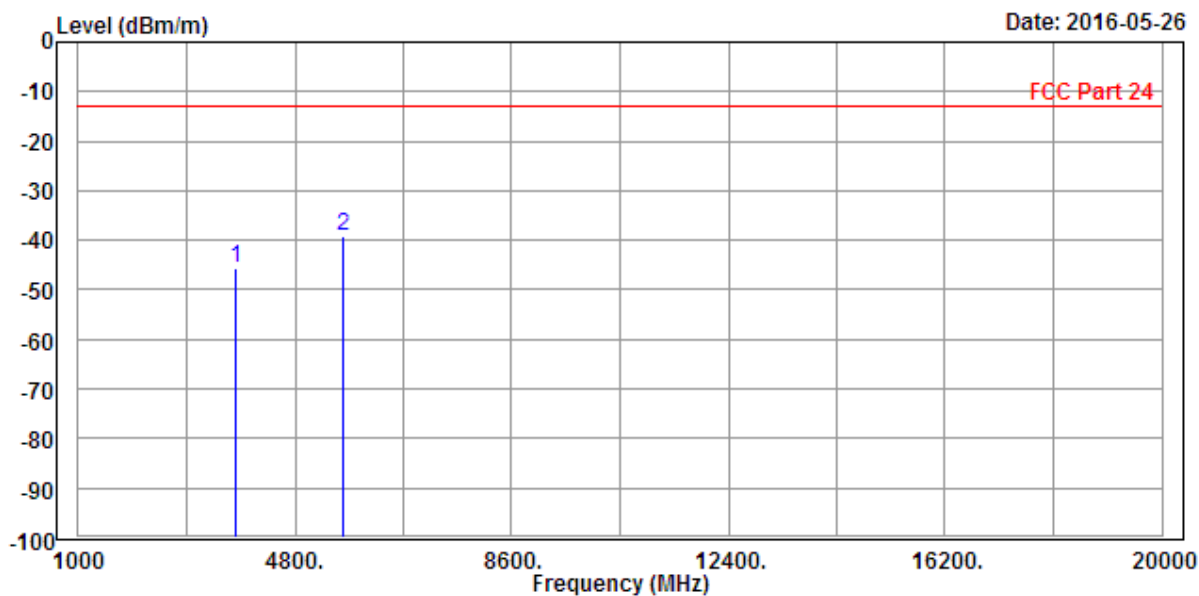

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(5M)
 Plan : Y-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -45.51 | -48.90 | -13.00 | -32.51 | 3.39 | Peak | Horizontal |
| 2 PP | 5640.000 | -39.06 | -48.18 | -13.00 | -26.06 | 9.12 | Peak | Horizontal |

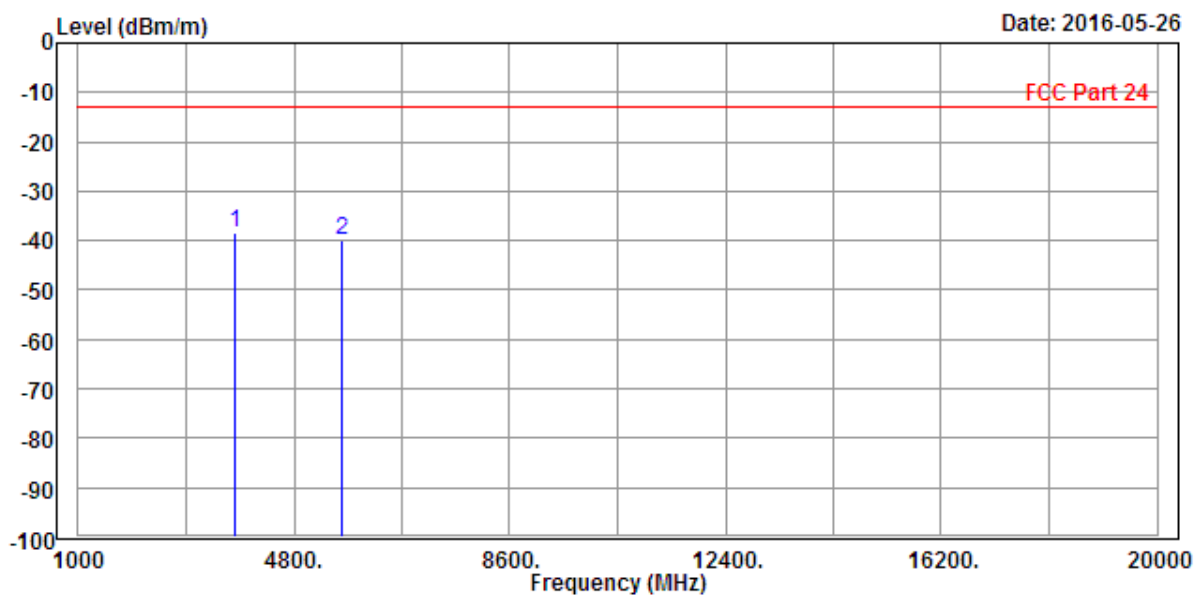


Date: 2016-05-26

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(5M)
 Plan : Y-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | PP 3755.000 | -38.39 | -42.24 | -13.00 | -25.39 | 3.85 | Peak | Vertical |
| 2 | 5640.000 | -39.95 | -48.21 | -13.00 | -26.95 | 8.26 | Peak | Vertical |

CHANNEL BANDWIDTH: 10MHz / QPSK

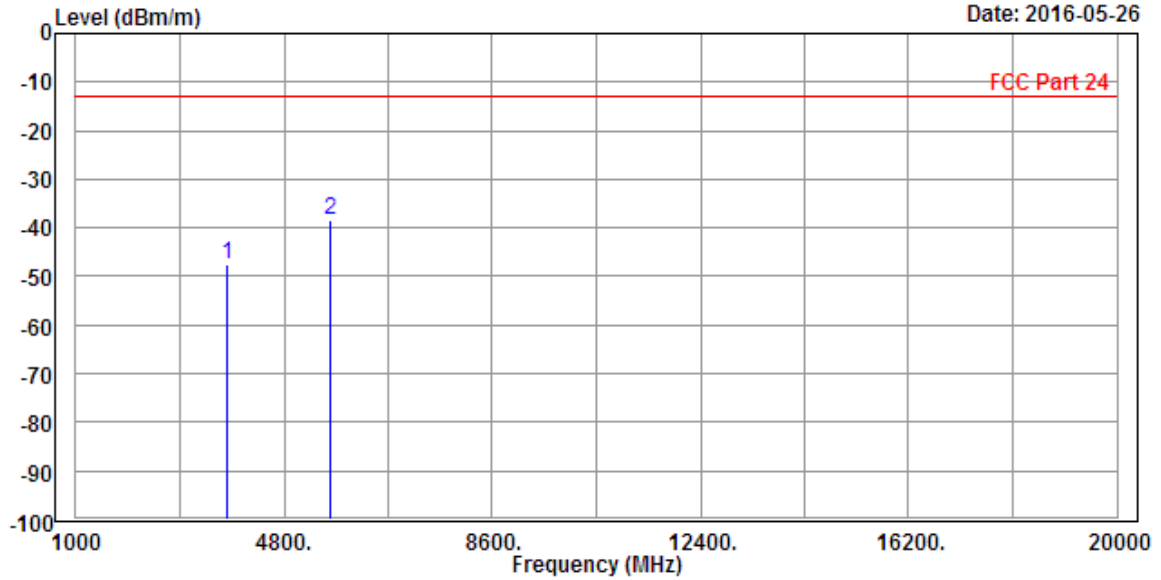

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(10M)
 Plan : X-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -47.44 | -50.83 | -13.00 | -34.44 | 3.39 | Peak | Horizontal |
| 2 PP | 5640.000 | -38.30 | -47.42 | -13.00 | -25.30 | 9.12 | Peak | Horizontal |

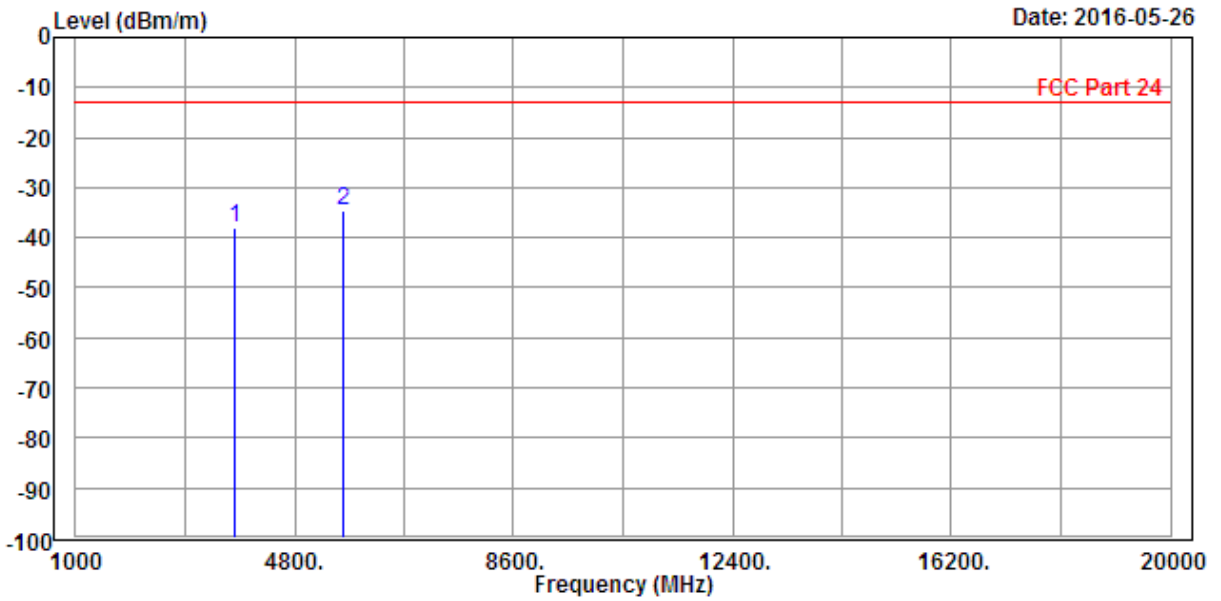

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(10M)
 Plan : X-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|----------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -38.08 | -41.93 | -13.00 | -25.08 | 3.85 | Peak | Vertical |
| 2 | 5640.000 | -34.64 | -42.90 | -13.00 | -21.64 | 8.26 | Peak | Vertical |

CHANNEL BANDWIDTH: 15MHz / QPSK

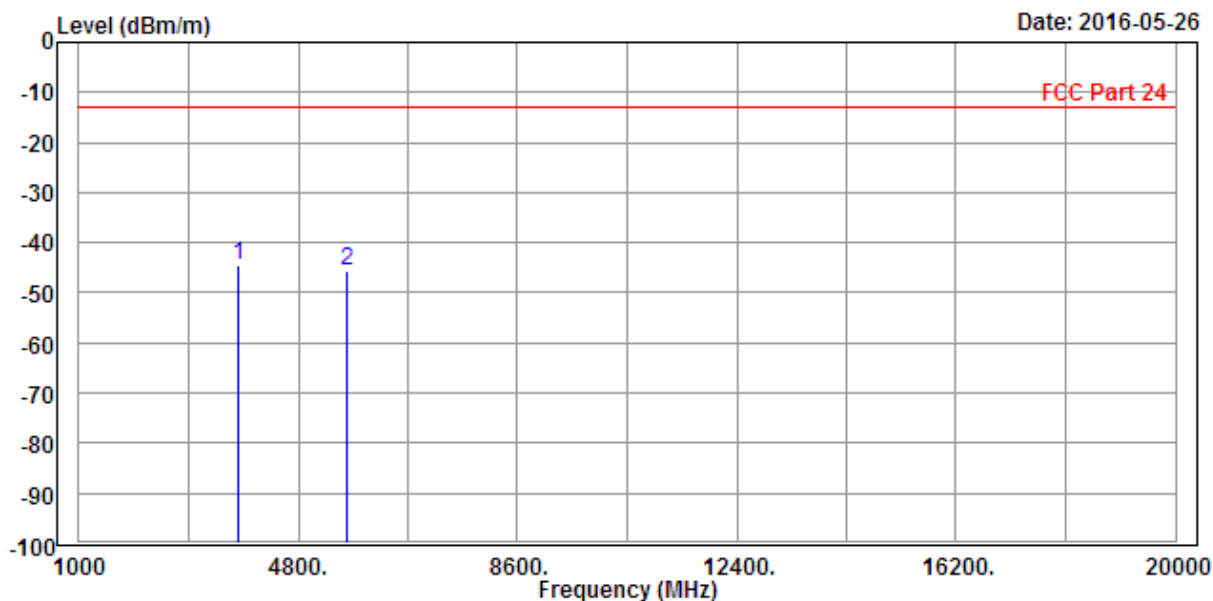

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(15M)
 Plan : Y-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602

| | Read | Limit | Over | | | | |
|---------------|--------|--------|--------|--------|--------|--------|------------|
| Freq | Level | Level | Line | Limit | Factor | Remark | Pol/Phase |
| MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 PP 3755.000 | -44.36 | -47.75 | -13.00 | -31.36 | 3.39 | Peak | Horizontal |
| 2 5640.000 | -45.63 | -54.75 | -13.00 | -32.63 | 9.12 | Peak | Horizontal |

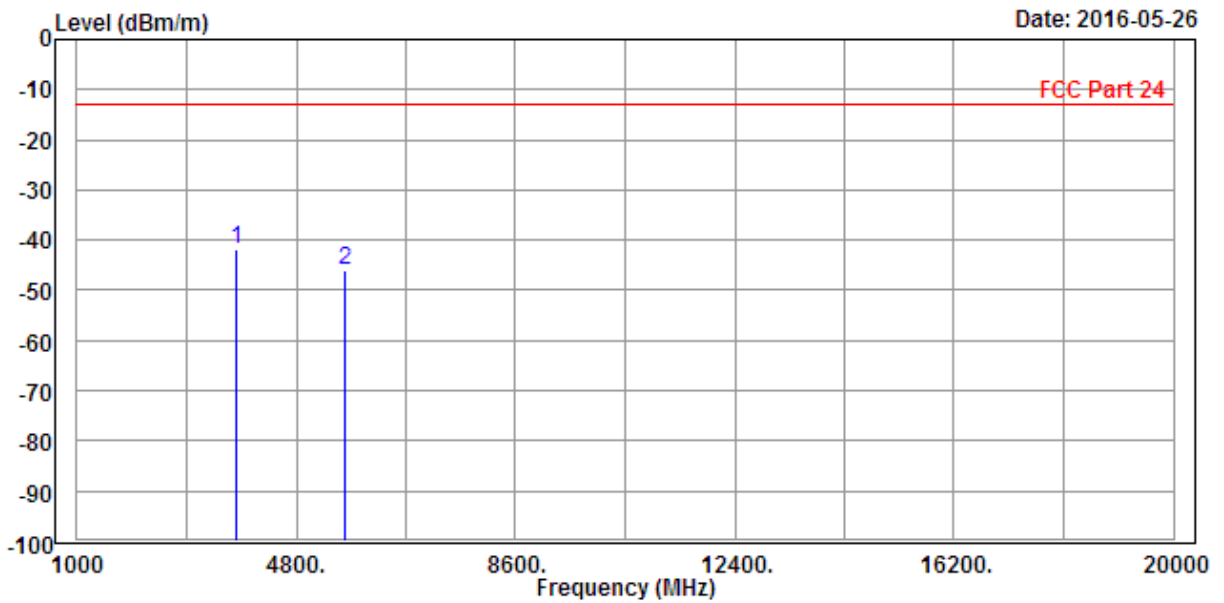


Date: 2016-05-26

FCC Part 24

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(15M)
 Plan : Y-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 PP | 3760.000 | -41.88 | -45.76 | -13.00 | -28.88 | 3.88 | Peak | Vertical |
| 2 | 5640.000 | -45.97 | -54.23 | -13.00 | -32.97 | 8.26 | Peak | Vertical |

CHANNEL BANDWIDTH: 20MHz / QPSK

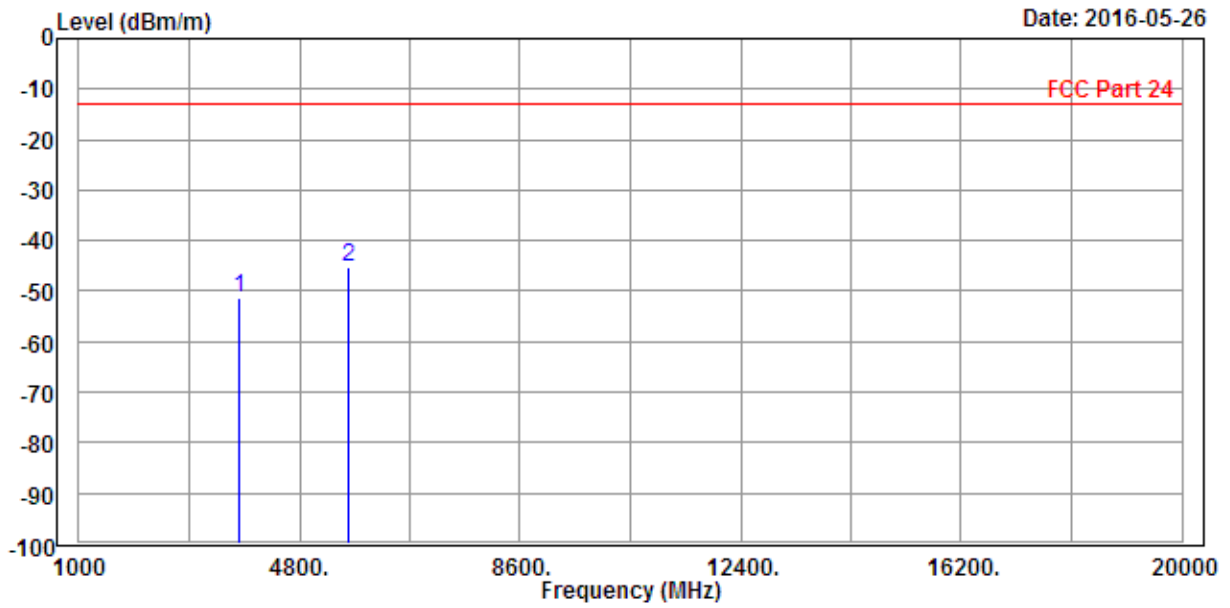

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(20M)
 Plan : Y-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -51.24 | -54.63 | -13.00 | -38.24 | 3.39 | Peak | Horizontal |
| 2 PP | 5640.000 | -45.15 | -54.27 | -13.00 | -32.15 | 9.12 | Peak | Horizontal |

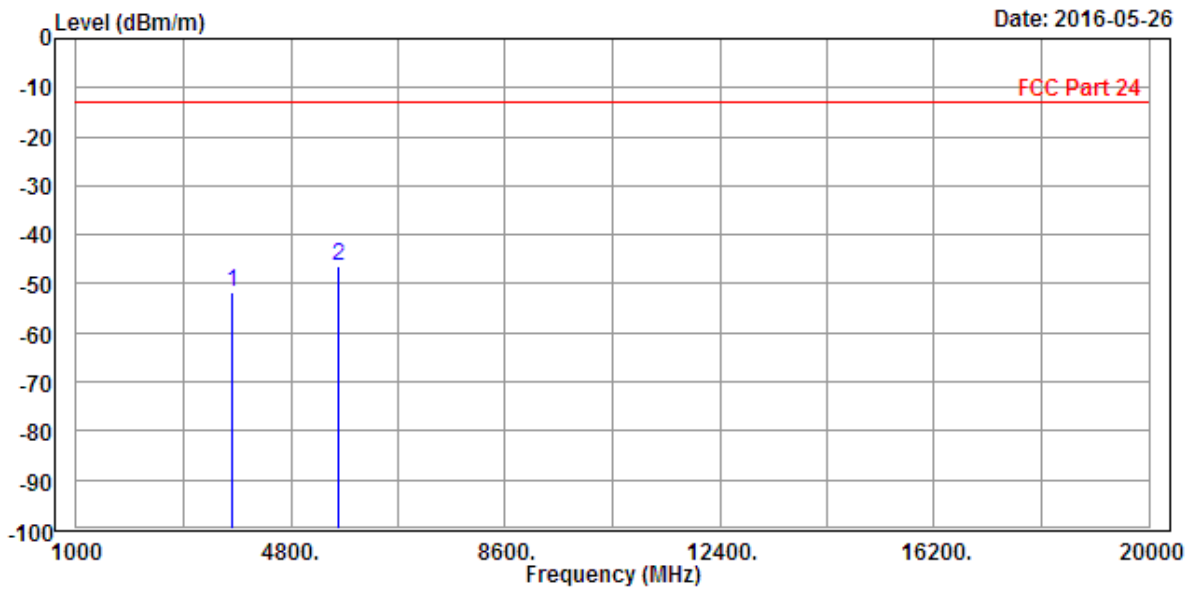

Condition: FCC Part 24 3m EIRP_1G-18G-_20160505-EMC012645B+3117-FCC
 EUT : Baifone P4905
 Mode : LTE Band2(20M)
 Plan : Y-Plan
 Test By : Alex Chen
 Remark : IMEI 357288070008602

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 3755.000 | -51.84 | -55.69 | -13.00 | -38.84 | 3.85 | Peak | Vertical |
| 2 PP | 5640.000 | -46.42 | -54.68 | -13.00 | -33.42 | 8.26 | Peak | Vertical |

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---