



# FCC Part 15.247(WIFI) TEST REPORT

*for*

## WCDMA Mobile Phone

Model Name: LX20  
Brand Name: LANIX  
Trade Name: LANIX LX20  
Report No.: SH11020006W02  
FCC ID: ZC4LX20

*prepared for*

**Corporativo Lanix S.A. de C.V.**

Carretera Internacional Hermosillo- Nogales K.M 8.5 Hermosillo Sonora Mexico



**Shenzhen Electronic Product Quality Testing Center  
Morlab Laboratory**

3/F, Electronic Testing Building, Shahe Road, Xili,  
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



**Bluetooth®**

**CTIA Authorized Test Lab**

LAB CODE 20081223-00

**NOTE:** This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

## Table of Contents

1.	TEST REPORT CERTIFICATION .....	4
2.	GENERAL INFORMATION .....	5
2.1.	DESCRIPTION OF EUT.....	5
2.2.	Objective.....	6
2.3.	Test Standards and Results .....	6
2.4.	List of Equipments Used .....	6
2.5.	Test Facility .....	7
2.6.	Environmental conditions .....	7
3.	CONDUCTED EMISSION TEST .....	8
3.1.	Limits of Conducted Emission.....	8
3.2.	Test Procedure.....	8
3.3.	Test Setup .....	9
3.4.	EUT Setup and Operating Conditions.....	9
3.5.	Test Results.....	10
4.	RADIATED EMISSION TEST .....	12
4.1.	Limits of Radiated Emission.....	12
4.2.	Test Procedure.....	12
4.3.	Test Setup .....	13
4.4.	EUT Setup and Operating Conditions.....	13
4.5.	Test Results.....	14
5.	6DB BANDWIDTH MEASUREMENT .....	15
5.1.	Definition .....	15
5.2.	Test Procedure.....	15
5.3.	Test Setup .....	15
5.4.	Setup and Operating Conditions.....	15
5.5.	Test Results.....	16
6.	MAXIMUM PEAK OUTPUT POWER.....	20
6.1.	Requirement of the standard.....	20
6.2.	Test Procedure.....	20



<b>6.3.</b>	<b>Test Setup .....</b>	<b>20</b>
<b>6.4.</b>	<b>EUT Setup and Operating Conditions.....</b>	<b>20</b>
<b>6.5.</b>	<b>Test Results.....</b>	<b>20</b>
<b>7.</b>	<b>BAND EDGE.....</b>	<b>24</b>
<b>7.1.</b>	<b>Requirement of the standard.....</b>	<b>24</b>
<b>7.2.</b>	<b>Test Procedure.....</b>	<b>24</b>
<b>7.3.</b>	<b>Test Setup .....</b>	<b>24</b>
<b>7.4.</b>	<b>EUT Setup and Operating Conditions.....</b>	<b>25</b>
<b>7.5.</b>	<b>Test Results.....</b>	<b>25</b>
<b>8.</b>	<b>CONDUCTED SPURIOUS EMISSION .....</b>	<b>29</b>
<b>8.1.</b>	<b>Requirement of the standard.....</b>	<b>29</b>
<b>8.2.</b>	<b>Test Procedure.....</b>	<b>29</b>
<b>8.3.</b>	<b>Test Setup .....</b>	<b>29</b>
<b>8.4.</b>	<b>EUT Setup and Operating Conditions.....</b>	<b>29</b>
<b>8.5.</b>	<b>Test Results.....</b>	<b>29</b>
<b>9.</b>	<b>POWER SPECTRUM DENSITY MEASUREMENT .....</b>	<b>33</b>
<b>9.1.</b>	<b>Limits of Power Spectrum Density .....</b>	<b>33</b>
<b>9.2.</b>	<b>Test Procedure.....</b>	<b>33</b>
<b>9.3.</b>	<b>Test Setup .....</b>	<b>33</b>
<b>9.4.</b>	<b>EUT Setup and Operating Conditions.....</b>	<b>33</b>
<b>9.5.</b>	<b>Test Results.....</b>	<b>33</b>



# 1. Test Report Certification

**Equipment under Test:** WCDMA Mobile Phone

**Brand Name:** LANIX

**Model Name:** LX20

**FCC ID:** ZC4LX20

**Applicant:** Corporativo Lanix S.A. de C.V.

Carretera Internacional Hermosillo- Nogales KM 8.5 Hermosillo  
Sonora Mexico

**Manufacturer:** Shanghai Huaqin Telecom Technology Co.,Ltd.

Building1,399 Keyuan Road,Pudong district,Shanghai,China

**Test Standards:** 47 CFR Part 15,Subpart C

**Test Date(s):** Mar.8, 2011 –Mar.8, 2011

**Test Result:** PASS

**\* We Hereby Certify That:**

The equipment under test was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related European Commission's standards.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by: Shi Feng Dated: 2011.3.17  
Shi Feng

Reviewed by: Zhang Jun Dated: 2011.3.17  
Zhang Jun

Approved by: Wei Bei Dated: 2011.3.17  
Wei Bei



## 2. General Information

### 2.1. DESCRIPTION OF EUT

<b>Product</b>	WCDMA Mobile Phone
<b>Brand Name</b>	LANIX
<b>Model Number</b>	LX20
<b>WIFI module Model name</b>	MT6612
<b>WIFI module Brand name</b>	MediaTek
<b>Frequency Range</b>	2412 ~ 2462 MHz
<b>Transmit Power</b>	≤20dBm
<b>Modulation Technique</b>	DSSS /OFDM
<b>Number of Channels</b>	11 Channels
<b>Antenna Information</b>	Manufacturer: SAINTENNA Model: SAA30480A Gain: 0dBi (Peak)
<b>Temperature Range</b>	-10 ~ +55 °C
<b>Hardware Version</b>	V3.0
<b>Software Version</b>	LX20_TELCEL_SW_01

#### NOTE:

1. The EUT is a GSM、GPRS、WCDMA、BLUETOOTH、WIFI mobile phone. It provides Wi-Fi (IEEE 802.11b and IEEE 802.11g) wireless interface, operating at 2.4GHz ISM band. The Wi-Fi modulations are Direct Sequence Spread Spectrum (DSSS) for IEEE 802.11b and Orthogonal Frequency Division Multiplexing (OFDM) for IEEE 802.11g. The Channels and transmitter center frequencies are:

- Channel 1: 2412 MHz (lowest channel)
- Channel 2: 2417 MHz
- Channel 3: 2422 MHz
- Channel 4: 2427 MHz
- Channel 5: 2432 MHz
- Channel 6: 2437 MHz (middle channel)
- Channel 7: 2442 MHz
- Channel 8: 2447 MHz
- Channel 9: 2452 MHz
- Channel 10: 2457 MHz
- Channel 11: 2462 MHz (highest channel)

2. Please refer to Appendix I for the photographs of the EUT. For a more detailed features

description about the EUT, please refer to User's Manual.

## 2.2. Objective

Perform EMC test according to FCC Part 15 Subpart C (Wi-Fi, 2.4GHz ISM band radiator).

## 2.3. Test Standards and Results

The EUT has been tested according to 47 CFR Part 15, Radio Frequency Devices.

Test items and the results are as bellow:

No	FCC Rules	Test Type	Result
1	§15.207	Conducted Emission	PASS
2	§15.209 §15.247(c)	Radiated Emission	PASS
3	§15.247(a)	6dB Bandwidth	PASS
4	§15.247(b)	Maximum Peak Output Power	PASS
5	§15.247(c)	Band Edge	PASS
6	§15.247(c)	Conducted Spurious Emission	PASS
7	§15.247(d)	Power Spectrum Density	PASS

## 2.4. List of Equipments Used

Description	Manufacturer	Model No.	Cal. Date	Serial No.
Test Receiver	Rohde & Schwarz	ESIB26	2010.9	A0304218
Test Receiver	Schwarzbeck	FCCKL1528	2010.9	A0304230
Spectrum Analyzer	Rohde & Schwarz	FSP13	2010.9	M-030176
Spectrum Analyzer	Rohde & Schwarz	FSP30	2010.9	101020
Spectrum Analyzer	Agilent	E4440A	2010.9	MY46187763
LISN	Schwarzbeck	NSLK8127	2010.9	A0304233
Loop Antenna	Rohde & Schwarz	HFH2-Z2	2010.9	A0304220
Ultra Broadband Ant.	Rohde & Schwarz	HL562	2010.9	A0304224
Horn Ant.	Rohde & Schwarz	HF906	2010.9	100150
Shield Room	Nanbo Tech	Site 1	2010.9	A0304188
Anechoic Chamber	Albatross	EMC12.8×6.8× 6.4(m)	2010.9	A0304210

## 2.5. Test Facility

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Board for Laboratories (CNAL) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

## 2.6. Environmental conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature ( °C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	96

### 3. Conducted Emission Test

#### 3.1. Limits of Conducted Emission

According to FCC §15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$  H/50 ohms line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

**NOTE:**


1. The lower limit shall apply at the band edges.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

#### 3.2. Test Procedure

- a. The EUT was placed on a 0.8m high insulating table and kept 0.4 meters from the conducting wall of shielded room.
- b. The EUT was connected to the power mains through a line impedance stabilization network (LISN). The LISN provide 50 $\Omega$ /50 $\mu$ H of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150 kHz to 30 MHz was searched using CISPR Quasi-Peak and Average detector.



### 3.3. Test Setup

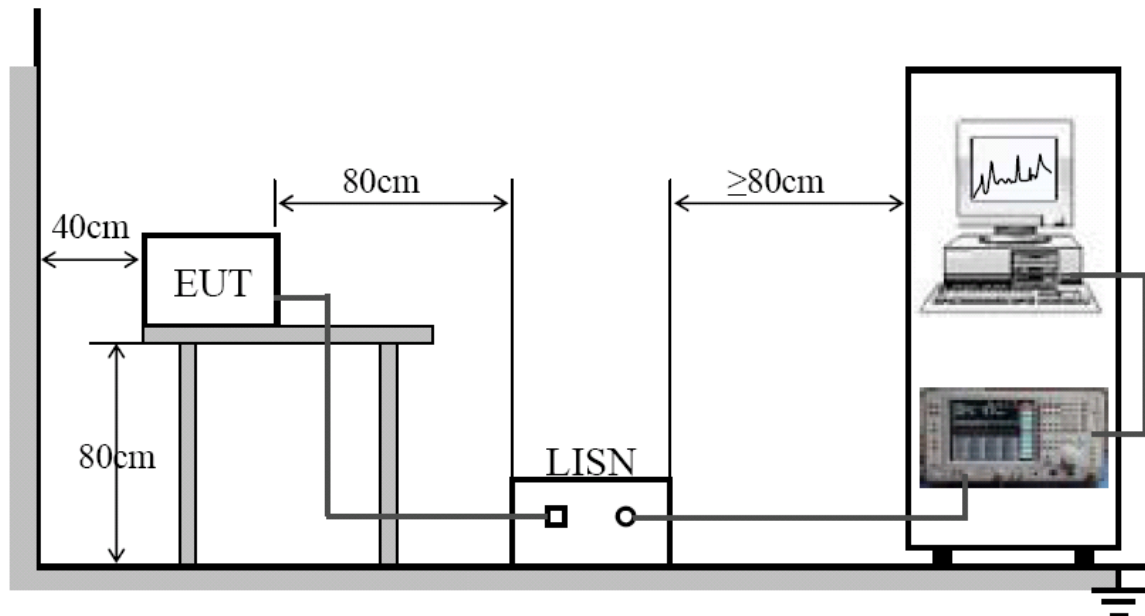

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

### 3.4. EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery + Charger.

During the measurement, the EUT was charging empty battery. The charger was powered by 120V 60Hz AC mains supply.

The Wi-Fi function of the MS was activated. The EUT accessed to the internet through a Wi-Fi wireless router (D-LINK, DI-624+A), and kept transceiving data with a network termination.


### 3.5. Test Results

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.150000	53.0	150.000	9.000	Off	L1	9.5	13.0	66.0	PASS
0.220894	50.0	150.000	9.000	Off	L1	9.7	12.6	62.6	PASS
0.511931	40.2	150.000	9.000	Off	L1	9.7	15.8	56.0	PASS
0.657450	40.0	150.000	9.000	Off	L1	9.7	16.0	56.0	PASS
0.735806	40.2	150.000	9.000	Off	L1	9.7	15.8	56.0	PASS
1.101469	40.9	150.000	9.000	Off	L1	9.7	15.1	56.0	PASS
0.150000	56.5	150.000	9.000	On	N	9.8	9.5	66.0	PASS
0.217162	49.0	150.000	9.000	On	N	9.6	13.8	62.8	PASS
0.362681	36.3	150.000	9.000	On	N	9.7	22.2	58.5	PASS
0.437306	34.1	150.000	9.000	On	N	9.7	22.9	57.0	PASS
0.661181	38.7	150.000	9.000	On	N	9.7	17.3	56.0	PASS
0.735806	38.2	150.000	9.000	On	N	9.7	17.8	56.0	PASS

Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.220894	39.7	150.000	9.000	Off	L1	9.7	12.9	52.6	PASS
0.437306	23.7	150.000	9.000	Off	L1	9.7	23.3	47.0	PASS
0.515662	35.7	150.000	9.000	Off	L1	9.7	10.3	46.0	PASS
0.657450	30.0	150.000	9.000	Off	L1	9.7	16.0	46.0	PASS
0.728344	25.5	150.000	9.000	Off	L1	9.7	20.5	46.0	PASS
0.806700	29.5	150.000	9.000	Off	L1	9.7	16.5	46.0	PASS
0.150000	12.2	150.000	9.000	On	N	9.8	43.8	56.0	PASS
0.220894	38.9	150.000	9.000	On	N	9.6	13.7	52.6	PASS
0.437306	26.4	150.000	9.000	On	N	9.7	20.6	47.0	PASS
0.657450	30.9	150.000	9.000	On	N	9.7	15.1	46.0	PASS
0.728344	22.1	150.000	9.000	On	N	9.7	23.9	46.0	PASS
1.030575	23.6	150.000	9.000	On	N	9.7	22.4	46.0	PASS


**Test Plot:**

EMI\_ENV216 Auto Test-L CISPR 22

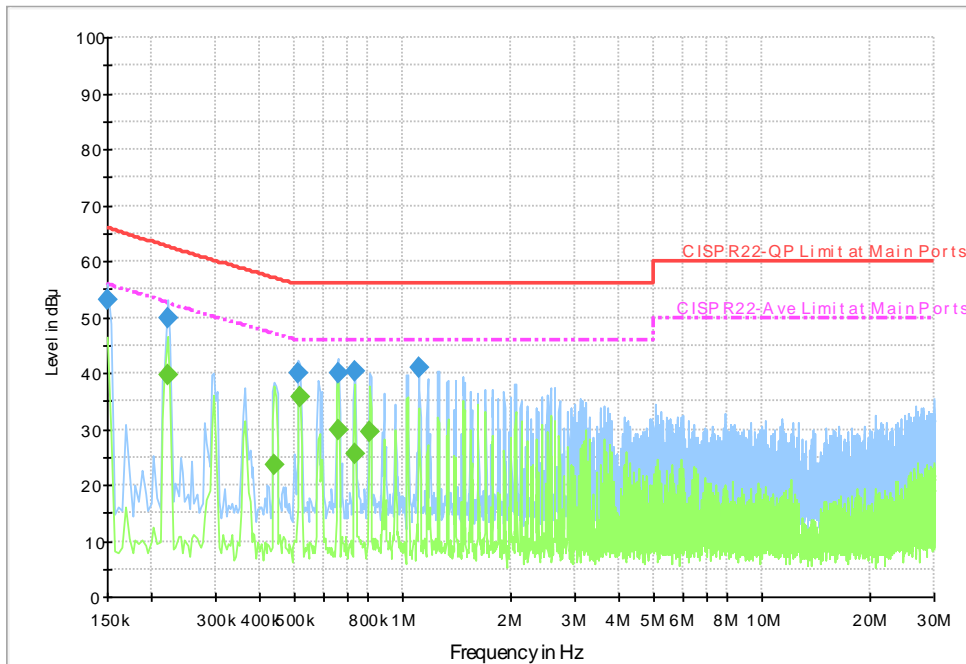

(Plot A: L Phase)

EMI\_ENV216 Auto Test-N CISPR 22

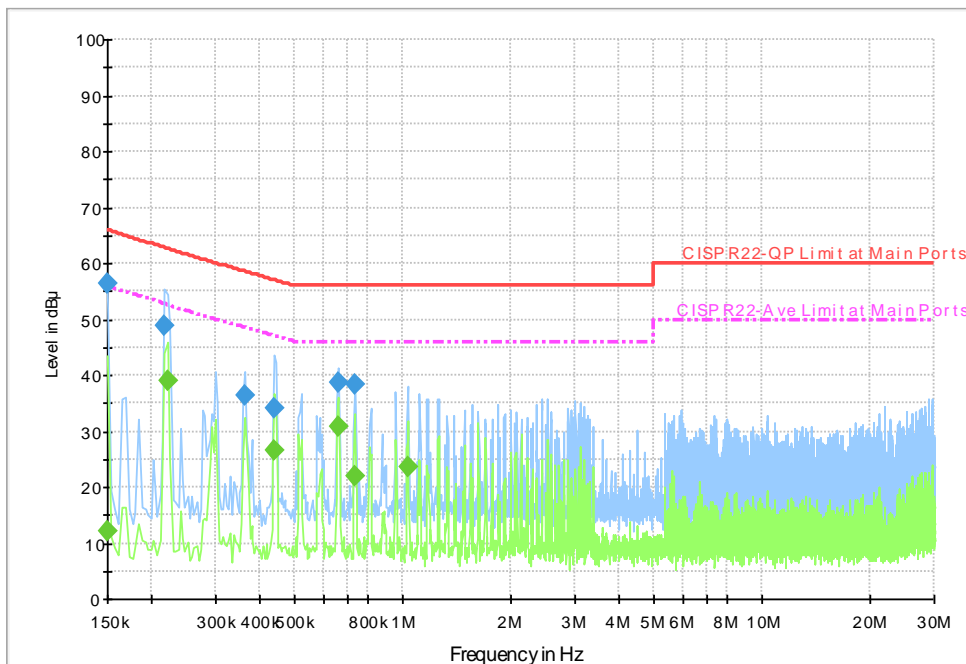

(Plot B: N Phase)

## 4. Radiated Emission Test

### 4.1. Limits of Radiated Emission

According to FCC §15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

According to FCC §15.209 (a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency(MHz)	Field Strength( $\mu$ V/m)	Measurement Distance(m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules,

### 4.2. Test Procedure

- a. The EUT was placed on the top of a ratable 0.8 meters above the ground at a semi-anechoic chamber.
- b. In the frequency range of 9 kHz to 30 MHz, magnetic field was measured with loop antenna. The antenna was positioned with its plane vertical at 1 m distance from the EUT. The center of the loop was 1 m above the ground. During the measurement the loop antenna rotated about its vertical axis for maximum response at each azimuth about the EUT.
- c. In the frequency range above 30MHz, ultra-broadband bi-log antenna (30 MHz to 1 GHz) and horn antenna (above 1GHz) were used. Antenna was 3 meters away from the EUT. Antenna height was varied from one meter to four meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. The test-receiver system was set to Peak Detector Function and Specified Bandwidth with Maximum Hold Mode.
- e. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10 dB margins would be retested one by one using the quasi-peak method.


### 4.3. Test Setup

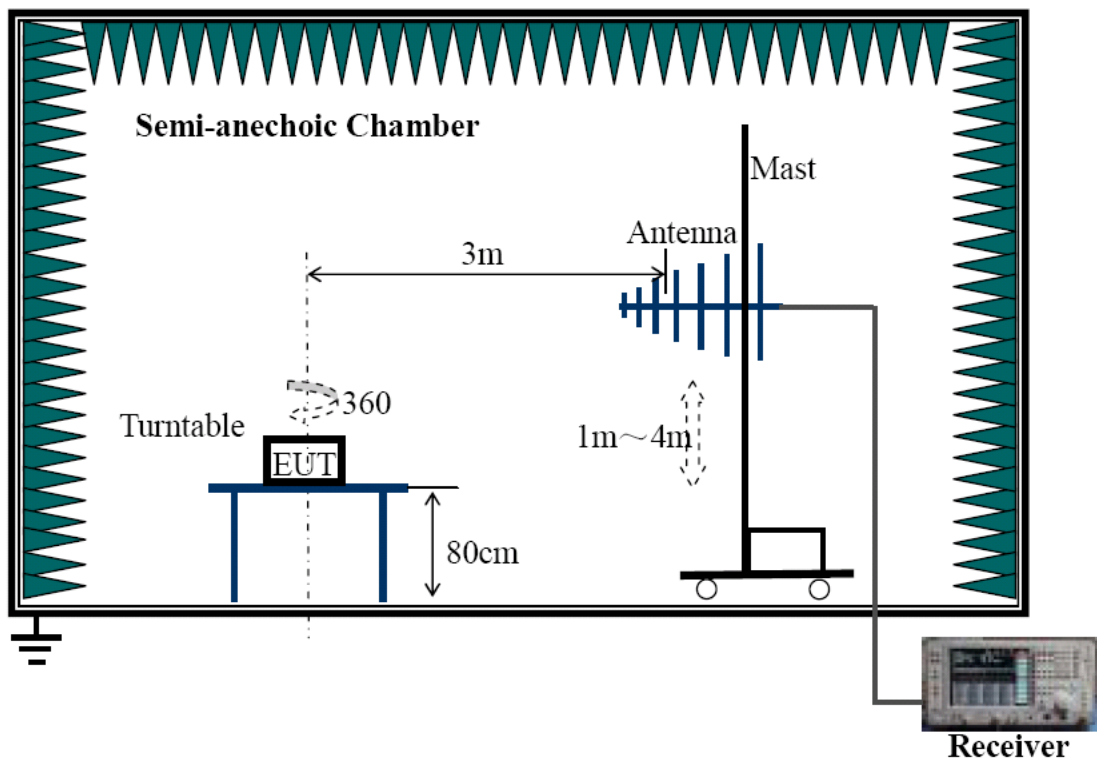

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

### 4.4. EUT Setup and Operating Conditions

The EUT was connected to and controlled by a control unit provided by the applicant.

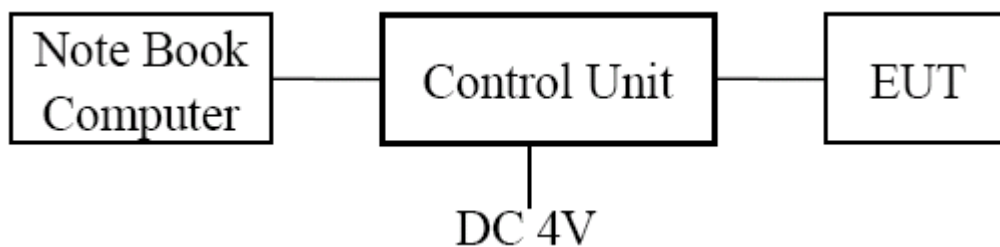

The EUT was set to continuous Wi-Fi transmitting at maximum power and maximum data rate, e.g., 11 Mbps for IEEE802.11b (DSSS) and 54 Mbps for IEEE802.11g (OFDM).

At each operating mode, lowest, middle and highest channels were measured respectively.

## 4.5. Test Results

### I. Fundamental Emissions

EUT Modulation	EUT Operating Freq. (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)	
			PK	AV
DSSS	2412.00	Vertical	100.37	92.22
		Horizontal	101.44	93.34
	2437.00	Vertical	100.41	92.47
		Horizontal	101.78	93.74
	2462.00	Vertical	101.52	93.34
		Horizontal	102.41	94.44
OFDM	2412.00	Vertical	100.57	92.74
		Horizontal	102.67	93.75
	2437.00	Vertical	100.78	92.78
		Horizontal	102.89	94.12
	2462.00	Vertical	101.28	92.82
		Horizontal	103.41	94.47

**NOTE:** Field strength of fundamental emissions were measured and record as a reference for calculation of the band edge emissions according to Marker-Delta Method DA 00-705.

### II. Spurious Emissions

EUT Modulation	EUT Operating Freq. (MHz)	Emissions Falling in Restrict Bands (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		QP Limits (dB $\mu$ V/m)	
				PK	AV	PK	AV
DSSS	2412.00	4824.00	Vertical	58.65	38.35	74	54
			Horizontal	60.32	38.68	74	54
	2437.00	4874.00	Vertical	59.25	38.78	74	54
			Horizontal	61.57	39.03	74	54
	2462.00	4924.00	Vertical	60.24	39.25	74	54
			Horizontal	63.04	40.12	74	54
OFDM	2412.00	4824.00	Vertical	60.14	40.87	74	54
			Horizontal	62.41	41.22	74	54
	2437.00	4874.00	Vertical	60.87	41.05	74	54
			Horizontal	62.64	41.92	74	54
	2462.00	4924.00	Vertical	61.04	41.55	74	54
			Horizontal	63.51	42.37	74	54

**NOTE:** The spurious Emissions from 9 kHz to 10th harmonic of the fundamental frequency were researched. Refer to following test plots.

## 5. 6dB Bandwidth Measurement


### 5.1. Definition

According to FCC §15.247 (a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.2. Test Procedure

- a. The EUT temporary antenna port was coupled to the spectrum analyzer. The loss of the cables the test system is calibrated to correct the reading.
- b. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- c. The resolution bandwidth of the spectrum analyzer was set to at least 1% of the EUT emission bandwidth. RBW=100 kHz, VBW=300 kHz.

### 5.3. Test Setup

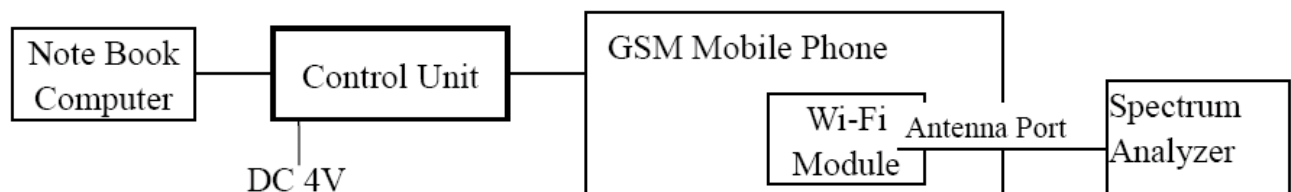

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

### 5.4. Setup and Operating Conditions

The EUT was connected to and controlled by a control unit provided by the applicant.

The EUT was set to continuous Wi-Fi transmitting at maximum power and maximum data rate, e.g., 11 Mbps for IEEE802.11b (DSSS) and 54 Mbps for IEEE802.11g (OFDM).


At each operating mode, lowest, middle and highest channels were measured respectively.

### 5.5. Test Results

EUT Modulation	EUT Operating Frequency ( MHz )	6dB Bandwidth (MHz)	FCC Requirement
DSSS	2412	8.734	>500 kHz
	2437	8.253	
	2462	8.173	
OFDM	2412	16.506	
	2437	16.506	
	2462	16.506	

### 6dB Bandwidth Test Plots


#### 1. DSSS-2412MHz

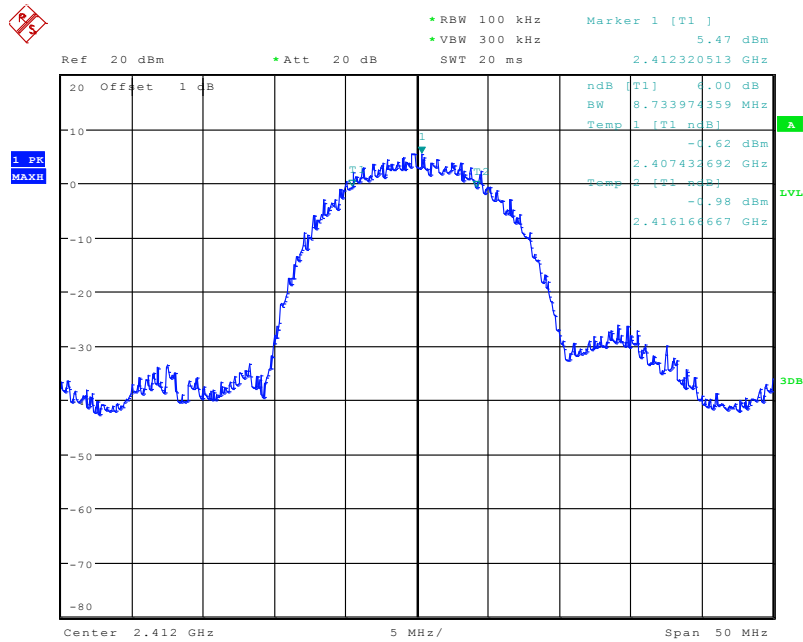

Date: 8.MAR.2011 15:16:36




### 2. DSSS-2437MHz

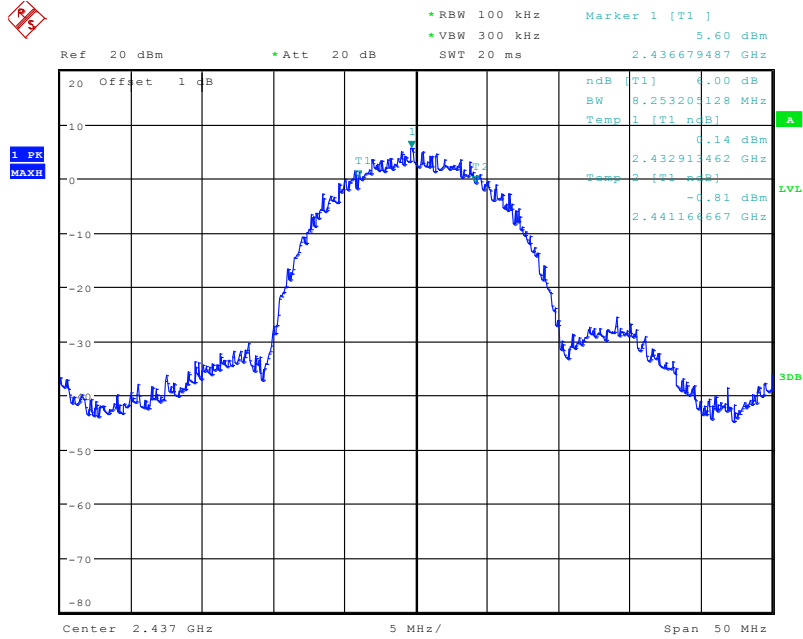


Date: 8.MAR.2011 15:19:38

### 3. DSSS-2462MHz

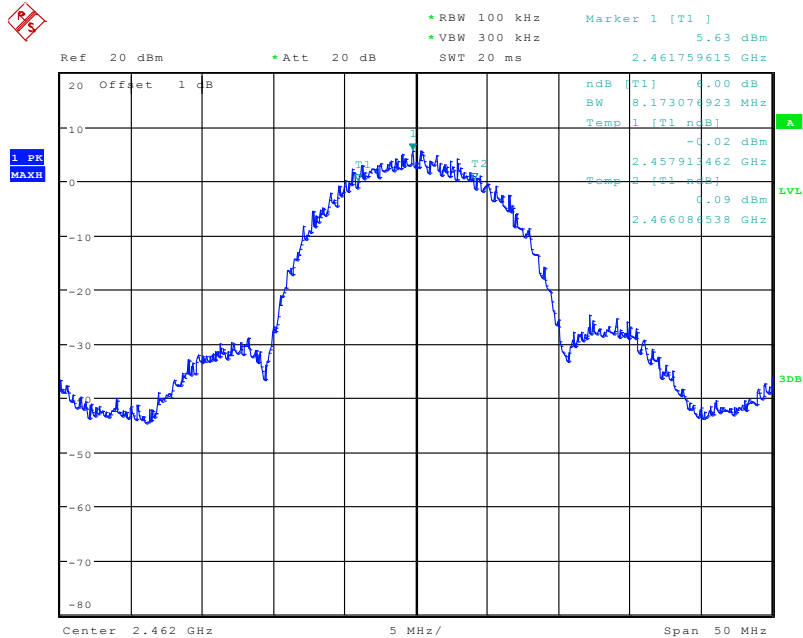


Date: 8.MAR.2011 15:23:37

#### 4. OFDM-2412MHz

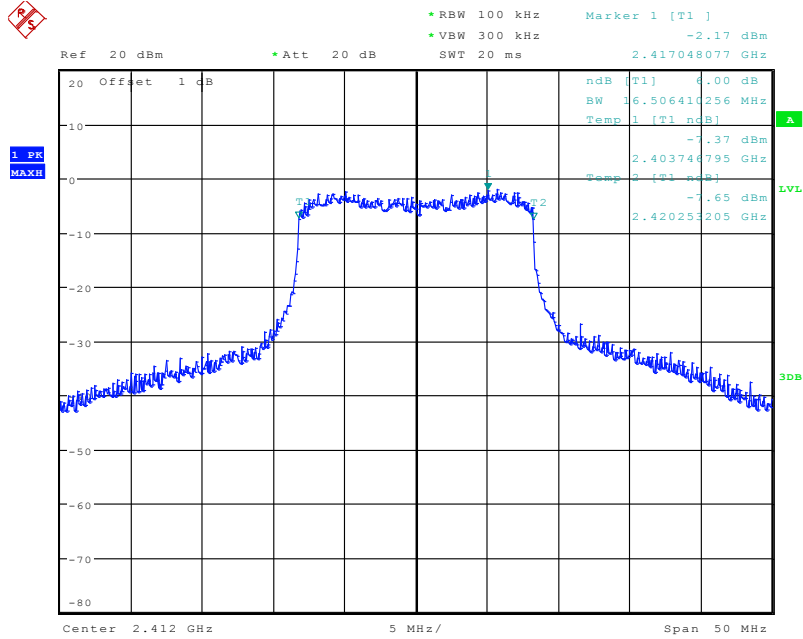


Date: 8.MAR.2011 15:27:54

#### 5. OFDM-2437MHz

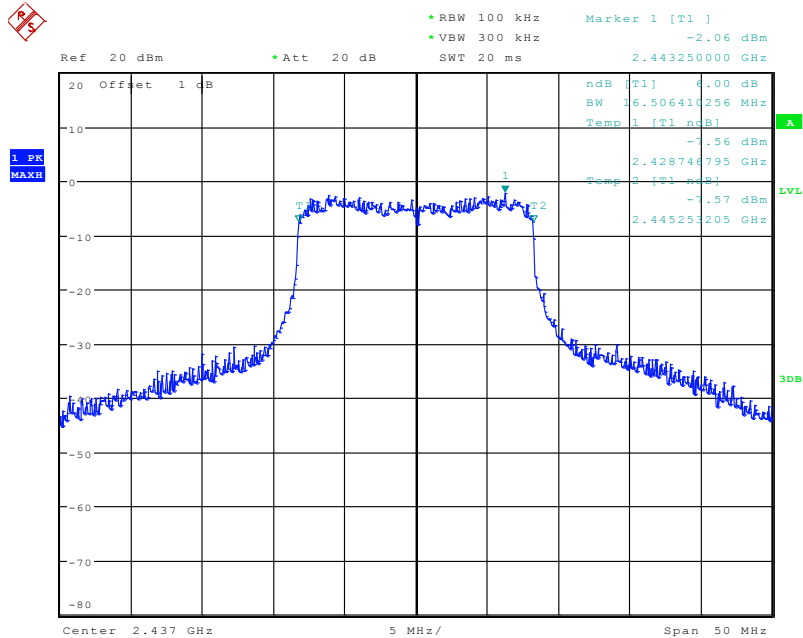

Date: 8.MAR.2011 15:28:33

### 6. OFDM-2462MHz

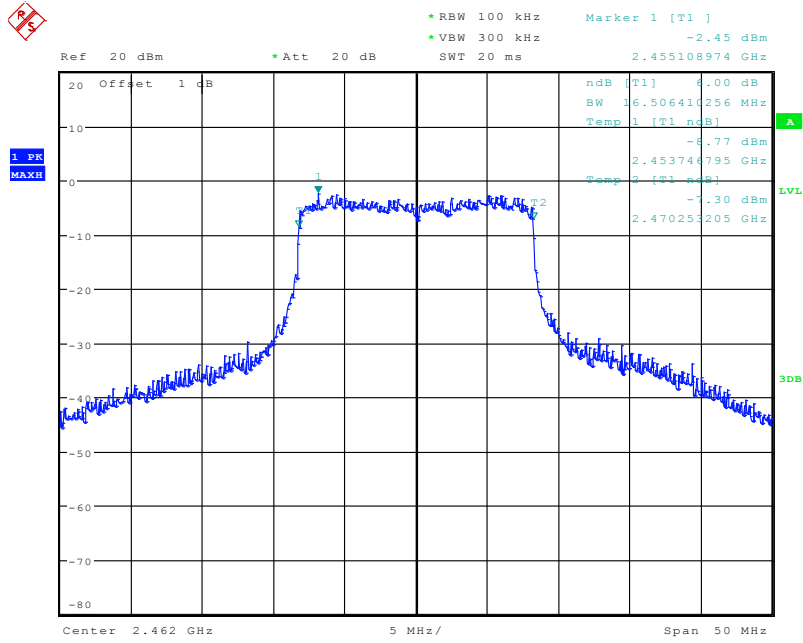

Date: 8.MAR.2011 15:29:03

## 6. Maximum Peak Output Power


### 6.1. Requirement of the standard

According to FCC §15.247 (b) (3), the maximum peak output power of systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands is 1 Watt.

### 6.2. Test Procedure

The EUT temporary antenna port was coupled to the power meter. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The lost of the cables the test system is calibrated to correct the reading.

### 6.3. Test Setup

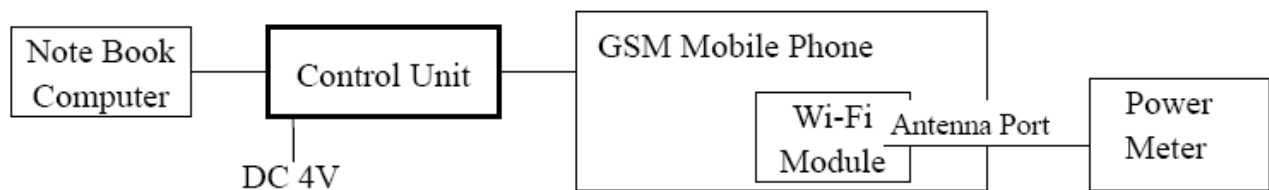

### 6.4. EUT Setup and Operating Conditions


Same as 5.4

### 6.5. Test Results

Modulation	Operating Frequency ( MHz )	Peak Output Power		Limit (W)
		(dBm)	(W)	
DSSS	2412	16.65	0.046	1
	2437	16.60	0.046	1
	2462	16.88	0.049	1
OFDM	2412	18.08	0.064	1
	2437	17.80	0.060	1
	2462	17.89	0.061	1


#### Maximum Peak Output Power Test Plots

### 1. DSSS-2412MHz

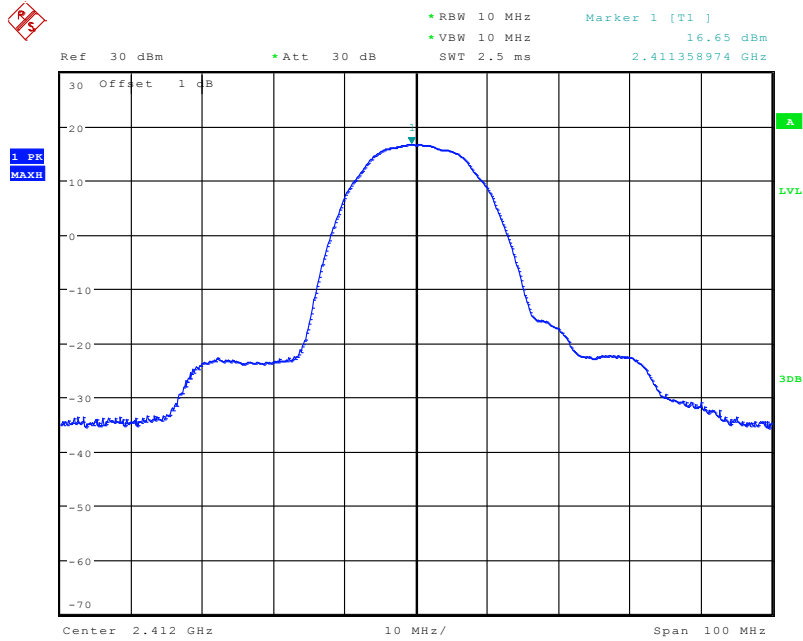


Date: 8.MAR.2011 15:30:18

### 2. DSSS-2437MHz

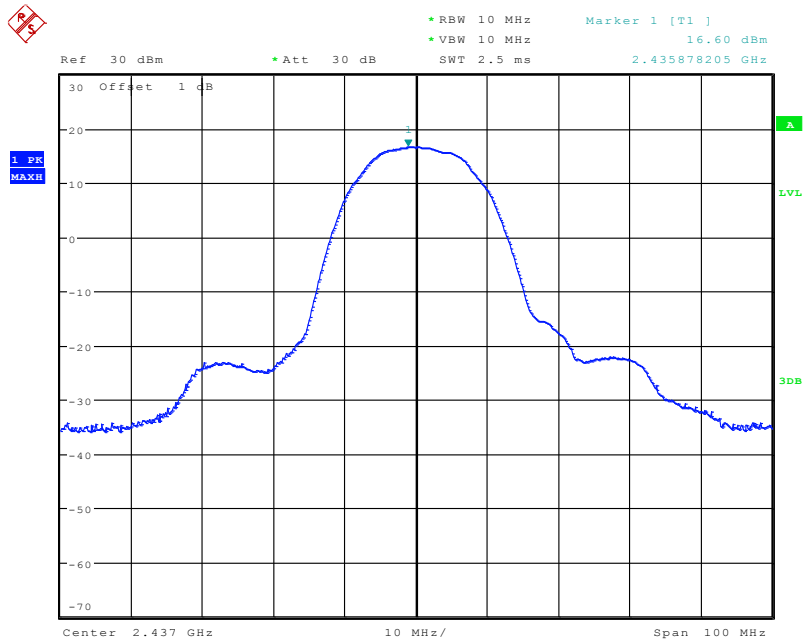


Date: 8.MAR.2011 15:31:41

### 3. DSSS-2462MHz

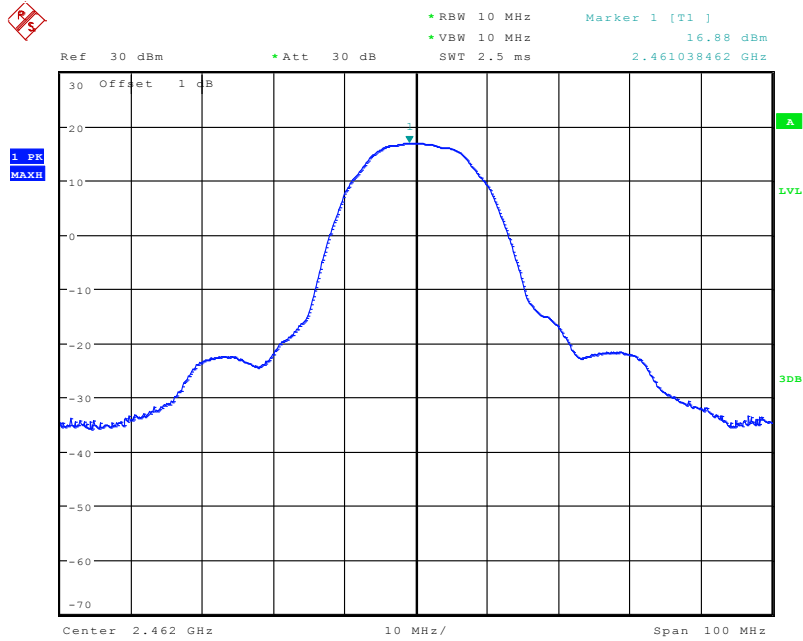


Date: 8.MAR.2011 15:32:11

### 4. OFDM-2412MHz

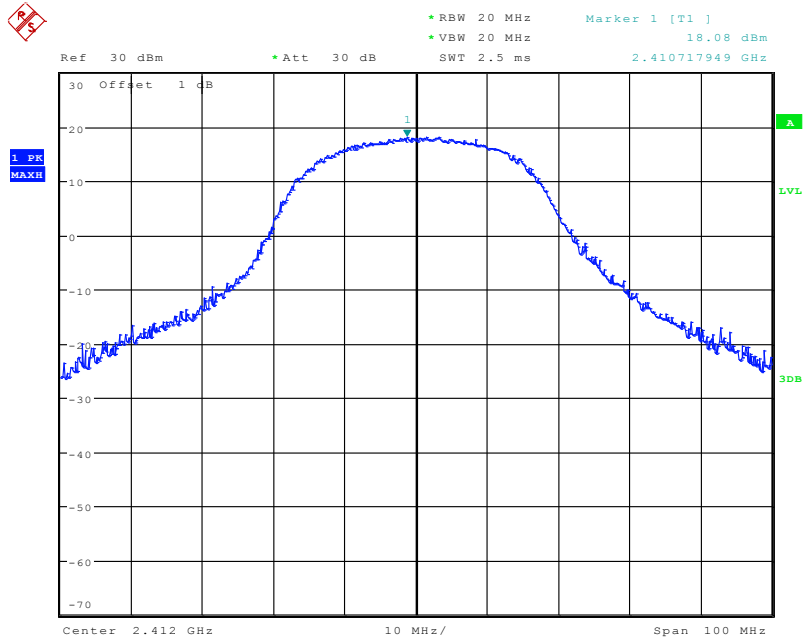


Date: 8.MAR.2011 15:32:54

### 5. OFDM-2437MHz

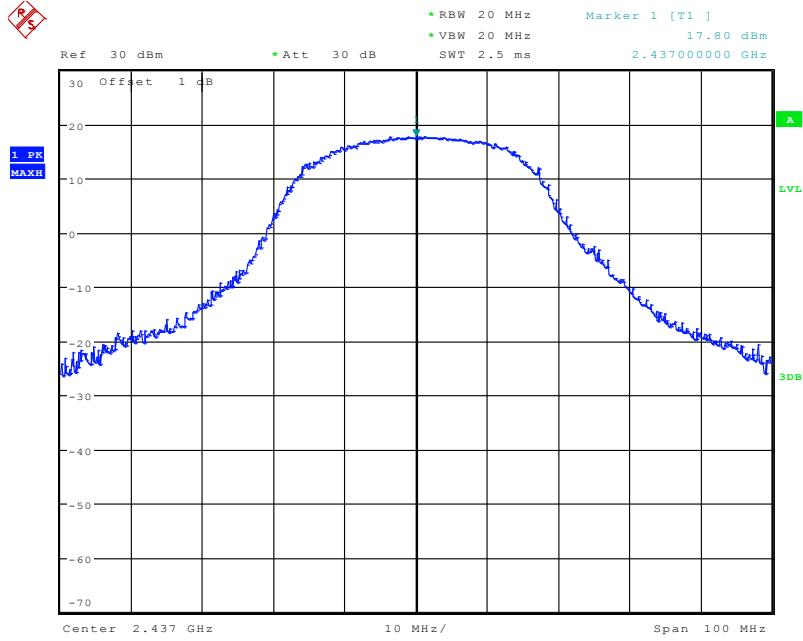

Date: 8.MAR.2011 15:33:23

### 6. OFDM-2462MHz

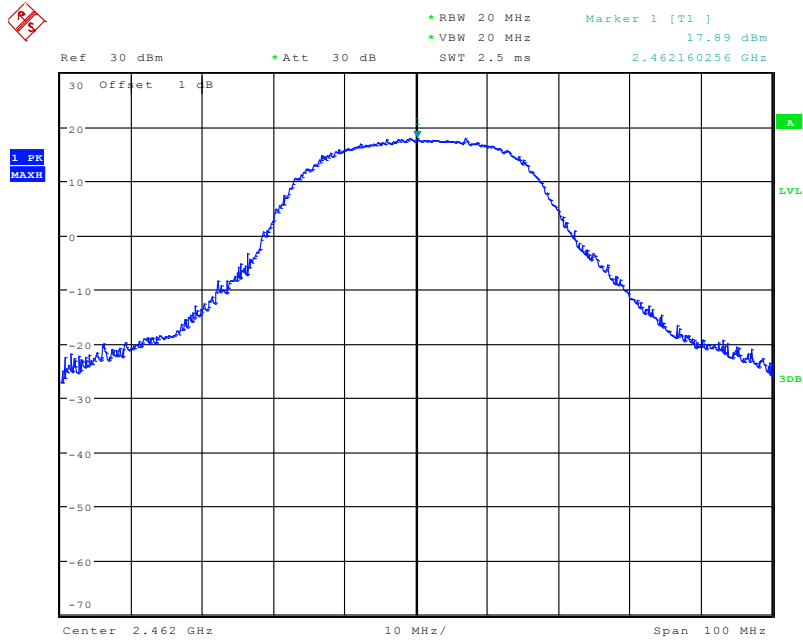

Date: 8.MAR.2011 15:33:56

## 7. Band Edge

### 7.1. Requirement of the standard

According to FCC §15.247(c), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 7.2. Test Procedure

a. For RF Conducted Measurement:

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Span greater than RBW.

b. For RF Radiated Measurement:

The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, then the video bandwidth is set to 1MHz for peak measurements and 10Hz for average measurements.


The spectrum from 30MHz to 26GHz is investigated with the transmitter set to the lowest, middle and highest channels in the 2.4GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are Made with the antenna polarized in both the vertical and the horizontal positions.


### 7.3. Test Setup

#### Conducted Band Edge

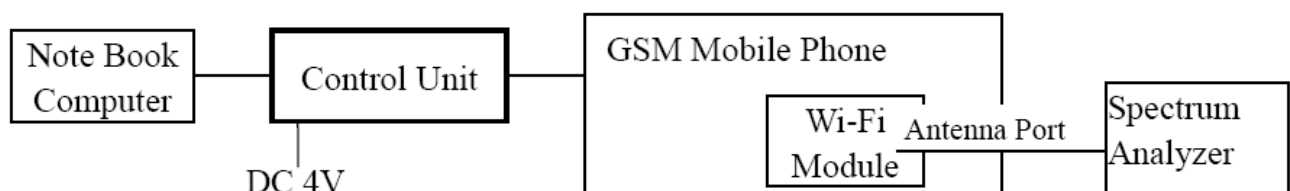



### Radiated Band Edge

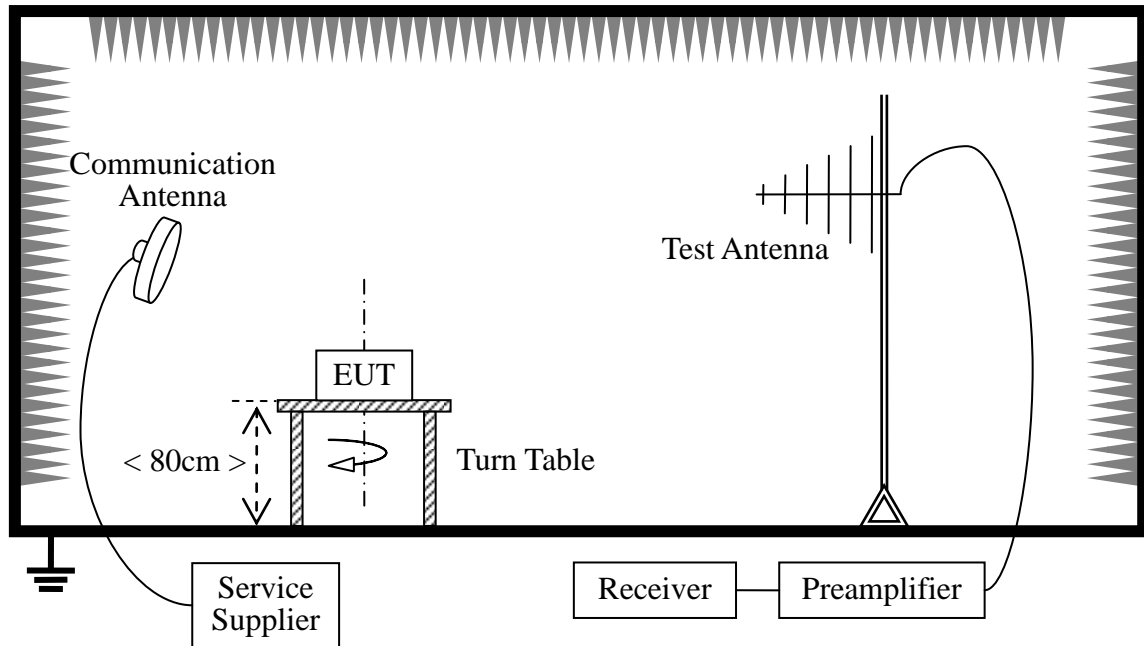


### 7.4. EUT Setup and Operating Conditions

Same as 5.4

### 7.5. Test Results


#### Conducted Band Edge

1. DSSS-2412MHz Maxpeak Detector

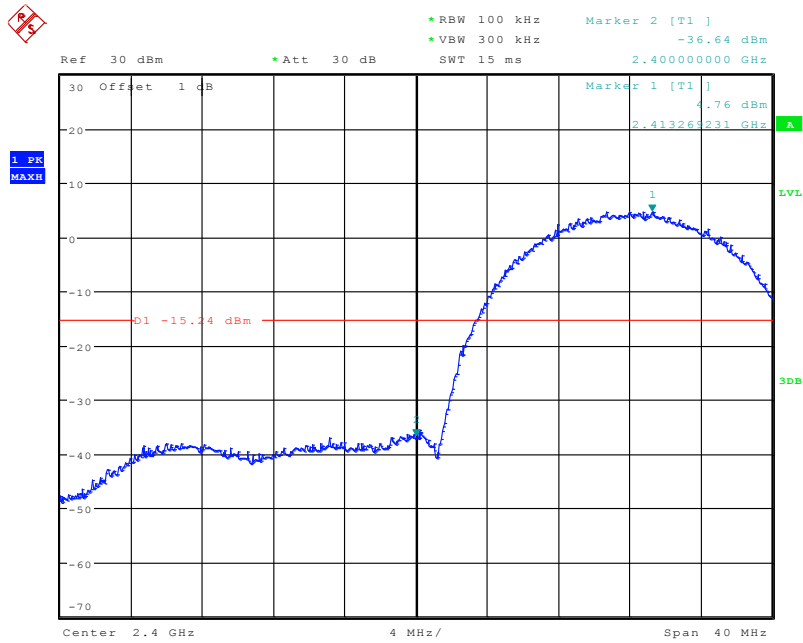


Date: 25.MAR.2011 14:43:29

## 2. DSSS-2462MHz Maxpeak Detector

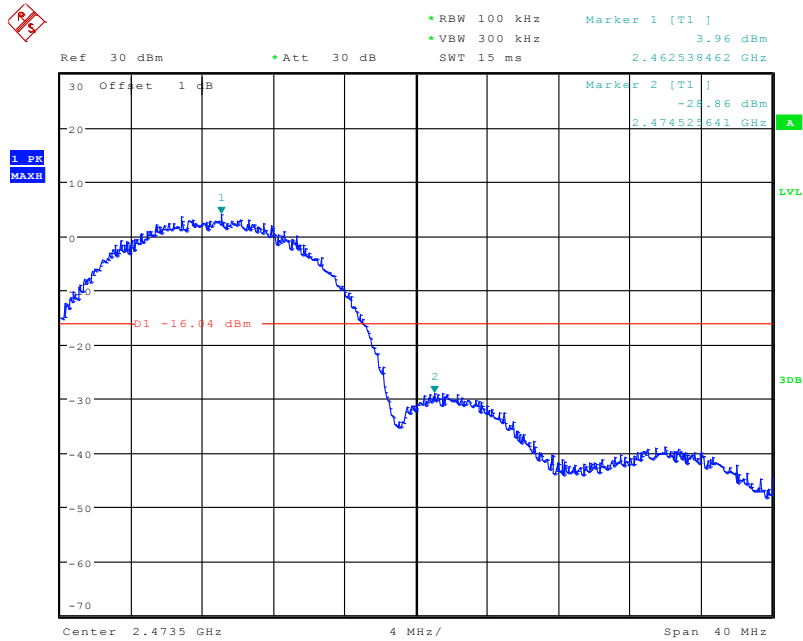


Date: 25.MAR.2011 15:02:05

## 3. OFDM -2412MHz Maxpeak Detector

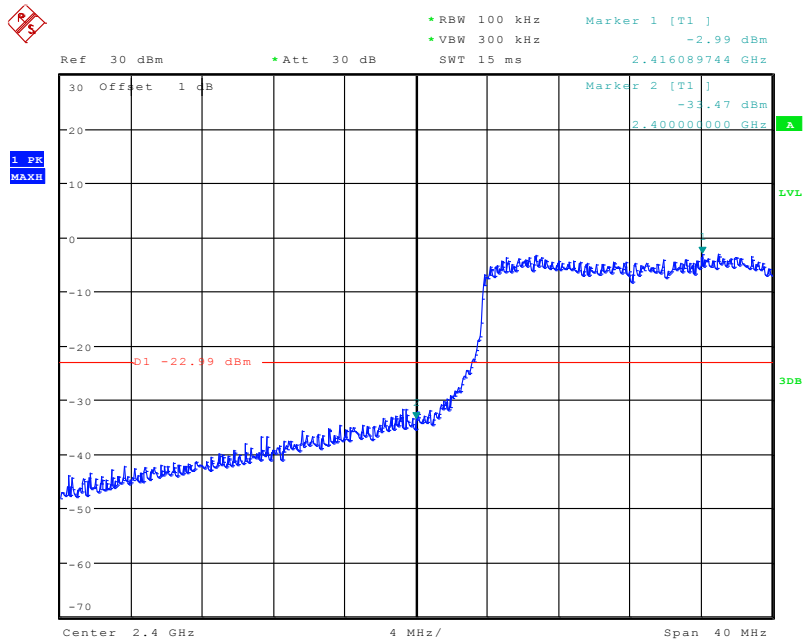

Date: 25.MAR.2011 14:48:46

#### 4. OFDM -2462MHz Maxpeak Detector

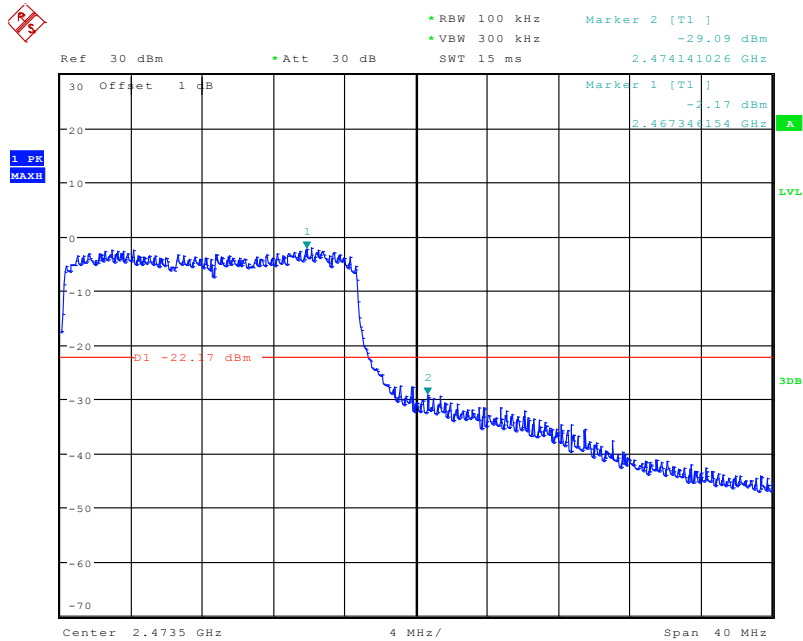

Date: 25.MAR.2011 14:51:43

**Radiated Band Edge**

Modulation	Frequency (MHz)	Measure Level (dBuV/m)	Correct Factor (dB)	Reading Level (dBuV)	Limit (dBuV/m)	Detector Type	Antenna Polarity
DSSS	2400	59.69	0.35	59.34	74	Peak	H
	2400	43.86	0.35	43.51	54	Average	
	2400	57.59	0.35	57.24	74	Peak	V
	2400	42.16	0.35	41.81	54	Average	
	2483.5	61.49	0.64	60.85	74	Peak	H
	2483.5	45.72	0.64	45.08	54	Average	
	2483.5	59.81	0.64	59.17	74	Peak	V
	2483.5	44.89	0.64	44.25	54	Average	
OFDM	2400	55.71	0.35	55.36	74	Peak	H
	2400	42.17	0.35	41.82	54	Average	
	2400	53.79	0.35	53.44	74	Peak	V
	2400	40.73	0.35	40.38	54	Average	
	2483.5	59.33	0.64	58.69	74	Peak	H
	2483.5	44.85	0.64	44.21	54	Average	
	2483.5	59.91	0.64	59.27	74	Peak	V
	2483.5	46.32	0.64	45.88	54	Average	

**NOTE:**

Measurement Level = Reading Level + Correct Factor

## 8. Conducted Spurious Emission

### 8.1. Requirement of the standard

According to FCC §15.247(c), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 8.2. Test Procedure

- a. The EUT was coupled to the spectrum analyzer and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the reading.
- b. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- c. The spurious Emissions from 9 KHz to 10th harmonic of the fundamental frequency were researched.
- d. According to the standard requirement, the resolution bandwidth of the spectrum analyzer was set to RBW=100 kHz, VBW=300 kHz.

### 8.3. Test Setup

Same as 5.3

### 8.4. EUT Setup and Operating Conditions


Same as 5.4

### 8.5. Test Results

The following test plots shows that spurious emissions in the whole frequency range were below the 20dBc limit line.


### Conducted Spurious Emission Test Plots

#### 1. DSSS-2412MHz

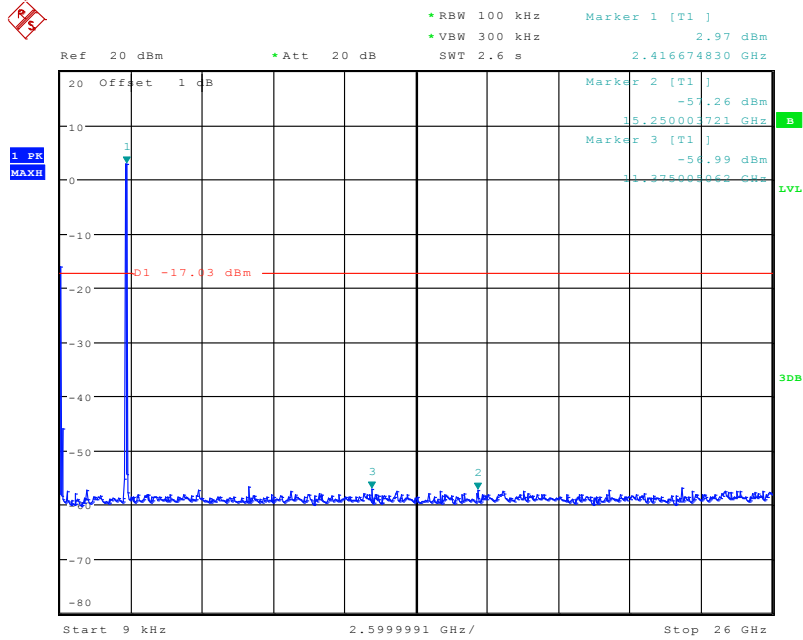


Date: 8.MAR.2011 16:15:56

#### 2. DSSS-2437MHz

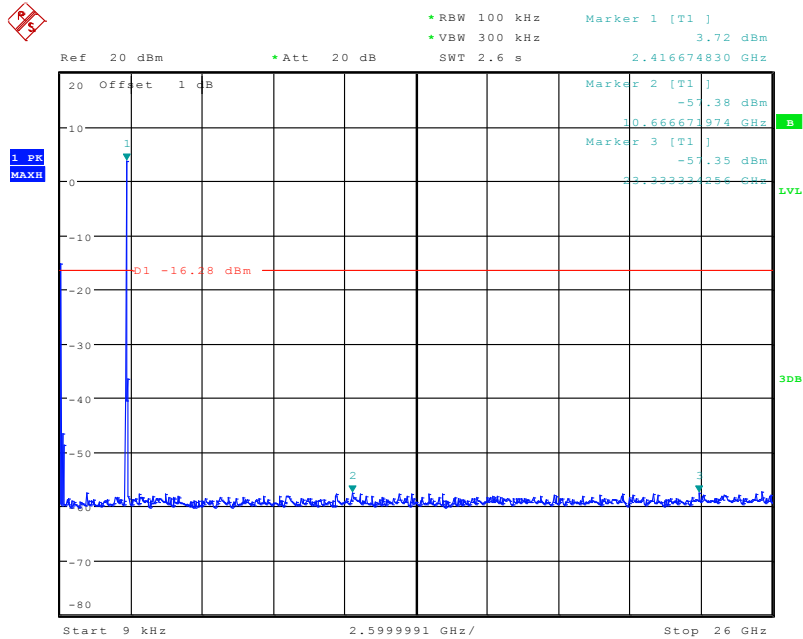


Date: 8.MAR.2011 16:18:55

### 3. DSSS-2462MHz

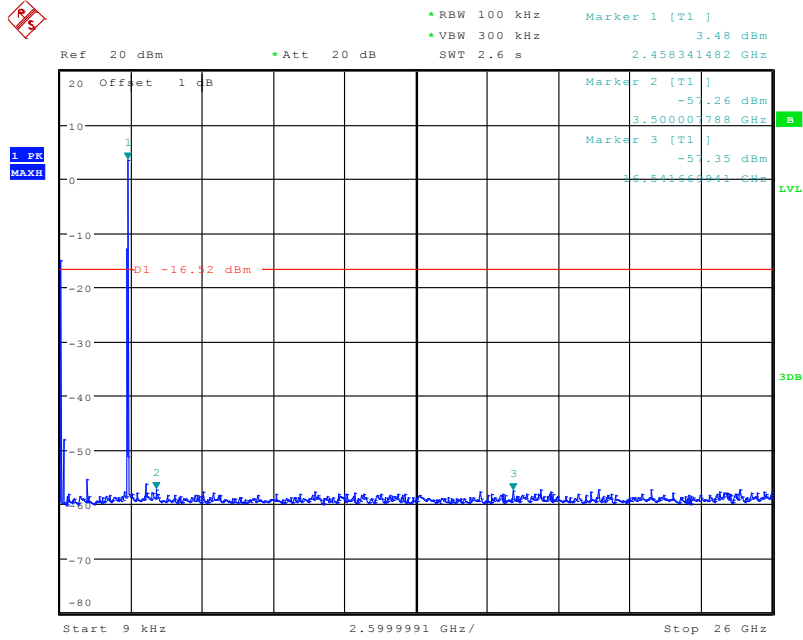


Date: 8.MAR.2011 16:20:02

### 4. OFDM-2412MHz

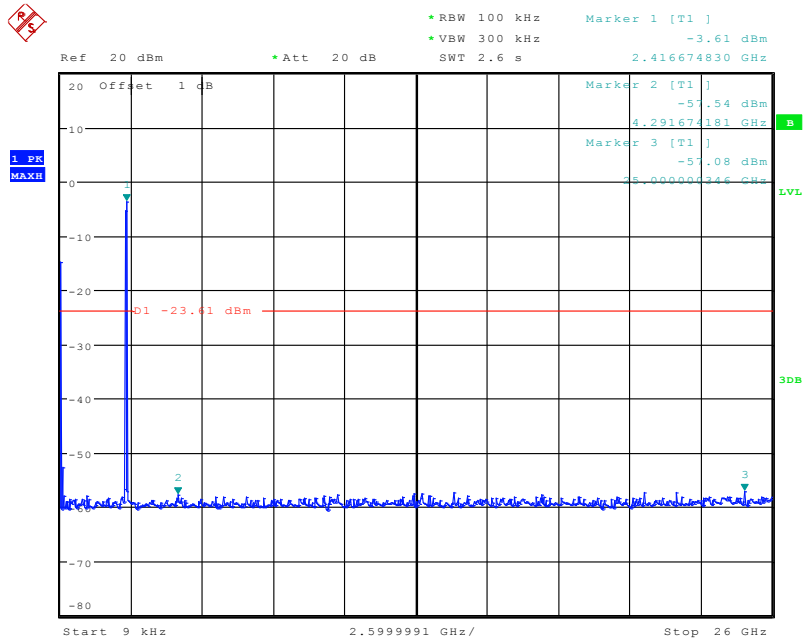


Date: 8.MAR.2011 16:22:08

5. OFDM-2437MHz

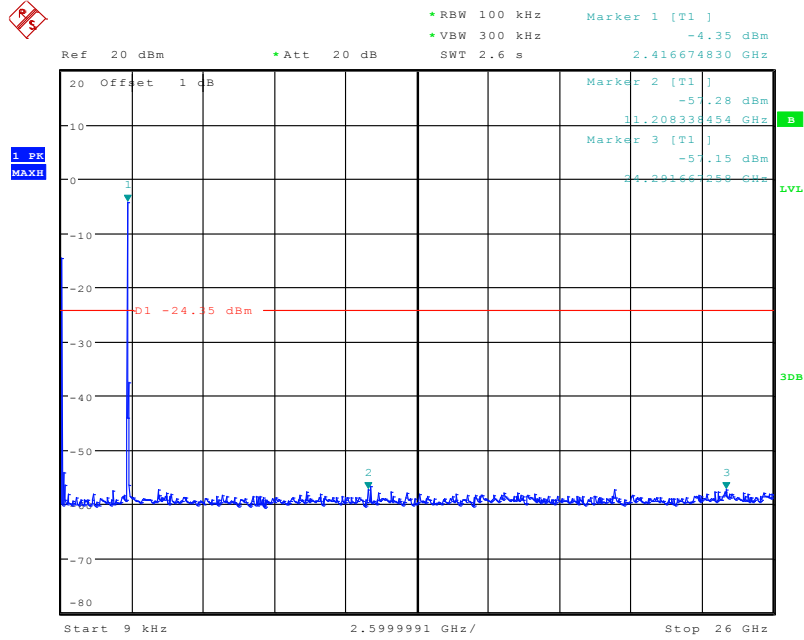

Date: 8.MAR.2011 16:22:53

6. OFDM-2462MHz

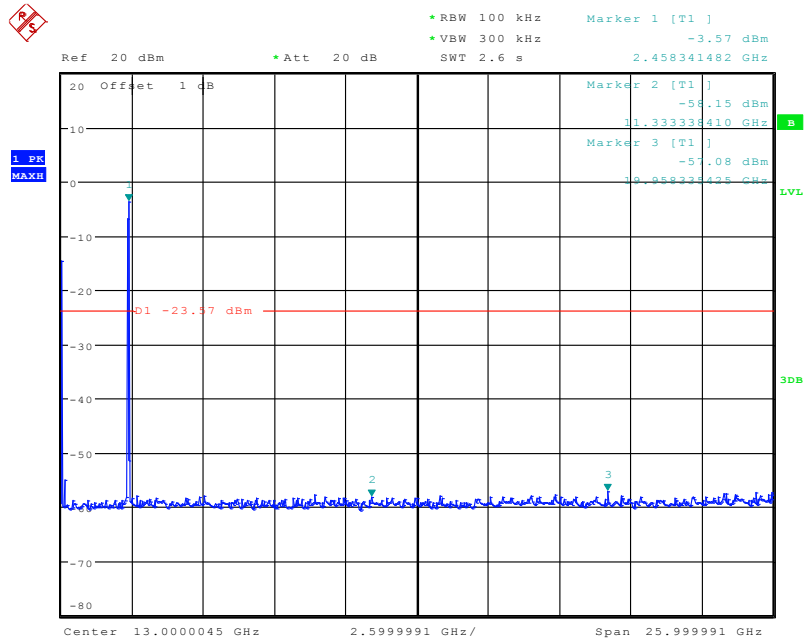

Date: 8.MAR.2011 16:23:42



## 9. Power Spectrum Density Measurement

### 9.1. Limits of Power Spectrum Density

According to FCC §15.247(d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 9.2. Test Procedure

- a. The EUT temporary antenna port was coupled to the spectrum analyzer. The loss of the cables the test system is calibrated to correct the reading.
- b. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- c. The resolution bandwidth of the spectrum analyzer was set to 3 kHz.

### 9.3. Test Setup

Same as 5.3

### 9.4. EUT Setup and Operating Conditions


Refer to 5.4.

### 9.5. Test Results

EUT Modulation	Operating Frequency ( MHz )	Power spectrum density (dBm/3kHz)	Limit (dBm/3kHz)
DSSS	2412	-8.92	8
	2437	-9.81	
	2462	-8.76	
OFDM	2412	-15.44	
	2437	-15.36	
	2462	-14.65	


### Plots of Power Spectrum Density

#### 1. DSSS-2412MHz

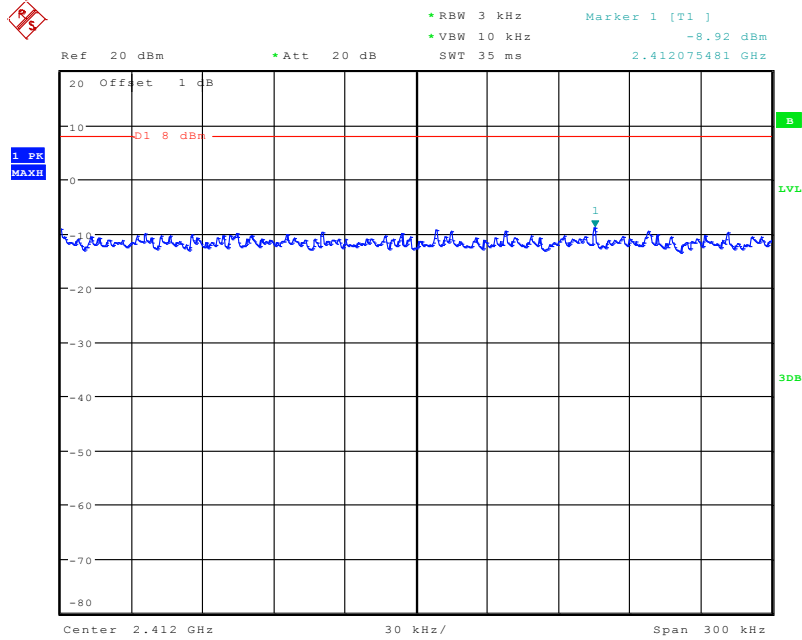


Date: 8.MAR.2011 16:30:12

#### 2. DSSS-2437MHz

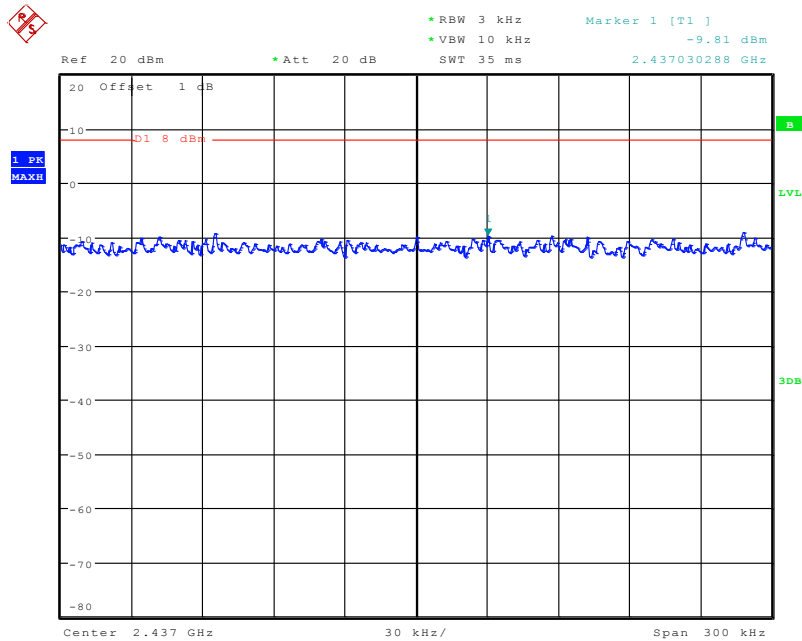


Date: 8.MAR.2011 16:30:37

### 3. DSSS-2462MHz

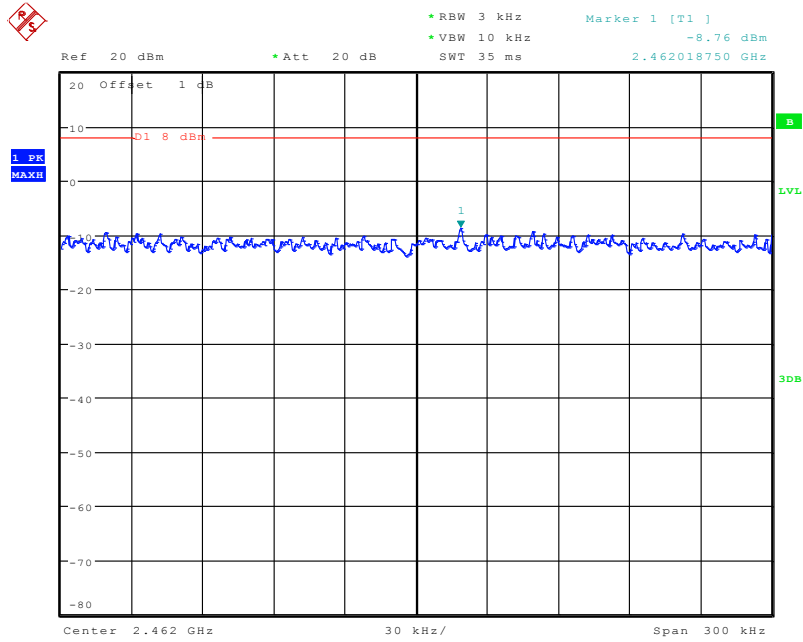


Date: 8.MAR.2011 16:31:03

### 4. OFDM-2412MHz

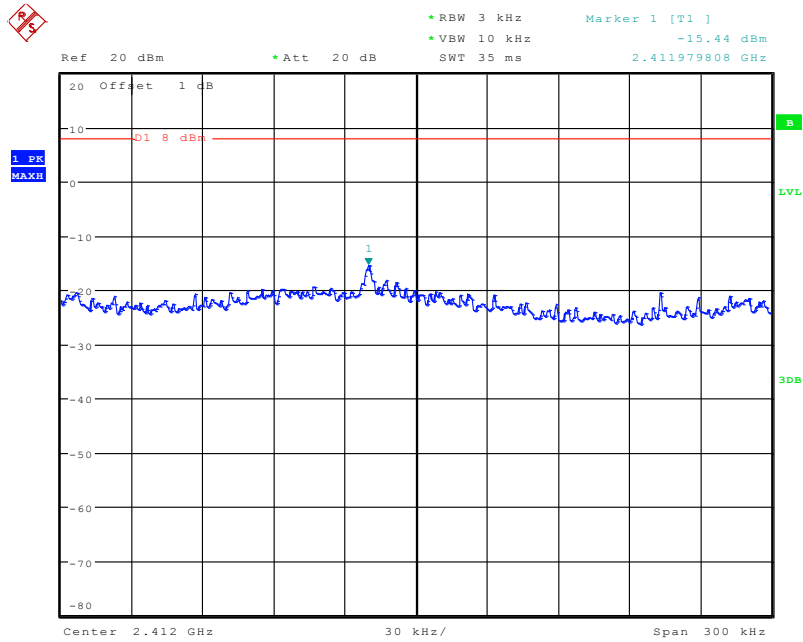


Date: 8.MAR.2011 16:31:33

### 5. OFDM-2437MHz

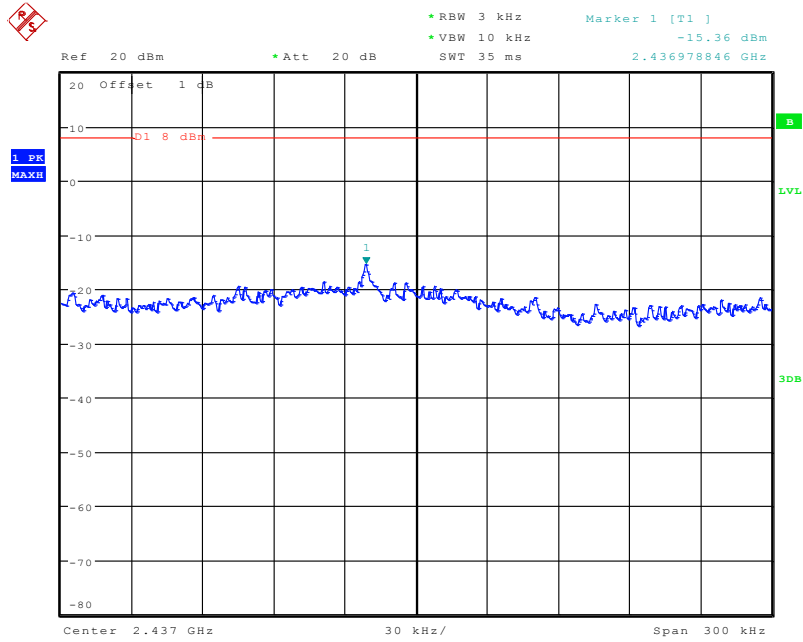

Date: 8.MAR.2011 16:31:54

### 6. OFDM-2462MHz

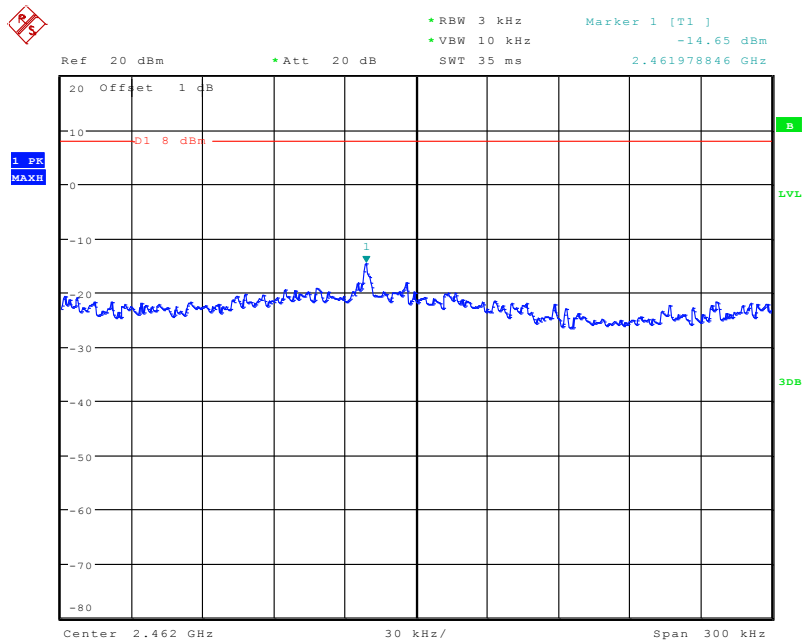

Date: 8.MAR.2011 16:32:12

**\*\* END OF REPORT \*\***