


FCC SAR Test Report

APPLICANT : Corporativo Lanix SA de CV
EQUIPMENT : Mobile phone
BRAND NAME : Lanix
MODEL NAME : Ilium S420
FCC ID : ZC4S420
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

The product was testing completed on Apr. 06, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.

SPORTON INTERNATIONAL(KUNSHAN) INC.

TEL : 86-0512-5790-0158

FAX : 86-0512-5790-0958

FCC ID : ZC4S420

Page Number : 1 of 53

Report Issued Date : Apr. 23, 2014

Report Version : Rev. 01



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
2.1 Testing Laboratory.....	5
2.2 Applicant	5
2.3 Manufacturer	5
2.4 Application Details.....	5
3. General Information	6
3.1 Description of Equipment Under Test (EUT)	6
3.2 Maximum RF output power among production units	7
3.3 Applied Standard.....	8
3.4 Device Category and SAR Limits	8
3.5 Test Conditions.....	8
4. Specific Absorption Rate (SAR).....	9
4.1 Introduction	9
4.2 SAR Definition.....	9
5. SAR Measurement System.....	10
5.1 E-Field Probe	11
5.2 Data Acquisition Electronics (DAE)	11
5.3 Robot	12
5.4 Measurement Server.....	12
5.5 Phantom.....	13
5.6 Device Holder	13
5.7 Data Storage and Evaluation	14
5.8 Test Equipment List.....	16
6. Tissue Simulating Liquids.....	17
7. System Verification Procedures	18
7.1 Purpose of System Performance check	18
7.2 System Setup.....	18
7.3 SAR System Verification Results	19
8. EUT Testing Position	20
8.1 Define two imaginary lines on the handset.....	20
8.2 Cheek Position	21
8.3 Tilted Position.....	21
8.4 Body Worn Position.....	22
9. Measurement Procedures	23
9.1 Spatial Peak SAR Evaluation.....	23
9.2 Power Reference Measurement.....	24
9.3 Area & Zoom Scan Procedures.....	24
9.4 Volume Scan Procedures.....	25
9.5 SAR Averaged Methods.....	25
9.6 Power Drift Monitoring.....	25
10. Conducted RF Output Power (Unit: dBm).....	26
11. Antenna Location	31
12. SAR Test Results	33
12.1 Head SAR	34
12.2 Hotspot SAR	35
12.3 Body Worn SAR	37
12.4 Repeated SAR Measurement	38
12.5 Highest SAR Plot	39
13. Simultaneous Transmission Analysis.....	44
13.1 Head Exposure Conditions	45
13.2 Hotspot Exposure Conditions.....	46
13.3 Body-Worn Exposure Conditions	48
13.4 SPLSR Evaluation and Analysis	49
14. Uncertainty Assessment	51
15. References	53
Appendix A. Plots of System Performance Check	
Appendix B. Plots of SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA433102	Rev. 01	Initial issue of report	Apr. 23, 2014

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Corporativo Lanix SA de CV, DUT: Mobile phone, Brand Name: Lanix, Model Name: Ilium S420** are as follows.

<Highest SAR Summary>

Exposure Position	Frequency Band	Reported 1g-SAR (W/kg)	Equipment Class	Highest Reported 1g-SAR (W/kg)
Head	GSM850	0.77	PCE	0.77
	GSM1900	0.60		
	WCDMA Band V	0.30		
	WCDMA Band II	0.64		
	WLAN 2.4GHz Band	0.37	DTS	0.37
Hotspot (Separation 1cm)	GSM850	1.50	PCE	1.50
	GSM1900	1.36		
	WCDMA Band V	0.79		
	WCDMA Band II	1.22		
	WLAN 2.4GHz Band	0.10	DTS	0.10
Body-worn (Separation 1cm)	GSM850	1.50	PCE	1.50
	GSM1900	1.36		
	WCDMA Band V	0.79		
	WCDMA Band II	1.23		
	WLAN 2.4GHz Band	0.16	DTS	0.16

<Highest Simultaneous transmission SAR>

Exposure Position	Frequency Band	Equipment Class	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
Body-worn (Separation 1cm)	GSM1900	PCE	1.46
	WLAN 2.4GHz Band	DTS	
Body-worn (Separation 1cm)	GSM1900	PCE	1.48
	Bluetooth	DSS	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958

2.2 Applicant

Company Name	Corporativo Lanix SA de CV
Address	Carretera Internacional a Nogales KM 8.5 Hermosillo, Sonora, México 83260

2.3 Manufacturer

Company Name	Beijing Tianyu Communication Equipment Co. Ltd.
Address	NO.55 Jiachang 2 road, OPTO-Mechatronics Industrial Park, Tongzhou district, Beijing 101111

2.4 Application Details

Date of Start during the Test	Apr. 01, 2014
Date of End during the Test	Apr. 06, 2014

3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT	Mobile phone
Brand Name	Lanix
Model Name	Ilium S420
FCC ID	ZC4S420
IMEI	862288020886576
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	• GSM/GPRS/EGPRS • RMC/AMR 12.2Kbps Rel 99 • HSDPA Rel 5, Cat10 • HSUPA Rel 6, Cat6 • 802.11b/g/n HT20 • Bluetooth v3.0+EDR
Antenna Type	WWAN: Monopole Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna
HW Version	TBW972315-8983-V007304
SW Version	ILIUMS420-TELCEL-SW-01
Transfer Mode Category	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Production Unit
Remark: 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. 2. This device supports GPRS/EDGE mode up to class12 and does not support DTM operation. 3. 802.11n- HT40 is not supported in 2.4GHz frequency band. 4. This device supported VoIP in GPRS/EDGE, WCDMA (e.g. 3rd part VoIP).	

3.2 Maximum RF output power among production units

Burst Average Power (dBm)		
Mode / Band	GSM850	GSM1900
GSM (GMSK, 1 Tx slot)	33.5	31
GPRS (GMSK, 1 Tx slot)	33.5	31
GPRS (GMSK, 2 Tx slots)	32.5	30
GPRS (GMSK, 3 Tx slots)	31	28
GPRS (GMSK, 4 Tx slots)	30	27
EDGE (GMSK, 1 Tx slot)	28	27
EDGE (GMSK, 2 Tx slots)	27	26
EDGE (GMSK, 3 Tx slots)	24.5	24
EDGE (GMSK, 4 Tx slots)	23.5	22.5

Maximum Target Power for Production Unit		
Mode / Band	WCDMA Band V	WCDMA Band II
AMR	23.5	23.5
RMC 12.2K	23.5	23.5
HSDPA Subtest-1	22.5	22.5
HSDPA Subtest-2	22.5	22.5
HSDPA Subtest-3	22	22
HSDPA Subtest-4	22	22
HSUPA Subtest-1	20	20.5
HSUPA Subtest-2	20.5	20.5
HSUPA Subtest-3	21	21.5
HSUPA Subtest-4	20	20
HSUPA Subtest-5	22	22

Average Power (dBm)			
Mode / Band	IEEE 802.11b/g/n		
	11b	11g	11n-HT20
WLAN 2.4GHz Band	16	11	12.5

Average Power (dBm)			
Mode / Band	1Mbps (GFSK)	2Mbps ($\pi/4$ -DQPSK)	3Mbps (8-DPSK)
Bluetooth	7.5	5.5	5.5

3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 Handset SAR v01r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- FCC KDB 941225 D06 Hotspot Mode SAR v01r01

3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.5 Test Conditions

3.5.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

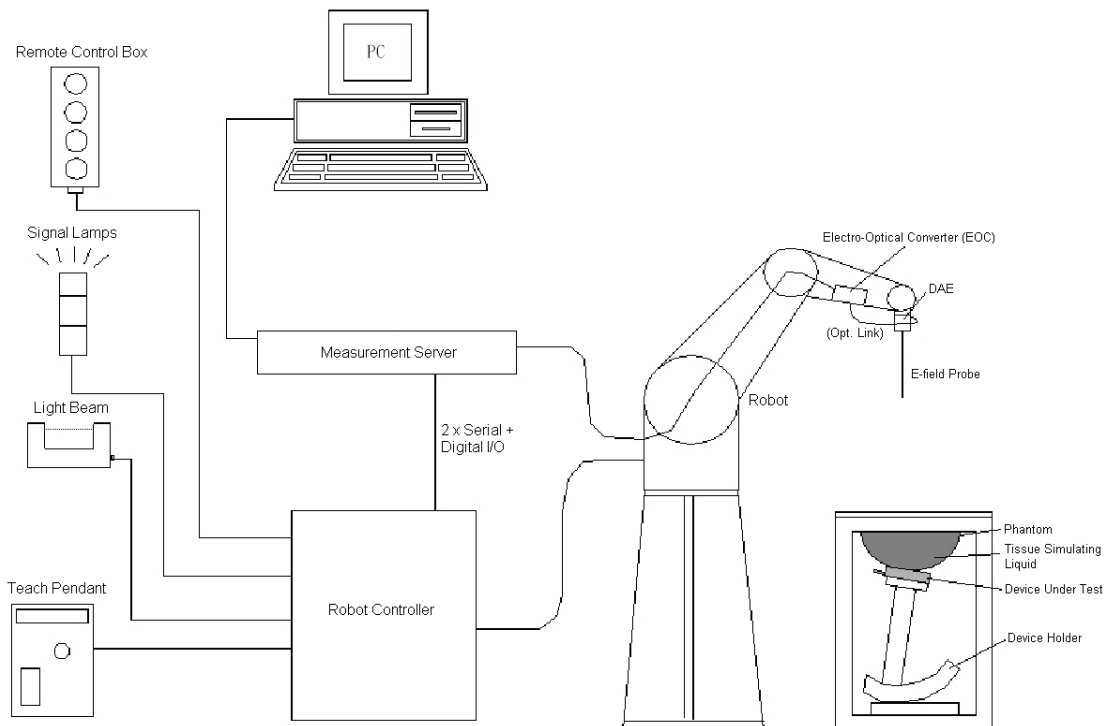


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

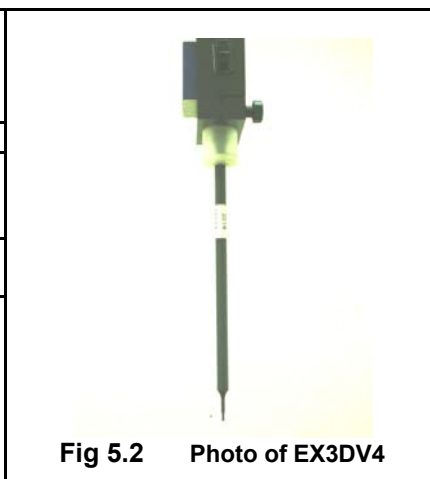


Fig 5.2 Photo of EX3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.3 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.4 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.5 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

Fig 5.6 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

5.6 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.7 Device Holder

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	Mar. 25, 2013	Mar. 23, 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	Mar. 27, 2013	Mar. 25, 2015
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 23, 2013	Aug. 22, 2014
SPEAG	Data Acquisition Electronics	DAE4	1210	Jun. 19, 2013	Jun. 18, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	Jun. 20, 2013	Jun. 19, 2014
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1477	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1479	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	Wireless Communication Test Set	E5515C	MY52102706	May 04, 2013	May 03, 2014
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	Apr. 22, 2013	Apr. 21, 2014
Agilent	Dielectric Probe Kit	85070E	MY44300475	NCR	NCR
R&S	Signal Generator	SMR40	100455	Jan. 17, 2014	Jan. 16, 2015
Anritsu	Power Sensor	MA2411B	0917070	Feb. 27, 2014	Feb. 26, 2015
Anritsu	Power Meter	ML2495A	1005002	Feb. 27, 2014	Feb. 26, 2015
Agilent	Dual Directional Coupler	778D	50422	Note 4	
Woken	Attenuator 1	WK0602-XX	N/A	Note 4	
PE	Attenuator 2	PE7005-10	N/A	Note 4	
PE	Attenuator 3	PE7005- 3	N/A	Note 4	
AR	Power Amplifier	5S1G4M2	328767	Note 5	
R&S	Spectrum Analyzer	FSP30	101399	May 23, 2013	May 22, 2014

Table 5.1 Test Equipment List

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01r03, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D835V2, SN: 4d151, D1900V2, SN: 5d170, can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
6. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.



Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070E Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Liquid Temp. ($^{\circ}\text{C}$)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.8	0.884	41.041	0.90	41.50	-1.78	-1.11	± 5	2014/4/5
1900	Head	22.9	1.424	38.966	1.40	40.00	1.71	-2.59	± 5	2014/4/5
2450	Head	22.6	1.811	39.263	1.80	39.20	0.61	0.16	± 5	2014/4/6
835	Body	22.6	0.982	54.856	0.97	55.20	1.24	-0.62	± 5	2014/4/4
1900	Body	22.5	1.551	53.411	1.52	53.30	2.04	0.21	± 5	2014/4/1
2450	Body	22.7	1.929	51.207	1.95	52.70	-1.08	-2.83	± 5	2014/4/6

Table 6.2 Measuring Results for Simulating Liquid

7. System Verification Procedures

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

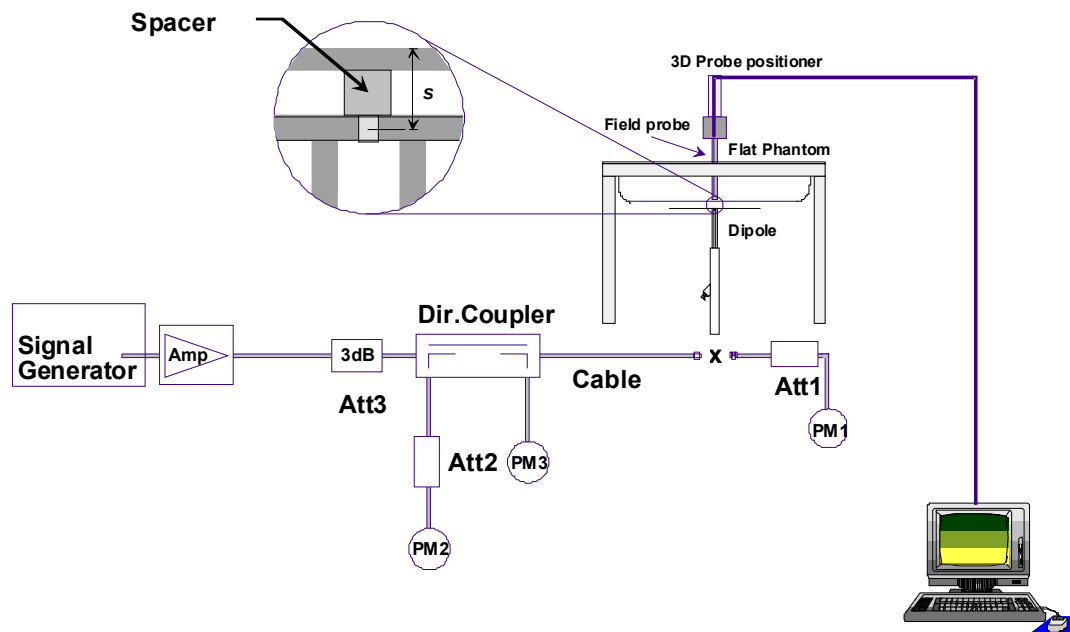


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole



Fig 7.2 Photo of Dipole Setup

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014/4/5	835	Head	250	4d151	3857	1210	2.38	9.49	9.52	0.32
2014/4/5	1900	Head	250	5d170	3857	1210	10.40	40.20	41.6	3.48
2014/4/6	2450	Head	250	736	3857	1210	13.30	53.20	53.2	0.00
2014/4/4	835	Body	250	4d151	3857	1210	2.22	9.43	8.88	-5.83
2014/4/1	1900	Body	250	5d170	3857	1210	10.30	41.20	41.2	0.00
2014/4/6	2450	Body	250	736	3857	1210	12.60	51.30	50.4	-1.75

Table 7.1 Target and Measurement SAR after Normalized

8. EUT Testing Position

8.1 Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

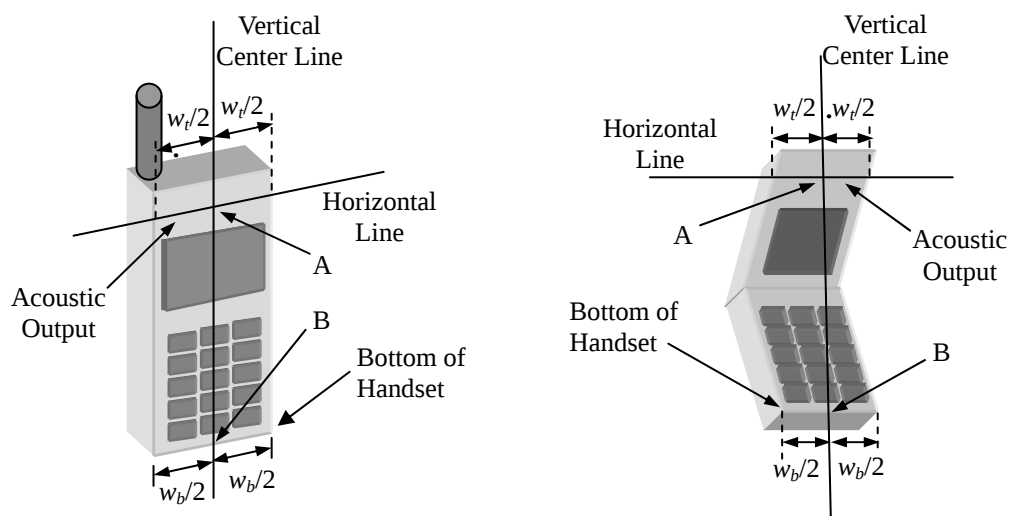


Fig 8.1 Illustration for Handset Vertical and Horizontal Reference Lines

8.2 Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 8.2).

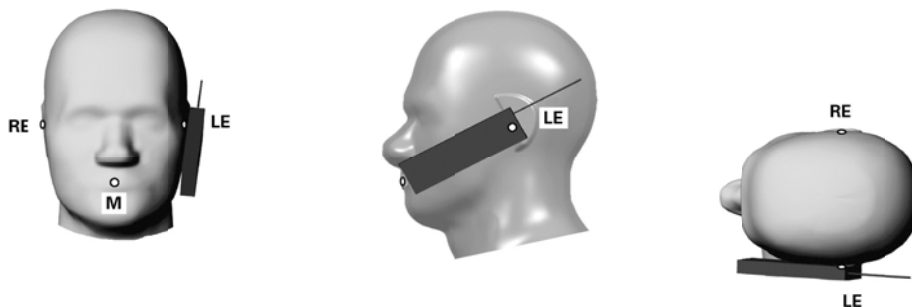


Fig 8.2 Illustration for Cheek Position

8.3 Tilted Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 8.3).

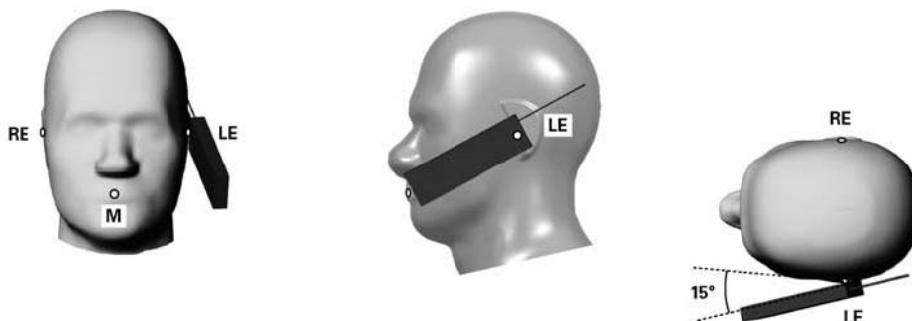


Fig 8.3 Illustration for Tilted Position

8.4 Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.0 cm.

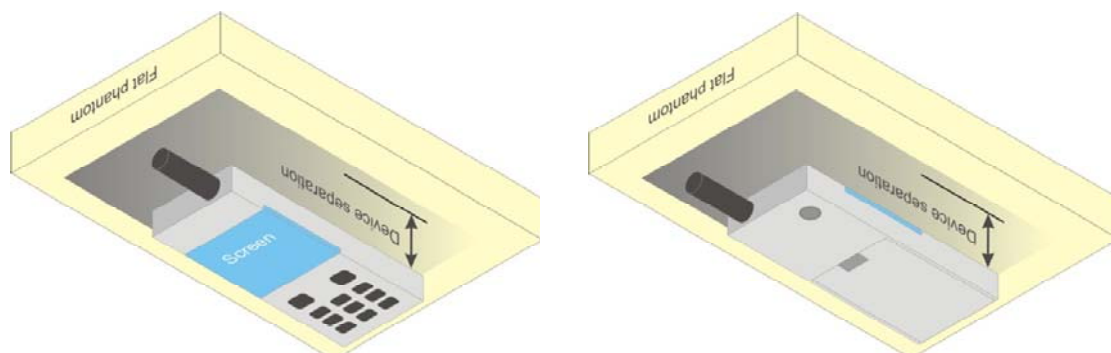


Fig 8.4 Illustration for Body Worn Position

8.5 Hotspot Position

- (a) To position the device parallel to the phantom surface with all sides and either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device and the flat phantom to 1.0 cm.

<EUT Setup Photos>

Please refer to Appendix D for the test setup photos.

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r03 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \delta \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Note:

1. Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. The EUT do not support DTM function.
3. According to October 2013TCB Workshop, for GSM / GPRS, the number of time slots to test for SAR should correspond to the highest source-based time-averaged maximum output power configuration; When time slots with equivalent maximum average output power specifications, including tolerance, if the measured maximum output power levels are within 0.25 dB of each other, test the configuration with the most number of time slots.
4. For head/body-worn/hotspot SAR testing, the EUT was set in GPRS 4 Tx slots for GSM850 and GSM1900 band.

Band GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM (GMSK, 1 Tx slot)	32.88	32.90	32.81	33.5	23.88	23.90	23.81	24.5
GPRS (GMSK, 1 Tx slot)	32.87	32.89	32.82	33.5	23.87	23.89	23.82	24.5
GPRS (GMSK, 2 Tx slots)	32.17	32.19	32.12	32.5	26.17	26.19	26.12	26.5
GPRS (GMSK, 3 Tx slots)	30.51	30.53	30.46	31	26.25	26.27	26.20	26.74
GPRS (GMSK, 4 Tx slots)	29.61	29.62	29.50	30	26.61	26.62	26.50	27
EDGE (8PSK, 1 Tx slot)	27.68	27.60	27.39	28	18.68	18.60	18.39	19
EDGE (8PSK, 2 Tx slots)	26.52	26.48	26.30	27	20.52	20.48	20.30	21
EDGE (8PSK, 3 Tx slots)	24.31	24.23	24.01	24.5	20.05	19.97	19.75	20.24
EDGE (8PSK, 4 Tx slots)	23.01	22.94	22.72	23.5	20.01	19.94	19.72	20.5
Band GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)	30.22	30.35	30.49	31	21.22	21.35	21.49	22
GPRS (GMSK, 1 Tx slot)	30.20	30.33	30.47	31	21.20	21.33	21.47	22
GPRS (GMSK, 2 Tx slots)	29.21	29.38	29.58	30	23.21	23.38	23.58	24
GPRS (GMSK, 3 Tx slots)	27.16	27.36	27.64	28	22.90	23.10	23.38	23.74
GPRS (GMSK, 4 Tx slots)	26.09	26.31	26.59	27	23.09	23.31	23.59	24
EDGE (8PSK, 1 Tx slot)	25.68	26.31	26.81	27	16.68	17.31	17.81	18
EDGE (8PSK, 2 Tx slots)	24.50	25.12	25.77	26	18.50	19.12	19.77	20
EDGE (8PSK, 3 Tx slots)	22.24	22.85	23.60	24	17.98	18.59	19.34	19.74
EDGE (8PSK, 4 Tx slots)	21.13	21.77	22.24	22.5	18.13	18.77	19.24	19.5

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

<WCDMA Conducted Power>
Note:

1. Applying the subtest setup in Table C10.1.4 and Table C.11.1.3 of 3GPP TS 34.121-1 V9.1.0 to Rel. 6 HSPA.
2. Per KDB 941225 D01v02, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
3. By design, AMR, HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
4. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.
5. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/kg}$, HSDPA/HSUPA SAR evaluation can be excluded.

Band			WCDMA Band V				WCDMA Band II			
Tx Channel			4132	4182	4233	Tune-up Limit (dBm)	9262	9400	9538	Tune-up Limit (dBm)
Rx Channel			4357	4407	4458		9662	9800	9938	
Frequency (MHz)			826.4	836.4	846.6		1852.4	1880	1907.6	
3GPP MPR (dB)	3GPP Rel 99	AMR	23.00	22.97	23.00	23.5	22.77	22.97	23.06	23.5
	3GPP Rel 99	RMC 12.2Kbps	23.02	22.97	23.01	23.5	22.78	22.99	23.07	23.5
0	3GPP Rel 6	HSDPA Subtest-1	22.14	21.93	22.12	22.5	21.81	22.12	22.14	22.5
0	3GPP Rel 6	HSDPA Subtest-2	22.13	21.94	22.11	22.5	21.82	22.11	22.15	22.5
0.5	3GPP Rel 6	HSDPA Subtest-3	21.66	21.47	21.62	22	21.36	21.63	21.65	22
0.5	3GPP Rel 6	HSDPA Subtest-4	21.63	21.45	21.61	22	21.35	21.68	21.70	22
0	3GPP Rel 6	HSUPA Subtest-1	19.89	19.83	19.99	20	19.73	20.13	20.00	20.5
2	3GPP Rel 6	HSUPA Subtest-2	19.91	19.83	20.00	20.5	19.75	20.15	20.00	20.5
1	3GPP Rel 6	HSUPA Subtest-3	20.88	20.82	20.97	21	20.74	21.14	20.97	21.5
2	3GPP Rel 6	HSUPA Subtest-4	19.35	19.33	19.45	20	19.18	19.67	19.45	20
0	3GPP Rel 6	HSUPA Subtest-5	21.36	21.29	21.45	22	21.18	21.60	21.43	22

<WLAN 2.4GHz Conducted Power>

802.11b Average Power (dBm)					
Channel	Frequency (MHz)	Data Rate (bps)			
		1M bps	2M bps	5.5M bps	11M bps
CH 01	2412	14.48	14.40	14.43	14.33
CH 06	2437	14.71	14.64	14.79	14.73
CH 11	2462	15.47	15.29	15.21	14.96

802.11g Average Power (dBm)									
Channel	Frequency (MHz)	Data Rate (bps)							
		6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
CH 01	2412	10.18	10.18	10.06	10.12	10.25	10.36	10.31	10.27
CH 06	2437	10.33	10.40	10.22	10.32	10.56	10.57	10.56	10.54
CH 11	2462	10.77	10.60	10.53	10.52	10.65	10.74	10.74	10.74

WLAN 2.4GHz Band 802.11n-HT20 Average Power (dBm)									
Channel	Frequency (MHz)	MCS Index							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412	11.87	11.84	11.83	11.70	11.63	11.61	11.70	11.58
CH 06	2437	12.24	12.19	12.24	12.07	11.90	11.93	12.02	12.00
CH 11	2462	12.37	12.31	12.35	12.25	12.14	12.22	12.23	12.13

Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
3. Apply the test exclusion rule in KDB 248227 D01 v01r02 11g, 11n-HT20 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

<Bluetooth Conducted Power>

Bluetooth average power (dBm)			
Mode	1Mbps (GFSK)	2Mbps ($\pi/4$ -DQPSK)	3Mbps (8-DPSK)
Tune Up Limit	7.5	5.5	5.5

Note:

1. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:


$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- If the distance of the antenna to the user is < 5 mm, 5mm is used to determine SAR exclusion threshold

Bluetooth Max Power (dBm)	mW	Test Distance (mm)	Frequency (GHz)	exclusion thresholds
7.5	6.00	0	2.48	1.89

Per KDB 447498 D01v05r02 exclusion thresholds is $1.89 < 3$, RF exposure evaluation is not required.

11. Antenna Location

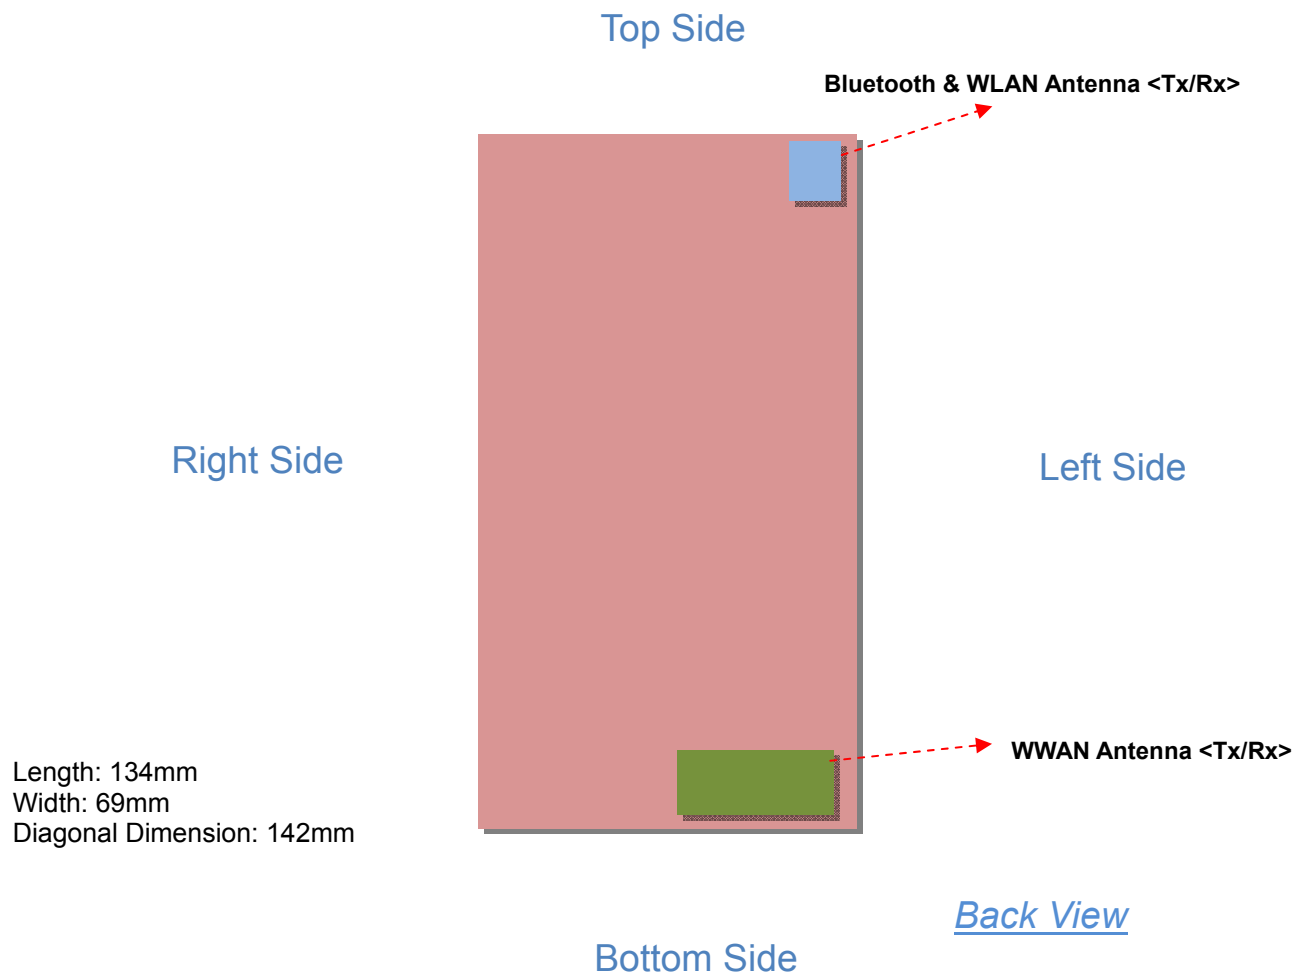

Antennas	Wireless Interface
WWAN Main Antenna (Tx / Rx)	GSM850 GSM1900 WCDMA Band V WCDMA Band II
BT&WLAN Antenna (Tx / Rx)	WLAN 2.4GHz Bluetooth

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	116mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	120mm	56mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

Note:

1. Head/Body-worn/Hotspot mode SAR assessments are required.
2. Referring to KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



12. SAR Test Results

Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor.
2. Per KDB 447498 D01v05r02, for each exposure position, if the highest output channel reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
3. According to October 2013TCB Workshop, for GSM / GPRS, the number of time slots to test for SAR should correspond to the highest source-based time-averaged maximum output power configuration; When time slots with equivalent maximum average output power specifications, including tolerance, if the measured maximum output power levels are within 0.25 dB of each other, test the configuration with the most number of time slots.
4. For Hotspot SAR testing, per KDB 941225 D06v01r01, for EUT dimension $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
5. Body-worn exposure conditions are intended to GPRS operations, therefore GPRS modes is selected to be tested.
6. Pre KDB648474 D04v02, when the reported SAR for a body-worn accessory for GSM Voice, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
7. Though per KDB 648474 D04v02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, the SAR testing with a headset connected to the handset is not required, but considered the simultaneous SAR for body-worn, we still perform the WLAN SAR with headset mode.
8. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA output power is $< 0.25\text{dB}$ higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2 W/kg, HSDPA/HSUPA SAR evaluation can be excluded.

12.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1	GSM850	GPRS (4 Tx slots)	Right Cheek	189	836.4	29.62	30	1.091	-0.01	0.643	0.702
2	GSM850	GPRS (4 Tx slots)	Right Tilted	189	836.4	29.62	30	1.091	0.009	0.363	0.396
3	GSM850	GPRS (4 Tx slots)	Left Cheek	189	836.4	29.62	30	1.091	0.13	0.704	0.768
4	GSM850	GPRS (4 Tx slots)	Left Tilted	189	836.4	29.62	30	1.091	0.06	0.468	0.511
5	GSM1900	GPRS (4 Tx slots)	Right Cheek	810	1909.8	26.59	27	1.099	-0.09	0.445	0.489
6	GSM1900	GPRS (4 Tx slots)	Right Tilted	810	1909.8	26.59	27	1.099	-0.17	0.143	0.157
7	GSM1900	GPRS (4 Tx slots)	Left Cheek	810	1909.8	26.59	27	1.099	-0.08	0.541	0.595
8	GSM1900	GPRS (4 Tx slots)	Left Tilted	810	1909.8	26.59	27	1.099	-0.01	0.159	0.175

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
9	WCDMA Band V	RMC12.2K	Right Cheek	4132	826.4	23.02	23.5	1.117	0.07	0.249	0.278
10	WCDMA Band V	RMC12.2K	Right Tilted	4132	826.4	23.02	23.5	1.117	0.02	0.145	0.162
11	WCDMA Band V	RMC12.2K	Left Cheek	4132	826.4	23.02	23.5	1.117	0.03	0.269	0.300
12	WCDMA Band V	RMC12.2K	Left Tilted	4132	826.4	23.02	23.5	1.117	0.15	0.197	0.220
13	WCDMA Band II	RMC 12.2K	Right Cheek	9538	1907.6	23.07	23.5	1.104	-0.07	0.434	0.479
14	WCDMA Band II	RMC 12.2K	Right Tilted	9538	1907.6	23.07	23.5	1.104	-0.16	0.155	0.171
15	WCDMA Band II	RMC 12.2K	Left Cheek	9538	1907.6	23.07	23.5	1.104	0.02	0.576	0.636
16	WCDMA Band II	RMC 12.2K	Left Tilted	9538	1907.6	23.07	23.5	1.104	0.07	0.151	0.167

<WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
17	WLAN 2.4GHz	802.11b	Right Cheek	11	2462	15.47	16	1.130	0.13	0.325	0.367
18	WLAN 2.4GHz	802.11b	Right Tilted	11	2462	15.47	16	1.130	0.15	0.192	0.217
19	WLAN 2.4GHz	802.11b	Left Cheek	11	2462	15.47	16	1.130	0.12	0.193	0.218
20	WLAN 2.4GHz	802.11b	Left Tilted	11	2462	15.47	16	1.130	-0.08	0.184	0.208

12.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
21	GSM850	GPRS (4 Tx slots)	Front	1	189	836.4	29.62	30	1.091	0.01	0.879	0.959
22	GSM850	GPRS (4 Tx slots)	Back	1	189	836.4	29.62	30	1.091	-0.03	1.330	1.452
23	GSM850	GPRS (4 Tx slots)	Left Side	1	189	836.4	29.62	30	1.091	0.08	0.914	0.998
24	GSM850	GPRS (4 Tx slots)	Right Side	1	189	836.4	29.62	30	1.091	0.11	0.931	1.016
25	GSM850	GPRS (4 Tx slots)	Bottom Side	1	189	836.4	29.62	30	1.091	0.09	0.176	0.192
27	GSM850	GPRS (4 Tx slots)	Front	1	128	824.2	29.61	30	1.094	0.01	0.855	0.935
28	GSM850	GPRS (4 Tx slots)	Front	1	251	848.8	29.5	30	1.122	-0.0019	0.837	0.939
29	GSM850	GPRS (4 Tx slots)	Back	1	128	824.2	29.61	30	1.094	-0.006	1.370	1.499
31	GSM850	GPRS (4 Tx slots)	Back	1	251	848.8	29.5	30	1.122	0.02	1.210	1.358
32	GSM850	GPRS (4 Tx slots)	Left Side	1	128	824.2	29.61	30	1.094	0.11	0.916	1.002
33	GSM850	GPRS (4 Tx slots)	Left Side	1	251	848.8	29.5	30	1.122	0.07	0.821	0.921
34	GSM850	GPRS (4 Tx slots)	Right Side	1	128	824.2	29.61	30	1.094	0.15	0.886	0.969
35	GSM850	GPRS (4 Tx slots)	Right Side	1	251	848.8	29.5	30	1.122	0.09	0.880	0.987
39	GSM1900	GPRS (4 Tx slots)	Front	1	810	1909.8	26.59	27	1.099	-0.02	0.813	0.893
40	GSM1900	GPRS (4 Tx slots)	Back	1	810	1909.8	26.59	27	1.099	-0.09	1.110	1.220
41	GSM1900	GPRS (4 Tx slots)	Left Side	1	810	1909.8	26.59	27	1.099	0.07	0.544	0.598
42	GSM1900	GPRS (4 Tx slots)	Right Side	1	810	1909.8	26.59	27	1.099	0.05	0.218	0.240
43	GSM1900	GPRS (4 Tx slots)	Bottom Side	1	810	1909.8	26.59	27	1.099	0.11	0.807	0.887
45	GSM1900	GPRS (4 Tx slots)	Front	1	512	1850.2	26.09	27	1.233	-0.02	0.740	0.912
46	GSM1900	GPRS (4 Tx slots)	Front	1	661	1880	26.31	27	1.172	-0.04	0.793	0.930
47	GSM1900	GPRS (4 Tx slots)	Back	1	512	1850.2	26.09	27	1.233	0.0061	1.100	1.356
48	GSM1900	GPRS (4 Tx slots)	Back	1	661	1880	26.31	27	1.172	-0.05	1.120	1.313
50	GSM1900	GPRS (4 Tx slots)	Bottom Side	1	512	1850.2	26.09	27	1.233	0.11	0.629	0.776
51	GSM1900	GPRS (4 Tx slots)	Bottom Side	1	661	1880	26.31	27	1.172	0.13	0.720	0.844

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
55	WCDMA Band V	RMC12.2K	Front	1	4132	826.4	23.02	23.5	1.117	0.02	0.382	0.427
56	WCDMA Band V	RMC12.2K	Back	1	4132	826.4	23.02	23.5	1.117	0.06	0.703	0.785
57	WCDMA Band V	RMC12.2K	Left Side	1	4132	826.4	23.02	23.5	1.117	0.08	0.431	0.481
58	WCDMA Band V	RMC12.2K	Right Side	1	4132	826.4	23.02	23.5	1.117	0.01	0.414	0.462
59	WCDMA Band V	RMC12.2K	Bottom Side	1	4132	826.4	23.02	23.5	1.117	0.14	0.067	0.075
60	WCDMA Band II	RMC12.2K	Front	1	9538	1907.6	23.07	23.5	1.104	-0.0018	0.741	0.818
61	WCDMA Band II	RMC12.2K	Back	1	9538	1907.6	23.07	23.5	1.104	-0.07	1.000	1.104
62	WCDMA Band II	RMC12.2K	Left Side	1	9538	1907.6	23.07	23.5	1.104	0.03	0.509	0.562
63	WCDMA Band II	RMC12.2K	Right Side	1	9538	1907.6	23.07	23.5	1.104	0.07	0.199	0.220
64	WCDMA Band II	RMC12.2K	Bottom Side	1	9538	1907.6	23.07	23.5	1.104	0.12	0.746	0.824
65	WCDMA Band II	RMC12.2K	Front	1	9262	1852.4	22.78	23.5	1.180	-0.04	0.686	0.810
66	WCDMA Band II	RMC12.2K	Front	1	9400	1880	22.99	23.5	1.125	-0.12	0.709	0.797
67	WCDMA Band II	RMC12.2K	Back	1	9262	1852.4	22.78	23.5	1.180	0.02	1.030	1.216
68	WCDMA Band II	RMC12.2K	Back	1	9400	1880	22.99	23.5	1.125	-0.08	1.050	1.181
69	WCDMA Band II	RMC12.2K	Bottom Side	1	9262	1852.4	22.78	23.5	1.180	0.1	0.619	0.731
70	WCDMA Band II	RMC12.2K	Bottom Side	1	9400	1880	22.99	23.5	1.125	0.11	0.667	0.750

**<WLAN2.4GHz SAR>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
74	WLAN 2.4GHz	802.11b	Front	1	11	2462	15.47	16	1.130	0.01	0.084	0.095
75	WLAN 2.4GHz	802.11b	Back	1	11	2462	15.47	16	1.130	0.09	0.087	0.098
76	WLAN 2.4GHz	802.11b	Left Side	1	11	2462	15.47	16	1.130	0.11	0.052	0.059
77	WLAN 2.4GHz	802.11b	TOP Side	1	11	2462	15.47	16	1.130	0.01	0.042	0.047

12.3 Body Worn SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
21	GSM850	GPRS (4 Tx slots)	Front	1	-	189	836.4	29.62	30	1.091	0.01	0.879	0.959
22	GSM850	GPRS (4 Tx slots)	Back	1	-	189	836.4	29.62	30	1.091	-0.03	1.330	1.452
27	GSM850	GPRS (4 Tx slots)	Front	1	-	128	824.2	29.61	30	1.094	0.01	0.855	0.935
28	GSM850	GPRS (4 Tx slots)	Front	1	-	251	848.8	29.5	30	1.122	-0.0019	0.837	0.939
29	GSM850	GPRS (4 Tx slots)	Back	1	-	128	824.2	29.61	30	1.094	-0.006	1.370	1.499
31	GSM850	GPRS (4 Tx slots)	Back	1	-	251	848.8	29.5	30	1.122	0.02	1.210	1.358
36	GSM850	GPRS (4 Tx slots)	Back	1	Headset	128	824.2	29.61	30	1.094	0.03	1.160	1.269
37	GSM850	GPRS (4 Tx slots)	Back	1	Headset	189	836.4	29.62	30	1.091	0.09	1.130	1.233
38	GSM850	GPRS (4 Tx slots)	Back	1	Headset	251	848.8	29.5	30	1.122	0.1	1.020	1.144
39	GSM1900	GPRS (4 Tx slots)	Front	1	-	810	1909.8	26.59	27	1.099	-0.02	0.813	0.893
40	GSM1900	GPRS (4 Tx slots)	Back	1	-	810	1909.8	26.59	27	1.099	-0.09	1.110	1.220
45	GSM1900	GPRS (4 Tx slots)	Front	1	-	512	1850.2	26.09	27	1.233	-0.02	0.740	0.912
46	GSM1900	GPRS (4 Tx slots)	Front	1	-	661	1880	26.31	27	1.172	-0.04	0.793	0.930
47	GSM1900	GPRS (4 Tx slots)	Back	1	-	512	1850.2	26.09	27	1.233	0.0061	1.100	1.356
48	GSM1900	GPRS (4 Tx slots)	Back	1	-	661	1880	26.31	27	1.172	-0.05	1.120	1.313
52	GSM1900	GPRS (4 Tx slots)	Back	1	Headset	512	1850.2	26.09	27	1.233	-0.004	1.060	1.307
53	GSM1900	GPRS (4 Tx slots)	Back	1	Headset	661	1880	26.31	27	1.172	-0.06	1.080	1.266
54	GSM1900	GPRS (4 Tx slots)	Back	1	Headset	810	1909.8	26.59	27	1.099	-0.09	1.060	1.165

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
55	WCDMA Band V	RMC12.2K	Front	1	-	4132	826.4	23.02	23.5	1.117	0.02	0.382	0.427
56	WCDMA Band V	RMC12.2K	Back	1	-	4132	826.4	23.02	23.5	1.117	0.06	0.703	0.785
60	WCDMA Band II	RMC12.2K	Front	1	-	9538	1907.6	23.07	23.5	1.104	-0.0018	0.741	0.818
61	WCDMA Band II	RMC12.2K	Back	1	-	9538	1907.6	23.07	23.5	1.104	-0.07	1.000	1.104
65	WCDMA Band II	RMC12.2K	Front	1	-	9262	1852.4	22.78	23.5	1.180	-0.04	0.686	0.810
66	WCDMA Band II	RMC12.2K	Front	1	-	9400	1880	22.99	23.5	1.125	-0.12	0.709	0.797
67	WCDMA Band II	RMC12.2K	Back	1	-	9262	1852.4	22.78	23.5	1.180	0.02	1.030	1.216
68	WCDMA Band II	RMC12.2K	Back	1	-	9400	1880	22.99	23.5	1.125	-0.08	1.050	1.181
71	WCDMA Band II	RMC12.2K	Back	1	Headset	9262	1852.4	22.78	23.5	1.180	-0.02	1.040	1.228
72	WCDMA Band II	RMC12.2K	Back	1	Headset	9400	1880	22.99	23.5	1.125	-0.09	1.040	1.170
73	WCDMA Band II	RMC12.2K	Back	1	Headset	9538	1907.6	23.07	23.5	1.104	-0.1	1.010	1.115

<WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
74	WLAN 2.4GHz	802.11b	Front	1	-	11	2462	15.47	16	1.130	0.01	0.084	0.095
75	WLAN 2.4GHz	802.11b	Back	1	-	11	2462	15.47	16	1.130	0.09	0.087	0.098
78	WLAN 2.4GHz	802.11b	Back	1	Headset	11	2462	15.47	16	1.130	-0.02	0.139	0.157

12.4 Repeated SAR Measurement

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
29	GSM850	GPRS (4 Tx slots)	Back	1	128	824.2	29.61	30	1.094	-0.006	1.370	1	1.499
30	GSM850	GPRS (4 Tx slots)	Back	1	128	824.2	29.61	30	1.094	0.01	1.360	0.007	1.488
48	GSM1900	GPRS (4 Tx slots)	Back	1	661	1880	26.31	27	1.172	-0.05	1.120	1	1.313
49	GSM1900	GPRS (4 Tx slots)	Back	1	661	1880	26.31	27	1.172	-0.0089	1.110	0.009	1.301

Note:

1. Per KDB 865664 D01v01r02, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01r02, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the largest SAR to the smallest SAR among original and repeated measurement.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

12.5 Highest SAR Plot

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2014.04.04

#29_GSM850_GPRS (4 Tx slots)_Back 1cm_Ch128

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r =$

54.956; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.579 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 36.492 V/m; Power Drift = -0.006 dB
Peak SAR (extrapolated) = 1.745 W/kg
SAR(1 g) = 1.370 mW/g; SAR(10 g) = 1.04 mW/g
Maximum value of SAR (measured) = 1.576 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 36.492 V/m; Power Drift = -0.006 dB
Peak SAR (extrapolated) = 1.719 W/kg
SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.795 mW/g
Maximum value of SAR (measured) = 1.539 mW/g

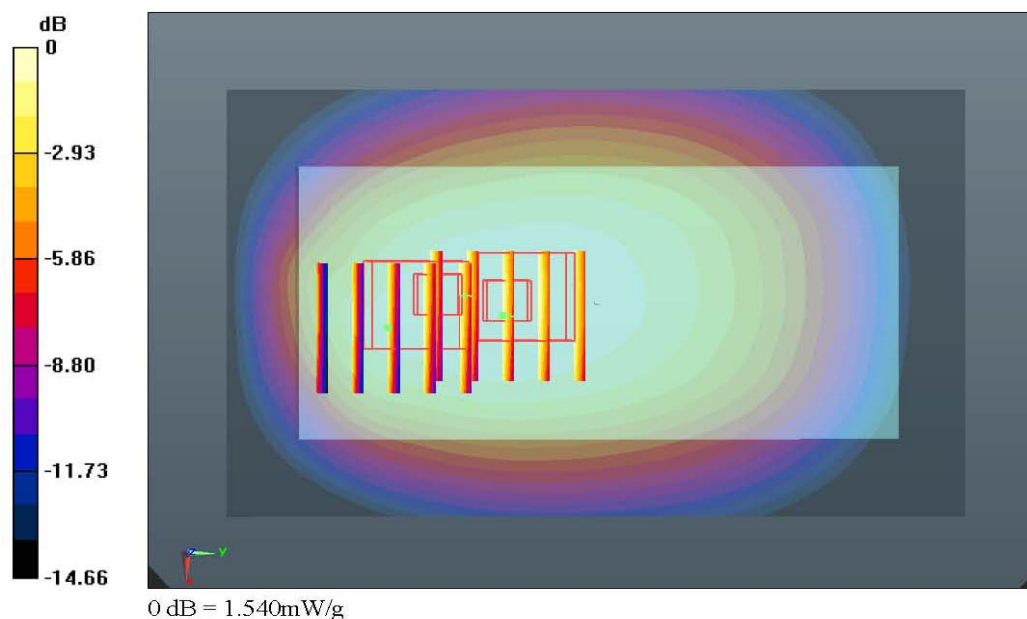

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2014.04.01

#47_GSM1900_GPRS (4 Tx slots)_Back 1cm_Ch512

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r =$

53.526; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1 210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.476 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.938 V/m; Power Drift = 0.0061 dB

Peak SAR (extrapolated) = 1.755 W/kg

SAR(1 g) = 1.100 mW/g; SAR(10 g) = 0.668 mW/g

Maximum value of SAR (measured) = 1.454 mW/g

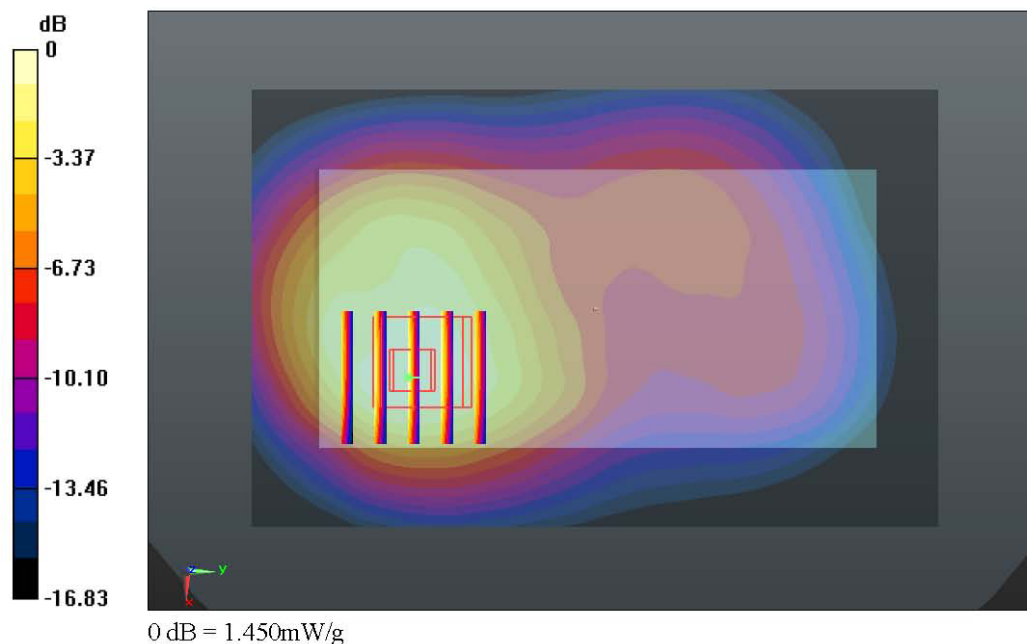

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2014.04.04

#56_WCDMA Band V_RMC12.2K_Back 1cm_Ch4132

Communication System: UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_140404 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.974 \text{ mho/m}$; $\epsilon_r =$

54.936; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1 210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch4132/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.780 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.415 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.891 W/kg

SAR(1 g) = 0.703 mW/g; SAR(10 g) = 0.532 mW/g

Maximum value of SAR (measured) = 0.805 mW/g

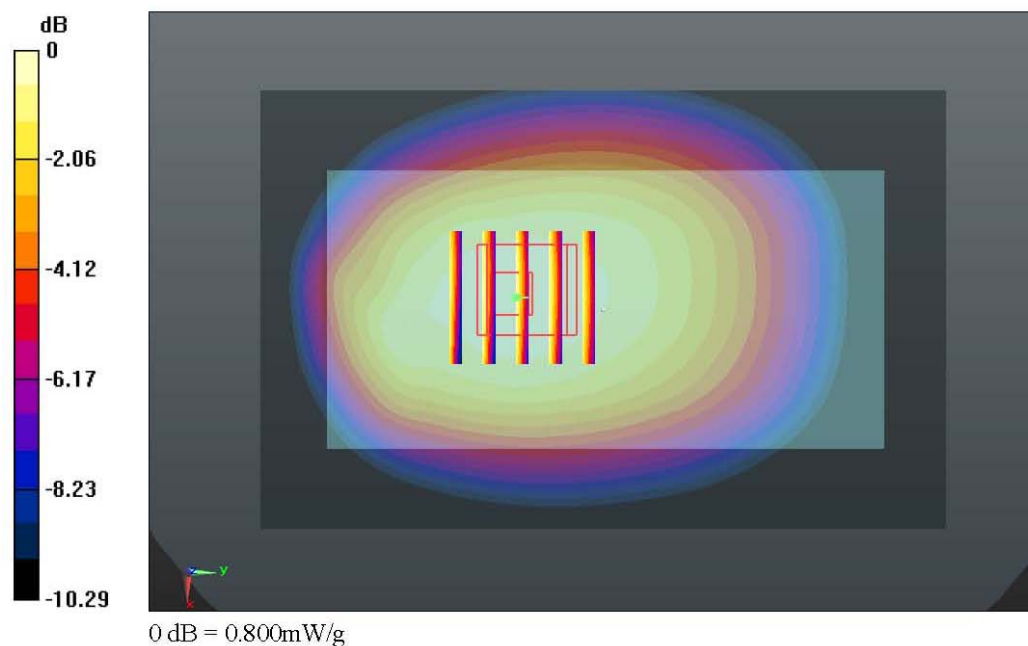

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2014.04.01

#71_WCDMA Band II_RMC12.2K_Back 1cm_Ch9262_Headset

Communication System: UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.493$ mho/m; $\epsilon_r =$

53.518; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19

- Phantom: SAM2; Type: SAM; Serial: TP-1477

- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.390 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.916 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.652 W/kg

SAR(1 g) = 1.040 mW/g; SAR(10 g) = 0.634 mW/g

Maximum value of SAR (measured) = 1.368 mW/g

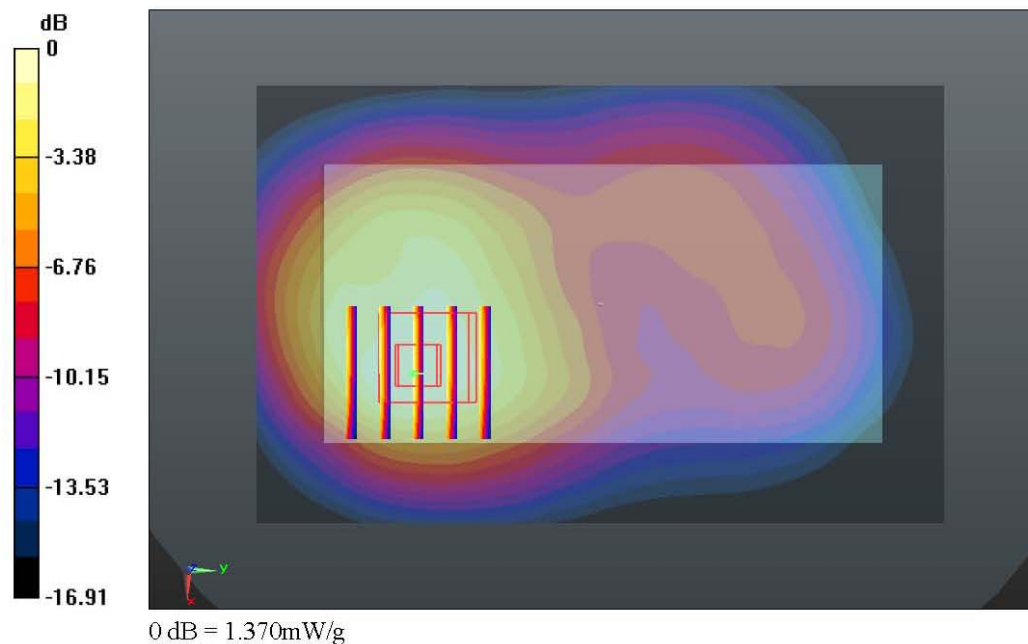

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2014.04.06

#78_WLAN2.4GHz_802.11b_1M_Back 1cm_Ch11_Headset

Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_140406 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.946 \text{ mho/m}$; $\epsilon_r =$

51.151; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1 210; Calibrated: 2013.06.19

- Phantom: SAM2; Type: SAM; Serial: TP-1477

- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.207 mW/g


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.773 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.139 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.214 mW/g

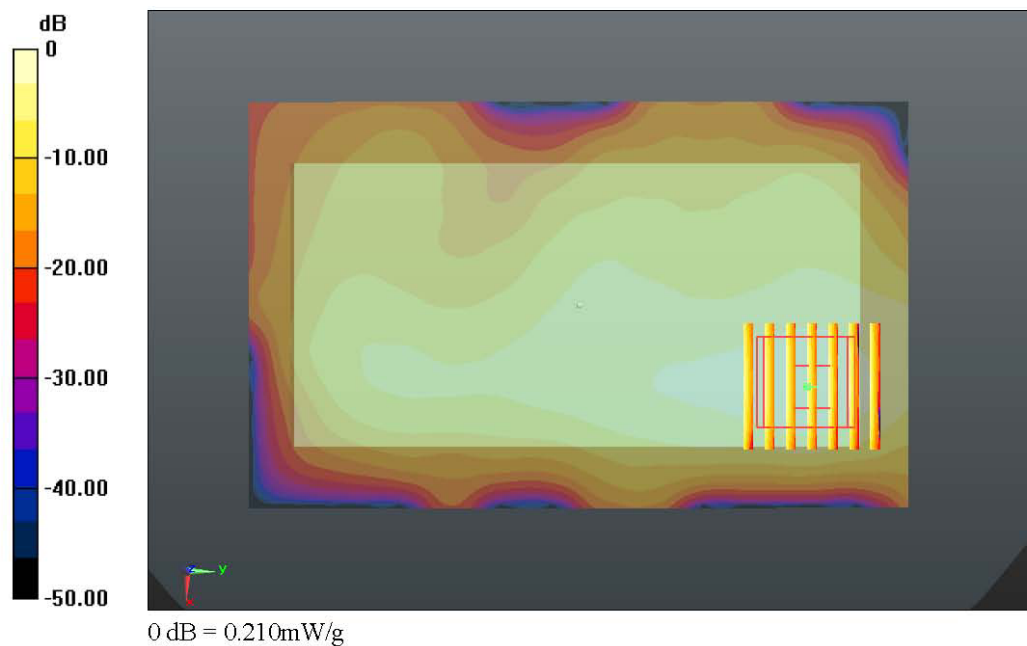

13. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Phone			Note
		Head	Body-worn	Hotspot	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
3.	GSM(Voice) + Bluetooth(data)	Yes	Yes		
4.	WCDMA((Voice) + Bluetooth(data)	Yes	Yes		
5.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
6.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
7.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
8.	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering

Note:

- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- EUT will choose either GSM or WCDMA according to the network signal condition; therefore, they will not transmit simultaneously.
- Considering the possibility of 3rd party VoIP app installation by end users and the device does not have limitation to operate VoIP in GPRS/EGPRS wireless interface; considering the data rate of EGPRS to support VOIP quality and realistic operation, SAR testing was not performed evaluation VOIP operation in EGPRS mode.
- The reported SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6\text{W/kg}$.
 - $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan
If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum test separation distance is $< 5\text{mm}$, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.
If the test separation distance (antenna-user) is $< 5\text{mm}$, 5mm is used for excluded SAR calculation

Bluetooth				
Tune-up Maximum power (dBm)	Exposure Position	Head	Hotspot	Body-worn
	Test separation (mm)	0	10	10
7.5	Estimated SAR (W/kg)	0.252	0.126	0.126

13.1 Head Exposure Conditions

<WWAN-PCE + WLAN 2.4GHz-DTS>

WWAN Band	Position	WWAN-PCE		WLAN 2.4GHz -DTS		Summed SAR (W/kg)	SPLSR ≤ 0.04	Case No
		Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)			
GSM850	Right Cheek	#1	0.702	#17	0.367	1.07		
	Right Tilted	#2	0.396	#18	0.217	0.61		
	Left Cheek	#3	0.768	#19	0.218	0.99		
	Left Tilted	#4	0.511	#20	0.208	0.72		
GSM1900	Right Cheek	#5	0.489	#17	0.367	0.86		
	Right Tilted	#6	0.157	#18	0.217	0.37		
	Left Cheek	#7	0.595	#19	0.218	0.81		
	Left Tilted	#8	0.175	#20	0.208	0.38		
WCDMA Band V	Right Cheek	#9	0.278	#17	0.367	0.65		
	Right Tilted	#10	0.162	#18	0.217	0.38		
	Left Cheek	#11	0.300	#19	0.218	0.52		
	Left Tilted	#12	0.220	#20	0.208	0.43		
WCDMA Band II	Right Cheek	#13	0.479	#17	0.367	0.85		
	Right Tilted	#14	0.171	#18	0.217	0.39		
	Left Cheek	#15	0.636	#19	0.218	0.85		
	Left Tilted	#16	0.167	#20	0.208	0.38		

<WWAN-PCE + Bluetooth-DSS>

WWAN Band	Position	WWAN-PCE		Bluetooth -DSS	Summed SAR (W/kg)	SPLSR ≤ 0.04	Case No
		Plot No	Max. WWAN SAR (W/kg)	Estimated SAR (W/kg)			
GSM850	Right Cheek	#1	0.702	0.252	0.95		
	Right Tilted	#2	0.396	0.252	0.65		
	Left Cheek	#3	0.768	0.252	1.02		
	Left Tilted	#4	0.511	0.252	0.76		
GSM1900	Right Cheek	#5	0.489	0.252	0.74		
	Right Tilted	#6	0.157	0.252	0.41		
	Left Cheek	#7	0.595	0.252	0.85		
	Left Tilted	#8	0.175	0.252	0.43		
WCDMA Band V	Right Cheek	#9	0.278	0.252	0.53		
	Right Tilted	#10	0.162	0.252	0.41		
	Left Cheek	#11	0.300	0.252	0.55		
	Left Tilted	#12	0.220	0.252	0.47		
WCDMA Band II	Right Cheek	#13	0.479	0.252	0.73		
	Right Tilted	#14	0.171	0.252	0.42		
	Left Cheek	#15	0.636	0.252	0.89		
	Left Tilted	#16	0.167	0.252	0.42		

13.2 Hotspot Exposure Conditions

<WWAN-PCE + WLAN 2.4GHz-DTS>

WWAN Band	Position	WWAN-PCE		WLAN 2.4GHz -DTS		Summed SAR (W/kg)	SPLSR ≤ 0.04	Case No
		Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)			
GSM850	Front	#21	0.959	#74	0.095	1.05		
	Back	#29	1.499	#75	0.098	1.60	0.03	#1
	Left side	#32	1.002	#76	0.059	1.06		
	Right side	#24	1.016			1.02		
	Top side			#77	0.047	0.05		
	Bottom side	#25	0.192			0.19		
GSM1900	Front	#46	0.930	#74	0.095	1.03		
	Back	#47	1.356	#75	0.098	1.45		
	Left side	#41	0.598	#76	0.059	0.66		
	Right side	#42	0.240			0.24		
	Top side			#77	0.047	0.05		
	Bottom side	#43	0.887			0.89		
WCDMA Band V	Front	#55	0.427	#74	0.095	0.52		
	Back	#56	0.785	#75	0.098	0.88		
	Left side	#57	0.481	#76	0.059	0.54		
	Right side	#58	0.462			0.46		
	Top side			#77	0.047	0.05		
	Bottom side	#59	0.075			0.08		
WCDMA Band II	Front	#60	0.818	#74	0.095	0.91		
	Back	#67	1.216	#75	0.098	1.31		
	Left side	#62	0.562	#76	0.059	0.62		
	Right side	#63	0.220			0.22		
	Top side			#77	0.047	0.05		
	Bottom side	#64	0.824			0.82		

<WWAN-PCE + Bluetooth-DSS>

WWAN Band	Position	WWAN-PCE		Bluetooth-DSS	Summed SAR (W/kg)	SPLSR ≤ 0.04	Case No
		Plot No	Max. WWAN SAR (W/kg)	Estimated SAR (W/kg)			
GSM850	Front	#21	0.959	0.126	1.09		
	Back	#29	1.499	0.126	1.63	0.03	#2
	Left side	#32	1.002	0.126	1.13		
	Right side	#24	1.016		1.02		
	Top side			0.126	0.13		
	Bottom side	#25	0.192		0.19		
GSM1900	Front	#46	0.930	0.126	1.06		
	Back	#47	1.356	0.126	1.48		
	Left side	#41	0.598	0.126	0.72		
	Right side	#42	0.240		0.24		
	Top side			0.126	0.13		
	Bottom side	#43	0.887		0.89		
WCDMA Band V	Front	#55	0.427	0.126	0.55		
	Back	#56	0.785	0.126	0.91		
	Left side	#57	0.481	0.126	0.61		
	Right side	#58	0.462		0.46		
	Top side			0.126	0.13		
	Bottom side	#59	0.075		0.08		
WCDMA Band II	Front	#60	0.818	0.126	0.94		
	Back	#67	1.216	0.126	1.34		
	Left side	#62	0.562	0.126	0.69		
	Right side	#63	0.220		0.22		
	Top side			0.126	0.13		
	Bottom side	#64	0.824		0.82		

13.3 Body-Worn Exposure Conditions

<WWAN-PCE + WLAN 2.4GHz-DTS>


WWAN Band	Position	WWAN-PCE		WLAN 2.4GHz -DTS		Summed SAR (W/kg)	SPLSR ≤ 0.04	Case No
		Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)			
GSM850	Front	#21	0.959	#74	0.095	1.05		
	Back	#29	1.499	#75	0.098	1.60	0.03	#1
	Back with Headset	#36	1.269	#78	0.157	1.43		
GSM1900	Front	#46	0.930	#74	0.095	1.03		
	Back	#47	1.356	#75	0.098	1.45		
	Back with Headset	#52	1.307	#78	0.157	1.46		
WCDMA Band V	Front	#55	0.427	#74	0.095	0.52		
	Back	#56	0.785	#75	0.098	0.88		
WCDMA Band II	Front	#60	0.818	#74	0.095	0.91		
	Back	#67	1.216	#75	0.098	1.31		
	Back with Headset	#71	1.228	#78	0.157	1.39		

<WWAN-PCE + Bluetooth-DSS>


WWAN Band	Position	WWAN-PCE		Bluetooth-DSS	Summed SAR (W/kg)	SPLSR ≤ 0.04	Case No
		Plot No	Max. WWAN SAR (W/kg)	Estimated SAR (W/kg)			
GSM850	Front	#21	0.959	0.126	1.09		
	Back	#29	1.499	0.126	1.63	0.03	#2
	Back with Headset	#36	1.269	0.126	1.40		
GSM1900	Front	#46	0.930	0.126	1.06		
	Back	#47	1.356	0.126	1.48		
	Back with Headset	#52	1.307	0.126	1.43		
WCDMA Band V	Front	#55	0.427	0.126	0.55		
	Back	#56	0.785	0.126	0.91		
WCDMA Band II	Front	#60	0.818	0.126	0.94		
	Back	#67	1.216	0.126	1.34		
	Back with Headset	#71	1.228	0.126	1.35		

13.4 SPLSR Evaluation and Analysis

Case 1 Plot No	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
#29 Cube 0	GSM850	Back	1.499	1	-0.014	-0.021	-0.205	75.6	1.60	0.03	Not required
#75	WLAN 2.4GHz		0.098	1	0.0022	0.0528	-0.205				
#29 Cube 1	GSM850	Back	1.335	1	-0.019	-0.0305	-0.205	86.0	1.43	0.02	Not required
#75	WLAN 2.4GHz		0.098	1	0.0022	0.0528	-0.205				

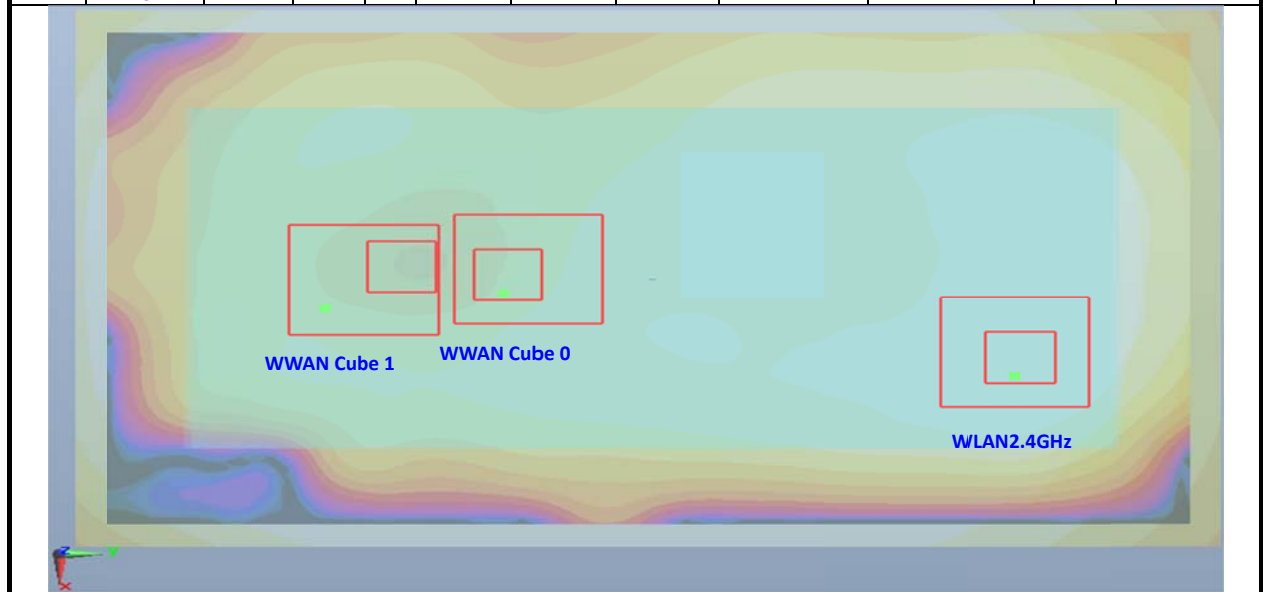

Case 2 Plot No	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
#29 Cube 0	GSM850	Back	1.499	1	-0.014	-0.021	-0.205	75.6	1.63	0.03	Not required
-	Bluetooth		0.126	1	0.0022	0.0528	-0.205				
#29 Cube 1	GSM850	Back	1.335	1	-0.019	-0.0305	-0.205	86.0	1.46	0.02	Not required
-	Bluetooth		0.126	1	0.0022	0.0528	-0.205				

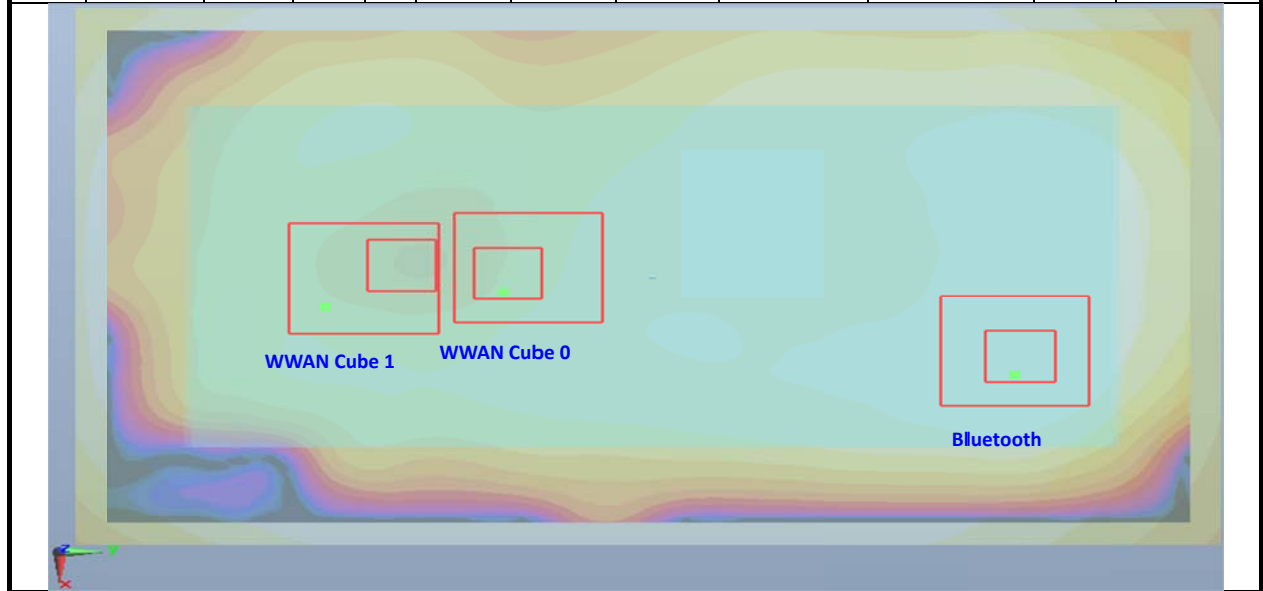

Remark: 1. For SPLSR calculation Bluetooth SAR peak position is estimated using WLAN 2.4GHz peak location, due to the WLAN and Bluetooth shares the same RF trace to the same antenna, and the operational frequency range is the same.
 2. Per KDB 447498 D01v05r02, if $SPLSR \leq 0.04$, further evaluation is not required.

Test Engineer : Fulu Hu

14. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 14.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/ κ ^(b)	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 15.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 15.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

15. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013
- [8] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [9] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [10] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [11] FCC KDB 941225 D06 v01r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", May 2013
- [12] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [13] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations", May 2013



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_835MHz_140405**DUT: D835V2 - SN:4d151**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_140405 Medium parameters used: $f = 835$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 41.041$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.036 mW/g


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.039 V/m; Power Drift = -0.0067 dB

Peak SAR (extrapolated) = 3.568 W/kg

SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.56 mW/g

Maximum value of SAR (measured) = 3.026 mW/g

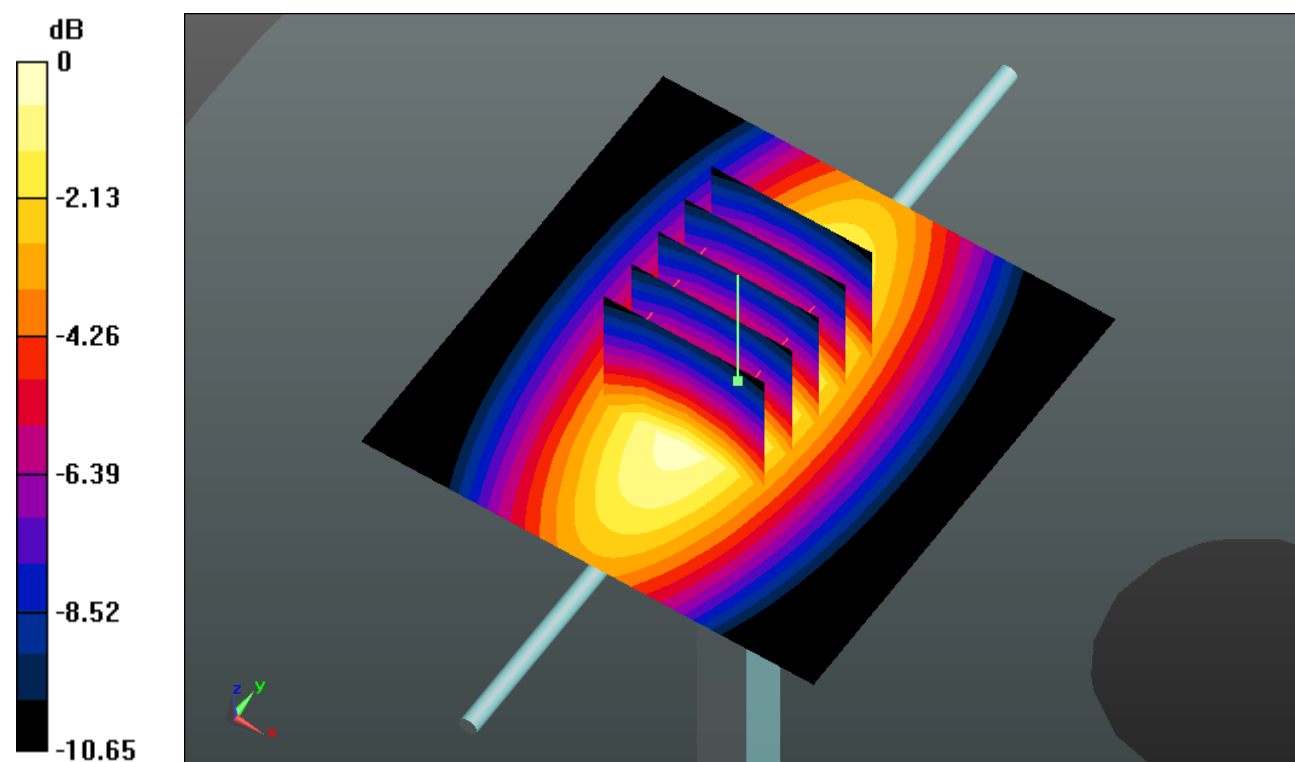

0 dB = 3.030mW/g

System Check_Head_1900MHz_140405**DUT: D1900V2 - SN:5d170**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_140405 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.424$ mho/m; $\epsilon_r =$

38.966 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.922 mW/g


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.518 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 19.110 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.41 mW/g

Maximum value of SAR (measured) = 15.000 mW/g

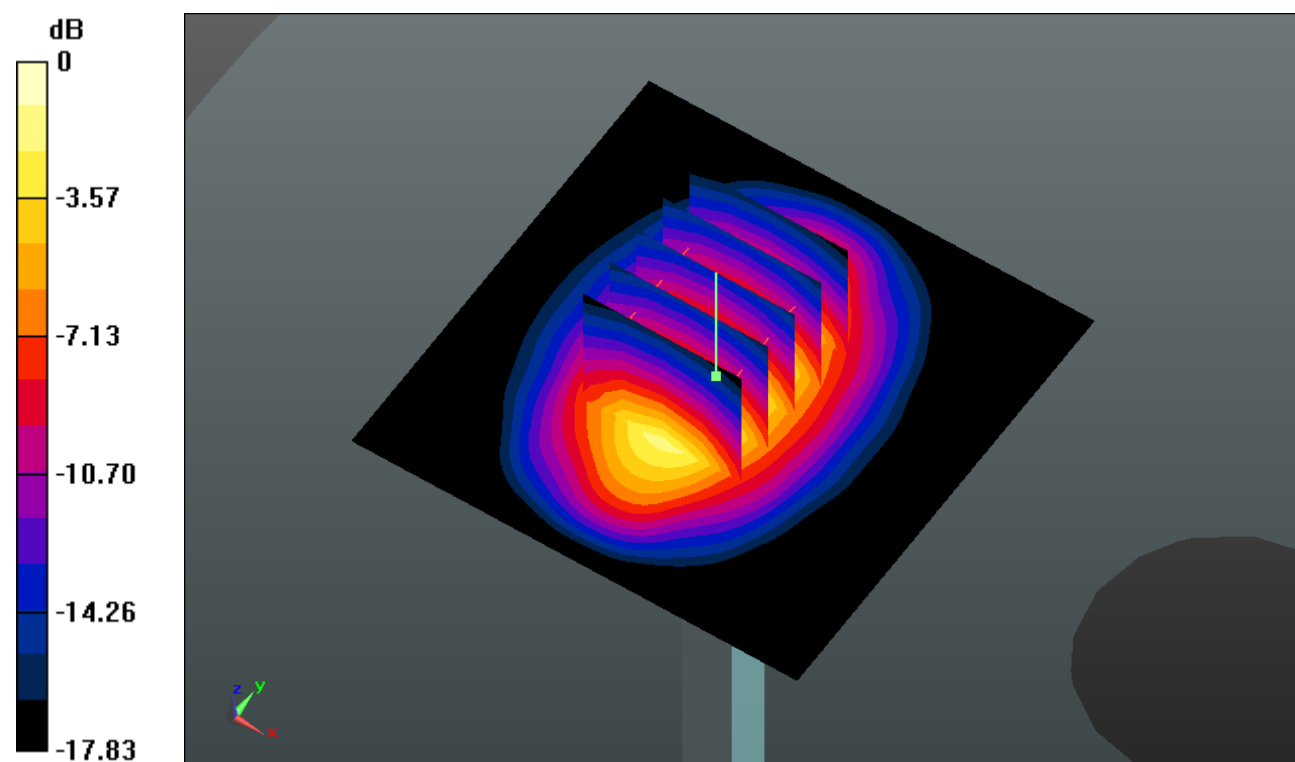

0 dB = 15.000mW/g

System Check_Head_2450MHz_140406**DUT: D2450V2 - SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_140406 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.811$ mho/m; $\epsilon_r =$

39.263 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.05, 7.05, 7.05); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 21.319 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.145 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 28.089 W/kg

SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.05 mW/g

Maximum value of SAR (measured) = 20.767 mW/g

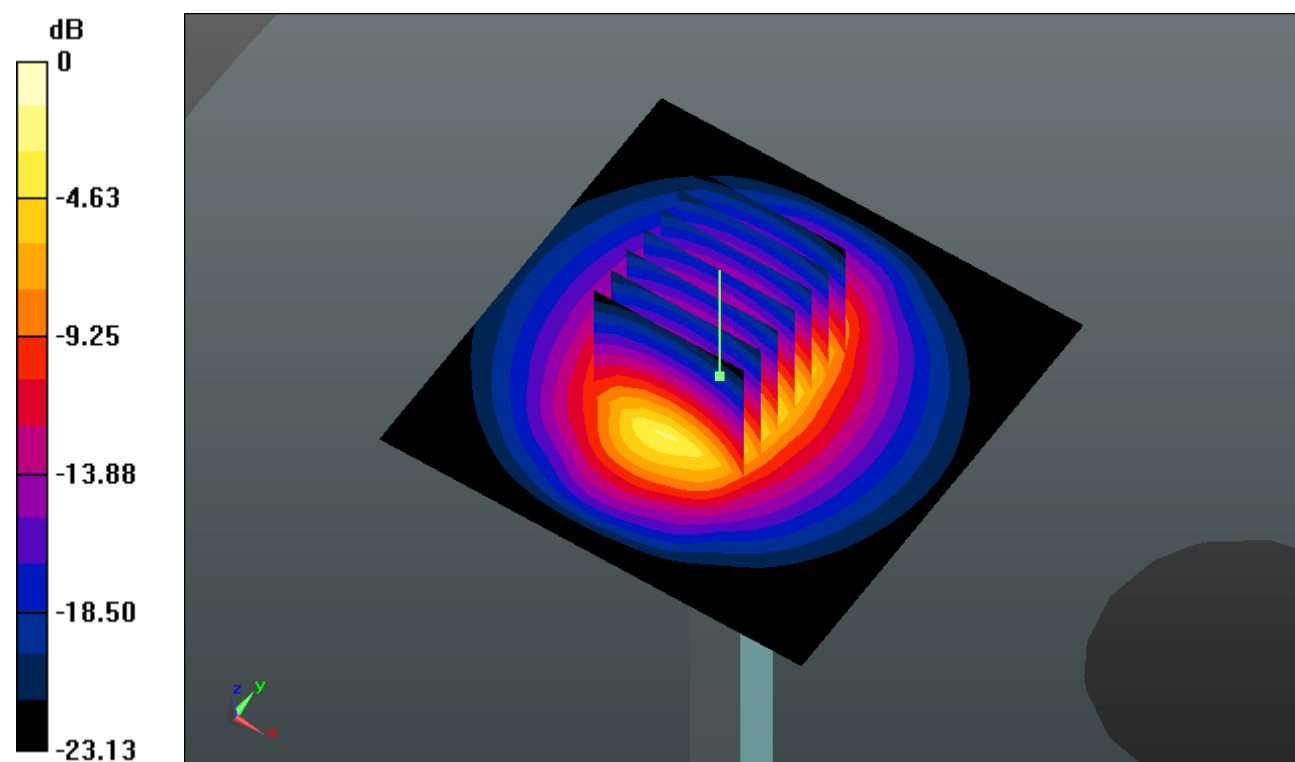

0 dB = 20.770mW/g

System Check_Body_835MHz_140404**DUT: D835V2 - SN:4d151**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_140404 Medium parameters used: $f = 835$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.856$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.824 mW/g


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.413 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.305 W/kg

SAR(1 g) = 2.22 mW/g; SAR(10 g) = 1.46 mW/g

Maximum value of SAR (measured) = 2.815 mW/g

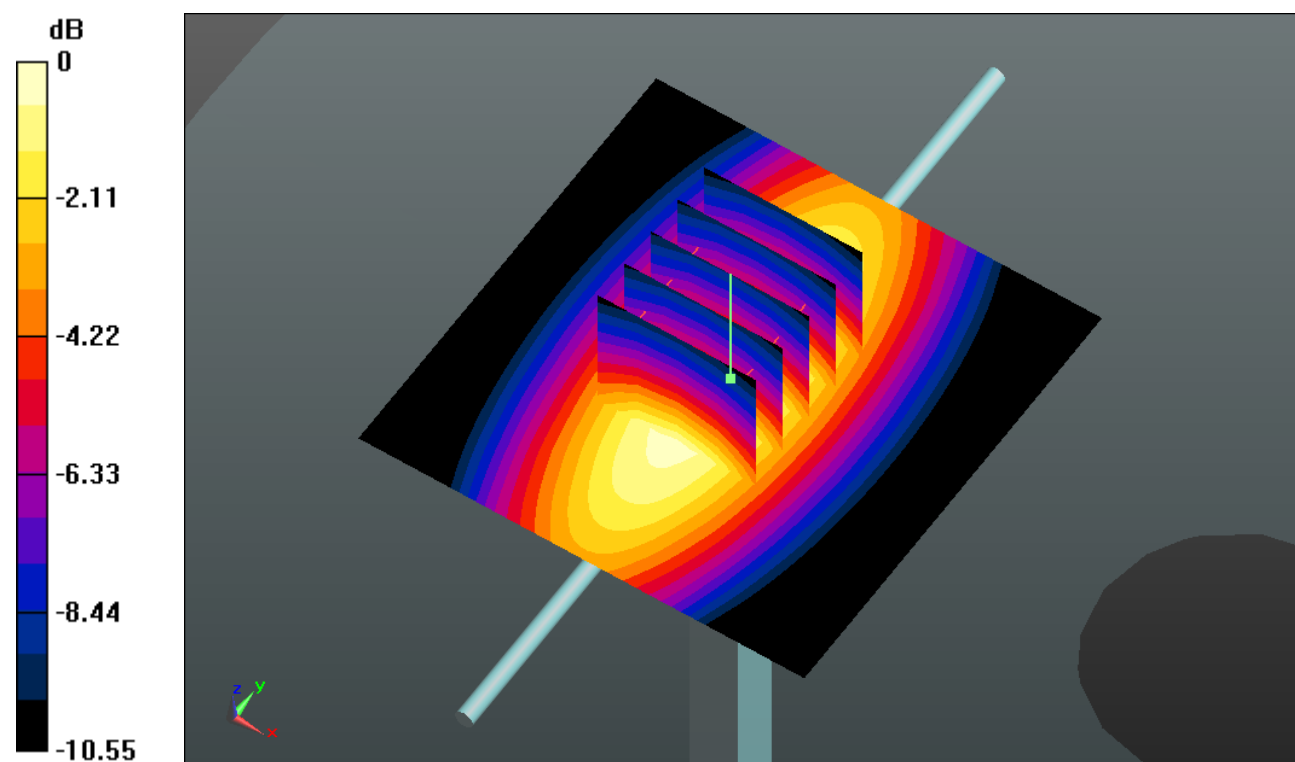

0 dB = 2.810mW/g

System Check_Body_1900MHz_140401**DUT: D1900V2 - SN:5d170**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.551$ mho/m; $\epsilon_r =$

53.411 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.280 mW/g


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.962 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 18.201 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.29 mW/g

Maximum value of SAR (measured) = 14.700 mW/g

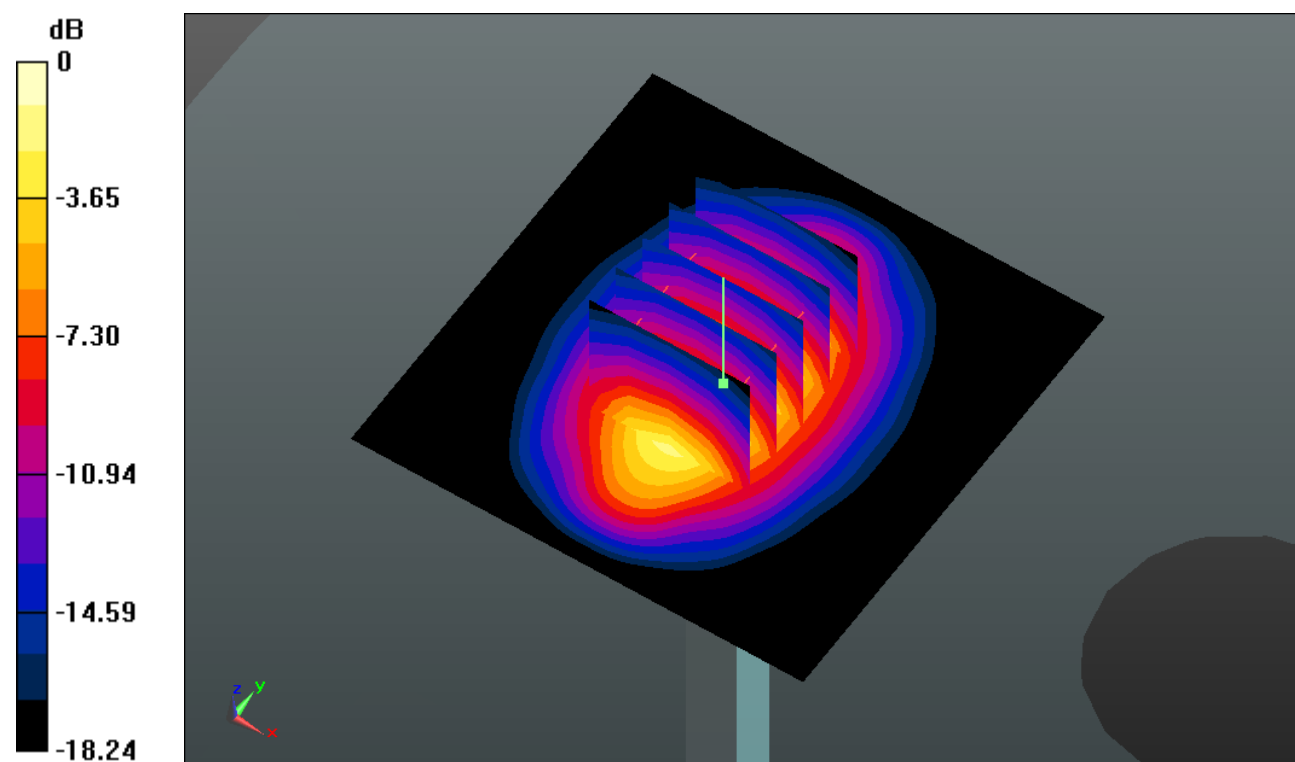

0 dB = 14.700mW/g

System Check_Body_2450MHz_140406**DUT: D2450V2 - SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_140406 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.929$ mho/m; $\epsilon_r =$

51.207 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 19.560 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.005 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 25.632 W/kg

SAR(1 g) = 12.6 mW/g; SAR(10 g) = 5.87 mW/g

Maximum value of SAR (measured) = 19.132 mW/g

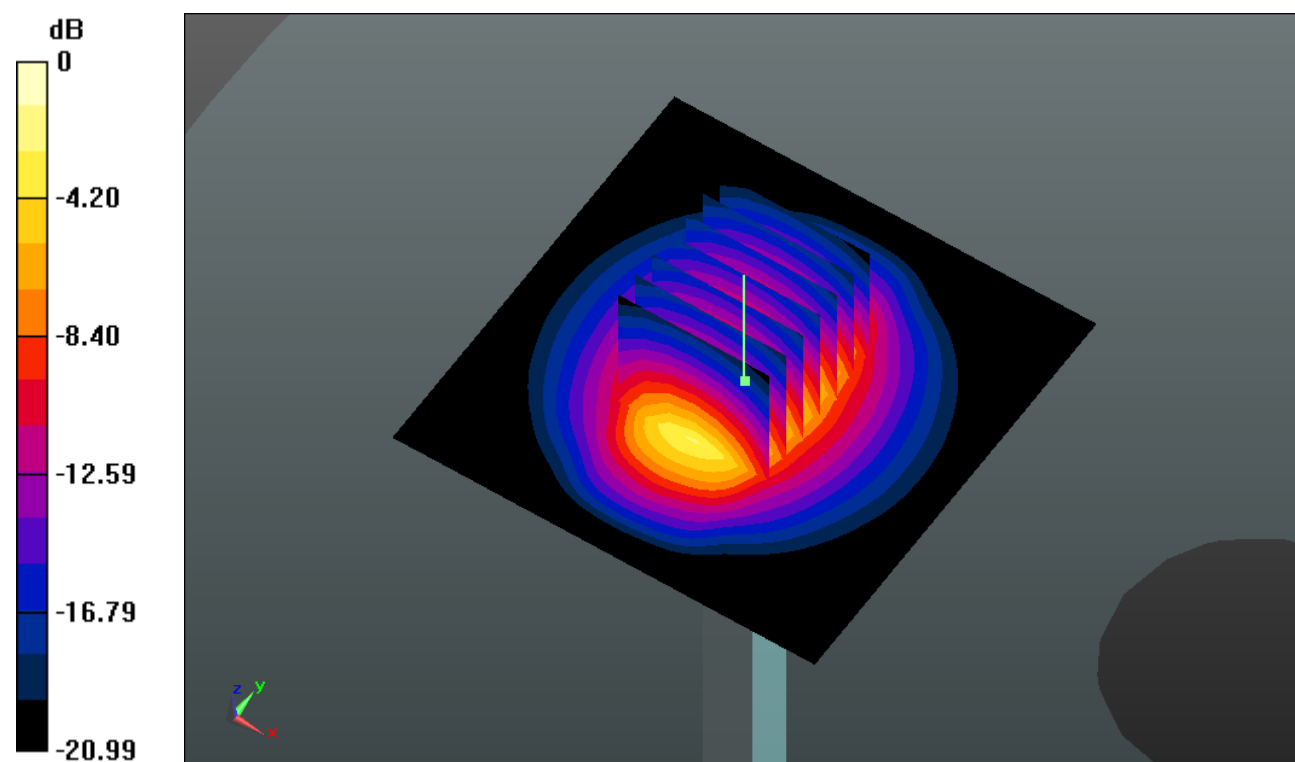

0 dB = 19.130mW/g



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

#01_GSM850_GPRS (4 Tx slots)_Right Check_Ch189

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: HSL_835_140405 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r =$

41.022; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.722 mW/g



Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.091 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.792 W/kg

SAR(1 g) = 0.643 mW/g; SAR(10 g) = 0.494 mW/g

Maximum value of SAR (measured) = 0.720 mW/g

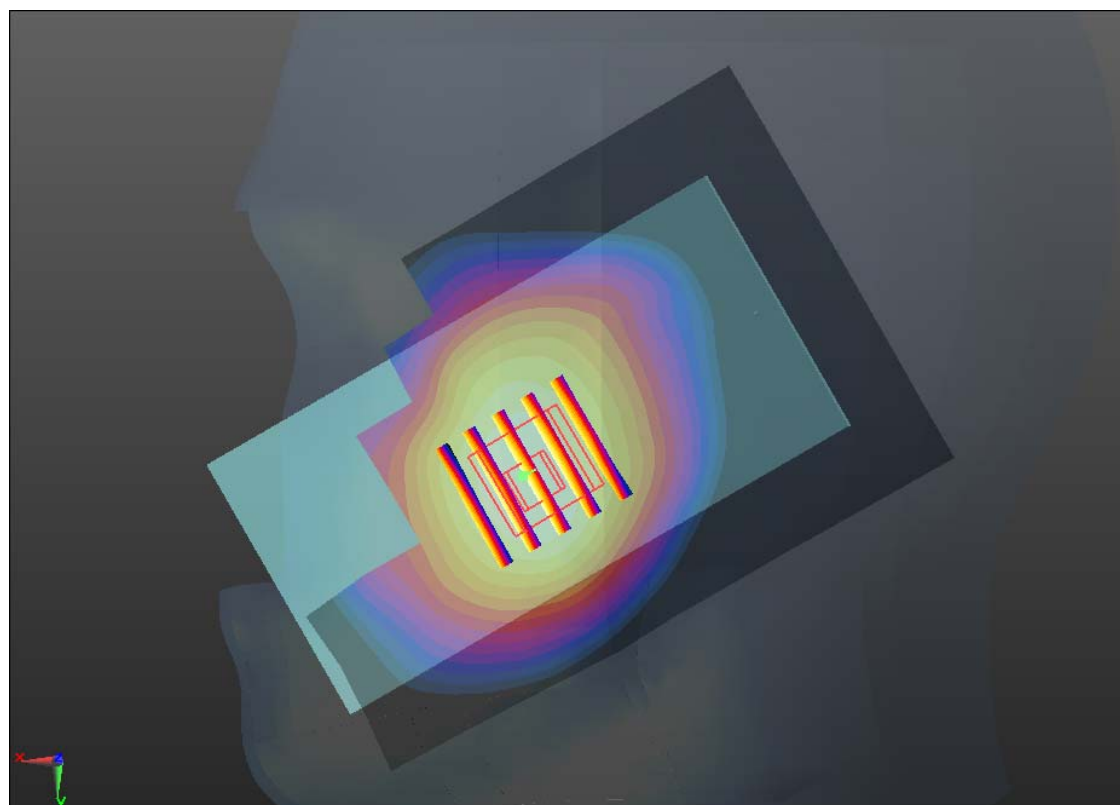

0 dB = 0.720mW/g

#02_GSM850_GPRS (4 Tx slots)_Right Tilted_Ch189

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: HSL_835_140405 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r =$

41.022; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.411 mW/g



Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.765 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.363 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.408 mW/g

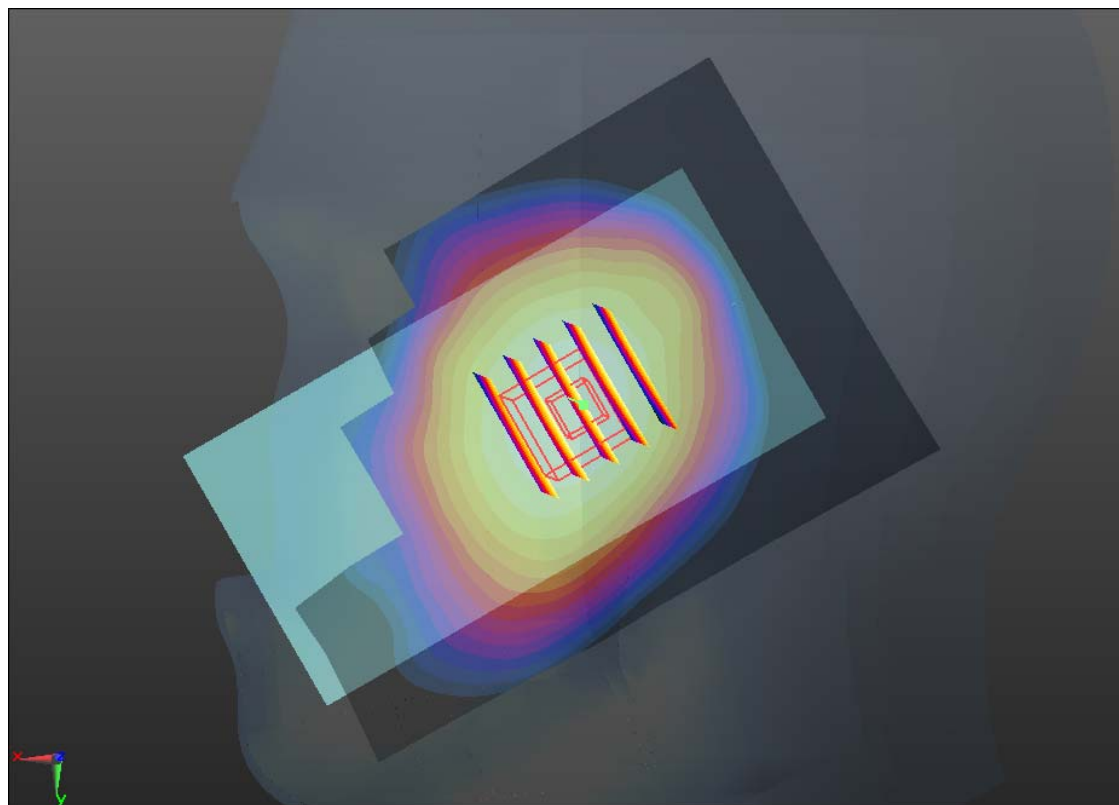

0 dB = 0.410mW/g

#03_GSM850_GPRS (4 Tx slots)_Left Check_Ch189

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: HSL_835_140405 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r =$

41.022; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.788 mW/g



Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.998 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.849 W/kg

SAR(1 g) = 0.704 mW/g; SAR(10 g) = 0.548 mW/g

Maximum value of SAR (measured) = 0.791 mW/g

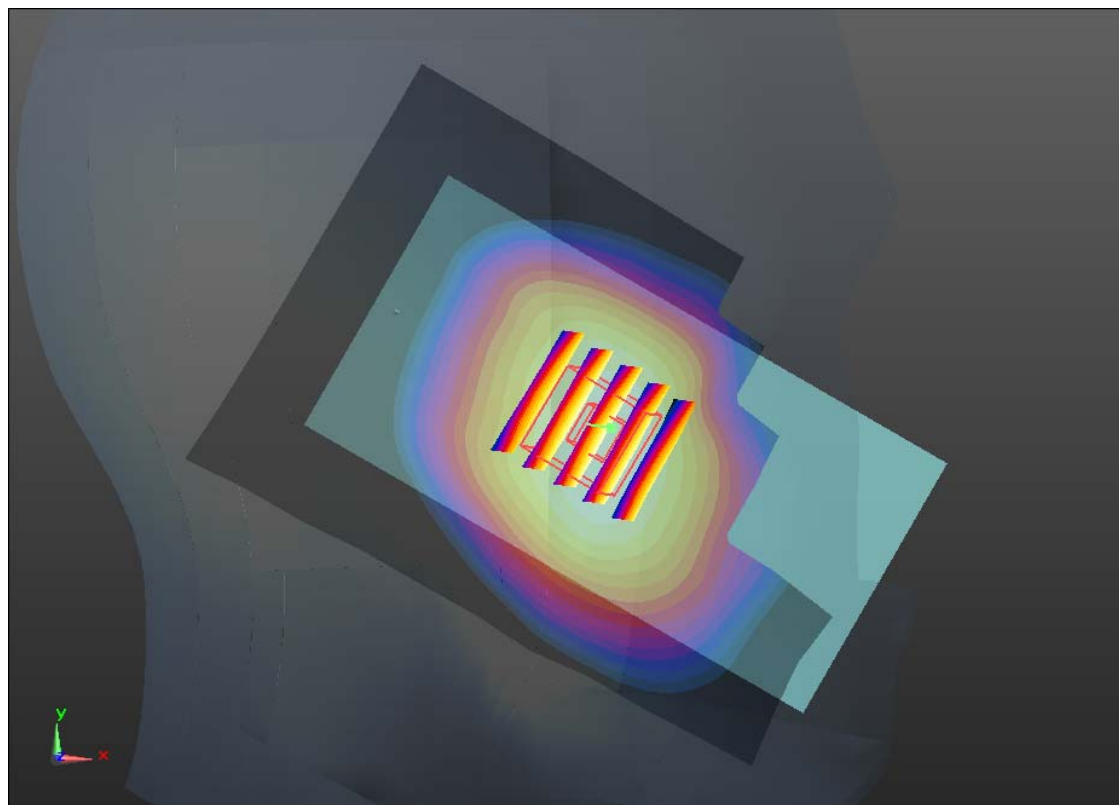

0 dB = 0.790mW/g

#04_GSM850_GPRS (4 Tx slots)_Left Tilted_Ch189

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: HSL_835_140405 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r =$

41.022; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.529 mW/g



Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.443 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.359 mW/g

Maximum value of SAR (measured) = 0.534 mW/g

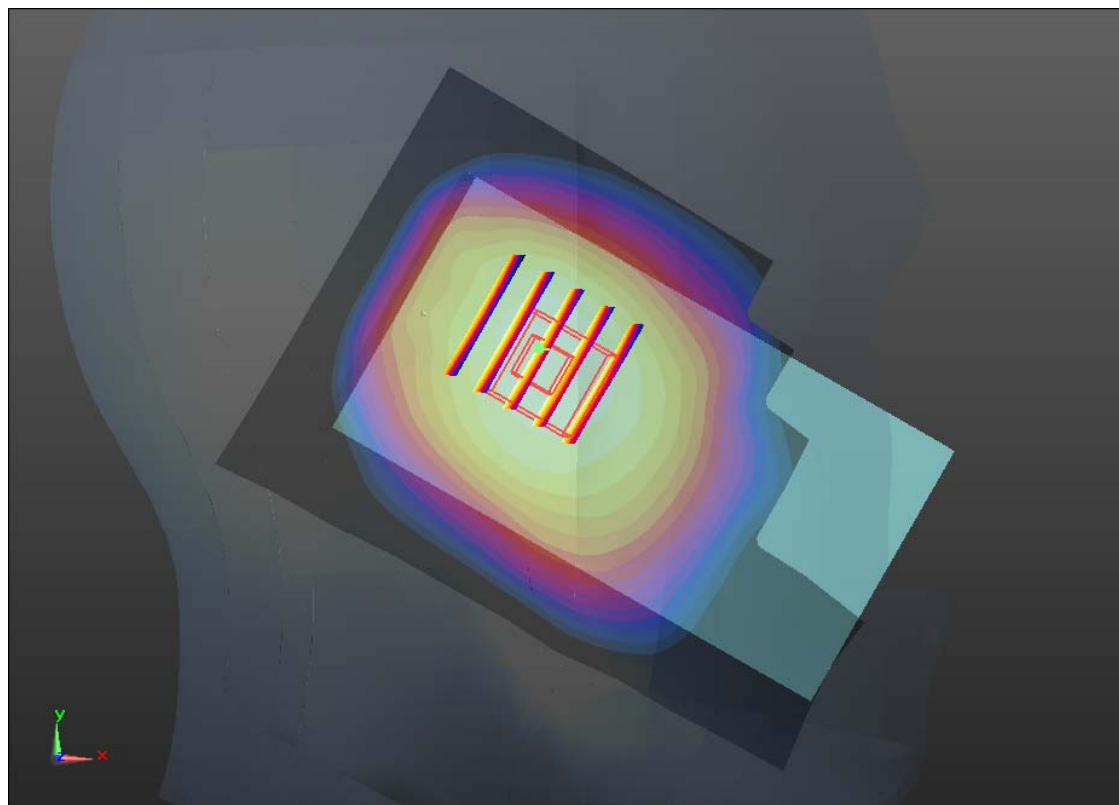

0 dB = 0.530mW/g

#05_GSM1900_GPRS (4 Tx slots)_Right Cheek_Ch512

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_140405 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r =$

39.154; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.584 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.662 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.675 W/kg

SAR(1 g) = 0.445 mW/g; SAR(10 g) = 0.278 mW/g

Maximum value of SAR (measured) = 0.554 mW/g

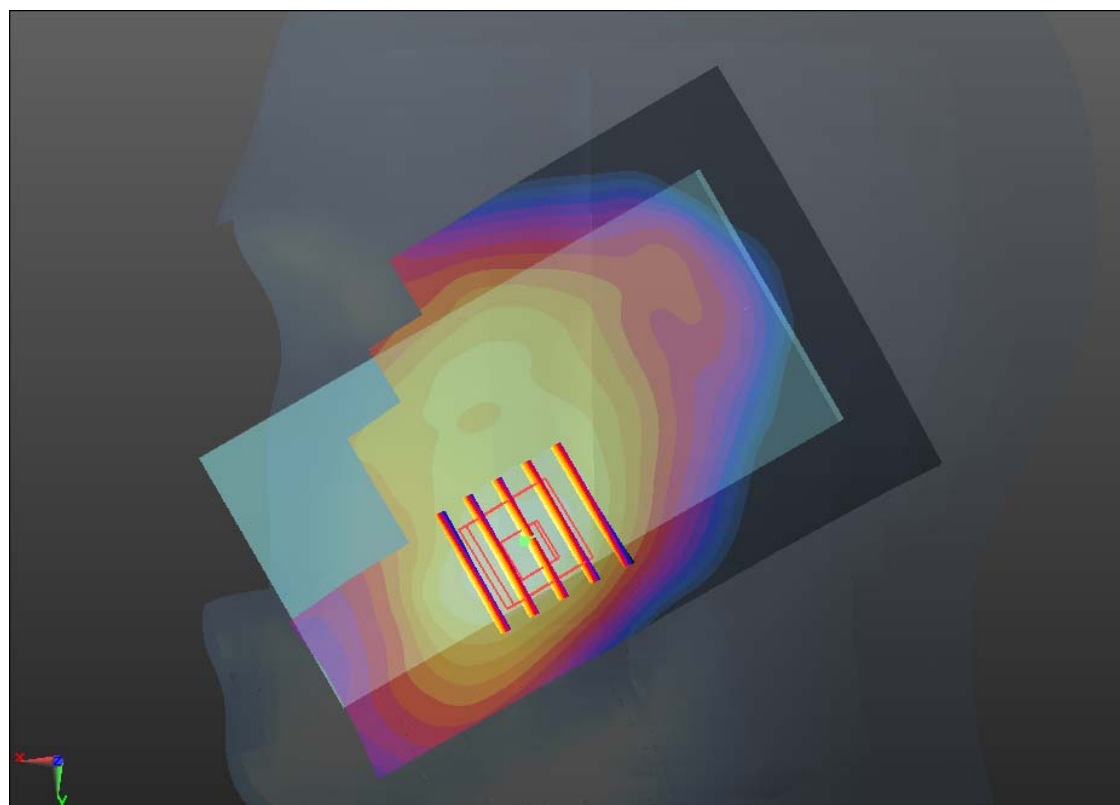

0 dB = 0.550mW/g

#06_GSM1900_GPRS (4 Tx slots)_Right Tilted_Ch512

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_140405 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r =$

39.154; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.208 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.768 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.176 mW/g

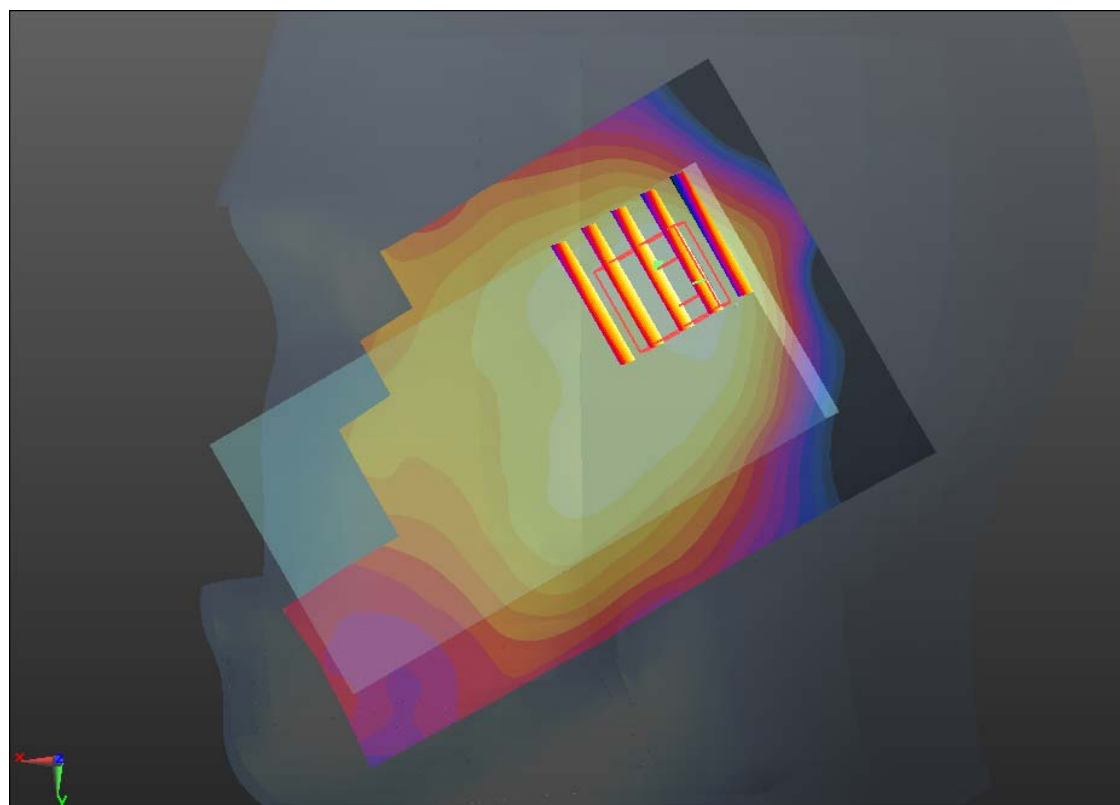

0 dB = 0.180mW/g

#07_GSM1900_GPRS (4 Tx slots)_Left Check_Ch512

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_140405 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r =$

39.154; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.711 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.288 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.541 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.687 mW/g

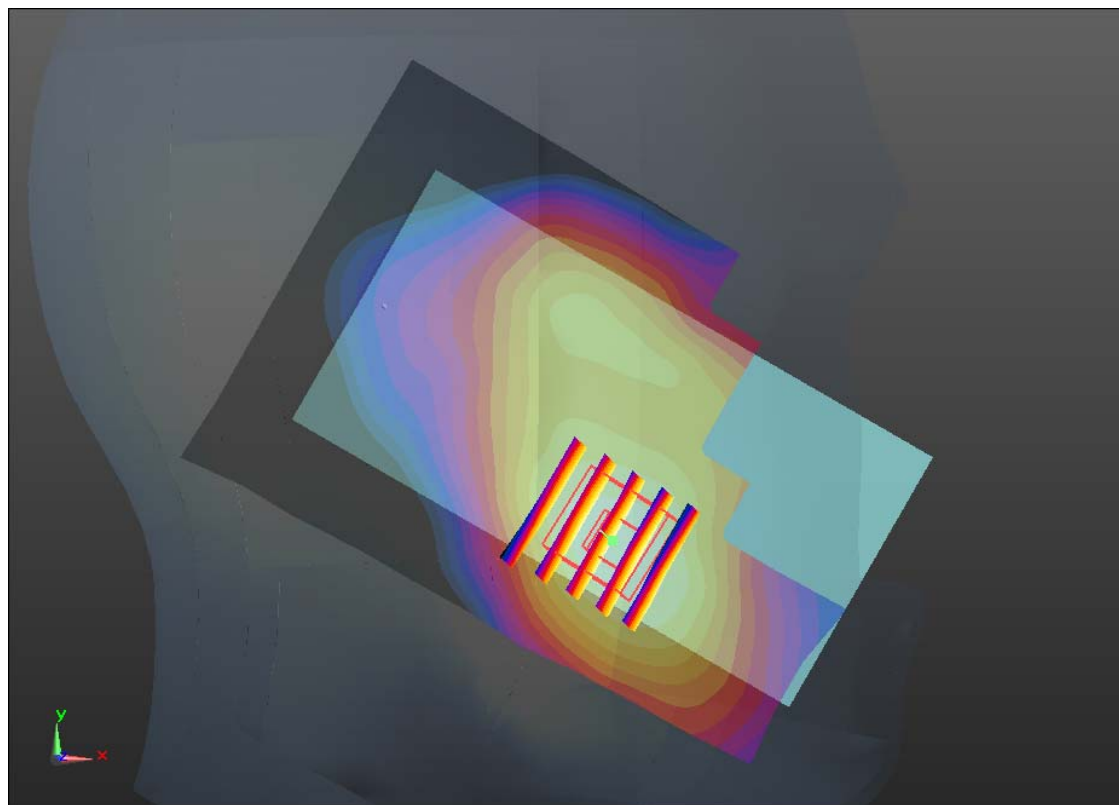

0 dB = 0.690mW/g

#08_GSM1900_GPRS (4 Tx slots)_Left Tilted_Ch512

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_140405 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.374$ mho/m; $\epsilon_r =$

39.154; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.203 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.782 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.197 mW/g

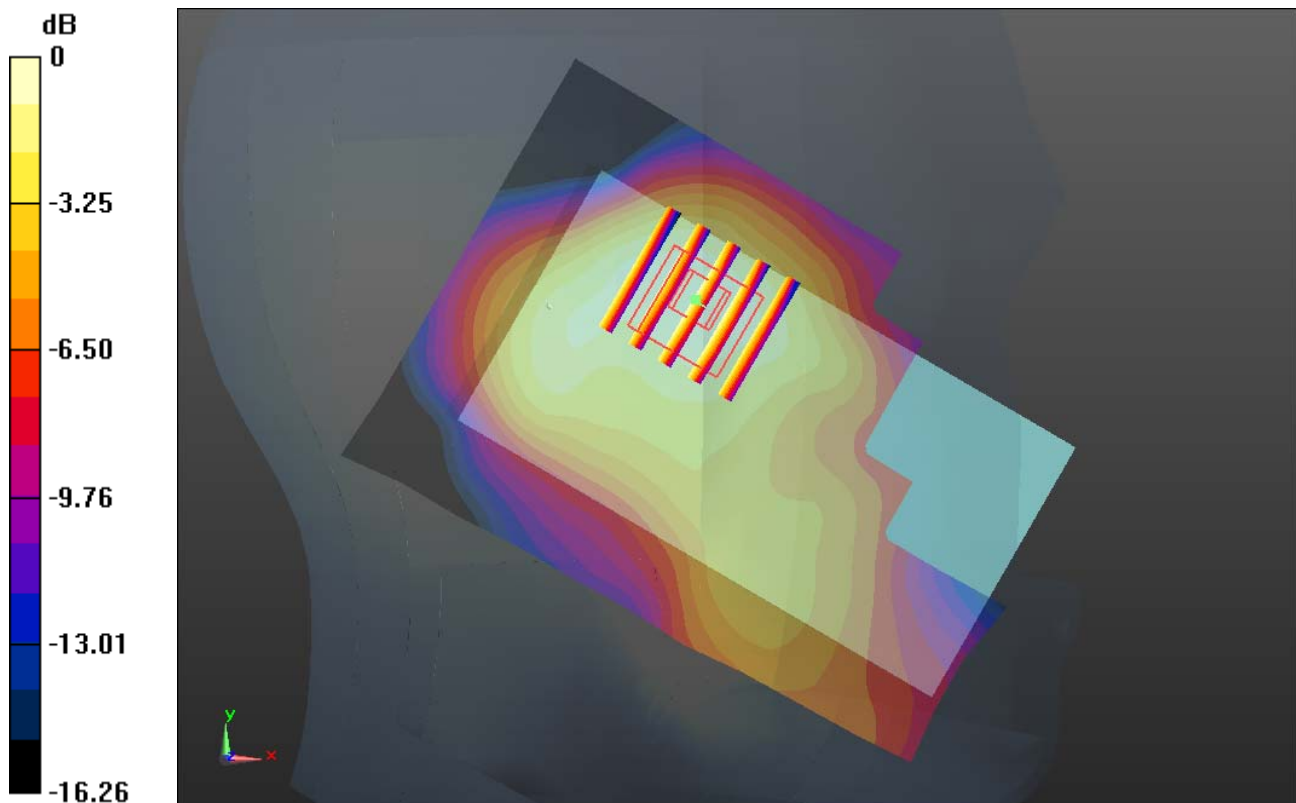

0 dB = 0.200mW/g

#09_WCDMA Band V_RMC12.2K_Right Cheek_Ch4132

Communication System: UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_140405 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r =$

41.142; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch4132/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.281 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.399 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.280 mW/g

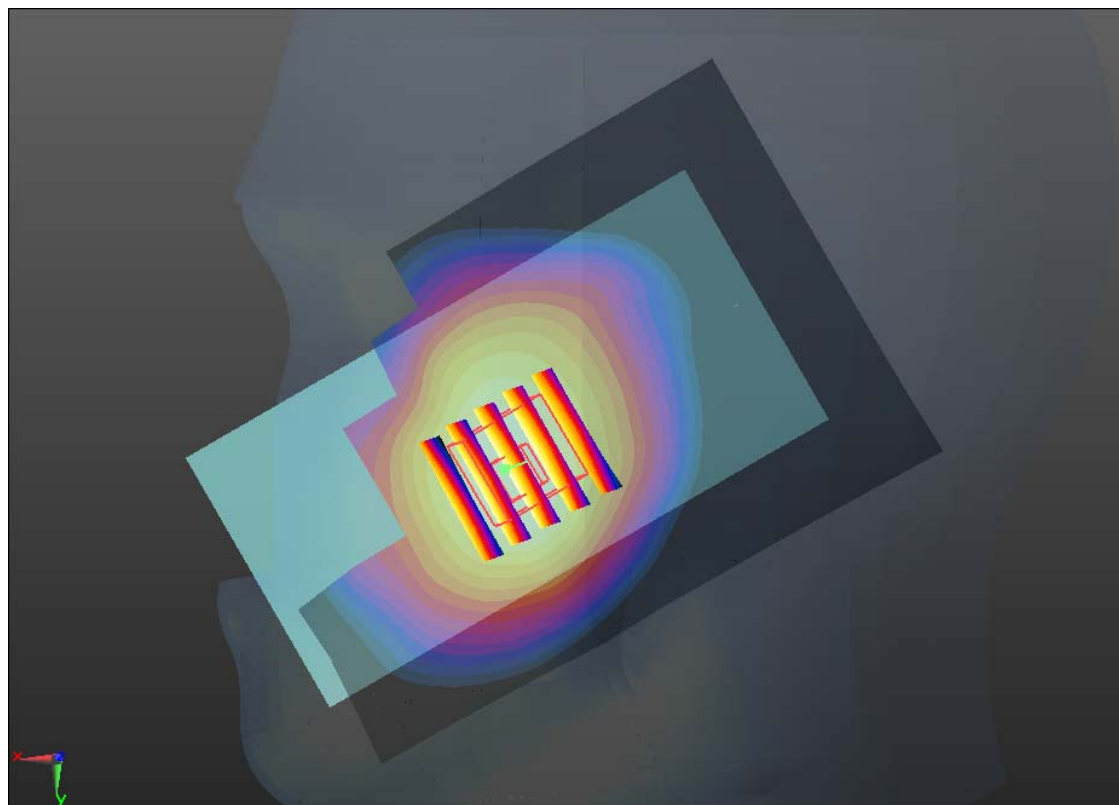

0 dB = 0.280mW/g

#10_WCDMA Band V_RMC12.2K_Right Tilted_Ch4132

Communication System: UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_140405 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r =$

41.142; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch4132/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.165 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.685 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

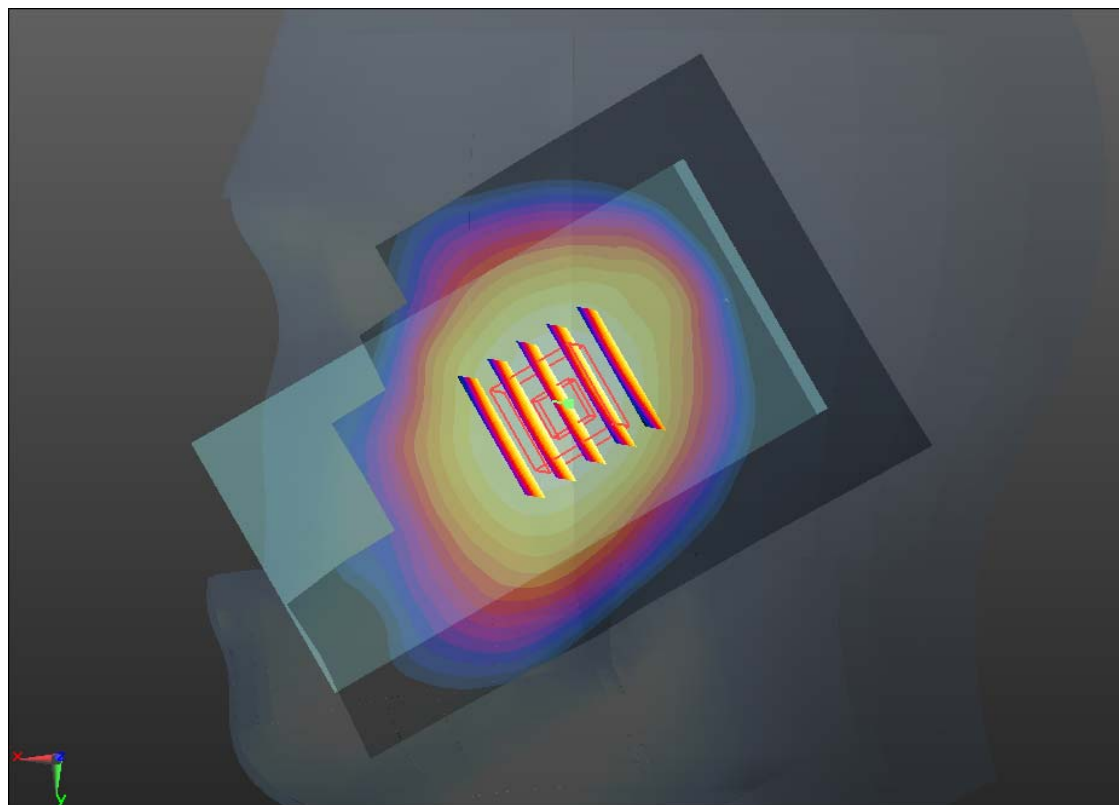

0 dB = 0.160mW/g

#11_WCDMA Band V_RMC12.2K_Left Cheek_Ch4132

Communication System: UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_140405 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r =$

41.142; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch4132/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.306 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.358 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.301 mW/g

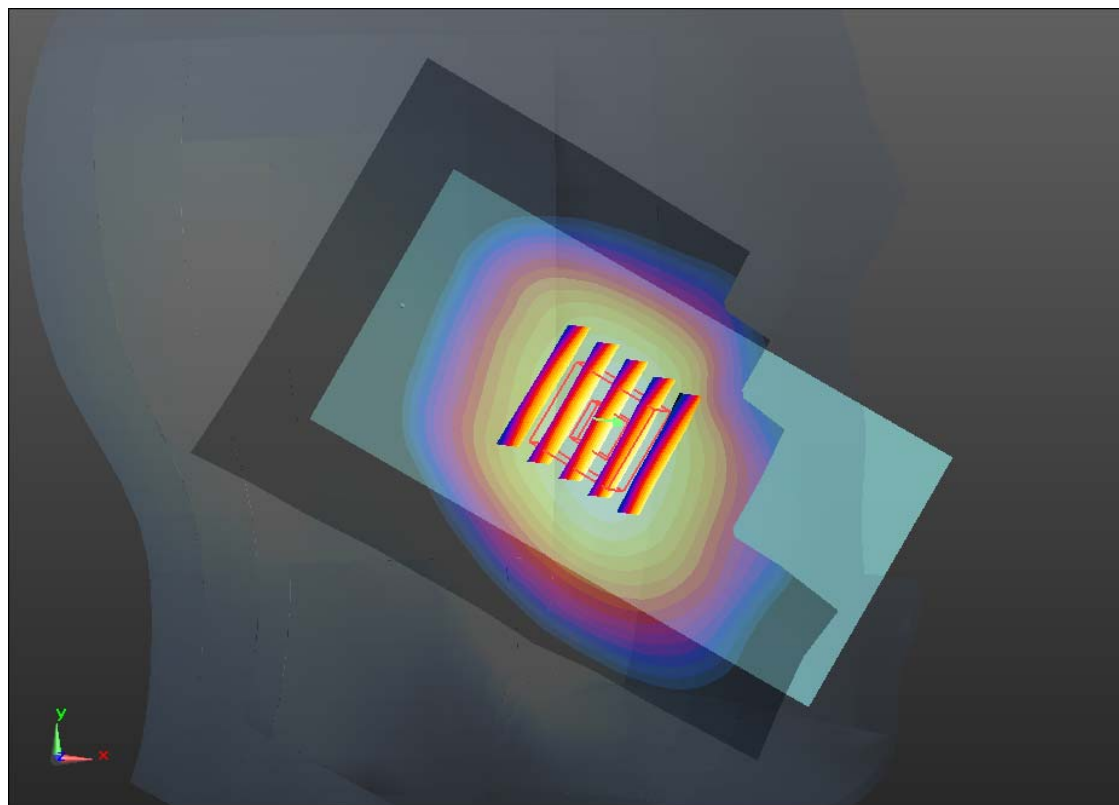

0 dB = 0.300mW/g

#12_WCDMA Band V_RMC12.2K_Left Tilted_Ch4132

Communication System: UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_140405 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r =$

41.142; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch4132/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.222 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.244 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.223 mW/g

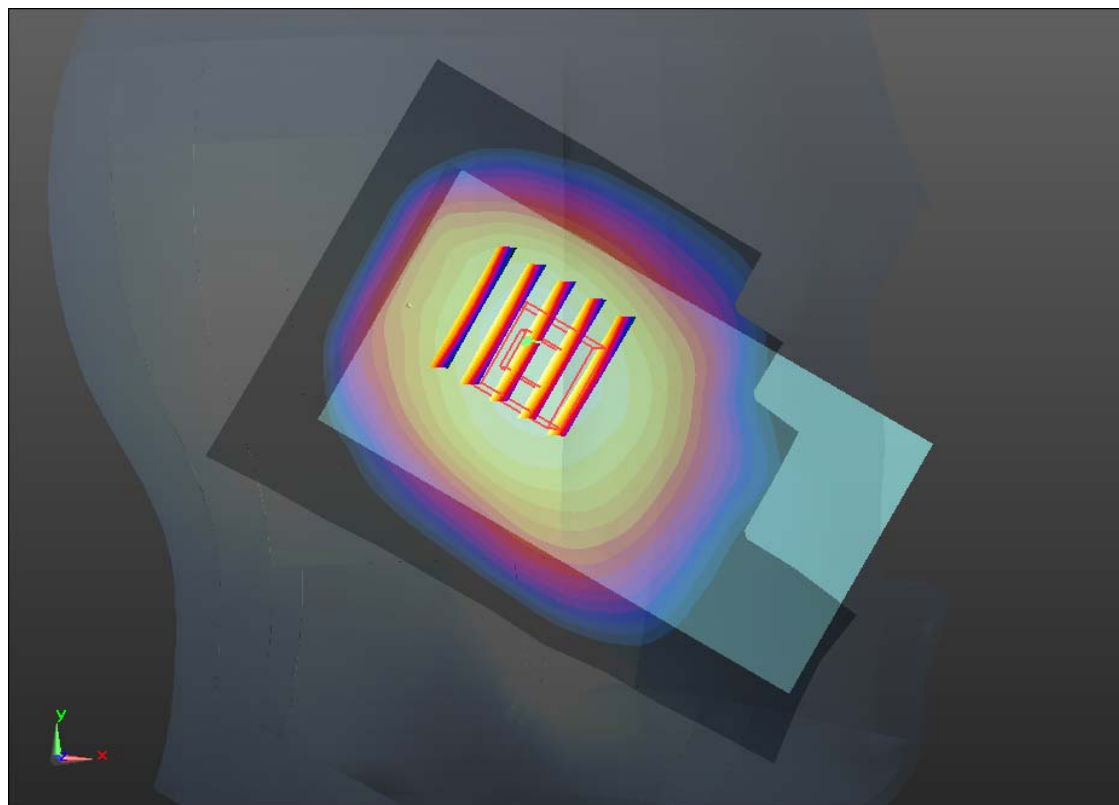

0 dB = 0.220mW/g

#13_WCDMA Band II_RMC12.2K_Right Cheek_Ch9538

Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_140405 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.432$ mho/m; $\epsilon_r =$

38.928 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (71x111x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.574 mW/g



Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.929 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 0.554 mW/g

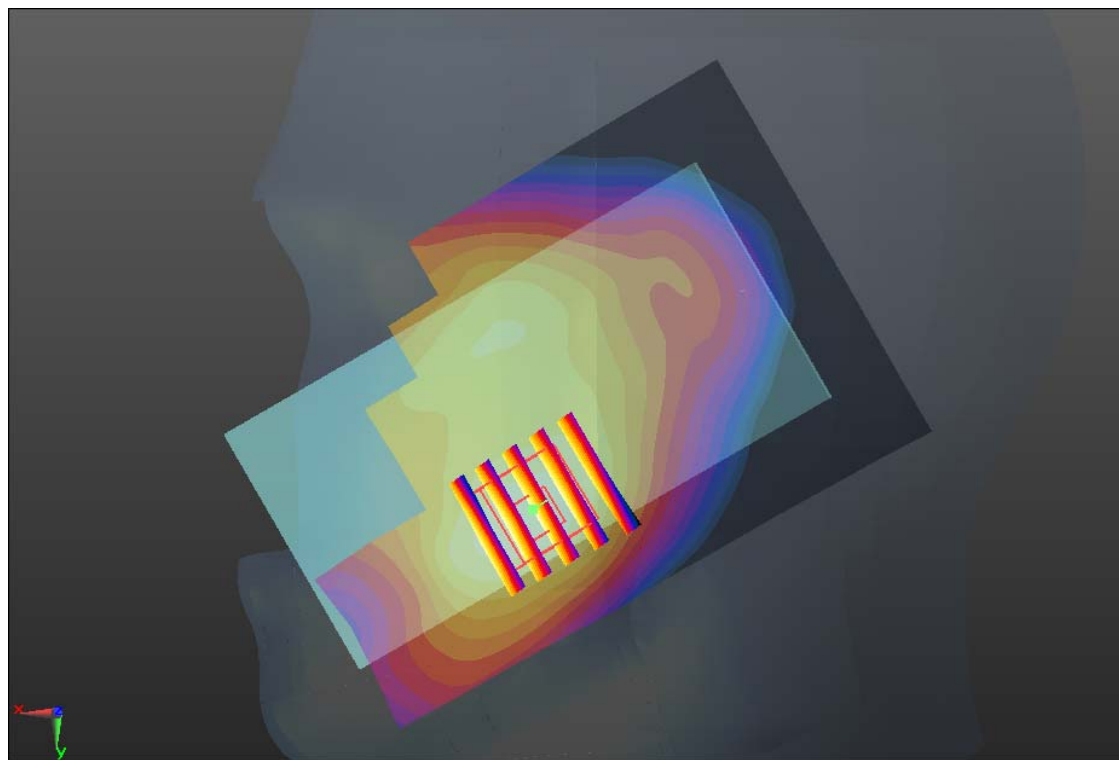

0 dB = 0.550 mW/g

#14_WCDMA Band II_RMC12.2K_Right Tilted_Ch9538

Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_140405 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.432$ mho/m; $\epsilon_r =$

38.928 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (71x111x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.221 mW/g



Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.326 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.188 mW/g

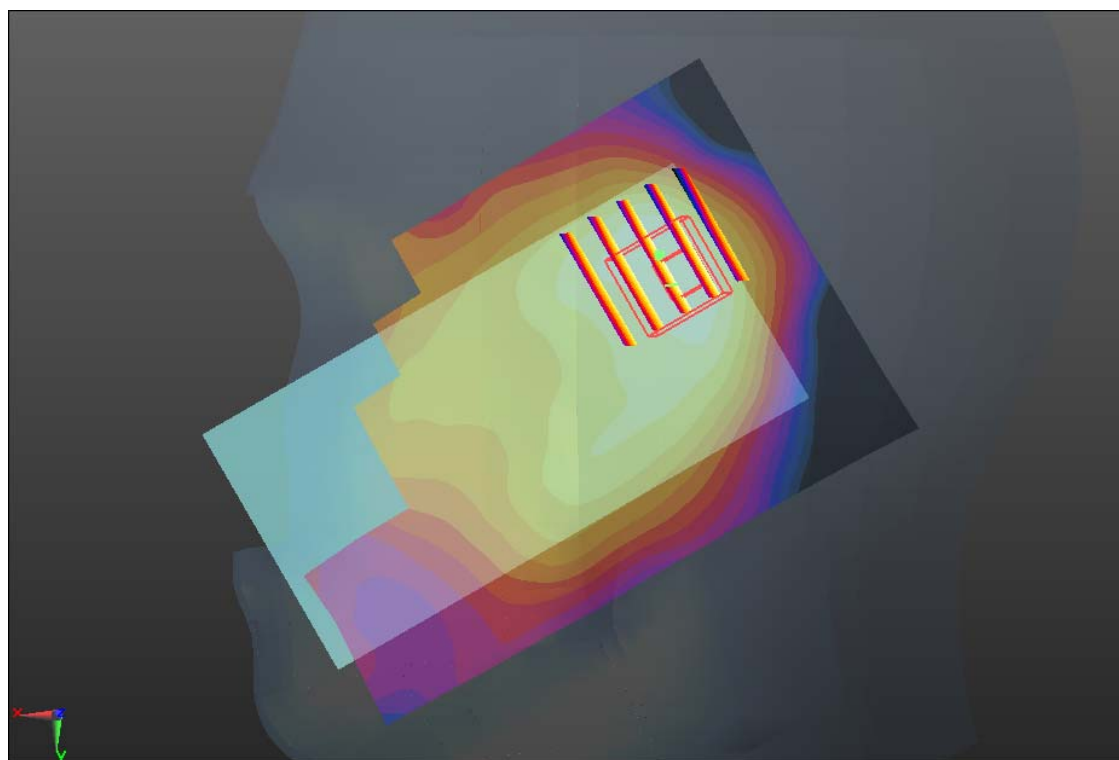

0 dB = 0.190 mW/g

#15_WCDMA Band II_RMC12.2K_Left Cheek_Ch9538

Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_140405 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.432$ mho/m; $\epsilon_r =$

38.928 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (71x111x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.774 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.222 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.881 W/kg

SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.743 mW/g

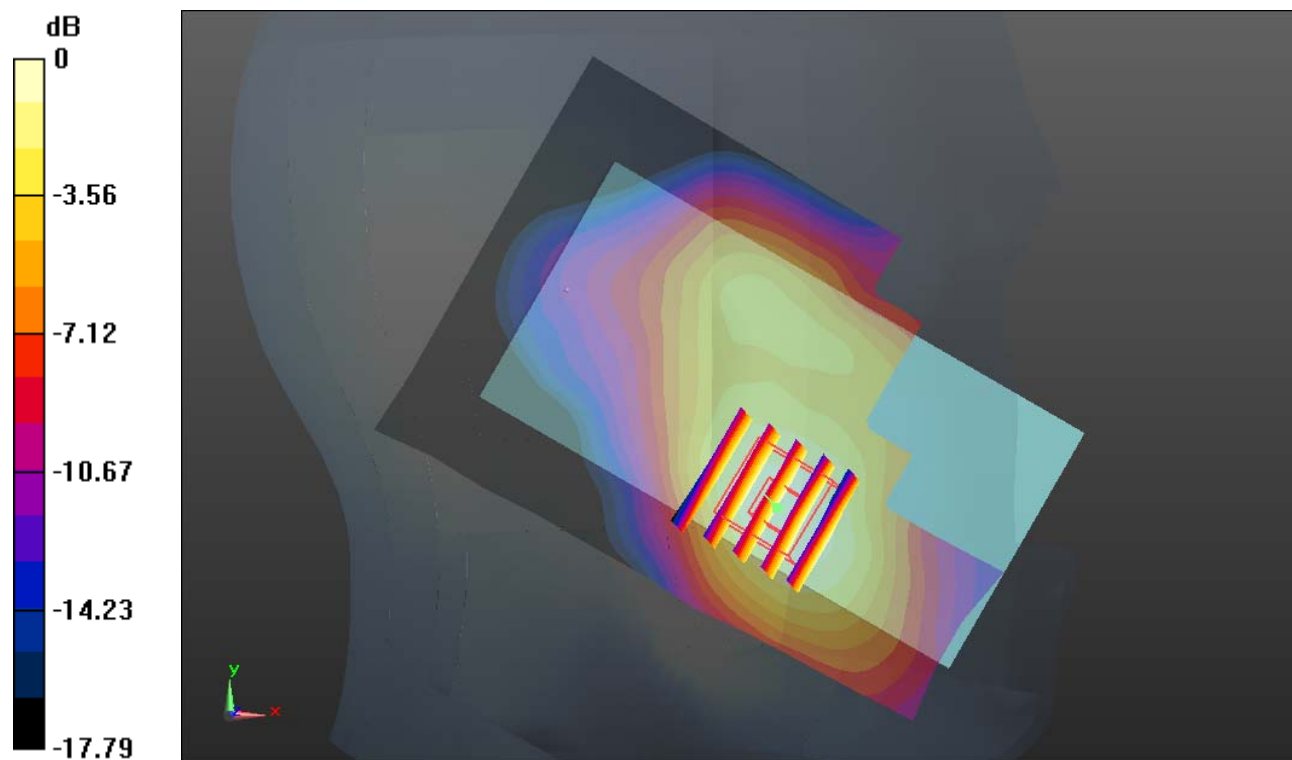

0 dB = 0.740 mW/g

#16_WCDMA Band II_RMC12.2K_Left Tilted_Ch9538

Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_140405 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.432$ mho/m; $\epsilon_r =$

38.928 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (71x111x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.195 mW/g



Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.098 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.188 mW/g

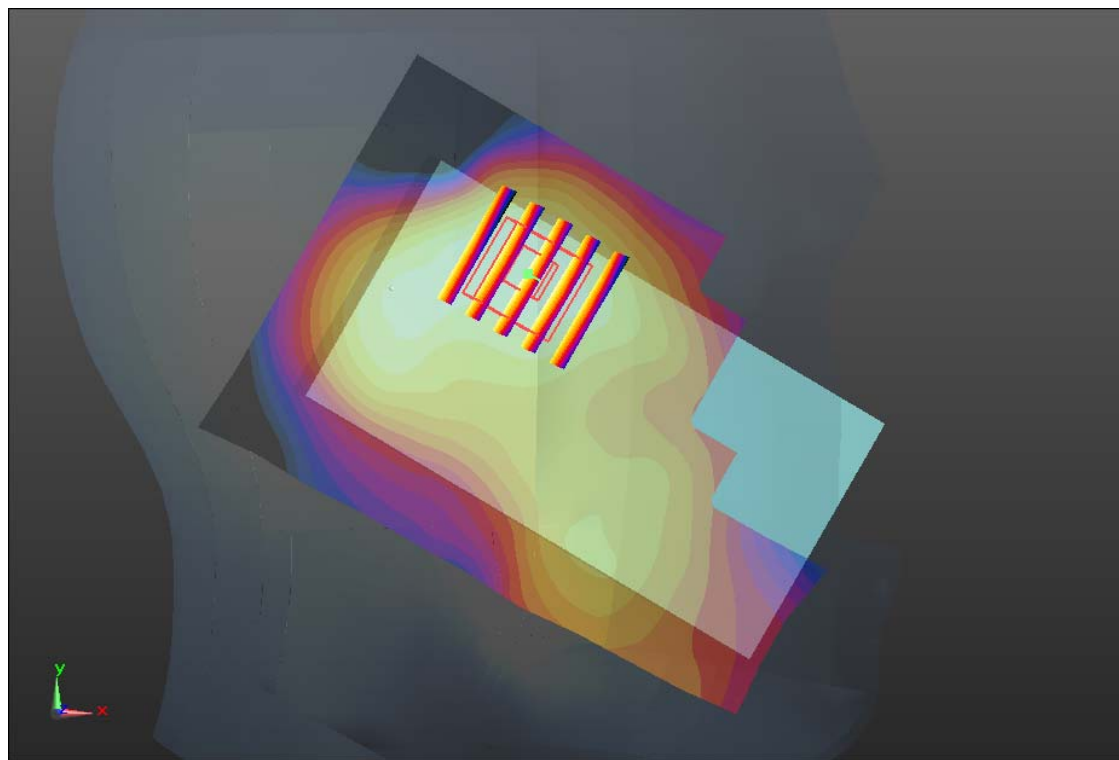

0 dB = 0.190 mW/g

#17_WLAN2.4GHz_802.11b_1M_Right Check_Ch11

Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_140406 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ mho/m; $\epsilon_r =$

39.219 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.05, 7.05, 7.05); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (interpolated) = 0.517 mW/g


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.608 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.478 mW/g

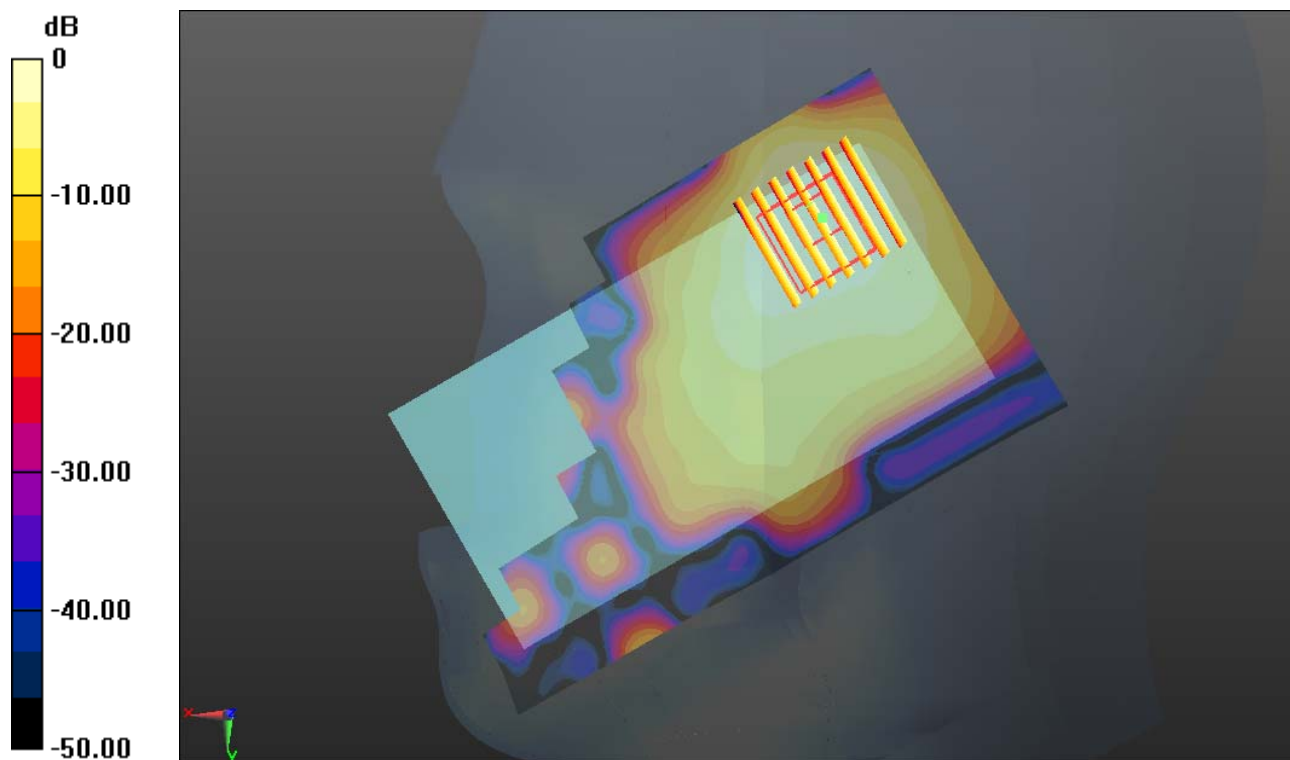

#18_WLAN2.4GHz_802.11b_1M_Right Tilted_Ch11

Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_140406 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ mho/m; $\epsilon_r =$

39.219; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.05, 7.05, 7.05); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.282 mW/g


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.411 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.292 mW/g

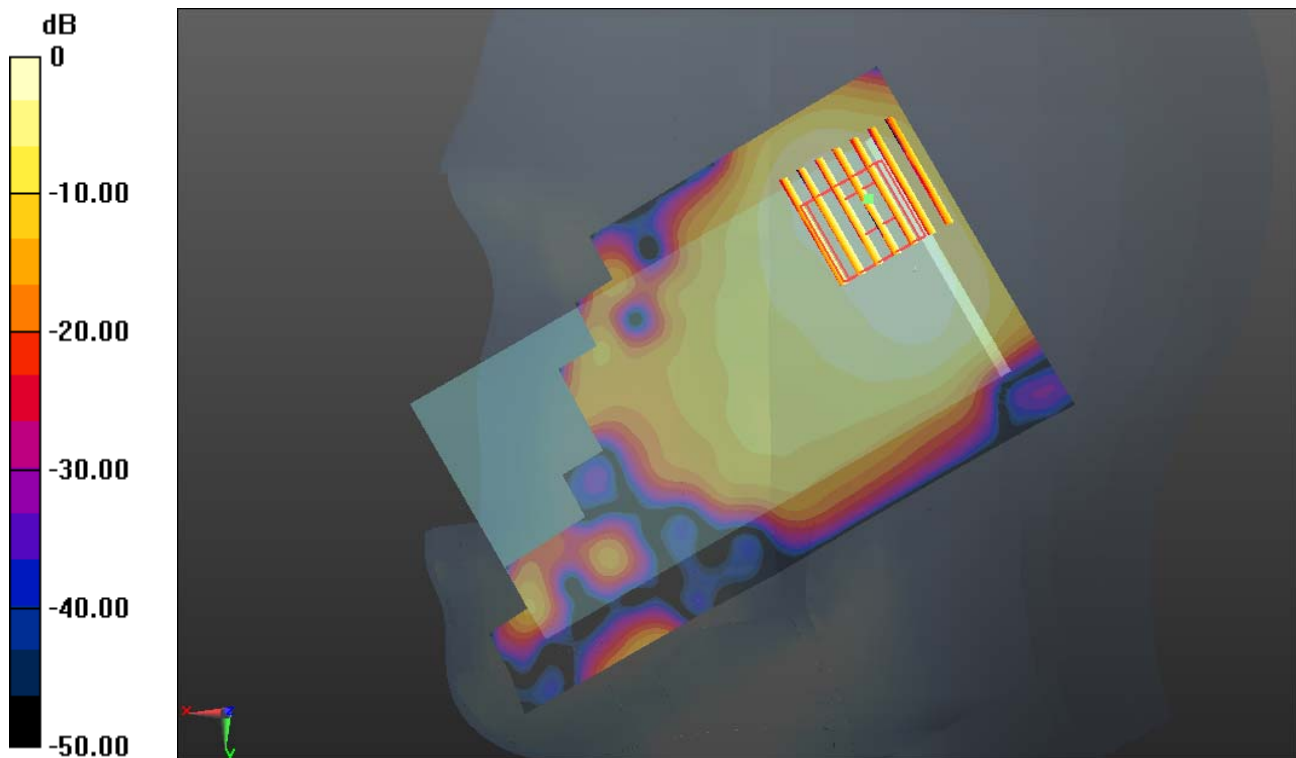

0 dB = 0.290mW/g

#19_WLAN2.4GHz_802.11b_1M_Left Check_Ch11

Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_140406 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ mho/m; $\epsilon_r =$

39.219 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.05, 7.05, 7.05); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (interpolated) = 0.267 mW/g



Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.248 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (measured) = 0.266 mW/g

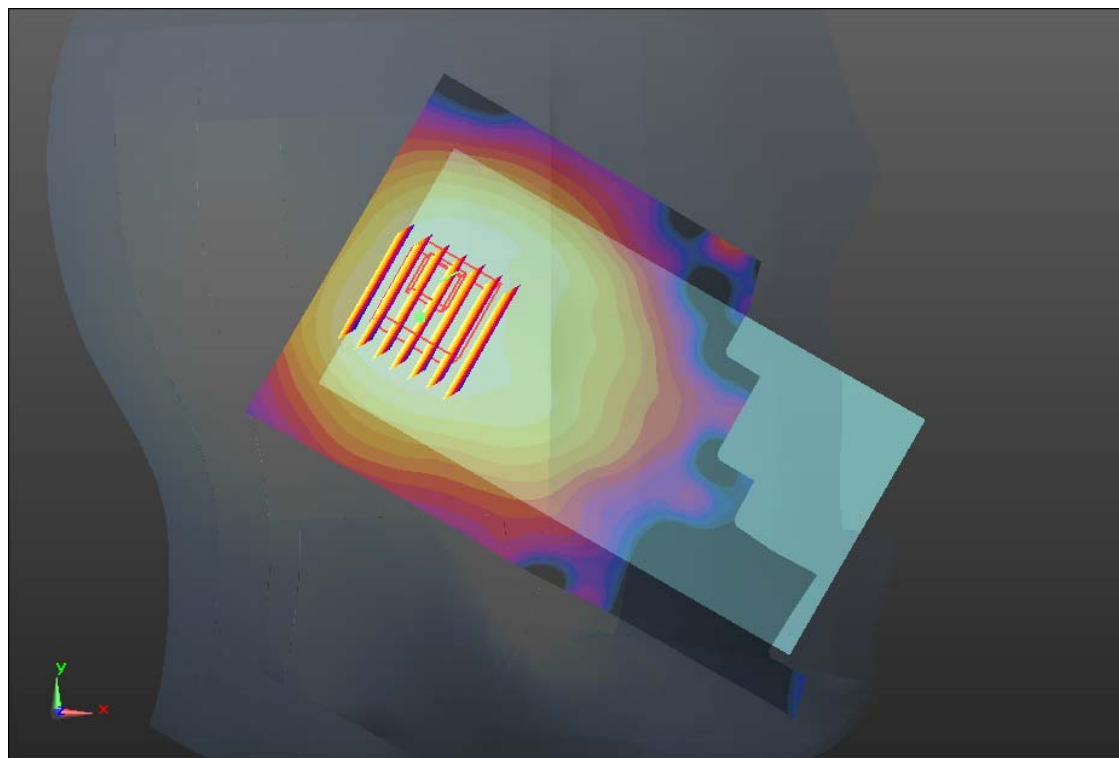

0 dB = 0.270 mW/g

#20_WLAN2.4GHz_802.11b_1M_Left Tilted_Ch11

Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_140406 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ mho/m; $\epsilon_r =$

39.219 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.05, 7.05, 7.05); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (interpolated) = 0.274 mW/g



Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.759 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.273 mW/g

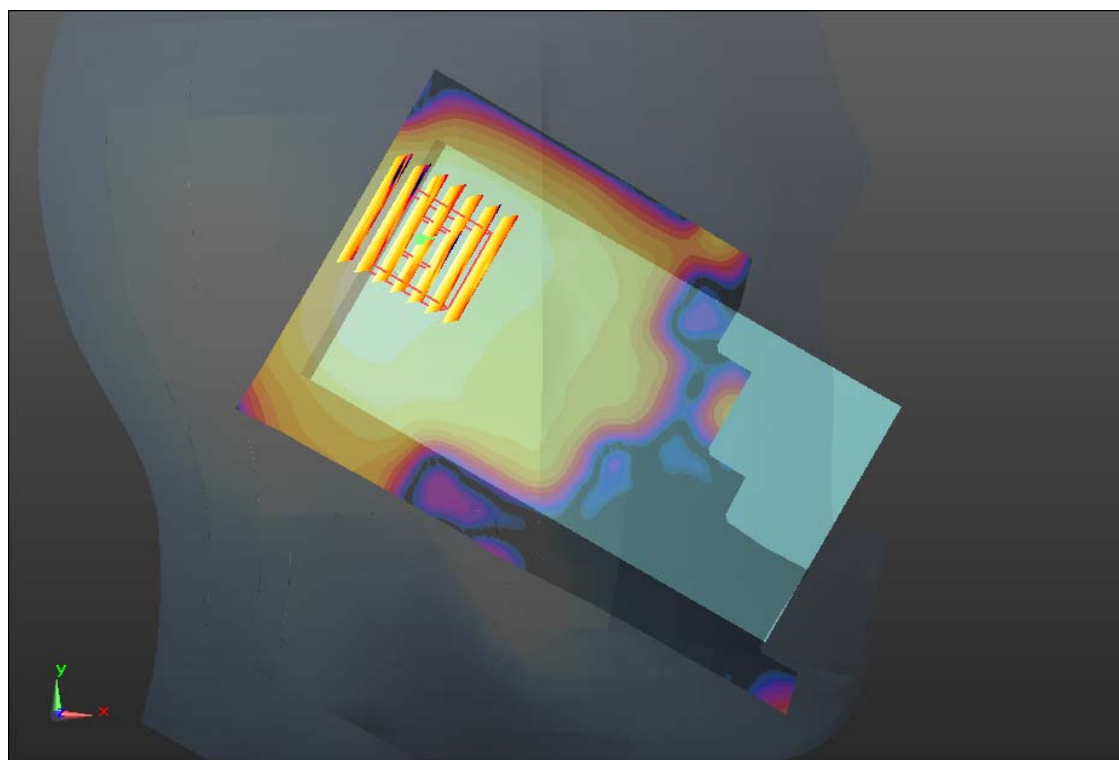

0 dB = 0.270 mW/g

#21_GSM850_GPRS (4 Tx slots)_Front 1cm_Ch189

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r =$

54.841; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.998 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.917 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.089 W/kg

SAR(1 g) = 0.879 mW/g; SAR(10 g) = 0.684 mW/g

Maximum value of SAR (measured) = 0.994 mW/g

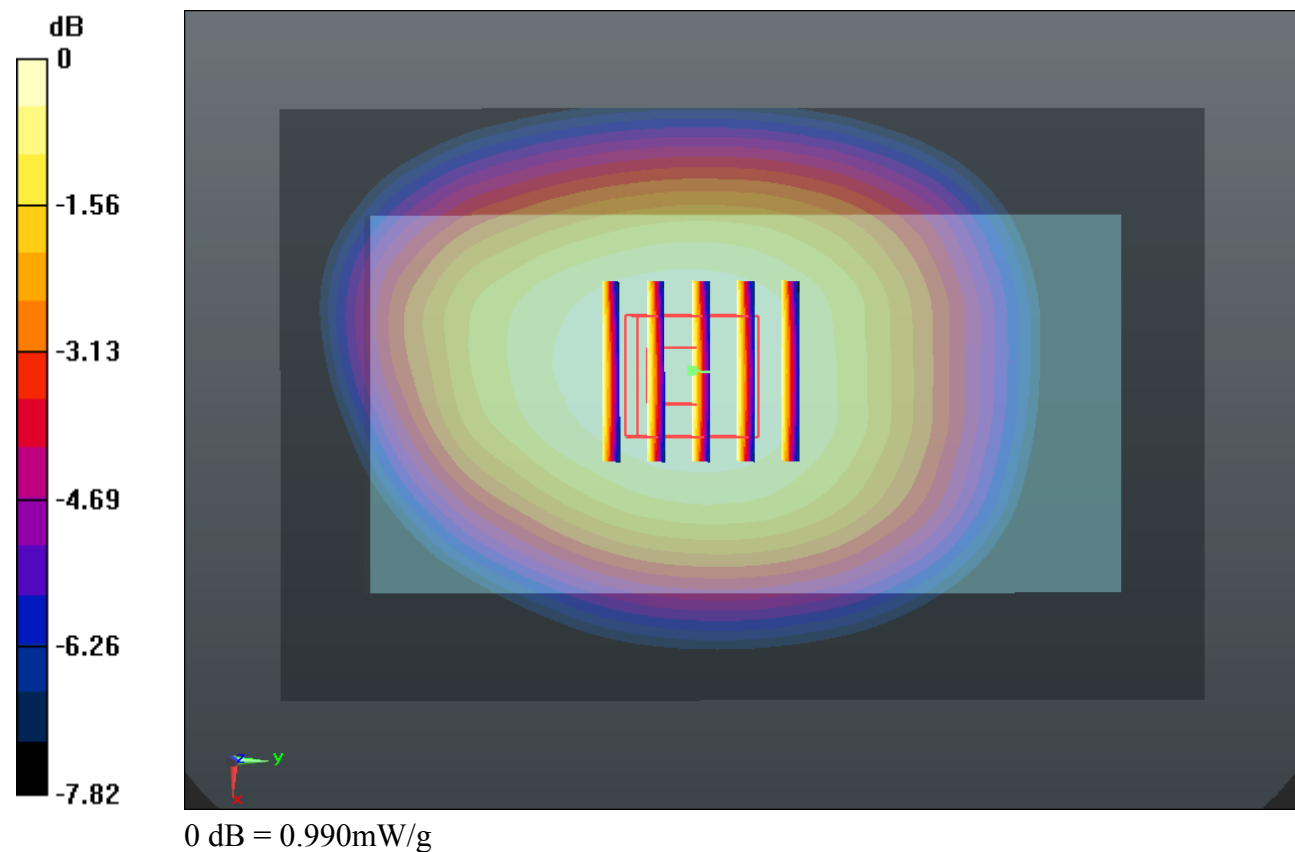

#22_GSM850_GPRS (4 Tx slots)_Back 1cm_Ch189

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.984 \text{ mho/m}$; $\epsilon_r =$

54.841 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.527 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 36.116 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.691 W/kg

SAR(1 g) = 1.330 mW/g ; SAR(10 g) = 1.02 mW/g

Maximum value of SAR (measured) = 1.525 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 36.116 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.662 W/kg

SAR(1 g) = 1.17 mW/g ; SAR(10 g) = 0.754 mW/g

Maximum value of SAR (measured) = 1.487 mW/g

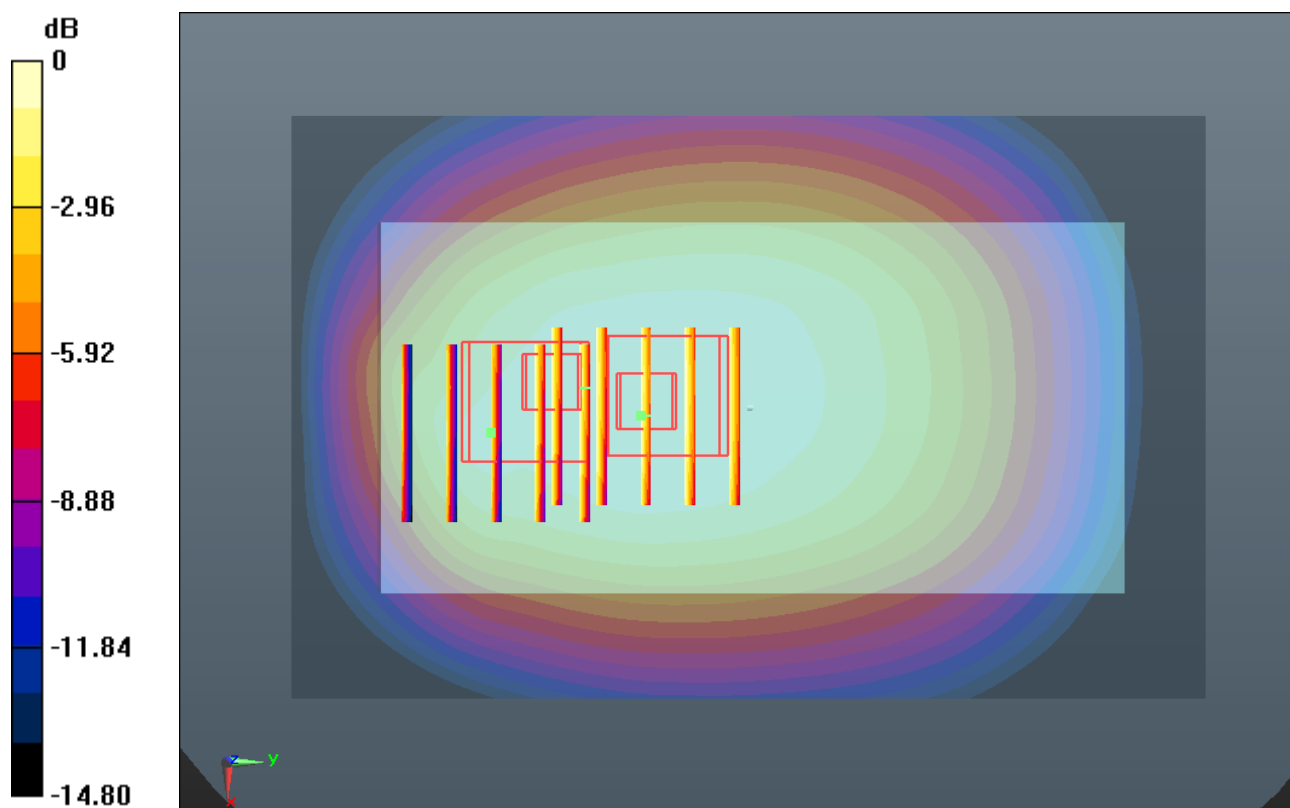

#23_GSM850_GPRS (4 Tx slots)_Left Side 1cm_Ch189

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r =$

54.841; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.112 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.369 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.287 W/kg

SAR(1 g) = 0.914 mW/g; SAR(10 g) = 0.635 mW/g

Maximum value of SAR (measured) = 1.119 mW/g

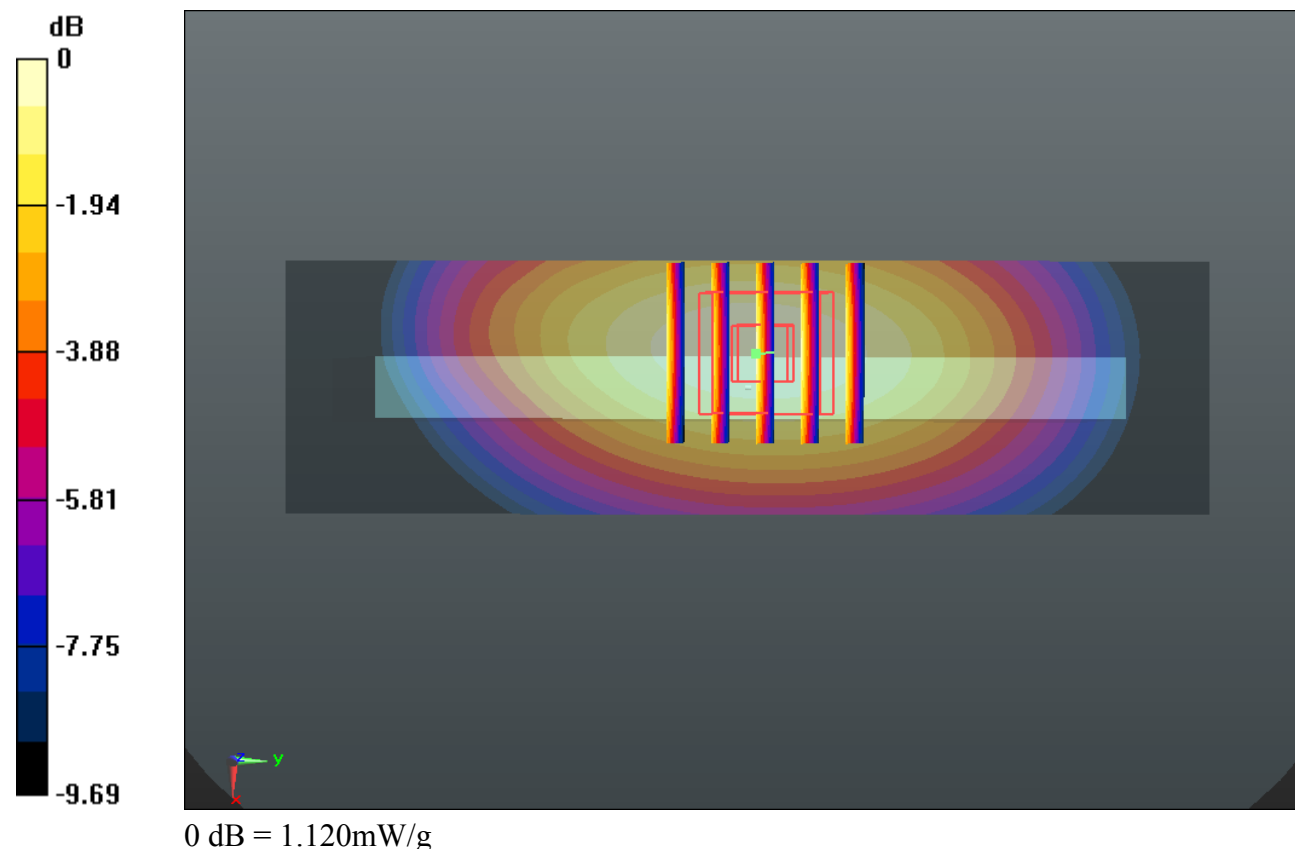

#24_GSM850_GPRS (4 Tx slots)_Right Side 1cm_Ch189

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r =$

54.841; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.137 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.116 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.313 W/kg

SAR(1 g) = 0.931 mW/g; SAR(10 g) = 0.648 mW/g

Maximum value of SAR (measured) = 1.141 mW/g

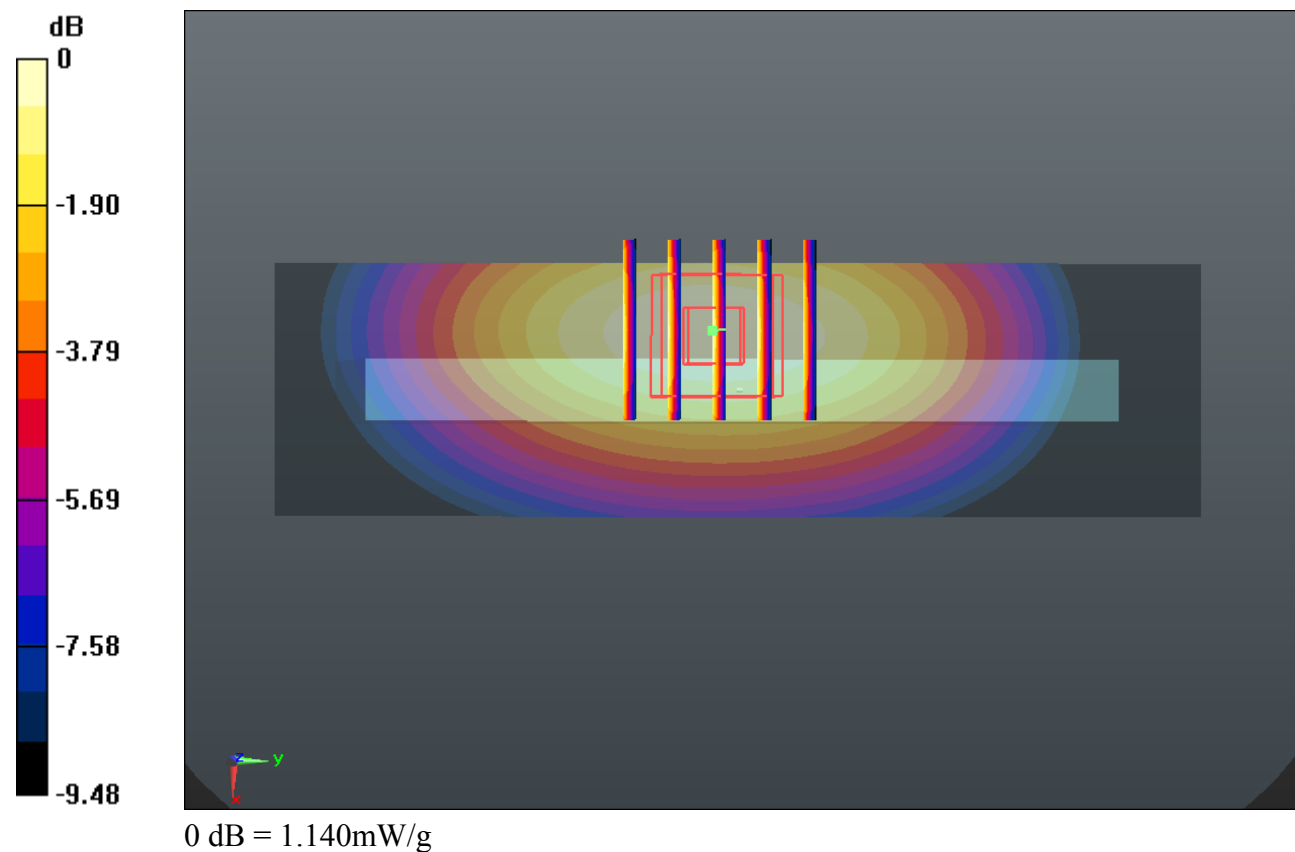

#25_GSM850_GPRS (4 Tx slots)_Bottom Side 1cm_Ch189

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r =$

54.841; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (31x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.246 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.496 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.254 mW/g

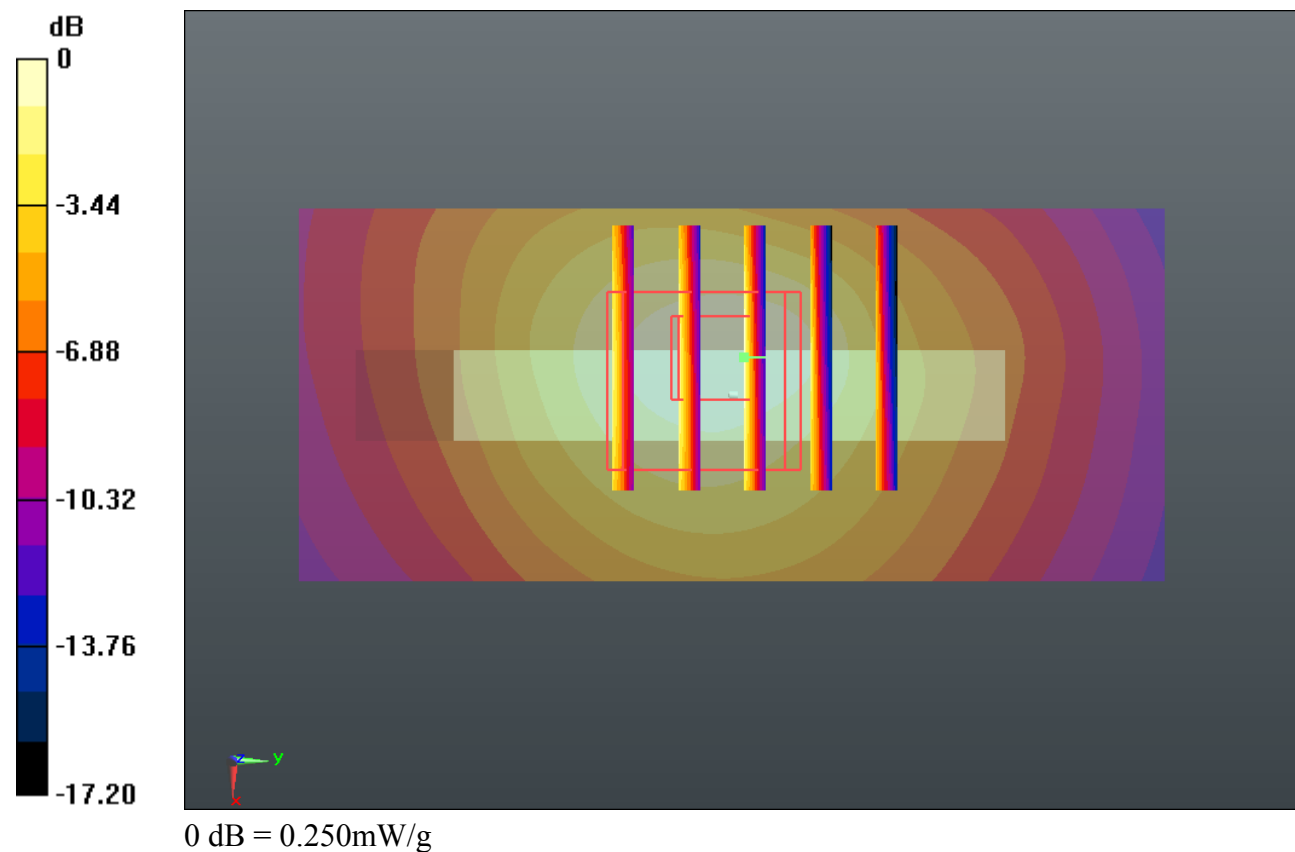

#27_GSM850_GPRS (4 Tx slots)_Front 1cm_Ch128

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r =$

54.956; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.968 mW/g


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.441 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.063 W/kg

SAR(1 g) = 0.855 mW/g; SAR(10 g) = 0.663 mW/g

Maximum value of SAR (measured) = 0.975 mW/g

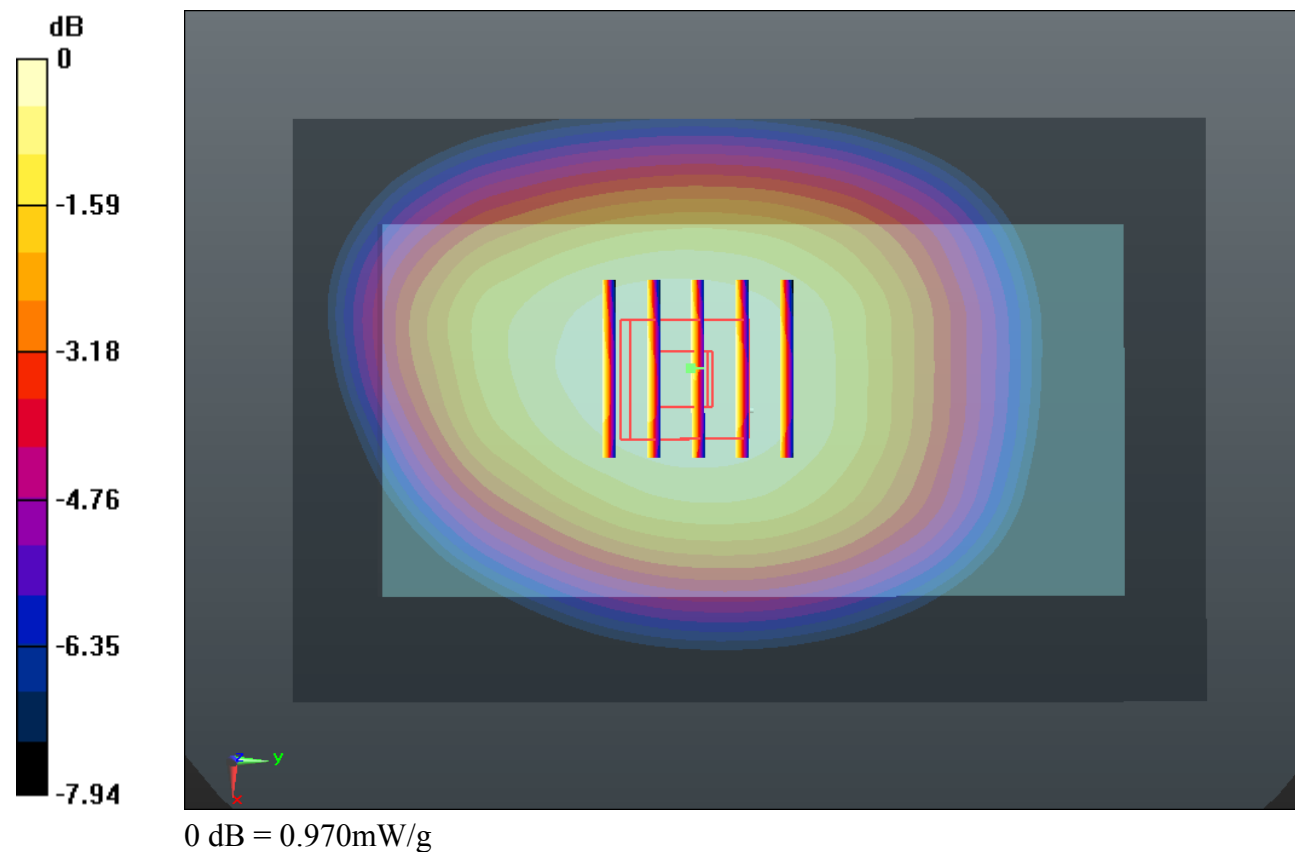

#28_GSM850_GPRS (4 Tx slots)_Front 1cm_Ch251

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 54.708$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.949 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.091 V/m; Power Drift = -0.0019 dB

Peak SAR (extrapolated) = 1.045 W/kg

SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.646 mW/g

Maximum value of SAR (measured) = 0.956 mW/g

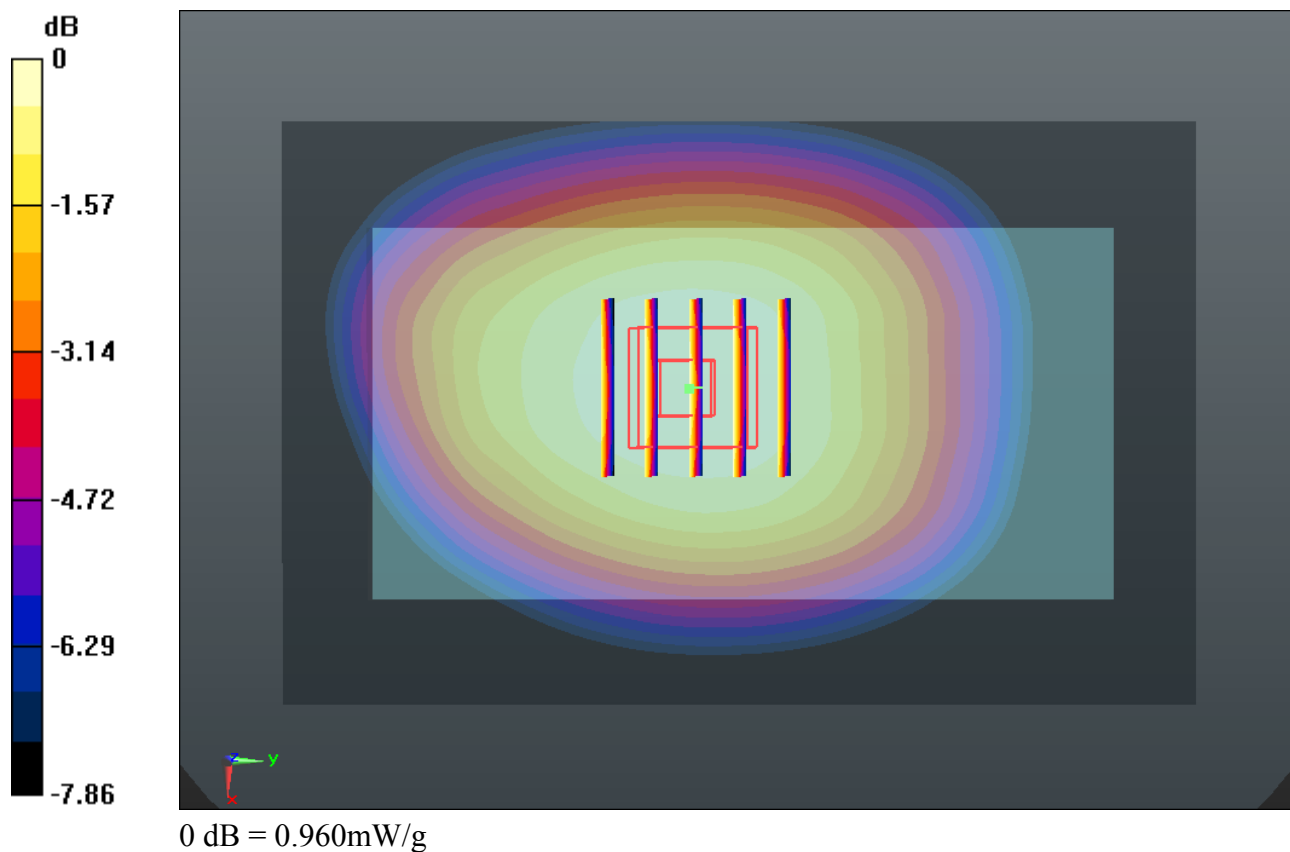

#29_GSM850_GPRS (4 Tx slots)_Back 1cm_Ch128

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r =$

54.956; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.579 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.492 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.745 W/kg

SAR(1 g) = 1.370 mW/g; SAR(10 g) = 1.04 mW/g

Maximum value of SAR (measured) = 1.576 mW/g


Ch128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.492 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.719 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.795 mW/g

Maximum value of SAR (measured) = 1.539 mW/g

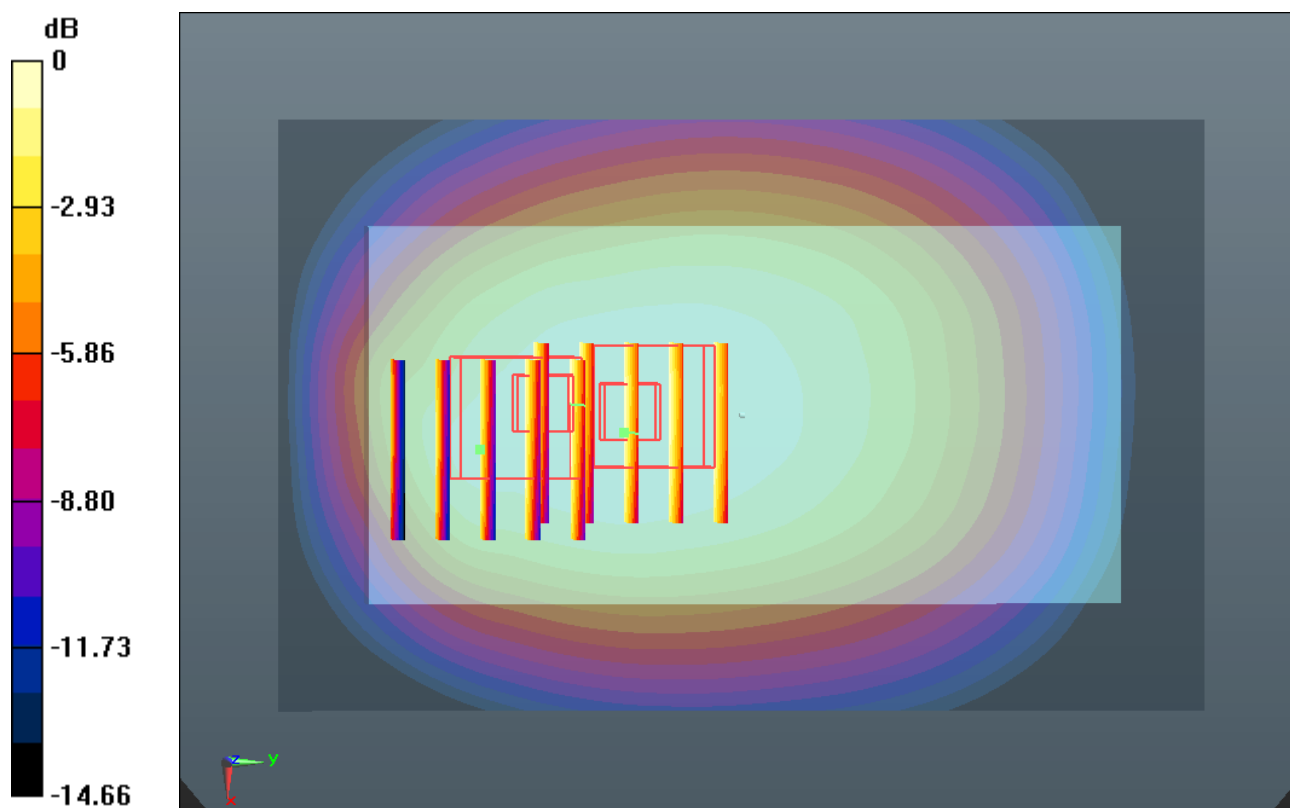

#30_GSM850_GPRS (4 Tx slots)_Back 1cm_Ch128_Repeat SAR

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r =$

54.956; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.558 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.318 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.735 W/kg

SAR(1 g) = 1.360 mW/g; SAR(10 g) = 1.03 mW/g

Maximum value of SAR (measured) = 1.570 mW/g


Ch128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.318 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.702 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.782 mW/g

Maximum value of SAR (measured) = 1.522 mW/g

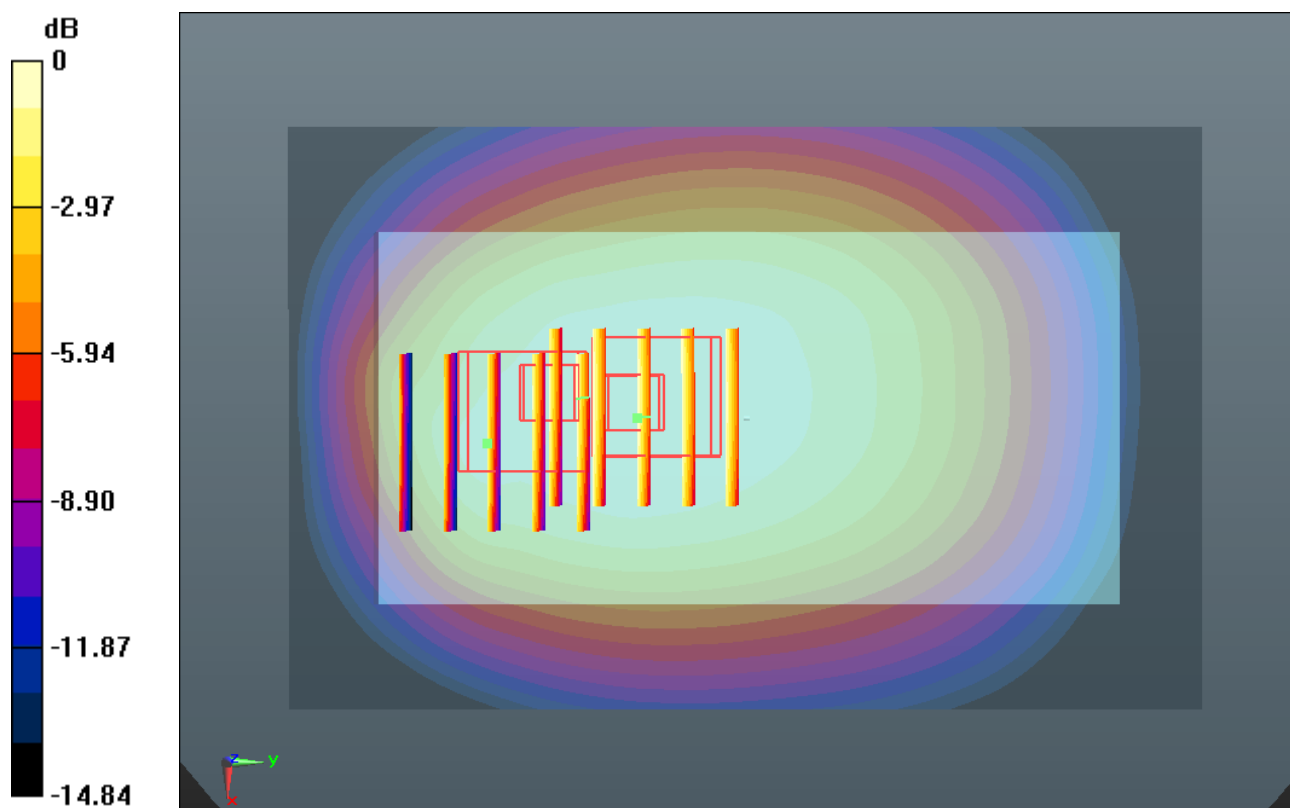

0 dB = 1.520mW/g

#31_GSM850_GPRS (4 Tx slots)_Back 1cm_Ch251

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 54.708$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.390 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.187 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.529 W/kg

SAR(1 g) = 1.210 mW/g; SAR(10 g) = 0.921 mW/g

Maximum value of SAR (measured) = 1.393 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.187 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.483 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.660 mW/g

Maximum value of SAR (measured) = 1.331 mW/g

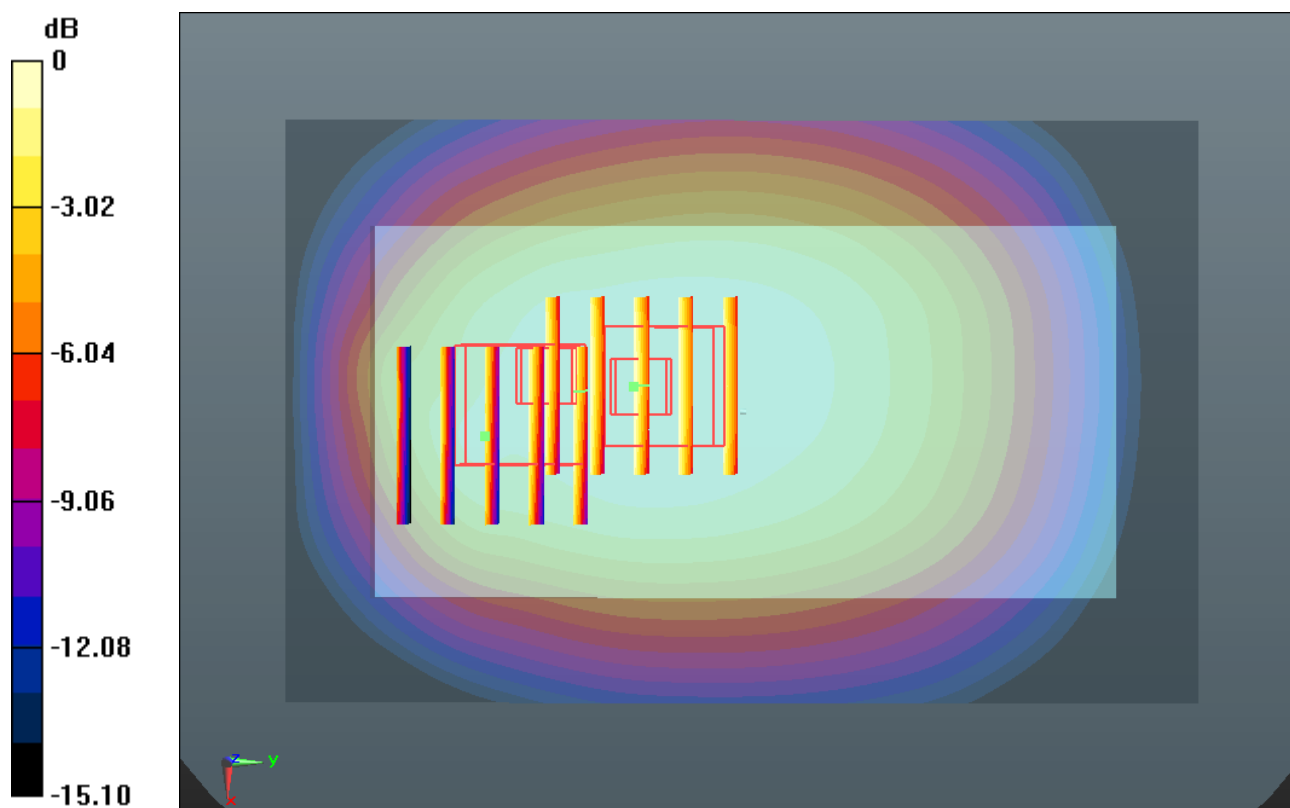

#32_GSM850_GPRS (4 Tx slots)_Left Side 1cm_Ch128

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r =$

54.956; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.120 mW/g


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.657 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.282 W/kg

SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.640 mW/g

Maximum value of SAR (measured) = 1.116 mW/g

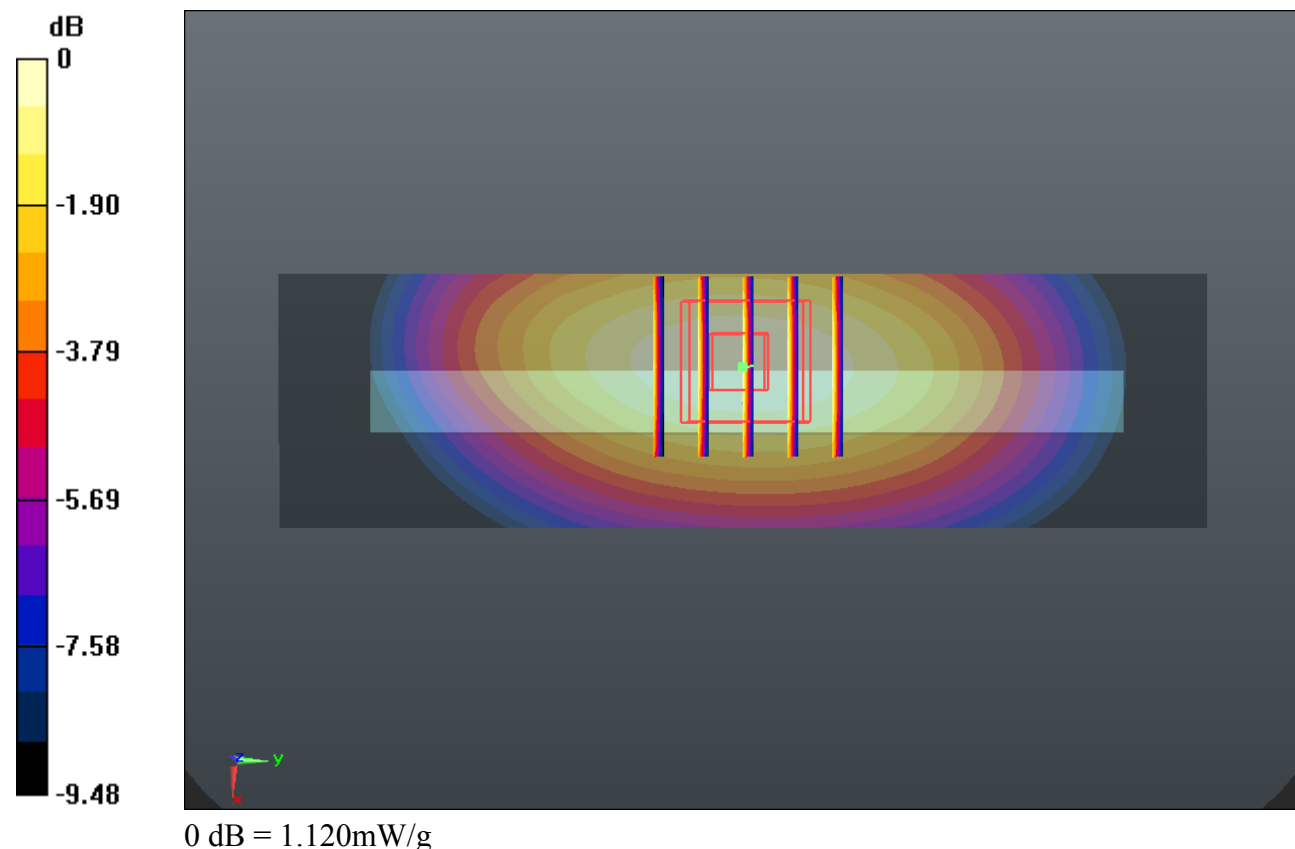

#33_GSM850_GPRS (4 Tx slots)_Left Side 1cm_Ch251

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 54.708$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.999 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.555 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.160 W/kg

SAR(1 g) = 0.821 mW/g; SAR(10 g) = 0.568 mW/g

Maximum value of SAR (measured) = 1.009 mW/g

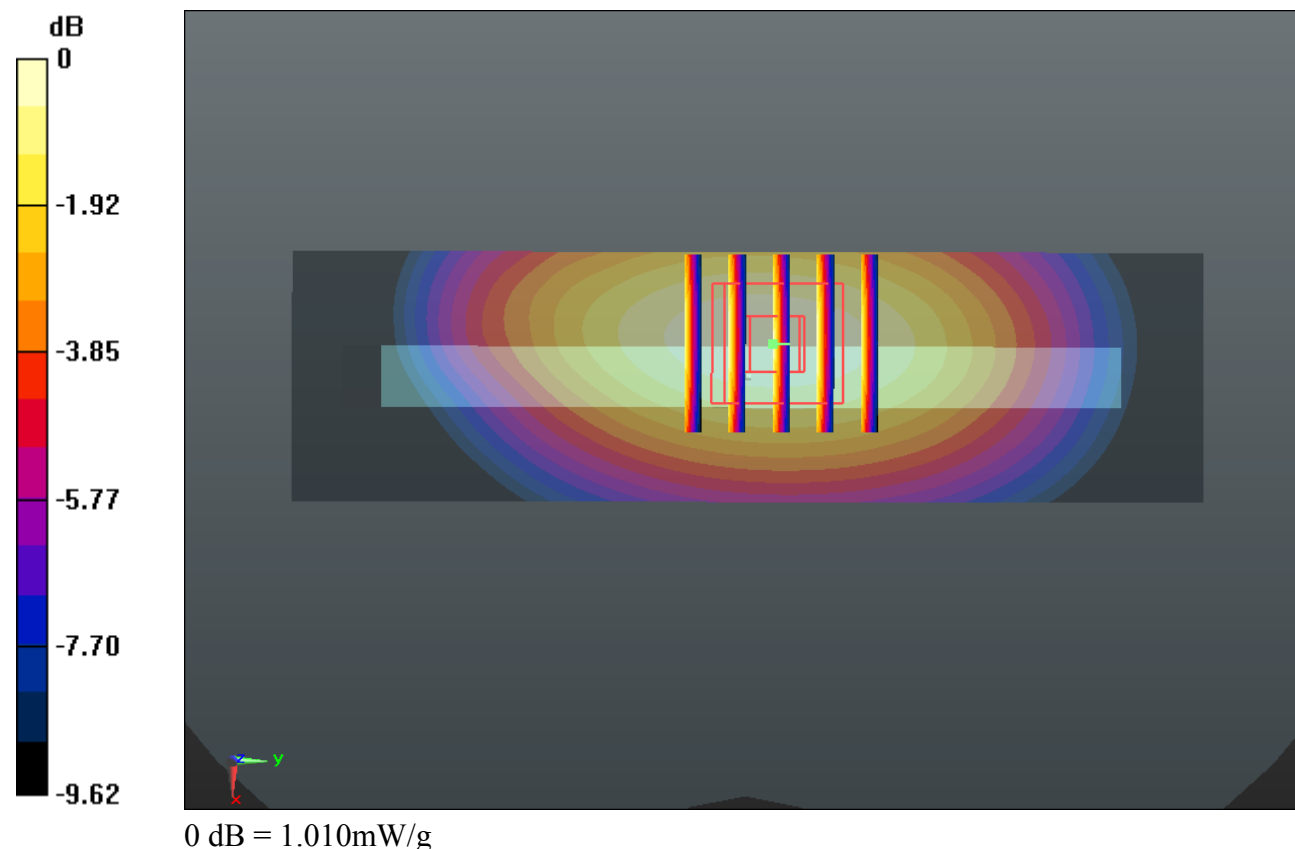

#34_GSM850_GPRS (4 Tx slots)_Right Side 1cm_Ch128

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r =$

54.956; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.077 mW/g


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.374 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.248 W/kg

SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.616 mW/g

Maximum value of SAR (measured) = 1.086 mW/g

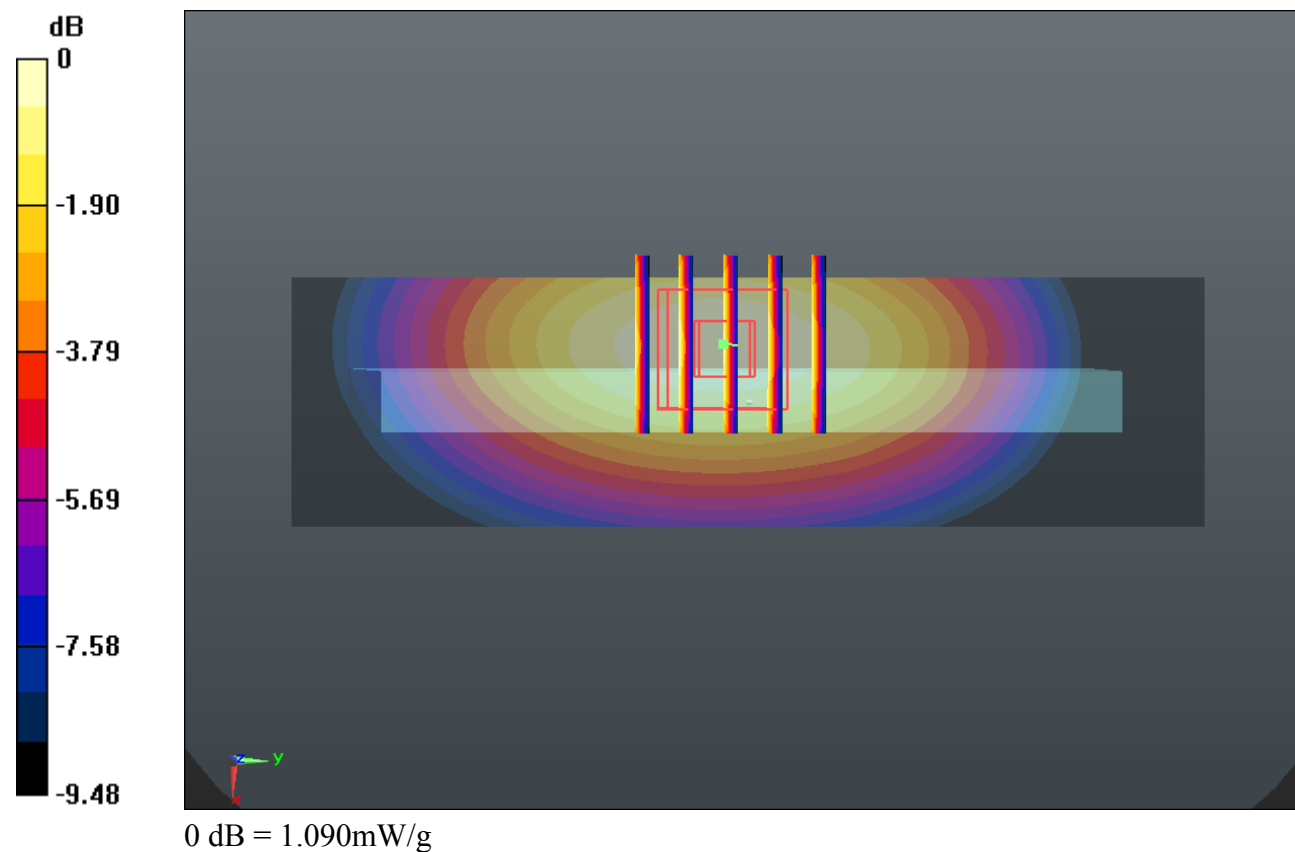

#35_GSM850_GPRS (4 Tx slots)_Right Side 1cm_Ch251

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 54.708$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.075 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.946 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.249 W/kg

SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.609 mW/g

Maximum value of SAR (measured) = 1.083 mW/g

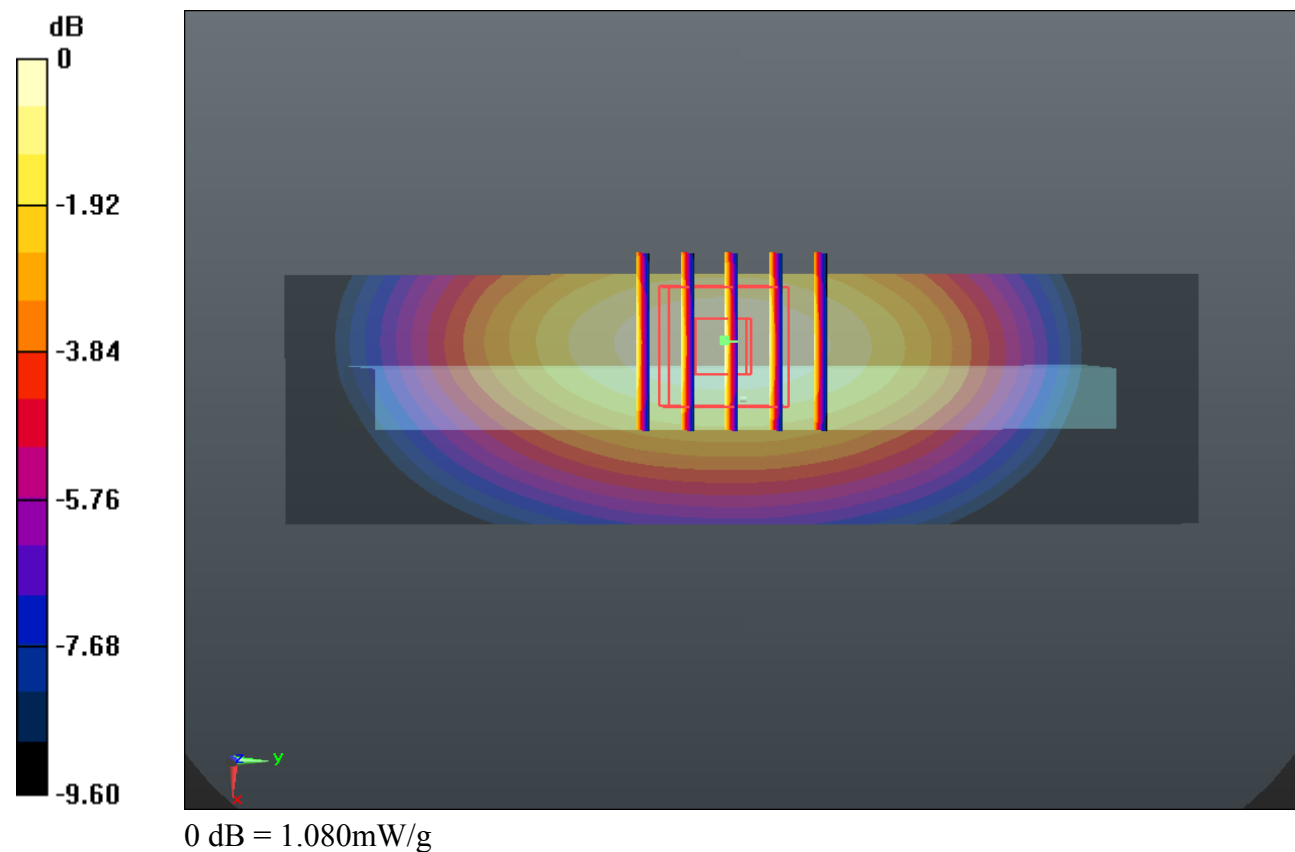

#36_GSM850_GPRS (4 Tx slots)_Back 1cm_Ch128_Headset

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r =$

54.956; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.417 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.207 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.573 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.710 mW/g

Maximum value of SAR (measured) = 1.331 mW/g



Ch128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.207 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.516 W/kg

SAR(1 g) = 1.160 mW/g; SAR(10 g) = 0.859 mW/g

Maximum value of SAR (measured) = 1.349 mW/g

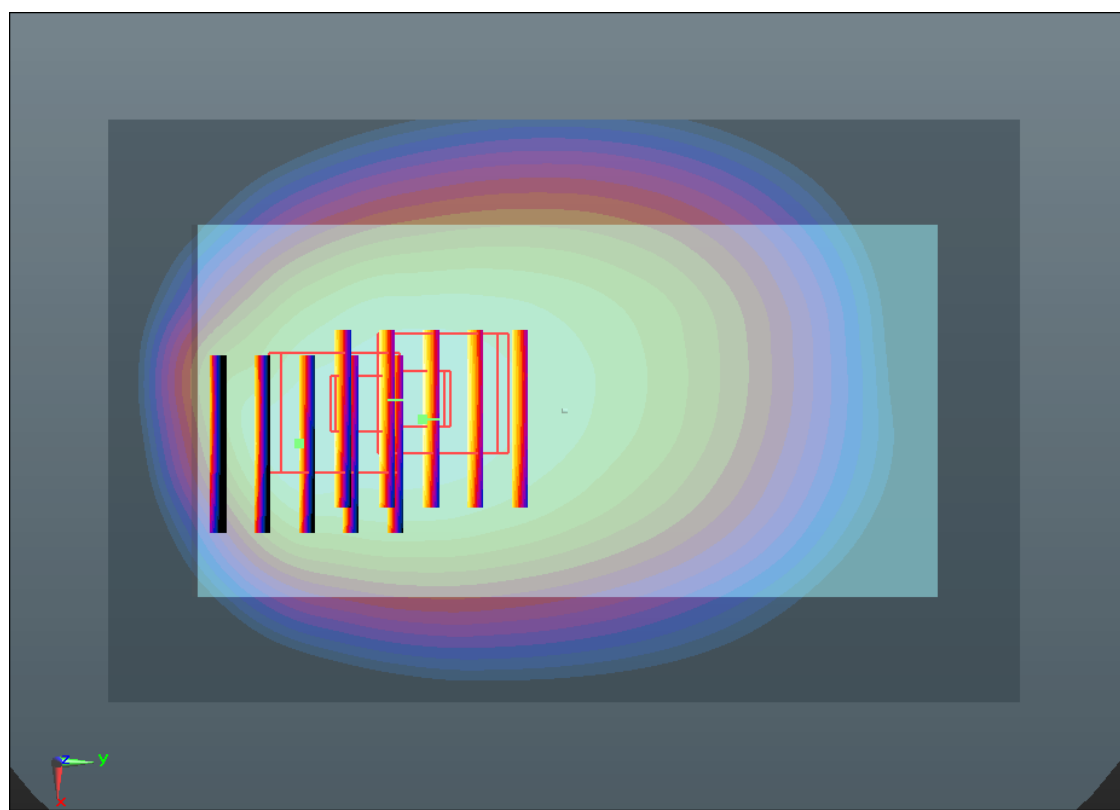

0 dB = 1.350mW/g

#37_GSM850_GPRS (4 Tx slots)_Back 1cm_Ch189_Headset

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.984 \text{ mho/m}$; $\epsilon_r =$

54.841; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.318 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.462 V/m ; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.459 W/kg

SAR(1 g) = 1.01 mW/g ; SAR(10 g) = 0.659 mW/g

Maximum value of SAR (measured) = 1.292 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.462 V/m ; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.468 W/kg

SAR(1 g) = 1.130 mW/g ; SAR(10 g) = 0.847 mW/g

Maximum value of SAR (measured) = 1.309 mW/g

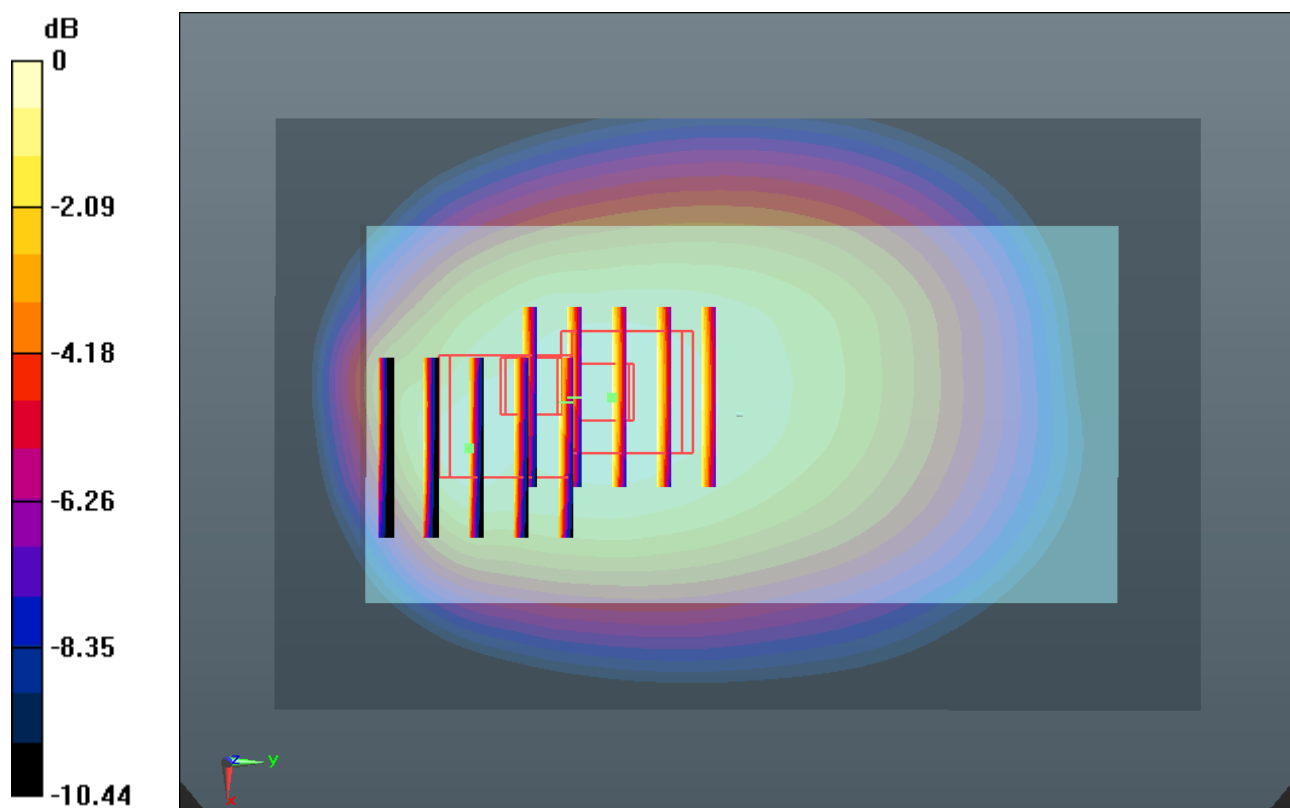

#38 GSM850_GPRS (4 Tx slots)_Back 1cm_Ch251_Headset

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_835_140404 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.997 \text{ mho/m}$; $\epsilon_r = 54.708$;
 $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$


DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.176 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 30.194 V/m ; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 1.319 W/kg
SAR(1 g) = 1.020 mW/g ; SAR(10 g) = 0.766 mW/g
Maximum value of SAR (measured) = 1.182 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 30.194 V/m ; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 1.322 W/kg
SAR(1 g) = 0.894 mW/g ; SAR(10 g) = 0.570 mW/g
Maximum value of SAR (measured) = 1.157 mW/g

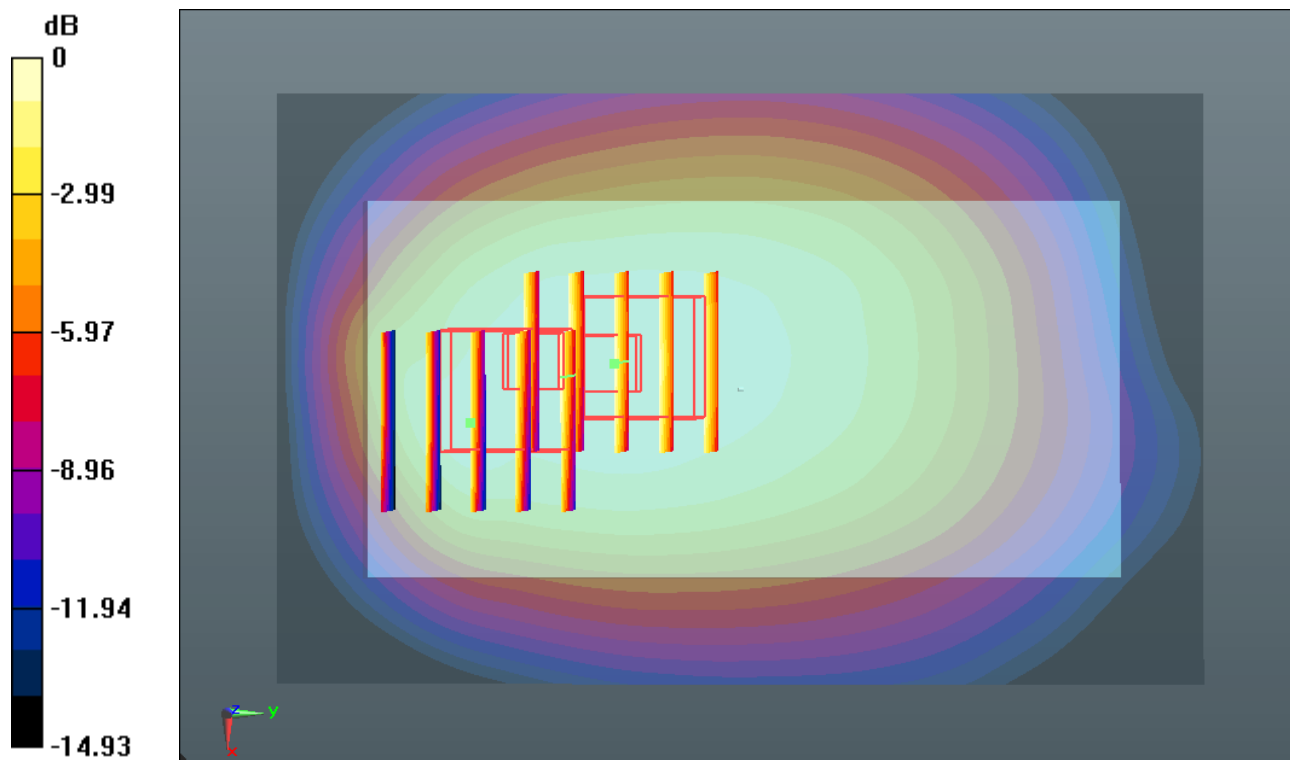

0 dB = 1.160mW/g

#39_GSM1900_GPRS (4 Tx slots)_Front 1cm_Ch810

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.561$ mho/m; $\epsilon_r =$

53.38; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.070 mW/g



Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.247 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.257 W/kg

SAR(1 g) = 0.813 mW/g; SAR(10 g) = 0.504 mW/g

Maximum value of SAR (measured) = 1.041 mW/g

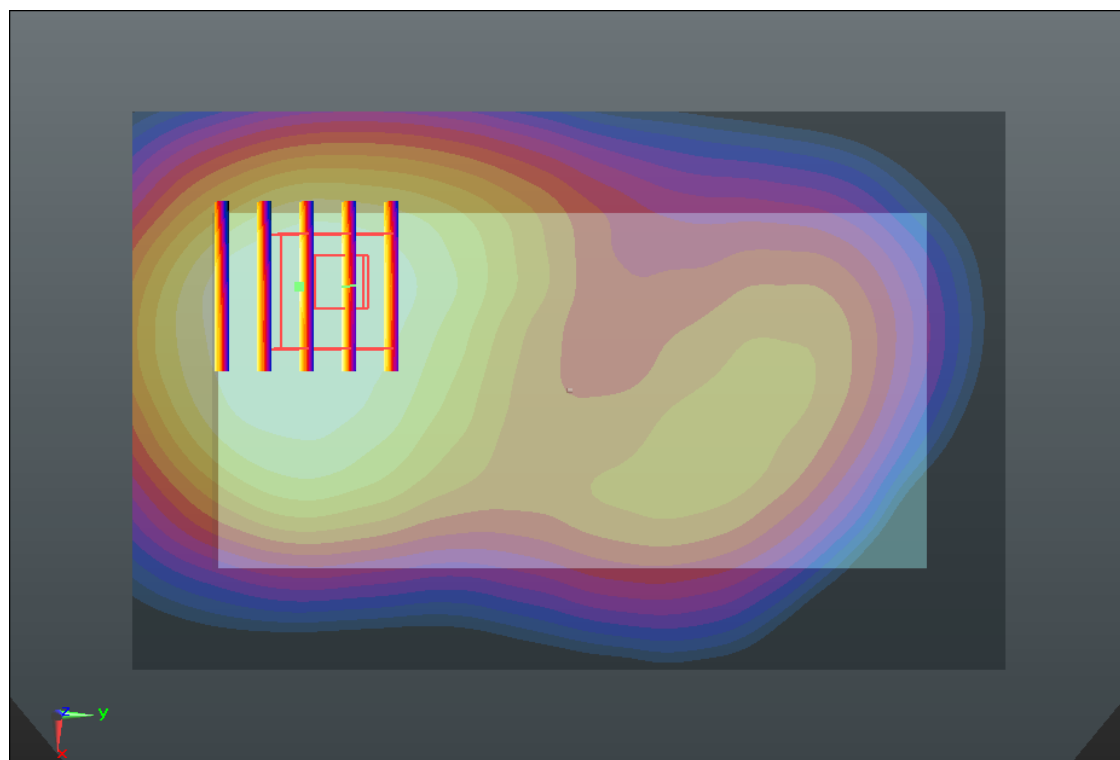

0 dB = 1.040mW/g

#40_GSM1900_GPRS (4 Tx slots)_Back 1cm_Ch810

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.561$ mho/m; $\epsilon_r =$

53.38; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.477 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.320 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.770 W/kg

SAR(1 g) = 1.110 mW/g; SAR(10 g) = 0.674 mW/g

Maximum value of SAR (measured) = 1.459 mW/g

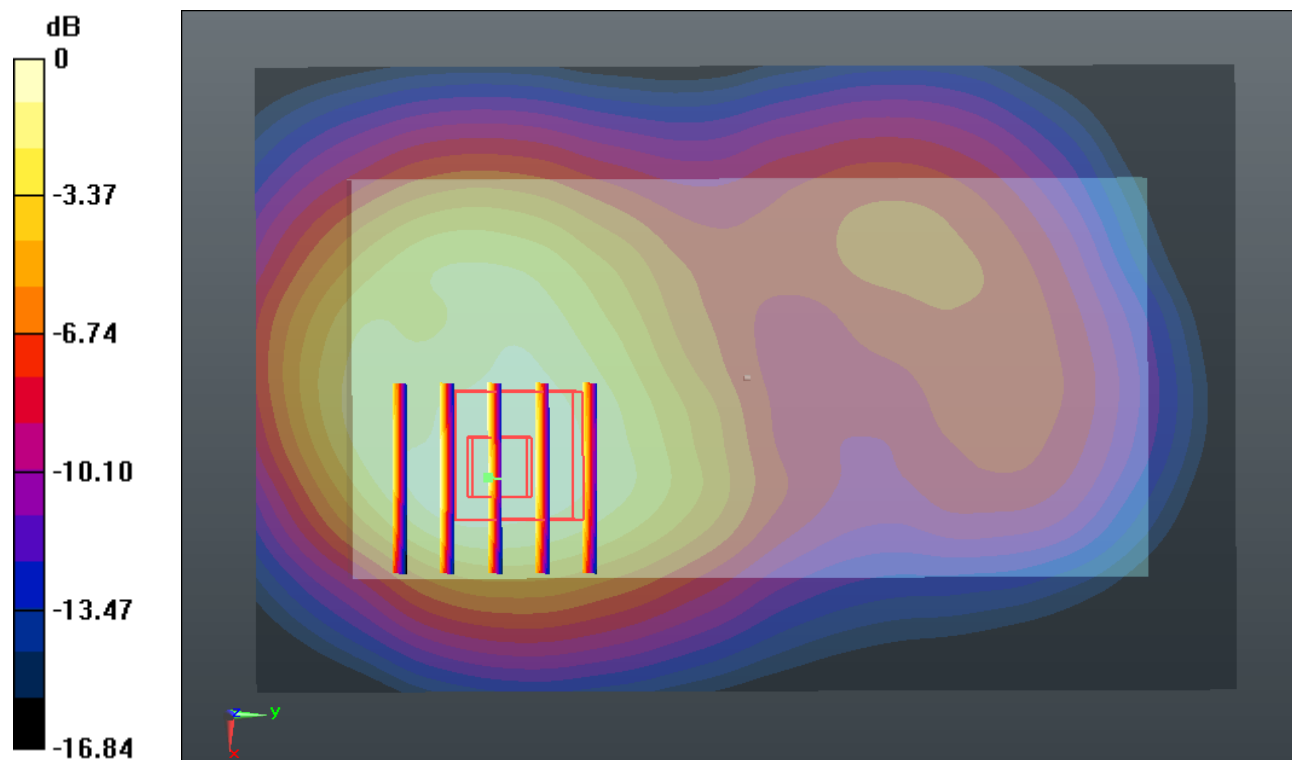

0 dB = 1.460mW/g

#41_GSM1900_GPRS (4 Tx slots)_Left Side 1cm_Ch810

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.561$ mho/m; $\epsilon_r =$

53.38; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.737 mW/g



Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.268 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.871 W/kg

SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.315 mW/g

Maximum value of SAR (measured) = 0.721 mW/g

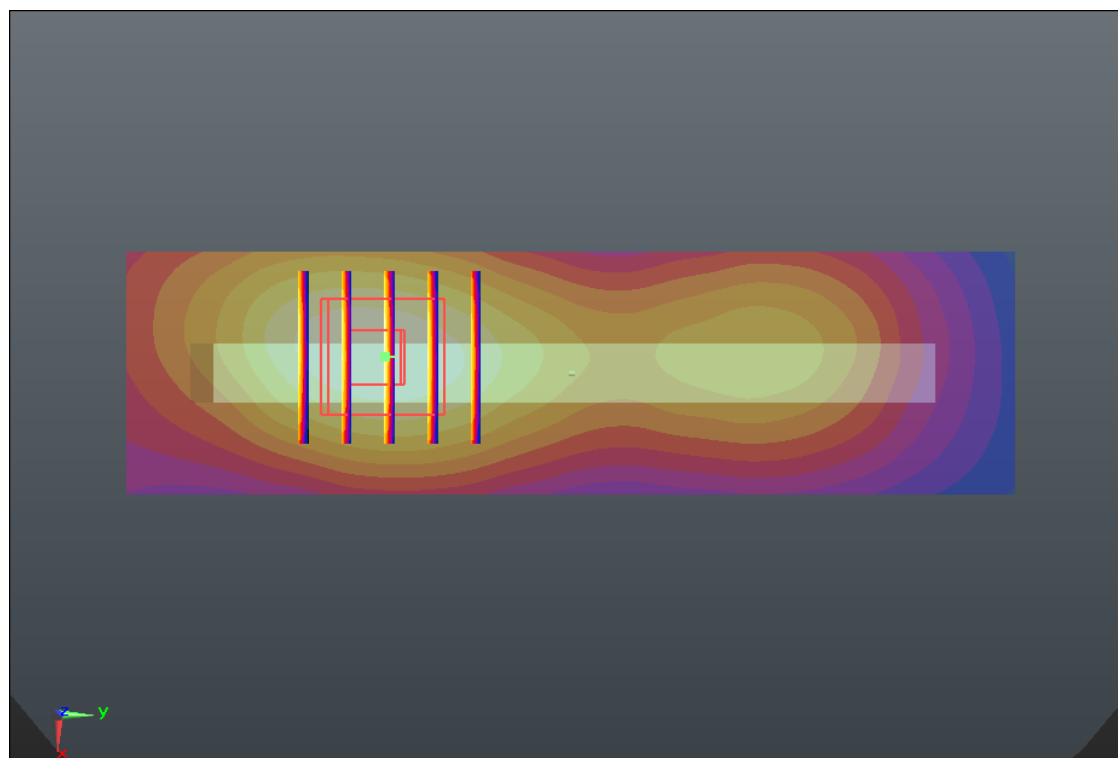

0 dB = 0.720mW/g

#42_GSM1900_GPRS (4 Tx slots)_Right Side 1cm_Ch810

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.561$ mho/m; $\epsilon_r =$

53.38; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.276 mW/g



Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.927 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.133 mW/g

Maximum value of SAR (measured) = 0.285 mW/g

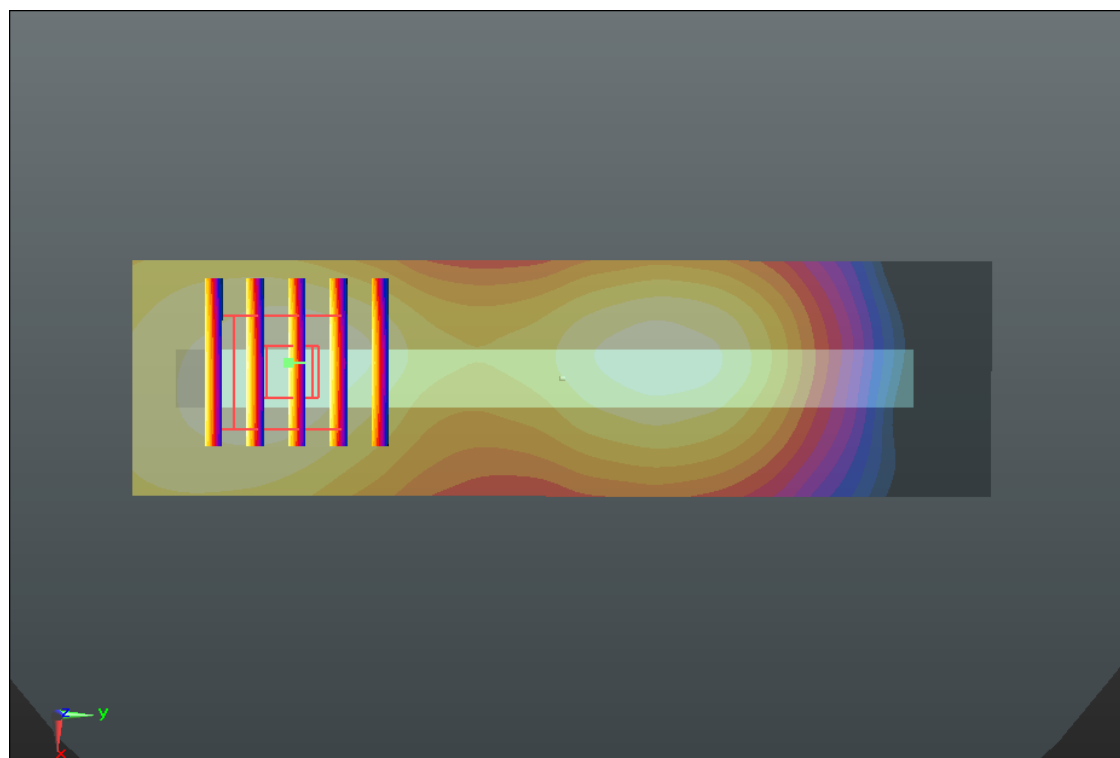

0 dB = 0.280mW/g

#43_GSM1900_GPRS (4 Tx slots)_Bottom Side 1cm_Ch810

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.561$ mho/m; $\epsilon_r =$

53.38; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.058 mW/g



Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.664 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.353 W/kg

SAR(1 g) = 0.807 mW/g; SAR(10 g) = 0.437 mW/g

Maximum value of SAR (measured) = 1.127 mW/g

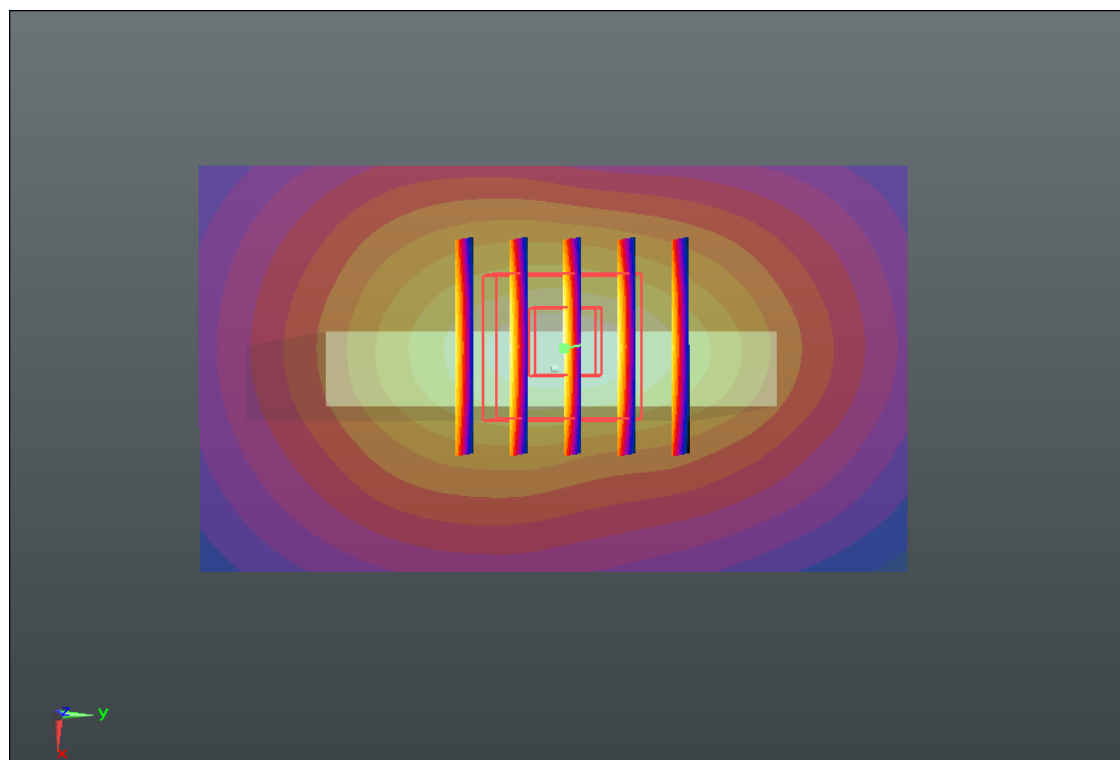

0 dB = 1.130mW/g

#45_GSM1900_GPRS (4 Tx slots)_Front 1cm_Ch512

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r =$

53.526; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.986 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.143 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.142 W/kg

SAR(1 g) = 0.740 mW/g; SAR(10 g) = 0.457 mW/g

Maximum value of SAR (measured) = 0.932 mW/g

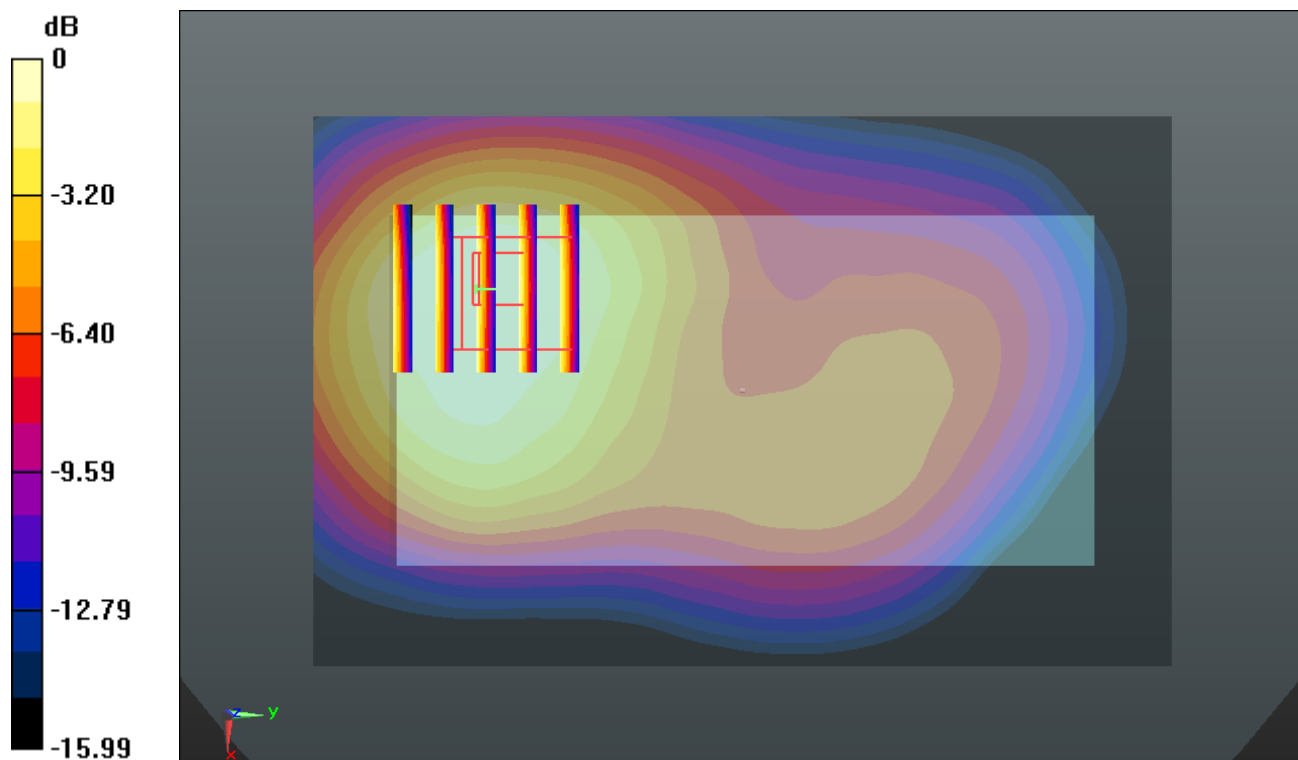

#46_GSM1900_GPRS (4 Tx slots)_Front 1cm_Ch661

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.526$ mho/m; $\epsilon_r =$

53.461; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.044 mW/g



Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.425 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.229 W/kg

SAR(1 g) = 0.793 mW/g; SAR(10 g) = 0.492 mW/g

Maximum value of SAR (measured) = 1.009 mW/g

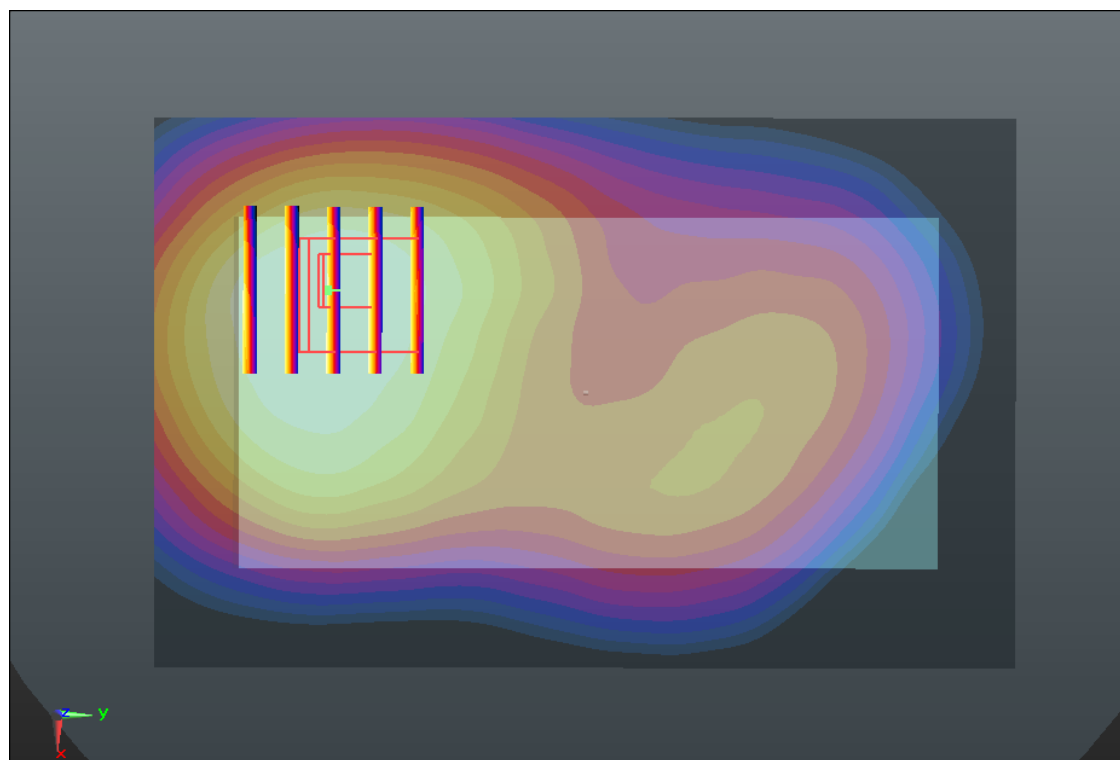

0 dB = 1.010mW/g

#47_GSM1900_GPRS (4 Tx slots)_Back 1cm_Ch512

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r =$

53.526; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.476 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.938 V/m; Power Drift = 0.0061 dB

Peak SAR (extrapolated) = 1.755 W/kg

SAR(1 g) = 1.100 mW/g; SAR(10 g) = 0.668 mW/g

Maximum value of SAR (measured) = 1.454 mW/g

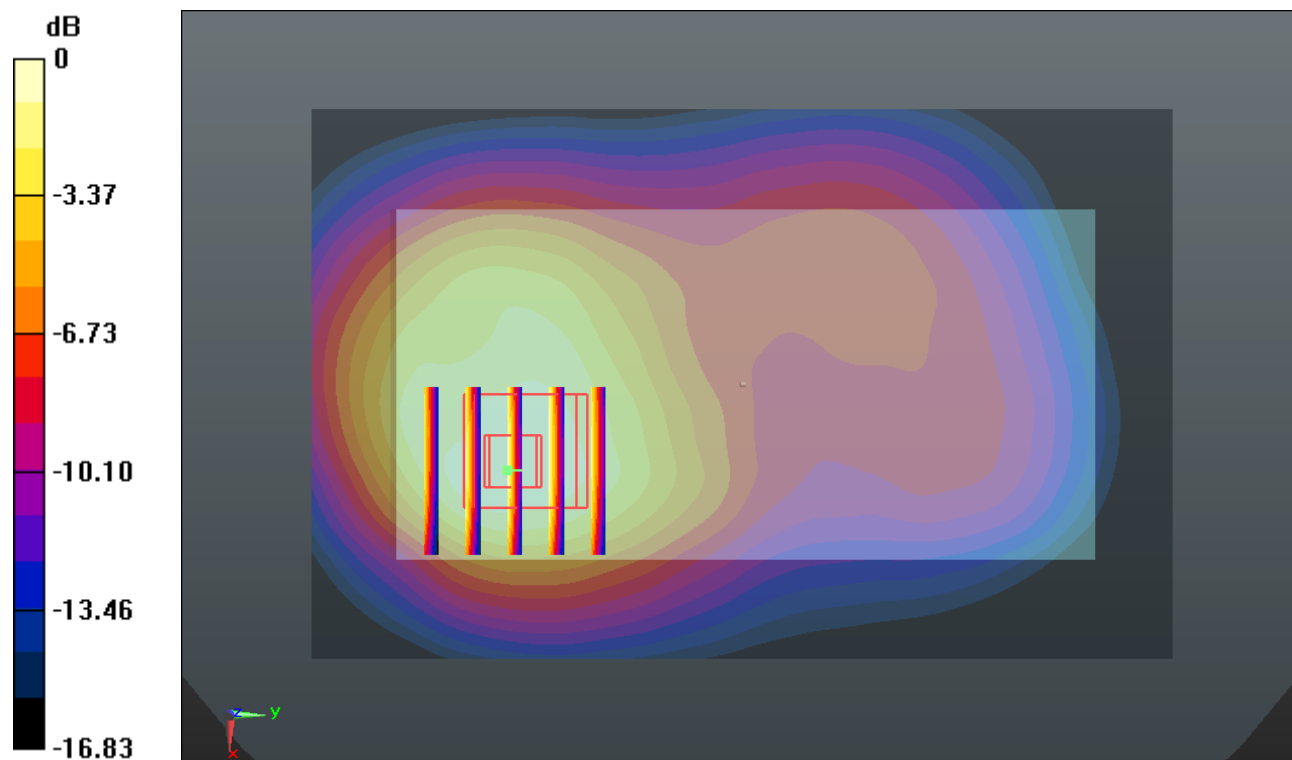

0 dB = 1.450mW/g

#48_GSM1900_GPRS (4 Tx slots)_Back 1cm_Ch661

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.526$ mho/m; $\epsilon_r =$

53.461; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.495 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.022 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.784 W/kg

SAR(1 g) = 1.120 mW/g; SAR(10 g) = 0.681 mW/g

Maximum value of SAR (measured) = 1.481 mW/g

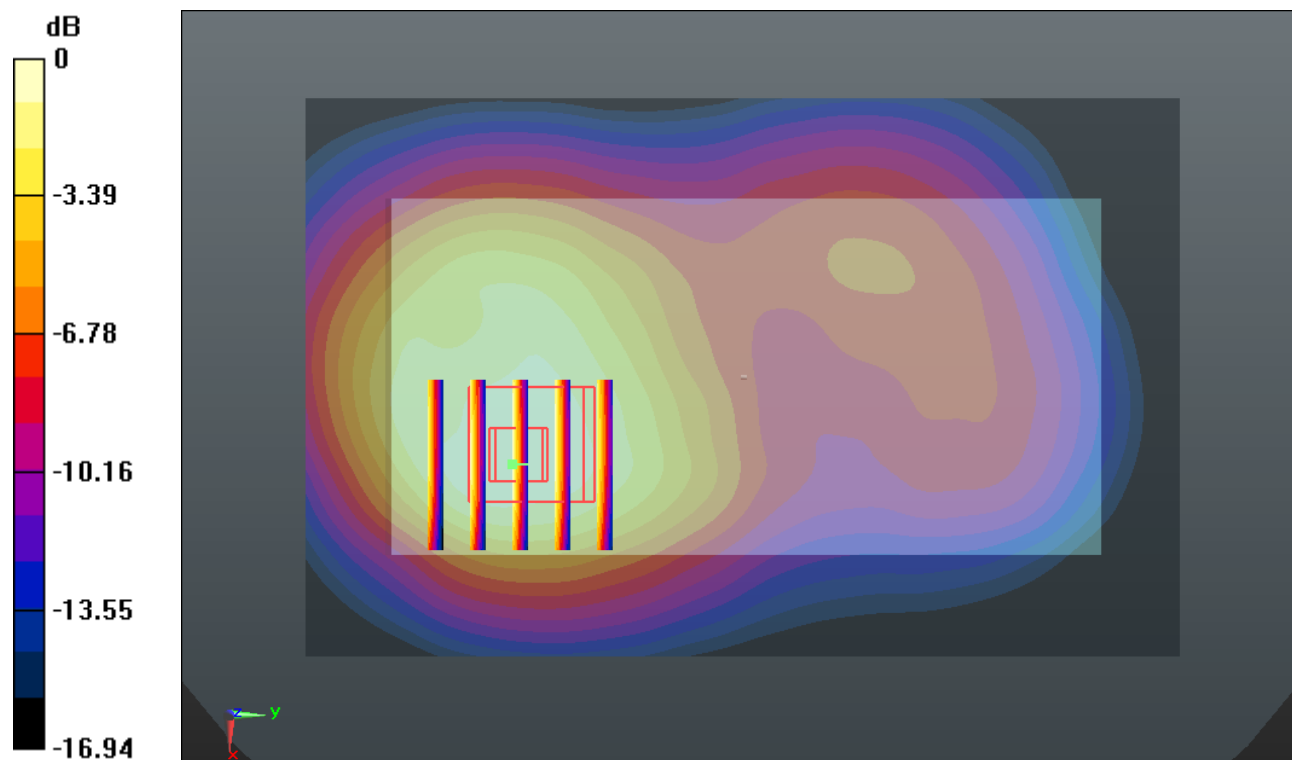

0 dB = 1.480mW/g

#49_GSM1900_GPRS (4 Tx slots)_Back 1cm_Ch661_Repeat SAR

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.526$ mho/m; $\epsilon_r =$

53.461; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.480 mW/g



Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.868 V/m; Power Drift = -0.0089 dB

Peak SAR (extrapolated) = 1.772 W/kg

SAR(1 g) = 1.110 mW/g; SAR(10 g) = 0.677 mW/g

Maximum value of SAR (measured) = 1.475 mW/g

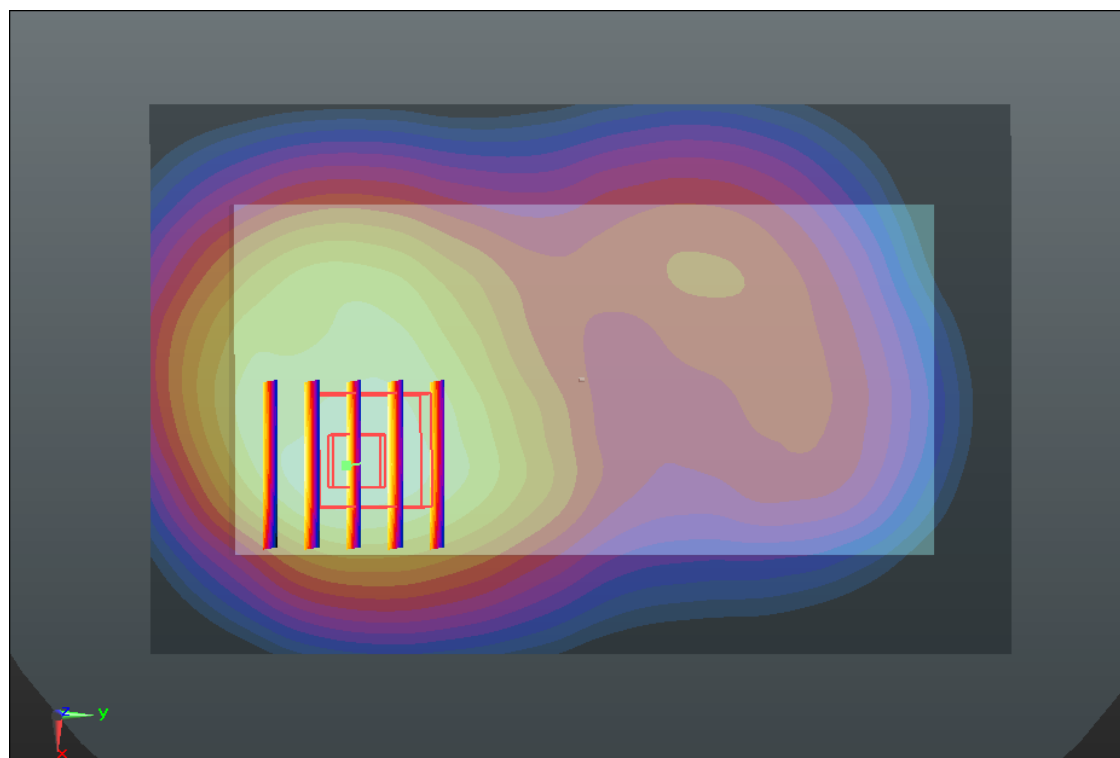

0 dB = 1.480mW/g

#50_GSM1900_GPRS (4 Tx slots)_Bottom Side 1cm_Ch512

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r =$

53.526; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.811 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.321 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.033 W/kg

SAR(1 g) = 0.629 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.870 mW/g

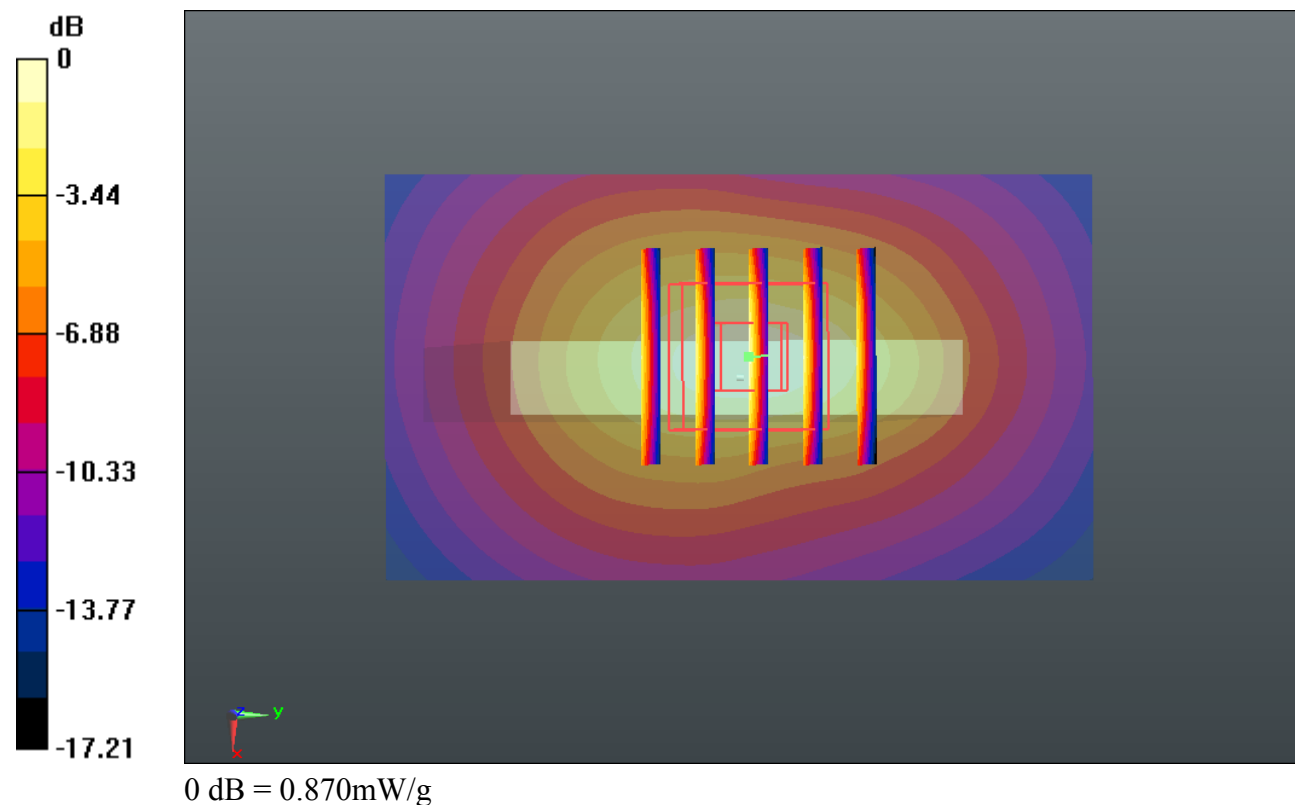

#51_GSM1900_GPRS (4 Tx slots)_Bottom Side 1cm_Ch661

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.526$ mho/m; $\epsilon_r =$

53.461; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.934 mW/g



Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.539 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.193 W/kg

SAR(1 g) = 0.720 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 1.000 mW/g

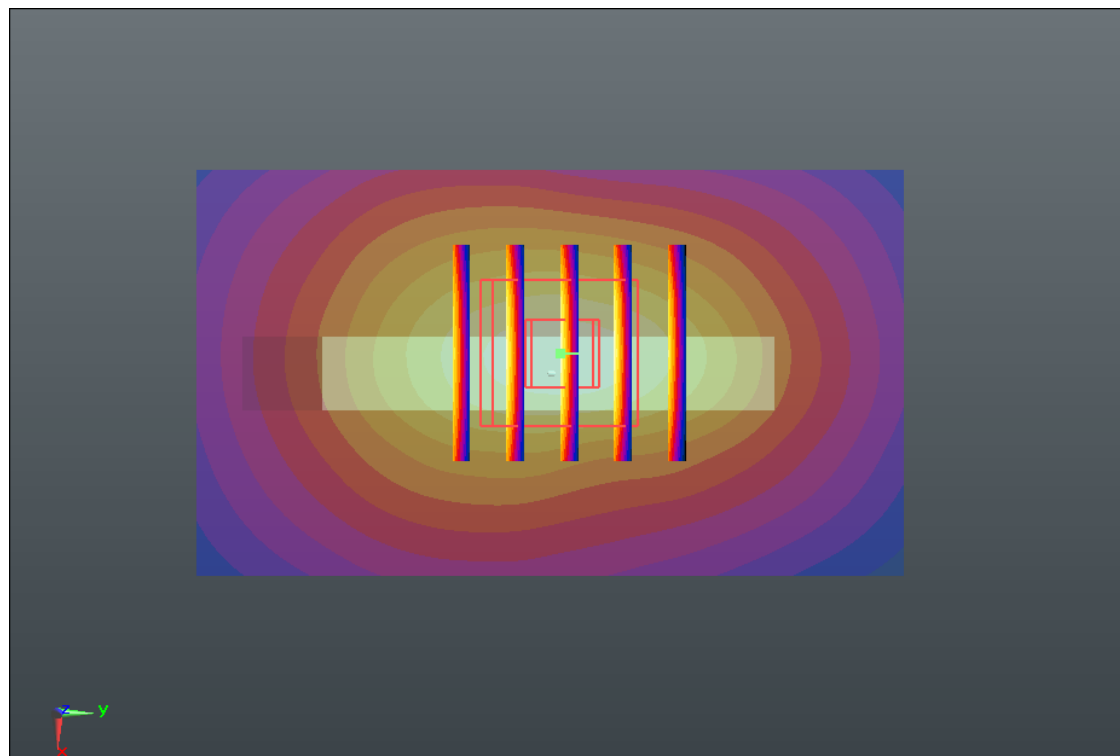

0 dB = 1.000mW/g

#52_GSM1900_GPRS (4 Tx slots)_Back 1cm_Ch512_Headset

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r =$

53.526; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.414 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.447 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 1.667 W/kg

SAR(1 g) = 1.060 mW/g; SAR(10 g) = 0.644 mW/g

Maximum value of SAR (measured) = 1.386 mW/g

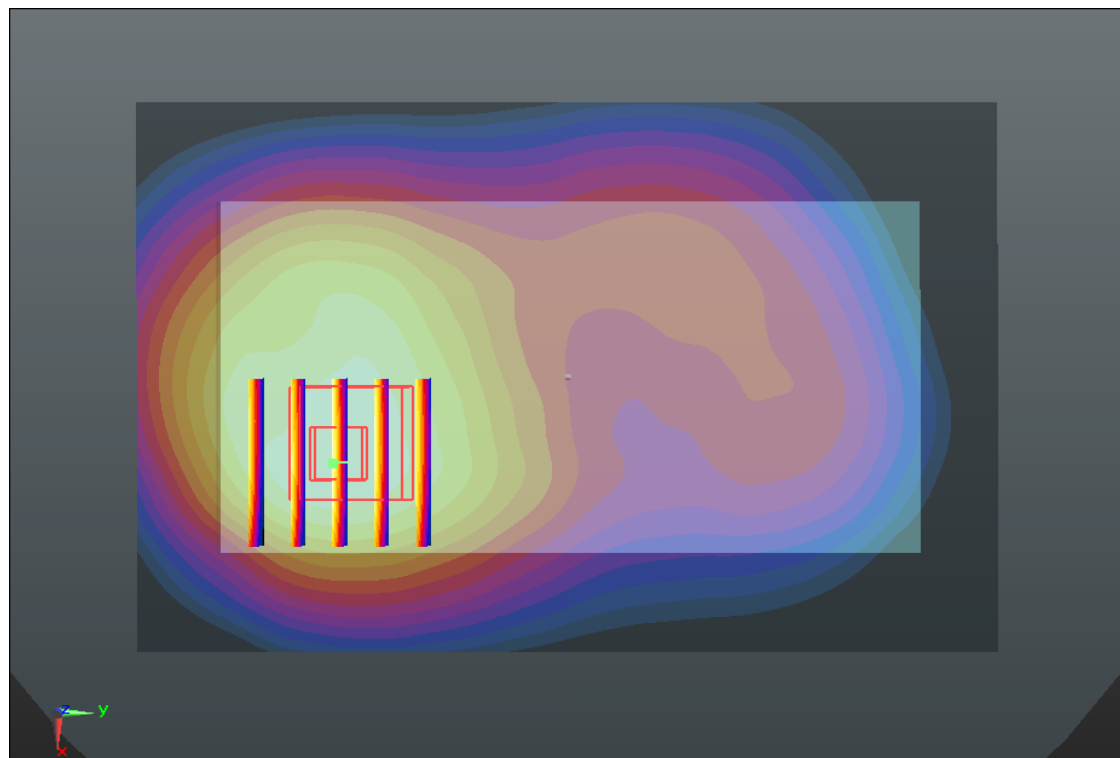

0 dB = 1.390mW/g

#53_GSM1900_GPRS (4 Tx slots)_Back 1cm_Ch661_Headset

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.526$ mho/m; $\epsilon_r =$

53.461; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.426 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.894 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.694 W/kg

SAR(1 g) = 1.080 mW/g; SAR(10 g) = 0.661 mW/g

Maximum value of SAR (measured) = 1.406 mW/g

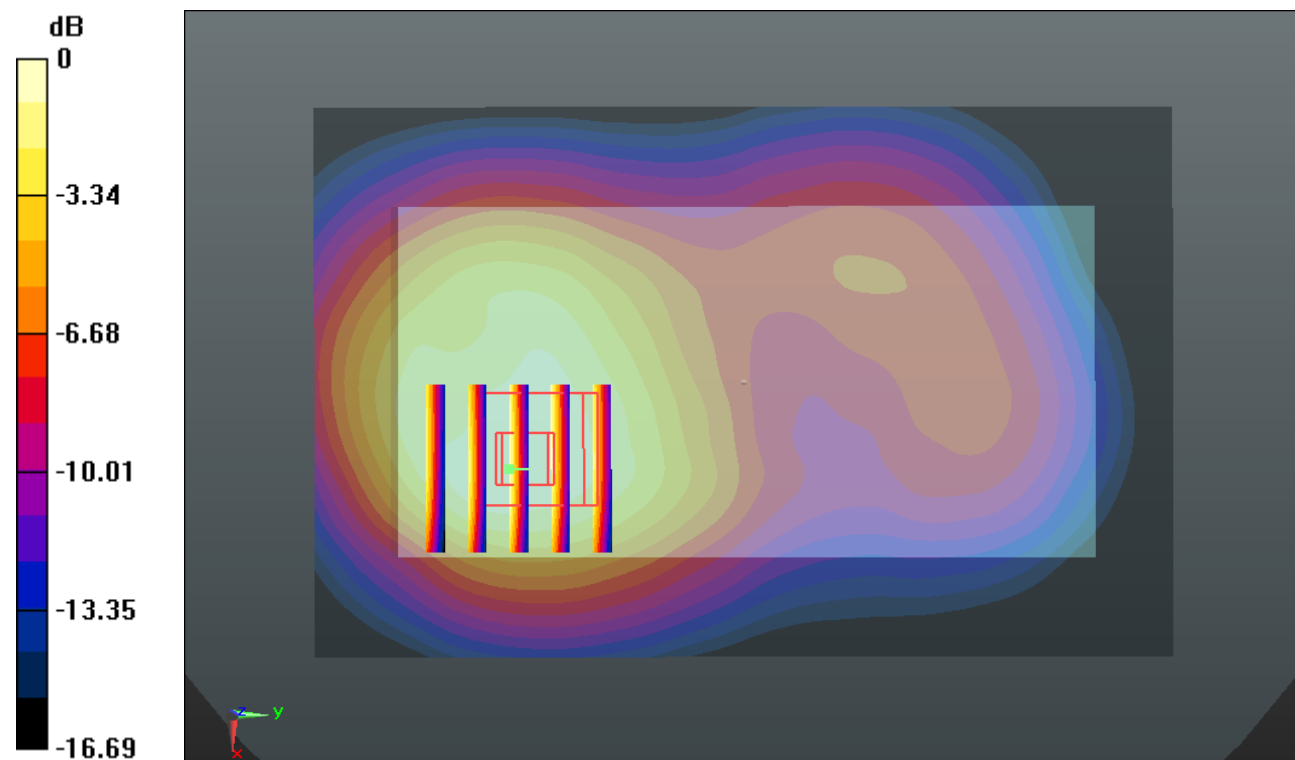

0 dB = 1.410mW/g

#54_GSM1900_GPRS (4 Tx slots)_Back 1cm_Ch810_Headset

Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_140401 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.561 \text{ mho/m}$; $\epsilon_r =$

53.38; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.410 mW/g

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.356 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.687 W/kg

SAR(1 g) = 1.060 mW/g ; SAR(10 g) = 0.651 mW/g

Maximum value of SAR (measured) = 1.396 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.356 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.686 W/kg

SAR(1 g) = 0.985 mW/g ; SAR(10 g) = 0.540 mW/g

Maximum value of SAR (measured) = 1.390 mW/g

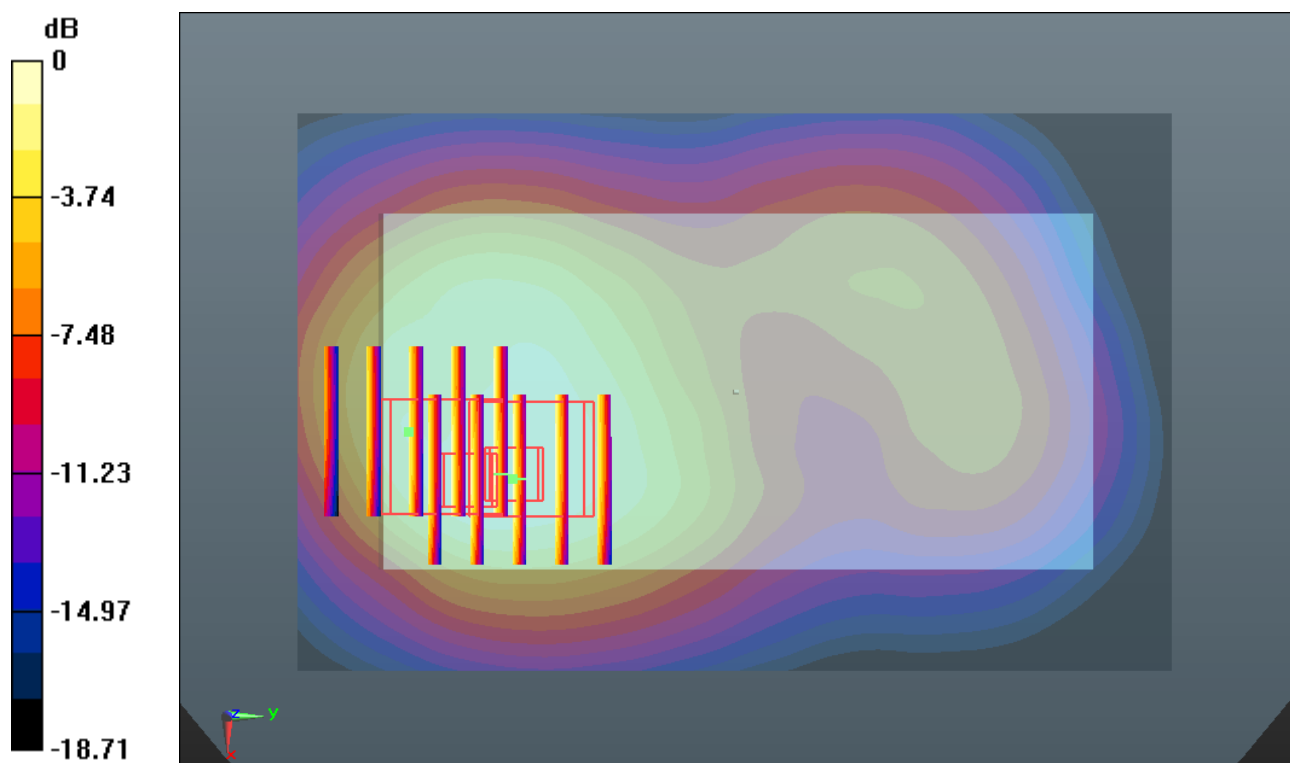

0 dB = 1.390mW/g

#55_WCDMA Band V_RMC12.2K_Front 1cm_Ch4132

Communication System: UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_140404 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r =$

54.936; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch4132/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.432 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.704 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.382 mW/g; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 0.433 mW/g

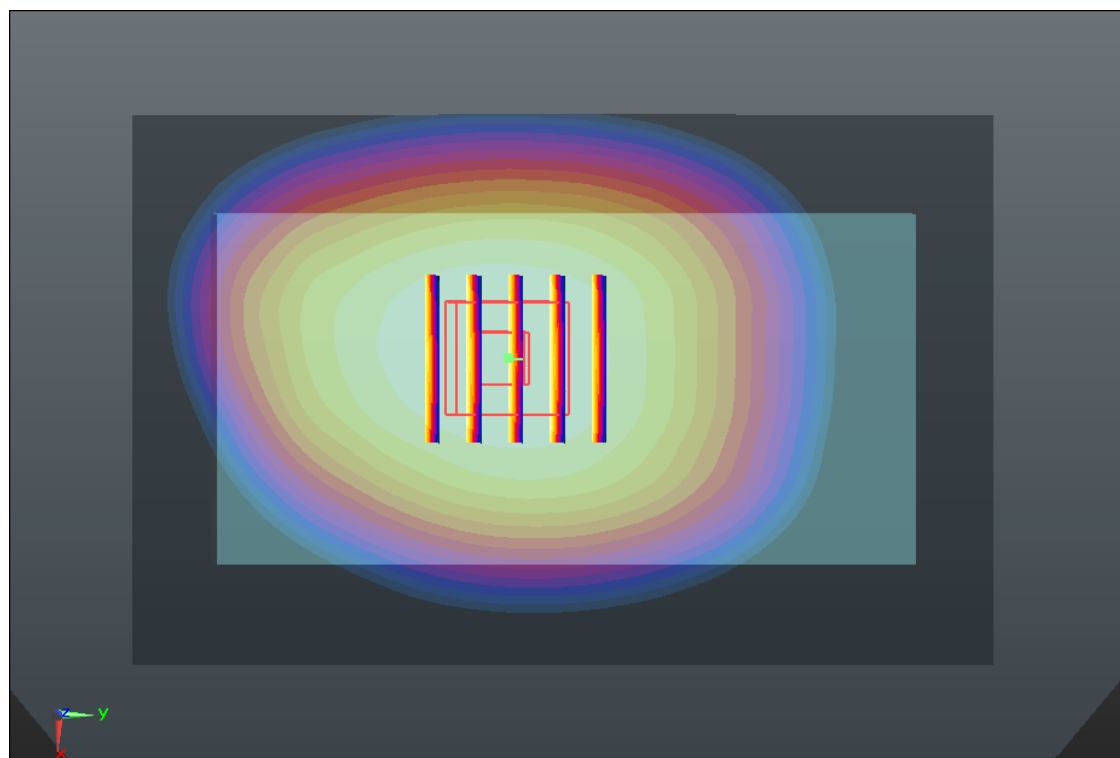

0 dB = 0.430mW/g

#56_WCDMA Band V_RMC12.2K_Back 1cm_Ch4132

Communication System: UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_140404 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r =$

54.936; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch4132/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.780 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.415 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.891 W/kg

SAR(1 g) = 0.703 mW/g; SAR(10 g) = 0.532 mW/g

Maximum value of SAR (measured) = 0.805 mW/g

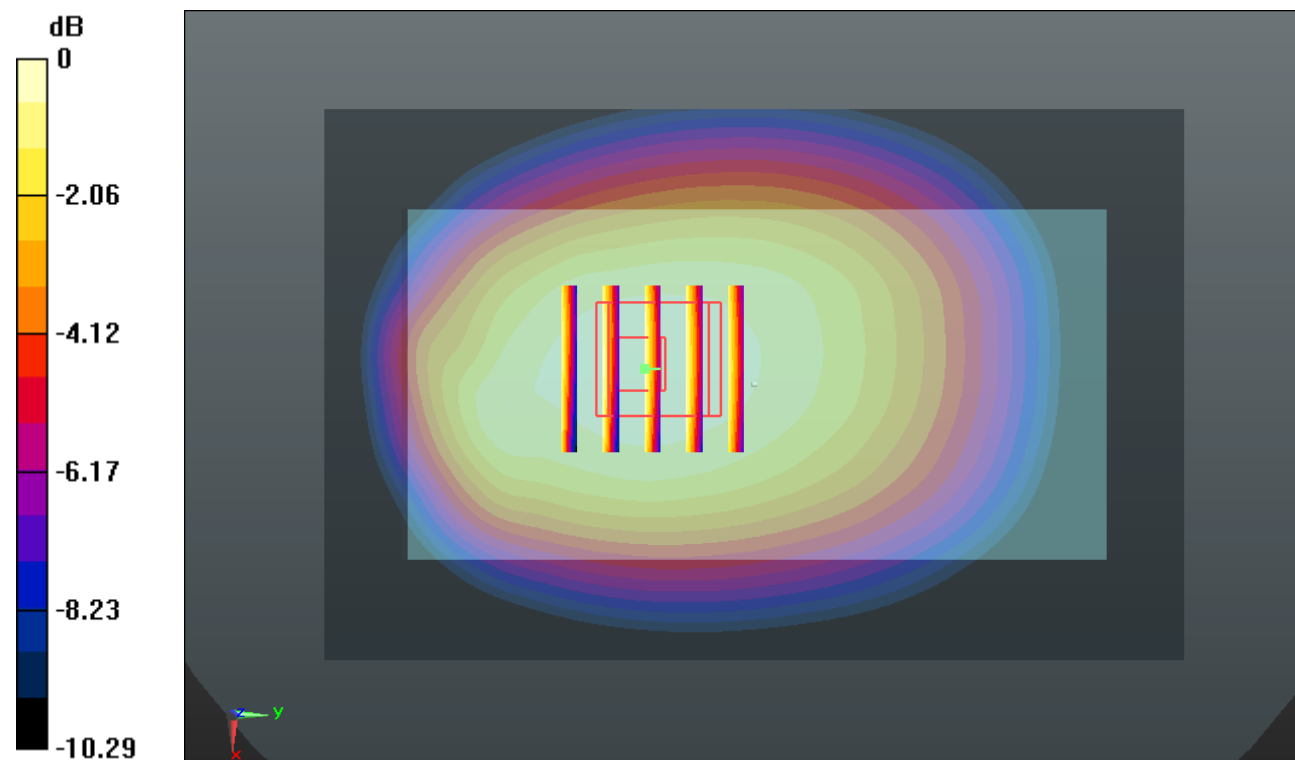

0 dB = 0.800mW/g

#57_WCDMA Band V_RMC12.2K_Left Side 1cm_Ch4132

Communication System: UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_140404 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r =$

54.936; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch4132/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.526 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.954 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.300 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

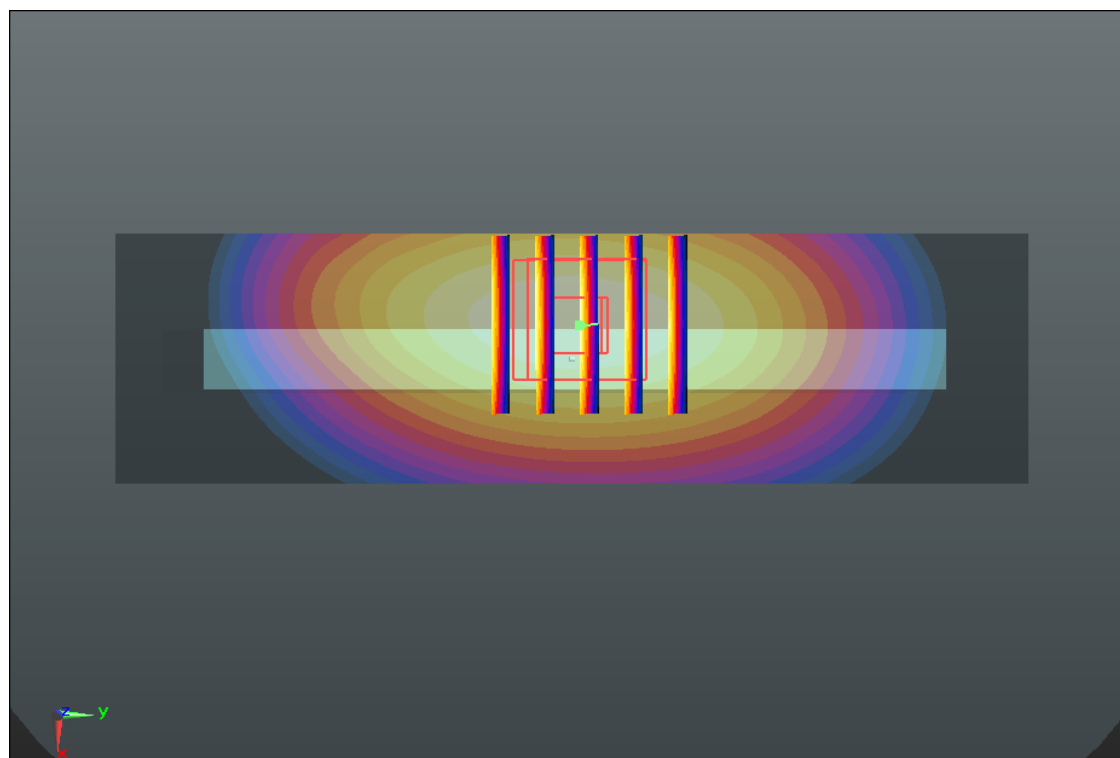

0 dB = 0.530mW/g

#58_WCDMA Band V_RMC12.2K_Right Side 1cm_Ch4132

Communication System: UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_140404 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r =$

54.936; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch4132/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.501 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.162 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.584 W/kg

SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.287 mW/g

Maximum value of SAR (measured) = 0.508 mW/g

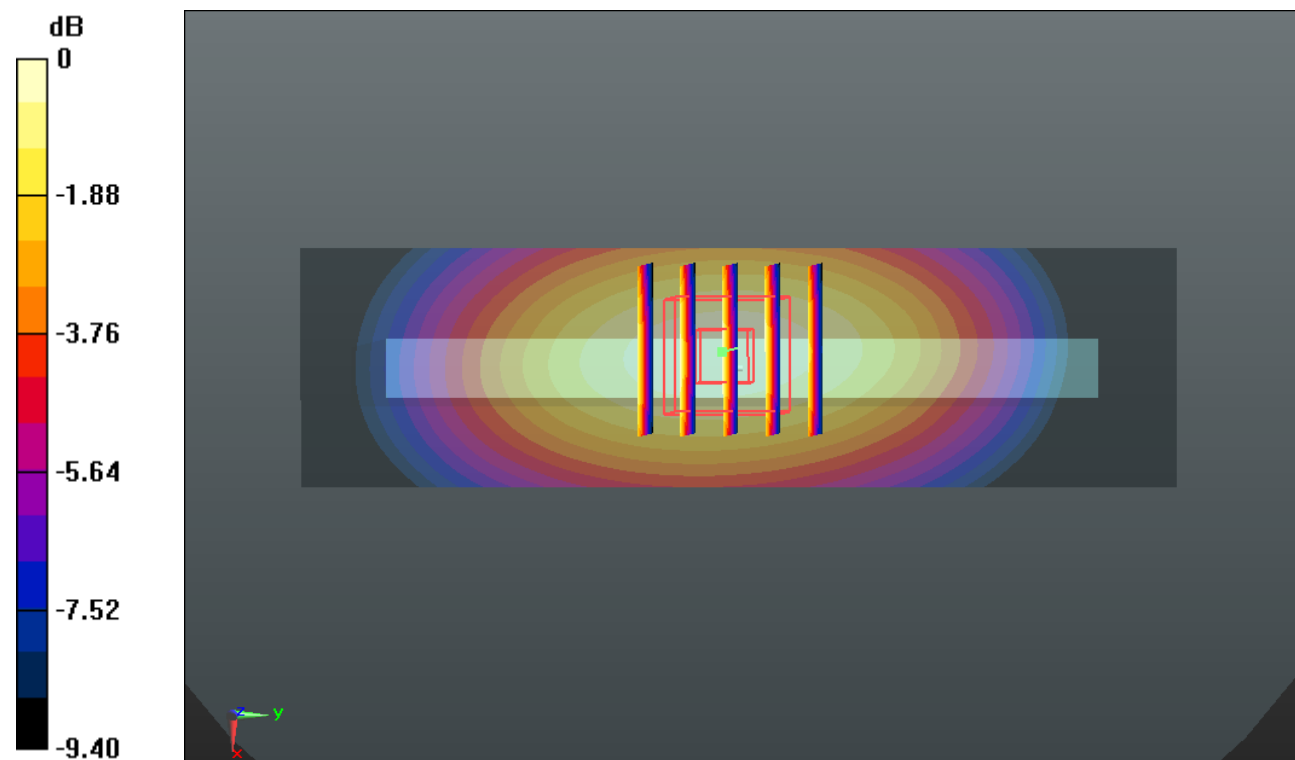

0 dB = 0.510mW/g

#59_WCDMA Band V_RMC12.2K_Bottom Side 1cm_Ch4132

Communication System: UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_140404 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r =$

54.936; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch4132/Area Scan (31x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.090 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.294 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.097 mW/g

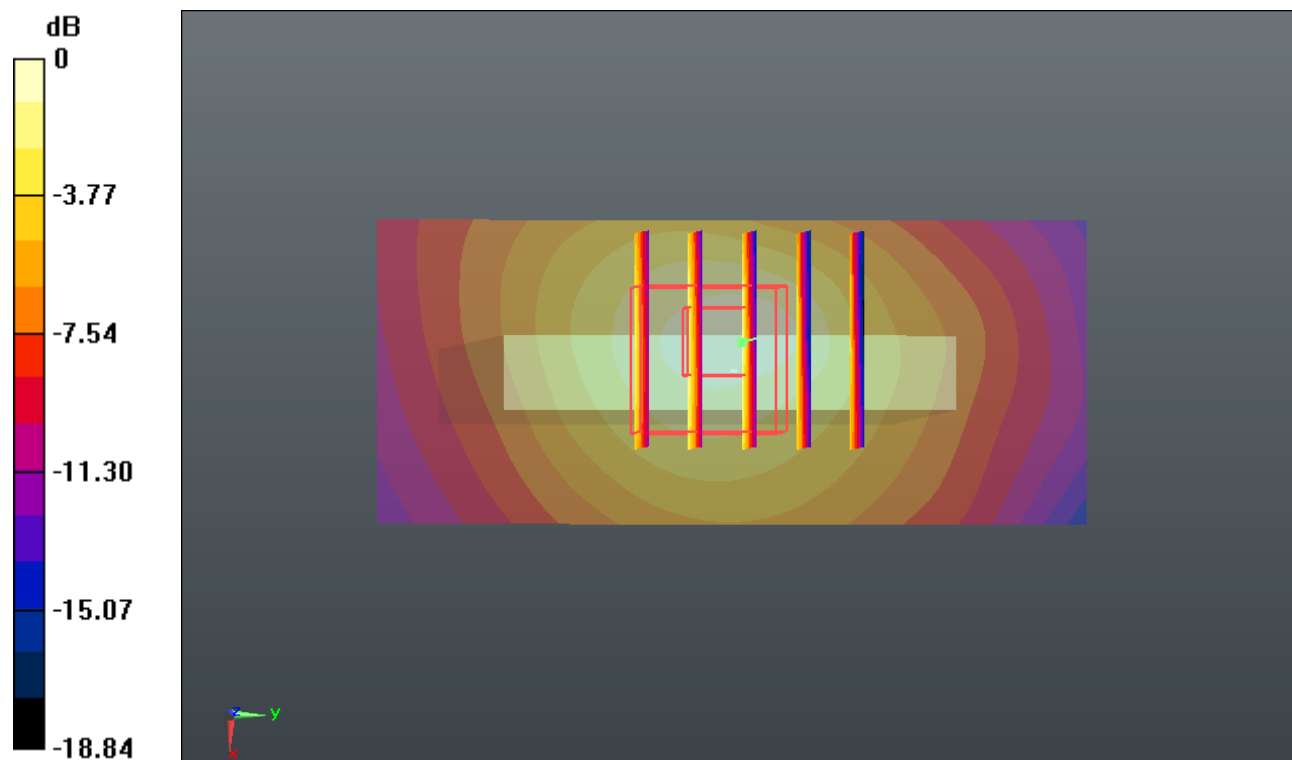

0 dB = 0.100mW/g

#60_WCDMA Band II_RMC12.2K_Front 1cm_Ch9538

Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.559$ mho/m; $\epsilon_r =$

53.386; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.979 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.805 V/m; Power Drift = -0.0018 dB

Peak SAR (extrapolated) = 1.151 W/kg

SAR(1 g) = 0.741 mW/g; SAR(10 g) = 0.461 mW/g

Maximum value of SAR (measured) = 0.942 mW/g

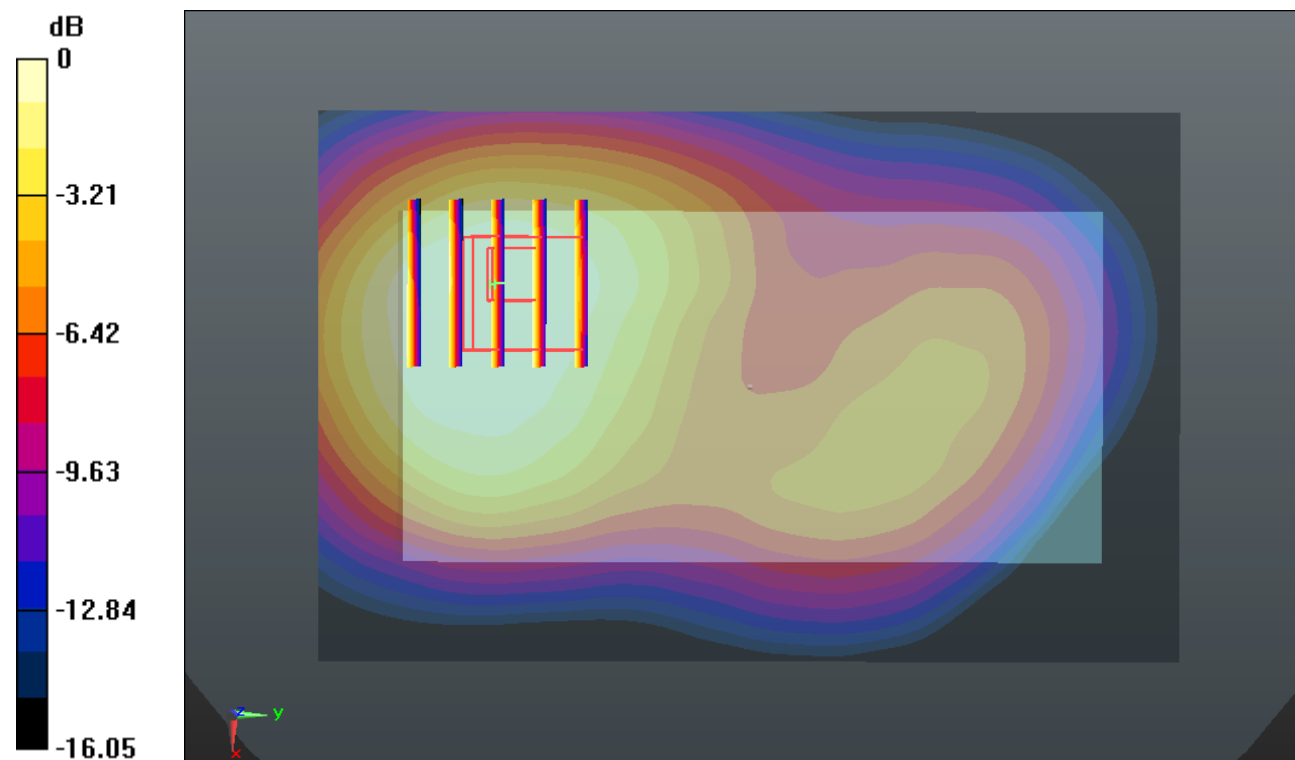

0 dB = 0.940mW/g

#61_WCDMA Band II_RMC12.2K_Back 1cm_Ch9538

Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.559$ mho/m; $\epsilon_r =$

53.386; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.347 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.607 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.599 W/kg

SAR(1 g) = 1.000 mW/g; SAR(10 g) = 0.615 mW/g

Maximum value of SAR (measured) = 1.315 mW/g

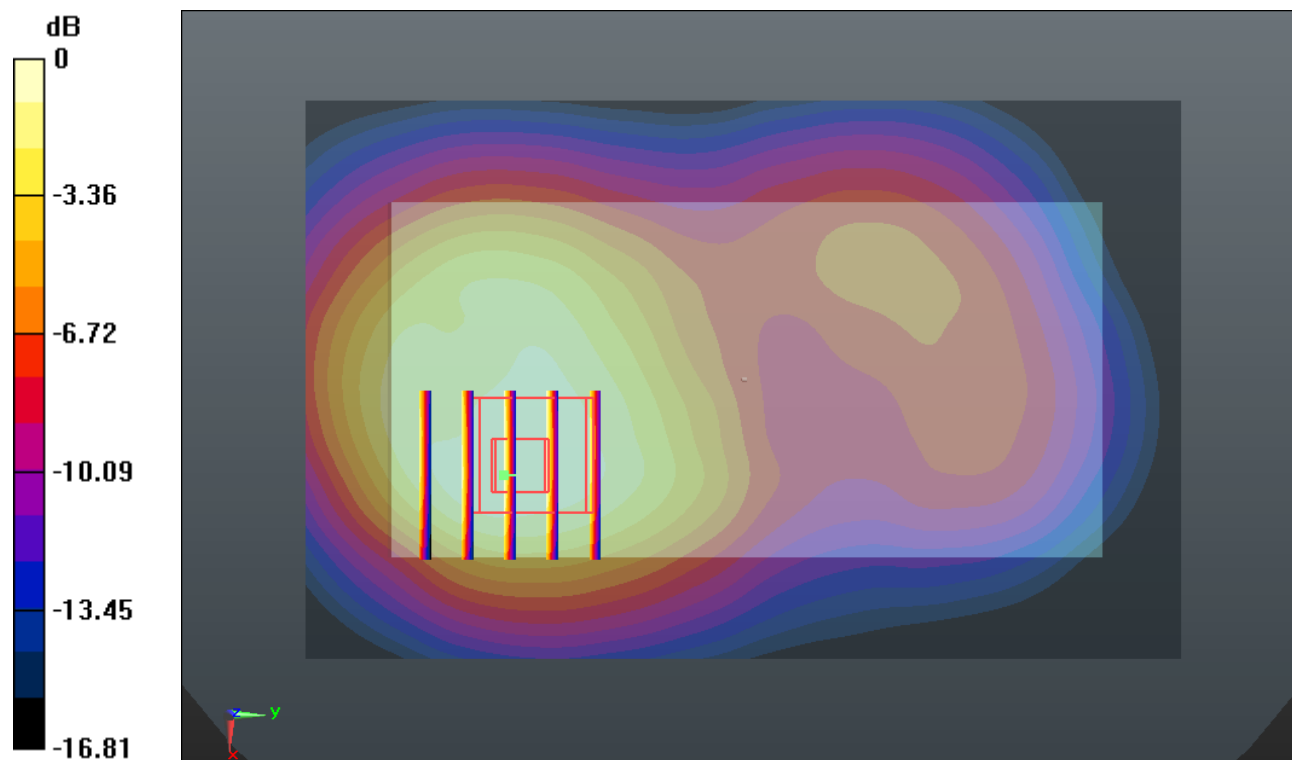

0 dB = 1.320mW/g

#62_WCDMA Band II_RMC12.2K_Left Side 1cm_Ch9538

Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.559$ mho/m; $\epsilon_r =$

53.386; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.690 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.822 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.815 W/kg

SAR(1 g) = 0.509 mW/g; SAR(10 g) = 0.294 mW/g

Maximum value of SAR (measured) = 0.675 mW/g

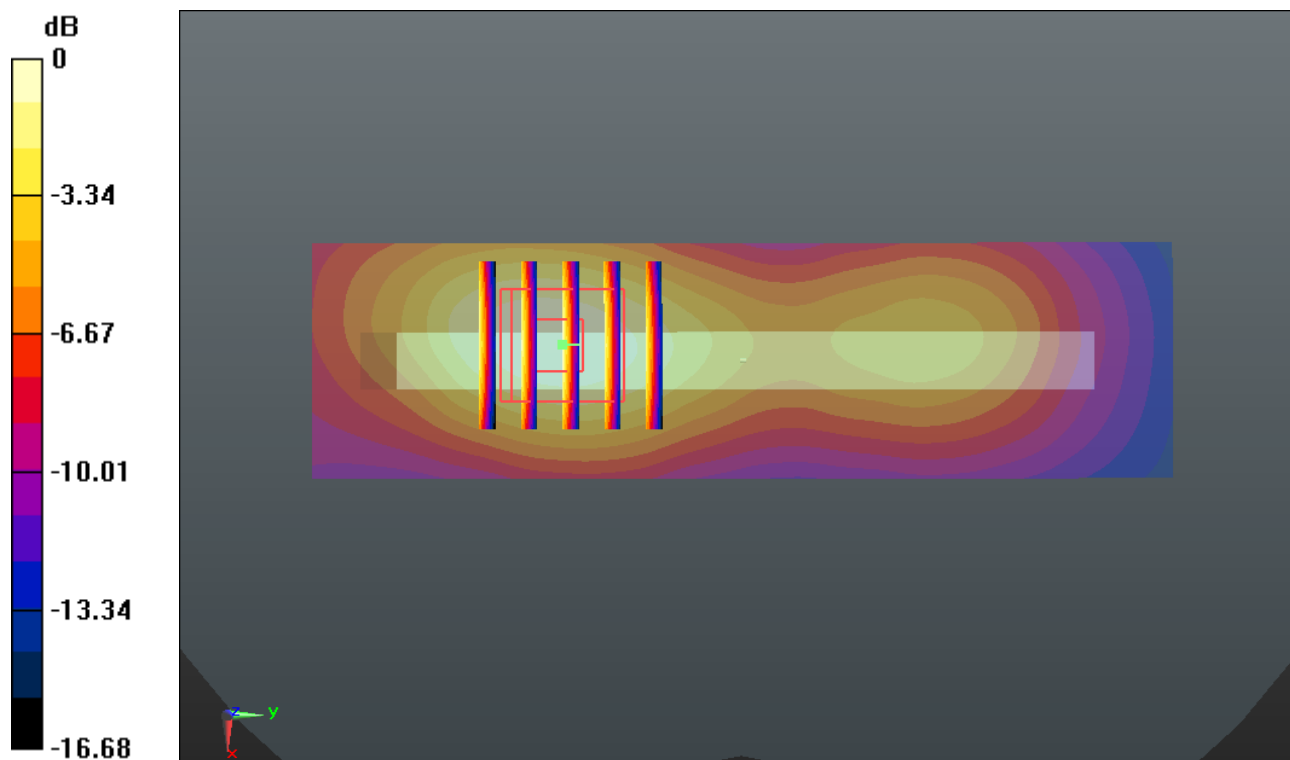

0 dB = 0.680mW/g

#63_WCDMA Band II_RMC12.2K_Right Side 1cm_Ch9538

Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.559$ mho/m; $\epsilon_r =$

53.386; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.254 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.530 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.260 mW/g

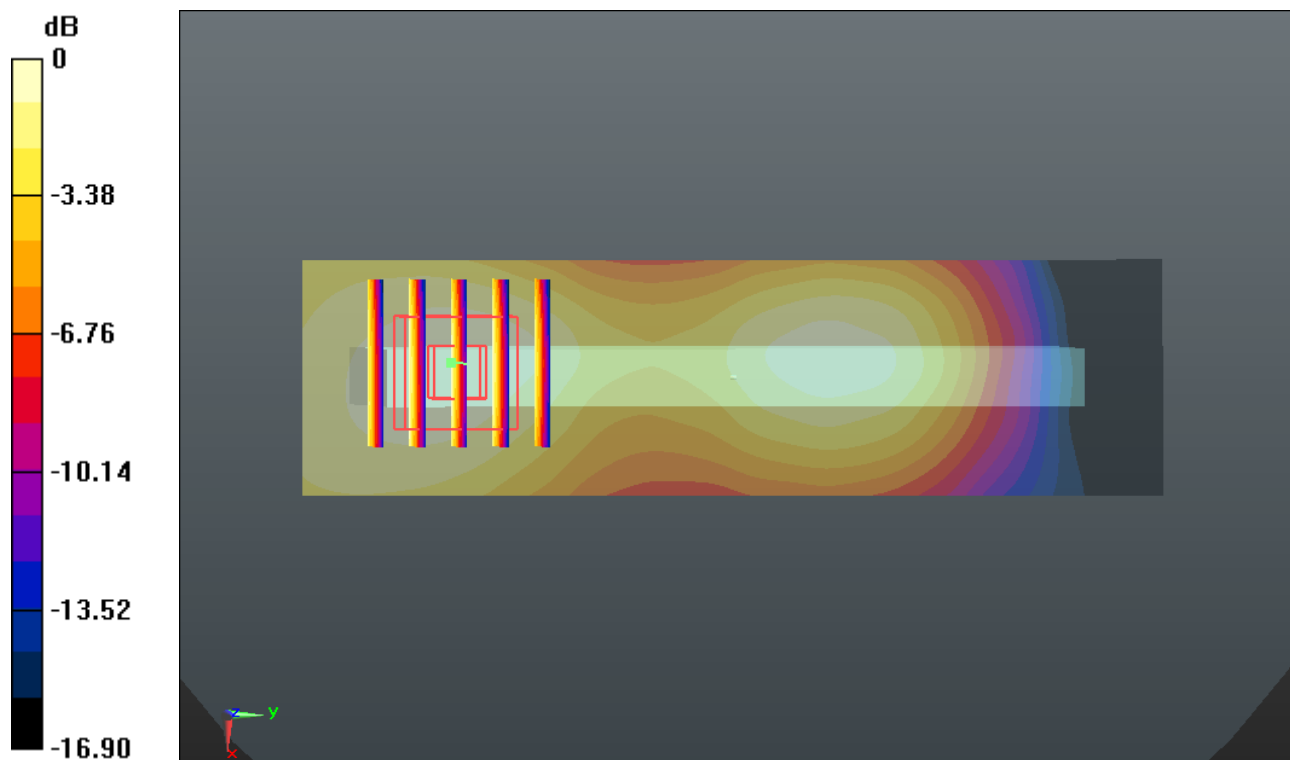

0 dB = 0.260mW/g

#64_WCDMA Band II_RMC12.2K_Bottom Side 1cm_Ch9538

Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.559$ mho/m; $\epsilon_r =$

53.386; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.973 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.816 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.245 W/kg

SAR(1 g) = 0.746 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 1.031 mW/g

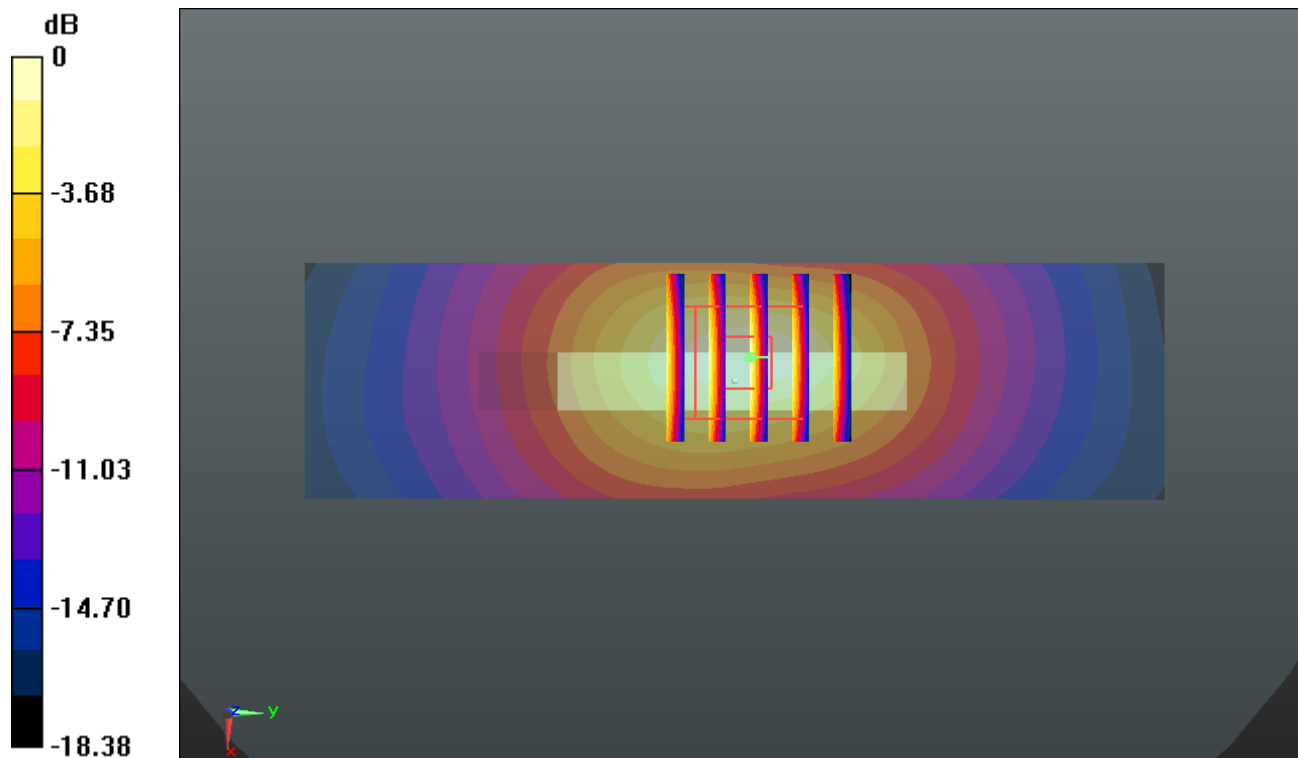

0 dB = 1.030mW/g

#65_WCDMA Band II_RMC12.2K_Front 1cm_Ch9262

Communication System: UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.493$ mho/m; $\epsilon_r =$

53.518; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.912 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.740 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.062 W/kg

SAR(1 g) = 0.686 mW/g; SAR(10 g) = 0.424 mW/g

Maximum value of SAR (measured) = 0.865 mW/g

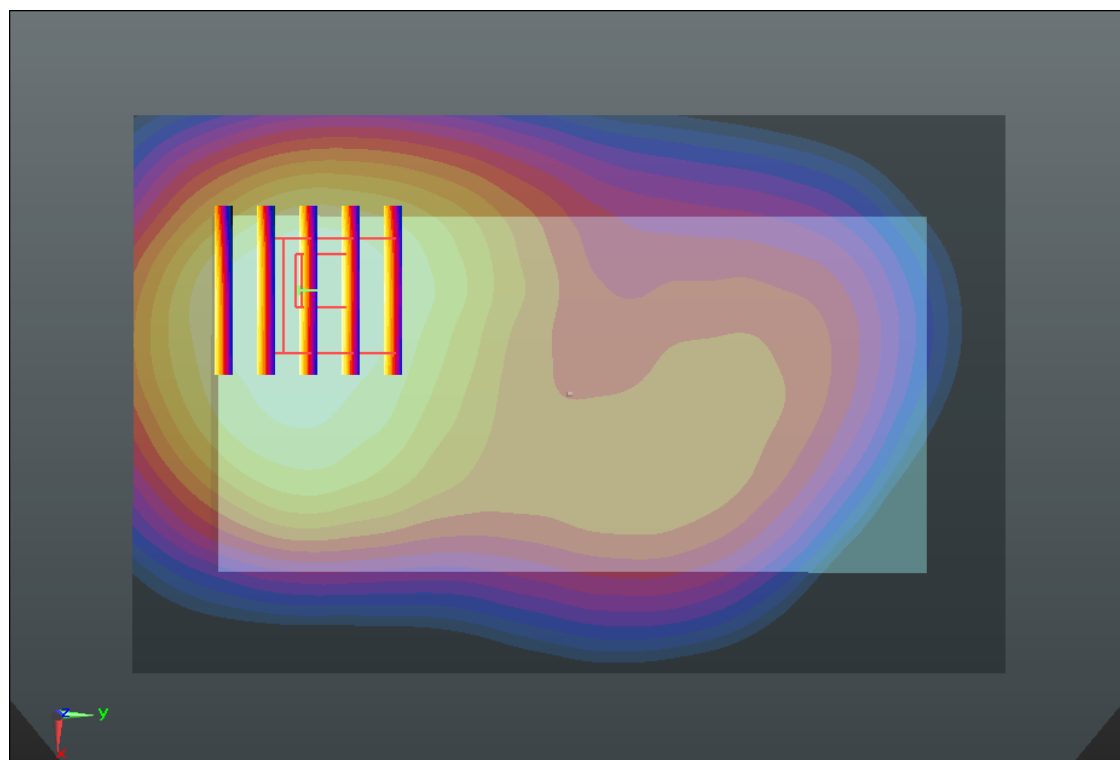

0 dB = 0.870mW/g

#66_WCDMA Band II_RMC12.2K_Front 1cm_Ch9400

Communication System: UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.526$ mho/m; $\epsilon_r =$

53.461; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9400/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.940 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.945 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.098 W/kg

SAR(1 g) = 0.709 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 0.903 mW/g

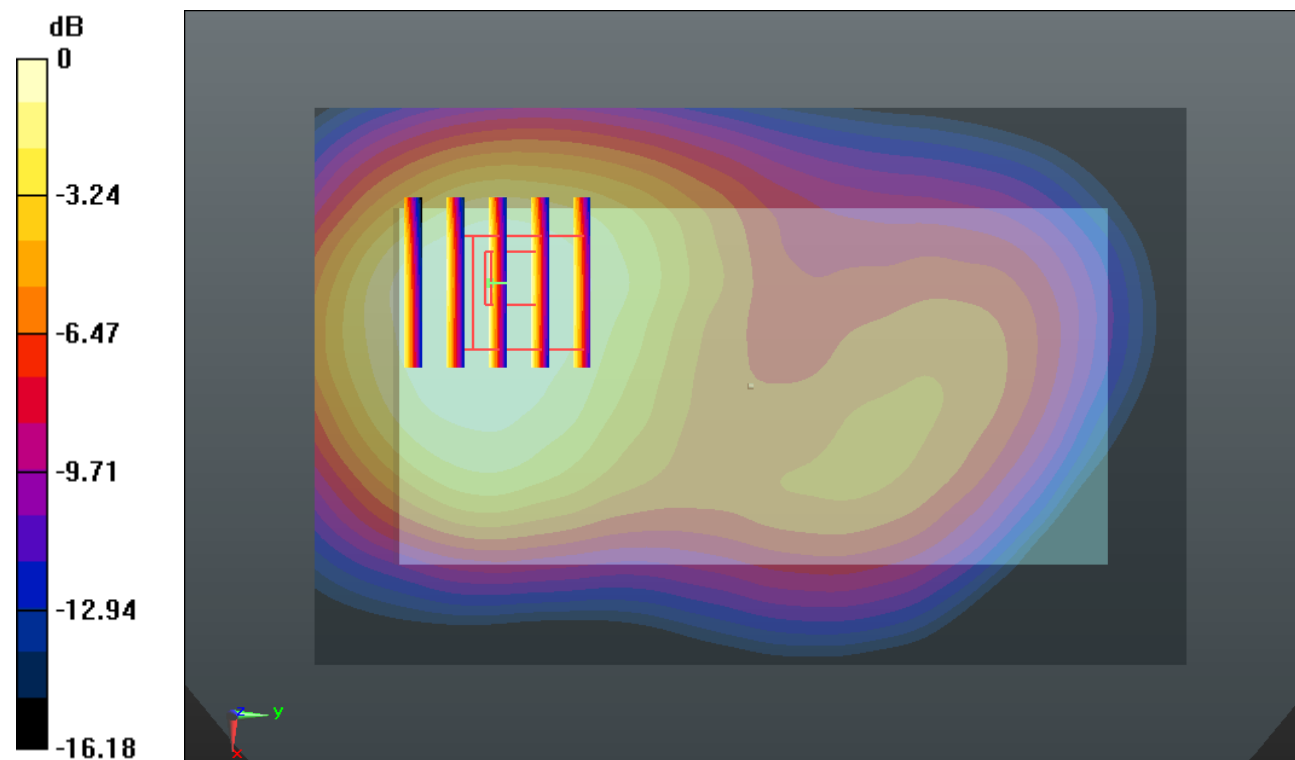

0 dB = 0.900mW/g

#67_WCDMA Band II_RMC12.2K_Back 1cm_Ch9262

Communication System: UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.493$ mho/m; $\epsilon_r =$

53.518; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.376 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.542 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.624 W/kg

SAR(1 g) = 1.030 mW/g; SAR(10 g) = 0.625 mW/g

Maximum value of SAR (measured) = 1.336 mW/g

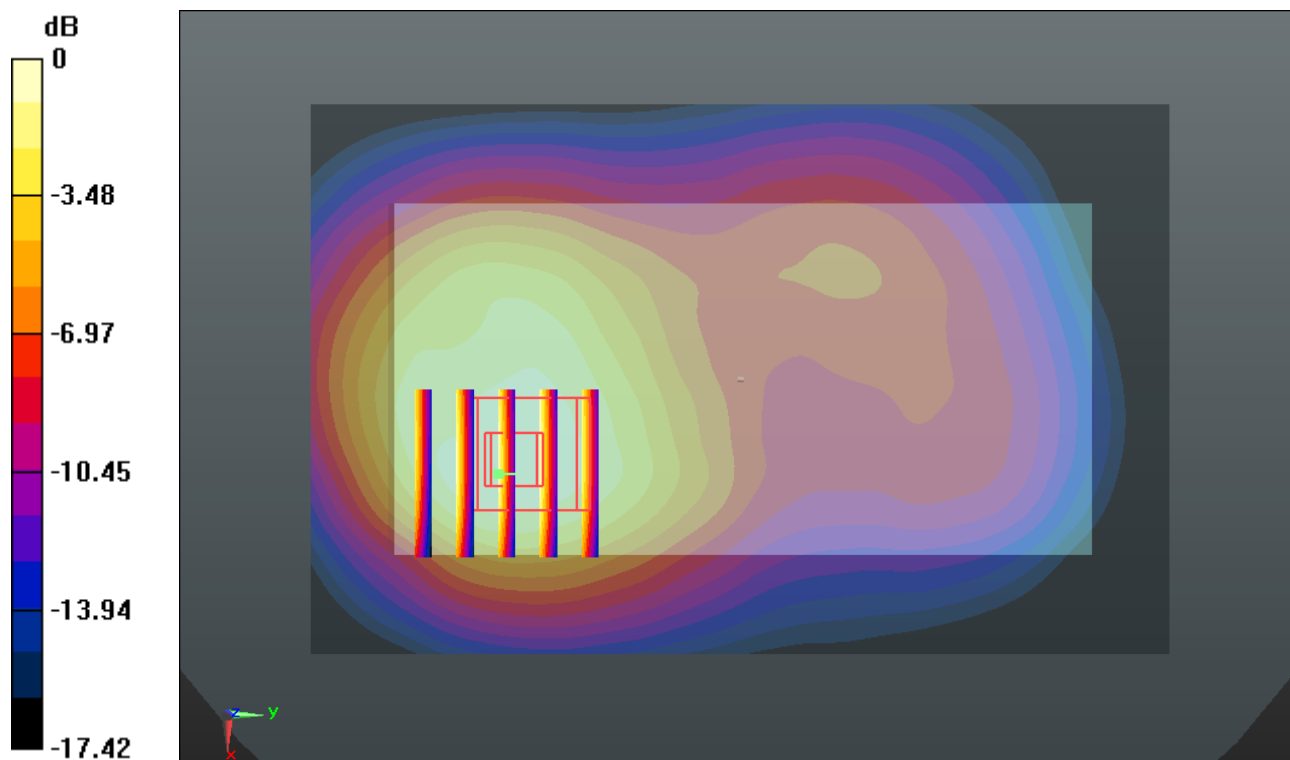

0 dB = 1.340mW/g

#68_WCDMA Band II_RMC12.2K_Back 1cm_Ch9400

Communication System: UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.526$ mho/m; $\epsilon_r =$

53.461; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9400/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.426 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.781 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.673 W/kg

SAR(1 g) = 1.050 mW/g; SAR(10 g) = 0.643 mW/g

Maximum value of SAR (measured) = 1.385 mW/g

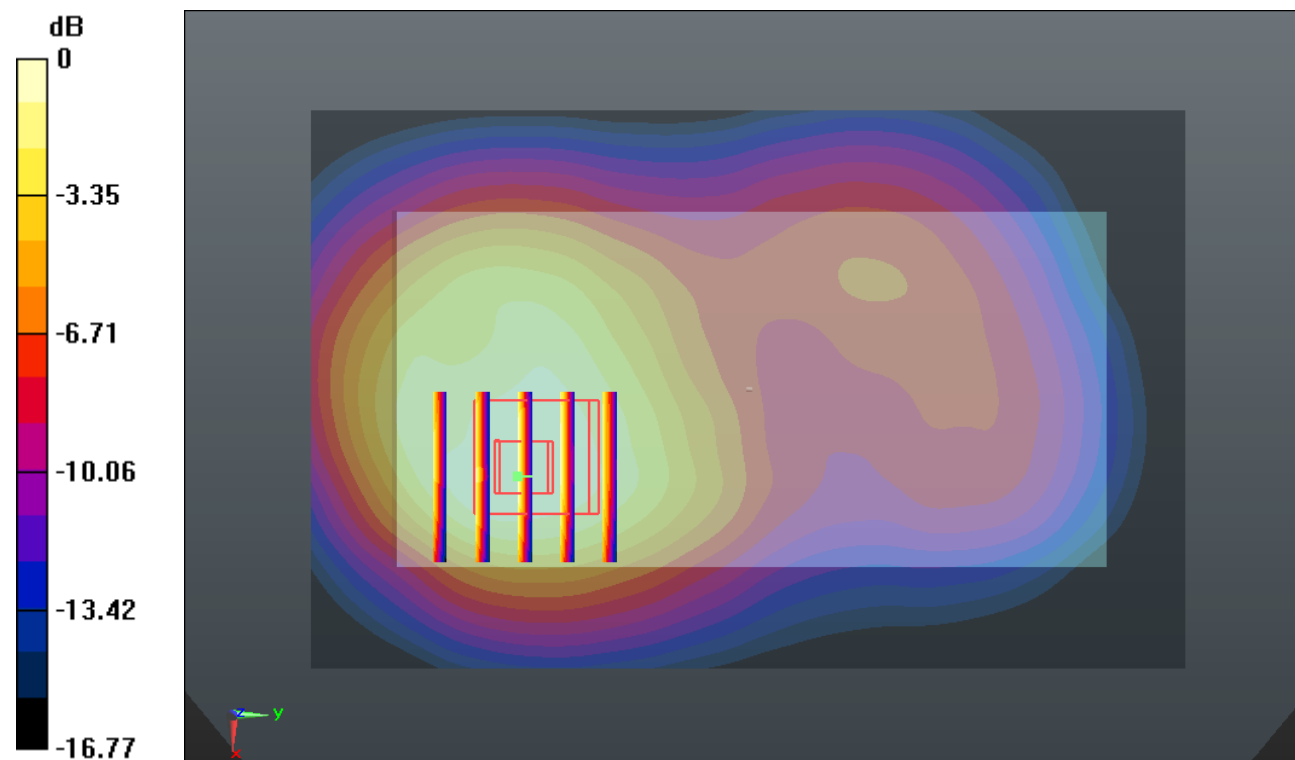

0 dB = 1.390mW/g

#69_WCDMA Band II_RMC12.2K_Bottom Side 1cm_Ch9262

Communication System: UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.493$ mho/m; $\epsilon_r =$

53.518; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.793 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.301 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.011 W/kg

SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.341 mW/g

Maximum value of SAR (measured) = 0.840 mW/g

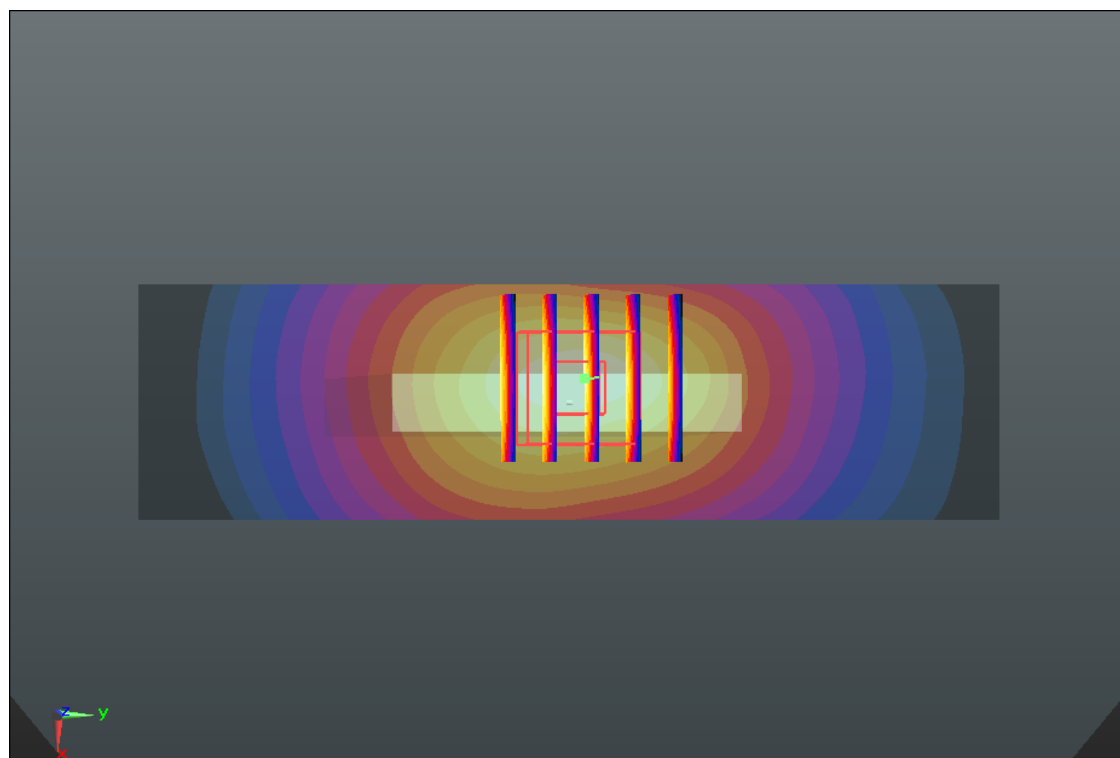

0 dB = 0.840mW/g

#70_WCDMA Band II_RMC12.2K_Bottom Side 1cm_Ch9400

Communication System: UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.526$ mho/m; $\epsilon_r =$

53.461; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9400/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.856 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.848 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.106 W/kg

SAR(1 g) = 0.667 mW/g; SAR(10 g) = 0.364 mW/g

Maximum value of SAR (measured) = 0.914 mW/g

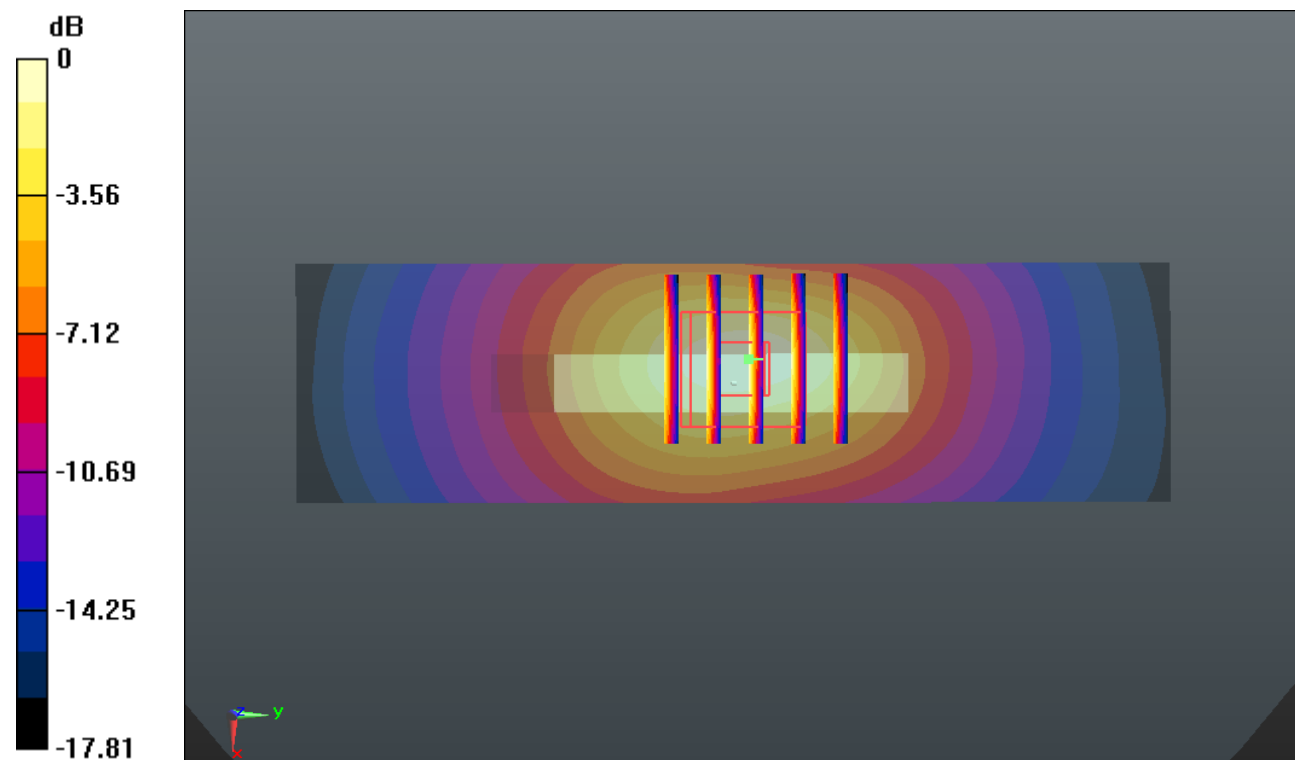

0 dB = 0.910mW/g

#71_WCDMA Band II_RMC12.2K_Back 1cm_Ch9262_Headset

Communication System: UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.493$ mho/m; $\epsilon_r =$

53.518; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.390 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.916 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.652 W/kg

SAR(1 g) = 1.040 mW/g; SAR(10 g) = 0.634 mW/g

Maximum value of SAR (measured) = 1.368 mW/g

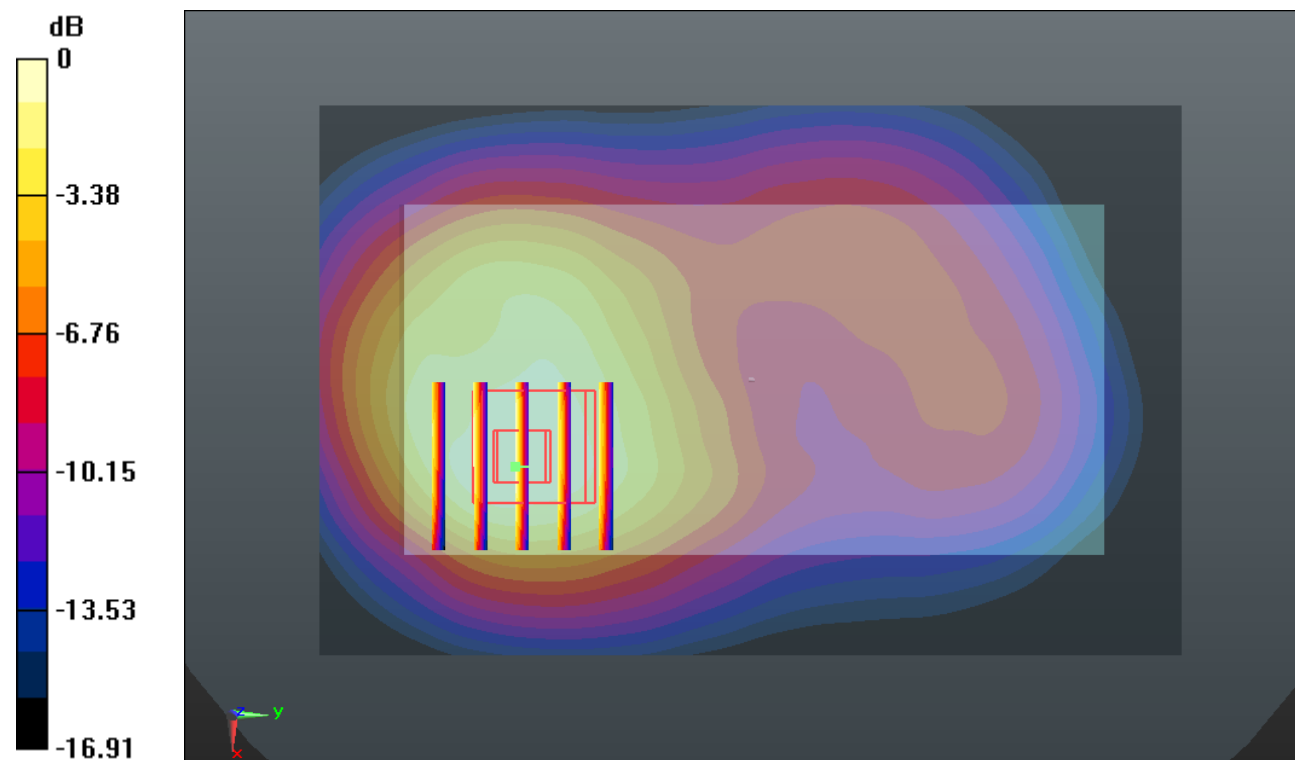

0 dB = 1.370mW/g

#72_WCDMA Band II_RMC12.2K_Back 1cm_Ch9400_Headset

Communication System: UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.526$ mho/m; $\epsilon_r =$

53.461; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9400/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.382 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.259 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.651 W/kg

SAR(1 g) = 1.040 mW/g; SAR(10 g) = 0.636 mW/g

Maximum value of SAR (measured) = 1.365 mW/g

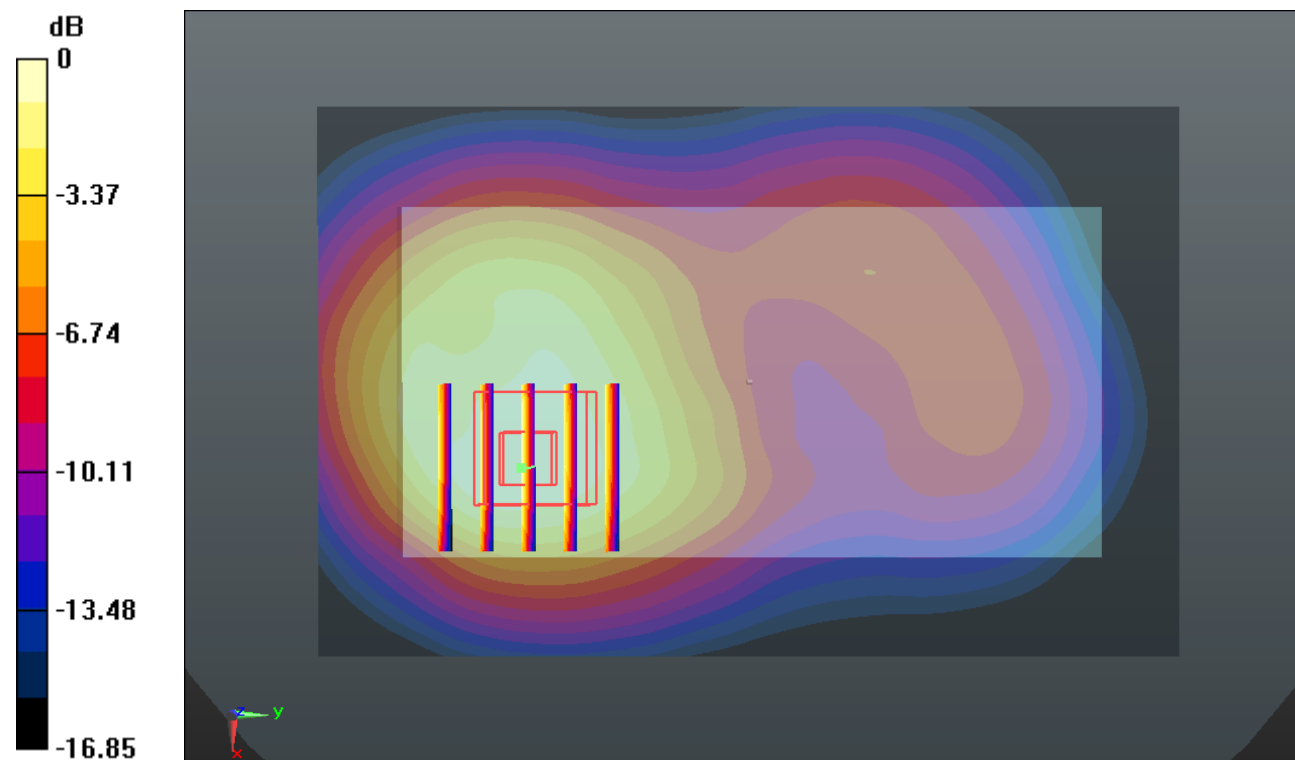

0 dB = 1.370mW/g

#73_WCDMA Band II_RMC12.2K_Back 1cm_Ch9538_Headset

Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140401 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.559$ mho/m; $\epsilon_r =$

53.386; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.346 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.625 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.619 W/kg

SAR(1 g) = 1.010 mW/g; SAR(10 g) = 0.620 mW/g

Maximum value of SAR (measured) = 1.339 mW/g

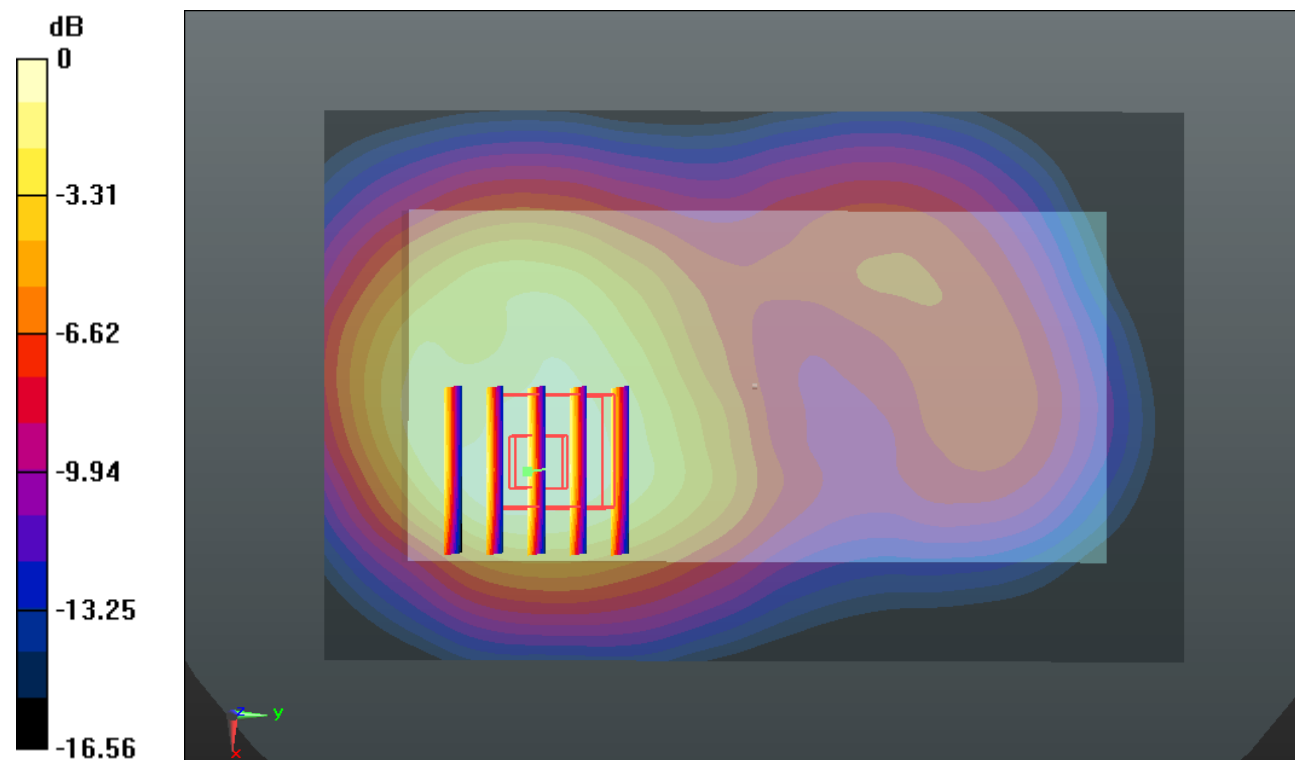

0 dB = 1.340mW/g

#74_WLAN2.4GHz_802.11b_1M_Front 1cm_Ch11

Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_140406 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.946$ mho/m; $\epsilon_r =$

51.151; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.122 mW/g


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.489 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.120 mW/g

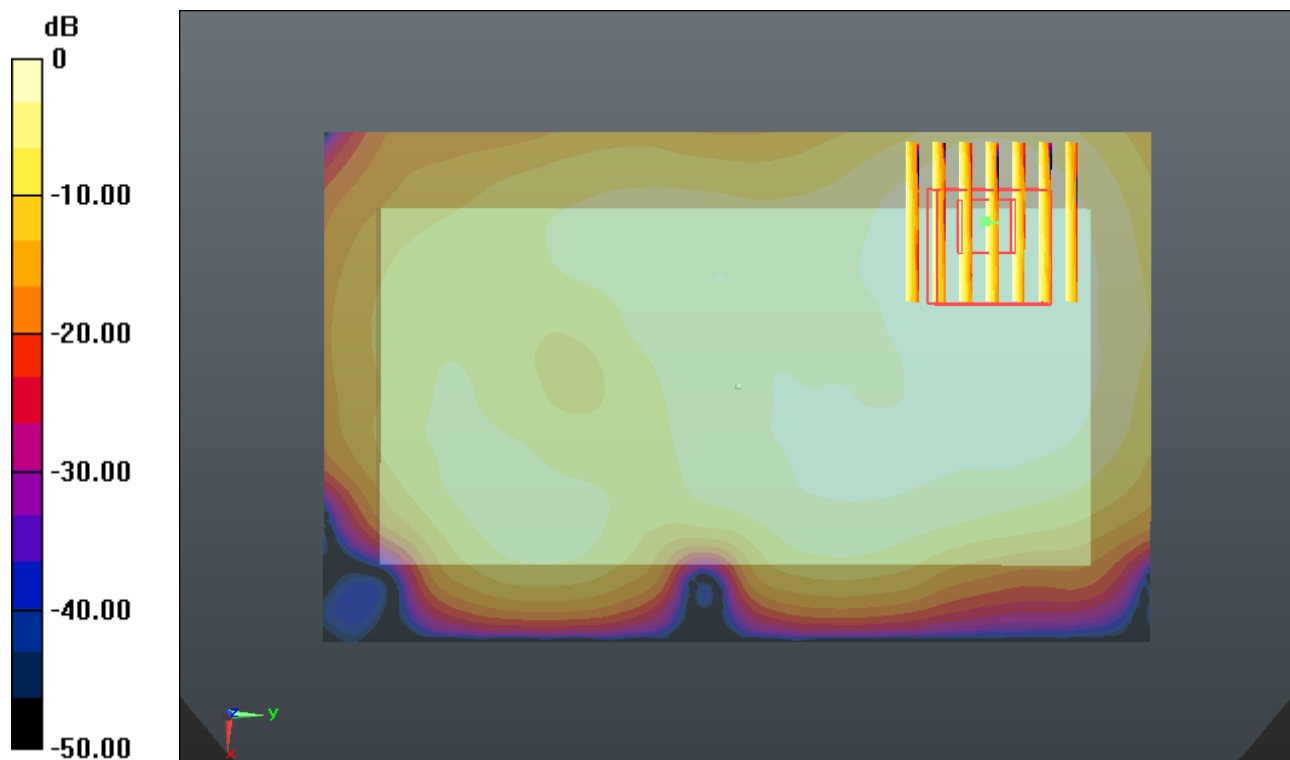

#75_WLAN2.4GHz_802.11b_1M_Back 1cm_Ch11

Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_140406 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.946$ mho/m; $\epsilon_r =$

51.151; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.132 mW/g


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.349 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.129 mW/g

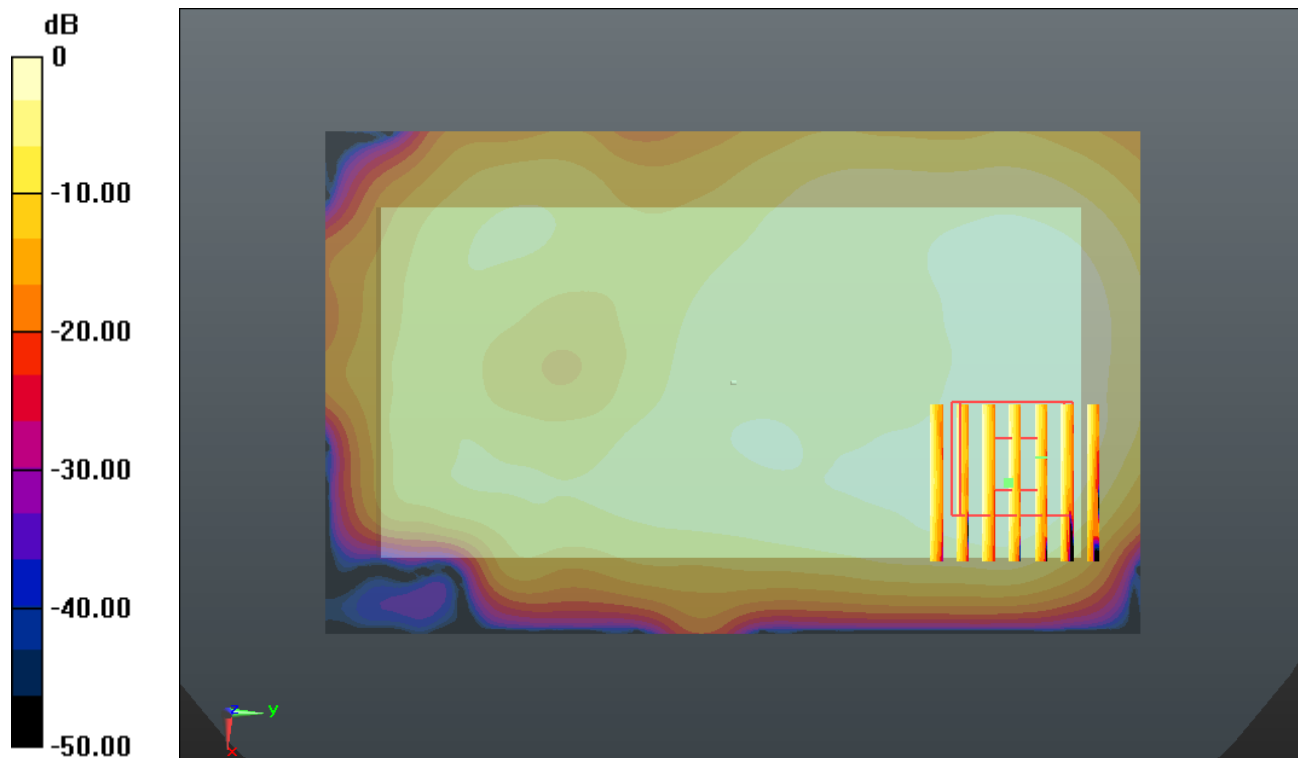

0 dB = 0.130mW/g

#76_WLAN2.4GHz_802.11b_1M_Left Side 1cm_Ch11

Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_140406 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.946$ mho/m; $\epsilon_r =$

51.151; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (41x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.075 mW/g


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.412 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.098 W/kg

SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.076 mW/g

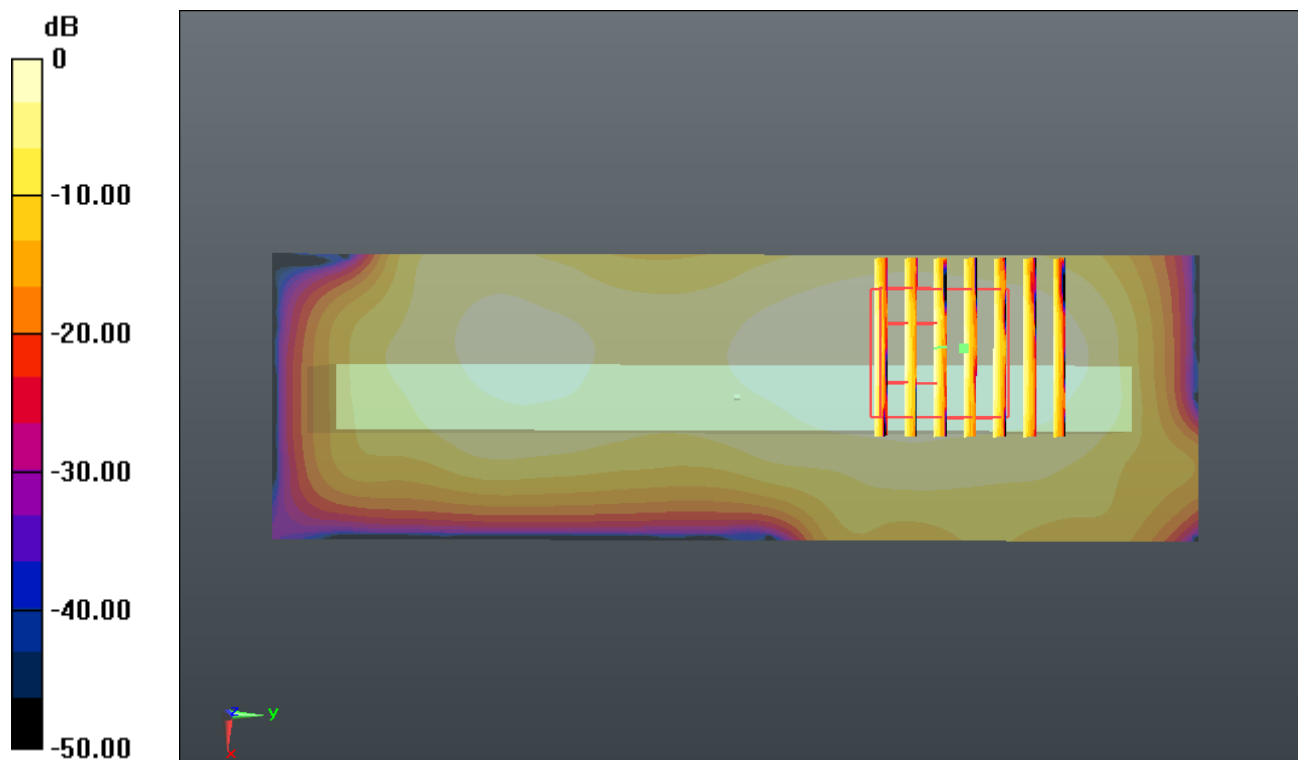

0 dB = 0.080mW/g

#77_WLAN2.4GHz_802.11b_1M_Top Side 1cm_Ch11

Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_140406 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.946$ mho/m; $\epsilon_r =$

51.151; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (41x81x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (interpolated) = 0.089 mW/g


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.061 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.090 mW/g

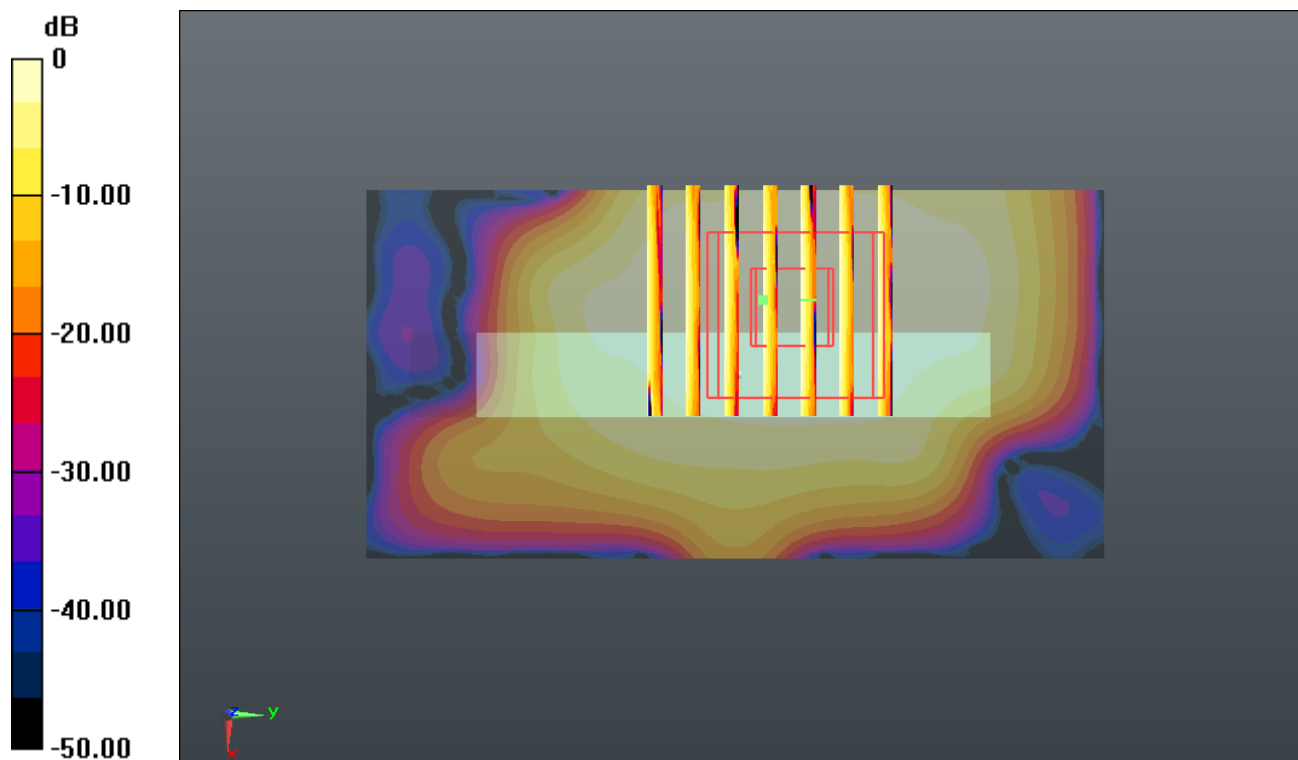

0 dB = 0.090mW/g

#78_WLAN2.4GHz_802.11b_1M_Back 1cm_Ch11_Headset

Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_140406 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.946$ mho/m; $\epsilon_r =$

51.151; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.207 mW/g


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.773 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.139 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.214 mW/g

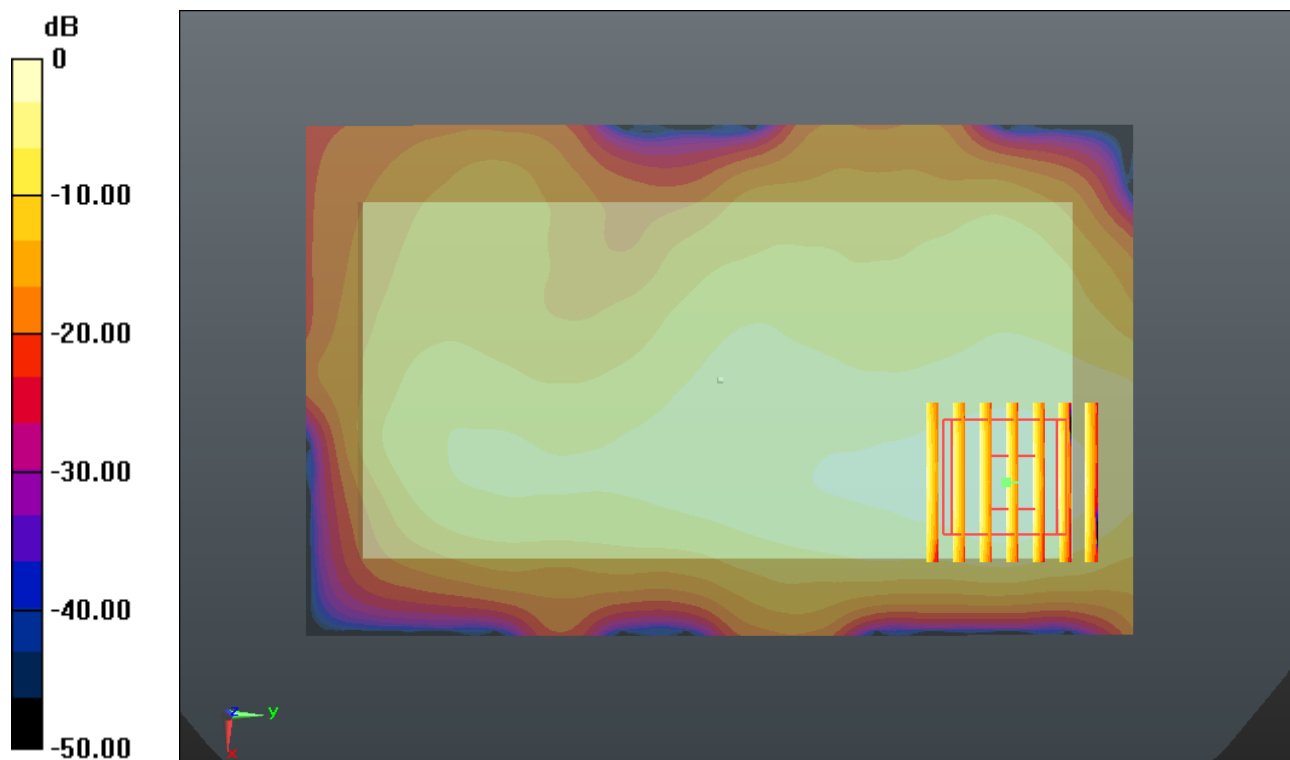

0 dB = 0.210mW/g