



BUREAU
VERITAS

Test Report No.: RF160218W004-2



FCC TEST REPORT

(WIFI + BT LE)

Product: smartphone
Model Name: Ilium X510
FCC ID: ZC4X510
Applicant: Corporativo Lanix S.A. de C.V.
Address: Carretera Internacional Hermosillo-Nogales Km 8.5, Hermosillo
Sonora, Mexico
Manufacturer: Tinno Mobile Technology Corp.
Address: 4/F., H-3 Building, OCT Eastern Industrial Park. NO.1XiangShan
East Road., Nan Shan District, Shenzhen, P.R. China..
Prepared by: Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch
Lab Location: No. 34, Chenwulu Section, Guantai Rd., Houjie Town,
Dongguan City, Guangdong 523942, China
TEL: +86 769 8593 5656
FAX: +86 769 8593 1080
E-MAIL: customerservice.dg@cn.bureauveritas.com
Report No.: RF160218W004-2
Received Date: Feb. 18, 2016
Test Date: Feb. 19, 2016 ~ Mar. 08, 2016
Issued Date: Mar. 09, 2016

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 CERTIFICATION 5

2 SUMMARY OF TEST RESULTS..... 6

2.1 MEASUREMENT UNCERTAINTY 6

3 GENERAL INFORMATION 7

3.1 GENERAL DESCRIPTION OF EUT..... 7

3.2 DESCRIPTION OF TEST MODES..... 9

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST 10

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 10

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS..... 13

3.4 DESCRIPTION OF SUPPORT UNITS..... 13

4 TEST TYPES AND RESULTS..... 14

4.1 CONDUCTED EMISSION MEASUREMENT 14

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 14

4.1.2 TEST INSTRUMENTS..... 14

4.1.3 TEST PROCEDURES 15

4.1.4 DEVIATION FROM TEST STANDARD 15

4.1.5 TEST SETUP 16

4.1.6 EUT OPERATING CONDITIONS 16

4.1.7 TEST RESULTS 17

4.2 RADIATED EMISSION MEASUREMENT 19

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 19

4.2.2 TEST INSTRUMENTS..... 20

4.2.3 TEST PROCEDURES 21

4.2.4 DEVIATION FROM TEST STANDARD 21

4.2.5 TEST SETUP 22

4.2.6 EUT OPERATING CONDITIONS 22

4.2.7 TEST RESULTS 23

4.3 6DB BANDWIDTH MEASUREMENT 45

4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT 45

4.3.2 TEST INSTRUMENTS..... 45

4.3.3 TEST PROCEDURE..... 45

4.3.4 DEVIATION FROM TEST STANDARD 46

4.3.5 TEST SETUP 46

4.3.6 EUT OPERATING CONDITIONS 46



| | | |
|---------|--|-----------|
| 4.3.7 | TEST RESULTS | 47 |
| 4.4 | CONDUCTED OUTPUT POWER | 52 |
| 4.4.1 | LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT | 52 |
| 4.4.2 | TEST SETUP | 52 |
| 4.4.3 | TEST INSTRUMENTS..... | 52 |
| 4.4.4 | TEST PROCEDURES | 52 |
| 4.4.5 | DEVIATION FROM TEST STANDARD | 52 |
| 4.4.6 | EUT OPERATING CONDITIONS | 52 |
| 4.4.7 | TEST RESULTS | 53 |
| 4.4.7.1 | MAXIMUM PEAK OUTPUT POWER | 53 |
| 4.4.7.2 | AVERAGE OUTPUT POWER (FOR REFERENCE)..... | 55 |
| 4.5 | POWER SPECTRAL DENSITY MEASUREMENT | 57 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT | 57 |
| 4.5.2 | TEST SETUP | 57 |
| 4.5.3 | TEST INSTRUMENTS..... | 57 |
| 4.5.4 | TEST PROCEDURE..... | 57 |
| 4.5.5 | DEVIATION FROM TEST STANDARD | 57 |
| 4.5.6 | EUT OPERATING CONDITION | 57 |
| 4.5.7 | TEST RESULTS | 58 |
| 4.6 | OUT OF BAND EMISSION MEASUREMENT | 63 |
| 4.6.1 | LIMITS OF OUT OF BAND EMISSION MEASUREMENT | 63 |
| 4.6.2 | TEST SETUP | 63 |
| 4.6.3 | TEST INSTRUMENTS..... | 63 |
| 4.6.4 | TEST PROCEDURE..... | 63 |
| 4.6.5 | DEVIATION FROM TEST STANDARD | 64 |
| 4.6.6 | EUT OPERATING CONDITION | 64 |
| 4.6.7 | TEST RESULTS | 64 |
| 4.6.8 | TEST RESULTS | 65 |
| 5 | PHOTOGRAPHS OF THE TEST CONFIGURATION | 70 |
| 6 | APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT | |
| | BY THE LAB | 71 |



RELEASE CONTROL RECORD


| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|----------------|-------------------|---------------|
| RF160218W004-2 | Original release | Mar. 09, 2016 |



1 CERTIFICATION

PRODUCT: smartphone
BRAND NAME: LANIX
MODEL NAME: Ilium X510
APPLICANT: Corporativo Lanix S.A. de C.V.
TESTED: Feb. 19, 2016 ~ Mar. 08, 2016
TEST SAMPLE: Production unit
STANDARDS: **FCC Part 15, Subpart C. Section 15.247**
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch** and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Mar. 09, 2016
(Amyee Qian / Engineer)

APPROVED BY :  , **DATE:** Mar. 09, 2016
(William Chung / Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247) | | | |
|---|----------------------------------|--------|--|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit. Minimum passing margin is -2.88dB at 0.456000MHz. |
| 15.205 15.209 | Radiated Emissions | PASS | Meet the requirement of limit. Minimum passing margin is -1.0dB at 2483.50MHz. |
| 15.247(d) | Out of band Emission Measurement | PASS | Meet the requirement of limit. |
| 15.247(a)(2) | 6dB bandwidth | PASS | Meet the requirement of limit. |
| 15.247(b) | Conducted Output power | PASS | Meet the requirement of limit. |
| 15.247(e) | Power Spectral Density | PASS | Meet the requirement of limit. |
| 15.203 | Antenna Requirement | PASS | No antenna connector is used |

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|---------------|-------------|
| Conducted emissions | 9kHz~30MHz | 2.66dB |
| Radiated emissions | 9KHz ~ 30MHz | 2.74dB |
| | 30MHz ~ 1GMHz | 3.55dB |
| | 1GHz ~ 18GHz | 4.84dB |
| | 18GHz ~ 40GHz | 1.94dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|------------------------------|--|
| PRODUCT | smartphone |
| MODEL NAME | Ilium X510 |
| NOMINAL VOLTAGE | 5.0Vdc (adapter or host equipment) 3.8Vdc (Li-ion, battery) |
| MODULATION TECHNOLOGY | DSSS, OFDM, DTS |
| MODULATION TYPE | CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM BT-LE(GFSK) for DTS |
| TRANSMISSION RATE | 802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n: up to 135 Mbps |
| OPERATING FREQUENCY | 2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11b/g/n(HT40) 2402-2480MHz for BT-LE(GFSK) |
| MAX. OUTPUT POWER | WLAN: 89.331mW (Maximum) BT-LE: 0.655mW (Maximum) |
| ANTENNA TYPE | PIFA Antenna with 0dBi gain |
| I/O PORTS | Refer to user's manual |
| CABLE SUPPLIED | USB cable: Unshielded, detachable, 1.0m Earphone cable: Unshielded, detachable, 1.0m |

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapter:

| ADAPTER | |
|----------------|--------------------|
| BRAND: | LANIX |
| MODEL: | Ilium X510-C |
| INPUT: | AC 100-240V, 150mA |
| OUTPUT: | DC 5V, 1000mA |

- The EUT matched the following USB cable and Earphone:

| USB CABLE | |
|---------------------|-----------|
| BRAND: | N/A |
| MODEL: | N/A |
| SIGNAL LINE: | 1.0 METER |



| EARPHONE | |
|--------------|-----------|
| BRAND: | LANIX |
| MODEL: | N/A |
| SIGNAL LINE: | 1.0 METER |

4. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

| MODULATION MODE | TX/RX FUNCTION |
|-----------------|----------------|
| 802.11b | 1TX /1RX |
| 802.11g | 1TX /1RX |
| 802.11n (20MHz) | 1TX /1RX |
| 802.11n (40MHz) | 1TX /1RX |

5. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1 | 2412 MHz | 7 | 2442 MHz |
| 2 | 2417 MHz | 8 | 2447 MHz |
| 3 | 2422 MHz | 9 | 2452 MHz |
| 4 | 2427 MHz | 10 | 2457 MHz |
| 5 | 2432 MHz | 11 | 2462 MHz |
| 6 | 2437 MHz | | |

7 channels are provided for 802.11n (HT40):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 3 | 2422MHz | 7 | 2442MHz |
| 4 | 2427MHz | 8 | 2447MHz |
| 5 | 2432MHz | 9 | 2452MHz |
| 6 | 2437MHz | | |

40 channels are provided for BT-LE (GFSK):

| CHANNEL | FREQ. (MHZ) | CHANNEL | FREQ. (MHZ) | CHANNEL | FREQ. (MHZ) | CHANNEL | FREQ. (MHZ) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0 | 2402 | 10 | 2422 | 20 | 2442 | 30 | 2462 |
| 1 | 2404 | 11 | 2424 | 21 | 2444 | 31 | 2464 |
| 2 | 2406 | 12 | 2426 | 22 | 2446 | 32 | 2466 |
| 3 | 2408 | 13 | 2428 | 23 | 2448 | 33 | 2468 |
| 4 | 2410 | 14 | 2430 | 24 | 2450 | 34 | 2470 |
| 5 | 2412 | 15 | 2432 | 25 | 2452 | 35 | 2472 |
| 6 | 2414 | 16 | 2434 | 26 | 2454 | 36 | 2474 |
| 7 | 2416 | 17 | 2436 | 27 | 2456 | 37 | 2476 |
| 8 | 2418 | 18 | 2438 | 28 | 2458 | 38 | 2478 |
| 9 | 2420 | 19 | 2440 | 29 | 2460 | 39 | 2480 |



3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | MODE |
|--------------------|---------------|-------|-----|------|------|
| | RE<1G | RE≥1G | PLC | APCM | |
| - | √ | √ | √ | √ | - |

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1 | CCK | DBPSK | 1.0 |
| BT-LE | 0 to 39 | 39 | DTS | GFSK | 1 |

For the test results, only the worst case was shown in test report.



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | CCK | DBPSK | 1.0 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.0 |
| 802.11n HT20 | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.5 |
| 802.11n HT40 | 3 to 9 | 3, 6, 9 | OFDM | BPSK | 13.5 |
| BT-LE | 0 to 39 | 0,19, 39 | DTS | GFSK | 1 |

POWER LINE CONDUCTED EMISSION TEST:

The EUT was tested with the following mode

| EUT CONFIGURE MODE | TESTED CONDITION |
|--------------------|--|
| - | BT Link+ WIFI (2.4G) Link + USB Cable + Adapter + Earphone |

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 11 | CCK | DBPSK | 1.0 |
| 802.11g | 1 to 11 | 1, 11 | OFDM | BPSK | 6.0 |
| 802.11n HT20 | 1 to 11 | 1, 11 | OFDM | BPSK | 6.5 |
| 802.11n HT40 | 3 to 9 | 3, 9 | OFDM | BPSK | 13.5 |
| BT-LE | 0 to 39 | 0, 39 | DTS | GFSK | 1 |



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | CCK | DBPSK | 1.0 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.0 |
| 802.11n HT20 | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.5 |
| 802.11n HT40 | 3 to 9 | 3,6, 9 | OFDM | BPSK | 13.5 |
| BT-LE | 0 to 39 | 0, 19, 39 | DTS | GFSK | 1 |

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | TEST VOLTAGE | TESTED BY |
|---------------|--------------------------|----------------------|-------------|
| RE<1G | 22deg. C, 54%RH | DC 5V from adaptor | Blue Zheng |
| RE≥1G | 22deg. C, 54%RH | DC 5V from adaptor | Blue Zheng |
| PLC | 25deg. C, 60%RH | DC 5V from adaptor | Yuqiang Yin |
| APCM | 25deg. C, 60%RH | DC 3.8V from battery | Yuqiang Yin |



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247
558074 D01 DTS Meas Guidance v03r03

ANSI C63.10-2013

Note:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Verification). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|-----------|----------|-----------|------------|--------|
| 1 | DC source | LONG WEI | PS-6403D | 010934269 | N/A |
| 2 | PC | HP | A6608CN | 3CR83825X3 | N/A |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | DC Line: Unshielded, Detachable 1.0m |
| 2 | AC Line: Unshielded, Detachable 1.5m |



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dBµV) | |
|-----------------------------|------------------------|----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 to 56 | 56 to 46 |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|--------------------------|---------------|-----------------|------------|-----------|-----------|
| EMI Test Receiver | Rohde&Schwarz | ESCI | 100340 | May 11,15 | May 10,16 |
| Artificial Mains Network | Rohde&Schwarz | ENV216 | 101173 | May 11,15 | May 10,16 |
| Artificial Mains Network | Rohde&Schwarz | ESH3-Z5 | 100317 | May 11,15 | May 10,16 |
| Test software | ADT | ADT_Cond_V7.3.7 | N/A | N/A | N/A |

- NOTE:**
1. The test was performed in shielded room 553.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

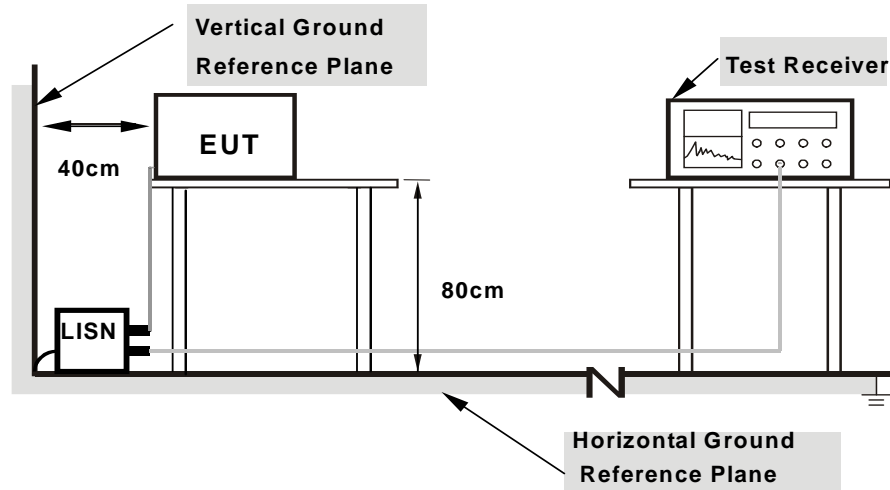

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA:

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| Frequency (MHz) | QuasiPeak (dBµV) | CAverage (dBµV) | Limit (dBµV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|------|--------|------------|
| 0.456000 | --- | 36.31 | 47.26 | -10.95 | L | ON | 9.7 |
| 0.456000 | 49.37 | --- | 57.26 | -7.89 | L | ON | 9.7 |
| 0.820000 | --- | 24.07 | 46.00 | -21.93 | L | ON | 9.7 |
| 0.820000 | 38.80 | --- | 56.00 | -17.20 | L | ON | 9.7 |
| 2.132000 | --- | 24.85 | 46.00 | -21.15 | L | ON | 9.7 |
| 2.132000 | 37.19 | --- | 56.00 | -18.81 | L | ON | 9.7 |
| 3.644000 | --- | 33.69 | 46.00 | -12.31 | L | ON | 9.7 |
| 3.644000 | 45.52 | --- | 56.00 | -10.48 | L | ON | 9.7 |
| 4.146000 | --- | 35.32 | 46.00 | -10.68 | L | ON | 9.7 |
| 4.146000 | 47.25 | --- | 56.00 | -8.75 | L | ON | 9.7 |
| 27.890000 | --- | 31.51 | 50.00 | -18.49 | L | ON | 10.2 |
| 27.890000 | 42.61 | --- | 60.00 | -17.39 | L | ON | 10.2 |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

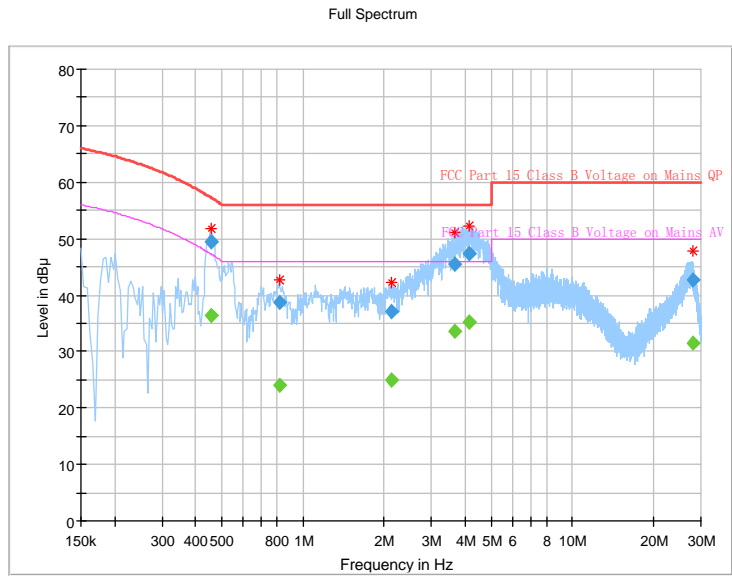




| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|
|-------|-------------|-------------------|--------------------------------|

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|--------------|----------|-----------|-------------|
| 0.454000 | --- | 44.31 | 47.31 | -3.00 | N | ON | 10.1 |
| 0.454000 | 51.56 | --- | 57.31 | -5.75 | N | ON | 10.1 |
| 0.456000 | --- | 44.38 | 47.26 | -2.88 | N | ON | 10.1 |
| 0.456000 | 51.73 | --- | 57.26 | -5.53 | N | ON | 10.1 |
| 0.980000 | --- | 32.34 | 46.00 | -13.66 | N | ON | 9.9 |
| 0.980000 | 42.69 | --- | 56.00 | -13.31 | N | ON | 9.9 |
| 1.412000 | --- | 32.82 | 46.00 | -13.18 | N | ON | 9.9 |
| 1.412000 | 39.55 | --- | 56.00 | -16.45 | N | ON | 9.9 |
| 3.412000 | --- | 38.14 | 46.00 | -7.86 | N | ON | 9.8 |
| 3.412000 | 46.06 | --- | 56.00 | -9.94 | N | ON | 9.8 |
| 4.184000 | --- | 38.51 | 46.00 | -7.49 | N | ON | 9.8 |
| 4.184000 | 47.29 | --- | 56.00 | -8.71 | N | ON | 9.8 |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

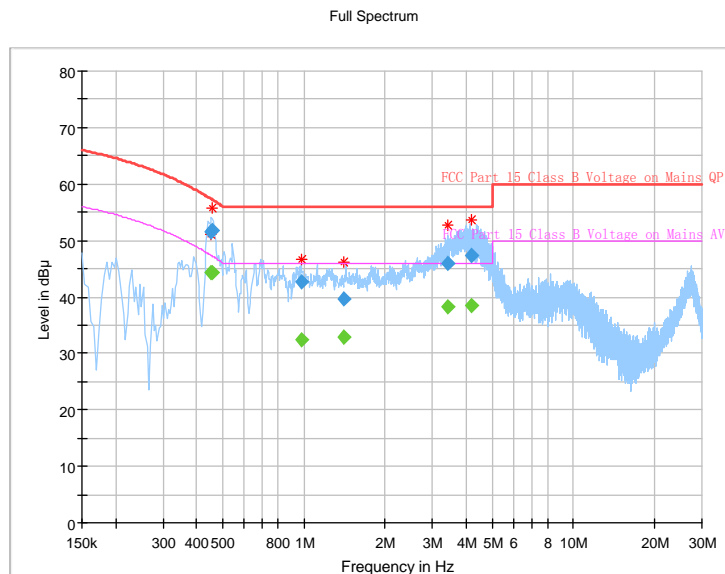



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------------------------------|---------------|--------------------------|-------------|--------------|--------------|
| EMI Test Receiver | Rohde&Schwarz | ESR7 | 101494 | Apr. 27,15 | Apr. 26,16 |
| Signal and Spectrum Analyzer | Rohde&Schwarz | FSV40 | 101094 | Apr. 23,15 | Apr. 22,16 |
| Bilog Antenna | Teseq | CBL 6111D | 30643 | Jul. 16, 15 | Jul. 15, 16 |
| Horn Antenna | ETS-Lindgren | 3117 | 00062558 | May 30,14 | May 29,16 |
| Horn Antenna (15GHz-40GHz) | SCHWARZBECK | BBHA 9170 | BBHA9170147 | Jan. 21,14 | Jan. 20,17 |
| Amplifier (9kHz-1GHz) | SONOMA | 310D | 186955 | Mar. 04,15 | Mar. 03, 17 |
| Pre-Amplifier (0.5~18GHz) | SCHWARZBECK | BBV 9718 | 9718-266 | Mar 26,14 | Mar. 25,16 |
| Pre-Amplifier (18GHz-40GHz) | EMCI | EMC 184045 | 980102 | Nov. 19,15 | Nov. 18,16 |
| GPS Generator+ Antenna | TOJOIN | GNSS-5000A | E1-010119 | Aug. 08, 14 | Aug. 07, 16 |
| 3m Semi-anechoic Chamber | ETS-LINDGREN | 9m*6m*6m | NSEMC003 | April. 19,14 | April. 18,16 |
| Test Software | ADT | ADT_Radiated_V7.6.15.9.2 | N/A | N/A | N/A |

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 966 Chamber.
3. The FCC Site Registration No. is 502831.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation



4.2.5 TEST SETUP

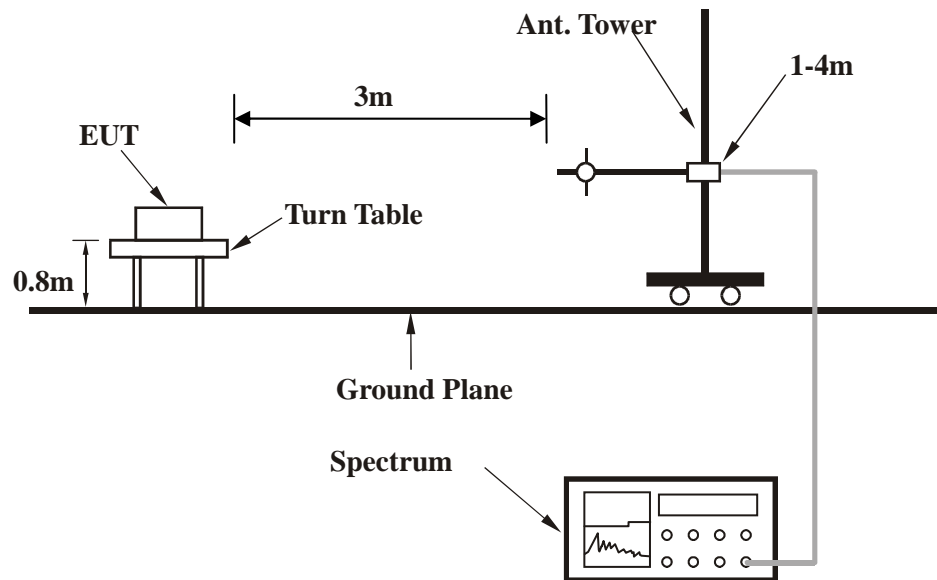

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


802.11g

| | | | |
|------------------------|--------------|--------------------------|-----------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 32.91 | -52.7 QP | -13.0 | -39.7 | 1.00 H | 0 | -68.08 | 15.34 |
| 2 | 95.96 | -73.1 QP | -13.0 | -60.1 | 1.00 H | 0 | -62.78 | -10.30 |
| 3 | 239.52 | -85.3 QP | -13.0 | -72.3 | 1.00 H | 0 | -68.84 | -16.48 |
| 4 | 440.31 | -84.5 QP | -13.0 | -71.5 | 1.00 H | 0 | -74.06 | -10.43 |
| 5 | 663.41 | -80.5 QP | -13.0 | -67.5 | 1.00 H | 0 | -73.88 | -6.59 |
| 6 | 814.73 | -77.5 QP | -13.0 | -64.5 | 1.00 H | 0 | -73.54 | -3.95 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

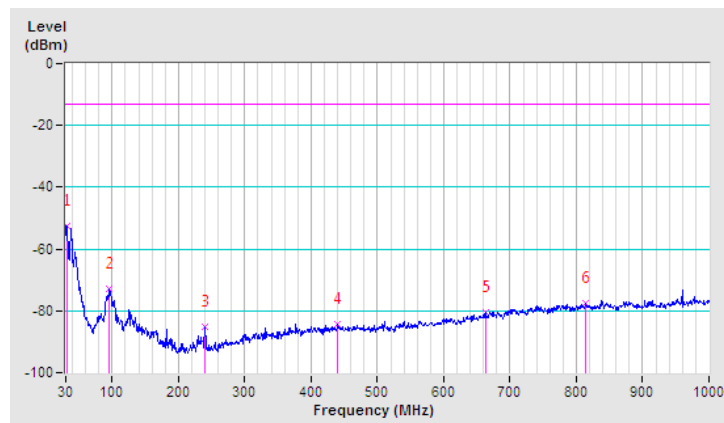




| | | | |
|------------------------|--------------|------------------------------|-----------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz | | |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 37.76 | -56.6 QP | -13.0 | -43.6 | 1.00 V | 0 | -55.25 | -1.30 |
| 2 | 96.93 | -72.4 QP | -13.0 | -59.4 | 1.00 V | 0 | -61.76 | -10.63 |
| 3 | 129.91 | -73.9 QP | -13.0 | -60.9 | 1.00 V | 0 | -62.79 | -11.15 |
| 4 | 240.49 | -83.8 QP | -13.0 | -70.8 | 1.00 V | 0 | -72.41 | -11.35 |
| 5 | 480.08 | -79.6 QP | -13.0 | -66.6 | 1.00 V | 0 | -71.61 | -7.98 |
| 6 | 699.30 | -80.2 QP | -13.0 | -67.2 | 1.00 V | 0 | -73.93 | -6.23 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

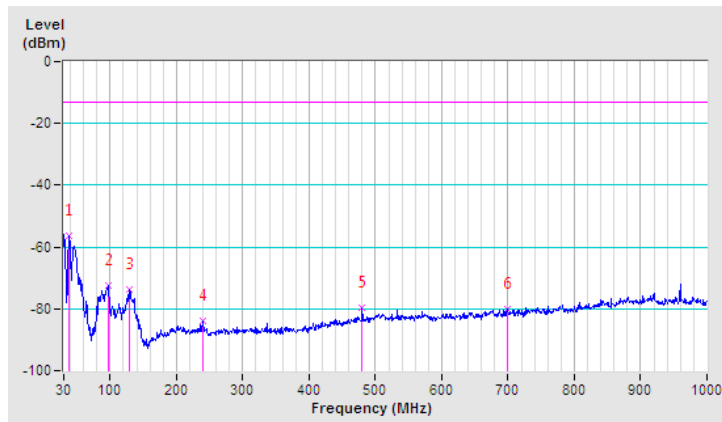



802.11b

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 49.4 PK | 74.0 | -24.6 | 1.50 H | 119 | 57.23 | -7.87 |
| 2 | 2390.00 | 40.4 AV | 54.0 | -13.6 | 1.50 H | 119 | 48.29 | -7.87 |
| 3 | #2400.00 | 65.9 PK | 83.5 | -17.6 | 1.50 H | 119 | 73.73 | -7.84 |
| 4 | #2400.00 | 61.1 AV | 79.5 | -18.4 | 1.50 H | 119 | 68.96 | -7.84 |
| 5 | *2412.00 | 103.5 PK | | | 1.50 H | 119 | 111.32 | -7.81 |
| 6 | *2412.00 | 99.5 AV | | | 1.50 H | 119 | 107.27 | -7.81 |
| 7 | 4824.00 | 52.2 PK | 74.0 | -21.8 | 1.00 H | 223 | 54.20 | -1.97 |
| 8 | 4824.00 | 40.4 AV | 54.0 | -13.7 | 1.00 H | 223 | 42.32 | -1.97 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 44.9 PK | 74.0 | -29.1 | 1.00 V | 244 | 52.80 | -7.87 |
| 2 | 2390.00 | 34.4 AV | 54.0 | -19.6 | 1.00 V | 244 | 42.30 | -7.87 |
| 3 | #2400.00 | 62.0 PK | 79.9 | -17.9 | 1.00 V | 244 | 69.84 | -7.84 |
| 4 | #2400.00 | 57.2 AV | 76.6 | -19.4 | 1.00 V | 244 | 65.06 | -7.84 |
| 5 | *2412.00 | 99.9 PK | | | 1.00 V | 244 | 107.70 | -7.81 |
| 6 | *2412.00 | 96.6 AV | | | 1.00 V | 244 | 104.39 | -7.81 |
| 7 | 4824.00 | 52.2 PK | 74.0 | -21.9 | 1.00 V | 179 | 54.12 | -1.97 |
| 8 | 4824.00 | 39.7 AV | 54.0 | -14.3 | 1.00 V | 179 | 41.66 | -1.97 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



| | | | |
|------------------------|--------------|------------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 104.8 PK | | | 1.30 H | 119 | 112.52 | -7.73 |
| 2 | *2437.00 | 102.0 AV | | | 1.30 H | 119 | 109.76 | -7.73 |
| 3 | 4874.00 | 52.6 PK | 74.0 | -21.4 | 1.30 H | 256 | 54.45 | -1.81 |
| 4 | 4874.00 | 41.1 AV | 54.0 | -12.9 | 1.30 H | 256 | 42.92 | -1.81 |
| 5 | 7311.00 | 56.3 PK | 74.0 | -17.7 | 1.30 H | 296 | 53.51 | 2.75 |
| 6 | 7311.00 | 45.1 AV | 54.0 | -8.9 | 1.30 H | 296 | 42.37 | 2.75 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 100.2 PK | | | 1.00 V | 129 | 107.91 | -7.73 |
| 2 | *2437.00 | 96.5 AV | | | 1.00 V | 129 | 104.20 | -7.73 |
| 3 | 4874.00 | 51.9 PK | 74.0 | -22.1 | 1.00 V | 222 | 53.69 | -1.81 |
| 4 | 4874.00 | 41.5 AV | 54.0 | -12.5 | 1.00 V | 222 | 43.33 | -1.81 |
| 5 | 7311.00 | 54.1 PK | 74.0 | -19.9 | 1.00 V | 179 | 51.37 | 2.75 |
| 6 | 7311.00 | 44.9 AV | 54.0 | -9.1 | 1.00 V | 100 | 42.17 | 2.75 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



| | | | |
|-----------------|---------------|-------------------|--------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 97.5 PK | | | 1.00 H | 100 | 105.13 | -7.66 |
| 2 | *2462.00 | 94.1 AV | | | 1.00 H | 100 | 101.80 | -7.66 |
| 3 | 2483.50 | 48.6 PK | 74.0 | -25.4 | 1.00 H | 100 | 56.21 | -7.60 |
| 4 | 2483.50 | 40.6 AV | 54.0 | -13.4 | 1.00 H | 100 | 48.24 | -7.60 |
| 5 | 4924.00 | 52.2 PK | 74.0 | -21.8 | 1.00 H | 81 | 53.87 | -1.64 |
| 6 | 4924.00 | 41.5 AV | 54.0 | -12.5 | 1.00 H | 81 | 43.10 | -1.64 |
| 7 | 7386.00 | 56.7 PK | 74.0 | -17.3 | 1.00 H | 192 | 53.86 | 2.87 |
| 8 | 7386.00 | 44.9 AV | 54.0 | -9.1 | 1.00 H | 192 | 42.05 | 2.87 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 103.4 PK | | | 1.00 V | 169 | 111.05 | -7.66 |
| 2 | *2462.00 | 101.2 AV | | | 1.00 V | 169 | 108.86 | -7.66 |
| 3 | 2483.50 | 50.2 PK | 74.0 | -23.9 | 1.00 V | 169 | 57.75 | -7.60 |
| 4 | 2483.50 | 43.0 AV | 54.0 | -11.0 | 1.00 V | 169 | 50.63 | -7.60 |
| 5 | 4924.00 | 53.4 PK | 74.0 | -20.6 | 1.00 V | 228 | 55.02 | -1.64 |
| 6 | 4924.00 | 42.1 AV | 54.0 | -12.0 | 1.00 V | 228 | 43.69 | -1.64 |
| 7 | 7386.00 | 56.3 PK | 74.0 | -17.7 | 1.00 V | 279 | 53.45 | 2.87 |
| 8 | 7386.00 | 44.9 AV | 54.0 | -9.1 | 1.00 V | 279 | 41.99 | 2.87 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



802.11g

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 57.3 PK | 74.0 | -16.7 | 1.49 H | 246 | 61.23 | -3.97 |
| 2 | 2390.00 | 47.6 AV | 54.0 | -6.5 | 1.49 H | 246 | 51.52 | -3.97 |
| 3 | #2400.00 | 72.1 PK | 87.7 | -15.6 | 1.48 H | 246 | 76.08 | -3.96 |
| 4 | #2400.00 | 63.7 AV | 84.0 | -20.7 | 1.48 H | 246 | 67.70 | -3.96 |
| 5 | *2412.00 | 107.7 PK | | | 1.48 H | 246 | 111.64 | -3.95 |
| 6 | *2412.00 | 104.0 AV | | | 1.48 H | 246 | 107.97 | -3.95 |
| 7 | 4824.00 | 54.9 PK | 74.0 | -19.1 | 1.48 H | 128 | 56.01 | -1.10 |
| 8 | 4824.00 | 47.5 AV | 54.0 | -6.5 | 1.48 H | 128 | 48.63 | -1.10 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 55.2 PK | 74.0 | -18.8 | 1.00 V | 298 | 59.17 | -3.97 |
| 2 | 2390.00 | 44.6 AV | 54.0 | -9.5 | 1.00 V | 298 | 48.52 | -3.97 |
| 3 | #2400.00 | 70.0 PK | 87.5 | -17.5 | 1.00 V | 298 | 73.99 | -3.96 |
| 4 | #2400.00 | 61.5 AV | 83.6 | -22.1 | 1.00 V | 298 | 65.43 | -3.96 |
| 5 | *2412.00 | 107.5 PK | | | 1.00 V | 298 | 111.48 | -3.95 |
| 6 | *2412.00 | 103.6 AV | | | 1.00 V | 298 | 107.57 | -3.95 |
| 7 | 4824.00 | 54.2 PK | 74.0 | -19.8 | 1.00 V | 25 | 55.33 | -1.10 |
| 8 | 4824.00 | 40.9 AV | 54.0 | -13.1 | 1.00 V | 25 | 41.99 | -1.10 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



| | | | |
|------------------------|--------------|------------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 109.9 PK | | | 1.50 H | 243 | 113.81 | -3.91 |
| 2 | *2437.00 | 105.8 AV | | | 1.50 H | 243 | 109.66 | -3.91 |
| 3 | 4874.00 | 55.9 PK | 74.0 | -18.1 | 1.50 H | 243 | 56.92 | -1.06 |
| 4 | 4874.00 | 45.6 AV | 54.0 | -8.4 | 1.50 H | 243 | 46.62 | -1.06 |
| 5 | 7311.00 | 58.6 PK | 74.0 | -15.4 | 1.50 H | 243 | 55.56 | 3.05 |
| 6 | 7311.00 | 48.7 AV | 54.0 | -5.3 | 1.50 H | 243 | 45.64 | 3.05 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 108.7 PK | | | 1.00 V | 300 | 112.62 | -3.91 |
| 2 | *2437.00 | 104.7 AV | | | 1.00 V | 300 | 108.60 | -3.91 |
| 3 | 4874.00 | 54.6 PK | 74.0 | -19.4 | 1.00 V | 258 | 55.69 | -1.06 |
| 4 | 4874.00 | 42.2 AV | 54.0 | -11.8 | 1.00 V | 258 | 43.25 | -1.06 |
| 5 | 7311.00 | 59.3 PK | 74.0 | -14.7 | 1.00 V | 187 | 56.28 | 3.05 |
| 6 | 7311.00 | 49.2 AV | 54.0 | -4.8 | 1.00 V | 187 | 46.17 | 3.05 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



| | | | |
|-----------------|---------------|-------------------|--------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 110.0 PK | | | 1.50 H | 260 | 113.92 | -3.89 |
| 2 | *2462.00 | 105.8 AV | | | 1.50 H | 260 | 109.65 | -3.89 |
| 3 | 2483.50 | 60.9 PK | 74.0 | -13.1 | 1.50 H | 260 | 64.78 | -3.86 |
| 4 | 2483.50 | 52.9 AV | 54.0 | -1.1 | 1.50 H | 260 | 56.72 | -3.86 |
| 5 | 4924.00 | 52.9 PK | 74.0 | -21.1 | 1.50 H | 86 | 53.93 | -1.02 |
| 6 | 4924.00 | 40.2 AV | 54.0 | -13.8 | 1.50 H | 86 | 41.24 | -1.02 |
| 7 | 7386.00 | 57.2 PK | 74.0 | -16.8 | 1.50 H | 159 | 53.91 | 3.25 |
| 8 | 7386.00 | 46.3 AV | 54.0 | -7.7 | 1.50 H | 159 | 43.08 | 3.25 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 108.6 PK | | | 1.00 V | 260 | 112.45 | -3.89 |
| 2 | *2462.00 | 104.6 AV | | | 1.00 V | 260 | 108.46 | -3.89 |
| 3 | 2483.50 | 57.4 PK | 74.0 | -16.6 | 1.00 V | 261 | 61.30 | -3.86 |
| 4 | 2483.50 | 50.9 AV | 54.0 | -3.2 | 1.00 V | 261 | 54.71 | -3.86 |
| 5 | 4924.00 | 53.7 PK | 74.0 | -20.3 | 1.00 V | 167 | 54.70 | -1.02 |
| 6 | 4924.00 | 43.9 AV | 54.0 | -10.1 | 1.00 V | 167 | 44.94 | -1.02 |
| 7 | 7386.00 | 57.9 PK | 74.0 | -16.1 | 1.00 V | 296 | 54.67 | 3.25 |
| 8 | 7386.00 | 45.4 AV | 54.0 | -8.6 | 1.00 V | 296 | 42.18 | 3.25 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



802.11g

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 68.0 PK | 74.0 | -6.0 | 1.00 H | 182 | 72.89 | -4.93 |
| 2 | 2390.00 | 52.6 AV | 54.0 | -1.4 | 1.00 H | 182 | 57.57 | -4.93 |
| 3 | #2400.00 | 82.4 PK | 88.1 | -5.7 | 1.00 H | 182 | 87.31 | -4.92 |
| 4 | #2400.00 | 67.2 AV | 78.2 | -11.0 | 1.00 H | 182 | 72.16 | -4.92 |
| 5 | *2412.00 | 108.1 PK | | | 1.00 H | 182 | 113.01 | -4.91 |
| 6 | *2412.00 | 98.2 AV | | | 1.00 H | 182 | 103.15 | -4.91 |
| 7 | 4824.00 | 55.1 PK | 74.0 | -18.9 | 1.00 H | 263 | 57.98 | -2.92 |
| 8 | 4824.00 | 43.1 AV | 54.0 | -11.0 | 1.00 H | 263 | 45.97 | -2.92 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 69.5 PK | 74.0 | -4.5 | 1.00 V | 298 | 74.41 | -4.93 |
| 2 | 2390.00 | 52.9 AV | 54.0 | -1.1 | 1.00 V | 298 | 57.81 | -4.93 |
| 3 | #2400.00 | 83.7 PK | 87.5 | -3.8 | 1.00 V | 298 | 88.64 | -4.92 |
| 4 | #2400.00 | 68.6 AV | 77.8 | -9.2 | 1.00 V | 298 | 73.51 | -4.92 |
| 5 | *2412.00 | 107.5 PK | | | 1.00 V | 298 | 112.42 | -4.91 |
| 6 | *2412.00 | 97.8 AV | | | 1.00 V | 298 | 102.73 | -4.91 |
| 7 | 4824.00 | 53.9 PK | 74.0 | -20.2 | 1.00 V | 86 | 56.77 | -2.92 |
| 8 | 4824.00 | 41.0 AV | 54.0 | -13.0 | 1.00 V | 86 | 43.94 | -2.92 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



| | | | |
|------------------------|--------------|------------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 106.1 PK | | | 1.00 H | 178 | 110.99 | -4.88 |
| 2 | *2437.00 | 96.5 AV | | | 1.00 H | 178 | 101.40 | -4.88 |
| 3 | 4874.00 | 53.4 PK | 74.0 | -20.6 | 1.00 H | 116 | 56.31 | -2.92 |
| 4 | 4874.00 | 41.5 AV | 54.0 | -12.6 | 1.00 H | 116 | 44.37 | -2.92 |
| 5 | 7311.00 | 56.1 PK | 74.0 | -17.9 | 1.00 H | 72 | 57.14 | -1.07 |
| 6 | 7311.00 | 42.8 AV | 54.0 | -11.2 | 1.00 H | 72 | 43.91 | -1.07 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 108.4 PK | | | 1.00 V | 302 | 113.30 | -4.88 |
| 2 | *2437.00 | 98.6 AV | | | 1.00 V | 302 | 103.43 | -4.88 |
| 3 | 4874.00 | 54.0 PK | 74.0 | -20.1 | 1.00 V | 305 | 56.87 | -2.92 |
| 4 | 4874.00 | 41.5 AV | 54.0 | -12.5 | 1.00 V | 305 | 44.38 | -2.92 |
| 5 | 7311.00 | 54.6 PK | 74.0 | -19.5 | 1.00 V | 189 | 55.62 | -1.07 |
| 6 | 7311.00 | 42.3 AV | 54.0 | -11.7 | 1.00 V | 189 | 43.41 | -1.07 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



| | | | |
|------------------------|---------------|--------------------------|--------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 107.4 PK | | | 1.00 H | 182 | 112.24 | -4.86 |
| 2 | *2462.00 | 98.0 AV | | | 1.00 H | 182 | 102.89 | -4.86 |
| 3 | 2483.50 | 71.0 PK | 74.0 | -3.0 | 1.00 H | 182 | 75.86 | -4.84 |
| 4 | 2483.50 | 53.0 AV | 54.0 | -1.0 | 1.00 H | 182 | 57.82 | -4.84 |
| 5 | 4924.00 | 51.2 PK | 74.0 | -22.8 | 1.00 H | 302 | 54.08 | -2.92 |
| 6 | 4924.00 | 40.6 AV | 54.0 | -13.4 | 1.00 H | 302 | 43.50 | -2.92 |
| 7 | 7386.00 | 55.3 PK | 74.0 | -18.7 | 1.00 H | 157 | 56.30 | -1.01 |
| 8 | 7386.00 | 41.8 AV | 54.0 | -12.3 | 1.00 H | 157 | 42.76 | -1.01 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 104.4 PK | | | 1.00 V | 305 | 112.08 | -7.66 |
| 2 | *2462.00 | 94.9 AV | | | 1.00 V | 305 | 102.59 | -7.66 |
| 3 | 2483.50 | 66.5 PK | 74.0 | -7.6 | 1.00 V | 305 | 74.05 | -7.60 |
| 4 | 2483.50 | 49.7 AV | 54.0 | -4.4 | 1.00 V | 305 | 57.25 | -7.60 |
| 5 | 4924.00 | 52.1 PK | 74.0 | -21.9 | 1.00 V | 88 | 53.75 | -1.64 |
| 6 | 4924.00 | 39.9 AV | 54.0 | -14.1 | 1.00 V | 88 | 41.53 | -1.64 |
| 7 | 7386.00 | 56.3 PK | 74.0 | -17.7 | 1.00 V | 223 | 53.45 | 2.87 |
| 8 | 7386.00 | 43.2 AV | 54.0 | -10.8 | 1.00 V | 223 | 40.36 | 2.87 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



802.11n (20MHz)

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 65.4 PK | 74.0 | -8.6 | 1.00 H | 205 | 73.31 | -7.87 |
| 2 | 2390.00 | 46.0 AV | 54.0 | -8.0 | 1.00 H | 205 | 53.90 | -7.87 |
| 3 | #2400.00 | 70.3 PK | 80.5 | -10.2 | N/A H | N/A | 78.09 | -7.84 |
| 4 | #2400.00 | 56.7 AV | 70.7 | -14.0 | N/A H | N/A | 64.58 | -7.84 |
| 5 | *2412.00 | 100.5 PK | | | 1.00 H | 205 | 108.32 | -7.81 |
| 6 | *2412.00 | 90.7 AV | | | 1.00 H | 205 | 98.55 | -7.81 |
| 7 | 4824.00 | 50.3 PK | 74.0 | -23.7 | 1.00 H | 215 | 52.25 | -1.97 |
| 8 | 4824.00 | 38.2 AV | 54.0 | -15.8 | 1.00 H | 215 | 40.20 | -1.97 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 69.2 PK | 74.0 | -4.8 | 1.30 V | 75 | 77.10 | -7.87 |
| 2 | 2390.00 | 50.5 AV | 54.0 | -3.5 | 1.30 V | 75 | 58.39 | -7.87 |
| 3 | #2400.00 | 83.8 PK | 85.6 | -1.8 | 1.30 V | 75 | 91.62 | -7.84 |
| 4 | #2400.00 | 67.3 AV | 75.5 | -8.3 | 1.30 V | 75 | 75.16 | -7.84 |
| 5 | *2412.00 | 105.6 PK | | | 1.30 V | 75 | 113.45 | -7.81 |
| 6 | *2412.00 | 95.5 AV | | | 1.30 V | 75 | 103.27 | -7.81 |
| 7 | 4824.00 | 49.8 PK | 74.0 | -24.2 | 1.30 V | 189 | 51.74 | -1.97 |
| 8 | 4824.00 | 37.9 AV | 54.0 | -16.1 | 1.30 V | 189 | 39.84 | -1.97 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



| | | | |
|------------------------|--------------|------------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 103.3 PK | | | 1.00 H | 210 | 111.06 | -7.73 |
| 2 | *2437.00 | 93.5 AV | | | 1.00 H | 210 | 101.19 | -7.73 |
| 3 | 4874.00 | 53.2 PK | 74.0 | -20.8 | 1.00 H | 76 | 55.00 | -1.81 |
| 4 | 4874.00 | 40.8 AV | 54.0 | -13.2 | 1.00 H | 76 | 42.58 | -1.81 |
| 5 | 7311.00 | 59.5 PK | 74.0 | -14.5 | 1.00 H | 221 | 56.74 | 2.75 |
| 6 | 7311.00 | 45.8 AV | 54.0 | -8.2 | 1.00 H | 221 | 43.04 | 2.75 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 102.3 PK | | | 1.00 V | 60 | 110.04 | -7.73 |
| 2 | *2437.00 | 92.6 AV | | | 1.00 V | 60 | 100.30 | -7.73 |
| 3 | 4874.00 | 53.8 PK | 74.0 | -20.2 | 1.40 V | 231 | 55.65 | -1.81 |
| 4 | 4874.00 | 41.0 AV | 54.0 | -13.0 | 1.40 V | 231 | 42.84 | -1.81 |
| 5 | 7311.00 | 59.3 PK | 74.0 | -14.7 | 1.40 V | 156 | 56.52 | 2.75 |
| 6 | 7311.00 | 45.8 AV | 54.0 | -8.2 | 1.40 V | 156 | 43.01 | 2.75 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



| | | | |
|------------------------|---------------|--------------------------|--------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 99.5 PK | | | 1.00 H | 160 | 107.14 | -7.66 |
| 2 | *2462.00 | 89.8 AV | | | 1.00 H | 160 | 97.44 | -7.66 |
| 3 | 2483.50 | 64.6 PK | 74.0 | -9.4 | 1.00 H | 160 | 72.17 | -7.60 |
| 4 | 2483.50 | 46.3 AV | 54.0 | -7.7 | 1.00 H | 160 | 53.86 | -7.60 |
| 5 | 4924.00 | 53.9 PK | 74.0 | -20.1 | 1.00 H | 156 | 55.53 | -1.64 |
| 6 | 4924.00 | 41.1 AV | 54.0 | -12.9 | 1.00 H | 156 | 42.72 | -1.64 |
| 7 | 7386.00 | 57.4 PK | 74.0 | -16.6 | 1.00 H | 312 | 54.51 | 2.87 |
| 8 | 7386.00 | 44.5 AV | 54.0 | -9.5 | 1.00 H | 312 | 41.62 | 2.87 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 103.1 PK | | | 1.00 V | 62 | 110.79 | -7.66 |
| 2 | *2462.00 | 93.2 AV | | | 1.00 V | 62 | 100.81 | -7.66 |
| 3 | 2483.50 | 70.0 PK | 74.0 | -4.0 | 1.00 V | 65 | 77.56 | -7.60 |
| 4 | 2483.50 | 51.7 AV | 54.0 | -2.3 | 1.00 V | 65 | 59.28 | -7.60 |
| 5 | 4924.00 | 52.9 PK | 74.0 | -21.1 | 1.00 V | 195 | 54.51 | -1.64 |
| 6 | 4924.00 | 40.5 AV | 54.0 | -13.5 | 1.00 V | 195 | 42.18 | -1.64 |
| 7 | 7386.00 | 57.8 PK | 74.0 | -16.2 | 1.00 V | 234 | 54.91 | 2.87 |
| 8 | 7386.00 | 44.3 AV | 54.0 | -9.7 | 1.00 V | 234 | 41.46 | 2.87 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



802.11n (40MHz)

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 3 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 64.4 PK | 74.0 | -9.6 | 1.50 H | 23 | 72.26 | -7.87 |
| 2 | 2390.00 | 50.1 AV | 54.0 | -3.9 | 1.50 H | 23 | 57.94 | -7.87 |
| 3 | #2400.00 | 66.1 PK | 77.9 | -11.8 | 1.50 H | 23 | 73.90 | -7.84 |
| 4 | #2400.00 | 54.2 AV | 68.2 | -14.0 | 1.50 H | 23 | 62.06 | -7.84 |
| 5 | *2422.00 | 97.9 PK | | | 1.50 H | 23 | 105.71 | -7.78 |
| 6 | *2422.00 | 88.2 AV | | | 1.50 H | 23 | 95.93 | -7.78 |
| 7 | 4844.00 | 52.4 PK | 74.0 | -21.6 | 1.50 H | 126 | 54.35 | -1.91 |
| 8 | 4844.00 | 39.9 AV | 54.0 | -14.1 | 1.50 H | 126 | 41.82 | -1.91 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 55.3 PK | 74.0 | -18.7 | 1.00 V | 72 | 63.14 | -7.87 |
| 2 | 2390.00 | 39.9 AV | 54.0 | -14.1 | 1.00 V | 72 | 47.76 | -7.87 |
| 3 | #2400.00 | 72.4 PK | 79.2 | -6.8 | 1.00 V | 72 | 80.27 | -7.84 |
| 4 | #2400.00 | 60.1 AV | 69.6 | -9.5 | 1.00 V | 72 | 67.89 | -7.84 |
| 5 | *2422.00 | 99.2 PK | | | 1.00 V | 72 | 106.99 | -7.78 |
| 6 | *2422.00 | 89.6 AV | | | 1.00 V | 72 | 97.36 | -7.78 |
| 7 | 4844.00 | 52.6 PK | 74.0 | -21.4 | 1.00 V | 264 | 54.55 | -1.91 |
| 8 | 4844.00 | 40.1 AV | 54.0 | -14.0 | 1.00 V | 264 | 41.96 | -1.91 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



| | | | |
|-----------------|--------------|-------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2437.00 | 99.1 PK | | | 1.00 H | 360 | 106.87 | -7.73 |
| 2 | *2437.00 | 89.4 AV | | | 1.00 H | 360 | 97.08 | -7.73 |
| 3 | 4884.00 | 52.8 PK | 74.0 | -21.2 | 1.00 H | 306 | 54.56 | -1.77 |
| 4 | 4884.00 | 40.9 AV | 54.0 | -13.1 | 1.00 H | 306 | 42.66 | -1.77 |
| 5 | 7311.00 | 57.6 PK | 74.0 | -16.4 | 1.00 H | 248 | 54.84 | 2.75 |
| 6 | 7311.00 | 44.6 AV | 54.0 | -9.4 | 1.00 H | 248 | 41.82 | 2.75 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2437.00 | 101.6 PK | | | 1.00 V | 75 | 109.36 | -7.73 |
| 2 | *2437.00 | 91.3 AV | | | 1.00 V | 75 | 99.07 | -7.73 |
| 3 | 4874.00 | 53.2 PK | 74.0 | -20.8 | 1.00 V | 126 | 55.04 | -1.81 |
| 4 | 4874.00 | 40.6 AV | 54.0 | -13.4 | 1.00 V | 126 | 42.45 | -1.81 |
| 5 | 7311.00 | 58.1 PK | 74.0 | -15.9 | 1.00 V | 72 | 55.32 | 2.75 |
| 6 | 7311.00 | 44.8 AV | 54.0 | -9.2 | 1.00 V | 72 | 42.06 | 2.75 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 9 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 98.3 PK | | | 1.00 H | 345 | 106.02 | -7.69 |
| 2 | *2462.00 | 88.3 AV | | | 1.00 H | 345 | 95.98 | -7.69 |
| 3 | 2483.50 | 66.5 PK | 74.0 | -7.5 | 1.00 H | 345 | 74.06 | -7.60 |
| 4 | 2483.50 | 51.7 AV | 54.0 | -2.3 | 1.00 H | 345 | 59.34 | -7.60 |
| 5 | 4904.00 | 53.7 PK | 74.0 | -20.3 | 1.00 H | 186 | 55.45 | -1.71 |
| 6 | 4904.00 | 40.6 AV | 54.0 | -13.4 | 1.00 H | 186 | 42.28 | -1.71 |
| 7 | 7356.00 | 57.0 PK | 74.0 | -17.0 | 1.00 H | 248 | 54.22 | 2.81 |
| 8 | 7356.00 | 44.5 AV | 54.0 | -9.5 | 1.00 H | 248 | 41.66 | 2.81 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 101.5 PK | | | 1.00 V | 355 | 109.20 | -7.69 |
| 2 | *2462.00 | 91.1 AV | | | 1.00 V | 355 | 98.75 | -7.69 |
| 3 | 2483.50 | 68.7 PK | 74.0 | -5.3 | 1.00 V | 355 | 76.34 | -7.60 |
| 4 | 2483.50 | 52.9 AV | 54.0 | -1.1 | 1.00 V | 355 | 60.51 | -7.60 |
| 5 | 4902.00 | 53.8 PK | 74.0 | -20.3 | 1.00 V | 178 | 55.46 | -1.71 |
| 6 | 4902.00 | 41.1 AV | 54.0 | -13.0 | 1.00 V | 178 | 42.76 | -1.71 |
| 7 | 7356.00 | 57.9 PK | 74.0 | -16.1 | 1.00 V | 245 | 55.11 | 2.81 |
| 8 | 7356.00 | 44.6 AV | 54.0 | -9.4 | 1.00 V | 245 | 41.76 | 2.81 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.



BELOW 1GHz WORST-CASE DATA:


BT-LE (GFSK)

| | | | |
|------------------------|---------------|--------------------------|-----------------|
| CHANNEL | TX Channel 39 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 32.91 | -52.7 QP | -13.0 | -39.7 | 1.00 H | 0 | -68.08 | 15.34 |
| 2 | 95.96 | -73.1 QP | -13.0 | -60.1 | 1.00 H | 0 | -62.78 | -10.30 |
| 3 | 182.29 | -85.9 QP | -13.0 | -72.9 | 1.00 H | 0 | -68.24 | -17.70 |
| 4 | 377.26 | -84.2 QP | -13.0 | -71.2 | 1.00 H | 0 | -72.99 | -11.22 |
| 5 | 510.15 | -83.7 QP | -13.0 | -70.7 | 1.00 H | 0 | -73.44 | -10.21 |
| 6 | 644.98 | -81.6 QP | -13.0 | -68.6 | 1.00 H | 0 | -74.36 | -7.20 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

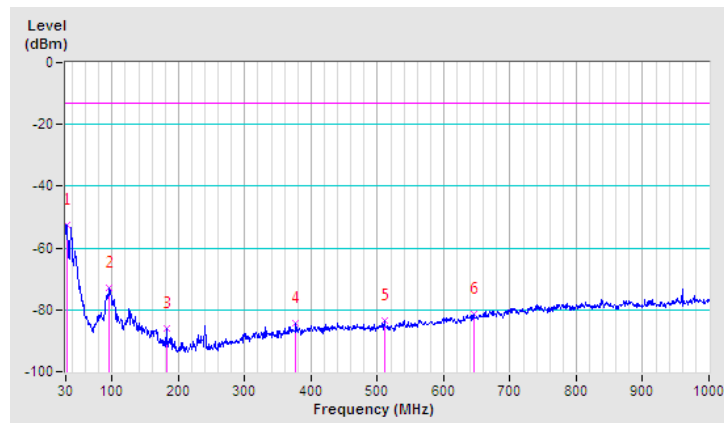




| | | | |
|------------------------|---------------|------------------------------|-----------------|
| CHANNEL | TX Channel 39 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz | | |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 30.00 | -56.0 QP | -13.0 | -43.0 | 1.00 V | 0 | -61.29 | 5.33 |
| 2 | 96.93 | -72.4 QP | -13.0 | -59.4 | 1.00 V | 0 | -61.76 | -10.63 |
| 3 | 129.91 | -73.9 QP | -13.0 | -60.9 | 1.00 V | 0 | -62.79 | -11.15 |
| 4 | 318.09 | -86.2 QP | -13.0 | -73.2 | 1.00 V | 0 | -74.93 | -11.23 |
| 5 | 533.43 | -80.5 QP | -13.0 | -67.5 | 1.00 V | 0 | -73.18 | -7.28 |
| 6 | 760.41 | -79.1 QP | -13.0 | -66.1 | 1.00 V | 0 | -73.43 | -5.64 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

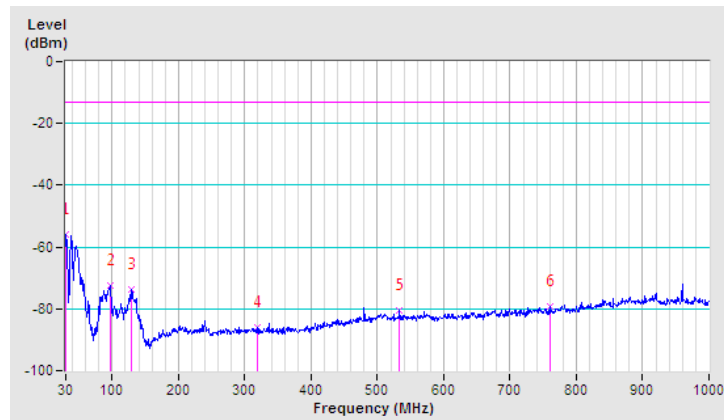



ABOVE 1GHz TEST DATA:

BT-LE (GFSK)

| | | | |
|-----------------|--------------|-------------------|--------------|
| CHANNEL | TX Channel 0 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 70.2 PK | 74.0 | -3.8 | 1.00 H | 195 | 78.10 | -7.87 |
| 2 | 2390.00 | 41.7 AV | 54.0 | -12.3 | 1.00 H | 195 | 49.55 | -7.87 |
| 3 | #2400.00 | 55.1 PK | 70.7 | -15.6 | 1.50 H | 195 | 62.97 | -7.84 |
| 4 | #2400.00 | 39.4 AV | 47.7 | -8.3 | 1.50 H | 195 | 47.28 | -7.84 |
| 5 | *2402.00 | 90.7 PK | | | 1.50 H | 195 | 98.49 | -7.84 |
| 6 | *2402.00 | 67.7 AV | | | 1.50 H | 195 | 75.52 | -7.84 |
| 7 | 4804.00 | 51.8 PK | 74.0 | -22.2 | 1.00 H | 159 | 53.83 | -2.04 |
| 8 | 4804.00 | 38.3 AV | 54.0 | -15.7 | 1.00 H | 159 | 40.31 | -2.04 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 61.2 PK | 74.0 | -12.8 | 1.00 V | 100 | 69.06 | -7.87 |
| 2 | 2390.00 | 33.0 AV | 54.0 | -21.0 | 1.00 V | 100 | 40.89 | -7.87 |
| 3 | #2400.00 | 56.3 PK | 73.1 | -16.8 | 1.00 V | 88 | 64.10 | -7.84 |
| 4 | #2400.00 | 40.9 AV | 49.3 | -8.4 | 1.00 V | 88 | 48.75 | -7.84 |
| 5 | *2402.00 | 93.1 PK | | | 1.00 V | 88 | 100.98 | -7.84 |
| 6 | *2402.00 | 69.3 AV | | | 1.00 V | 88 | 77.13 | -7.84 |
| 7 | 4804.00 | 49.8 PK | 74.0 | -24.2 | 1.00 V | 112 | 51.83 | -2.04 |
| 8 | 4804.00 | 37.7 AV | 54.0 | -16.3 | 1.00 V | 112 | 39.78 | -2.04 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



| | | | |
|------------------------|---------------|------------------------------|--------------|
| CHANNEL | TX Channel 19 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2440.00 | 89.1 PK | | | 1.50 H | 198 | 96.79 | -7.73 |
| 2 | *2440.00 | 67.0 AV | | | 1.50 H | 198 | 74.72 | -7.73 |
| 3 | 4880.00 | 50.8 PK | 74.0 | -23.2 | 1.50 H | 234 | 52.57 | -1.78 |
| 4 | 4880.00 | 38.5 AV | 54.0 | -15.5 | 1.50 H | 234 | 40.29 | -1.78 |
| 5 | 7320.00 | 55.8 PK | 74.0 | -18.2 | 1.50 H | 212 | 53.02 | 2.76 |
| 6 | 7320.00 | 42.9 AV | 54.0 | -11.1 | 1.50 H | 212 | 40.18 | 2.76 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2440.00 | 91.5 PK | | | 1.50 V | 223 | 99.27 | -7.73 |
| 2 | *2440.00 | 71.8 AV | | | 1.50 V | 223 | 79.49 | -7.73 |
| 3 | 4880.00 | 51.1 PK | 74.0 | -23.0 | 1.50 V | 158 | 52.83 | -1.78 |
| 4 | 4880.00 | 39.7 AV | 54.0 | -14.3 | 1.50 V | 158 | 41.51 | -1.78 |
| 5 | 7322.00 | 55.6 PK | 74.0 | -18.4 | 1.50 V | 178 | 52.87 | 2.76 |
| 6 | 7322.00 | 43.1 AV | 54.0 | -10.9 | 1.50 V | 178 | 40.37 | 2.76 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



| | | | |
|-----------------|---------------|-------------------|--------------|
| CHANNEL | TX Channel 39 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2480.00 | 89.6 PK | | | 1.40 H | 360 | 97.17 | -7.61 |
| 2 | *2480.00 | 67.2 AV | | | 1.40 H | 360 | 74.78 | -7.61 |
| 3 | 2483.50 | 43.8 PK | 74.0 | -30.2 | 1.40 H | 360 | 51.44 | -7.60 |
| 4 | 2483.50 | 32.8 AV | 54.0 | -21.2 | 1.40 H | 360 | 40.37 | -7.60 |
| 5 | 4960.00 | 51.0 PK | 74.0 | -23.0 | 1.00 H | 225 | 52.55 | -1.52 |
| 6 | 4960.00 | 39.0 AV | 54.0 | -15.0 | 1.00 H | 225 | 40.48 | -1.52 |
| 7 | 7440.00 | 56.5 PK | 74.0 | -17.5 | 1.00 H | 298 | 53.52 | 2.96 |
| 8 | 7440.00 | 43.1 AV | 54.0 | -10.9 | 1.00 H | 298 | 40.15 | 2.96 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2480.00 | 95.2 PK | | | 1.00 V | 73 | 102.83 | -7.61 |
| 2 | *2480.00 | 69.8 AV | | | 1.00 V | 73 | 77.40 | -7.61 |
| 3 | 2483.50 | 44.1 PK | 74.0 | -29.9 | 1.00 V | 73 | 51.72 | -7.60 |
| 4 | 2483.50 | 32.6 AV | 54.0 | -21.4 | 1.00 V | 73 | 40.22 | -7.60 |
| 5 | 4960.00 | 51.6 PK | 74.0 | -22.4 | 1.00 V | 186 | 53.15 | -1.52 |
| 6 | 4960.00 | 38.6 AV | 54.0 | -15.4 | 1.00 V | 186 | 40.08 | -1.52 |
| 7 | 7440.00 | 55.5 PK | 74.0 | -18.5 | 1.00 V | 212 | 52.52 | 2.96 |
| 8 | 7440.00 | 42.9 AV | 54.0 | -11.1 | 1.00 V | 212 | 39.96 | 2.96 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



4.3 6 dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|--------------------------------|---------------|-----------|------------|-------------|-------------|
| Spectrum Analyzer (10Hz–40GHz) | Rohde&Schwarz | FSV40 | 101003 | Apr. 07,15 | Apr. 06,16 |
| Power Meter | Anritsu | ML2495A | 1139001 | Feb. 20,15 | Feb. 19,17 |
| Power Sensor | Anritsu | MA2411B | 1126068 | Feb. 20,15 | Feb. 19,17 |
| Power Sensor | Keysight | U2021XA | MY55060016 | Feb. 18,15 | Feb. 17,17 |
| Power Sensor | Keysight | U2021XA | MY55060018 | Feb. 18,15 | Feb. 17,17 |
| Digital Multimeter | FLUKE | 15B | A1220010DG | Oct. 12, 15 | Oct. 11, 16 |

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

4.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

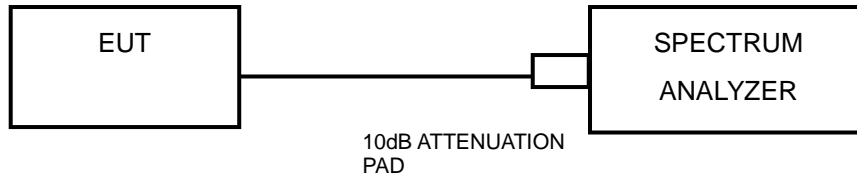

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1 | 2412 | 9.15 | 0.5 | PASS |
| 6 | 2437 | 9.14 | 0.5 | PASS |
| 11 | 2462 | 9.14 | 0.5 | PASS |

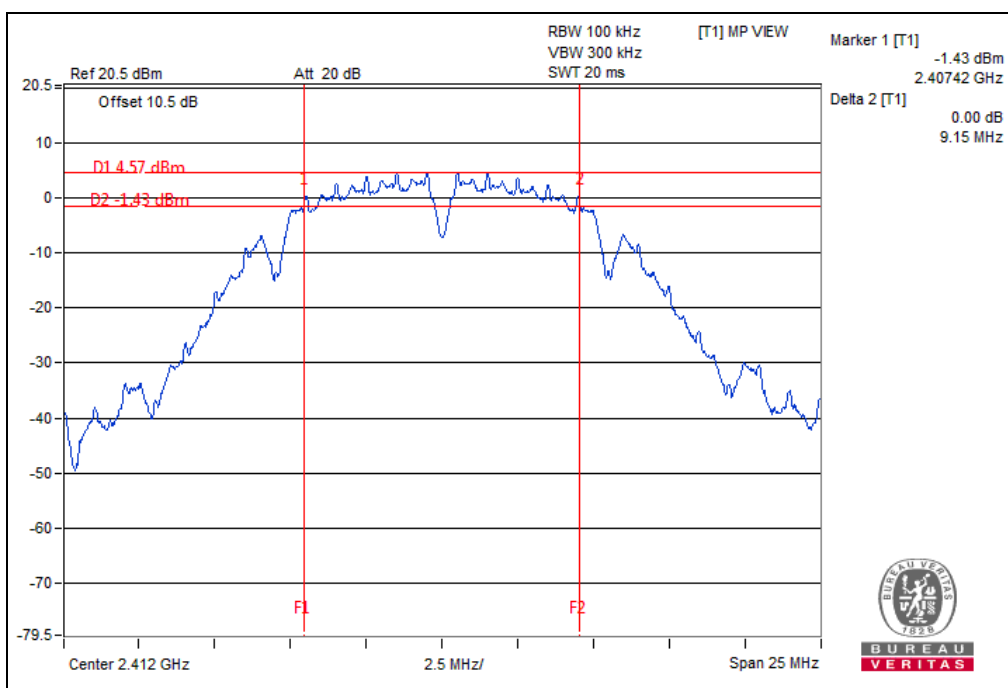




BUREAU VERITAS

Test Report No.: RF160218W004-2

802.11g

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1 | 2412 | 16.37 | 0.5 | PASS |
| 6 | 2437 | 16.37 | 0.5 | PASS |
| 11 | 2462 | 16.38 | 0.5 | PASS |

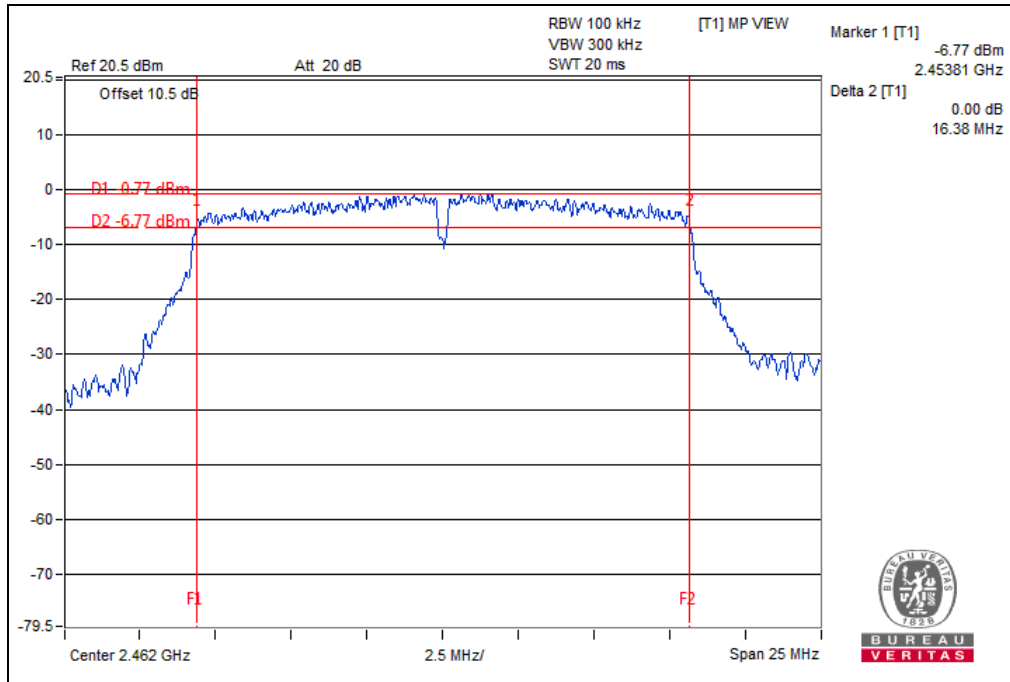




**BUREAU
VERITAS**

Test Report No.: RF160218W004-2

802.11n (20MHz)

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1 | 2412 | 17.60 | 0.5 | PASS |
| 6 | 2437 | 17.60 | 0.5 | PASS |
| 11 | 2462 | 17.60 | 0.5 | PASS |

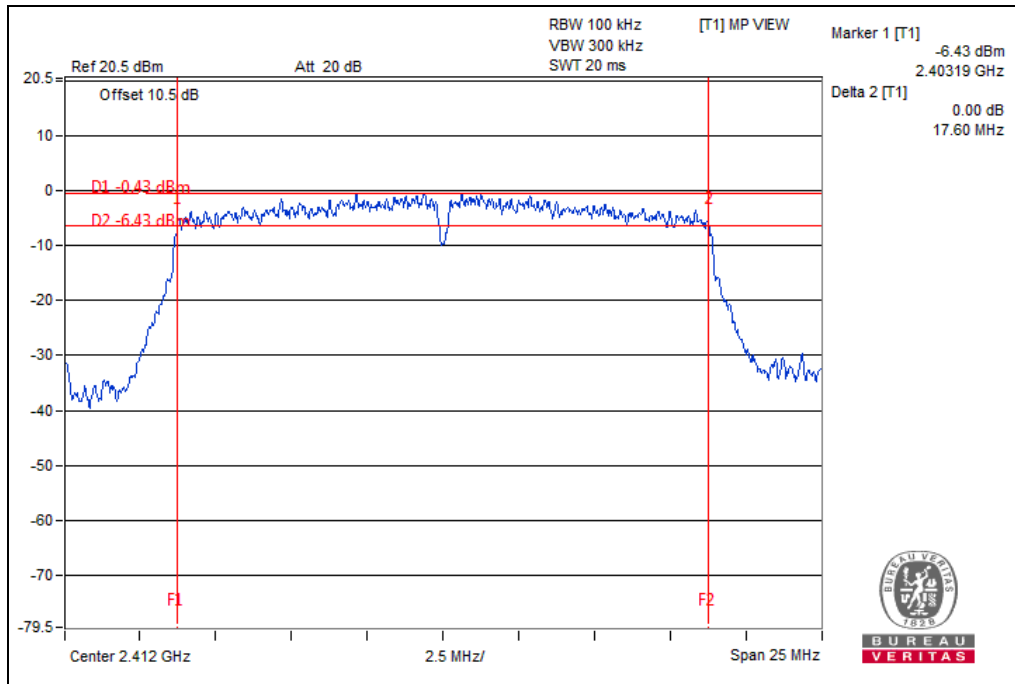




BUREAU VERITAS

Test Report No.: RF160218W004-2

802.11n (40MHz)

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 3 | 2422 | 36.36 | 0.5 | PASS |
| 6 | 2437 | 36.33 | 0.5 | PASS |
| 9 | 2452 | 36.33 | 0.5 | PASS |

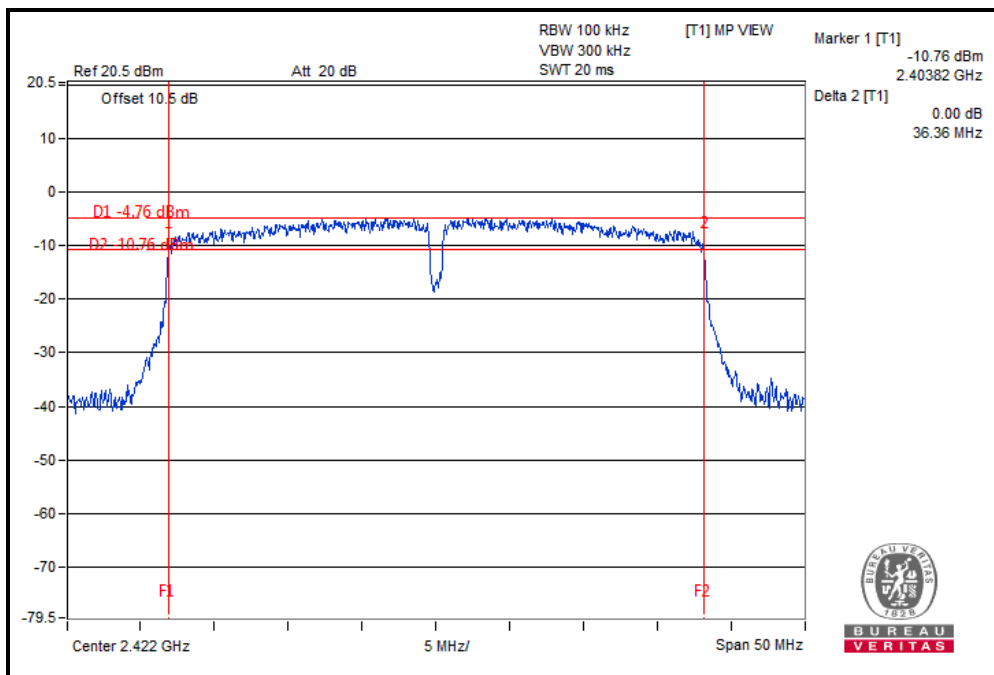




**BUREAU
VERITAS**

Test Report No.: RF160218W004-2

BT-LE (GFSK)

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 0 | 2402 | 0.71 | 0.5 | PASS |
| 19 | 2440 | 0.71 | 0.5 | PASS |
| 39 | 2480 | 0.71 | 0.5 | PASS |

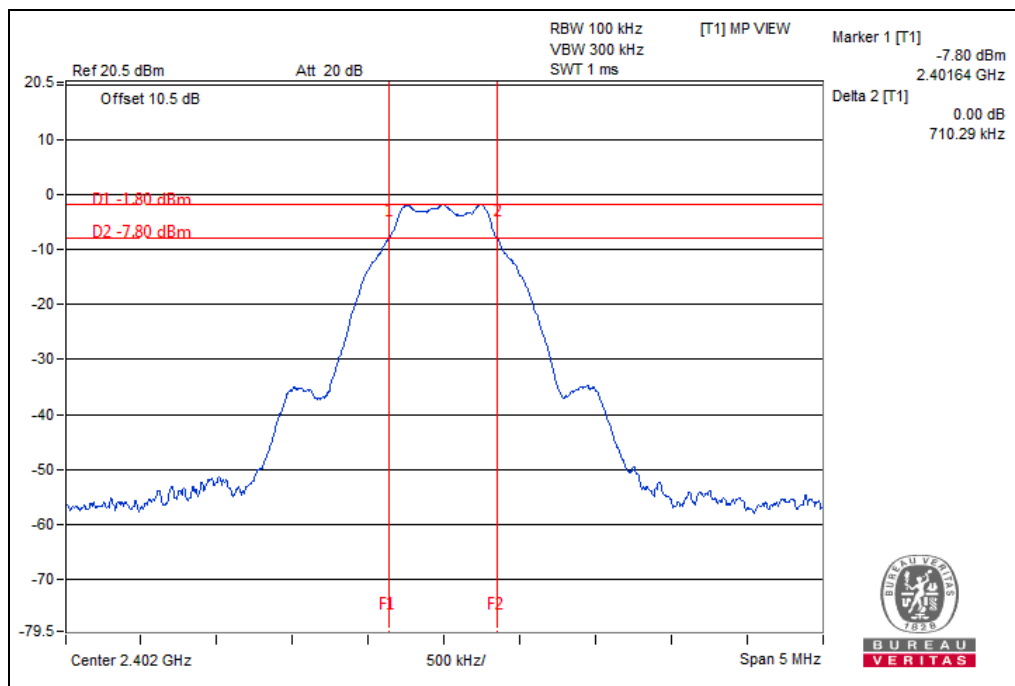




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 TEST SETUP

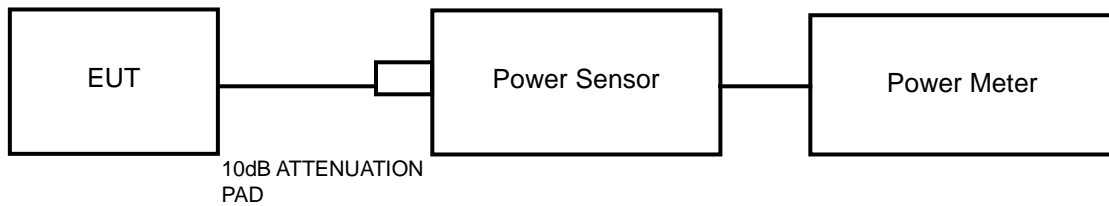

4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.4.7 TEST RESULTS

4.4.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER (dBm) | PEAK POWER (mW) | PEAK POWER LIMIT(W) | PASS/FAIL |
|---------|-------------------------|------------------|-----------------|---------------------|-----------|
| 1 | 2412 | 17.06 | 50.816 | 1 | PASS |
| 6 | 2437 | 17.04 | 50.582 | 1 | PASS |
| 11 | 2462 | 17.11 | 51.404 | 1 | PASS |

802.11g

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER (dBm) | PEAK POWER (mW) | PEAK POWER LIMIT(W) | PASS/FAIL |
|---------|-------------------------|------------------|-----------------|---------------------|-----------|
| 1 | 2412 | 18.23 | 66.527 | 1 | PASS |
| 6 | 2437 | 18.79 | 75.683 | 1 | PASS |
| 11 | 2462 | 19.50 | 89.125 | 1 | PASS |

802.11n (20MHz)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER (dBm) | PEAK POWER (mW) | PEAK POWER LIMIT(W) | PASS/FAIL |
|---------|-------------------------|------------------|-----------------|---------------------|-----------|
| 1 | 2412 | 18.06 | 63.973 | 1 | PASS |
| 6 | 2437 | 19.51 | 89.331 | 1 | PASS |
| 11 | 2462 | 18.84 | 76.560 | 1 | PASS |

802.11n (40MHz)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER (dBm) | PEAK POWER (mW) | PEAK POWER LIMIT(W) | PASS/FAIL |
|---------|-------------------------|------------------|-----------------|---------------------|-----------|
| 3 | 2422 | 18.45 | 69.984 | 1 | PASS |
| 6 | 2437 | 19.08 | 80.910 | 1 | PASS |
| 9 | 2452 | 19.21 | 83.368 | 1 | PASS |



BT-LE (GFSK)

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER (dBm) | PEAK POWER (mW) | PEAK POWER LIMIT(W) | PASS/FAIL |
|---------|-------------------------|------------------|-----------------|---------------------|-----------|
| 0 | 2402 | -2.21 | 0.601 | 1 | PASS |
| 19 | 2440 | -1.84 | 0.655 | 1 | PASS |
| 39 | 2480 | -2.07 | 0.621 | 1 | PASS |



4.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

| CHANNEL | CHANNEL FREQUENCY (MHz) | AVERAGE POWER (dBm) | PASS/FAIL |
|---------|-------------------------|---------------------|-----------|
| 1 | 2412 | 14.24 | N/A |
| 6 | 2437 | 14.29 | N/A |
| 11 | 2462 | 14.46 | N/A |

802.11g

| CHANNEL | CHANNEL FREQUENCY (MHz) | AVERAGE POWER (dBm) | PASS/FAIL |
|---------|-------------------------|---------------------|-----------|
| 1 | 2412 | 11.64 | N/A |
| 6 | 2437 | 11.88 | N/A |
| 11 | 2462 | 12.06 | N/A |

802.11n (20MHz)

| CHANNEL | CHANNEL FREQUENCY (MHz) | AVERAGE POWER (dBm) | PASS/FAIL |
|---------|-------------------------|---------------------|-----------|
| 1 | 2412 | 11.83 | N/A |
| 6 | 2437 | 12.11 | N/A |
| 11 | 2462 | 12.14 | N/A |

802.11n (40MHz)

| CHANNEL | CHANNEL FREQUENCY (MHz) | AVERAGE POWER (dBm) | PASS/FAIL |
|---------|-------------------------|---------------------|-----------|
| 3 | 2422 | 11.75 | N/A |
| 6 | 2437 | 11.81 | N/A |
| 9 | 2452 | 11.85 | N/A |



BT-LE (GFSK)

| CHANNEL | CHANNEL FREQUENCY (MHz) | AVERAGE POWER (dBm) | PASS/FAIL |
|---------|-------------------------|---------------------|-----------|
| 0 | 2402 | -2.73 | N/A |
| 19 | 2440 | -2.36 | N/A |
| 39 | 2480 | -2.63 | N/A |




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.5.7 TEST RESULTS

802.11b

| Channel | FREQ. (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) | PASS /FAIL |
|---------|-------------|----------------|------------------|------------|
| 1 | 2412 | -13.67 | 8 | PASS |
| 6 | 2437 | -13.85 | 8 | PASS |
| 11 | 2462 | -13.80 | 8 | PASS |

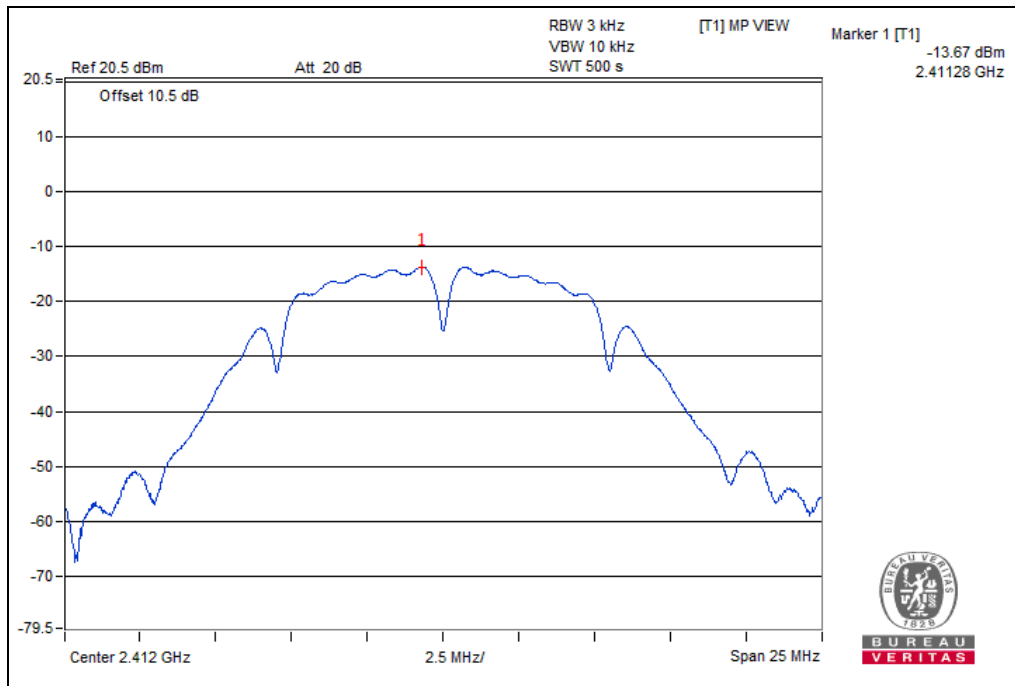




**BUREAU
VERITAS**

Test Report No.: RF160218W004-2

802.11g

| Channel | FREQ. (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) | PASS /FAIL |
|---------|-------------|----------------|------------------|------------|
| 1 | 2412 | -14.34 | 8 | PASS |
| 6 | 2437 | -14.62 | 8 | PASS |
| 11 | 2462 | -14.66 | 8 | PASS |

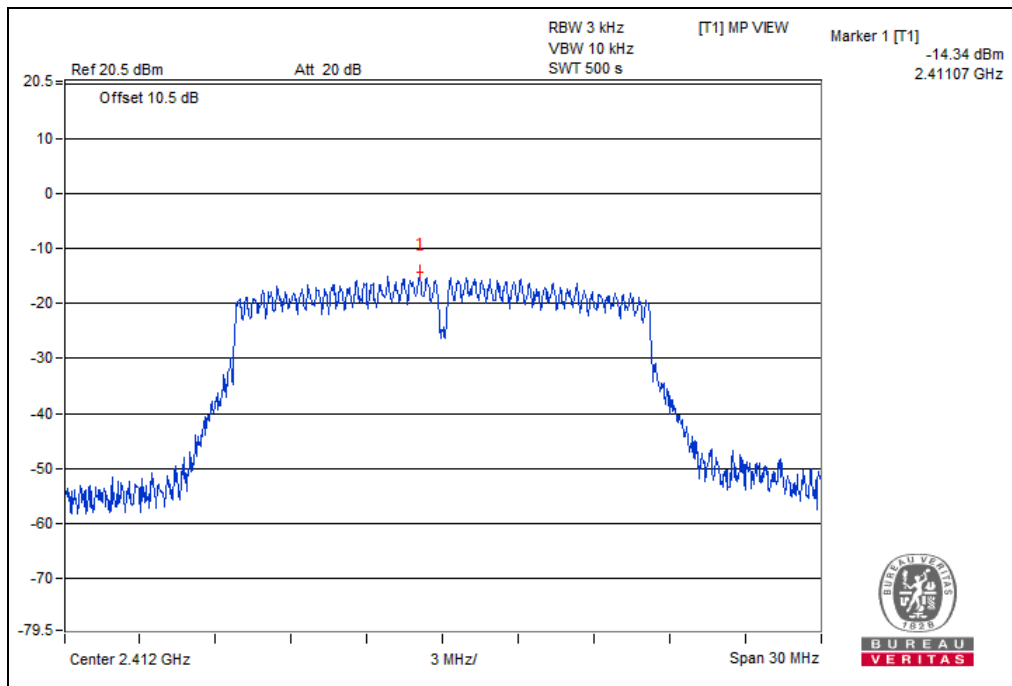




**BUREAU
VERITAS**

Test Report No.: RF160218W004-2

802.11n (20MHz)

| Channel | FREQ. (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) | PASS /FAIL |
|---------|-------------|----------------|------------------|------------|
| 1 | 2412 | -14.56 | 8 | PASS |
| 6 | 2437 | -14.52 | 8 | PASS |
| 11 | 2462 | -13.99 | 8 | PASS |

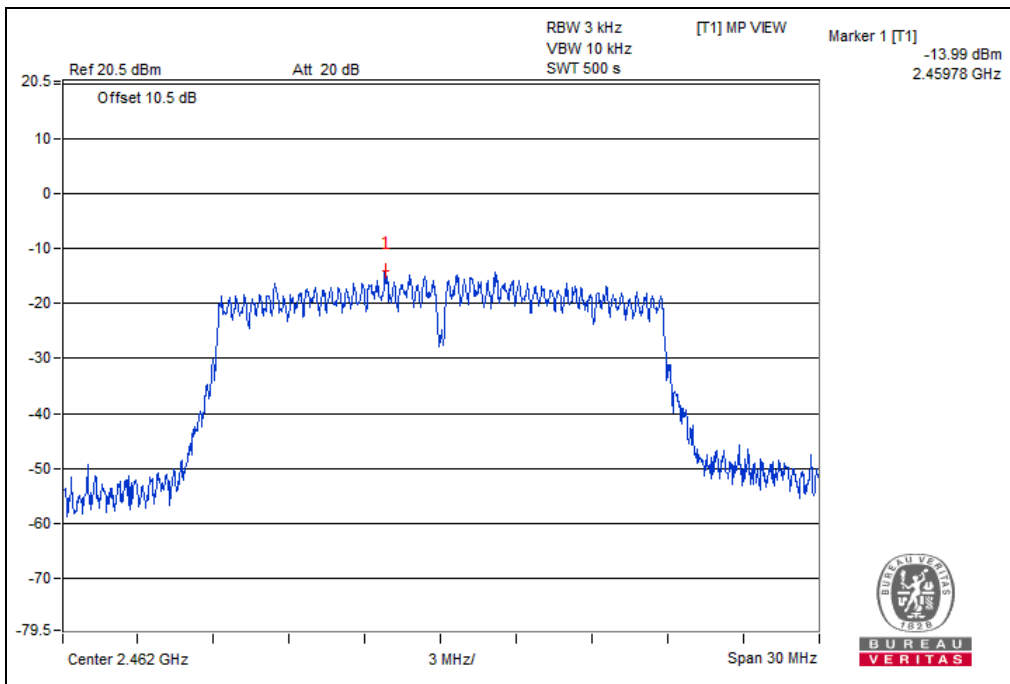




**BUREAU
VERITAS**

Test Report No.: RF160218W004-2

802.11n (40MHz)

| Channel | FREQ. (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) | PASS /FAIL |
|---------|-------------|----------------|------------------|------------|
| 3 | 2422 | -17.96 | 8 | PASS |
| 6 | 2437 | -17.96 | 8 | PASS |
| 9 | 2452 | -17.55 | 8 | PASS |

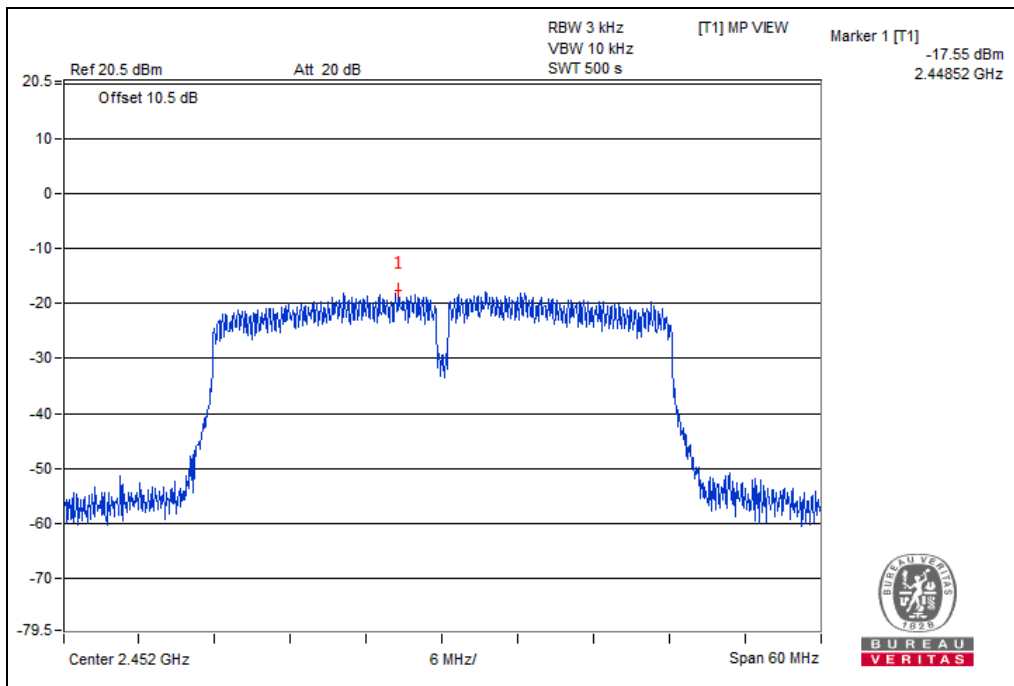




**BUREAU
VERITAS**

Test Report No.: RF160218W004-2

BT-LE (GFSK)

| Channel | FREQ. (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) | PASS /FAIL |
|---------|-------------|----------------|------------------|------------|
| 0 | 2402 | -14.96 | 8 | PASS |
| 19 | 2440 | -15.12 | 8 | PASS |
| 39 | 2480 | -14.85 | 8 | PASS |

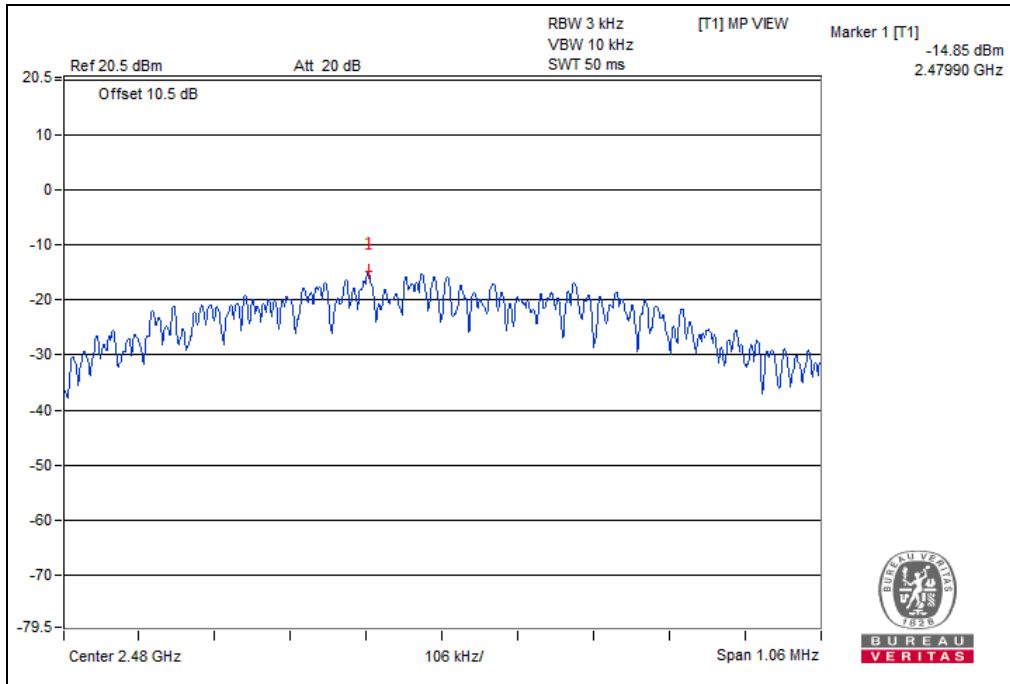

**BUREAU
VERITAS**




4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

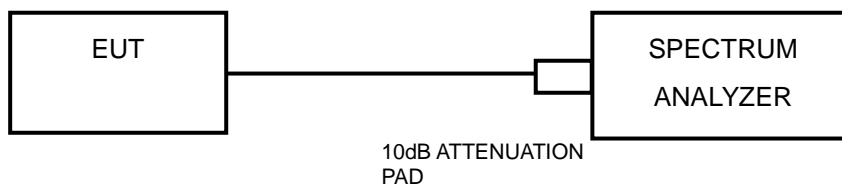

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.




4.6.8 TEST RESULTS

802.11b


CH 1

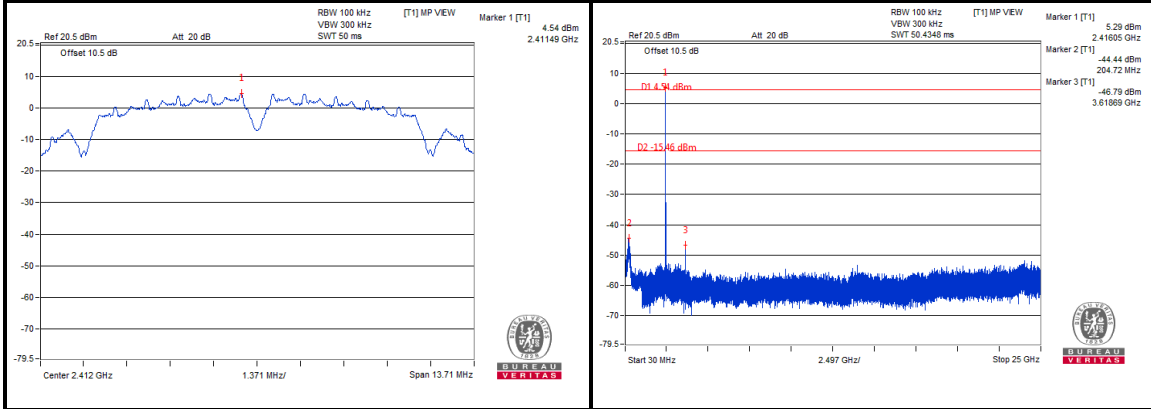

CH 6

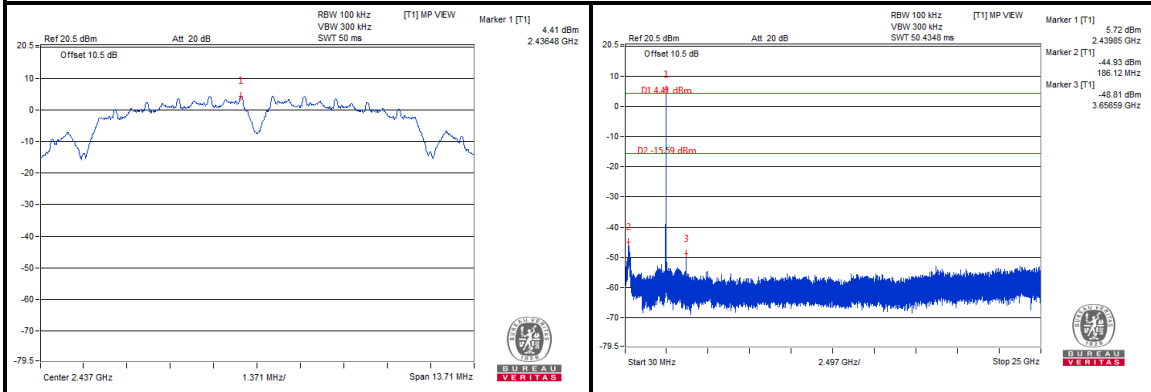

CH 11

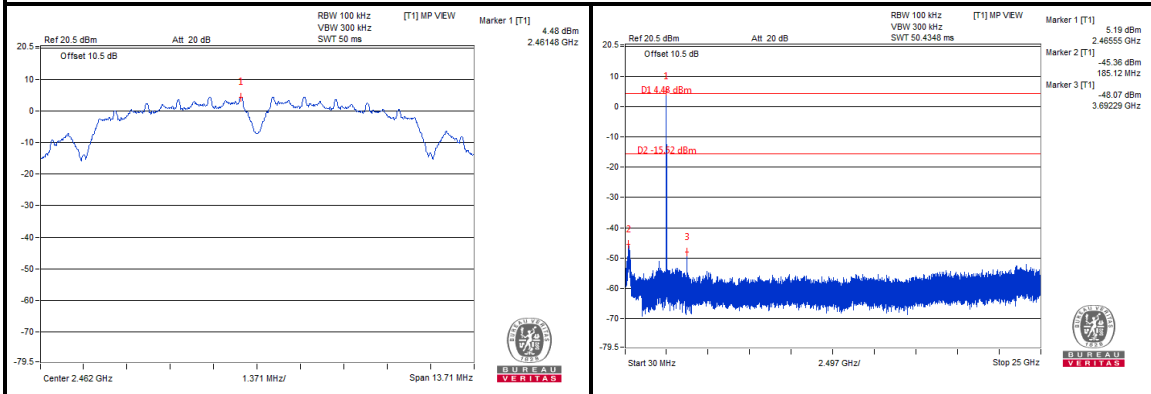




BUREAU VERITAS


Test Report No.: RF160218W004-2

802.11g


CH 1

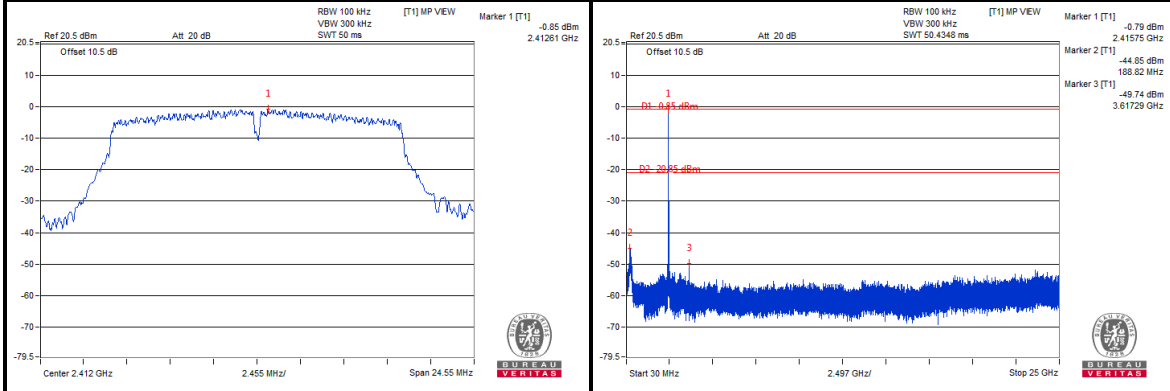

CH 6

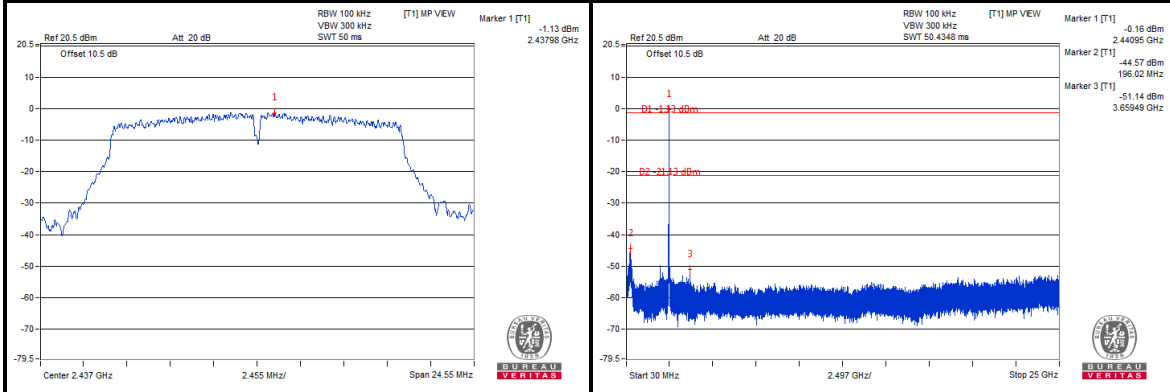

CH 11

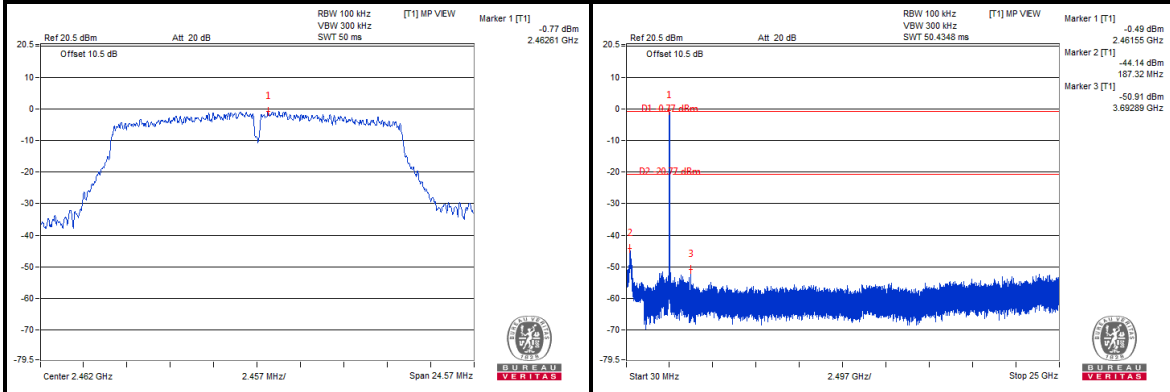

Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com





BUREAU VERITAS



Test Report No.: RF160218W004-2

802.11n (20MHz)



CH 1

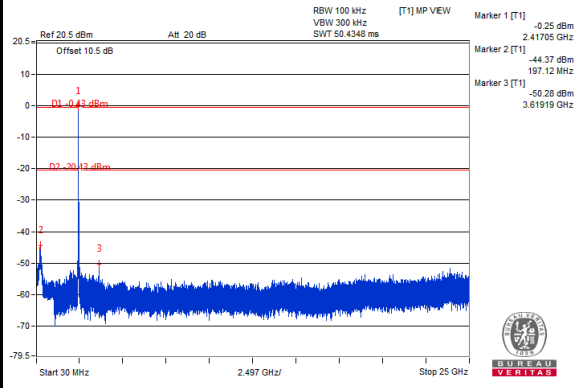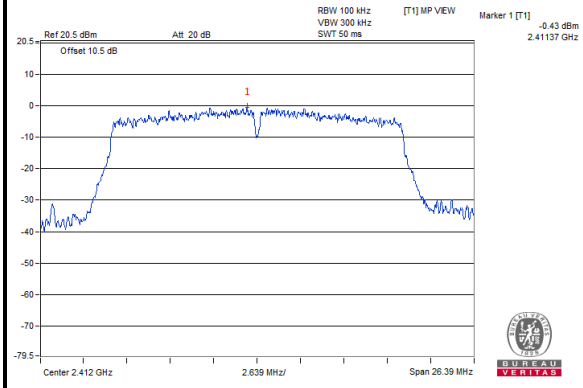

CH 6

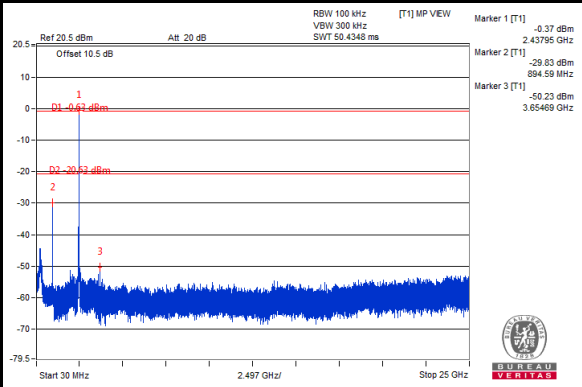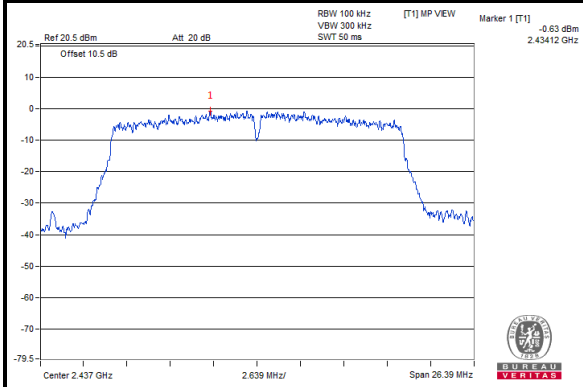

CH 11

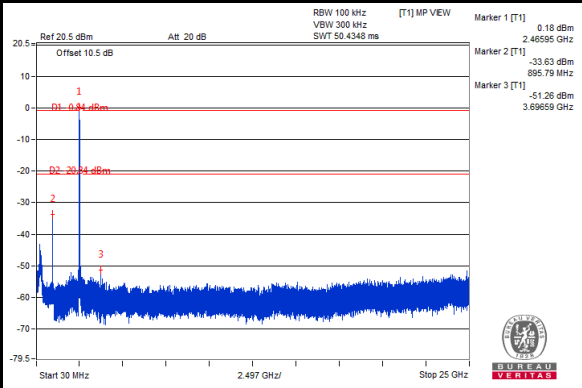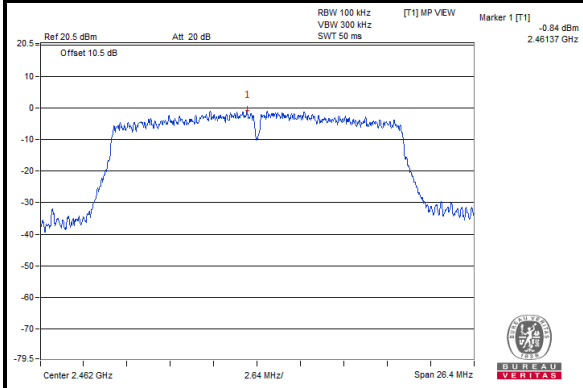

Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com





BUREAU VERITAS



Test Report No.: RF160218W004-2

802.11n (40MHz)



CH 3

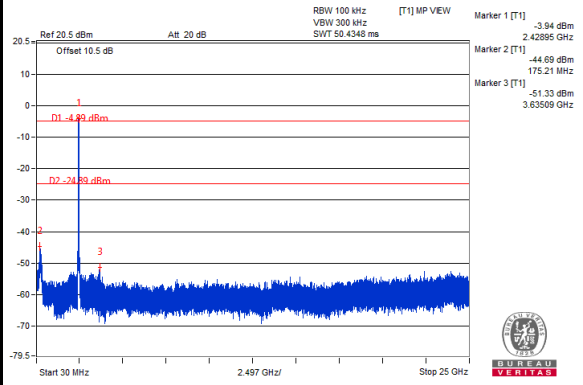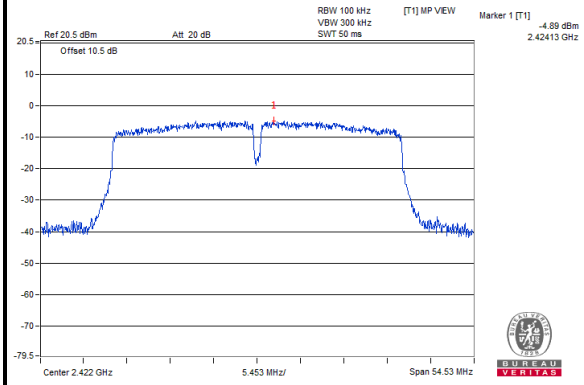

CH 6

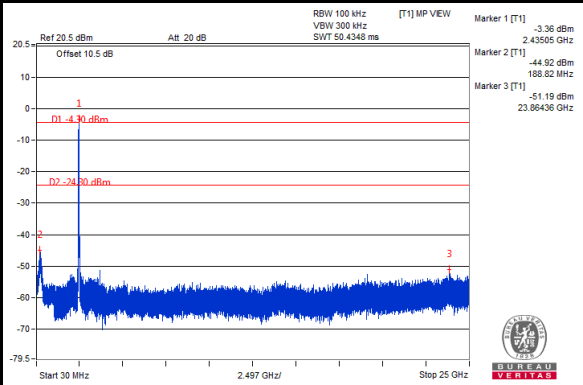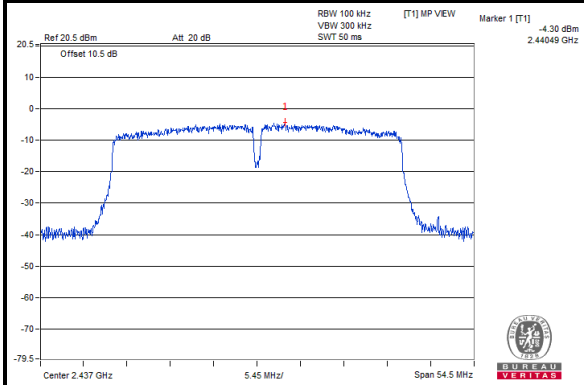

CH 9

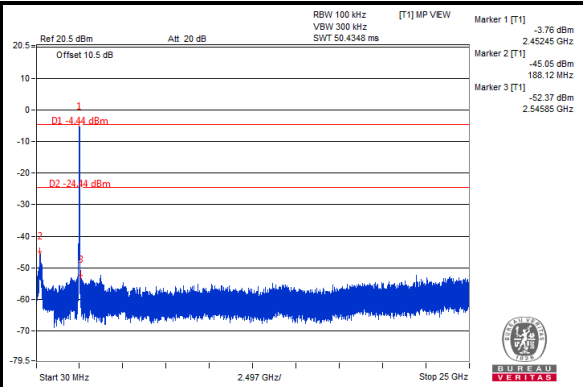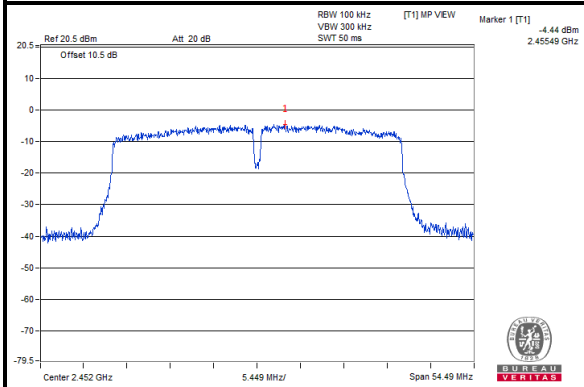





BUREAU VERITAS



Test Report No.: RF160218W004-2

BT-LE (GFSK)



CH 0

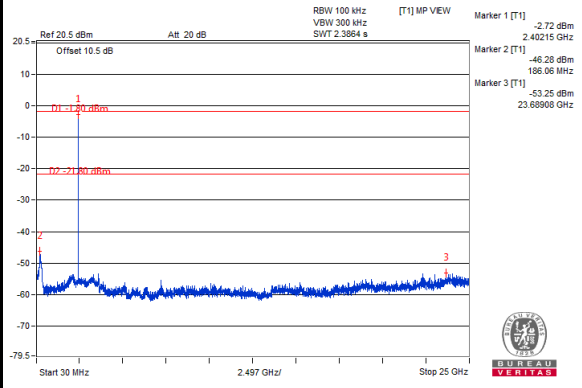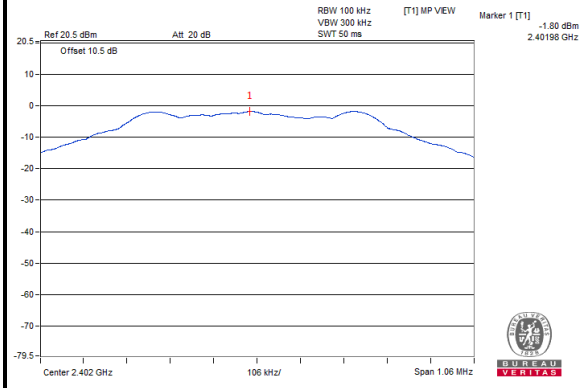

CH 19

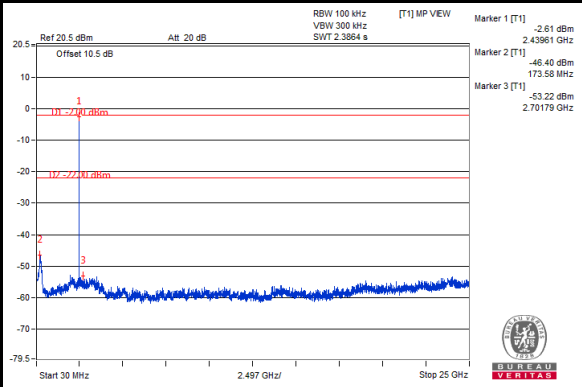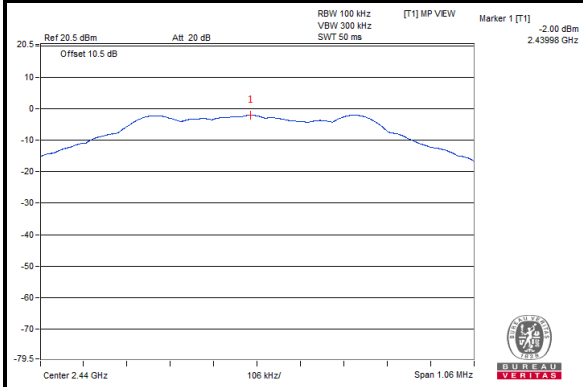

CH 39

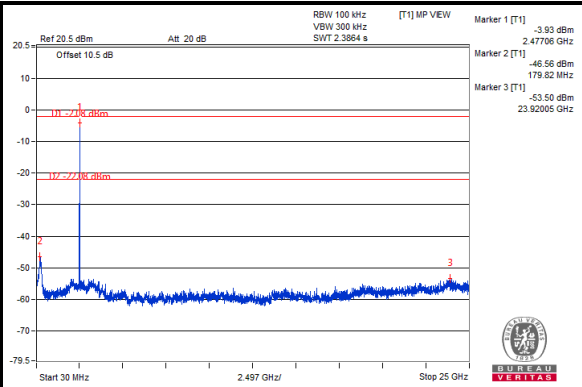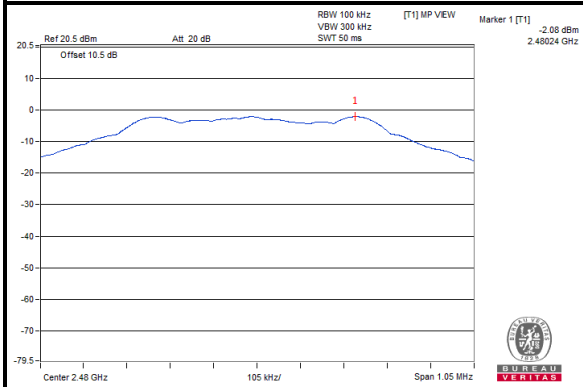

Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---