

FCC

RF

TEST REPORT


ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.







FOR  
**Notebook Computer**

ISSUED TO  
Samsung Electronics Co., Ltd.

19 Chapin Road, Building D, Pine Brook, New Jersey, United States,  
07058

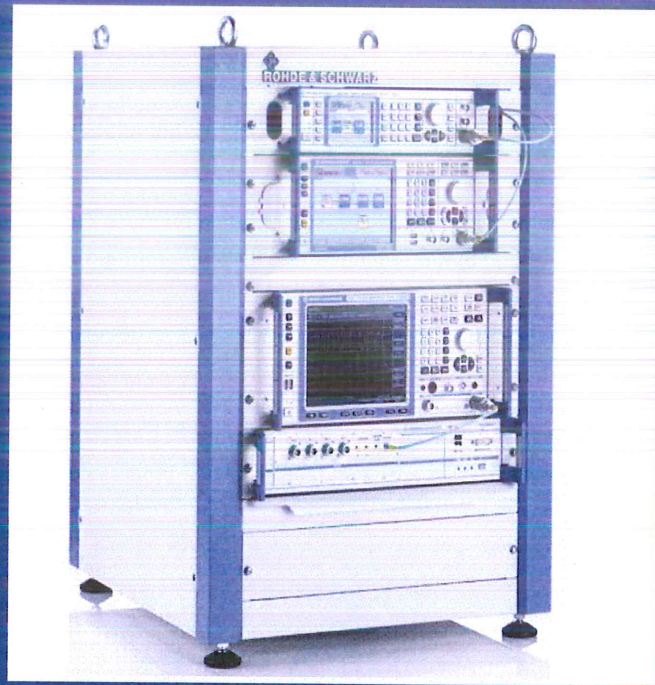

Tested by:   
Ye Hongji  
Date:   
Oct. 29, 2020

Approved by:   
Liao Jianming  
(Technical Director)  
Date:   
Oct. 29, 2020

Report No.: BL-SZ2090237-602  
EUT Name: Notebook Computer  
Model Name: NT550XDA (refer section 2.4)  
Brand Name: Samsung  
Test Standard: 47 CFR Part 15 Subpart C  
FCC ID: ZCANP550XDAC

Test Conclusion: Pass  
Test Date: Sep. 10, 2020 ~ Oct. 22, 2020  
Date of Issue: Oct. 29, 2020

*NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.*

### Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Oct. 29, 2020</u>	<u>Initial Issue</u>

## TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	5
1.1	Identification of the Testing Laboratory .....	5
1.2	Identification of the Responsible Testing Location .....	5
1.3	Laboratory Condition .....	5
1.4	Announce .....	5
2	PRODUCT INFORMATION .....	6
2.1	Applicant Information .....	6
2.2	Manufacturer Information .....	6
2.3	Factory Information .....	6
2.4	General Description for Equipment under Test (EUT) .....	6
2.5	Technical Information .....	7
2.6	Additional Instructions .....	8
3	SUMMARY OF TEST RESULTS .....	9
3.1	Test Standards .....	9
3.2	Verdict .....	9
4	GENERAL TEST CONFIGURATIONS .....	10
4.1	Test Environments .....	10
4.2	Test Equipment List .....	10
4.3	Measurement Uncertainty .....	11
4.4	Description of Test Setup .....	12
4.4.1	For Antenna Port Test .....	12
4.4.2	For AC Power Supply Port Test .....	12
4.4.3	For Radiated Test (Below 30 MHz) .....	13
4.4.4	For Radiated Test (30 MHz-1 GHz) .....	13
4.4.5	For Radiated Test (Above 1 GHz) .....	14
4.5	Measurement Results Explanation Example .....	15
4.5.1	For conducted test items: .....	15

4.5.2	For radiated band edges and spurious emission test:.....	15
5	TEST ITEMS.....	16
5.1	Antenna Requirements.....	16
5.1.1	Relevant Standards.....	16
5.1.2	Antenna Anti-Replacement Construction .....	16
5.1.3	Antenna Gain .....	16
5.2	Output Power .....	17
5.2.1	Test Limit.....	17
5.2.2	Test Setup.....	17
5.2.3	Test Procedure.....	17
5.2.4	Test Result .....	18
5.3	Occupied Bandwidth .....	19
5.3.1	Limit.....	19
5.3.2	Test Setup.....	19
5.3.3	Test Procedure.....	19
5.3.4	Test Result .....	19
5.4	Conducted Spurious Emission .....	20
5.4.1	Limit.....	20
5.4.2	Test Setup.....	20
5.4.3	Test Procedure.....	20
5.4.4	Test Result .....	21
5.5	Band Edge (Authorized-band band-edge).....	22
5.5.1	Limit.....	22
5.5.2	Test Setup.....	22
5.5.3	Test Procedure.....	22
5.5.4	Test Result .....	22
5.6	Conducted Emission .....	23
5.6.1	Limit.....	23
5.6.2	Test Setup.....	23
5.6.3	Test Procedure.....	23
5.6.4	Test Result .....	23
5.7	Radiated Spurious Emission .....	24
5.7.1	Limit.....	24

5.7.2	Test Setup .....	24
5.7.3	Test Procedure .....	24
5.7.4	Test Result .....	27
5.8	Band Edge (Restricted-band band-edge).....	28
5.8.1	Limit.....	28
5.8.2	Test Setup .....	28
5.8.3	Test Procedure .....	28
1.1.1	Test Result .....	28
5.9	Power Spectral density (PSD).....	29
5.9.1	Limit.....	29
5.9.2	Test Setup .....	29
5.9.3	Test Procedure .....	29
5.9.4	Test Result .....	29
ANNEX A	TEST RESULT .....	30
A.1	Output Power, Duty Cycle .....	30
A.2	Occupied Bandwidth .....	33
A.3	Conducted Spurious Emissions .....	37
A.4	Band Edge (Authorized-band band-edge).....	42
A.5	Conducted Emissions.....	46
A.6	Radiated Spurious Emission .....	50
A.7	Band Edge (Restricted-band band-edge).....	78
A.8	Power Spectral Density (PSD) .....	83
ANNEX B	TEST SETUP PHOTOS .....	85
ANNEX C	EUT EXTERNAL PHOTOS .....	85
ANNEX D	EUT INTERNAL PHOTOS .....	85

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v6.9.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Samsung Electronics Co., Ltd.
Address	19 Chapin Road, Building D, Pine Brook, New Jersey, United States, 07058

### 2.2 Manufacturer Information

Manufacturer	Nanchang Huaqin Electronic Technology Co Ltd
Address	No.2999, Tianxiang Avenue, High-tech Development Zone, Nanchang City, Jiangxi Province, P.R. China

### 2.3 Factory Information

Factory	N/A
Address	N/A

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	Notebook Computer
Model Name Under Test	NT550XDA
Series Model Name	550XDA, NT550XDZ, 550XDZ, NT551XDA, NP550XDA, NT550XDA
Description of Model name differentiation	Only differences are model names for trading purpose.
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	359.26 x 241.3 x18.85mm
Weight (Approx.)	1.89Kg

#### Antenna Information:

Antenna Port	Model Name	Antenna Manufacturer	Antenna Type	Antenna Gain (dBi)			
				2.4 GHz	5.15-5.35 GHz	5.47-5.725 GHz	5.725-5.85 GHz
Main Antenna	F-0G-XZ-0236-000-00	Speed	PIFA	0.85	2.90	2.05	1.59
Auxiliary Antenna	F-0G-XZ-0237-000-00		PIFA	1.71	-1.00	0.29	0.26
Main Antenna	N12-7050-R0A	South Star	PIFA	0.29	2.47	2.41	2.51
Auxiliary Antenna	N12-7051-R0A		PIFA	1.80	1.82	1.49	1.44

## 2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac U-NII-1/2A/2C/3
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS	
Modulation Type	GFSK	
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location	
Transfer Rate	1 Mbps	
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.	
Number of Channel	40 (at intervals of 2 MHz)	
Tested Channel	0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz)	
Antenna Type	Main Antenna	PIFA Antenna
	Aux. Antenna	
Antenna Gain	Main Antenna	Speed: 0.85 dBi South Star: 0.29 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
	Aux. Antenna	Speed: 1.71 dBi South Star: 1.80 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna Impedance	50Ω	
Antenna System (MIMO Smart Antenna)	N/A	

## 2.6 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing. Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	DRTU		
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	Power parameter Settings is 16
	CH19	2440	
	CH39	2480	

Run Software

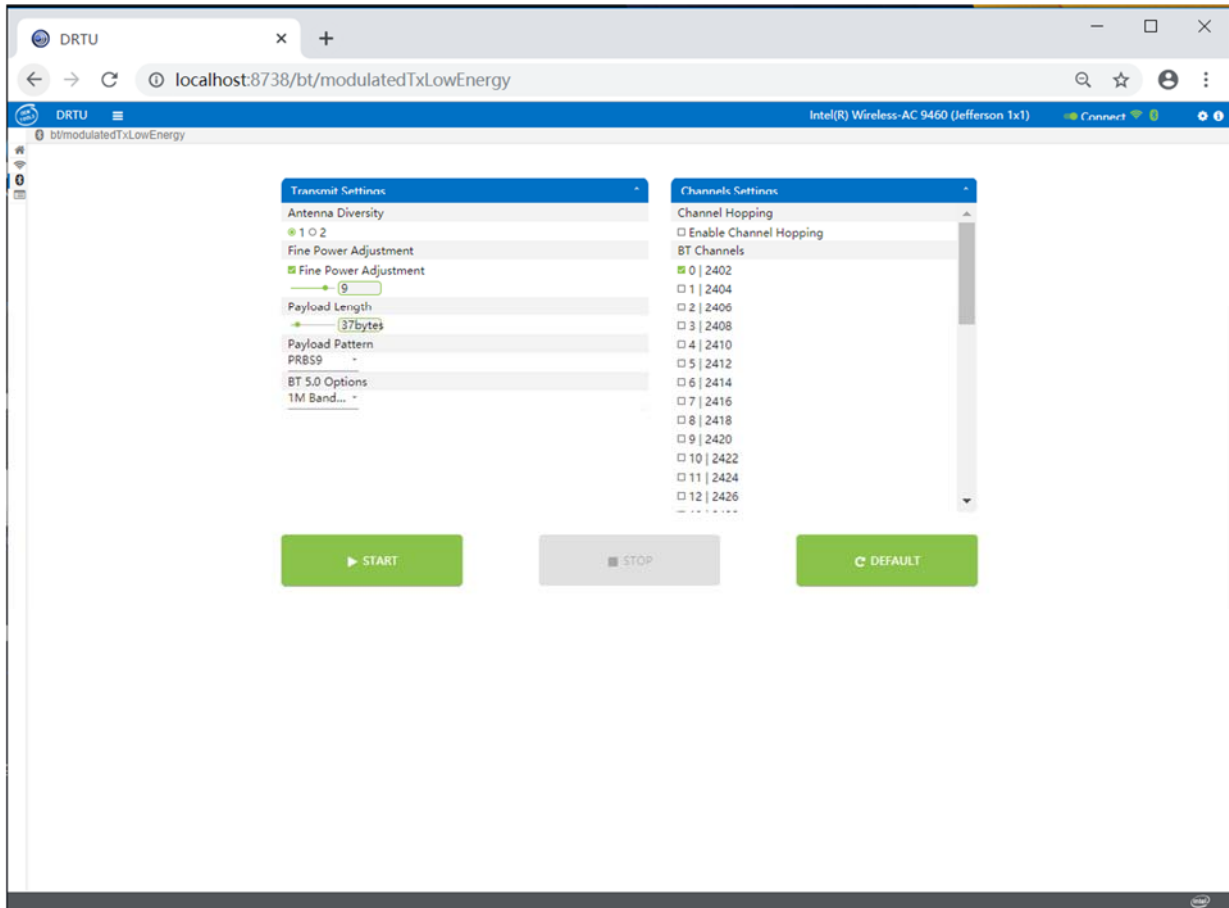



### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-17 Edition)	Miscellaneous Wireless Communications Services
2	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

#### 3.2 Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	--	Pass <sup>Note1</sup>
2	Output Power	15.247(b)	Low/Middle/High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	Low/Middle/High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	Low/ High	ANNEX A.4	Pass
6	Conducted Emission	15.207	Low/Middle/High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	Low/Middle/High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Low/Middle/High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	Low/Middle/High	ANNEX A.8	Pass
10	Receiver Spurious Emissions	--	--	N/A	N/A <sup>Note2</sup>

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note 2: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	11.4 V

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2020.06.08	2021.06.07
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2020.06.08	2021.06.07
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW270	100607	2020.06.08	2021.06.07
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2020.06.08	2021.06.07
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2020.06.08	2021.06.07
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2020.06.08	2021.06.07
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2020.06.10	2021.06.09
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.06	2021.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2020.06.08	2021.06.07
Power Amplifier	OPHIR RF	5225F	1037	2020.02.19	2021.02.18
Power Amplifier	OPHIR RF	5273F	1016	2020.02.19	2021.02.18
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2019.11.12	2020.11.11
Ear Simulator	B&K	4185	2409449	2019.11.12	2020.11.11

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Ear Simulator	B&K	4195	2418189	2019.11.12	2020.11.11
Audio analyzer	B&K	UPL 16	100129	2019.11.12	2020.11.11

### 4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .


Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	$\pm 1.4$ dB
Power Spectral Density, conducted	$\pm 2.5$ dB
Unwanted Emissions, conducted	$\pm 2.8$ dB
All emissions, radiated	$\pm 5.4$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 4\%$

## 4.4 Description of Test Setup

### 4.4.1 For Antenna Port Test


Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable loss is 0.5dB, then the conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

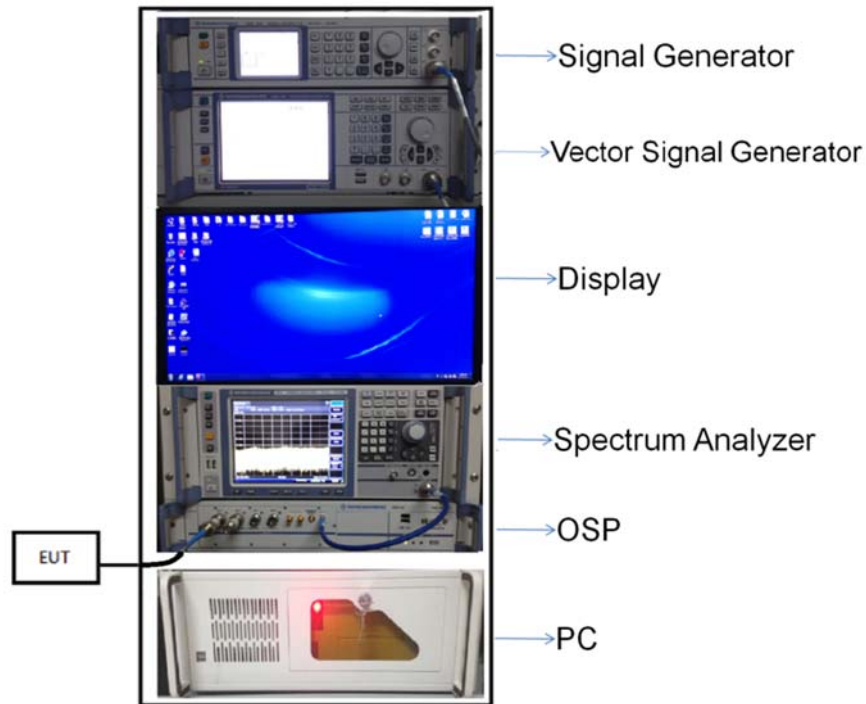


(Diagram 1)

### 4.4.2 For AC Power Supply Port Test

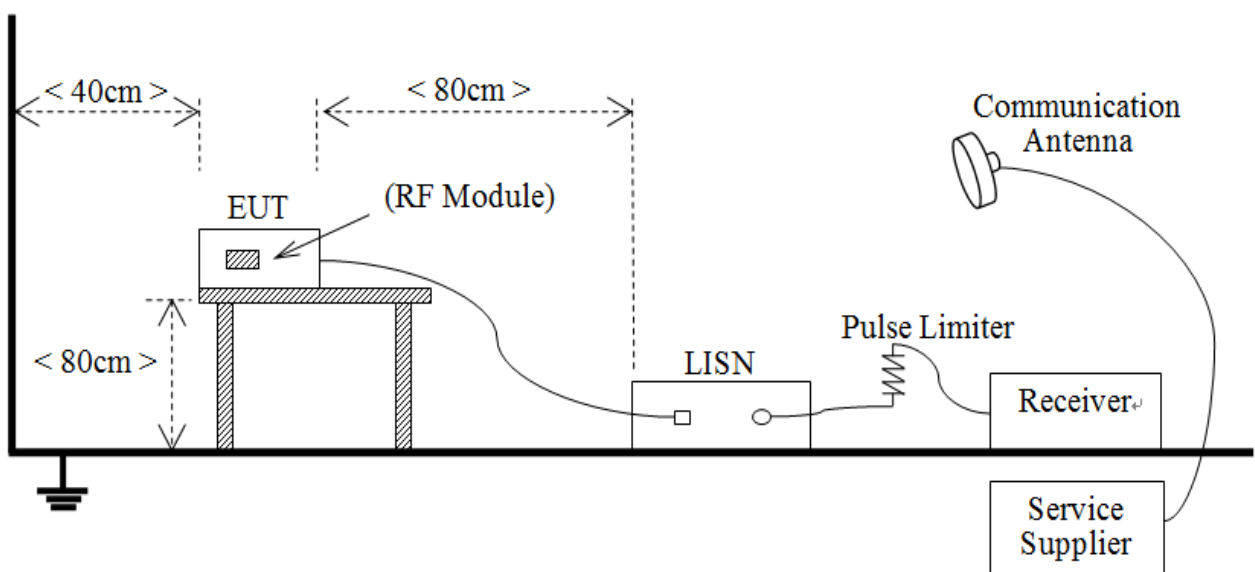


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

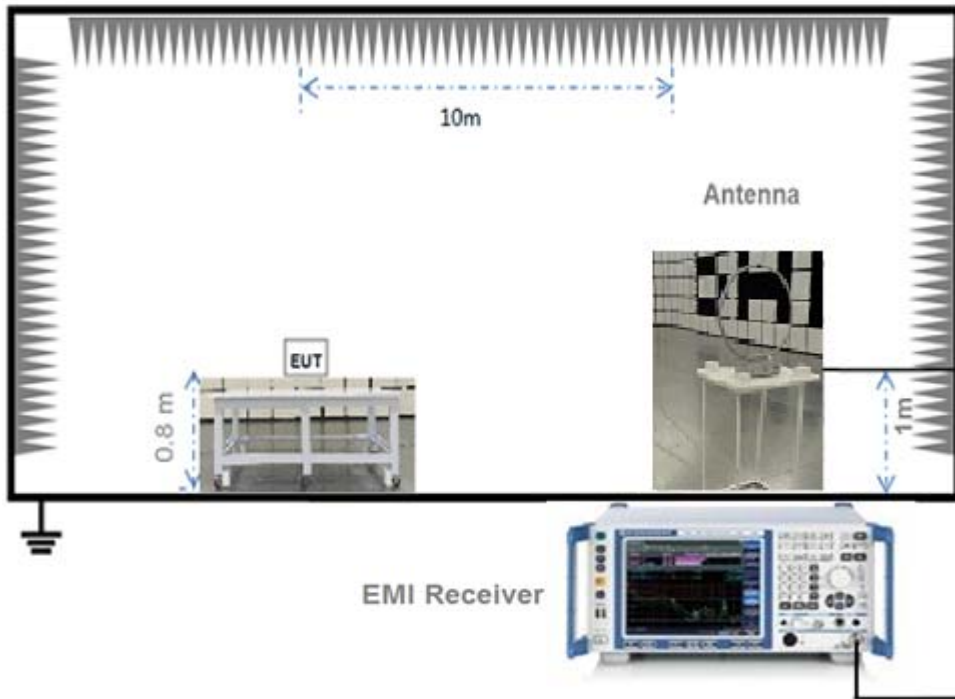


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

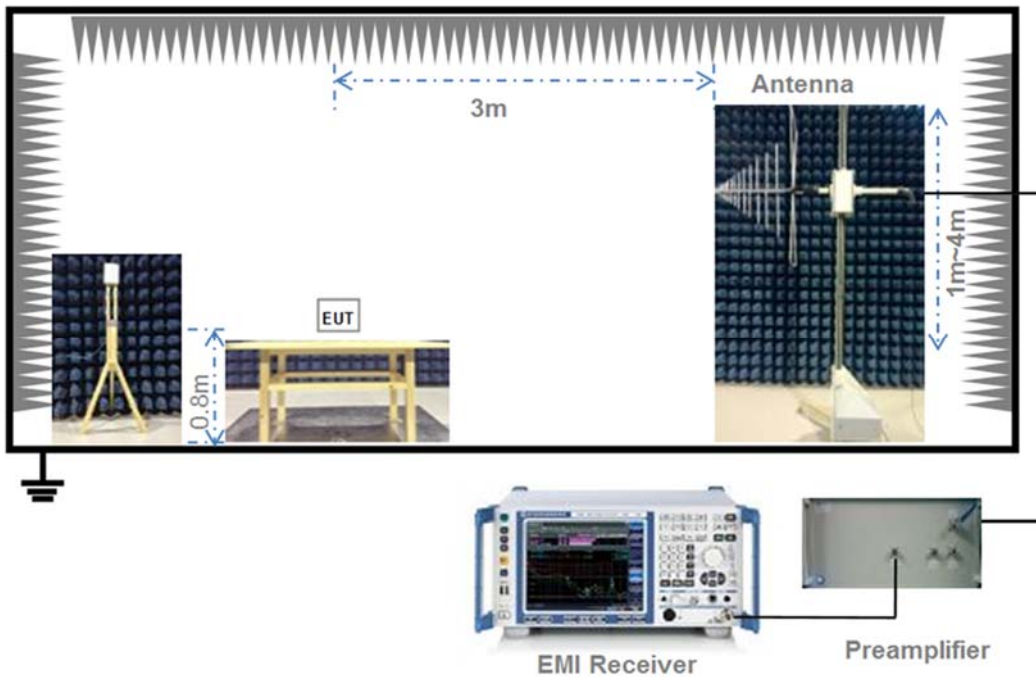

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

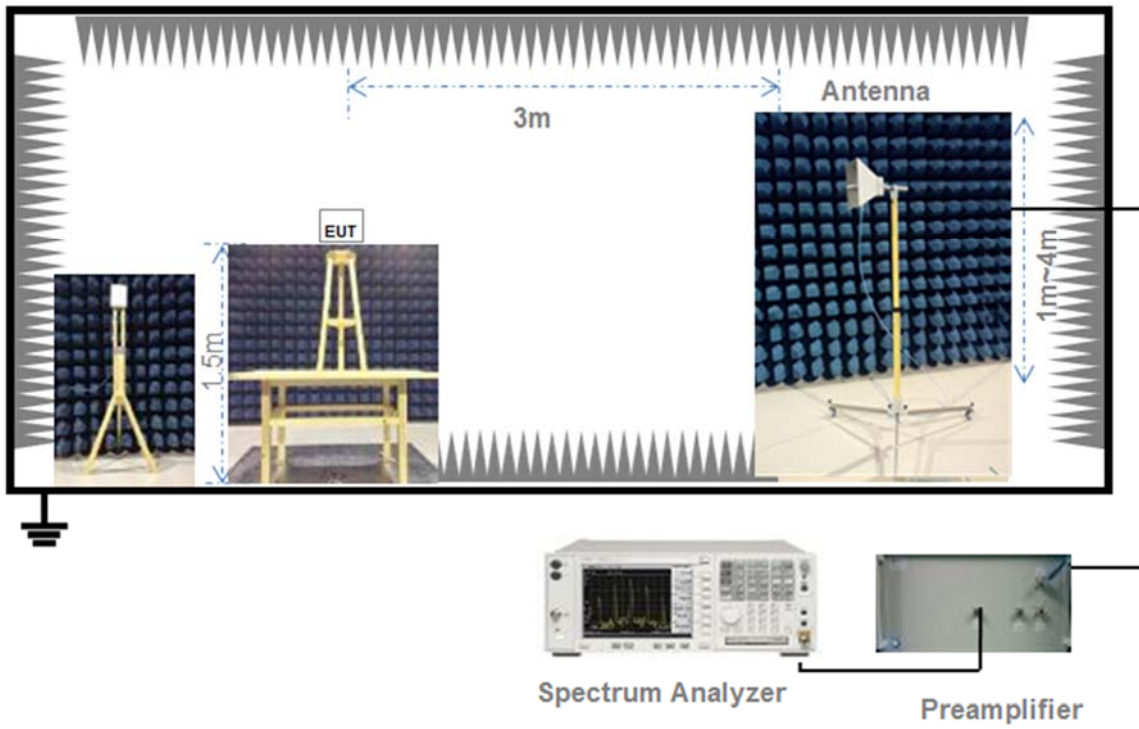

(Diagram 5)

## 4.5 Measurement Results Explanation Example

### 4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

### 4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 5.2 Output Power

### 5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 5.4 (d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

### 5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

#### a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW  $\geq$  DTS bandwidth.

Set VBW  $\geq$  3 x RBW.

Set span  $\geq$  3 x RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

#### b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value.

Set VBW  $\geq$  RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 Occupied Bandwidth

### 5.3.1 Limit

FCC §15.247(a); RSS-247, 5.2 (a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW)  $\geq 3$  RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3.4 Test Result

Please refer to ANNEX A.2.

## 5.4 Conducted Spurious Emission

### 5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

#### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Band Edge (Authorized-band band-edge)

### 5.5.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle  $\geq 98\%$ ). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission)  $\pm 0.5$  MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission  $\pm 0.5$  MHz.

### 5.5.4 Test Result

Please refer to ANNEX A.4.

## 5.6 Conducted Emission

### 5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.6.4 Test Result

Please refer to ANNEX A.5.

## 5.7 Radiated Spurious Emission

### 5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ ) =  $20 \cdot \log[\text{Field Strength } (\mu\text{V}/\text{m})]$ .
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

### 5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.



General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

#### Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle  $\geq 98$  percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW  $\geq 3 \times$  RBW.
- e) Detector = RMS, if  $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

#### Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

#### 5.7.4 Test Result

Please refer to ANNEX A.6.

## 5.8 Band Edge (Restricted-band band-edge)

### 5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.10; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

### 5.8.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

### 1.1.1 Test Result

Please refer to ANNEX A.7.

## 5.9 Power Spectral density (PSD)

### 5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### 5.9.2 Test Setup

See section 4.4.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

Set the VBW  $\geq 3 \text{ RBW}$ .

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.9.4 Test Result

Please refer to ANNEX A.7.

# ANNEX A TEST RESULT

## A.1 Output Power, Duty Cycle

### Peak Power Test Data

#### Main Antenna

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE)		dBm	mW	
	dBm	mW			
Low	10.02	10.05	30	1000	Pass
Middle	10.40	10.96			Pass
High	10.31	10.74			Pass


#### Aux. Antenna

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE)		dBm	mW	
	dBm	mW			
Low	10.04	10.09	30	1000	Pass
Middle	10.54	11.32			Pass
High	10.43	11.04			Pass

### Test plots

#### Main Antenna

GFSK(BLE) LOW CHANNEL

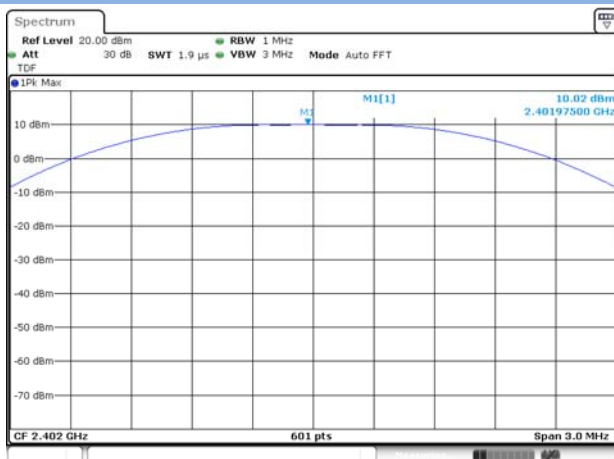


Date: 15.OCT.2020 10:25:43

GFSK(BLE) MIDDLE CHANNEL



Date: 15.OCT.2020 10:30:29

## GFSK(BLE) HIGH CHANNEL

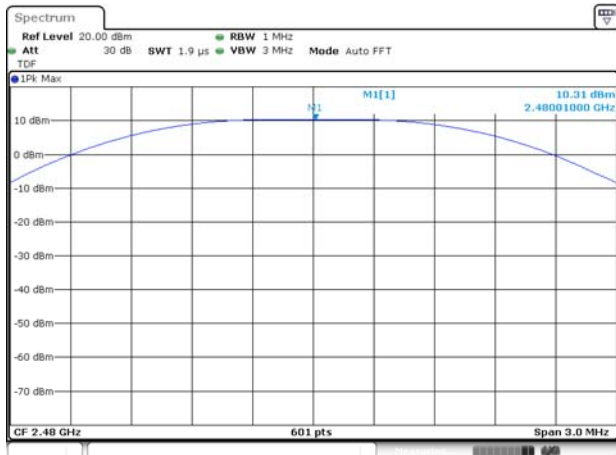


Date: 15.OCT.2020 10:32:09

## Test plots


## Aux. Antenna

## GFSK(BLE) LOW CHANNEL

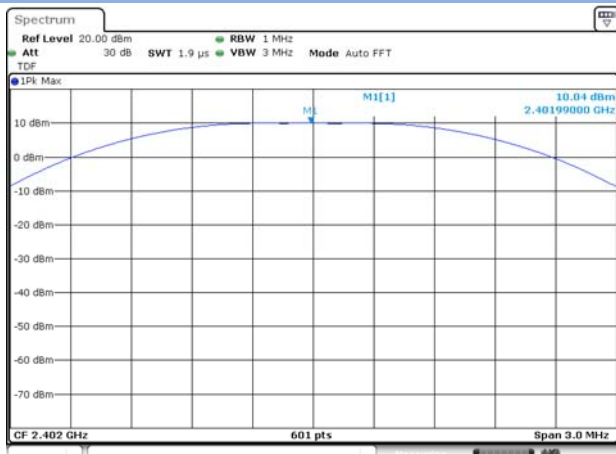

Date: 15.OCT.2020 11:11:37

## GFSK(BLE) MIDDLE CHANNEL

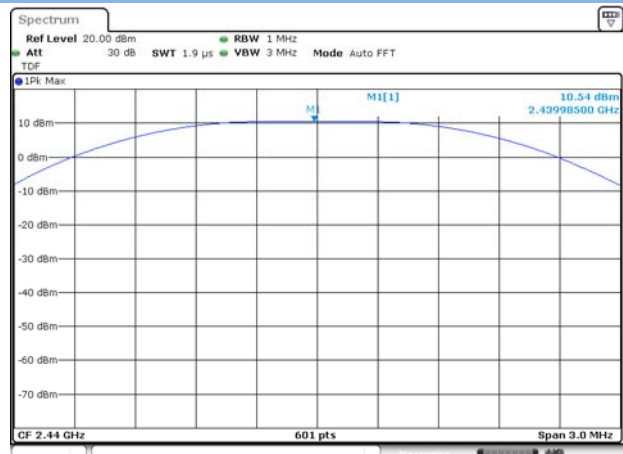

Date: 15.OCT.2020 11:05:30

## GFSK(BLE) HIGH CHANNEL



Date: 15.OCT.2020 11:10:48

Duty Cycle Test Data

Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK	0.38804	0.62413	62.17%

Test plots





## A.2 Occupied Bandwidth

### Test Data

#### Main Antenna

Test Mode	GFSK (BLE)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	639.160	1037.627	≥500
Middle Channel	638.916	1033.285	≥500
High Channel	660.889	1020.260	≥500


#### Aux. Antenna

Test Mode	GFSK (BLE)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	634.766	1037.627	≥500
Middle Channel	643.311	1020.260	≥500
High Channel	652.100	1033.285	≥500

Test plots


Main Antenna 6 dB Bandwidth

GFSK (BLE) LOW CHANNEL

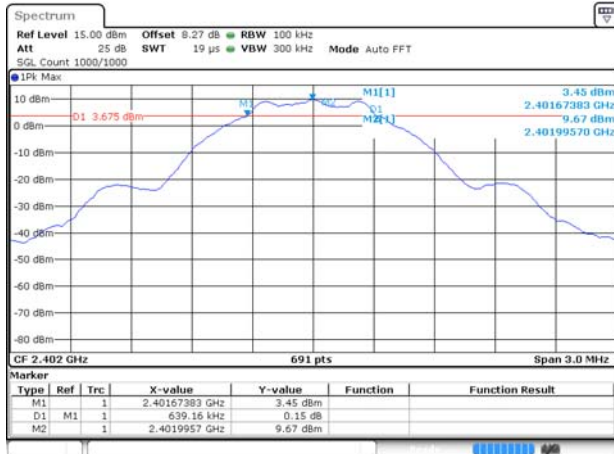


Date: 15.OCT.2020 10:27:19

GFSK (BLE) MIDDLE CHANNEL

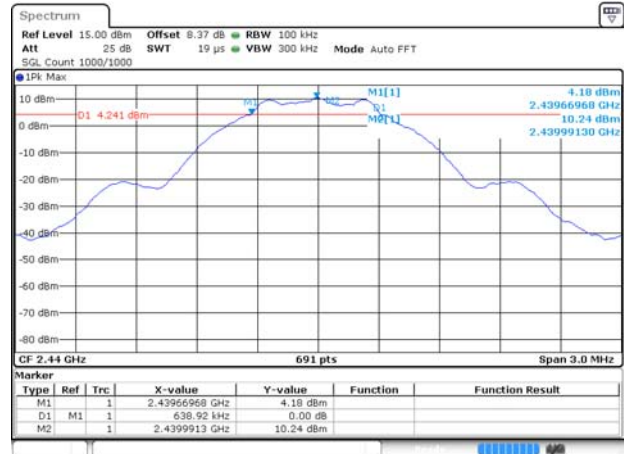

Date: 15.OCT.2020 10:30:35

GFSK (BLE) HIGH CHANNEL

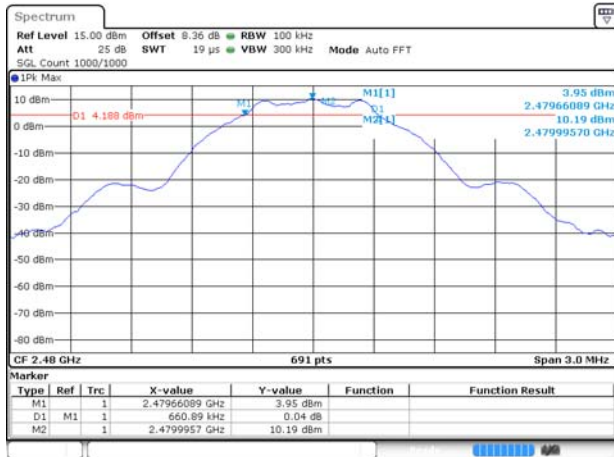

Date: 15.OCT.2020 10:32:15

Aux. Antenna 6 dB Bandwidth

GFSK (BLE) LOW CHANNEL




Date: 15.OCT.2020 11:03:28

GFSK (BLE) MIDDLE CHANNEL



Date: 15.OCT.2020 11:05:36


### GFSK (BLE) HIGH CHANNEL

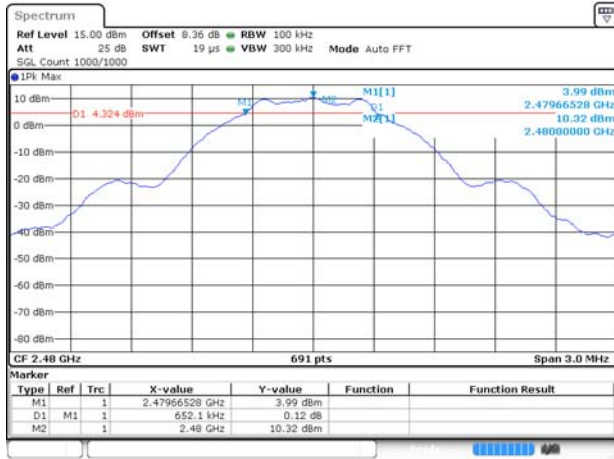

Date: 15.OCT.2020 11:08:06


### Main Antenna 99% Bandwidth

#### GFSK (BLE) LOW CHANNEL

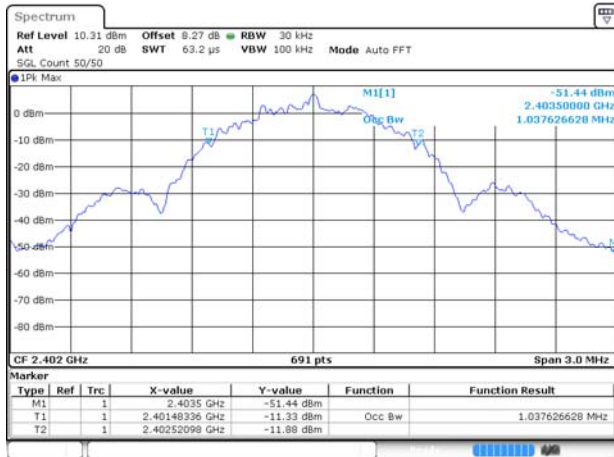

Date: 15.OCT.2020 10:27:25

#### GFSK (BLE) MIDDLE CHANNEL

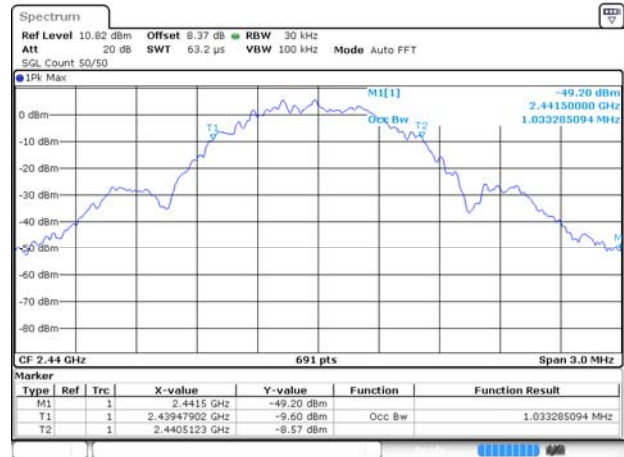

Date: 15.OCT.2020 10:30:41


### GFSK (BLE) HIGH CHANNEL



Date: 15.OCT.2020 10:32:21


Aux. Antenna 99% Bandwidth

GFSK (BLE) LOW CHANNEL

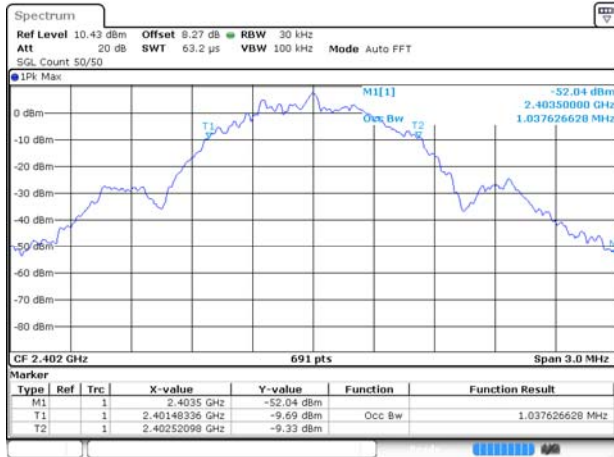

Date: 15.OCT.2020 11:03:34

GFSK (BLE) MIDDLE CHANNEL

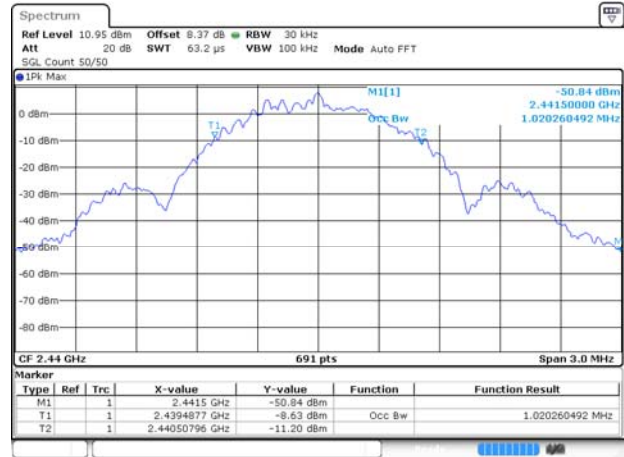

Date: 15.OCT.2020 11:05:42

GFSK (BLE) LOW CHANNEL



Date: 15.OCT.2020 11:08:12

### A.3 Conducted Spurious Emissions

#### Test Data

##### Main Antenna

GFSK (BLE)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-32.91	9.84	-10.16	Pass
Middle	-32.46	10.29	-9.71	Pass
High	-32.76	10.19	-9.81	Pass


##### Aux. Antenna

GFSK (BLE)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-33.22	9.95	-10.05	Pass
Middle	-33.01	10.43	-9.57	Pass
High	-33.28	10.35	-9.65	Pass

Test Plots


Main Antenna

GFSK (BLE) LOW CHANNEL, CARRIER LEVEL

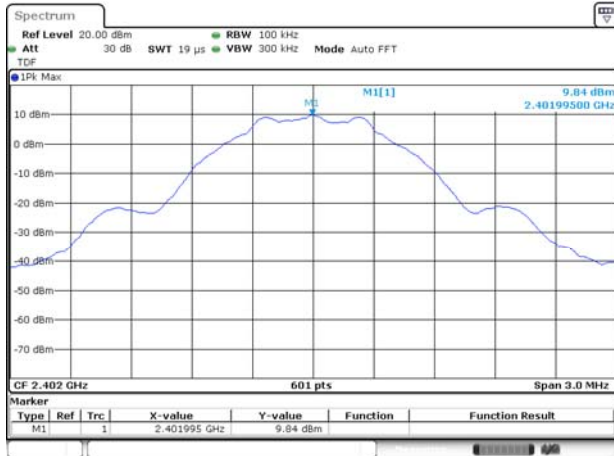


Date: 15 OCT.2020 10:28:26

GFSK (BLE) LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

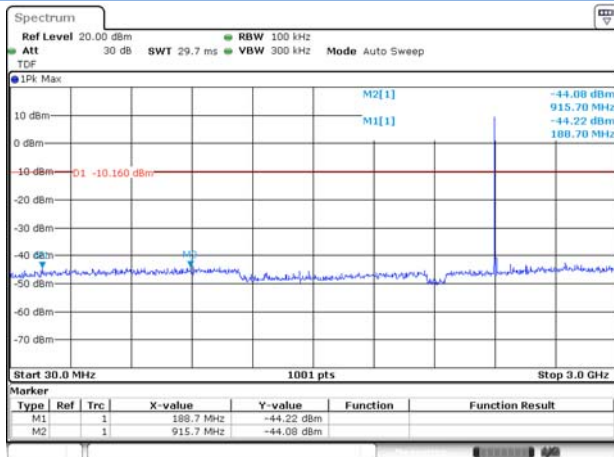


Date: 15 OCT.2020 10:28:47

GFSK (BLE) LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

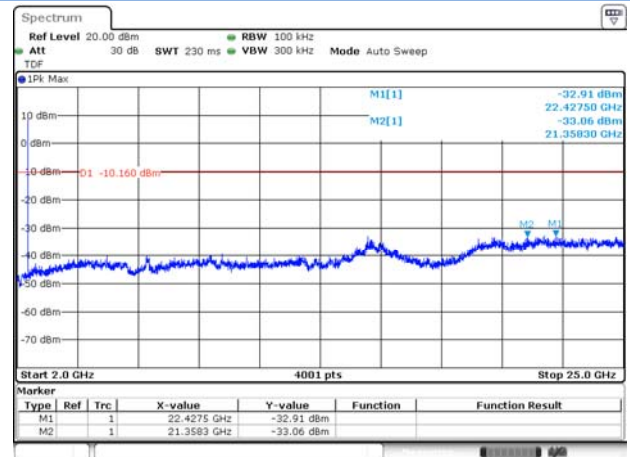


Date: 15 OCT.2020 10:29:00

GFSK (BLE) MIDDLE CHANNEL, CARRIER LEVEL

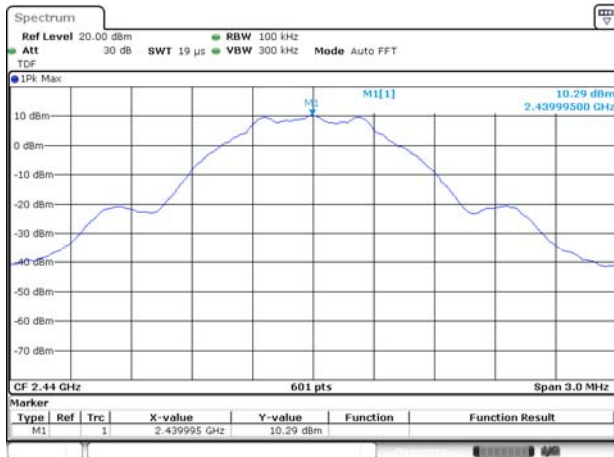


Date: 15 OCT.2020 10:30:54

GFSK (BLE) MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

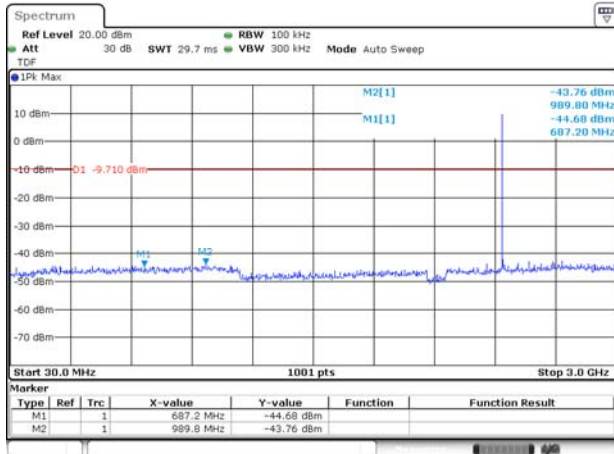


Date: 15.OCT.2020 10:31:12

GFSK (BLE) MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

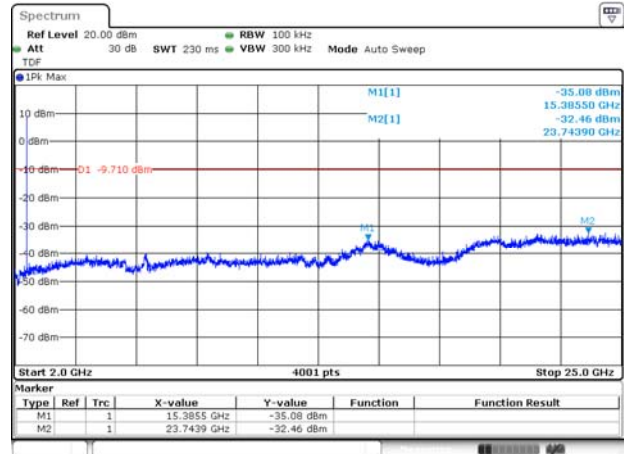


Date: 15.OCT.2020 10:31:24

GFSK (BLE) HIGH CHANNEL, CARRIER LEVEL

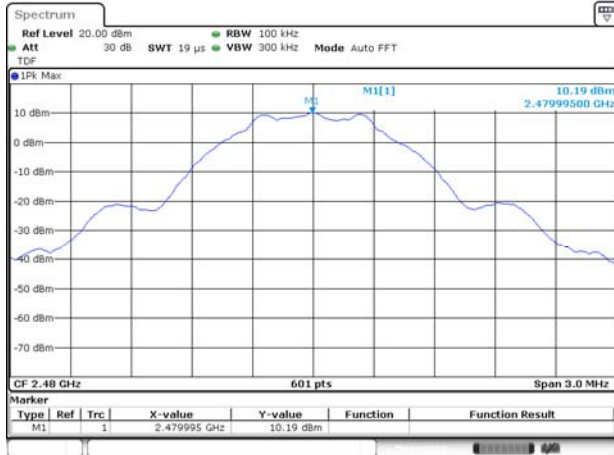


Date: 15.OCT.2020 10:32:35

GFSK (BLE) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

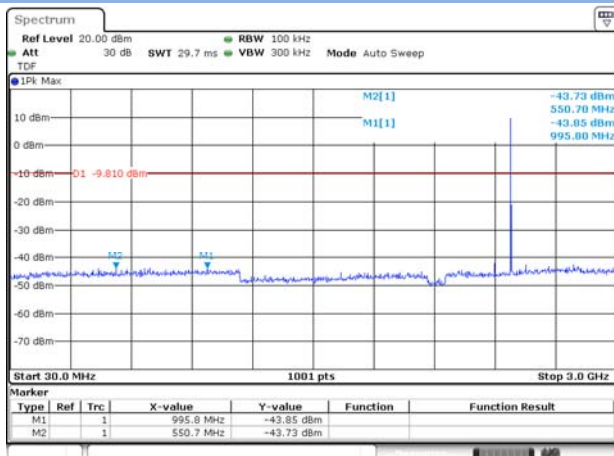

Date: 15.OCT.2020 10:33:01


GFSK (BLE) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

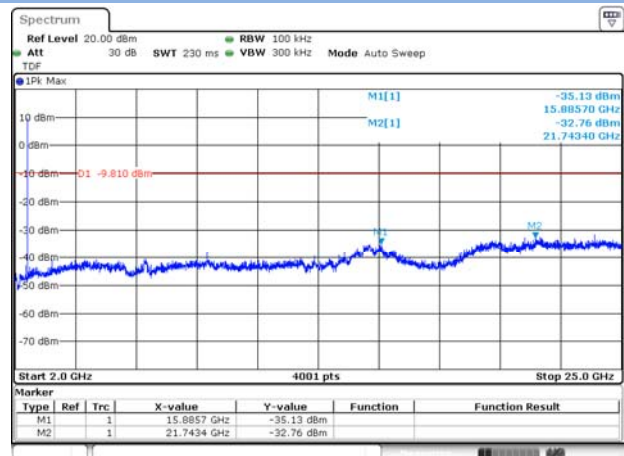

Date: 15.OCT.2020 10:33:14


Aux. Antenna

GFSK (BLE) LOW CHANNEL, CARRIER LEVEL

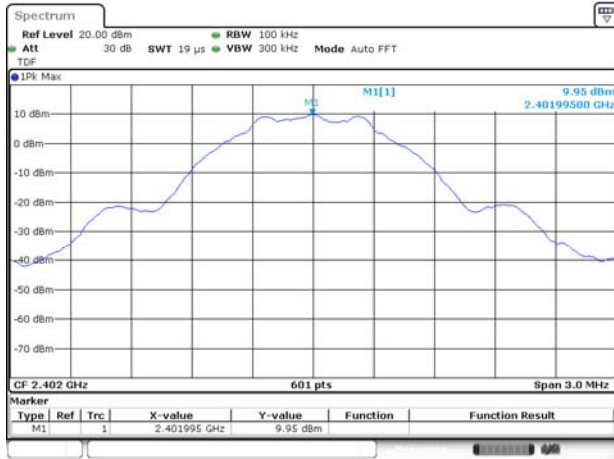


Date: 15.OCT.2020 11:03:46

GFSK (BLE) LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

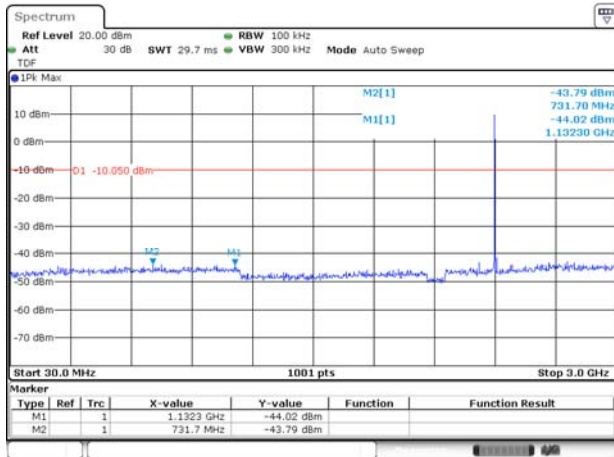


Date: 15.OCT.2020 11:04:04

GFSK (BLE) LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

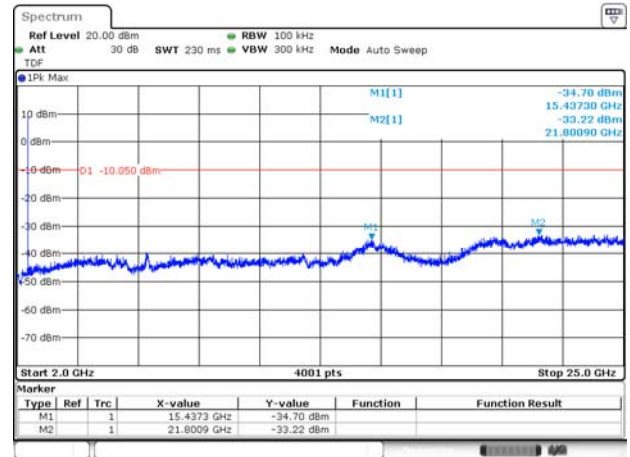

Date: 15.OCT.2020 11:04:15


GFSK (BLE) MIDDLE CHANNEL, CARRIER LEVEL

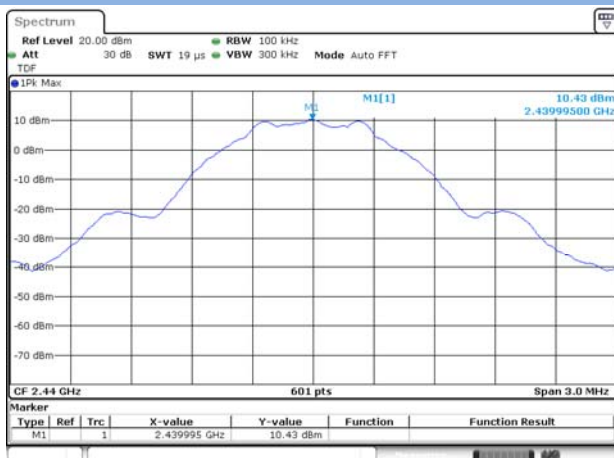

Date: 15.OCT.2020 11:06:00




GFSK (BLE) MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

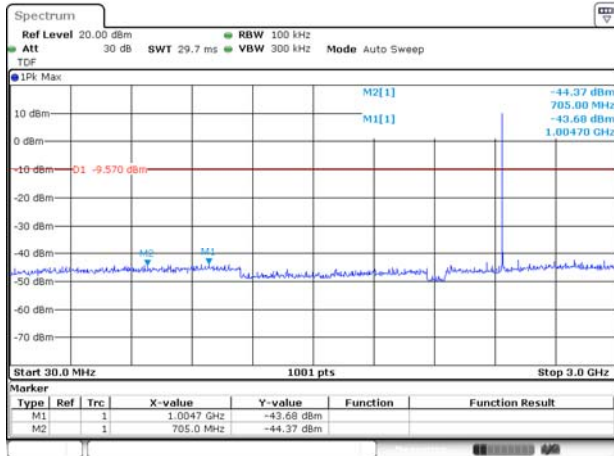


Date: 15.OCT.2020 11:08:33

GFSK (BLE) MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

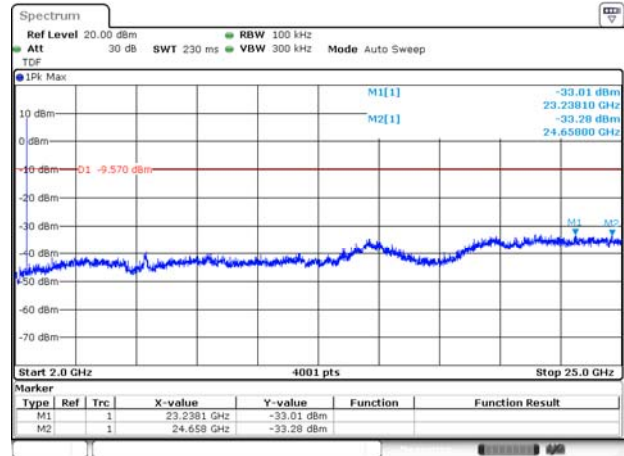


Date: 15.OCT.2020 11:08:45

GFSK (BLE) HIGH CHANNEL, CARRIER LEVEL

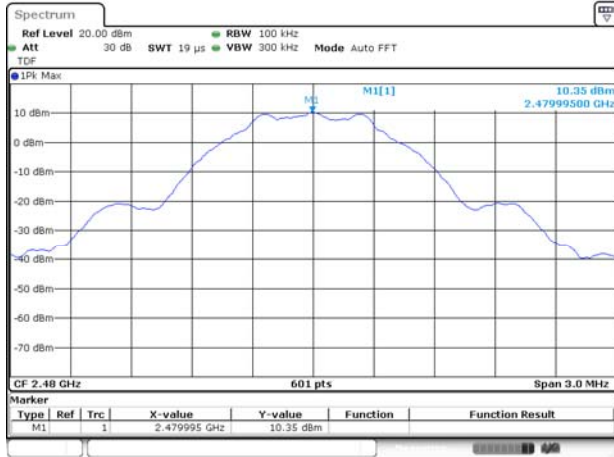


Date: 15.OCT.2020 11:08:50

GFSK (BLE) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

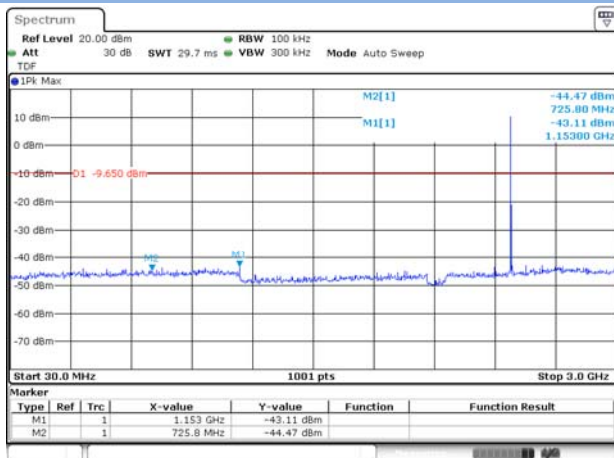

Date: 15.OCT.2020 11:09:17

GFSK (BLE) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

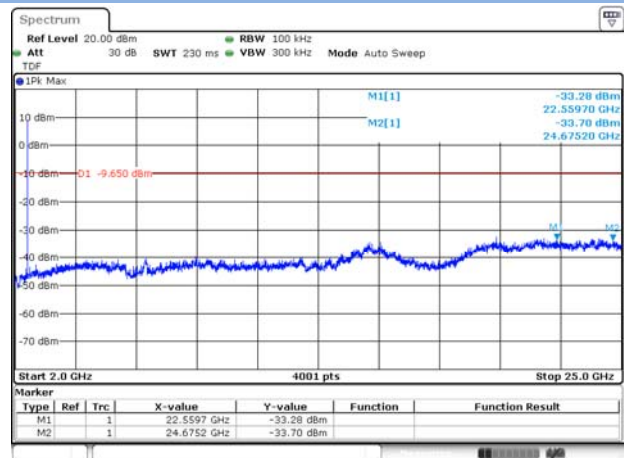

Date: 15.OCT.2020 11:09:29

## A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

### Main Antenna

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-34.22	9.84	-10.16	Pass
High Channel	-45.68	10.19	-9.81	Pass


### Aux. Antenna

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-34.79	9.95	-10.05	Pass
High Channel	-45.35	10.35	-9.65	Pass

Test Plots


Main Antenna

LOW CHANNEL, Carrier level

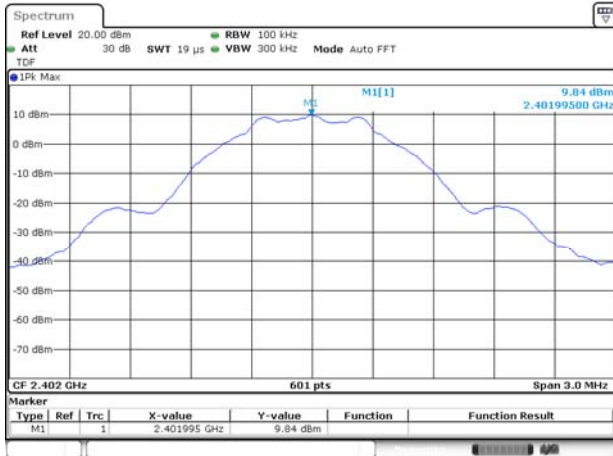


Date: 15 OCT.2020 10:28:26

LOW CHANNEL, Reference level

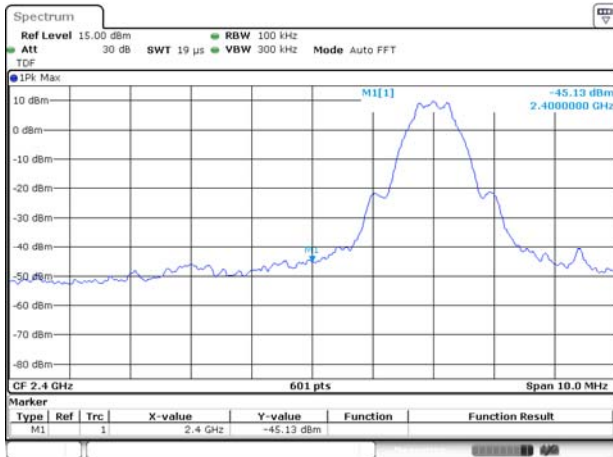


Date: 15 OCT.2020 10:29:13

LOW CHANNEL, Band Edge

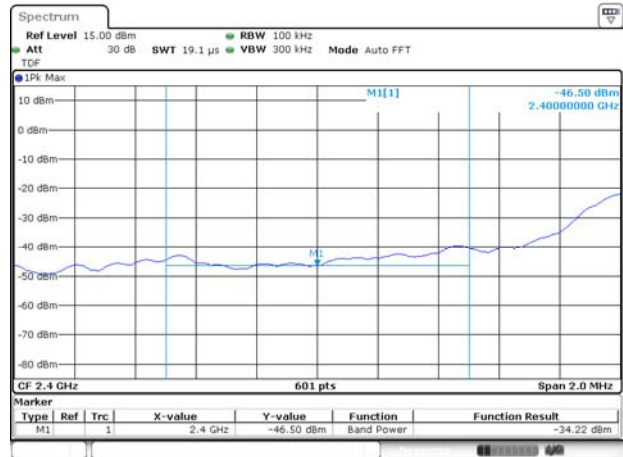


Date: 15 OCT.2020 10:29:23

High CHANNEL, Carrier level

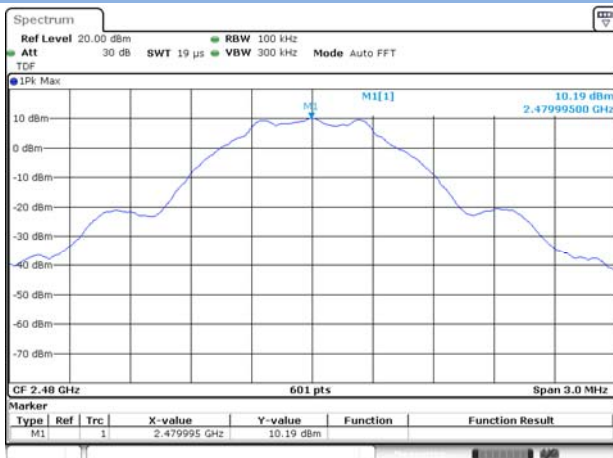


Date: 15 OCT.2020 10:32:35

HIGH CHANNEL, Reference level

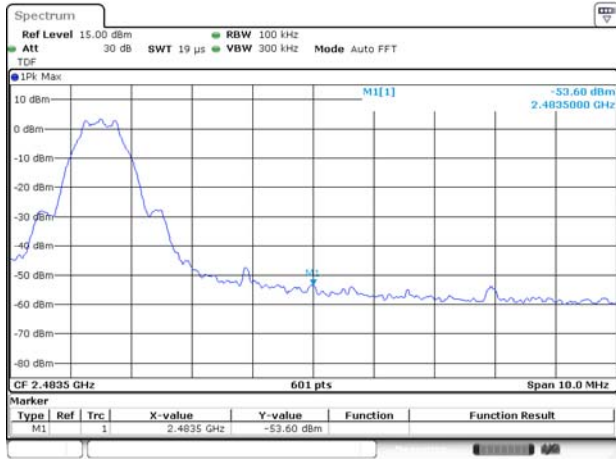

Date: 15.OCT.2020 10:33:23


HIGH CHANNEL, Band Edge

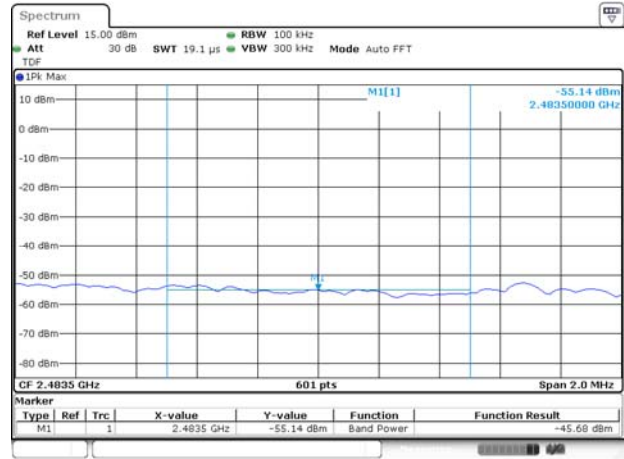

Date: 15.OCT.2020 10:33:28


Aux. Antenna

LOW CHANNEL, Carrier level

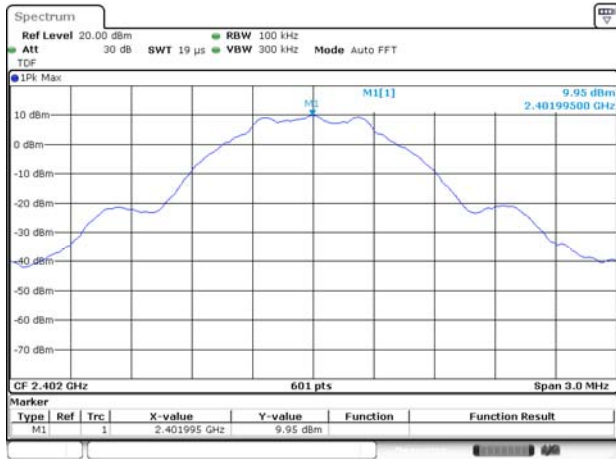


Date: 15.OCT.2020 11:03:46

LOW CHANNEL, Reference level

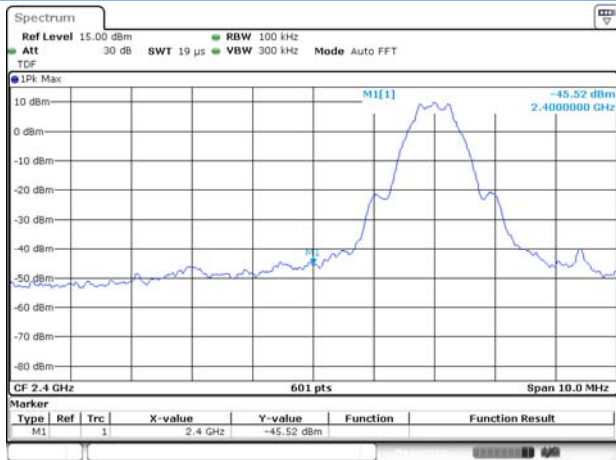


Date: 15.OCT.2020 11:04:23

LOW CHANNEL, Band Edge

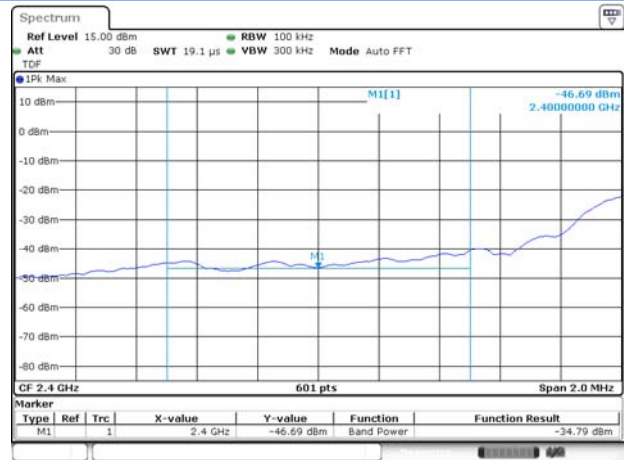


Date: 15.OCT.2020 11:04:27

### High CHANNEL, Carrier level

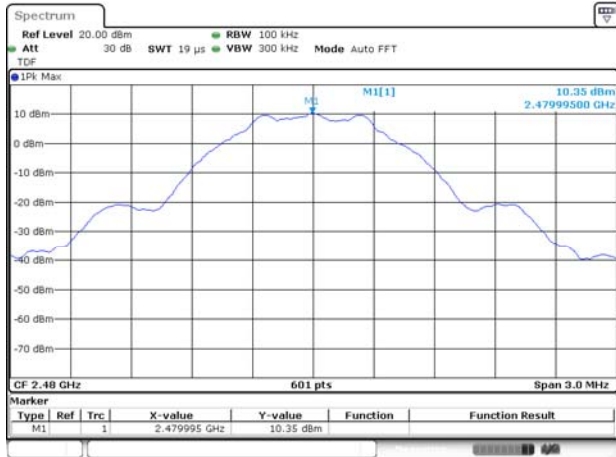


Date: 15.OCT.2020 11:08:50

### HIGH CHANNEL, Reference level

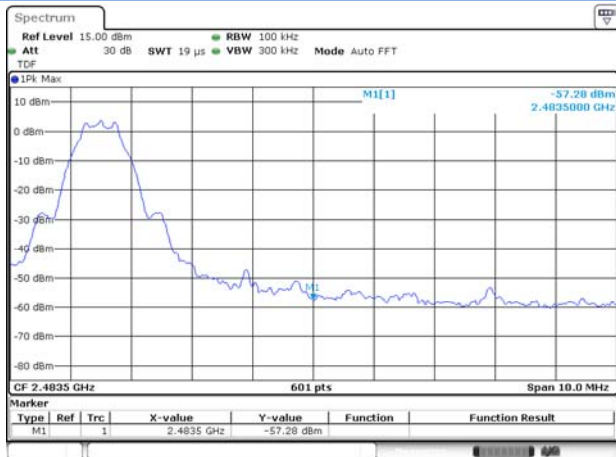

Date: 15.OCT.2020 11:09:37

### HIGH CHANNEL, Band Edge

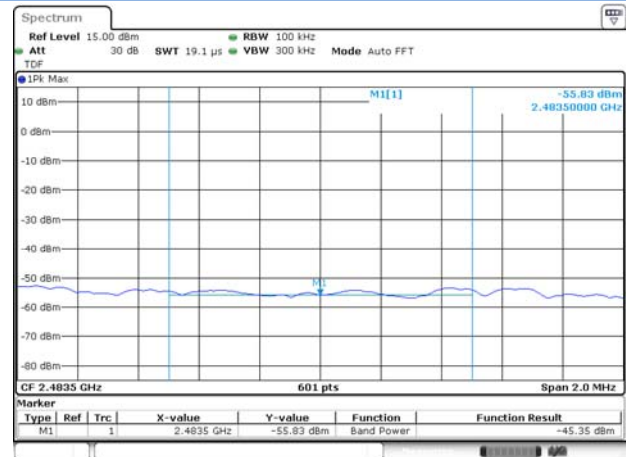


Date: 15.OCT.2020 11:09:42

## A.5 Conducted Emissions

Note<sup>1</sup>: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.  
 Note<sup>2</sup>: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (240 VAC, 50 Hz ) shown here.  
 Note<sup>3</sup>: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

### Test Data and Plots


#### Speed

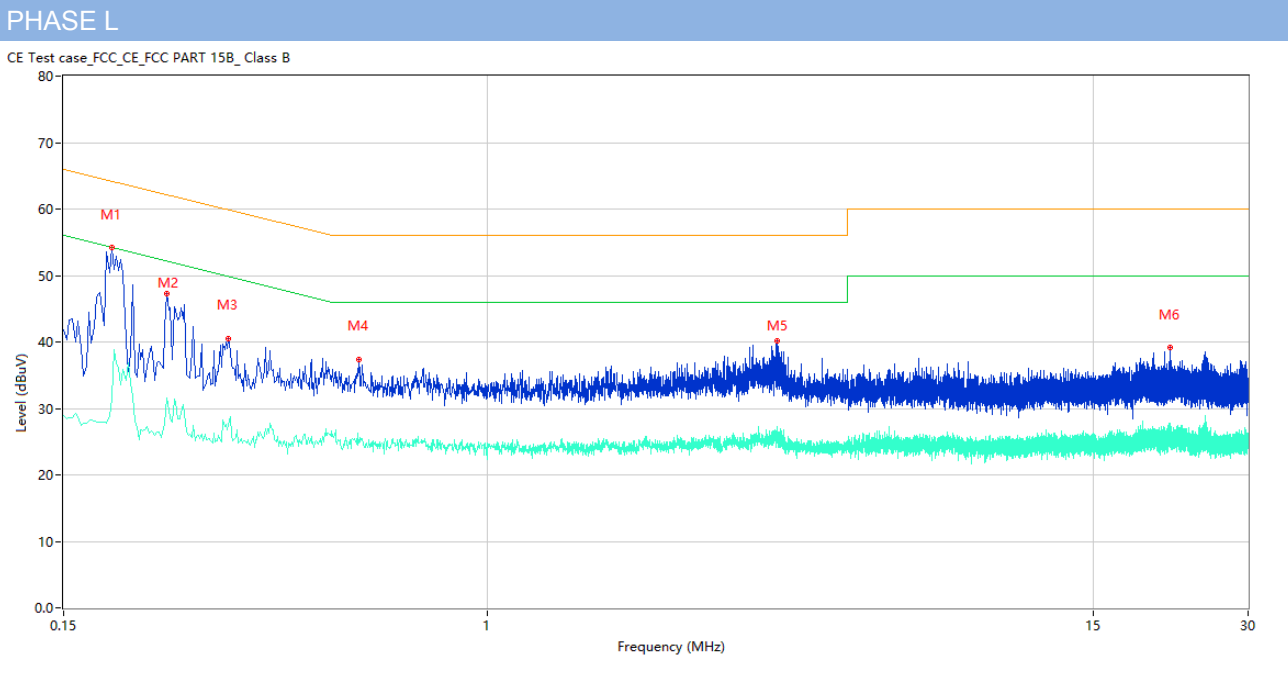

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.186	54.24	10.39	64.21	-9.97	Peak	L	Pass
1**	0.186	31.62	10.39	54.21	-22.59	AV	L	Pass
2	0.238	47.22	10.35	62.17	-14.95	Peak	L	Pass
2**	0.238	31.57	10.35	52.17	-20.60	AV	L	Pass
3	0.314	40.55	10.33	59.86	-19.31	Peak	L	Pass
3**	0.314	27.68	10.33	49.86	-22.18	AV	L	Pass
4	0.562	37.37	10.28	56.00	-18.63	Peak	L	Pass
4**	0.562	24.90	10.28	46.00	-21.10	AV	L	Pass
5	3.642	40.10	10.30	56.00	-15.90	Peak	L	Pass
5**	3.642	26.24	10.30	46.00	-19.76	AV	L	Pass
6	21.176	39.23	10.57	60.00	-20.77	Peak	L	Pass
6**	21.176	26.37	10.57	50.00	-23.63	AV	L	Pass

PHASE N

CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

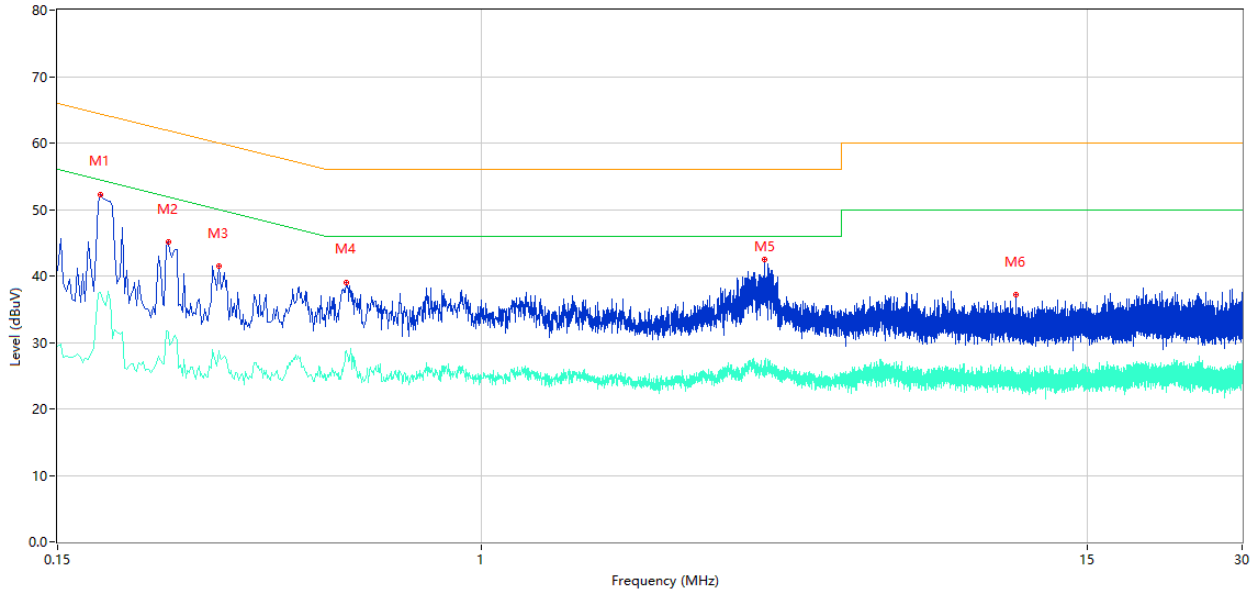


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.182	52.30	10.39	64.39	-12.09	Peak	N	Pass
1**	0.182	37.50	10.39	54.39	-16.89	AV	N	Pass
2	0.246	45.07	10.34	61.89	-16.82	Peak	N	Pass
2**	0.246	31.56	10.34	51.89	-20.33	AV	N	Pass
3	0.308	41.51	10.33	60.02	-18.51	Peak	N	Pass
3**	0.308	28.79	10.33	50.02	-21.23	AV	N	Pass
4	0.546	39.04	10.29	56.00	-16.96	Peak	N	Pass
4**	0.546	28.72	10.29	46.00	-17.28	AV	N	Pass
5	3.540	42.55	10.30	56.00	-13.45	Peak	N	Pass
5**	3.540	26.70	10.30	46.00	-19.30	AV	N	Pass
6	10.934	37.25	10.37	60.00	-22.75	Peak	N	Pass
6**	10.934	25.30	10.37	50.00	-24.70	AV	N	Pass

South Star

PHASE L

CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

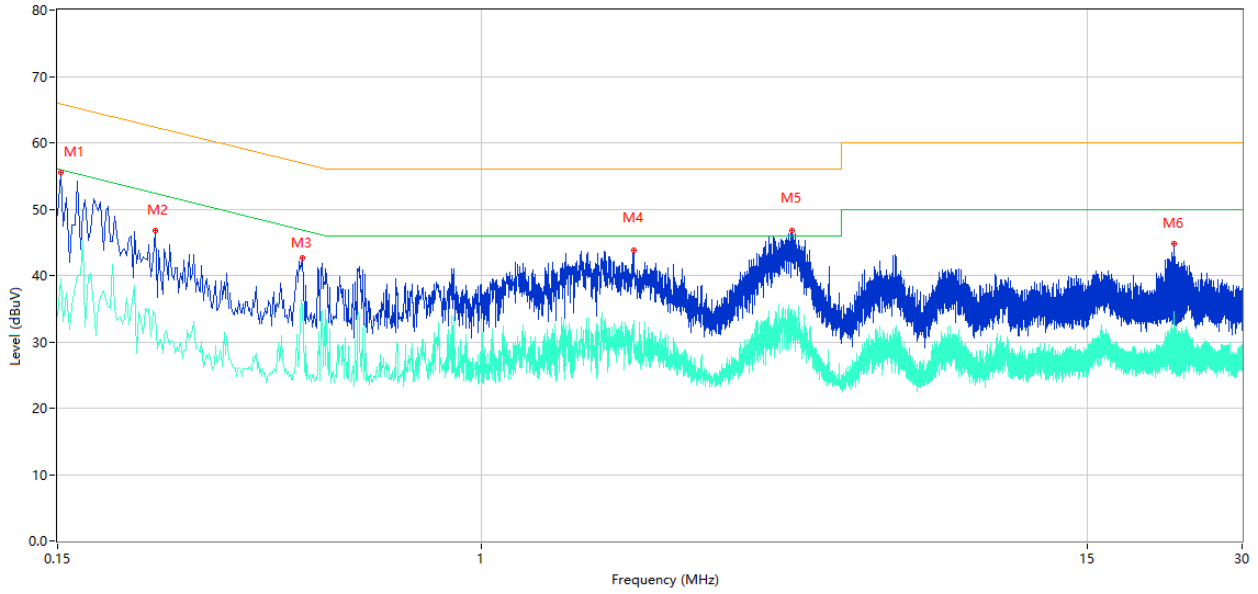


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.152	55.60	10.41	65.89	-10.29	Peak	L	Pass
1**	0.152	39.48	10.41	55.89	-16.41	AV	L	Pass
2	0.232	46.80	10.36	62.38	-15.58	Peak	L	Pass
2**	0.232	33.87	10.36	52.38	-18.51	AV	L	Pass
3	0.448	42.65	10.30	56.91	-14.26	Peak	L	Pass
3**	0.448	35.42	10.30	46.91	-11.49	AV	L	Pass
4	1.972	43.78	10.26	56.00	-12.22	Peak	L	Pass
4**	1.972	33.30	10.26	46.00	-12.70	AV	L	Pass
5	4.014	46.81	10.29	56.00	-9.19	Peak	L	Pass
5**	4.014	34.88	10.29	46.00	-11.12	AV	L	Pass
6	22.084	44.75	10.59	60.00	-15.25	Peak	L	Pass
6**	22.084	32.34	10.59	50.00	-17.66	AV	L	Pass



PHASE N

CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

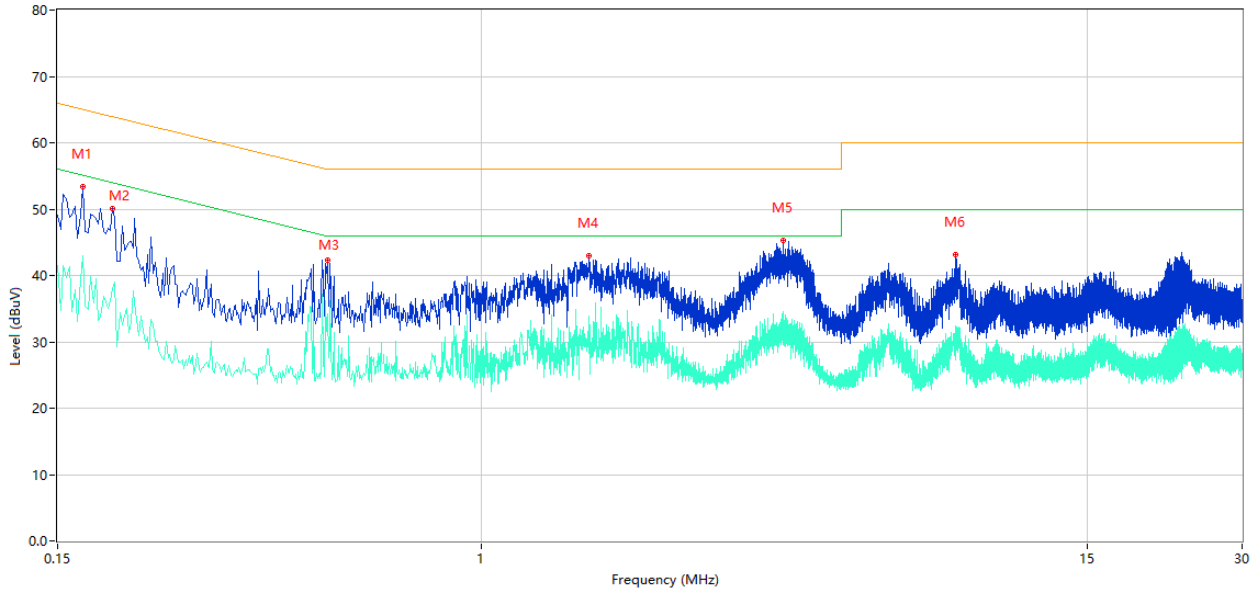

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.168	53.42	10.40	65.06	-11.64	Peak	N	Pass
1**	0.168	42.97	10.40	55.06	-12.09	AV	N	Pass
2	0.192	50.08	10.38	63.95	-13.87	Peak	N	Pass
2**	0.192	38.09	10.38	53.95	-15.86	AV	N	Pass
3	0.502	42.31	10.30	56.00	-13.69	Peak	N	Pass
3**	0.502	34.20	10.30	46.00	-11.80	AV	N	Pass
4	1.618	42.92	10.26	56.00	-13.08	Peak	N	Pass
4**	1.618	33.90	10.26	46.00	-12.10	AV	N	Pass
5	3.846	45.26	10.29	56.00	-10.74	Peak	N	Pass
5**	3.846	34.50	10.29	46.00	-11.50	AV	N	Pass
6	8.326	43.07	10.34	60.00	-16.93	Peak	N	Pass
6**	8.326	32.40	10.34	50.00	-17.60	AV	N	Pass

## A.6 Radiated Spurious Emission

Note<sup>1</sup>: The symbol of "--" in the table which means not application.

Note<sup>2</sup>: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note<sup>3</sup>: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note<sup>4</sup>: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and BLE 1M- Middle channel mode is the worst.

Note<sup>5</sup>: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

### Test Data and Plots

#### Speed


#### 30 MHz to 1 GHz, ANT H

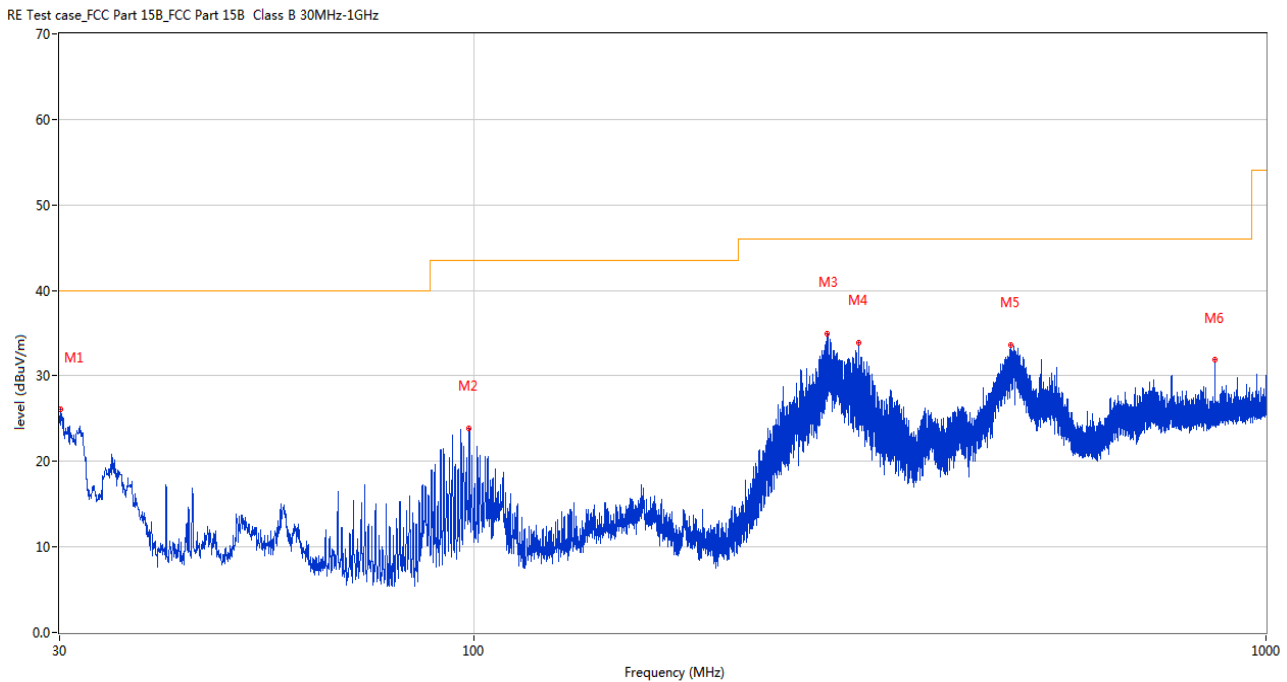

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.049	26.06	-27.19	40.0	-13.94	Peak	339.00	200	Horizontal	Pass
2	98.676	23.85	-29.39	43.5	-19.65	Peak	143.00	200	Horizontal	Pass
3	279.581	34.90	-24.98	46.0	-11.10	Peak	234.00	100	Horizontal	Pass
4	306.110	33.81	-24.02	46.0	-12.19	Peak	98.00	100	Horizontal	Pass
5	475.861	33.56	-19.39	46.0	-12.44	Peak	131.00	200	Horizontal	Pass
6	862.503	31.89	-12.21	46.0	-14.11	Peak	127.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case\_FCC Part 15B\_FCC Part 15B Class B 30MHz-1GHz

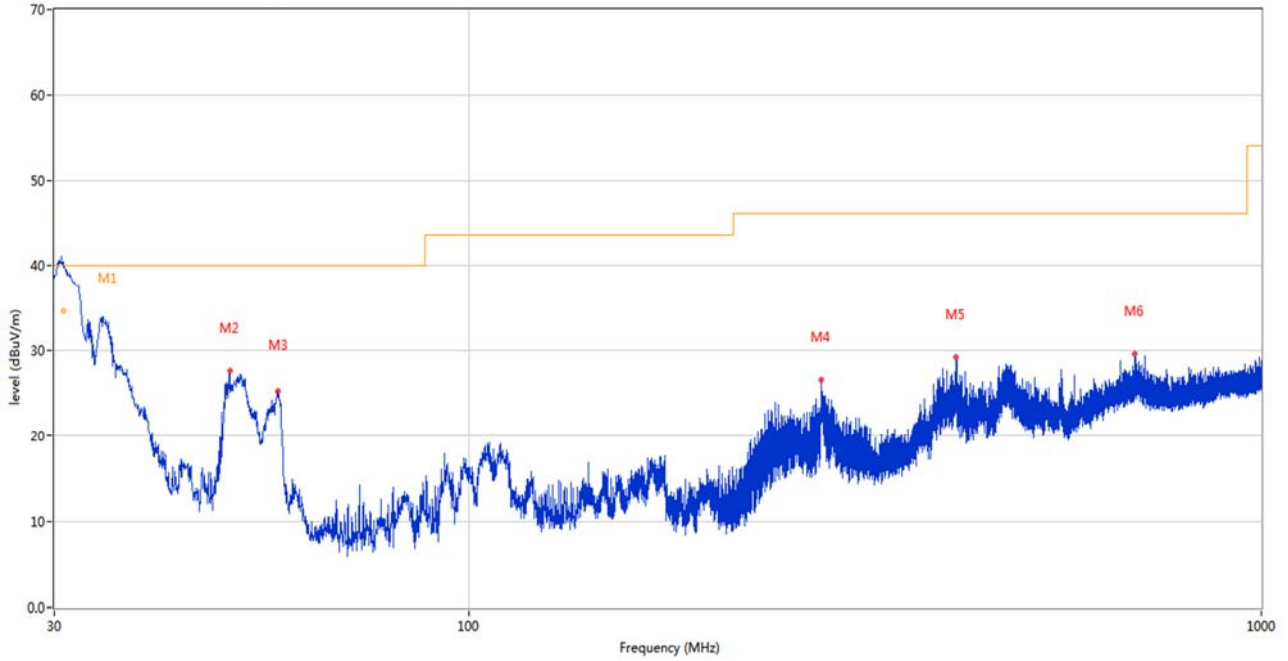


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.793	40.22	-27.13	40.0	0.22	Peak	293.00	121	Vertical	N/A
1*	30.793	33.91	-27.13	40.0	-6.09	QP	293.00	121	Vertical	Pass
2	49.934	27.70	-26.62	40.0	-12.30	Peak	190.00	100	Vertical	Pass
3	57.499	25.34	-26.95	40.0	-14.66	Peak	253.00	100	Vertical	Pass
4	278.611	26.63	-24.97	46.0	-19.37	Peak	178.00	200	Vertical	Pass
5	411.404	29.28	-20.86	46.0	-16.72	Peak	185.00	100	Vertical	Pass
6	693.238	29.70	-14.48	46.0	-16.30	Peak	121.00	200	Vertical	Pass

South Star

30 MHz to 1 GHz, ANT H


RE Test case\_FCC Part 15B\_FCC Part 15B Class B 30MHz-1GHz

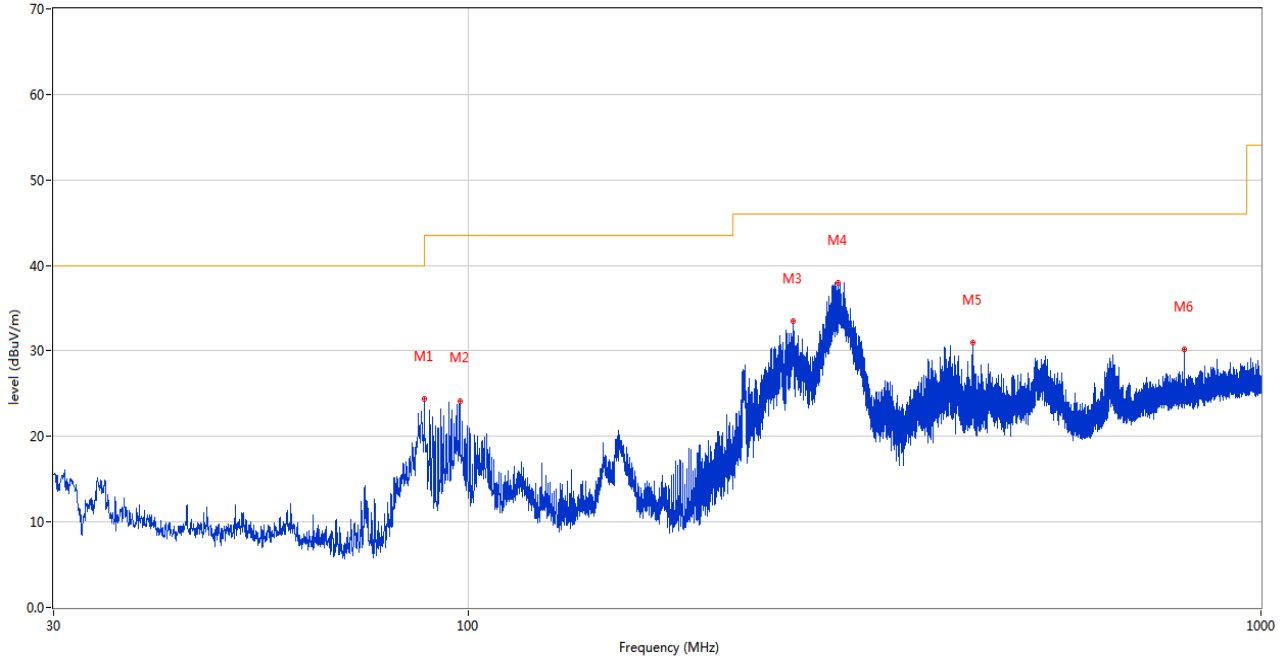

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	88.054	24.38	-30.29	43.5	-19.12	Peak	157.00	200	Horizontal	Pass
2	97.561	24.11	-29.54	43.5	-19.39	Peak	157.00	200	Horizontal	Pass
3	257.125	33.45	-26.13	46.0	-12.55	Peak	154.00	100	Horizontal	Pass
4	292.579	37.96	-24.45	46.0	-8.04	Peak	240.00	100	Horizontal	Pass
5	433.423	30.96	-20.17	46.0	-15.04	Peak	0.00	200	Horizontal	Pass
6	799.986	30.14	-12.68	46.0	-15.86	Peak	120.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case\_FCC Part 15B\_FCC Part 15B Class B 30MHz-1GHz

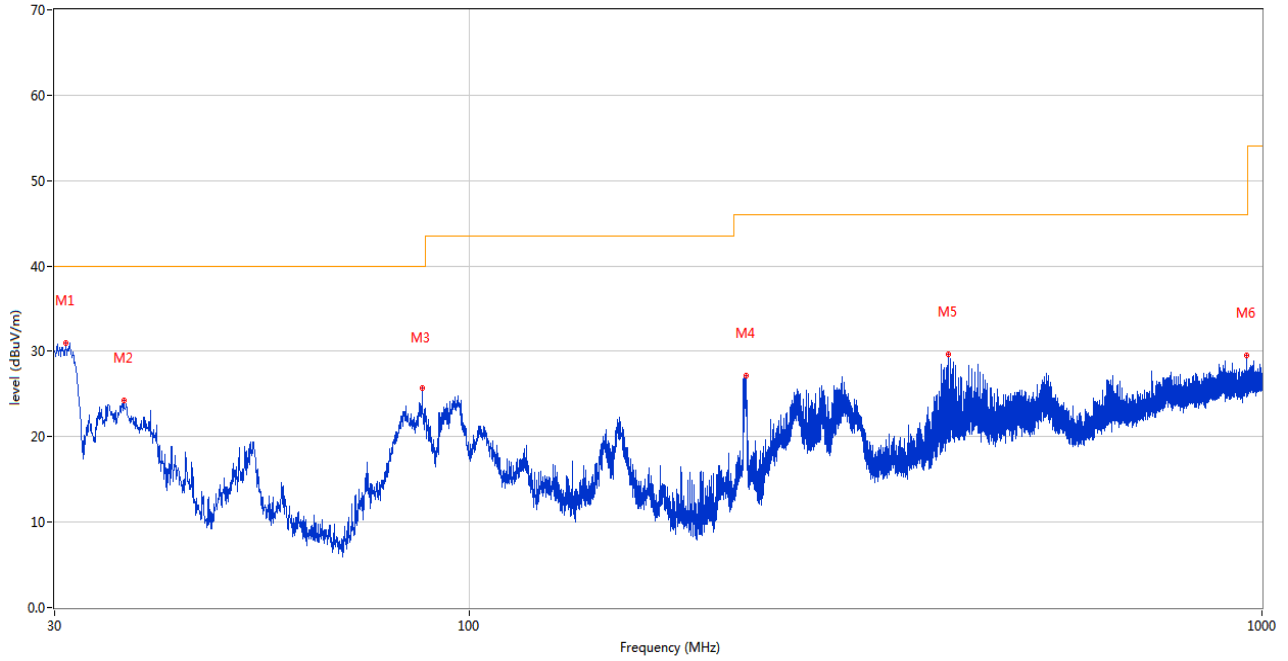

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.970	30.99	-27.11	40.0	-9.01	Peak	254.00	100	Vertical	Pass
2	36.693	24.25	-26.55	40.0	-15.75	Peak	56.00	100	Vertical	Pass
3	87.230	25.70	-30.34	40.0	-14.30	Peak	128.00	100	Vertical	Pass
4	223.661	27.19	-27.19	46.0	-18.81	Peak	155.00	200	Vertical	Pass
5	401.995	29.70	-21.18	46.0	-16.30	Peak	155.00	200	Vertical	Pass
6	955.234	29.54	-10.76	46.0	-16.46	Peak	0.00	200	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.


Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

Note 3: The data with the fundamental signal is added with a filter; the data without the fundamental signal is not added with the filter.

Speed

Main Antenna

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

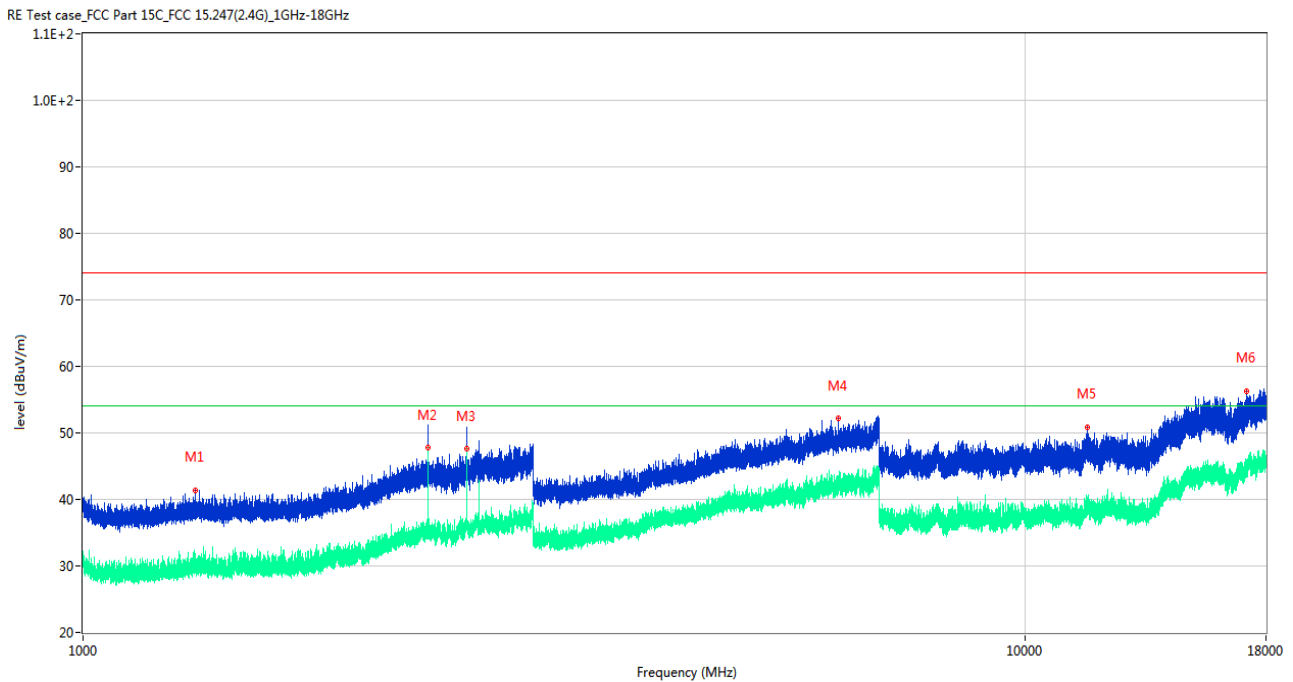

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1314.500	41.32	-11.04	74.0	-32.68	Peak	220.00	150	Horizontal	Pass
1**	1314.500	30.33	-11.04	54.0	-23.67	AV	220.00	150	Horizontal	Pass
2	2325.200	50.96	-5.93	74.0	-23.04	Peak	256.00	150	Horizontal	Pass
2**	2325.200	47.86	-5.93	54.0	-6.14	AV	256.00	150	Horizontal	Pass
3	2555.900	49.55	-5.07	74.0	-24.45	Peak	116.00	150	Horizontal	Pass
3**	2555.900	47.56	-5.07	54.0	-6.44	AV	116.00	150	Horizontal	Pass
4	6334.200	52.23	3.01	74.0	-21.77	Peak	7.00	150	Horizontal	Pass
4**	6334.200	42.30	3.01	54.0	-11.70	AV	7.00	150	Horizontal	Pass
5	11622.713	50.88	20.25	74.0	-23.12	Peak	202.00	150	Horizontal	Pass
5**	11622.713	40.31	20.25	54.0	-13.69	AV	202.00	150	Horizontal	Pass
6	17179.426	56.35	23.60	74.0	-17.65	Peak	93.00	150	Horizontal	Pass
6**	17179.426	44.03	23.60	54.0	-9.97	AV	93.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1133.400	40.79	-11.62	74.0	-33.21	Peak	245.00	150	Vertical	Pass
1**	1133.400	30.25	-11.62	54.0	-23.75	AV	245.00	150	Vertical	Pass
2	2241.100	46.42	-7.05	74.0	-27.58	Peak	183.00	150	Vertical	Pass
2**	2241.100	34.69	-7.05	54.0	-19.31	AV	183.00	150	Vertical	Pass
3	2997.700	48.75	-2.48	74.0	-25.25	Peak	232.00	150	Vertical	Pass
3**	2997.700	37.77	-2.48	54.0	-16.23	AV	232.00	150	Vertical	Pass
4	6915.200	53.05	4.79	74.0	-20.95	Peak	259.00	150	Vertical	Pass
4**	6915.200	43.36	4.79	54.0	-10.64	AV	259.00	150	Vertical	Pass
5	12169.538	51.08	20.15	74.0	-22.92	Peak	0.00	150	Vertical	Pass
5**	12169.538	41.60	20.15	54.0	-12.40	AV	0.00	150	Vertical	Pass
6	17673.449	56.79	24.38	74.0	-17.21	Peak	268.00	150	Vertical	Pass
6**	17673.449	45.14	24.38	54.0	-8.86	AV	268.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

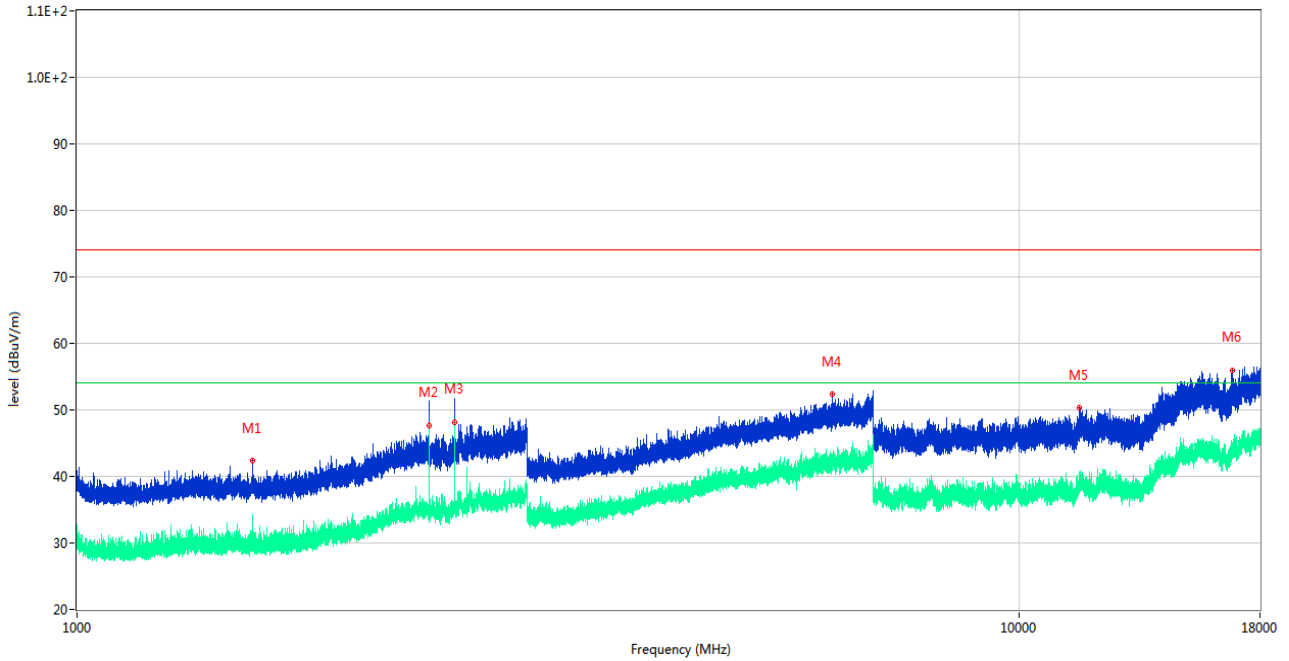

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1534.400	42.37	-11.26	74.0	-31.63	Peak	126.00	150	Horizontal	Pass
1**	1534.400	29.38	-11.26	54.0	-24.62	AV	126.00	150	Horizontal	Pass
2	2362.900	51.36	-6.83	74.0	-22.64	Peak	310.00	150	Horizontal	Pass
2**	2362.900	47.60	-6.83	54.0	-6.40	AV	310.00	150	Horizontal	Pass
3	2516.900	49.99	-5.60	74.0	-24.01	Peak	237.00	150	Horizontal	Pass
3**	2516.900	48.16	-5.60	54.0	-5.84	AV	237.00	150	Horizontal	Pass
4	6335.000	52.32	3.02	74.0	-21.68	Peak	27.00	150	Horizontal	Pass
4**	6335.000	41.89	3.02	54.0	-12.11	AV	27.00	150	Horizontal	Pass
5	11583.901	50.42	19.94	74.0	-23.58	Peak	131.00	150	Horizontal	Pass
5**	11583.901	38.25	19.94	54.0	-15.75	AV	131.00	150	Horizontal	Pass
6	16811.926	55.89	23.33	74.0	-18.11	Peak	291.00	150	Horizontal	Pass
6**	16811.926	43.11	23.33	54.0	-10.89	AV	291.00	150	Horizontal	Pass



GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1127.500	40.79	-11.63	74.0	-33.21	Peak	209.00	150	Vertical	Pass
1**	1127.500	28.71	-11.63	54.0	-25.29	AV	209.00	150	Vertical	Pass
2	2319.100	46.94	-5.98	74.0	-27.06	Peak	218.00	150	Vertical	Pass
2**	2319.100	35.17	-5.98	54.0	-18.83	AV	218.00	150	Vertical	Pass
3	2940.400	49.32	-3.56	74.0	-24.68	Peak	218.00	150	Vertical	Pass
3**	2940.400	36.76	-3.56	54.0	-17.24	AV	218.00	150	Vertical	Pass
4	6653.000	52.45	4.66	74.0	-21.55	Peak	4.00	150	Vertical	Pass
4**	6653.000	43.47	4.66	54.0	-10.53	AV	4.00	150	Vertical	Pass
5	11620.412	50.59	20.24	74.0	-23.41	Peak	84.00	150	Vertical	Pass
5**	11620.412	38.93	20.24	54.0	-15.07	AV	84.00	150	Vertical	Pass
6	17859.824	57.27	24.24	74.0	-16.73	Peak	127.00	150	Vertical	Pass
6**	17859.824	45.92	24.24	54.0	-8.08	AV	127.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

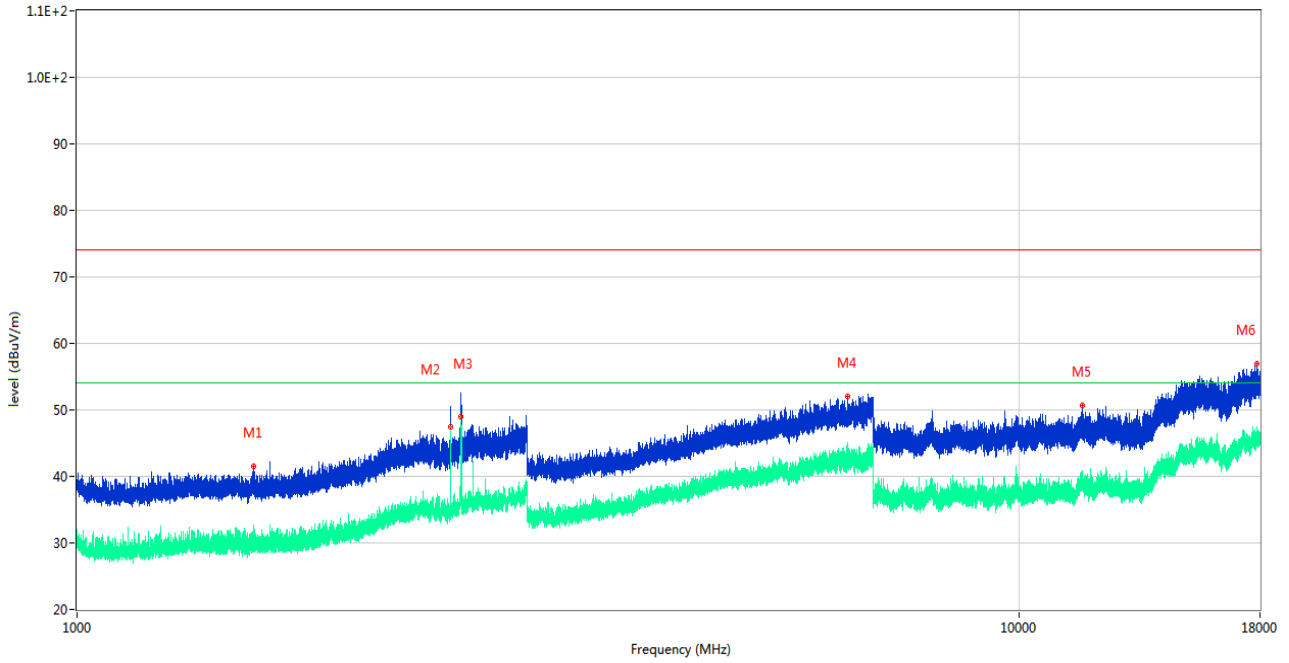

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1539.500	41.46	-11.36	74.0	-32.54	Peak	309.00	150	Horizontal	Pass
1**	1539.500	29.59	-11.36	54.0	-24.41	AV	309.00	150	Horizontal	Pass
2	2489.600	50.12	-6.35	74.0	-23.88	Peak	244.00	150	Horizontal	Pass
2**	2489.600	47.51	-6.35	54.0	-6.49	AV	244.00	150	Horizontal	Pass
3	2557.200	51.91	-5.24	74.0	-22.09	Peak	232.00	150	Horizontal	Pass
3**	2557.200	48.98	-5.24	54.0	-5.02	AV	232.00	150	Horizontal	Pass
4	6575.600	52.10	2.85	74.0	-21.90	Peak	317.00	150	Horizontal	Pass
4**	6575.600	42.39	2.85	54.0	-11.61	AV	317.00	150	Horizontal	Pass
5	11672.450	50.67	20.14	74.0	-23.33	Peak	308.00	150	Horizontal	Pass
5**	11672.450	37.96	20.14	54.0	-16.04	AV	308.00	150	Horizontal	Pass
6	17857.200	56.91	24.21	74.0	-17.09	Peak	44.00	150	Horizontal	Pass
6**	17857.200	44.75	24.21	54.0	-9.25	AV	44.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

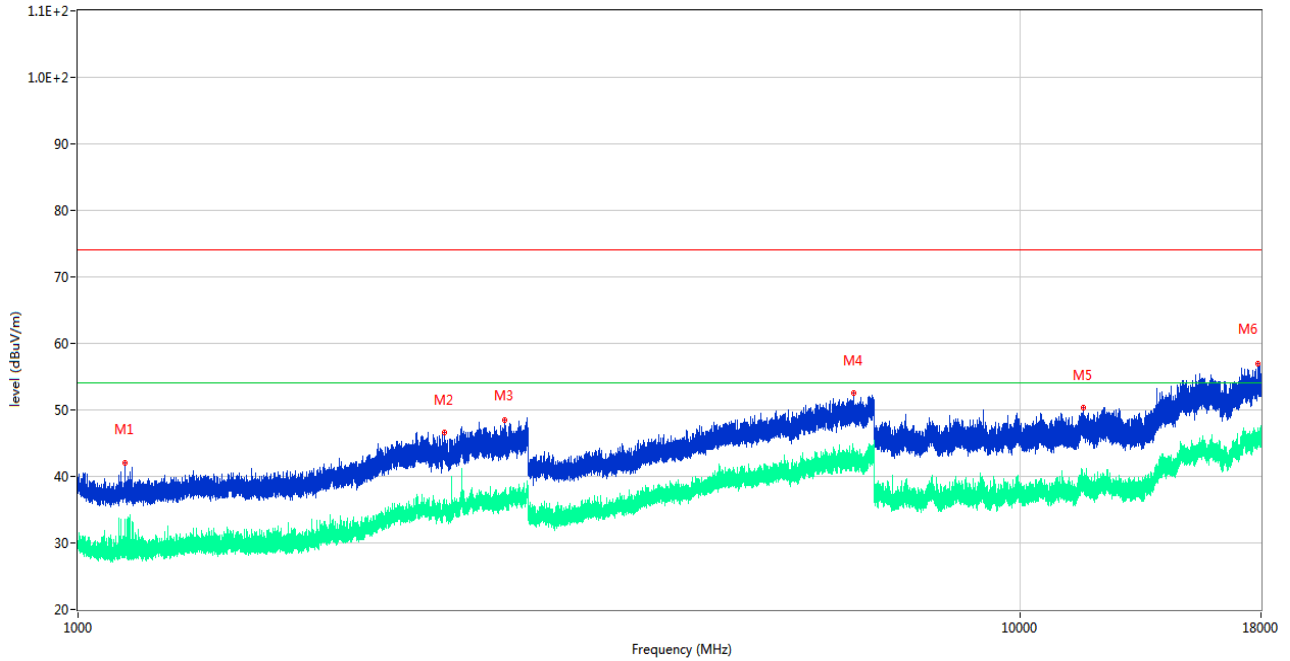


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1120.300	42.01	-11.34	74.0	-31.99	Peak	187.00	150	Vertical	Pass
1**	1120.300	29.91	-11.34	54.0	-24.09	AV	187.00	150	Vertical	Pass
2	2450.000	46.56	-5.82	74.0	-27.44	Peak	120.00	150	Vertical	Pass
2**	2450.000	35.25	-5.82	54.0	-18.75	AV	120.00	150	Vertical	Pass
3	2833.500	48.40	-3.72	74.0	-25.60	Peak	147.00	150	Vertical	Pass
3**	2833.500	36.33	-3.72	54.0	-17.67	AV	147.00	150	Vertical	Pass
4	6651.400	52.51	4.53	74.0	-21.49	Peak	352.00	150	Vertical	Pass
4**	6651.400	42.14	4.53	54.0	-11.86	AV	352.00	150	Vertical	Pass
5	11651.463	50.39	20.37	74.0	-23.61	Peak	290.00	150	Vertical	Pass
5**	11651.463	38.36	20.37	54.0	-15.64	AV	290.00	150	Vertical	Pass
6	17861.663	56.87	24.26	74.0	-17.13	Peak	331.00	150	Vertical	Pass
6**	17861.663	45.70	24.26	54.0	-8.30	AV	331.00	150	Vertical	Pass

Aux. Antenna

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

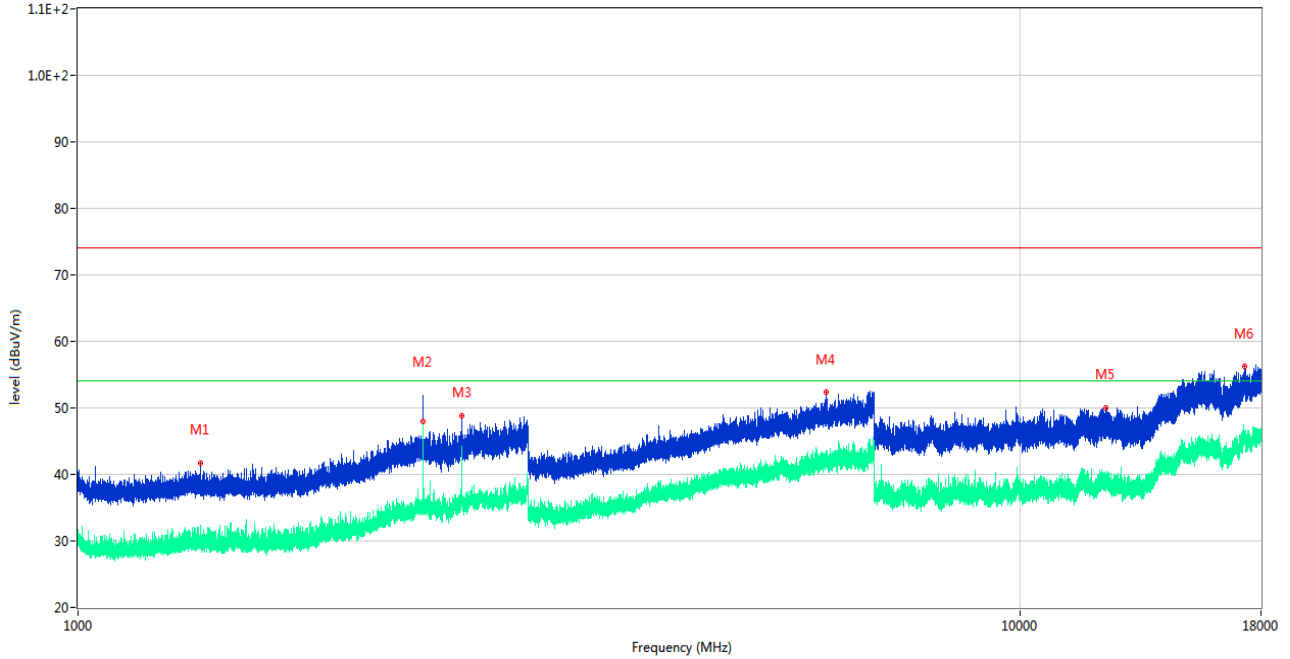

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1347.600	41.72	-11.06	74.0	-32.28	Peak	119.00	150	Horizontal	Pass
1**	1347.600	29.26	-11.06	54.0	-24.74	AV	119.00	150	Horizontal	Pass
2	2325.300	50.65	-5.93	74.0	-23.35	Peak	344.00	150	Horizontal	Pass
2**	2325.300	48.02	-5.93	54.0	-5.98	AV	344.00	150	Horizontal	Pass
3	2555.500	48.79	-5.05	74.0	-25.21	Peak	217.00	150	Horizontal	Pass
3**	2555.500	44.28	-5.05	54.0	-9.72	AV	217.00	150	Horizontal	Pass
4	6216.800	52.32	2.93	74.0	-21.68	Peak	360.00	150	Horizontal	Pass
4**	6216.800	42.94	2.93	54.0	-11.06	AV	360.00	150	Horizontal	Pass
5	12320.474	50.08	19.92	74.0	-23.92	Peak	360.00	150	Horizontal	Pass
5**	12320.474	38.95	19.92	54.0	-15.05	AV	360.00	150	Horizontal	Pass
6	17289.677	56.32	24.55	74.0	-17.68	Peak	200.00	150	Horizontal	Pass
6**	17289.677	45.90	24.55	54.0	-8.10	AV	200.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1145.300	41.60	-11.76	74.0	-32.40	Peak	229.00	150	Vertical	Pass
1**	1145.300	28.18	-11.76	54.0	-25.82	AV	229.00	150	Vertical	Pass
2	2324.900	47.70	-5.92	74.0	-26.30	Peak	188.00	150	Vertical	Pass
2**	2324.900	37.52	-5.92	54.0	-16.48	AV	188.00	150	Vertical	Pass
3	2998.300	49.22	-2.48	74.0	-24.78	Peak	310.00	150	Vertical	Pass
3**	2998.300	38.19	-2.48	54.0	-15.81	AV	310.00	150	Vertical	Pass
4	6658.200	53.38	4.25	74.0	-20.62	Peak	203.00	150	Vertical	Pass
4**	6658.200	41.89	4.25	54.0	-12.11	AV	203.00	150	Vertical	Pass
5	11628.174	50.79	20.29	74.0	-23.21	Peak	95.00	150	Vertical	Pass
5**	11628.174	39.78	20.29	54.0	-14.22	AV	95.00	150	Vertical	Pass
6	17254.238	57.25	24.22	74.0	-16.75	Peak	223.00	150	Vertical	Pass
6**	17254.238	45.16	24.22	54.0	-8.84	AV	223.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

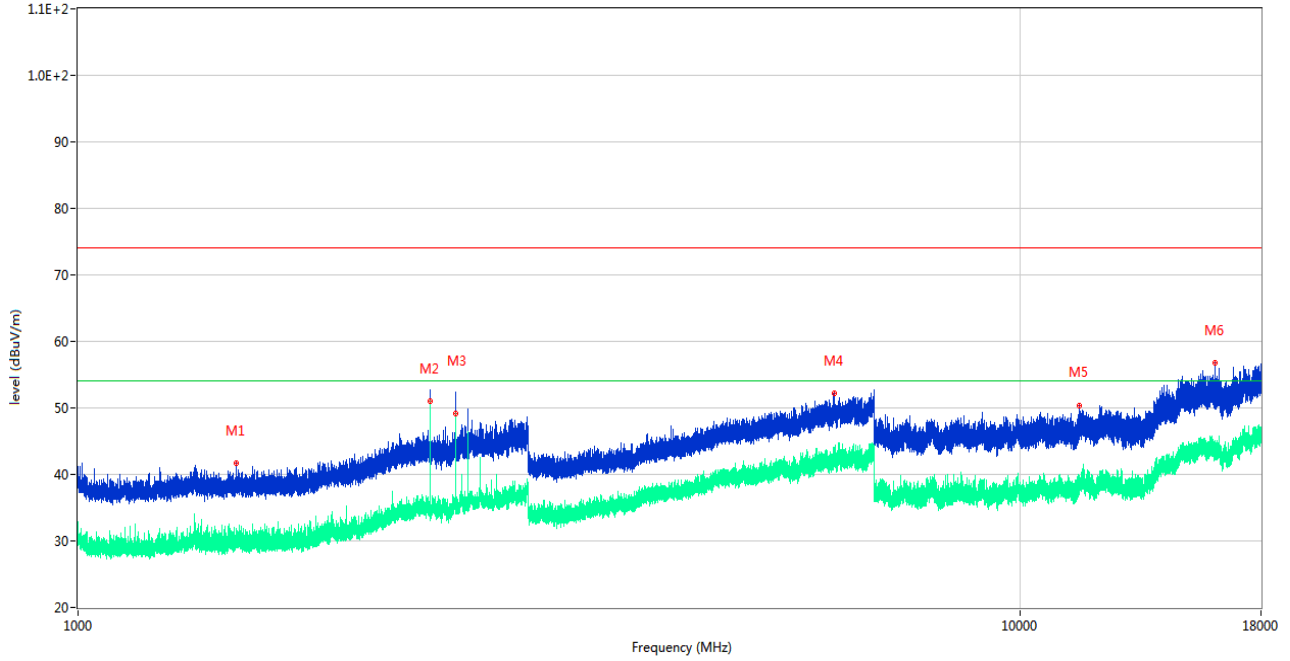

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1473.200	41.74	-11.40	74.0	-32.26	Peak	43.00	150	Horizontal	Pass
1**	1473.200	30.42	-11.40	54.0	-23.58	AV	43.00	150	Horizontal	Pass
2	2363.300	52.41	-6.85	74.0	-21.59	Peak	256.00	150	Horizontal	Pass
2**	2363.300	48.379	-6.85	54.0	-5.621	AV	256.00	150	Horizontal	Pass
3	2516.800	52.28	-5.59	74.0	-21.72	Peak	217.00	150	Horizontal	Pass
3**	2516.800	49.15	-5.59	54.0	-4.85	AV	217.00	150	Horizontal	Pass
4	6344.800	52.25	3.03	74.0	-21.75	Peak	273.00	150	Horizontal	Pass
4**	6344.800	42.39	3.03	54.0	-11.61	AV	273.00	150	Horizontal	Pass
5	11561.475	50.26	19.78	74.0	-23.74	Peak	137.00	150	Horizontal	Pass
5**	11561.475	39.14	19.78	54.0	-14.86	AV	137.00	150	Horizontal	Pass
6	16098.187	56.84	24.22	74.0	-17.16	Peak	72.00	150	Horizontal	Pass
6**	16098.187	42.98	24.22	54.0	-11.02	AV	72.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

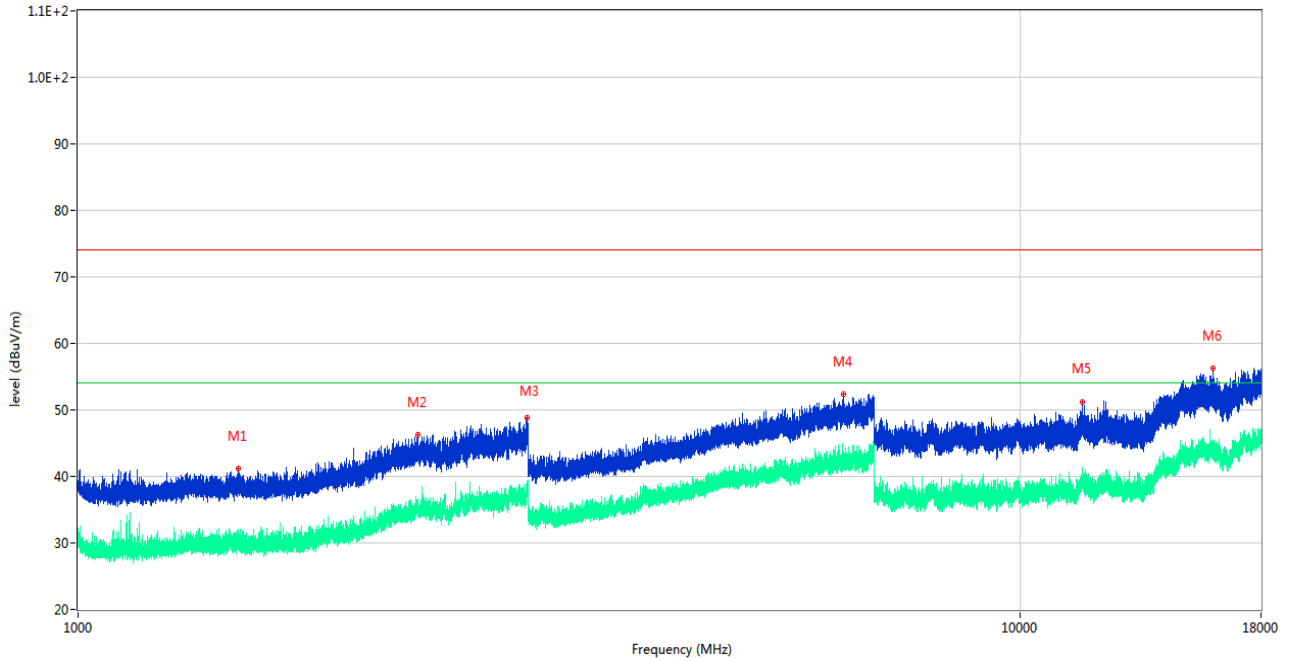

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1477.700	41.25	-11.28	74.0	-32.75	Peak	174.00	150	Vertical	Pass
1**	1477.700	29.42	-11.28	54.0	-24.58	AV	174.00	150	Vertical	Pass
2	2291.900	46.27	-5.84	74.0	-27.73	Peak	210.00	150	Vertical	Pass
2**	2291.900	34.57	-5.84	54.0	-19.43	AV	210.00	150	Vertical	Pass
3	2995.800	48.87	-2.55	74.0	-25.13	Peak	261.00	150	Vertical	Pass
3**	2995.800	39.38	-2.55	54.0	-14.62	AV	261.00	150	Vertical	Pass
4	6487.400	52.44	2.59	74.0	-21.56	Peak	336.00	150	Vertical	Pass
4**	6487.400	41.96	2.59	54.0	-12.04	AV	336.00	150	Vertical	Pass
5	11630.474	51.19	20.30	74.0	-22.81	Peak	360.00	150	Vertical	Pass
5**	11630.474	38.85	20.30	54.0	-15.15	AV	360.00	150	Vertical	Pass
6	15999.750	56.22	24.02	74.0	-17.78	Peak	163.00	150	Vertical	Pass
6**	15999.750	42.92	24.02	54.0	-11.08	AV	163.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

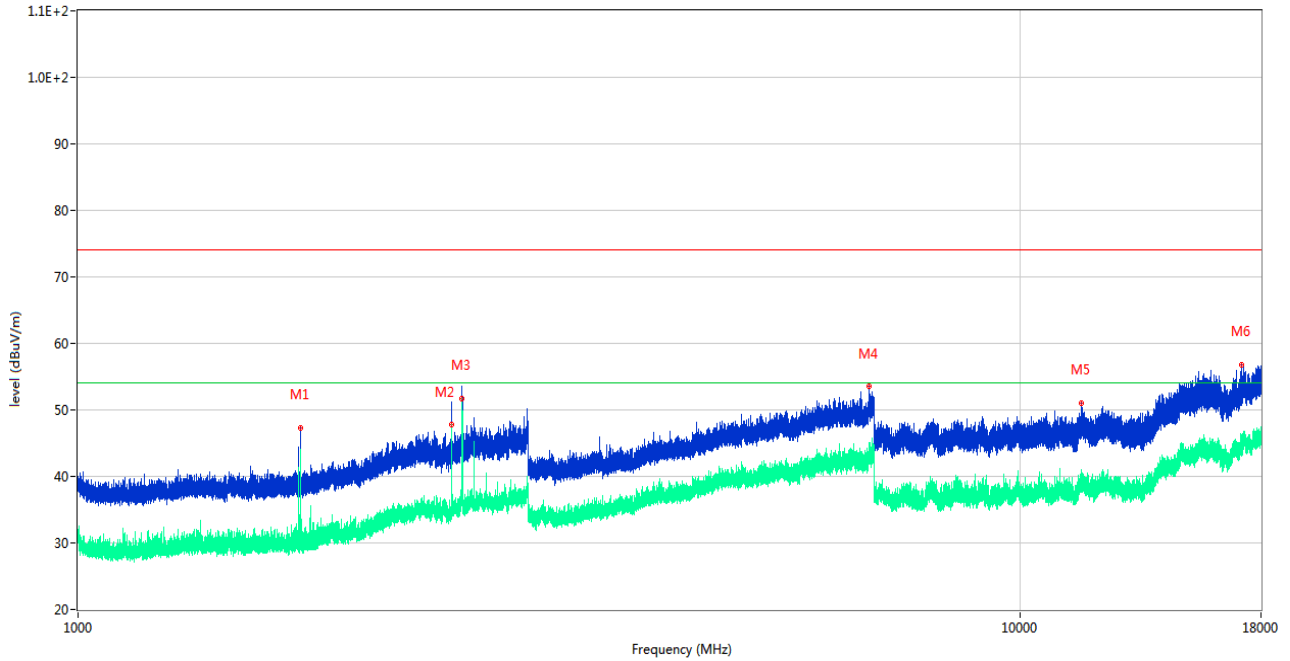


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1722.400	47.31	-11.68	74.0	-26.69	Peak	360.00	150	Horizontal	Pass
1**	1722.400	42.04	-11.68	54.0	-11.96	AV	360.00	150	Horizontal	Pass
2	2489.600	48.62	-6.35	74.0	-25.38	Peak	136.00	150	Horizontal	Pass
2**	2489.600	47.87	-6.35	54.0	-6.13	AV	136.00	150	Horizontal	Pass
3	2556.900	52.95	-5.18	74.0	-21.05	Peak	207.00	150	Horizontal	Pass
3**	2556.900	49.643	-5.18	54.0	-4.357	AV	207.00	150	Horizontal	Pass
4	6915.800	53.48	4.76	74.0	-20.52	Peak	97.00	150	Horizontal	Pass
4**	6915.800	43.50	4.76	54.0	-10.50	AV	97.00	150	Horizontal	Pass
5	11618.975	51.03	20.23	74.0	-22.97	Peak	13.00	150	Horizontal	Pass
5**	11618.975	39.41	20.23	54.0	-14.59	AV	13.00	150	Horizontal	Pass
6	17174.176	56.73	23.54	74.0	-17.27	Peak	294.00	150	Horizontal	Pass
6**	17174.176	43.86	23.54	54.0	-10.14	AV	294.00	150	Horizontal	Pass



GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

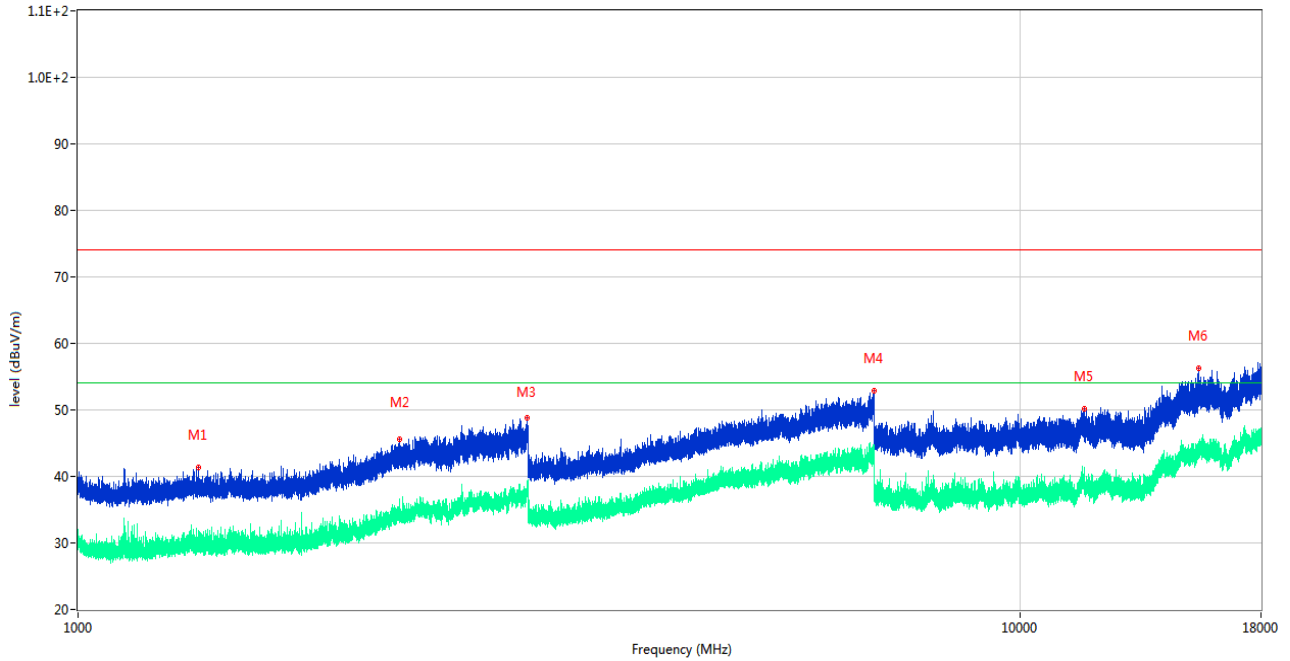


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1343.500	41.44	-10.99	74.0	-32.56	Peak	327.00	150	Vertical	Pass
1**	1343.500	28.97	-10.99	54.0	-25.03	AV	327.00	150	Vertical	Pass
2	2193.300	45.66	-6.65	74.0	-28.34	Peak	65.00	150	Vertical	Pass
2**	2193.300	33.01	-6.65	54.0	-20.99	AV	65.00	150	Vertical	Pass
3	2994.800	48.82	-2.68	74.0	-25.18	Peak	203.00	150	Vertical	Pass
3**	2994.800	37.57	-2.68	54.0	-16.43	AV	203.00	150	Vertical	Pass
4	6999.200	52.82	3.86	74.0	-21.18	Peak	259.00	150	Vertical	Pass
4**	6999.200	43.82	3.86	54.0	-10.18	AV	259.00	150	Vertical	Pass
5	11693.438	50.13	19.90	74.0	-23.87	Peak	290.00	150	Vertical	Pass
5**	11693.438	38.65	19.90	54.0	-15.35	AV	290.00	150	Vertical	Pass
6	15472.388	56.25	23.61	74.0	-17.75	Peak	205.00	150	Vertical	Pass
6**	15472.388	43.84	23.61	54.0	-10.16	AV	205.00	150	Vertical	Pass

South Star

Main Antenna

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

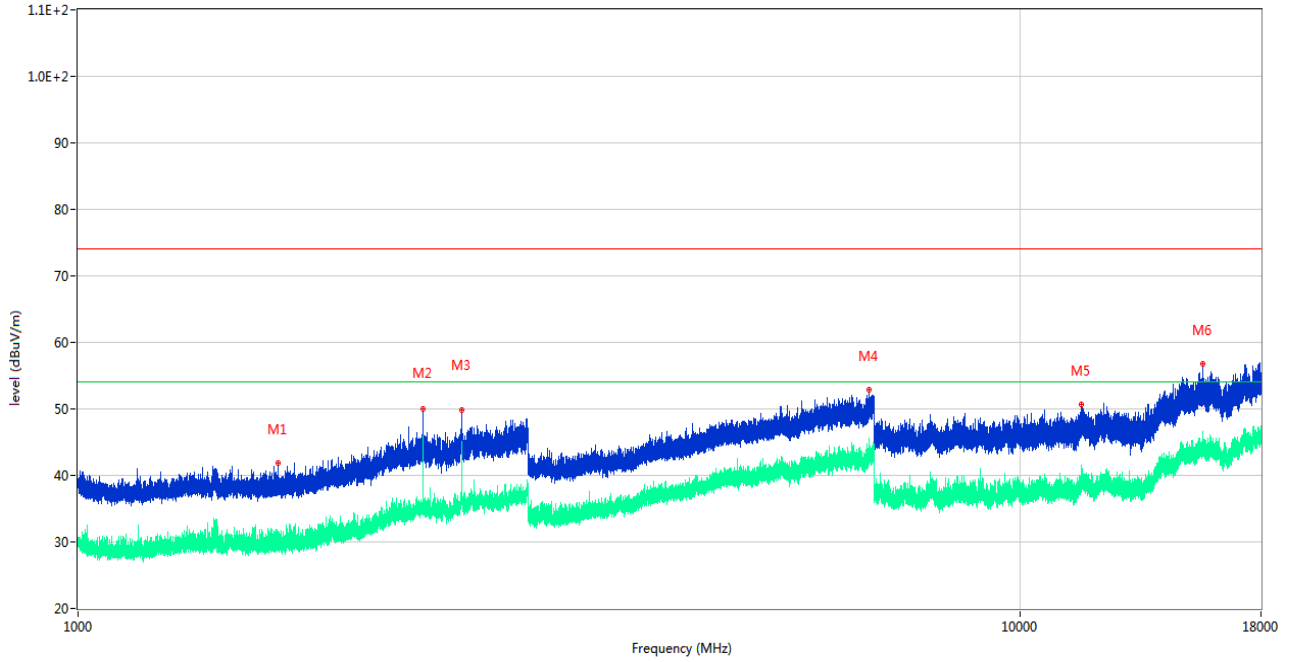

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1630.800	41.92	-11.56	74.0	-32.08	Peak	309.00	150	Horizontal	Pass
1**	1630.800	30.72	-11.56	54.0	-23.28	AV	309.00	150	Horizontal	Pass
2	2325.100	49.96	-5.93	74.0	-24.04	Peak	323.00	150	Horizontal	Pass
2**	2325.100	44.53	-5.93	54.0	-9.47	AV	323.00	150	Horizontal	Pass
3	2555.600	49.90	-5.06	74.0	-24.10	Peak	227.00	150	Horizontal	Pass
3**	2555.600	44.46	-5.06	54.0	-9.54	AV	227.00	150	Horizontal	Pass
4	6914.600	52.87	4.80	74.0	-21.13	Peak	142.00	150	Horizontal	Pass
4**	6914.600	43.41	4.80	54.0	-10.59	AV	142.00	150	Horizontal	Pass
5	11614.662	50.62	20.21	74.0	-23.38	Peak	54.00	150	Horizontal	Pass
5**	11614.662	39.57	20.21	54.0	-14.43	AV	54.00	150	Horizontal	Pass
6	15626.213	56.71	23.48	74.0	-17.29	Peak	307.00	150	Horizontal	Pass
6**	15626.213	44.04	23.48	54.0	-9.96	AV	307.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

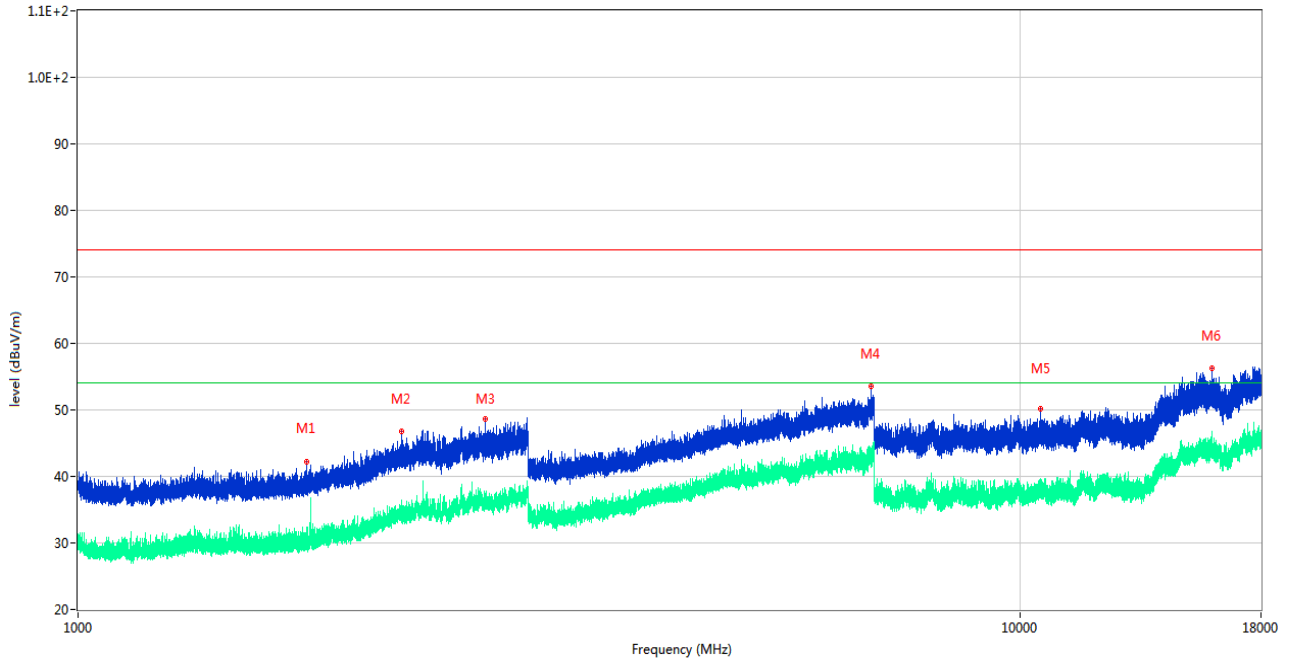

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1749.600	42.14	-11.53	74.0	-31.86	Peak	288.00	150	Vertical	Pass
1**	1749.600	29.59	-11.53	54.0	-24.41	AV	288.00	150	Vertical	Pass
2	2202.400	46.70	-6.98	74.0	-27.30	Peak	29.00	150	Vertical	Pass
2**	2202.400	34.19	-6.98	54.0	-19.81	AV	29.00	150	Vertical	Pass
3	2702.400	48.63	-4.71	74.0	-25.37	Peak	280.00	150	Vertical	Pass
3**	2702.400	36.06	-4.71	54.0	-17.94	AV	280.00	150	Vertical	Pass
4	6937.200	53.48	4.35	74.0	-20.52	Peak	0.00	150	Vertical	Pass
4**	6937.200	42.88	4.35	54.0	-11.12	AV	0.00	150	Vertical	Pass
5	10500.025	50.22	18.36	74.0	-23.78	Peak	244.00	150	Vertical	Pass
5**	10500.025	37.72	18.36	54.0	-16.28	AV	244.00	150	Vertical	Pass
6	15960.375	56.28	23.99	74.0	-17.72	Peak	77.00	150	Vertical	Pass
6**	15960.375	43.67	23.99	54.0	-10.33	AV	77.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

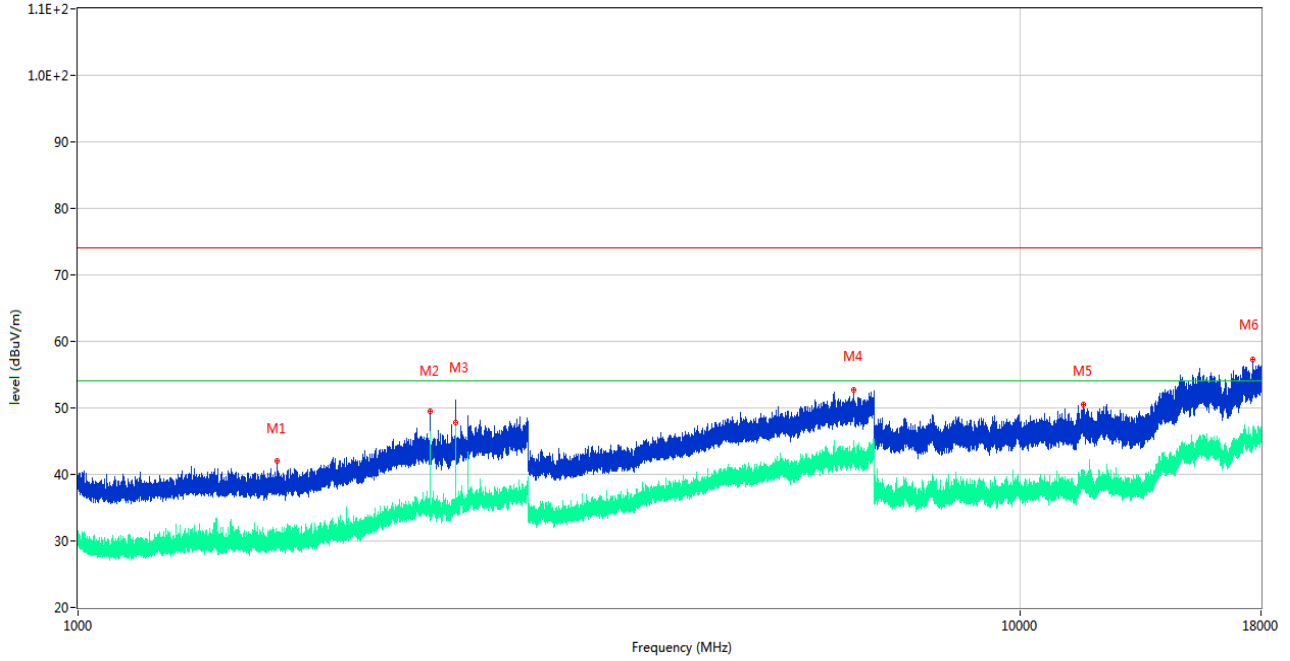

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1626.100	42.09	-11.64	74.0	-31.91	Peak	187.00	150	Horizontal	Pass
1**	1626.100	29.47	-11.64	54.0	-24.53	AV	187.00	150	Horizontal	Pass
2	2363.300	49.53	-6.85	74.0	-24.47	Peak	333.00	150	Horizontal	Pass
2**	2363.300	46.42	-6.85	54.0	-7.58	AV	333.00	150	Horizontal	Pass
3	2516.700	51.12	-5.59	74.0	-22.88	Peak	234.00	150	Horizontal	Pass
3**	2516.700	47.85	-5.59	54.0	-6.15	AV	234.00	150	Horizontal	Pass
4	6647.600	52.64	4.50	74.0	-21.36	Peak	1.00	150	Horizontal	Pass
4**	6647.600	43.75	4.50	54.0	-10.25	AV	1.00	150	Horizontal	Pass
5	11675.325	50.59	20.11	74.0	-23.41	Peak	0.00	150	Horizontal	Pass
5**	11675.325	39.00	20.11	54.0	-15.00	AV	0.00	150	Horizontal	Pass
6	17635.387	57.21	24.08	74.0	-16.79	Peak	43.00	150	Horizontal	Pass
6**	17635.387	44.55	24.08	54.0	-9.45	AV	43.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

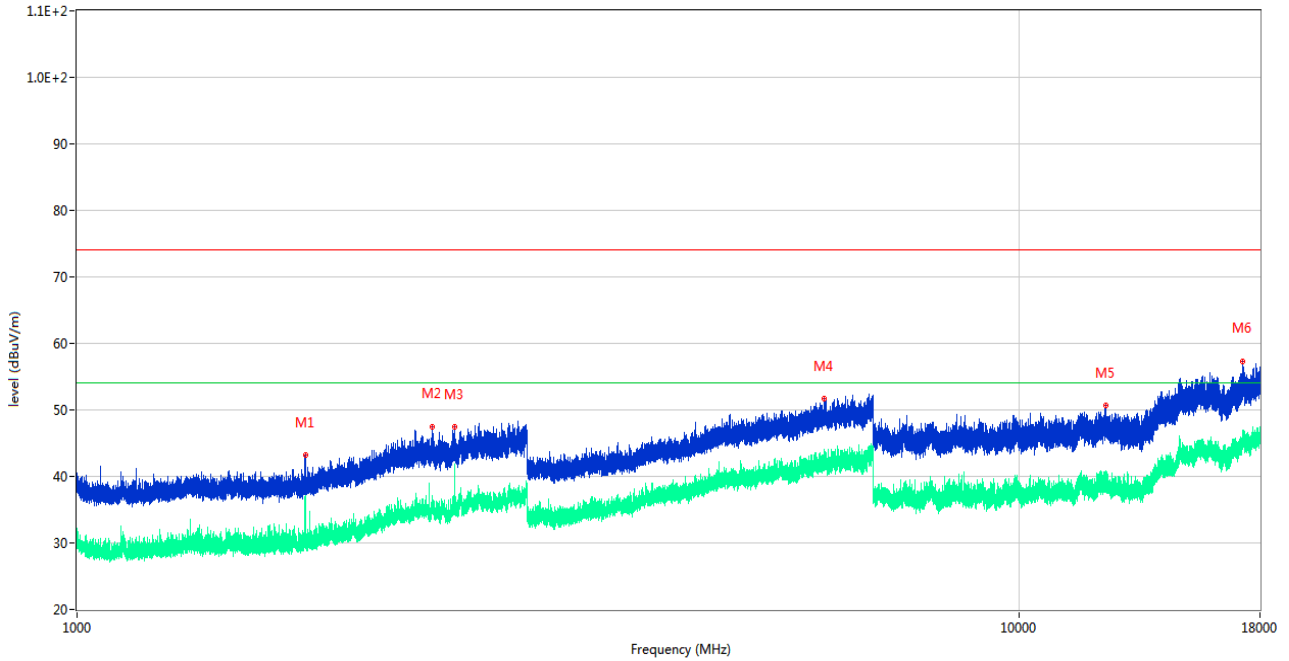

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1746.100	43.29	-11.47	74.0	-30.71	Peak	238.00	150	Vertical	Pass
1**	1746.100	37.13	-11.47	54.0	-16.87	AV	238.00	150	Vertical	Pass
2	2381.500	47.41	-5.89	74.0	-26.59	Peak	360.00	150	Vertical	Pass
2**	2381.500	34.50	-5.89	54.0	-19.50	AV	360.00	150	Vertical	Pass
3	2516.200	47.38	-5.59	74.0	-26.62	Peak	200.00	150	Vertical	Pass
3**	2516.200	36.93	-5.59	54.0	-17.07	AV	200.00	150	Vertical	Pass
4	6207.800	51.75	2.60	74.0	-22.25	Peak	197.00	150	Vertical	Pass
4**	6207.800	41.50	2.60	54.0	-12.50	AV	197.00	150	Vertical	Pass
5	12349.799	50.66	19.71	74.0	-23.34	Peak	318.00	150	Vertical	Pass
5**	12349.799	38.95	19.71	54.0	-15.05	AV	318.00	150	Vertical	Pass
6	17243.738	57.23	24.20	74.0	-16.77	Peak	338.00	150	Vertical	Pass
6**	17243.738	45.48	24.20	54.0	-8.52	AV	338.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

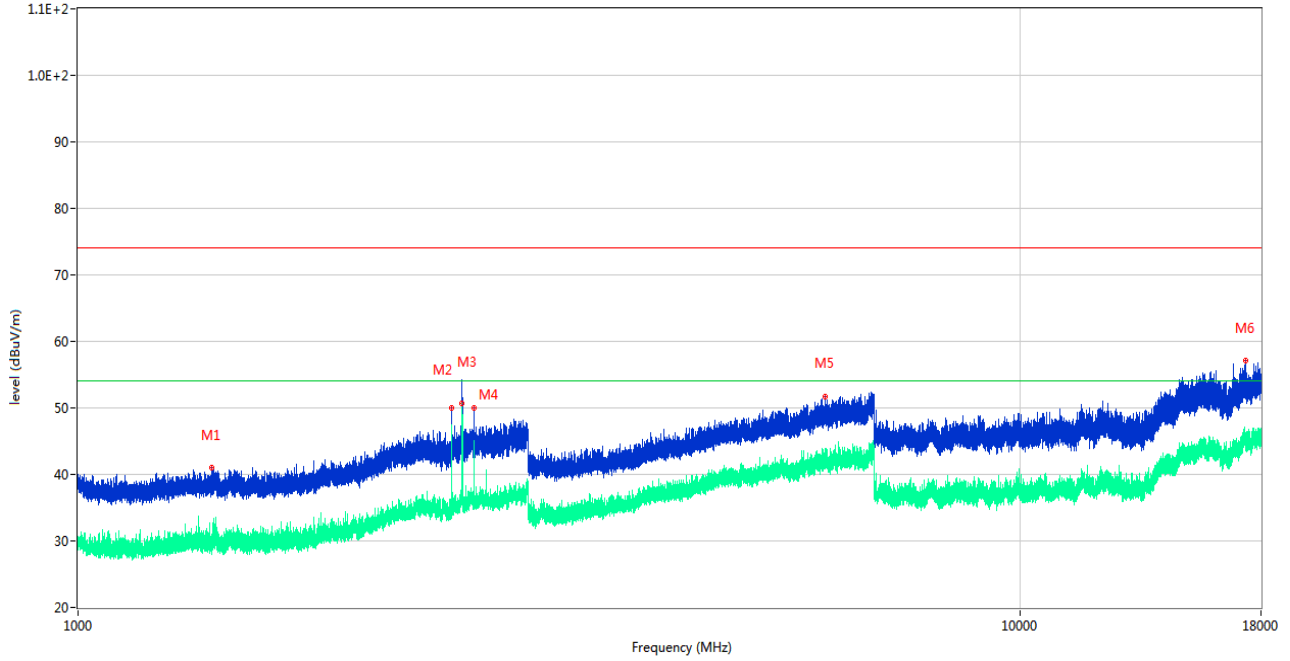

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1387.600	40.97	-11.61	74.0	-33.03	Peak	328.00	150	Horizontal	Pass
1**	1387.600	29.06	-11.61	54.0	-24.94	AV	328.00	150	Horizontal	Pass
2	2489.600	49.93	-6.35	74.0	-24.07	Peak	211.00	150	Horizontal	Pass
2**	2489.600	45.13	-6.35	54.0	-8.87	AV	211.00	150	Horizontal	Pass
3	2556.700	52.91	-5.14	74.0	-21.09	Peak	204.00	150	Horizontal	Pass
3**	2556.700	47.611	-5.14	54.0	-6.389	AV	204.00	150	Horizontal	Pass
4	2633.500	50.05	-5.50	74.0	-23.95	Peak	114.00	150	Horizontal	Pass
4**	2633.500	44.05	-5.50	54.0	-9.95	AV	114.00	150	Horizontal	Pass
5	6201.800	51.67	2.74	74.0	-22.33	Peak	86.00	150	Horizontal	Pass
5**	6201.800	42.11	2.74	54.0	-11.89	AV	86.00	150	Horizontal	Pass
6	17322.224	57.08	24.28	74.0	-16.92	Peak	362.00	150	Horizontal	Pass
6**	17322.224	44.47	24.28	54.0	-9.53	AV	362.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

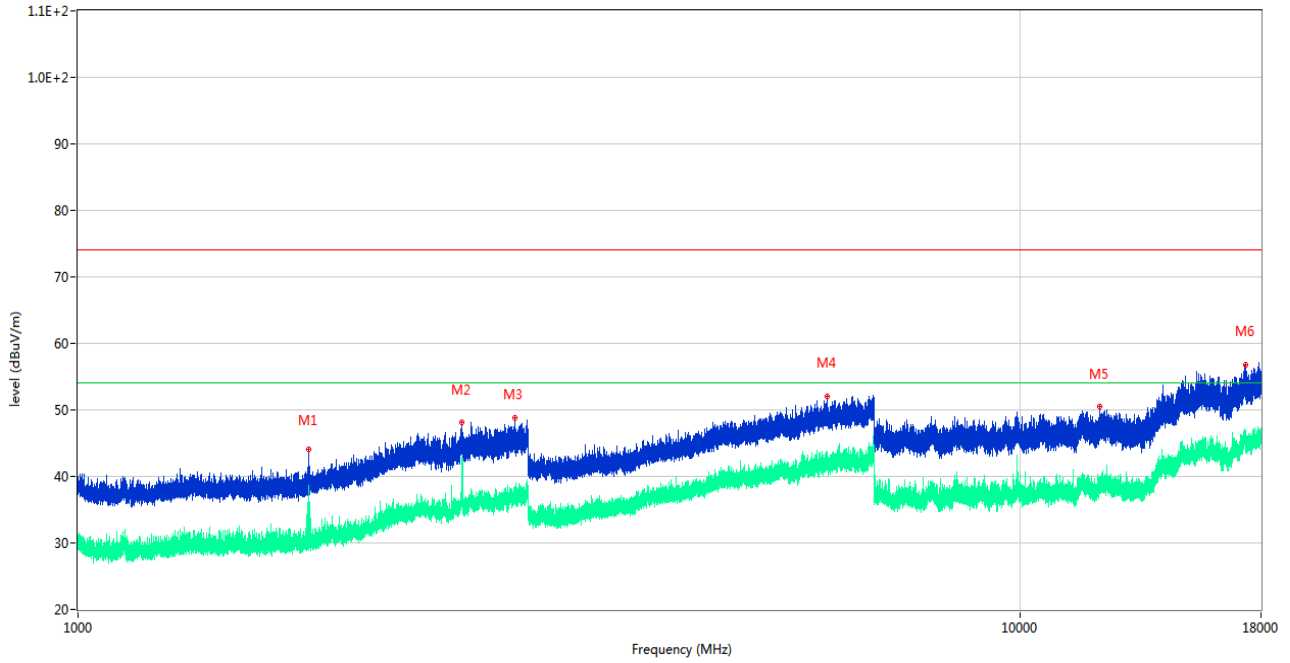


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1758.700	44.00	-11.43	74.0	-30.00	Peak	328.00	150	Vertical	Pass
1**	1758.700	34.54	-11.43	54.0	-19.46	AV	328.00	150	Vertical	Pass
2	2556.400	48.12	-5.10	74.0	-25.88	Peak	185.00	150	Vertical	Pass
2**	2556.400	40.56	-5.10	54.0	-13.44	AV	185.00	150	Vertical	Pass
3	2904.300	48.76	-3.70	74.0	-25.24	Peak	159.00	150	Vertical	Pass
3**	2904.300	37.59	-3.70	54.0	-16.41	AV	159.00	150	Vertical	Pass
4	6235.800	52.09	3.34	74.0	-21.91	Peak	299.00	150	Vertical	Pass
4**	6235.800	41.31	3.34	54.0	-12.69	AV	299.00	150	Vertical	Pass
5	12133.026	50.59	19.78	74.0	-23.41	Peak	351.00	150	Vertical	Pass
5**	12133.026	38.44	19.78	54.0	-15.56	AV	351.00	150	Vertical	Pass
6	17331.675	56.73	24.10	74.0	-17.27	Peak	23.00	150	Vertical	Pass
6**	17331.675	45.02	24.10	54.0	-8.98	AV	23.00	150	Vertical	Pass

Aux. Antenna

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

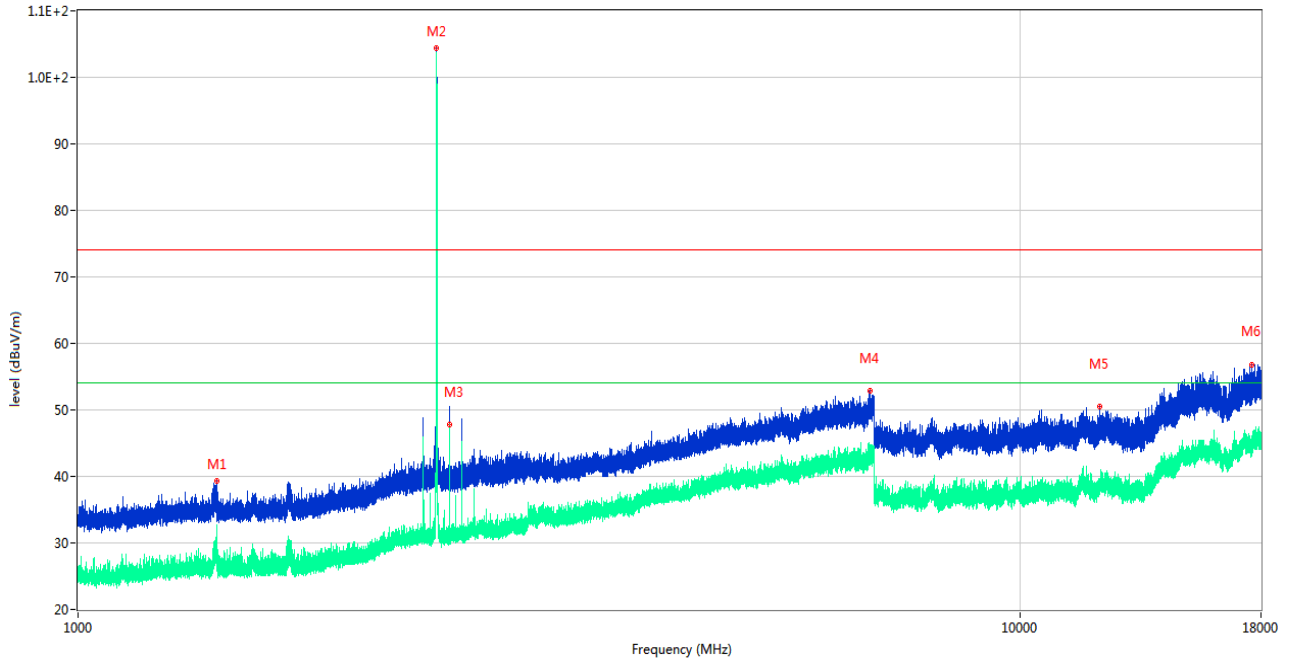


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1403.500	39.39	-14.90	74.0	-34.61	Peak	200.00	150	Horizontal	Pass
1**	1403.500	29.74	-14.90	54.0	-24.26	AV	200.00	150	Horizontal	Pass
2	2401.700	104.40	-10.62	74.0	30.40	Peak	330.00	150	Horizontal	N/A
2**	2401.700	102.85	-10.62	54.0	48.85	AV	330.00	150	Horizontal	N/A
3	2478.500	50.45	-10.36	74.0	-23.55	Peak	239.00	150	Horizontal	Pass
3**	2478.500	47.82	-10.36	54.0	-6.18	AV	239.00	150	Horizontal	Pass
4	6924.000	52.92	4.24	74.0	-21.08	Peak	257.00	150	Horizontal	Pass
4**	6924.000	43.07	4.24	54.0	-10.93	AV	257.00	150	Horizontal	Pass
5	12148.550	50.45	19.91	74.0	-23.55	Peak	191.00	150	Horizontal	Pass
5**	12148.550	38.28	19.91	54.0	-15.72	AV	191.00	150	Horizontal	Pass
6	17615.700	56.77	23.82	74.0	-17.23	Peak	138.00	150	Horizontal	Pass
6**	17615.700	44.44	23.82	54.0	-9.56	AV	138.00	150	Horizontal	Pass



GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

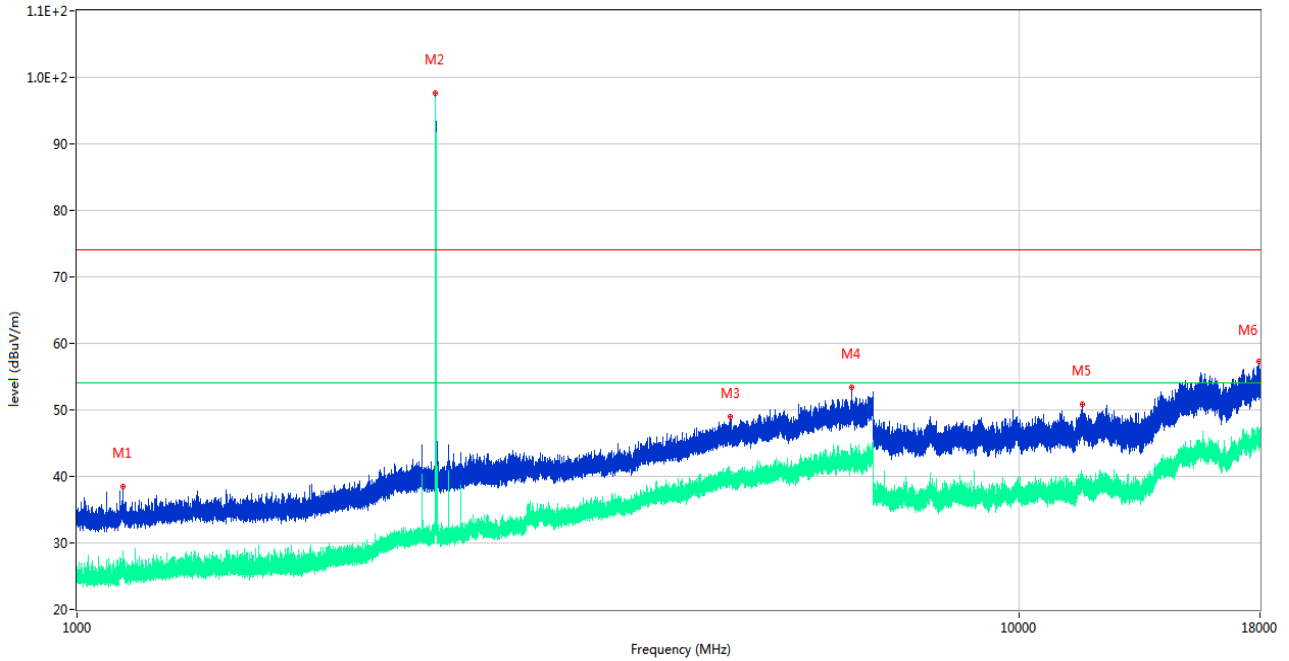

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1118.700	38.42	-15.30	74.0	-35.58	Peak	292.00	150	Vertical	Pass
1**	1118.700	26.33	-15.30	54.0	-27.67	AV	292.00	150	Vertical	Pass
2	2402.200	97.57	-10.56	74.0	23.57	Peak	199.00	150	Vertical	N/A
2**	2402.200	96.64	-10.56	54.0	42.64	AV	199.00	150	Vertical	N/A
3	4928.200	49.05	-1.23	74.0	-24.95	Peak	165.00	150	Vertical	Pass
3**	4928.200	40.51	-1.23	54.0	-13.49	AV	165.00	150	Vertical	Pass
4	6635.000	53.46	3.75	74.0	-20.54	Peak	330.00	150	Vertical	Pass
4**	6635.000	42.50	3.75	54.0	-11.50	AV	330.00	150	Vertical	Pass
5	11661.525	50.82	20.25	74.0	-23.18	Peak	215.00	150	Vertical	Pass
5**	11661.525	38.67	20.25	54.0	-15.33	AV	215.00	150	Vertical	Pass
6	17934.637	57.33	24.38	74.0	-16.67	Peak	143.00	150	Vertical	Pass
6**	17934.637	45.98	24.38	54.0	-8.02	AV	143.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

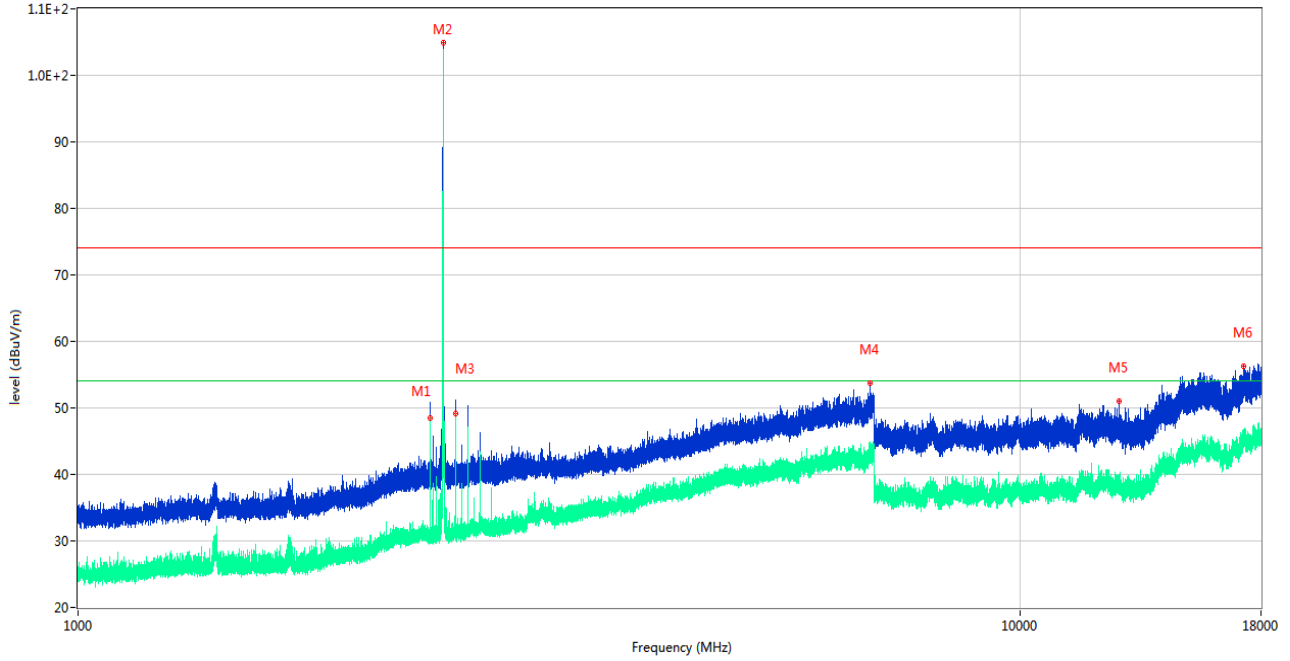

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2363.100	50.45	-10.44	74.0	-23.55	Peak	259.00	150	Horizontal	Pass
1**	2363.100	48.40	-10.44	54.0	-5.60	AV	259.00	150	Horizontal	Pass
2	2439.800	104.97	-10.35	74.0	30.97	Peak	266.00	150	Horizontal	N/A
2**	2439.800	102.90	-10.35	54.0	48.90	AV	266.00	150	Horizontal	N/A
3	2516.800	50.54	-9.95	74.0	-23.46	Peak	213.00	150	Horizontal	Pass
3**	2516.800	49.22	-9.95	54.0	-4.78	AV	213.00	150	Horizontal	Pass
4	6921.200	53.71	4.51	74.0	-20.29	Peak	0.00	150	Horizontal	Pass
4**	6921.200	43.37	4.51	54.0	-10.63	AV	0.00	150	Horizontal	Pass
5	12736.201	50.93	18.90	74.0	-23.07	Peak	20.00	150	Horizontal	Pass
5**	12736.201	37.94	18.90	54.0	-16.06	AV	20.00	150	Horizontal	Pass
6	17261.324	56.24	24.26	74.0	-17.76	Peak	327.00	150	Horizontal	Pass
6**	17261.324	46.39	24.26	54.0	-7.61	AV	327.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

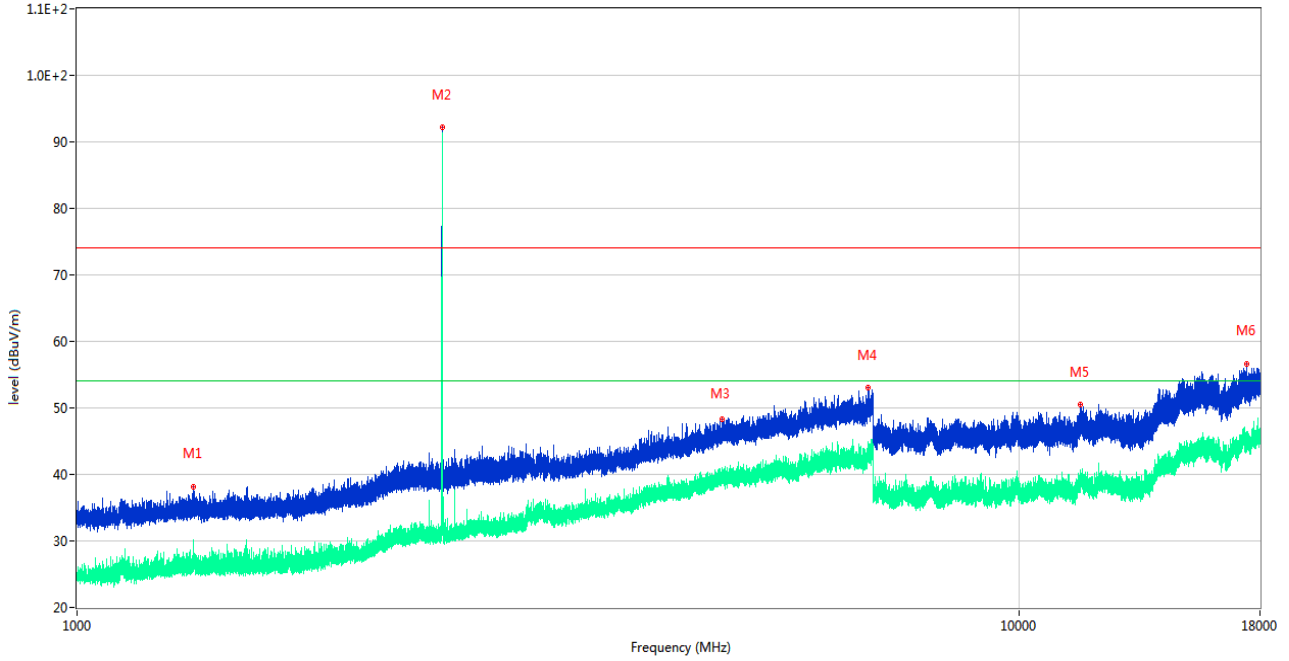

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.200	38.07	-14.71	74.0	-35.93	Peak	251.00	150	Vertical	Pass
1**	1330.200	26.61	-14.71	54.0	-27.39	AV	251.00	150	Vertical	Pass
2	2439.700	92.17	-10.34	74.0	18.17	Peak	128.00	150	Vertical	N/A
2**	2439.700	90.71	-10.34	54.0	36.71	AV	128.00	150	Vertical	N/A
3	4841.000	48.30	-1.31	74.0	-25.70	Peak	302.00	150	Vertical	Pass
3**	4841.000	39.48	-1.31	54.0	-14.52	AV	302.00	150	Vertical	Pass
4	6914.000	53.08	4.78	74.0	-20.92	Peak	198.00	150	Vertical	Pass
4**	6914.000	43.10	4.78	54.0	-10.90	AV	198.00	150	Vertical	Pass
5	11616.099	50.58	20.22	74.0	-23.42	Peak	59.00	150	Vertical	Pass
5**	11616.099	39.10	20.22	54.0	-14.90	AV	59.00	150	Vertical	Pass
6	17445.863	56.60	23.63	74.0	-17.40	Peak	123.00	150	Vertical	Pass
6**	17445.863	44.44	23.63	54.0	-9.56	AV	123.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

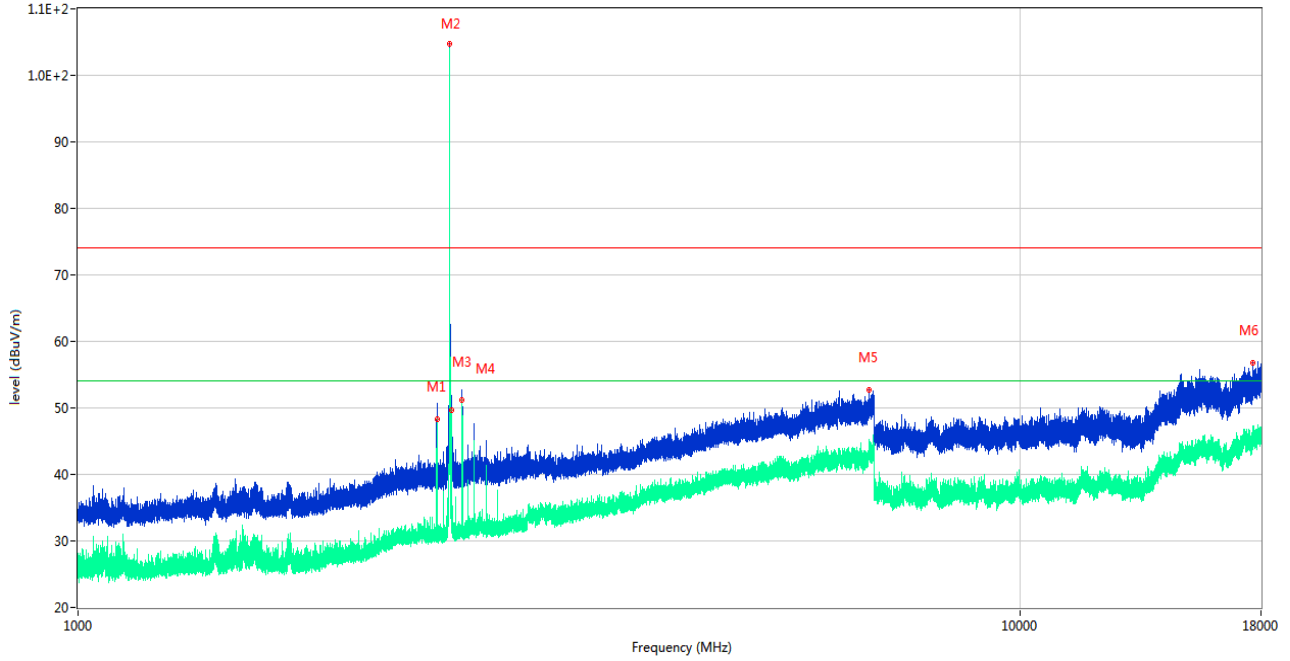

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2403.500	50.67	-10.40	74.0	-23.33	Peak	252.00	150	Horizontal	Pass
1**	2403.500	48.29	-10.40	54.0	-5.71	AV	252.00	150	Horizontal	Pass
2	2479.700	104.79	-10.27	74.0	30.79	Peak	204.00	150	Horizontal	N/A
2**	2479.700	103.22	-10.27	54.0	49.22	AV	204.00	150	Horizontal	N/A
3	2489.700	51.26	-9.71	74.0	-22.74	Peak	244.00	150	Horizontal	Pass
3**	2489.700	49.68	-9.71	54.0	-4.32	AV	244.00	150	Horizontal	Pass
4	2557.000	51.58	-10.26	74.0	-22.42	Peak	204.00	150	Horizontal	Pass
4**	2557.000	47.119	-10.26	54.0	-6.881	AV	204.00	150	Horizontal	Pass
5	6907.200	52.74	4.62	74.0	-21.26	Peak	267.00	150	Horizontal	Pass
5**	6907.200	43.05	4.62	54.0	-10.95	AV	267.00	150	Horizontal	Pass
6	17641.163	56.73	24.16	74.0	-17.27	Peak	28.00	150	Horizontal	Pass
6**	17641.163	43.91	24.16	54.0	-10.09	AV	28.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

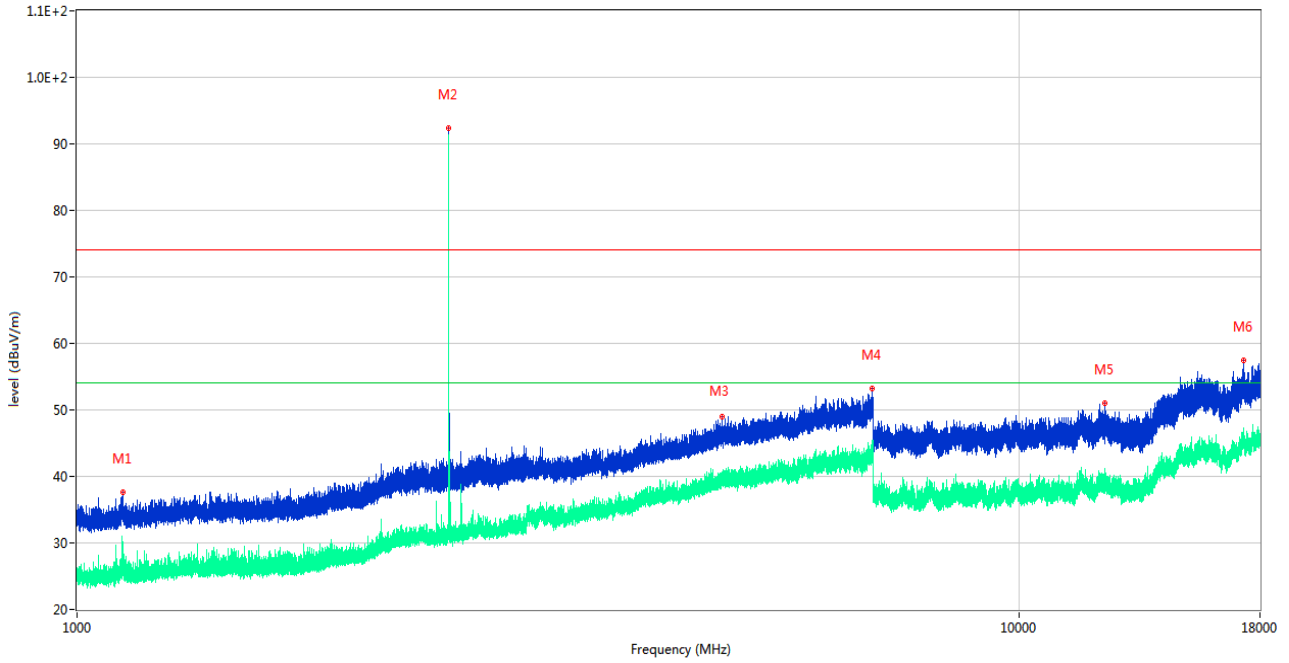

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1119.100	37.67	-15.31	74.0	-36.33	Peak	9.00	150	Vertical	Pass
1**	1119.100	25.30	-15.31	54.0	-28.70	AV	9.00	150	Vertical	Pass
2	2479.700	92.43	-10.27	74.0	18.43	Peak	119.00	150	Vertical	N/A
2**	2479.700	90.29	-10.27	54.0	36.29	AV	119.00	150	Vertical	N/A
3	4838.600	49.00	-1.35	74.0	-25.00	Peak	307.00	150	Vertical	Pass
3**	4838.600	39.10	-1.35	54.0	-14.90	AV	307.00	150	Vertical	Pass
4	6976.400	53.15	5.17	74.0	-20.85	Peak	181.00	150	Vertical	Pass
4**	6976.400	43.82	5.17	54.0	-10.18	AV	181.00	150	Vertical	Pass
5	12325.937	50.97	19.88	74.0	-23.03	Peak	136.00	150	Vertical	Pass
5**	12325.937	39.34	19.88	54.0	-14.66	AV	136.00	150	Vertical	Pass
6	17302.536	57.46	24.56	74.0	-16.54	Peak	-2.00	150	Vertical	Pass
6**	17302.536	45.66	24.56	54.0	-8.34	AV	-2.00	150	Vertical	Pass

## A.7 Band Edge (Restricted-band band-edge)

Note<sup>1</sup>: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note<sup>2</sup>: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note<sup>3</sup>: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note<sup>4</sup>: The Level (dBuV/m) has been corrected by factor.

### Test Data

#### Speed

##### Main Antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	54.165	31.47	74	19.835	PEAK	Pass
		2390	45.082	31.47	54	8.918	AVERAGE	Pass
GFSK	HIGH	2483.5	58.402	31.40	74	15.598	PEAK	Pass
		2483.5	45.177	31.40	54	8.823	AVERAGE	Pass

##### Aux. Antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	53.925	31.47	74	20.075	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	56.875	31.40	74	17.125	PEAK	Pass
		2483.5	44.514	31.40	54	9.486	AVERAGE	Pass

##### South Star

##### Main Antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	53.218	31.47	74	20.782	PEAK	Pass
		2390	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	56.370	31.40	74	17.630	PEAK	Pass
		2483.5	44.283	31.40	54	9.717	AVERAGE	Pass

##### Aux. Antenna


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	54.254	31.47	74	19.746	PEAK	Pass
		2390	44.904	31.47	54	9.096	AVERAGE	Pass
GFSK	HIGH	2483.5	55.257	31.40	74	18.743	PEAK	Pass
		2483.5	43.895	31.40	54	10.105	AVERAGE	Pass

Test plots


Speed

Main Antenna


LOW CHANNEL, PEAK

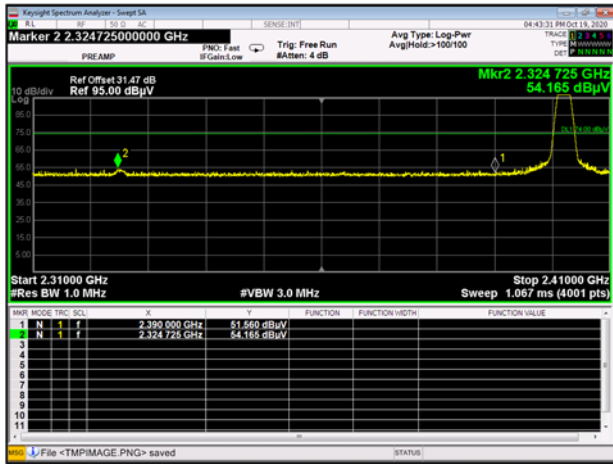


HIGH CHANNEL, PEAK

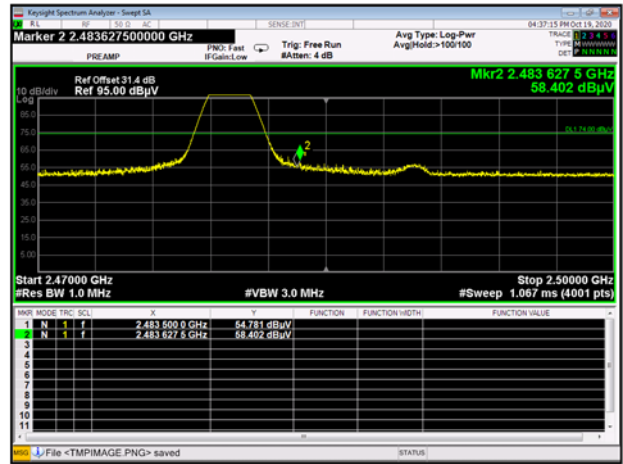


LOW CHANNEL, AV

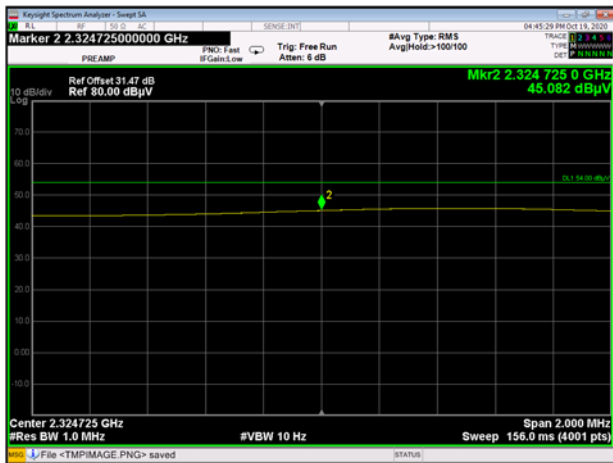

HIGH CHANNEL, AV2

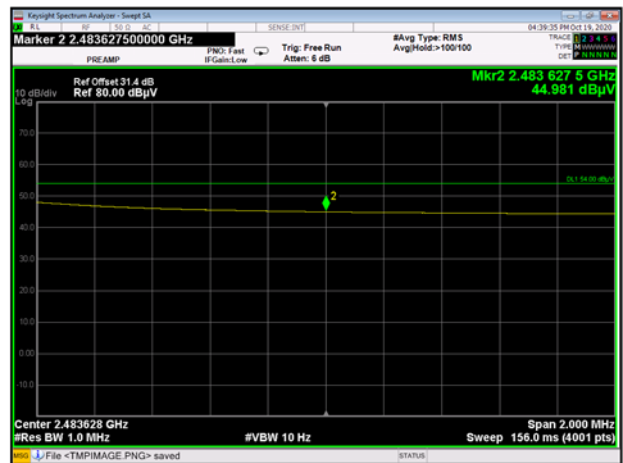


HIGH CHANNEL, AV1

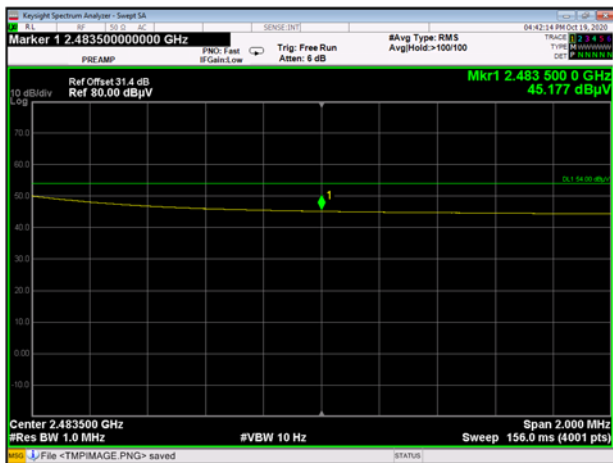


Aux. Antenna

LOW CHANNEL, PEAK

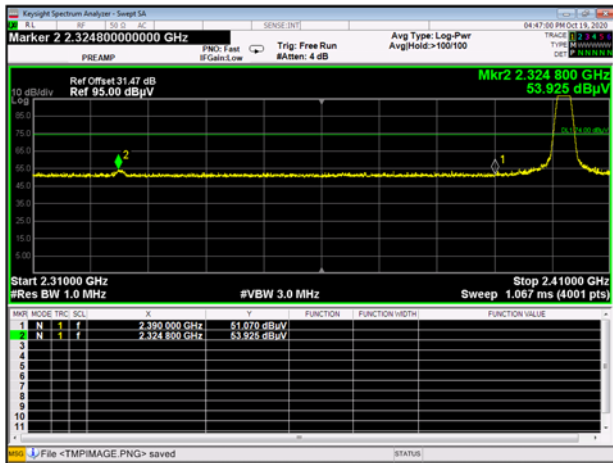

HIGH CHANNEL, PEAK

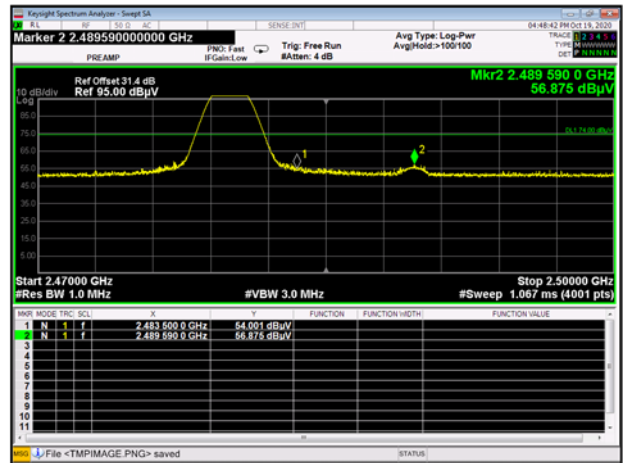

HIGH CHANNEL, AV1




HIGH CHANNEL, AV2






South Star  
Main Antenna


LOW CHANNEL, PEAK

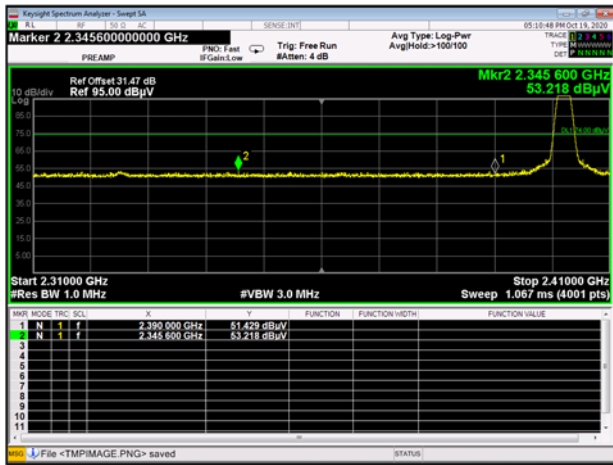


HIGH CHANNEL, PEAK

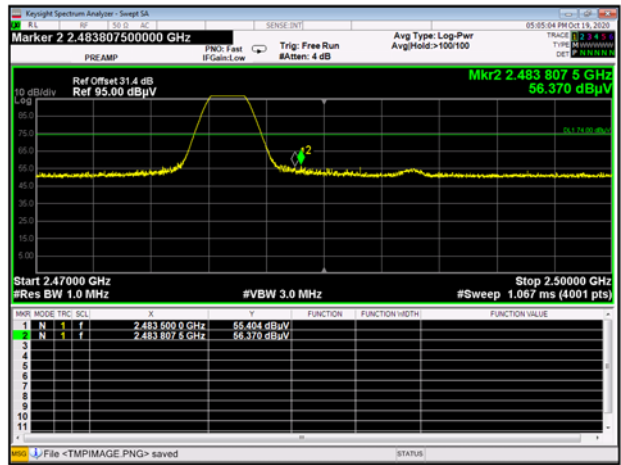

HIGH CHANNEL, AV

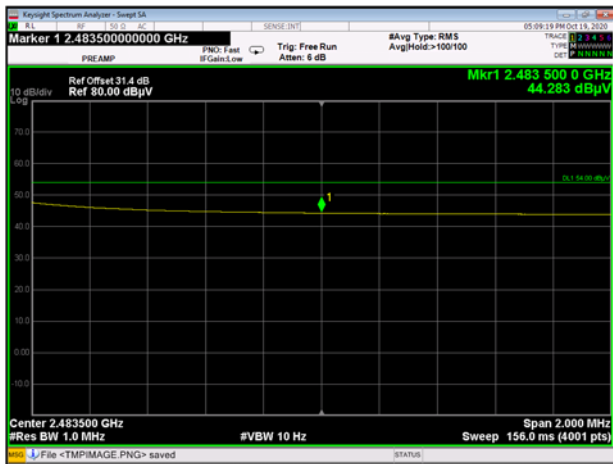


HIGH CHANNEL, AV2

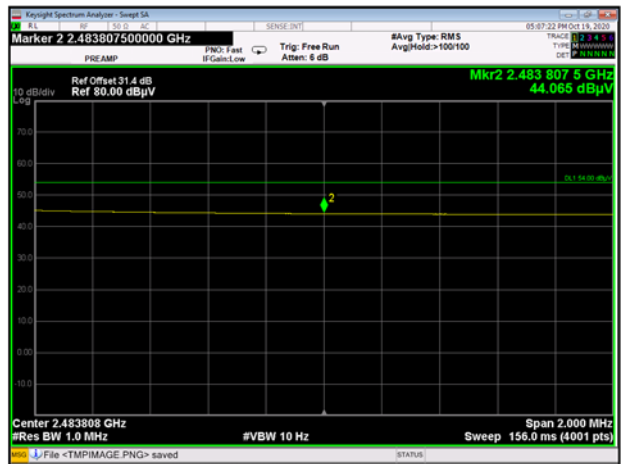


Aux. Antenna


LOW CHANNEL, PEAK

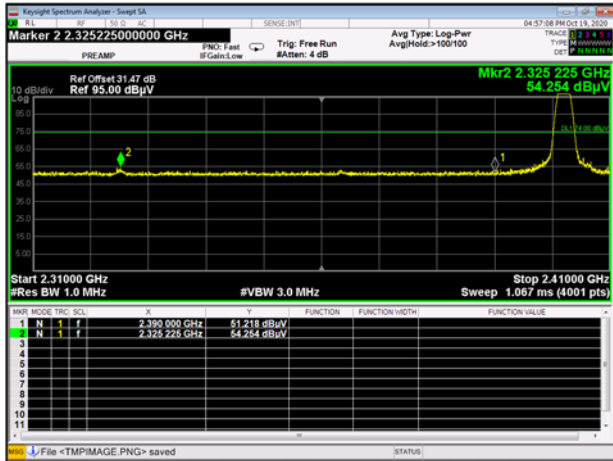


HIGH CHANNEL, PEAK

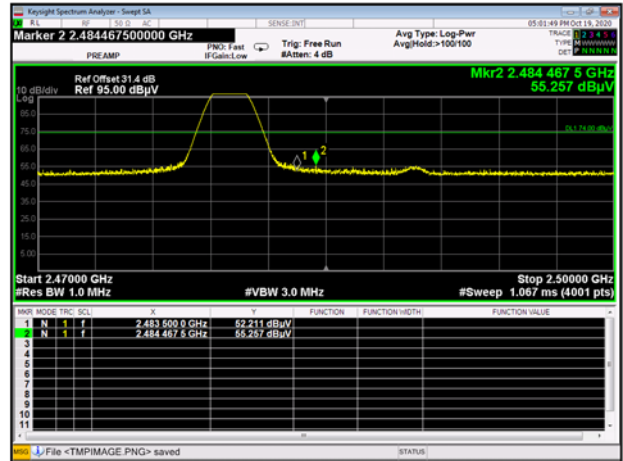

HIGH CHANNEL, AV

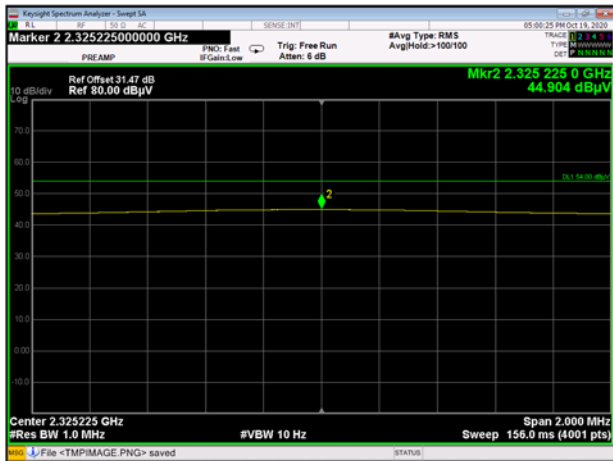

HIGH CHANNEL, AV

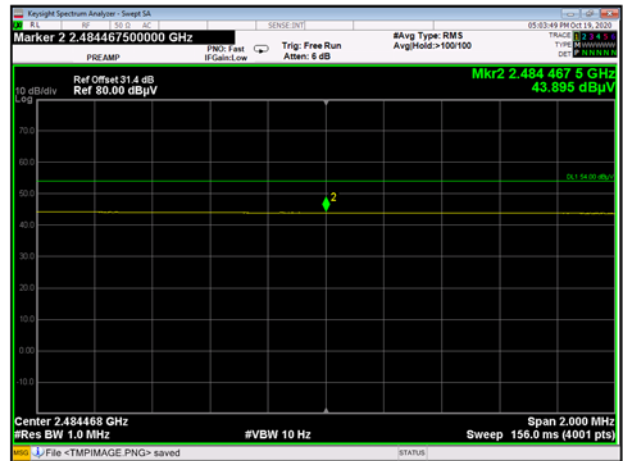

## A.8 Power Spectral Density (PSD)

### Test Data

#### Main Antenna

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-5.20	8	Pass
Middle Channel	-4.71	8	Pass
High Channel	-4.71	8	Pass


#### Aux. Antenna

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-5.25	8	Pass
Middle Channel	-4.58	8	Pass
High Channel	-4.50	8	Pass

### Test plots


#### Main Antenna

GFSK (BLE) LOW CHANNEL

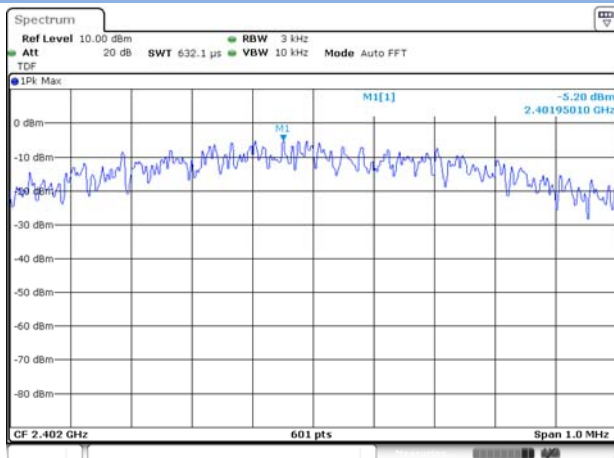


Date: 15 OCT.2020 10:29:35

GFSK (BLE) MIDDLE CHANNEL

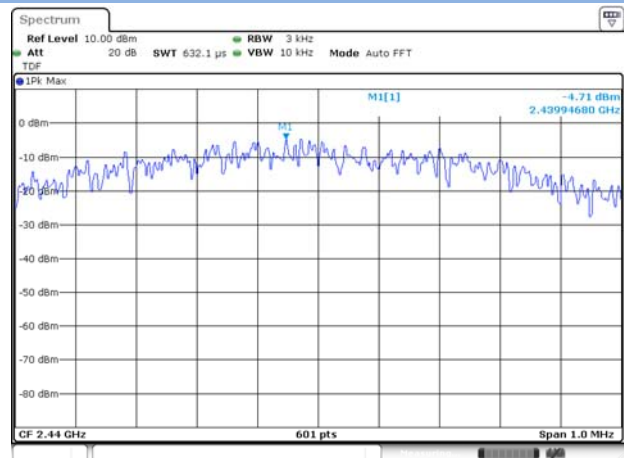

Date: 15 OCT.2020 10:31:33


GFSK (BLE) HIGH CHANNEL

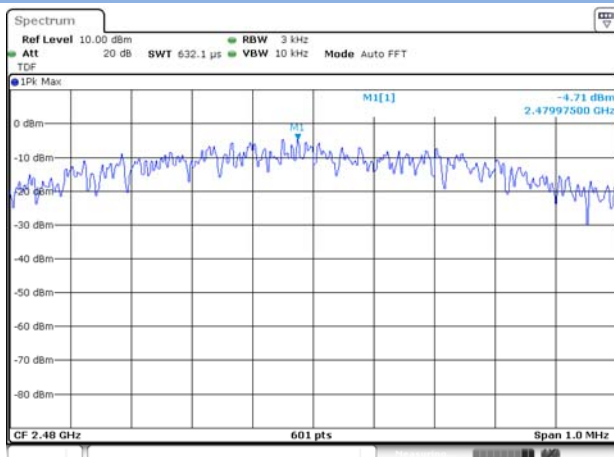

Date: 15 OCT.2020 10:33:36


Aux. Antenna

GFSK (BLE) LOW CHANNEL

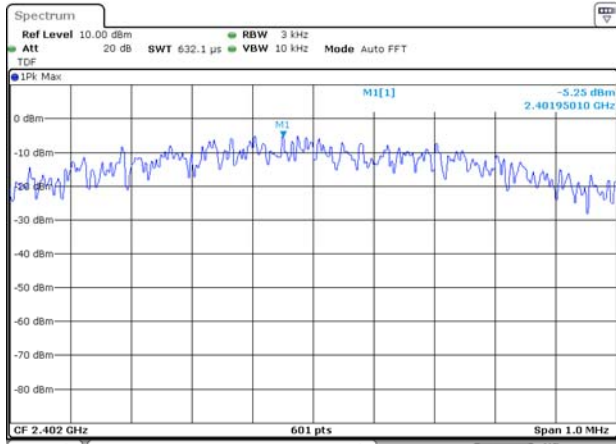


Date: 15.OCT.2020 11:04:35

GFSK (BLE) MIDDLE CHANNEL

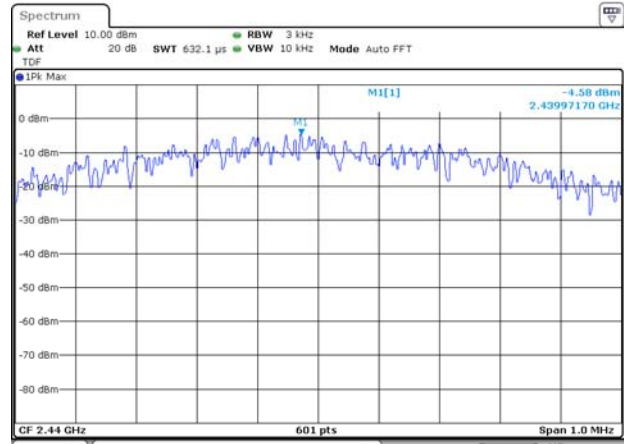

Date: 15.OCT.2020 11:08:52

GFSK (BLE) HIGH CHANNEL

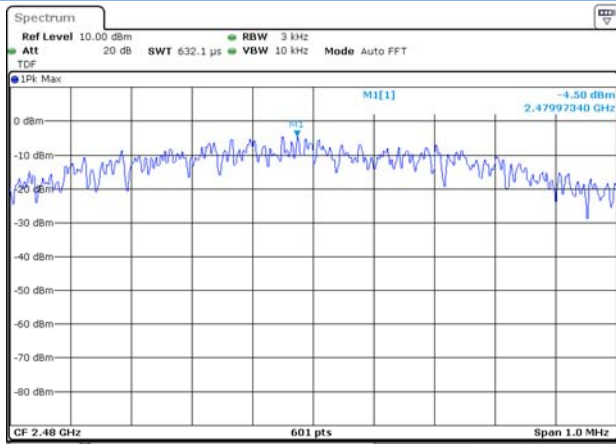

Date: 15.OCT.2020 11:09:57

## **ANNEX B TEST SETUP PHOTOS**

Please refer the document "BL-SZ2090237-AR-1.PDF".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ2090237-AW.PDF".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document "BL-SZ2090237-AI-1.PDF".

--END OF REPORT--