

FCC

SAR

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Notebook Computer

ISSUED TO
Samsung Electronics Co., Ltd.

19 Chapin Road, Building D, Pine Brook, New Jersey, United States,
07058

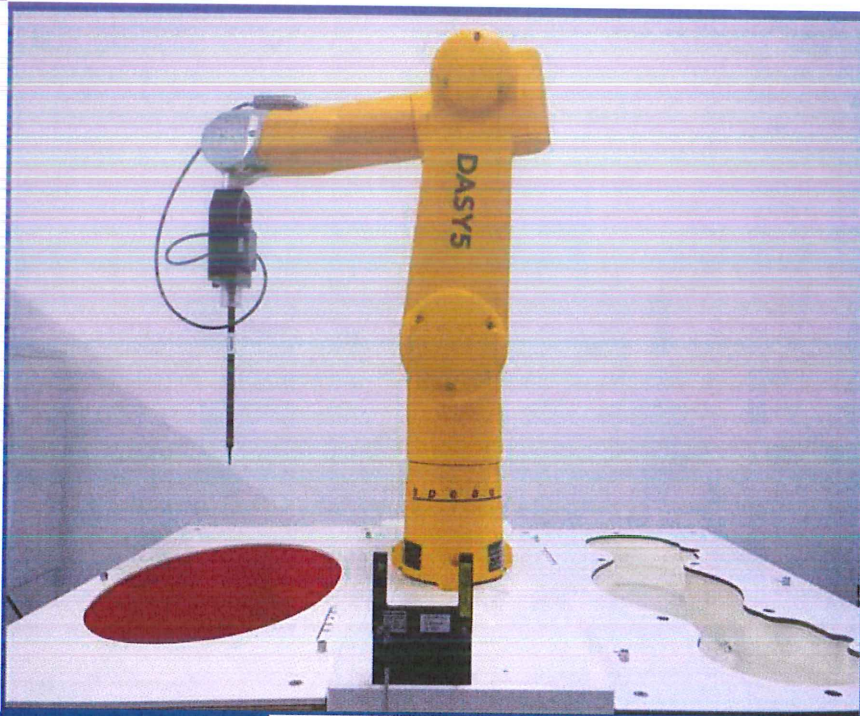

Tested by: Zong Liyao
Zong Liyao

Date Oct. 29, 2020

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date Oct. 29, 2020

Report No.: BL-SZ2090237-702
EUT Name: Notebook Computer
Model Name: NT550XDA (refer section 2.4)
Brand Name: Samsung
FCC ID: ZCANP550XDAX
Test Standard: FCC 47 CFR Part 2.1093
ANSI C95.1: 1999, IEEE 1528: 2013
Maximum SAR: Body 2.4GHz(1 g): 0.436 W/kg
Body 5GHz(1 g): 0.455 W/kg
Test Conclusion: Pass
Test Date: Oct. 12, 2020 ~ Oct. 15, 2020
Date of Issue: Oct. 29, 2020

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Oct. 29, 2020</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Test Environment Condition	4
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
3	SUMMARY OF TEST RESULT	8
3.1	Test Standards	8
3.2	Device Category and SAR Limit	9
3.3	Test Result Summary	10
3.4	Test Uncertainty	11
4	MEASUREMENT SYSTEM	12
4.1	Specific Absorption Rate (SAR) Definition	12
4.2	DASY SAR System	13
5	SYSTEM VERIFICATION	21
5.1	Purpose of System Check	21
5.2	System Check Setup	21
6	SYSTEM VALIDATION	22
7	TEST POSITION CONFIGURATIONS	23
7.1	Laptop Exposure Condition	23
8	MEASUREMENT PROCEDURE	24

8.1	Measurement Process Diagram.....	24
8.2	SAR Scan General Requirement	25
8.3	Measurement Procedure.....	26
8.4	Area & Zoom Scan Procedure	26
9	CONDUCTED RF OUPUT POWER.....	27
9.1	WIFI.....	27
9.2	Bluetooth (Aux. Antenna)	39
10	TEST EXCLUSION CONSIDERATION.....	40
10.1	Laptop Mode antenna location sketch.....	40
10.2	SAR Test Consideration Table.....	41
11	TEST RESULT	45
11.1	Bluetooth	45
11.2	WIFI 2.4GHz.....	45
11.3	WIFI 5GHz.....	46
12	SAR Measurement Variability.....	47
13	SIMULTANEOUS TRANSMISSION.....	48
13.1	Simultaneous Transmission Mode Considerations	48
13.2	Sum SAR of Simultaneous Transmission	49
14	TEST EQUIPMENTS LIST	50
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	51
ANNEX B	SYSTEM CHECK RESULT	52
ANNEX C	TEST DATA.....	57
ANNEX D	SAR TEST SETUP PHOTOS.....	66
ANNEX E	CALIBRATION REPORT	66

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation (A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Test Environment Condition

Ambient Temperature	21°C to 23°C
Ambient Relative Humidity	36% to 48%
Ambient Pressure	100KPa to 102KPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Samsung Electronics Co., Ltd.
Address	19 Chapin Road, Building D, Pine Brook, New Jersey, United States, 07058

2.2 Manufacturer Information

Manufacturer	Nanchang Huaqin Electronic Technology Co Ltd
Address	No.2999, Tianxiang Avenue, High-tech Development Zone, Nanchang City, Jiangxi Province, P.R. China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Notebook Computer
Model Name Under Test	NT550XDA
Series Model Name	550XDA, NT550XDZ, 550XDZ, NT551XDA, NP550XDA, NT550XDA
Description of Model name differentiation	Only differences are model names for trading purpose.
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	359.26 x 241.3 x18.85mm
Weight (Approx.)	1.89Kg

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac and 802.11ax U-NII-1/2A/2C/3
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN, 5G WLAN, Bluetooth	
Frequency Range	802.11b/g	2400 ~ 2462 MHz
	802.11n(HT20/HT40)	2400 ~ 2462 MHz
	802.11ax(HE20/HE40)	2400 ~ 2462 MHz
	802.11a/ n(HT20/HT40)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	802.11 ac(VHT20/VHT40/ VHT80/VHT160)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	802.11 ax(HE20/HE40/ HE80/HE160)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	Bluetooth	2400 MHz ~ 2483.5 MHz
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna	
Hotspot Function	N/A	
Exposure Category	General Population/Uncontrolled exposure	
EUT Stage	Portable Device	
Product	Type	
	☒ Production unit	☐ Identical prototype

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
8	KDB 616217 D04v01r02	SAR for laptop and tablets

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR (1 g Value)

Band	Antenna	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)
		Body	Body
Bluetooth	Aux. Antenna	0.179	0.455
2.4G WLAN	Aux. Antenna	0.385	
2.4G WLAN	Main Antenna	0.436	
5.3G WLAN	Aux. Antenna	0.339	
5.3G WLAN	Main Antenna	0.349	
5.6G WLAN	Aux. Antenna	0.373	
5.6G WLAN	Main Antenna	0.420	
5.8G WLAN	Aux. Antenna	0.341	
5.8G WLAN	Main Antenna	0.455	
Limit (W/kg)		1.60	
Verdict		Pass	

3.3.2 Highest Simultaneous Transmission SAR (1 g Value)

Position	Simultaneous Configuration	Simultaneous SAR (W/kg)	Limit (W/kg)	Verdict
Body (1g)	5 G WLAN (Main Antenna) + 5 G WLAN (Auxiliary Antenna) + Bluetooth (Auxiliary Antenna)	1.007	1.60	Pass

3.4 Test Uncertainty

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 0.455 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

4 MEASUREMENT SYSTEM

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 DASY SAR System

4.2.1 DASY SAR System Diagram

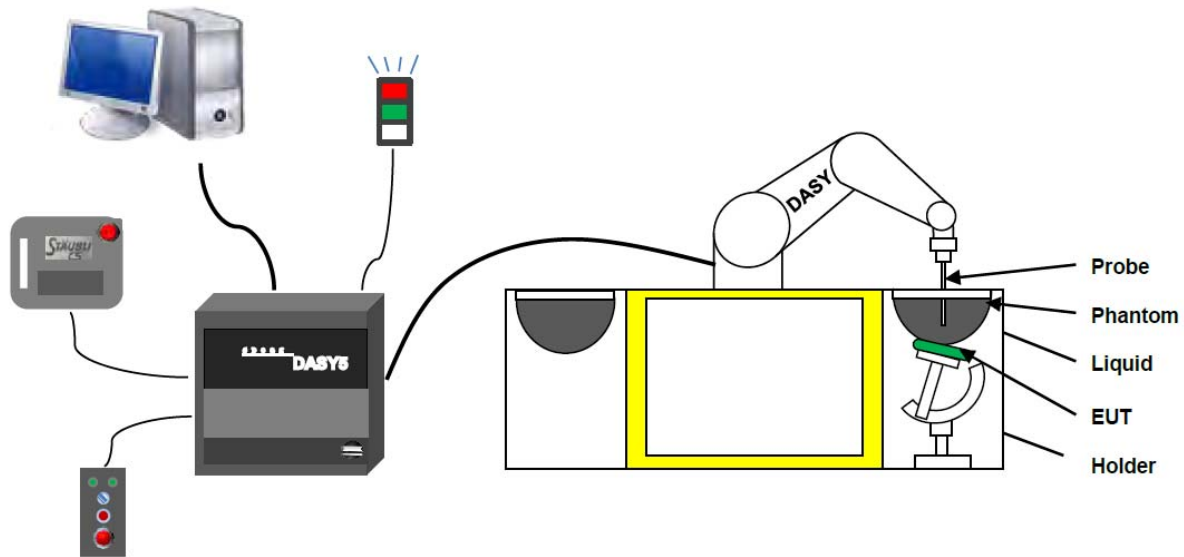

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision
(repeatability ± 0.02 mm)
- High reliability
(industrial design)
- Low maintenance costs
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
(brush less synchron motors; no stepper motors)
- Low ELF interference
(motor control _elds shielded via the closed metallic construction shields)

4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN: 3578 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ; ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)



E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1/2 annexe technique using reference guide at the five frequencies.

4.2.4 Data Acquisition Electronics

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200MOhm
- The Inputs: Symmetrical and Floating
- Commom Mode Rejection: Above 80dB

4.2.5 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



- Left hand
- Right hand
- Flat phantom

Photo of Phantom SN1857



Serial Number	Material	Length	Height
SN 1857 SAM	Vinylester, glass fiber reinforced	1000	500

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.



•Flat phantom

Photo of Phantom SN1012



Serial Number	Shell Thickness (mm)	Major ellipse axis (mm)	Minor axis (mm)
SN 1012 ELI4	2.0 ± 0.2	600	500

4.2.6 Device Holder

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA"s only. If necessary an additional support of polystyrene material is used. Larger DUT"s (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.



The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.54	47.86
5800	78.50	21.40			0.1		6.0	48.20


5 SYSTEM VERIFICATION

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

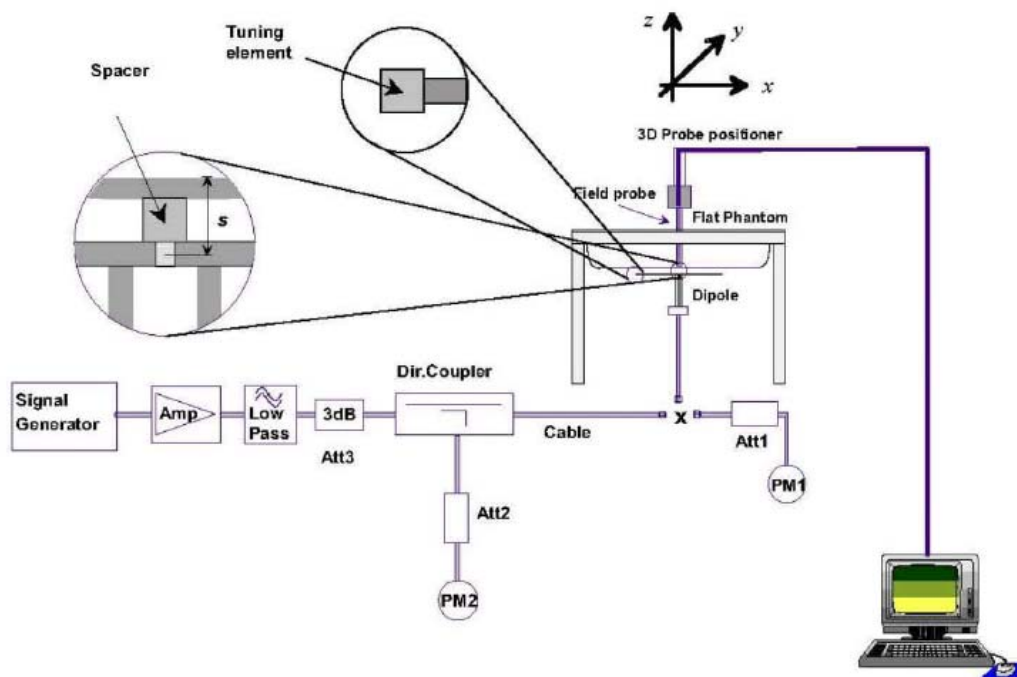

6 SYSTEM VALIDATION

Per FCC KDB 865664 D02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue-equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.


A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Fre. (MHz)	Probe Mode	Probe Serial No.	Probe Cal. Point (MHz)	Liquid Type	Meas. Liquid Cond. (σ)	Meas. Liquid Perm. (ϵ)	CW Validation			Modulation Validation			Date
							Sensiti -vity	Linear- ity	Isotrop -y	Modu. Type	Duty Factor	PAR	
2450	EX3DV4	3578	2450	Head	1.85	38.53	Pass	Pass	Pass	OFDM	Pass	Pass	2020.07.29
5250	EX3DV4	3578	5250	Head	4.57	37.40	Pass	Pass	Pass	OFDM	N/A	Pass	2020.07.29
5600	EX3DV4	3578	5600	Head	5.03	35.96	Pass	Pass	Pass	OFDM	N/A	Pass	2020.07.29
5750	EX3DV4	3578	5750	Head	5.38	34.57	Pass	Pass	Pass	OFDM	N/A	Pass	2020.07.29

7 TEST POSITION CONFIGURATIONS


7.1 Laptop Exposure Condition

This DUT should consider one position which is bottom of laptop touching with phantom 0 mm air gap and the screen portion of the device shall be an open position at a 90° angle.

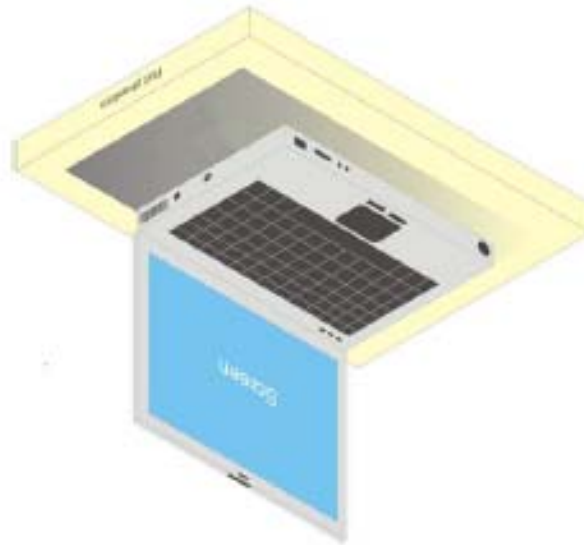

8 MEASUREMENT PROCEDURE

8.1 Measurement Process Diagram

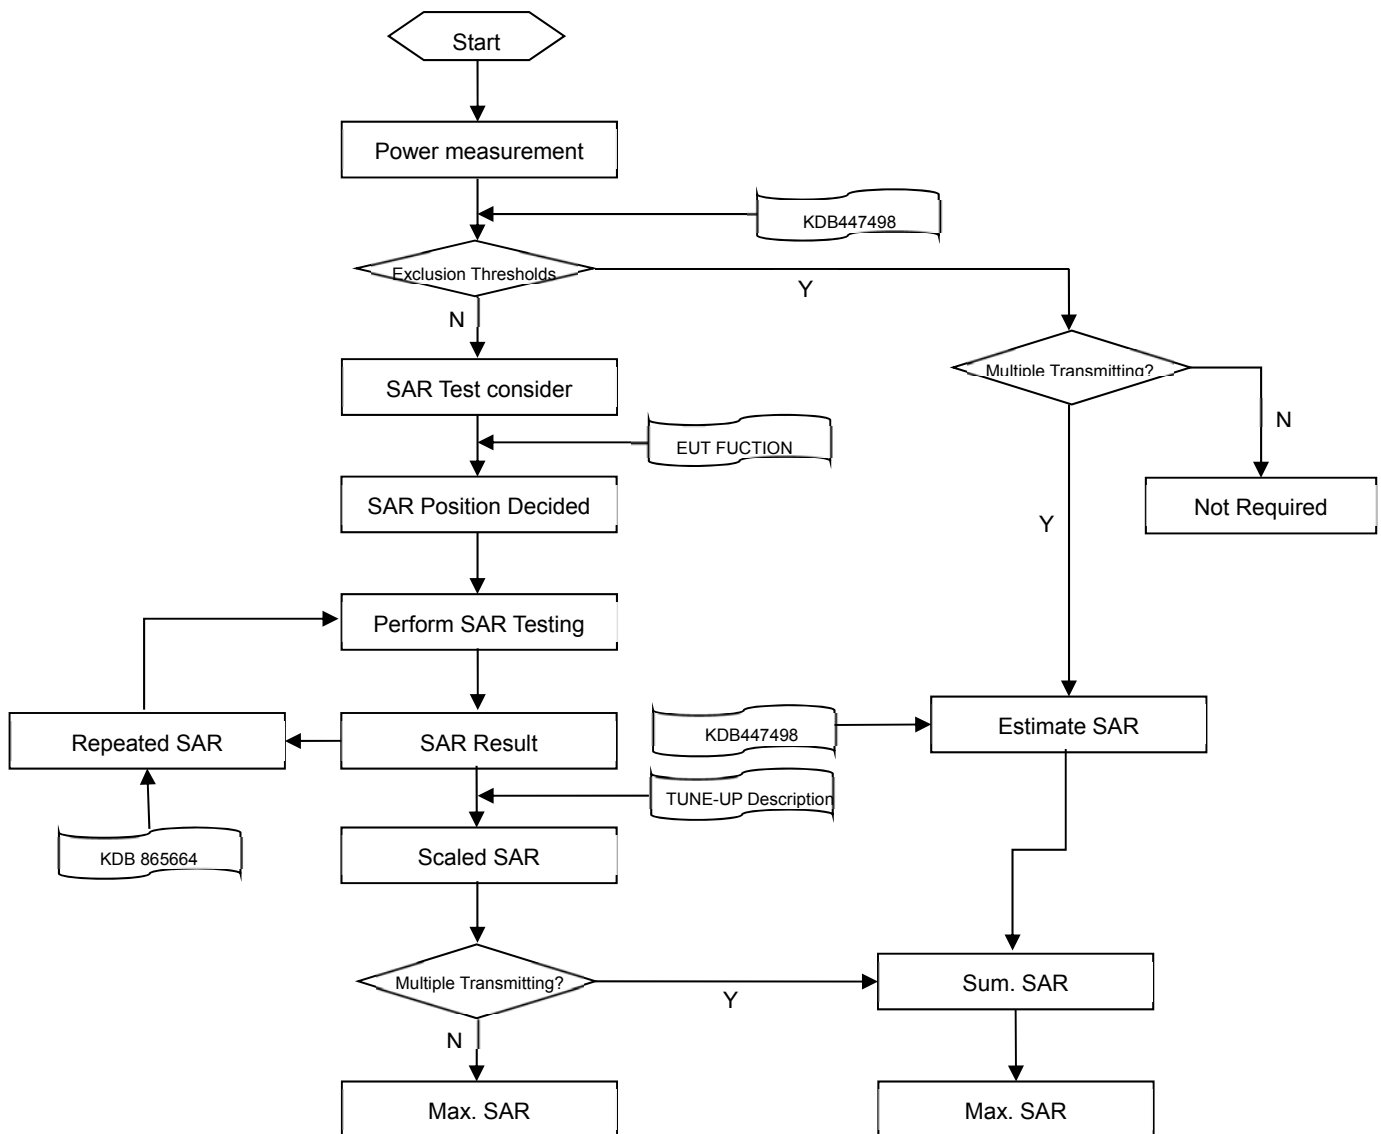

8.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
				5–6 GHz: ≤ 2 mm
		Δz Zoom (n>1): between subsequent points		≤ 1.5·Δz Zoom (n-1)
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm
Note:				
1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

8.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

9 CONDUCTED RF OUTPUT POWER

9.1 WIFI

9.1.1 2.4G WIFI (Aux. Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.483)	802.11b	1	2412	16.76	17.00	No
		6	2437	16.92	17.00	Yes
		11	2462	16.64	17.00	No
	802.11g	1	2412	16.83	17.00	No
		6	2437	16.80	17.00	No
		11	2462	16.72	17.00	No
	802.11n(HT20)	1	2412	16.81	17.00	No
		6	2437	16.69	17.00	No
		11	2462	16.64	17.00	No
	802.11n(HT40)	3	2422	15.40	15.50	No
		6	2437	15.39	15.50	No
		9	2452	15.25	15.50	No
	802.11ax(HE20) -SU	1	2412	16.70	17.00	No
		6	2437	16.57	17.00	No
		11	2462	16.56	17.00	No
	802.11ax(HE40) -SU	3	2422	15.11	15.50	No
		6	2437	15.11	15.50	No
		9	2452	15.05	15.50	No
	802.11ax(HE20) -RU26	1	2412	16.66	17.00	No
		6	2437	16.86	17.00	No
		11	2462	16.53	17.00	No
	802.11ax(HE40) -RU26	3	2422	15.04	15.50	No
		6	2437	15.03	15.50	No
		9	2452	15.02	15.50	No

Note: According to 2019 TCB workshop, 802.11ax was considered a higher order 802.11 mode when compared to b/g/n to apply KDB Publication 248227 D01v02r02 for OFDM mode selection. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values.

9.1.2 2.4G WIFI (Main Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.483)	802.11b	1	2412	16.93	17.00	No
		6	2437	16.93	17.00	Yes
		11	2462	16.91	17.00	No
	802.11g	1	2412	16.60	17.00	No
		6	2437	16.77	17.00	No
		11	2462	16.64	17.00	No
	802.11n(HT20)	1	2412	16.54	17.00	No
		6	2437	16.76	17.00	No
		11	2462	16.53	17.00	No
	802.11n(HT40)	3	2422	15.18	15.50	No
		6	2437	15.31	15.50	No
		9	2452	15.24	15.50	No
	802.11ax(HE20)-SU	1	2412	16.53	17.00	No
		6	2437	16.53	17.00	No
		11	2462	16.52	17.00	No
	802.11ax(HE40)-SU	3	2422	15.02	15.50	No
		6	2437	15.10	15.50	No
		9	2452	15.02	15.50	No
	802.11ax(HE20)-RU26	1	2412	16.74	17.00	No
		6	2437	16.80	17.00	No
		11	2462	16.56	17.00	No
	802.11ax(HE40)-RU26	3	2422	15.00	15.50	No
		6	2437	15.04	15.50	No
		9	2452	15.01	15.50	No

Note: According to 2019 TCB workshop, 802.11ax was considered a higher order 802.11 mode when compared to b/g/n to apply KDB Publication 248227 D01v02r02 for OFDM mode selection. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values.

9.1.3 2.4G WIFI (MIMO Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.483)	802.11g	1	2412	16.72	17.00	No
		6	2437	16.81	17.00	No
		11	2462	16.82	17.00	No
	802.11n(HT20)	1	2412	16.63	17.00	No
		6	2437	16.69	17.00	No
		11	2462	16.69	17.00	No
	802.11n(HT40)	3	2422	15.25	15.50	No
		6	2437	15.42	15.50	No
		9	2452	15.08	15.50	No
	802.11ax(HE20) -SU	1	2412	16.70	17.00	No
		6	2437	16.58	17.00	No
		11	2462	16.57	17.00	No
	802.11ax(HE40) -SU	3	2422	15.19	15.50	No
		6	2437	15.22	15.50	No
		9	2452	15.19	15.50	No
	802.11ax(HE20) -RU26	1	2412	16.74	17.00	No
		6	2437	16.85	17.00	No
		11	2462	16.58	17.00	No
	802.11ax(HE40) -RU26	3	2422	15.16	15.50	No
		6	2437	15.09	15.50	No
		9	2452	15.12	15.50	No

Note: For 2.4GHz SAR testing was performed on single antenna RF power in SISO mode that is larger to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission used more conservative "Max. (ant Aux.) + Max. (ant Main) " method to determine SAR compliance. When the sum of 1-g SISO transmission SAR measurement is <1.6W/kg, 2.4G MIMO SAR test is not required.

9.1.4 5G WIFI (Aux. Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	12.84	13.00	No
		44	5220	12.70	13.00	No
		48	5240	12.82	13.00	No
	802.11n(HT20)	36	5180	12.78	13.00	No
		44	5220	12.70	13.00	No
		48	5240	12.72	13.00	No
	802.11n(HT40)	38	5190	12.92	13.00	No
		46	5230	12.86	13.00	No
	802.11ac(VHT20)	36	5180	12.79	13.00	No
		44	5220	12.60	13.00	No
		48	5240	12.70	13.00	No
	802.11ac(VHT40)	38	5190	12.93	13.00	No
		46	5230	12.84	13.00	No
	802.11ac(VHT80)	42	5210	12.57	13.00	No
	802.11ac(VHT160)	50	5250	11.54	12.00	No
	802.11ax(HE20)-SU	36	5180	12.68	13.00	No
		44	5220	12.57	13.00	No
		48	5240	12.60	13.00	No
	802.11ax(HE40)-SU	38	5190	12.79	13.00	No
		46	5230	12.63	13.00	No
	802.11ax(HE80)-SU	42	5210	12.81	13.00	No
	802.11ax(HE160)-SU	50	5250	11.85	12.00	No
	802.11ax(HE20)-RU26	36	5180	12.78	13.00	No
		44	5220	12.74	13.00	No
		48	5240	12.89	13.00	No
	802.11ax(HE40)-RU26	38	5190	12.69	13.00	No
		46	5230	12.52	13.00	No
	802.11ax(HE80)-RU26	42	5210	12.76	13.00	No
	802.11ax(HE160)-RU26	50	5250	11.75	12.00	No
5.3 (5.25~5.35)	802.11a	52	5260	12.85	13.00	No
		56	5280	12.83	13.00	No
		64	5320	12.76	13.00	No
	802.11n(HT20)	52	5260	12.88	13.00	No
		56	5280	12.81	13.00	No
		64	5320	12.84	13.00	No
	802.11n(HT40)	54	5270	12.62	13.00	No
		62	5310	12.53	13.00	No
	802.11ac(VHT20)	52	5260	12.81	13.00	No
		56	5280	12.83	13.00	No
		64	5320	12.84	13.00	No
	802.11ac(VHT40)	54	5270	12.61	13.00	No
		62	5310	12.56	13.00	No

	802.11ac(VHT80)	58	5290	12.75	13.00	Yes
	802.11ax(HE20)-SU	52	5260	12.76	13.00	No
		56	5280	12.72	13.00	No
		64	5320	12.62	13.00	No
	802.11ax(HE40)-SU	54	5270	12.84	13.00	No
		62	5310	12.76	13.00	No
	802.11ax(HE80)-SU	58	5290	12.88	13.00	No
	802.11ax(HE20)-RU26	52	5260	12.64	13.00	No
		56	5280	12.62	13.00	No
		64	5320	12.57	13.00	No
	802.11ax(HE40)-RU26	54	5270	12.75	13.00	No
		62	5310	12.64	13.00	No
	802.11ax(HE80)-RU26	58	5290	12.74	13.00	No
5.6 (5.47~5.725)	802.11a	100	5500	12.84	13.00	No
		116	5580	12.85	13.00	No
		140	5700	12.79	13.00	No
		144	5720	12.81	13.00	No
	802.11n(HT20)	100	5500	12.76	13.00	No
		116	5580	12.68	13.00	No
		140	5700	12.72	13.00	No
		144	5720	12.85	13.00	No
	802.11n(HT40)	102	5510	12.81	13.00	No
		118	5590	12.87	13.00	No
		134	5670	12.70	13.00	No
		142	5710	12.72	13.00	No
	802.11ac(VHT20)	100	5500	12.76	13.00	No
		116	5580	12.68	13.00	No
		140	5700	12.72	13.00	No
		144	5720	12.86	13.00	No
	802.11ac(VHT40)	102	5510	12.87	13.00	No
		118	5590	12.89	13.00	No
		134	5670	12.60	13.00	No
		142	5710	12.73	13.00	No
	802.11ac(VHT80)	106	5530	12.56	13.00	Yes
		122	5610	12.55	13.00	No
		138	5690	12.54	13.00	No
	802.11ac(VHT160)	114	5570	11.54	12.00	No
	802.11ax(HE20)-SU	100	5500	12.65	13.00	No
		116	5580	12.57	13.00	No
		140	5700	12.88	13.00	No
		144	5720	12.64	13.00	No
	802.11ax(HE40)-SU	102	5510	12.75	13.00	No
		118	5590	12.64	13.00	No
		134	5670	12.80	13.00	No
		142	5710	12.87	13.00	No

	802.11ax(HE80)-SU	106	5530	12.84	13.00	No
		122	5610	12.74	13.00	No
		138	5690	12.74	13.00	No
	802.11ax(HE160)-SU	114	5570	11.81	12.00	No
	802.11ax(HE20)-RU26	100	5500	12.80	13.00	No
		116	5580	12.61	13.00	No
		140	5700	12.67	13.00	No
		144	5720	12.81	13.00	No
	802.11ax(HE40)-RU26	102	5510	12.74	13.00	No
		118	5590	12.54	13.00	No
		134	5670	12.75	13.00	No
		142	5710	12.56	13.00	No
	802.11ax(HE80)-RU26	106	5530	12.77	13.00	No
		122	5610	12.71	13.00	No
		138	5690	12.57	13.00	No
	802.11ax(HE160)-RU26	114	5570	11.70	12.00	No
5.8 (5.725~5.850)	802.11a	149	5745	12.65	13.00	No
		157	5785	12.82	13.00	No
		165	5825	12.72	13.00	No
	802.11n(HT20)	149	5745	12.64	13.00	No
		157	5785	12.83	13.00	No
		165	5825	12.75	13.00	No
	802.11n(HT40)	151	5755	12.53	13.00	No
		159	5795	12.73	13.00	No
	802.11ac(VHT20)	149	5745	12.62	13.00	No
		157	5785	12.83	13.00	No
		165	5825	12.76	13.00	No
	802.11ac(VHT40)	151	5755	12.87	13.00	No
		159	5795	12.72	13.00	No
	802.11ac(VHT80)	155	5775	12.76	13.00	Yes
	802.11ax(HE20)-SU	149	5745	12.81	13.00	No
		157	5785	12.77	13.00	No
		165	5825	12.88	13.00	No
	802.11ax(HE40)-SU	151	5755	12.63	13.00	No
		159	5795	12.87	13.00	No
	802.11ax(HE80)-SU	155	5775	12.85	13.00	No
	802.11ax(HE20)-RU26	149	5745	12.70	13.00	No
		157	5785	12.63	13.00	No
		165	5825	12.82	13.00	No
	802.11ax(HE40)-RU26	151	5755	12.56	13.00	No
		159	5795	12.75	13.00	No
	802.11ax(HE80)-RU26	155	5775	12.79	13.00	No

Note: According to 2019 TCB workshop, 802.11ax was considered a higher order 802.11 mode when compared to a/n/ac to apply KDB Publication 248227 D01v02r02 for OFDM mode selection. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values.

9.1.5 5G WIFI (Main Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	12.74	13.00	No
		44	5220	12.56	13.00	No
		48	5240	12.68	13.00	No
	802.11n(HT20)	36	5180	12.66	13.00	No
		44	5220	12.57	13.00	No
		48	5240	12.63	13.00	No
	802.11n(HT40)	38	5190	12.75	13.00	No
		46	5230	12.70	13.00	No
	802.11ac(VHT20)	36	5180	12.68	13.00	No
		44	5220	12.55	13.00	No
		48	5240	12.68	13.00	No
	802.11ac(VHT40)	38	5190	12.79	13.00	No
		46	5230	12.76	13.00	No
	802.11ac(VHT80)	42	5210	12.81	13.00	No
	802.11ac(VHT160)	50	5250	11.91	12.00	No
	802.11ax(HE20)-SU	36	5180	12.55	13.00	No
		44	5220	12.71	13.00	No
		48	5240	12.58	13.00	No
	802.11ax(HE40)-SU	38	5190	12.56	13.00	No
		46	5230	12.58	13.00	No
	802.11ax(HE80)-SU	42	5210	12.54	13.00	No
	802.11ax(HE160)-SU	50	5250	11.72	12.00	No
	802.11ax(HE20)-RU26	36	5180	12.84	13.00	No
		44	5220	12.85	13.00	No
		48	5240	12.57	13.00	No
	802.11ax(HE40)-RU26	38	5190	12.51	13.00	No
		46	5230	12.52	13.00	No
	802.11ax(HE80)-RU26	42	5210	12.53	13.00	No
	802.11ax(HE160)-RU26	50	5250	11.51	12.00	No
5.3 (5.25~5.35)	802.11a	52	5260	12.81	13.00	No
		56	5280	12.82	13.00	No
		64	5320	12.75	13.00	No
	802.11n(HT20)	52	5260	12.77	13.00	No
		56	5280	12.78	13.00	No
		64	5320	12.66	13.00	No
	802.11n(HT40)	54	5270	12.88	13.00	No
		62	5310	12.84	13.00	No
	802.11ac(VHT20)	52	5260	12.76	13.00	No
		56	5280	12.75	13.00	No
		64	5320	12.66	13.00	No
	802.11ac(VHT40)	54	5270	12.89	13.00	No
		62	5310	12.82	13.00	No

	802.11ac(VHT80)	58	5290	12.64	13.00	Yes
	802.11ax(HE20)-SU	52	5260	12.56	13.00	No
		56	5280	12.54	13.00	No
		64	5320	12.86	13.00	No
	802.11ax(HE40)-SU	54	5270	12.70	13.00	No
		62	5310	12.55	13.00	No
	802.11ax(HE80)-SU	58	5290	12.82	13.00	No
	802.11ax(HE20)-RU26	52	5260	12.74	13.00	No
		56	5280	12.85	13.00	No
		64	5320	12.64	13.00	No
	802.11ax(HE40)-RU26	54	5270	12.57	13.00	No
		62	5310	12.49	13.00	No
	802.11ax(HE80)-RU26	58	5290	12.62	13.00	No
5.6 (5.47~5.725)	802.11a	100	5500	12.83	13.00	No
		116	5580	12.80	13.00	No
		140	5700	12.86	13.00	No
		144	5720	12.82	13.00	No
	802.11n(HT20)	100	5500	12.82	13.00	No
		116	5580	12.84	13.00	No
		140	5700	12.83	13.00	No
		144	5720	12.89	13.00	No
	802.11n(HT40)	102	5510	12.81	13.00	No
		118	5590	12.80	13.00	No
		134	5670	12.78	13.00	No
		142	5710	12.80	13.00	No
	802.11ac(VHT20)	100	5500	12.73	13.00	No
		116	5580	12.64	13.00	No
		140	5700	12.73	13.00	No
		144	5720	12.77	13.00	No
	802.11ac(VHT40)	102	5510	12.85	13.00	No
		118	5590	12.76	13.00	No
		134	5670	12.86	13.00	No
		142	5710	12.88	13.00	No
	802.11ac(VHT80)	106	5530	12.89	13.00	Yes
		122	5610	12.85	13.00	No
		138	5690	12.65	13.00	No
	802.11ac(VHT160)	114	5570	11.88	12.00	No
	802.11ax(HE20)-SU	100	5500	12.62	13.00	No
		116	5580	12.85	13.00	No
		140	5700	12.55	13.00	No
		144	5720	12.62	13.00	No
	802.11ax(HE40)-SU	102	5510	12.73	13.00	No
		118	5590	12.83	13.00	No
		134	5670	12.88	13.00	No
		142	5710	12.66	13.00	No

	802.11ax(HE80)-SU	106	5530	12.71	13.00	No
		122	5610	12.65	13.00	No
		138	5690	12.84	13.00	No
	802.11ax(HE160)-SU	114	5570	11.80	12.00	No
	802.11ax(HE20)-RU26	100	5500	12.86	13.00	No
		116	5580	12.81	13.00	No
		140	5700	12.80	13.00	No
		144	5720	12.87	13.00	No
	802.11ax(HE40)-RU26	102	5510	12.63	13.00	No
		118	5590	12.66	13.00	No
		134	5670	12.63	13.00	No
		142	5710	12.62	13.00	No
	802.11ax(HE80)-RU26	106	5530	12.60	13.00	No
		122	5610	12.58	13.00	No
		138	5690	12.77	13.00	No
	802.11ax(HE160)-RU26	114	5570	11.69	12.00	No
5.8 (5.725~5.850)	802.11a	149	5745	12.55	13.00	No
		157	5785	12.63	13.00	No
		165	5825	12.60	13.00	No
	802.11n(HT20)	149	5745	12.54	13.00	No
		157	5785	12.55	13.00	No
		165	5825	12.54	13.00	No
	802.11n(HT40)	151	5755	12.62	13.00	No
		159	5795	12.85	13.00	No
	802.11ac(VHT20)	149	5745	12.88	13.00	No
		157	5785	12.55	13.00	No
		165	5825	12.54	13.00	No
	802.11ac(VHT40)	151	5755	12.62	13.00	No
		159	5795	12.86	13.00	No
	802.11ac(VHT80)	155	5775	12.66	13.00	Yes
	802.11ax(HE20)-SU	149	5745	12.80	13.00	No
		157	5785	12.87	13.00	No
		165	5825	12.82	13.00	No
	802.11ax(HE40)-SU	151	5755	12.81	13.00	No
		159	5795	12.84	13.00	No
	802.11ax(HE80)-SU	155	5775	12.80	13.00	No
	802.11ax(HE20)-RU26	149	5745	12.62	13.00	No
		157	5785	12.81	13.00	No
		165	5825	12.83	13.00	No
	802.11ax(HE40)-RU26	151	5755	12.73	13.00	No
		159	5795	12.62	13.00	No
	802.11ax(HE80)-RU26	155	5775	12.70	13.00	No

Note: According to 2019 TCB workshop, 802.11ax was considered a higher order 802.11 mode when compared to a/n/ac to apply KDB Publication 248227 D01v02r02 for OFDM mode selection. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values.

9.1.6 5G WIFI (MIMO Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11n(HT20)	36	5180	12.91	13.00	No
		44	5220	12.81	13.00	No
		48	5240	12.87	13.00	No
	802.11n(HT40)	38	5190	12.57	13.00	No
		46	5230	12.76	13.00	No
	802.11ac(VHT20)	36	5180	12.90	13.00	No
		44	5220	12.77	13.00	No
		48	5240	12.83	13.00	No
	802.11ac(VHT40)	38	5190	12.73	13.00	No
		46	5230	12.85	13.00	No
	802.11ac(VHT80)	42	5210	12.74	13.00	No
	802.11ac(VHT160)	50	5250	11.76	12.00	No
	802.11ax(HE20)-SU	36	5180	12.86	13.00	No
		44	5220	12.54	13.00	No
		48	5240	12.76	13.00	No
	802.11ax(HE40)-SU	38	5190	12.73	13.00	No
		46	5230	12.68	13.00	No
	802.11ax(HE80)-SU	42	5210	12.83	13.00	No
	802.11ax(HE160)-SU	50	5250	11.76	12.00	No
	802.11ax(HE20)-RU26	36	5180	12.67	13.00	No
		44	5220	12.52	13.00	No
		48	5240	12.64	13.00	No
	802.11ax(HE40)-RU26	38	5190	12.57	13.00	No
		46	5230	12.63	13.00	No
	802.11ax(HE80)-RU26	42	5210	12.66	13.00	No
	802.11ax(HE160)-RU26	50	5250	11.63	12.00	No
5.3 (5.25~5.35)	802.11n(HT20)	52	5260	12.61	13.00	No
		56	5280	12.60	13.00	No
		64	5320	12.56	13.00	No
	802.11n(HT40)	54	5270	12.70	13.00	No
		62	5310	12.61	13.00	No
	802.11ac(VHT20)	52	5260	12.62	13.00	No
		56	5280	12.62	13.00	No
		64	5320	12.57	13.00	No
	802.11ac(VHT40)	54	5270	12.67	13.00	No
		62	5310	12.59	13.00	No
	802.11ac(VHT80)	58	5290	12.87	13.00	No
	802.11ax(HE20)-SU	52	5260	12.85	13.00	No
		56	5280	12.86	13.00	No
		64	5320	12.80	13.00	No
	802.11ax(HE40)-SU	54	5270	12.88	13.00	No
		62	5310	12.83	13.00	No

	802.11ax(HE80)-SU	58	5290	12.59	13.00	No
	802.11ax(HE20)-RU26	52	5260	12.80	13.00	No
		56	5280	12.85	13.00	No
		64	5320	12.67	13.00	No
	802.11ax(HE40)-RU26	54	5270	12.78	13.00	No
		62	5310	12.66	13.00	No
	802.11ax(HE80)-RU26	58	5290	12.56	13.00	No
5.6 (5.47~5.725)	802.11n(HT20)	100	5500	12.80	13.00	No
		116	5580	12.76	13.00	No
		140	5700	12.79	13.00	No
		144	5720	12.74	13.00	No
	802.11n(HT40)	102	5510	12.61	13.00	No
		118	5590	12.75	13.00	No
		134	5670	12.74	13.00	No
		142	5710	12.83	13.00	No
	802.11ac(VHT20)	100	5500	12.80	13.00	No
		116	5580	12.77	13.00	No
		140	5700	12.79	13.00	No
		144	5720	12.77	13.00	No
	802.11ac(VHT40)	102	5510	12.58	13.00	No
		118	5590	12.71	13.00	No
		134	5670	12.67	13.00	No
		142	5710	12.80	13.00	No
	802.11ac(VHT80)	106	5530	12.73	13.00	No
		122	5610	12.63	13.00	No
		138	5690	12.62	13.00	No
	802.11ac(VHT160)	114	5570	11.75	12.00	No
	802.11ax(HE20)-SU	100	5500	12.75	13.00	No
		116	5580	12.71	13.00	No
		140	5700	12.78	13.00	No
		144	5720	12.80	13.00	No
	802.11ax(HE40)-SU	102	5510	12.87	13.00	No
		118	5590	12.84	13.00	No
		134	5670	12.86	13.00	No
		142	5710	12.64	13.00	No
	802.11ax(HE80)-SU	106	5530	12.84	13.00	No
		122	5610	12.85	13.00	No
		138	5690	12.76	13.00	No
	802.11ax(HE160)-SU	114	5570	11.88	12.00	No
	802.11ax(HE20)-RU26	100	5500	12.81	13.00	No
		116	5580	12.69	13.00	No
		140	5700	12.54	13.00	No
		144	5720	12.68	13.00	No
	802.11ax(HE40)-RU26	102	5510	12.69	13.00	No
		118	5590	12.67	13.00	No

		142	5710	12.68	13.00	No
	802.11ax(HE80)-RU26	106	5530	12.69	13.00	No
		122	5610	12.72	13.00	No
		138	5690	12.65	13.00	No
	802.11ax(HE160)-RU26	114	5570	11.79	12.00	No
5.8 (5.725~5.850)	802.11n(HT20)	149	5745	12.90	13.00	No
		157	5785	12.62	13.00	No
		165	5825	12.74	13.00	No
	802.11n(HT40)	151	5755	12.76	13.00	No
		159	5795	12.73	13.00	No
	802.11ac(VHT20)	149	5745	12.83	13.00	No
		157	5785	12.63	13.00	No
		165	5825	12.71	13.00	No
	802.11ac(VHT40)	151	5755	12.75	13.00	No
		159	5795	12.78	13.00	No
	802.11ac(VHT80)	155	5775	12.86	13.00	No
	802.11ax(HE20)-SU	149	5745	12.71	13.00	No
		157	5785	12.85	13.00	No
		165	5825	12.67	13.00	No
	802.11ax(HE40)-SU	151	5755	12.73	13.00	No
		159	5795	12.71	13.00	No
	802.11ax(HE80)-SU	155	5775	12.65	13.00	No
	802.11ax(HE20)-RU26	149	5745	12.85	13.00	No
		157	5785	12.90	13.00	No
		165	5825	12.76	13.00	No
	802.11ax(HE40)-RU26	151	5755	12.69	13.00	No
		159	5795	12.60	13.00	No
	802.11ax(HE80)-RU26	155	5775	12.61	13.00	No

Note¹: For 5GHz SAR testing was performed on single antenna RF power in SISO mode that is larger to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission used more conservative "Max. (ant Aux.) + Max. (ant Main) " method to determine SAR compliance. When the sum of 1-g SISO transmission SAR measurement is <1.6W/kg, 5G MIMO SAR test is not required.


Note²: All the fully loaded RUs and partially loaded RUs were tested, and recorded worst mode

9.2 Bluetooth (Aux. Antenna)

Mode	GFSK			$\pi/4$ -DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Conducted Power (dBm)	8.70	9.25	9.77	8.15	8.67	9.30
Tune-up Power Limit (dBm)	10.50			10.50		
Mode	8-DPSK			BLE		
Channel	0	39	78	0	19	39
Frequency (MHz)	2402	2441	2480	2402	2440	2480
Conducted Power (dBm)	8.18	8.71	9.36	6.68	6.75	6.80
Tune-up Power Limit (dBm)	10.50			7.00		

10 TEST EXCLUSION CONSIDERATION

10.1 Laptop Mode antenna location sketch

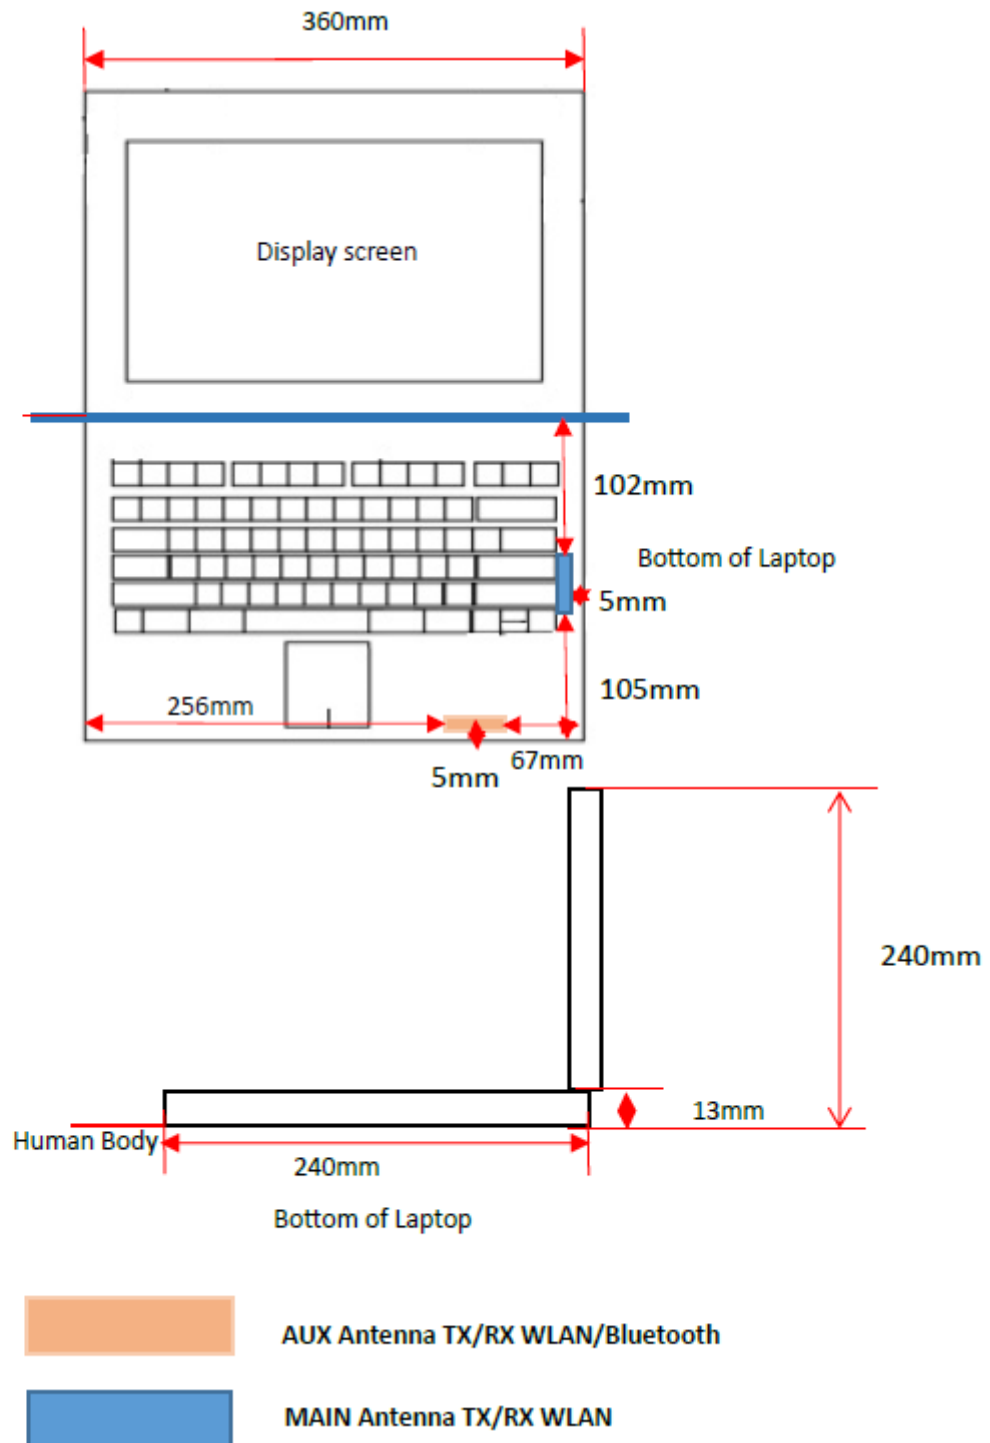

10.2 SAR Test Consideration Table

According with FCC KDB 447498 D01, Appendix A, <SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm> Table, this Device SAR test configurations consider as following :

Aux. Antenna

Band	Mode	Max. Conducted Power		Test Position Configurations
		dBm	mW	Bottom Edge
WLAN 2.4 G	Distance to User			<5mm
	802.11b	17.00	50.12	Yes
	802.11g	17.00	50.12	No
	802.11n(HT20)	17.00	50.12	No
	802.11n(HT40)	15.50	35.48	No
	802.11ax(HE20)	17.00	50.12	No
	802.11ax(HE40)	15.50	35.48	No
WLAN 5.2 G	Distance to User			<5mm
	802.11a	13.00	19.95	No
	802.11n(HT20)	13.00	19.95	No
	802.11n(HT40)	13.00	19.95	No
	802.11ac(VHT20)	13.00	19.95	No
	802.11ac(VHT40)	13.00	19.95	No
	802.11ac(VHT80)	13.00	19.95	No
	802.11ac(VHT160)	12.00	15.85	No
	802.11ax(HE20)	13.00	19.95	No
	802.11ax(HE40)	13.00	19.95	No
	802.11ax(HE80)	13.00	19.95	No
	802.11ax(HE160)	12.00	15.85	No
WLAN 5.3 G	Distance to User			<5mm
	802.11a	13.00	19.95	No
	802.11n(HT20)	13.00	19.95	No
	802.11n(HT40)	13.00	19.95	No
	802.11ac(VHT20)	13.00	19.95	No
	802.11ac(VHT40)	13.00	19.95	No
	802.11ac(VHT80)	13.00	19.95	Yes
	802.11ax(HE20)	13.00	19.95	No
	802.11ax(HE40)	13.00	19.95	No
	802.11ax(HE80)	13.00	19.95	No
WLAN 5.6 G	Distance to User			<5mm
	802.11a	13.00	19.95	No
	802.11n(HT20)	13.00	19.95	No
	802.11n(HT40)	13.00	19.95	No
	802.11ac(VHT20)	13.00	19.95	No
	802.11ac(VHT40)	13.00	19.95	No
	802.11ac(VHT80)	13.00	19.95	Yes

	802.11ac(VHT160)	12.00	15.85	No
	802.11ax(HE20)	13.00	19.95	No
	802.11ax(HE40)	13.00	19.95	No
	802.11ax(HE80)	13.00	19.95	No
	802.11ax(HE160)	12.00	15.85	No
WLAN 5.8 G	Distance to User			<5mm
	802.11a	13.00	19.95	No
	802.11n(HT20)	13.00	19.95	No
	802.11n(HT40)	13.00	19.95	No
	802.11ac(VHT20)	13.00	19.95	No
	802.11ac(VHT40)	13.00	19.95	No
	802.11ac(VHT80)	13.00	19.95	Yes
	802.11ax(HE20)	13.00	19.95	No
	802.11ax(HE40)	13.00	19.95	No
	802.11ax(HE80)	13.00	19.95	No
Bluetooth	Distance to User			<5mm
	BR/EDR	10.50	11.22	Yes
	BLE	7.00	5.01	No

Main Antenna

Band	Mode	Max. Conducted Power		Test Position Configurations
		dBm	mW	Bottom Edge
WLAN 2.4 G	Distance to User			<5mm
	802.11b	17.00	50.12	Yes
	802.11g	17.00	50.12	No
	802.11n(HT20)	17.00	50.12	No
	802.11n(HT40)	15.50	35.48	No
	802.11ax(HE20)	17.00	50.12	No
	802.11ax(HE40)	15.50	35.48	No
WLAN 5.2 G	Distance to User			<5mm
	802.11a	13.00	19.95	No
	802.11n(HT20)	13.00	19.95	No
	802.11n(HT40)	13.00	19.95	No
	802.11ac(VHT20)	13.00	19.95	No
	802.11ac(VHT40)	13.00	19.95	No
	802.11ac(VHT80)	13.00	19.95	No
	802.11ac(VHT160)	12.00	15.85	No
	802.11ax(HE20)	13.00	19.95	No
	802.11ax(HE40)	13.00	19.95	No
	802.11ax(HE80)	13.00	19.95	No
	802.11ax(HE160)	12.00	15.85	No
WLAN 5.3 G	Distance to User			<5mm
	802.11a	13.00	19.95	No

	802.11n(HT20)	13.00	19.95	No
	802.11n(HT40)	13.00	19.95	No
	802.11ac(VHT20)	13.00	19.95	No
	802.11ac(VHT40)	13.00	19.95	No
	802.11ac(VHT80)	13.00	19.95	Yes
	802.11ax(HE20)	13.00	19.95	No
	802.11ax(HE40)	13.00	19.95	No
	802.11ax(HE80)	13.00	19.95	No
WLAN 5.6 G	Distance to User			<5mm
	802.11a	13.00	19.95	No
	802.11n(HT20)	13.00	19.95	No
	802.11n(HT40)	13.00	19.95	No
	802.11ac(VHT20)	13.00	19.95	No
	802.11ac(VHT40)	13.00	19.95	No
	802.11ac(VHT80)	13.00	19.95	Yes
	802.11ac(VHT160)	12.00	15.85	No
	802.11ax(HE20)	13.00	19.95	No
	802.11ax(HE40)	13.00	19.95	No
	802.11ax(HE80)	13.00	19.95	No
	802.11ax(HE160)	12.00	15.85	No
WLAN 5.8 G	Distance to User			<5mm
	802.11a	13.00	19.95	No
	802.11n(HT20)	13.00	19.95	No
	802.11n(HT40)	13.00	19.95	No
	802.11ac(VHT20)	13.00	19.95	No
	802.11ac(VHT40)	13.00	19.95	No
	802.11ac(VHT80)	13.00	19.95	Yes
	802.11ax(HE20)	13.00	19.95	No
	802.11ax(HE40)	13.00	19.95	No
	802.11ax(HE80)	13.00	19.95	No

Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units.
- Per RSS-102, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per RSS-102, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold.
- Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
 - When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
 - When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel.

5. Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
 - a. When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
 - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
6. Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
 - a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
 - b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.
 - c. The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.
7. Per KDB 248227 D01 5G WLAN Subsequent Test Configuration Procedures
SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.
 - a. When SAR test exclusion provisions of KDB Publication 447498 D01 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
 - b. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

11 TEST RESULT

11.1 Bluetooth

Mode	Antenna Manufacturer	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1g Scaled SAR (W/kg)	Meas. No.
Body															
DH5	South Star	Aux	Bottom	0	78	2480	0.02	0.116	9.77	10.50	1.183	76.8	1.302	0.179	1#
	Speed		Side	0	78	2480	0.05	0.111	9.77	10.50	1.183	76.8	1.302	0.171	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.															

11.2 WIFI 2.4GHz

Mode	Antenna Manufacturer	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1g Scaled SAR (W/kg)	Meas. No.
Body															
802.11b	South Star	Aux	Bottom	0	6	2437	0.07	0.332	16.92	17.00	1.019	98.3	1.017	0.344	/
	Speed		Side	0	6	2437	-0.08	0.372	16.92	17.00	1.019	98.3	1.017	0.385	2#
	South Star	Main	Bottom	0	6	2437	-0.01	0.379	16.93	17.00	1.016	98.3	1.017	0.392	/
	Speed		Side	0	6	2437	-0.01	0.422	16.93	17.00	1.016	98.3	1.017	0.436	3#
Note: Refer to ANNEX C for the detailed test data for each test configuration.															

11.3WIFI 5GHz

Band	Antenna Manufacturer	Antenna Manufacturer	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1g Scaled SAR (W/kg)	Meas. No.
Body																
5.3G	802.11 ac80	South Star	Aux	Bottom Side	0	58	5290	0.15	0.250	12.75	13.00	1.059	98.8	1.012	0.268	/
		Speed			0	58	5290	0.05	0.316	12.75	13.00	1.059	98.8	1.012	0.339	4#
		South Star	Main	Bottom Side	0	58	5290	-0.07	0.277	12.64	13.00	1.086	98.8	1.012	0.305	/
		Speed			0	58	5290	0.04	0.317	12.64	13.00	1.086	98.8	1.012	0.349	5#
5.6G	802.11 ac80	South Star	Aux	Bottom Side	0	106	5530	0.09	0.295	12.56	13.00	1.107	98.8	1.012	0.331	/
		Speed			0	106	5530	0.07	0.333	12.56	13.00	1.107	98.8	1.012	0.373	6#
		South Star	Main	Bottom Side	0	106	5530	0.03	0.364	12.89	13.00	1.026	98.8	1.012	0.378	/
		Speed			0	106	5530	0.01	0.405	12.89	13.00	1.026	98.8	1.012	0.420	7#
5.8G	802.11 ac80	South Star	Aux	Bottom Side	0	155	5775	0.02	0.262	12.76	13.00	1.057	98.8	1.012	0.280	/
		Speed			0	155	5775	0.02	0.319	12.76	13.00	1.057	98.8	1.012	0.341	8#
		South Star	Main	Bottom Side	0	155	5775	0.15	0.272	12.66	13.00	1.081	98.8	1.012	0.297	/
		Speed			0	155	5775	0.06	0.416	12.66	13.00	1.081	98.8	1.012	0.455	9#
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

12 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Note: For 1g SAR, the highest measured 1g SAR is $0.455 < 0.80$ W/kg, repeated measurement is not required.

13 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

According KDB 447498 D01v06, simultaneous transmission:

- a) $SPLSR = (SAR1 + SAR2)^{1.5} / R_i$ (min. separation distance, mm), and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
SAR1 is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.
SAR2 is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition as the first.
- b) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
- c) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

13.1 Simultaneous Transmission Mode Considerations

NO.	Mode	Body
1	2.4 G WLAN (Main Antenna)	+ 2.4 G WLAN (Auxiliary Antenna)
2	2.4 G WLAN (Main Antenna)	+ Bluetooth (Auxiliary Antenna)
3	5 G WLAN (Main Antenna)	+ 5 G WLAN (Auxiliary Antenna)
4	5 G WLAN (Main Antenna)	+ Bluetooth (Auxiliary Antenna)
5	5 G WLAN (Main Antenna)	+ 5 G WLAN (Auxiliary Antenna) + Bluetooth (Auxiliary Antenna)
Note: 1. The EUT supports the Auxiliary antenna with TX/RX diversity function for WLAN and Bluetooth, the Main antenna with TX/RX diversity function for WLAN. 2. WLAN 2.4GHz and Bluetooth will not be transmitting from the Auxiliary antenna at same time.		

13.2 Sum SAR of Simultaneous Transmission

13.2.1 Highest Bluetooth and WLAN Sum Body SAR of Simultaneous Transmission

Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR
Body (Separation 0 mm)				
2.4 G WLAN (Main Antenna) + 2.4 G WLAN (Auxiliary Antenna)	2.4 G WLAN (Main Antenna)	0.436	0.821	No
	2.4 G WLAN (Auxiliary Antenna)	0.385		
2.4 G WLAN (Main Antenna) + Bluetooth (Auxiliary Antenna)	2.4 G WLAN (Main Antenna)	0.436	0.615	No
	Bluetooth (Auxiliary Antenna)	0.179		
5 G WLAN (Main Antenna) + 5 G WLAN (Auxiliary Antenna)	5 G WLAN (Main Antenna)	0.455	0.828	No
	5 G WLAN (Auxiliary Antenna)	0.373		
5 G WLAN (Main Antenna) + Bluetooth (Auxiliary Antenna)	5 G WLAN (Main Antenna)	0.455	0.634	No
	Bluetooth (Auxiliary Antenna)	0.179		
5 G WLAN (Main Antenna) + 5 G WLAN (Auxiliary Antenna) + Bluetooth (Auxiliary Antenna)	5 G WLAN (Main Antenna)	0.455	1.007	No
	5 G WLAN (Auxiliary Antenna)	0.373		
	Bluetooth (Auxiliary Antenna)	0.179		

14 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test Software	Speag	DASY5	52.8.8.1222	N/A	N/A
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2019/06/10	2021/06/09
5GHz Validation Dipole	Speag	D5GHzV2	SN: 1200	2020/02/17	2021/02/16
E-Field Probe	Speag	EX3DV4	SN: 3578	2020/07/06	2021/07/05
Data Acquisition Electronics	Speag	DAE3	SN: 360	2019/10/16	2020/10/15
Signal Generator	R&S	SMB100A	177746	2020/06/08	2021/06/07
Power Meter	R&S	NRVD-B2	7250BJ-0112/2011	2019/10/30	2020/10/29
Power Sensor	R&S	NRV-Z4	100381	2019/10/30	2020/10/29
Power Sensor	R&S	NRV-Z2	100211	2019/10/30	2020/10/29
Network Analyzer	R&S	ZVL-6	101380	2020/06/22	2021/06/21
Thermometer	Elitech	RC-4HC	N/A	2019/11/02	2020/11/01
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Dielectric Probe Kit	SATIMO	SCLMP	SN 25/13 OCPG56	N/A	N/A
Phantom1	Speag	SAM	SN: 1859	N/A	N/A
Phantom2	Speag	ELI4	SN: 1012	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2020.10.15	Head	2450	21.3	1.80	39.26	1.80	39.20	0.00	0.15
2020.10.12	Head	5300	21.4	4.75	35.21	4.76	35.87	-0.21	-1.84
2020.10.13	Head	5600	21.4	5.05	35.68	5.07	35.53	-0.39	0.42
2020.10.14	Head	5800	21.3	5.25	35.09	5.27	35.30	-0.38	-0.59

Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$.

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 % (for 1 g).

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2020.10.15	Head	2450	100	5.370	53.70	52.60	2.09
2020.10.12	Head	5300	100	7.820	78.20	78.10	0.13
2020.10.13	Head	5600	100	8.530	85.30	80.30	6.23
2020.10.14	Head	5800	100	7.430	74.30	76.90	-3.38

Note: The tolerance limit of System validation $\pm 10\%$.

System Performance Check Data (2450MHz)

Date: 2020.10.15

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.257$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.55, 7.55, 7.55); Calibrated: 2020.07.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW2450 HEAD 100mW/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.96 W/kg


CW2450 HEAD 100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.24 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 11.65 W/kg

SAR(1 g) = 5.37 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 6.16 W/kg

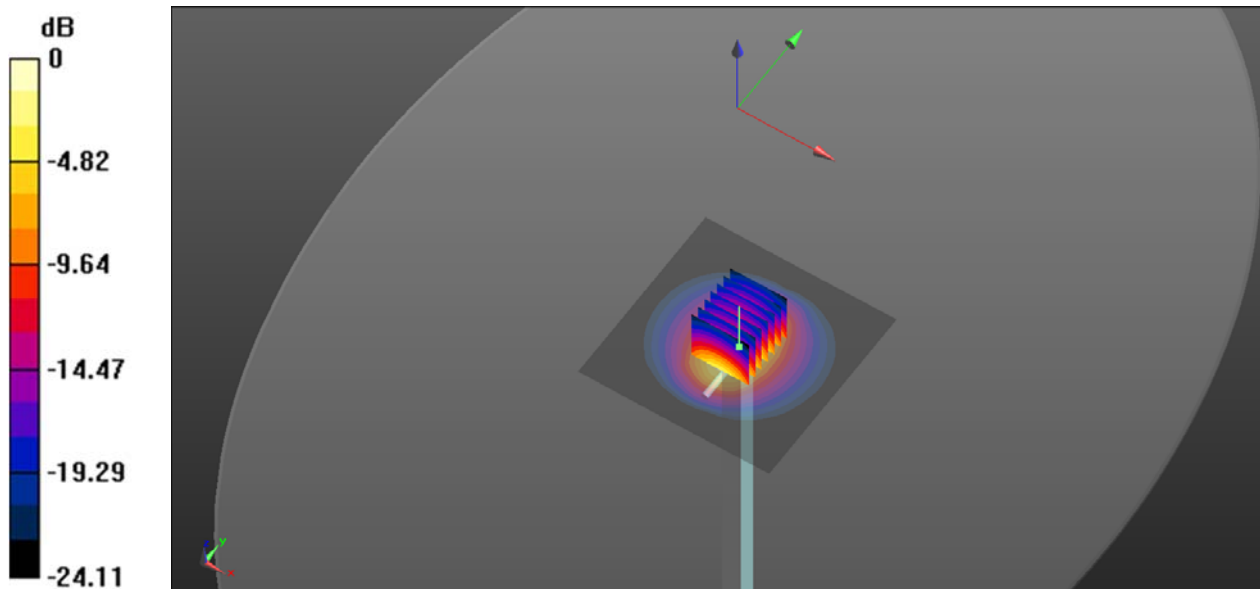

0 dB = 6.16 W/kg

System Performance Check Data (5300MHz)

Date: 2020.10.12

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.748$ S/m; $\epsilon_r = 35.205$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.43, 5.43, 5.43); Calibrated: 2020.07.06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 5300/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.61 W/kg


CW 5300/Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 43.58 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

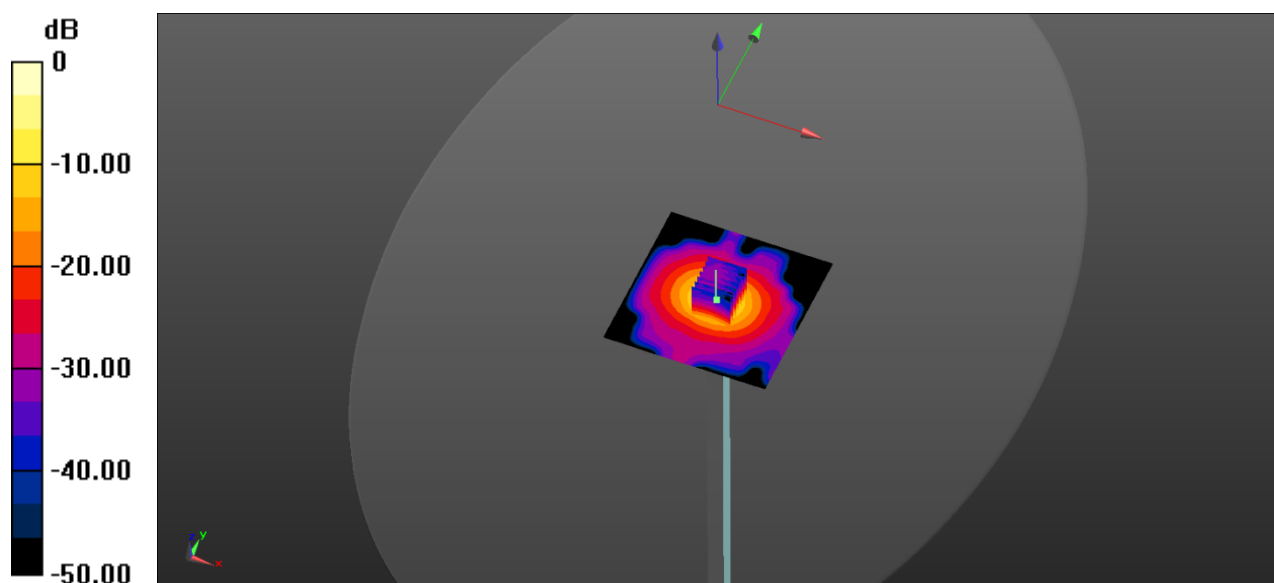

0 dB = 19.5 W/kg

System Performance Check Data (5600MHz)

Date: 2020.10.13

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.045$ S/m; $\epsilon_r = 35.675$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.8, 4.8, 4.8); Calibrated: 2020.07.06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 5600/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.91 W/kg


CW 5600/Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.93 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 39.8 W/kg

SAR(1 g) = 8.53 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 21.8 W/kg

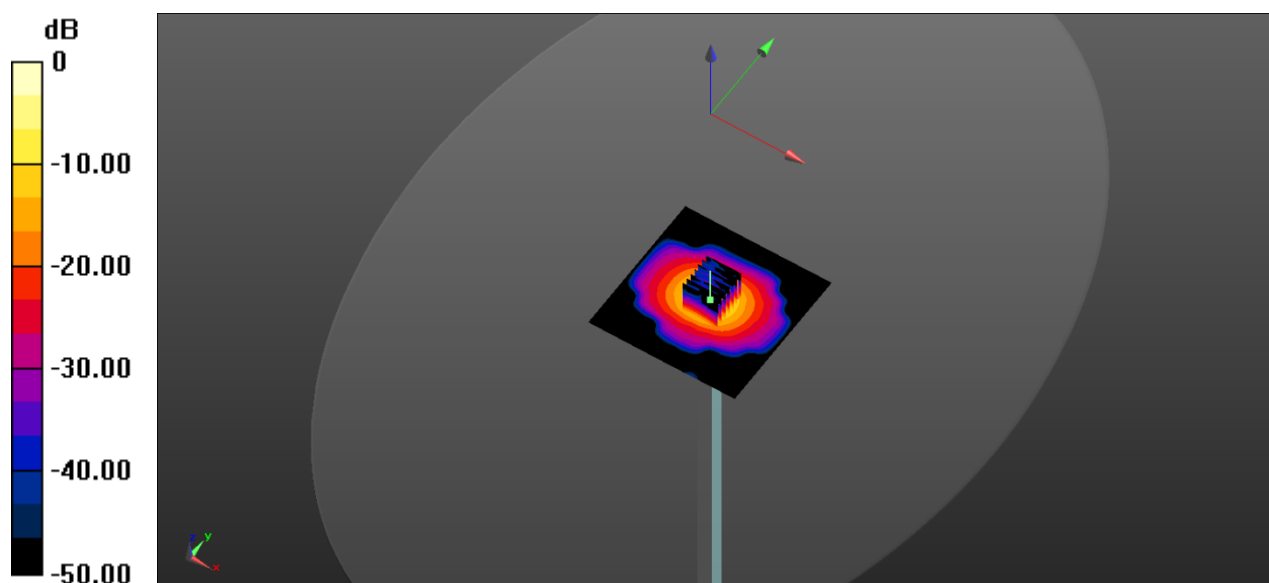

0 dB = 21.8 W/kg

System Performance Check Data (5800MHz)

Date: 2020.10.14

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.252$ S/m; $\epsilon_r = 35.087$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.83, 4.83, 4.83); Calibrated: 2020.07.06;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 5800/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.58 W/kg


CW 5800/Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.09 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 7.43 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

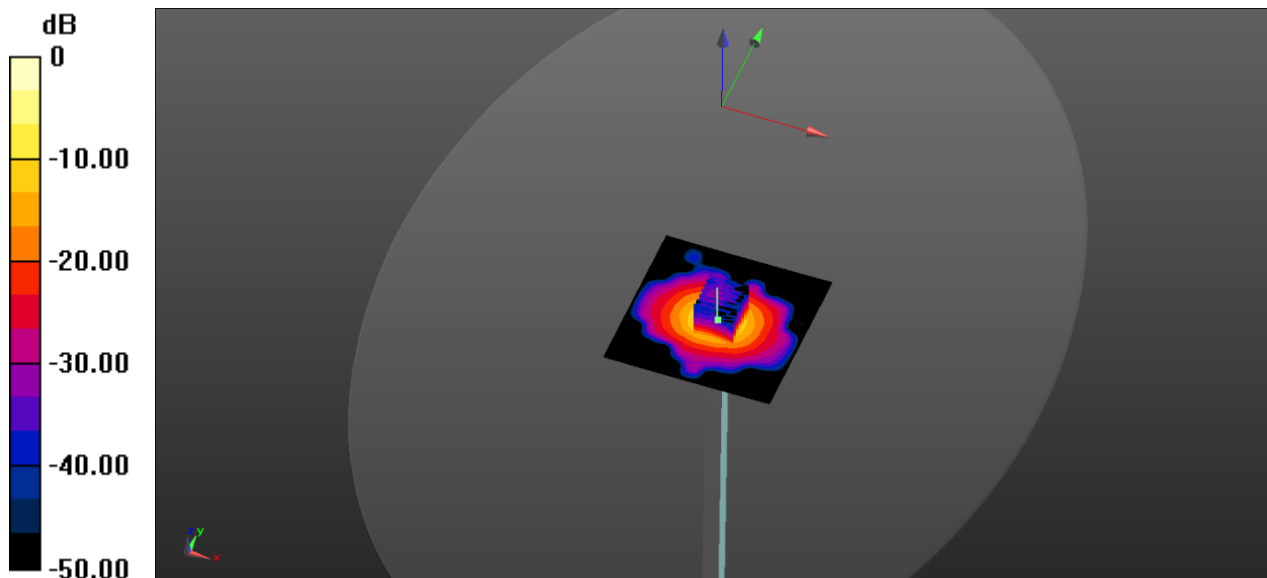

0 dB = 19.8 W/kg

ANNEX C TEST DATA

MEAS.1 Body Plane with Bottom Side 0mm on High Channel in Bluetooth mode with Antenna Auxiliary

Date: 2020.10.15

Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 38.914$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.55, 7.55, 7.55); Calibrated: 2020.07.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch78/Area Scan (61x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.112 W/kg


Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.666 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.121 W/kg

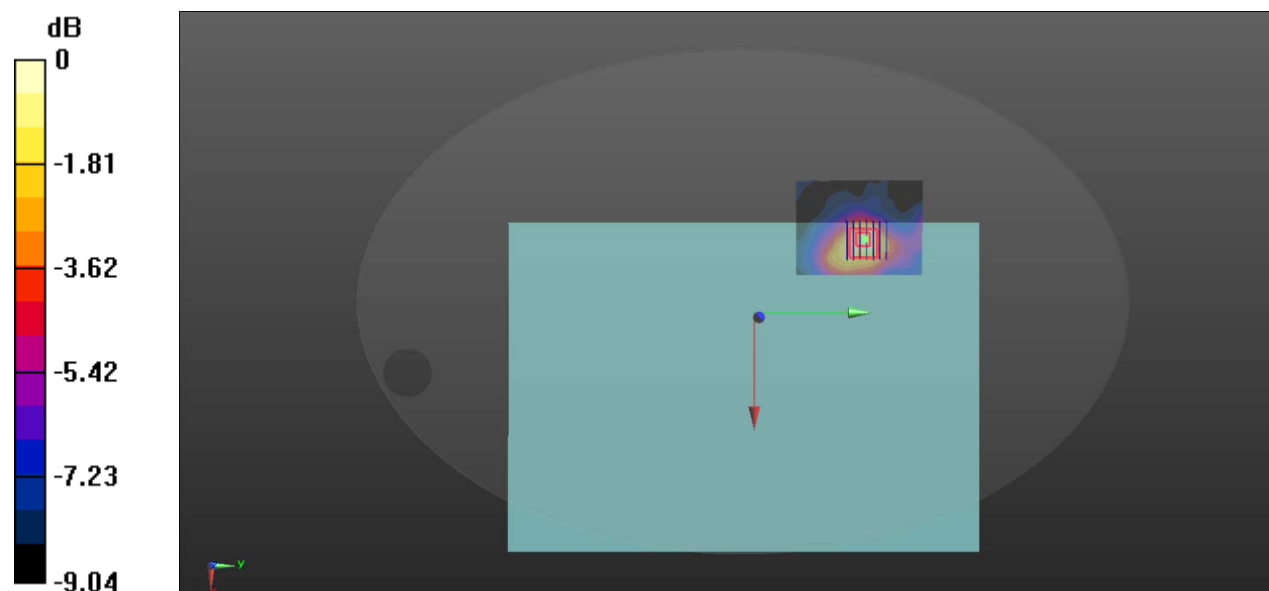

0 dB = 0.121 W/kg

MEAS.2 Body Plane with Bottom Side 0mm on Middle Channel in IEEE802.11b mode with Antenna Auxiliary

Date: 2020.10.15

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1.017

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.398$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.55, 7.55, 7.55); Calibrated: 2020.07.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (61x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.424 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.087 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.408 W/kg

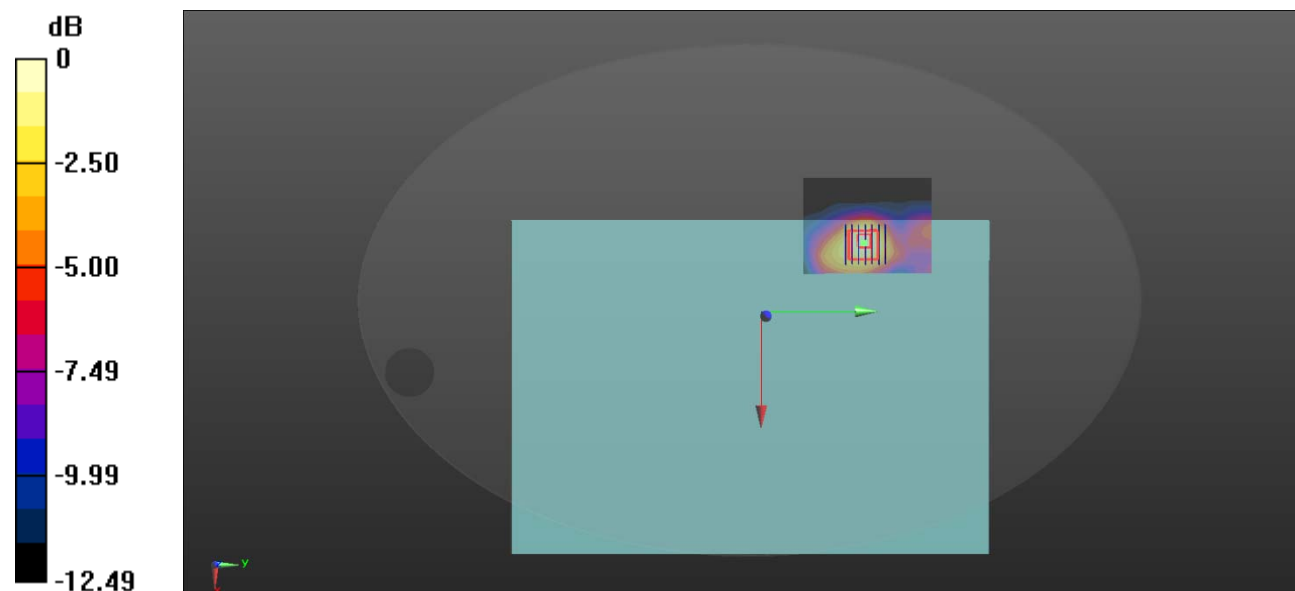

0 dB = 0.408 W/kg

MEAS.3 Body Plane with Bottom Side 0mm on Middle Channel in IEEE802.11b mode with Antenna Main

Date: 2020.10.15

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1.017

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.398$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.55, 7.55, 7.55); Calibrated: 2020.07.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (61x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.465 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.072 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

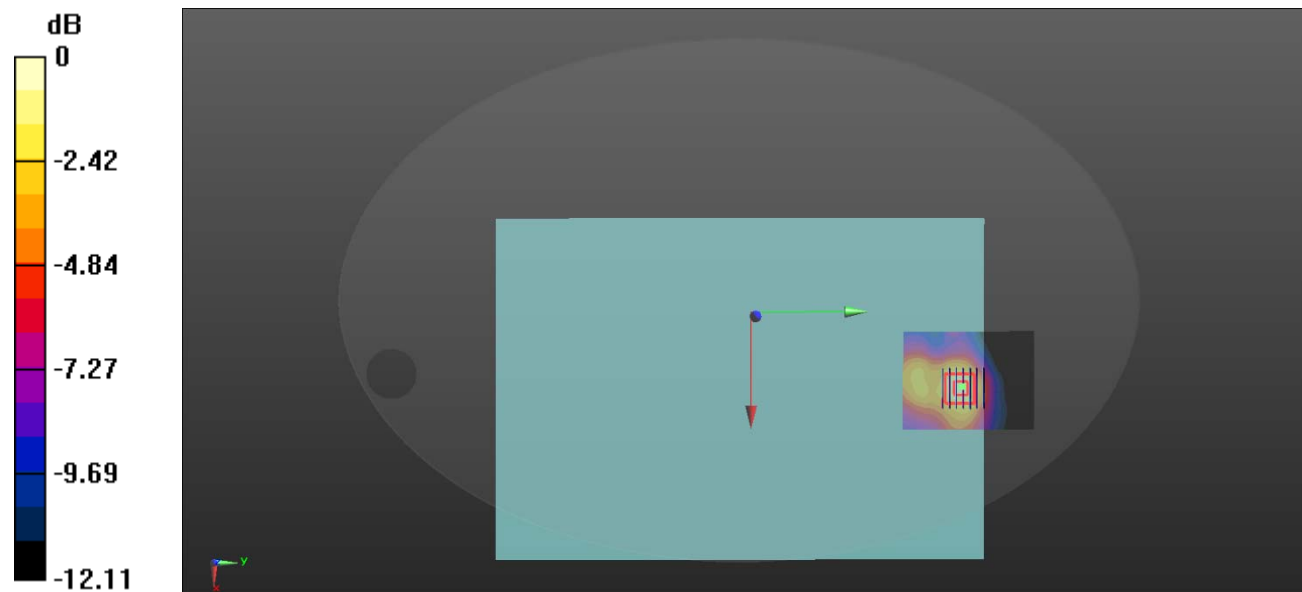

0 dB = 0.472 W/kg

MEAS.4 Body Plane with Bottom Side 0mm on Channel 58 in IEEE802.11ac80 mode with Antenna Auxiliary

Date: 2020.10.12

Communication System Band: WLAN(ac)80MHz; Frequency: 5290 MHz;Duty Cycle: 1:1.012

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.735$ S/m; $\epsilon_r = 35.314$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.43, 5.43, 5.43); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch58/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.302 W/kg


Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.559 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.539 W/kg

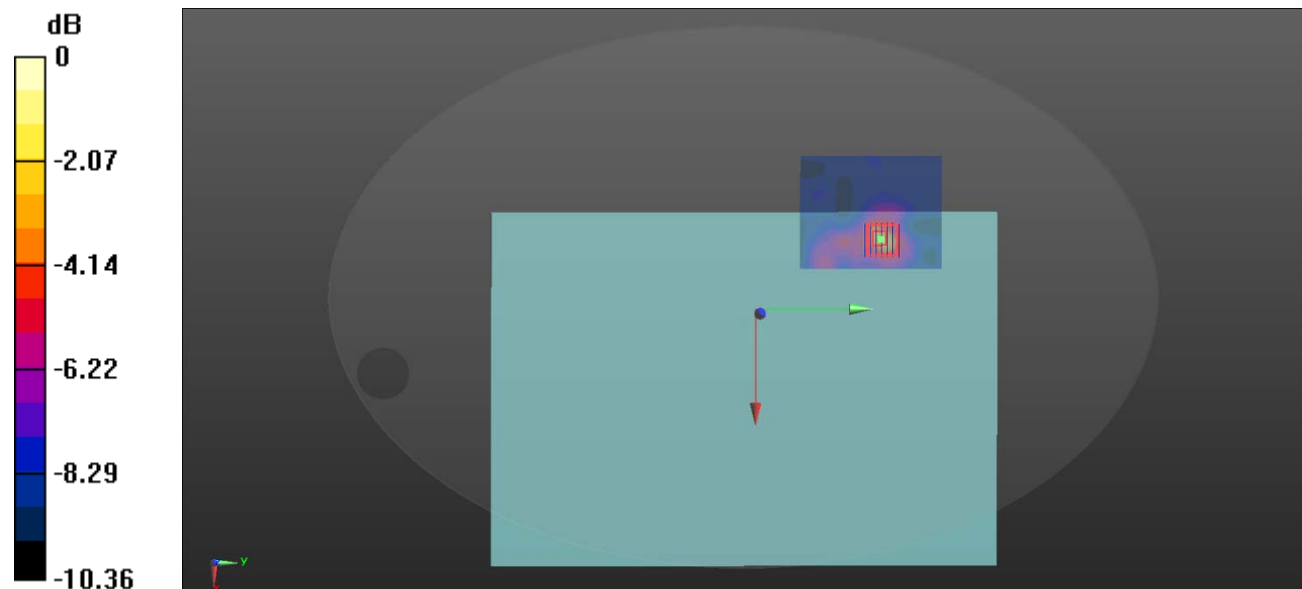

0 dB = 0.539 W/kg

MEAS.5 Body Plane with Bottom Side 0mm on Channel 58 in IEEE802.11ac80 mode with Antenna Main

Date: 2020.10.12

Communication System Band: WLAN(ac)80MHz; Frequency: 5290 MHz;Duty Cycle: 1:1.012

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.735$ S/m; $\epsilon_r = 35.314$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.43, 5.43, 5.43); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch58/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.337 W/kg


Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.874 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

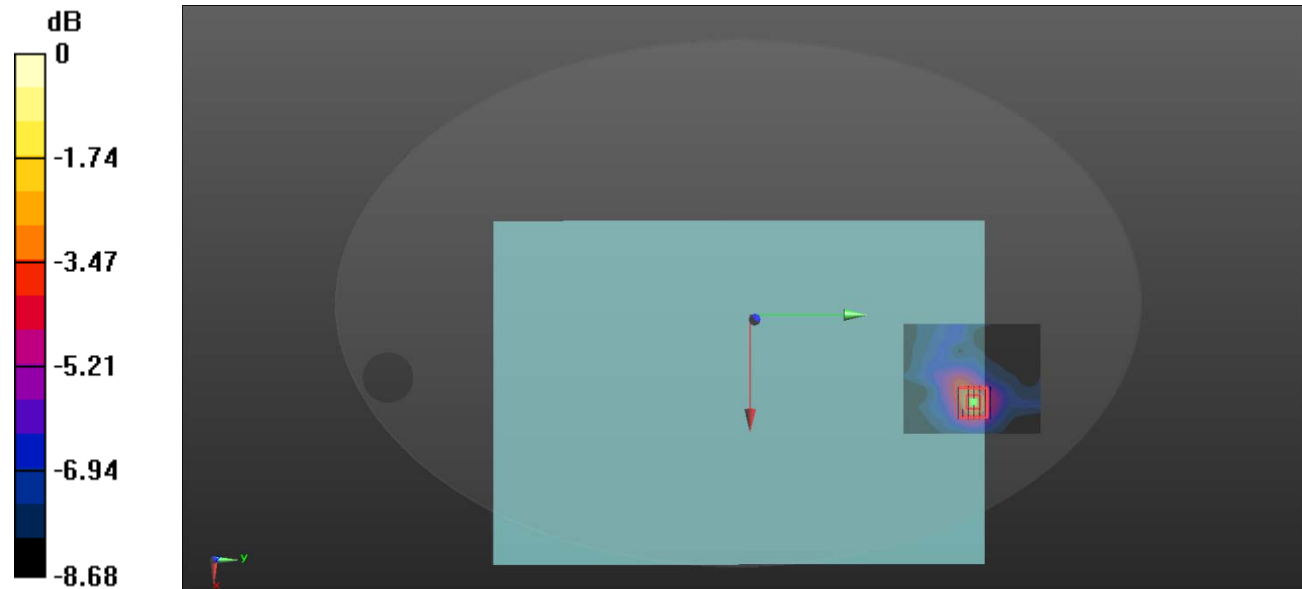

0 dB = 0.525 W/kg

MEAS.6 Body Plane with Bottom Side 0mm on Channel 106 in IEEE802.11ac80 mode with Antenna Auxiliary

Date: 2020.10.13

Communication System Band: WLAN(ac)80MHz; Frequency: 5530 MHz;Duty Cycle: 1:1.012

Medium parameters used: $f = 5530 \text{ MHz}$; $\sigma = 4.985 \text{ S/m}$; $\epsilon_r = 35.985$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature:22.5 Liquid Temperature:21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.8, 4.8, 4.8); Calibrated: 2020.07.06;
- Sensor-Surface: Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch106/Area Scan (81x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.319 W/kg


Ch106/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.942 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.333 W/kg ; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.568 W/kg

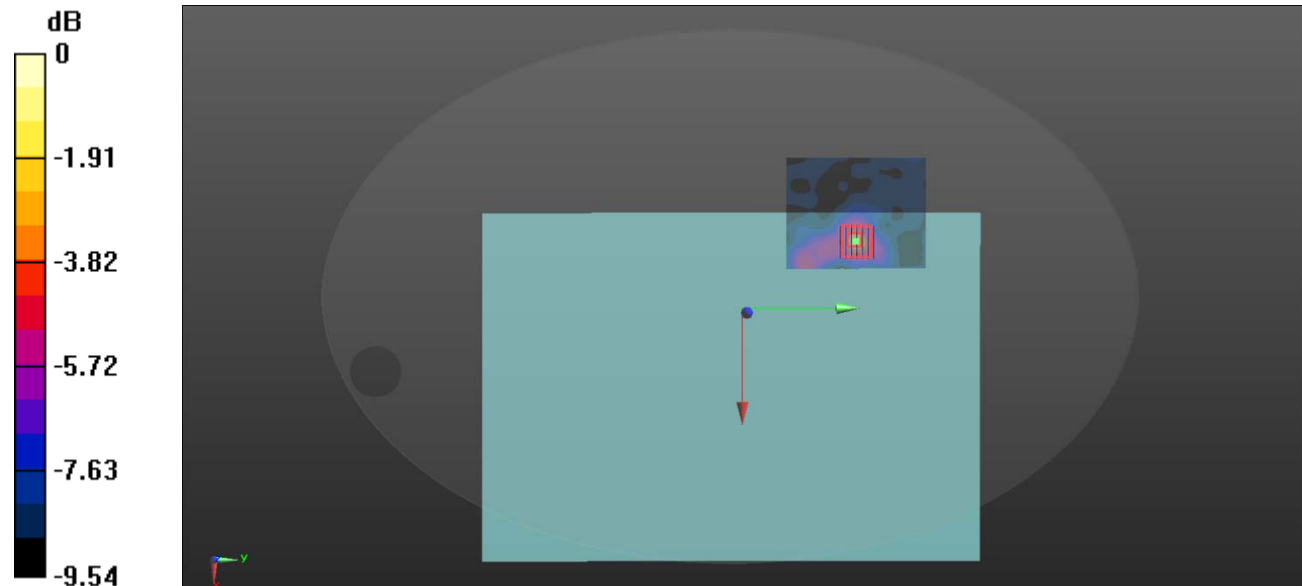

0 dB = 0.568 W/kg

MEAS.7 Body Plane with Bottom Side 0mm on Channel 106 in IEEE802.11ac80 mode with Antenna Main

Date: 2020.10.13

Communication System Band: WLAN(ac)80MHz; Frequency: 5530 MHz;Duty Cycle: 1:1.012

Medium parameters used: $f = 5530$ MHz; $\sigma = 4.985$ S/m; $\epsilon_r = 35.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5 Liquid Temperature:21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.8, 4.8, 4.8); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch106/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.401 W/kg


Ch106/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.476 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.209 W/kg

Maximum value of SAR (measured) = 0.686 W/kg

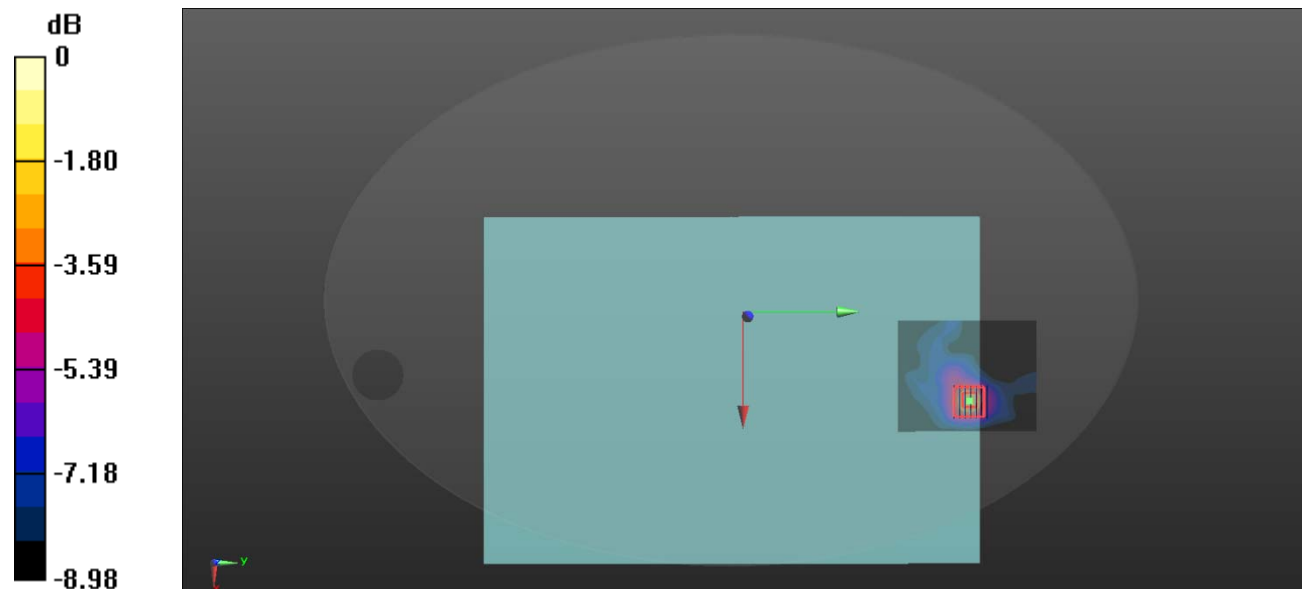

0 dB = 0.686 W/kg

MEAS.8 Body Plane with Bottom Side 0mm on Channel 155 in IEEE802.11ac80 mode with Antenna Auxiliary

Date: 2020.10.14

Communication System Band: WLAN(ac)80MHz; Frequency: 5775 MHz; Duty Cycle: 1:1.012

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.218$ S/m; $\epsilon_r = 35.358$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.83, 4.83, 4.83); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch155/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.353 W/kg


Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.015 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

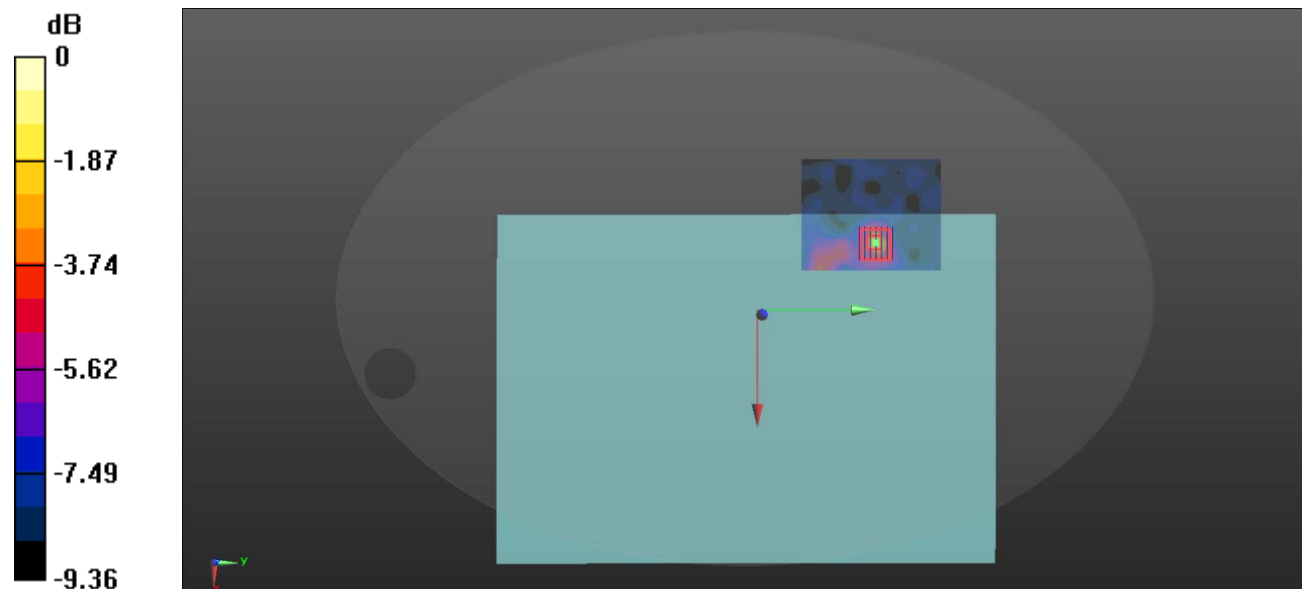

0 dB = 0.556 W/kg

MEAS.9 Body Plane with Bottom Side 0mm on Channel 155 in IEEE802.11ac80 mode with Antenna Main

Date: 2020.10.14

Communication System Band: WLAN(ac)80MHz; Frequency: 5775 MHz;Duty Cycle: 1:1.012

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.218$ S/m; $\epsilon_r = 35.358$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.83, 4.83, 4.83); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch155/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.411 W/kg


Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.871 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.703 W/kg

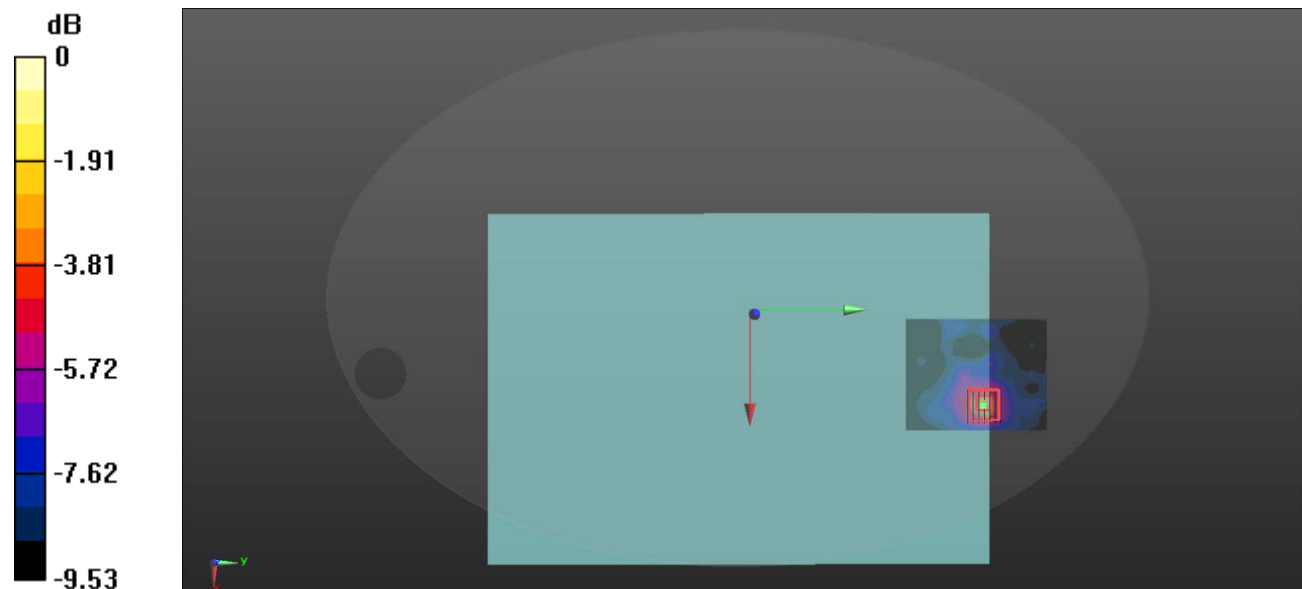

0 dB = 0.703 W/kg

ANNEX D SAR TEST SETUP PHOTOS

Please refer the document "BL-SZ2090237-AS.pdf"

ANNEX E CALIBRATION REPORT

Please refer the document "CALIBRATION REPORT.pdf".

--END OF REPORT--