





# FCC PART 15C TEST REPORT

No. I21Z70342-IOT01

for

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model Name: SM-A037F/DS,SM-A037F

FCC ID: ZCASMA037F

with

Hardware Version: REV1.0

**Software Version: A037F.001** 

Issued Date: 2021-7-13

#### Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

#### **Test Laboratory:**

#### CTTL, Telecommunication Technology Labs, CAICT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email: cttl\_terminals@caict.ac.cn, website: www.chinattl.com





# **REPORT HISTORY**

Report Number	Revision	Description	Issue Date
I21Z70342-IOT01	Rev.0	1st edition	2021-7-13





# **CONTENTS**

Ι.	Test I	_aboratory	5
	1.1.	Introduction &Accreditation	5
	1.2.	Testing Location	5
	1.3.	Testing Environment	6
	1.4.	Project data	6
	1.5.	Signature	6
2.	Clien	t Information	7
	2.1.	Applicant Information	7
	2.2.	Manufacturer Information	7
3.	Equip	oment Under Test (EUT) and Ancillary Equipment (AE)	8
	3.1.	About EUT	8
	3.2.	Internal Identification of EUT	8
	3.3.	Internal Identification of AE	8
	3.4.	Normal Accessory setting	10
	3.5.	General Description	10
4.	Refer	rence Documents	.11
	4.1.	Documents supplied by applicant	.11
	4.2.	Reference Documents for testing	.11
5.	Test I	Results	12
	5.1.	Summary of Test Results	12
	5.2.	Statements	12
	5.3.	Explanation of re-use of test data	12
6.	Test I	Facilities Utilized	13
7.	Meas	urement Uncertainty	14
	7.1.	Peak Output Power - Conducted	14
	7.2.	Frequency Band Edges - Conducted	14
	7.3.	Frequency Band Edges - Radiated	14
	7.4.	Transmitter Spurious Emission - Conducted	14
	7.5.	Transmitter Spurious Emission - Radiated	14
	7.6.	Time of Occupancy (Dwell Time)	14
	7.7.	20dB Bandwidth	15
	7.8.	Carrier Frequency Separation	15
	7.9.	AC Powerline Conducted Emission	15
AN	NEX A	a: EUT parameters	16
AN	NEX E	3: Detailed Test Results	17
	B.1. I	Measurement Method	17
	B.2. I	Peak Output Power	18
	B.3. I	Frequency Band Edges – Conducted	21
	B.4. I	Frequency Band Edges –Radiated	28
		Fransmitter Spurious Emission - Conducted	
	B.6. 7	Fransmitter Spurious Emission - Radiated	58
	B.7. 7	Fime of Occupancy (Dwell Time)	66





	B.8. 20dB Bandwidth	77
	B.9. Carrier Frequency Separation	83
	B.10. Number of Hopping Channels	86
	B.11. AC Powerline Conducted Emission	90
ANN	NEX C: Accreditation Certificate	94





## 1. Test Laboratory

#### 1.1. Introduction & Accreditation

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

## 1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,

P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,

P. R. China100191

CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology

Development Area, Beijing, P. R. China 100176





## 1.3. Testing Environment

Normal Temperature:  $15-35^{\circ}$ C Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2021-5-26 Testing End Date: 2021-7-13

1.5. Signature

Wu Le

(Prepared this test report)

Sun Zhenyu

(Reviewed this test report)

Zhu Liang

(Approved this test report)





## 2. Client Information

## 2.1. Applicant Information

Company Name: Samsung Electronics Co., Ltd.

Address 19 Chapin Rd., Building D Pine Brook, NJ 07058

Contact: Jenni Chun

Email: j1.chun@samsung.com

Tel: +1-201-937-4203

Fax: /

#### 2.2. Manufacturer Information

Company Name: Samsung Electronics Co., Ltd.

Samsung R5, Maetan dong 129, Samsung ro

Youngtong gu, Suwon city 443 742, Korea

Contact: Sunghoon Cho

Email: ggobi.cho@samsung.com

Tel: +82-10-2722-4159

Fax: /

Address





## 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model Name SM-A037F/DS,SM-A037F

FCC ID ZCASMA037F

Frequency Band ISM 2400MHz~2483.5MHz Type of Modulation GFSK/π/4 DQPSK/8DPSK

Number of Channels 79

Power Supply 4V DC by Battery

Antenna gain -0.80dBi

#### 3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	<b>HW Version</b>	SW Version	Date of receipt
UT30a	/	REV1.0	A037F.001	/
UT27a(SM-A037F/DS)	I21Z70342UT27a	REV1.0	A037F.001	2021-07-02

<sup>\*</sup>EUT ID: is used to identify the test sample in the lab internally.

## 3.3. Internal Identification of AE

AE ID*	Description	Remarks	
AE1	Charger1	/	/
AE2	Charger2	/	/
AE3	Charger3	/	/
AE4	Charger4	/	/
AE5	Charger5	/	/
AE6	USB cable	/	/
AE7	Headset1	/	/
AE8	Headset2	/	/
AE9	battery	/	/
AE10	Charger6	No test	/
AE11	Charger7	No test	/
AE12	Charger8	No test	/
AE13	Charger9	No test	/
AE14	Charger10	No test	/
AE1			
Model		EP-TA50JWE	

HAEM Co.,Ltd

Manufacturer





AE2 **EP-TA50JWE** Model Manufacturer RFTech Electronics(HuiZhou)Co.,LTD Length of cable AE3 **EP-TA50UWE** Model Manufacturer Dong Yang Length of cable AE4 **EP-TA50UWE** Model Manufacturer HAEM Co.,Ltd Length of cable AE5 Model **EP-TA50UWE** Manufacturer Salcomp Length of cable AE6 EP-DR140AWE Model Manufacturer Samsung Electronics Co., Ltd. Length of cable AE7 Model EHS61ASFWE Manufacturer DONGGUAN YOUNGBO ELECTRONICS CO.,LTD Length of cable AE8 Model EHS61ASFWE Manufacturer WATA ELECTRONICS CO.,LTD Length of cable / AE9 Secondary Li-ion Battery Type SN **HQ-50S** Manufacturer SUCD(FUJIAN) Electronics Co.,Ltd AE10 EP-TA50JWS Model Manufacturer HAEM Co.,Ltd Length of cable AE11 Model EP-TA50JWS Manufacturer RFTech Electronics(HuiZhou)Co.,LTD Length of cable AE12 Model **EP-TA50UWS** 

Dong Yang

Page 9 of 94.

Manufacturer

Length of cable





AE13

Model EP-TA50JWE Manufacturer Dong Yang

Length of cable /

AE14

Model EP-TA50UWE

Manufacturer RFTech Electronics(HuiZhou)Co.,LTD

Length of cable /

## 3.4. Normal Accessory setting

Fully charged battery should be used during the test.

## 3.5. General Description

The Equipment Under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

<sup>\*</sup>AE ID: is used to identify the test sample in the lab internally.





## 4. Reference Documents

## 4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

## 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	
FCC Part15	15.209 Radiated emission limits, general requirements;	2018
	15.247 Operation within the bands 902–928MHz,	
	2400-2483.5 MHz, and 5725-5850 MHz.	
ANSI C63.10	American National Standard of Procedures for	luna 2012
ANSI 603.10	Compliance Testing of Unlicensed Wireless Devices	June,2013





## 5. Test Results

## 5.1. Summary of Test Results

Abbreviations used in this clause:

- **P** Pass, The EUT complies with the essential requirements in the standard.
- **F** Fail, The EUT does not comply with the essential requirements in the standard
- NA Not Applicable, The test was not applicable
- NP Not Performed, The test was not performed by CTTL
- R Re-use test data from basic model report.

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power	15.247 (b)(1)	Р
Frequency Band Edges- Conducted	15.247 (d)	R
Frequency Band Edges- Radiated	15.247, 15.205, 15.209	R
Transmitter Spurious Emission - Conducted	15.247 (d)	R
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	R
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	R
20dB Bandwidth	15.247 (a)(1)	R
Carrier Frequency Separation	15.247 (a)(1)	R
Number of hopping channels	15.247 (a)(b)(iii)	R
AC Powerline Conducted Emission	15.107, 15.207	R

Please refer to ANNEX A for detail.

The measurement is made according to ANSI C63.10.

#### 5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

#### 5.3. Explanation of re-use of test data

The Equipment Under Test (EUT) model SM-A037F/DS,SM-A037F (FCC ID: ZCASMA037F) are variant product of SM-A037M/DS (FCC ID: ZCASMA037M), according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, spot check measurements(Peak Output Power-Conducted) were performed on SM-A037F/DS, other test results are derived from test report No. I21Z70258-IOT01. Please refer Annex A for detail spot check verification data and reference data. the spot check test results are consistent with basic model.

For detail differences between two models please refer the Declaration of Changes document.





# 6. Test Facilities Utilized

## **Conducted test system**

No.	Equipment	Model	Serial Number	Manufacturer	Calibratio n Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	100024	Rohde & Schwarz	1 year	2022-03-25
2	Bluetooth Tester	CBT	100315	Rohde & Schwarz	1 year	2021-12-16
3	LISN	ENV216	101459	R&S	1 year	2022-03-16
4	Test Receiver	ESCI	100766	R&S	1 year	2022-03-09
5	Shielding Room	S81	/	ETS-Lindgren	/	/

## Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2022-02-23
2	BiLog Antenna	VULB9163	9163-483	Schwarzbeck	1 year	2021-08-27
3	Antenna	3115	6914	ETS-Lindgren	1 year	2022-02-03
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	1 year	2021-08-05
5	Bluetooth Tester	CBT	101042	Rohde & Schwarz	1 year	2022-01-03
6	Vector Signal Analyzer	FSV40	101047	R&S	1 year	2022-05-17





## 7. Measurement Uncertainty

## 7.1. Peak Output Power - Conducted

## **Measurement Uncertainty:**

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

## 7.2. Frequency Band Edges - Conducted

## **Measurement Uncertainty:**

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

## 7.3. Frequency Band Edges - Radiated

## **Measurement Uncertainty:**

Measurement Uncertainty (k=2)	
-------------------------------	--

## 7.4. Transmitter Spurious Emission - Conducted

## **Measurement Uncertainty:**

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

## 7.5. Transmitter Spurious Emission - Radiated

#### **Measurement Uncertainty:**

Frequency Range	Uncertainty(dBm) (k=2)
9kHz-30MHz	/
30MHz ≤ f ≤ 1GHz	5.16
1GHz ≤ f ≤18GHz	5.44
18GHz ≤ f ≤40GHz	5.28

## 7.6. Time of Occupancy (Dwell Time)

## **Measurement Uncertainty:**

Measurement Uncertainty (k=2)	0.88ms
-------------------------------	--------





## 7.7. 20dB Bandwidth

## **Measurement Uncertainty:**

## 7.8. Carrier Frequency Separation

## **Measurement Uncertainty:**

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

## 7.9. AC Powerline Conducted Emission

## **Measurement Uncertainty:**

Measurement Uncertainty (k=2)	3.10dB
-------------------------------	--------





# **ANNEX A: EUT parameters**

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.






## **ANNEX B: Detailed Test Results**

#### **B.1. Measurement Method**

#### **B.1.1. Conducted Measurements**

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



#### **B.1.2. Radiated Emission Measurements**


The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

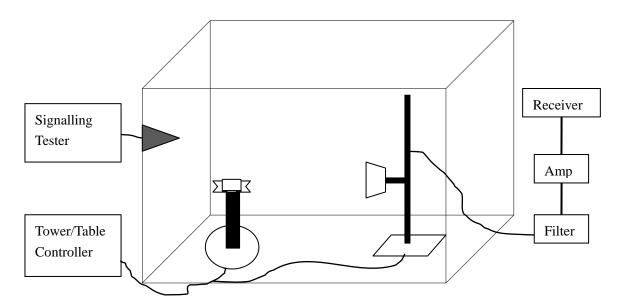





## **B.2. Peak Output Power**

## **B.2.1. Peak Output Power - Conducted**

Method of Measurement: See ANSI C63.10-clause 7.8.5

a) Use the following spectrum analyzer settings:

Span: 6MHzRBW: 3MHzVBW: 3MHz

Sweep time: 2.5msDetector function: peak

• Trace: max hold

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power.

#### **Measurement Limit:**

Standard	Limits		
FCC Dort 15 247 (b)(1)	Bandwidth≤1MHz	30dBm (1W)	
FCC Part 15.247 (b)(1)	Bandwidth > 1MHz	21dBm (125mW)	

## **Spot check Measurement Results:**

#### For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.86	8.13	8.87	Р

#### For π/4 DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.07	7.54	8.13	Р

#### For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.30	7.21	8.28	Р

**Conclusion: PASS** 





## **Reference Measurement Results from basic model:**

## For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	9.54	8.56	9.54	Р

#### For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.41	7.71	8.92	Р

## For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	8.73	7.79	8.92	Р

**Conclusion: PASS** 





## B.2.2. E.I.R.P.

#### The radiated E.I.R.P. is listed below:

Antenna gain = -0.80dBi

## **Spot check Measurement Results:**

#### For GFSK

Channel	Ch 0	Ch 39	Ch 78	Conclusion
	2402 MHz	2441 MHz	2480 MHz	
E.I.R.P (dBm)	8.06	7.33	8.07	Р

## Forπ/4 DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	7.27	6.74	7.33	Р

#### For 8DPSK

Channel	Ch 0	Ch 39	Ch 78	Conclusion
	2402 MHz	2441 MHz	2480 MHz	Conclusion
E.I.R.P (dBm)	7.50	6.41	7.48	Р

Note: E.I.R.P. are calculated with the antenna gain.

**Conclusion: PASS** 

#### **Reference Measurement Results from basic model:**

#### For GFSK

Channel	Ch 0	Ch 39	Ch 78	Canalusian
	2402 MHz	2441 MHz	2480 MHz	Conclusion
E.I.R.P (dBm)	8.74	7.76	8.74	Р

## Forπ/4 DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	7.61	6.91	8.12	Р

#### For 8DPSK

Channel	Ch 0	Ch 39	Ch 78	Conducion
	2402 MHz	2441 MHz	2480 MHz	Conclusion
E.I.R.P (dBm)	7.93	6.99	8.12	Р

Note: E.I.R.P. are calculated with the antenna gain.

**Conclusion: PASS** 





## **B.3. Frequency Band Edges – Conducted**

#### Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- Span: 10 MHz

Resolution Bandwidth: 100 kHzVideo Bandwidth: 300 kHz

Sweep Time:AutoDetector: PeakTrace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

#### **Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

#### **Measurement Result:**

#### For GFSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.1	-60.41	Р
0	Hopping ON	Fig.2	-64.45	Р
70	Hopping OFF	Fig.3	-65.59	Р
78	Hopping ON	Fig.4	-65.82	Р

#### For π/4 DQPSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.5	-63.11	Р
U	Hopping ON	Fig.6	-66.71	Р
70	Hopping OFF	Fig.7	-66.52	Р
78	Hopping ON	Fig.8	-65.82	Р

#### For 8DPSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.9	-61.77	Р
U	Hopping ON	Fig.10	-66.04	Р
78	Hopping OFF	Fig.11	-66.40	Р





Hopping ON	Fig.12	-66.16	Р
------------	--------	--------	---

Conclusion: PASS
Test graphs as below

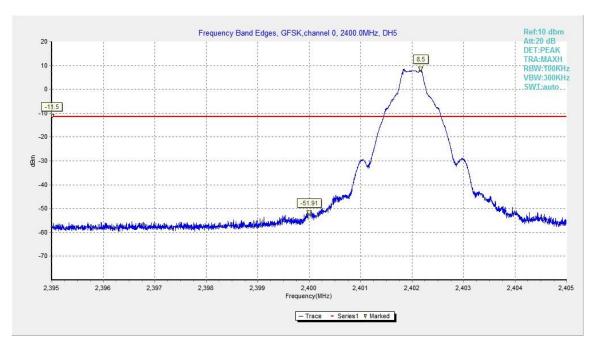


Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

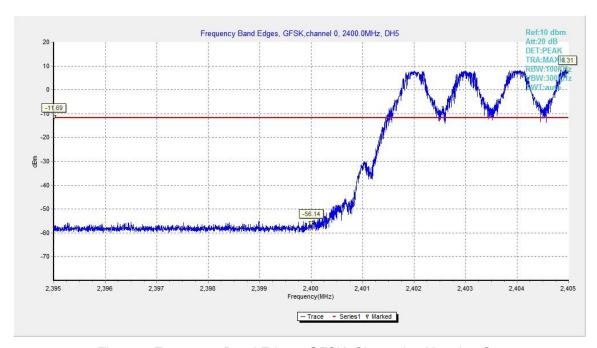


Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On





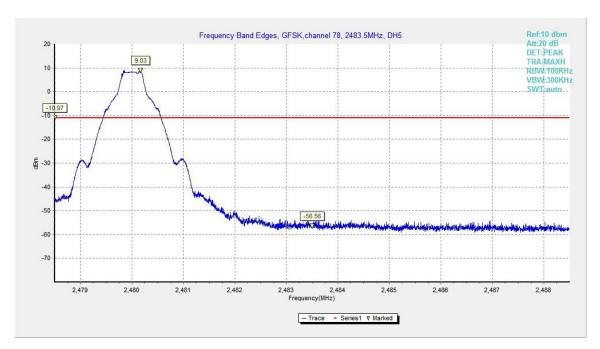


Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

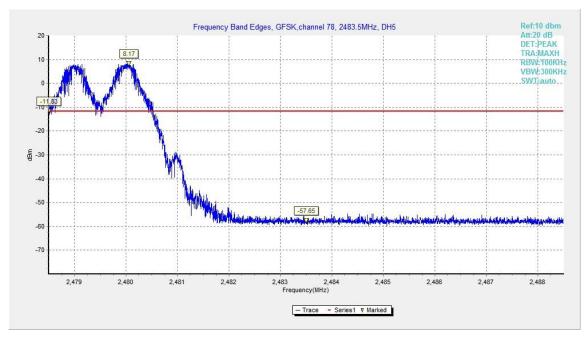


Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On





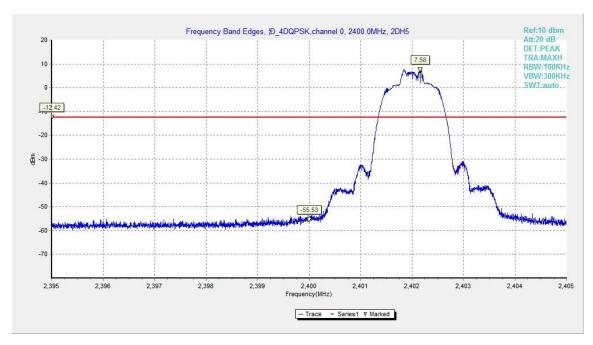


Fig.5. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping Off

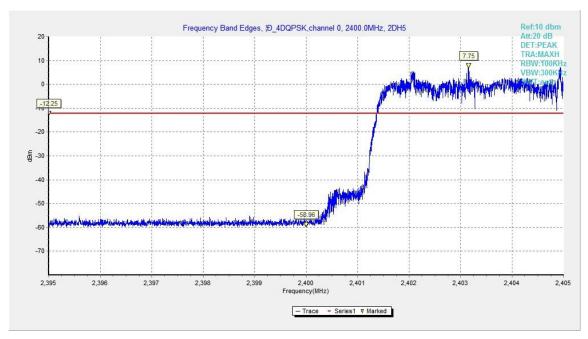


Fig.6. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping On





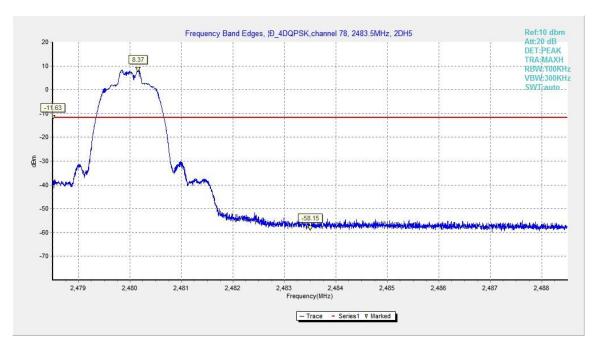


Fig.7. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping Off

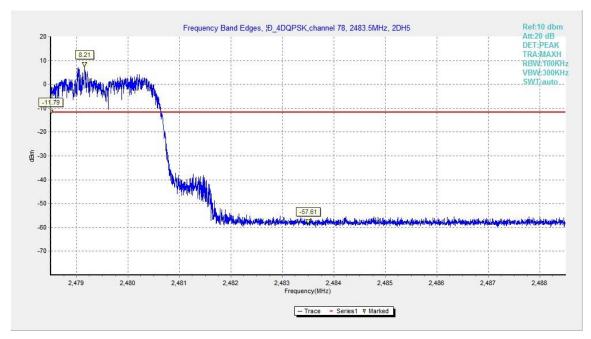


Fig.8. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping On





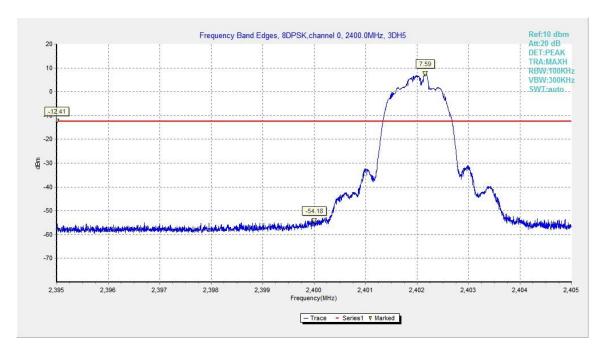


Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

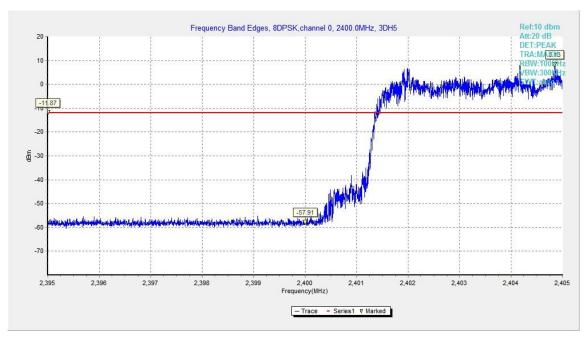


Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On





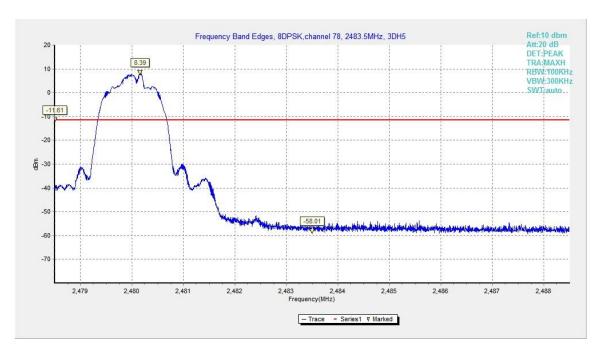


Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

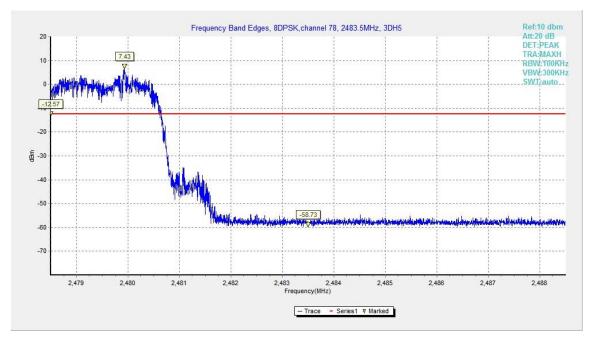


Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On





## **B.4. Frequency Band Edges – Radiated**

# Method of Measurement: See ANSI C63.10-2013-clause 6.4 &6.5 & 6.6 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

#### Limit in restricted band:

Frequency (MHz)	Field strength(µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission	Field strength(uV/m)	Field strength(dBuV/m)
(MHz)		
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

## Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m and the table height shall be 1.5 m.

The EUT and transmitting antenna shall be centered on the turntable.

#### **Test Procedure**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### The receiver references:

Frequency of emission	RBW/VBW	Sweep Time(s)
(MHz)		
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20





## EUT ID: UT30a

#### **Measurement Results:**

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.38GHz ~2.45GHz	Fig.13	Р
Gran	78	2.45GHz ~2.5GHz	Fig.14	Р

Mode	Channel	Frequency Range	Test Results	Conclusion
π/4 DQPSK	0	2.38GHz ~2.43GHz	Fig.15	Р
II/4 DQPSK	78	2.45GHz ~2.5GHz	Fig.16	Р

Mode	Channel	Frequency Range	Test Results	Conclusion
8DPSK	0	2.38GHz ~2.45GHz	Fig.17	Р
ODPSK	78	2.45GHz ~2.5GHz	Fig.18	Р

**Conclusion: PASS** 

## Test graphs as below

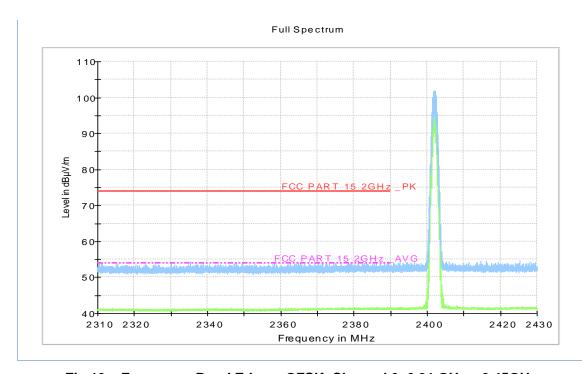


Fig.13. Frequency Band Edges: GFSK, Channel 0, 2.31 GHz – 2.45GHz





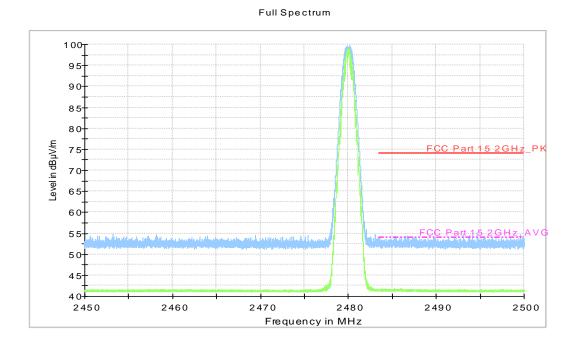


Fig.14. Frequency Band Edges: GFSK, Channel 78, ch11, 2.45 GHz - 2.50GHz

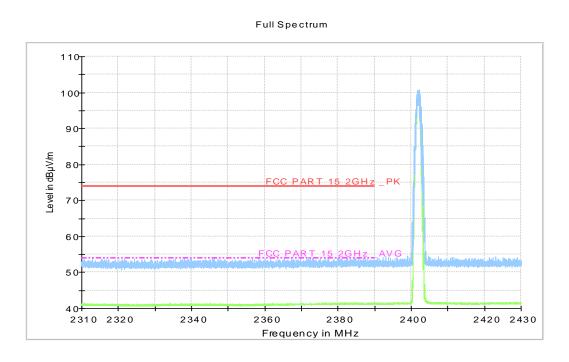


Fig.15. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, 2.31 GHz - 2.45GHz





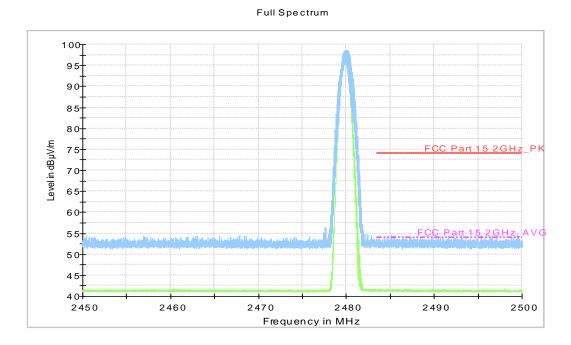


Fig.16. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, 2.45 GHz - 2.50GHz

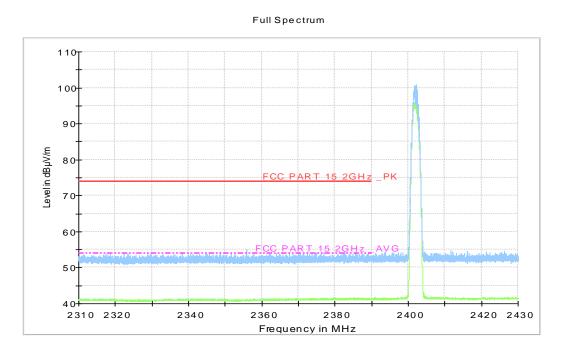


Fig.17. Frequency Band Edges: 8DPSK, Channel 0, 2.31 GHz - 2.45GHz





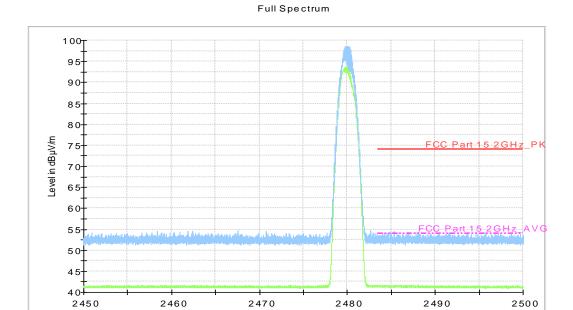


Fig.18. Frequency Band Edges: 8DPSK, Channel 78, 2.45 GHz - 2.50GHz

Frequency in MHz





## **B.5. Transmitter Spurious Emission - Conducted**

#### Method of Measurement: See ANSI C63.10-clause 7.8.8

Measurement Procedure - Reference Level

- 1. Set the RBW = 100 kHz.
- 2. Set the VBW = 300 kHz.
- 3. Set the span to 5-30 % greater than the EBW.
- 4. Detector = peak.
- 5. Sweep time = auto couple.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

- 1. Set RBW = 100 kHz.
- 2. Set VBW = 300 kHz.
- 3. Set span to encompass the spectrum to be examined.
- 4. Detector = peak.
- 5. Trace Mode = max hold.
- 6. Sweep = auto couple.
- 7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

#### **Measurement Limit:**

Standard	Limit
ECC 47 CED Dort 15 247 (d)	20dB below peak output power in 100 kHz
FCC 47 CFR Part 15.247 (d)	bandwidth

#### **Measurement Results:**

#### For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.19	Р





2402 MHz	30 MHz ~ 1 GHz	Fig.20	Р
	1 GHz ~ 3 GHz	Fig.21	Р
	3 GHz ~ 10 GHz	Fig.22	Р
	10 GHz ~ 26 GHz	Fig.23	Р
	Center Frequency	Fig.24	Р
Ch 39	30 MHz ~ 1 GHz	Fig.25	Р
2441 MHz	1 GHz ~ 3 GHz	Fig.26	Р
	3 GHz ~ 10 GHz	Fig.27	Р
	10 GHz ~ 26 GHz	Fig.28	Р
	Center Frequency	Fig.29	Р
Ch 70	30 MHz ~ 1 GHz	Fig.30	Р
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.31	Р
	3 GHz ~ 10 GHz	Fig.32	Р
	10 GHz ~ 26 GHz	Fig.33	Р

## For $\pi/4$ DQPSK

Channel	Frequency Range Test Results		Conclusion
	Center Frequency	Fig.34	Р
Ch O	30 MHz ~ 1 GHz	Fig.35	Р
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.36	Р
2 102 11112	3 GHz ~ 10 GHz	Fig.37	Р
	10 GHz ~ 26 GHz	Fig.38	Р
	Center Frequency	Fig.39	Р
Ch 20	30 MHz ~ 1 GHz	Fig.40	Р
Ch 39 2441 MHz	1 GHz ~ 3 GHz	Fig.41	Р
	3 GHz ~ 10 GHz	Fig.42	Р
	10 GHz ~ 26 GHz	Fig.43	Р
	Center Frequency	Fig.44	Р
Ch 70	30 MHz ~ 1 GHz	Fig.45	Р
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.46	Р
2 100 1111 12	3 GHz ~ 10 GHz	Fig.47	Р
	10 GHz ~ 26 GHz	Fig.48	Р

## For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.49	Р
	30 MHz ~ 1 GHz	Fig.50	Р
	1 GHz ~ 3 GHz	Fig.51	Р
	3 GHz ~ 10 GHz	Fig.52	Р
	10 GHz ~ 26 GHz	Fig.53	Р





Ch 39 2441 MHz	Center Frequency	Fig.54	Р
	30 MHz ~ 1 GHz	Fig.55	Р
	1 GHz ~ 3 GHz	Fig.56	Р
	3 GHz ~ 10 GHz	Fig.57	Р
	10 GHz ~ 26 GHz	Fig.58	Р
Ch 78 2480 MHz	Center Frequency	Fig.59	Р
	30 MHz ~ 1 GHz	Fig.60	Р
	1 GHz ~ 3 GHz	Fig.61	Р
	3 GHz ~ 10 GHz	Fig.62	Р
	10 GHz ~ 26 GHz	Fig.63	Р

Conclusion: PASS
Test graphs as below

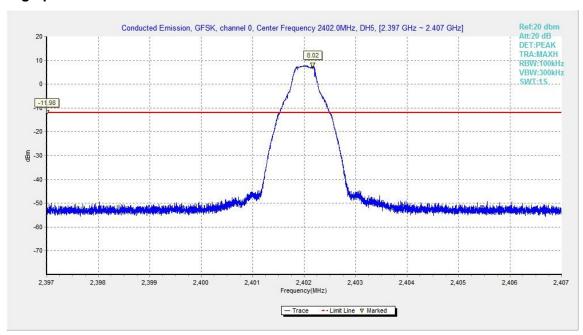


Fig.19. Conducted spurious emission: GFSK, Channel 0,2402MHz





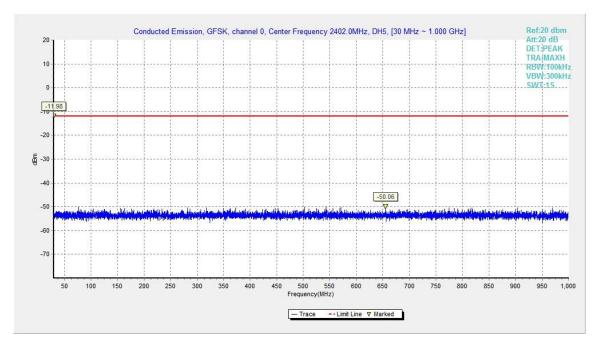


Fig.20. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

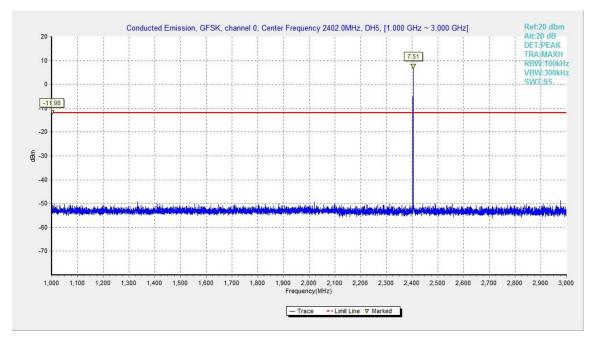


Fig.21. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz





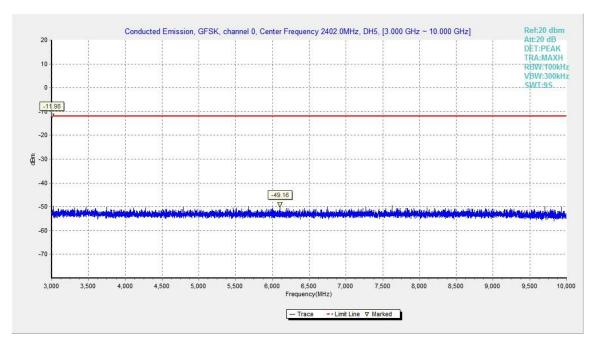


Fig.22. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

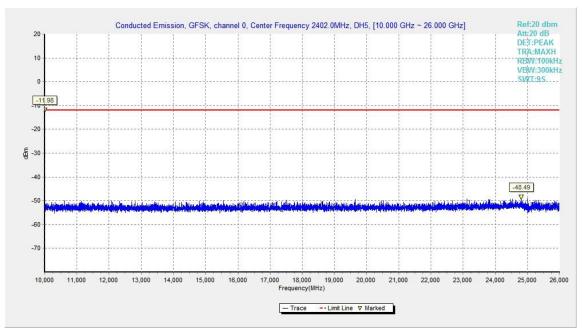


Fig.23. Conducted spurious emission: GFSK, Channel 0,10GHz - 26GHz





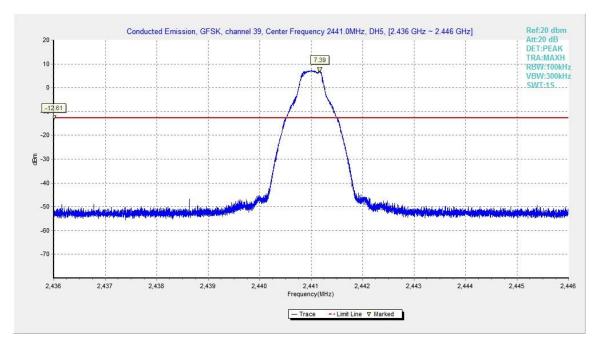


Fig.24. Conducted spurious emission: GFSK, Channel 39, 2441MHz

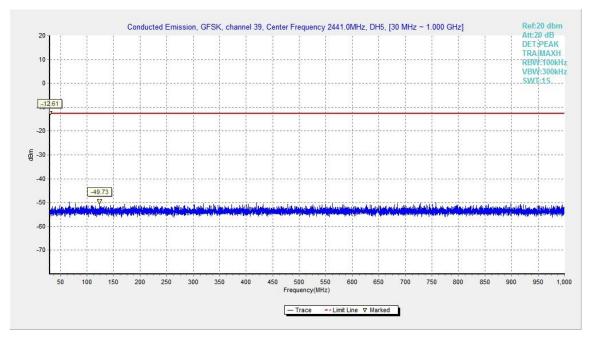


Fig.25. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz





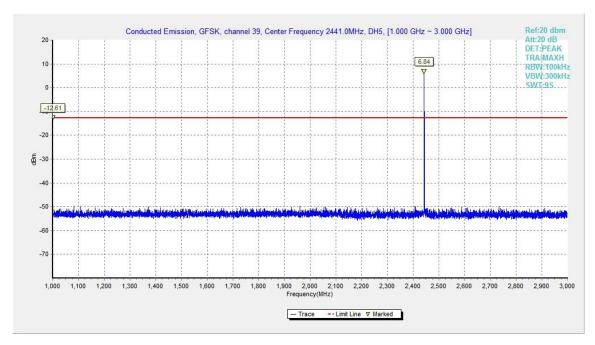


Fig.26. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

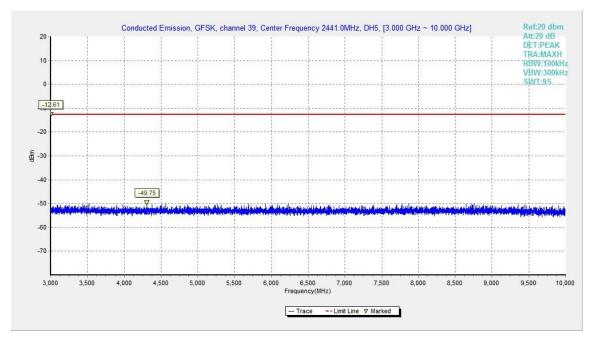


Fig.27. Conducted spurious emission: GFSK, Channel 39, 3GHz - 10GHz





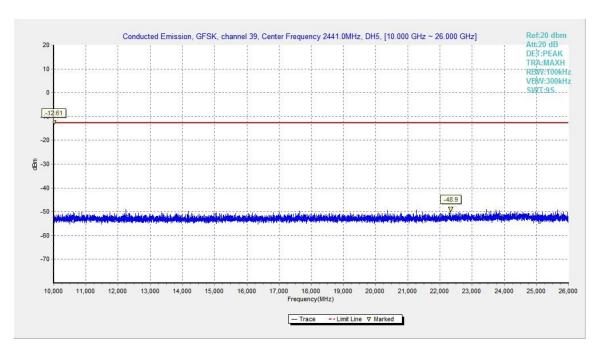


Fig.28. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

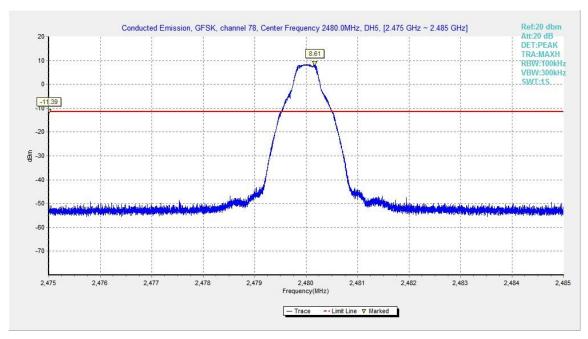


Fig.29. Conducted spurious emission: GFSK, Channel 78, 2480MHz





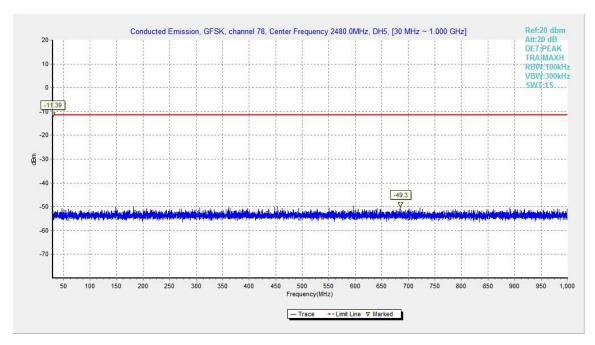


Fig.30. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

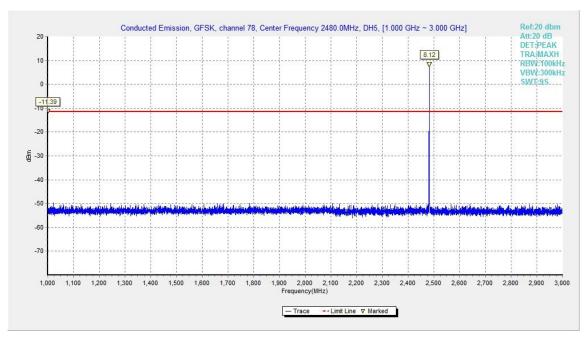


Fig.31. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz





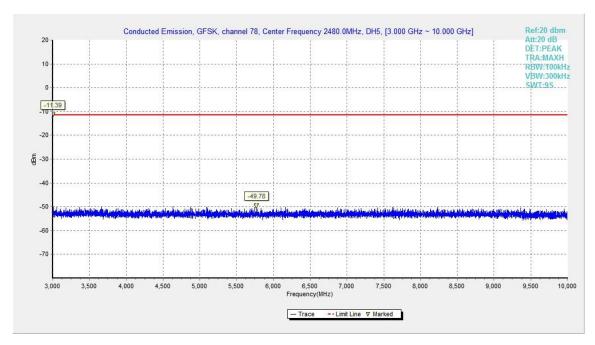


Fig.32. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

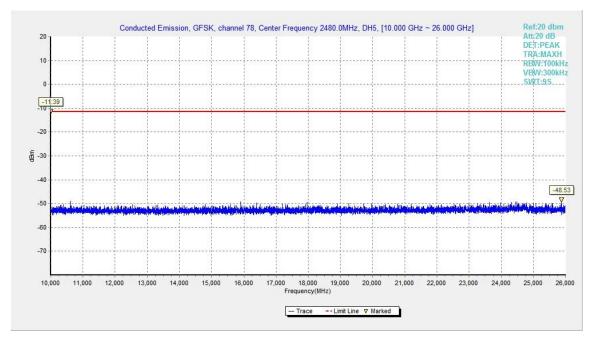


Fig.33. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz





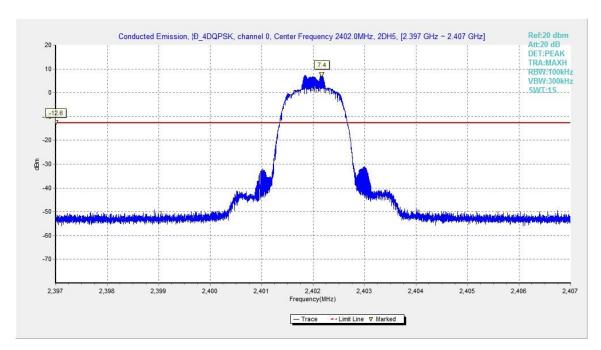


Fig.34. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0,2402MHz

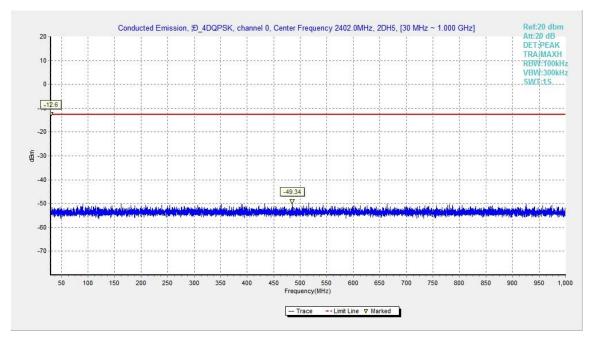


Fig.35. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 30MHz - 1GHz





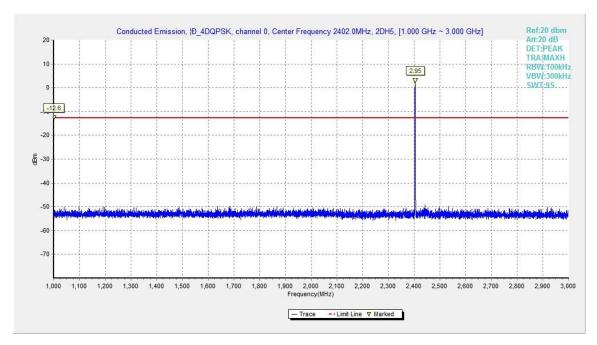


Fig.36. Conducted spurious emission: π/4 DQPSK, Channel 0, 1GHz - 3GHz

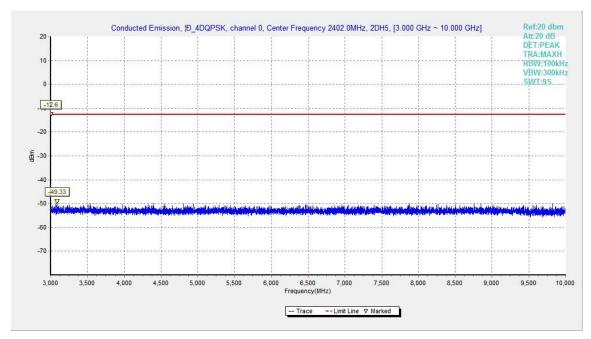


Fig.37. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 3GHz - 10GHz





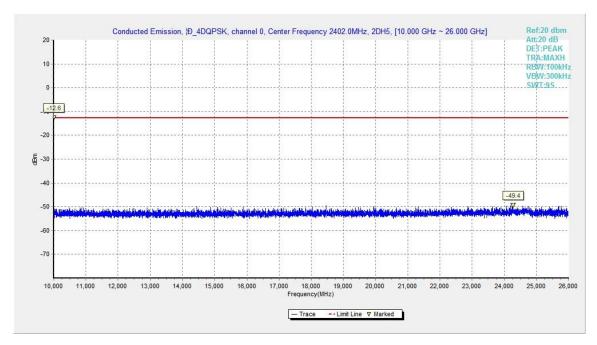


Fig.38. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0,10GHz - 26GHz

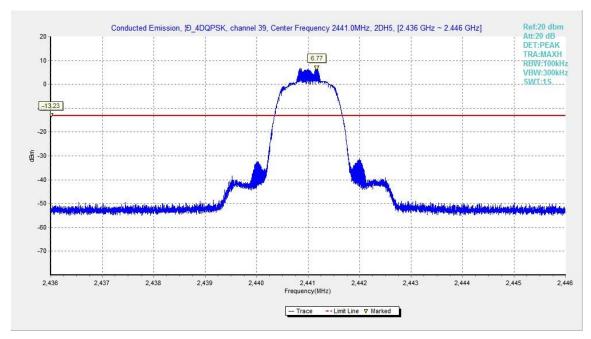


Fig.39. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 2441MHz





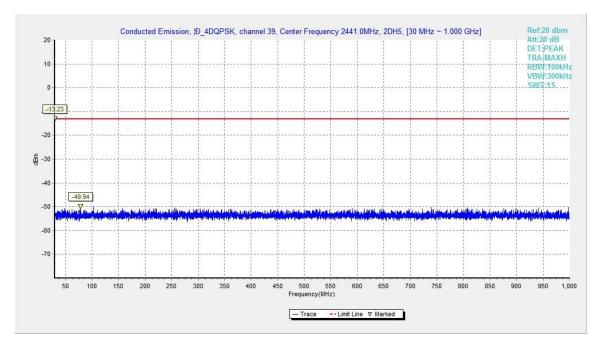


Fig.40. Conducted spurious emission: π/4 DQPSK, Channel 39, 30MHz - 1GHz

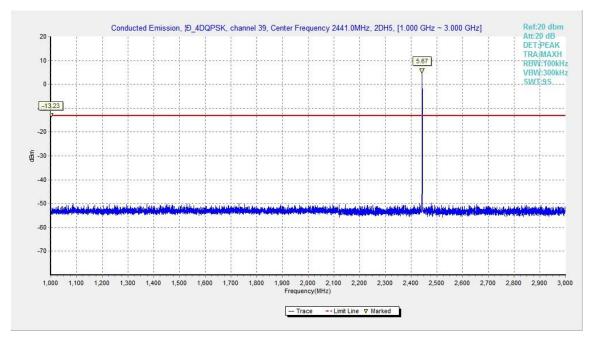


Fig.41. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 1GHz - 3GHz





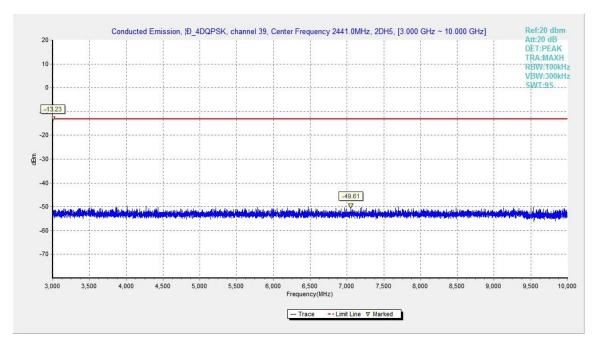


Fig.42. Conducted spurious emission: π/4 DQPSK, Channel 39, 3GHz - 10GHz

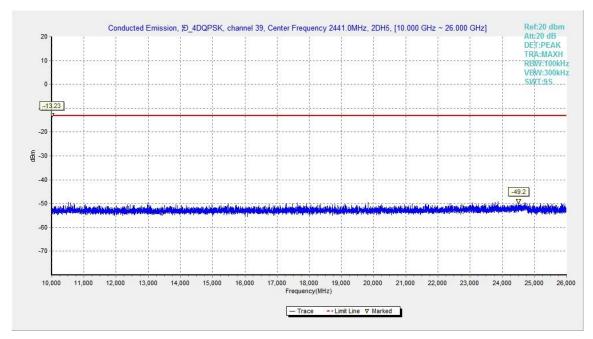


Fig.43. Conducted spurious emission: π/4 DQPSK, Channel 39, 10GHz – 26GHz





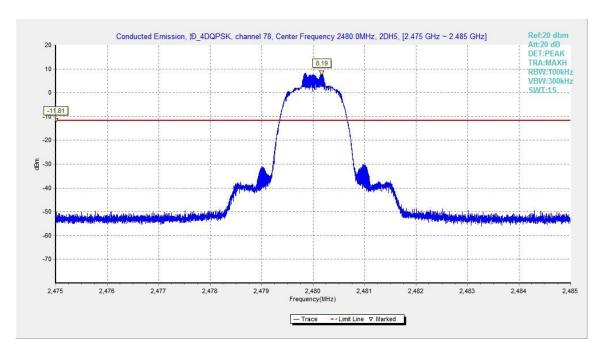


Fig.44. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 2480MHz

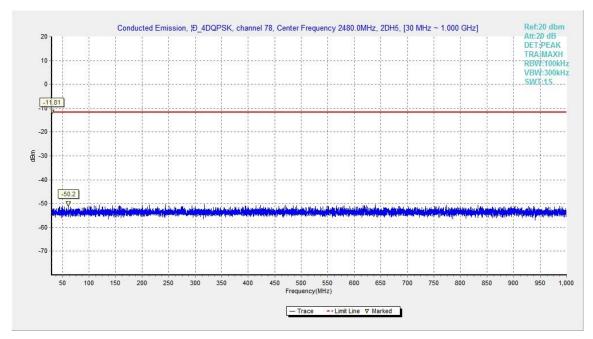


Fig.45. Conducted spurious emission: π/4 DQPSK, Channel 78, 30MHz - 1GHz





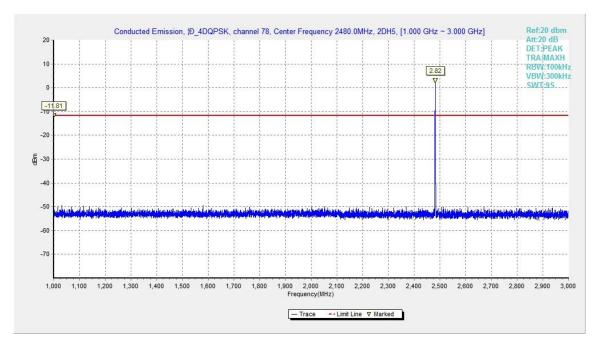


Fig.46. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 1GHz - 3GHz

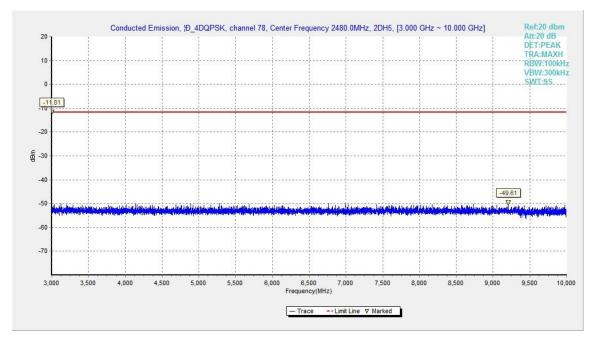


Fig.47. Conducted spurious emission: π/4 DQPSK, Channel 78, 3GHz - 10GHz





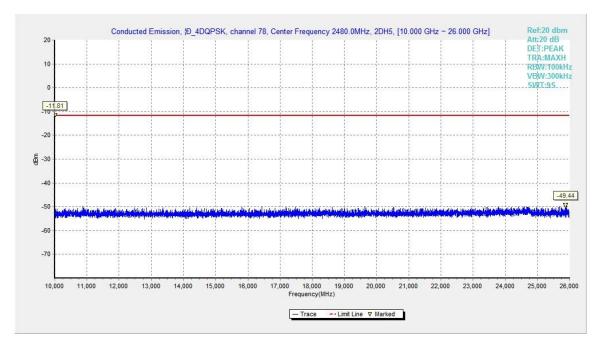


Fig.48. Conducted spurious emission: π/4 DQPSK, Channel 78, 10GHz - 26GHz

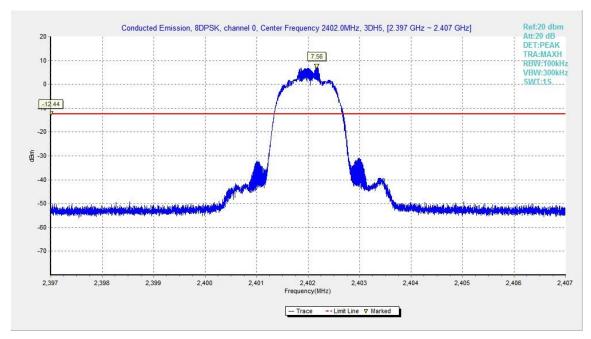


Fig.49. Conducted spurious emission: 8DPSK, Channel 0,2402MHz





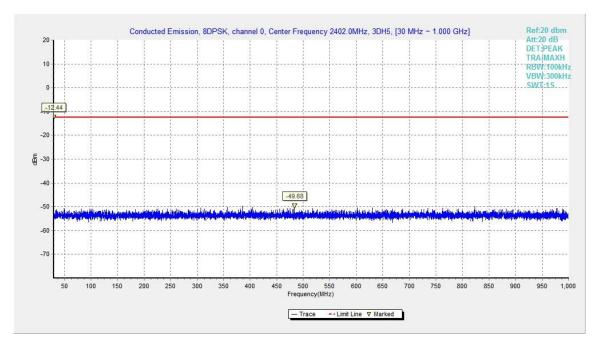


Fig.50. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

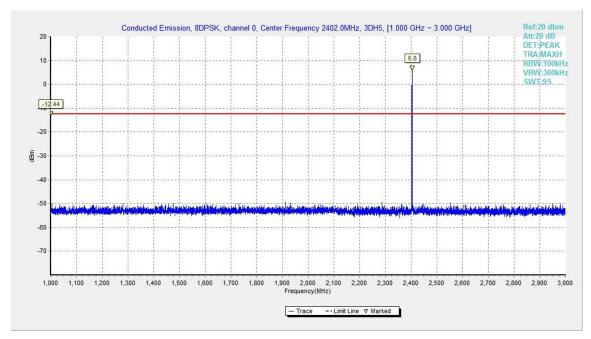


Fig.51. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz





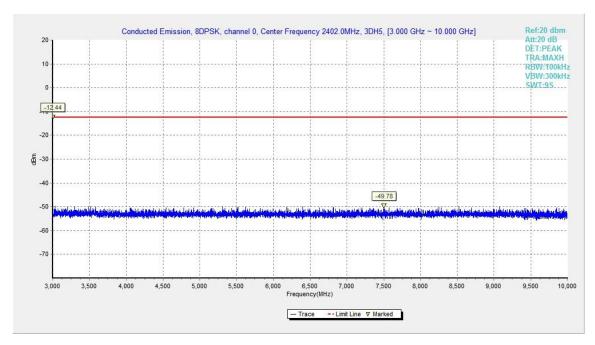


Fig.52. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

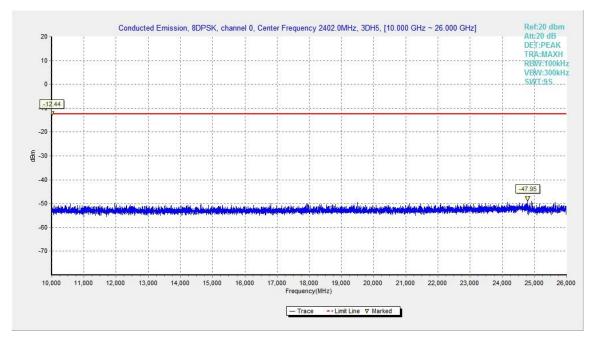


Fig.53. Conducted spurious emission: 8DPSK, Channel 0,10GHz - 26GHz