

Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

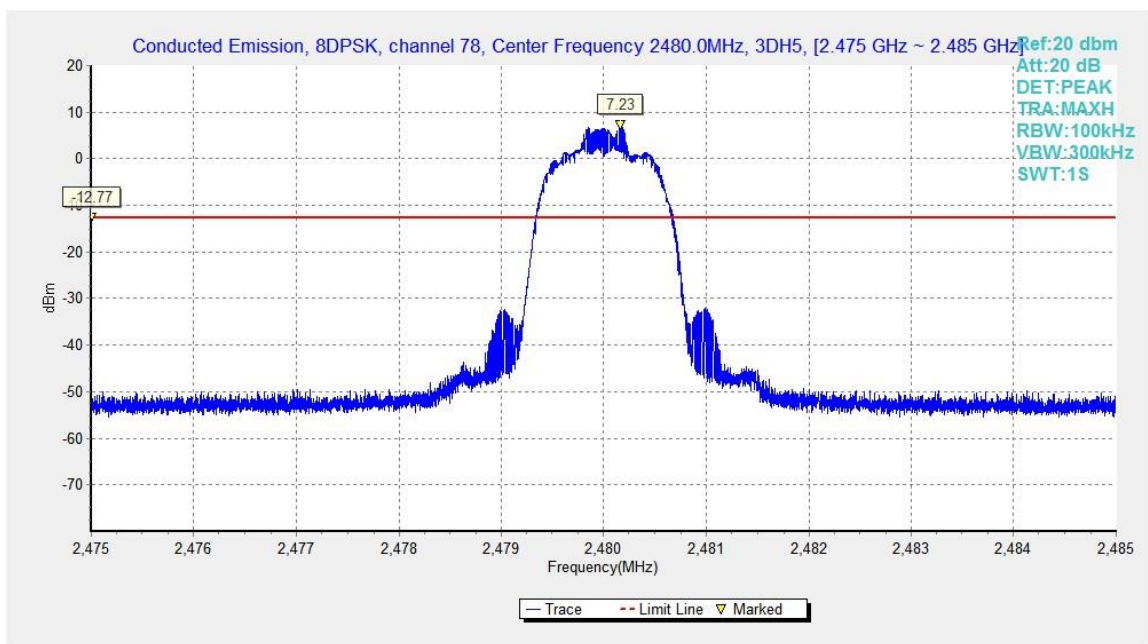


Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

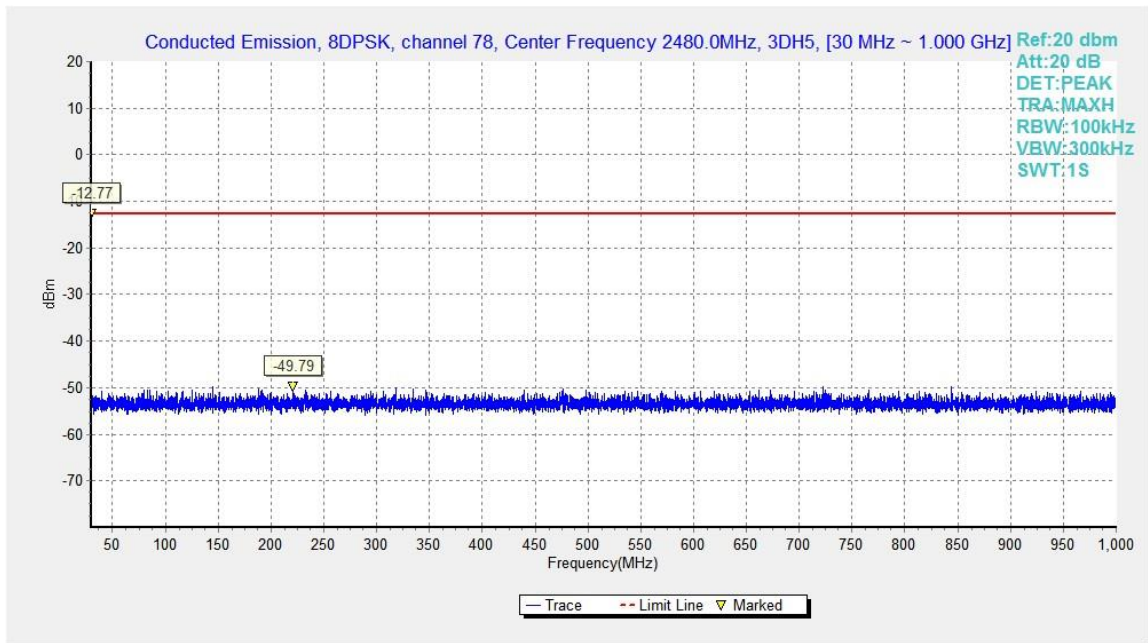


Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

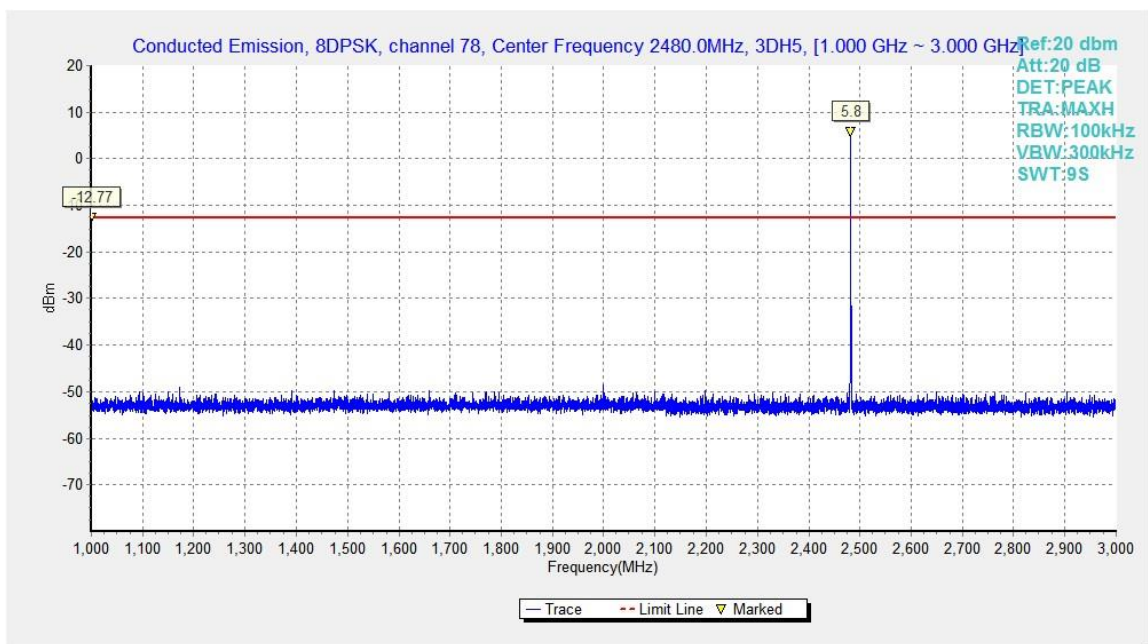


Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

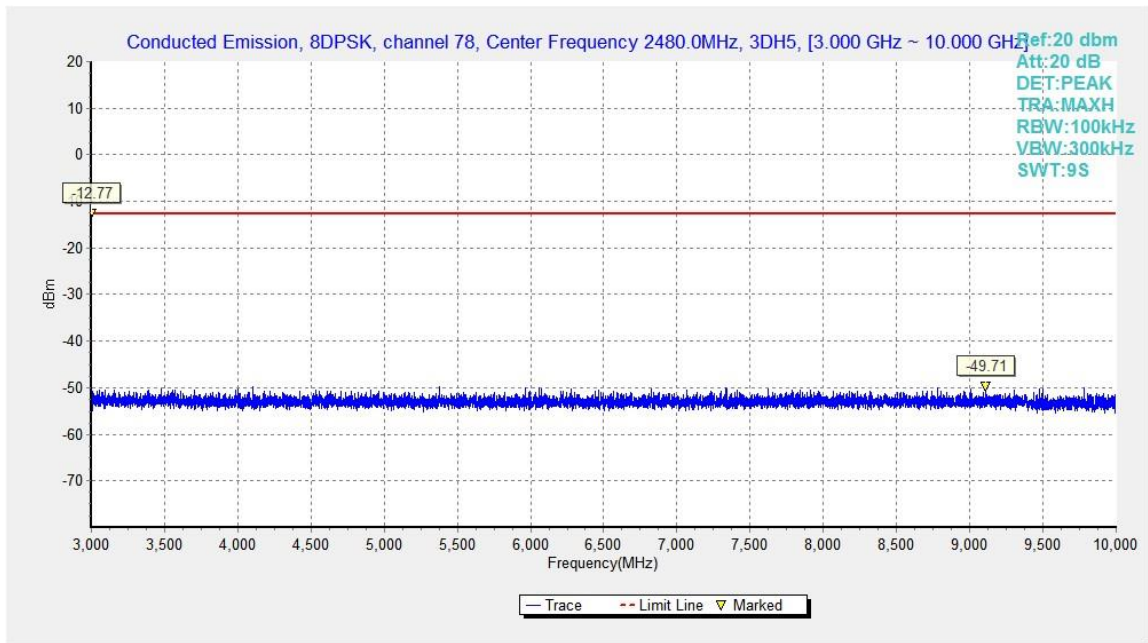


Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

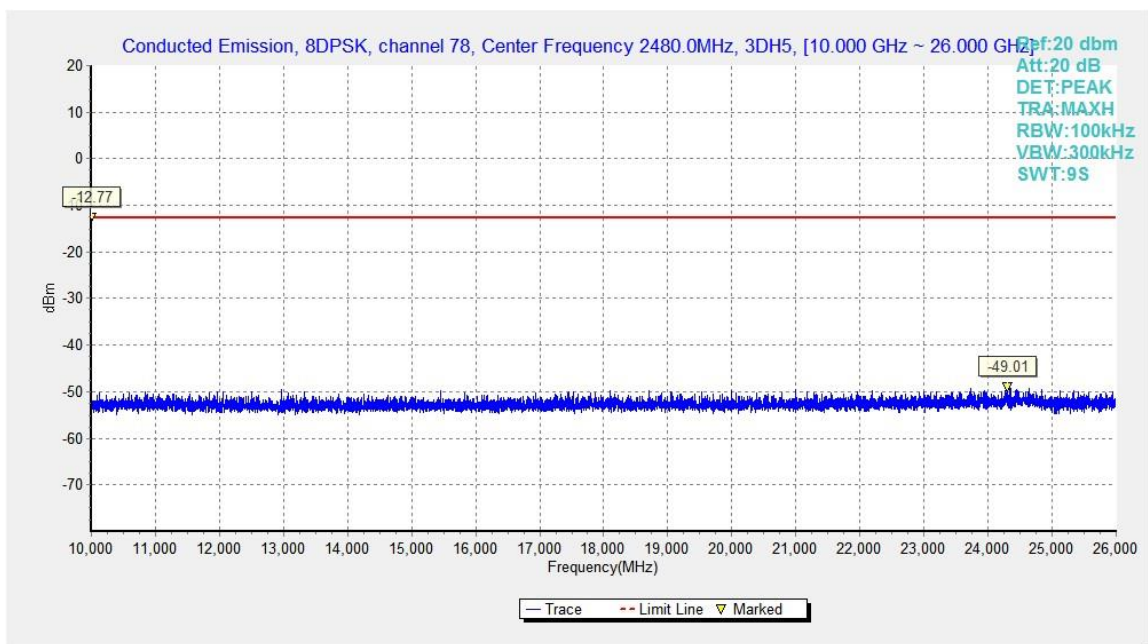


Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

## B.5. Radiated Unwanted Emission

### Limits

#### Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).


#### Limit in restricted band

Frequency (MHz)	Field strength( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30


Frequency of emission (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor.


### Test setup

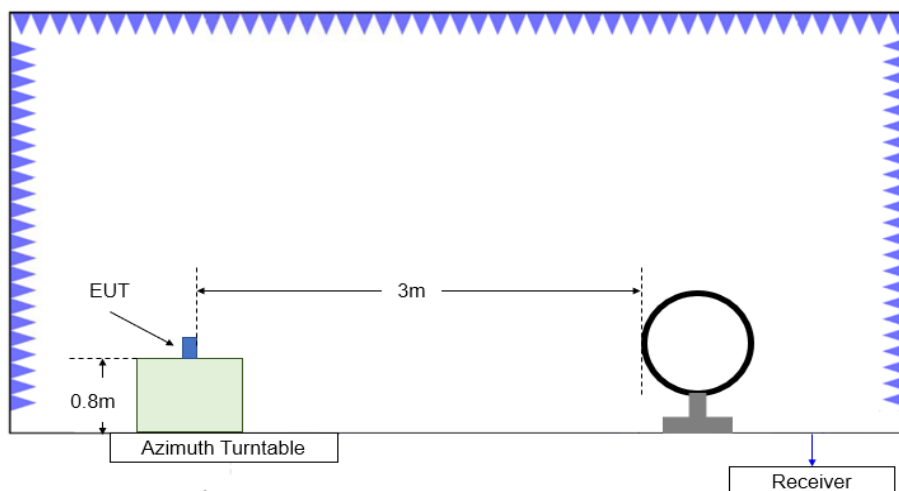

**Figure B.5.1. Test Site Diagram (9kHz-30MHz)**

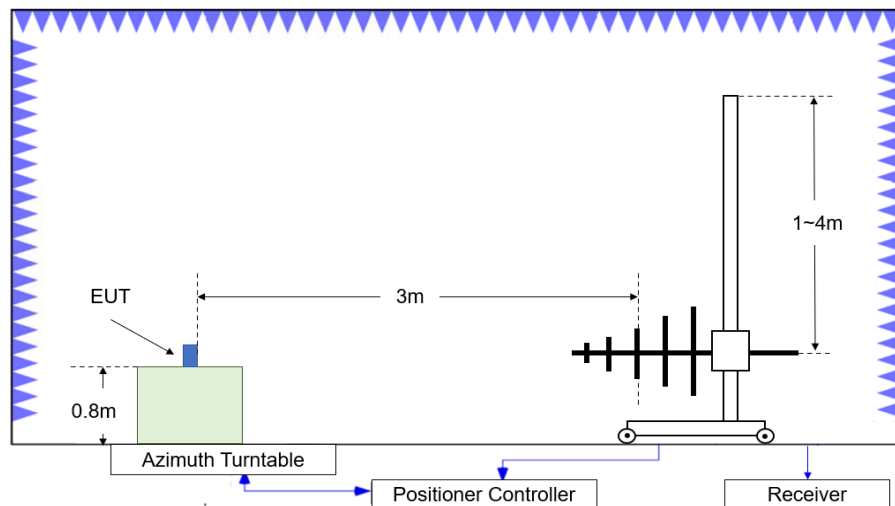

**Figure B.5.2. Test Site Diagram (30MHz-1GHz)**

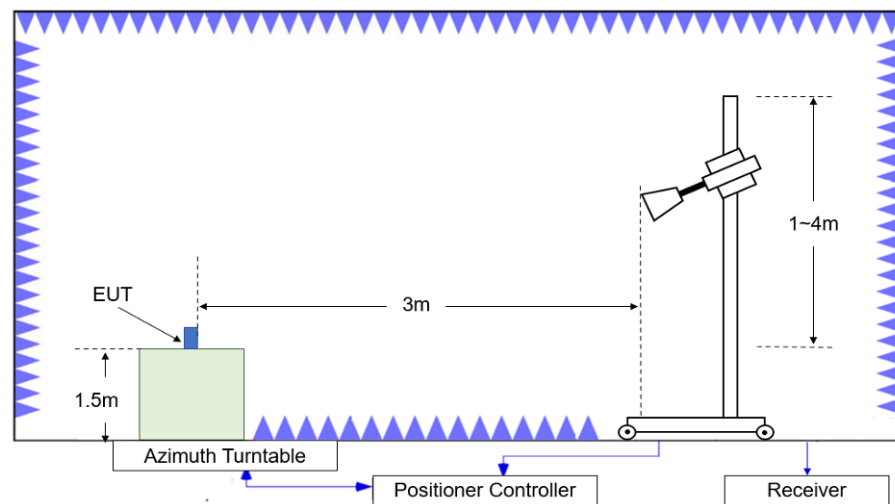

**Figure B.5.3. Test Site Diagram (1GHz-40GHz)**

### Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10.

#### Test setting

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-3000	1MHz/3MHz	15
3000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

### Sample Calculation

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

**Test note**

1. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
2. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
3. Measurement frequencies were performed from 9 kHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.

**Test Result**
**EUT ID: UT11a**
**Peak Measurement results**
**GFSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2383.290	61.01	48.29	31.70	-18.98	74.00	12.99	V
2386.300	60.53	48.32	31.72	-19.50	74.00	13.47	H
4803.500	47.62	-33.17	34.10	46.70	74.00	26.38	V
7206.000	44.71	-31.50	35.70	40.51	74.00	29.29	V
9608.000	45.35	-29.80	36.72	38.43	74.00	28.65	H
12010.000	47.81	-29.15	38.81	38.15	74.00	26.19	H

**GFSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2437.200	60.40	47.81	31.87	-19.28	74.00	13.60	V
2446.400	60.45	47.68	31.89	-19.13	74.00	13.55	H
4882.000	45.36	-33.44	34.10	44.71	74.00	28.64	V
7323.000	43.29	-31.75	35.75	39.30	74.00	30.71	V
7964.000	45.84	-30.14	35.90	40.07	74.00	28.16	H
12205.000	46.21	-29.06	38.99	36.27	74.00	27.79	H

**GFSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2492.075	62.38	46.18	32.32	-16.12	74.00	11.62	H
2494.200	61.83	46.05	32.34	-16.56	74.00	12.17	V
4960.500	48.02	-33.21	34.10	47.13	74.00	25.98	H
7440.000	43.07	-31.57	35.80	38.83	74.00	30.93	V
9920.000	44.45	-30.42	37.16	37.71	74.00	29.55	H
12400.000	46.62	-28.87	38.90	36.59	74.00	27.38	V

**$\pi/4$  DQPSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2371.180	60.63	48.11	31.63	-19.10	74.00	13.37	H
2374.960	60.42	48.17	31.65	-19.40	74.00	13.58	H
4803.500	45.17	-33.17	34.10	44.24	74.00	28.83	H
7206.000	45.55	-31.50	35.70	41.34	74.00	28.45	V
9608.000	44.94	-29.80	36.72	38.03	74.00	29.06	V
12010.000	47.60	-29.15	38.81	37.95	74.00	26.40	H

 **$\pi/4$  DQPSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2435.200	60.03	47.82	31.87	-19.66	74.00	13.97	V
2450.400	59.83	47.63	31.90	-19.70	74.00	14.17	V
4882.000	43.78	-33.44	34.10	43.12	74.00	30.22	H
7323.000	43.39	-31.75	35.75	39.40	74.00	30.61	V
9746.000	43.99	-29.95	36.89	37.05	74.00	30.01	H
12205.000	47.26	-29.06	38.99	37.32	74.00	26.74	H

 **$\pi/4$  DQPSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2484.925	62.24	46.52	32.25	-16.53	74.00	11.76	V
2485.525	61.56	46.50	32.26	-17.19	74.00	12.44	H
4959.500	45.54	-33.22	34.10	44.66	74.00	28.46	H
7440.000	43.39	-31.57	35.80	39.15	74.00	30.61	V
9920.000	44.23	-30.42	37.16	37.48	74.00	29.77	V
12400.000	46.27	-28.87	38.90	36.24	74.00	27.73	V

**8DPSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2369.430	60.96	48.10	31.62	-18.75	74.00	13.04	H
2384.900	60.92	48.30	31.71	-19.10	74.00	13.08	H
4804.000	44.64	-33.17	34.10	43.71	74.00	29.36	H
7206.000	44.23	-31.50	35.70	40.03	74.00	29.77	V
9608.000	45.34	-29.80	36.72	38.43	74.00	28.66	H
12010.000	47.33	-29.15	38.81	37.67	74.00	26.67	H

**8DPSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2431.200	60.21	47.86	31.86	-19.51	74.00	13.79	V
2449.600	60.15	47.63	31.90	-19.38	74.00	13.85	H
4882.500	44.04	-33.44	34.10	43.38	74.00	29.96	H
7323.000	42.65	-31.75	35.75	38.66	74.00	31.35	V
9764.000	44.22	-30.38	36.93	37.67	74.00	29.78	H
12205.000	46.20	-29.06	38.99	36.26	74.00	27.80	V

**8DPSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2485.000	61.75	46.52	32.25	-17.02	74.00	12.25	V
2487.700	61.77	46.41	32.28	-16.92	74.00	12.23	V
4959.500	45.60	-33.22	34.10	44.72	74.00	28.40	H
7440.000	43.52	-31.57	35.80	39.29	74.00	30.48	V
9920.000	44.70	-30.42	37.16	37.96	74.00	29.30	H
12400.000	47.02	-28.87	38.90	36.99	74.00	26.98	V



**Average Measurement results**
**GFSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2365.200	46.28	48.17	31.59	-33.48	54.00	7.72	V
2375.400	46.40	48.18	31.65	-33.44	54.00	7.60	V
4804.000	42.23	-33.17	34.10	41.30	54.00	11.77	H
7206.000	32.01	-31.50	35.70	27.81	54.00	21.99	V
9608.000	34.01	-29.80	36.72	27.10	54.00	19.99	V
12010.000	35.86	-29.15	38.81	26.20	54.00	18.14	V

**GFSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2435.200	48.20	47.82	31.87	-31.49	54.00	5.80	V
2446.000	48.28	47.69	31.89	-31.30	54.00	5.72	V
4881.500	41.11	-33.44	34.10	40.45	54.00	12.89	H
7323.000	31.44	-31.75	35.75	27.45	54.00	22.56	V
9764.000	33.00	-30.38	36.93	26.45	54.00	21.00	V
12205.000	35.22	-29.06	38.99	25.28	54.00	18.78	H

**GFSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2485.400	48.86	46.50	32.26	-29.90	54.00	5.14	V
2486.600	48.84	46.45	32.27	-29.88	54.00	5.16	V
4959.500	43.56	-33.22	34.10	42.68	54.00	10.44	V
7440.000	31.05	-31.57	35.80	26.81	54.00	22.95	H
9920.000	32.40	-30.42	37.16	25.66	54.00	21.60	V
12400.000	34.82	-28.87	38.90	24.80	54.00	19.18	H

**$\pi/4$  DQPSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2374.000	46.29	48.15	31.64	-33.51	54.00	7.71	V
2383.400	46.38	48.29	31.70	-33.61	54.00	7.62	V
4803.500	37.48	-33.17	34.10	36.55	54.00	16.52	H
7206.000	31.75	-31.50	35.70	27.54	54.00	22.25	V
9608.000	33.92	-29.80	36.72	27.01	54.00	20.08	V
12010.000	35.79	-29.15	38.81	26.14	54.00	18.21	V

 **$\pi/4$  DQPSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2436.400	48.09	47.81	31.87	-31.60	54.00	5.91	V
2447.600	48.22	47.66	31.90	-31.34	54.00	5.78	V
4881.500	35.35	-33.44	34.10	34.69	54.00	18.65	V
7323.000	31.37	-31.75	35.75	27.38	54.00	22.63	V
9764.000	32.97	-30.38	36.93	26.42	54.00	21.03	V
12205.000	35.15	-29.06	38.99	25.21	54.00	18.85	V

 **$\pi/4$  DQPSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2487.200	48.89	46.43	32.27	-29.81	54.00	5.11	V
2491.800	48.94	46.20	32.32	-29.58	54.00	5.06	V
4959.500	37.95	-33.22	34.10	37.07	54.00	16.05	V
7440.000	30.99	-31.57	35.80	26.76	54.00	23.01	V
9920.000	32.34	-30.42	37.16	25.59	54.00	21.66	H
12400.000	34.69	-28.87	38.90	24.67	54.00	19.31	H

**8DPSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2380.000	46.38	48.25	31.68	-33.55	54.00	7.62	V
2385.200	46.45	48.31	31.71	-33.57	54.00	7.55	V
4803.500	37.49	-33.17	34.10	36.56	54.00	16.51	V
7206.000	31.78	-31.50	35.70	27.58	54.00	22.22	V
9608.000	33.82	-29.80	36.72	26.90	54.00	20.18	H
12010.000	35.68	-29.15	38.81	26.02	54.00	18.32	H

**8DPSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2434.600	48.13	47.83	31.87	-31.57	54.00	5.87	V
2447.200	48.28	47.67	31.89	-31.28	54.00	5.72	V
4882.000	35.23	-33.44	34.10	34.57	54.00	18.77	H
7323.000	31.25	-31.75	35.75	27.25	54.00	22.75	V
9764.000	32.86	-30.38	36.93	26.31	54.00	21.14	H
12205.000	35.11	-29.06	38.99	25.17	54.00	18.89	H

**8DPSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2545.000	48.98	42.44	32.58	-26.04	54.00	5.02	V
2569.000	48.99	39.90	32.56	-23.48	54.00	5.01	V
4959.500	37.93	-33.22	34.10	37.05	54.00	16.07	H
7440.000	30.89	-31.57	35.80	26.66	54.00	23.11	V
9920.000	32.18	-30.42	37.16	25.44	54.00	21.82	V
12400.000	34.70	-28.87	38.90	24.67	54.00	19.30	H

**Conclusion: Pass**

Note: the spurious emission above 18G is noise only and did not show on the report.

**Band edge compliance**


Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.31GHz ~2.43GHz	Fig.58	P
	78	2.45GHz ~2.5GHz	Fig.59	P

Mode	Channel	Frequency Range	Test Results	Conclusion
$\pi/4$ DQPSK	0	2.31GHz ~2.43GHz	Fig.60	P
	78	2.45GHz ~2.5GHz	Fig.61	P

Mode	Channel	Frequency Range	Test Results	Conclusion
8DPSK	0	2.31GHz ~2.43GHz	Fig.62	P
	78	2.45GHz ~2.5GHz	Fig.63	P

**Conclusion: PASS**

Test graphs as below

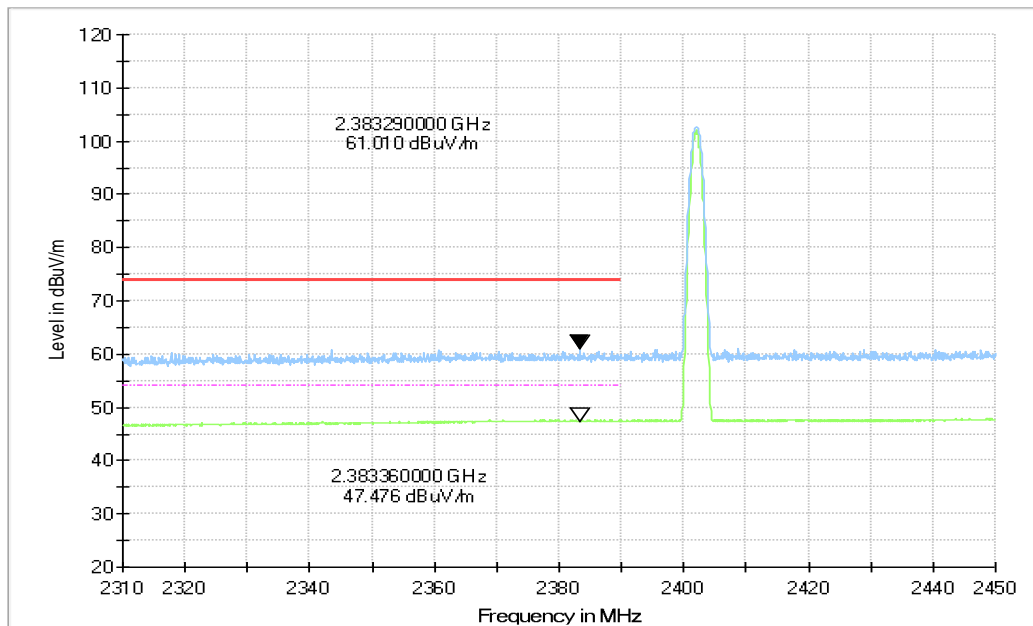

**Fig.58. Frequency Band Edges: GFSK, Channel 0, Hopping Off, 2.31 GHz – 2.45GHz**

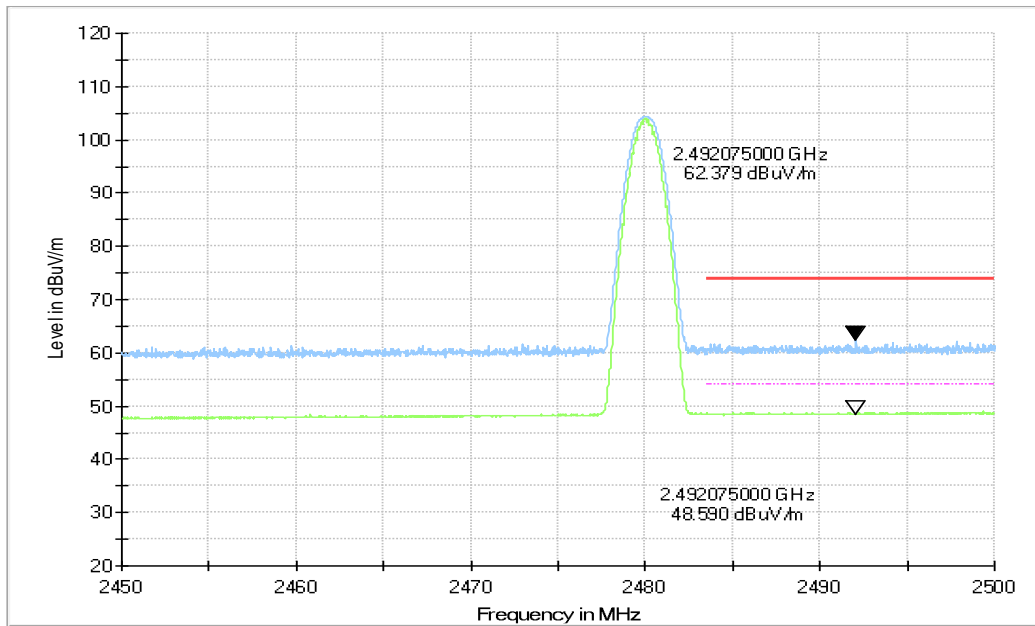


Fig.59. Frequency Band Edges: GFSK, Channel 78, Hopping Off, ch11, 2.45 GHz - 2.50GHz



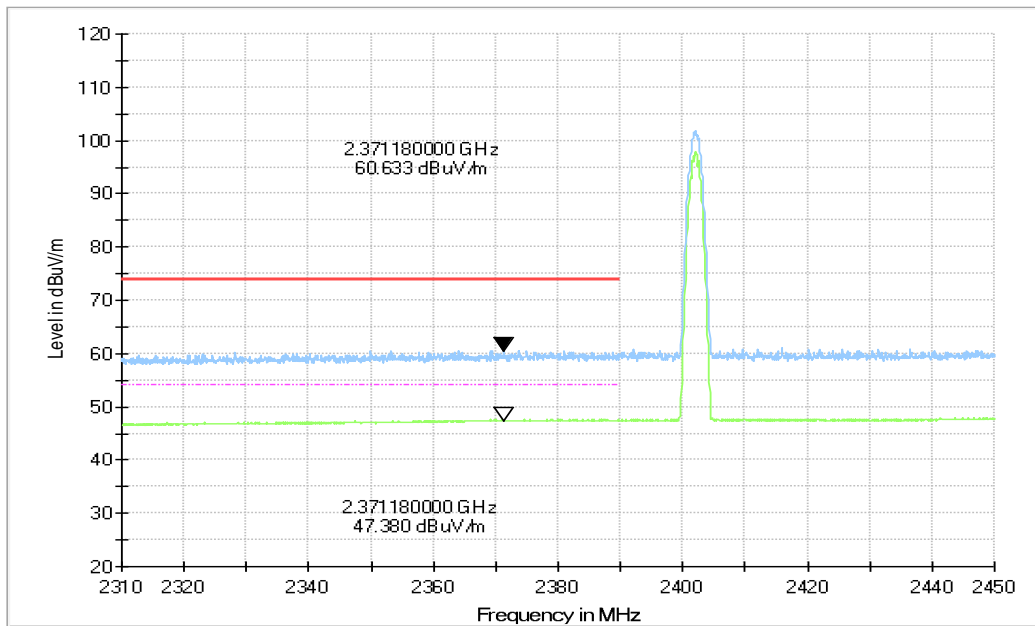



Fig.60. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping Off, 2.31 GHz - 2.45GHz

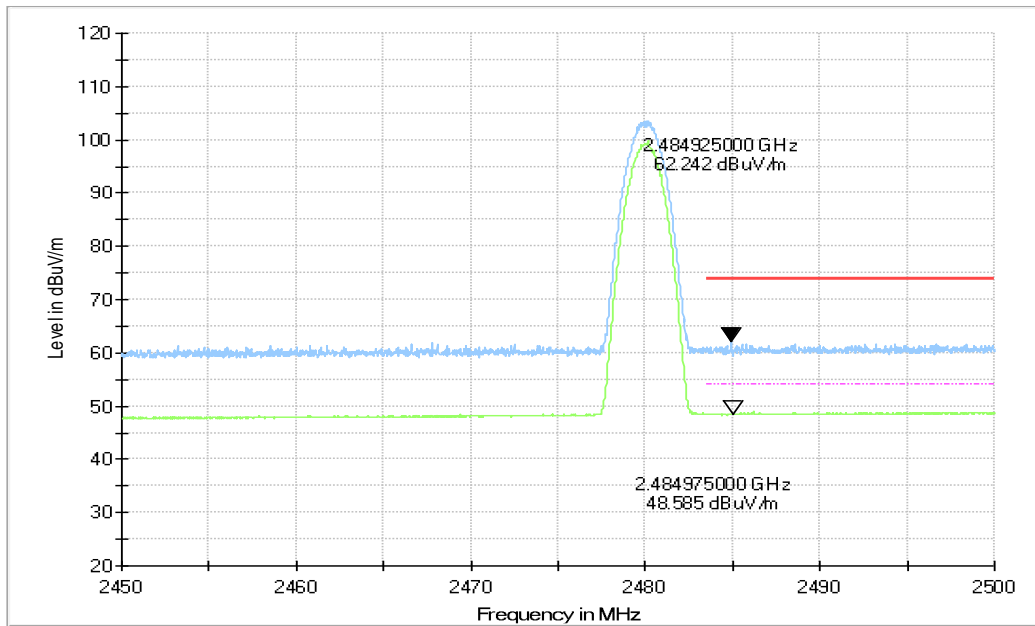

**Fig.61. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping Off, 2.45 GHz - 2.50GHz**

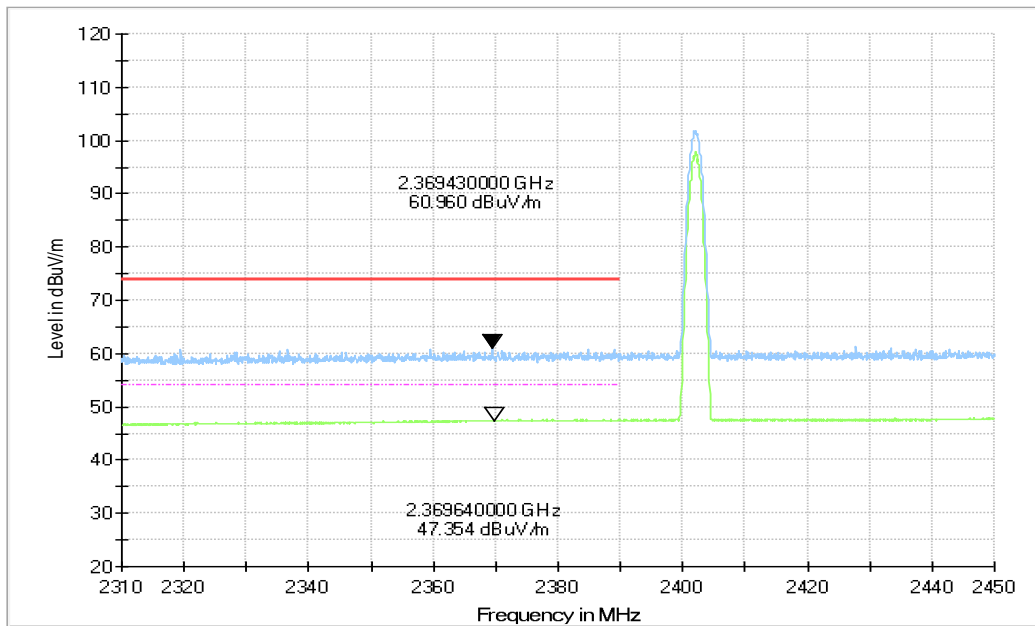

**Fig.62. Frequency Band Edges: 8DPSK, Channel 0, 2.31 GHz - 2.45GHz**

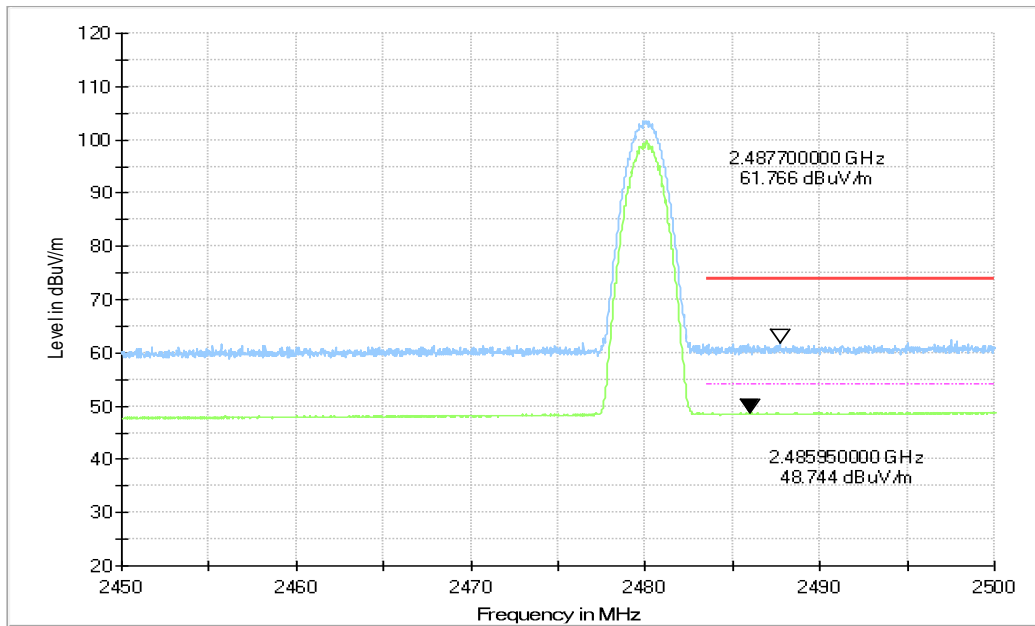

**Fig.63. Frequency Band Edges: 8DPSK, Channel 78, 2.45 GHz - 2.50GHz**

## B.6. Time of Occupancy (Dwell Time)

**Method of Measurement: See ANSI C63.10-clause 7.8.4**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW  $\geq$  RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

### Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

### Measurement Result:

#### For GFSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Count		
39	DH1	Fig.64	0.38	Fig.65	319	121.22	P
	DH3	Fig.66	1.63	Fig.67	98	159.74	P
	DH5	Fig.68	2.88	Fig.69	61	175.68	P

#### For $\pi/4$ DQPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Count		
39	2DH1	Fig.70	0.38	Fig.71	320	121.6	P
	2DH3	Fig.72	1.64	Fig.73	108	177.12	P
	2DH5	Fig.74	2.88	Fig.75	59	169.92	P



**For 8DPSK**

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	ms	Fig.	Count		
39	3DH1	Fig.76	0.38	Fig.77	321	121.98	P
	3DH3	Fig.78	1.63	Fig.79	103	167.89	P
	3DH5	Fig.80	2.89	Fig.81	63	182.07	P

**Conclusion: PASS**

**Test graphs as below:**

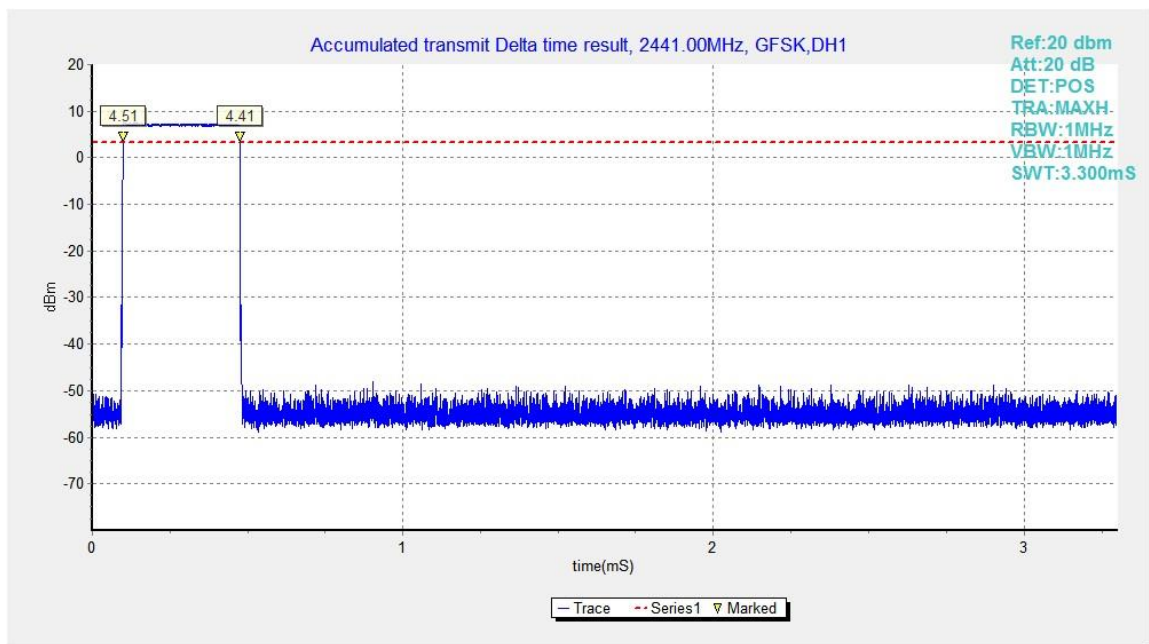


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

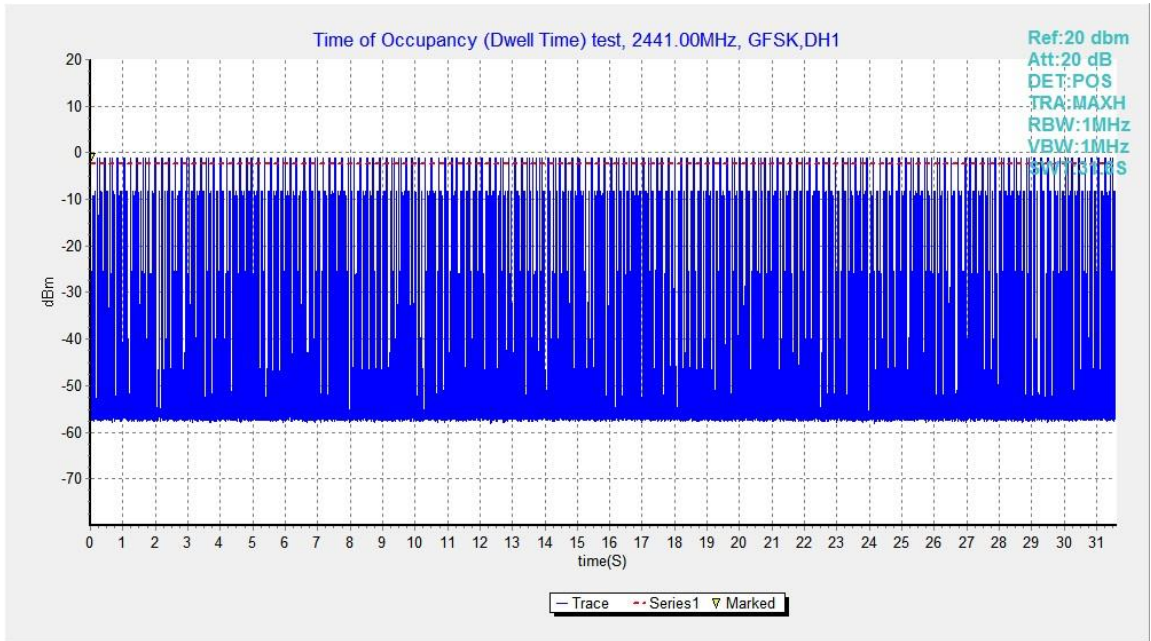


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

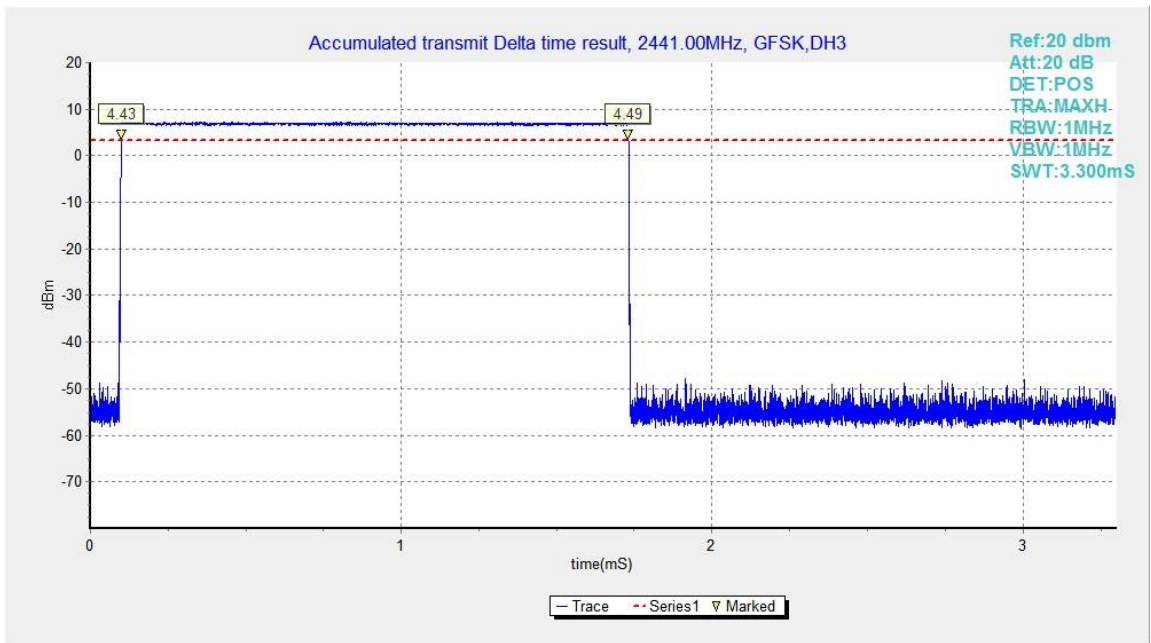


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

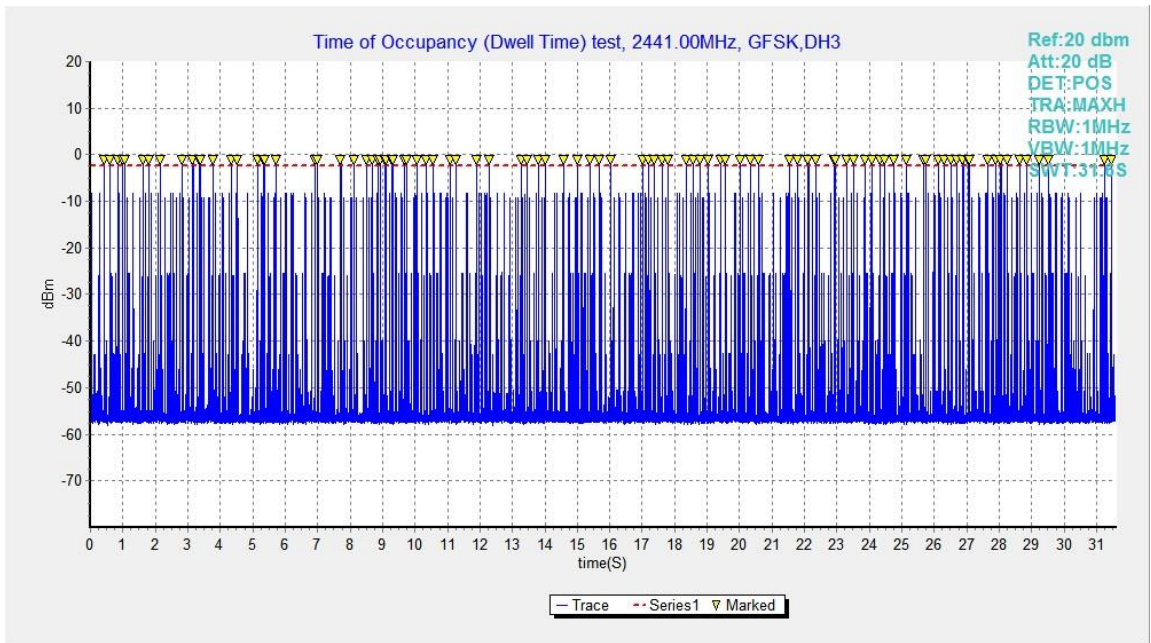


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3

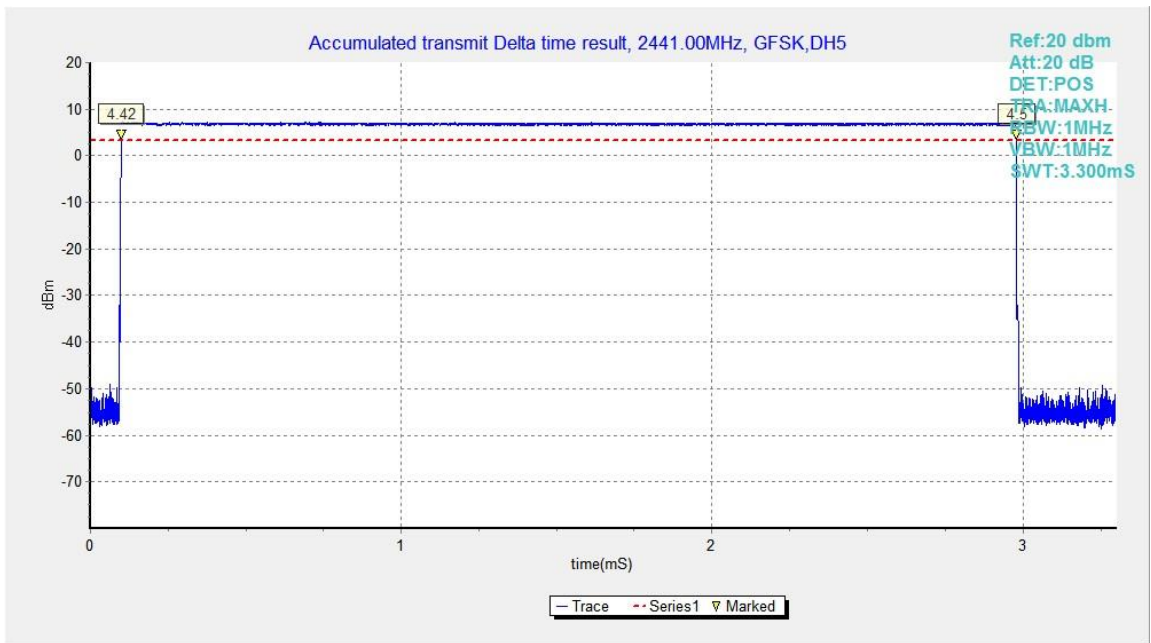


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

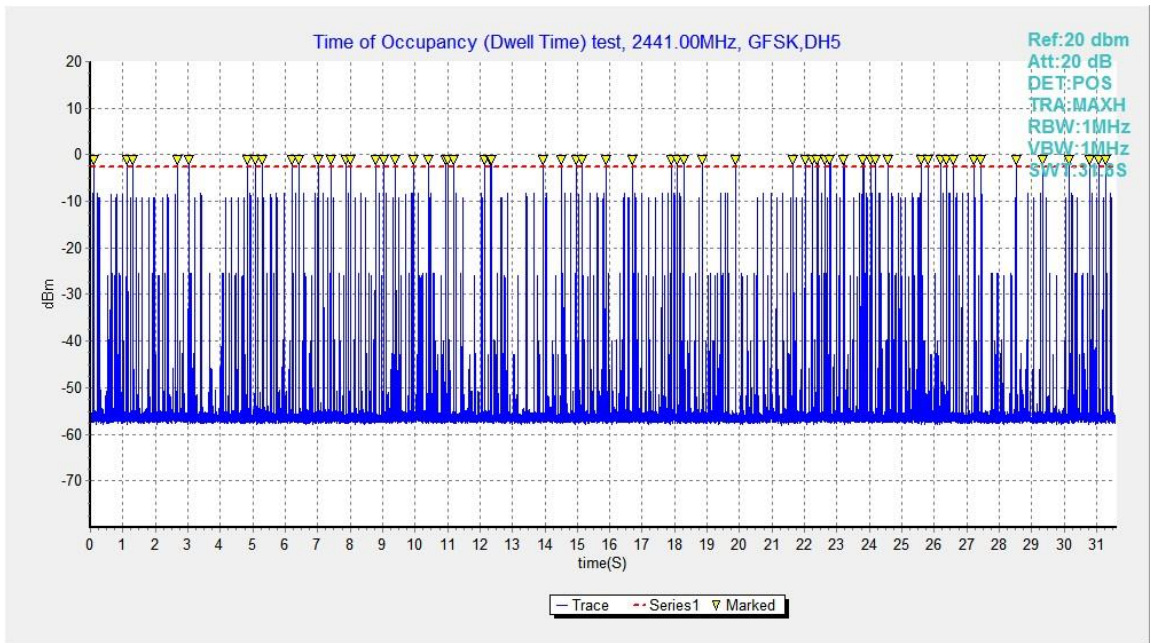


Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

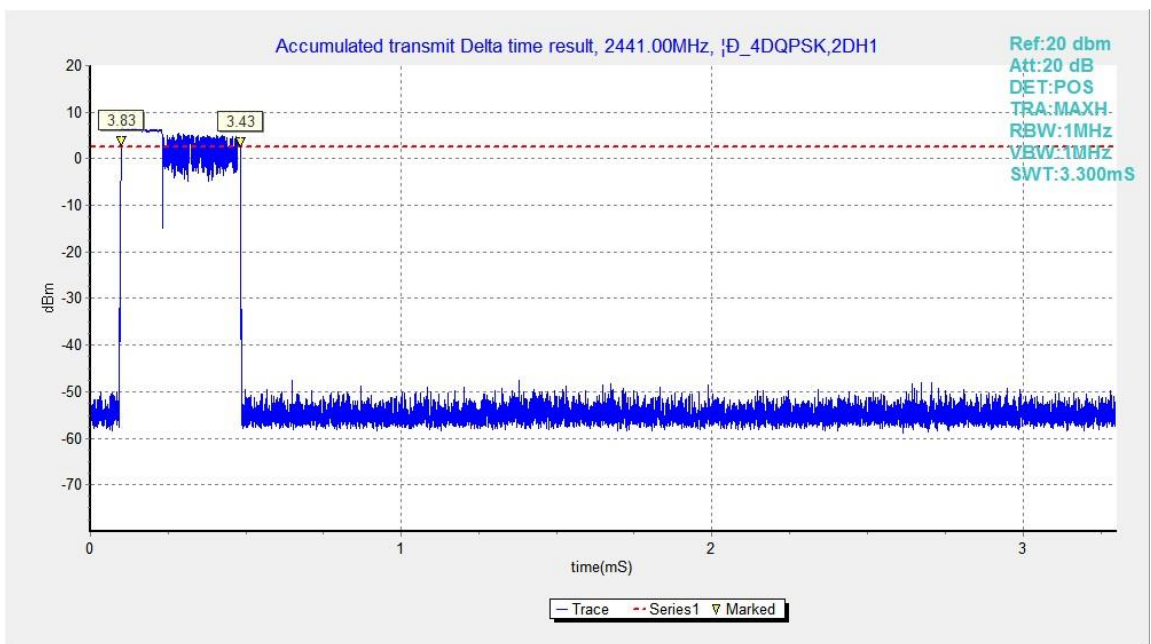


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

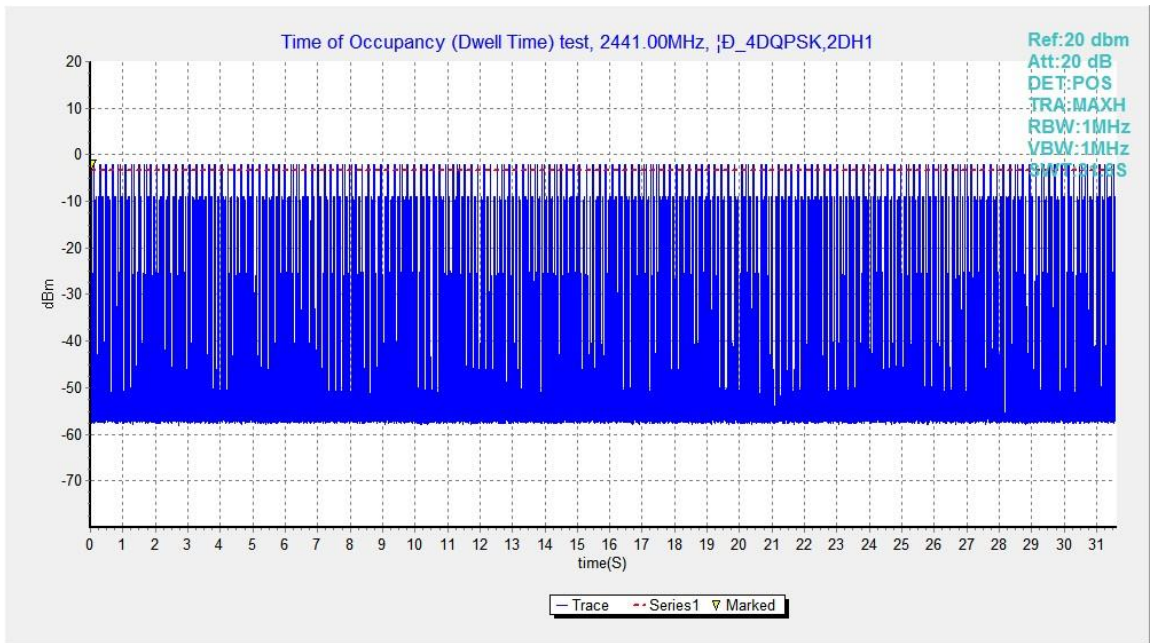


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

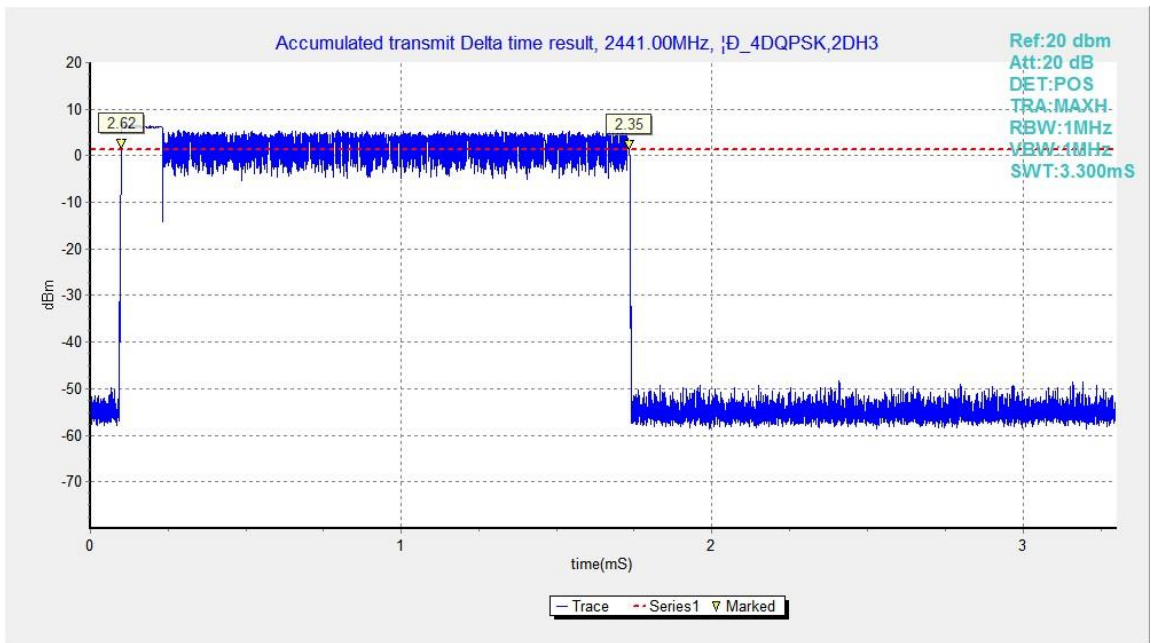


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

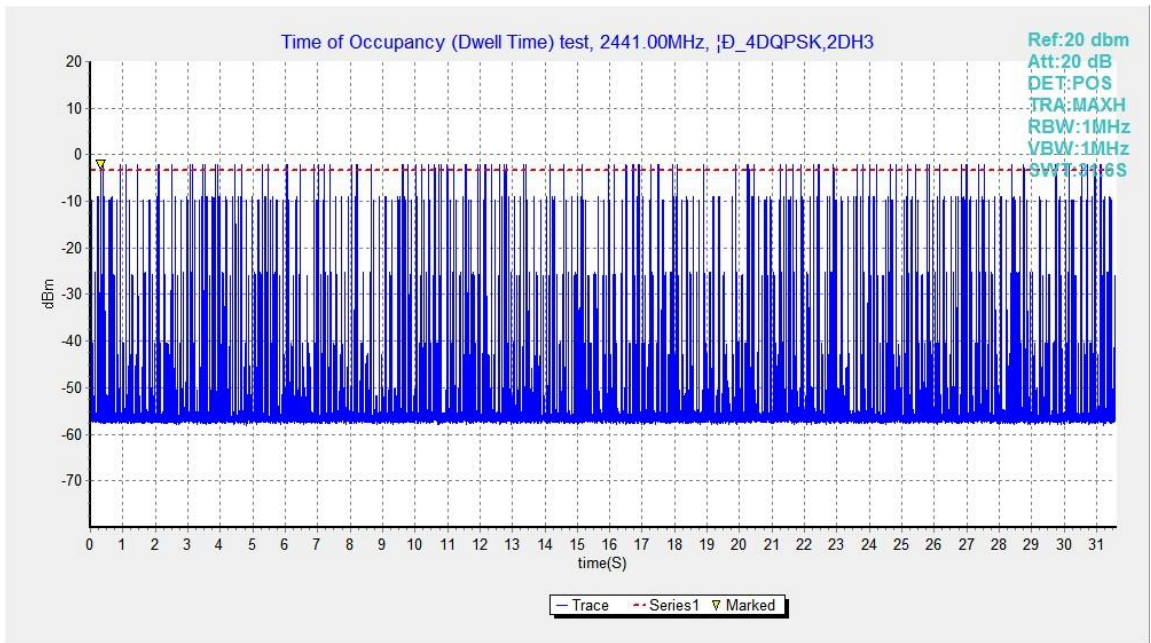


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

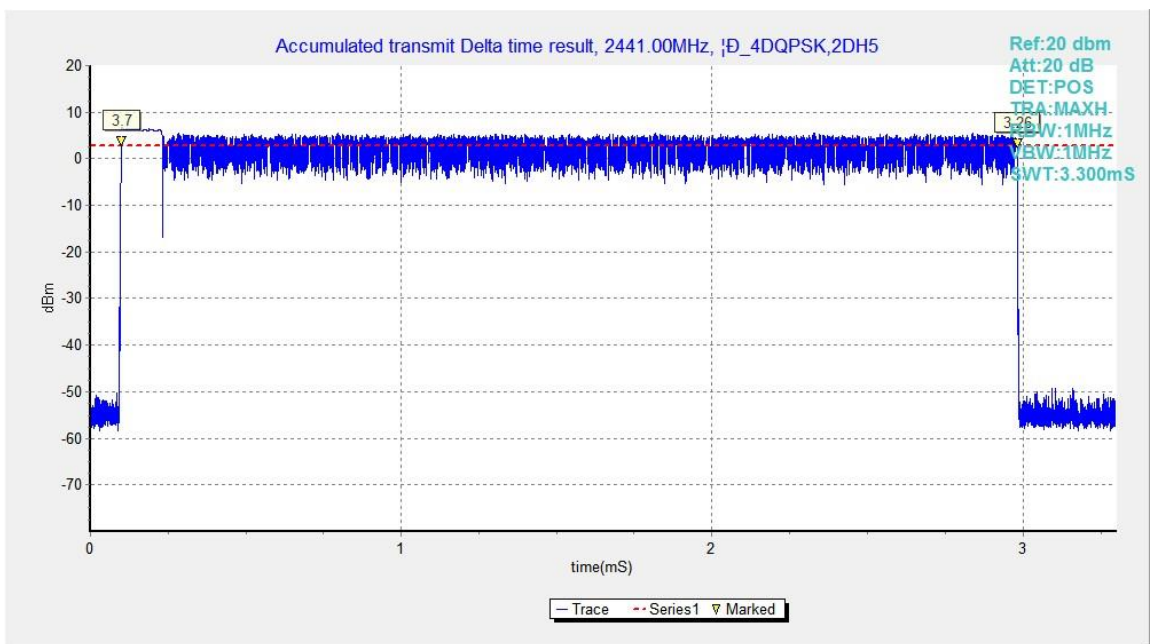


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

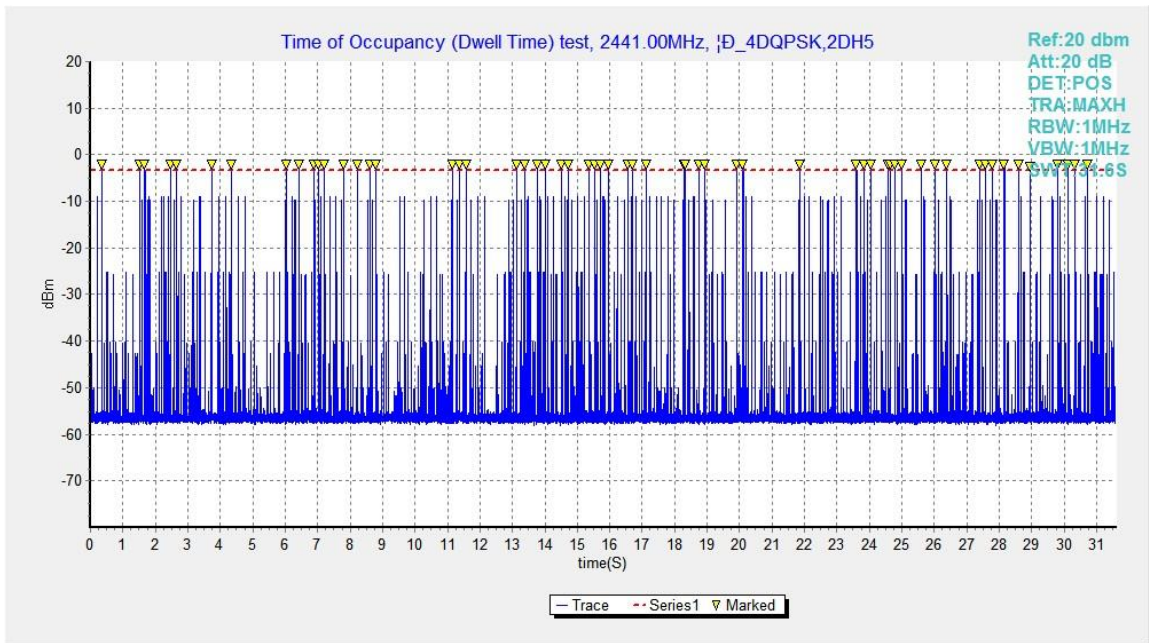


Fig.75. Number of Transmissions Measurement: Channel 39,Packet 2-DH5

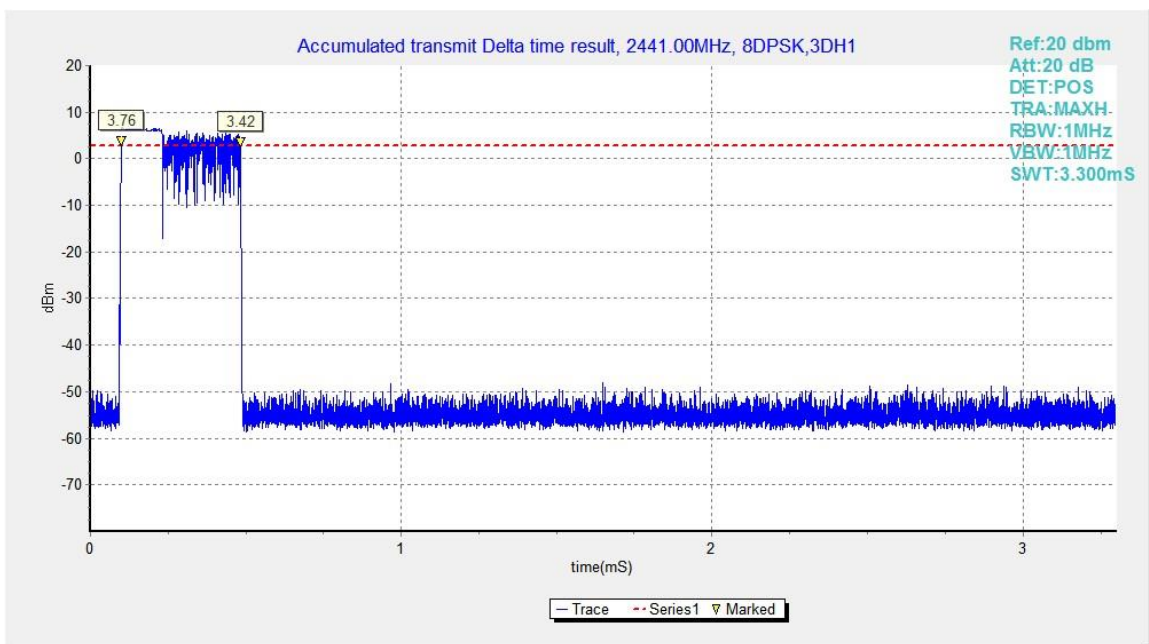


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

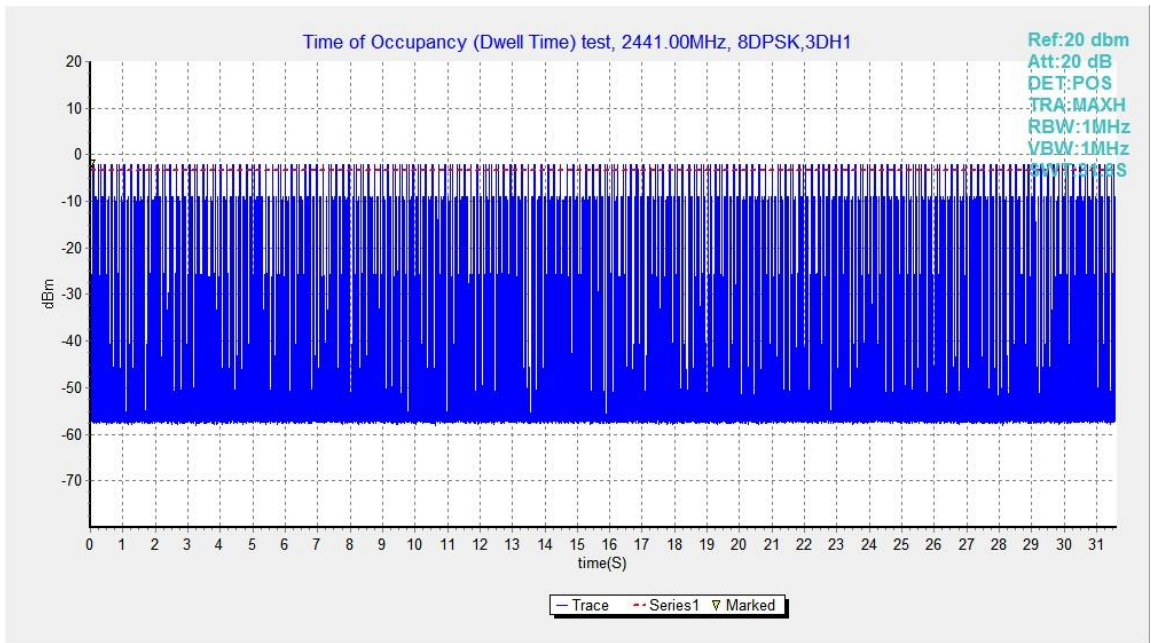


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

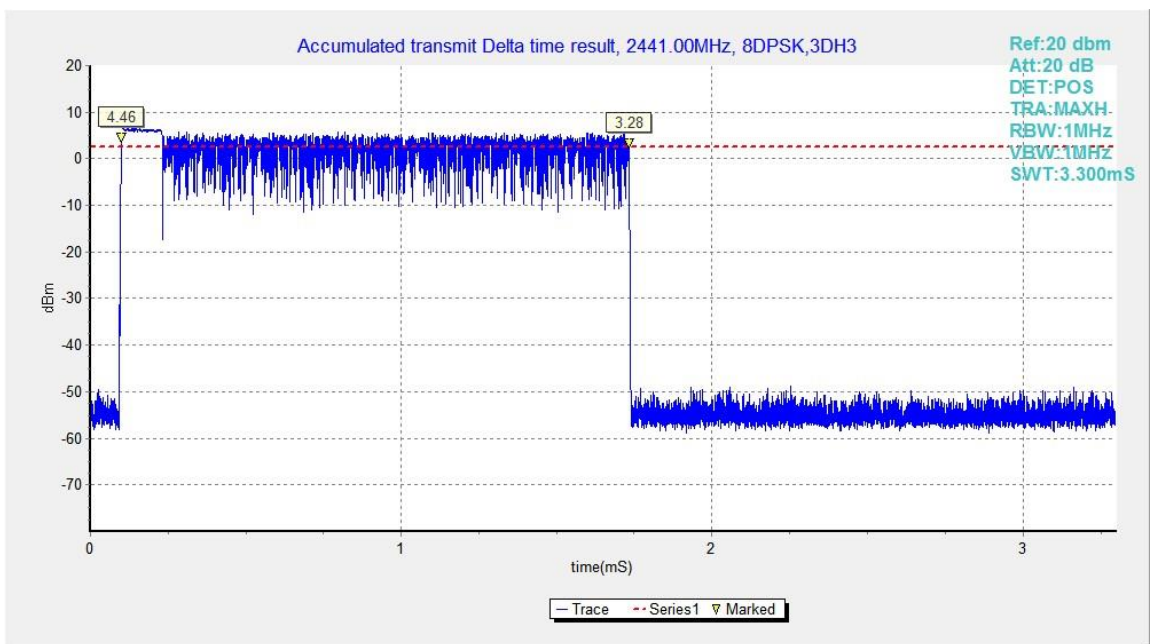


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3



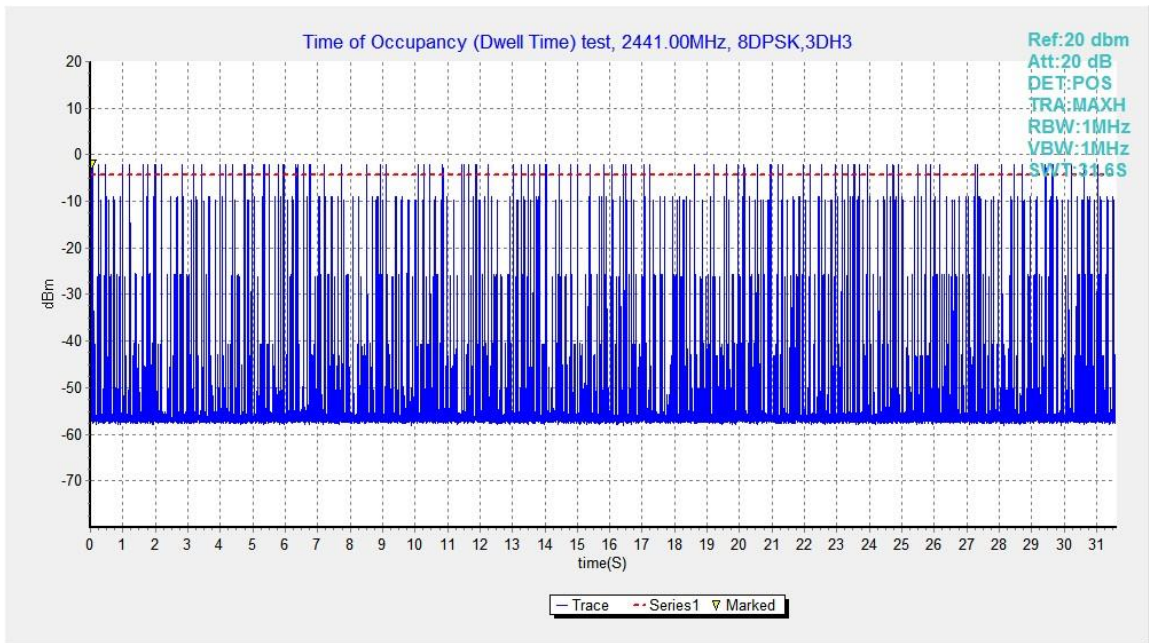


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

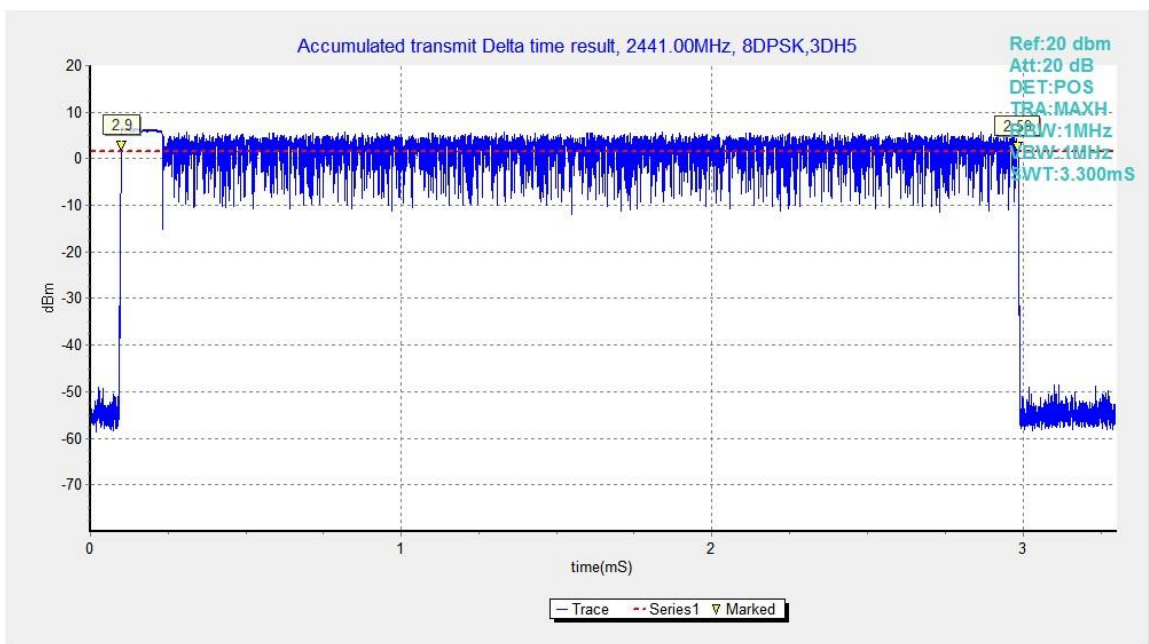


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

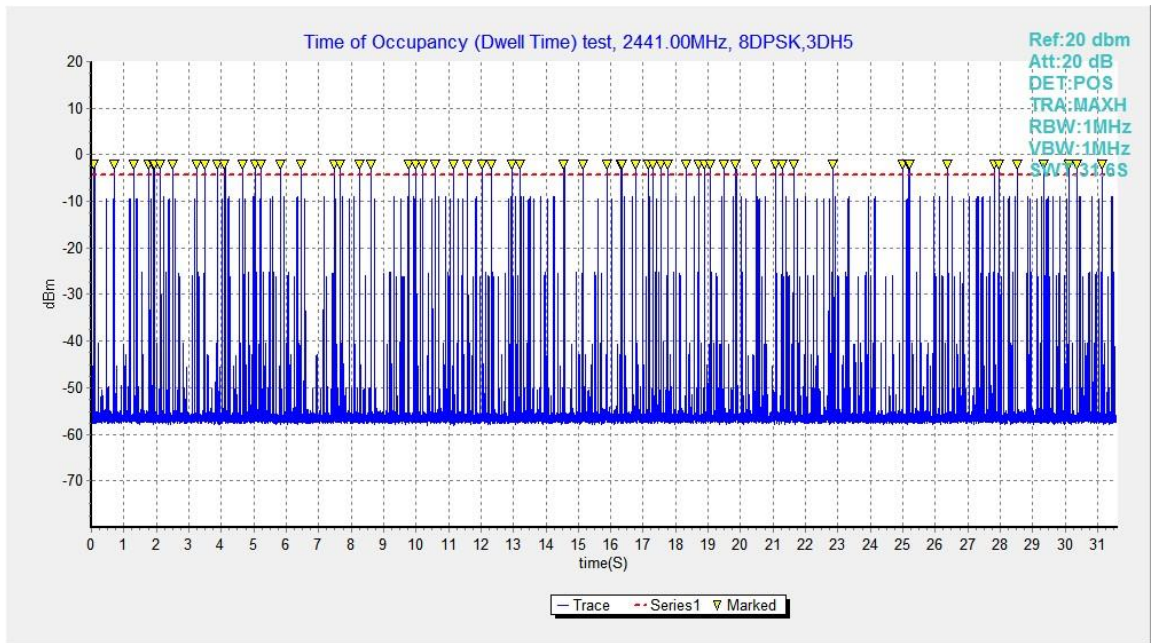


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5

## B.7. 20dB Bandwidth

**Method of Measurement: See ANSI C63.10-clause 6.9.2**

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

\* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

### Measurement Results:

#### For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	944.25	NA
39	Fig.83	942.00	NA
78	Fig.84	940.50	NA

#### For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1238.25	NA
39	Fig.86	1258.50	NA
78	Fig.87	1220.25	NA

#### For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1206.00	NA
39	Fig.89	1233.00	NA
78	Fig.90	1239.00	NA

**Conclusion: NA**

**Test graphs as below:**

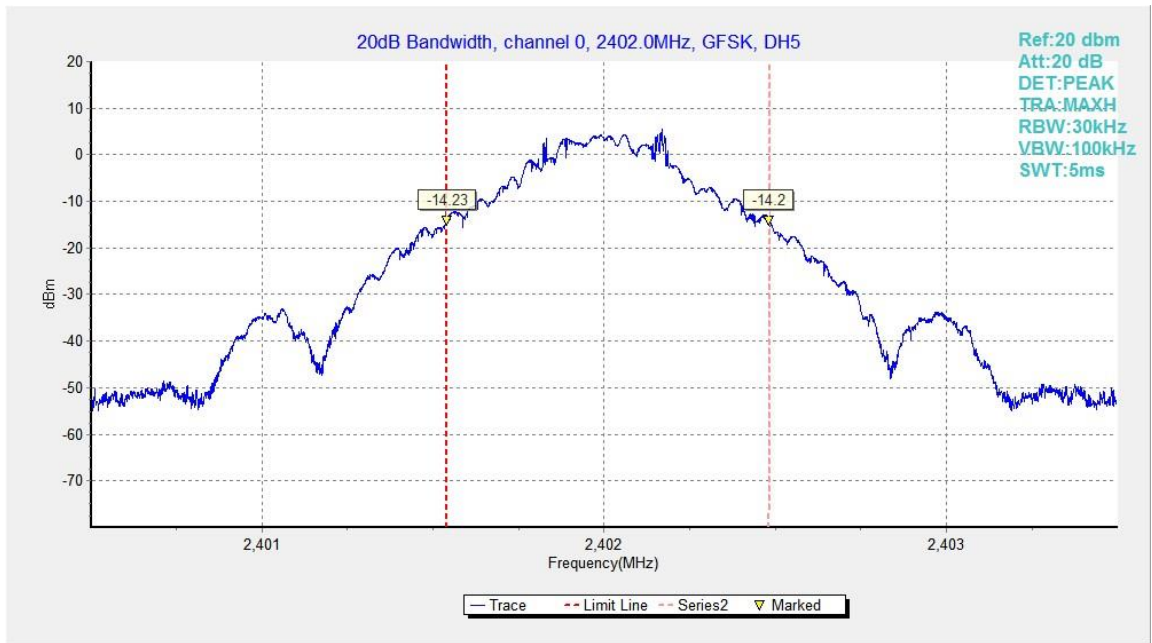


Fig.82. 20dB Bandwidth: GFSK, Channel 0

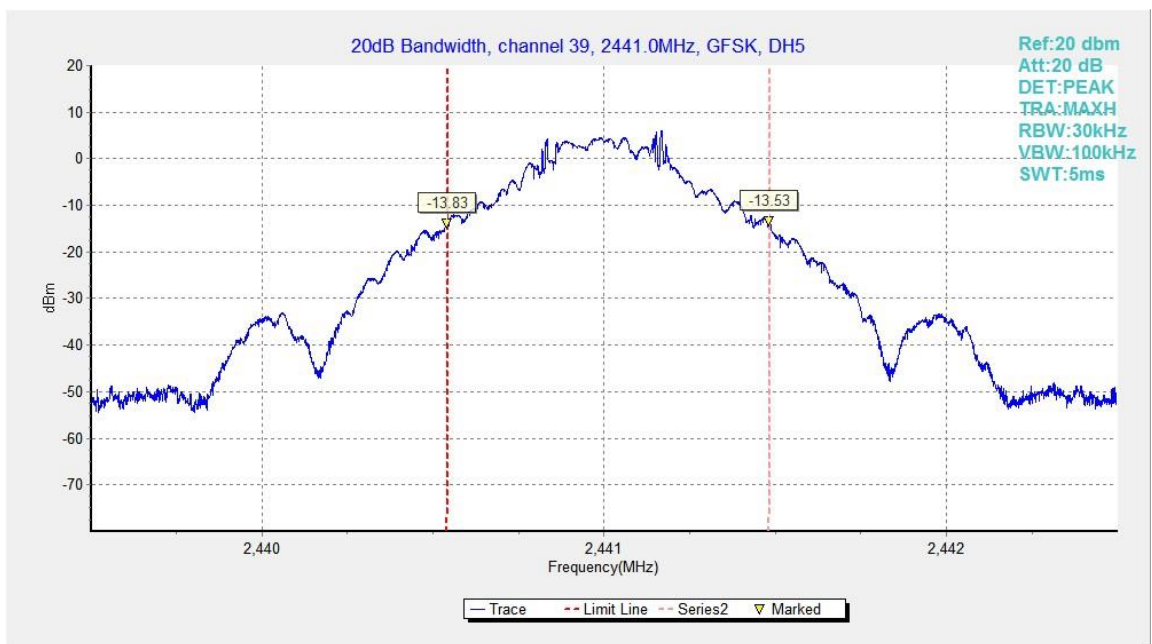


Fig.83. 20dB Bandwidth: GFSK, Channel 39

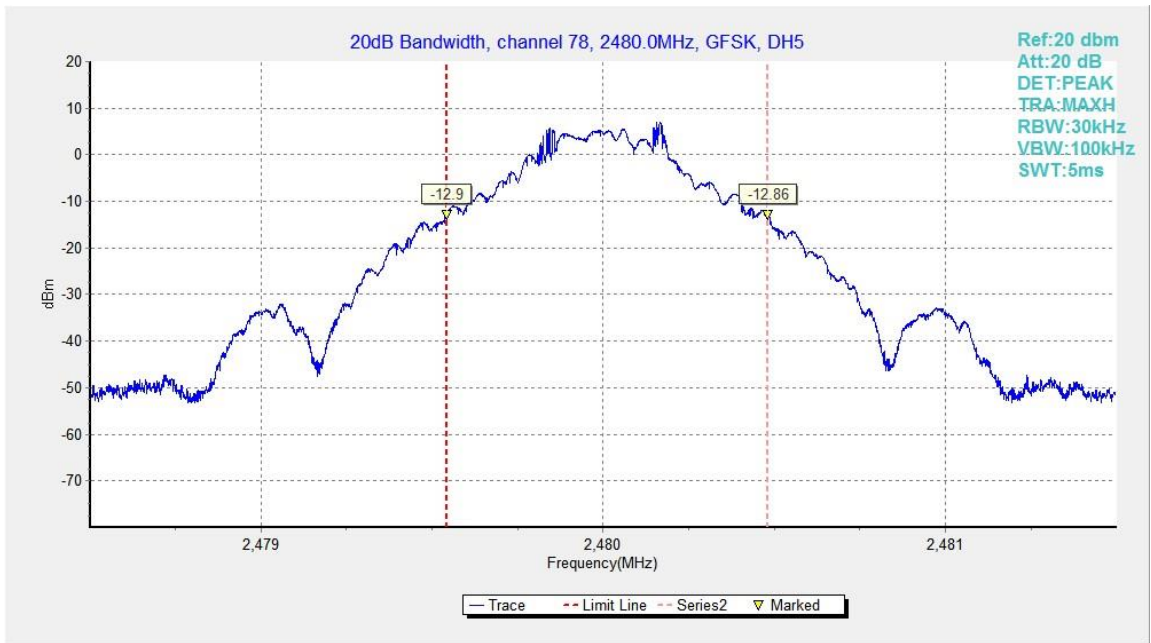


Fig.84. 20dB Bandwidth: GFSK, Channel 78

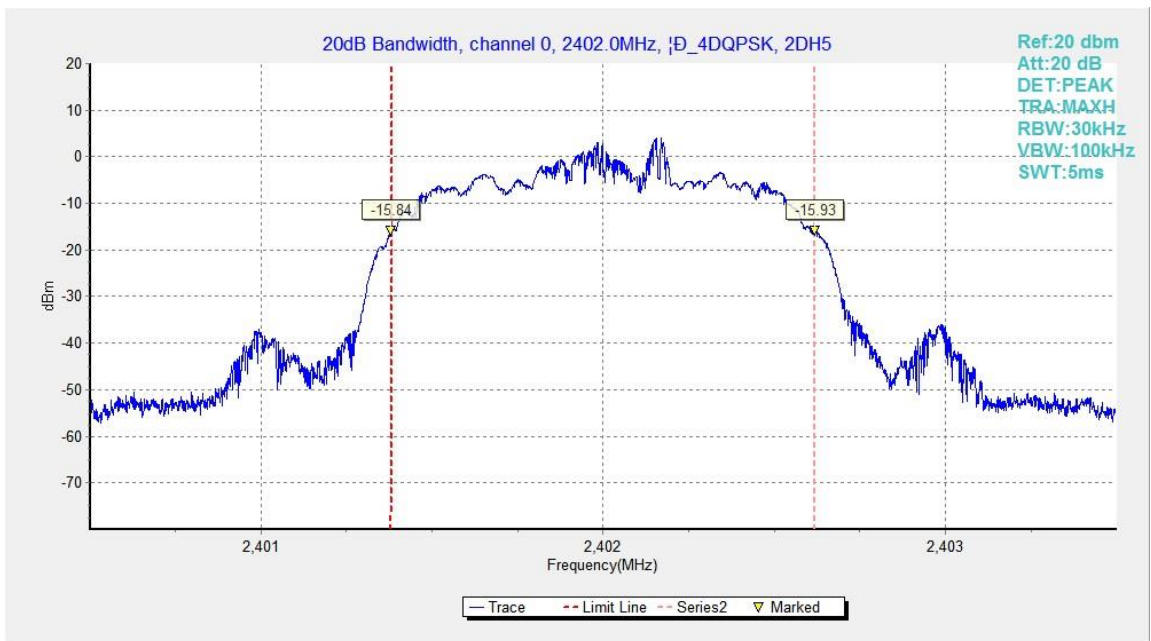
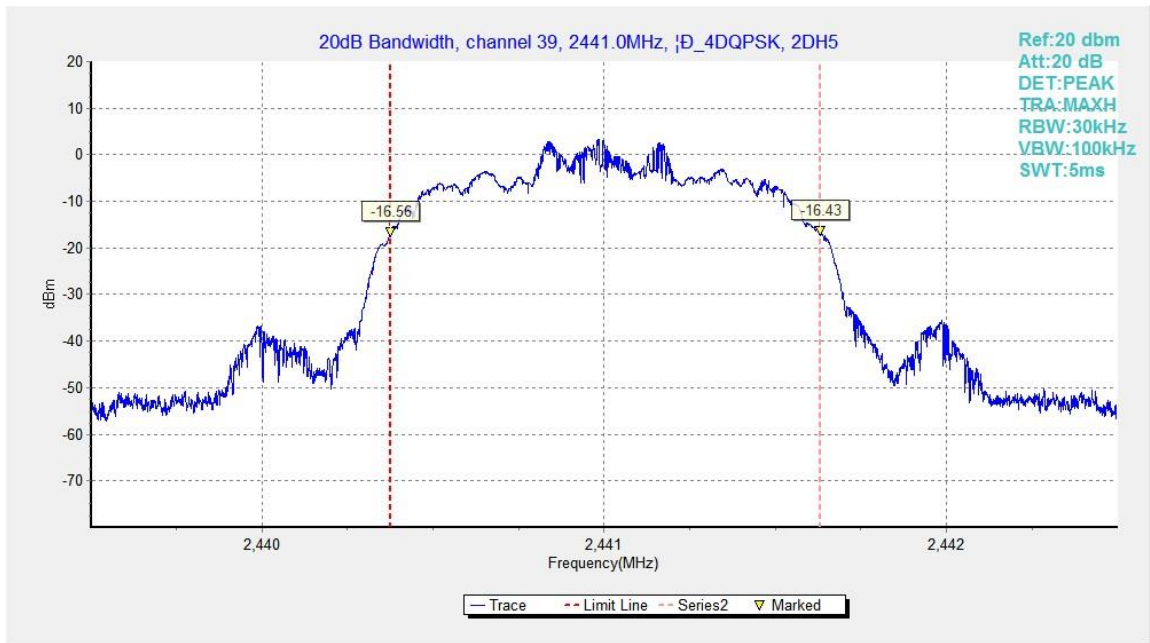
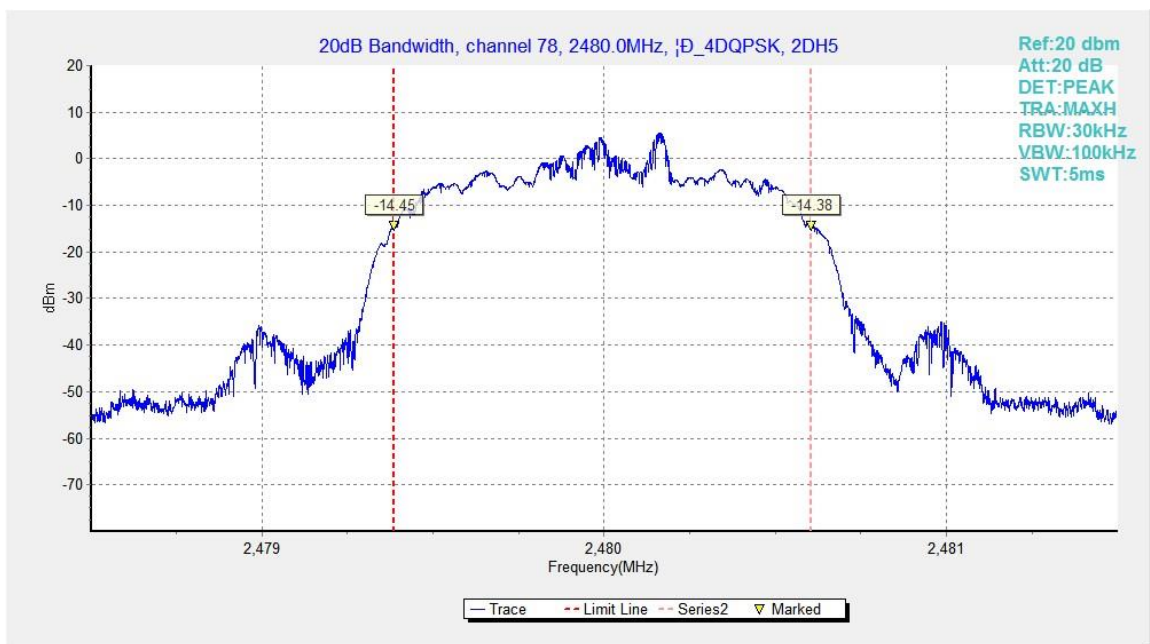


Fig.85. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 0


 Fig.86. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 39

 Fig.87. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 78

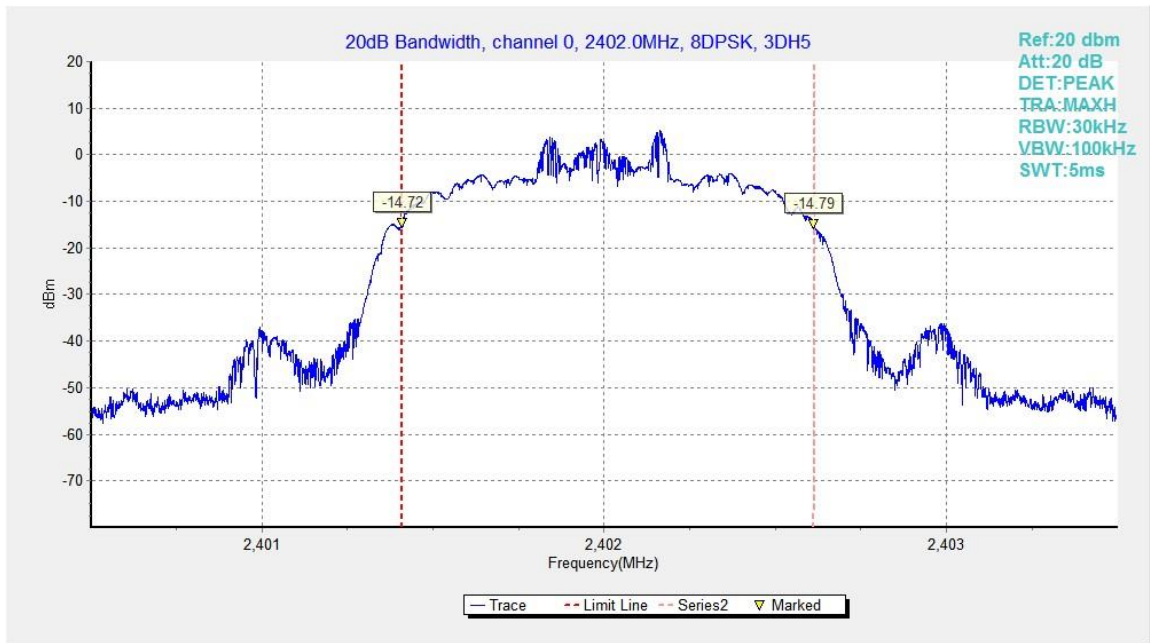


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

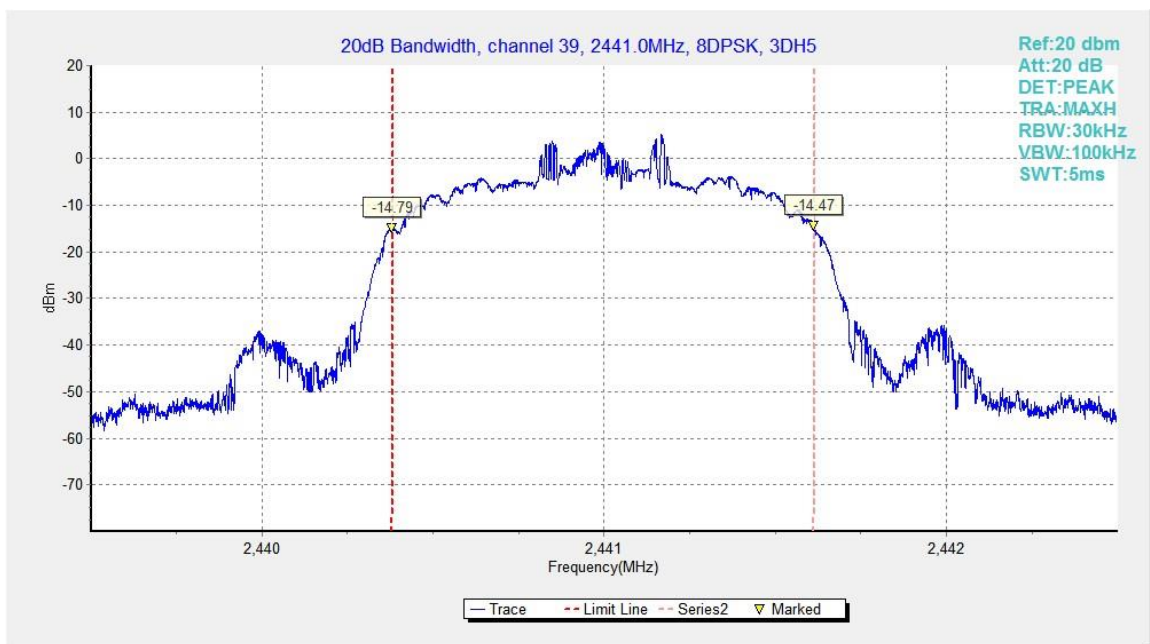


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

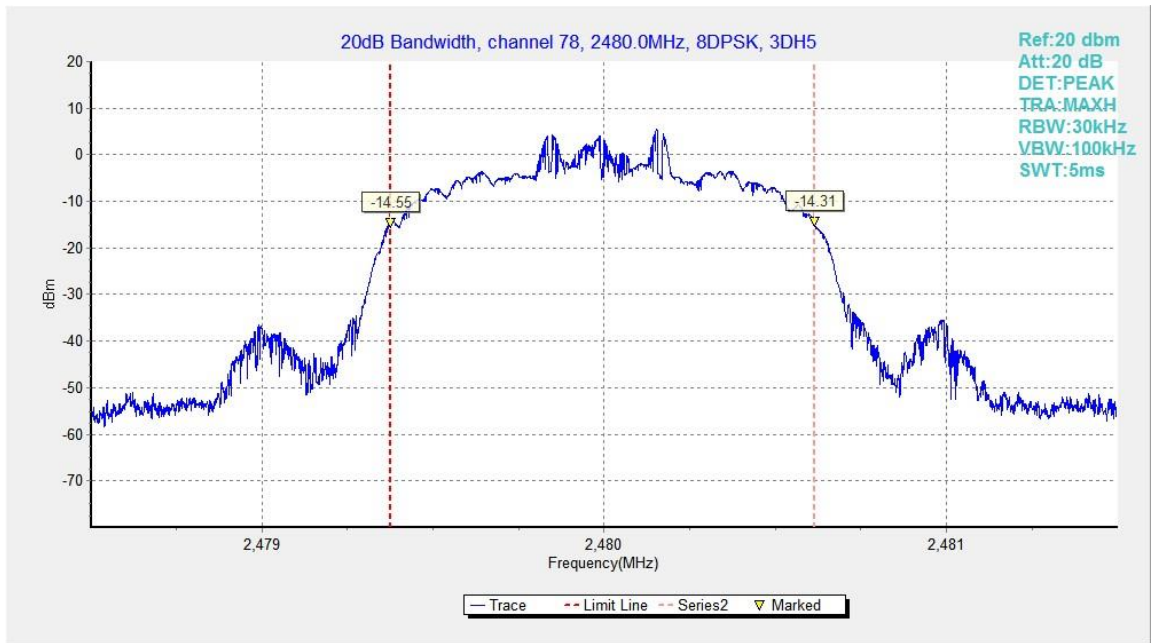


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78



## B.8. Carrier Frequency Separation

**Method of Measurement: See ANSI C63.10-clause 7.8.2**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

\* Comment: This limit should be over 25 kHz or  $(2/3) * 20\text{dB}$  bandwidth, whichever is greater.

### Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

### Measurement Result:

#### For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.91	980.25	P

#### For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.92	996.00	P

#### For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.93	992.25	P

**Conclusion: PASS**

**Test graphs as below:**

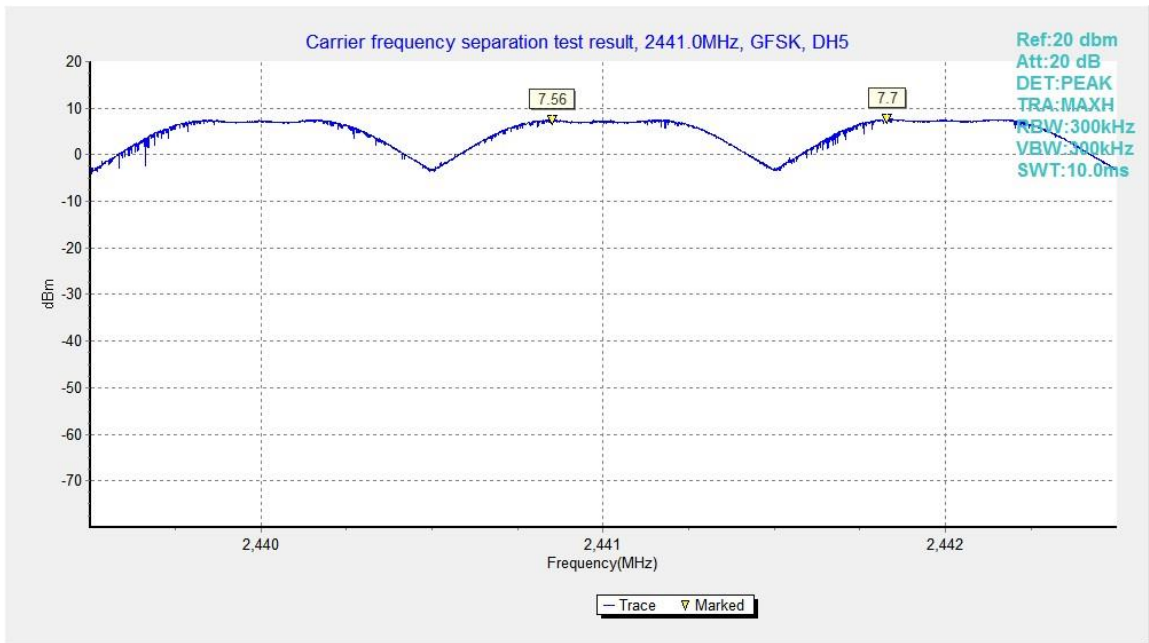
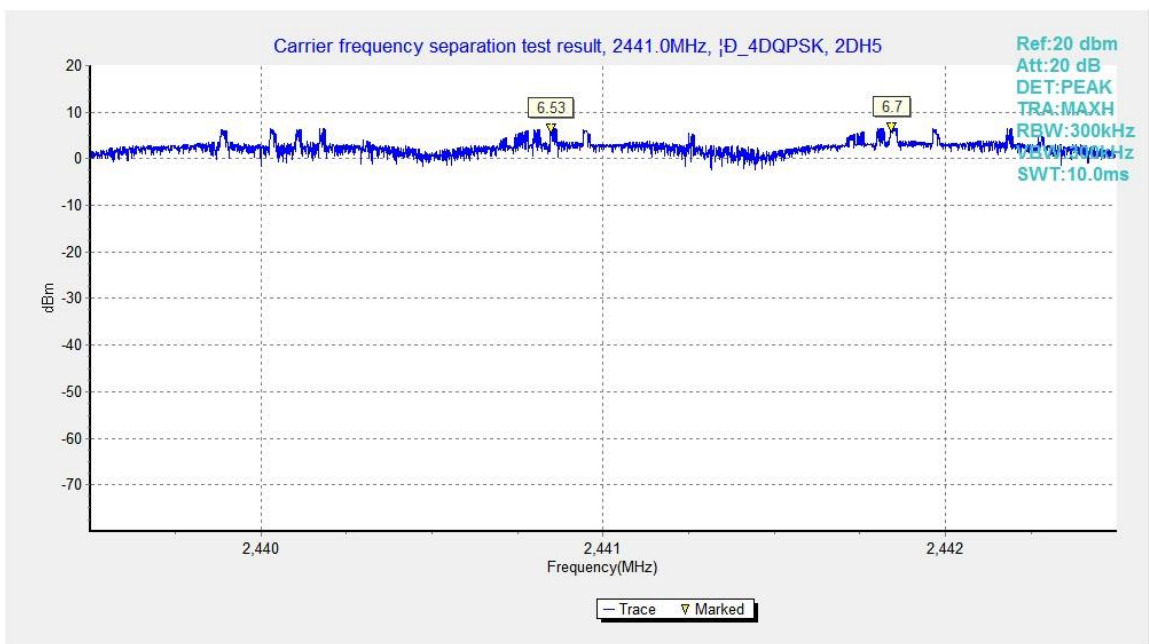


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39


 Fig.92. Carrier frequency separation measurement:  $\pi/4$  DQPSK, Channel 39

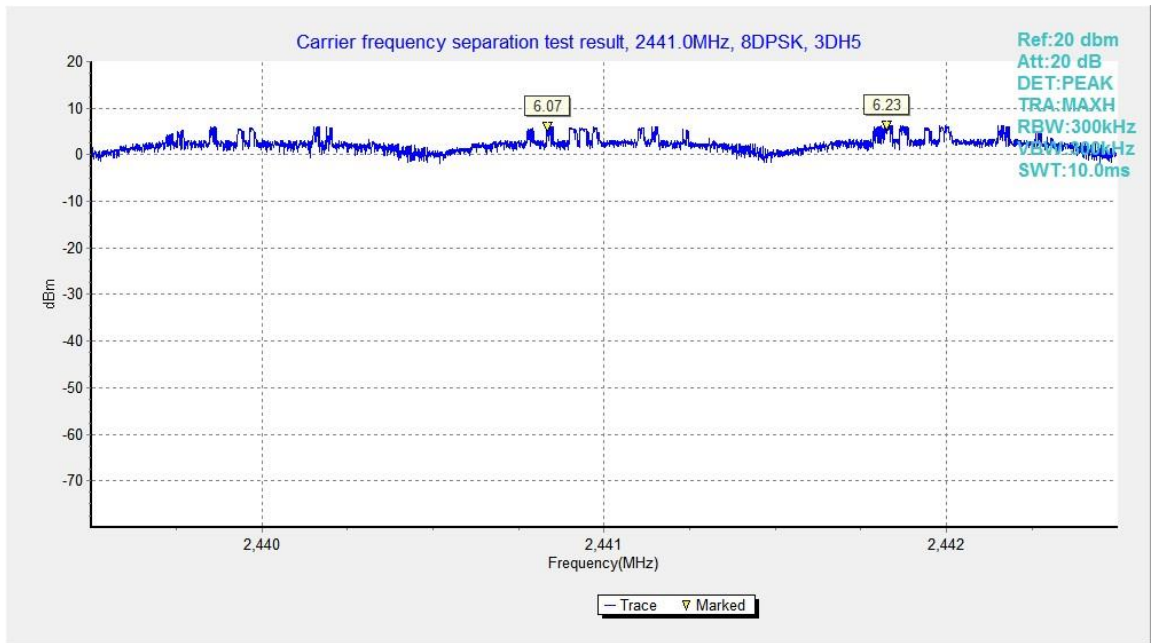


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

## B.9. Number of Hopping Channels

**Method of Measurement: See ANSI C63.10-clause 7.8.3**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

### Measurement Result:

#### For GFSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.94	P
40~78	Fig.95	

#### For $\pi/4$ DQPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.96	P
40~78	Fig.97	

#### For 8DPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.98	P
40~78	Fig.99	

**Conclusion: PASS**

**Test graphs as below:**

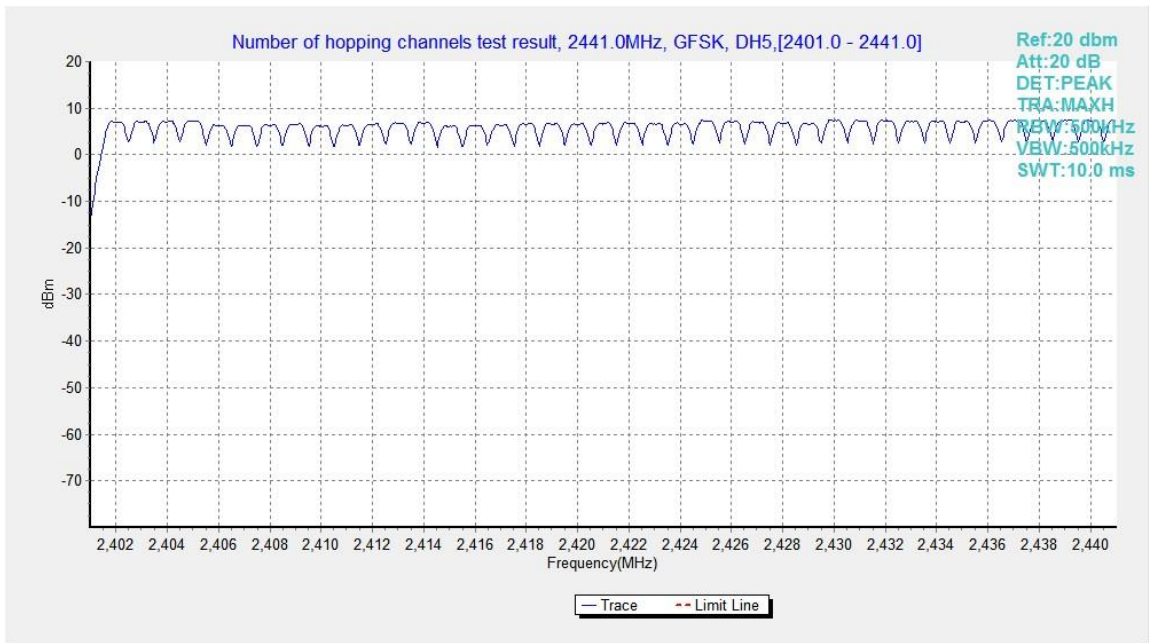


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

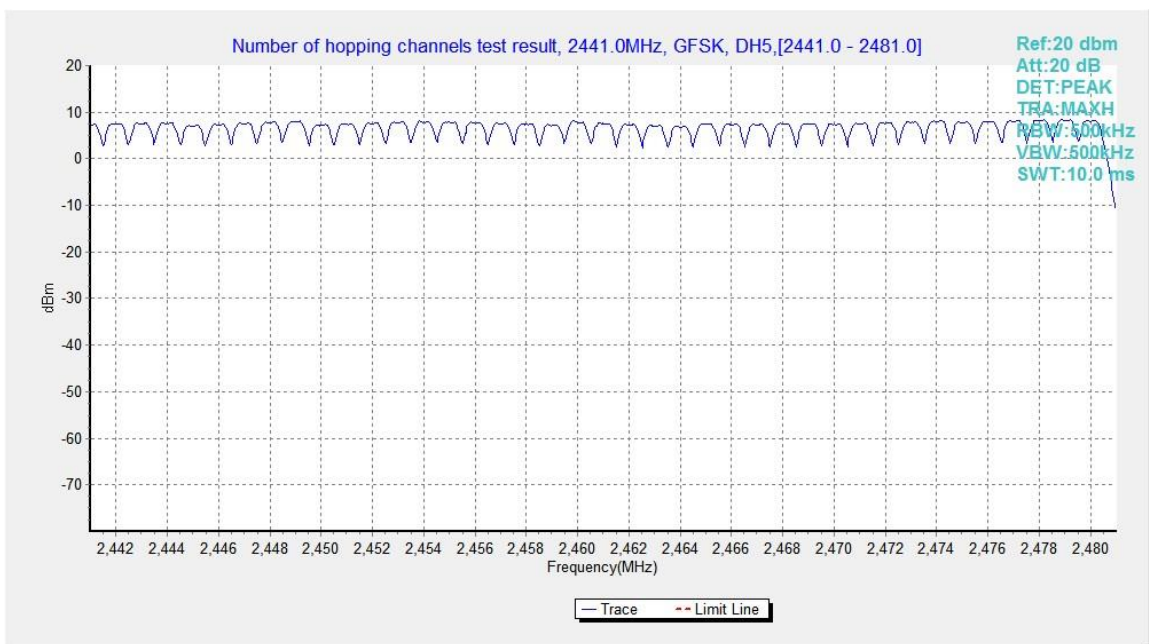


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

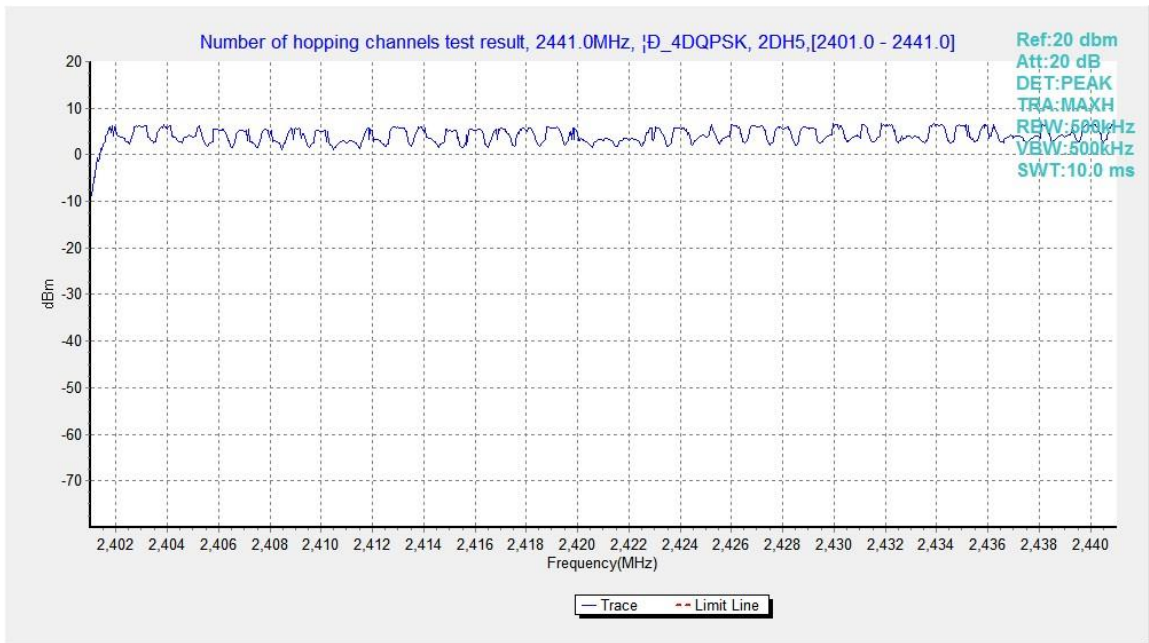


Fig.96. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 0 - 39

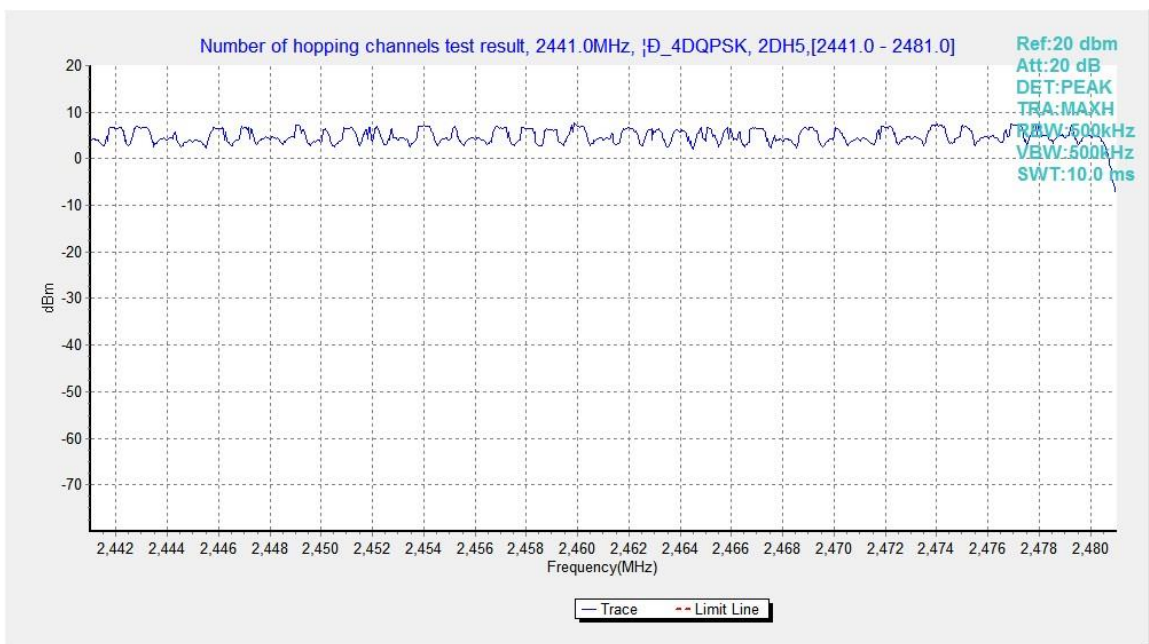


Fig.97. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 40 - 78

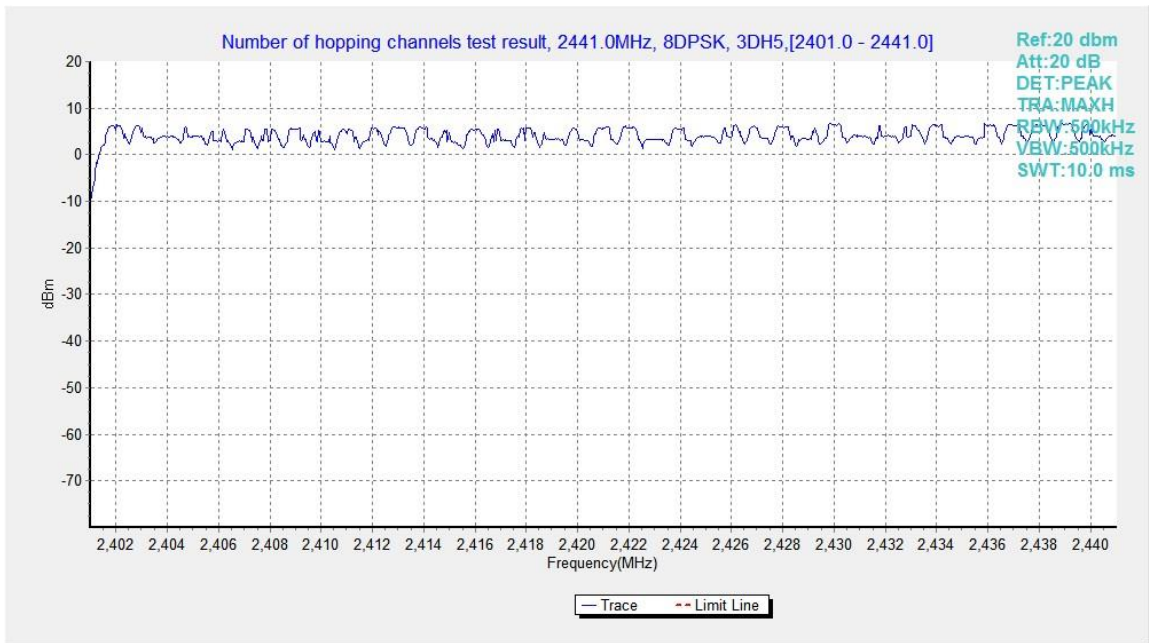


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

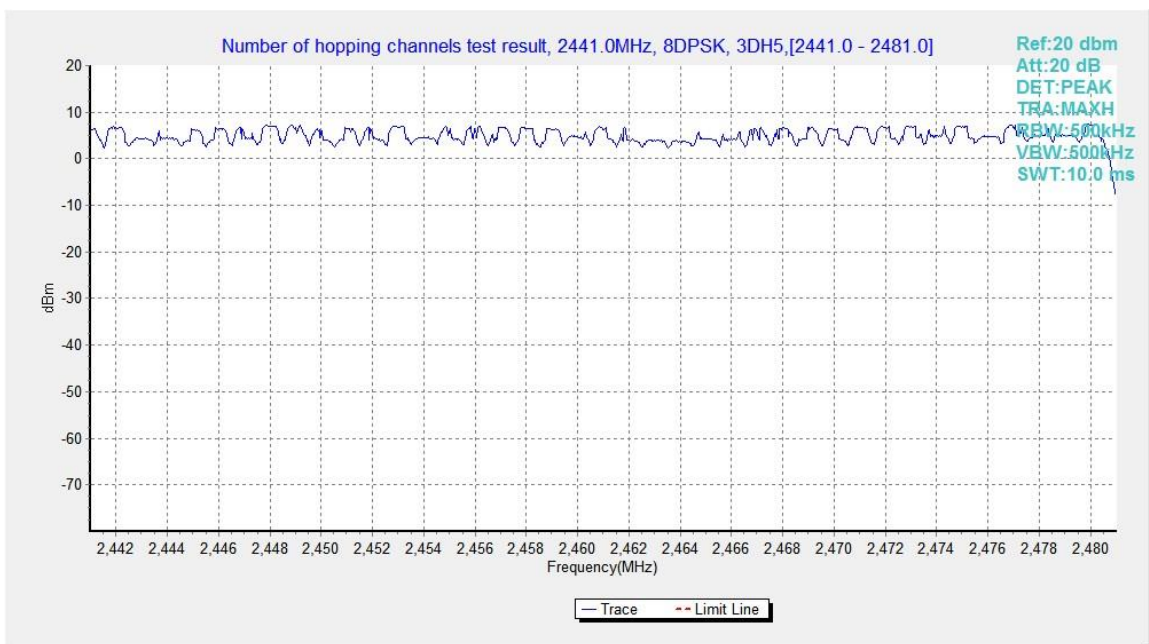


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

## B.10. AC Powerline Conducted Emission

### Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

### Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

### Test setup

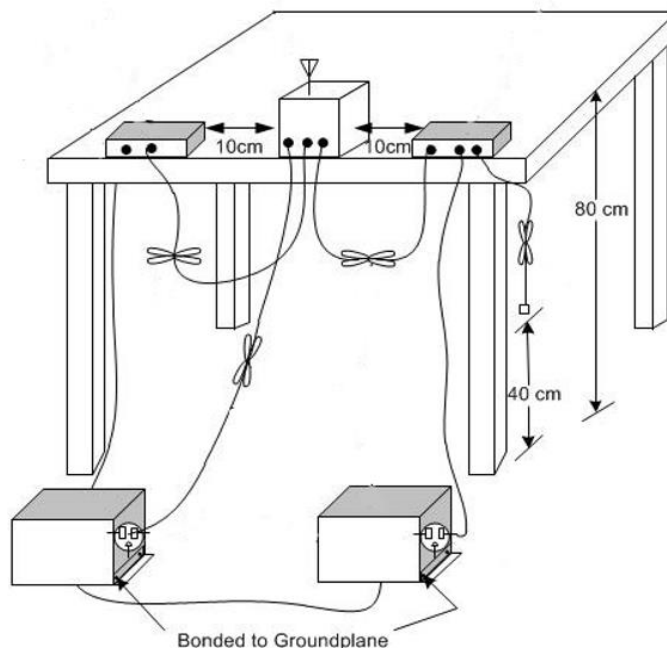



**Measurement Result and limit:**


Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.10.1	Fig. B.10.2	<b>P</b>
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz				

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.10.1	Fig. B.10.2	<b>P</b>
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz				

**Conclusion: Pass**
**Test graphs as below:**

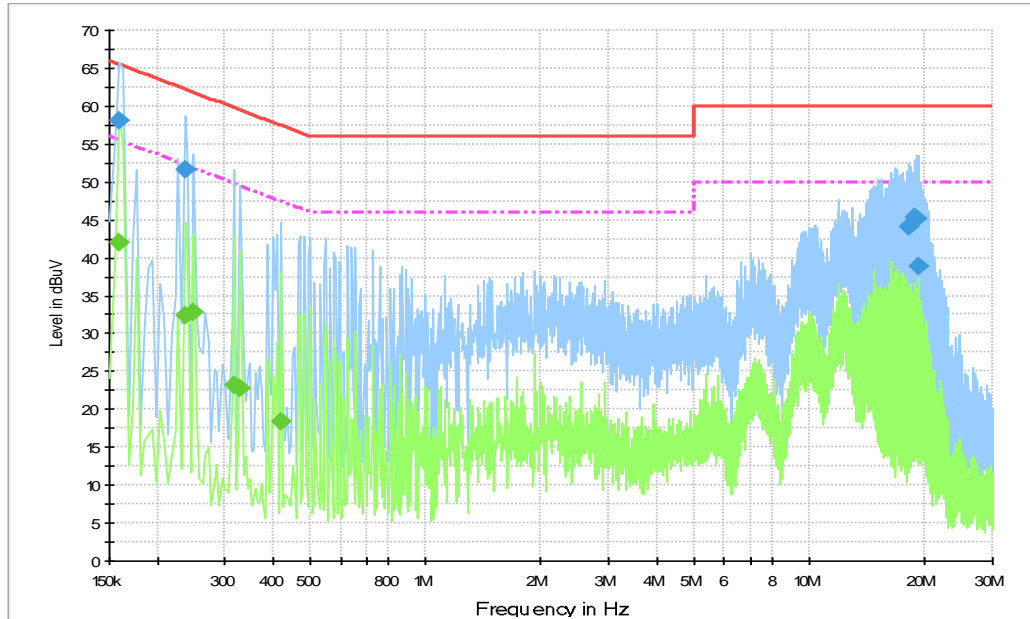

**Fig.B.10.1 AC Powerline Conducted Emission- Bluetooth**


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.159000	58.0	2000.0	9.000	On	N	20.1	7.5	65.5
0.235500	51.7	2000.0	9.000	On	L1	20.0	10.5	62.3
18.154500	44.1	2000.0	9.000	On	N	20.2	15.9	60.0
18.766500	45.3	2000.0	9.000	On	N	20.2	14.7	60.0
18.951000	45.2	2000.0	9.000	On	N	20.2	14.8	60.0
19.180500	38.9	2000.0	9.000	On	L1	20.1	21.1	60.0

**Final Result 2**

Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.159000	41.9	2000.0	9.000	On	N	20.1	13.6	55.5
0.235500	32.3	2000.0	9.000	On	N	20.0	19.9	52.3
0.249000	32.8	2000.0	9.000	On	L1	20.0	19.0	51.8
0.316500	23.3	2000.0	9.000	On	N	20.1	26.5	49.8
0.330000	22.8	2000.0	9.000	On	N	20.1	26.6	49.5
0.420000	18.4	2000.0	9.000	On	L1	20.1	29.0	47.4

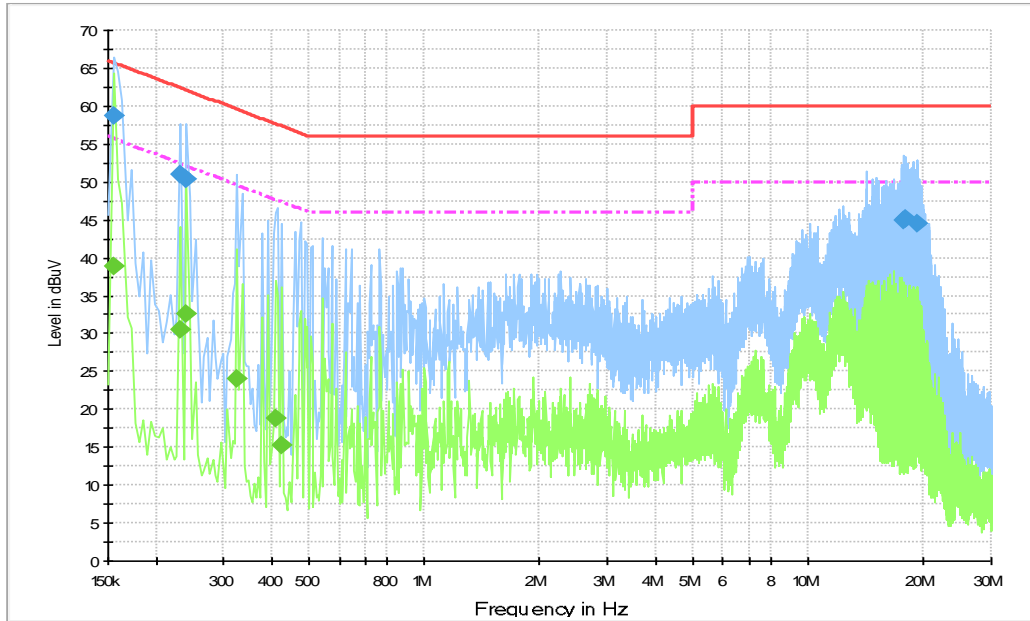

**Fig.B.10.2 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	58.6	2000.0	9.000	On	L1	20.2	7.1	65.8
0.231000	51.0	2000.0	9.000	On	L1	20.0	11.4	62.4
0.240000	50.3	2000.0	9.000	On	L1	20.0	11.8	62.1
17.758500	44.9	2000.0	9.000	On	N	20.2	15.1	60.0
17.848500	45.1	2000.0	9.000	On	N	20.2	14.9	60.0
19.180500	44.5	2000.0	9.000	On	N	20.2	15.5	60.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	38.9	2000.0	9.000	On	N	20.2	16.8	55.8
0.231000	30.5	2000.0	9.000	On	L1	20.0	21.9	52.4
0.240000	32.7	2000.0	9.000	On	L1	20.0	19.4	52.1
0.325500	24.0	2000.0	9.000	On	L1	20.0	25.6	49.6
0.411000	18.7	2000.0	9.000	On	N	20.2	28.9	47.6
0.424500	15.3	2000.0	9.000	On	L1	20.1	32.0	47.4



## **B.11. Antenna Requirement**

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

## ANNEX C: Accreditation Certificate



### Accredited Laboratory

A2LA has accredited

#### TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

#### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 26<sup>th</sup> day of June 2023.



Mr. Trace McInturf, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 7049.01  
Valid to July 31, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

\*\*\*END OF REPORT\*\*\*