



TEST REPORT

No. 24T04Z200129-004

for

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN

Model Name: SM-A065M/DS, SM-A065M

with

FCC ID: ZCASMA065M

Hardware Version: REV1.0

Software Version: A065M.001

Issued Date: 2024-07-03

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z200129-004	Rev.0	1st edition	2024-06-25
24T04Z200129-004	Rev.1	Revised GNSS information in 3.4 on P7	2024-07-03

Note: the latest revision of the test report supersedes all previous versions.

CONTENTS

1. TEST LABORATORY.....	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA.....	4
1.5. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4. GENERAL DESCRIPTION.....	7
3.5. EUT SET-UPS.....	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. LABORATORY ENVIRONMENT	10
6. SUMMARY OF TEST RESULTS	11
7. TEST EQUIPMENTS UTILIZED	12
ANNEX A: MEASUREMENT RESULTS.....	13
ANNEX B: PERSONS INVOLVED IN THIS TESTING.....	35

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

CTTL (BDA)

Address: No. 18A, Kangding Street, Beijing Economic-Technology Development Area, Beijing, 100176, P.R. China

1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2024-06-03

Testing End Date: 2024-06-20

1.5. Signature




Li Yan

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Zhang Xia

Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Samsung Electronics Co., Ltd.
Address: 19 Chapin Rd., Building D Pine Brook, NJ 07058
City: /
Postal Code: /
Country: /
Contact Person: Jenni Chun
Contact Email: j1.chun@samsung.com
Telephone: +1-201-937-4203
Fax: /

2.2. Manufacturer Information

Company Name: Samsung Electronics. Co., Ltd.
Address: Samsung R5, Maetan dong 129, Samsung ro
Youngtong gu, Suwon city 443 742, Korea
City: /
Postal Code: /
Country: /
Contact Person: Sunghoon Cho
Contact Email: ggobi.cho@samsung.com
Telephone: +82-10-2722-4159
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN
Model name	SM-A065M/DS, SM-A065M
FCC ID	ZCASMA065M

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI/SN	HW Version	SW Version
EUT1	2404200129UT26a(SM-A065M/DS)	REV1.0	A065M.001
EUT2	2404200129UT27a(SM-A065M/DS)	REV1.0	A065M.001

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Name	Model	Manufacturer
AE1-1	Battery	HQ-7160SS	SCUD (FUJIAN) Electronics Co., Ltd.
AE1-2	Battery	HQ-7160SD	SCUD (FUJIAN) Electronics Co., Ltd.
AE1-3	Battery	HQ-7160NA	Ningde Amperex technology limited
AE2-1*	Adapter	EP-TA800	SOLUM CO.,LTD.
AE2-2*	Adapter	EP-T1510	DONGYANG E&P INC.
AE2-3*	Adapter	EP-TA200	RFTECH ELECTRONICS (HUIZHOU) CO., LTD
AE3-1	Date Cable1 C-C	EP-DN980BWE	RFTECH ELECTRONICS (HUIZHOU) CO., LTD
AE3-2	Date Cable2 C-C	EP-DN980BWE	Guangxi Broad Telecommunication Co.,Ltd.
AE3-3	Date Cable3 C-C	EP-DN980BWE	Cresyn electronics(Dongguan)Co;Ltd.
AE3-4	Date Cable4 C-C	EP-DN980BWE	ASAP TECHNOLOGY(JIANGXI) CO.,LTD.
AE4*	Date Cable5 C-A	EP-DR140AWE	Cresyn electronics(Dongguan)Co;Ltd.
AE5*	Headset	EHS61ASFWE	Dongguan YoungBo Electronics
AE6*	PC	/	/
AE7*	SD card	/	/
AE8*	MHD	/	/

* The USB cables are shielded.

*AE ID: is used to identify the test sample in the lab internally.

*AE2-1, AE2-2, AE2-3, AE4 and A5 are not the AE for EUT, provided by the client for relevant tests.

*AE6, AE7 and AE8 are not the AE for EUT, provided by the Lab for relevant tests.

3.4. General Description

Description	Multi-band GSM/WCDMA/LTE Mobile Phone with Bluetooth, WLAN	
Model name	SM-A065M/DS, SM-A065M	
Marketing name	Galaxy A06	
Brand name	SAMSUNG	
Cellular Bands	<input checked="" type="checkbox"/> GSM	Bands 850/900/1800/1900MHz
	<input type="checkbox"/> CDMA	/
	<input checked="" type="checkbox"/> WCDMA	Bands 1/2/4/5/8
	<input checked="" type="checkbox"/> LTE	Bands 1/2/3/4/5/7/8/12/13/17/26/28/38/40/41/66
	<input type="checkbox"/> 5G NR SA	/
	<input type="checkbox"/> 5G NR NSA	/
Unlicensed Radio	<input checked="" type="checkbox"/> Wi-Fi 2.4GHz	802.11b/g/n(20MHz)
	<input checked="" type="checkbox"/> Wi-Fi 5GHz	802.11a/n(20MHz,40MHz)/ac(20MHz,40MHz,80MHz)
	<input checked="" type="checkbox"/> Wi-Fi 5.8GHz	802.11a/n(20MHz,40MHz)/ac(20MHz,40MHz,80MHz)
	<input checked="" type="checkbox"/> Bluetooth	<input checked="" type="checkbox"/> EDR <input type="checkbox"/> BLE4 <input checked="" type="checkbox"/> BLE5
Other	<input checked="" type="checkbox"/> GNSS	<input checked="" type="checkbox"/> GPS <input type="checkbox"/> BDS <input checked="" type="checkbox"/> Gallileo <input type="checkbox"/> Glonass
	<input checked="" type="checkbox"/> FM <input checked="" type="checkbox"/> MP3 <input checked="" type="checkbox"/> MP4 <input checked="" type="checkbox"/> Camera <input checked="" type="checkbox"/> USB <input type="checkbox"/> NFC	
	<input checked="" type="checkbox"/> External memory	

The device contains receivers which tune and operate between 30MHz-960MHz in the following bands: GSM850, WCDMA Band 5, LTE Band 5, LTE Band 12, LTE Band 13, LTE Band 17, and LTE Band 26.

Samples undergoing test were selected by the client.

Manual and specifications of the EUT were provided to fulfil the test.

For more EUT information please refers to the manufacturer's specifications or user's manual.

3.5. EUT set-ups

Set-up

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT + AE2-1 + AE3-1/2/3/4 +AE5	Adapter1 + cable + headset
Set.2	EUT + AE2-2 + AE3-1/2/3/4	Adapter1
Set.3	EUT + AE2-2 + AE3-1/2/3/4 +AE5	Adapter2 + cable+ headset
Set.4	EUT + AE2-3 + AE4 +AE5	Adapter3 + cable+ headset
Set.5	EUT + AE5	headset
Set.6	EUT + AE3-1/2/3/4 + EUT	EUT+EUT
Set.7	EUT + AE3-1/2/3/4 + HD	EUT+HD
Set.8	EUT + AE3-1/2/3/4 + PC	Type C communication with PC
Set.9	EUT + AE4 + PC + SD	USB communication with PC+SD

Test mode

Mode No.	Operating mode	Remarks
mode.1	MP4 Play	RE, CE
mode.2	Front Camera	RE, CE
mode.3	Rear Camera	RE, CE
mode.4	OTG Phone to Phone charging	RE only
mode.5	OTG + Mobile HD+MP4	RE only
mode.6	USB DATA (TYPE C)	RE, CE
mode.7	USB DATA (USB, SD TO PC)	RE, CE
mode.8	FM mode	FM(Low/Mid/High channel)
mode.9	CXX RX mode	GSM850, WCDMA Band 5, LTE Band 5, LTE Band 12, LTE Band 13, LTE Band 17, and LTE Band 26 (Low/Mid/High channel)

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters are supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC 47 CFR Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2021
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB;
Electrical insulation	1MHz— 1000MHz, >90dB. > 2 MΩ
Ground system resistance	< 4 Ω
Temperature	Min. = 15 °C, Max. = 35 °C

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
	BR	Re-use test data from basic model report.

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	A.1	P	CTTL(BDA)
2	Conducted Emission	15.107(a)	A.2	P	CTTL(BDA)

7. Test Facilities Utilized

Test Equipment

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURER	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100376	R&S	2024-06-29	1 year
2	Test Receiver	ESCI	100766	R&S	2025-04-18	1 year
3	LISN	ENV216	101459	R&S	2025-04-18	1 year
4	BiLog Antenna	VULB9163	302	Schwarzbeck	2024-08-28	1 year
5	EMI Antenna	3115	00119021	ETS-Lindgren	2024-06-24	1 year
6	Vector Signal Generator	SMF100A	101295	R&S	2025-01-25	1 Year
7	Universal Radio Communication Tester	CMW500	169743	R&S	2025-01-25	1 Year
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
9	Keyboard	KU-1601	2048361	Lenovo	N/A	N/A
10	Mouse	EMS-537A	8021S3MC	Lenovo	N/A	N/A
11	PC	M4000e-17	M706RMW2	Lenovo	N/A	N/A
12	PC	T14S	PC-1RP0TY	Lenovo	N/A	N/A

Test Software

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V8.53.0	R&S
Conducted Emission	EMC32 V8.53.0	R&S

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator at distances of 3 meters (for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

For the test setup photographs please see the test setup photos document.

A.1.2 EUT Operating Mode

The EUT is operating in the USB mode, charging mode, FM, MP3, MP4, CAMERA, OTG, SD and cellular RX mode.

The EUT was tested while operating in licensed band RX mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in the Section 3.4, are investigated. Only the worst case emissions are reported.

The FM radio mode radiated testing was performed with the Low/Mid/High channel. Only the worst cases are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V}/\text{m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance.

A.1.4 Test Condition

Voltage (V)	Frequency (Hz)
120	60

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 5.73dB, 1GHz-18GHz: 5.58dB, $k=2$.

Note: all the set-up and operating mode list in section 3.5 were tested, only the worst test data are showed in this section.

Set.1+Mode3, Rear Camera

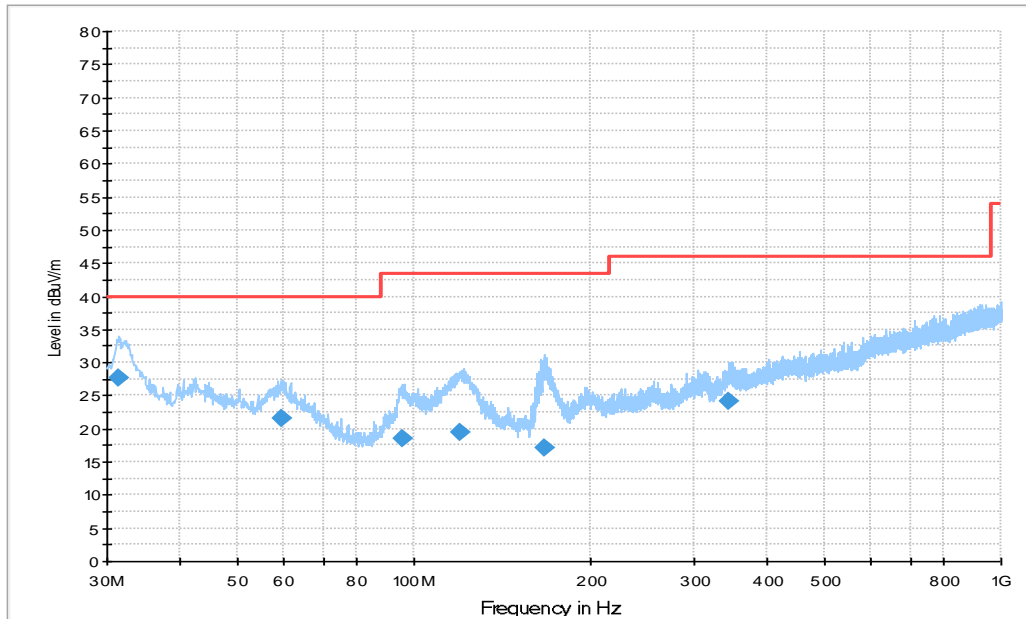


Figure A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
31.395000	27.8	100.0	V	31.0	-1.4	12.2	40.0
59.354000	21.5	100.0	V	231.0	0.4	18.5	40.0
95.281000	18.5	100.0	V	199.0	-1.3	25.0	43.5
119.78500	19.5	100.0	V	31.0	-2.9	24.0	43.5
166.53900	17.2	100.0	V	31.0	-3.2	26.3	43.5
343.66100	24.2	125.0	H	64.0	4.1	21.8	46.0

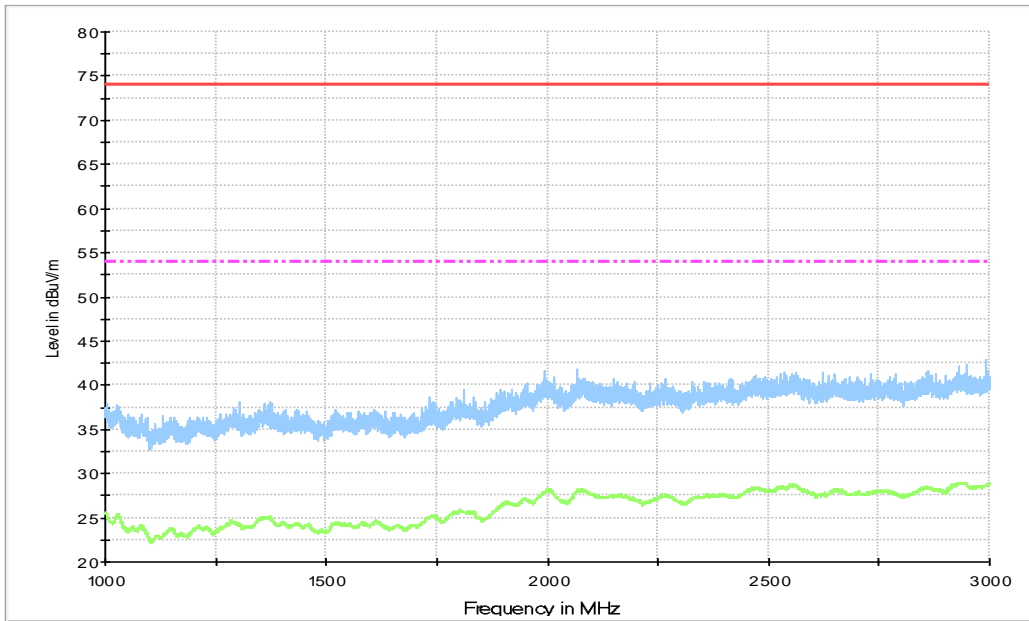


Figure A.2 Radiated Emission from 1GHz to 3GHz

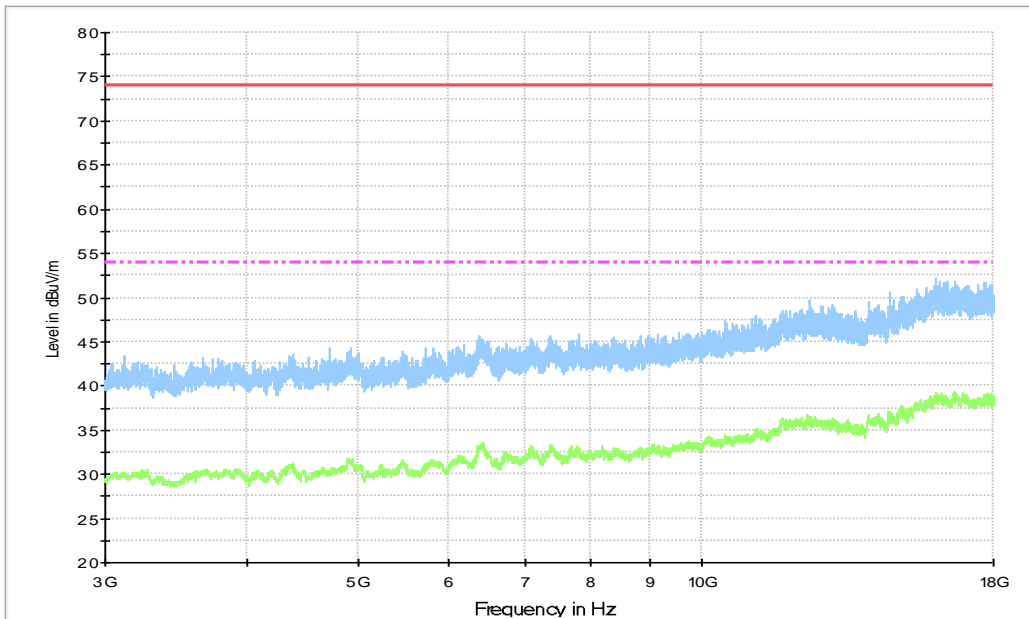


Figure A.3 Radiated Emission from 3GHz to 18GHz

Average detector result

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16642.50	39.31	-24.74	41.43	22.62	54.00	14.69	V
16628.50	39.20	-24.17	41.06	22.31	54.00	14.80	V
16017.50	39.19	-23.05	40.50	21.74	54.00	14.81	V
16639.50	39.19	-24.32	41.23	22.28	54.00	14.81	V
16950.00	39.18	-24.58	41.44	22.32	54.00	14.82	V
16626.00	39.17	-24.43	41.25	22.35	54.00	14.83	V

Peak detector result

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16023.50	52.28	-24.52	41.50	35.31	74.00	21.72	V
16663.50	51.93	-24.43	41.24	35.11	74.00	22.07	H
16159.50	51.86	-24.53	40.88	35.51	74.00	22.14	V
16426.50	51.77	-23.42	40.50	34.69	74.00	22.23	V
17707.00	51.65	-24.83	41.30	35.18	74.00	22.35	V
16319.00	51.65	-24.51	41.04	35.12	74.00	22.35	V

Set.3+Mode2+Mode9, Front Camera + RX WCDMA B5

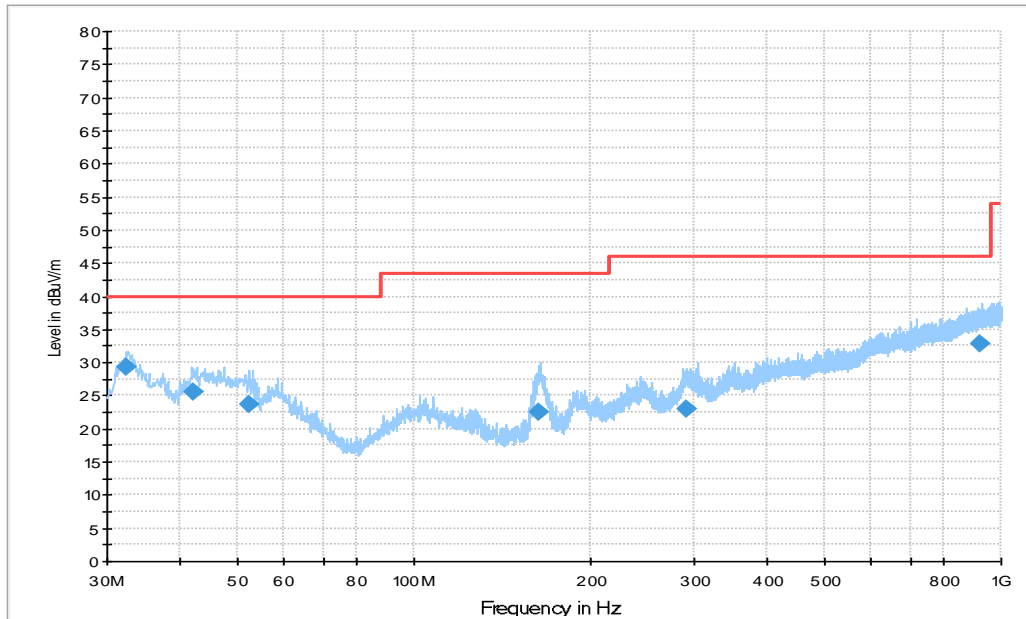


Figure A.4 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
32.388000	29.3	100.0	V	77.0	-1.2	10.7	40.0
42.088000	25.7	100.0	V	83.0	0.5	14.3	40.0
52.407000	23.8	100.0	V	32.0	-0.1	16.2	40.0
162.53900	22.6	100.0	V	211.0	-3.4	20.9	43.5
290.25100	23.1	100.0	V	103.0	1.7	22.9	46.0
922.82500	32.9	113.0	V	45.0	13.7	13.1	46.0

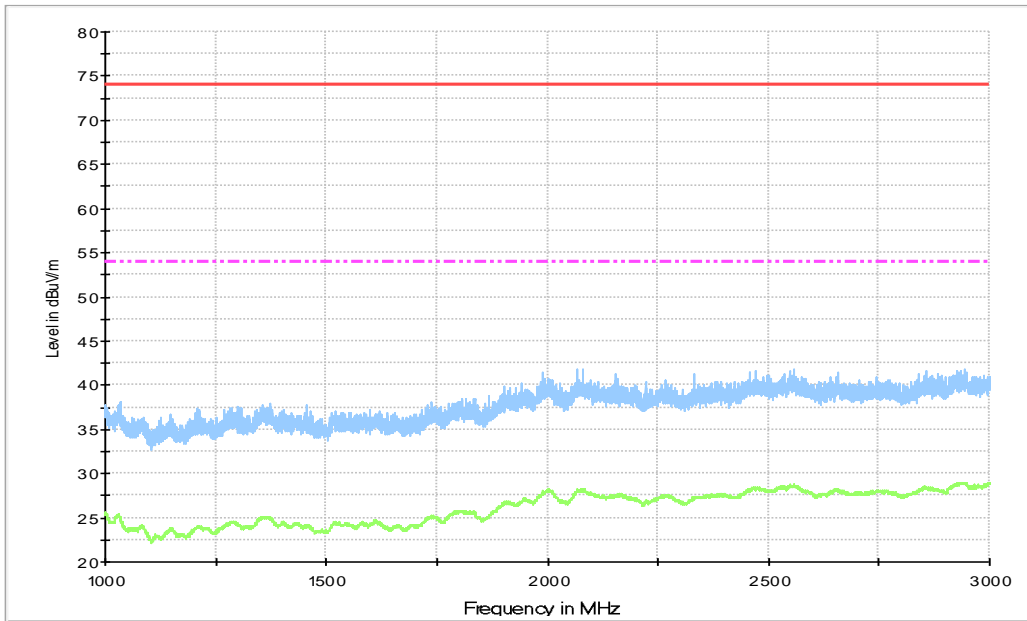


Figure A.5 Radiated Emission from 1GHz to 3GHz

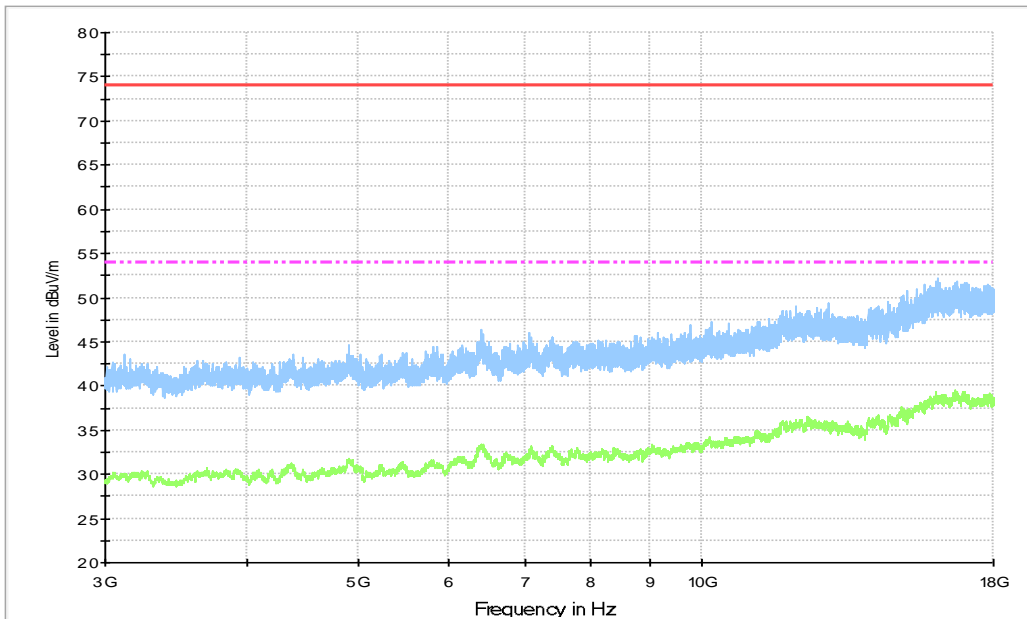


Figure A.6 Radiated Emission from 3GHz to 18GHz


Average detector result

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16641.00	39.45	-23.02	40.50	21.97	54.00	14.55	H
16940.50	39.40	-23.15	40.50	22.05	54.00	14.60	H
16019.50	39.38	-24.20	41.06	22.52	54.00	14.62	H
16695.50	39.31	-23.44	40.50	22.25	54.00	14.69	H
16638.00	39.31	-23.12	40.50	21.93	54.00	14.69	H
16635.00	39.30	-23.42	40.50	22.22	54.00	14.70	H

Peak detector result

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16074.00	52.28	-23.39	40.50	35.16	74.00	21.72	H
16014.50	51.78	-24.36	40.80	35.34	74.00	22.22	H
16701.50	51.76	-23.32	40.50	34.58	74.00	22.24	H
17053.50	51.73	-24.68	41.41	35.01	74.00	22.27	V
16165.00	51.70	-24.60	41.46	34.84	74.00	22.30	V
16953.50	51.66	-25.42	41.21	35.87	74.00	22.34	H

Set.4+Mode8, FM

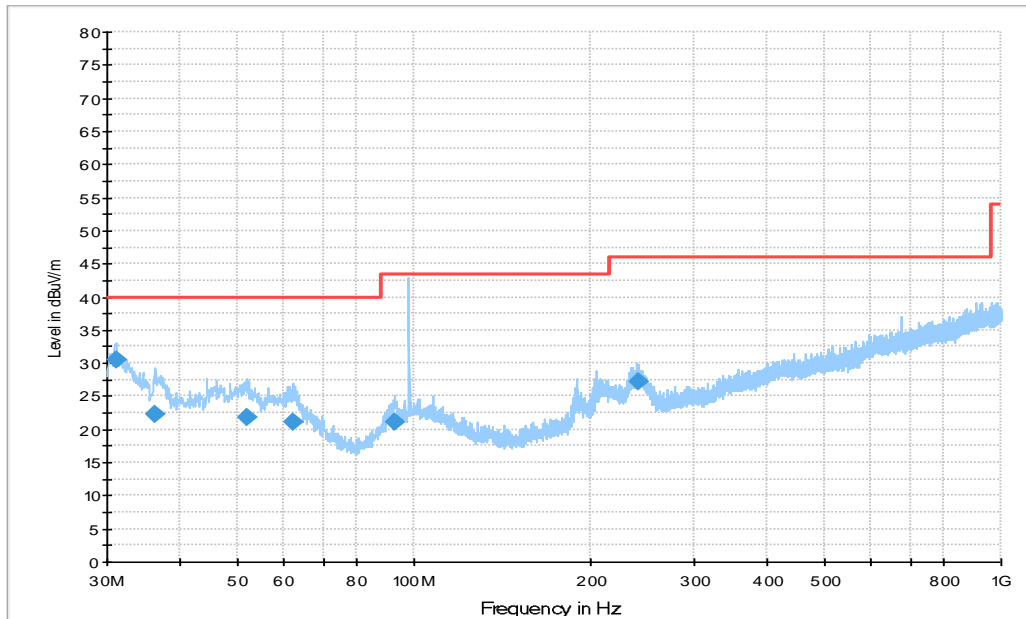

Note: the single at 98MHz is coming from FM signal source.

Figure A.7 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
31.067000	30.4	100.0	V	25.0	-1.4	9.6	40.0
36.305000	22.3	125.0	V	-39.0	-0.3	17.7	40.0
52.116000	21.9	125.0	V	45.0	0.0	18.1	40.0
62.301000	21.0	100.0	V	276.0	-0.7	19.0	40.0
92.953000	21.1	125.0	H	97.0	-1.8	22.4	43.5
240.68400	27.3	125.0	H	225.0	1.1	18.7	46.0

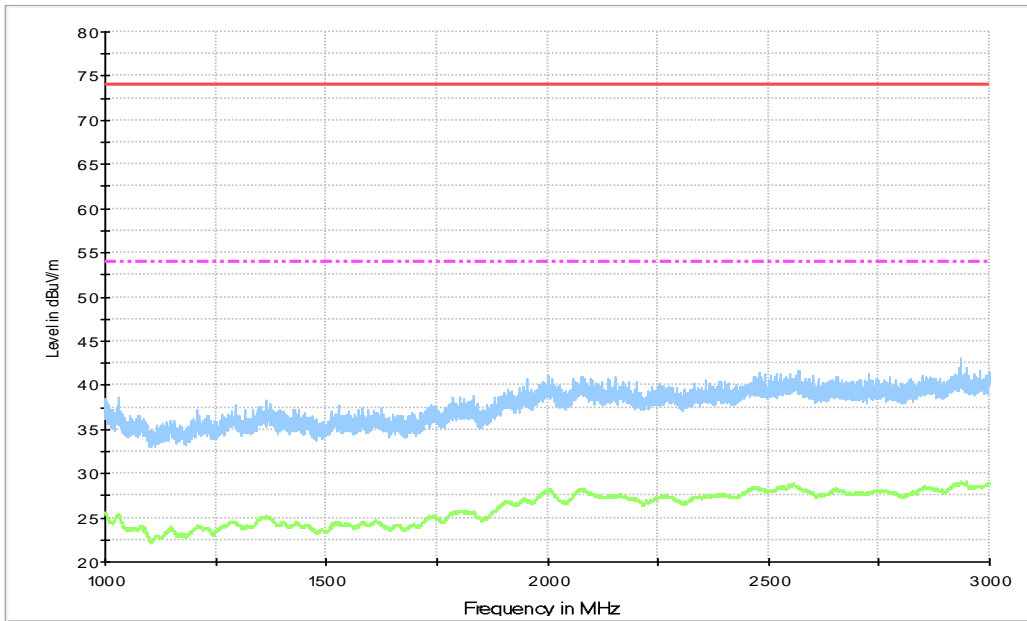


Figure A.8 Radiated Emission from 1GHz to 3GHz

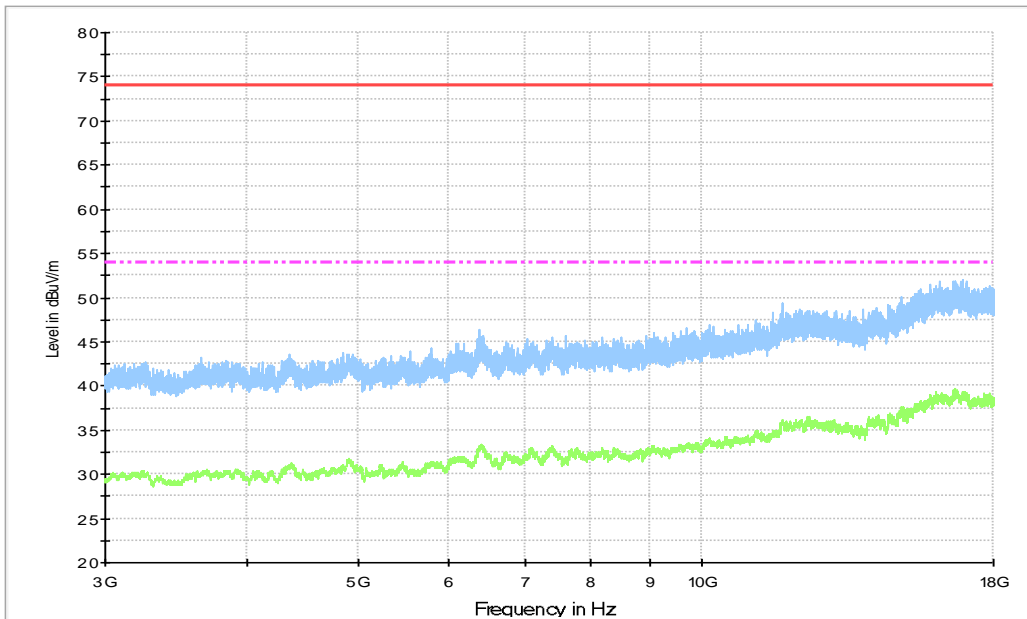


Figure A.9 Radiated Emission from 3GHz to 18GHz

Average detector result

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16637.50	40.16	-37.83	28.67	49.32	54.00	13.84	H
16630.50	40.16	-38.18	27.90	50.43	54.00	13.84	H
16643.50	40.06	-37.70	28.50	49.25	54.00	13.94	H
16651.50	40.05	-34.58	33.51	41.12	54.00	13.95	H
16625.00	40.05	-34.09	33.99	40.14	54.00	13.95	H
16631.50	40.01	-34.17	34.17	40.01	54.00	13.99	H

Peak detector result

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16923.00	51.94	-24.38	41.29	35.02	74.00	22.06	H
16168.50	51.93	-24.94	40.90	35.98	74.00	22.07	H
16669.00	51.93	-23.75	40.50	35.17	74.00	22.07	H
16821.50	51.89	-23.74	40.60	35.03	74.00	22.11	H
17064.00	51.83	-24.41	40.60	35.64	74.00	22.17	H
16647.50	51.81	-24.49	40.83	35.47	74.00	22.19	H

Set.7+Mode5+Mode9, OTG + MP4+ RX LTEB12

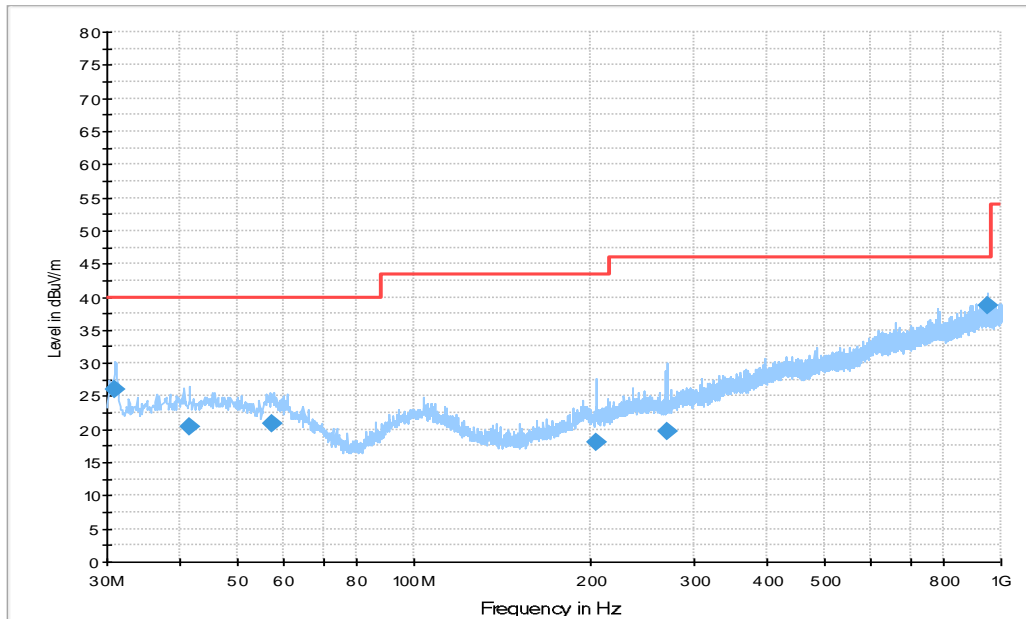


Figure A.10 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
30.970000	26.1	113.0	H	160.0	-1.4	13.9	40.0
41.446000	20.5	100.0	V	71.0	0.5	19.5	40.0
57.354000	20.9	125.0	H	-27.0	1.1	19.1	40.0
204.11500	18.1	100.0	V	179.0	-1.0	25.4	43.5
269.49300	19.8	113.0	H	270.0	0.7	26.2	46.0
948.49300	38.8	100.0	V	135.0	13.8	7.2	46.0

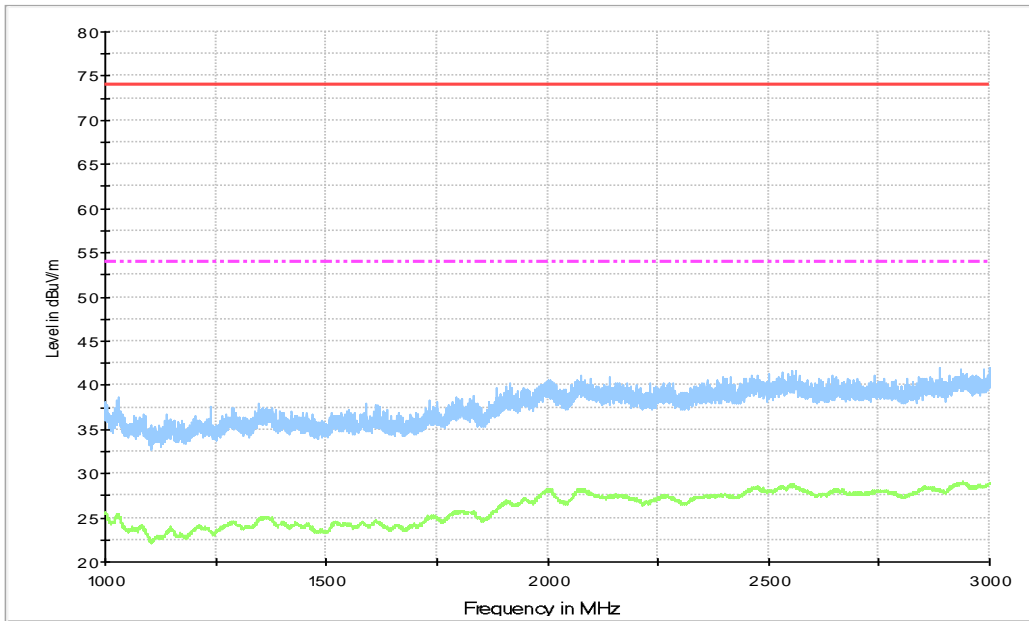


Figure A.11 Radiated Emission from 1GHz to 3GHz

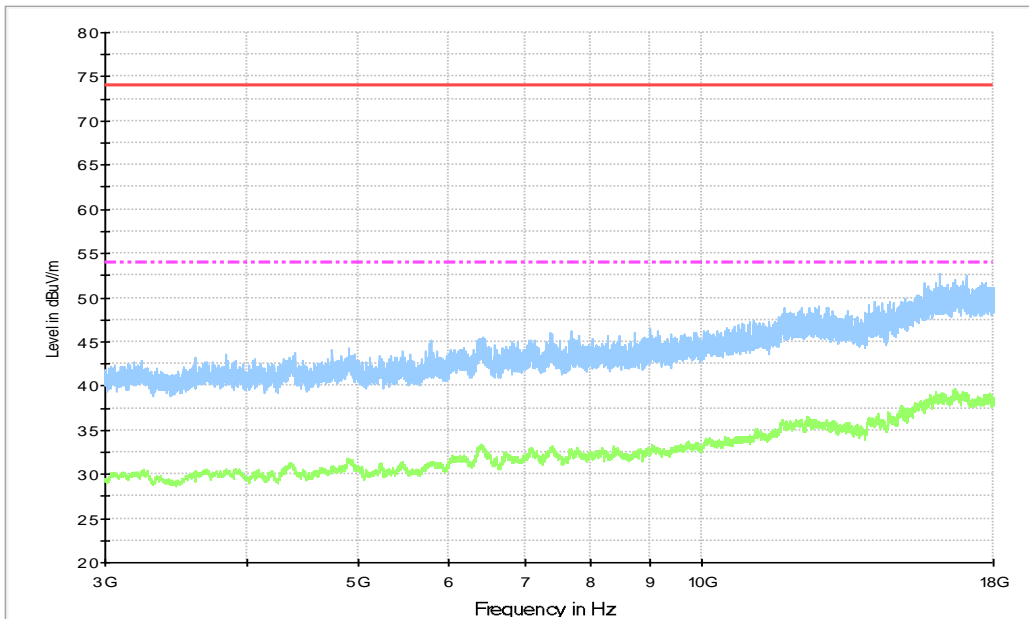


Figure A.12 Radiated Emission from 3GHz to 18GHz

Average detector result

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16632.00	39.71	-37.83	28.67	48.87	54.00	14.29	H
16638.00	39.68	-38.18	27.90	49.95	54.00	14.32	H
16628.00	39.50	-37.70	28.50	48.69	54.00	14.50	H
16640.00	39.49	-34.58	33.51	40.56	54.00	14.51	H
16626.50	39.48	-34.09	33.99	39.57	54.00	14.52	H
16621.50	39.44	-34.17	34.17	39.44	54.00	14.56	H

Peak detector result

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
16161.50	52.78	-38.06	28.59	62.25	74.00	21.22	H
17018.00	52.55	-38.17	27.91	62.81	74.00	21.45	H
16640.50	52.03	-37.68	28.38	61.33	74.00	21.97	H
16941.00	51.82	-35.21	32.90	54.13	74.00	22.18	V
17600.50	51.76	-34.57	33.40	52.93	74.00	22.24	H
16625.50	51.74	-34.40	33.96	52.18	74.00	22.26	H

Set.9+Mode7+Mode9, USB (SD TO PC) +RX LTE Band26

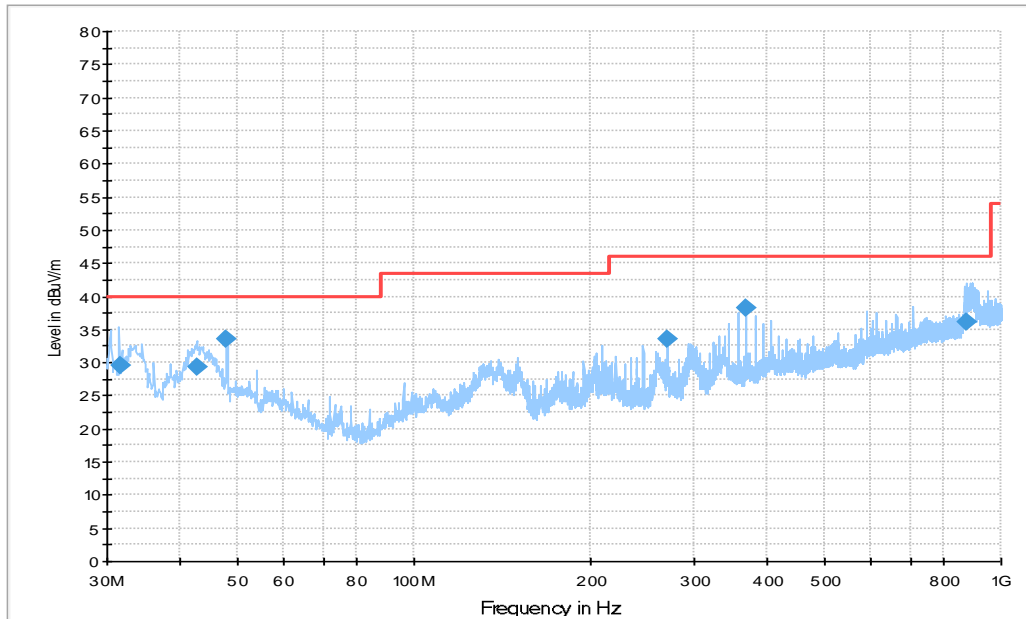


Figure A.13 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
31.515000	29.6	100.0	V	-13.0	-1.4	10.4	40.0
42.610000	29.3	100.0	V	225.0	0.5	10.7	40.0
48.005000	33.6	100.0	V	225.0	0.4	6.4	40.0
270.32900	33.6	100.0	H	76.0	0.8	12.4	46.0
368.62700	38.4	100.0	H	237.0	4.6	7.6	46.0
871.47500	36.1	100.0	V	6.0	13.0	9.9	46.0

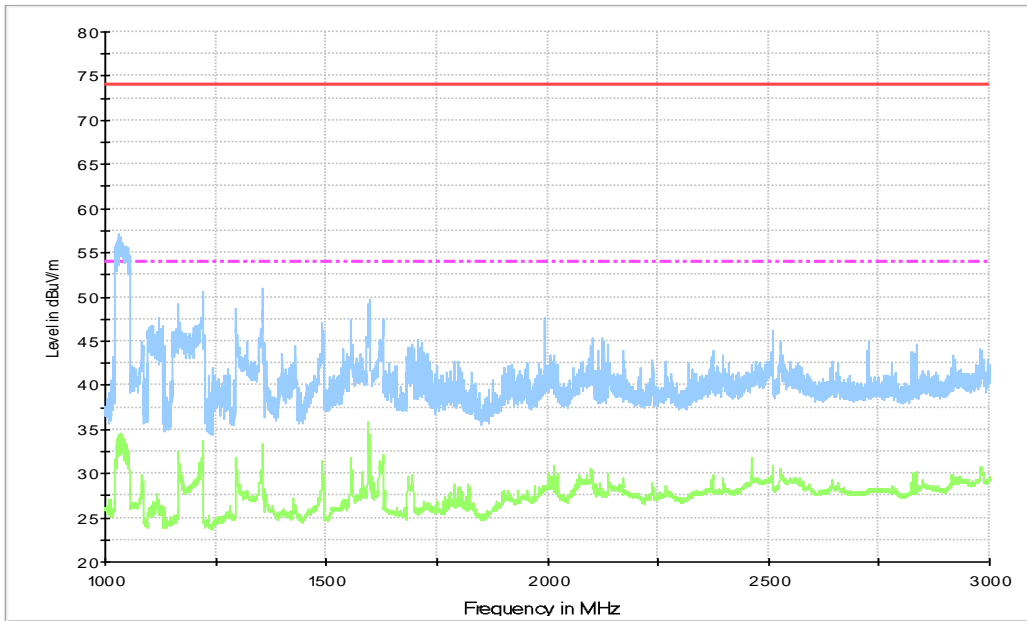


Figure A.14 Radiated Emission from 1GHz to 3GHz

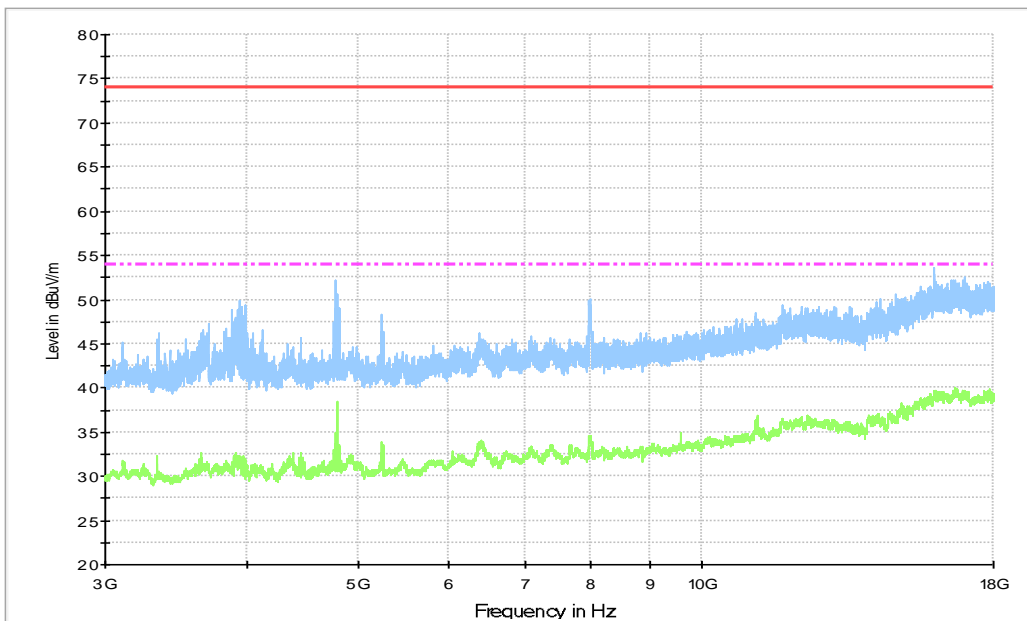


Figure A.15 Radiated Emission from 3GHz to 18GHz

Average detector result

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
1033.00	35.98	-37.83	28.67	45.14	54.00	18.02	H
1220.20	33.71	-38.18	27.90	43.99	54.00	20.29	H
1598.80	35.05	-37.70	28.50	44.25	54.00	18.95	V
4794.50	38.33	-34.58	33.51	39.40	54.00	15.67	H
5253.50	34.89	-34.09	33.99	34.98	54.00	19.11	H
6402.00	33.91	-34.17	34.17	33.91	54.00	20.09	H

Peak detector result

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
1024.60	57.23	-38.06	28.59	66.70	74.00	16.77	H
1210.80	50.66	-38.17	27.91	60.92	74.00	23.34	H
1356.60	49.38	-37.68	28.38	58.68	74.00	24.62	H
3946.00	50.21	-35.21	32.90	52.52	74.00	23.79	V
4779.00	54.19	-34.57	33.40	55.36	74.00	19.81	H
7970.00	50.26	-34.40	33.96	50.70	74.00	23.74	V

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

For the test setup photographs please see the test setup photos document.

A.2.2 EUT Operating Mode

The EUT is operating in the USB mode, charging mode, FM, MP3, MP4, CAMERA, SD and cellular RX mode.

The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60


RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 3.10$ dB, $k=2$.

Note: all the set-up and operating mode list in section 3.5 were tested, only the worst test data are showed in this section.

Set.1+Mode3

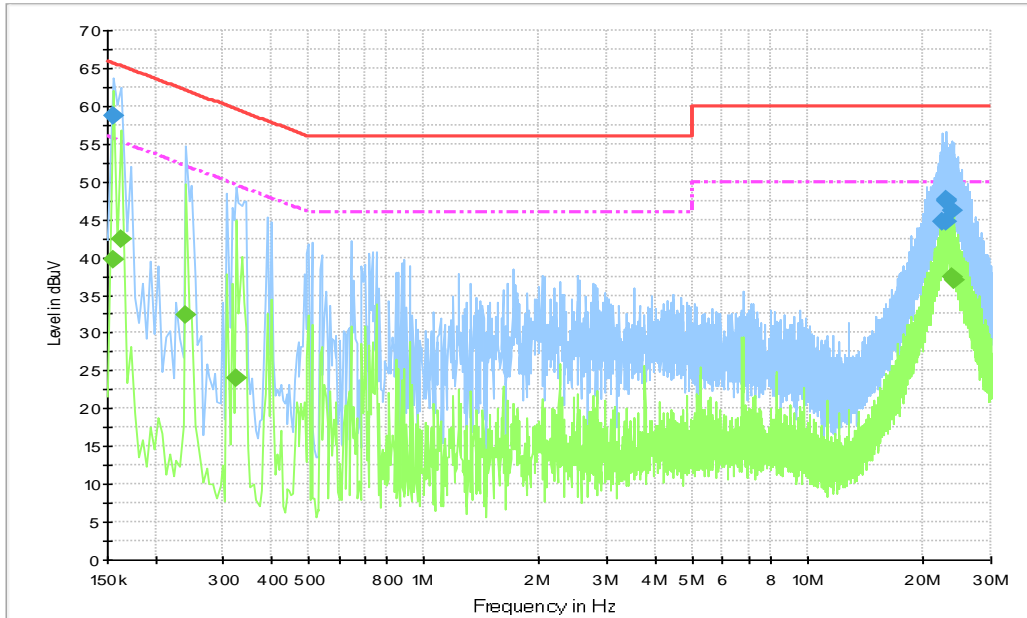

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.


Figure A.16 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	58.8	2000.0	9.000	L1	20.2	7.0	65.8
22.515000	44.6	2000.0	9.000	N	20.3	15.4	60.0
22.897500	44.8	2000.0	9.000	N	20.3	15.2	60.0
22.915500	47.7	2000.0	9.000	L1	20.1	12.3	60.0
22.992000	47.3	2000.0	9.000	L1	20.1	12.7	60.0
23.806500	46.2	2000.0	9.000	L1	20.1	13.8	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	39.7	2000.0	9.000	N	20.2	16.0	55.8
0.163500	42.4	2000.0	9.000	L1	20.1	12.9	55.3
0.240000	32.5	2000.0	9.000	N	20.1	19.6	52.1
0.325500	24.1	2000.0	9.000	L1	20.0	25.5	49.6
23.667000	37.5	2000.0	9.000	L1	20.1	12.5	50.0
23.883000	37.0	2000.0	9.000	L1	20.1	13.0	50.0

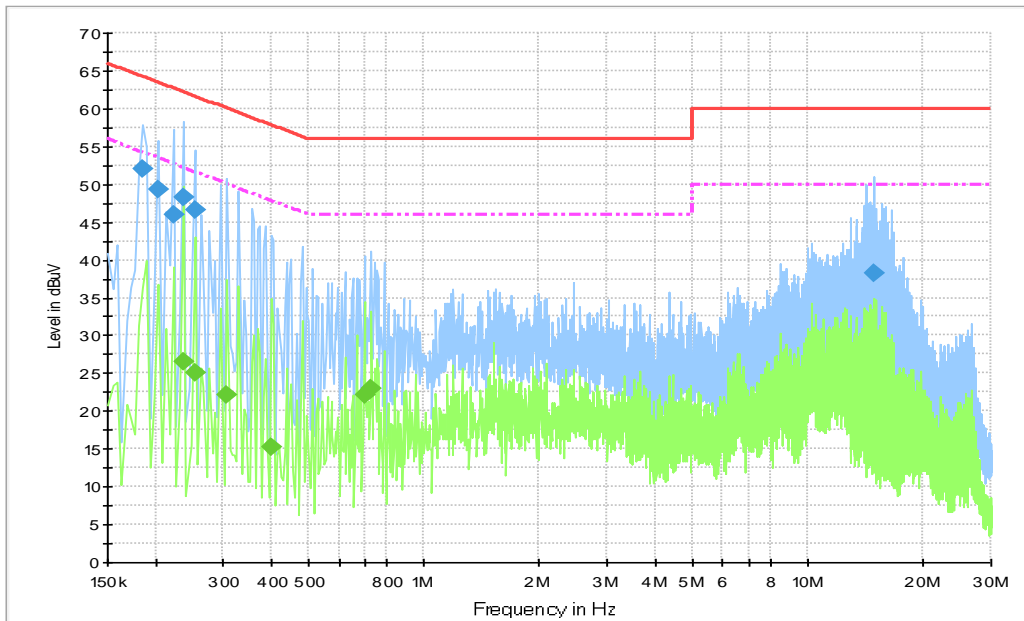Set.3+Mode2+ Mode9


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.


Figure A.17 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.186000	52.0	2000.0	9.000	N	20.1	12.2	64.2
0.204000	49.3	2000.0	9.000	N	20.1	14.1	63.4
0.222000	46.0	2000.0	9.000	N	20.0	16.7	62.7
0.235500	48.4	2000.0	9.000	L1	20.0	13.9	62.3
0.253500	46.6	2000.0	9.000	N	20.1	15.0	61.6
14.856000	38.3	2000.0	9.000	L1	20.0	21.7	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.235500	26.5	2000.0	9.000	L1	20.0	25.7	52.3
0.253500	25.1	2000.0	9.000	N	20.1	26.5	51.6
0.307500	22.2	2000.0	9.000	N	20.1	27.8	50.0
0.402000	15.2	2000.0	9.000	N	20.2	32.7	47.8
0.699000	22.1	2000.0	9.000	L1	20.0	23.9	46.0
0.730500	23.0	2000.0	9.000	L1	20.0	23.0	46.0

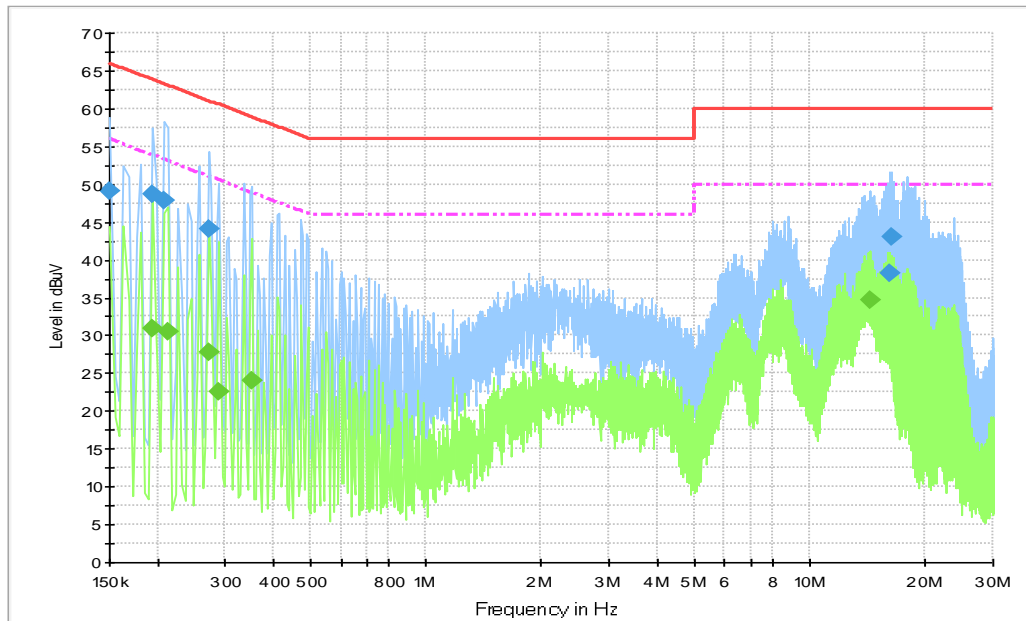Set.4+Mode8


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.


Figure A.18 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	49.2	2000.0	9.000	N	20.3	16.8	66.0
0.195000	48.6	2000.0	9.000	L1	20.0	15.2	63.8
0.208500	47.8	2000.0	9.000	N	20.0	15.5	63.3
0.271500	44.0	2000.0	9.000	L1	20.0	17.1	61.1
16.174500	38.2	2000.0	9.000	N	20.2	21.8	60.0
16.264500	43.1	2000.0	9.000	L1	20.0	16.9	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.195000	30.9	2000.0	9.000	N	20.1	22.9	53.8
0.213000	30.6	2000.0	9.000	L1	20.0	22.5	53.1
0.271500	27.8	2000.0	9.000	N	20.1	23.3	51.1
0.289500	22.7	2000.0	9.000	N	20.1	27.9	50.5
0.352500	24.0	2000.0	9.000	N	20.1	24.9	48.9
14.356500	34.7	2000.0	9.000	L1	20.0	15.3	50.0

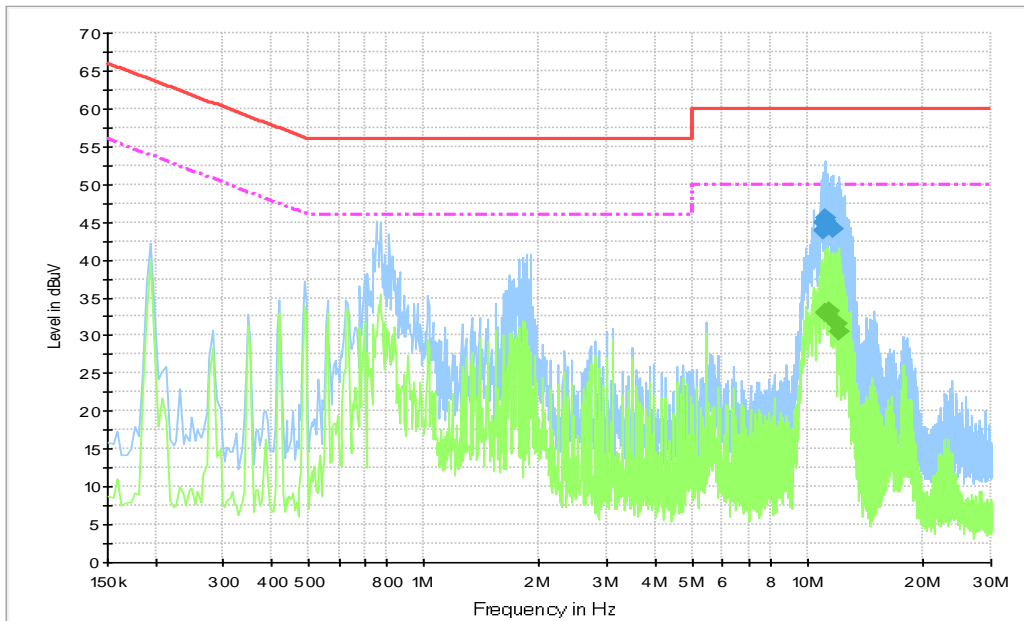Set.9+Mode7+Mode9


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Figure A.19 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
10.950000	43.8	2000.0	9.000	L1	20.0	16.2	60.0
11.031000	44.8	2000.0	9.000	N	20.1	15.2	60.0
11.098500	45.1	2000.0	9.000	L1	20.0	14.9	60.0
11.139000	45.6	2000.0	9.000	N	20.1	14.4	60.0
11.184000	44.7	2000.0	9.000	L1	20.0	15.3	60.0
11.589000	44.2	2000.0	9.000	N	20.2	15.8	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
11.103000	33.1	2000.0	9.000	N	20.1	16.9	50.0
11.148000	33.1	2000.0	9.000	L1	20.0	16.9	50.0
11.184000	32.7	2000.0	9.000	N	20.1	17.3	50.0
11.395500	33.2	2000.0	9.000	N	20.1	16.8	50.0
11.908500	31.6	2000.0	9.000	N	20.2	18.4	50.0
12.084000	30.5	2000.0	9.000	N	20.2	19.5	50.0



ANNEX B: Persons involved in this testing

Test Item	Tester
Radiated Emission	Sun Tianyuan
Conducted Emission	Guo Qian

*****END OF REPORT*****