






11G_2462_0~Reference

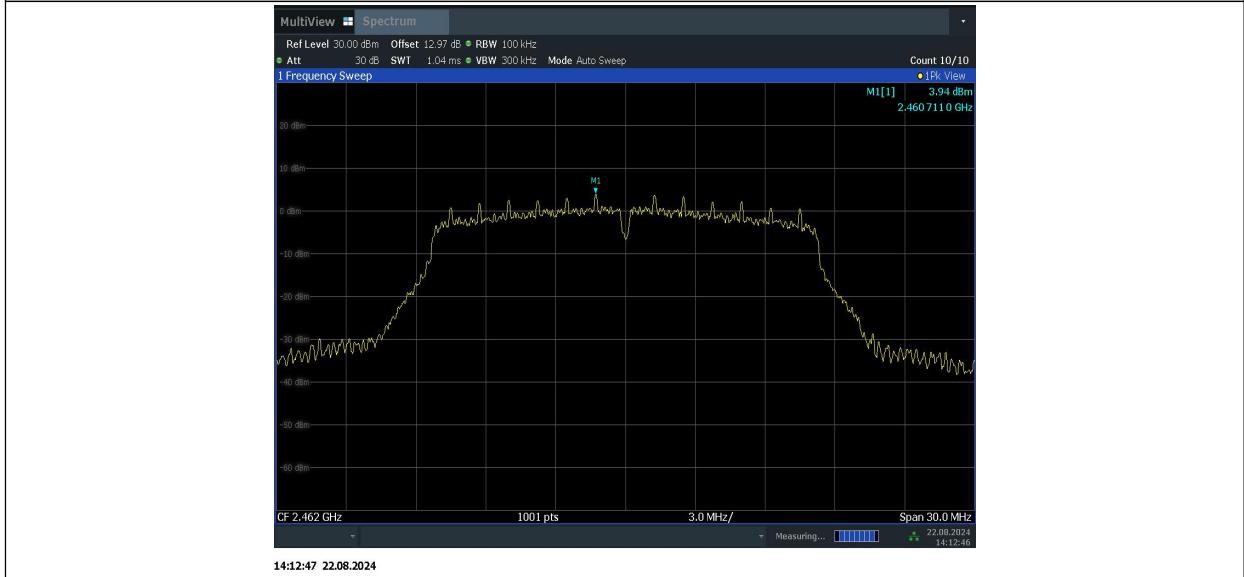


11G_2462_30~1000

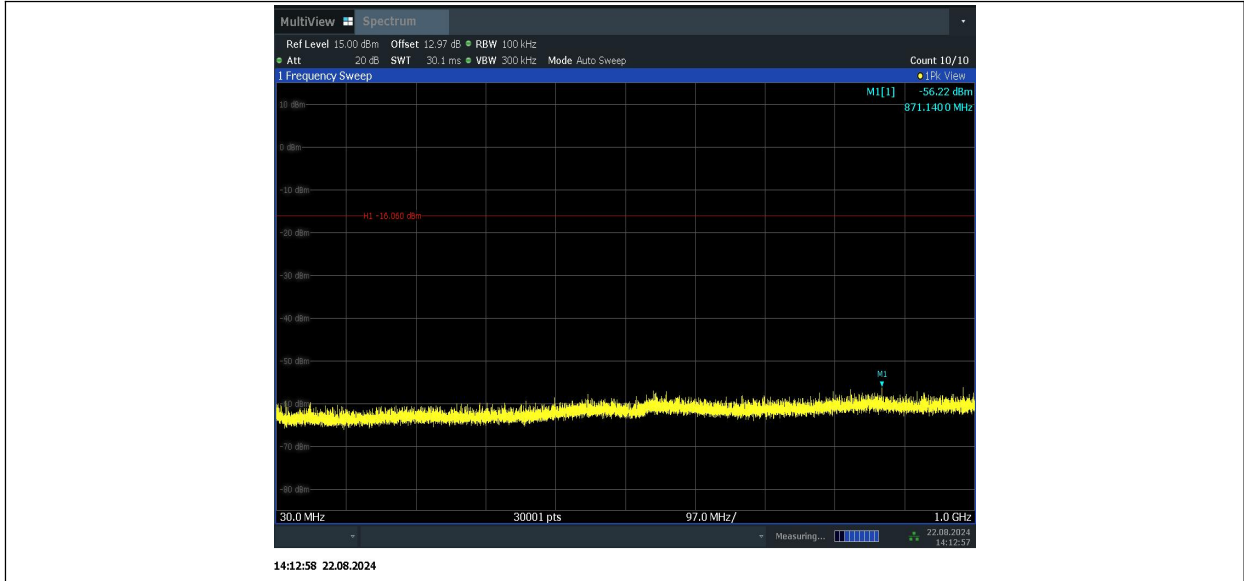


11G_2462_1000~26500

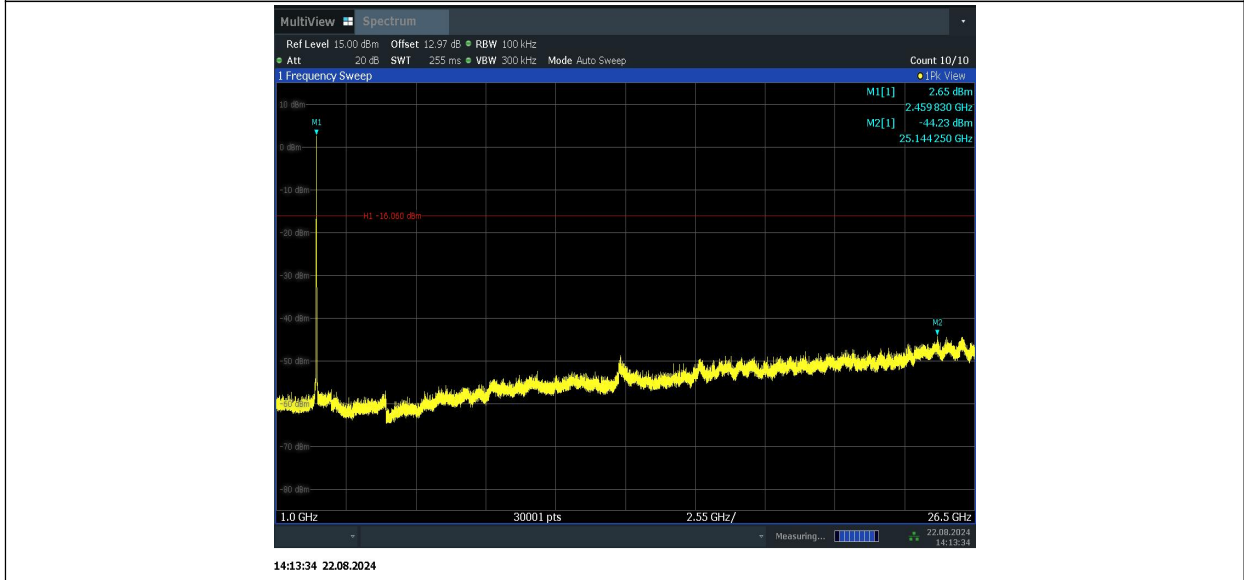

11N20_2412_0~Reference

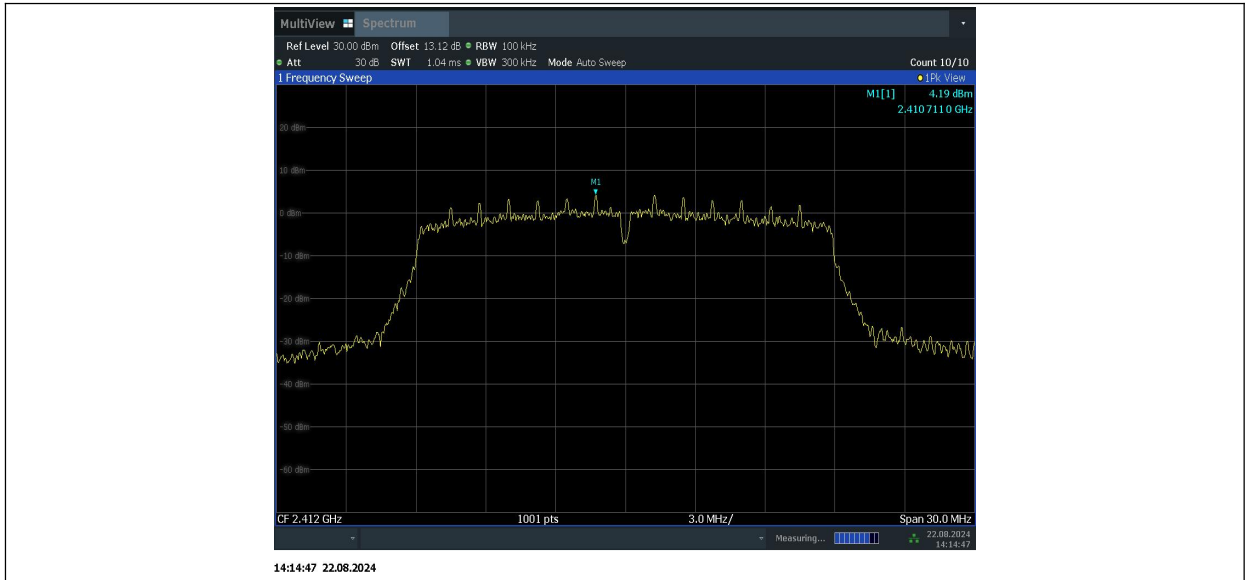


11N20_2412_30~1000

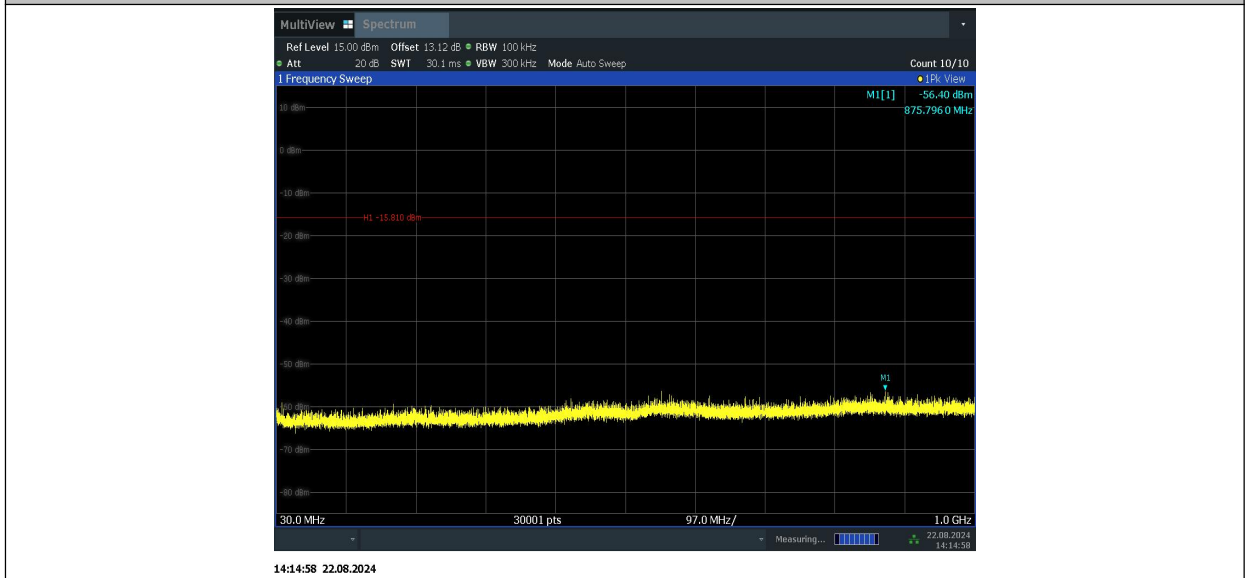


11N20_2412_1000~26500



11N20_2437_0~Reference

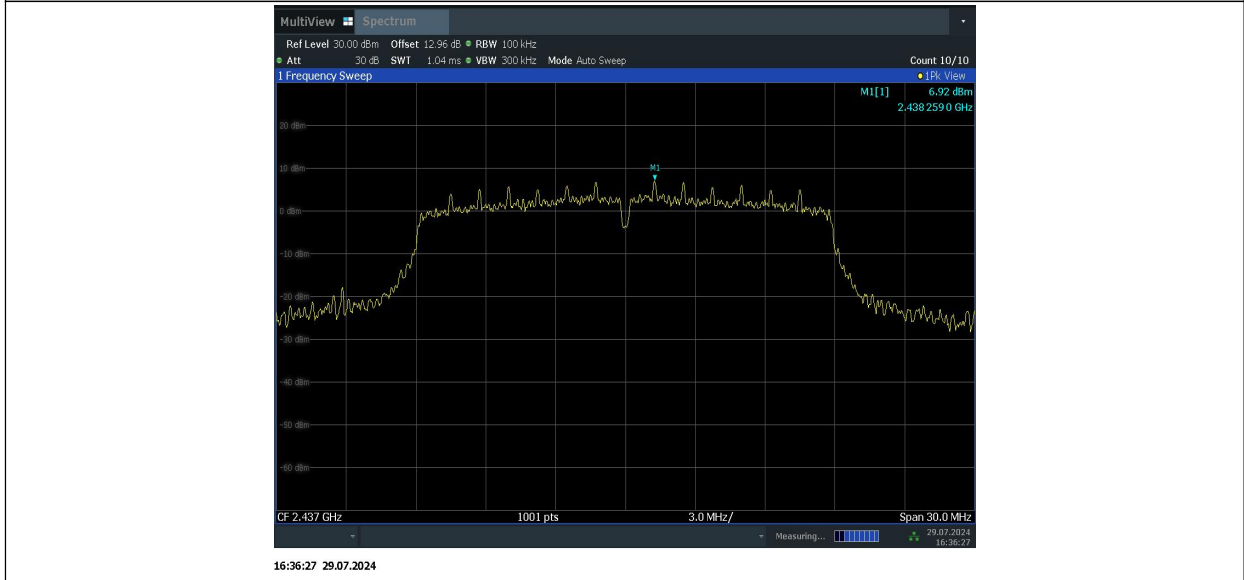


11N20_2437_30~1000

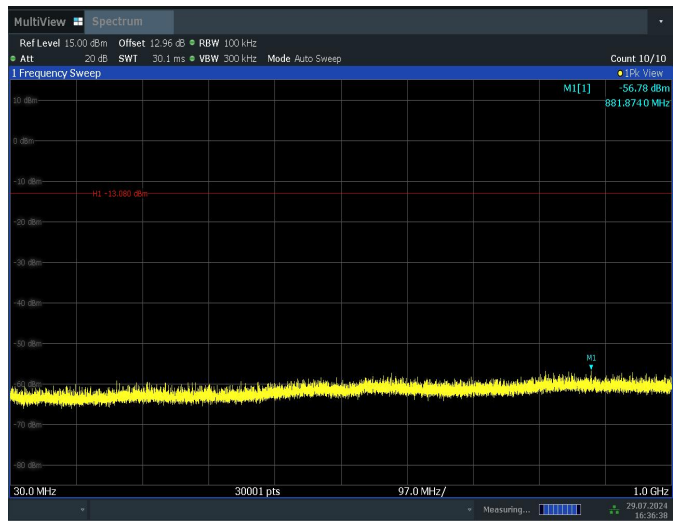


16:36:38 29.07.2024

11N20_2437_1000~26500

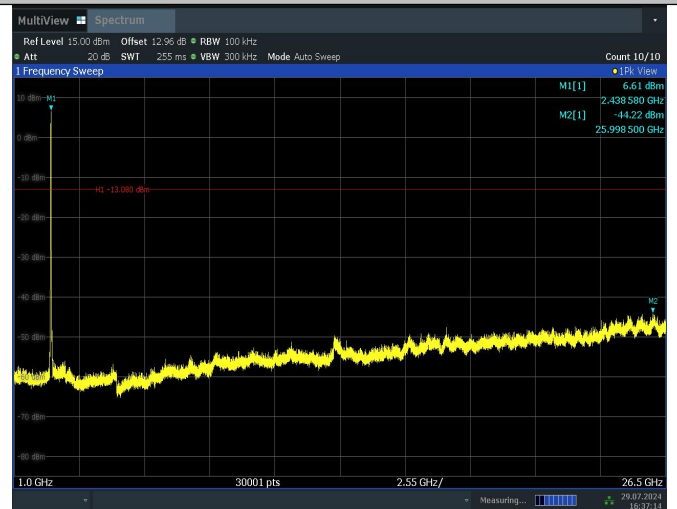


16:37:14 29.07.2024

11N20_2462_0~Reference

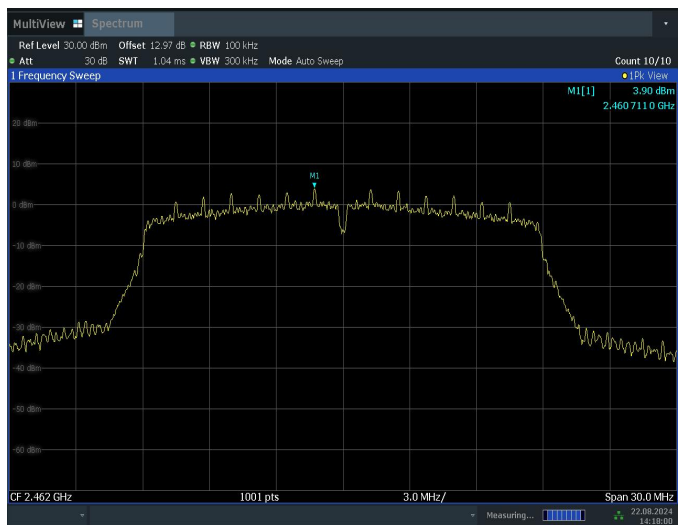


14:18:00 22.08.2024

11N20_2462_30~1000

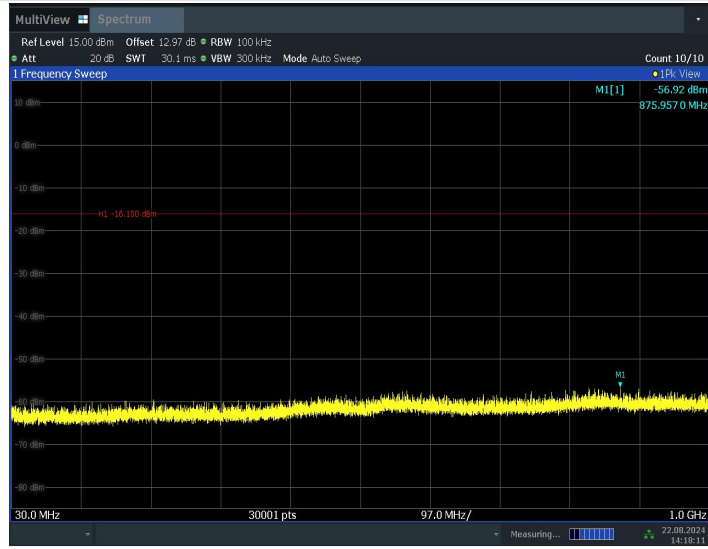

14:18:12 22.08.2024

11N20_2462_1000~26500

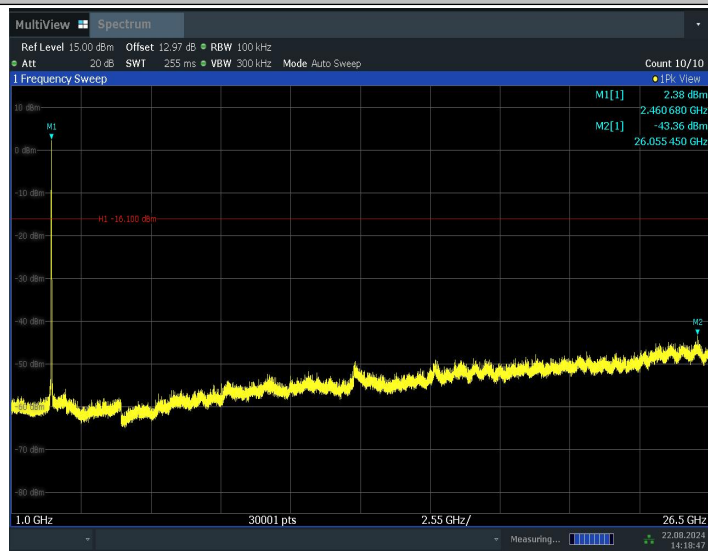

14:18:48 22.08.2024

Conclusion: Pass

A.7. Radiated Unwanted Emission

Limits

Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band

Frequency (MHz)	Field strength($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Field strength (dB $\mu\text{V}/\text{m}$)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor.

Test setup

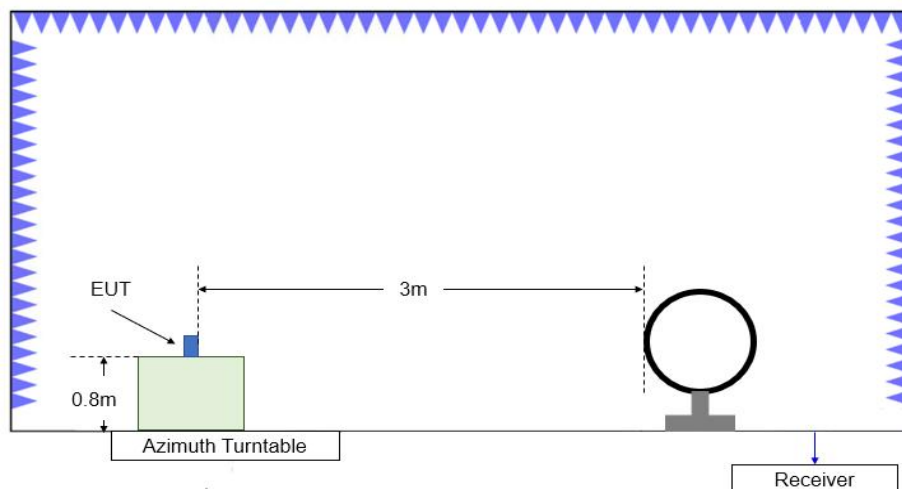


Figure A.2.1. Test Site Diagram (9kHz-30MHz)

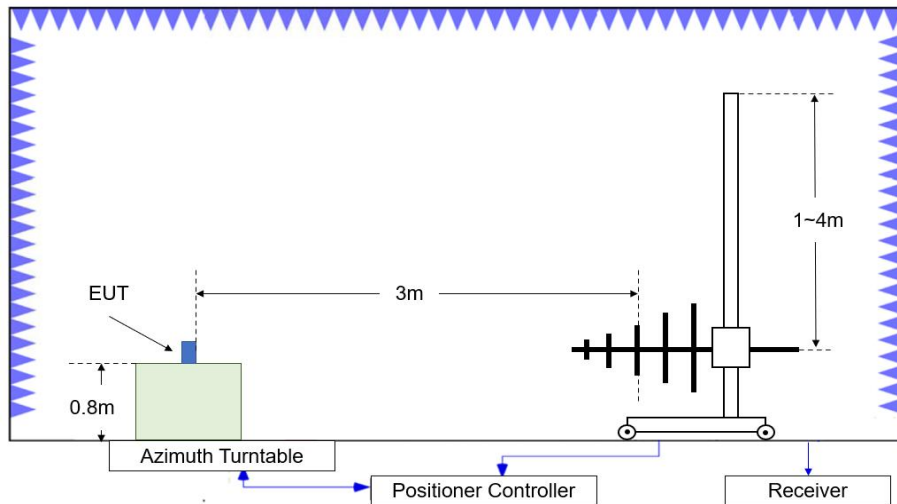


Figure A.2.2. Test Site Diagram (30MHz-1GHz)

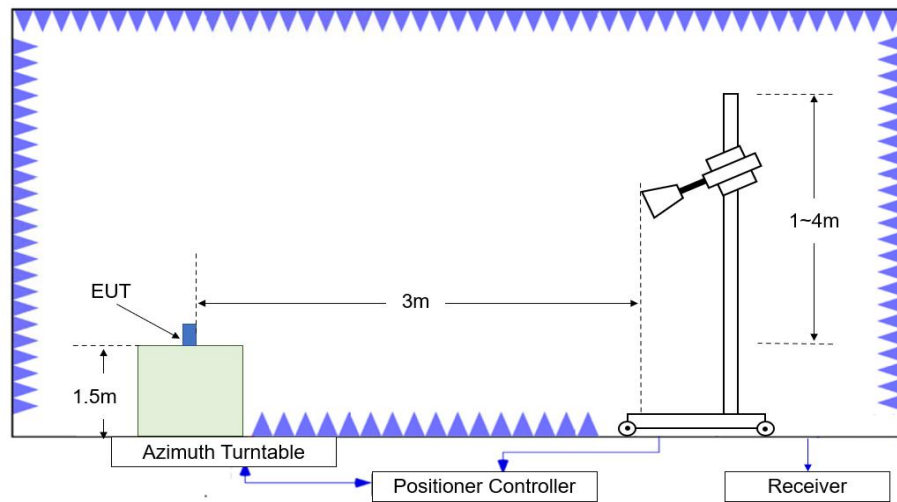


Figure A.2.3. Test Site Diagram (1GHz-40GHz)

Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10.

Test setting

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-3000	1MHz/3MHz	15
3000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Sample Calculation

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{\text{Mea}}+A_{\text{Rpl}}= P_{\text{Mea}}+\text{Cable Loss}+\text{Antenna Factor}$

Test note

1. The EUT is operating at its maximum duty cycle and its maximum power control level.
2. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
3. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
4. Measurement frequencies were performed from 9 kHz to the 10th harmonic of highest fundamental frequency.

Test Result

Peak
802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2386.450	53.93	-27.3	31.7	49.46	74.0	20.1	H
2389.000	53.72	-27.3	31.7	49.26	74.0	20.3	V
4824.000	46.86	-33.7	34.1	46.45	74.0	27.1	H
7236.000	43.28	-32.0	35.7	39.56	74.0	30.7	V
9648.000	45.29	-30.5	36.8	39.01	74.0	28.7	V
12060.000	47.84	-29.3	38.9	38.27	74.0	26.2	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2422.400	58.62	-27.3	31.8	54.04	74.0	15.4	H
2456.800	58.66	-27.3	32.0	53.94	74.0	15.3	V
4874.000	47.28	-33.6	34.1	46.80	74.0	26.7	H
7312.000	43.27	-31.9	35.7	39.41	74.0	30.7	H
9748.000	45.15	-30.2	36.9	38.46	74.0	28.8	V
12186.500	47.60	-29.1	39.0	37.72	74.0	26.4	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2487.775	57.22	-27.0	32.3	53.24	74.0	16.8	H
2488.125	58.10	-27.0	32.3	52.80	74.0	15.9	H
4924.000	49.67	-33.4	34.1	49.00	74.0	24.3	V
7387.500	43.70	-32.0	35.8	39.94	74.0	30.3	H
9848.000	44.43	-30.6	37.0	38.03	74.0	29.6	H
12309.500	47.33	-29.2	38.9	37.66	74.0	26.7	V

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.525	67.54	-27.3	31.7	63.08	74.0	6.5	V
2389.975	68.89	-27.3	31.7	64.44	74.0	5.1	H
4824.000	42.23	-33.7	34.1	41.82	74.0	31.8	H
7235.500	44.07	-32.0	35.7	40.35	74.0	29.9	H
9648.000	45.61	-30.5	36.8	39.34	74.0	28.4	V
12059.500	46.82	-29.3	38.9	37.23	74.0	27.2	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2393.600	57.42	-27.3	31.8	52.98	74.0	16.6	V
2474.400	56.70	-27.2	32.1	51.71	74.0	17.3	H
4874.000	42.23	-33.6	34.1	41.75	74.0	31.8	V
7311.500	43.39	-31.8	35.7	39.51	74.0	30.6	H
9747.000	44.84	-30.1	36.9	38.09	74.0	29.2	V
12184.500	46.54	-29.1	39.0	36.68	74.0	27.5	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.625	70.45	-27.0	32.2	65.25	74.0	3.6	V
2483.750	69.07	-27.0	32.2	63.87	74.0	4.9	H
4918.000	45.84	-33.4	34.1	45.12	74.0	28.2	H
7387.000	42.89	-32.0	35.8	39.13	74.0	31.1	V
9848.000	43.35	-30.6	37.0	36.95	74.0	30.6	V
12309.500	48.69	-29.2	38.9	39.02	74.0	25.3	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.650	66.55	-27.3	31.7	62.09	74.0	7.5	H
2389.900	66.55	-27.3	31.7	62.10	74.0	7.4	V
4826.000	42.64	-33.7	34.1	42.24	74.0	31.4	H
7238.500	44.08	-31.9	35.7	40.32	74.0	29.9	H
9650.500	45.43	-30.6	36.8	39.20	74.0	28.6	H
12059.500	47.36	-29.3	38.9	37.77	74.0	26.6	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2394.400	56.52	-27.3	31.8	52.08	74.0	17.5	H
2475.600	56.69	-27.1	32.2	51.68	74.0	17.3	V
4874.000	42.43	-33.6	34.1	41.95	74.0	31.6	H
7311.500	43.20	-31.8	35.7	39.32	74.0	30.8	V
9749.500	44.99	-30.3	36.9	38.40	74.0	29.0	H
12185.500	47.06	-29.1	39.0	37.19	74.0	26.9	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.700	70.62	-27.0	32.2	65.42	74.0	3.4	V
2483.800	70.27	-27.0	32.2	65.06	74.0	3.7	V
4924.000	46.58	-33.4	34.1	45.92	74.0	27.4	H
7387.000	43.68	-32.0	35.8	39.93	74.0	30.3	V
9851.000	44.83	-30.6	37.0	38.42	74.0	29.2	V
12310.500	47.45	-29.2	38.9	37.80	74.0	26.5	V

**Average
802.11b**
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2385.560	43.73	-27.2	31.7	39.26	54.0	10.3	V
2386.400	43.79	-27.3	31.7	39.33	54.0	10.2	V
4824.000	44.90	-33.7	34.1	44.49	54.0	9.1	V
7234.500	33.84	-32.0	35.7	30.13	54.0	20.2	V
9648.000	35.19	-30.5	36.8	28.92	54.0	18.8	V
12058.500	37.28	-29.3	38.9	27.67	54.0	16.7	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2411.600	44.28	-27.2	31.8	39.66	54.0	9.7	V
2465.400	44.37	-27.3	32.1	39.60	54.0	9.6	V
4874.000	45.07	-33.6	34.1	44.58	54.0	8.9	H
7309.500	33.75	-31.8	35.7	29.85	54.0	20.2	H
9748.000	35.28	-30.2	36.9	28.60	54.0	18.7	H
12184.500	37.50	-29.1	39.0	27.64	54.0	16.5	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2487.900	48.74	-27.0	32.3	44.45	54.0	5.3	V
2488.000	48.84	-27.0	32.3	44.55	54.0	5.2	V
4924.000	48.33	-33.4	34.1	47.67	54.0	5.7	V
7381.500	33.93	-32.1	35.8	30.22	54.0	20.1	H
9849.500	34.16	-30.6	37.0	27.74	54.0	19.8	V
12310.000	37.02	-29.3	38.9	27.37	54.0	17.0	V

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.800	48.51	-27.3	31.7	44.06	54.0	5.5	V
2390.000	49.18	-27.3	31.7	44.72	54.0	4.8	V
4824.000	33.57	-33.7	34.1	33.16	54.0	20.4	H
7233.000	33.46	-32.0	35.7	29.76	54.0	20.5	V
9647.000	35.64	-30.5	36.8	29.34	54.0	18.4	V
12058.000	37.93	-29.2	38.9	28.31	54.0	16.1	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2407.800	42.60	-27.2	31.8	38.01	54.0	11.4	V
2470.800	43.71	-27.2	32.1	38.81	54.0	10.3	V
4874.000	33.90	-33.6	34.1	33.42	54.0	20.1	V
7312.000	33.19	-31.9	35.7	29.33	54.0	20.8	H
9748.500	34.90	-30.2	36.9	28.24	54.0	19.1	V
12186.500	37.53	-29.1	39.0	27.66	54.0	16.5	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.500	49.53	-27.0	32.2	44.34	54.0	4.5	V
2483.625	49.41	-27.0	32.2	44.21	54.0	4.6	V
4924.000	36.85	-33.4	34.1	36.18	54.0	17.2	H
7374.500	33.67	-31.9	35.8	29.78	54.0	20.3	V
9349.500	35.06	-30.8	36.4	29.43	54.0	18.9	H
12314.500	37.00	-29.2	38.9	27.28	54.0	17.0	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.875	47.96	-27.3	31.7	43.51	54.0	6.0	V
2390.000	48.31	-27.3	31.7	43.85	54.0	5.7	V
4822.500	34.13	-33.7	34.1	33.72	54.0	19.9	H
7236.000	33.68	-32.0	35.7	29.95	54.0	20.3	V
8765.000	34.40	-31.0	36.0	29.42	54.0	19.6	H
12058.500	37.44	-29.3	38.9	27.83	54.0	16.6	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2406.625	42.47	-27.3	31.8	37.91	54.0	11.5	V
2470.875	43.96	-27.2	32.1	39.06	54.0	10.0	V
4874.000	34.27	-33.6	34.1	33.79	54.0	19.7	V
7312.000	33.32	-31.9	35.7	29.46	54.0	20.7	H
9748.500	34.73	-30.2	36.9	28.07	54.0	19.3	H
12184.500	36.93	-29.1	39.0	27.07	54.0	17.1	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.625	49.21	-27.0	32.2	44.01	54.0	4.8	V
2483.750	49.29	-27.0	32.2	44.09	54.0	4.7	V
4927.000	35.91	-33.5	34.1	35.35	54.0	18.1	V
7385.000	33.38	-32.1	35.8	29.64	54.0	20.6	H
9849.000	34.39	-30.6	37.0	27.98	54.0	19.6	V
12310.500	36.96	-29.2	38.9	27.31	54.0	17.0	V

Conclusion: Pass

Note: the spurious emission above 18G is noise only and did not show on the report.

Band edge compliance

802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.31GHz~2.43GHz---L	Fig.1	P
	11	2.45GHz~2.50GHz---H	Fig.2	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.31GHz~2.43GHz---L	Fig.3	P
	2	2.31GHz~2.43GHz---L	Fig.4	P
	10	2.45GHz~2.50GHz---H	Fig.5	P
	11	2.45GHz~2.50GHz---H	Fig.6	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.31GHz~2.43GHz---L	Fig.7	P
	2	2.31GHz~2.43GHz---L	Fig.8	P
	10	2.45GHz~2.50GHz---H	Fig.9	P
	11	2.45GHz~2.50GHz---H	Fig.10	P

Test graphs as below:

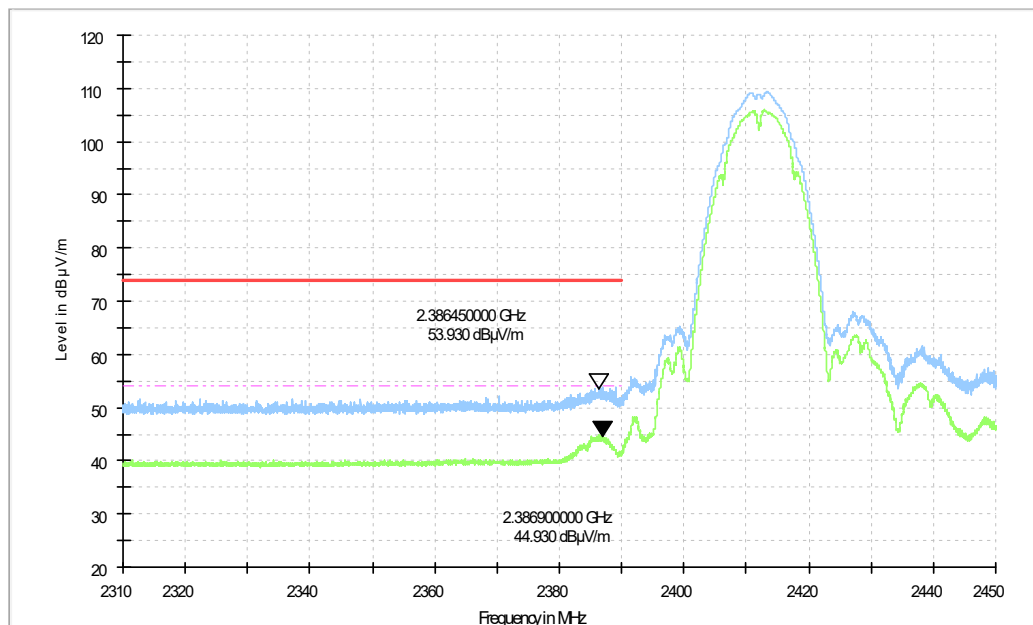


Fig.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.43GHz

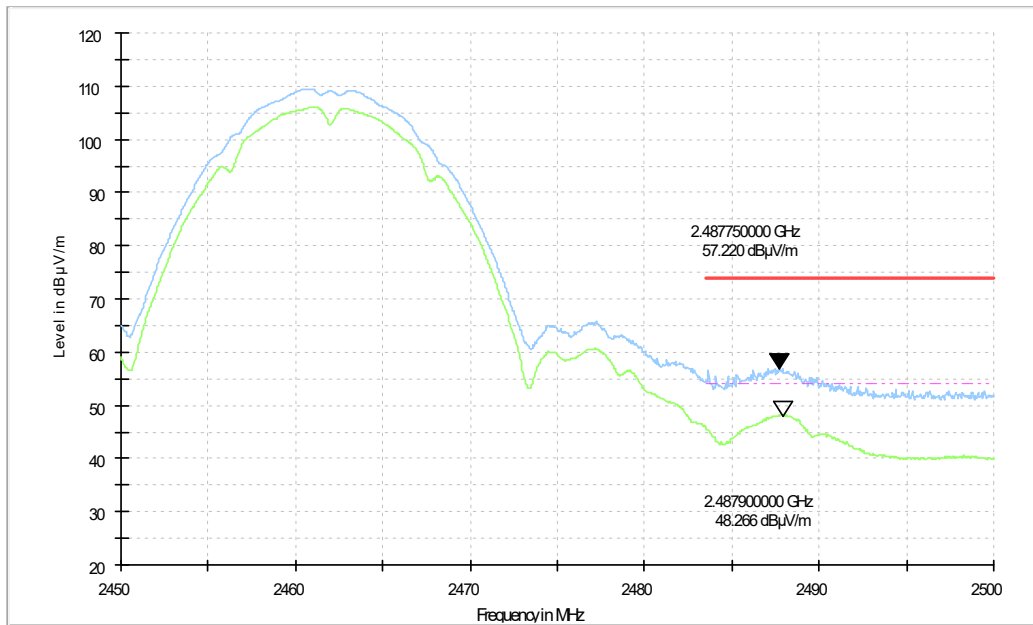


Fig.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

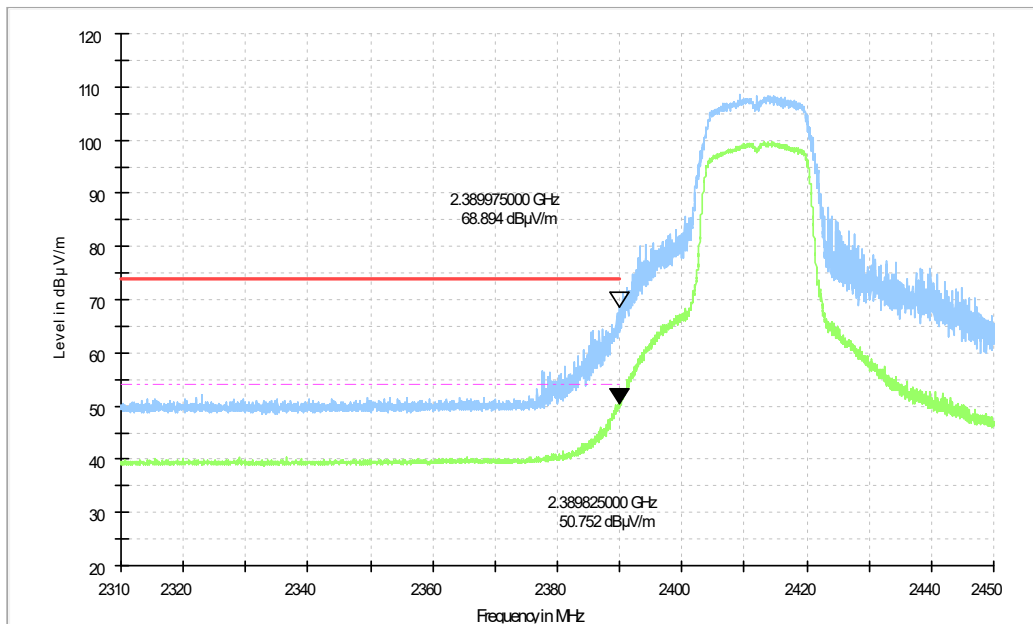


Fig.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.43GHz

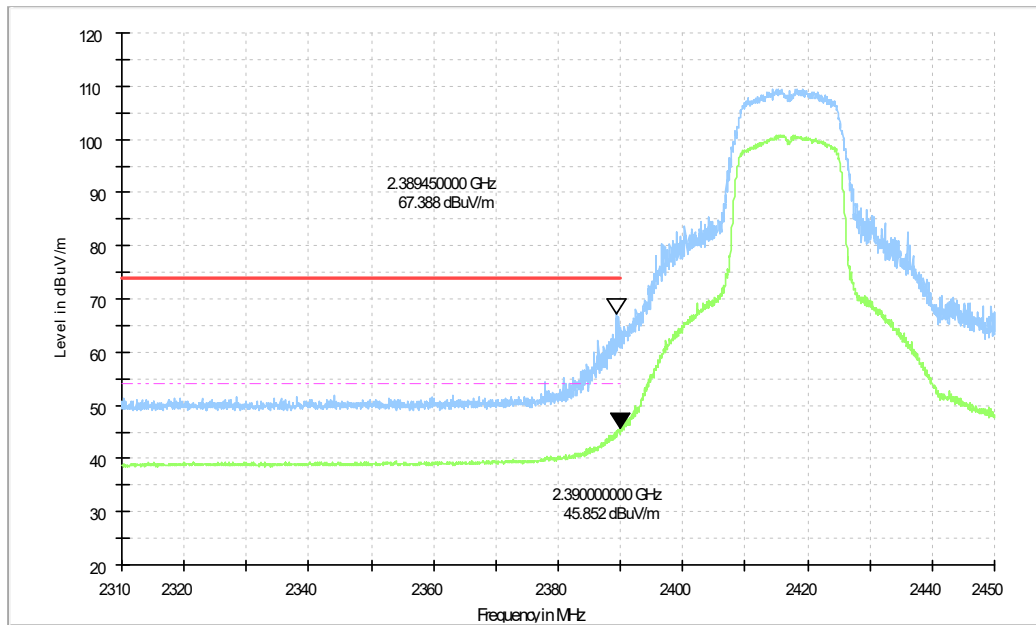


Fig.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch2, 2.31 GHz - 2.43GHz

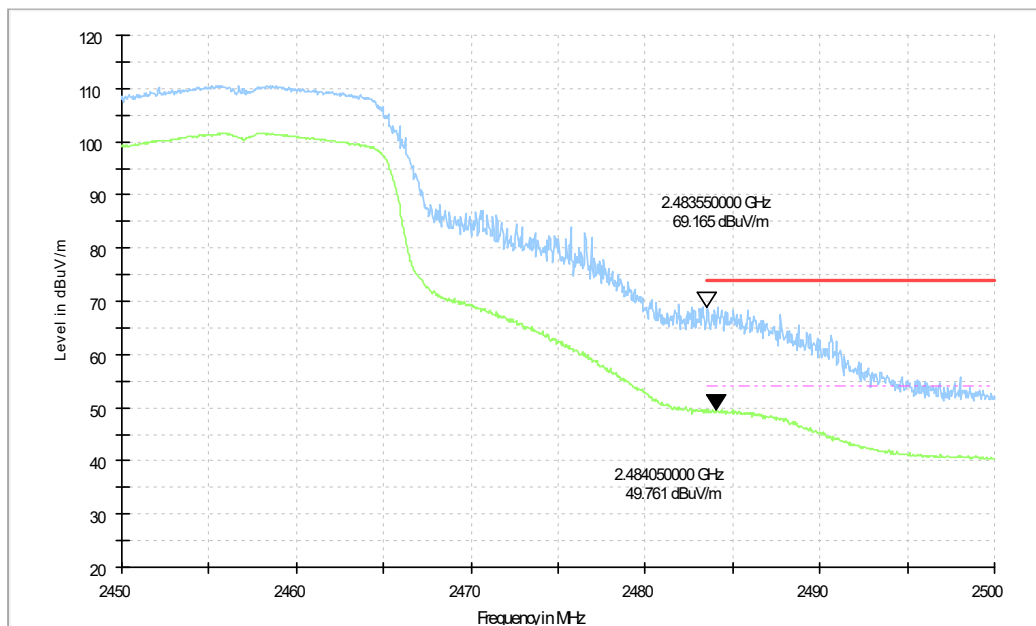


Fig.5 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch10, 2.45 GHz - 2.50GHz

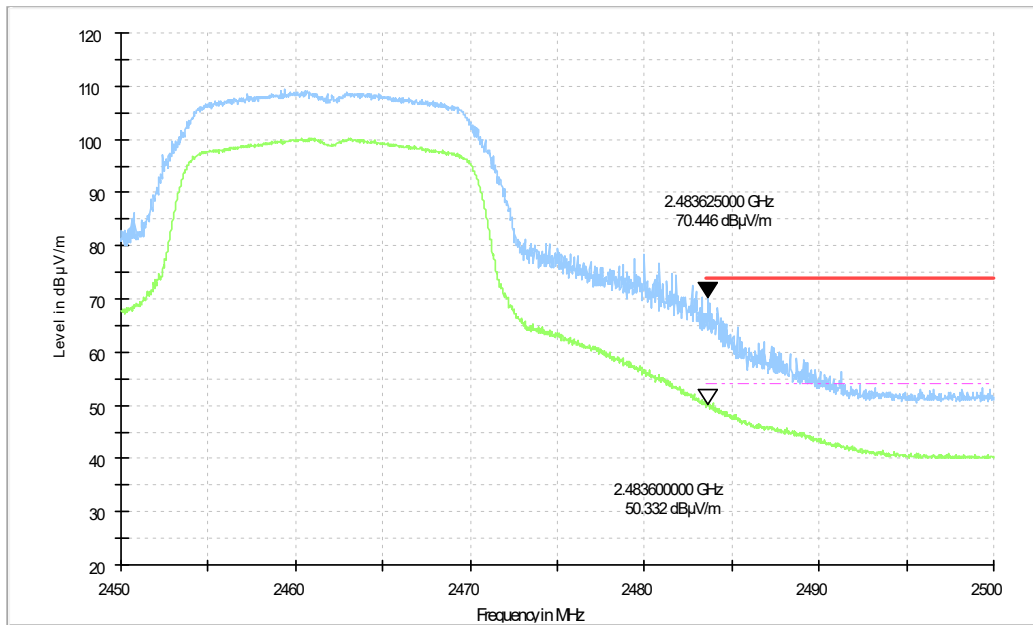


Fig.6 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

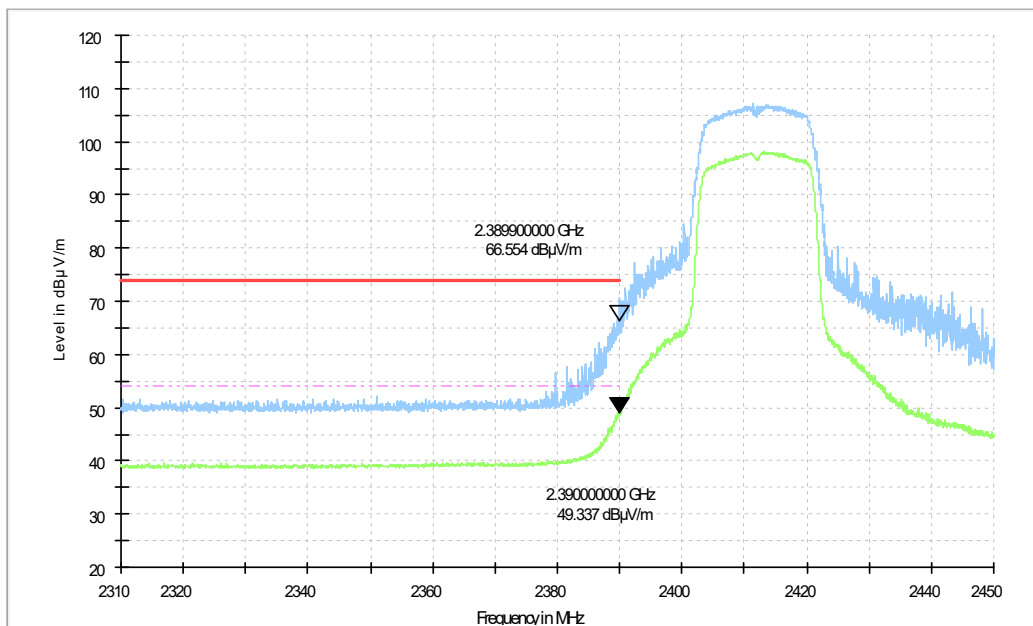


Fig.7 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.43GHz

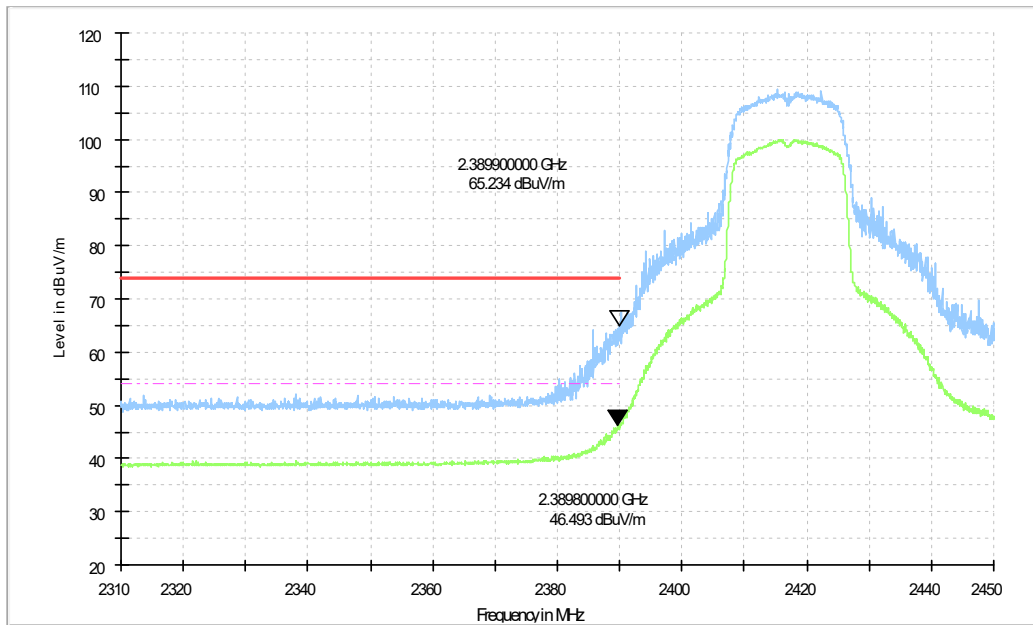


Fig.8 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch2, 2.31 GHz - 2.43GHz

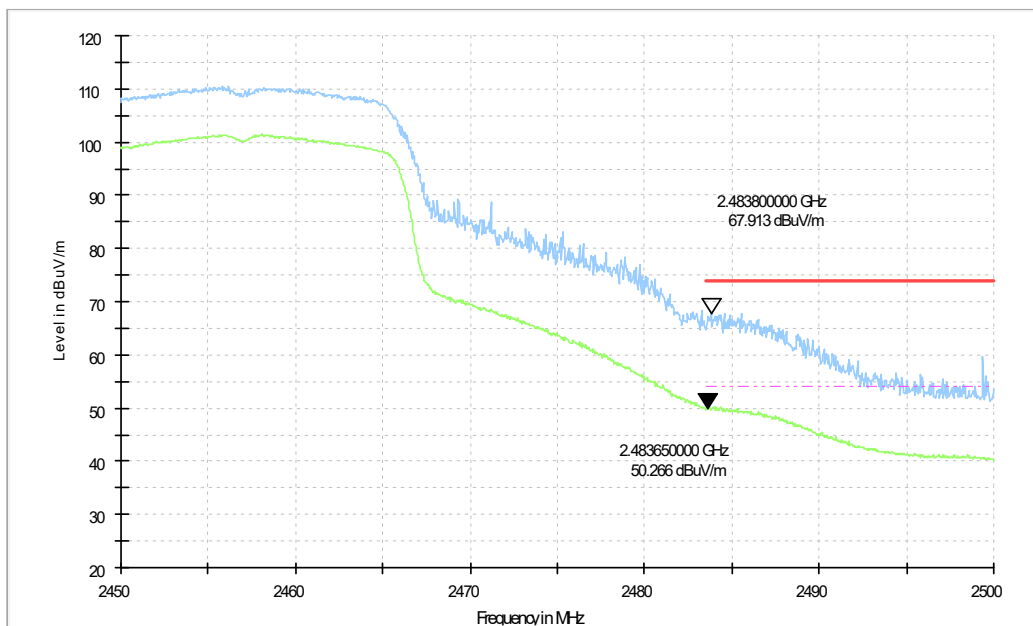


Fig.9 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch10, 2.45 GHz - 2.50GHz

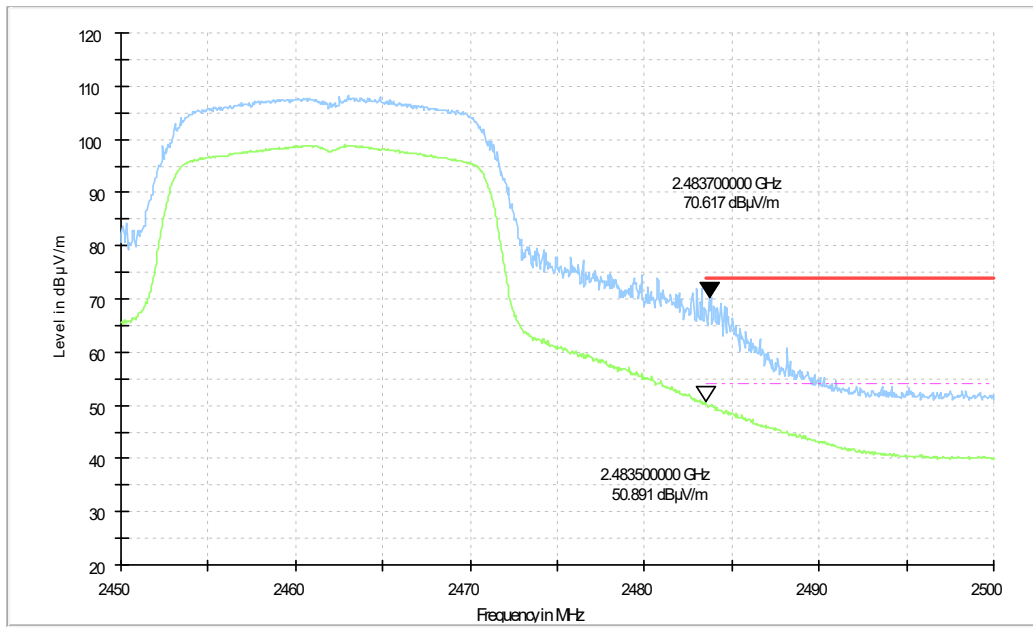


Fig.10 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

A.8. AC Power-line Conducted Emission

Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Test setup

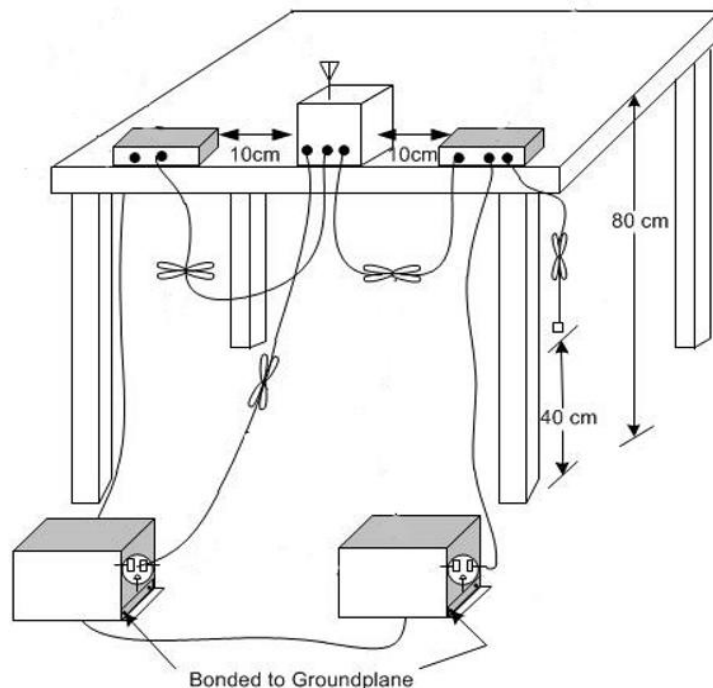

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.8.1	Fig.A.8.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.8.1	Fig.A.8.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:

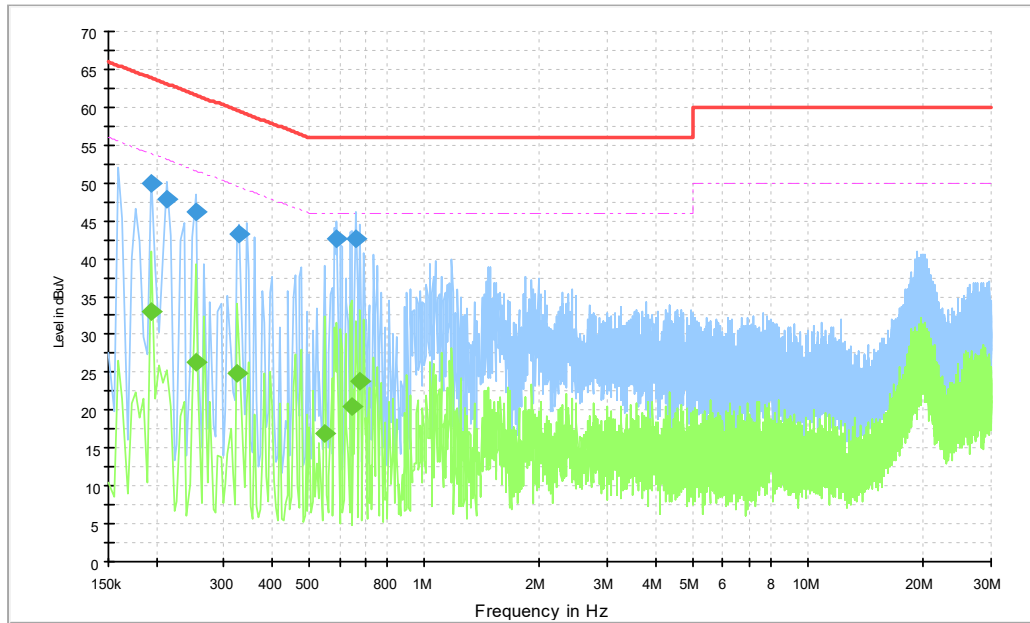


Fig.A.8.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.195000	49.9	2000.0	9.000	N	20.1	13.9	63.8
0.213000	47.9	2000.0	9.000	N	20.0	15.2	63.1
0.253500	46.3	2000.0	9.000	L1	20.0	15.4	61.6
0.330000	43.2	2000.0	9.000	L1	20.0	16.2	59.5
0.591000	42.6	2000.0	9.000	L1	20.0	13.4	56.0
0.663000	42.5	2000.0	9.000	L1	20.0	13.5	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.195000	33.1	2000.0	9.000	N	20.1	20.7	53.8
0.253500	26.3	2000.0	9.000	L1	20.0	25.3	51.6
0.325500	24.9	2000.0	9.000	N	20.1	24.7	49.6
0.550500	16.9	2000.0	9.000	L1	20.0	29.1	46.0
0.645000	20.4	2000.0	9.000	N	20.1	25.6	46.0
0.681000	23.8	2000.0	9.000	L1	20.0	22.2	46.0

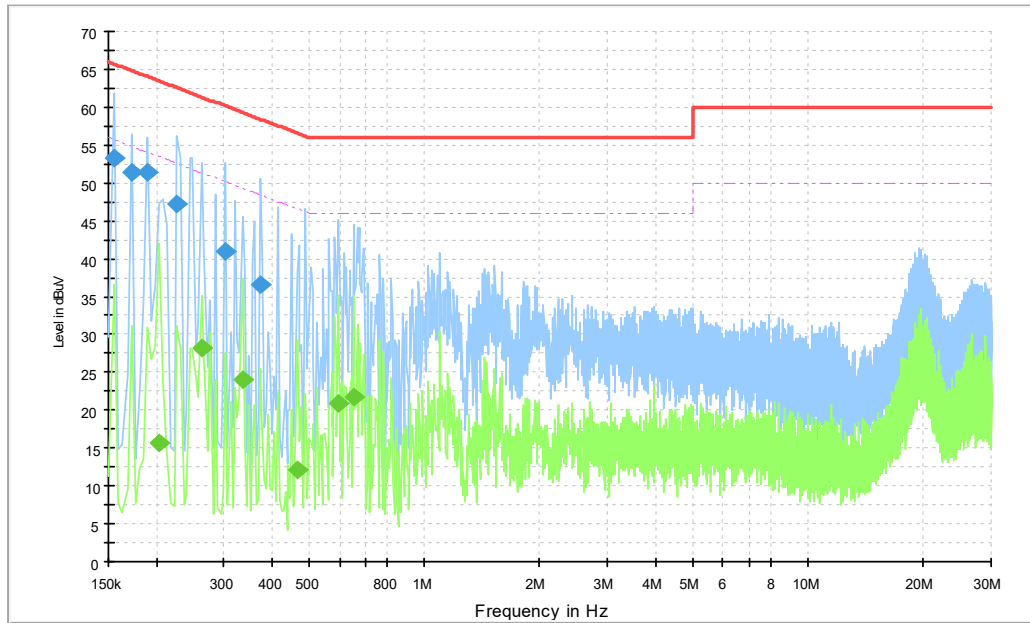


Fig.A.8.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	53.4	2000.0	9.000	L1	20.2	12.4	65.8
0.172500	51.5	2000.0	9.000	L1	20.1	13.4	64.8
0.190500	51.4	2000.0	9.000	L1	20.0	12.6	64.0
0.226500	47.2	2000.0	9.000	L1	20.0	15.4	62.6
0.303000	40.9	2000.0	9.000	L1	20.0	19.2	60.2
0.375000	36.7	2000.0	9.000	L1	20.0	21.7	58.4

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.204000	15.7	2000.0	9.000	N	20.1	37.8	53.4
0.262500	28.2	2000.0	9.000	L1	20.1	23.1	51.4
0.334500	24.1	2000.0	9.000	L1	20.0	25.2	49.3
0.465000	12.1	2000.0	9.000	N	20.2	34.5	46.6
0.595500	21.0	2000.0	9.000	N	20.1	25.0	46.0
0.654000	21.8	2000.0	9.000	N	20.1	24.2	46.0

A.9. Antenna Requirement

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

ANNEX B: EUT parameters

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT
Beijing, People's Republic of China

for technical competence in the field of
Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 23rd day of July 2024.



Mr. Trace McInturf, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2026

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

END OF REPORT