

Fig.54. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

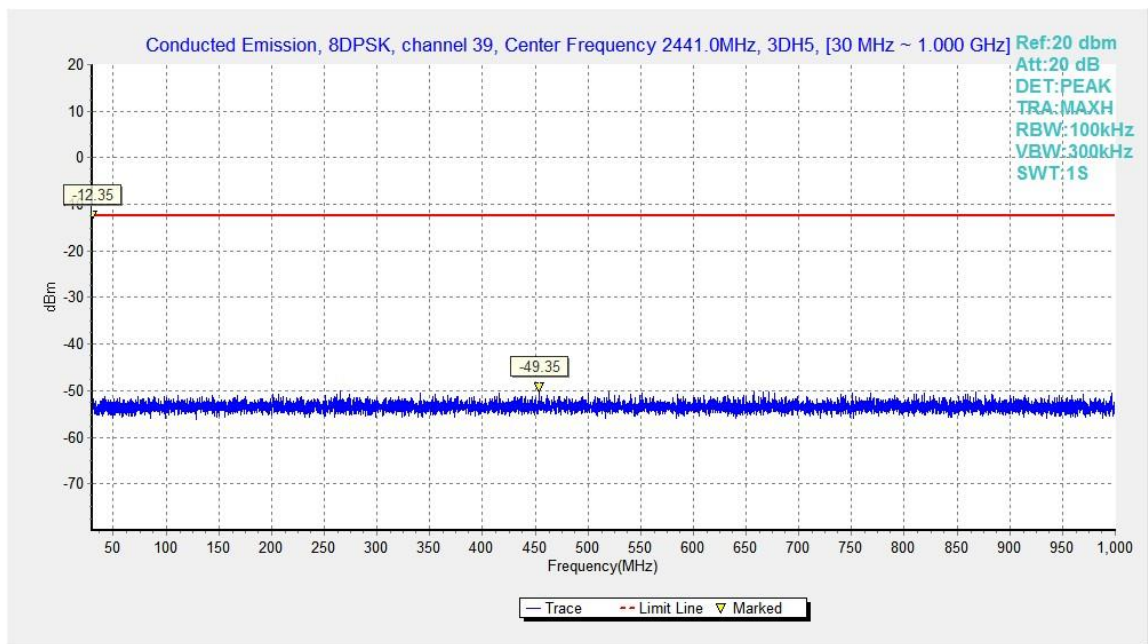


Fig.55. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

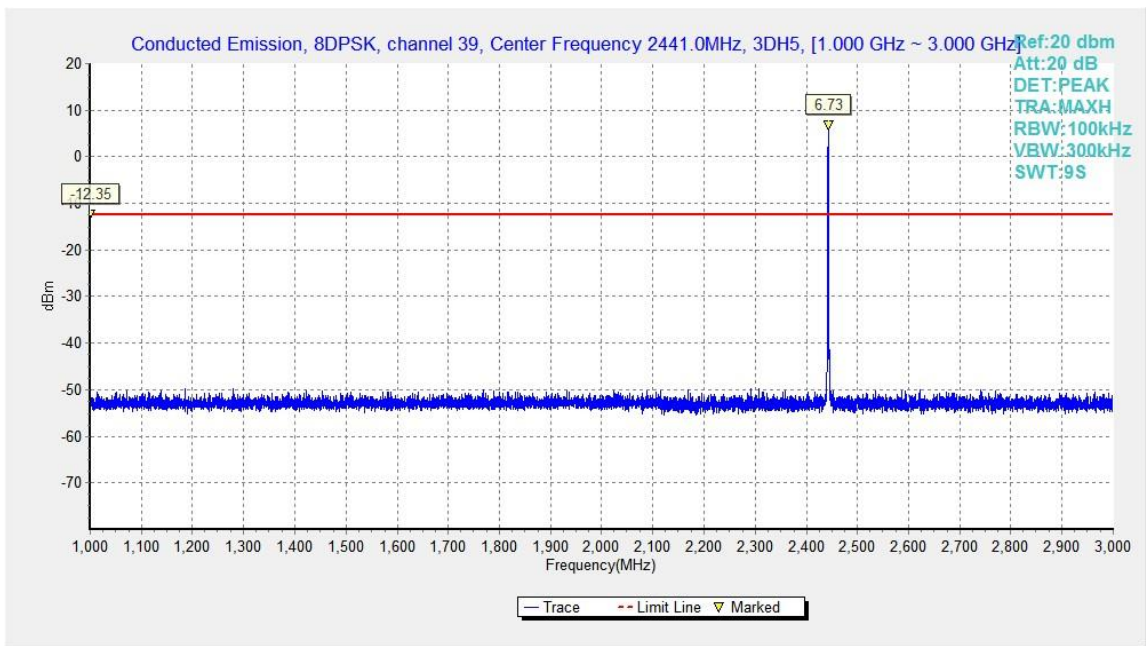


Fig.56. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

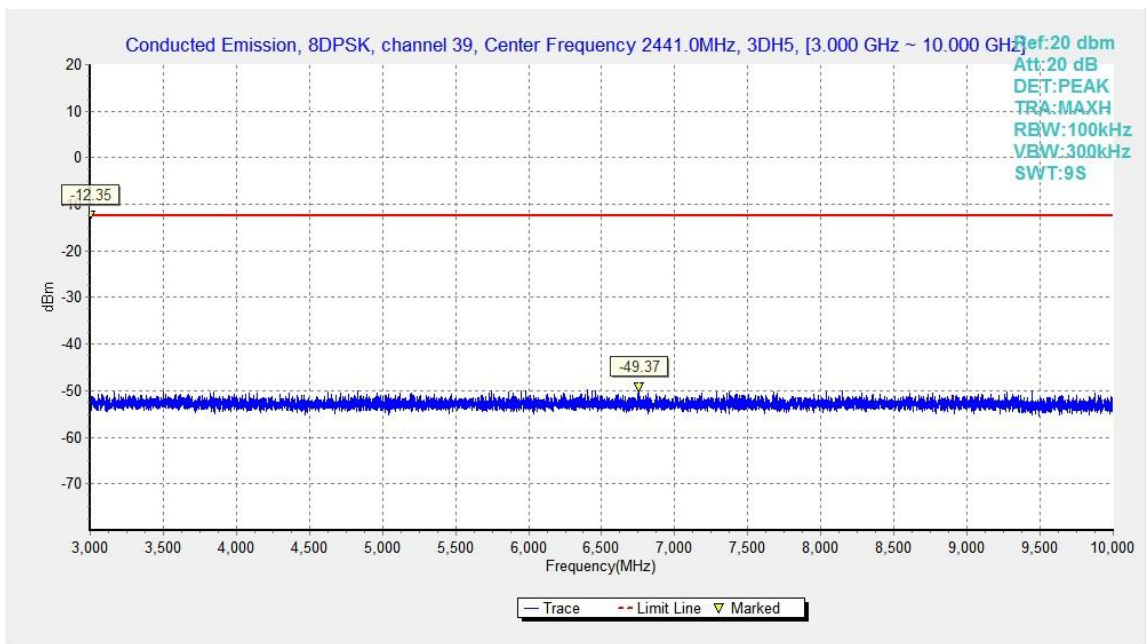


Fig.57. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

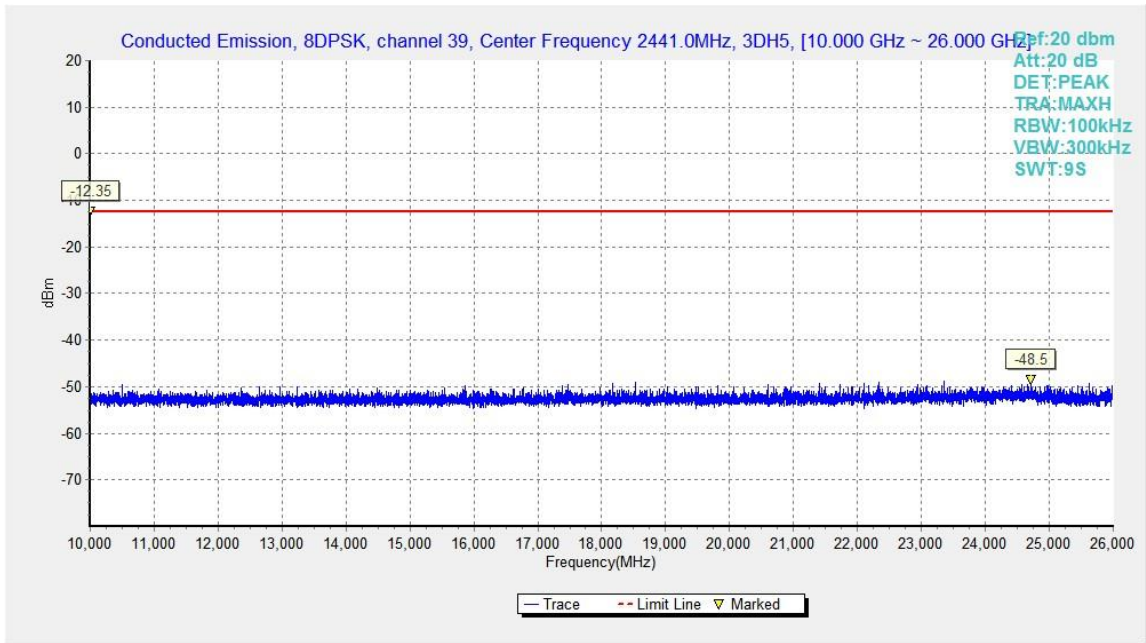


Fig.58. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

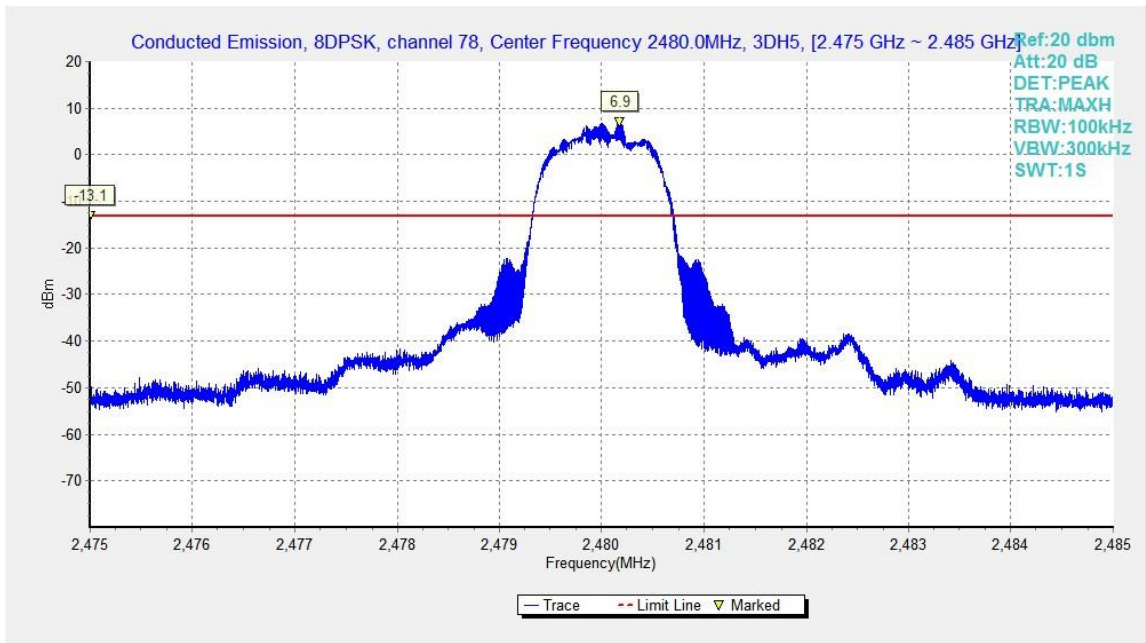


Fig.59. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

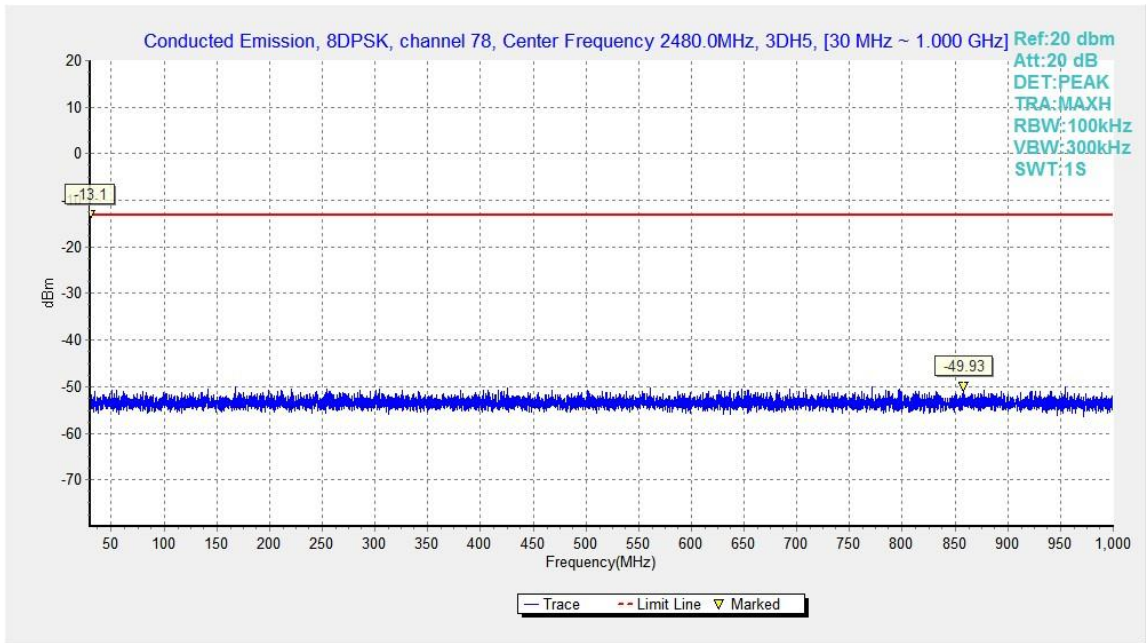


Fig.60. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

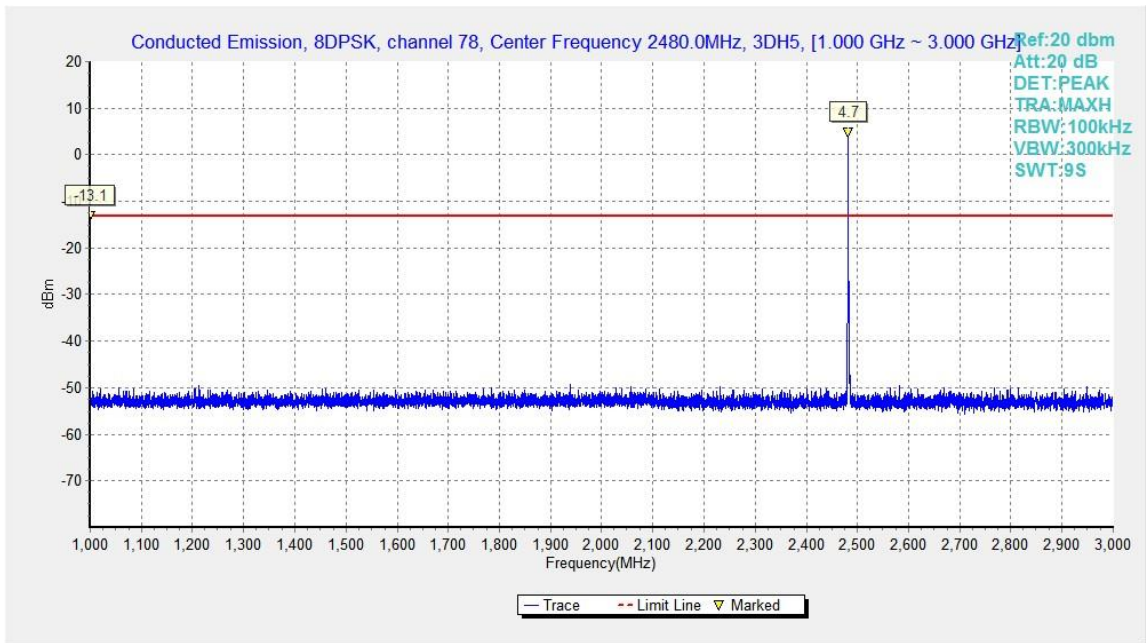


Fig.61. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

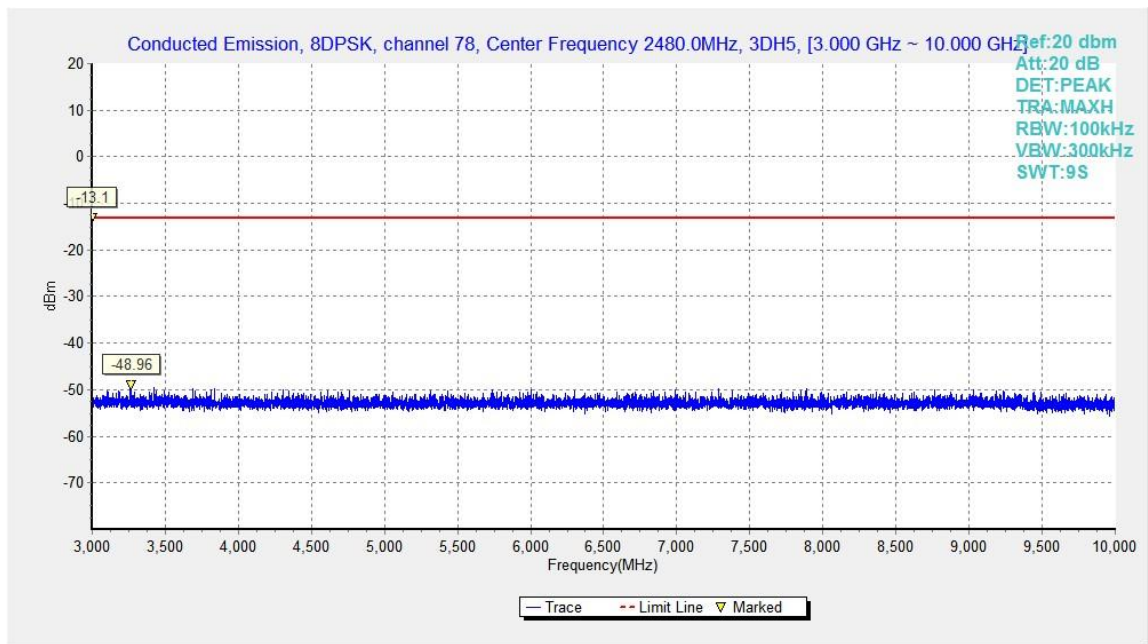


Fig.62. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

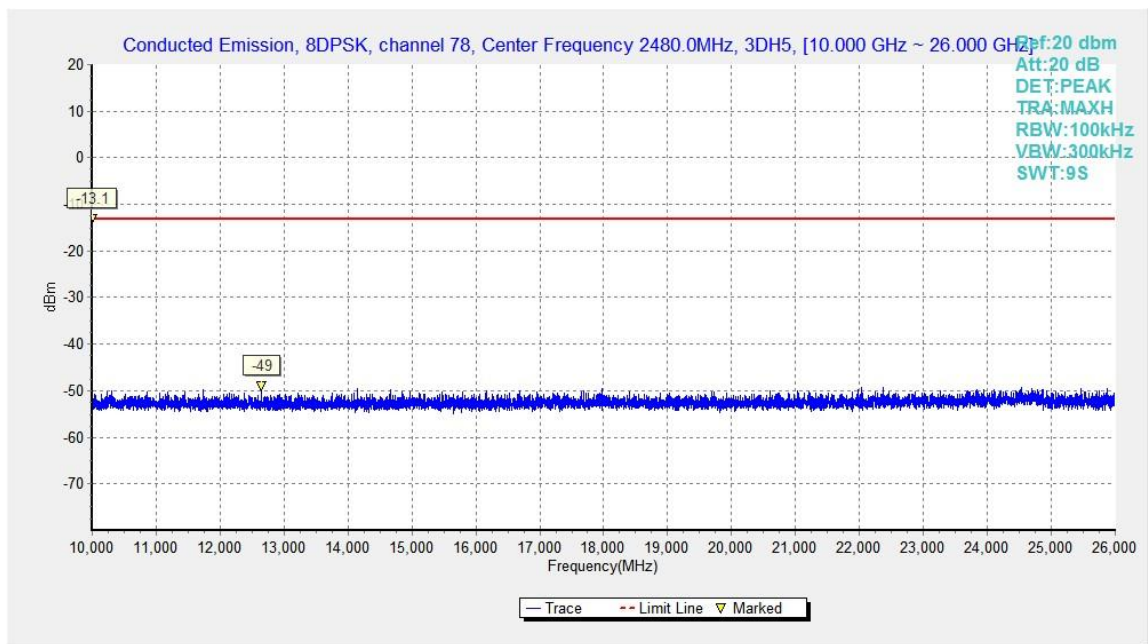


Fig.63. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

## B.6. Transmitter Spurious Emission - Radiated

**Method of Measurement:** See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit in restricted band:**

Frequency (MHz)	Field strength( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

**Set up:**

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m

The EUT and transmitting antenna shall be centered on the turntable.

**Note:**

1. A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

2. The range of evaluated frequency is from 9 kHz to 26GHz. Measurement value showed here only up to 6 maximum emissions noted.

## Spot check Measurement results

### Measurement results

#### Peak

#### GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2301.200	49.84	-35.4	31.9	53.32	74.0	24.2	V
2522.600	50.89	-34.7	32.1	53.48	74.0	23.1	H
4882.000	44.93	-26.3	34.0	37.28	74.0	29.1	V
7323.000	45.31	-24.9	35.6	34.61	74.0	28.7	H
9764.000	46.80	-24.0	37.1	33.72	74.0	27.2	H
12205.000	49.36	-22.5	38.9	32.97	74.0	24.6	H

#### Average

#### GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.680	46.91	3.5	31.9	11.55	54.0	7.1	V
2486.040	46.85	3.4	32.0	11.47	54.0	7.2	V
4882.000	31.36	-26.3	34.0	23.71	54.0	22.6	H
7323.000	31.91	-24.9	35.6	21.21	54.0	22.1	V
9764.000	33.61	-24.0	37.1	20.52	54.0	20.4	H
12205.000	36.45	-22.5	38.9	20.06	54.0	17.6	H

**Peak Measurement results from basic model**  
**GFSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2372.034	61.02	3.3	31.9	25.85	74.0	13.0	V
2386.804	61.57	3.5	31.9	26.22	74.0	12.4	H
4804.000	44.15	-28.9	33.9	39.17	74.0	29.9	V
7206.000	45.53	-26.8	35.6	36.77	74.0	28.5	V
9608.000	46.34	-26.9	36.9	36.32	74.0	27.7	V
12010.000	47.90	-26.4	38.9	35.39	74.0	26.1	V

**GFSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2375.800	46.08	-31.9	31.9	46.09	74.0	27.9	V
2524.600	46.74	-31.7	32.0	46.39	74.0	27.3	H
4882.000	43.16	-29.2	34.0	38.40	74.0	30.8	H
7323.000	44.47	-27.3	35.6	36.16	74.0	29.5	H
9764.000	45.96	-27.4	37.1	36.22	74.0	28.0	V
12205.000	46.51	-25.3	38.9	32.86	74.0	27.5	V

**GFSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.605	62.13	3.4	32.0	26.74	74.0	11.9	V
2484.290	61.82	3.4	32.0	26.42	74.0	12.2	V
4960.000	43.34	-28.9	34.0	38.28	74.0	30.7	H
7440.000	43.53	-27.8	35.6	35.69	74.0	30.5	H
9920.000	44.45	-27.0	37.3	34.19	74.0	29.6	H
12400.000	47.77	-24.8	38.9	33.68	74.0	26.2	V



**$\pi/4$  DQPSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2375.240	61.26	3.4	31.9	26.02	74.0	12.7	H
2385.768	61.54	3.5	31.9	26.18	74.0	12.5	V
4804.000	43.91	-28.9	33.9	38.93	74.0	30.1	V
7206.000	43.44	-26.8	35.6	34.67	74.0	30.6	V
9608.000	46.15	-26.9	36.9	36.13	74.0	27.9	V
12010.000	47.32	-26.4	38.9	34.80	74.0	26.7	V

 **$\pi/4$  DQPSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2371.600	46.45	-32.0	31.9	46.58	74.0	27.6	H
2518.200	46.56	-31.7	32.0	46.22	74.0	27.4	H
4882.000	44.08	-29.2	34.0	39.31	74.0	29.9	H
7323.000	44.29	-27.3	35.6	35.98	74.0	29.7	H
9764.000	45.01	-27.4	37.1	35.28	74.0	29.0	H
12205.000	47.60	-25.3	38.9	33.95	74.0	26.4	V

 **$\pi/4$  DQPSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2487.325	61.11	3.4	32.0	25.75	74.0	12.9	V
2491.470	61.28	3.4	32.0	25.92	74.0	12.7	H
4960.000	44.29	-28.9	34.0	39.22	74.0	29.7	V
7440.000	45.43	-27.8	35.6	37.60	74.0	28.6	H
9920.000	45.36	-27.0	37.3	35.10	74.0	28.6	V
12400.000	47.56	-24.8	38.9	33.47	74.0	26.4	V

**8DPSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2326.086	61.24	3.4	31.8	26.03	74.0	12.8	H
2385.320	61.61	3.5	31.9	26.25	74.0	12.4	H
4804.000	45.08	-28.9	33.9	40.11	74.0	28.9	V
7206.000	45.24	-26.8	35.6	36.48	74.0	28.8	V
9608.000	45.30	-26.9	36.9	35.28	74.0	28.7	H
12010.000	47.57	-26.4	38.9	35.05	74.0	26.4	H

**8DPSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2369.400	46.19	-32.1	31.9	46.39	74.0	27.8	V
2519.200	47.61	-31.7	32.0	47.26	74.0	26.4	V
4882.000	42.15	-29.2	34.0	37.38	74.0	31.9	V
7323.000	44.86	-27.3	35.6	36.54	74.0	29.1	V
9764.000	44.23	-27.4	37.1	34.50	74.0	29.8	H
12205.000	46.86	-25.3	38.9	33.21	74.0	27.1	H

**8DPSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2493.800	61.23	3.4	32.0	25.84	74.0	12.8	H
2495.575	61.18	3.4	32.0	25.77	74.0	12.8	V
4959.500	45.91	-28.9	34.0	40.84	74.0	28.1	H
7440.000	44.23	-27.8	35.6	36.40	74.0	29.8	V
9920.000	45.40	-27.0	37.3	35.14	74.0	28.6	H
12400.000	47.45	-24.8	38.9	33.36	74.0	26.5	H

**Average Measurement results from basic model**
**GFSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2388.060	47.53	3.5	31.9	12.17	54.0	6.5	V
2389.980	47.54	3.5	31.9	12.18	54.0	6.5	V
4804.000	32.42	-28.9	33.9	27.44	54.0	21.6	H
7206.000	33.95	-26.8	35.6	25.18	54.0	20.0	H
9607.500	34.39	-26.9	36.9	24.37	54.0	19.6	H
12010.500	35.98	-26.4	38.9	23.46	54.0	18.0	V

**GFSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2436.420	47.93	3.5	31.9	12.53	54.0	6.1	V
2445.540	48.07	3.5	31.9	12.65	54.0	5.9	V
4882.500	32.11	-29.2	34.0	27.34	54.0	21.9	V
7323.000	33.60	-27.3	35.6	25.28	54.0	20.4	V
9763.500	33.94	-27.4	37.1	24.20	54.0	20.1	H
12205.500	36.49	-25.3	38.9	22.84	54.0	17.5	H

**GFSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.520	50.07	3.4	32.0	14.67	54.0	3.9	V
2483.580	49.83	3.4	32.0	14.43	54.0	4.2	V
4960.500	32.86	-28.9	34.0	27.80	54.0	21.1	V
7440.000	33.28	-27.8	35.6	25.45	54.0	20.7	V
9919.500	34.30	-27.1	37.3	24.05	54.0	19.7	H
12400.500	36.34	-24.8	38.9	22.25	54.0	17.7	V

**$\pi/4$  DQPSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.860	47.59	3.5	31.9	12.22	54.0	6.4	V
2389.980	47.59	3.5	31.9	12.23	54.0	6.4	V
4803.000	33.48	-28.9	33.9	28.50	54.0	20.5	H
7206.000	33.96	-26.8	35.6	25.19	54.0	20.0	V
9607.500	34.34	-26.9	36.9	24.33	54.0	19.7	H
12010.500	35.80	-26.4	38.9	23.29	54.0	18.2	V

 **$\pi/4$  DQPSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2436.480	48.01	3.5	31.9	12.61	54.0	6.0	V
2445.780	48.10	3.5	31.9	12.68	54.0	5.9	V
4881.000	33.10	-29.2	34.0	28.33	54.0	20.9	H
7323.000	33.56	-27.3	35.6	25.25	54.0	20.4	V
9763.500	33.88	-27.4	37.1	24.15	54.0	20.1	H
12205.500	36.54	-25.3	38.9	22.90	54.0	17.5	V

 **$\pi/4$  DQPSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.520	47.32	3.4	32.0	11.92	54.0	6.7	V
2483.580	47.26	3.4	32.0	11.87	54.0	6.7	V
4960.500	34.03	-28.9	34.0	28.97	54.0	20.0	H
7440.000	33.19	-27.8	35.6	25.35	54.0	20.8	V
9919.500	34.18	-27.1	37.3	23.92	54.0	19.8	H
12400.500	36.39	-24.8	38.9	22.31	54.0	17.6	V

**8DPSK Ch 0**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.440	47.54	3.5	31.9	12.18	54.0	6.5	V
2389.920	47.54	3.5	31.9	12.18	54.0	6.5	V
4803.000	33.37	-28.9	33.9	28.39	54.0	20.6	H
7206.000	33.96	-26.8	35.6	25.20	54.0	20.0	V
9607.500	34.37	-26.9	36.9	24.35	54.0	19.6	H
12010.500	35.85	-26.4	38.9	23.33	54.0	18.2	V

**8DPSK Ch 39**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2436.120	47.98	3.5	31.9	12.58	54.0	6.0	V
2447.100	48.04	3.5	31.9	12.61	54.0	6.0	V
4881.000	33.07	-29.2	34.0	28.30	54.0	20.9	V
7323.000	33.60	-27.3	35.6	25.29	54.0	20.4	V
9763.500	33.93	-27.4	37.1	24.19	54.0	20.1	H
12205.500	36.48	-25.3	38.9	22.84	54.0	17.5	V

**8DPSK Ch 78**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.520	47.79	3.4	32.0	12.39	54.0	6.2	V
2483.580	47.68	3.4	32.0	12.28	54.0	6.3	V
4959.000	34.19	-28.9	34.0	29.11	54.0	19.8	H
7440.000	33.33	-27.8	35.6	25.49	54.0	20.7	V
9919.500	34.38	-27.1	37.3	24.13	54.0	19.6	H
12400.500	36.26	-24.8	38.9	22.17	54.0	17.7	V

**Conclusion: Pass**

## B.7. Time of Occupancy (Dwell Time)

**Method of Measurement: See ANSI C63.10-clause 7.8.4**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW  $\geq$  RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

### Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

### Measurement Result:

#### For GFSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Value		
39	DH1	Fig.64	0.41	Fig.65	319	130.79	P
	DH3	Fig.66	1.66	Fig.67	106	175.96	P
	DH5	Fig.68	2.91	Fig.69	52	151.32	P

#### For $\pi/4$ DQPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Value		
39	2DH1	Fig.70	0.4	Fig.71	321	128.4	P
	2DH3	Fig.72	1.65	Fig.73	110	181.5	P
	2DH5	Fig.74	2.90	Fig.75	64	185.6	P

**For 8DPSK**

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Value		
39	3DH1	Fig.76	0.40	Fig.77	320	128	P
	3DH3	Fig.78	1.65	Fig.79	99	163.35	P
	3DH5	Fig.80	2.90	Fig.81	73	211.7	P

**Conclusion: PASS**

**Test graphs as below:**

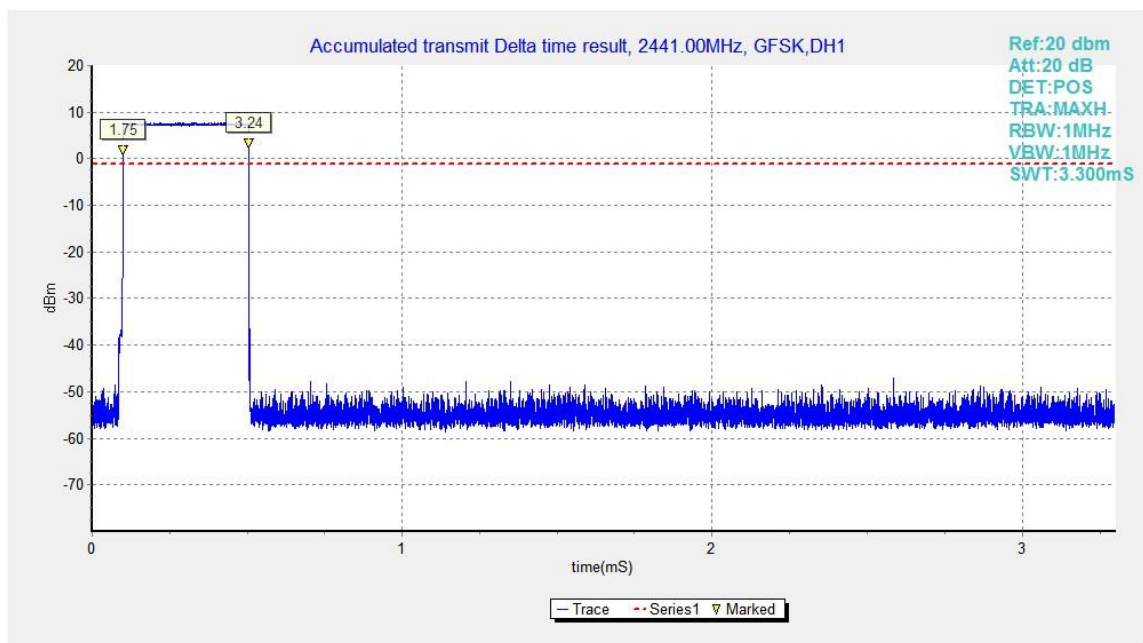


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

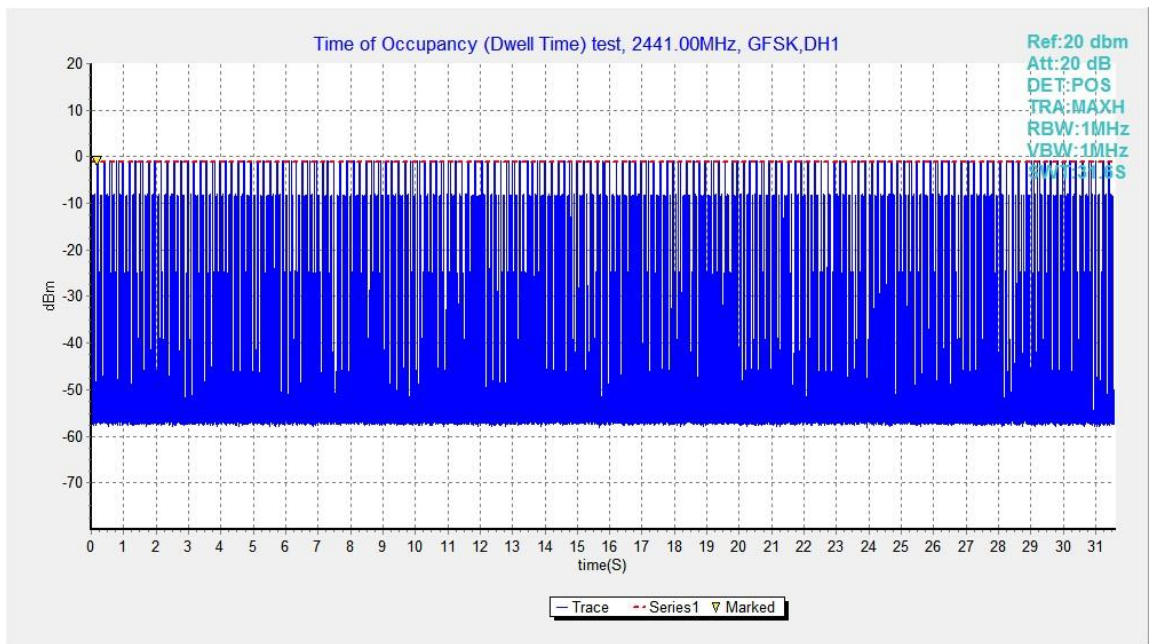


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

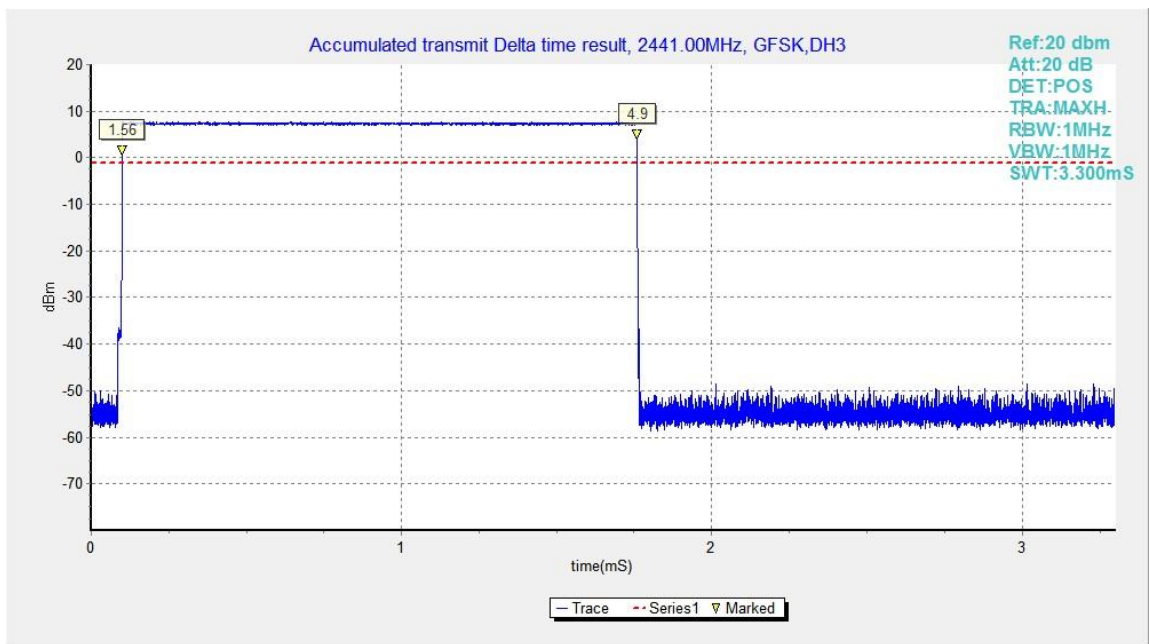


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3



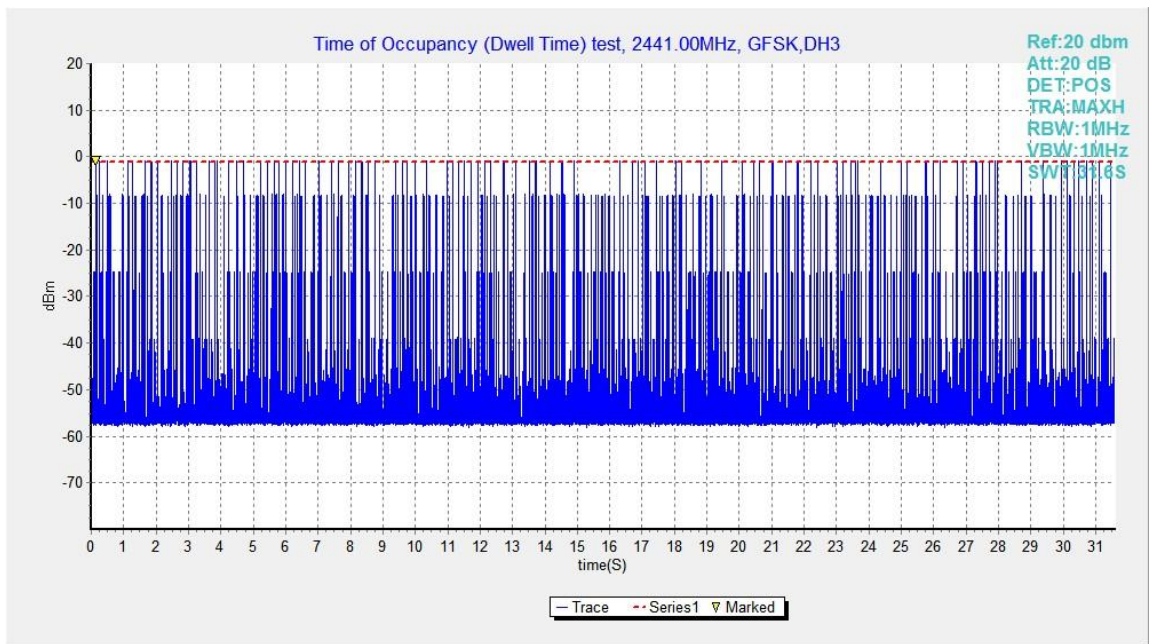


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3

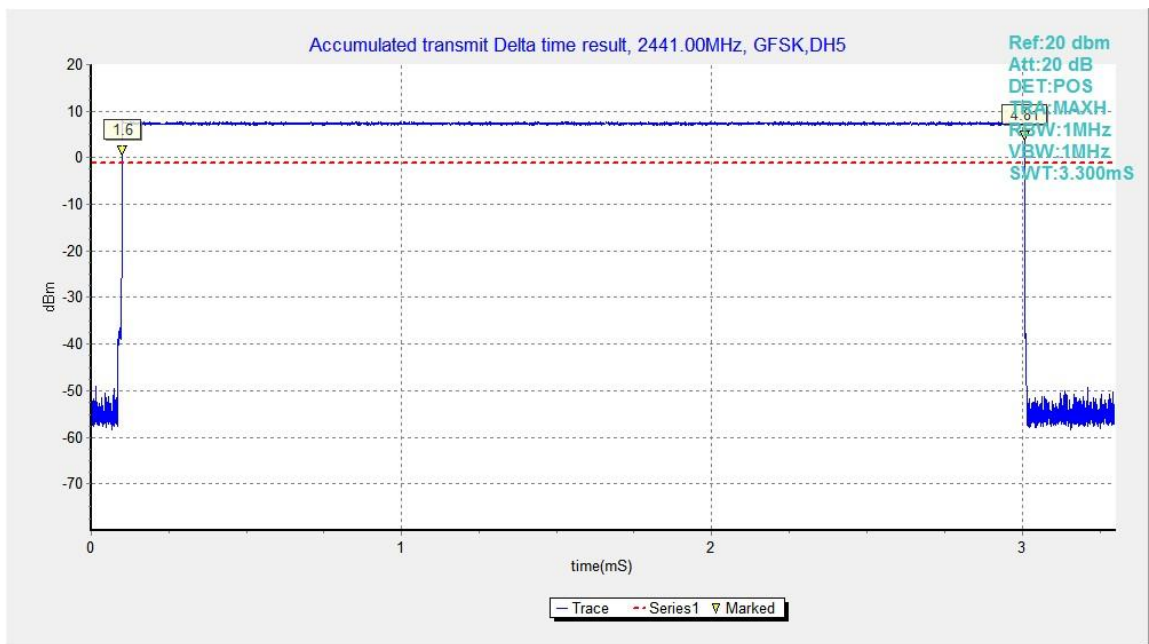


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

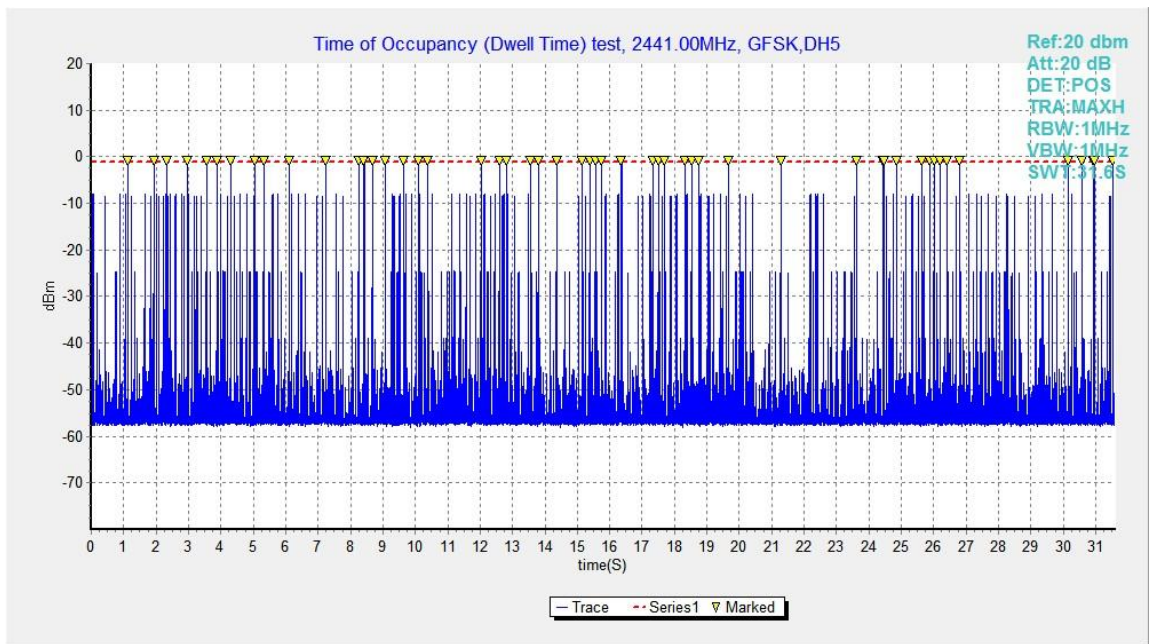


Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

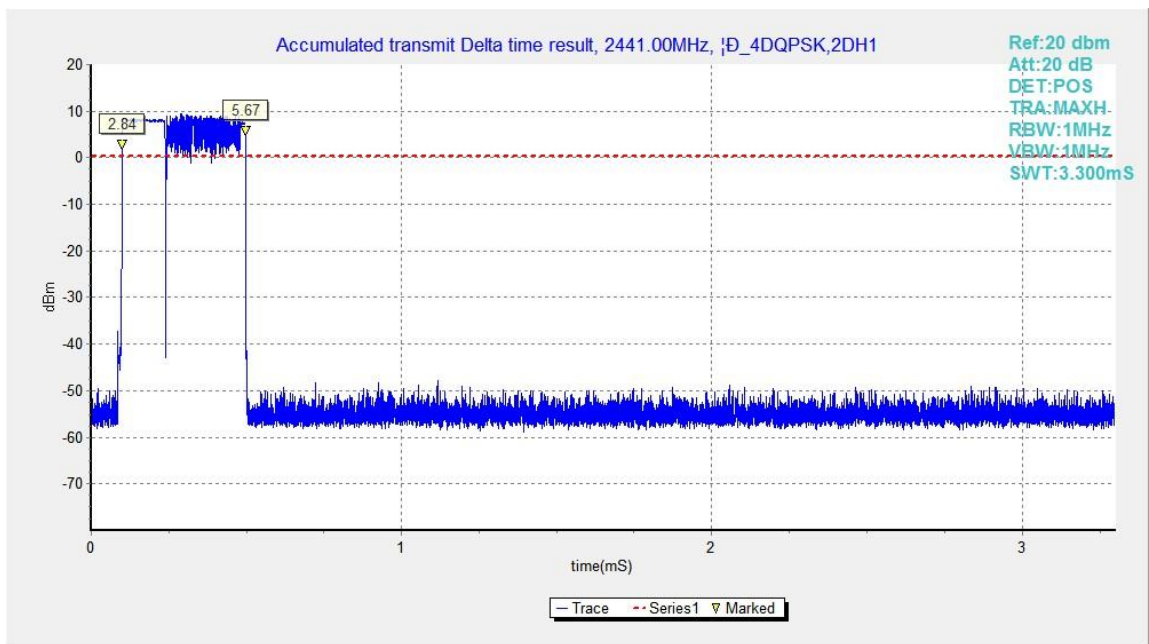


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

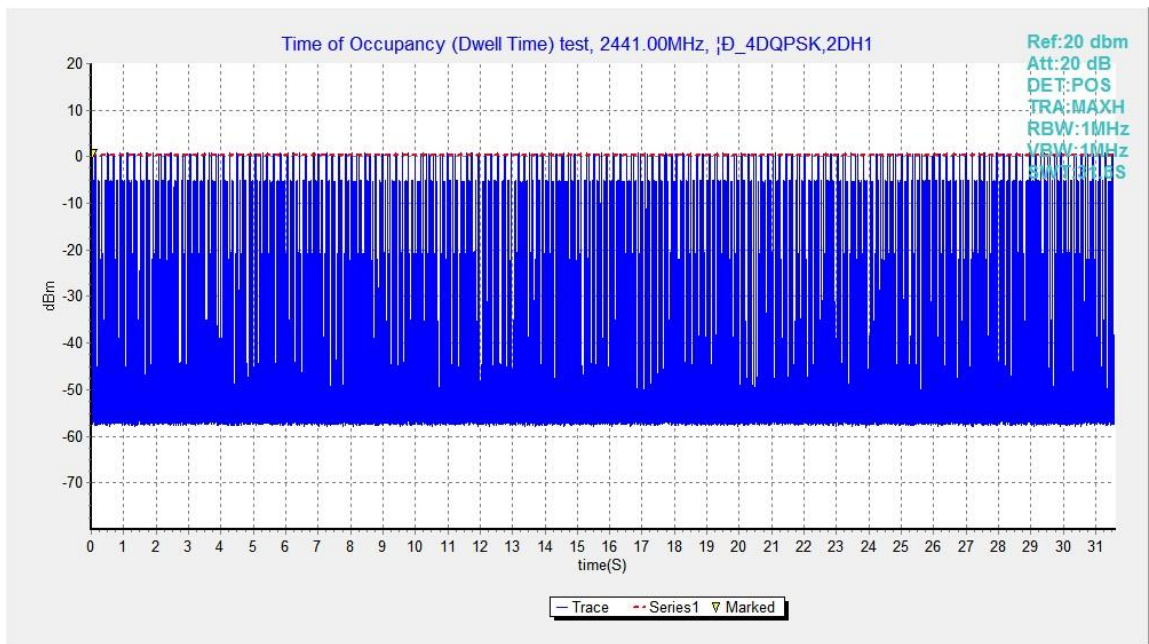


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

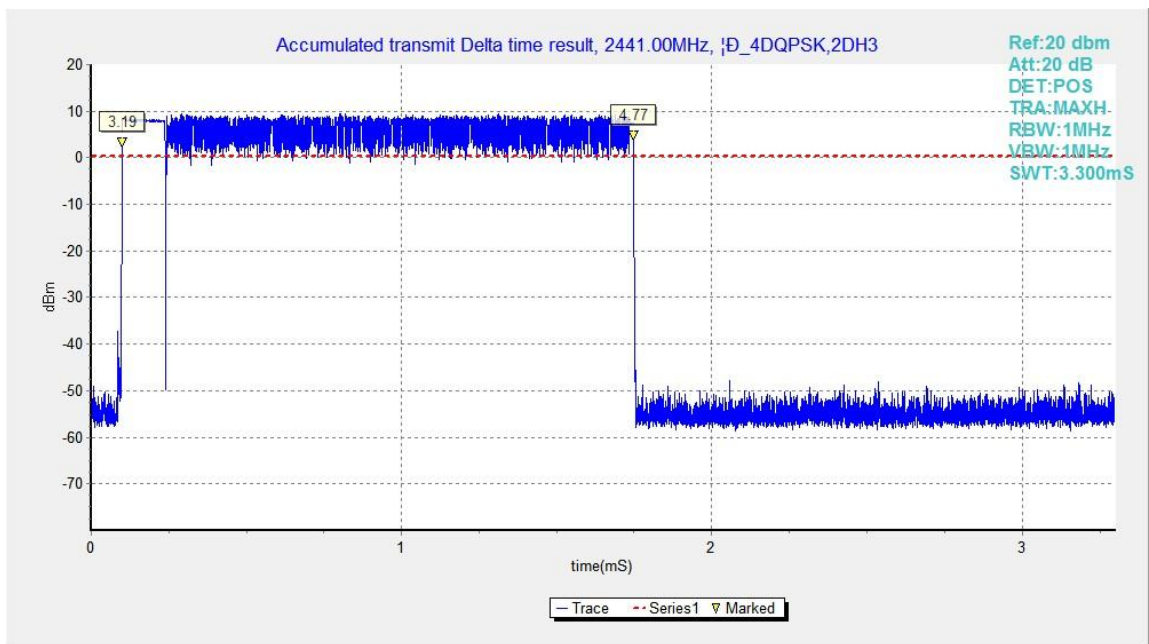


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

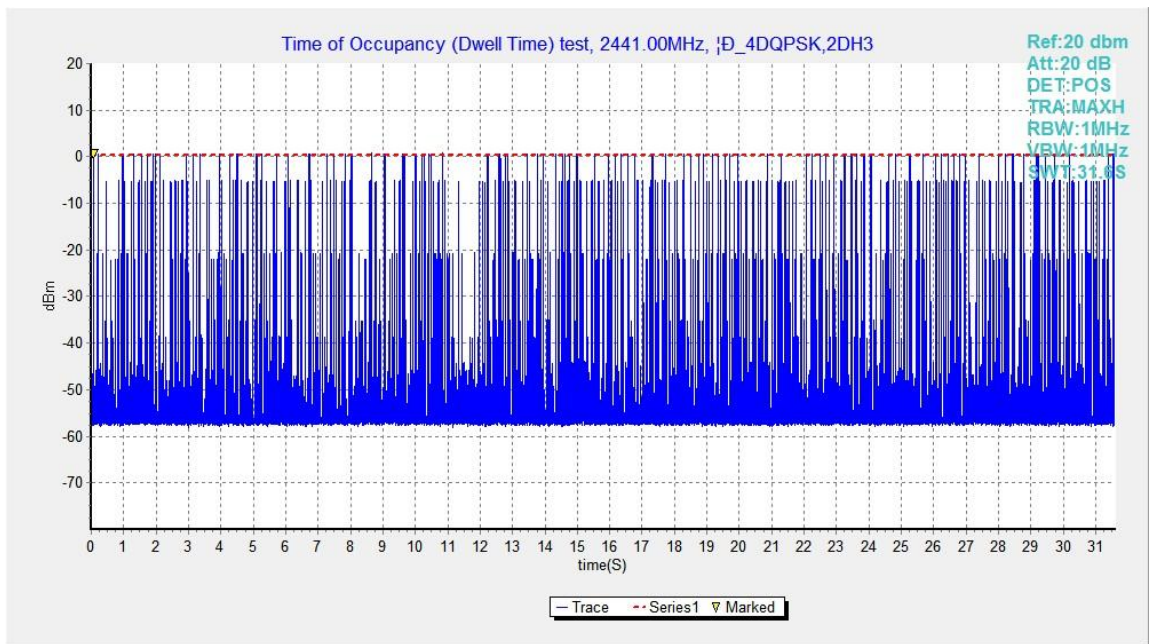


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

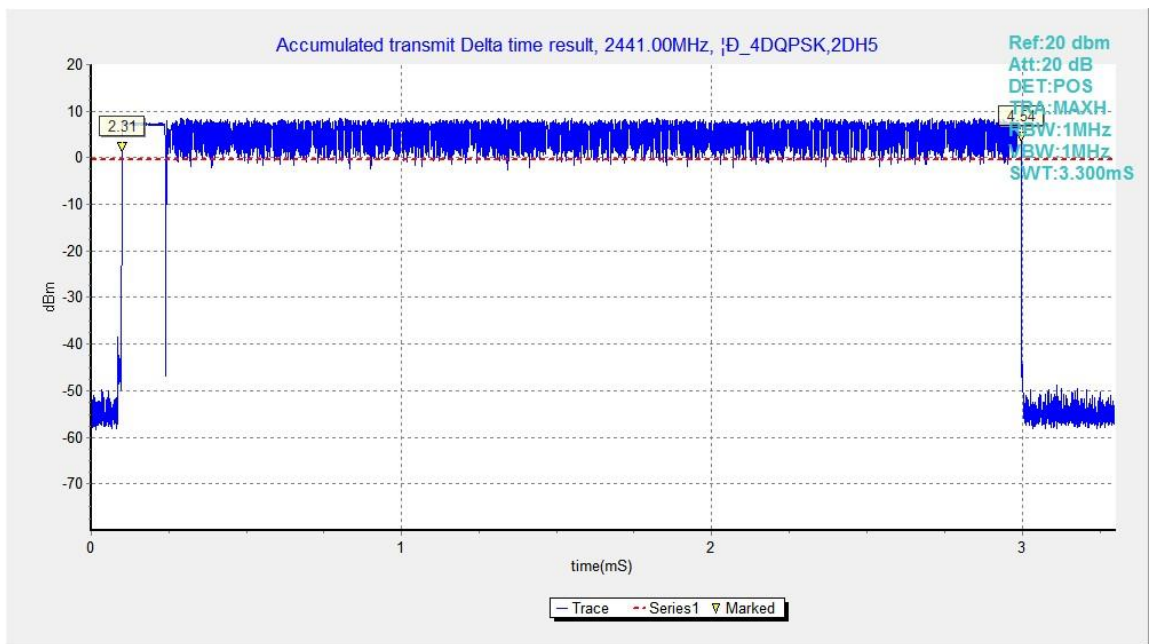


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

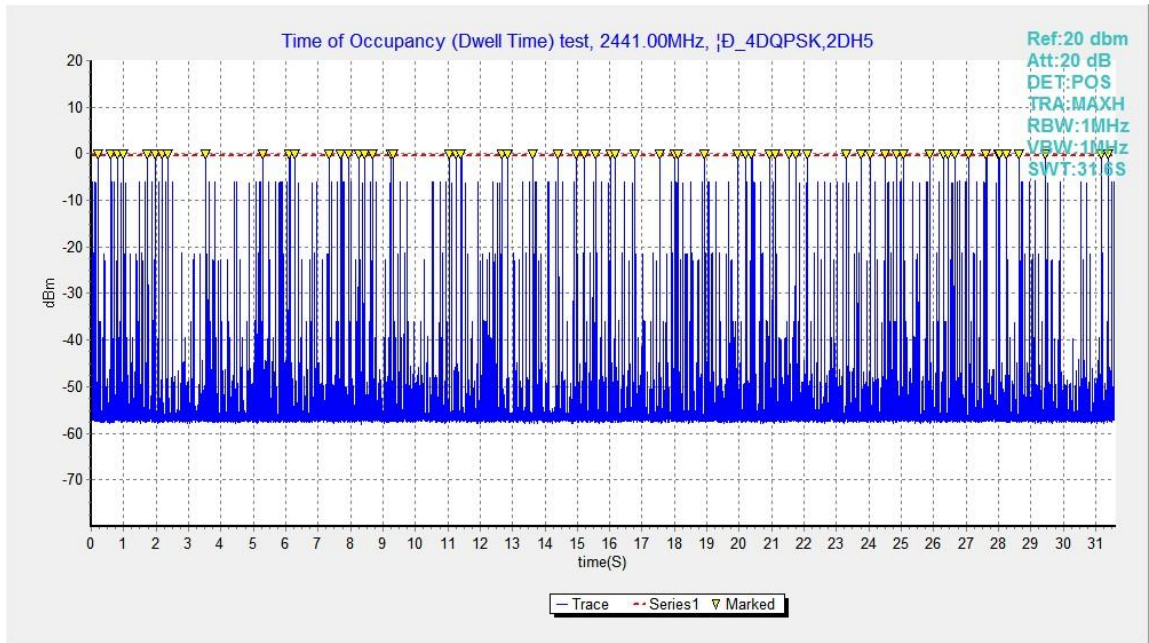


Fig.75. Number of Transmissions Measurement: Channel 39,Packet 2-DH5

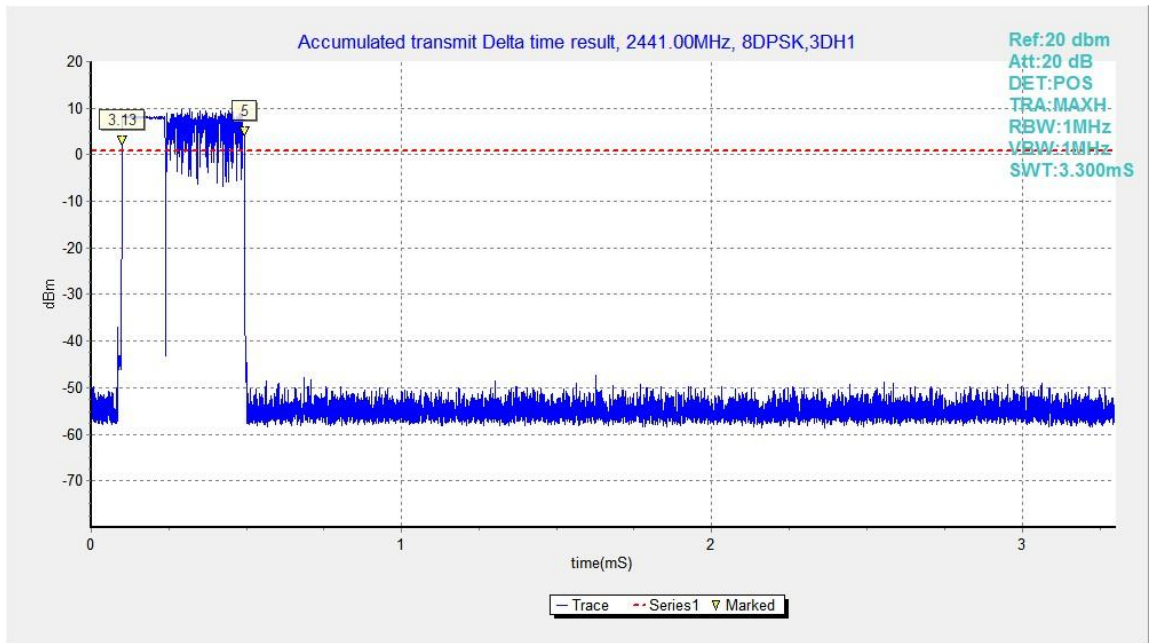


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

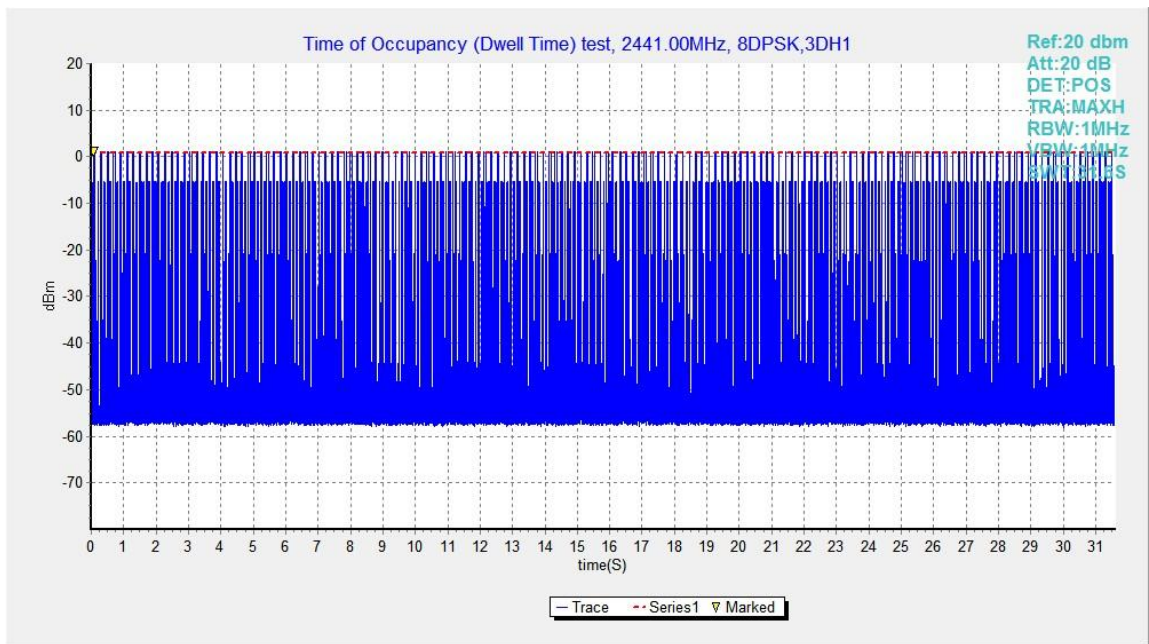


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

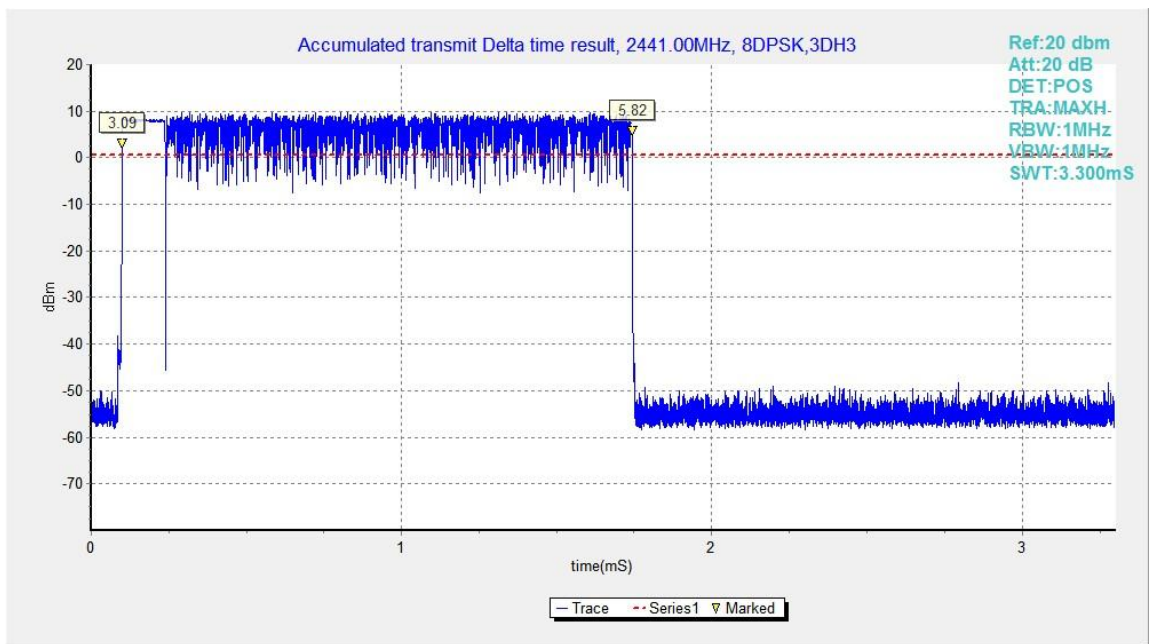


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

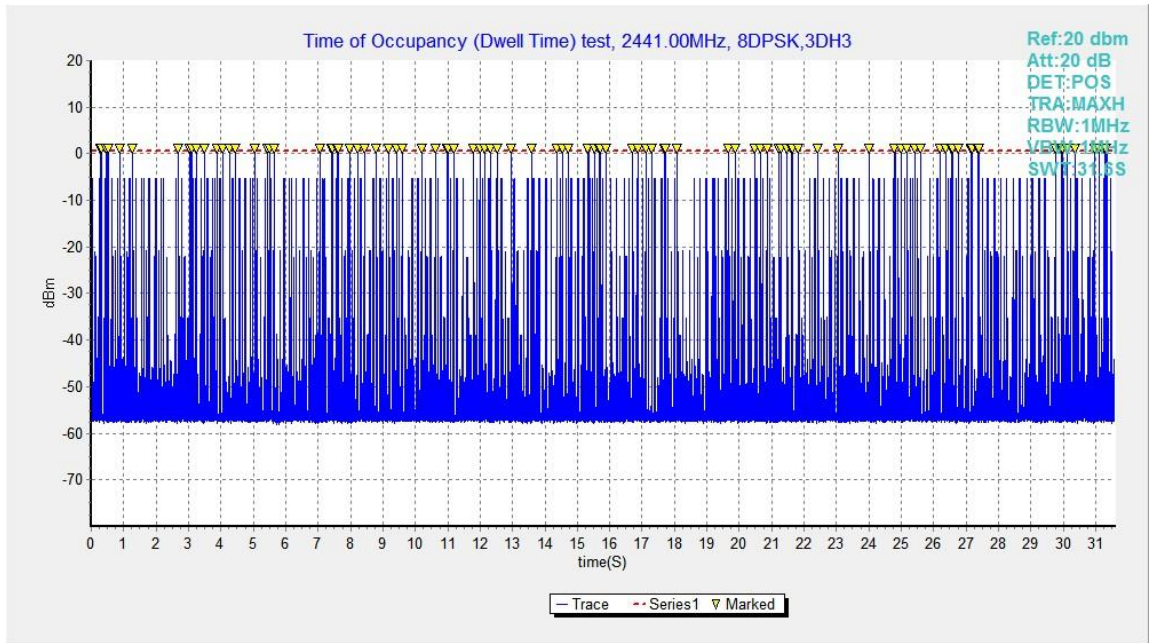


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

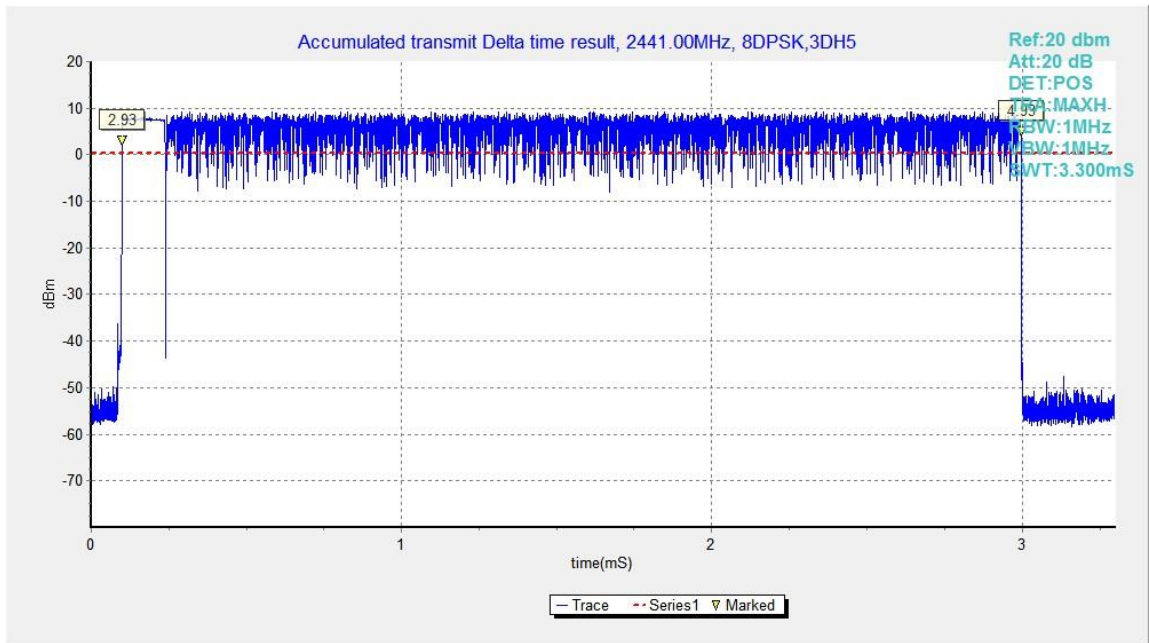


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

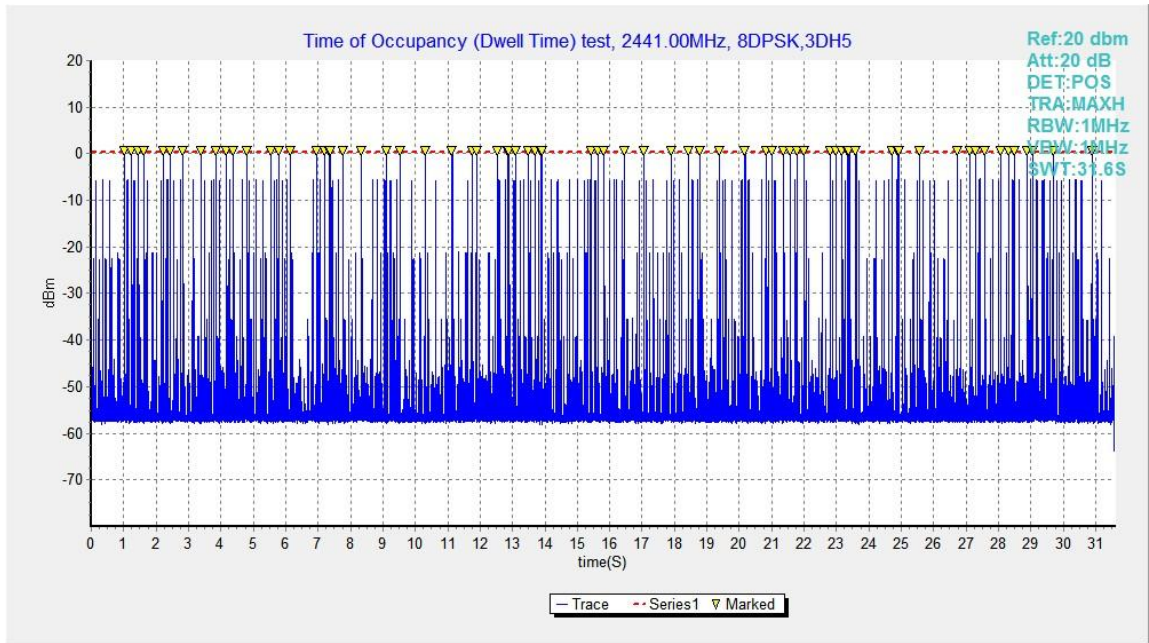


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5



## B.8. 20dB Bandwidth

**Method of Measurement: See ANSI C63.10-clause 6.9.2**

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

\* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

### Measurement Results:

#### For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	936.75	NA
39	Fig.83	936.75	NA
78	Fig.84	931.50	NA

#### For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1282.50	NA
39	Fig.86	1284.75	NA
78	Fig.87	1280.25	NA

#### For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1283.25	NA
39	Fig.89	1284.00	NA
78	Fig.90	1284.75	NA

**Conclusion: NA**

**Test graphs as below:**

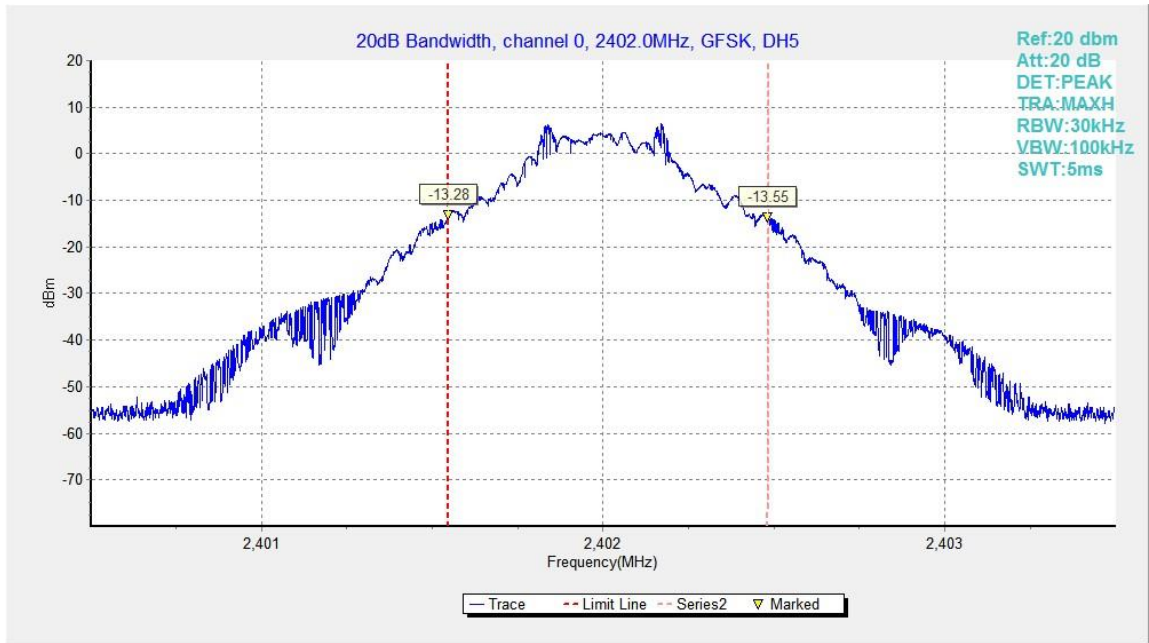


Fig.82. 20dB Bandwidth: GFSK, Channel 0

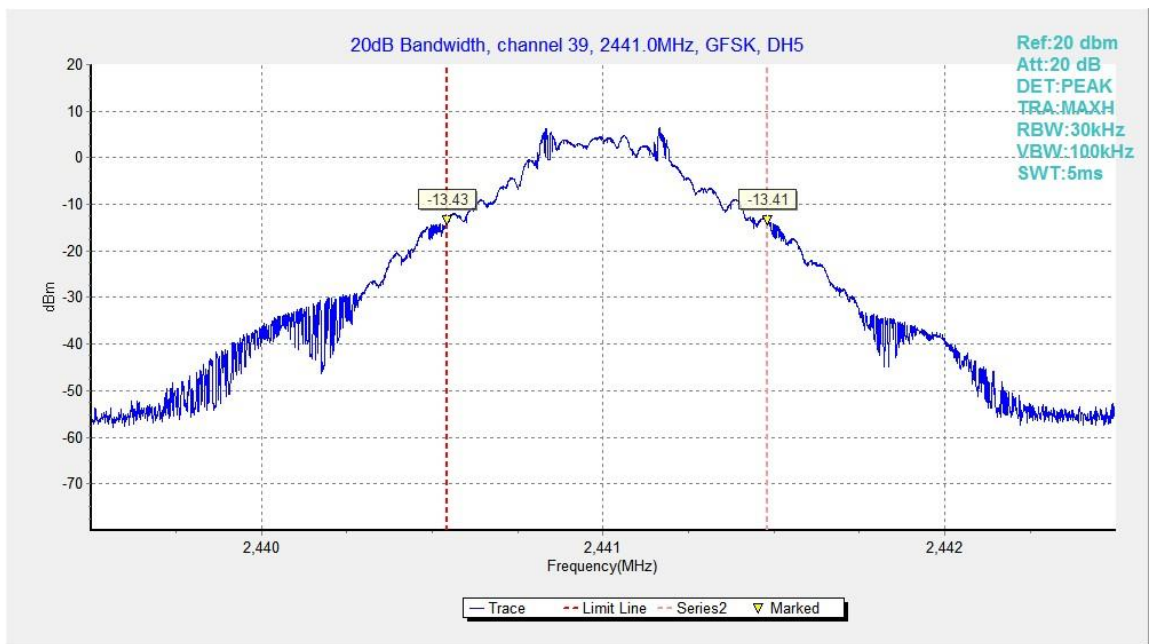


Fig.83. 20dB Bandwidth: GFSK, Channel 39

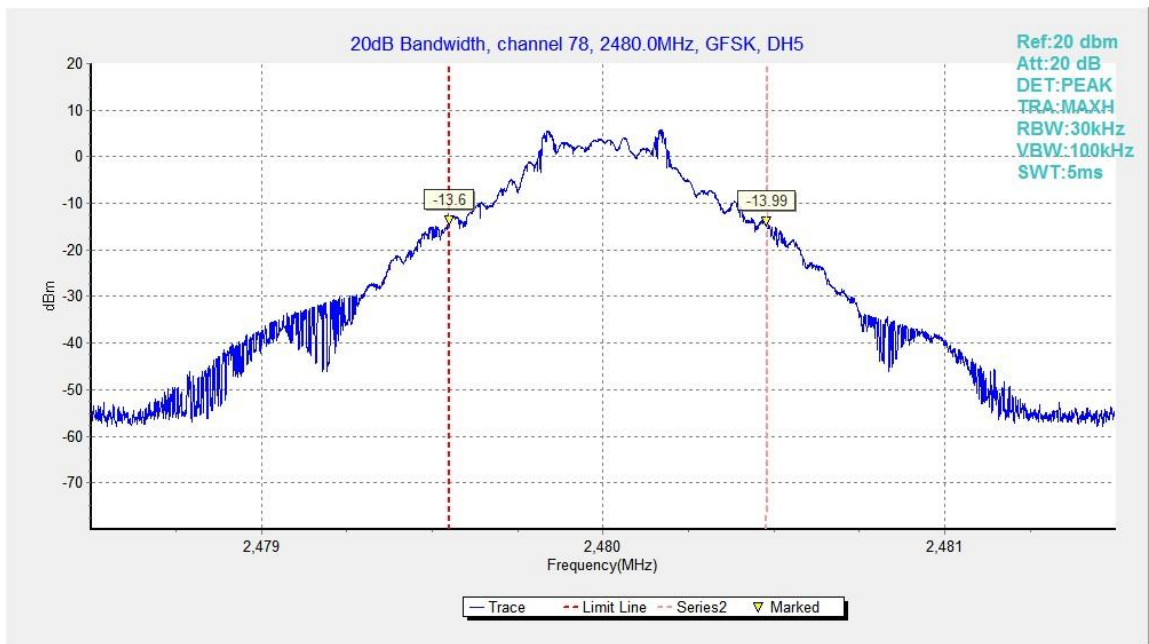


Fig.84. 20dB Bandwidth: GFSK, Channel 78

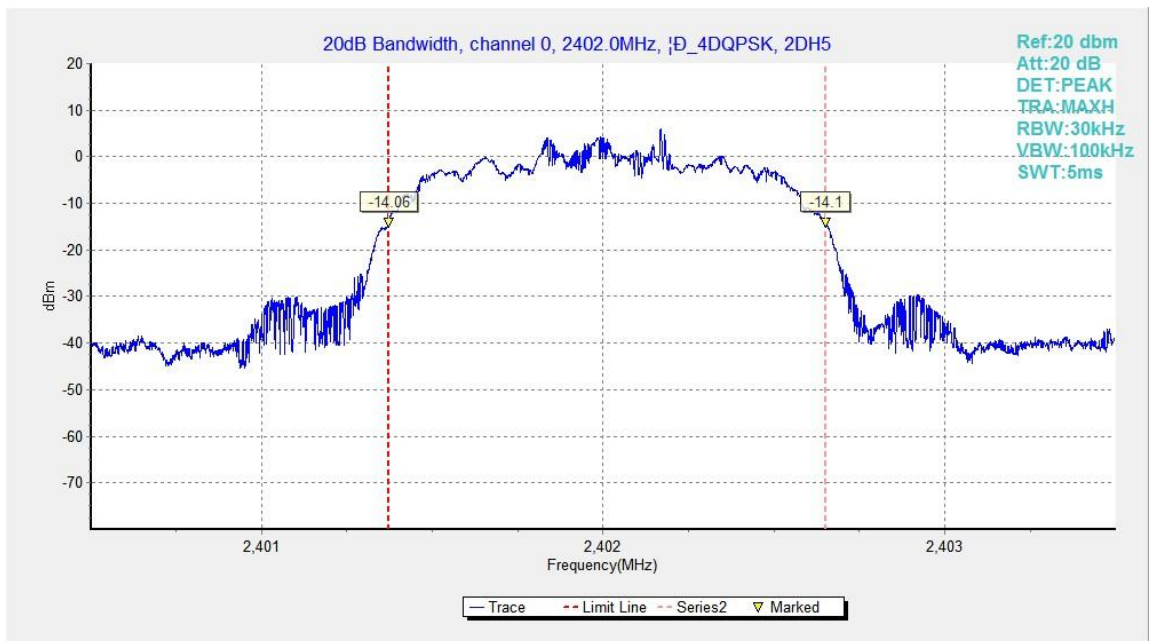


Fig.85. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 0

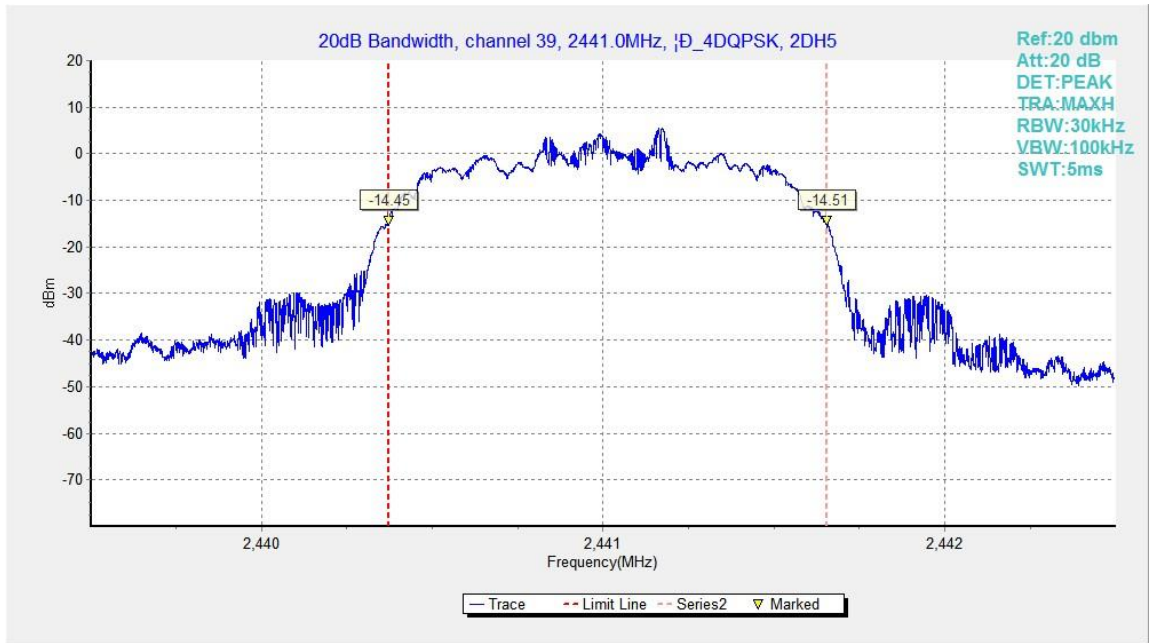


Fig.86. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 39

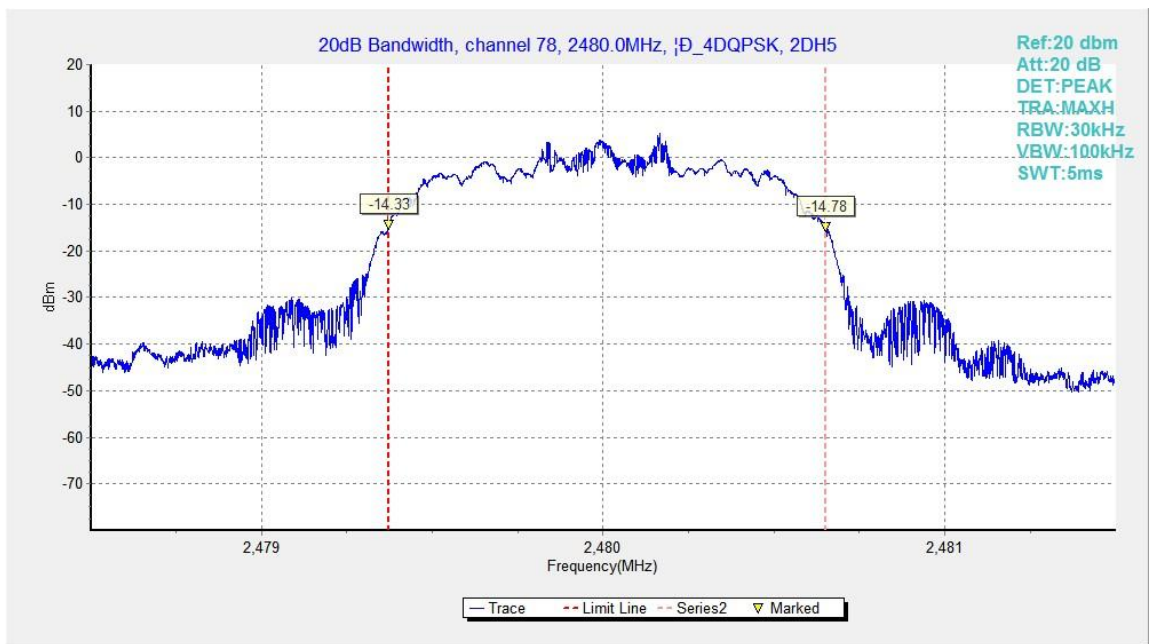


Fig.87. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 78

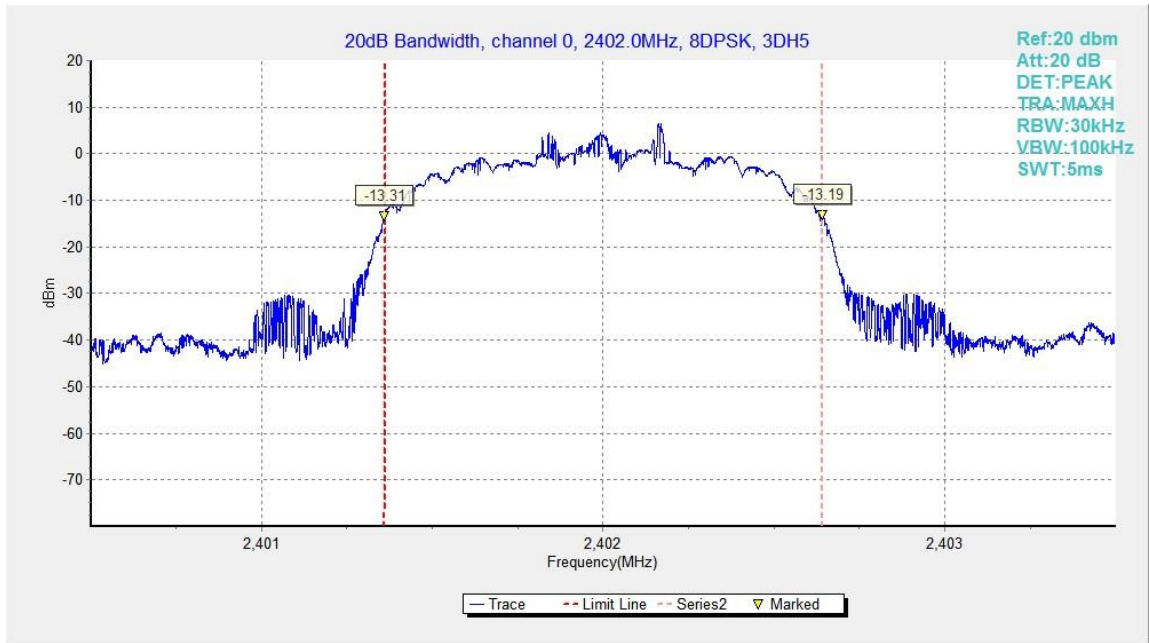


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

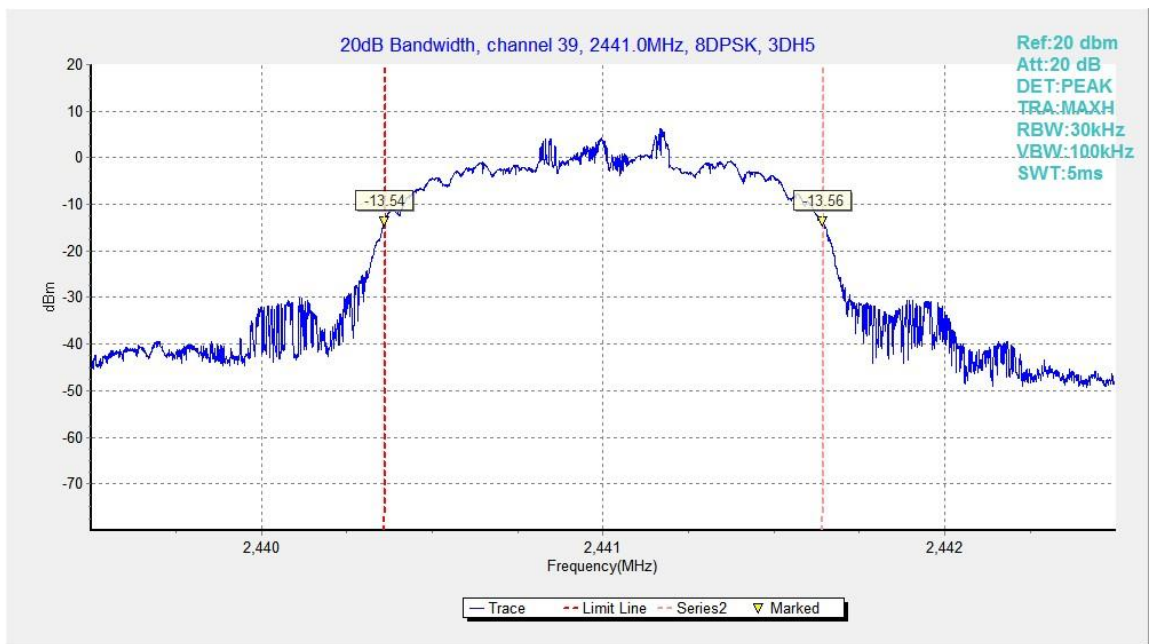


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

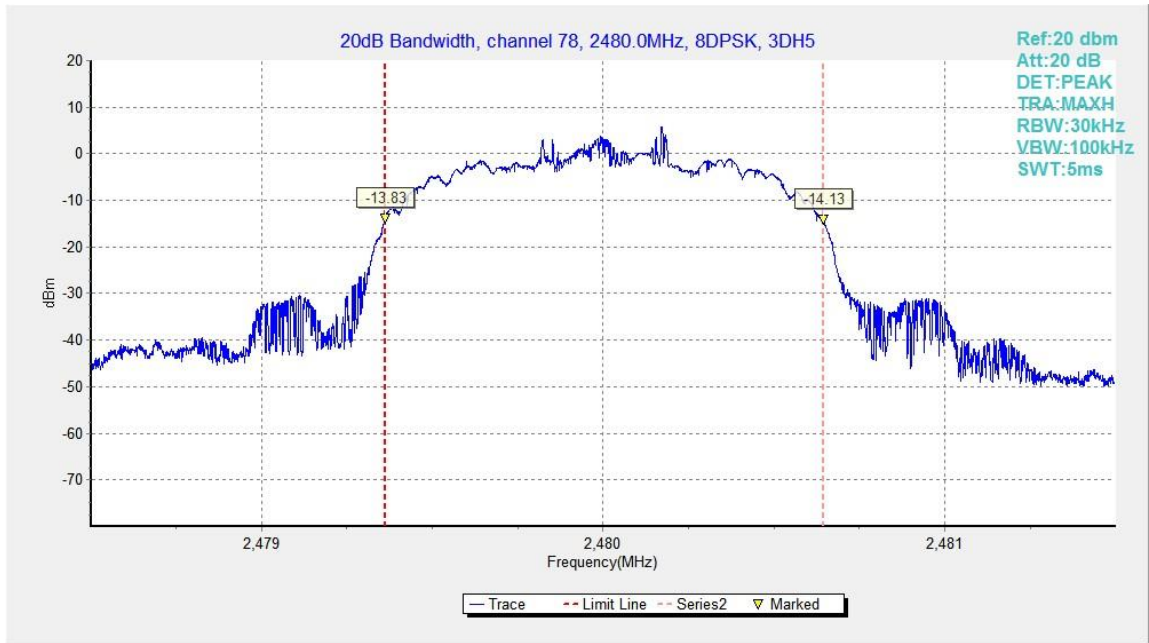


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

## B.9. Carrier Frequency Separation

**Method of Measurement: See ANSI C63.10-clause 7.8.2**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

\* Comment: This limit should be over 25 kHz or  $(2/3) * 20\text{dB}$  bandwidth, whichever is greater.

### Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

### Measurement Result:

#### For GFSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.91	991.50	P

#### For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.92	1005.00	P

#### For 8DPSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.93	1341.75	P

**Conclusion: PASS**

**Test graphs as below:**

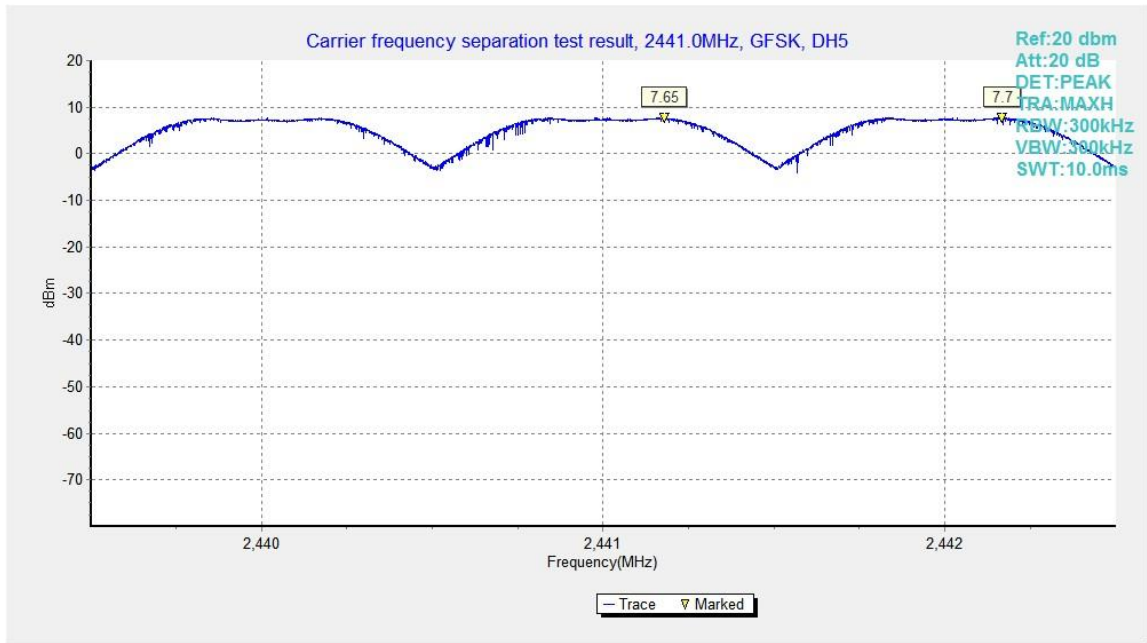


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

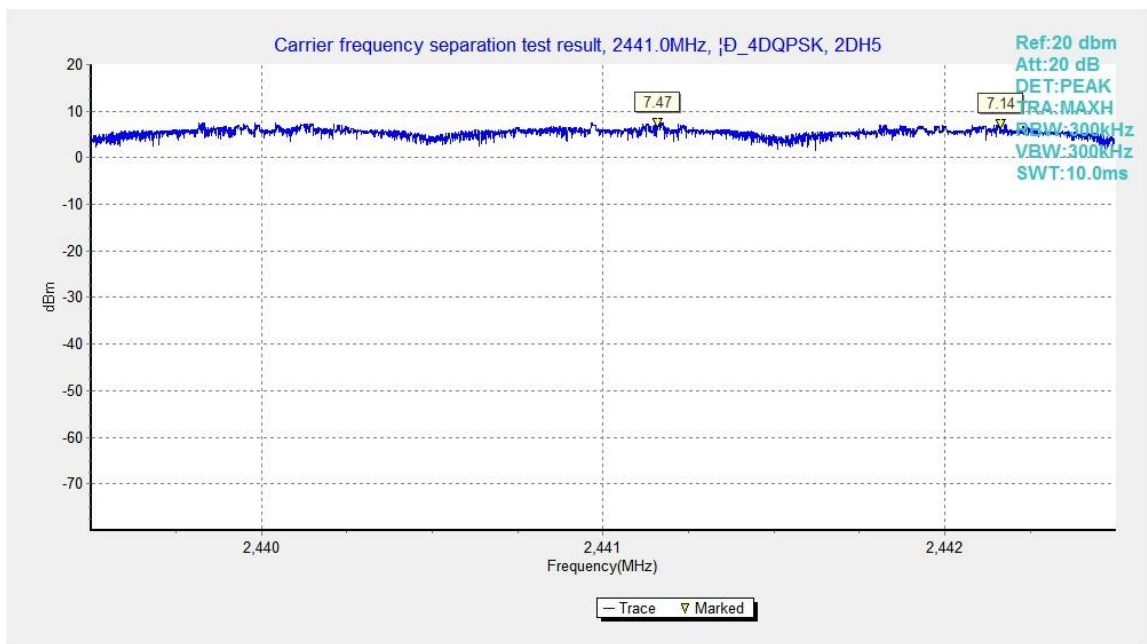


Fig.92. Carrier frequency separation measurement:  $\pi/4$  DQPSK, Channel 39



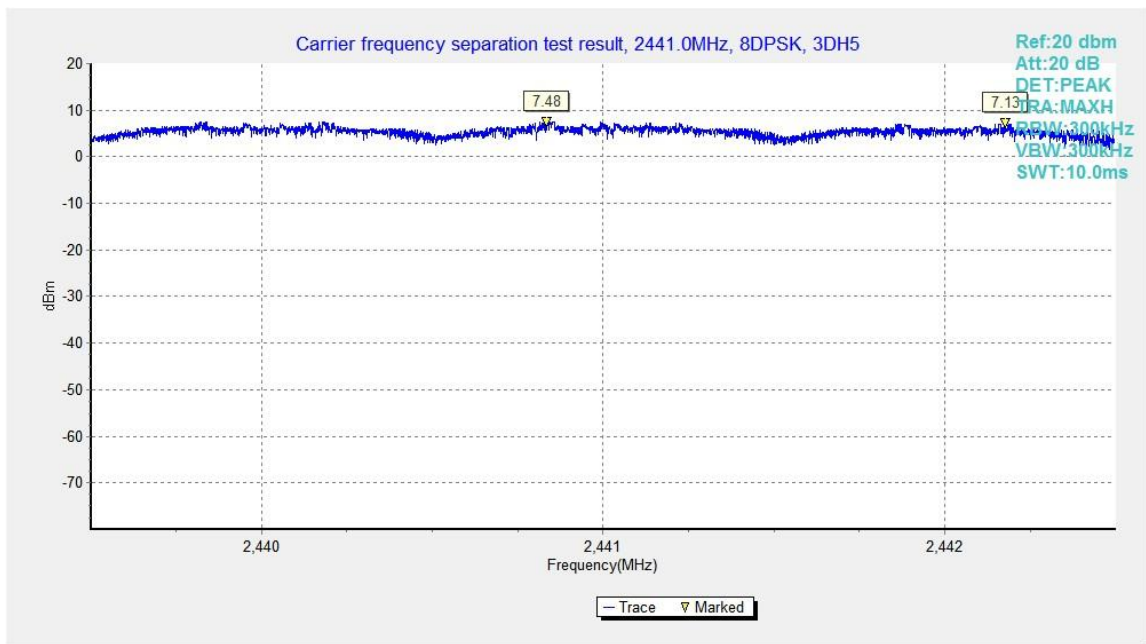


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

## B.10. Number of Hopping Channels

**Method of Measurement: See ANSI C63.10-clause 7.8.3**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

### Measurement Result:

#### For GFSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.94	79 P
40~78	Fig.95	

#### For $\pi/4$ DQPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.96	79 P
40~78	Fig.97	

#### For 8DPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.98	79 P
40~78	Fig.99	

**Conclusion: PASS**

**Test graphs as below:**

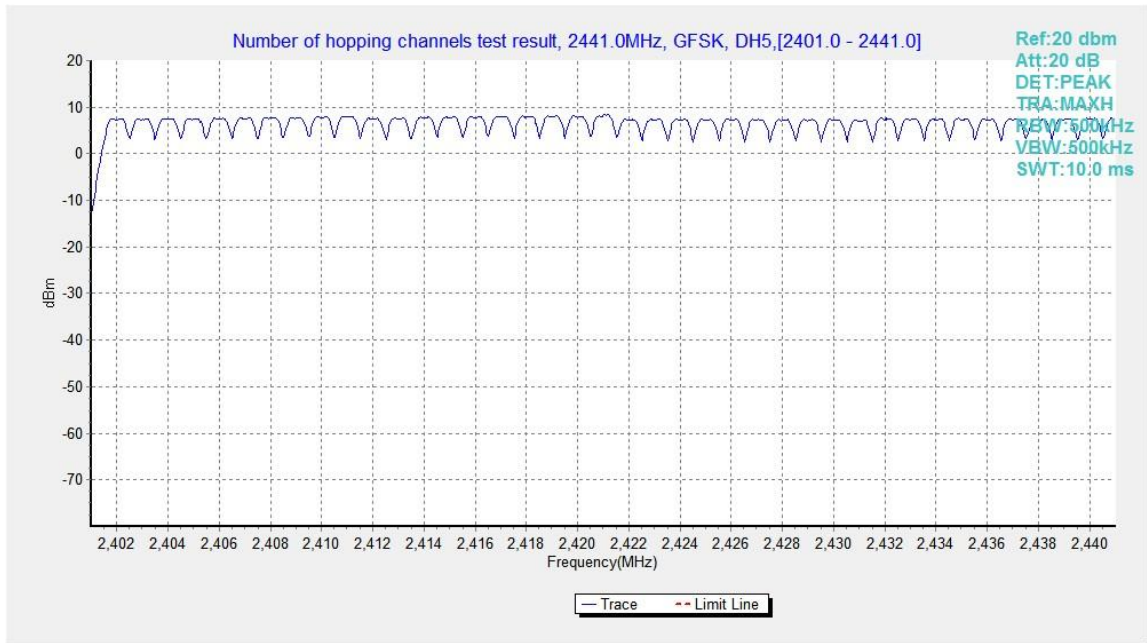


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

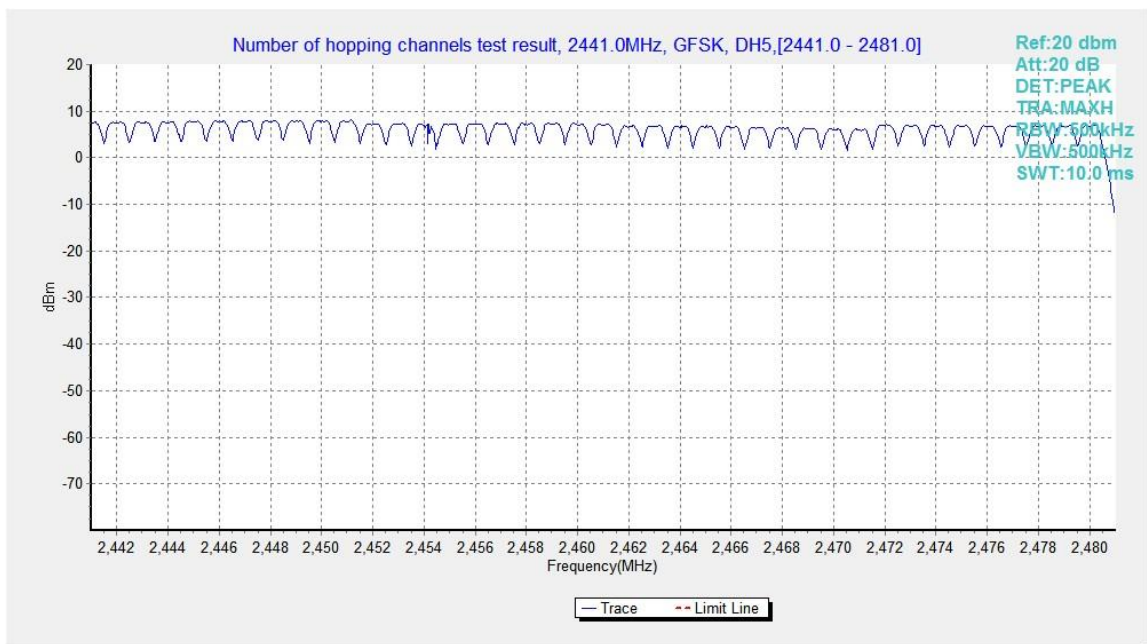


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

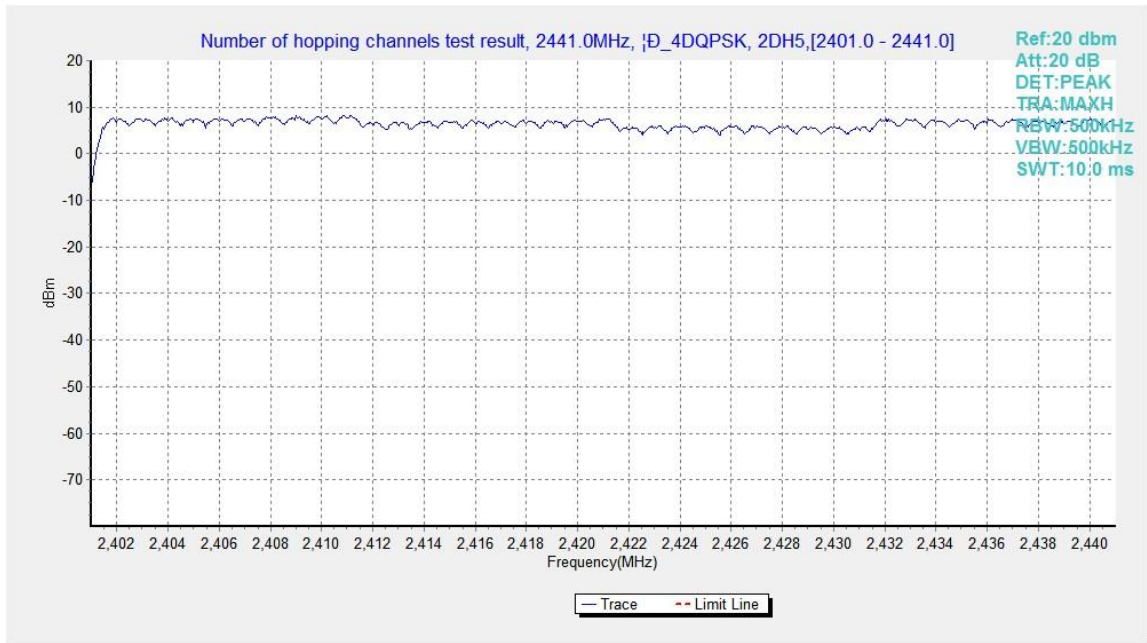


Fig.96. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 0 - 39

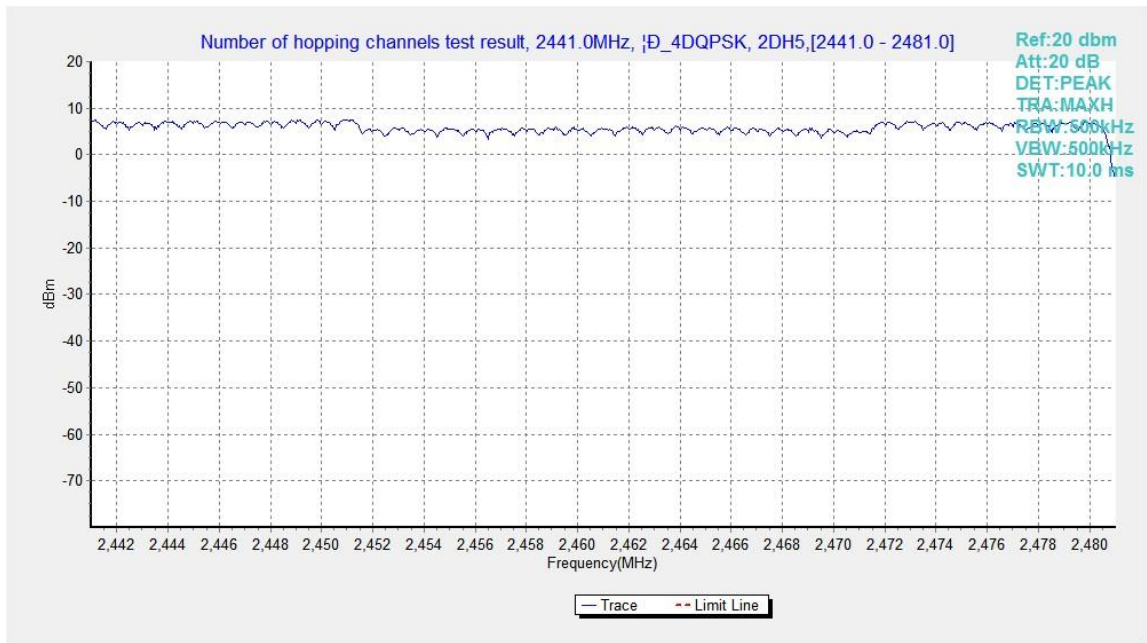


Fig.97. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 40 - 78

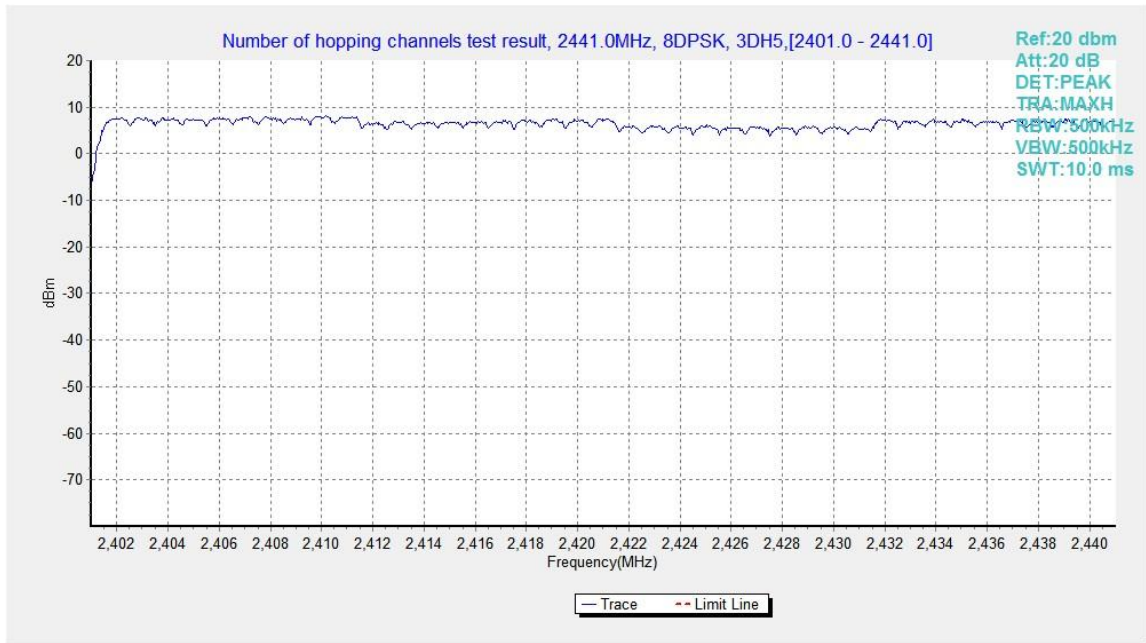


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

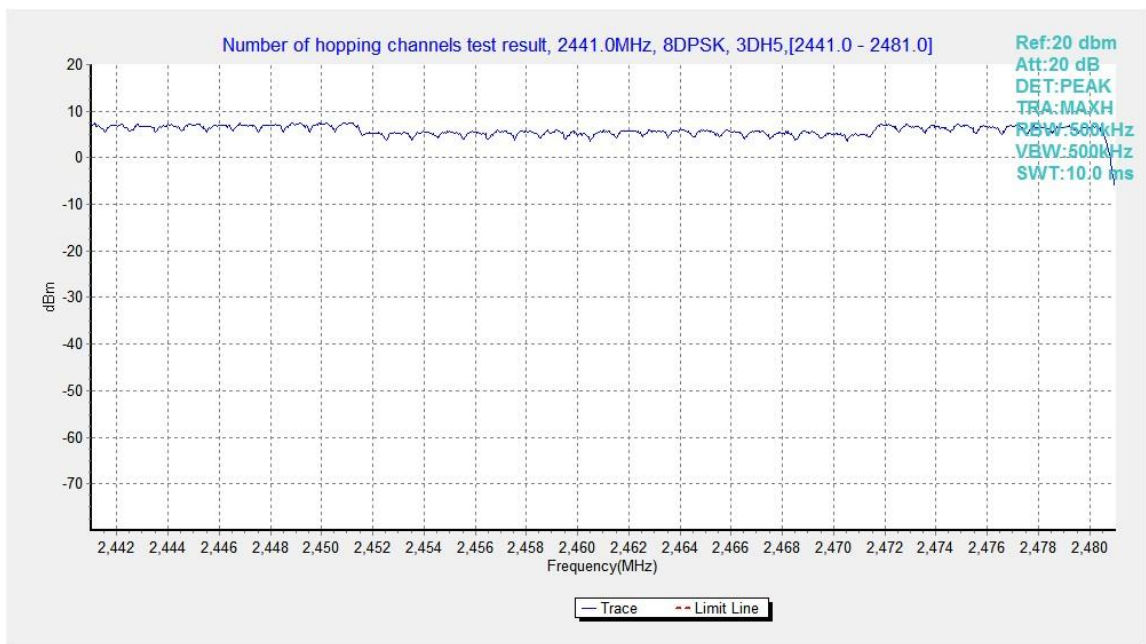


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

## B.11. AC Powerline Conducted Emission

### Method of Measurement:

See Clause 6.2 of ANSI C63.10-2013 specifically.

See Clause 4 and Clause 5 of ANSI C63.10-2013 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

### Measurement Setup

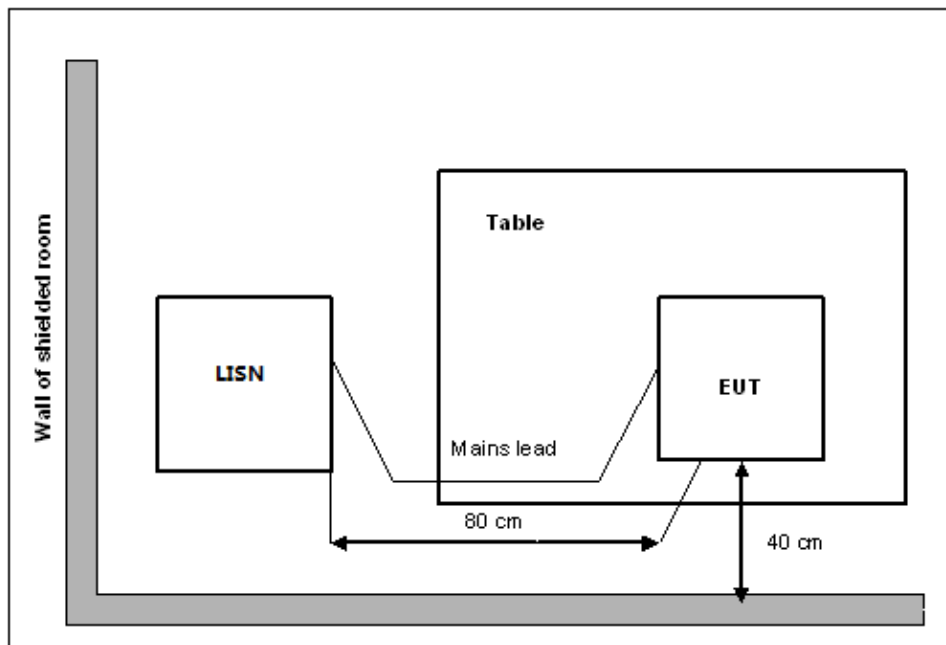

**Measurement Result and limit:**

## Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.11.1	Fig.B.11.2	<b>P</b>
0.5 to 5	56			
5 to 30	60			


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.11.1	Fig.B.11.2	<b>P</b>
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**
**Test graphs as below:**

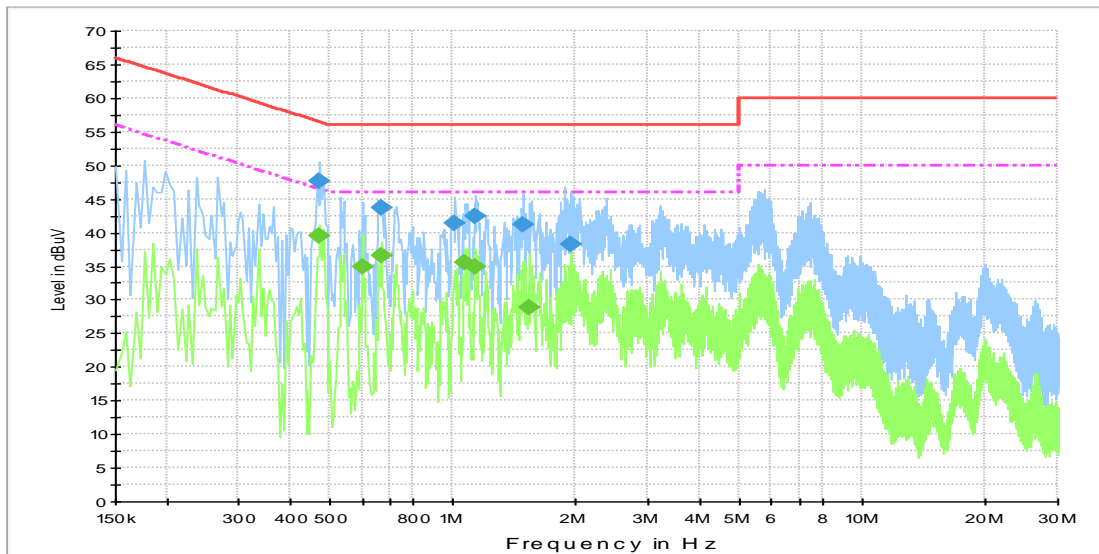

**Fig.B.11.1 AC Powerline Conducted Emission- bluetooth**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.


**Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.474000	47.6	5000.0	9.000	On	L1	19.9	8.8	56.4
0.667500	43.6	5000.0	9.000	On	L1	19.8	12.4	56.0
1.014000	41.4	5000.0	9.000	On	L1	19.7	14.6	56.0
1.140000	42.4	5000.0	9.000	On	L1	19.7	13.6	56.0
1.491000	41.2	5000.0	9.000	On	L1	19.7	14.8	56.0
1.936500	38.3	5000.0	9.000	On	N	19.7	17.7	56.0

**Final Result 2**

Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.474000	39.5	5000.0	9.000	On	L1	19.9	6.9	46.4
0.600000	35.0	5000.0	9.000	On	L1	19.8	11.0	46.0
0.667500	36.5	5000.0	9.000	OO.4	L1	19.8	9.5	46.0
1.072500	35.5	5000.0	9.000	On	L1	19.7	10.5	46.0
1.140000	35.0	5000.0	9.000	On	L1	19.7	11.0	46.0
1.540500	28.9	5000.0	9.000	On	N	19.7	17.1	46.0



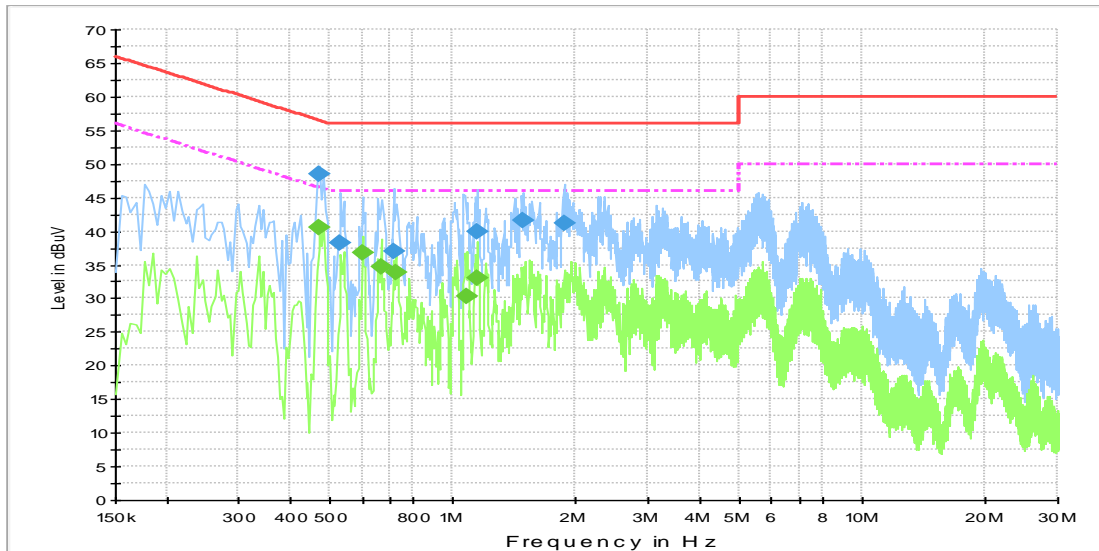

**Fig.B.11.2 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.474000	48.4	5000.0	9.000	On	L1	19.9	8.0	56.4
0.532500	38.3	5000.0	9.000	On	N	19.8	17.7	56.0
0.717000	36.9	5000.0	9.000	On	N	19.8	19.1	56.0
1.149000	40.0	5000.0	9.000	On	L1	19.7	16.0	56.0
1.491000	41.6	5000.0	9.000	On	L1	19.7	14.4	56.0
1.869000	41.2	5000.0	9.000	On	L1	19.7	14.8	56.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.474000	40.6	5000.0	9.000	On	L1	19.9	5.9	46.4
0.600000	36.9	5000.0	9.000	On	L1	19.8	9.1	46.0
0.667500	34.6	5000.0	9.000	On	L1	19.8	11.4	46.0
0.726000	33.9	5000.0	9.000	On	L1	19.8	12.1	46.0
1.081500	30.2	5000.0	9.000	On	N	19.7	15.8	46.0
1.149000	33.0	5000.0	9.000	On	L1	19.7	13.0	46.0

Note: The measurement results showed here are worst cases of the combinations of different adaptor.

## ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> <b>Certificate of Accreditation to ISO/IEC 17025:2017</b> <hr/>	
NVLAP LAB CODE: 600118-0	
<b>Telecommunication Technology Labs, CAICT</b> Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
<b>Electromagnetic Compatibility &amp; Telecommunications</b>	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
<hr/> 2021-09-29 through 2022-09-30 <i>Effective Dates</i>	  <i>For the National Voluntary Laboratory Accreditation Program</i>

\*\*\*END OF REPORT\*\*\*