

FCC Part 15C

Measurement And Test Report For

Shenzhen Smart-eye Digital Electronics Co., Ltd

#6 Northern Area , Shangxue S&T Industrial Park, Longgan, Shenzhen.

FCC ID: ZCBHYIPC-540D04W

June 05, 2012

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: IP CAMERA
Report Number:	MTI120529001RF
Test Engineer:	Bill Chen
Reviewed By:	Jason Zheng
Approved & Authorized By:	Hebe Lee Hebe Lee
Test Date:	May 28-Jun 04,2011
Prepared By:	<p>MTI Technology Laboratory Ltd. 10F, Yinxing Business Hotel, Xixiang Road, Bao'an District, Shenzhen, P.R.China. Tel: +86-755-8885 0135 Fax: +86-755-8885 0136</p> 

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of MTI Technology Laboratory Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY	5
1.5 TEST FACILITY	5
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT CONFIGURATION.....	6
2.2 EUT EXERCISE	6
2.3 GENERAL TEST PROCEDURES	6
2.4 LIST OF MEASURING EQUIPMENTS USED.....	7
2.5 TEST CONDUCTION	7
2.6 TEST PERIPHERAL INFORMATION.....	7
3. SUMMARY OF TEST RESULTS	8
4. ANTENNA REQUIREMENT	9
4.1 STANDARD APPLICABLE	9
4.2 ANTENNA CONNECTED CONSTRUCTION	9
5. CONDUCTED EMISSION MEASUREMENT.....	10
5.1 LIMITS OF CONDUCTED EMISSION	10
5.2 TEST SETUP DIAGRAM	10
5.3 INSTRUMENT SETTING.....	10
5.4 TEST EQUIPMENT LIST AND DETAILS	11
5.5 TEST PROCEDURE	11
5.6 TEST RESULT.....	11
6. 6DB BANDWIDTH MEASUREMENT	14
6.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	14
6.2 EUT SETUP	14
6.3 TEST EQUIPMENT LIST AND DETAILS	14
6.4 TEST PROCEDURE	14
6.5 TEST RESULT.....	14
7. MAXIMUM PEAK OUTPUT POWER.....	21
7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	21
7.2 EUT SETUP	21
7.3 TEST EQUIPMENT LIST AND DETAILS	21
7.4 TEST PROCEDURE	21
7.5 TEST RESULT.....	21
8. POWER SPECTRAL DENSITY MEASUREMENT.....	29
8.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	29
8.2 EUT SETUP	29
8.3 TEST EQUIPMENT LIST AND DETAILS	29
8.4 TEST PROCEDURE	29
8.5 TEST RESULT.....	29
HIGH CHANNEL	32
9. BAND EDGES MEASUREMENT	36
9.1 LIMITS OF BAND EDGES MEASUREMENT	36
9.2 TEST EQUIPMENT LIST AND DETAILS	36
9.3 TEST PROCEDURE	36
9.4 TEST RESULT.....	36
10. RADIATED EMISSION MEASUREMENT	53

10.1 LIMITS OF RADIATED EMISSION MEASUREMENT	53
10.2 EUT SETUP	53
10.3 TEST EQUIPMENT LIST AND DETAILS	53
10.4 TEST PROCEDURE	54
10.5 TEST RESULT.....	54

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Applicant:	Shenzhen Smart-eye Digital Electronics Co., Ltd
Address of applicant:	#6 Northern Area , Shangxue S&T Industrial Park, Longgan, Shenzhen
Manufacturer:	Shenzhen Smart-eye Digital Electronics Co., Ltd
Address of manufacturer:	#6 Northern Area , Shangxue S&T Industrial Park, Longgan, Shenzhen
Equipment Under Test:	IP CAMERA
Tested Model No.:	540D04W
Trade Name:	Wansview
Type of Modulation:	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Frequency Band:	2412~2462 MHz for 802.11b/g, 802.11n/HT20; 2422~2452 MHz for 802.11n/HT40
Number of Channels:	11 for 802.11b/g, 802.11n/HT20; 7 for 802.11n/HT40
Channel Separation:	5MHz
EIRP Power:	16.81 dBm
Power Supply:	DC 5V Form adapter with 120V/60Hz
Adapter:	Manufacturer: Shenzhen Smart-eye Digital Electronics Co., Ltd Model: NKB150050W1A

Remark: * The test data gathered are from the production sample provided by the manufacturer.

1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, and 15.247 rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

All measurement required was performed at laboratory of NTEK Testing Technology Co., Ltd., at 1/F, Building E, Fenda Science Park Sanwei Community, Xixiang Street, Baoan District , Shenzhen,Guangdong

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 238937

NTEK Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 238937.

The facility also complies with the radiated and AC line conducted test site criteria set forth in CISPR 16-1: 2002, CISPR16-2: 2002.

2. SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 Part 15 Subpart C.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures


Conducted Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 List of Measuring Equipments Used

Items	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Calibration Period
1	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100079	2011/11/18	1 year
2	Horn Antenna	R/S	CH14-H052	1091698	2011/11/18	1 year
3	Loop Antenna	COM Power	AL-130	UBTL0031	2011/11/18	1 year
4	3m Semi- Anechoic Chamber	ETS	N/A	N/A	2011/11/18	1 year
5	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	2011/11/18	1 year
6	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100009	2011/11/18	1 year
7	Receiver/ Spectrum Analyzer	ROHDE & SCHWARZ	ESCI	100106	2011/11/18	1 year
8	Spectrum Analyzer	Agilent	E7405A	US41160415	2011/11/18	1 year
9	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	100028	2011/11/18	1 year
10	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100044	2011/11/18	1 year
11	LISN	COM Power	LI-200	12212	2011/11/18	1 year
12	LISN	COM Power	LI-200	12019	2011/11/18	1 year
13	3m/5m Semi-Anechoic Chamber	ETS	N/A	N/A	2011/11/18	1 year
14	Ultra-Broadband Antenna	R/S	HL562	100015	2011/11/18	1 year
15	Horn Antenna	R/S	HF906	100039	2011/11/18	1 year
16	RF Test Panel	R/S	TS / RSP	335015/ 0017	N/A	N/A
17	Turntable	ETS	2088	2149	N/A	N/A
18	Antenna Mast	ETS	2075	2346	N/A	N/A

2.5 Test conduction



2.6 Test Peripheral Information

Items	Equipment	Manufacturer	Model No.
1	Notebook	Acer	4552G

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
15.203/15.247(b)/(c)	Antenna Requirement	Pass
15.207	AC Power Line Conducted Emission	Pass
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System	Pass
15.247(e)	Power Spectral Density	Pass
15.247(b)(1)	Maximum Peak Output Power	Pass
15.247(d)	Band Edges Emission	Pass
15.247(d)	Radiated Emission	Pass

Note: The EUT has been tested as an independent unit. And Continual Transmitting in maximum power (The notebook be used during Test)

4. ANTENNA REQUIREMENT

4.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

4.2 Antenna Connected Construction

The antennas used in this product are PIFA. PIFA antenna with RP-SMA connector, The maximum Gain of the antenna is 3dBi.


5. CONDUCTED EMISSION Measurement

5.1 Limits of Conducted Emission

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

5.2 Test Setup Diagram

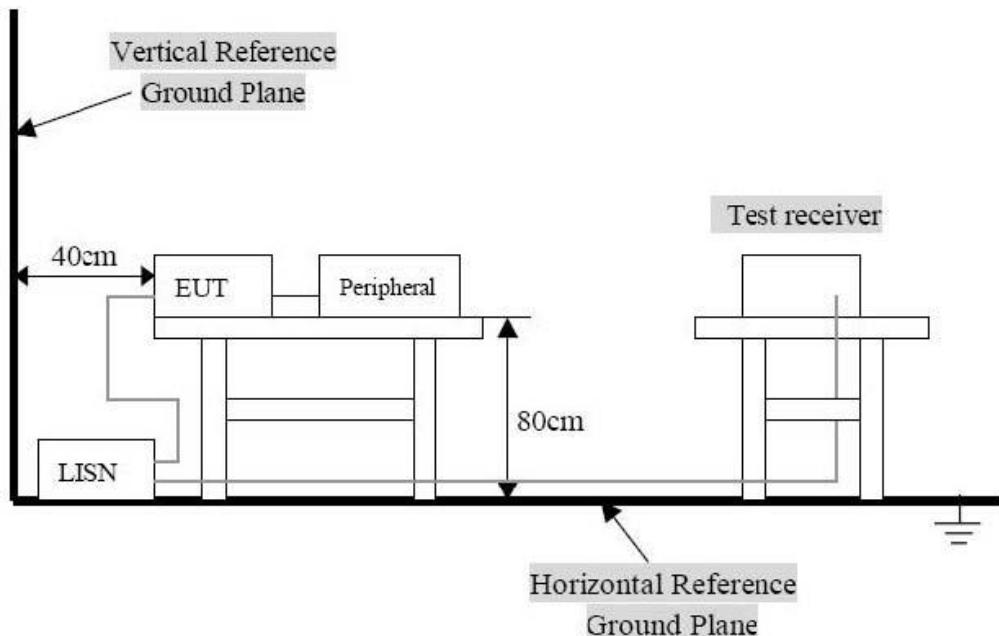

5.3 Instrument Setting

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz
Detector.....Peak & Quasi-Peak & Average
Sweep Speed.....Auto
IF Band Width.....9 KHz

5.4 Test Equipment List and Details

See section 2.4 of this report.

5.5 Test Procedure

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISN. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.


5.6 Test Result

Detailed information please refers to the following page.

According to the data in this section, the EUT complied with the FCC 15.207 Conducted margin for a Class B device, with the worst margin reading of:


-8.63 dB μ V at 2.077 MHz in the Line mode, QP detector, 0.15-30MHz

EUT: IP CAMERA
 M/N: 540D04W
 Operator: Amy
 Test Specification: L

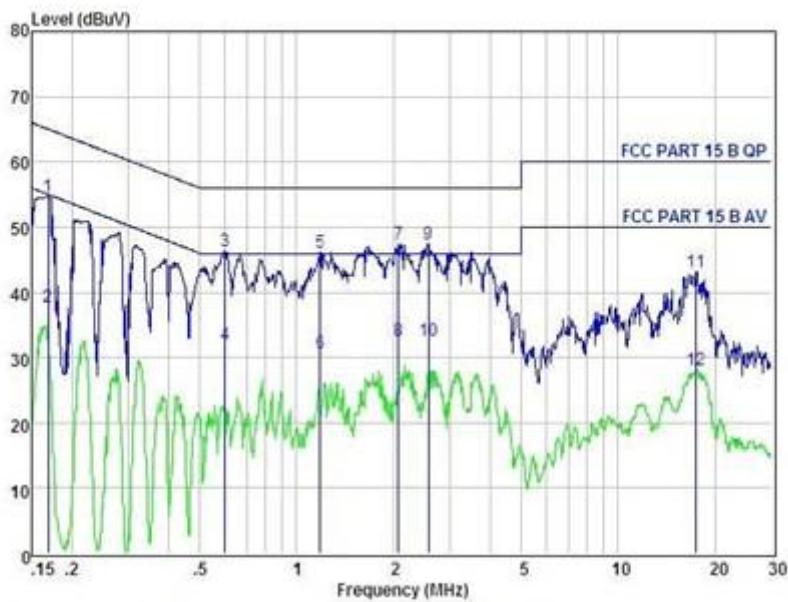

Condition	FCC PART 15 B QP										POL: LINE
	Item	Freq	Read	LISM	Preamp	Cable	Level	Limit	Margin	Remark	
	MHz	dBuV	dB	Factor	Factor	dB	dBuV	dBuV	dBuV		
1	0.169	44.86	0.03	-9.72	0.10	54.73	65.03	-10.30		QP	
2	0.169	27.81	0.03	-9.72	0.10	37.66	55.03	-17.37		Average	
3	0.598	36.54	0.03	-9.72	0.10	46.39	56.00	-9.61		QP	
4	0.598	22.04	0.03	-9.72	0.10	31.89	46.00	-14.11		Average	
5	1.184	36.20	0.04	-9.71	0.10	46.05	56.00	-9.95		QP	
6	1.184	20.91	0.04	-9.71	0.10	30.76	46.00	-15.24		Average	
7	2.077	37.81	0.06	-9.70	0.10	47.37	56.00	-8.63		QP	
8	2.077	22.72	0.06	-9.70	0.10	32.58	46.00	-13.42		Average	
9	2.567	37.50	0.06	-9.70	0.11	47.37	56.00	-8.63		QP	
10	2.567	22.73	0.06	-9.70	0.11	32.62	46.00	-13.38		Average	
11	17.475	33.11	0.29	-9.43	0.30	43.13	60.00	-16.87		QP	
12	17.475	18.07	0.29	-9.43	0.30	28.09	50.00	-21.91		Average	

EUT: IP CAMERA
 M/N: 540D04W
 Operator: Amy
 Test Specification: N

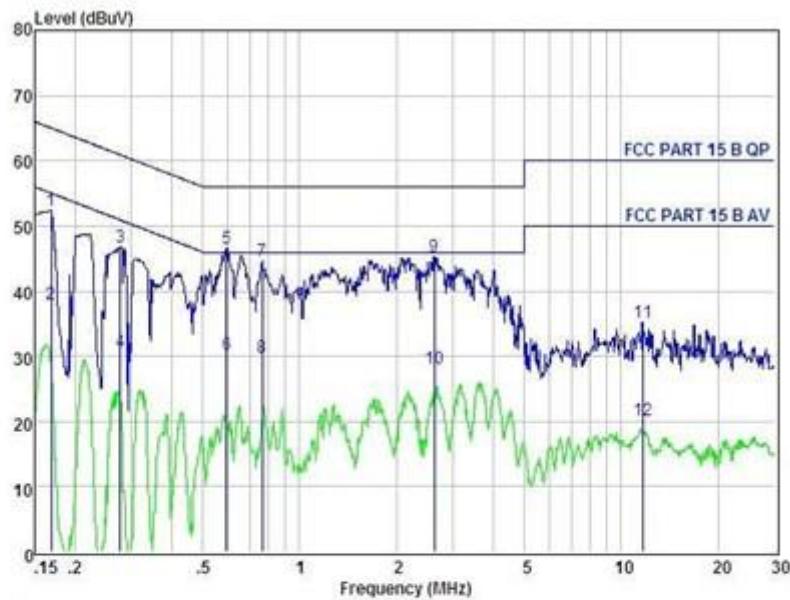


Condition : FCC PART 15 B QP										POL: NEUTRAL
Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark	
	MHz	dBuV	Factor	Factor	dB	dB	dBuV	dBuV		
1	0.169	42.52	0.03	-9.72	0.10	52.37	65.03	-12.66	QP	
2	0.169	28.20	0.03	-9.72	0.10	38.05	55.03	-16.98	Average	
3	0.277	36.88	0.03	-9.72	0.10	46.73	60.90	-14.17	QP	
4	0.277	20.88	0.03	-9.72	0.10	30.73	50.90	-20.17	Average	
5	0.592	36.73	0.03	-9.72	0.10	46.58	56.00	-9.42	QP	
6	0.592	20.29	0.03	-9.72	0.10	30.14	46.00	-15.86	Average	
7	0.767	34.71	0.04	-9.71	0.10	44.56	56.00	-11.44	QP	
8	0.767	20.01	0.04	-9.71	0.10	29.86	46.00	-16.14	Average	
9	2.622	35.42	0.06	-9.70	0.11	45.29	56.00	-10.71	QP	
10	2.622	18.15	0.06	-9.70	0.11	28.02	46.00	-17.98	Average	
11	11.683	25.24	0.25	-9.47	0.22	35.18	60.00	-24.82	QP	
12	11.683	10.24	0.25	-9.47	0.22	20.18	50.00	-29.82	Average	

6. 6dB Bandwidth Measurement

6.1 Limits of 6dB Bandwidth Measurement

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 EUT Setup

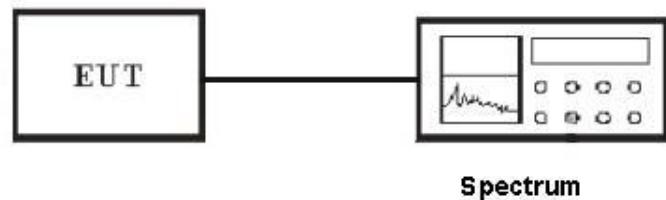

6.3 Test Equipment List and Details

See section 2.4.

6.4 Test Procedure


1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=100 KHz, VBW=100KHz, Sweep=auto
4. Mark the peak frequency and –6dB (upper and lower) frequency.

6.5 Test Result


PASS

Detailed information, Please refer to the following pages.


For 802.11b
Low Channel

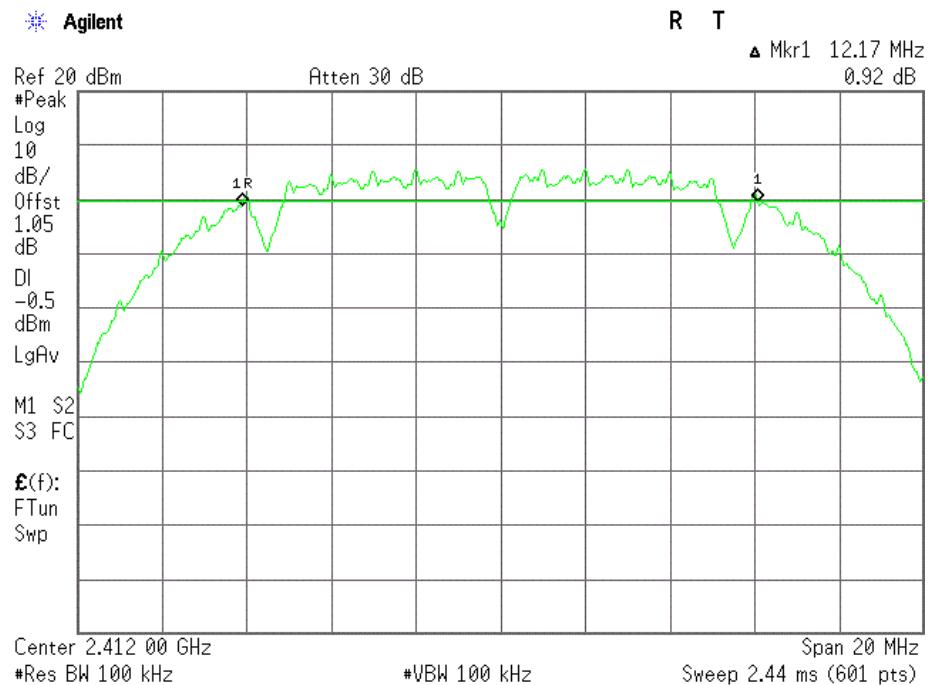


Middle Channel

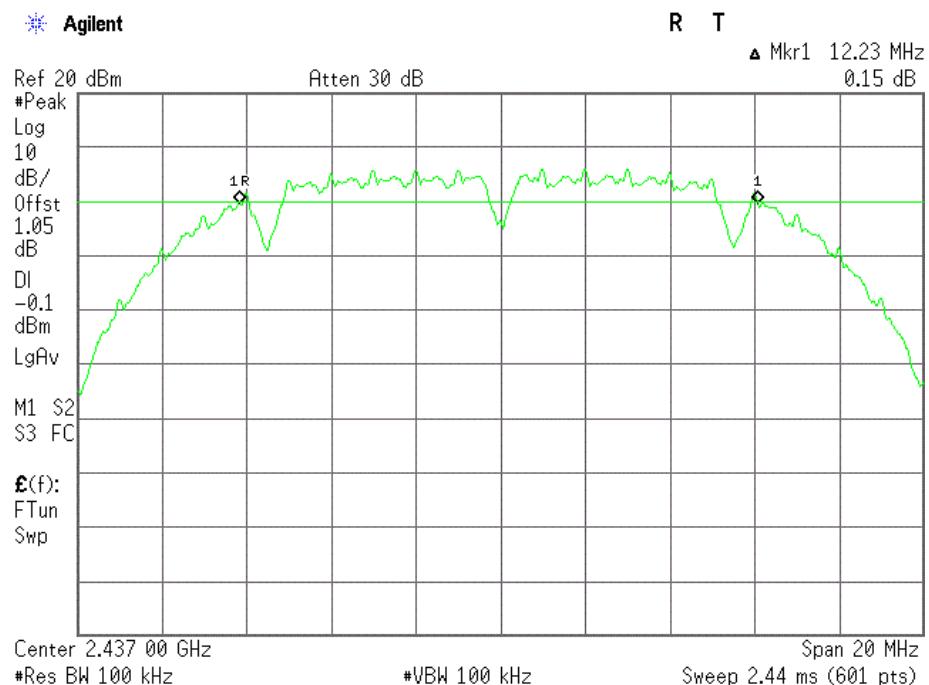


High Channel

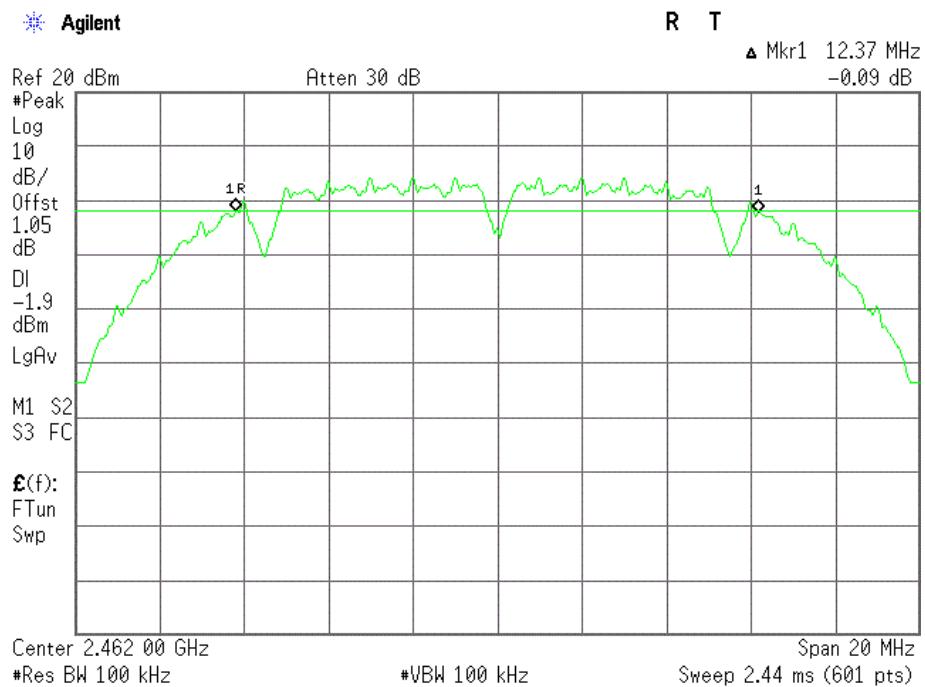


For 802.11g Low Channel

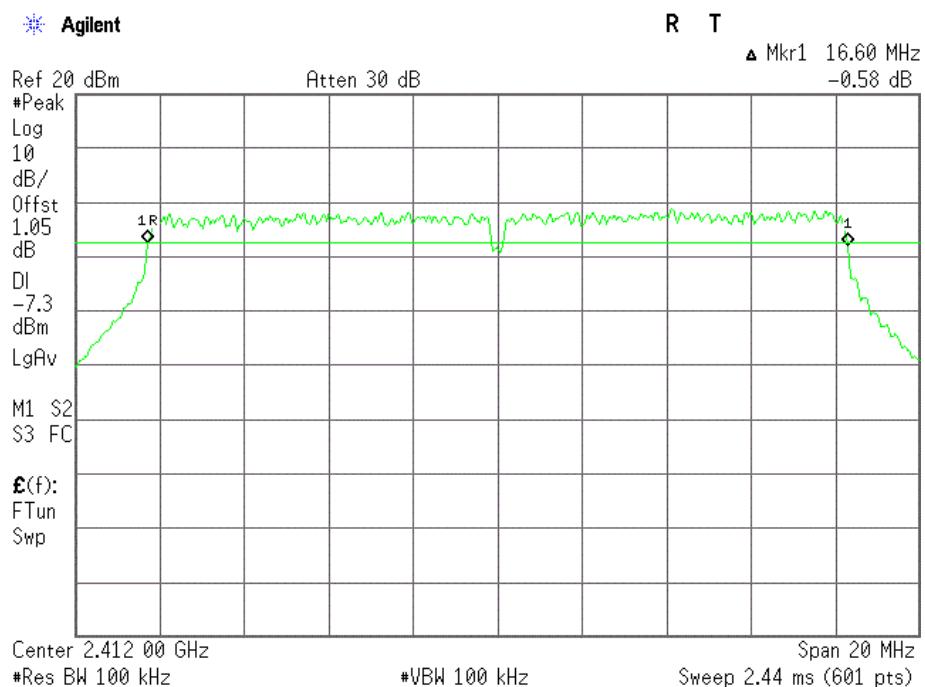

Middle Channel

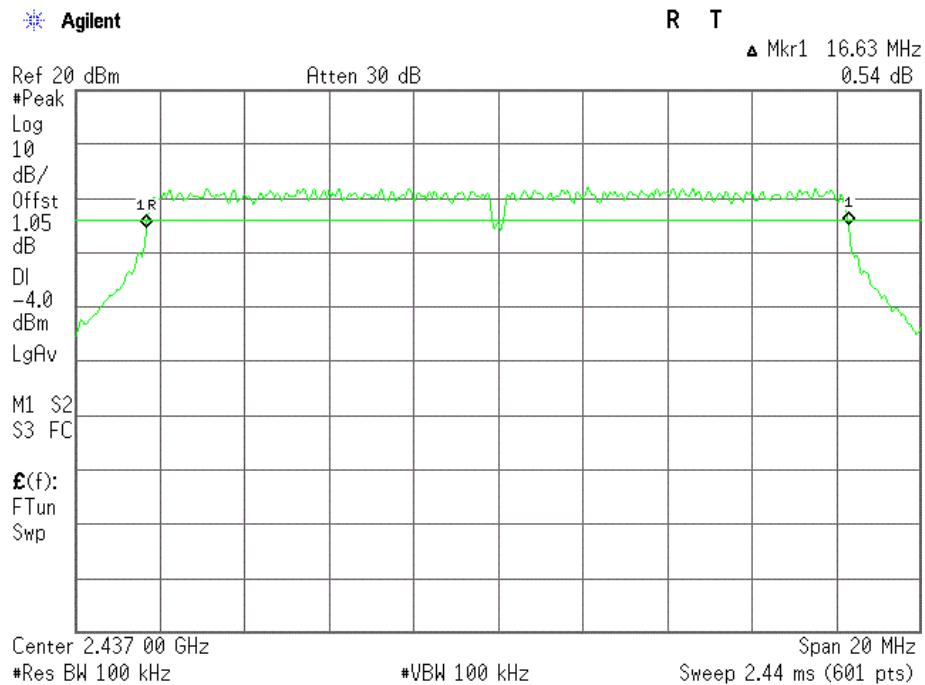


High Channel

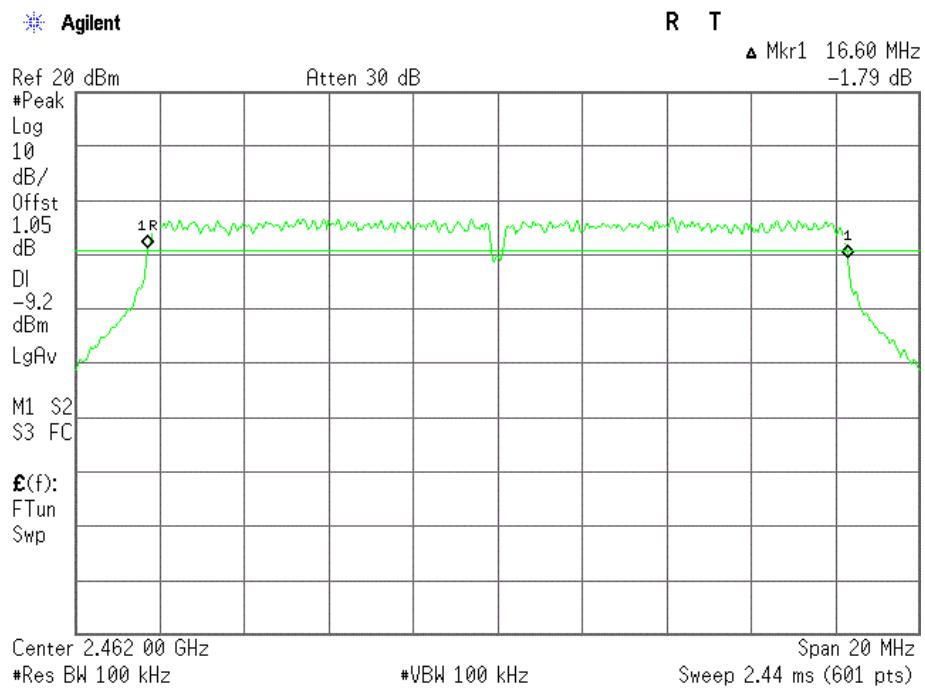


For 802.11n/HT20


Low Channel

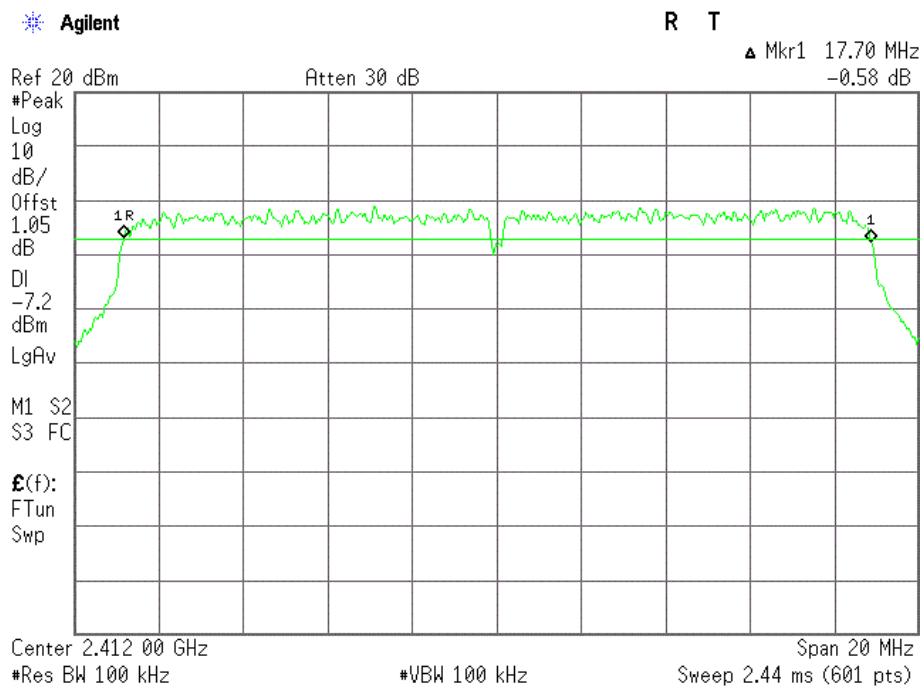

Middle Channel

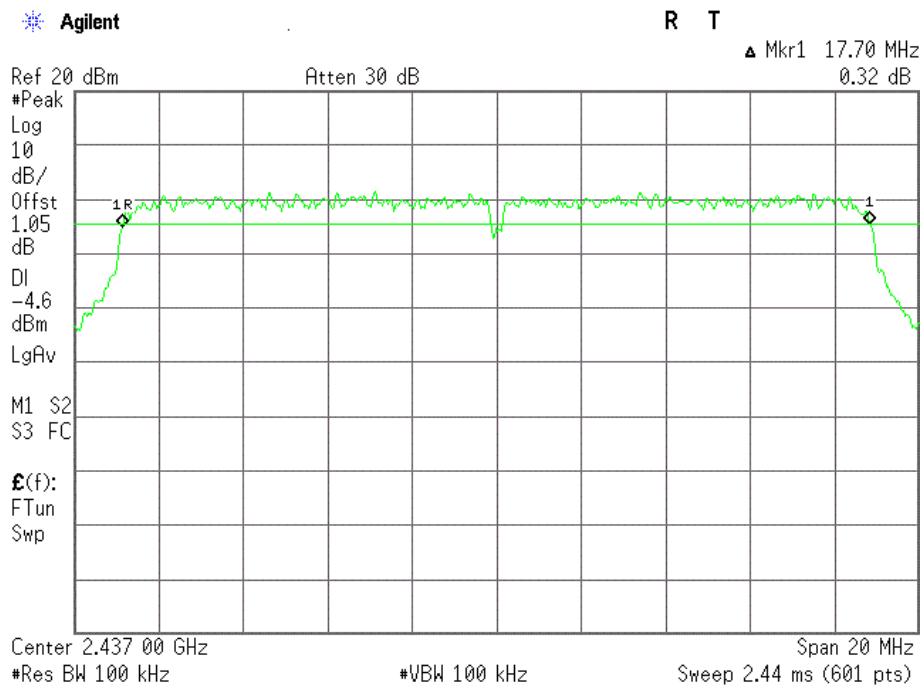


High Channel:

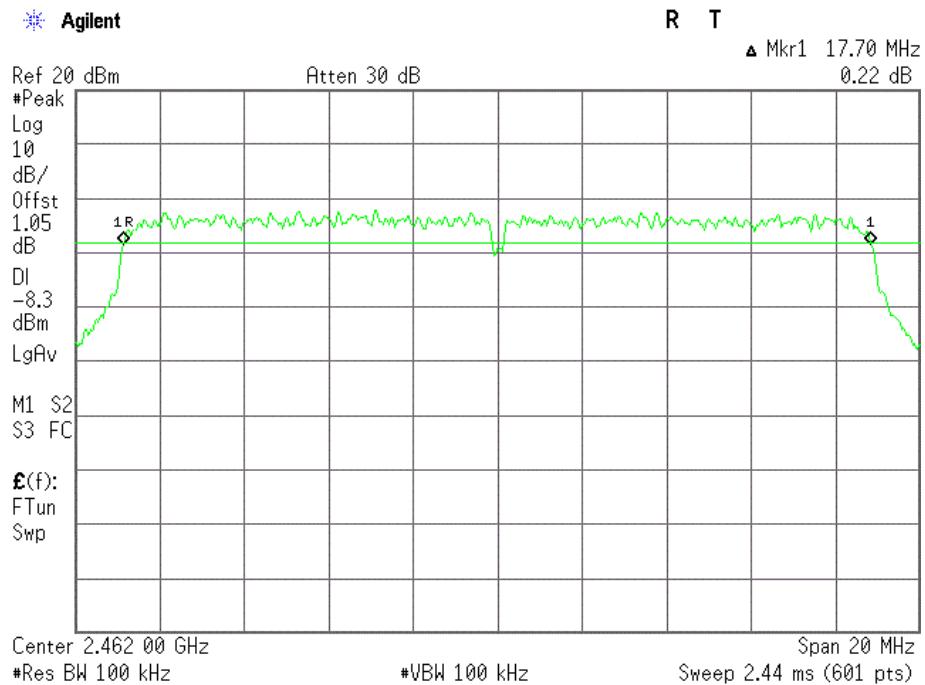


For 802.11n/HT40


Low Channel

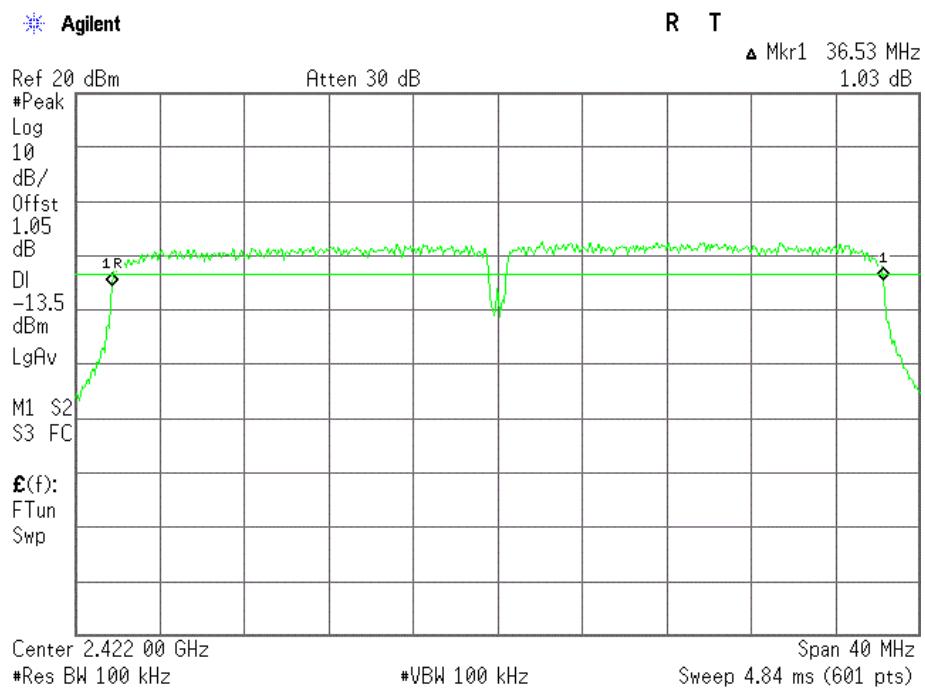

Middle Channel

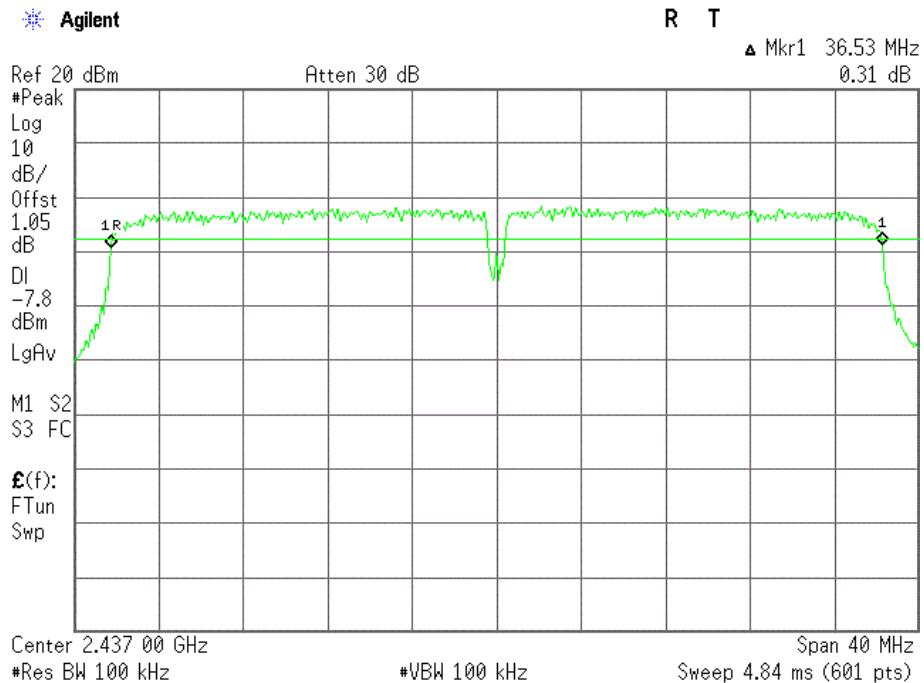

High Channel

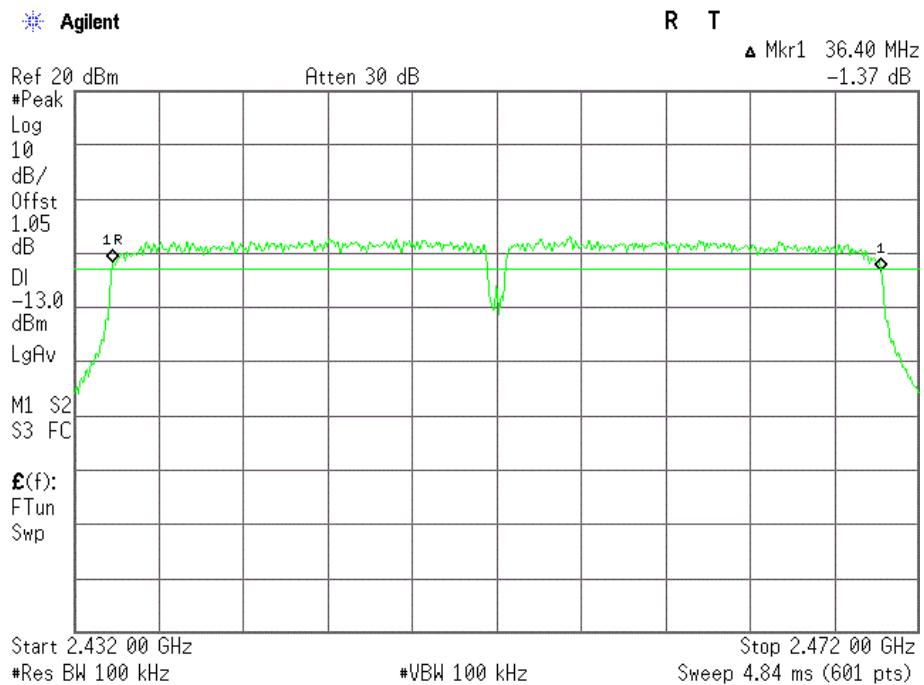


7. Maximum Peak Output Power

7.1 Limits of Maximum Peak Output Power Measurement

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 EUT Setup

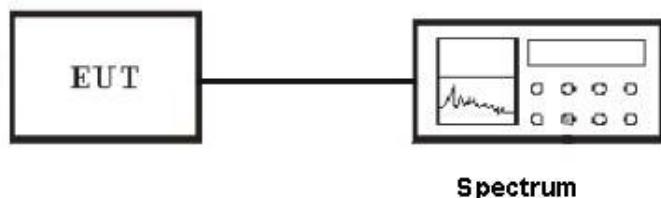

7.3 Test Equipment List and Details

See section 2.4.

7.4 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=1MHz, VBW=3MHz, Sweep=auto

7.5 Test Result

PASS

802.11b:

Channel No.	Frequency (MHz)	PEAK POWEROUTPUT (dBm)	PEAK POWEROUTPUT (W)	PEAK POWER LIMIT (W)	PASS/FAIL
LOW	2412	16.81	0.0480	1	PASS
Mid	2437	16.41	0.0438	1	PASS
High	2462	14.34	0.0272	1	PASS

802.11g:

Channel No.	Frequency (MHz)	PEAK POWEROUTPUT (dBm)	PEAK POWEROUTPUT (W)	PEAK POWER LIMIT (W)	PASS/FAIL
LOW	2412	14.35	0.0272	1	PASS
Mid	2437	15.10	0.0323	1	PASS
High	2462	14.79	0.0301	1	PASS

802.11n/HT20


Channel No.	Frequency (MHz)	PEAK POWEROUTPUT (dBm)	PEAK POWEROUTPUT (W)	PEAK POWER LIMIT (W)	PASS/FAIL
LOW	2412	11.44	0.0139	1	PASS
Mid	2437	12.12	0.0162	1	PASS
High	2462	11.54	0.0142	1	PASS

802.11n/HT40


Channel No.	Frequency (MHz)	PEAK POWEROUTPUT (dBm)	PEAK POWEROUTPUT (W)	PEAK POWER LIMIT (W)	PASS/FAIL
LOW	2422	10.83	0.0121	1	PASS
Mid	2437	10.49	0.0112	1	PASS
High	2452	10.02	0.0100	1	PASS

Detailed information test plot, Please refer to the following pages.


For 802.11b
Low Channel

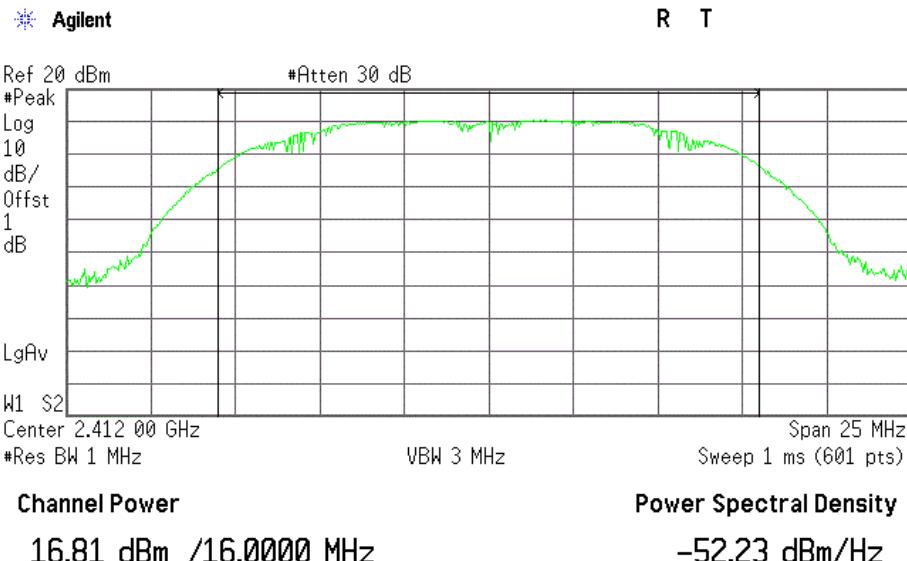


Middle Channel

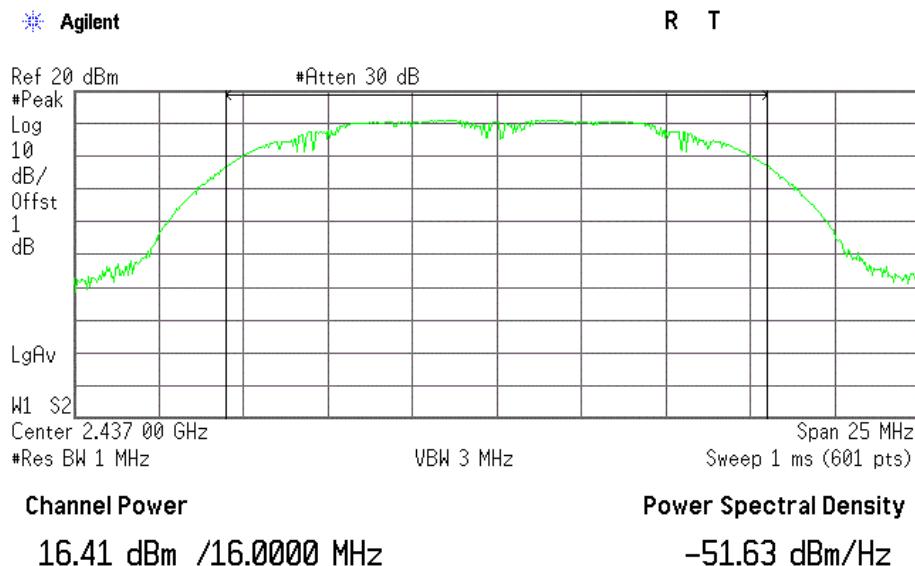


High Channel

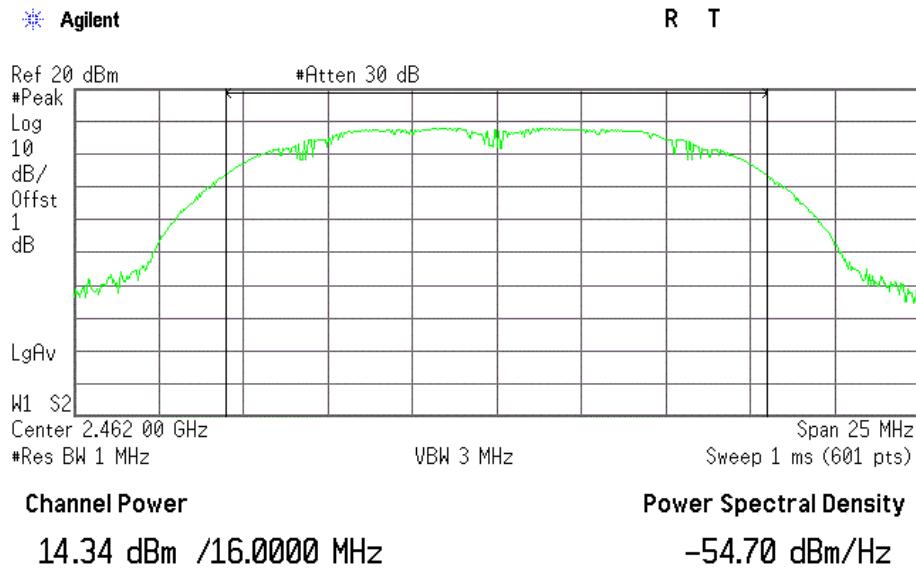


For 802.11g Low Channel

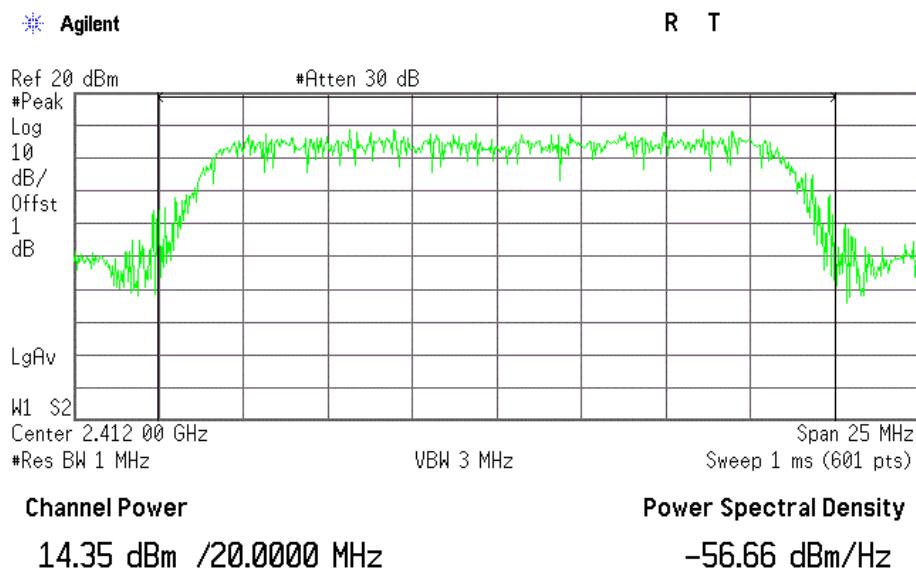


Middle Channel

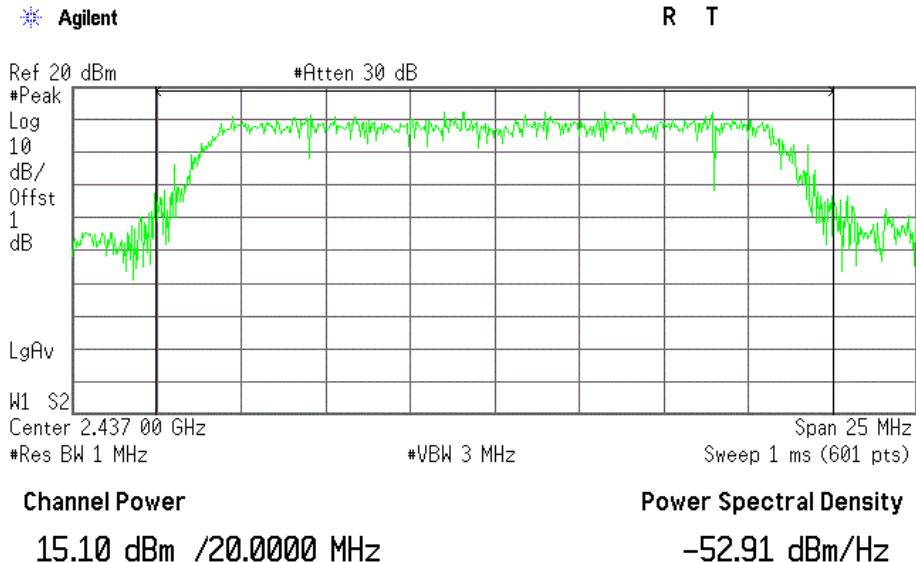


High Channel

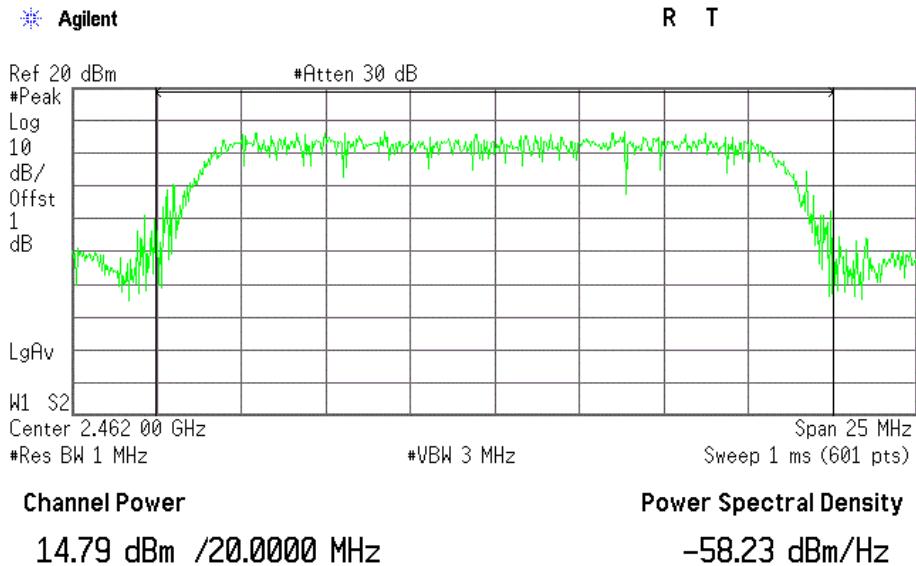


For 802.11n/HT20
Low Channel

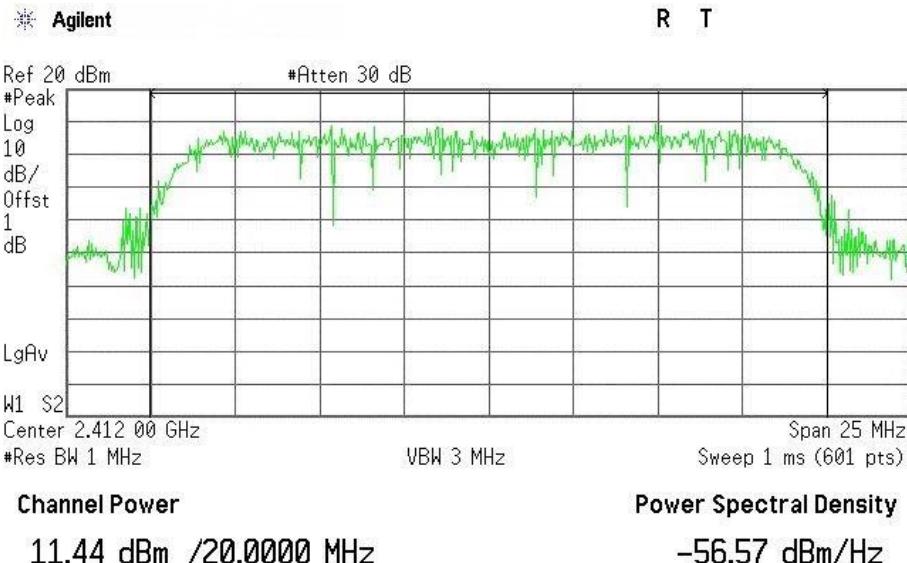

Mid Channel

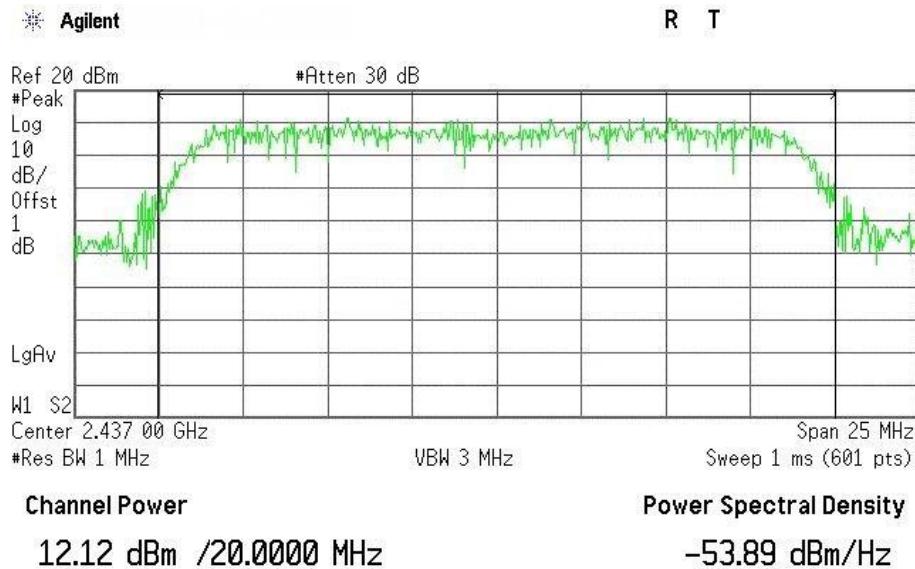


High Channel

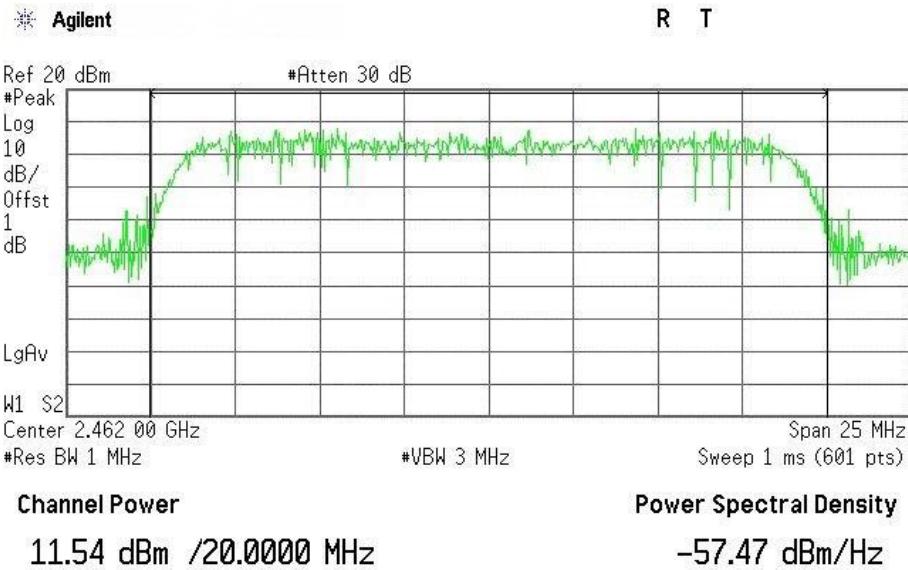


802.11n/HT40


Low Channel

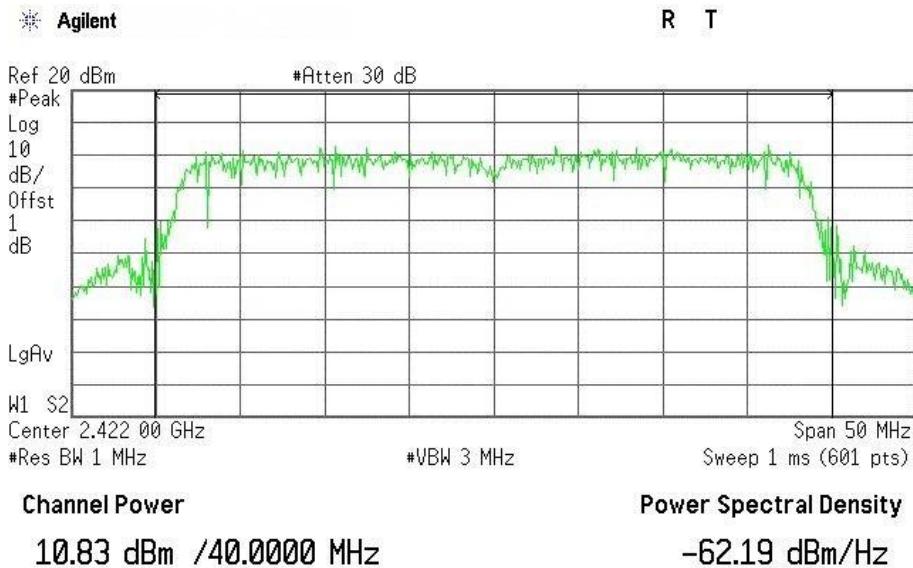

Middle Channel

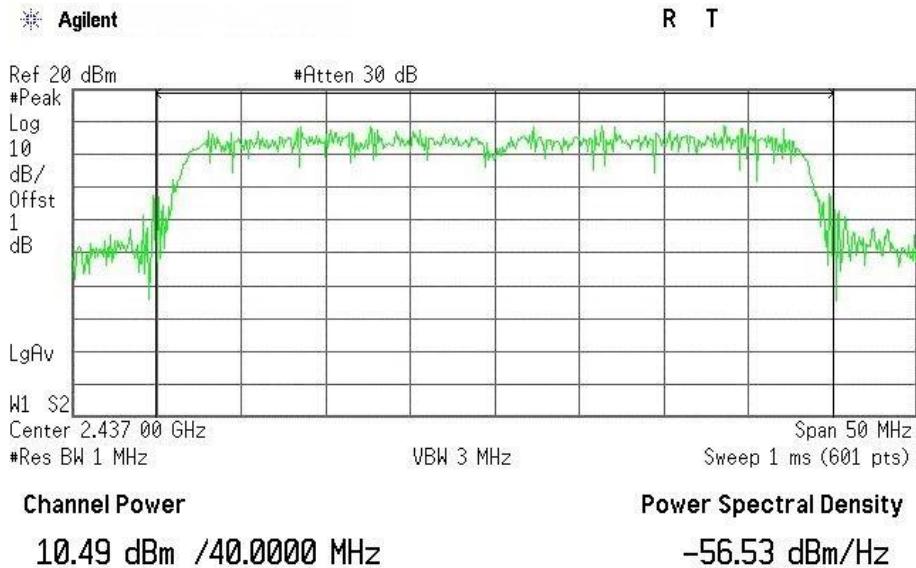

High Channel

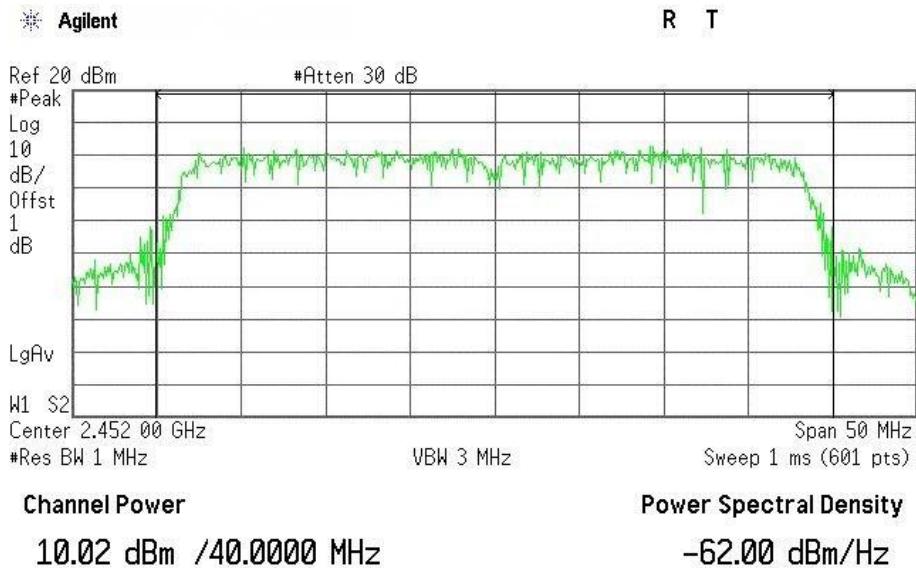


8. Power Spectral Density Measurement

8.1 Limits of Power Spectral Density Measurement

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2 EUT Setup

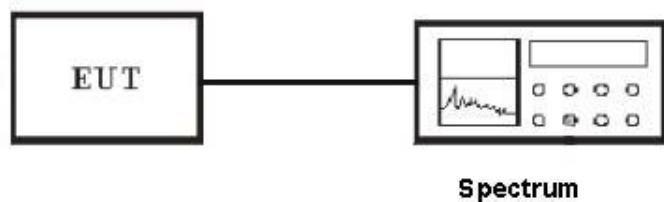

8.3 Test Equipment List and Details

See section 2.4.

8.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 3kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.


8.5 Test Result

PASS


Detailed information test plot, Please refer to the following pages.

IEEE 802.11b


Low Channel:

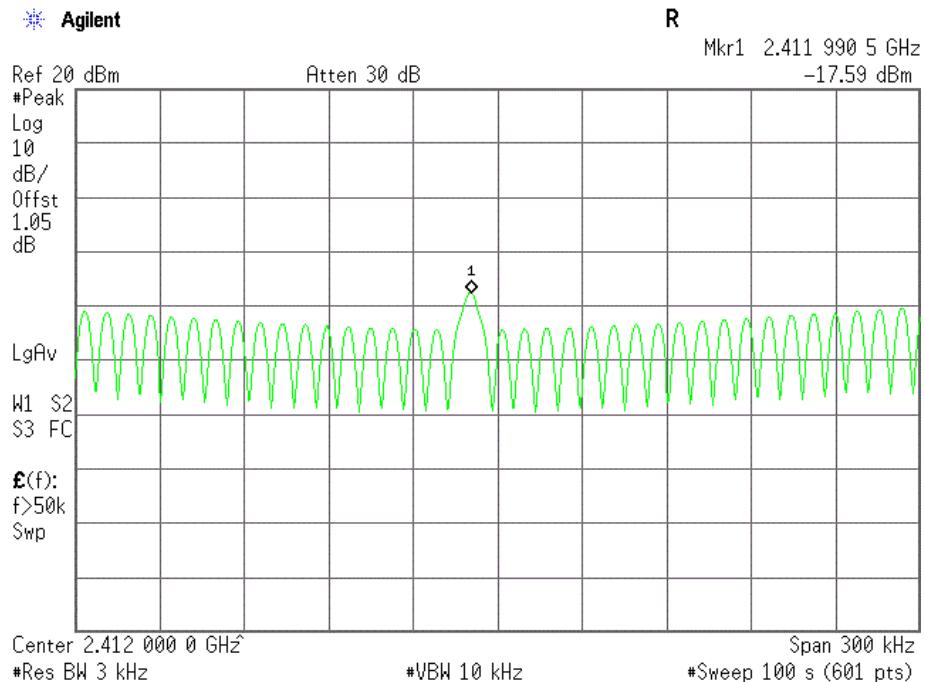


Middle Channel

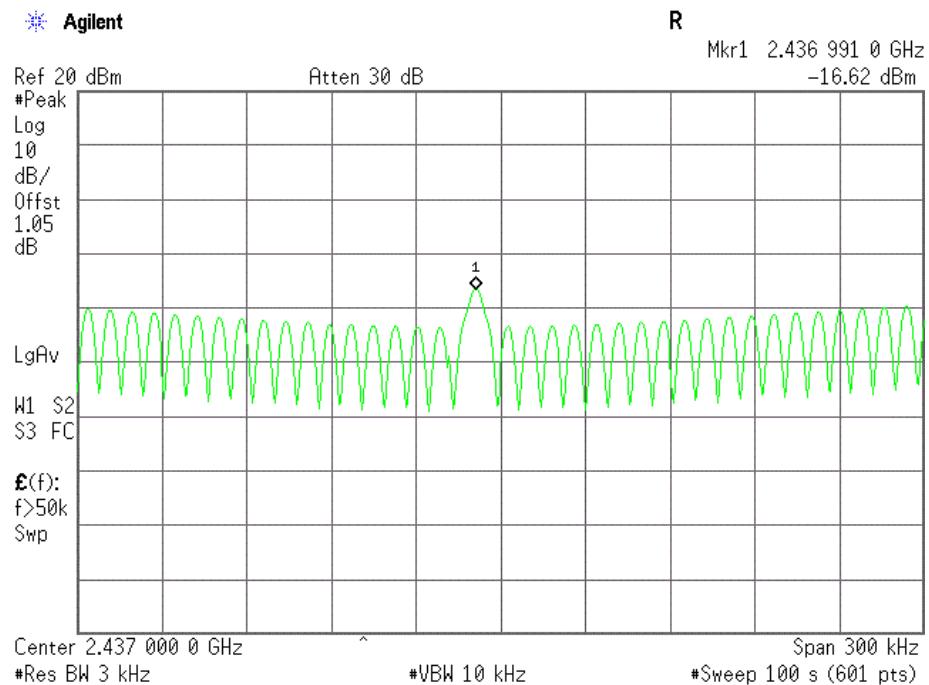


High Channel

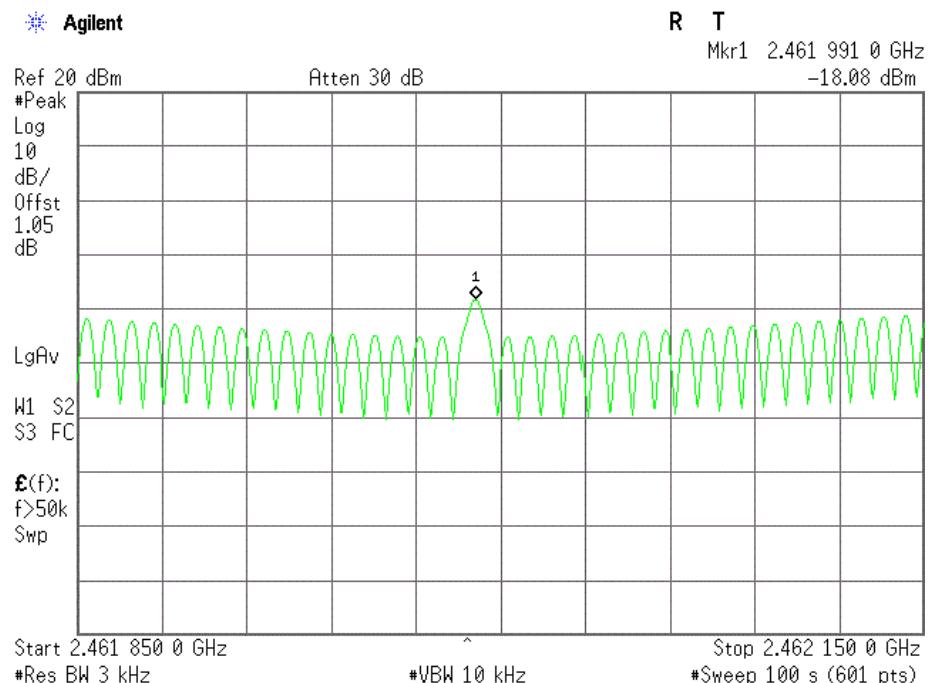


For 802.11g Low Channel

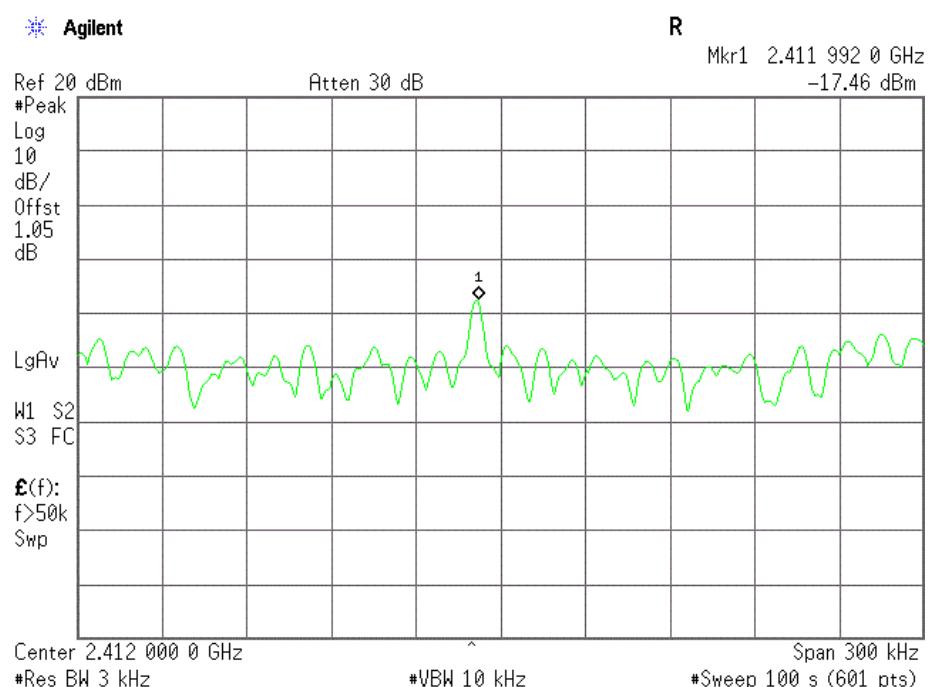


Middle Channel

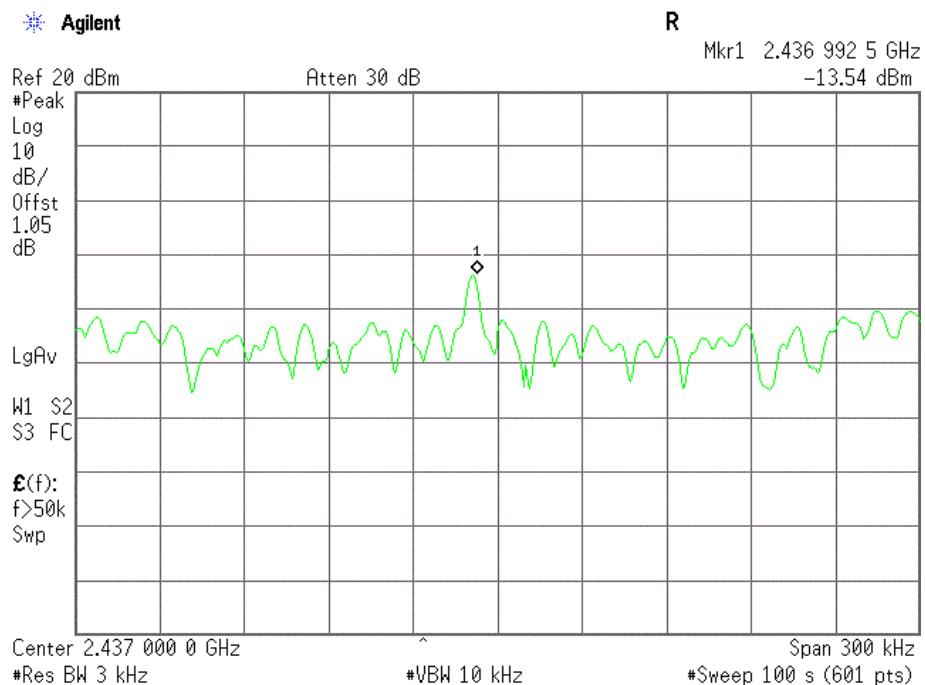


High Channel

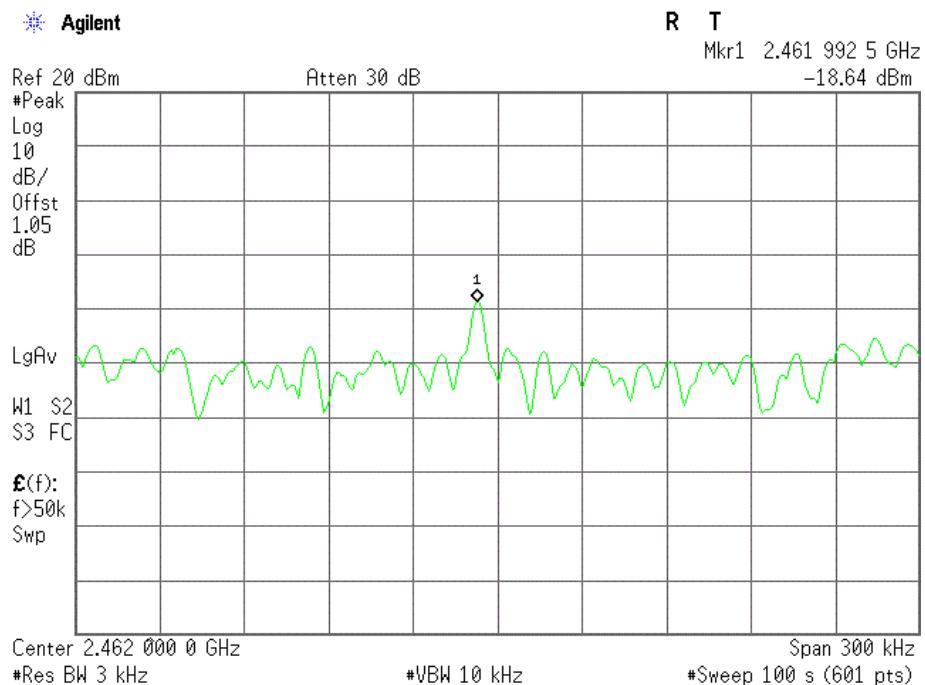


For 802.11n/HT20
Low Channel

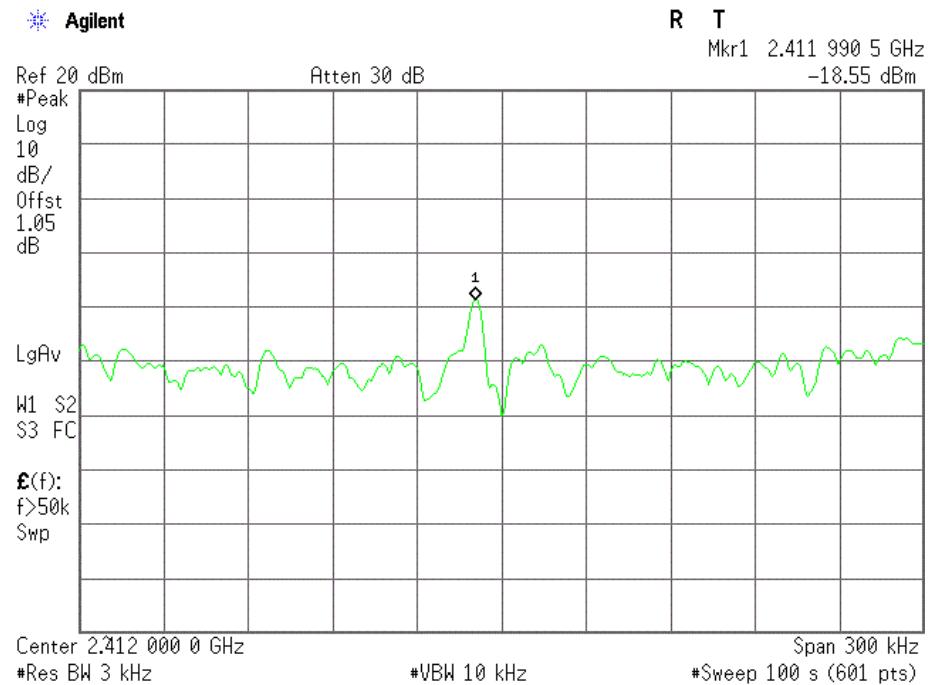


Middle Channel

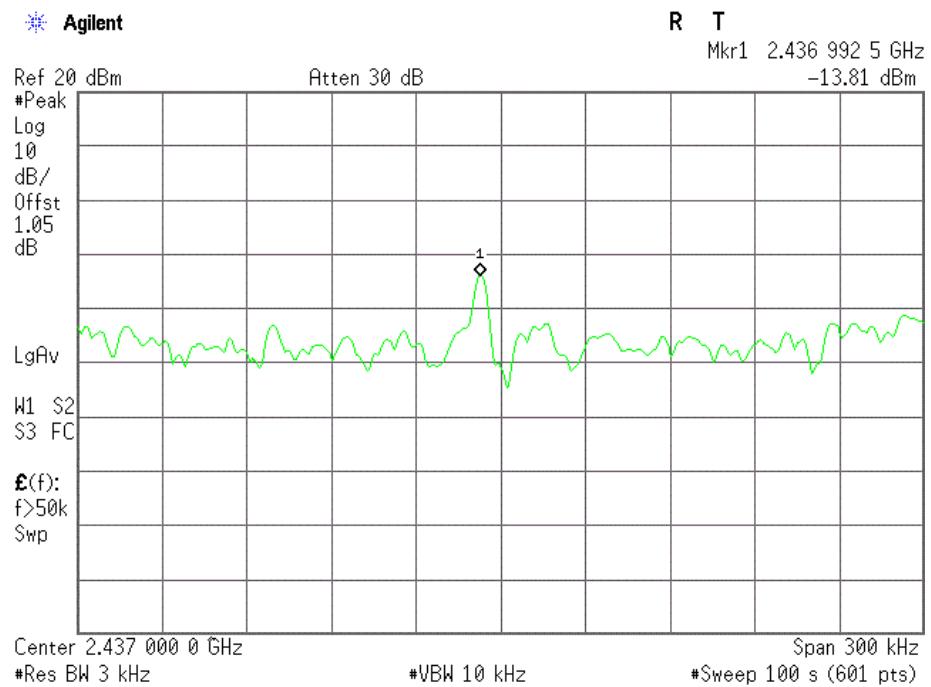


High Channel

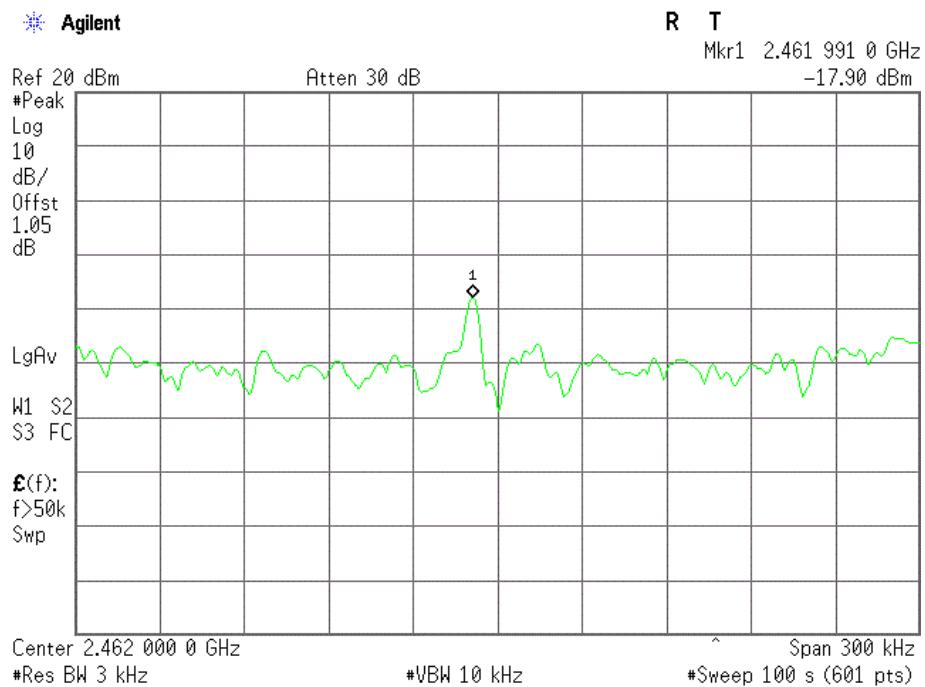


For 802.11n/HT40 Low Channel

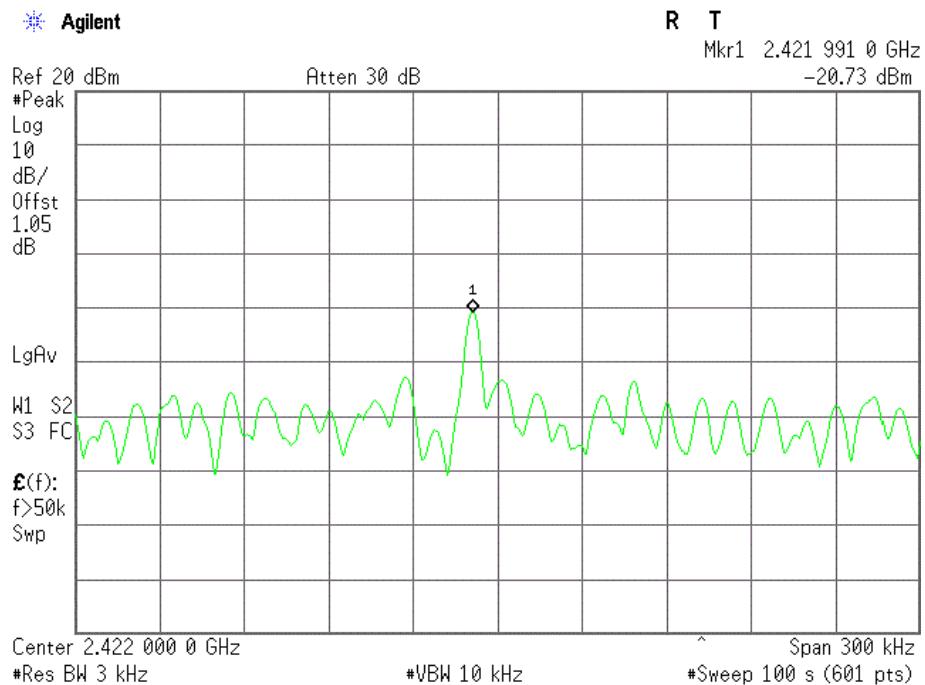

Middle Channel

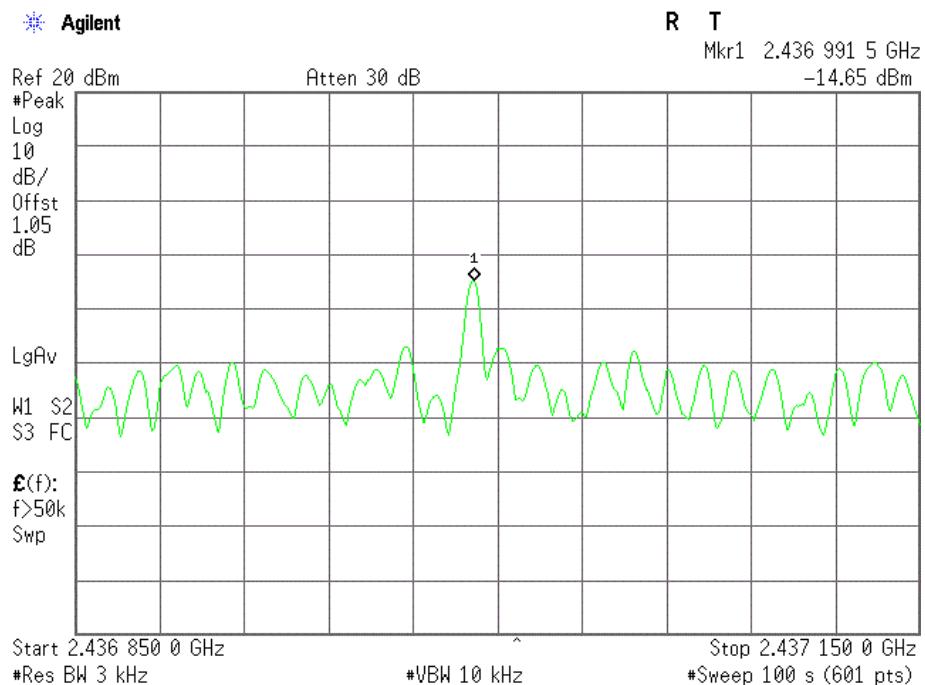

High Channel

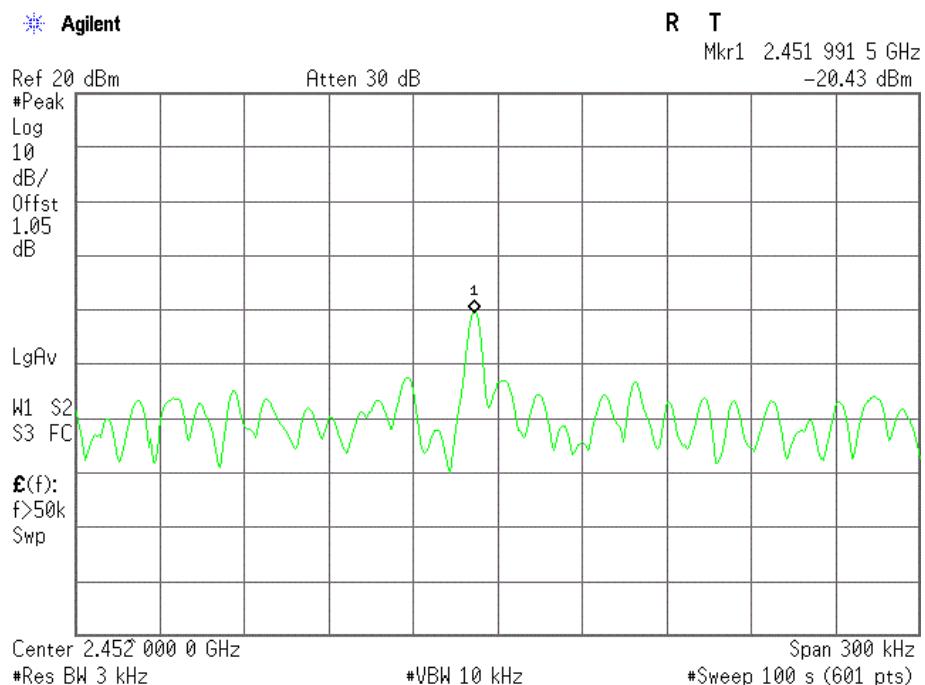

9. Band Edges Measurement

9.1 Limits of Band Edges Measurement

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.2 Test Equipment List and Details

See section 2.4.

9.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded. The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

9.4 Test Result



PASS

Detailed information test plot, Please refer to the following pages.



Test mode	Frequency MHz	Limit dB _{UV} /dB	Result
802.11b	2390.00	<54dB _{UV}	Pass
	2400.00	>20dB	Pass
	2483.50	<54dB _{UV}	Pass
802.11g	2390.00	<54dB _{UV}	Pass
	2400.00	>20dB	Pass
	2483.50	<54dB _{UV}	Pass
802.11n HT20	2390.00	<54dB _{UV}	Pass
	2400.00	>20dB	Pass
	2483.50	<54dB _{UV}	Pass
802.11n HT40	2390.00	<54dB _{UV}	Pass
	2400.00	>20dB	Pass
	2483.50	<54dB _{UV}	Pass

IEEE 802.11b



Lowest Bandedge- Vertical

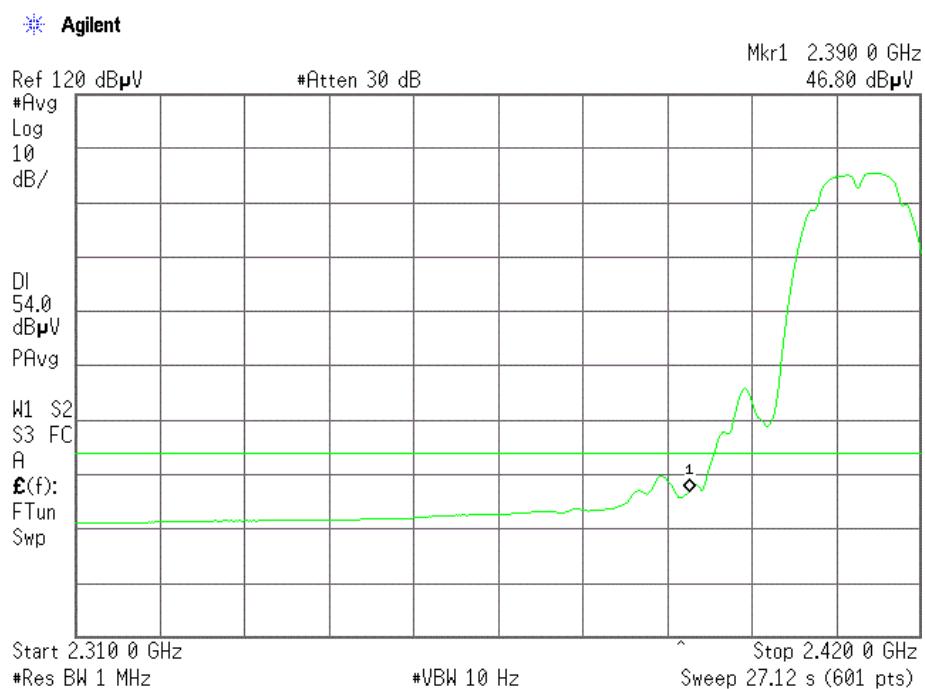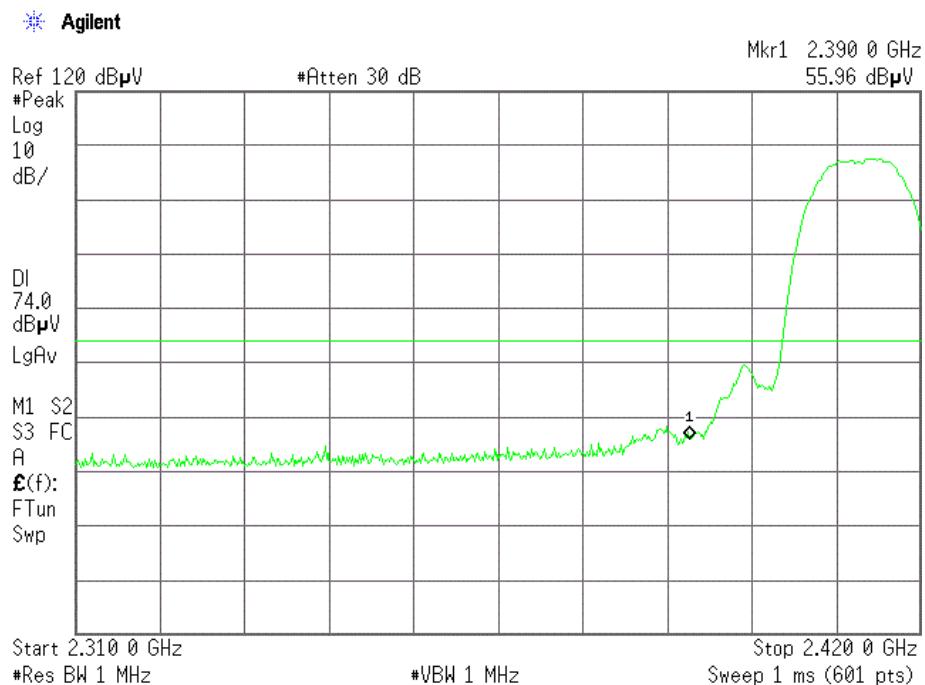



High Bandedge- Vertical

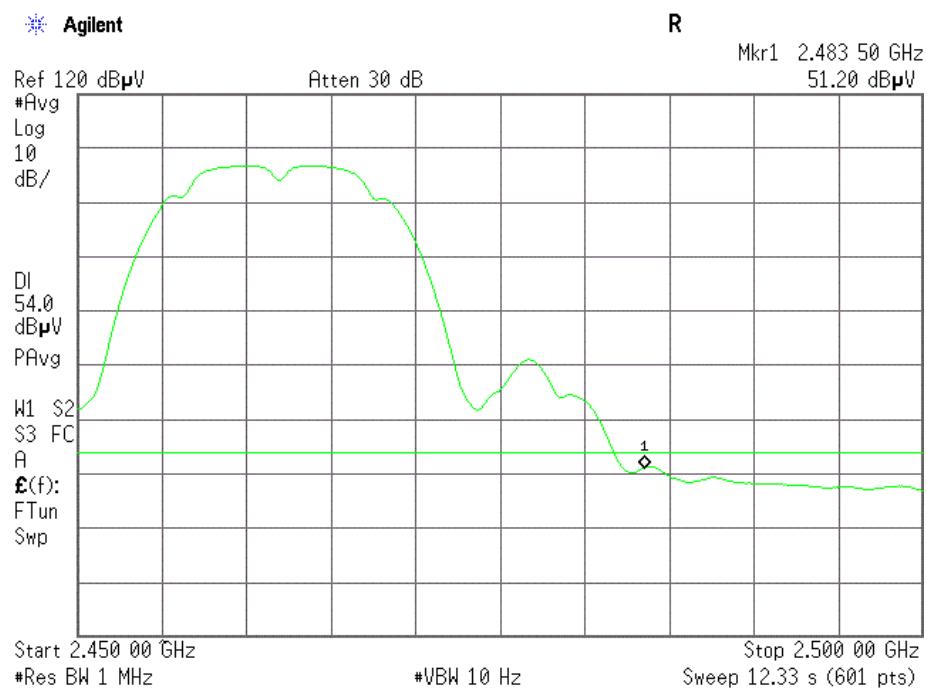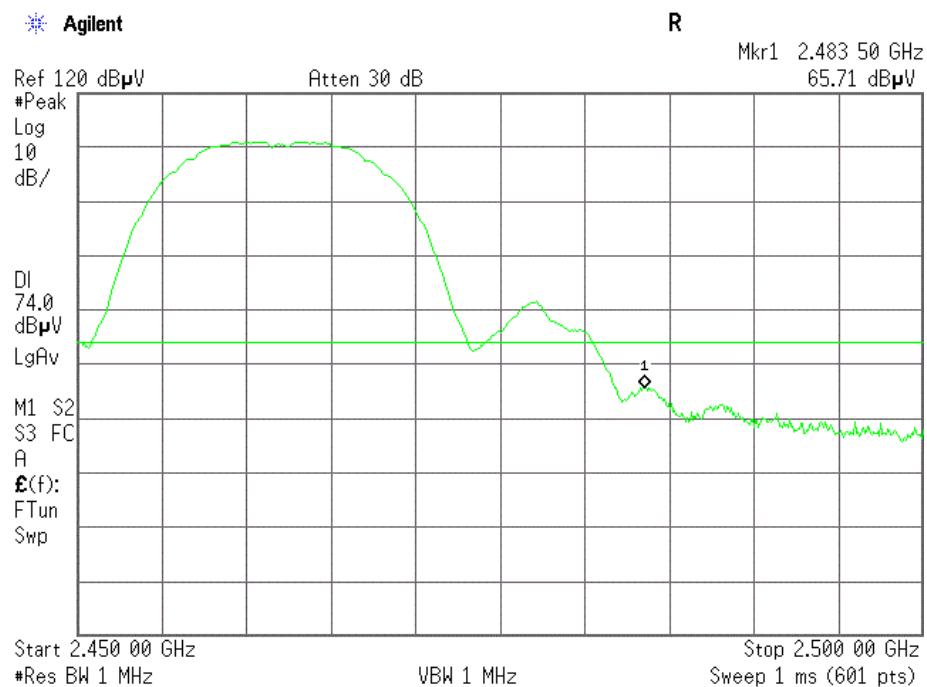

Lowest Bandedge-Horizontal

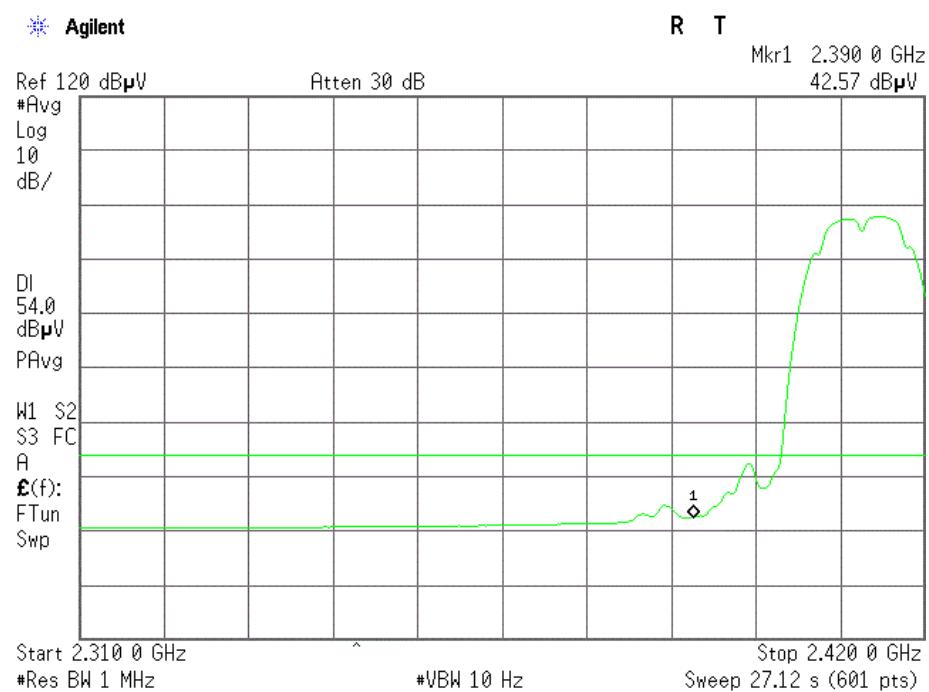
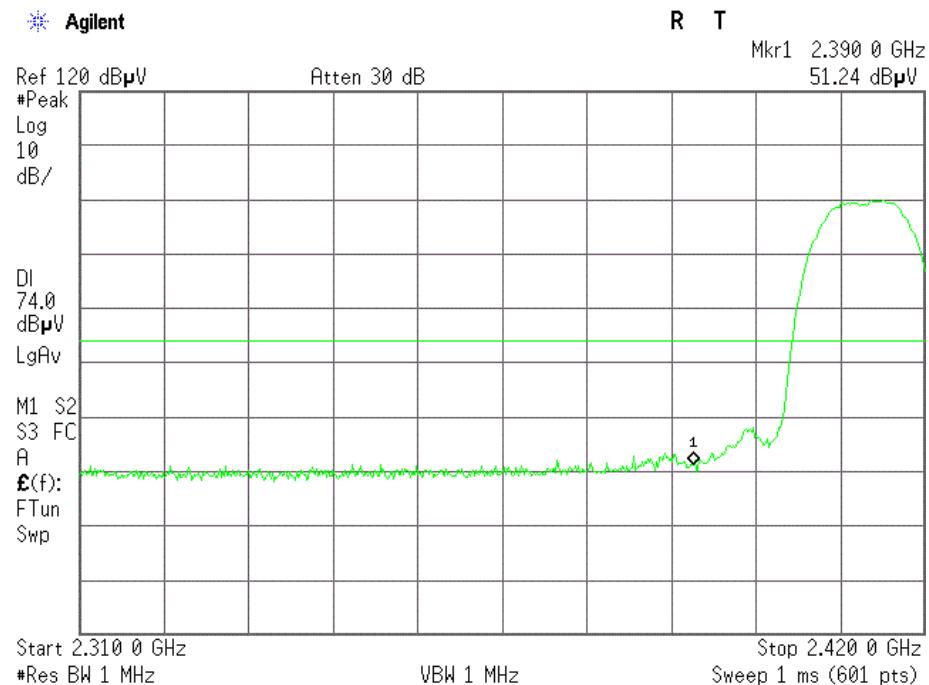


High Bandedge- Horizontal

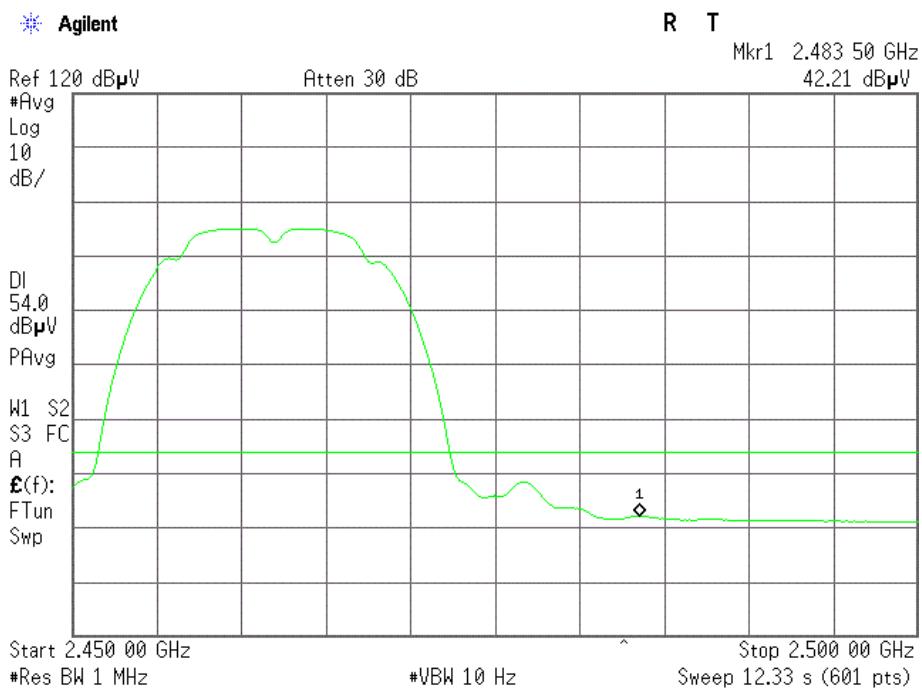
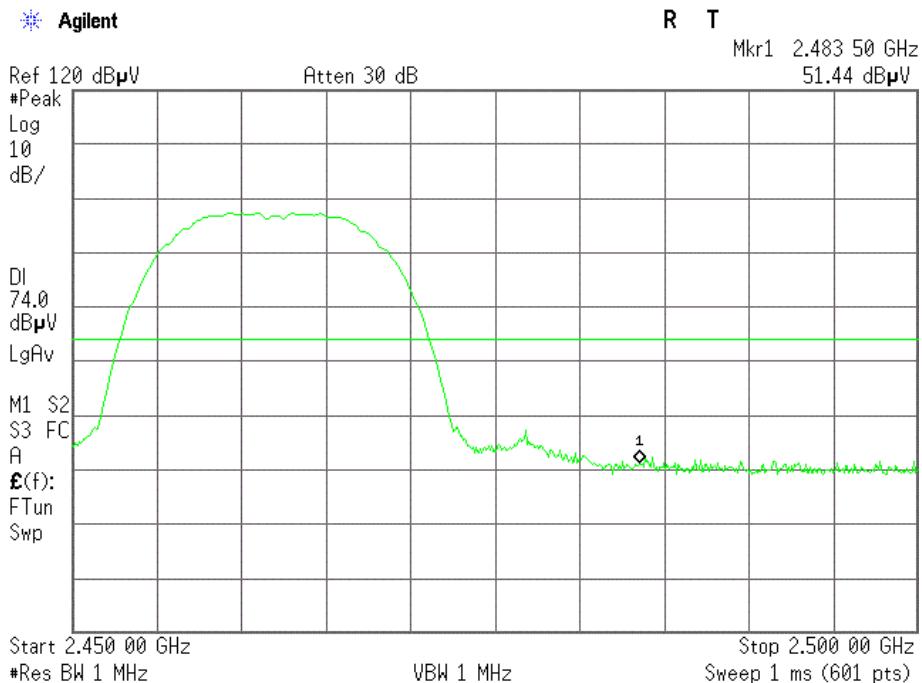


IEEE 802.11g



Lowest Bandedge- Vertical

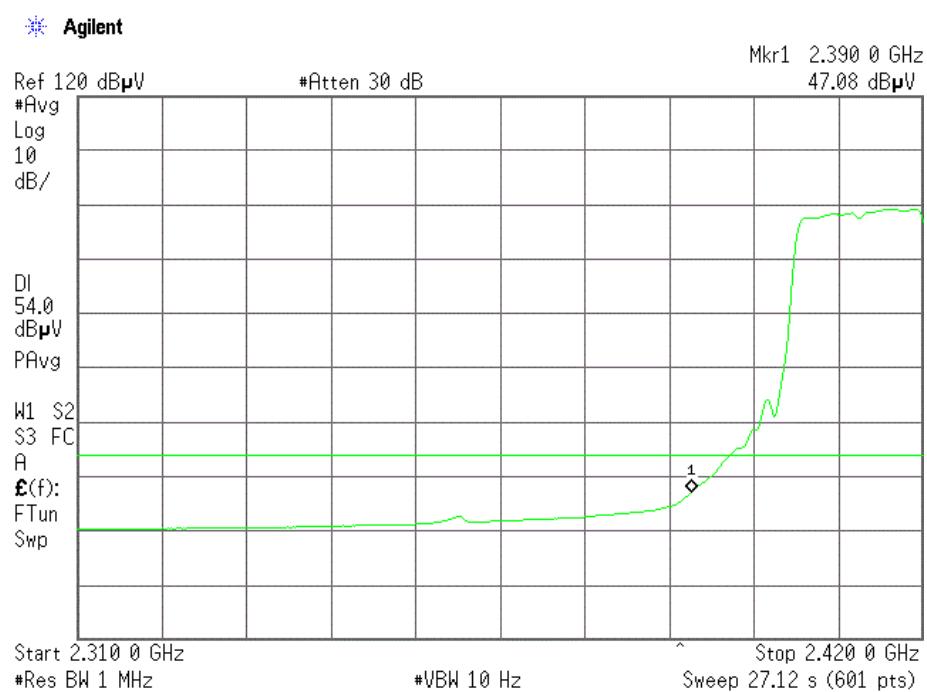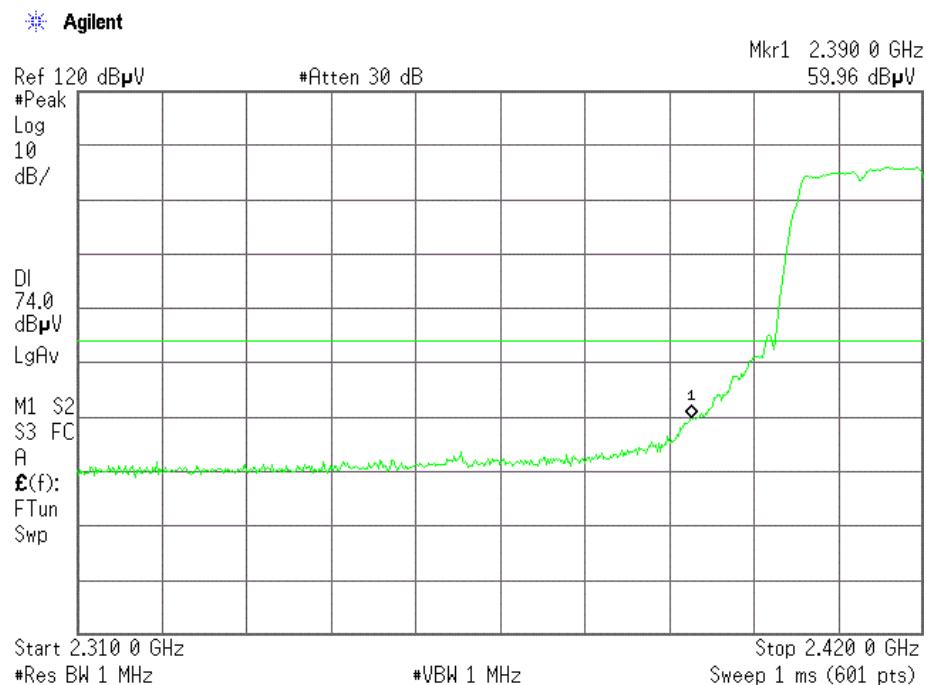



High Bandedge- Vertical

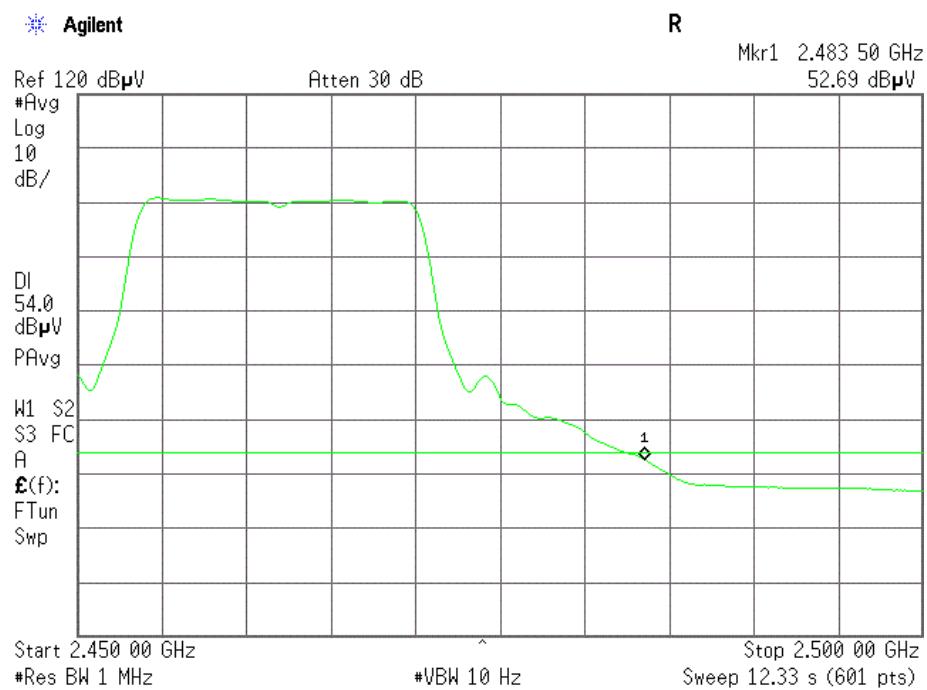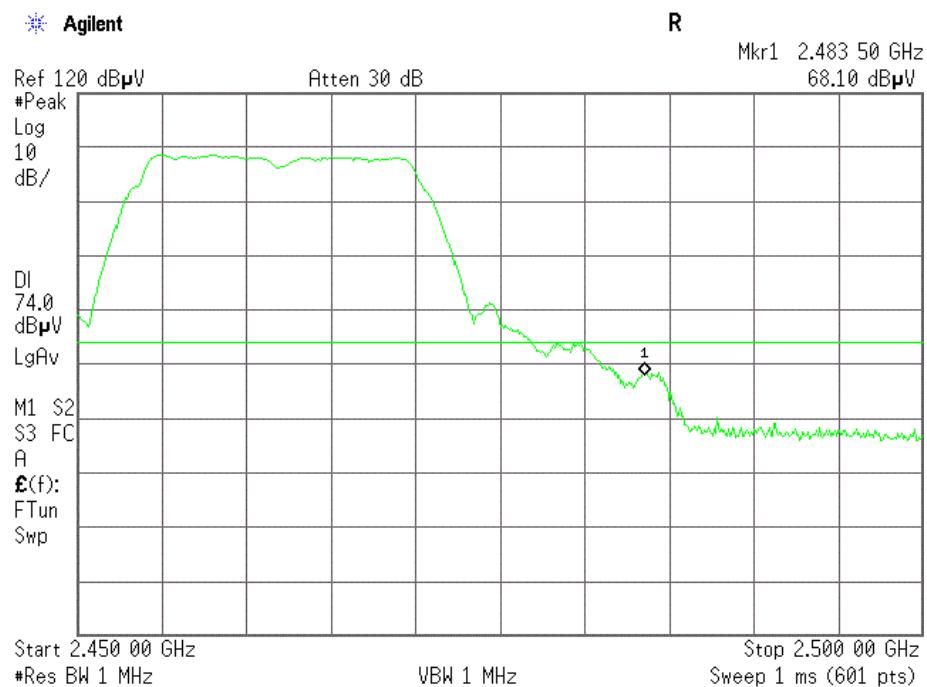

Lowest Bandedge-Horizontal

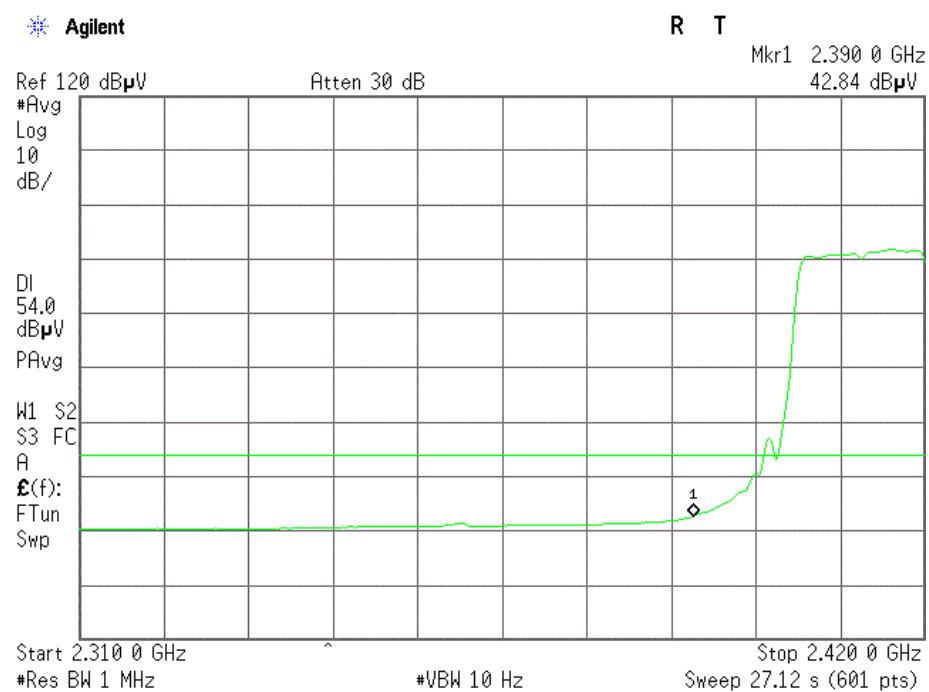
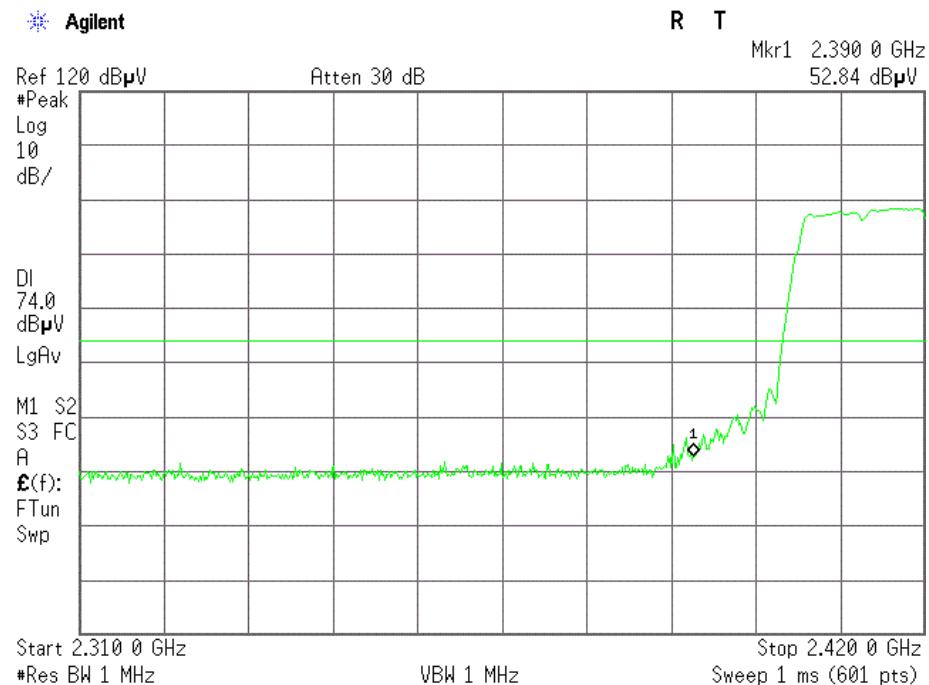


High Bandedge- Horizontal

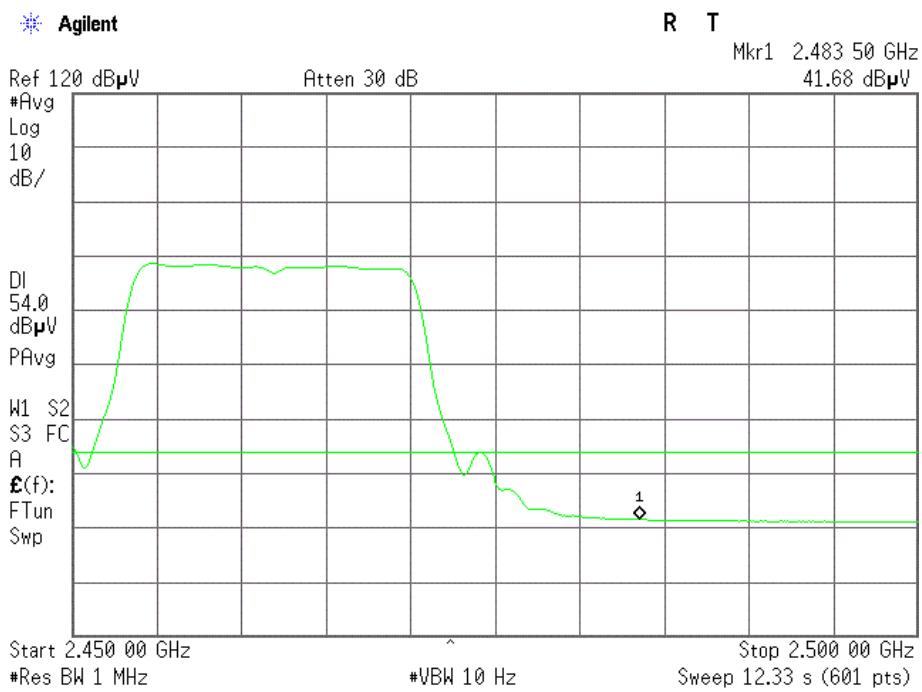
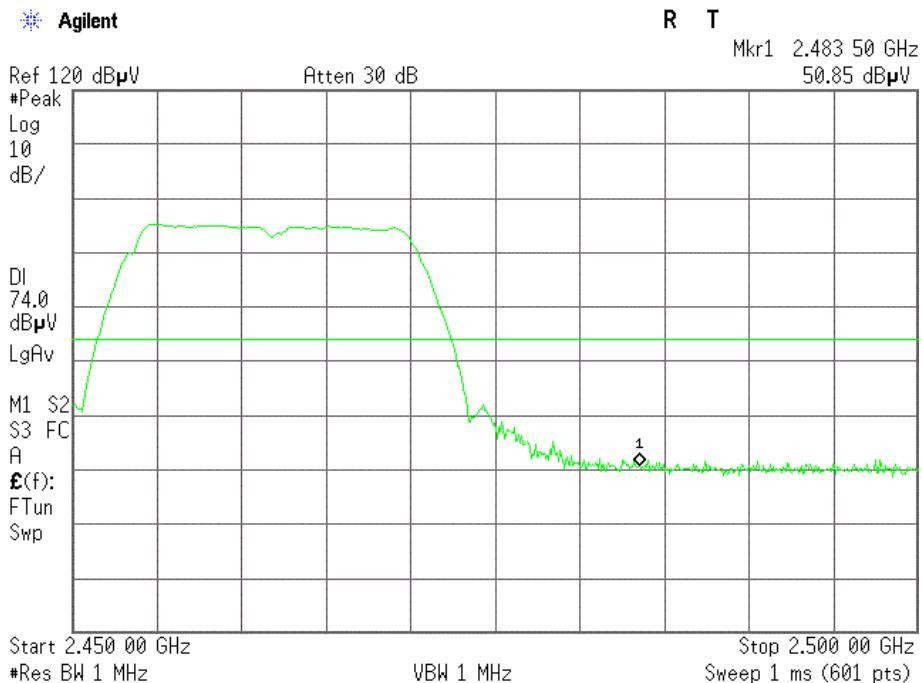


IEEE 802.11n:HT20



Lowest Bandedge- Vertical

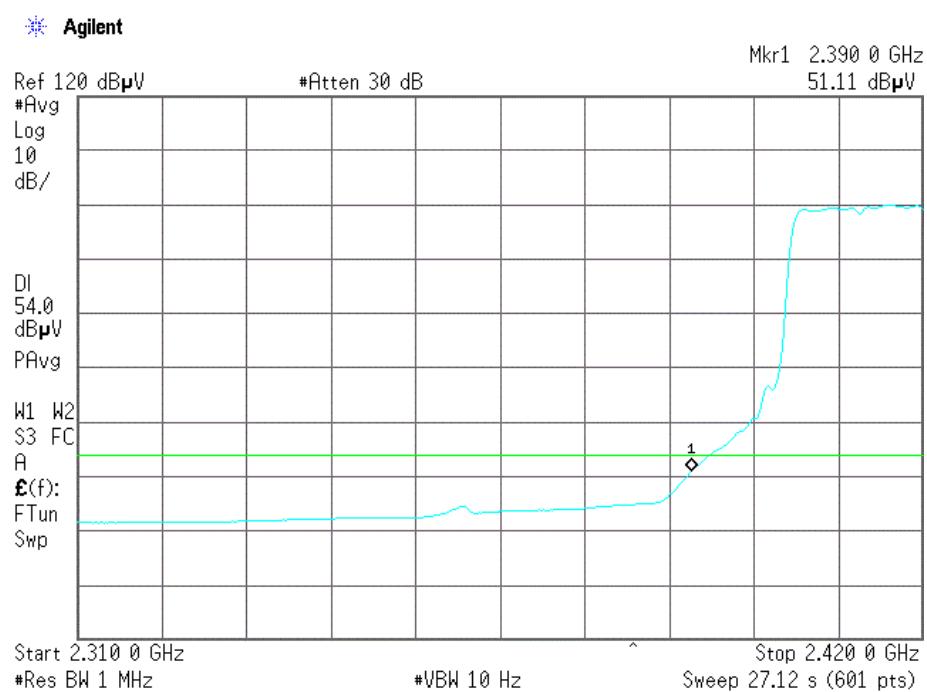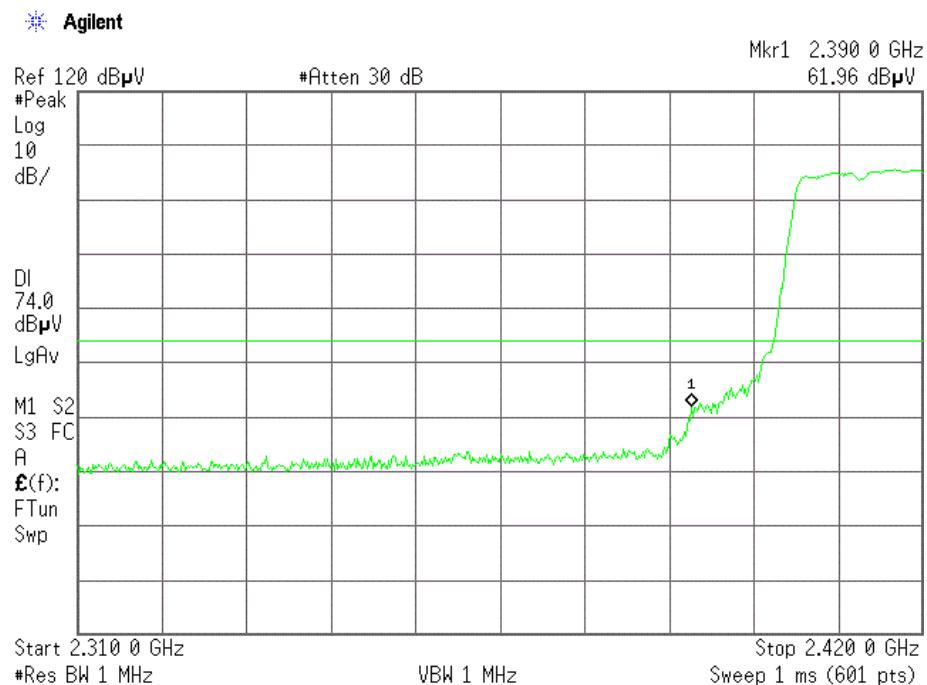



High Bandedge- Vertical

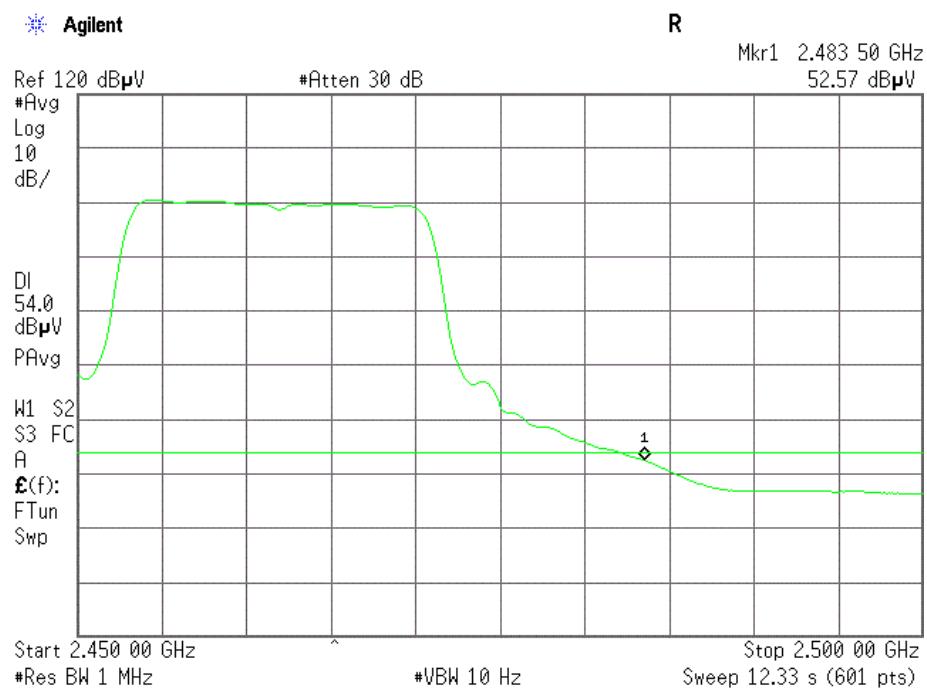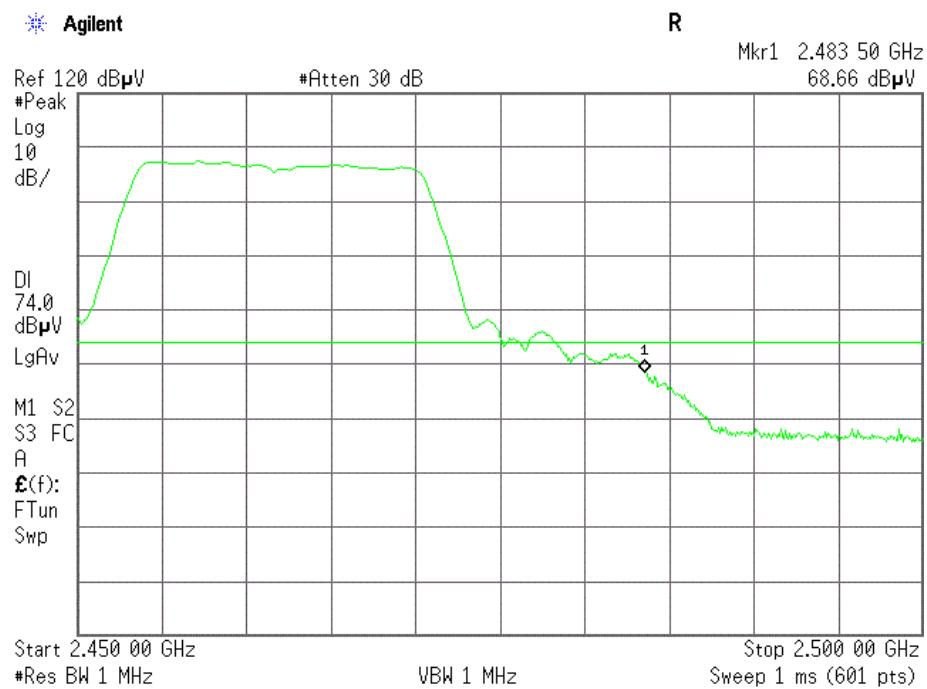

Lowest Bandedge-Horizontal

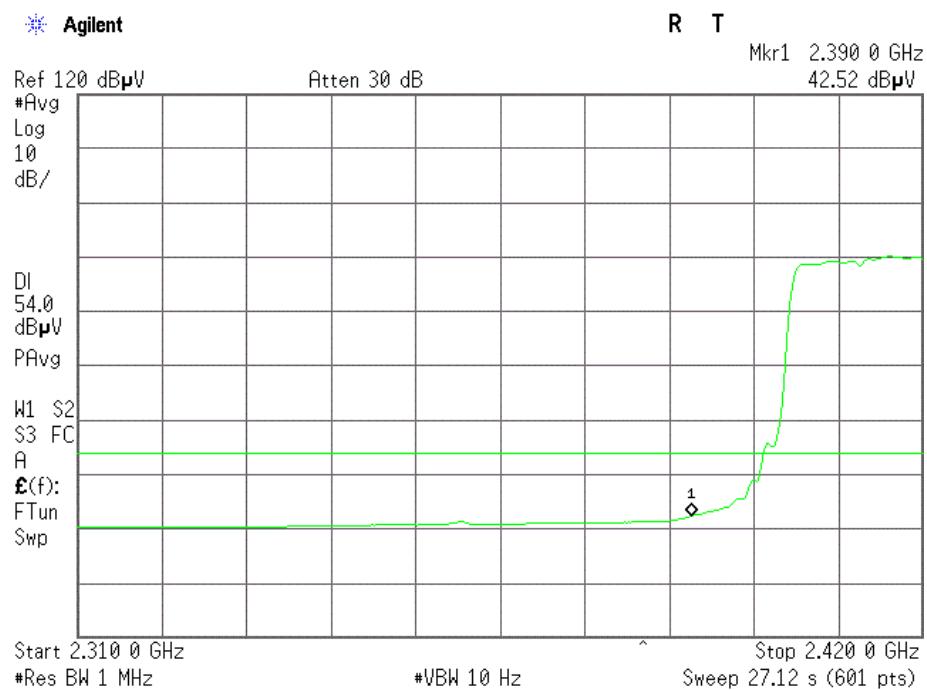
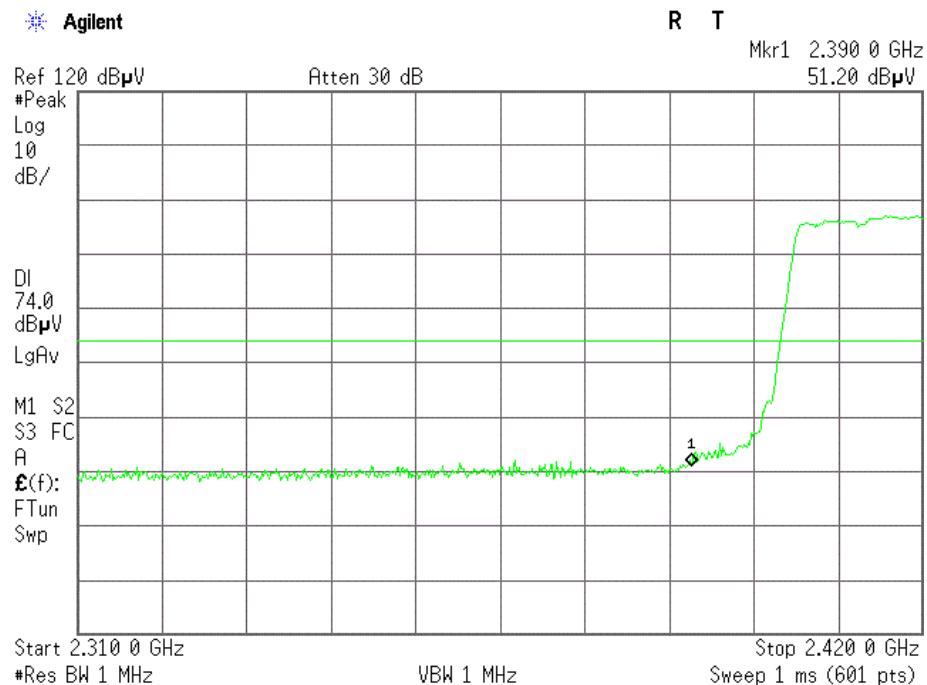


High Bandedge- Horizontal

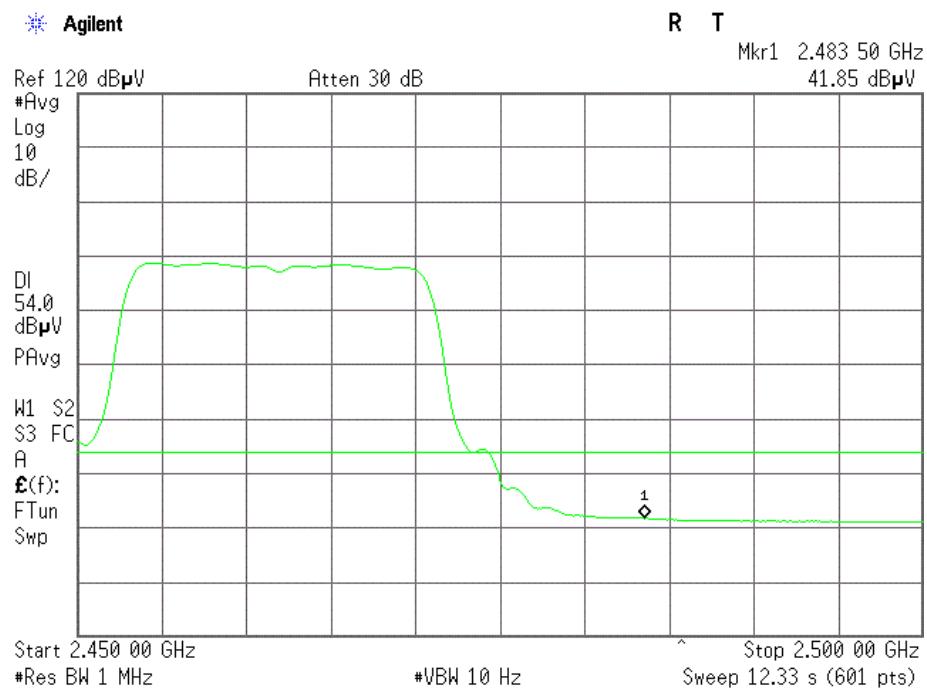
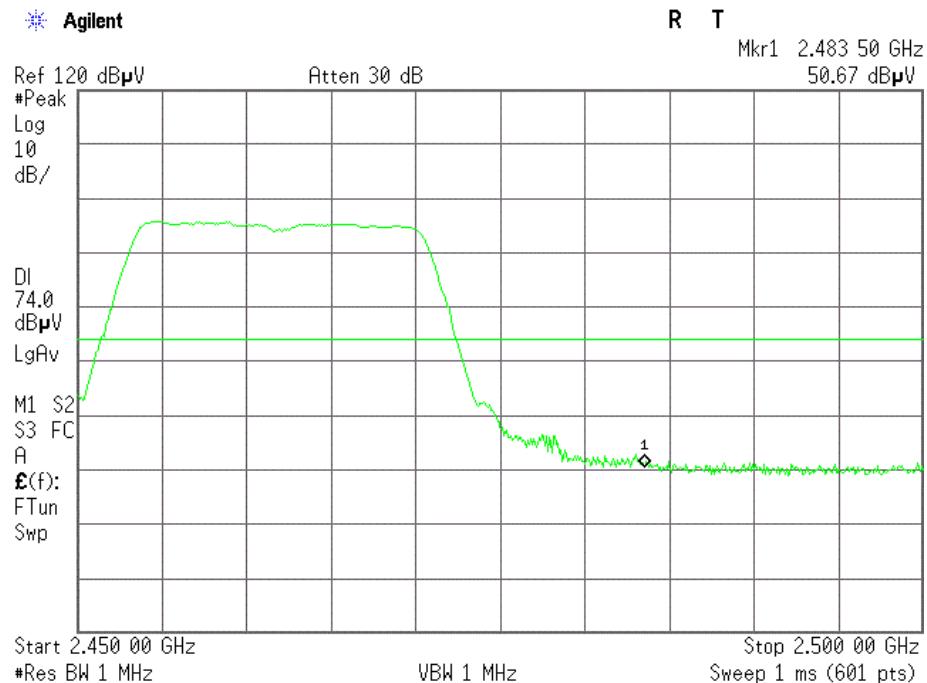


IEEE 802.11n:HT40



Lowest Bandedge- Vertical

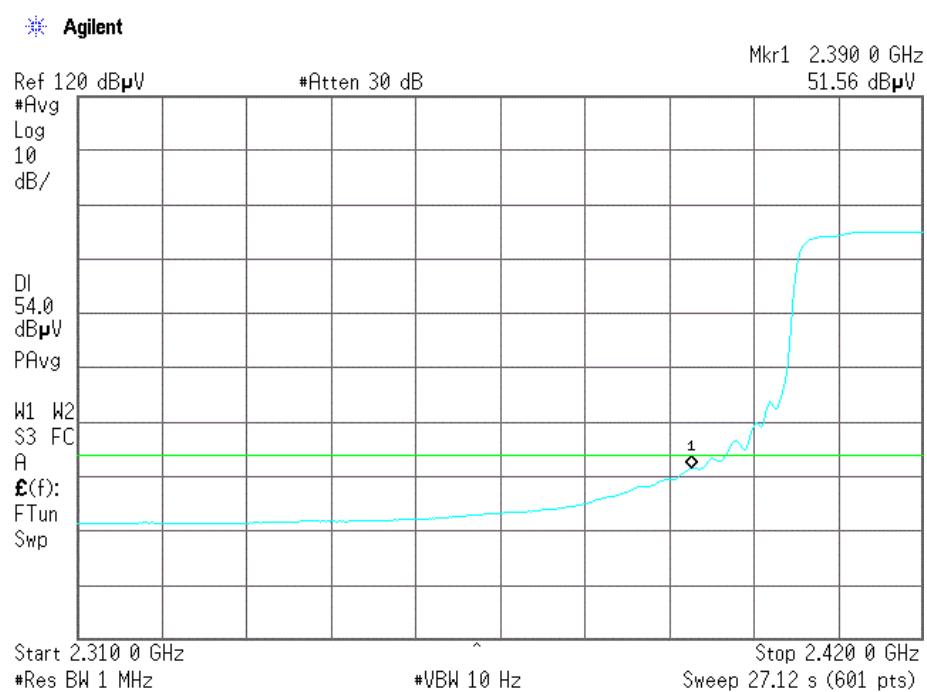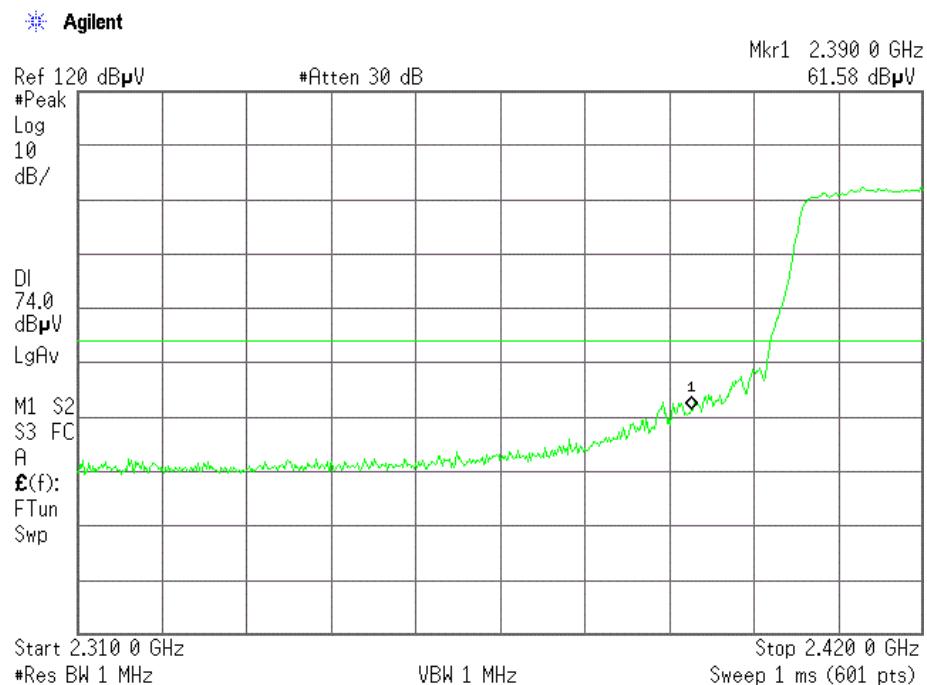



High Bandedge- Vertical

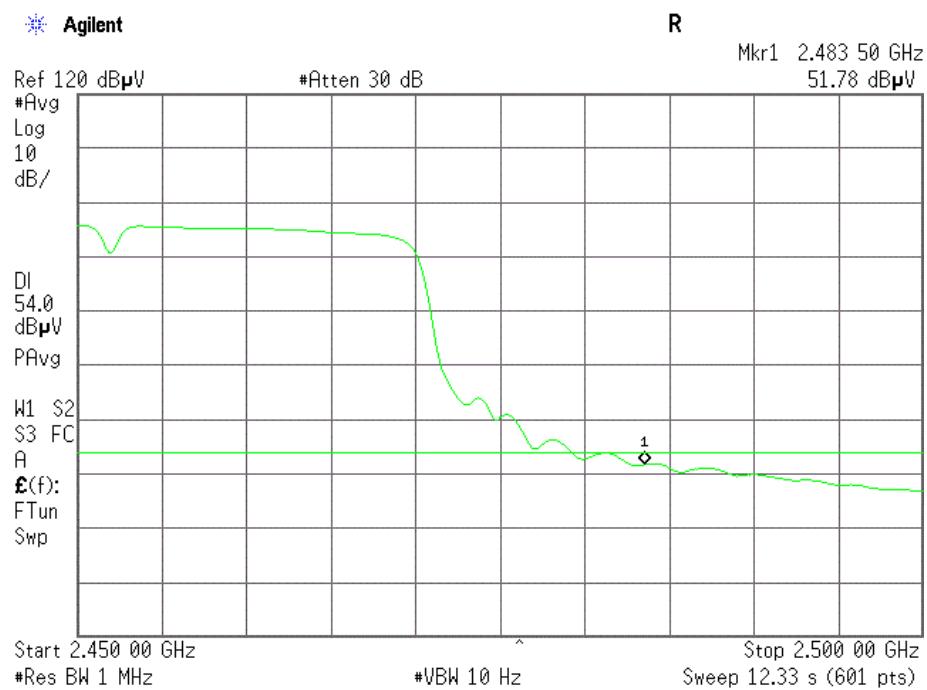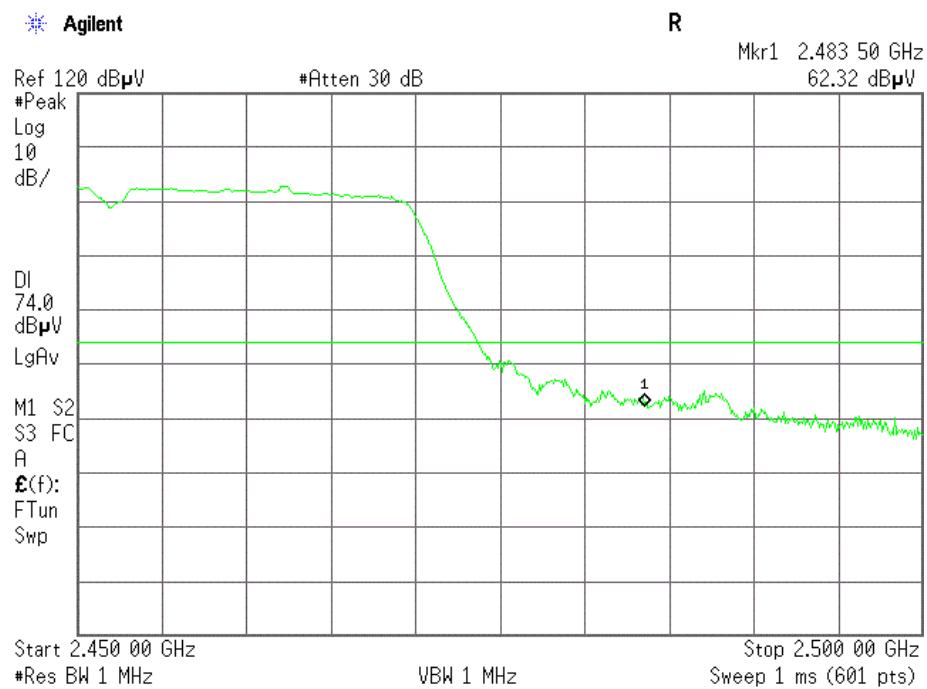

Lowest Bandedge-Horizontal

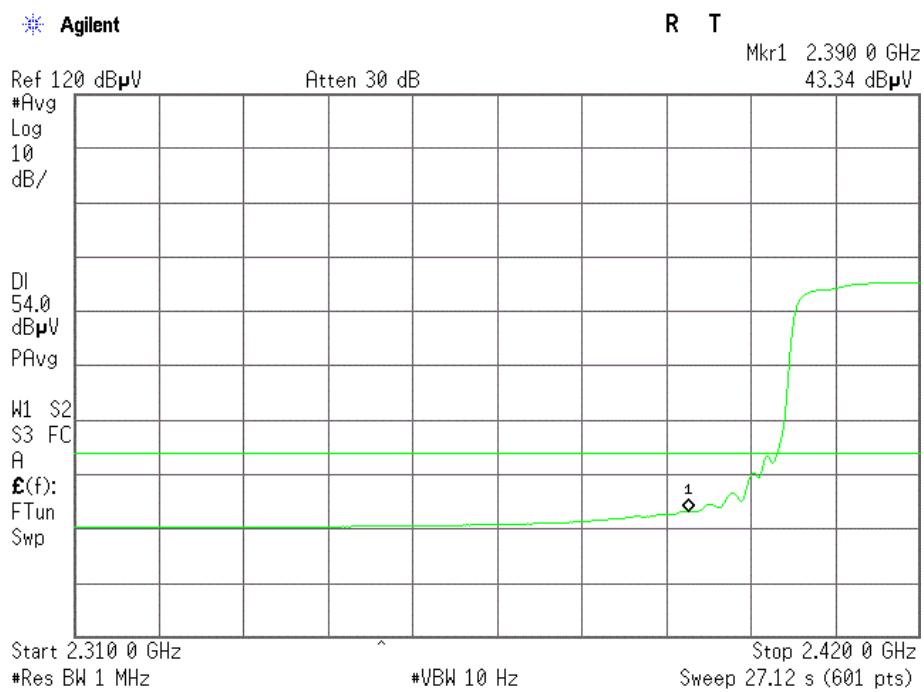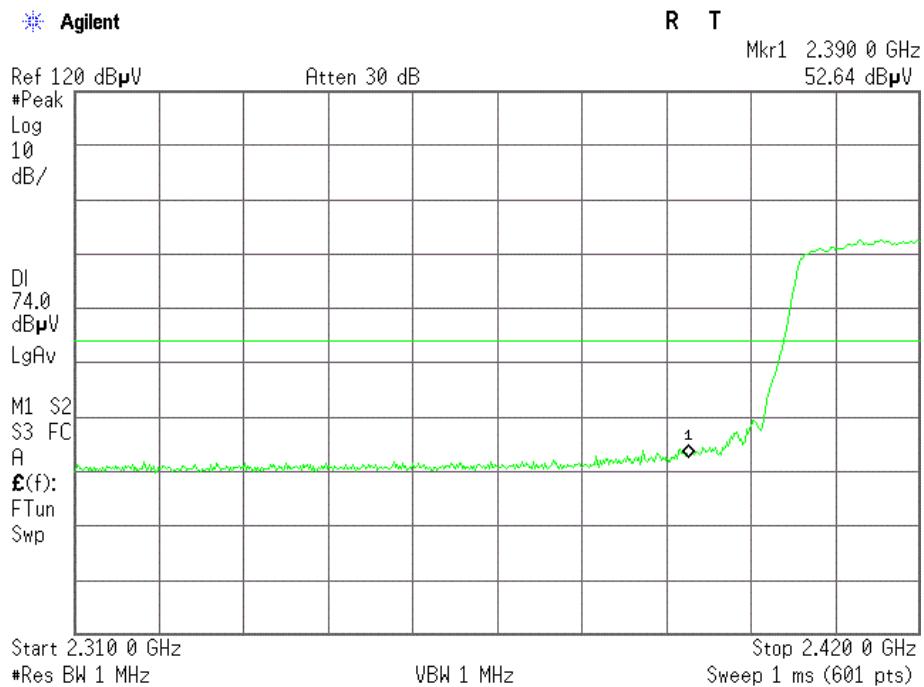

High Bandedge- Horizontal

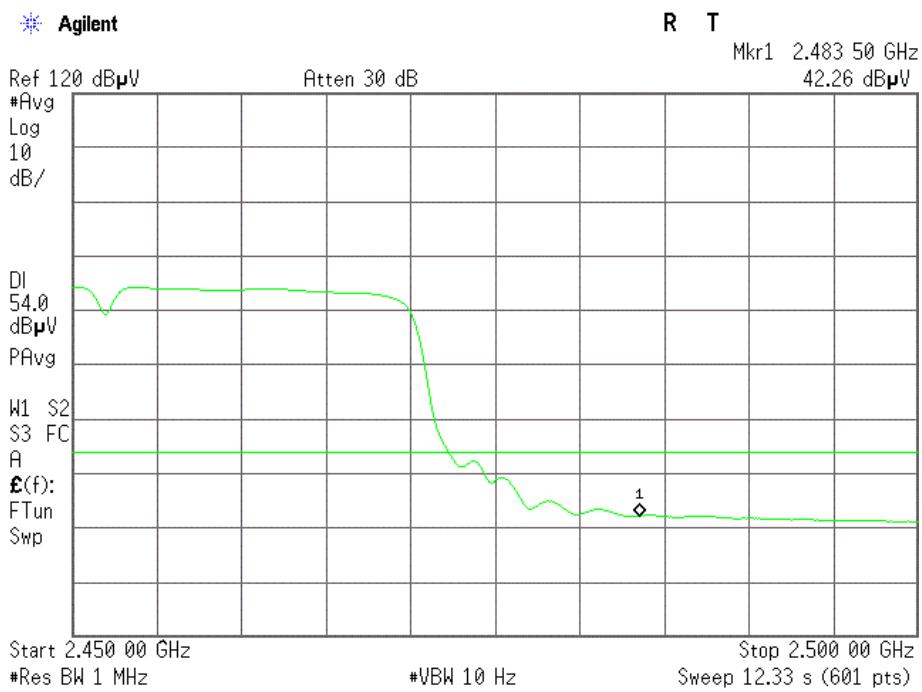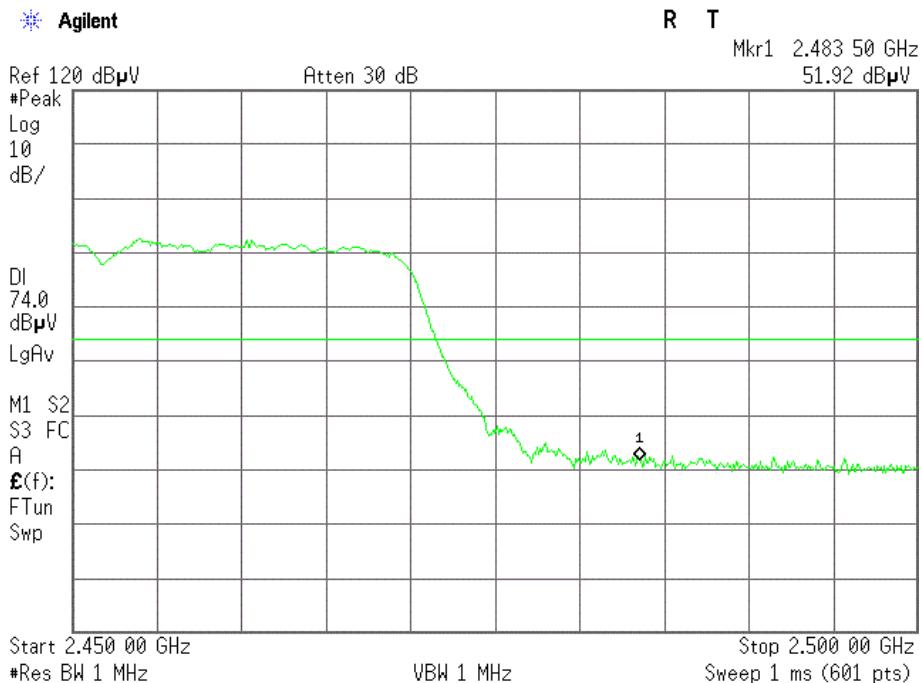

10. Radiated Emission Measurement

10.1 Limits of Radiated Emission Measurement

According to §15.247(c), 15.205 15.209(b) &15.35 (b), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Section 15.209:


30 - 88 MHz 40 dB_{uV/m} @3M
88 -216 MHz 43.5 dB_{uV/m} @3M
216 -960 MHz 46 dB_{uV/m} @3M
Above 960 MHz 54dB_{uV/m} @3M

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Emissions that fall in the restricted bands (15.205) must be less than 54dB_{uV/m} otherwise the spurious and harmonics must be attenuated by at least 20dB.

10.2 EUT Setup

Radiated Measurement Setup

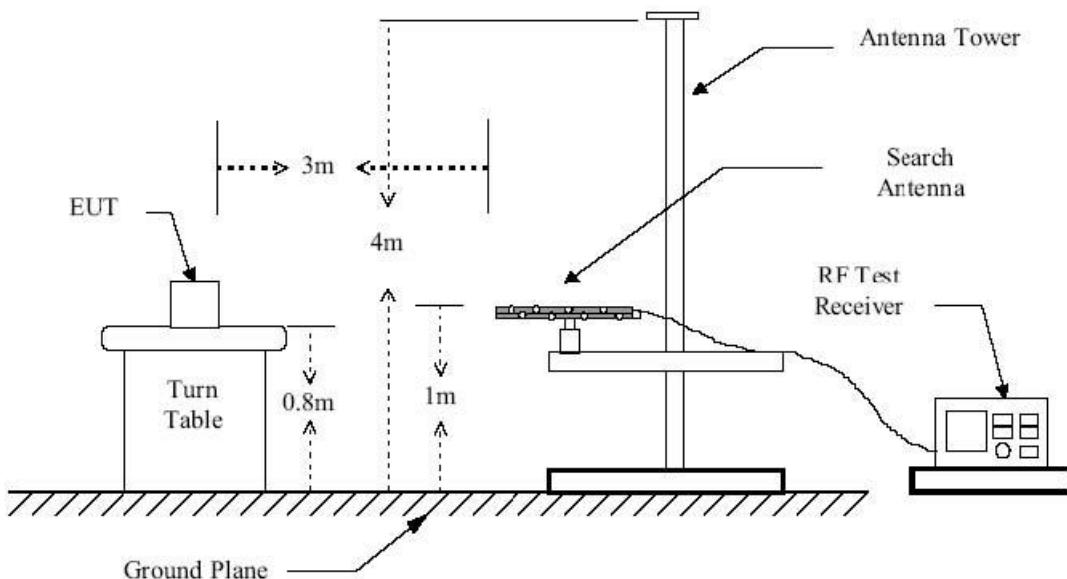

10.3 Test Equipment List and Details

See section 2.4.

10.4 Test Procedure

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

10.5 Test Result

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:


-3.29 dB μ V at 84.32MHz in the Horizontal polarization, with 9KHz to 25 GHz, 3Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

From 9KHz to 30MHz: Conclusion: PASS


Note: *The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.*

Spurious Emission From 30 MHz to 1 GHz
Horizontal

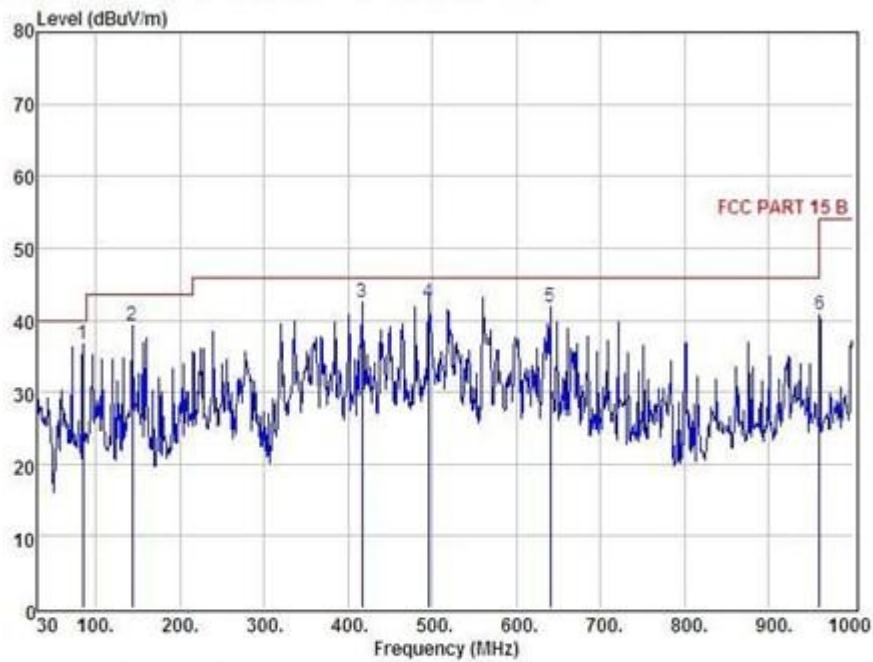

Condition : FCC PART 15 B 3m POL: HORIZONTAL									
Item	Freq MHz	Read Level dBuV	Antenna Factor	Preamp Factor	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	84.32	53.38	9.35	26.80	0.78	36.71	40.00	-3.29	QP
2	143.49	51.49	13.64	26.90	1.10	39.33	43.50	-4.17	QP
3	416.06	52.14	15.13	27.45	2.55	42.37	46.00	-3.63	QP
4	495.60	50.71	16.46	27.61	2.97	42.53	46.00	-3.47	QP
5	640.13	47.48	18.97	27.82	3.28	41.91	46.00	-4.09	QP
6	960.23	42.23	22.17	27.61	3.92	40.71	54.00	-13.29	QP

Vertical

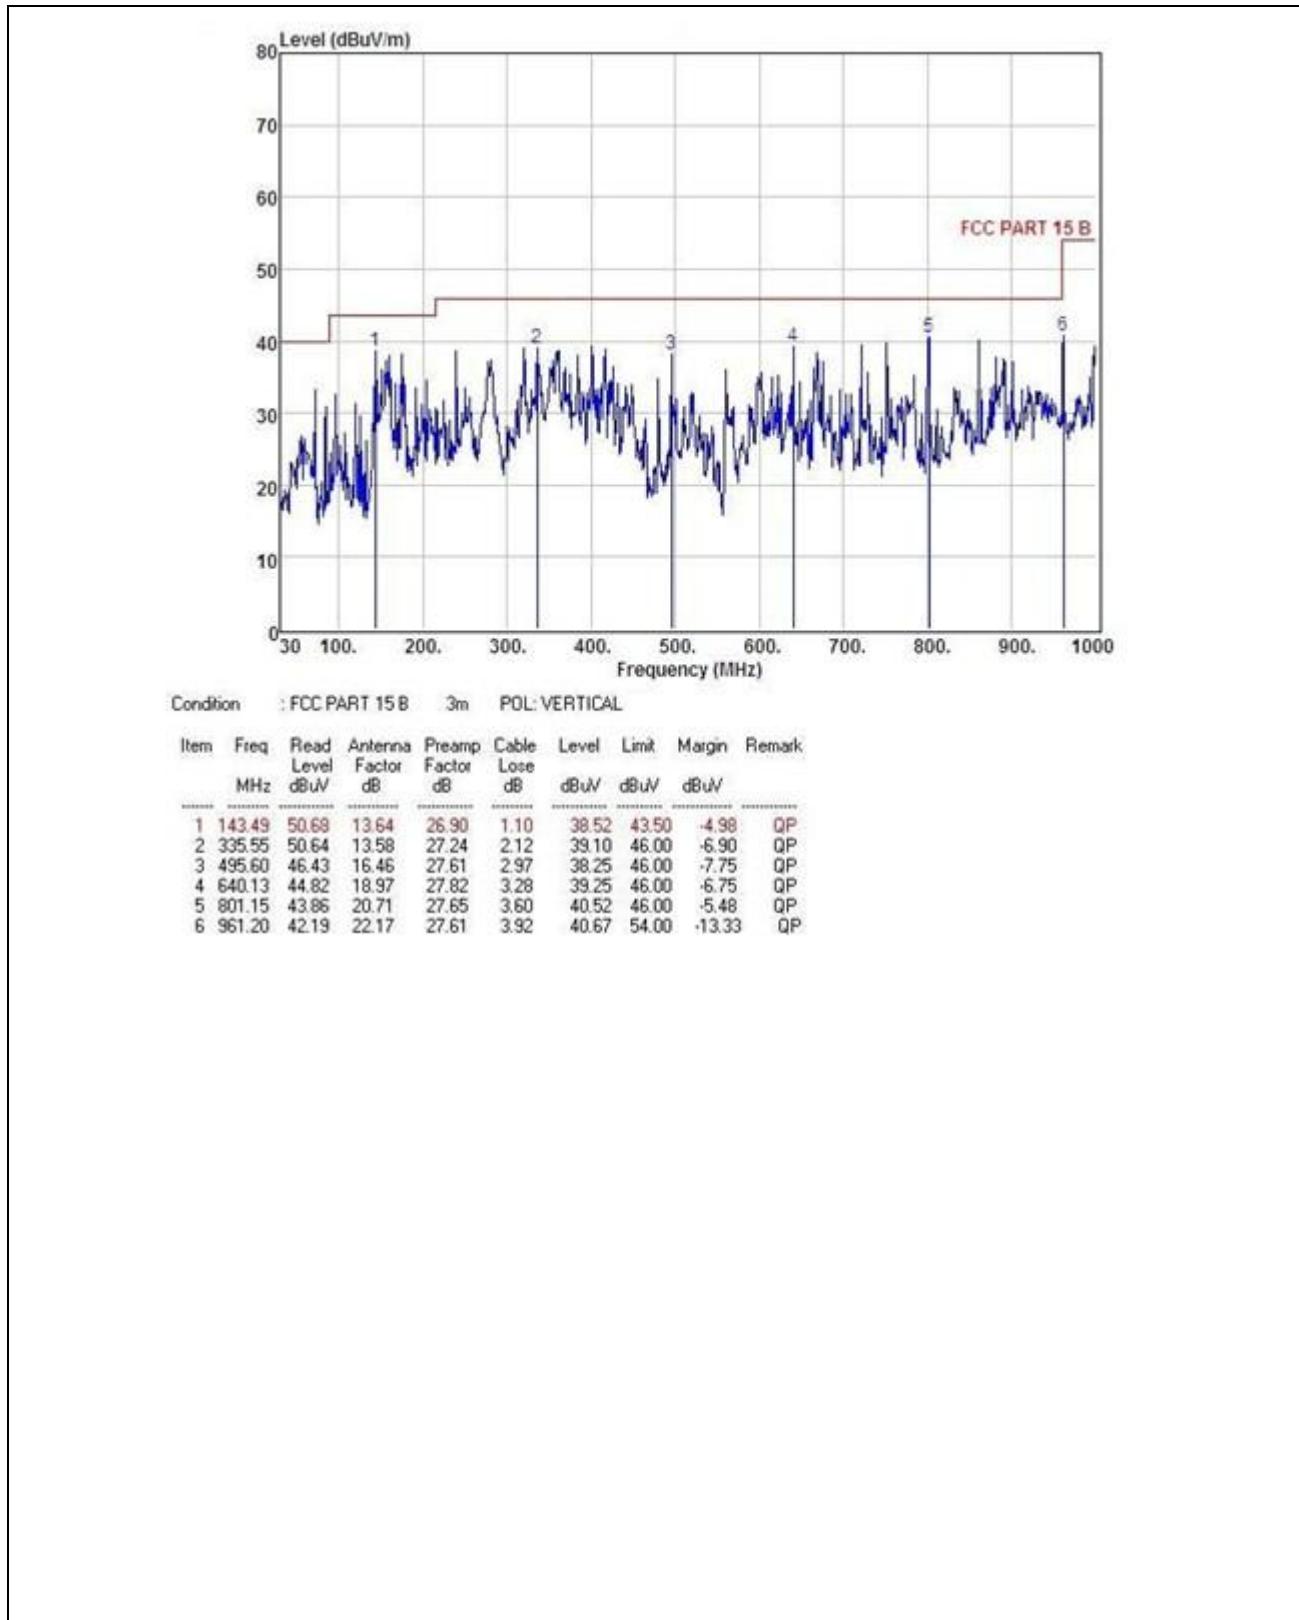

Spurious Emission Above 1GHz

For 802.11b

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4824.0	PK	44.83	247	V	34.1	5.2	33.0	51.13	74	-22.87
4824.0	PK	43.07	136	H	34.1	5.2	33.0	49.37	74	-24.63
7236.0	PK	40.52	253	V	37.4	6.1	33.5	50.52	74	-23.48
7236.0	PK	42.25	124	H	37.4	6.1	33.5	52.25	74	-21.75
4824.0	AV	35.74	168	V	34.1	5.2	33.0	42.04	54	-11.96
4824.0	AV	35.22	172	H	34.1	5.2	33.0	41.52	54	-12.48
7236.0	AV	33.96	154	V	37.4	6.1	33.5	43.96	54	-10.04
7236.0	AV	33.29	97	H	37.4	6.1	33.5	43.29	54	-10.71
Middle Channel (1G to 25GHz)										
4874.0	PK	45.97	166	V	34.1	5.2	33.0	52.27	74	-21.73
4874.0	PK	43.81	148	H	34.1	5.2	33.0	50.11	74	-23.89
7311.0	PK	39.38	139	V	37.4	6.1	33.5	49.38	74	-24.62
7311.0	PK	41.43	154	H	37.4	6.1	33.5	51.43	74	-22.57
4874.0	AV	36.06	128	V	34.1	5.2	33.0	42.36	54	-11.64
4874.0	AV	35.35	174	H	34.1	5.2	33.0	41.65	54	-12.35
7311.0	AV	35.82	153	V	37.4	6.1	33.5	45.82	54	-8.18
7311.0	AV	32.86	183	H	37.4	6.1	33.5	42.86	54	-11.14
High Channel (1G to 25GHz)										
4924.0	PK	46.85	147	V	34.1	5.2	33.0	53.15	74	-20.85
4924.0	PK	45.51	189	H	34.1	5.2	33.0	51.81	74	-22.19
7386.0	PK	39.74	243	V	37.4	6.1	33.5	49.74	74	-24.26
7386.0	PK	40.29	257	H	37.4	6.1	33.5	50.29	74	-23.71
4924.0	AV	36.12	183	V	34.1	5.2	33.0	42.42	54	-11.58
4924.0	AV	34.83	172	H	34.1	5.2	33.0	41.13	54	-12.87
7386.0	AV	34.38	104	V	37.4	6.1	33.5	44.38	54	-9.62
7386.0	AV	33.57	121	H	37.4	6.1	33.5	43.57	54	-10.43

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

For 802.11g

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4824.0	PK	46.85	196	V	34.1	5.2	33.0	53.15	74	-20.85
4824.0	PK	48.06	147	H	34.1	5.2	33.0	54.36	74	-19.64
7236.0	PK	38.29	132	V	37.4	6.1	33.5	48.29	74	-25.71
7236.0	PK	40.42	158	H	37.4	6.1	33.5	50.42	74	-23.58
4824.0	AV	35.01	209	V	34.1	5.2	33.0	41.31	54	-12.69
4824.0	AV	36.23	244	H	34.1	5.2	33.0	42.53	54	-11.47
7236.0	AV	34.26	235	V	37.4	6.1	33.5	44.26	54	-9.74
7236.0	AV	31.13	212	H	37.4	6.1	33.5	41.13	54	-12.87
Middle Channel (1G to 25GHz)										
4874.0	PK	47.27	158	V	34.1	5.2	33.0	53.57	74	-20.43
4874.0	PK	44.06	154	H	34.1	5.2	33.0	50.36	74	-23.64
7311.0	PK	40.28	136	V	37.4	6.1	33.5	50.28	74	-23.72
7311.0	PK	42.42	127	H	37.4	6.1	33.5	52.42	74	-21.58
4874.0	AV	36.46	166	V	34.1	5.2	33.0	42.76	54	-11.24
4874.0	AV	36.14	148	H	34.1	5.2	33.0	42.44	54	-11.56
7311.0	AV	35.63	216	V	37.4	6.1	33.5	45.63	54	-8.37
7311.0	AV	31.53	49	H	37.4	6.1	33.5	41.53	54	-12.47
High Channel (1G to 25GHz)										
4924.0	PK	46.81	137	V	34.1	5.2	33.0	53.11	74	-20.89
4924.0	PK	45.27	128	H	34.1	5.2	33.0	51.57	74	-22.43
7386.0	PK	42.43	175	V	37.4	6.1	33.5	52.43	74	-21.57
7386.0	PK	40.58	149	H	37.4	6.1	33.5	50.58	74	-23.42
4924.0	AV	35.77	162	V	34.1	5.2	33.0	42.07	54	-11.93
4924.0	AV	35.86	188	H	34.1	5.2	33.0	42.16	54	-11.84
7386.0	AV	34.28	218	V	37.4	6.1	33.5	44.28	54	-9.72
7386.0	AV	33.04	244	H	37.4	6.1	33.5	43.04	54	-10.96

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

For 802.11n/HT20

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4824.0	PK	42.33	237	V	34.1	5.2	33.0	48.63	74	-25.37
4824.0	PK	45.01	284	H	34.1	5.2	33.0	51.31	74	-22.69
7236.0	PK	40.26	356	V	37.4	6.1	33.5	50.26	74	-23.74
7236.0	PK	42.72	41	H	37.4	6.1	33.5	52.72	74	-21.28
4824.0	AV	35.77	79	V	34.1	5.2	33.0	42.07	54	-11.93
4824.0	AV	35.96	159	H	34.1	5.2	33.0	42.26	54	-11.74
7236.0	AV	31.19	213	V	37.4	6.1	33.5	41.19	54	-12.81
7236.0	AV	31.64	264	H	37.4	6.1	33.5	41.64	54	-12.36
Middle Channel (1G to 25GHz)										
4874.0	PK	42.56	287	V	34.1	5.2	33.0	48.86	74	-25.14
4874.0	PK	43.76	294	H	34.1	5.2	33.0	50.06	74	-23.94
7311.0	PK	41.42	152	V	37.4	6.1	33.5	51.42	74	-22.58
7311.0	PK	43.04	148	H	37.4	6.1	33.5	53.04	74	-20.96
4874.0	AV	34.99	173	V	34.1	5.2	33.0	41.29	54	-12.71
4874.0	AV	34.22	179	H	34.1	5.2	33.0	40.52	54	-13.48
7311.0	AV	32.47	256	V	37.4	6.1	33.5	42.47	54	-11.53
7311.0	AV	31.21	235	H	37.4	6.1	33.5	41.21	54	-12.79
High Channel (1G to 25GHz)										
4924.0	PK	43.73	283	V	34.1	5.2	33.0	50.03	74	-23.97
4924.0	PK	42.82	237	H	34.1	5.2	33.0	49.12	74	-24.88
7386.0	PK	40.74	126	V	37.4	6.1	33.5	50.74	74	-23.26
7386.0	PK	43.43	95	H	37.4	6.1	33.5	53.43	74	-20.57
4924.0	AV	35.12	158	V	34.1	5.2	33.0	41.42	54	-12.58
4924.0	AV	35.96	164	H	34.1	5.2	33.0	42.26	54	-11.74
7386.0	AV	34.68	307	V	37.4	6.1	33.5	44.68	54	-9.32
7386.0	AV	33.05	289	H	37.4	6.1	33.5	43.05	54	-10.95

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

For 802.11n/HT40

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (1G to 25GHz)										
4844.0	PK	40.86	155	V	34.1	5.2	33.0	47.16	74	-26.84
4844.0	PK	40.22	173	H	34.1	5.2	33.0	46.52	74	-27.48
7266.0	PK	38.21	168	V	37.4	6.1	33.5	48.21	74	-25.79
7266.0	PK	37.77	143	H	37.4	6.1	33.5	47.77	74	-26.23
4844.0	AV	35.88	185	V	34.1	5.2	33.0	42.18	54	-11.82
4844.0	AV	35.21	172	H	34.1	5.2	33.0	41.51	54	-12.49
7266.0	AV	34.43	139	V	37.4	6.1	33.5	44.43	54	-9.57
7266.0	AV	32.64	148	H	37.4	6.1	33.5	42.64	54	-11.36
Middle Channel (1G to 25GHz)										
4874.0	PK	40.21	231	V	34.1	5.2	33.0	46.51	74	-27.49
4874.0	PK	41.91	256	H	34.1	5.2	33.0	48.21	74	-25.79
7311.0	PK	38.51	284	V	37.4	6.1	33.5	48.51	74	-25.49
7311.0	PK	37.17	172	H	37.4	6.1	33.5	47.17	74	-26.83
4874.0	AV	35.95	168	V	34.1	5.2	33.0	42.25	54	-11.75
4874.0	AV	34.87	253	H	34.1	5.2	33.0	41.17	54	-12.83
7311.0	AV	32.32	184	V	37.4	6.1	33.5	42.32	54	-11.68
7311.0	AV	33.55	169	H	37.4	6.1	33.5	43.55	54	-10.45
High Channel (1G to 25GHz)										
4904.0	PK	42.88	132	V	34.1	5.2	33.0	49.18	74	-24.82
4904.0	PK	40.94	157	H	34.1	5.2	33.0	47.24	74	-26.76
7356.0	PK	38.07	195	V	37.4	6.1	33.5	48.07	74	-25.93
7356.0	PK	38.59	208	H	37.4	6.1	33.5	48.59	74	-25.41
4904.0	AV	35.18	174	V	34.1	5.2	33.0	41.48	54	-12.52
4904.0	AV	36.34	243	H	34.1	5.2	33.0	42.64	54	-11.36
7356.0	AV	34.57	332	V	37.4	6.1	33.5	44.57	54	-9.43
7356.0	AV	33.13	318	H	37.4	6.1	33.5	43.13	54	-10.87

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.